



802.11ax-HE80 26dB Bandwidth & 99% Bandwidth


Channel 42 (5210MHz)

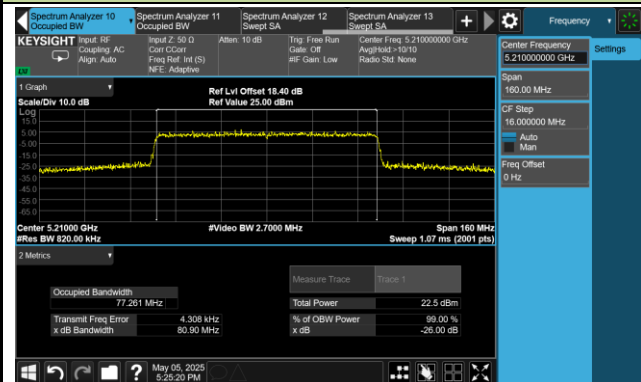


Channel 58 (5290MHz)

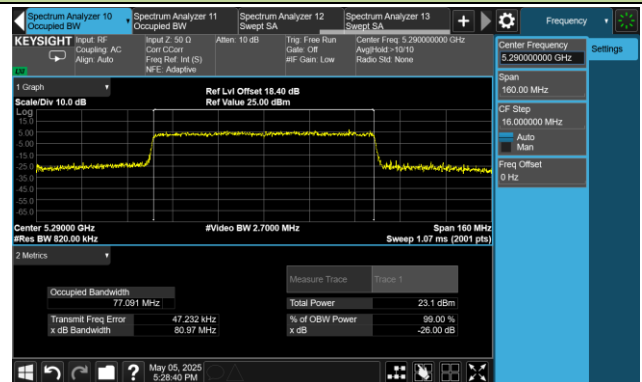


Channel 106 (5530MHz)

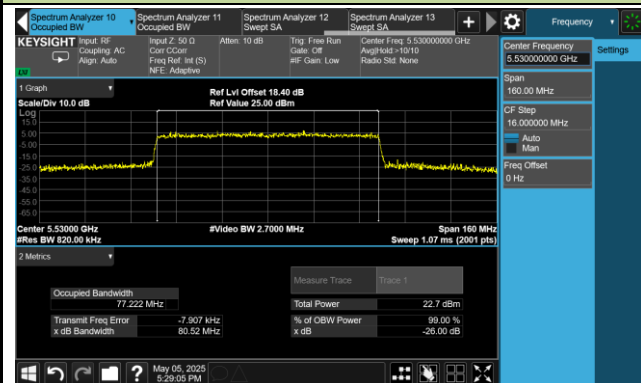

Channel 122 (5610MHz)

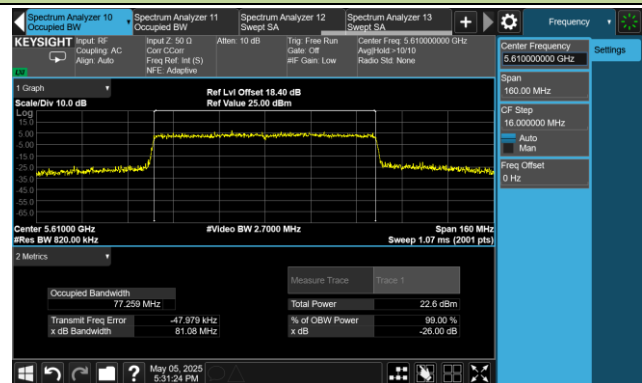

Channel 155 (5775MHz)

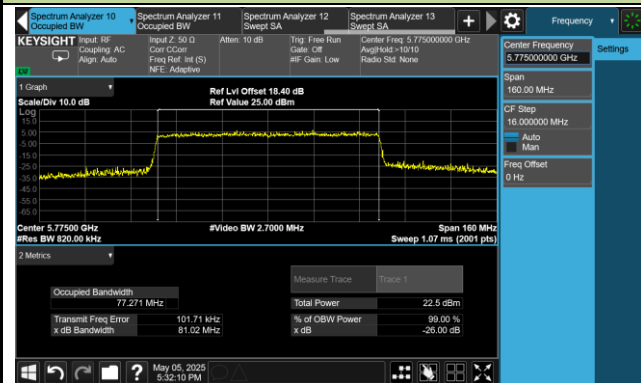


A.3 6dB Bandwidth Test Result

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-05-05		


Test Mode	Data Rate/ MCS	Channel No.	Frequency (MHz)	6dB Bandwidth (MHz)	Limit (MHz)
11a	6Mbps	149	5745	16.32	≥0.5
11a	6Mbps	157	5785	15.65	≥0.5
11a	6Mbps	165	5825	15.92	≥0.5
11ac-VHT20	MCS0	149	5745	16.96	≥0.5
11ac-VHT20	MCS0	157	5785	16.57	≥0.5
11ac-VHT20	MCS0	165	5825	16.82	≥0.5
11ac-VHT40	MCS0	151	5755	35.91	≥0.5
11ac-VHT40	MCS0	159	5795	35.25	≥0.5
11ac-VHT80	MCS0	155	5775	75.36	≥0.5
11ax-HE20	MCS0	149	5745	18.19	≥0.5
11ax-HE20	MCS0	157	5785	18.32	≥0.5
11ax-HE20	MCS0	165	5825	17.53	≥0.5
11ax-HE40	MCS0	151	5755	37.68	≥0.5
11ax-HE40	MCS0	159	5795	37.36	≥0.5
11ax-HE80	MCS0	155	5775	76.65	≥0.5

802.11a 6dB Bandwidth


Channel 149 (5745MHz)

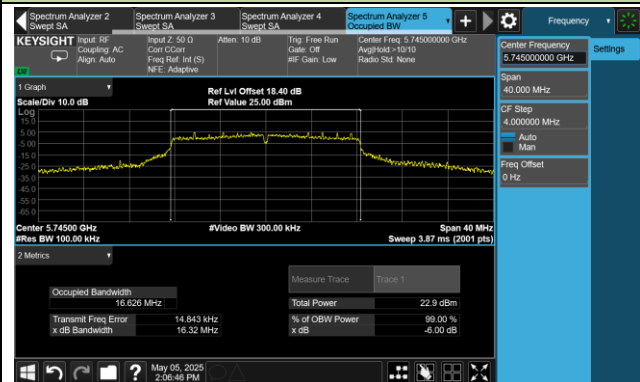

Channel 157 (5785MHz)

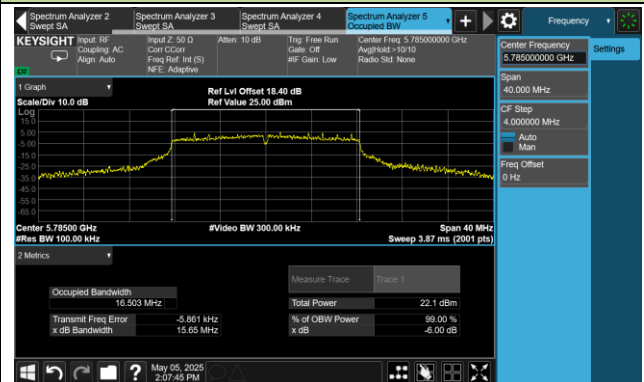


Channel 165 (5825MHz)

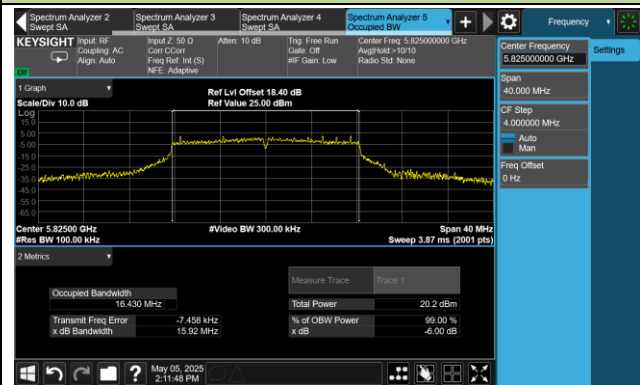


802.11ac-VHT20 6dB Bandwidth


Channel 149 (5745MHz)

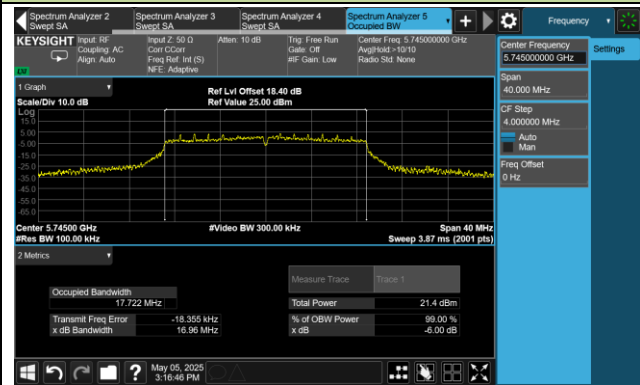

Channel 157 (5785MHz)

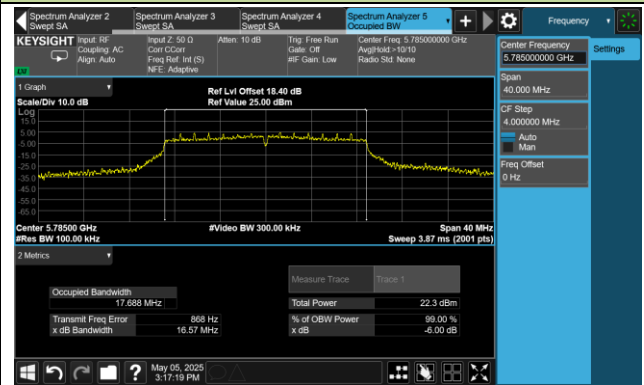


Channel 165 (5825MHz)

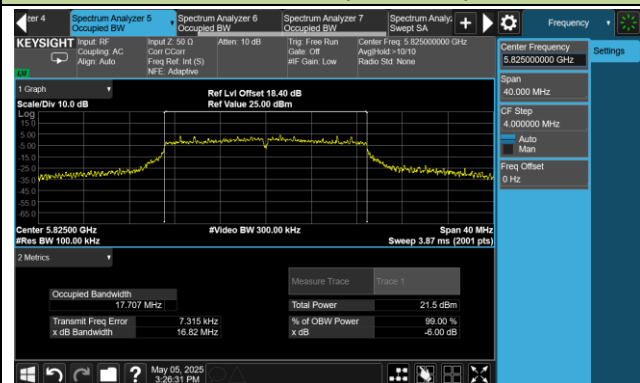


802.11ac-VHT40 6dB Bandwidth

Channel 151 (5755MHz)

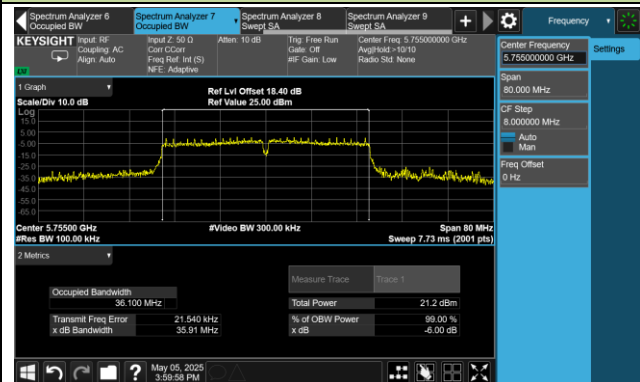


Channel 159 (5795MHz)

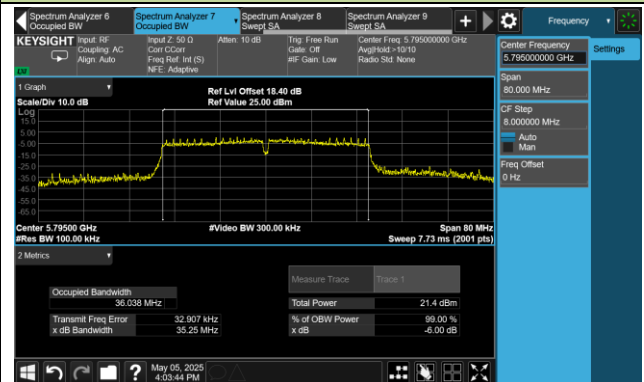


802.11ac-VHT80 6dB Bandwidth

Channel 155 (5775MHz)

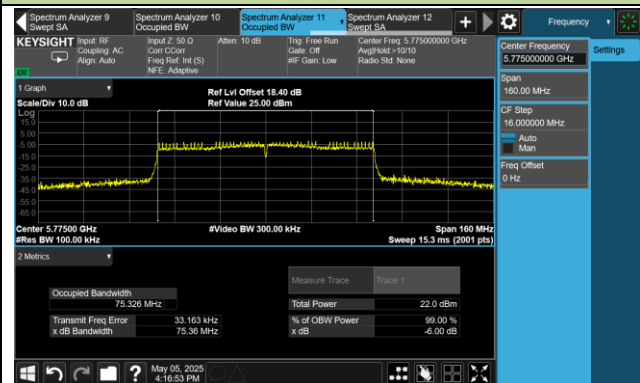


802.11ax-HE20 6dB Bandwidth


Channel 149 (5745MHz)

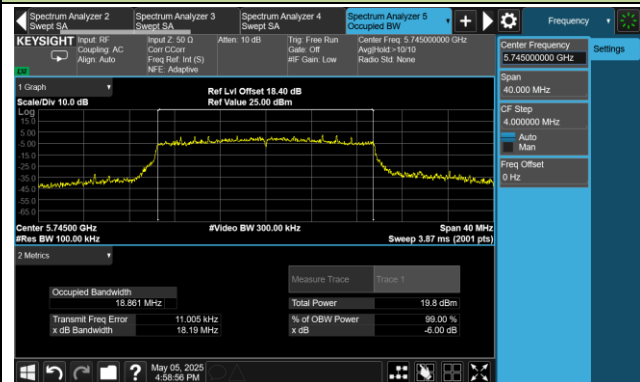

Channel 157 (5785MHz)

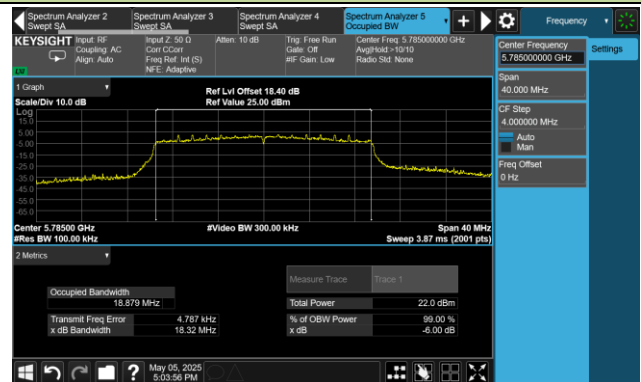


Channel 165 (5825MHz)

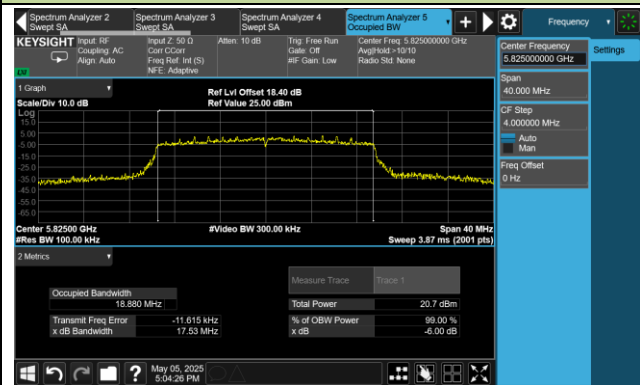



802.11ax-HE40 6dB Bandwidth

Channel 151 (5755MHz)

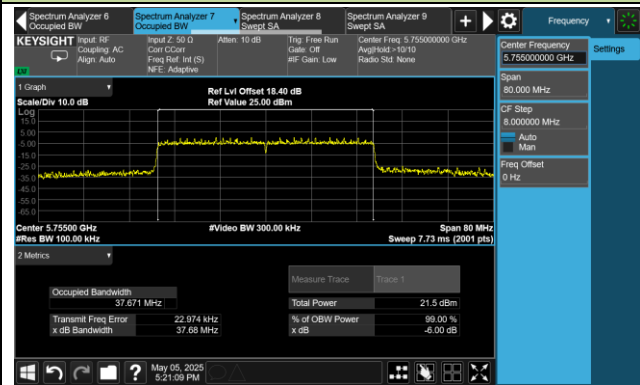

Channel 159 (5795MHz)

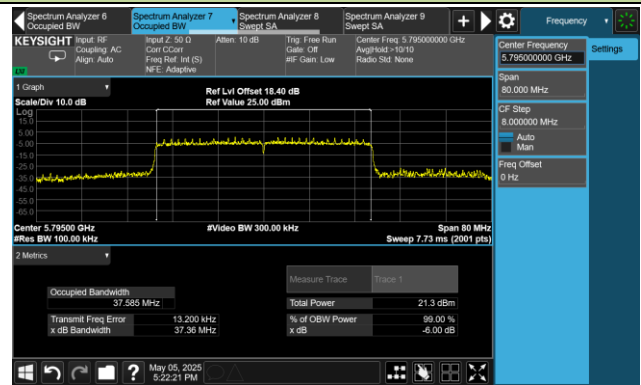

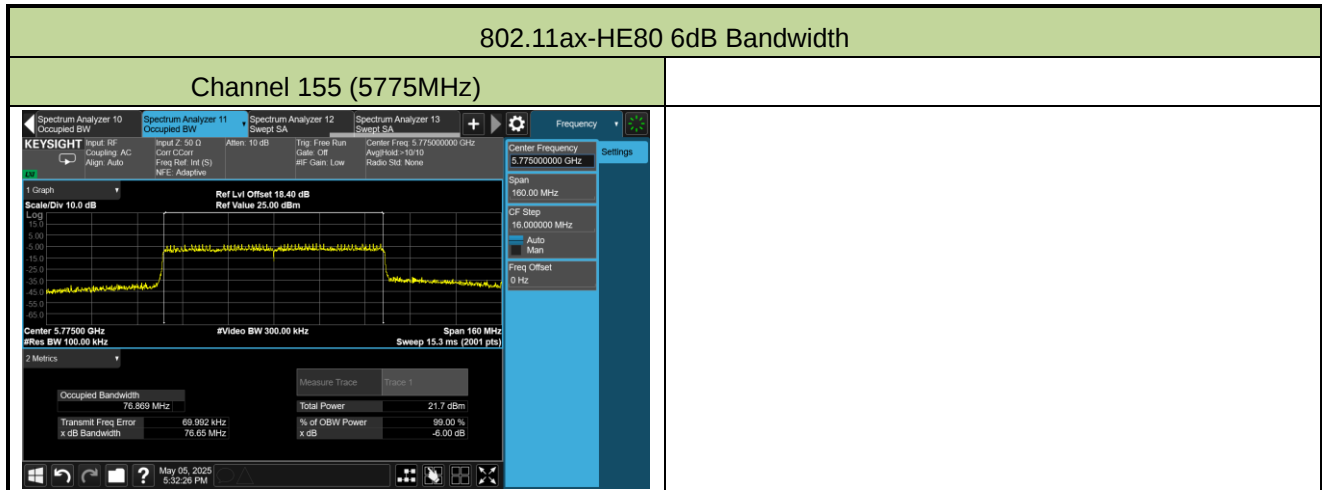

A.4 Output Power Test Result

Full RU

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-05-22		

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)
				Ant 3	Ant 2		
11a	6Mbps	36	5180	13.28	10.88	15.25	≤ 23.98
11a	6Mbps	44	5220	15.80	13.40	17.77	≤ 23.98
11a	6Mbps	48	5240	15.63	12.68	17.41	≤ 23.98
11a	6Mbps	52	5260	15.88	12.97	17.67	≤ 23.98
11a	6Mbps	60	5300	15.87	13.03	17.69	≤ 23.98
11a	6Mbps	64	5320	15.06	12.70	17.05	≤ 23.98
11a	6Mbps	100	5500	15.52	13.66	17.70	≤ 23.98
11a	6Mbps	116	5580	15.27	13.30	17.41	≤ 23.98
11a	6Mbps	140	5700	13.64	11.90	15.87	≤ 23.98
11a	6Mbps	149	5745	15.94	14.78	18.41	≤ 30.00
11a	6Mbps	157	5785	15.73	14.54	18.19	≤ 30.00
11a	6Mbps	165	5825	15.72	14.55	18.18	≤ 30.00
11ac-VHT20	MCS0	36	5180	14.73	11.92	16.56	≤ 23.98
11ac-VHT20	MCS0	44	5220	15.95	12.87	17.69	≤ 23.98
11ac-VHT20	MCS0	48	5240	15.95	12.86	17.68	≤ 23.98
11ac-VHT20	MCS0	52	5260	15.32	12.33	17.09	≤ 23.98
11ac-VHT20	MCS0	60	5300	15.03	12.45	16.94	≤ 23.98
11ac-VHT20	MCS0	64	5320	14.36	11.61	16.21	≤ 23.98
11ac-VHT20	MCS0	100	5500	15.43	12.52	17.22	≤ 23.98
11ac-VHT20	MCS0	116	5580	15.62	13.20	17.59	≤ 23.98
11ac-VHT20	MCS0	140	5700	15.36	13.38	17.49	≤ 23.98
11ac-VHT20	MCS0	149	5745	15.67	14.36	18.07	≤ 30.00
11ac-VHT20	MCS0	157	5785	15.69	14.21	18.02	≤ 30.00
11ac-VHT20	MCS0	165	5825	15.58	14.30	18.00	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)
				Ant 3	Ant 2		
11ac-VHT40	MCS0	38	5190	12.23	9.37	14.04	≤ 23.98
11ac-VHT40	MCS0	46	5230	15.20	12.02	16.91	≤ 23.98
11ac-VHT40	MCS0	54	5270	15.85	12.33	17.45	≤ 23.98
11ac-VHT40	MCS0	62	5310	14.56	12.13	16.52	≤ 23.98
11ac-VHT40	MCS0	102	5510	15.15	13.00	17.22	≤ 23.98
11ac-VHT40	MCS0	110	5550	14.96	13.12	17.15	≤ 23.98
11ac-VHT40	MCS0	134	5670	15.69	14.02	17.95	≤ 23.98
11ac-VHT40	MCS0	151	5755	15.43	14.23	17.88	≤ 30.00
11ac-VHT40	MCS0	159	5795	15.53	14.37	18.00	≤ 30.00
11ac-VHT80	MCS0	42	5210	12.93	9.19	14.46	≤ 23.98
11ac-VHT80	MCS0	58	5290	14.05	11.93	16.13	≤ 23.98
11ac-VHT80	MCS0	106	5530	13.99	12.15	16.18	≤ 23.98
11ac-VHT80	MCS0	122	5610	15.96	14.07	18.13	≤ 23.98
11ac-VHT80	MCS0	155	5775	15.08	14.10	17.63	≤ 30.00
11ax-HE20	MCS0	36	5180	13.56	11.02	15.48	≤ 23.98
11ax-HE20	MCS0	44	5220	15.89	12.53	17.54	≤ 23.98
11ax-HE20	MCS0	48	5240	15.69	12.35	17.34	≤ 23.98
11ax-HE20	MCS0	52	5260	15.06	12.28	16.90	≤ 23.98
11ax-HE20	MCS0	60	5300	15.16	12.27	16.96	≤ 23.98
11ax-HE20	MCS0	64	5320	15.23	12.95	17.25	≤ 23.98
11ax-HE20	MCS0	100	5500	15.69	13.21	17.63	≤ 23.98
11ax-HE20	MCS0	116	5580	15.57	13.72	17.75	≤ 23.98
11ax-HE20	MCS0	140	5700	14.38	12.72	16.64	≤ 23.98
11ax-HE20	MCS0	149	5745	15.23	13.92	17.63	≤ 30.00
11ax-HE20	MCS0	157	5785	15.98	14.43	18.28	≤ 30.00
11ax-HE20	MCS0	165	5825	15.68	14.22	18.02	≤ 30.00

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)
				Ant 3	Ant 2		
11ax-HE40	MCS0	38	5190	11.48	8.44	13.23	≤ 23.98
11ax-HE40	MCS0	46	5230	15.96	13.08	17.76	≤ 23.98
11ax-HE40	MCS0	54	5270	15.41	12.29	17.13	≤ 23.98
11ax-HE40	MCS0	62	5310	14.11	11.38	15.97	≤ 23.98
11ax-HE40	MCS0	102	5510	15.56	14.11	17.91	≤ 23.98
11ax-HE40	MCS0	110	5550	15.93	13.83	18.02	≤ 23.98
11ax-HE40	MCS0	134	5670	15.52	13.86	17.78	≤ 23.98
11ax-HE40	MCS0	151	5755	15.13	14.19	17.70	≤ 30.00
11ax-HE40	MCS0	159	5795	15.83	14.87	18.39	≤ 30.00
11ax-HE80	MCS0	42	5210	13.32	10.68	15.21	≤ 23.98
11ax-HE80	MCS0	58	5290	13.73	11.13	15.63	≤ 23.98
11ax-HE80	MCS0	106	5530	14.16	12.47	16.41	≤ 23.98
11ax-HE80	MCS0	122	5610	15.43	13.82	17.71	≤ 23.98
11ax-HE80	MCS0	155	5775	15.68	14.75	18.25	≤ 30.00

Note: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 3 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)}\}$ (dBm).

Partial RU

Test Site	WZ-SR5	Test Engineer	Lunn Yang
Test Date	2025-05-22		

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	RU size / index	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)
					Ant 3	Ant 2		
11ax-HE20	MCS0	36	5180	RU26/0	6.25	4.85	8.62	≤ 23.98
				RU52/37	8.67	5.26	10.30	≤ 23.98
				RU106/53	12.69	9.73	14.47	≤ 23.98
				RU242/61	13.11	10.05	14.85	≤ 23.98
		44	5220	RU26/4	9.08	5.15	10.56	≤ 23.98
				RU52/38	11.21	7.99	12.90	≤ 23.98
				RU106/53	14.60	11.75	16.42	≤ 23.98
				RU242/61	15.95	11.95	17.41	≤ 23.98
		48	5240	RU26/8	6.63	4.57	8.73	≤ 23.98
				RU52/40	12.05	9.22	13.87	≤ 23.98
				RU106/54	15.10	12.19	16.89	≤ 23.98
				RU242/61	15.36	12.23	17.08	≤ 23.98
		52	5260	RU26/0	8.33	4.16	9.74	≤ 23.98
				RU52/37	11.65	8.89	13.50	≤ 23.98
				RU106/53	14.28	11.53	16.13	≤ 23.98
				RU242/61	14.96	12.03	16.75	≤ 23.98
		60	5300	RU26/4	8.65	4.69	10.12	≤ 23.98
				RU52/38	10.82	7.63	12.52	≤ 23.98
				RU106/53	14.41	11.63	16.25	≤ 23.98
				RU242/61	14.92	11.97	16.70	≤ 23.98
		64	5320	RU26/8	8.12	4.72	9.75	≤ 23.98
				RU52/40	11.61	8.03	13.19	≤ 23.98
				RU106/54	12.89	10.33	14.81	≤ 23.98
				RU242/61	12.90	10.15	14.75	≤ 23.98
		100	5500	RU26/0	6.41	4.82	8.70	≤ 23.98
				RU52/37	8.68	7.30	11.05	≤ 23.98
				RU106/53	12.61	10.99	14.89	≤ 23.98
				RU242/61	14.83	12.05	16.67	≤ 23.98

Test Mode	Data Rate MCS	Channel No.	Freq. (MHz)	RU size / index	Average Power (dBm)		Total Average Power (dBm)	Power Limit (dBm)
					Ant 3	Ant 2		
11ax-HE20	MCS0	116	5580	RU26/4	9.09	6.15	10.87	≤ 23.98
				RU52/38	11.23	8.62	13.13	≤ 23.98
				RU106/53	14.35	12.11	16.38	≤ 23.98
				RU242/61	14.90	12.91	17.03	≤ 23.98
		140	5700	RU26/8	6.63	4.87	8.85	≤ 23.98
				RU52/40	10.95	9.08	13.13	≤ 23.98
				RU106/54	13.72	11.93	15.93	≤ 23.98
				RU242/61	13.75	11.97	15.96	≤ 23.98
		149	5745	RU26/0	7.04	3.49	8.63	≤ 30.00
				RU52/37	10.68	8.19	12.62	≤ 30.00
				RU106/53	12.30	11.23	14.81	≤ 30.00
				RU242/61	15.13	13.93	17.58	≤ 30.00
		157	5785	RU26/4	8.21	6.29	10.37	≤ 30.00
				RU52/38	11.65	9.31	13.65	≤ 30.00
				RU106/53	14.36	11.26	16.09	≤ 30.00
				RU242/61	15.05	13.53	17.37	≤ 30.00
		165	5825	RU26/8	7.57	6.12	9.92	≤ 30.00
				RU52/40	11.33	9.53	13.53	≤ 30.00
				RU106/54	13.39	11.68	15.63	≤ 30.00
				RU242/61	14.51	13.43	17.01	≤ 30.00
11ax-HE40	MCS0	38	5190	RU484/65	7.72	5.21	9.65	≤ 23.98
		46	5230	RU484/65	13.46	9.66	14.97	≤ 23.98
		54	5270	RU484/65	12.61	9.31	14.28	≤ 23.98
		62	5310	RU484/65	11.21	8.48	13.07	≤ 23.98
		102	5510	RU484/65	11.68	10.15	13.99	≤ 23.98
		110	5550	RU484/65	13.52	10.86	15.40	≤ 23.98
		134	5670	RU484/65	12.95	10.93	15.07	≤ 23.98
		151	5755	RU484/65	13.09	11.38	15.33	≤ 30.00
		159	5795	RU484/65	12.51	11.35	14.98	≤ 30.00
11ax-HE80	MCS0	42	5210	RU996/67	11.33	8.49	13.15	≤ 23.98
		58	5290	RU996/67	12.85	10.52	14.85	≤ 23.98
		106	5530	RU996/67	13.82	11.73	15.91	≤ 23.98
		122	5610	RU996/67	14.13	12.03	16.22	≤ 23.98
		155	5775	RU996/67	15.13	14.22	17.71	≤ 30.00

Note: Total Average Power (dBm) = $10 \cdot \log \{10^{(\text{Ant 3 Average Power} / 10)} + 10^{(\text{Ant 2 Average Power} / 10)}\}$.

A.5 Power Spectral Density Test Result

Full RU

Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-05-05 ~ 2025-05-21		
Test Item	Power Spectral Density (UNII-Band 1 & UNII-2a & UNII-2c)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/MHz)		Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)
				Ant 3	Ant 2			
11a	6Mbps	36	5180	1.946	-0.647	90.48	4.285	≤ 11.00
11a	6Mbps	44	5220	5.395	2.363	90.48	7.583	≤ 11.00
11a	6Mbps	48	5240	5.553	2.201	90.48	7.637	≤ 11.00
11a	6Mbps	52	5260	5.622	1.254	90.48	7.410	≤ 11.00
11a	6Mbps	60	5300	5.055	2.717	90.48	7.486	≤ 11.00
11a	6Mbps	64	5320	4.103	1.181	90.48	6.328	≤ 11.00
11a	6Mbps	100	5500	3.943	2.282	90.48	6.636	≤ 10.89
11a	6Mbps	116	5580	4.386	2.427	90.48	6.961	≤ 10.89
11a	6Mbps	140	5700	1.997	0.237	90.48	4.650	≤ 10.89
11ac-VHT20	MCS0	36	5180	2.837	-0.114	82.24	5.467	≤ 11.00
11ac-VHT20	MCS0	44	5220	3.453	0.715	82.24	6.156	≤ 11.00
11ac-VHT20	MCS0	48	5240	3.750	1.059	82.24	6.469	≤ 11.00
11ac-VHT20	MCS0	52	5260	3.795	0.766	82.24	6.399	≤ 11.00
11ac-VHT20	MCS0	60	5300	3.980	1.085	82.24	6.629	≤ 11.00
11ac-VHT20	MCS0	64	5320	2.166	-0.450	82.24	4.912	≤ 11.00
11ac-VHT20	MCS0	100	5500	2.408	0.991	82.24	5.617	≤ 10.89
11ac-VHT20	MCS0	116	5580	4.284	1.898	82.24	7.112	≤ 10.89
11ac-VHT20	MCS0	140	5700	3.725	1.734	82.24	6.702	≤ 10.89
11ac-VHT40	MCS0	38	5190	-3.235	-6.121	70.44	0.090	≤ 11.00
11ac-VHT40	MCS0	46	5230	-0.379	-2.826	70.44	3.100	≤ 11.00
11ac-VHT40	MCS0	54	5270	0.979	-2.207	70.44	4.204	≤ 11.00
11ac-VHT40	MCS0	62	5310	-0.559	-2.713	70.44	3.028	≤ 11.00
11ac-VHT40	MCS0	102	5510	-0.043	-1.972	70.44	3.631	≤ 10.89
11ac-VHT40	MCS0	110	5550	0.493	-1.821	70.44	4.020	≤ 10.89
11ac-VHT40	MCS0	134	5670	0.405	-0.840	70.44	4.359	≤ 10.89

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/MHz)		Duty Cycle (%)	Total PSD (dBm/MHz)	PSD Limit (dBm/MHz)
				Ant 3	Ant 2			
11ac-VHT80	MCS0	42	5210	-6.674	-9.554	55.99	-2.350	≤ 11.00
11ac-VHT80	MCS0	58	5290	-5.003	-7.348	55.99	-0.490	≤ 11.00
11ac-VHT80	MCS0	106	5530	-5.073	-6.391	55.99	-0.153	≤ 10.89
11ac-VHT80	MCS0	122	5610	-2.896	-5.028	55.99	1.697	≤ 10.89
11ax-HE20	MCS0	36	5180	2.055	-0.106	78.74	5.156	≤ 11.00
11ax-HE20	MCS0	44	5220	3.402	0.404	78.74	6.205	≤ 11.00
11ax-HE20	MCS0	48	5240	3.766	0.851	78.74	6.597	≤ 11.00
11ax-HE20	MCS0	52	5260	3.588	0.907	78.74	6.500	≤ 11.00
11ax-HE20	MCS0	60	5300	3.405	1.030	78.74	6.426	≤ 11.00
11ax-HE20	MCS0	64	5320	3.659	1.243	78.74	6.665	≤ 11.00
11ax-HE20	MCS0	100	5500	2.919	0.730	78.74	6.009	≤ 10.89
11ax-HE20	MCS0	116	5580	4.019	1.833	78.74	7.110	≤ 10.89
11ax-HE20	MCS0	140	5700	3.145	1.140	78.74	6.306	≤ 10.89
11ax-HE40	MCS0	38	5190	-5.236	-8.578	67.65	-1.886	≤ 11.00
11ax-HE40	MCS0	46	5230	-0.928	-3.591	67.65	2.649	≤ 11.00
11ax-HE40	MCS0	54	5270	-1.188	-4.147	67.65	2.287	≤ 11.00
11ax-HE40	MCS0	62	5310	-2.544	-5.127	67.65	1.061	≤ 11.00
11ax-HE40	MCS0	102	5510	-0.775	-2.460	67.65	3.171	≤ 10.89
11ax-HE40	MCS0	110	5550	-0.909	-2.514	67.65	3.070	≤ 10.89
11ax-HE40	MCS0	134	5670	-1.428	-3.108	67.65	2.520	≤ 10.89
11ax-HE80	MCS0	42	5210	-7.090	-9.828	55.10	-2.648	≤ 11.00
11ax-HE80	MCS0	58	5290	-4.097	-6.697	55.10	0.394	≤ 11.00
11ax-HE80	MCS0	106	5530	-4.549	-6.305	55.10	0.260	≤ 10.89
11ax-HE80	MCS0	122	5610	-5.041	-6.367	55.10	-0.055	≤ 10.89

Note: When EUT duty cycle < 98%, the total PSD (dBm/MHz) = $10 \cdot \log \{ 10^{(\text{Ant 3 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} \}$ (dBm/MHz) + $10 \cdot \log (1/\text{Duty cycle})$.


Test Site	WZ-SR5	Test Engineer	Lynn Yang
Test Date	2025-05-05		
Test Item	Power Spectral Density (UNII-Band 3)		

Test Mode	Data Rate/ MCS	Channel No.	Freq. (MHz)	AVPSD (dBm/510kHz)		Duty Cycle (%)	Total PSD (dBm/ 510kHz)	PSD Limit (dBm/ 500kHz)
				Ant 3	Ant 2			
11a	6Mbps	149	5745	2.870	1.698	90.48	5.768	≤ 29.89
11a	6Mbps	157	5785	2.137	0.842	90.48	4.982	≤ 29.89
11a	6Mbps	165	5825	2.133	0.370	90.48	4.785	≤ 29.89
11ac-VHT20	MCS0	149	5745	0.619	-0.615	82.24	3.905	≤ 29.89
11ac-VHT20	MCS0	157	5785	1.641	-0.196	82.24	4.678	≤ 29.89
11ac-VHT20	MCS0	165	5825	1.544	-0.250	82.24	4.598	≤ 29.89
11ac-VHT40	MCS0	151	5755	-2.626	-3.468	70.44	1.505	≤ 29.89
11ac-VHT40	MCS0	159	5795	-1.949	-3.343	70.44	1.942	≤ 29.89
11ac-VHT80	MCS0	155	5775	-5.725	-6.496	55.99	-0.564	≤ 29.89
11ax-HE20	MCS0	149	5745	0.646	-0.716	78.74	4.067	≤ 29.89
11ax-HE20	MCS0	157	5785	1.442	0.022	78.74	4.838	≤ 29.89
11ax-HE20	MCS0	165	5825	1.362	-0.318	78.74	4.651	≤ 29.89
11ax-HE40	MCS0	151	5755	-4.185	-4.901	67.65	0.179	≤ 29.89
11ax-HE40	MCS0	159	5795	-3.472	-4.141	67.65	0.914	≤ 29.89
11ax-HE80	MCS0	155	5775	-7.022	-7.950	55.10	-1.862	≤ 29.89

Note: When EUT duty cycle < 98%, the total (dBm/MHz) = $10 \cdot \log \{ 0^{(\text{Ant 3 PSD}/10)} + 10^{(\text{Ant 2 PSD}/10)} \}$ (dBm/510kHz) + $10 \cdot \log (1/\text{Duty cycle})$.

802.11a Power Spectral Density - Ant 3


Channel 36 (5180MHz)

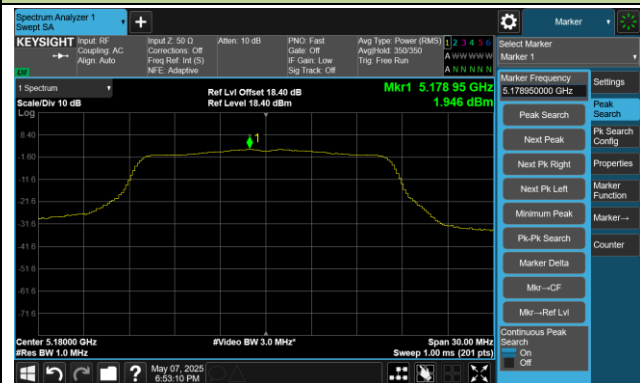

Channel 44 (5220MHz)




Channel 48 (5240MHz)

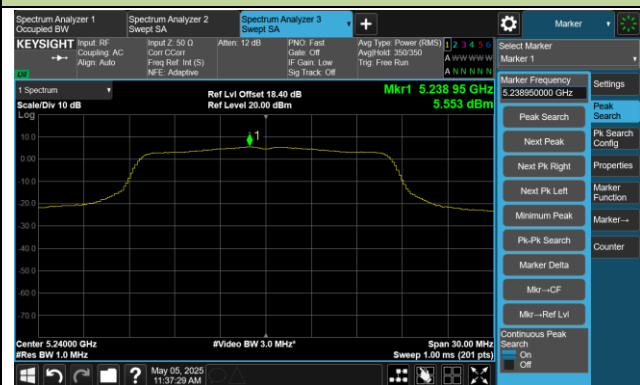

Channel 52 (5260MHz)



Channel 60 (5300MHz)

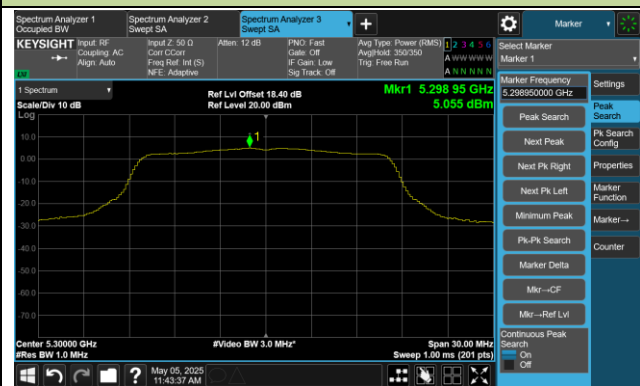

Channel 64 (5320MHz)



Channel 100 (5500MHz)



Channel 116 (5580MHz)



802.11a Power Spectral Density - Ant 3


Channel 140 (5700MHz)




Channel 149 (5745MHz)



Channel 157 (5785MHz)

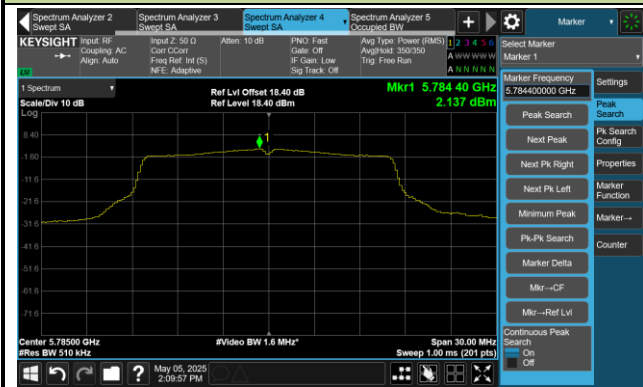

Channel 165 (5825MHz)

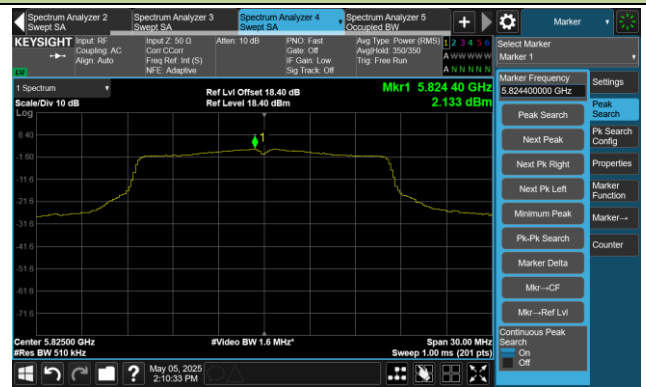

802.11ac-VHT20 Power Spectral Density - Ant 3

Channel 36 (5180MHz)



Channel 44 (5220MHz)



Channel 48 (5240MHz)



Channel 52 (5260MHz)




Channel 60 (5300MHz)



Channel 64 (5320MHz)



Channel 100 (5500MHz)

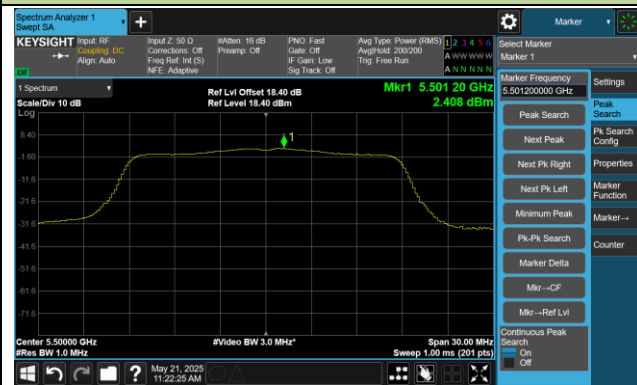

Channel 116 (5580MHz)



802.11ac-VHT20 Power Spectral Density - Ant 3

Channel 140 (5700MHz)



Channel 149 (5745MHz)



Channel 157 (5785MHz)




Channel 165 (5825MHz)




802.11ac-VHT40 Power Spectral Density - Ant 3


Channel 38 (5190MHz)

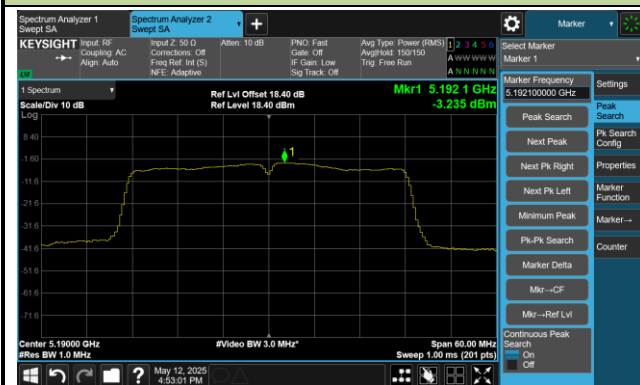

Channel 46 (5230MHz)

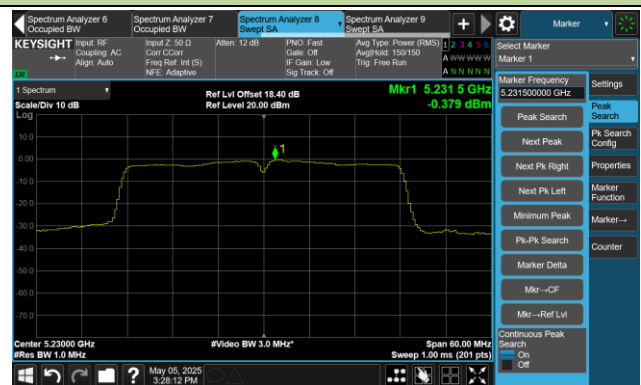


Channel 54 (5270MHz)

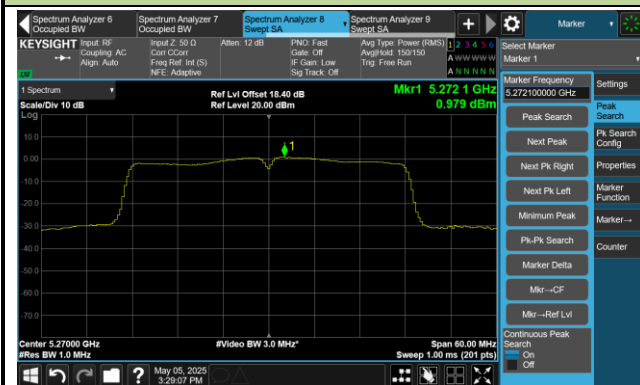

Channel 62 (5310MHz)




Channel 102 (5510MHz)

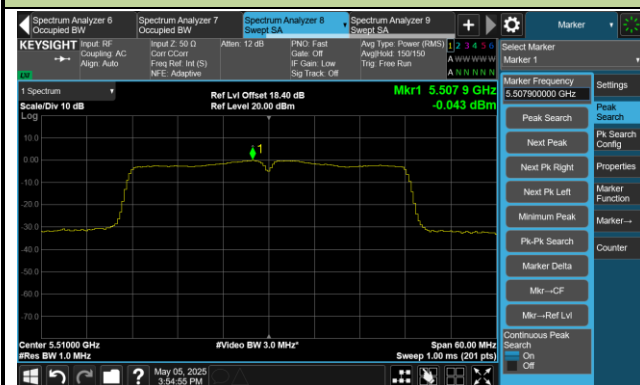


Channel 110 (5550MHz)



Channel 134 (5670MHz)

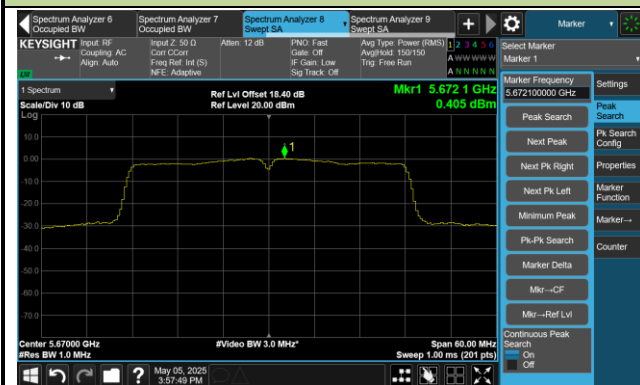


Channel 151 (5755MHz)

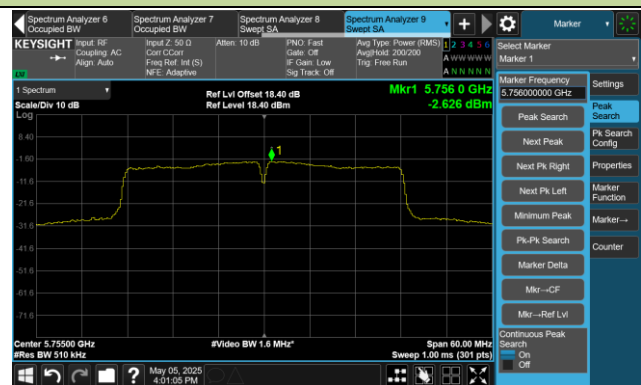


802.11ac-VHT40 Power Spectral Density - Ant 3

Channel 159 (5795MHz)

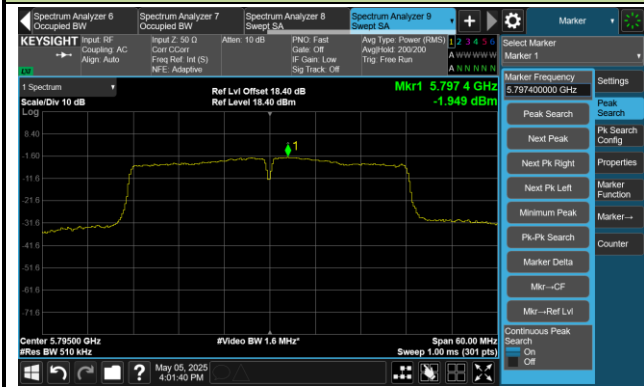


802.11ac-VHT80 Power Spectral Density - Ant 3


Channel 42 (5210MHz)

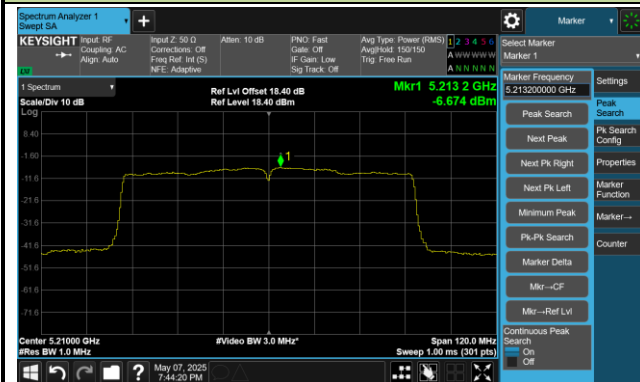

Channel 58 (5290MHz)

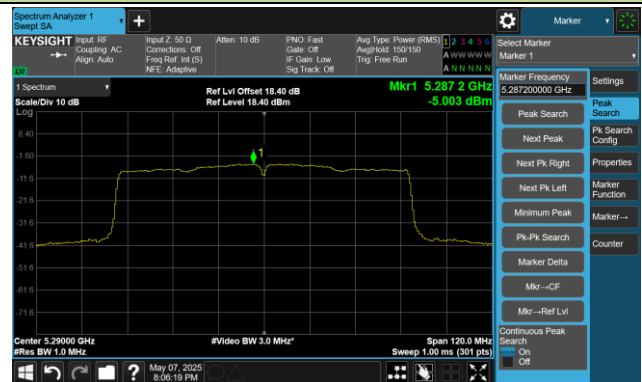

Channel 106 (5530MHz)

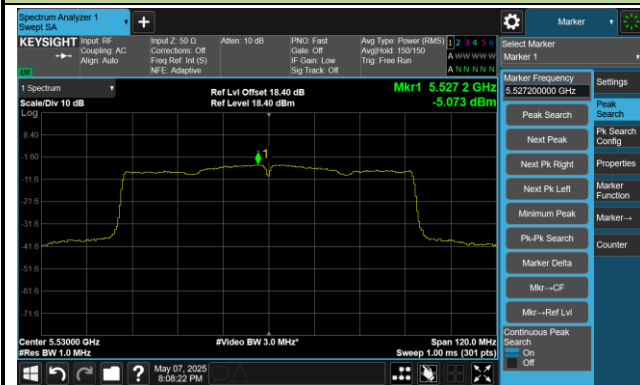

Channel 122 (5610MHz)




Channel 155 (5775MHz)



802.11ax-HE20 Power Spectral Density - Ant 3


Channel 36 (5180MHz)

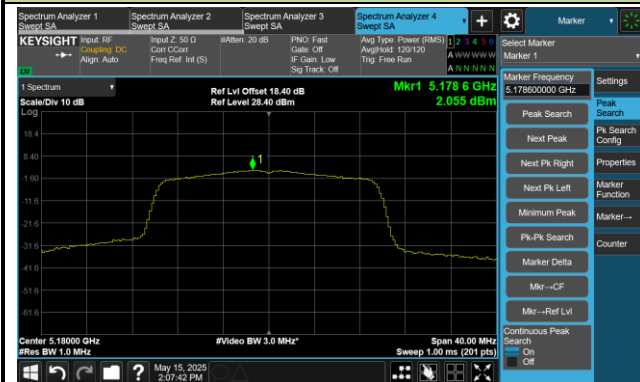

Channel 44 (5220MHz)



Channel 48 (5240MHz)

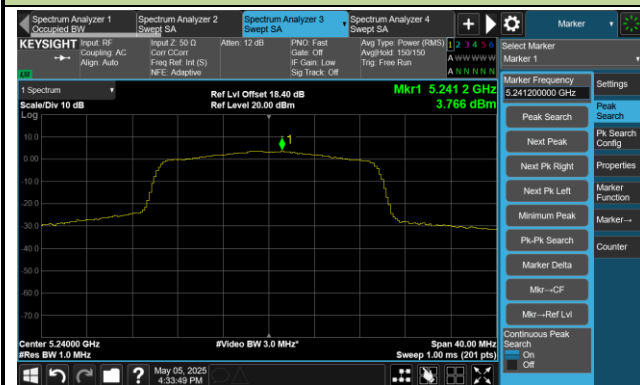

Channel 52 (5260MHz)




Channel 60 (5300MHz)



Channel 64 (5320MHz)



Channel 100 (5500MHz)

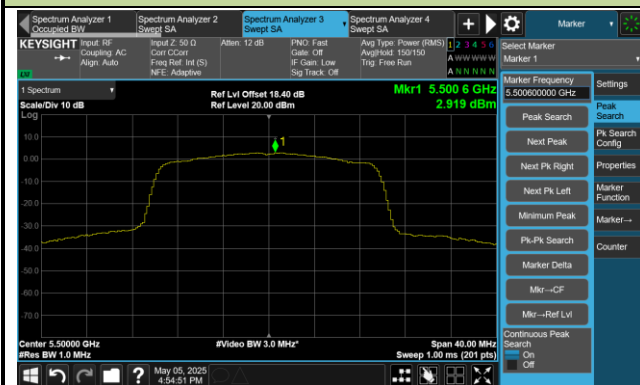


Channel 116 (5580MHz)




802.11ax-HE20 Power Spectral Density - Ant 3

Channel 140 (5700MHz)

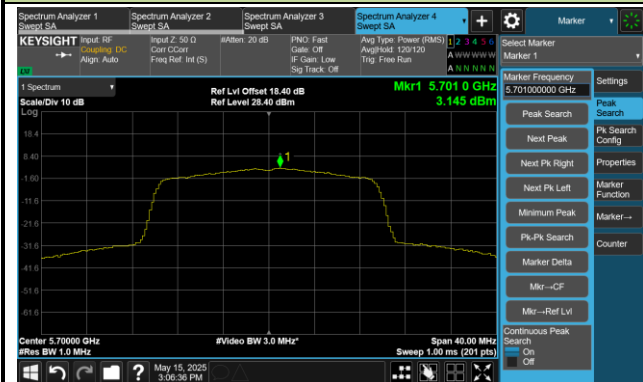

Channel 149 (5745MHz)

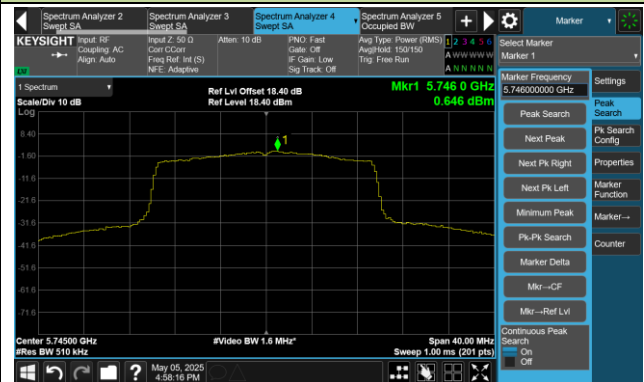

Channel 157 (5785MHz)



Channel 165 (5825MHz)

