


Site: NS-AC1	Time: 2022/04/29 - 15:47
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz, Ant 1	

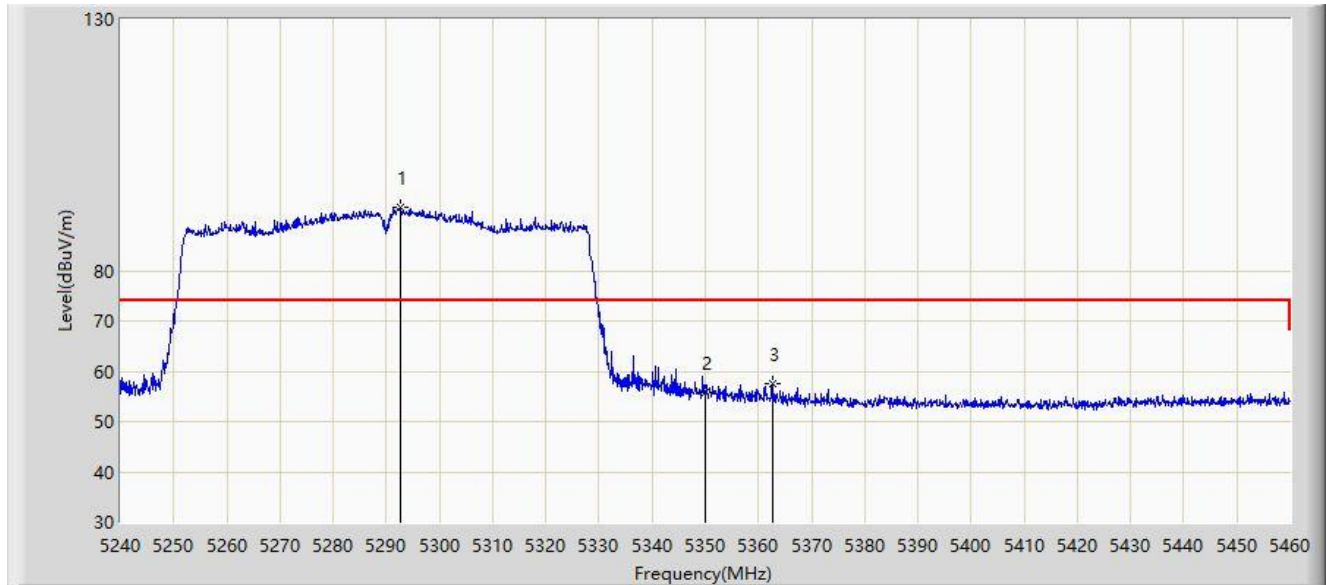


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5292.580	92.517	91.239	N/A	N/A	1.277	PK
2			5350.000	55.834	54.757	-18.166	74.000	1.078	PK
3			5362.650	57.482	56.125	-16.518	74.000	1.357	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 15:49
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz, Ant 1	

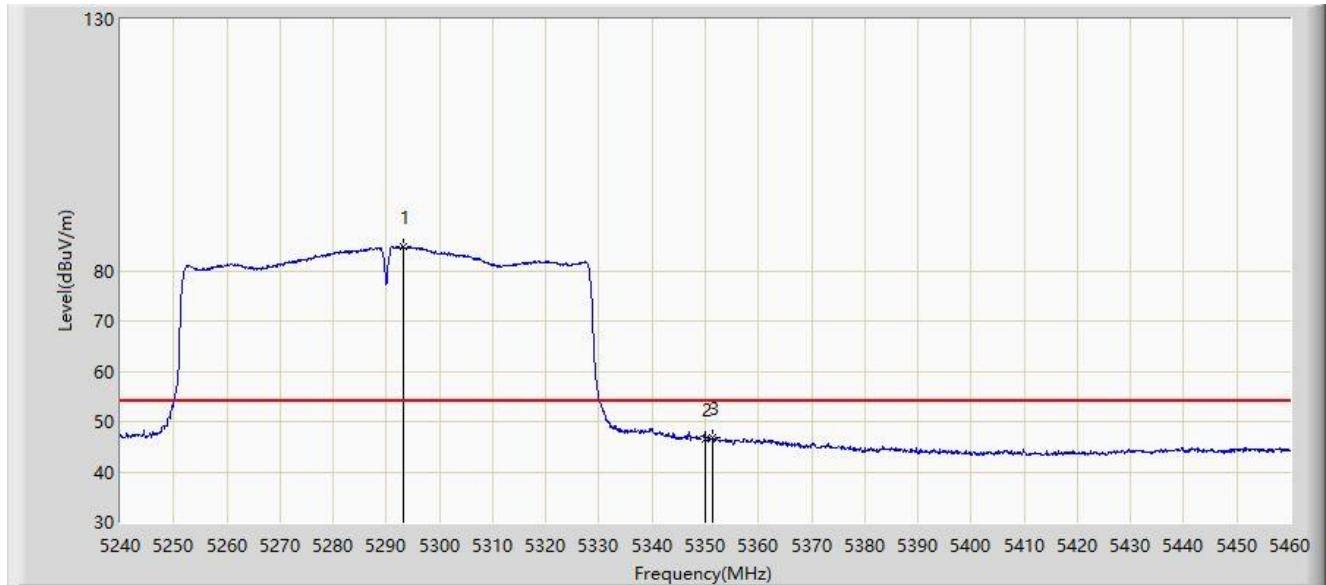


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5293.240	84.706	83.418	N/A	N/A	1.287	AV
2			5350.000	46.582	45.505	-7.418	54.000	1.078	AV
3			5351.320	46.908	45.848	-7.092	54.000	1.060	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 15:51
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz, Ant 1	

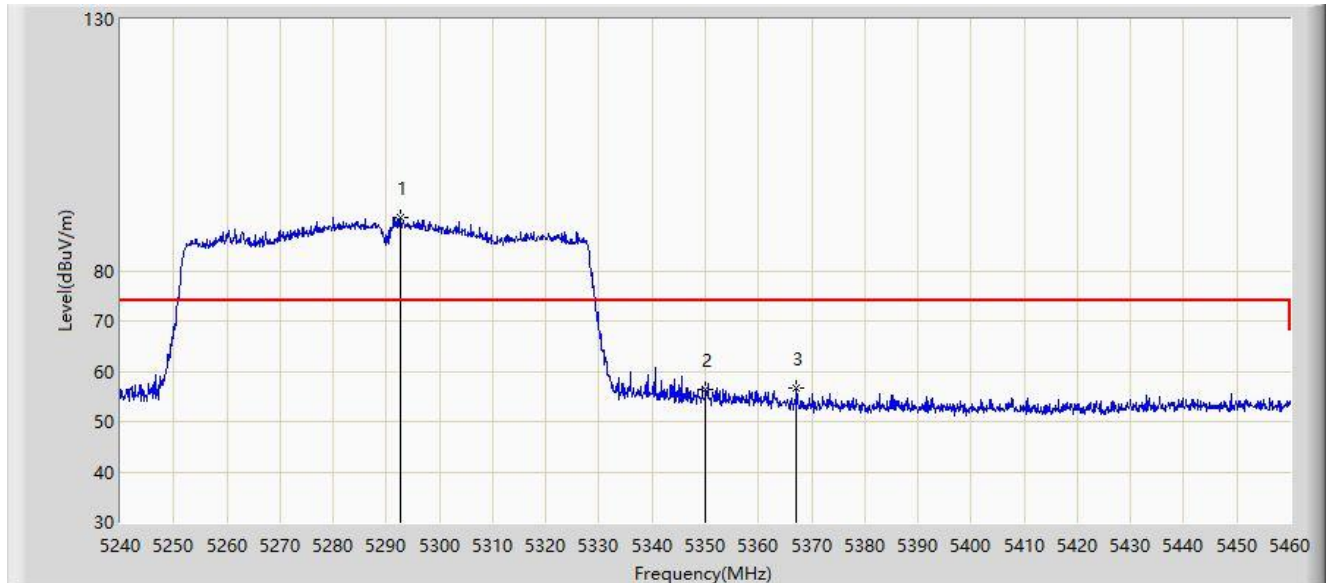


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5292.690	90.680	89.400	N/A	N/A	1.280	PK
2			5350.000	56.405	55.328	-17.595	74.000	1.078	PK
3			5367.160	56.686	55.200	-17.314	74.000	1.486	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 15:53
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5290MHz, Ant 1	

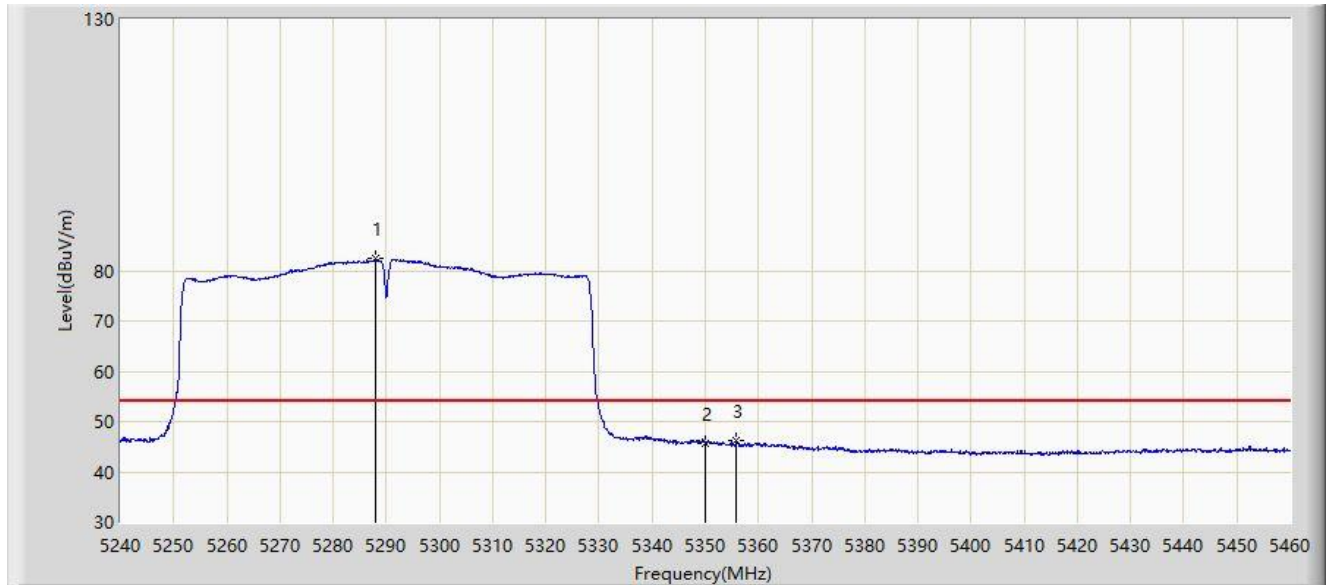


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5288.070	82.387	81.179	N/A	N/A	1.207	AV
2			5350.000	45.760	44.683	-8.240	54.000	1.078	AV
3			5355.830	46.189	45.028	-7.811	54.000	1.161	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 15:58
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz, Ant 1	

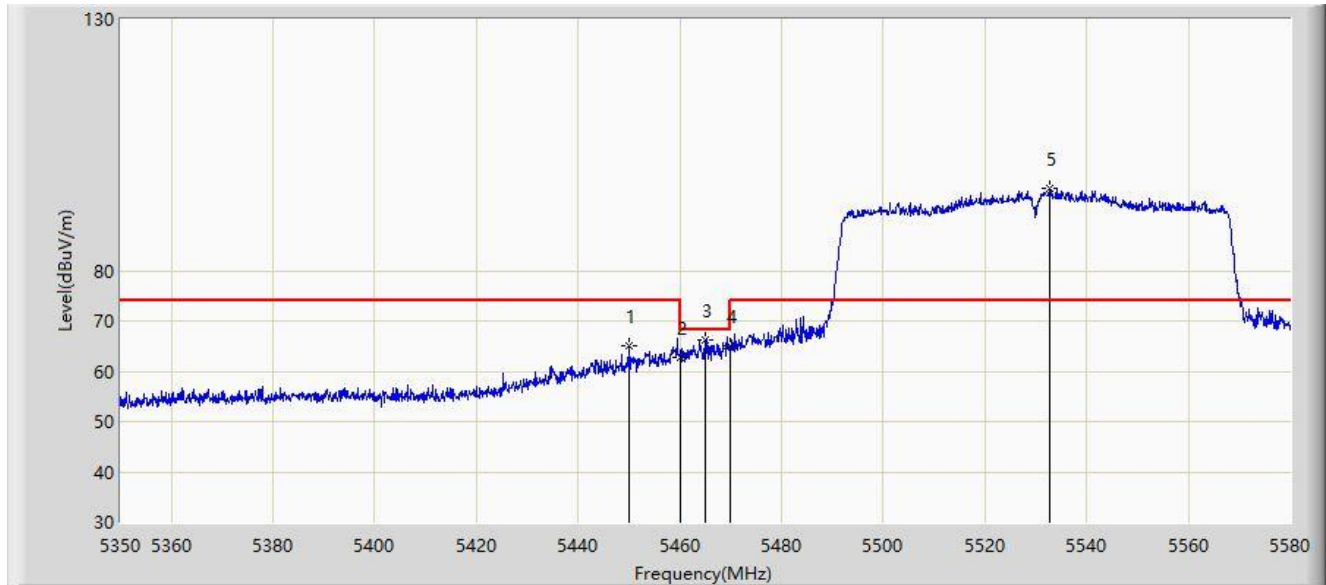


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5450.050	64.960	62.913	-9.040	74.000	2.047	PK
2			5460.000	62.810	60.739	-11.190	74.000	2.071	PK
3			5465.000	66.274	64.219	-1.926	68.200	2.055	PK
4			5470.000	65.054	63.015	-3.146	68.200	2.039	PK
5		*	5532.735	96.419	94.330	N/A	N/A	2.090	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 15:59
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz, Ant 1	

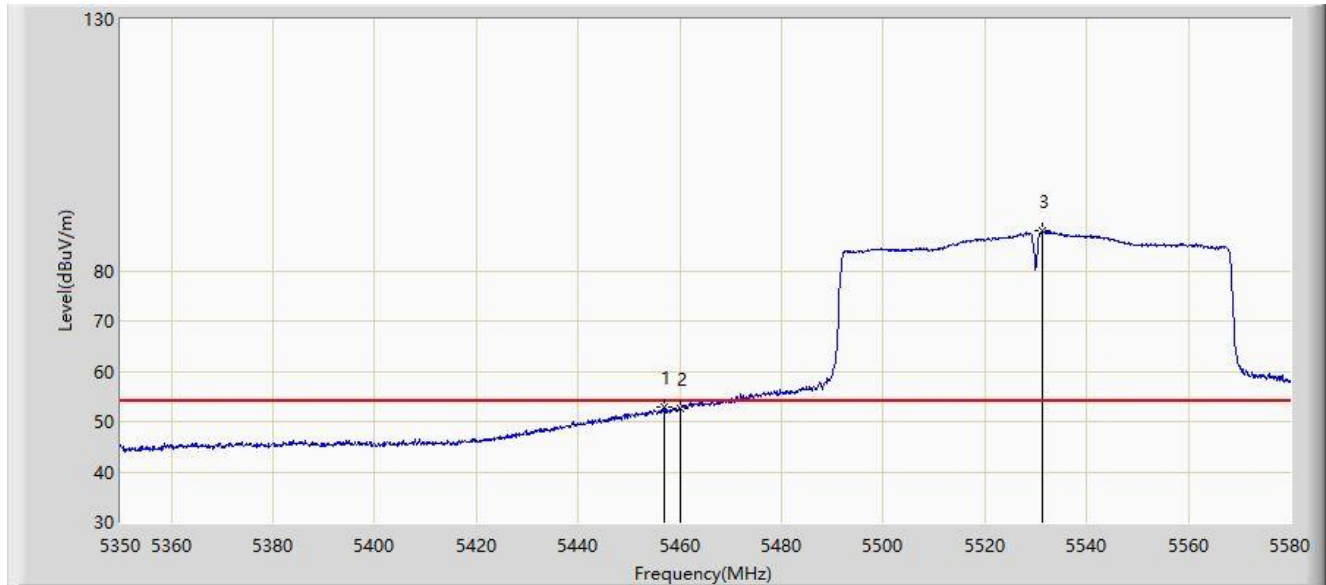


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5456.950	53.018	50.937	-0.982	54.000	2.081	AV
2			5460.000	52.517	50.446	-1.483	54.000	2.071	AV
3		*	5531.240	87.949	85.857	N/A	N/A	2.092	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 15:54
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz, Ant 1	

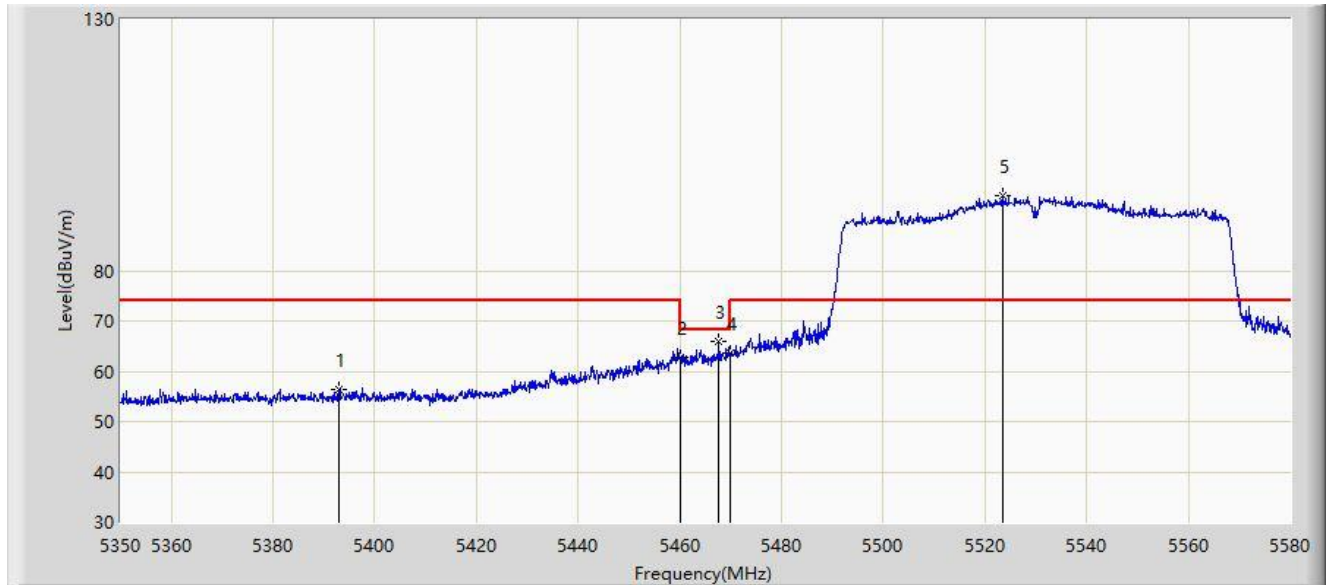


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5393.010	56.436	54.821	-17.564	74.000	1.615	PK
2			5460.000	62.847	60.776	-11.153	74.000	2.071	PK
3			5467.645	65.945	63.898	-2.255	68.200	2.047	PK
4			5470.000	63.736	61.697	-4.464	68.200	2.039	PK
5		*	5523.650	94.819	92.712	N/A	N/A	2.107	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 15:56
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5530MHz, Ant 1	

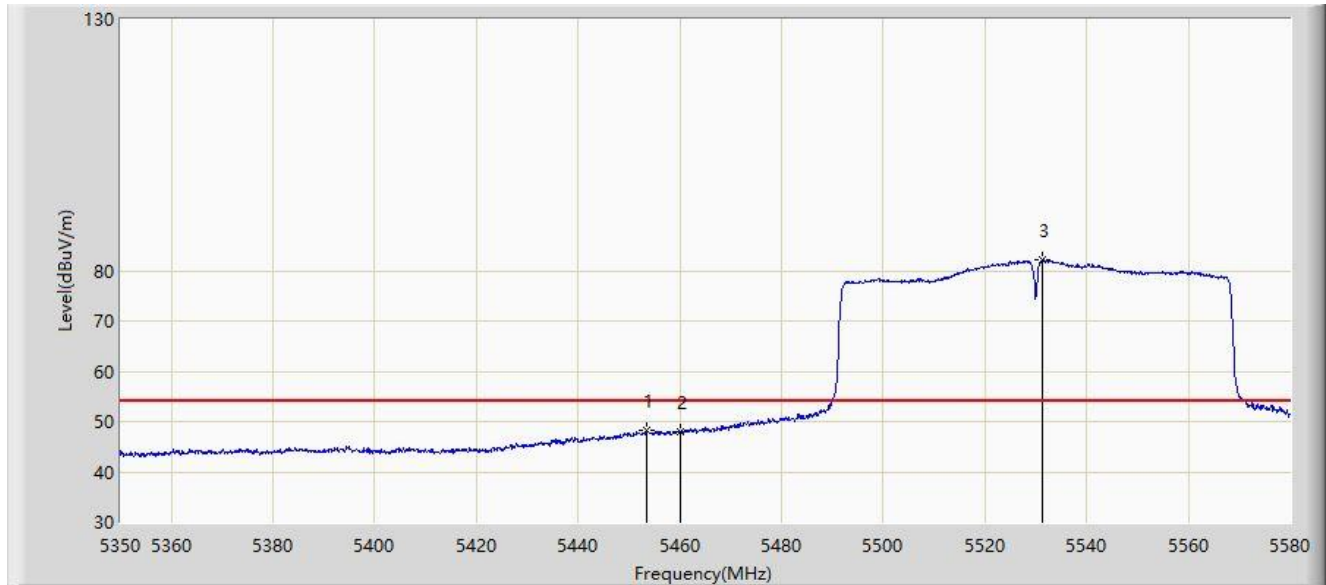


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5453.500	48.136	46.051	-5.864	54.000	2.086	AV
2			5460.000	48.060	45.989	-5.940	54.000	2.071	AV
3		*	5531.240	82.176	80.084	N/A	N/A	2.092	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:00
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz, Ant 1	

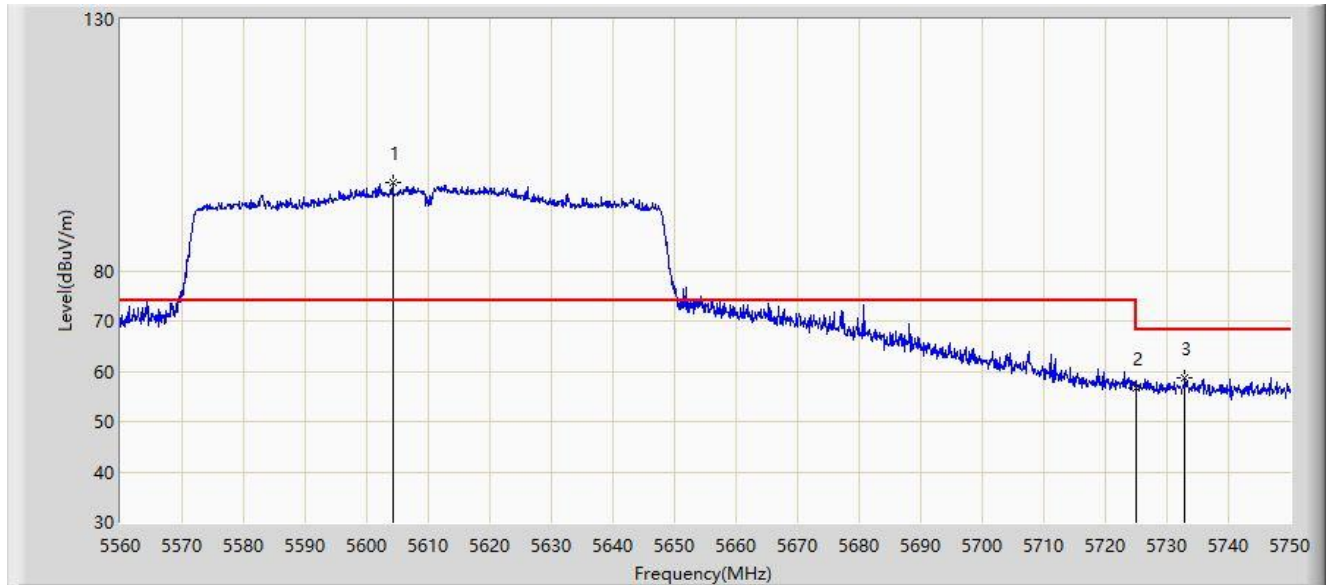


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5604.175	97.596	95.265	N/A	N/A	2.332	PK
2			5725.000	56.794	53.996	-11.406	68.200	2.799	PK
3			5732.900	58.625	55.919	-9.575	68.200	2.706	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:05
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5610MHz, Ant 1	

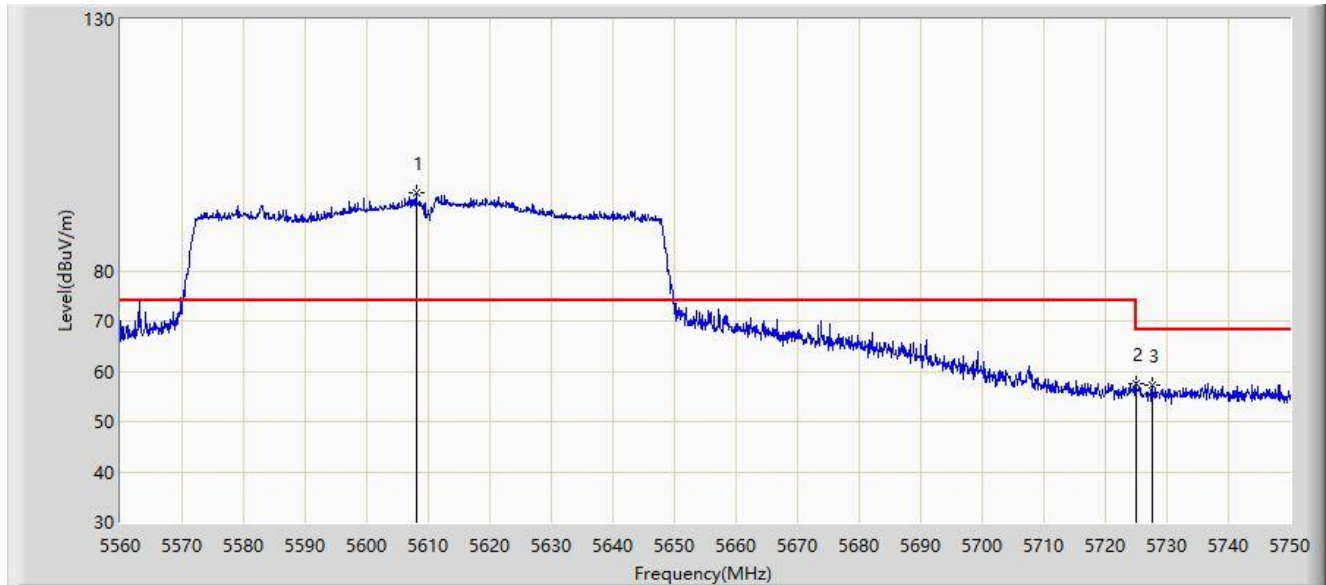


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5608.070	95.503	93.144	N/A	N/A	2.359	PK
2			5725.000	57.606	54.808	-10.594	68.200	2.799	PK
3			5727.580	57.285	54.515	-10.915	68.200	2.770	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:09
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz, Ant 1	

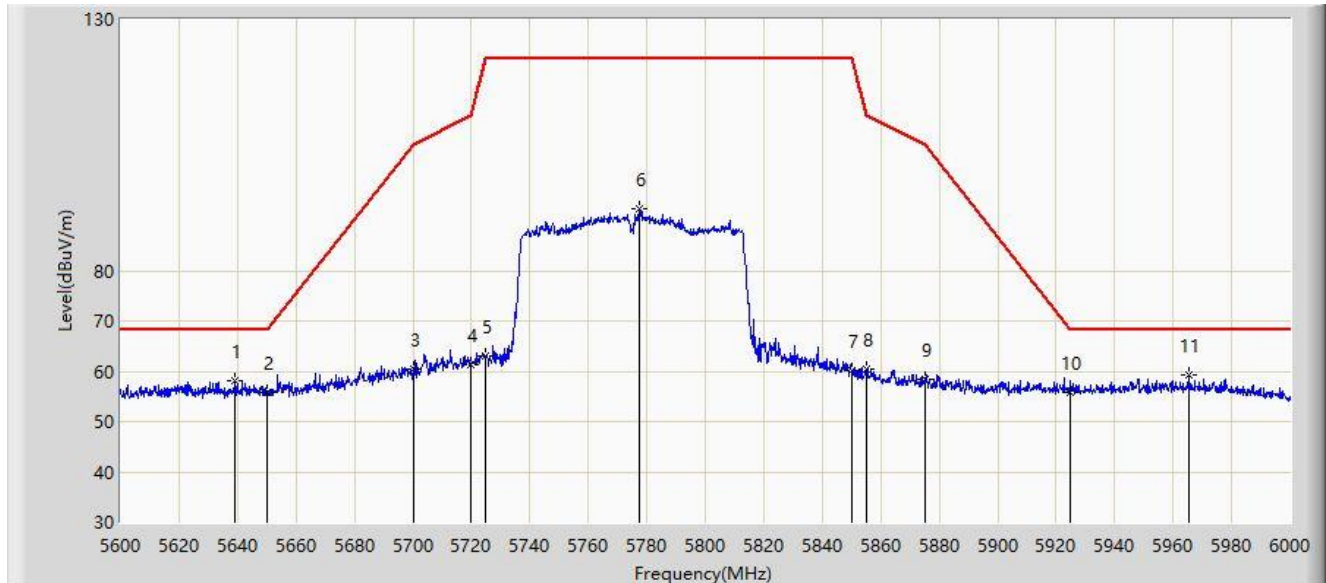


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5639.200	58.146	55.614	-10.054	68.200	2.532	PK
2			5650.000	55.903	53.410	-12.297	68.200	2.492	PK
3			5700.000	60.553	57.764	-44.647	105.200	2.790	PK
4			5720.000	61.224	58.379	-49.576	110.800	2.846	PK
5			5725.000	62.945	60.147	-59.255	122.200	2.799	PK
6			5777.400	92.438	89.592	N/A	N/A	2.846	PK
7			5850.000	60.161	56.981	-62.039	122.200	3.179	PK
8			5855.000	60.331	57.150	-50.469	110.800	3.181	PK
9			5875.000	58.270	54.896	-46.930	105.200	3.374	PK
10			5925.000	55.725	52.283	-12.475	68.200	3.441	PK
11		*	5965.200	59.137	55.274	-9.063	68.200	3.863	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:12
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT80 at channel 5775MHz, Ant 1	

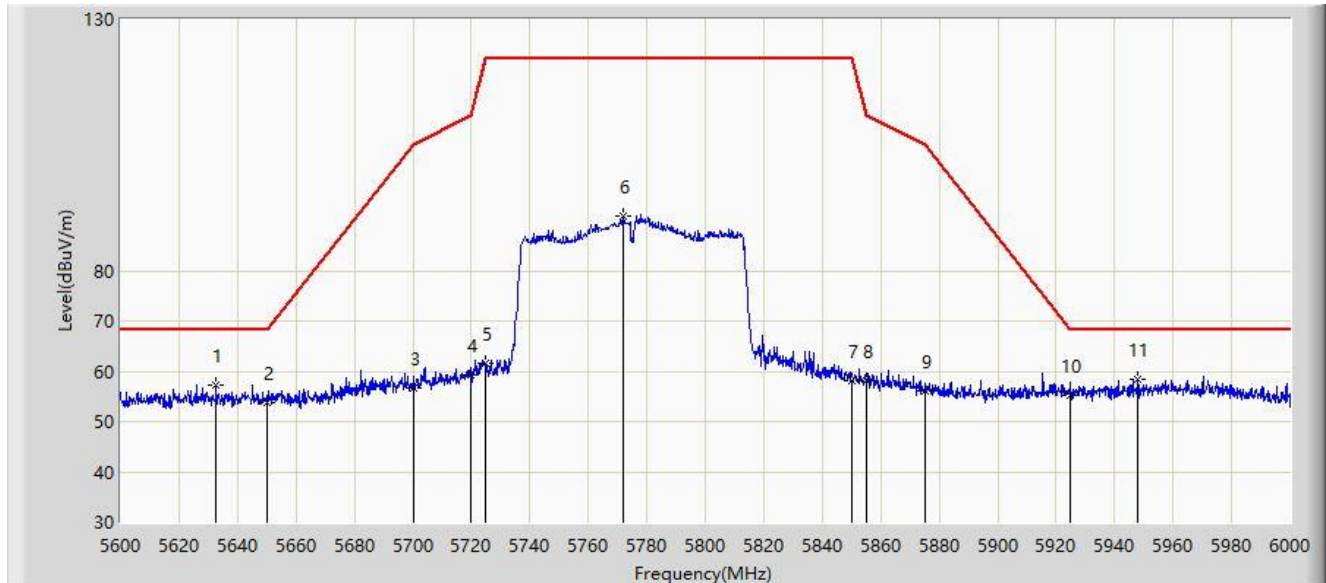


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5632.800	57.188	54.609	-11.012	68.200	2.578	PK
2			5650.000	53.885	51.392	-14.315	68.200	2.492	PK
3			5700.000	56.803	54.014	-48.397	105.200	2.790	PK
4			5720.000	59.219	56.374	-51.581	110.800	2.846	PK
5			5725.000	61.588	58.790	-60.612	122.200	2.799	PK
6			5771.800	90.963	88.108	N/A	N/A	2.854	PK
7			5850.000	58.201	55.021	-63.999	122.200	3.179	PK
8			5855.000	58.160	54.979	-52.640	110.800	3.181	PK
9			5875.000	56.038	52.664	-49.162	105.200	3.374	PK
10			5925.000	55.237	51.795	-12.963	68.200	3.441	PK
11		*	5948.000	58.520	54.790	-9.680	68.200	3.730	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:14
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz, Ant 1	

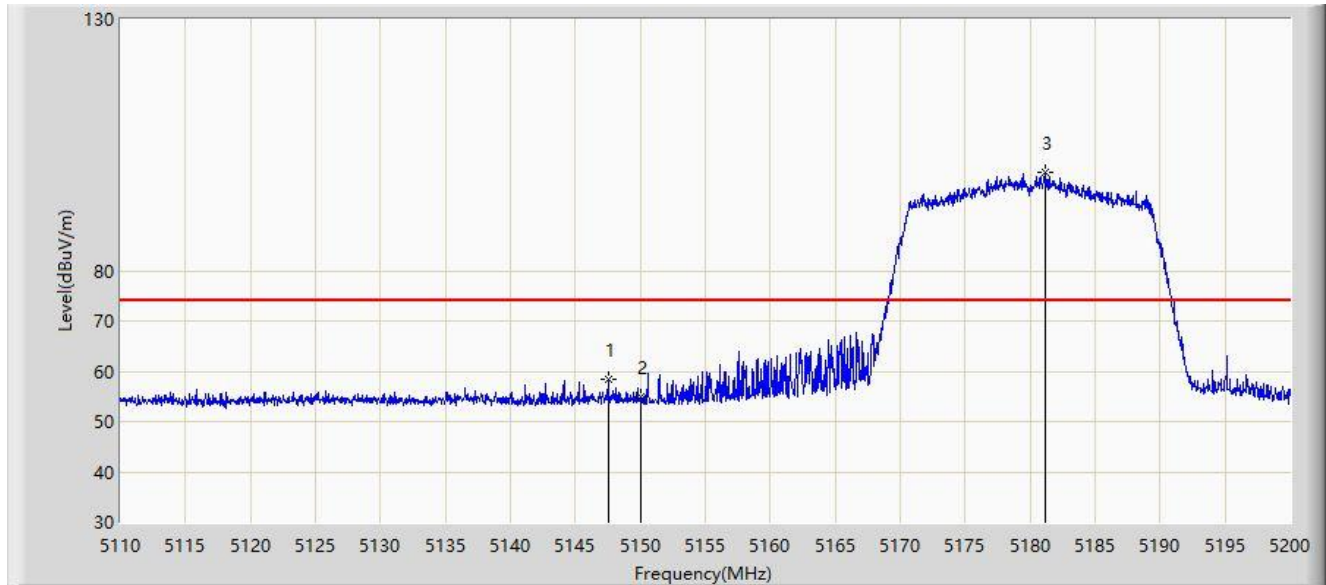


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5147.530	58.320	56.016	-9.880	68.200	2.305	PK
2			5150.000	54.876	52.588	-13.324	68.200	2.287	PK
3		*	5181.190	99.544	97.368	N/A	N/A	2.176	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:17
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz, Ant 1	

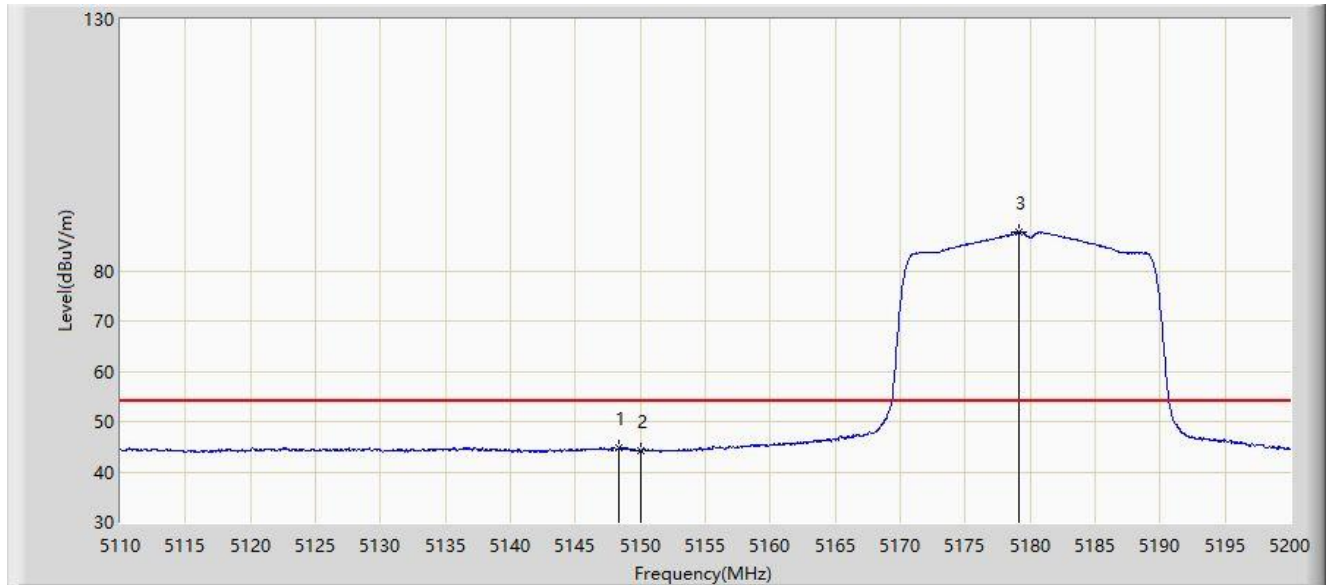


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5148.385	44.874	42.572	-9.126	54.000	2.302	AV
2			5150.000	44.262	41.974	-9.738	54.000	2.287	AV
3		*	5179.165	87.669	85.495	N/A	N/A	2.173	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:19
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz, Ant 1	

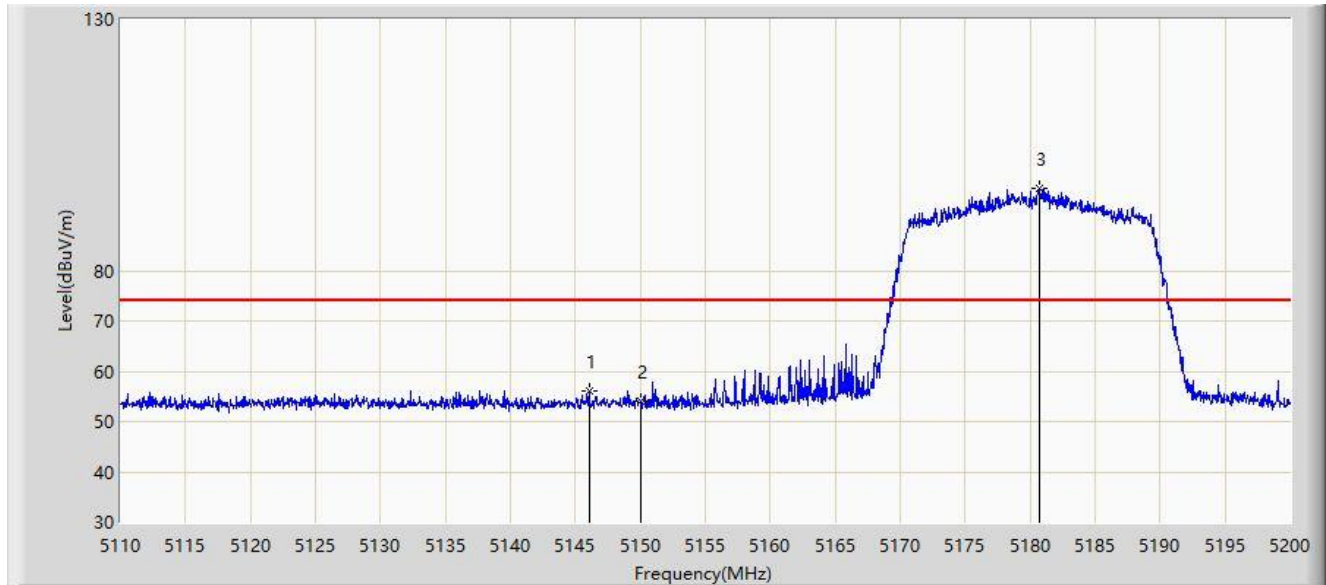


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5146.045	56.079	53.780	-17.921	74.000	2.298	PK
2			5150.000	54.027	51.739	-19.973	74.000	2.287	PK
3		*	5180.740	96.337	94.162	N/A	N/A	2.175	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:20
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5180MHz, Ant 1	

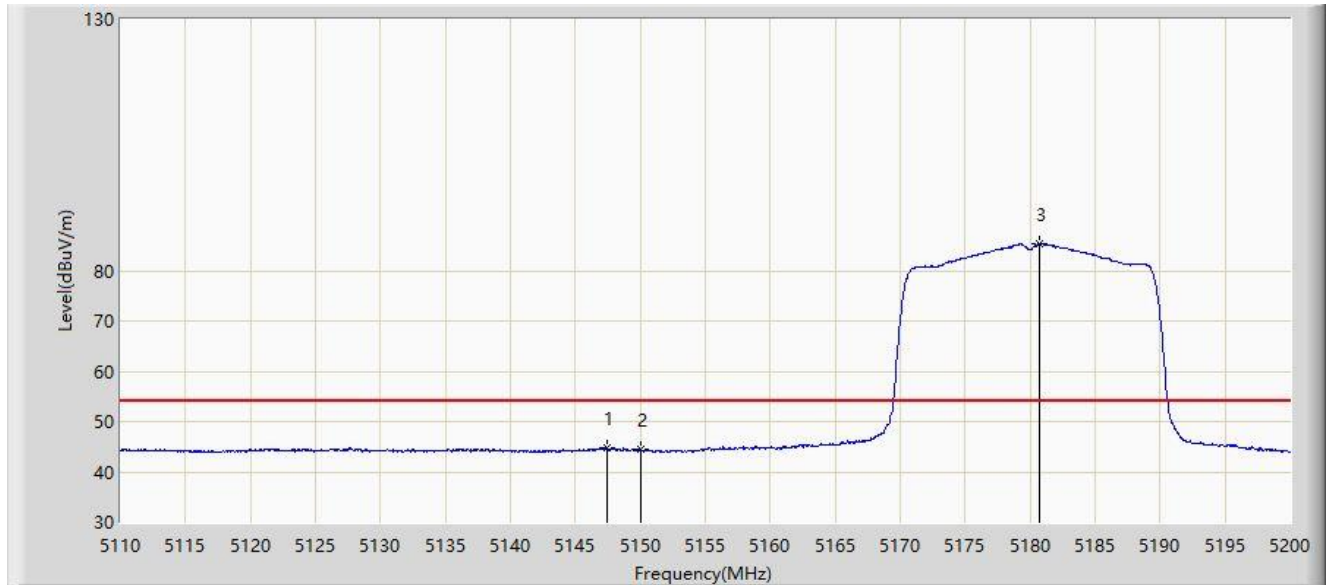


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5147.395	44.886	42.583	-9.114	54.000	2.303	AV
2			5150.000	44.354	42.066	-9.646	54.000	2.287	AV
3		*	5180.740	85.365	83.190	N/A	N/A	2.175	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:21
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz, Ant 1	

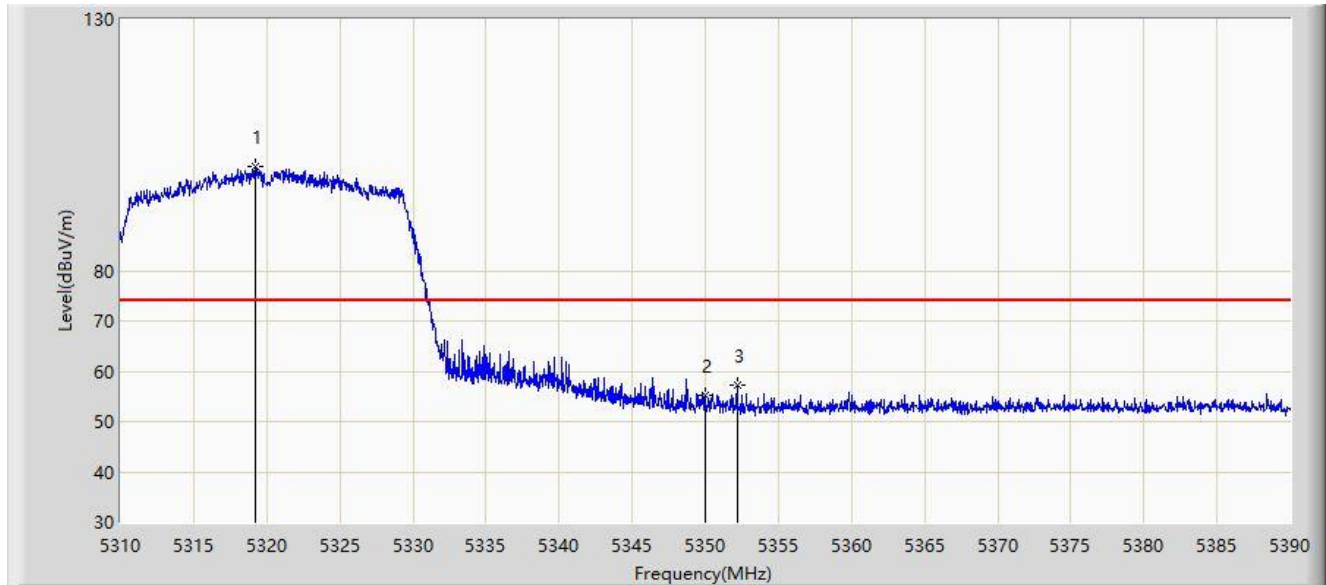


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5319.200	100.728	99.374	N/A	N/A	1.354	PK
2			5350.000	55.321	54.244	-18.679	74.000	1.078	PK
3			5352.200	57.116	56.059	-16.884	74.000	1.057	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:23
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz, Ant 1	

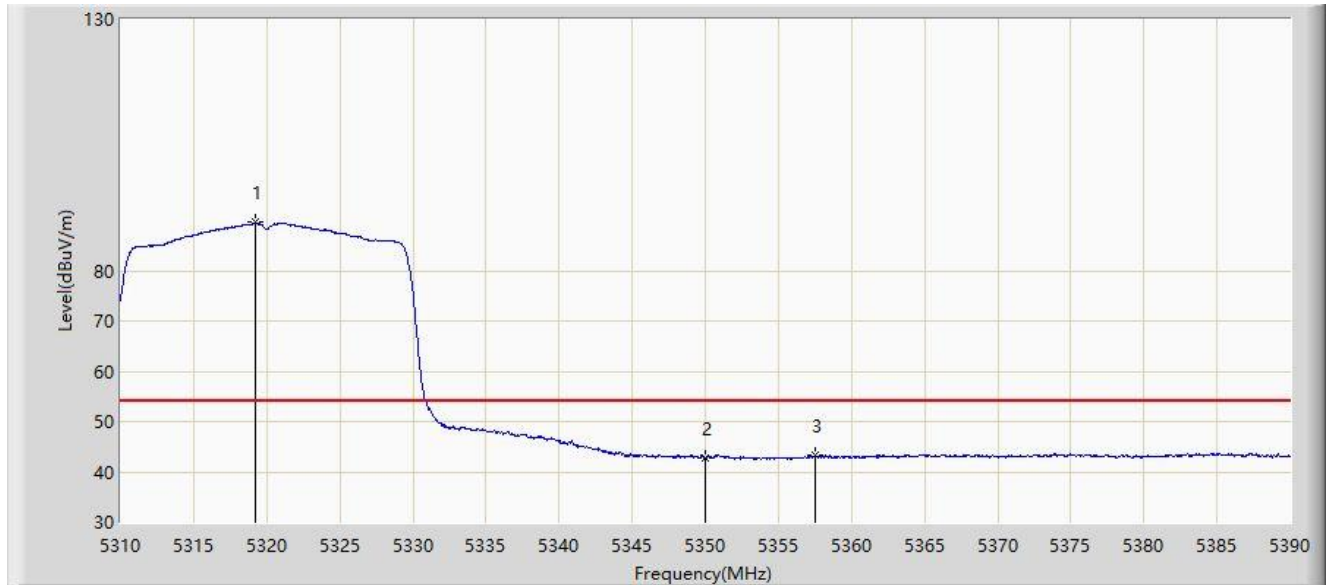


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5319.200	89.579	88.225	N/A	N/A	1.354	AV
2			5350.000	42.836	41.759	-11.164	54.000	1.078	AV
3			5357.560	43.209	41.998	-10.791	54.000	1.211	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:24
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz, Ant 1	

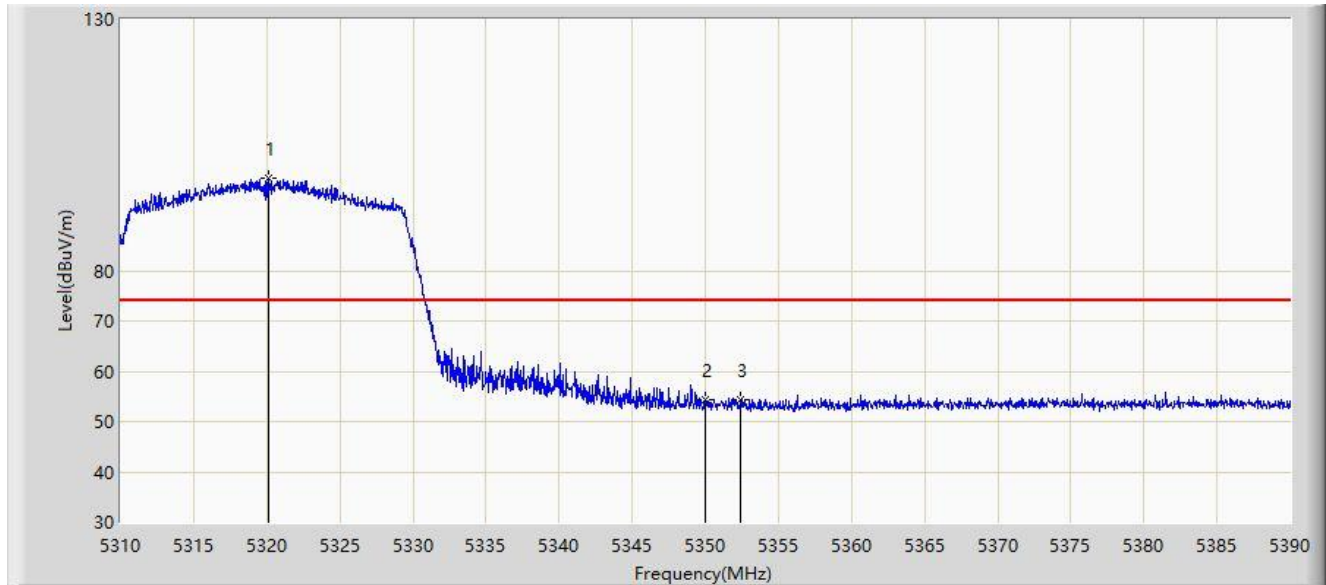


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5320.080	98.338	96.988	N/A	N/A	1.350	PK
2			5350.000	54.283	53.206	-19.717	74.000	1.078	PK
3			5352.440	54.411	53.347	-19.589	74.000	1.063	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:25
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5320MHz, Ant 1	

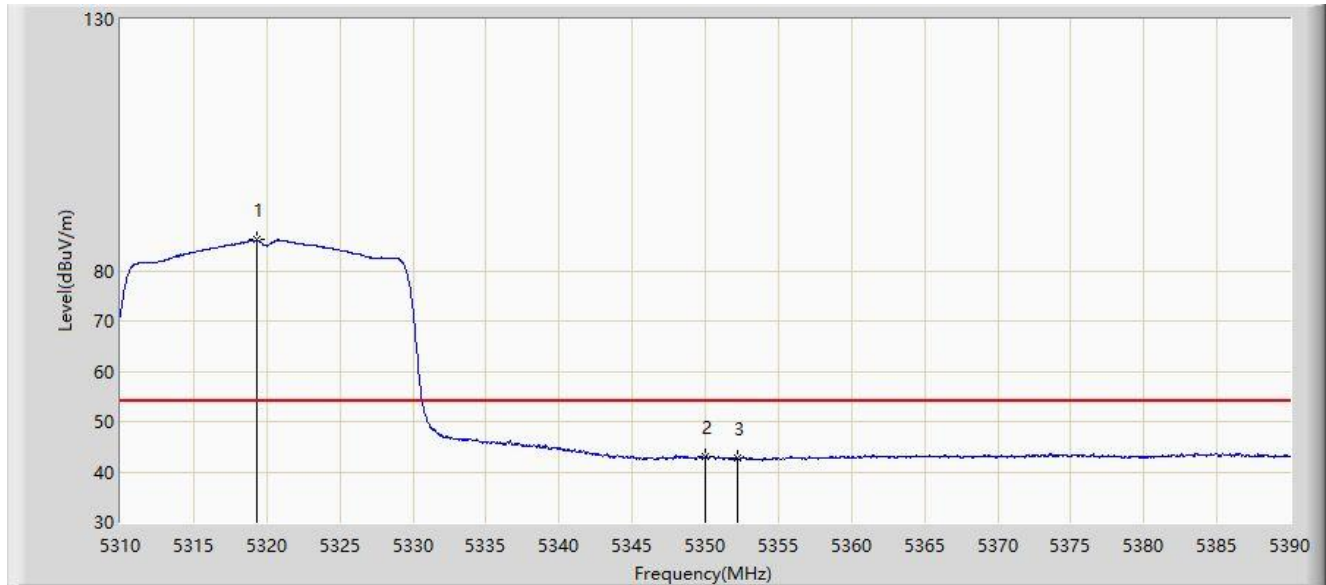


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5319.320	86.102	84.748	N/A	N/A	1.354	AV
2			5350.000	43.027	41.950	-10.973	54.000	1.078	AV
3			5352.240	42.895	41.837	-11.105	54.000	1.058	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:25
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz, Ant 1	

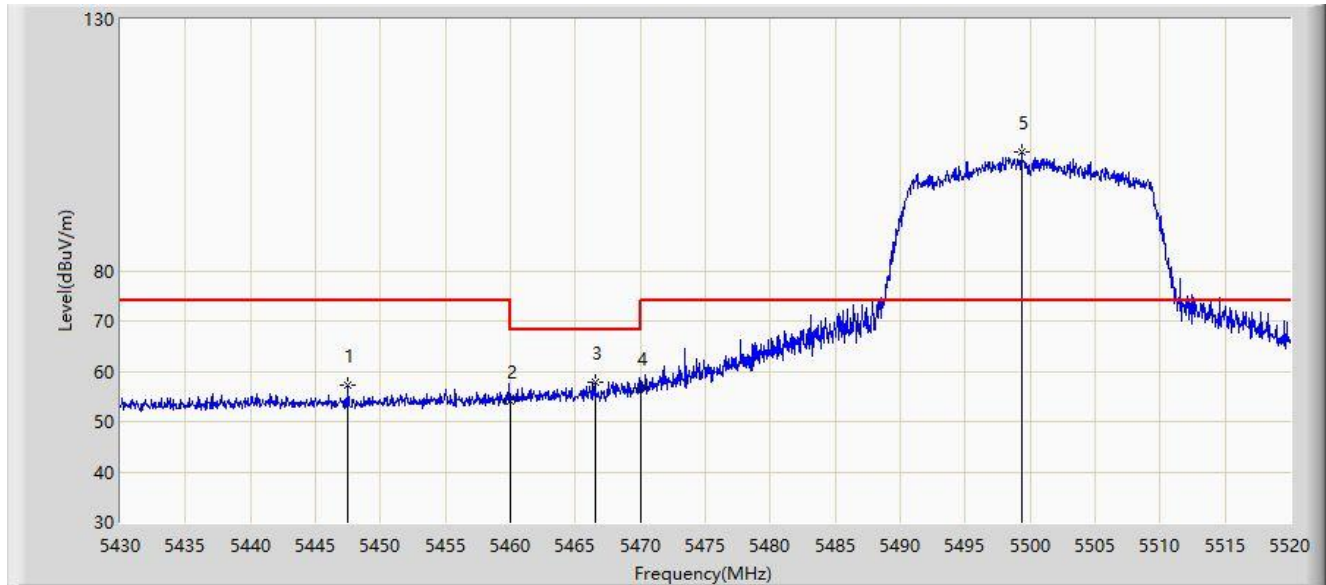


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5447.505	57.193	55.175	-16.807	74.000	2.019	PK
2			5460.000	54.184	52.113	-19.816	74.000	2.071	PK
3			5466.495	57.918	55.868	-10.282	68.200	2.050	PK
4			5470.000	56.548	54.509	-11.652	68.200	2.039	PK
5		*	5499.345	103.619	101.439	N/A	N/A	2.180	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:26
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz, Ant 1	

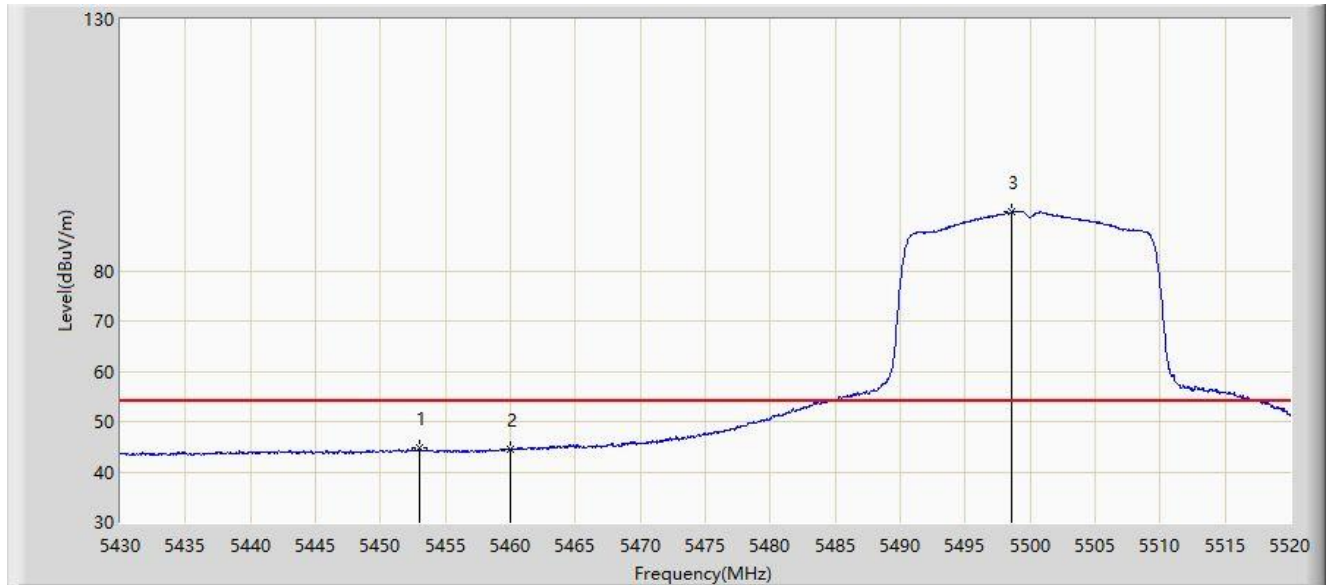


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5452.995	44.730	42.650	-9.270	54.000	2.079	AV
2			5460.000	44.380	42.309	-9.620	54.000	2.071	AV
3		*	5498.625	91.616	89.428	N/A	N/A	2.188	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:27
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz, Ant 1	

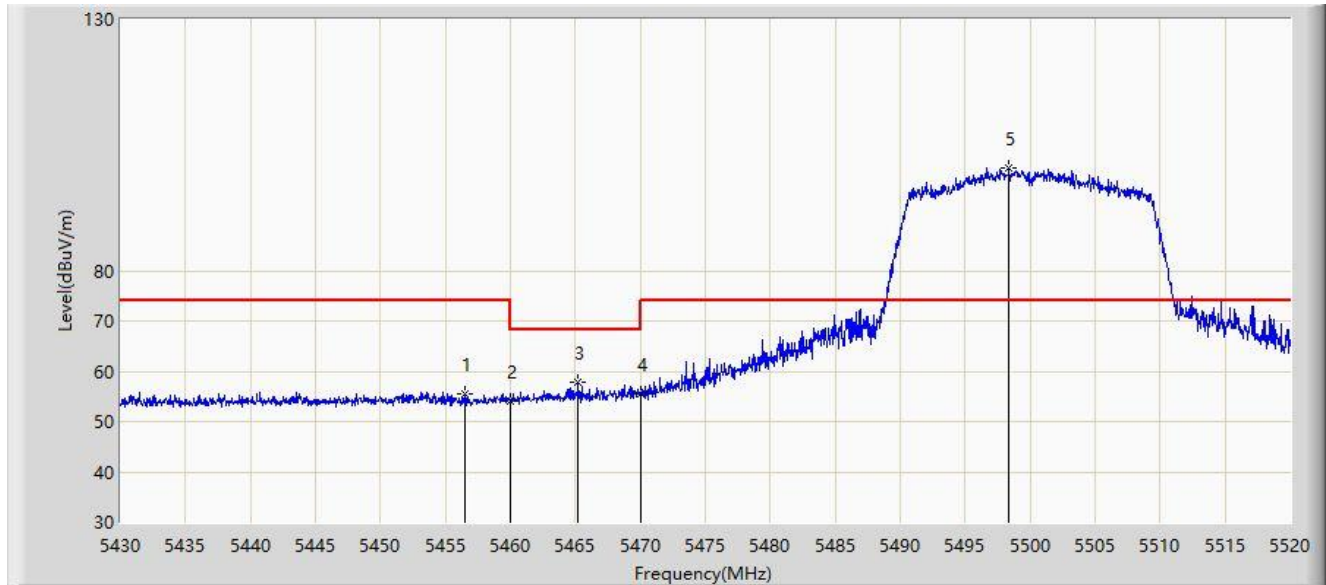


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5456.460	55.418	53.335	-18.582	74.000	2.083	PK
2			5460.000	54.009	51.938	-19.991	74.000	2.071	PK
3			5465.235	57.720	55.666	-10.480	68.200	2.054	PK
4			5470.000	55.495	53.456	-12.705	68.200	2.039	PK
5		*	5498.355	100.533	98.342	N/A	N/A	2.191	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:28
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5500MHz, Ant 1	

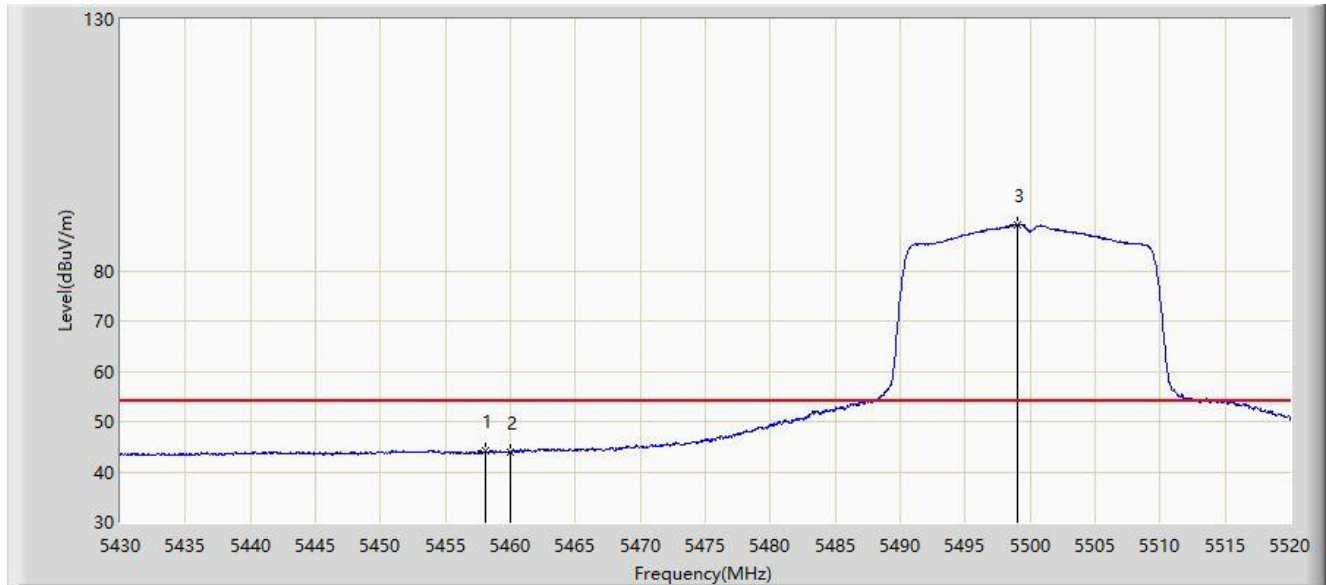


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5458.080	44.181	42.103	-9.819	54.000	2.078	AV
2			5460.000	43.915	41.844	-10.085	54.000	2.071	AV
3		*	5498.985	89.163	86.979	N/A	N/A	2.185	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:30
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz, Ant 1	

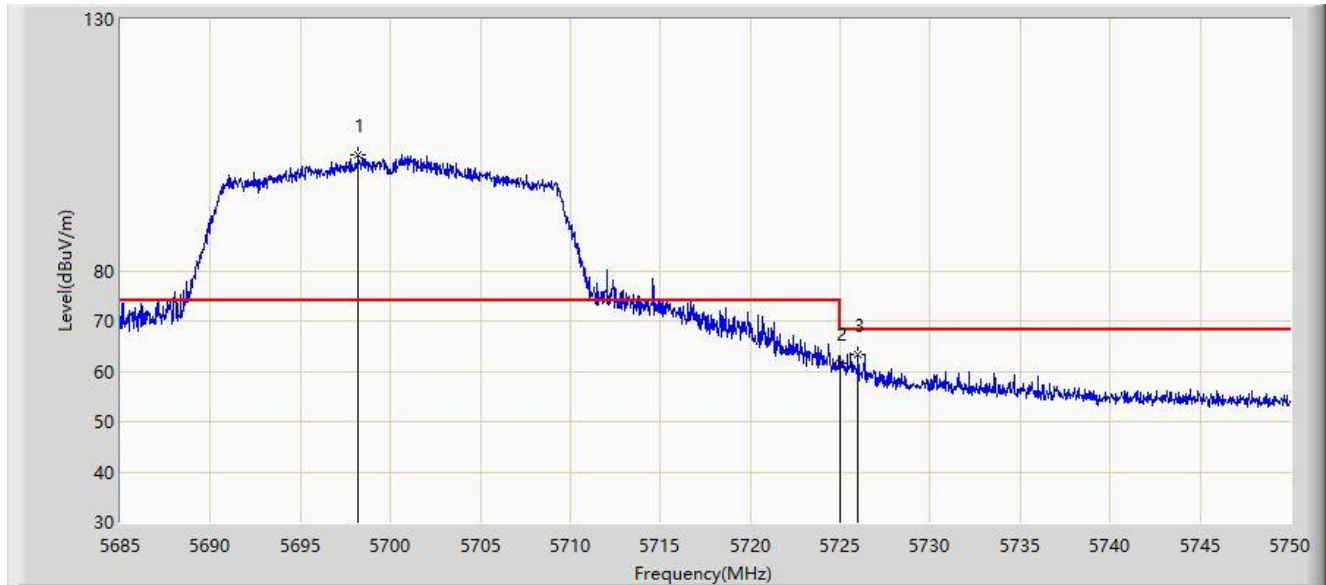


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5698.195	103.075	100.317	N/A	N/A	2.758	PK
2			5725.000	61.466	58.668	-6.734	68.200	2.799	PK
3			5725.982	63.405	60.616	-4.795	68.200	2.790	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:32
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5700MHz, Ant 1	

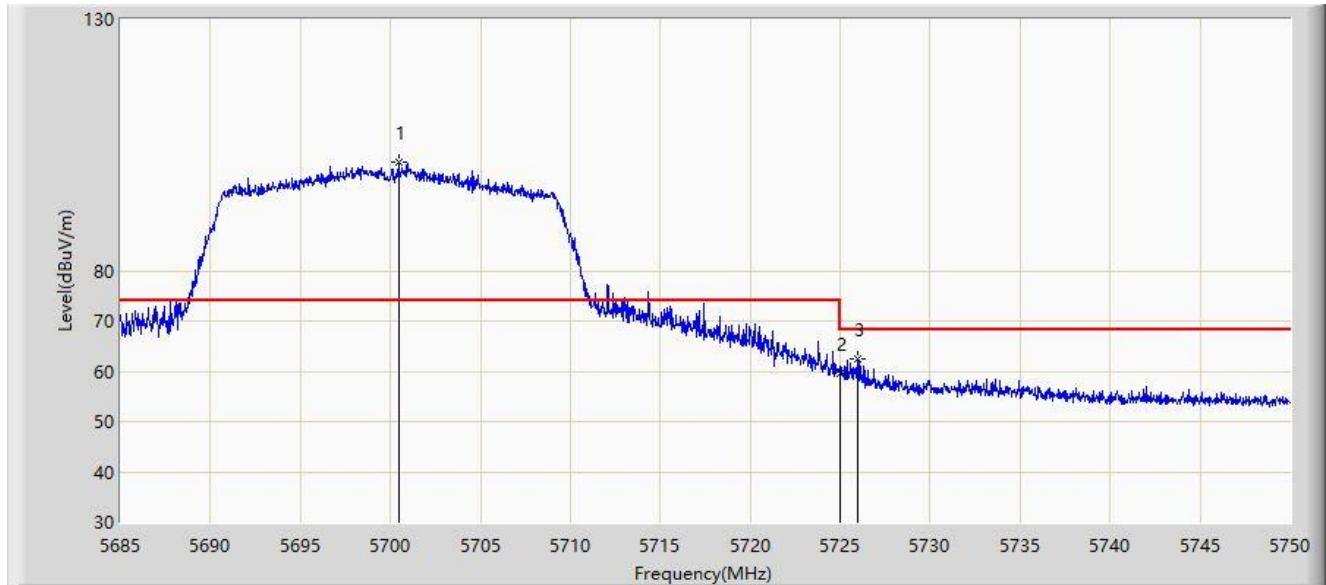


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5700.437	101.596	98.799	N/A	N/A	2.798	PK
2			5725.000	59.449	56.651	-8.751	68.200	2.799	PK
3			5725.950	62.456	59.666	-5.744	68.200	2.790	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:34
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz, Ant 1	

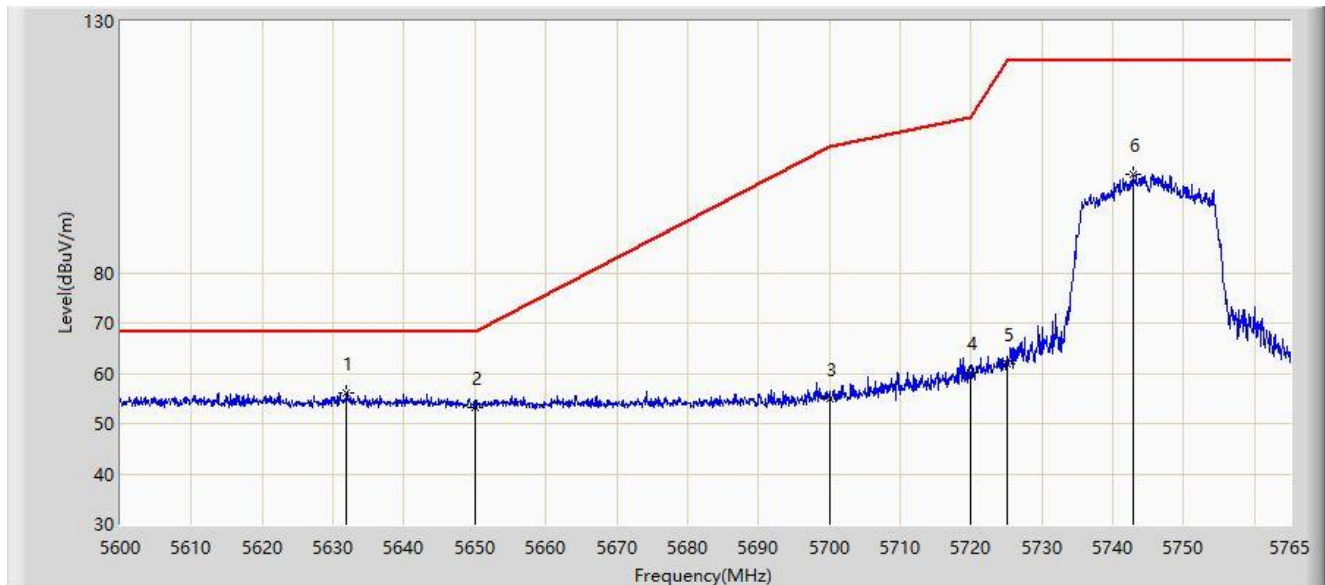


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5631.845	56.034	53.448	-12.166	68.200	2.585	PK
2			5650.000	53.211	50.718	-14.989	68.200	2.492	PK
3			5700.000	54.950	52.161	-50.250	105.200	2.790	PK
4			5720.000	60.289	57.444	-50.511	110.800	2.846	PK
5			5725.000	61.785	58.987	-60.415	122.200	2.799	PK
6			5742.808	99.695	97.108	N/A	N/A	2.586	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:36
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5745MHz, Ant 1	

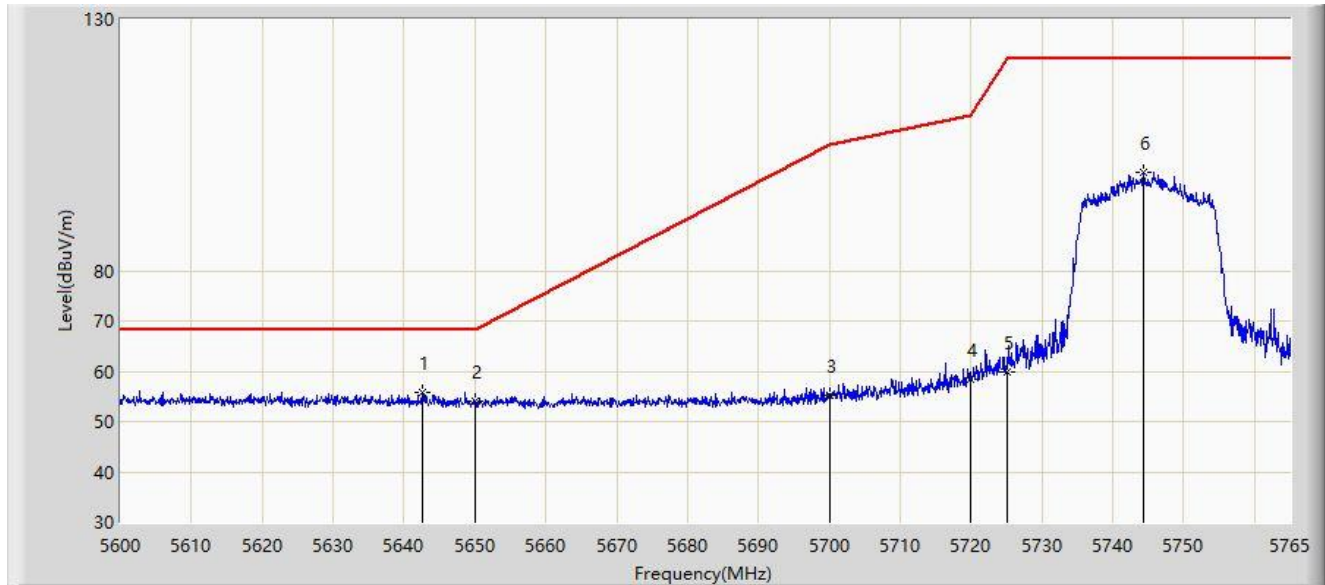


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5642.570	55.798	53.283	-12.402	68.200	2.515	PK
2			5650.000	54.066	51.573	-14.134	68.200	2.492	PK
3			5700.000	55.359	52.570	-49.841	105.200	2.790	PK
4			5720.000	58.353	55.508	-52.447	110.800	2.846	PK
5			5725.000	59.852	57.054	-62.348	122.200	2.799	PK
6			5744.375	99.633	97.025	N/A	N/A	2.608	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:38
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5825MHz, Ant 1	

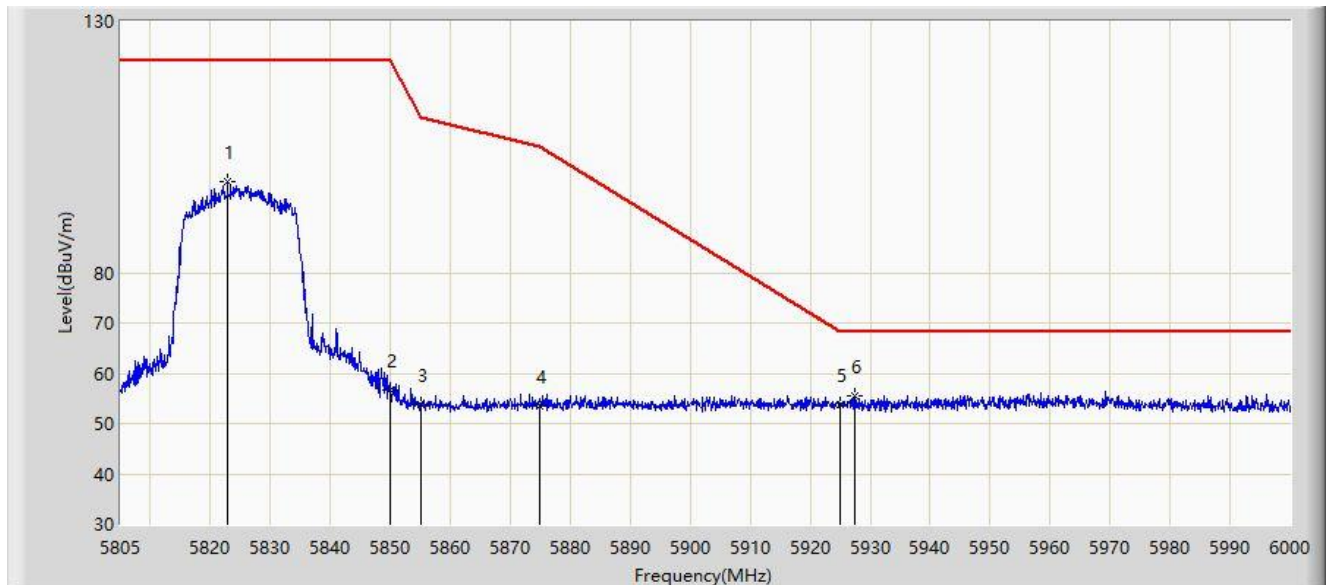


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5822.842	98.048	94.859	N/A	N/A	3.189	PK
2			5850.000	56.661	53.481	-65.539	122.200	3.179	PK
3			5855.000	53.865	50.684	-56.935	110.800	3.181	PK
4			5875.000	53.538	50.164	-51.662	105.200	3.374	PK
5			5925.000	53.775	50.333	-14.425	68.200	3.441	PK
6		*	5927.362	55.573	52.140	-12.627	68.200	3.433	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:41
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE20 at channel 5825MHz, Ant 1	

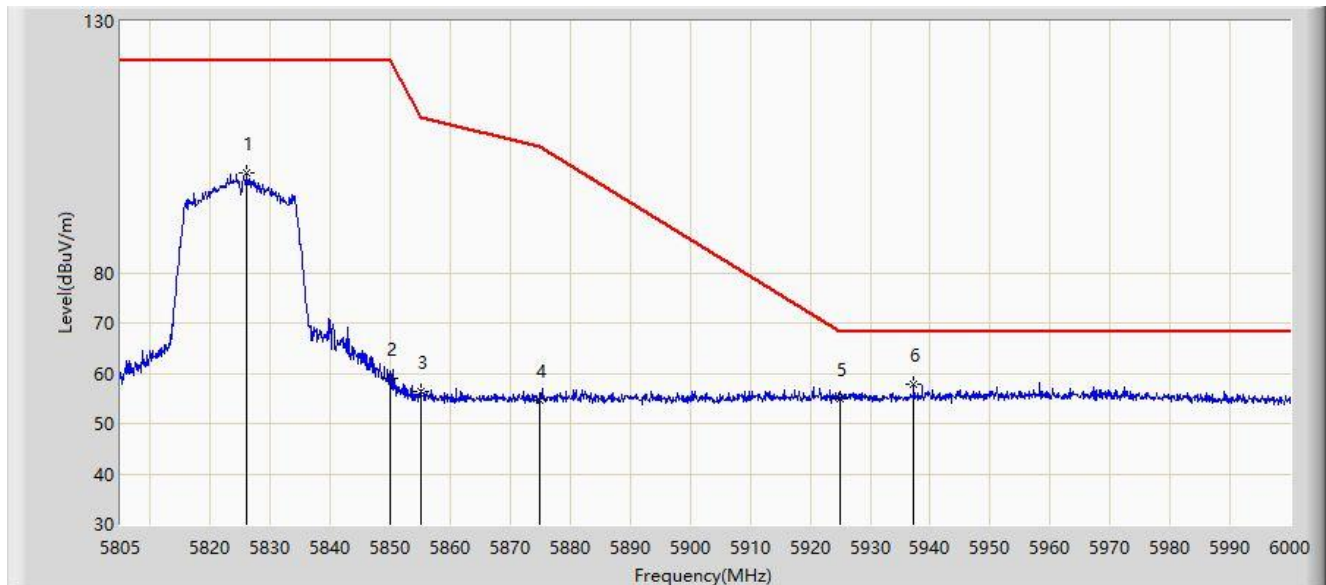


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5826.060	99.762	96.582	N/A	N/A	3.180	PK
2			5850.000	58.981	55.801	-63.219	122.200	3.179	PK
3			5855.000	56.319	53.138	-54.481	110.800	3.181	PK
4			5875.000	54.527	51.153	-50.673	105.200	3.374	PK
5			5925.000	54.954	51.512	-13.246	68.200	3.441	PK
6		*	5937.308	57.913	54.362	-10.287	68.200	3.551	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:43
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz, Ant 1	

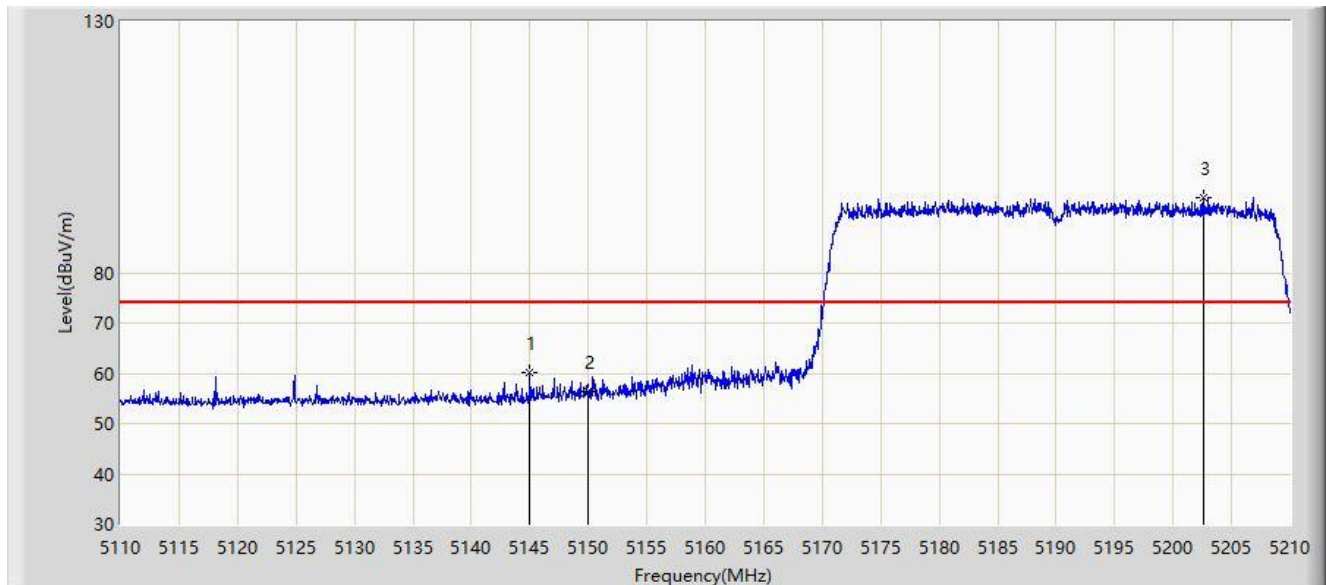


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5145.000	60.020	57.724	-13.980	74.000	2.296	PK
2			5150.000	56.308	54.020	-17.692	74.000	2.287	PK
3		*	5202.550	94.962	93.026	N/A	N/A	1.936	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:44
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz, Ant 1	

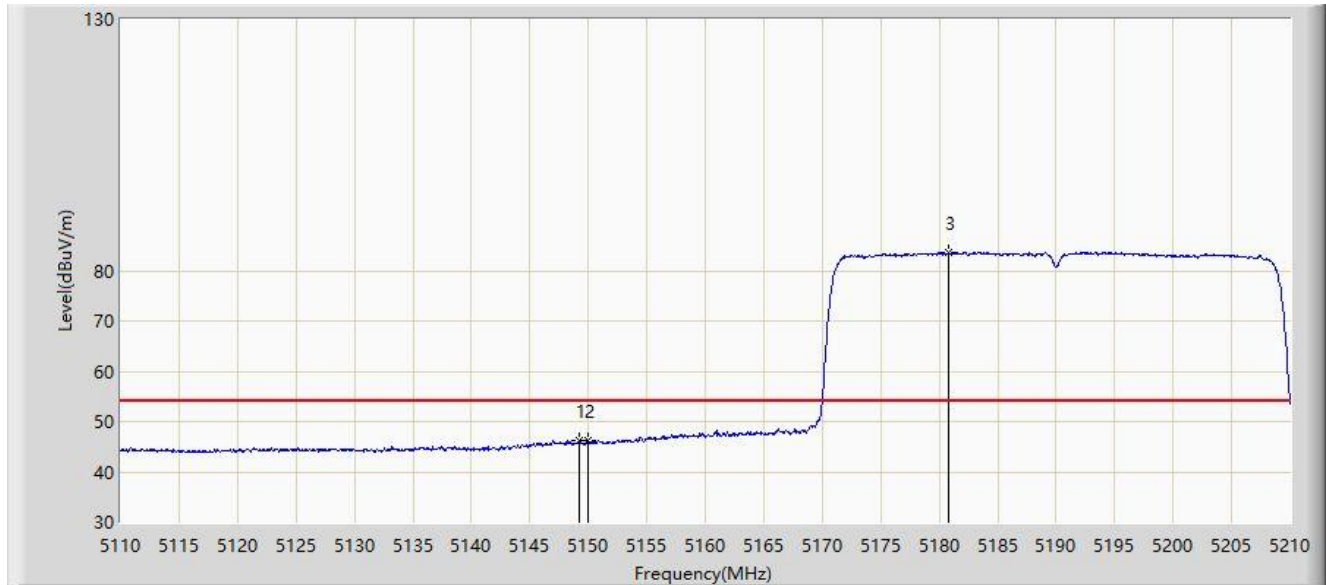


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5149.250	46.126	43.832	-7.874	54.000	2.294	AV
2			5150.000	46.095	43.807	-7.905	54.000	2.287	AV
3		*	5180.850	83.670	81.495	N/A	N/A	2.175	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:46
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz, Ant 1	

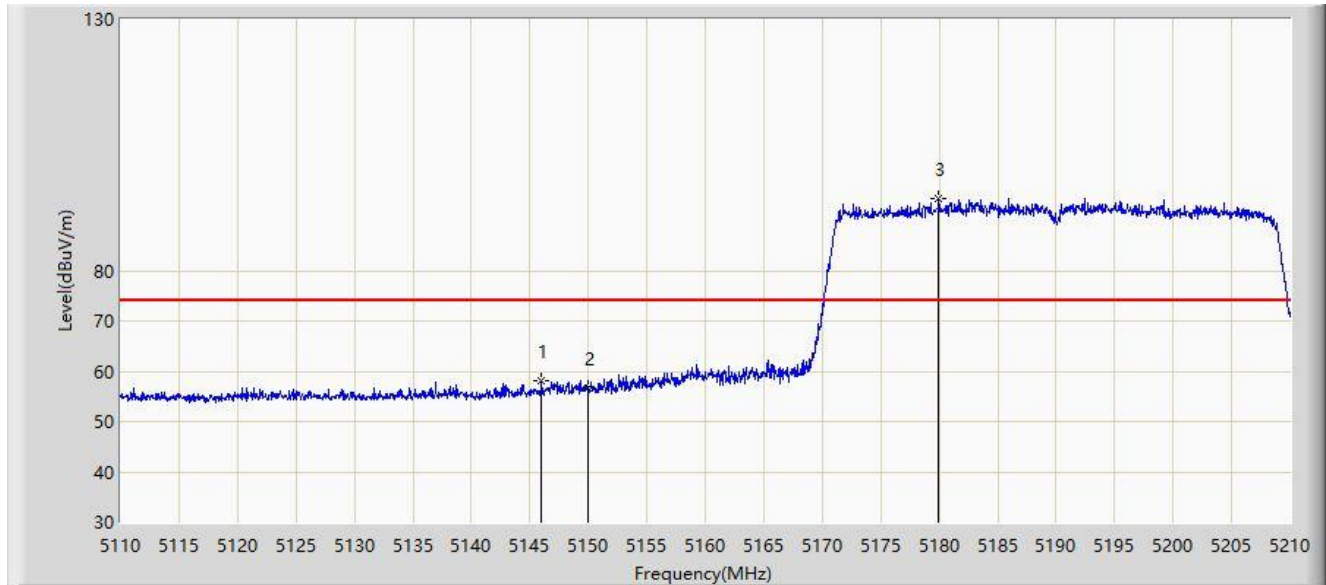


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5146.000	58.091	55.792	-15.909	74.000	2.298	PK
2			5150.000	56.535	54.247	-17.465	74.000	2.287	PK
3		*	5179.950	94.373	92.199	N/A	N/A	2.175	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:48
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5190MHz, Ant 1	

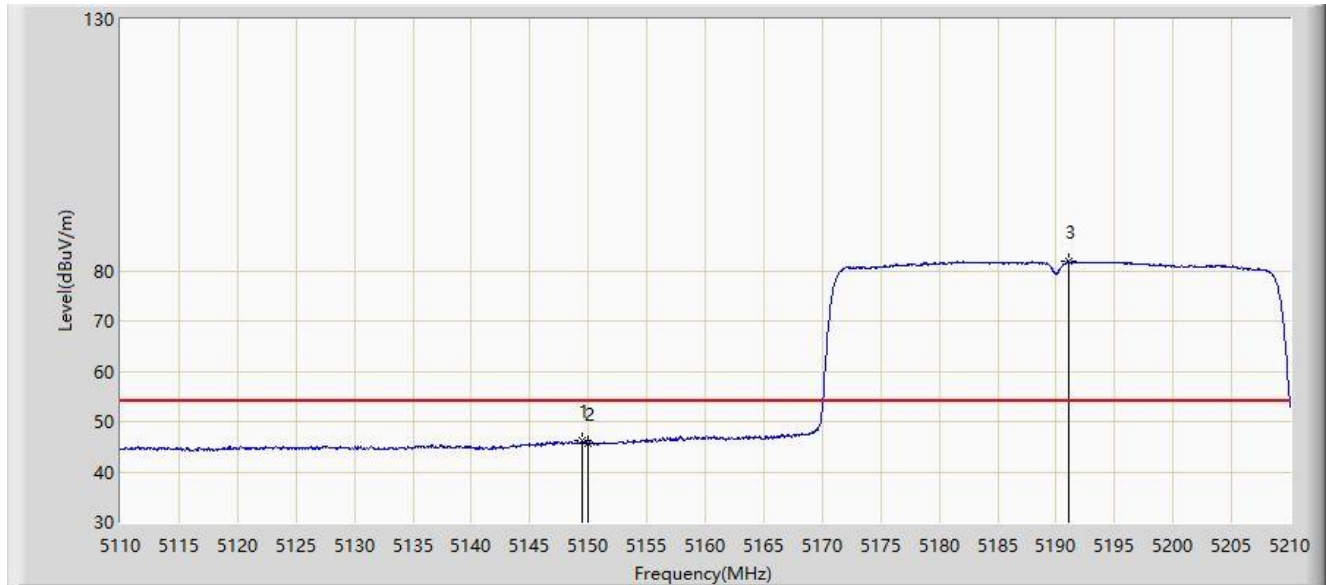


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5149.500	46.183	43.891	-7.817	54.000	2.292	AV
2			5150.000	45.527	43.239	-8.473	54.000	2.287	AV
3		*	5191.050	81.894	79.810	N/A	N/A	2.084	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:48
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz, Ant 1	

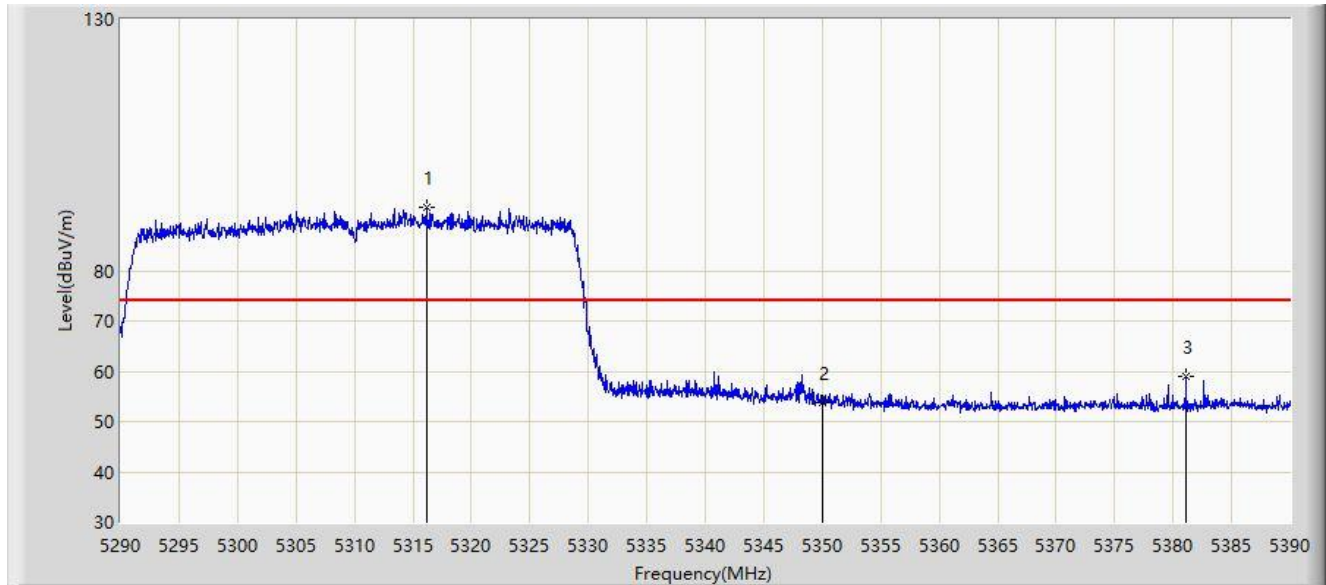


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5316.200	92.503	91.138	N/A	N/A	1.366	PK
2			5350.000	53.809	52.732	-20.191	74.000	1.078	PK
3			5381.100	59.111	57.432	-14.889	74.000	1.678	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:49
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz, Ant 1	

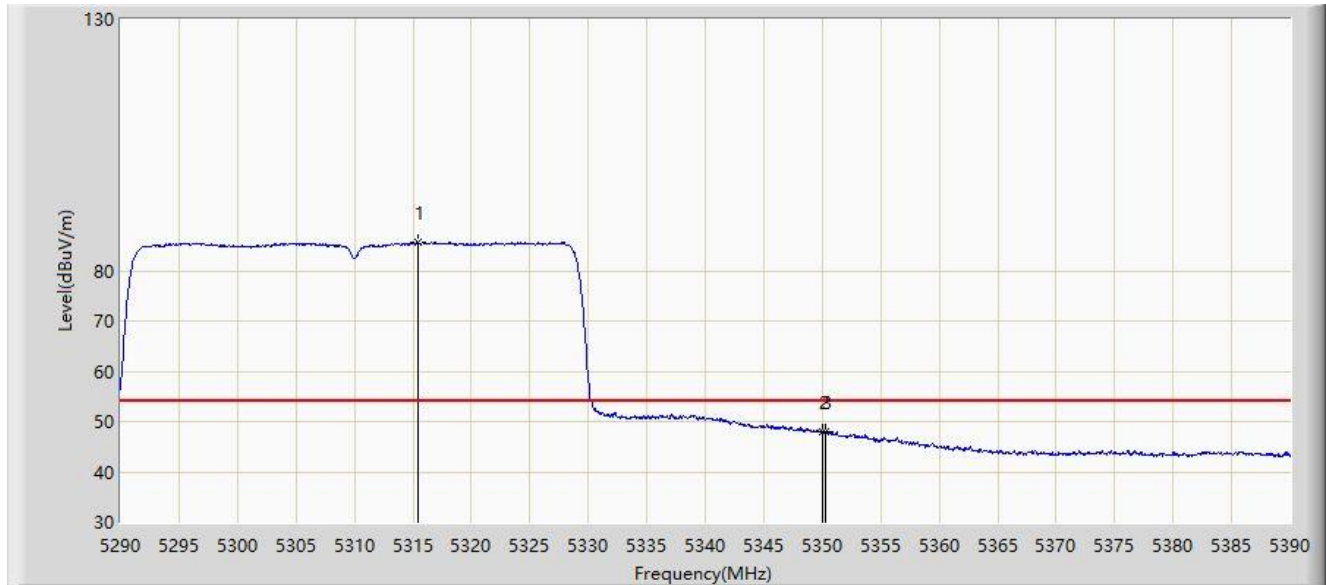


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5315.500	85.688	84.321	N/A	N/A	1.368	AV
2			5350.000	47.832	46.755	-6.168	54.000	1.078	AV
3			5350.300	48.102	47.029	-5.898	54.000	1.073	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:50
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz, Ant 1	

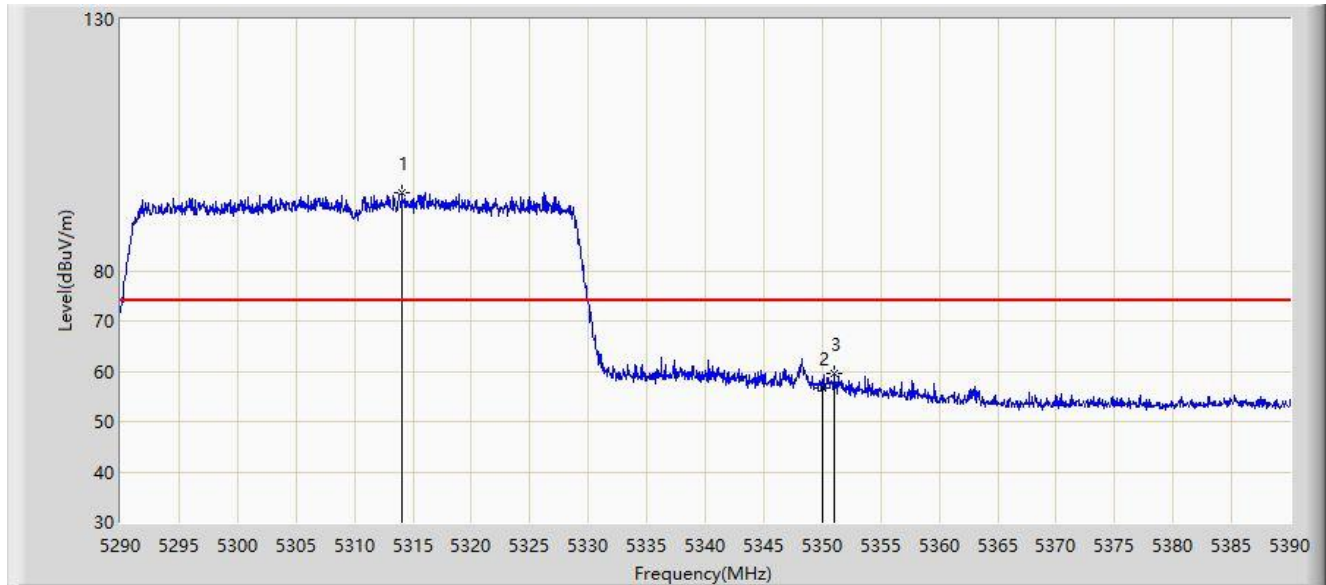


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5314.050	95.508	94.137	N/A	N/A	1.372	PK
2			5350.000	56.714	55.637	-17.286	74.000	1.078	PK
3			5351.000	59.475	58.411	-14.525	74.000	1.064	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:51
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5310MHz, Ant 1	

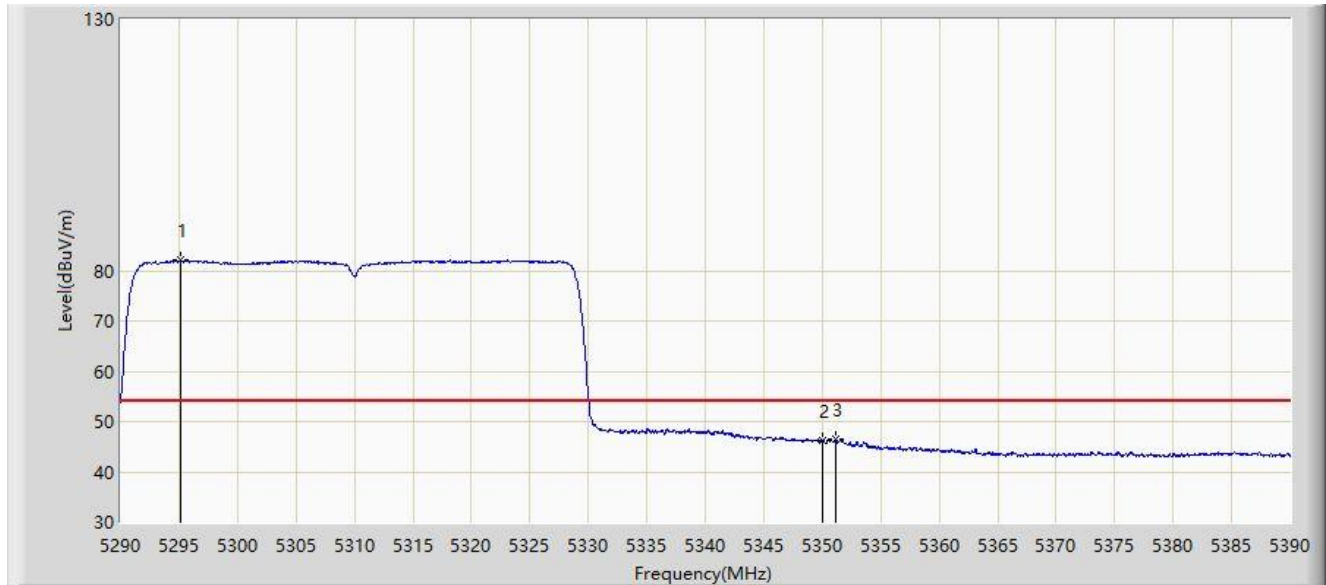


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5295.100	82.092	80.775	N/A	N/A	1.316	AV
2			5350.000	46.176	45.099	-7.824	54.000	1.078	AV
3			5351.100	46.377	45.314	-7.623	54.000	1.063	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:52
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz, Ant 1	

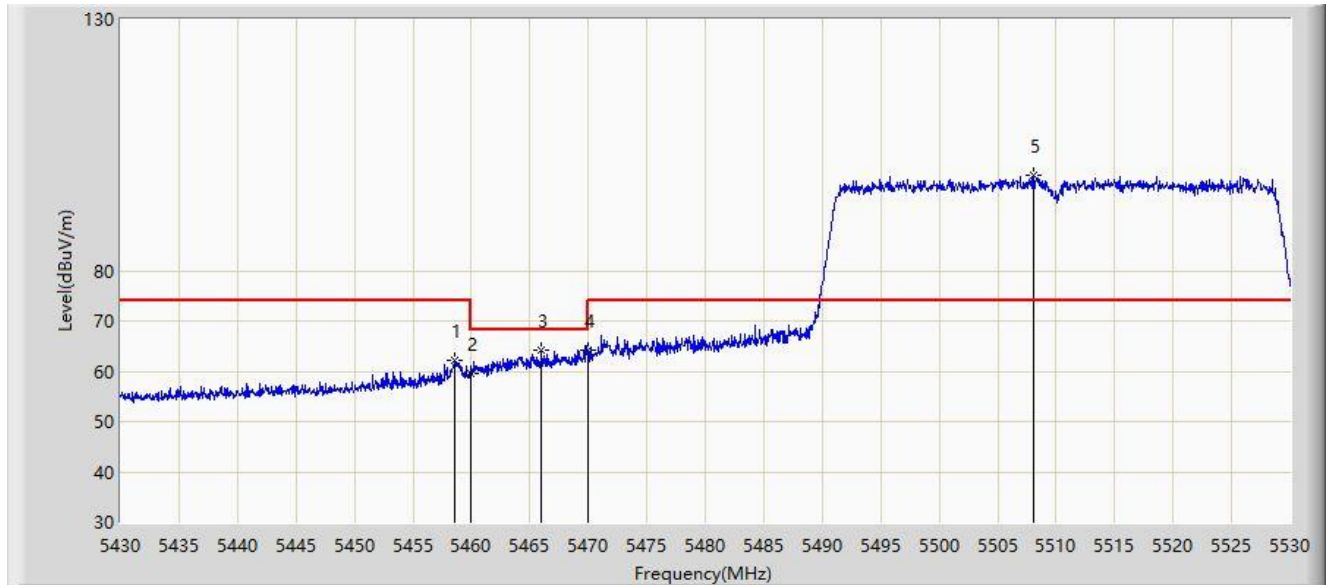


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5458.550	62.209	60.133	-11.791	74.000	2.076	PK
2			5460.000	59.531	57.460	-14.469	74.000	2.071	PK
3			5466.000	64.064	62.012	-4.136	68.200	2.053	PK
4			5470.000	64.253	62.214	-3.947	68.200	2.039	PK
5		*	5508.050	98.863	96.749	N/A	N/A	2.115	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:54
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz, Ant 1	

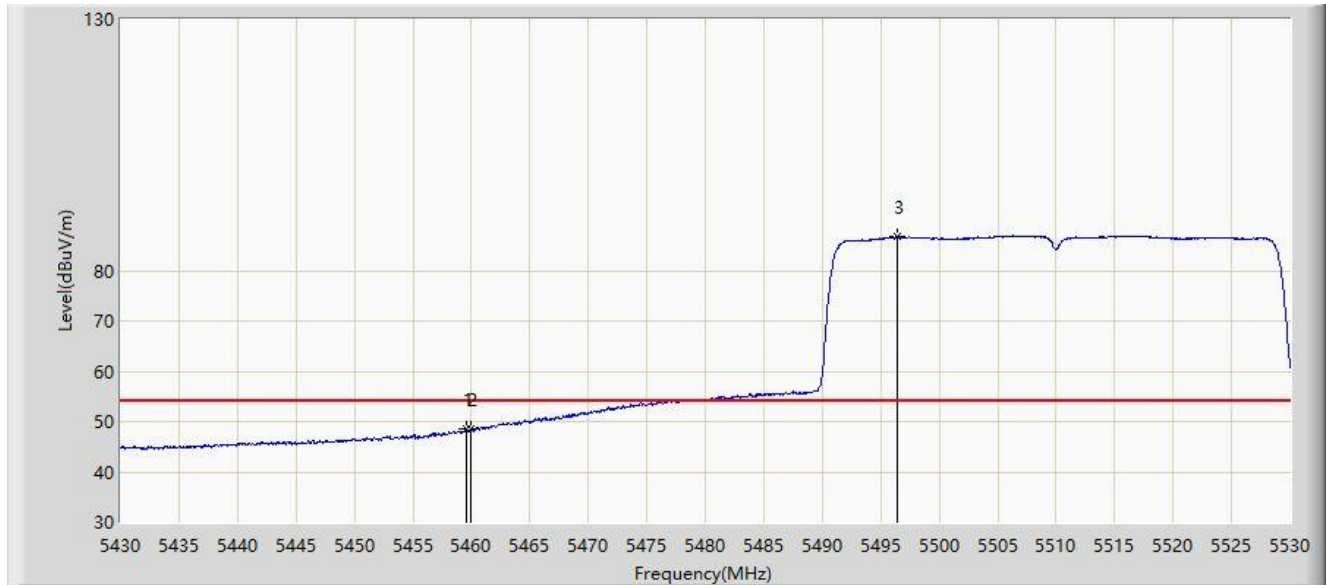


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5459.600	48.428	46.355	-5.572	54.000	2.073	AV
2			5460.000	48.424	46.353	-5.576	54.000	2.071	AV
3		*	5496.450	86.788	84.575	N/A	N/A	2.213	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:54
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz, Ant 1	

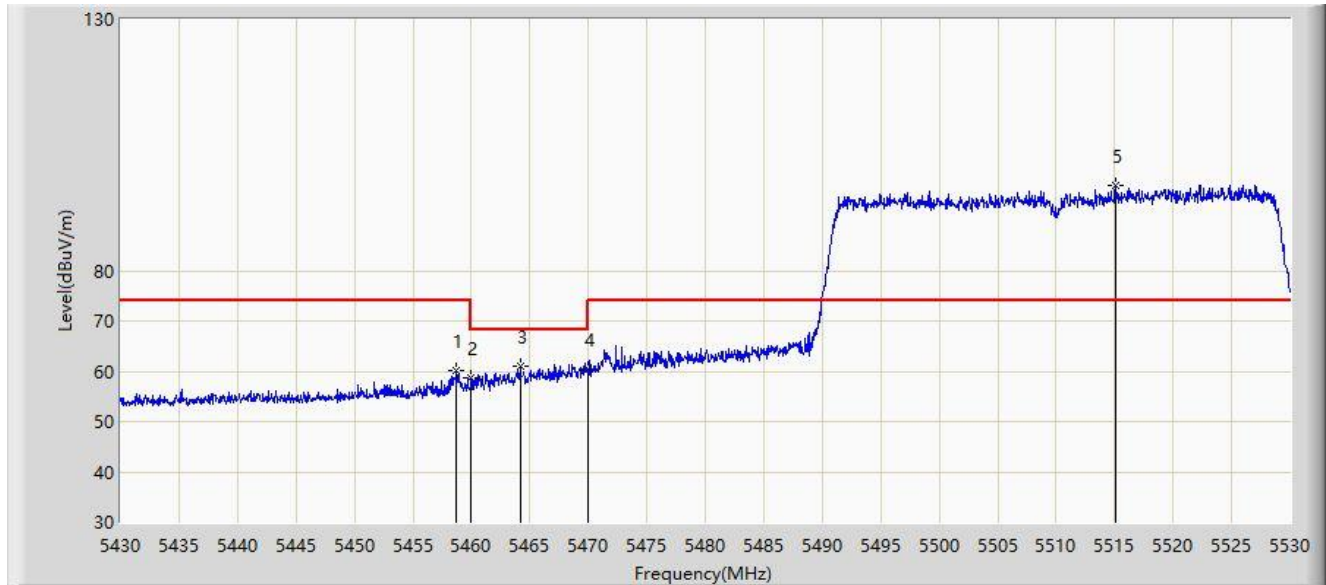


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5458.750	60.027	57.952	-13.973	74.000	2.076	PK
2			5460.000	58.709	56.638	-15.291	74.000	2.071	PK
3			5464.200	61.090	59.032	-7.110	68.200	2.058	PK
4			5470.000	60.553	58.514	-7.647	68.200	2.039	PK
5		*	5515.150	96.875	94.763	N/A	N/A	2.112	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:56
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5510MHz, Ant 1	

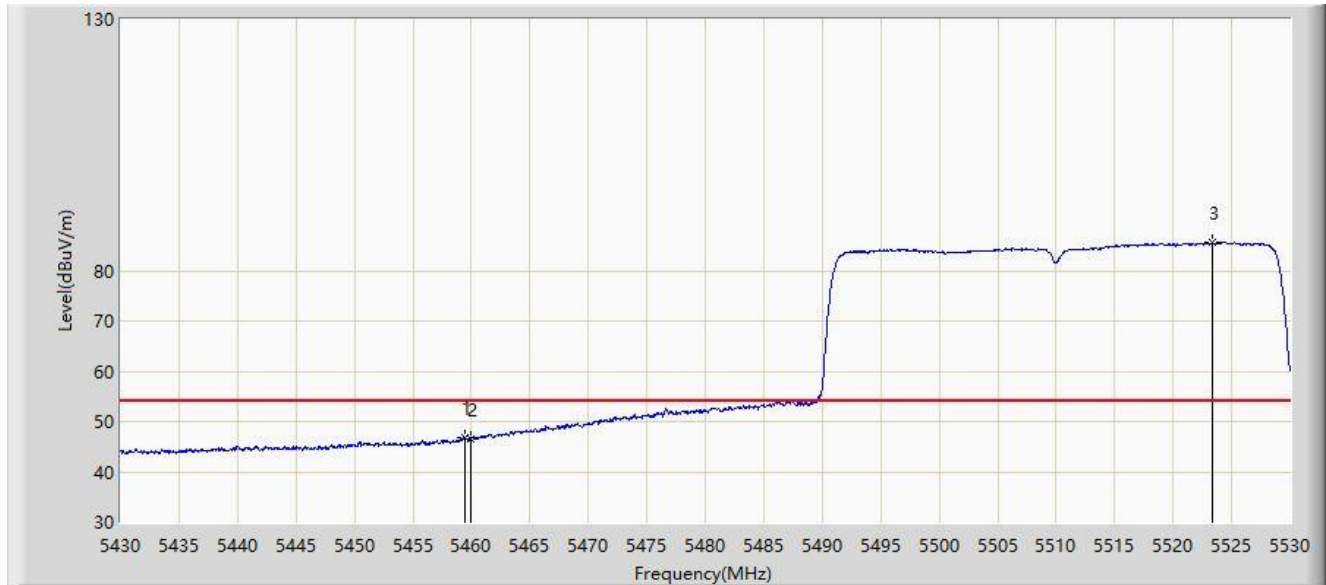


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5459.400	46.890	44.817	-7.110	54.000	2.074	AV
2			5460.000	46.493	44.422	-7.507	54.000	2.071	AV
3		*	5523.400	85.640	83.532	N/A	N/A	2.108	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:57
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5670MHz, Ant 1	

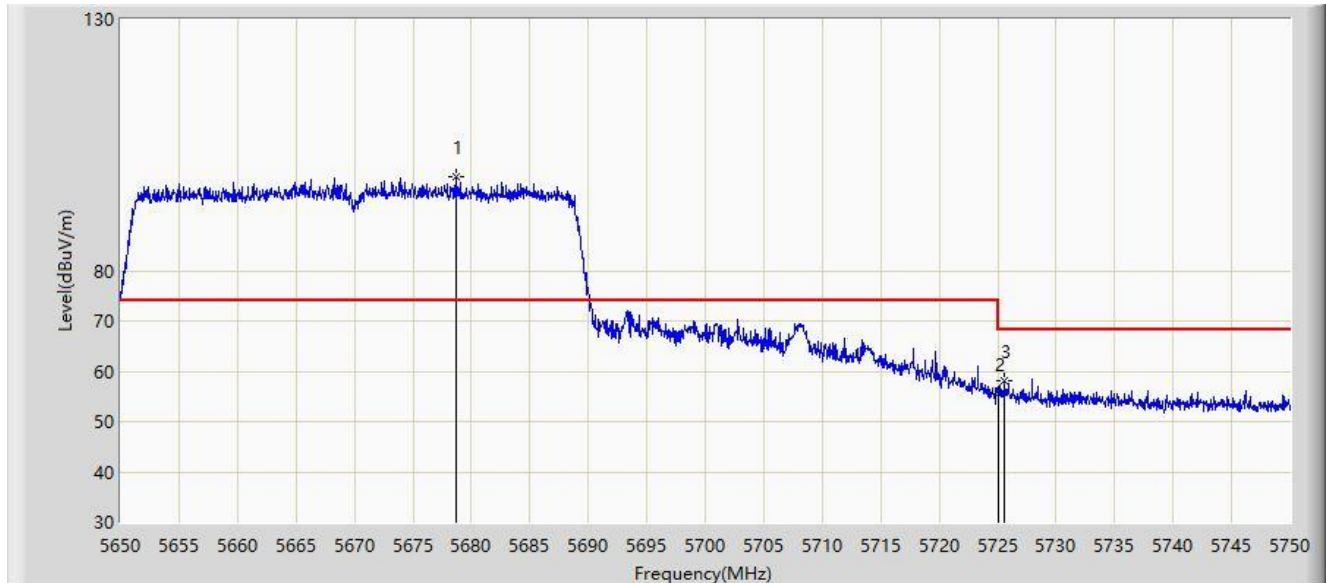


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5678.650	98.658	96.036	N/A	N/A	2.623	PK
2			5725.000	55.373	52.575	-12.827	68.200	2.799	PK
3			5725.600	58.127	55.334	-10.073	68.200	2.793	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 16:59
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5670MHz, Ant 1	

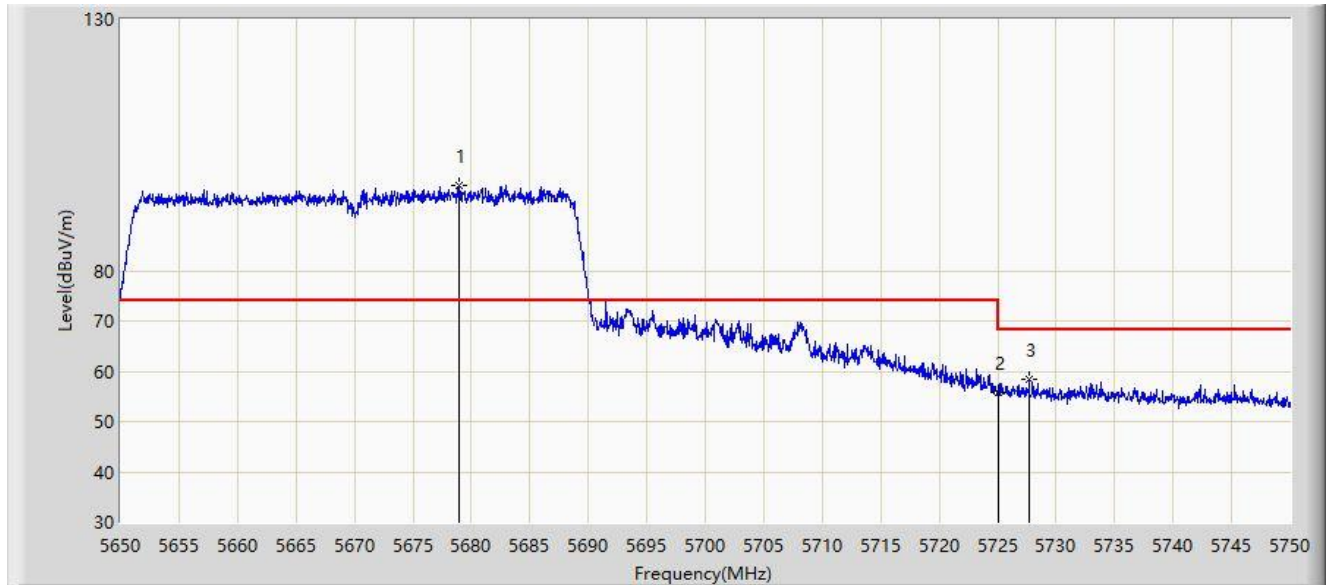


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5679.000	96.961	94.338	N/A	N/A	2.623	PK
2			5725.000	55.840	53.042	-12.360	68.200	2.799	PK
3			5727.700	58.325	55.556	-9.875	68.200	2.768	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:01
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5755MHz, Ant 1	

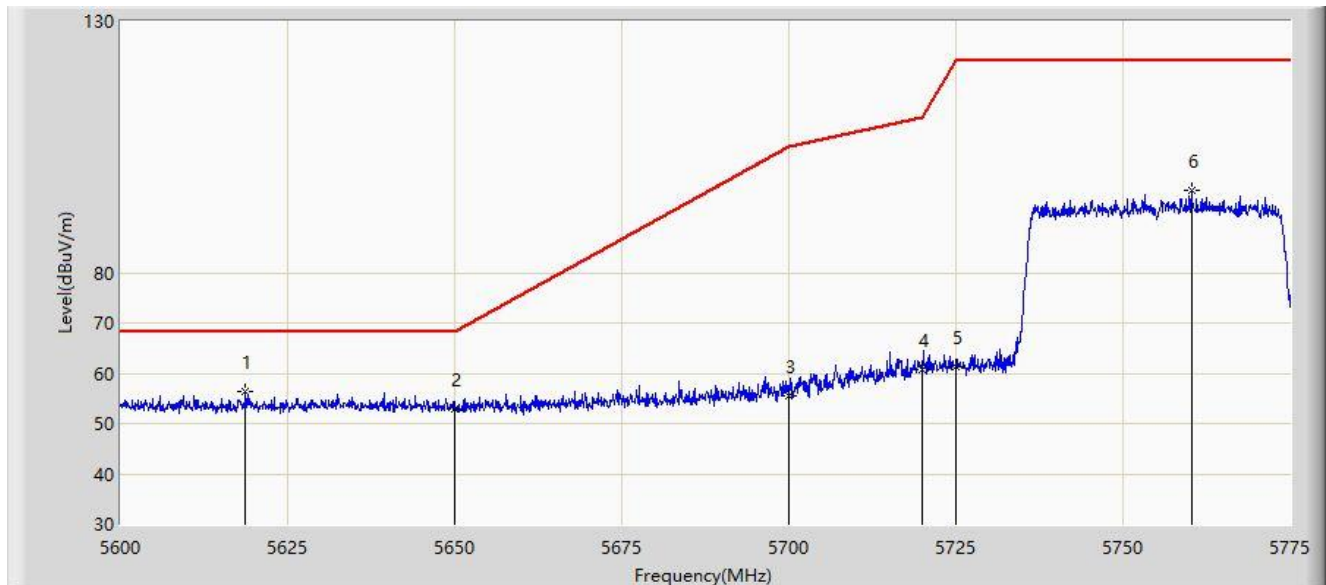


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5618.725	56.281	53.732	-11.919	68.200	2.550	PK
2			5650.000	52.899	50.406	-15.301	68.200	2.492	PK
3			5700.000	55.634	52.845	-49.566	105.200	2.790	PK
4			5720.000	60.765	57.920	-50.035	110.800	2.846	PK
5			5725.000	61.221	58.423	-60.979	122.200	2.799	PK
6			5760.212	96.332	93.459	N/A	N/A	2.873	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:05
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5755MHz, Ant 1	

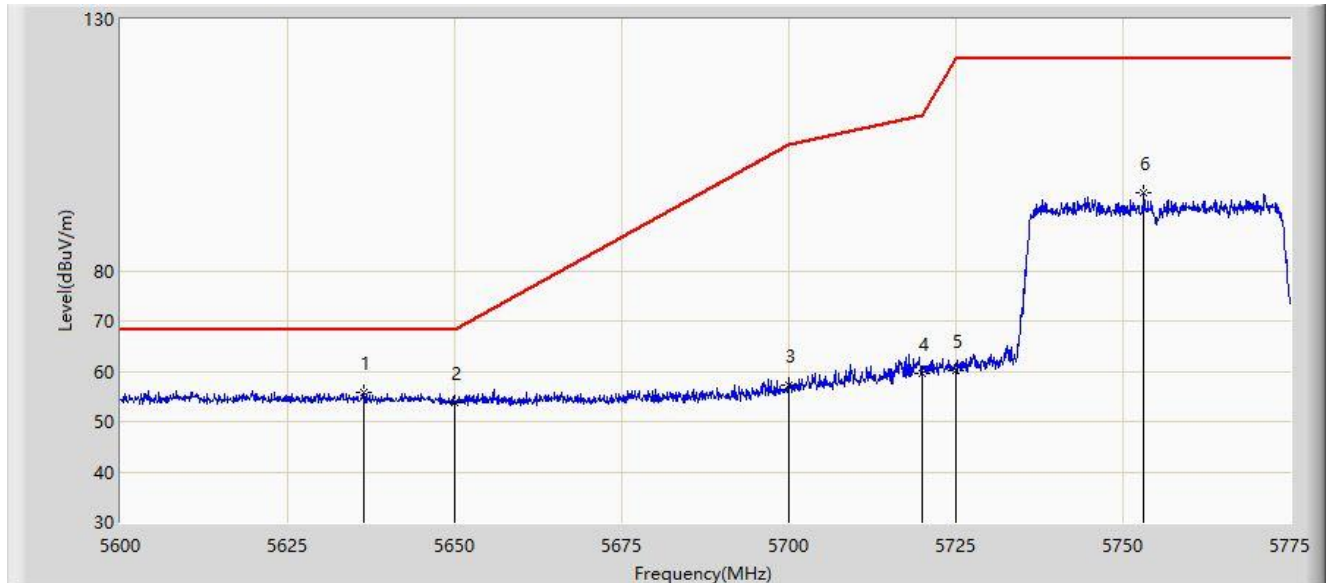


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5636.487	55.698	53.146	-12.502	68.200	2.552	PK
2			5650.000	53.865	51.372	-14.335	68.200	2.492	PK
3			5700.000	57.116	54.327	-48.084	105.200	2.790	PK
4			5720.000	59.460	56.615	-51.340	110.800	2.846	PK
5			5725.000	60.158	57.360	-62.042	122.200	2.799	PK
6			5753.125	95.507	92.750	N/A	N/A	2.756	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:10
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5795MHz, Ant 1	

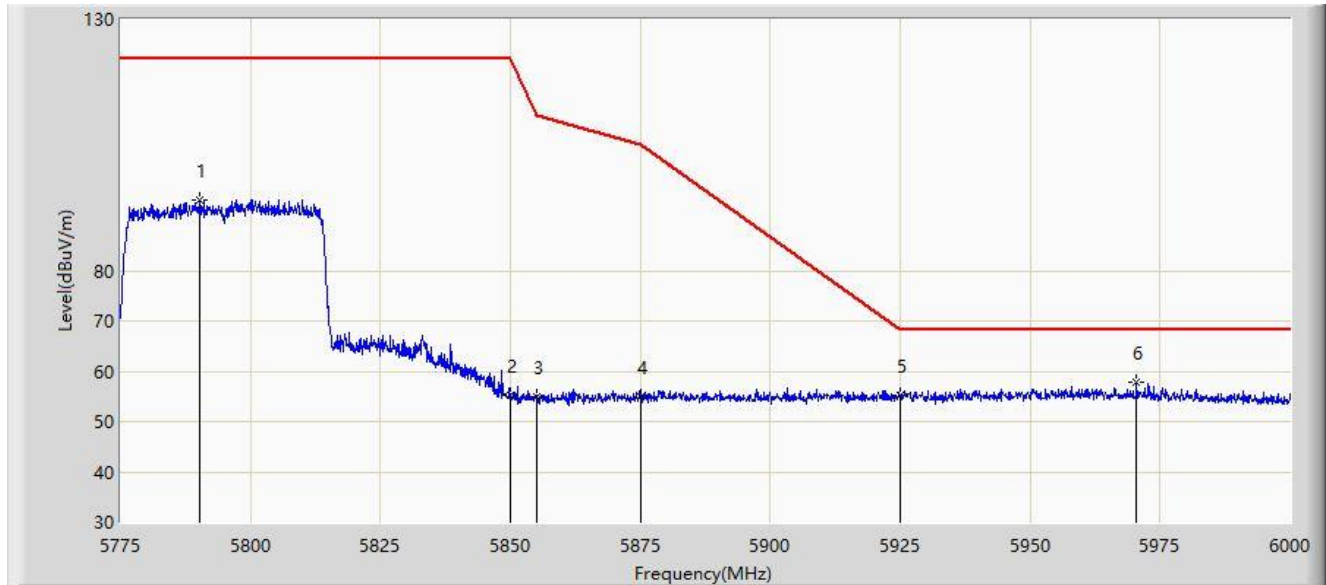


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5790.300	94.017	91.179	N/A	N/A	2.839	PK
2			5850.000	55.218	52.038	-66.982	122.200	3.179	PK
3			5855.000	54.847	51.666	-55.953	110.800	3.181	PK
4			5875.000	54.790	51.416	-50.410	105.200	3.374	PK
5			5925.000	55.171	51.729	-13.029	68.200	3.441	PK
6		*	5970.525	57.796	53.897	-10.404	68.200	3.898	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:15
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE40 at channel 5795MHz, Ant 1	

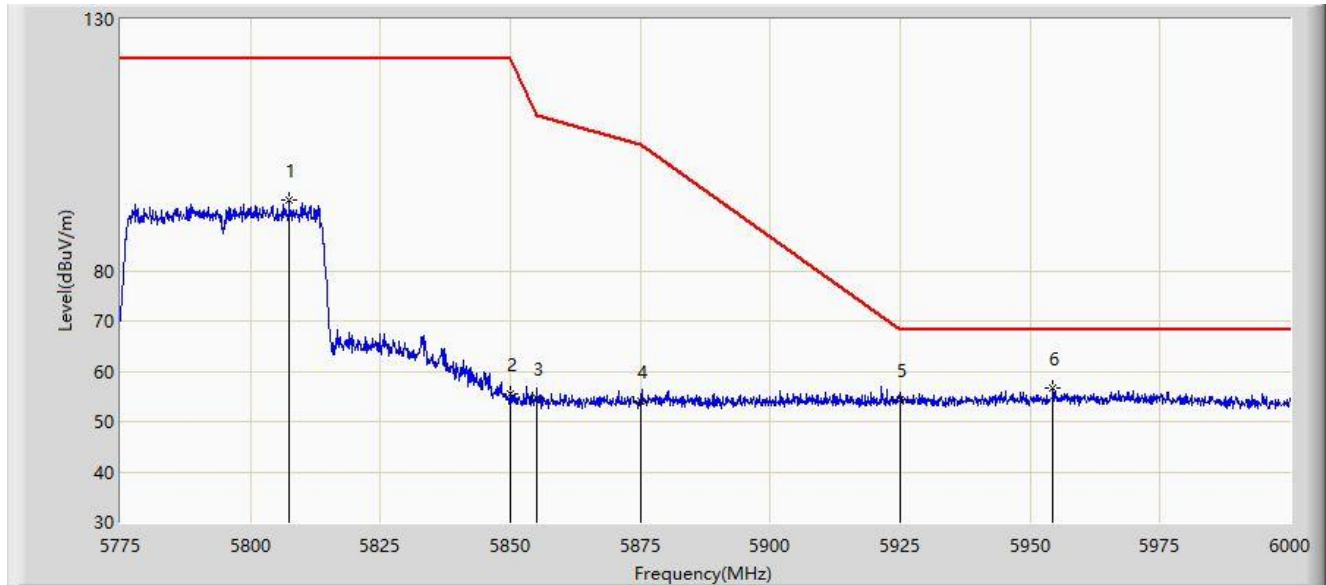


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5807.400	93.937	90.798	N/A	N/A	3.139	PK
2			5850.000	55.449	52.269	-66.751	122.200	3.179	PK
3			5855.000	54.762	51.581	-56.038	110.800	3.181	PK
4			5875.000	54.119	50.745	-51.081	105.200	3.374	PK
5			5925.000	54.455	51.013	-13.745	68.200	3.441	PK
6		*	5954.437	56.615	52.835	-11.585	68.200	3.780	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:17
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz, Ant 1	

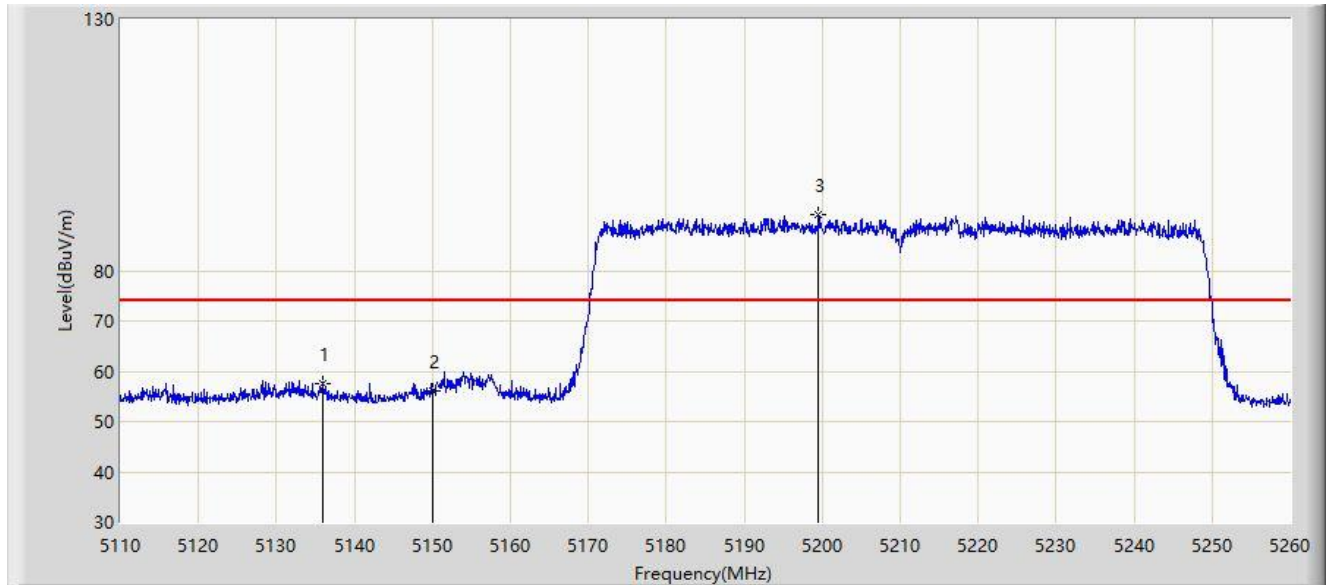


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5135.875	57.643	55.376	-16.357	74.000	2.267	PK
2			5150.000	55.956	53.668	-18.044	74.000	2.287	PK
3		*	5199.550	91.060	89.067	N/A	N/A	1.992	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:18
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz, Ant 1	

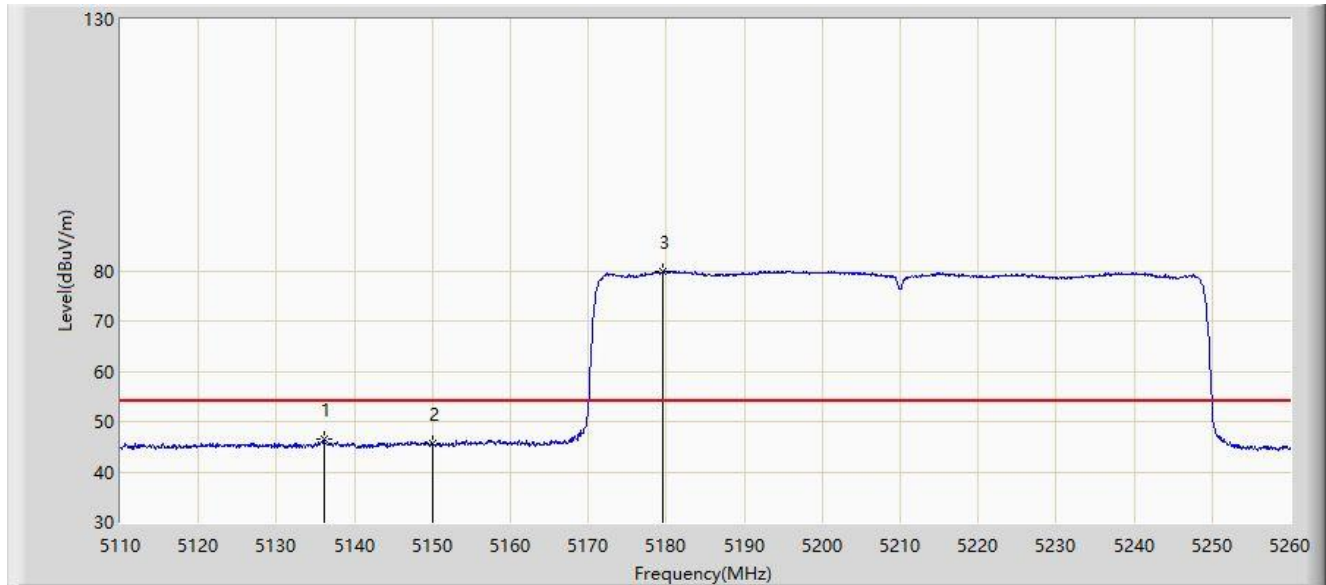


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5136.100	46.459	44.191	-7.541	54.000	2.268	AV
2			5150.000	45.527	43.239	-8.473	54.000	2.287	AV
3		*	5179.525	79.819	77.645	N/A	N/A	2.175	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:20
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz, Ant 1	

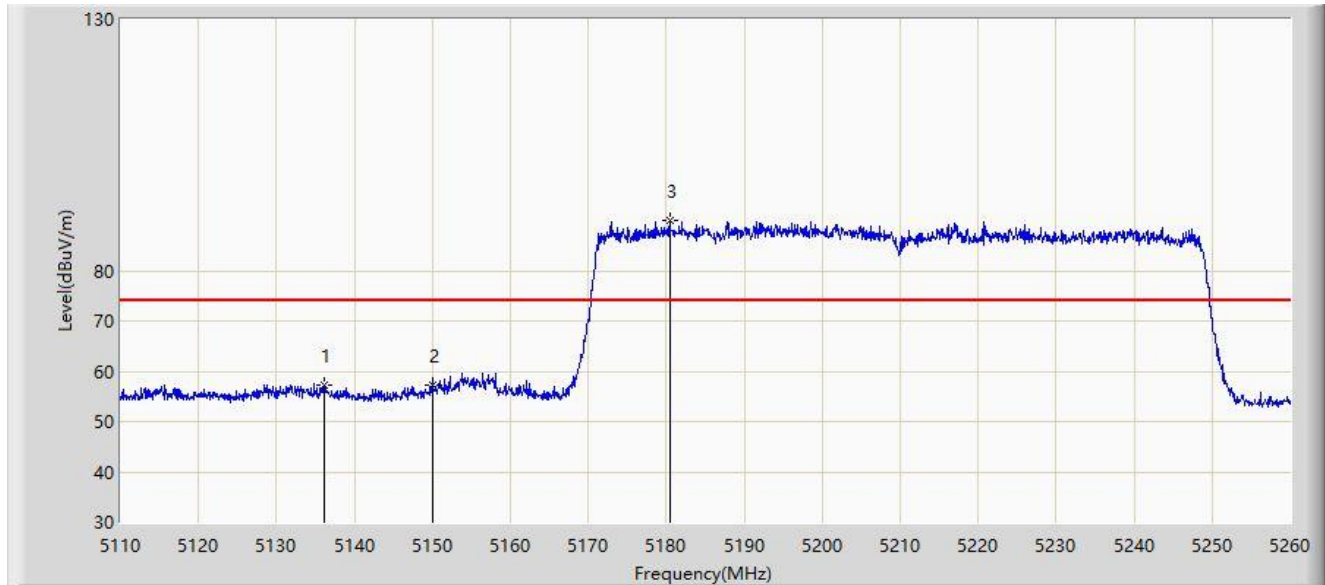


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5136.175	57.307	55.039	-16.693	74.000	2.268	PK
2			5150.000	57.196	54.908	-16.804	74.000	2.287	PK
3		*	5180.425	89.992	87.817	N/A	N/A	2.175	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:22
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE80 at channel 5210MHz, Ant 1	

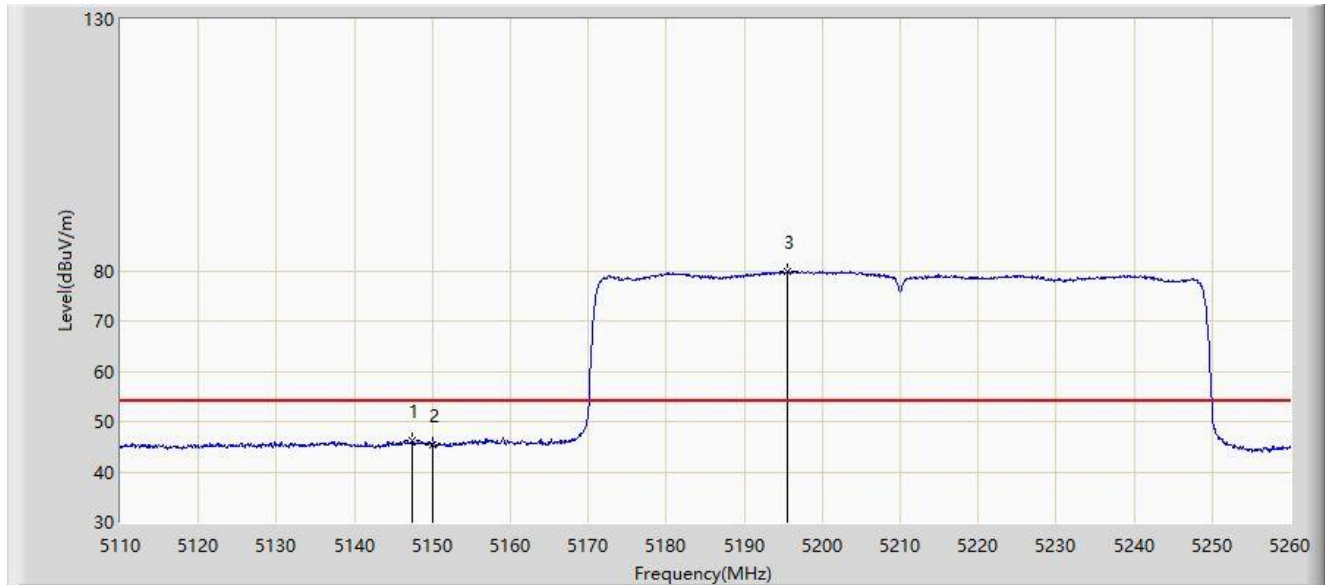


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5147.425	46.246	43.943	-7.754	54.000	2.303	AV
2			5150.000	45.396	43.108	-8.604	54.000	2.287	AV
3		*	5195.575	79.777	77.739	N/A	N/A	2.038	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:23
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz, Ant 1	

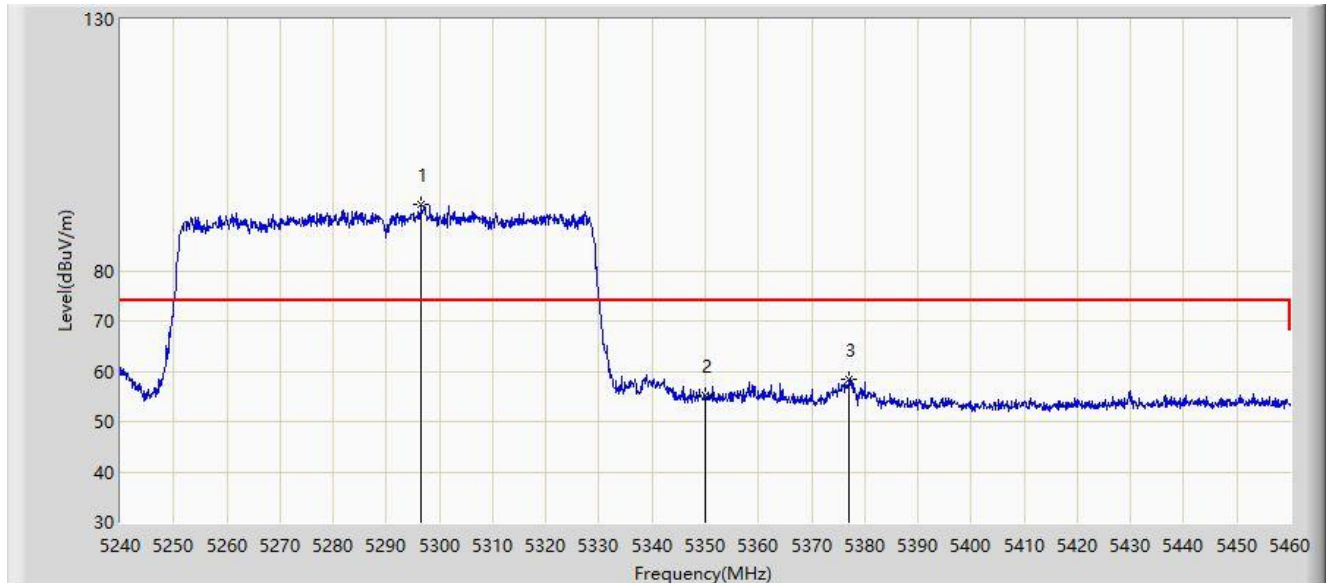


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5296.650	93.237	91.896	N/A	N/A	1.341	PK
2			5350.000	55.083	54.006	-18.917	74.000	1.078	PK
3			5377.060	58.516	56.884	-15.484	74.000	1.632	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:24
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz, Ant 1	

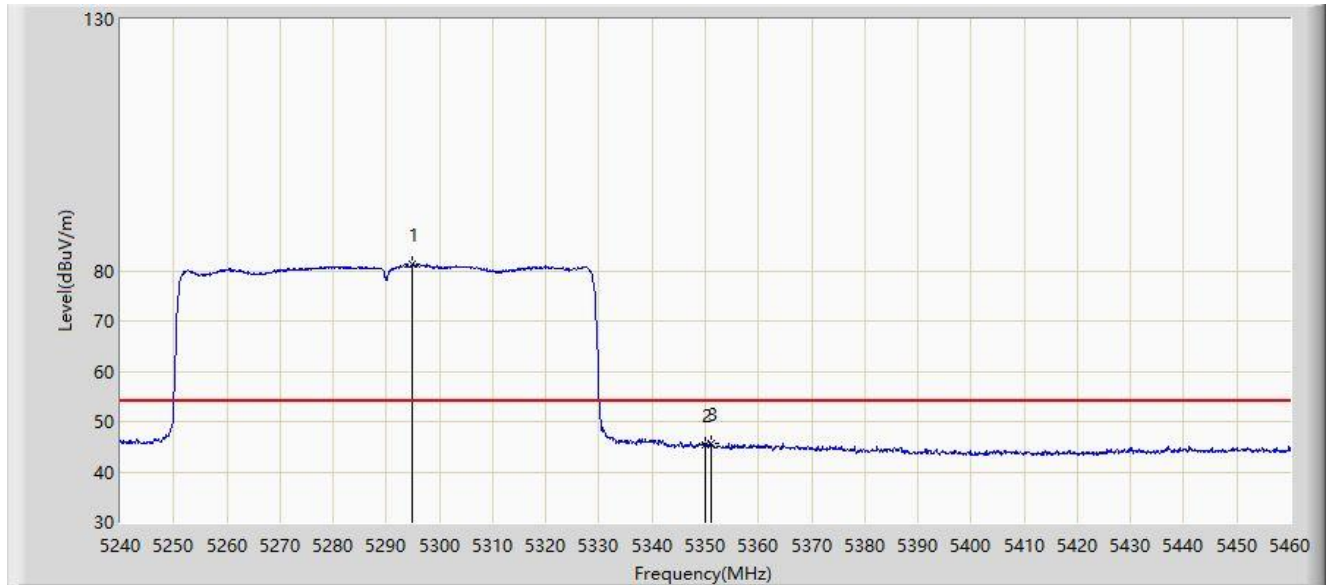


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5294.890	81.297	79.983	N/A	N/A	1.314	AV
2			5350.000	45.328	44.251	-8.672	54.000	1.078	AV
3			5350.990	45.769	44.705	-8.231	54.000	1.064	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:25
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz, Ant 1	

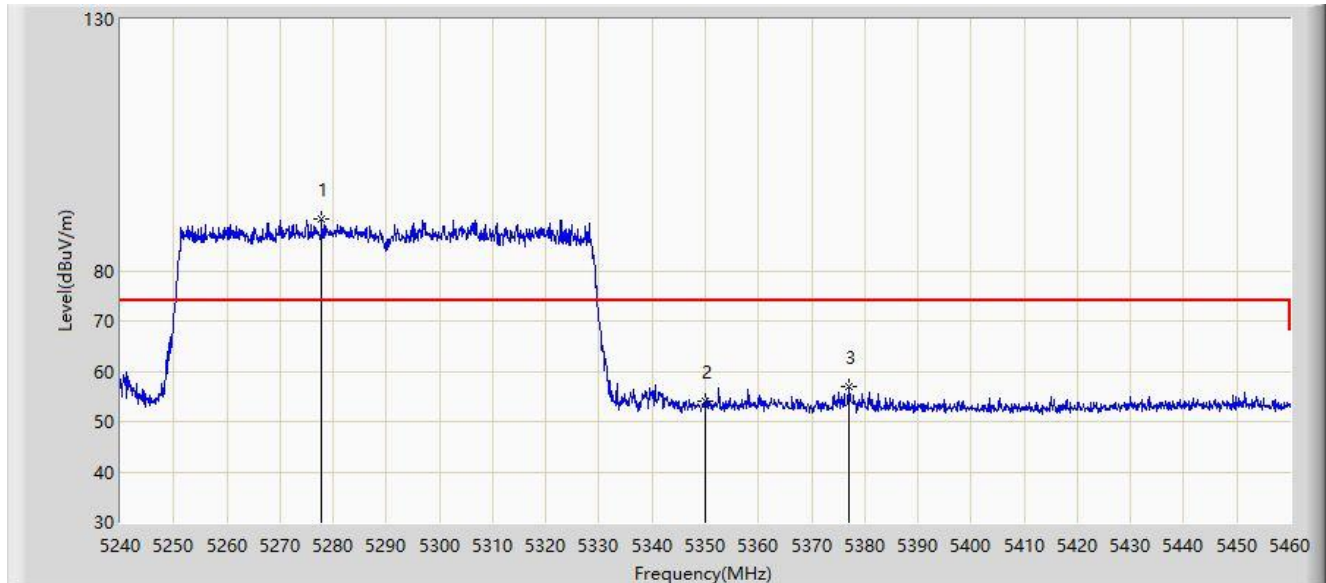


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5277.840	90.269	88.960	N/A	N/A	1.309	PK
2			5350.000	53.920	52.843	-20.080	74.000	1.078	PK
3			5376.950	56.915	55.284	-17.085	74.000	1.631	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:25
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE80 at channel 5290MHz, Ant 1	

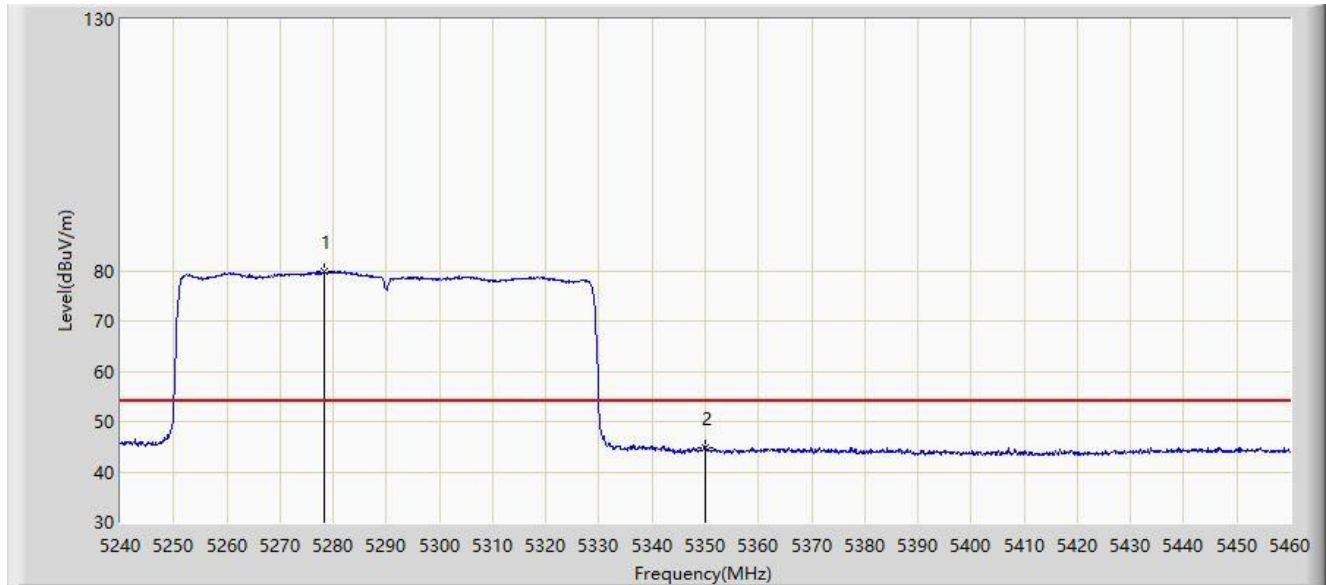


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5278.390	79.816	78.522	N/A	N/A	1.294	AV
2			5350.000	44.754	43.677	-9.246	54.000	1.078	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:27
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz, Ant 1	

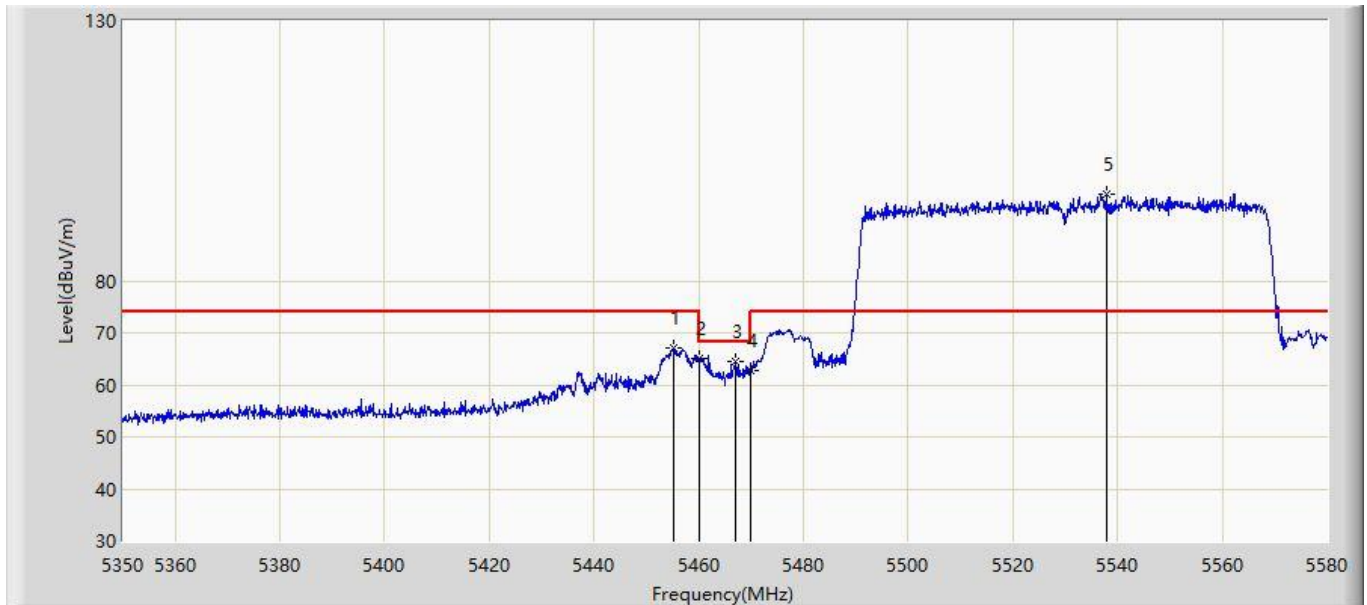


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5455.110	67.003	64.916	-6.997	74.000	2.087	PK
2			5460.000	64.944	62.873	-9.056	74.000	2.071	PK
3			5467.070	64.534	62.485	-3.666	68.200	2.049	PK
4			5470.000	62.614	60.575	-5.586	68.200	2.039	PK
5		*	5538.025	96.731	94.653	N/A	N/A	2.078	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:28
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz, Ant 1	

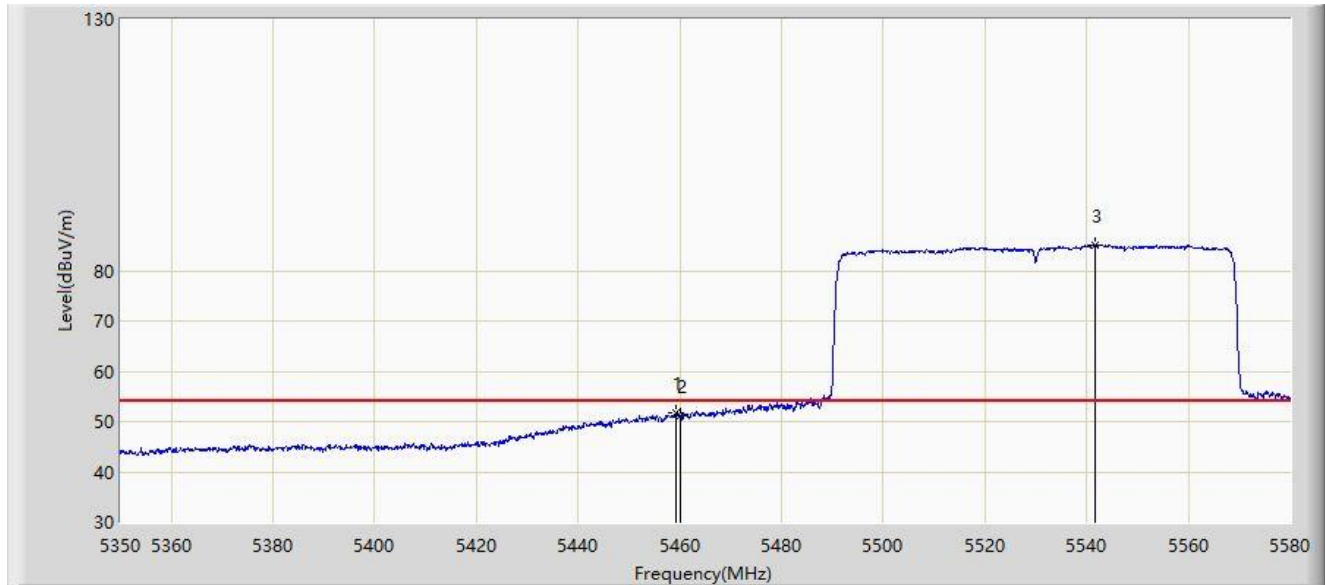


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5459.135	51.627	49.553	-2.373	54.000	2.074	AV
2			5460.000	51.035	48.964	-2.965	54.000	2.071	AV
3		*	5541.705	85.134	82.977	N/A	N/A	2.157	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:29
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz, Ant 1	

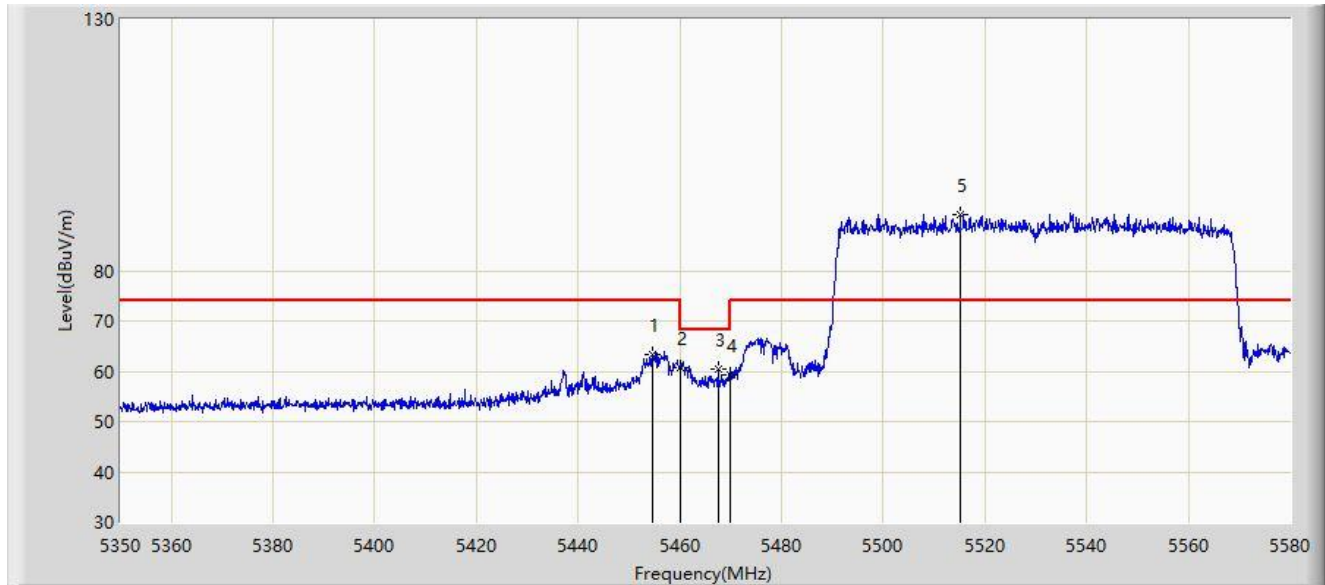


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5454.535	63.386	61.297	-10.614	74.000	2.089	PK
2			5460.000	60.759	58.688	-13.241	74.000	2.071	PK
3			5467.530	60.425	58.378	-7.775	68.200	2.046	PK
4			5470.000	59.398	57.359	-8.802	68.200	2.039	PK
5		*	5515.140	91.158	89.046	N/A	N/A	2.112	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:30
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE80 at channel 5530MHz, Ant 1	

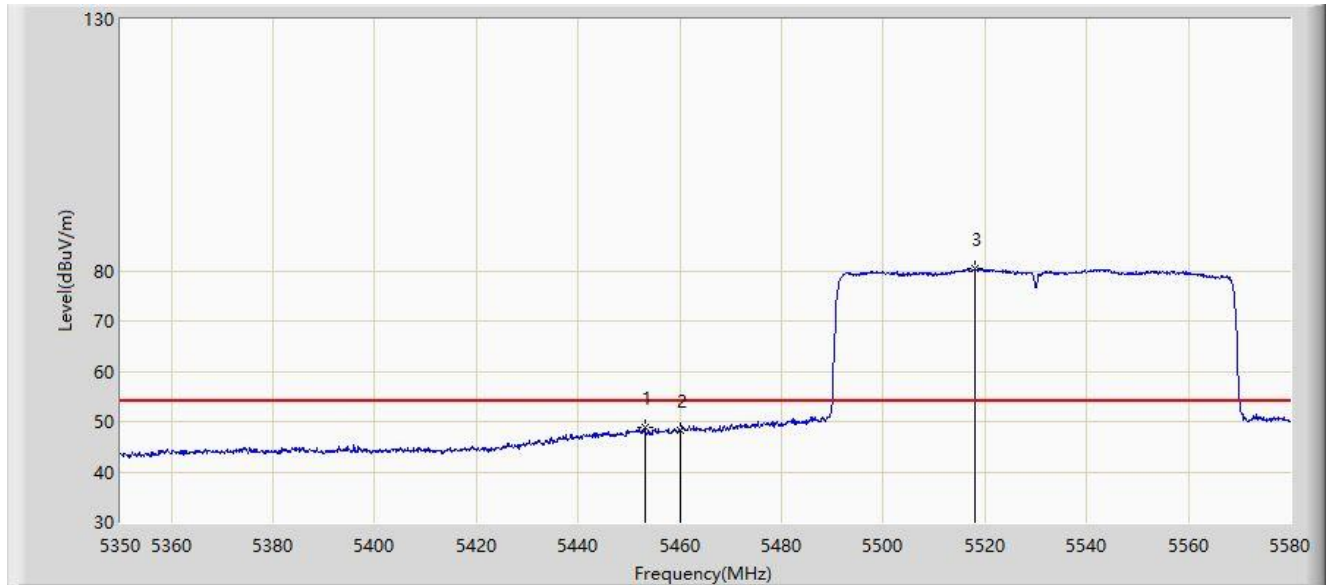


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5453.040	48.743	46.663	-5.257	54.000	2.080	AV
2			5460.000	48.369	46.298	-5.631	54.000	2.071	AV
3		*	5517.900	80.406	78.294	N/A	N/A	2.112	AV

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:30
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz, Ant 1	

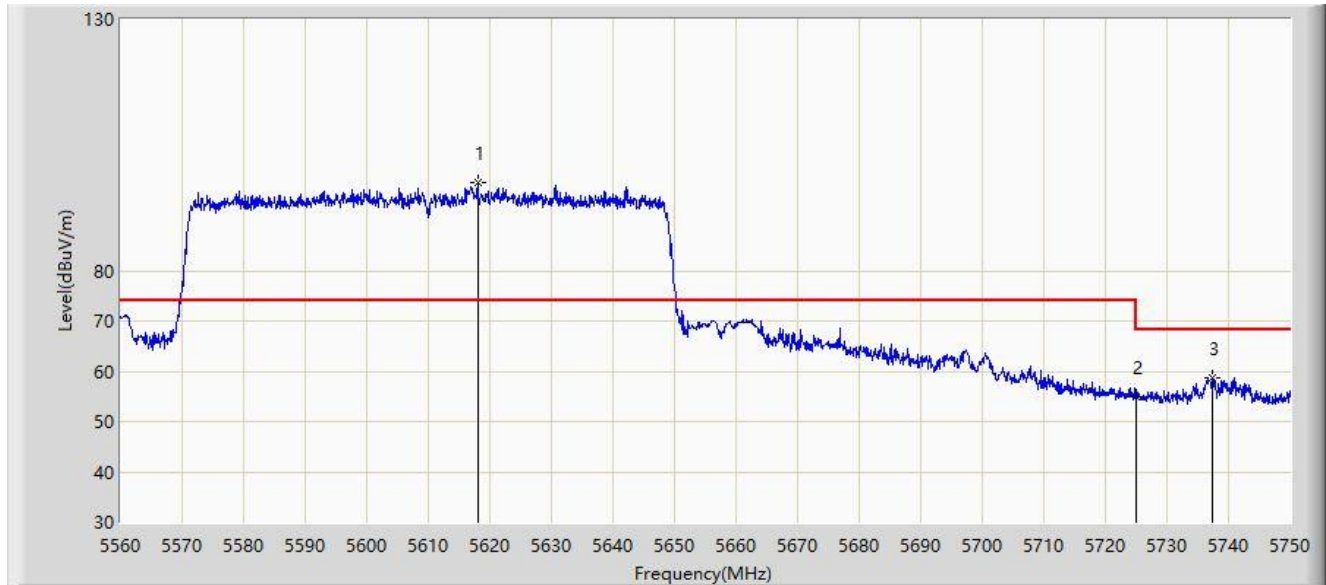


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5618.045	97.528	94.991	N/A	N/A	2.537	PK
2			5725.000	54.800	52.002	-13.400	68.200	2.799	PK
3			5737.365	58.586	55.934	-9.614	68.200	2.652	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:34
Limit: FCC_5G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE80 at channel 5610MHz, Ant 1	

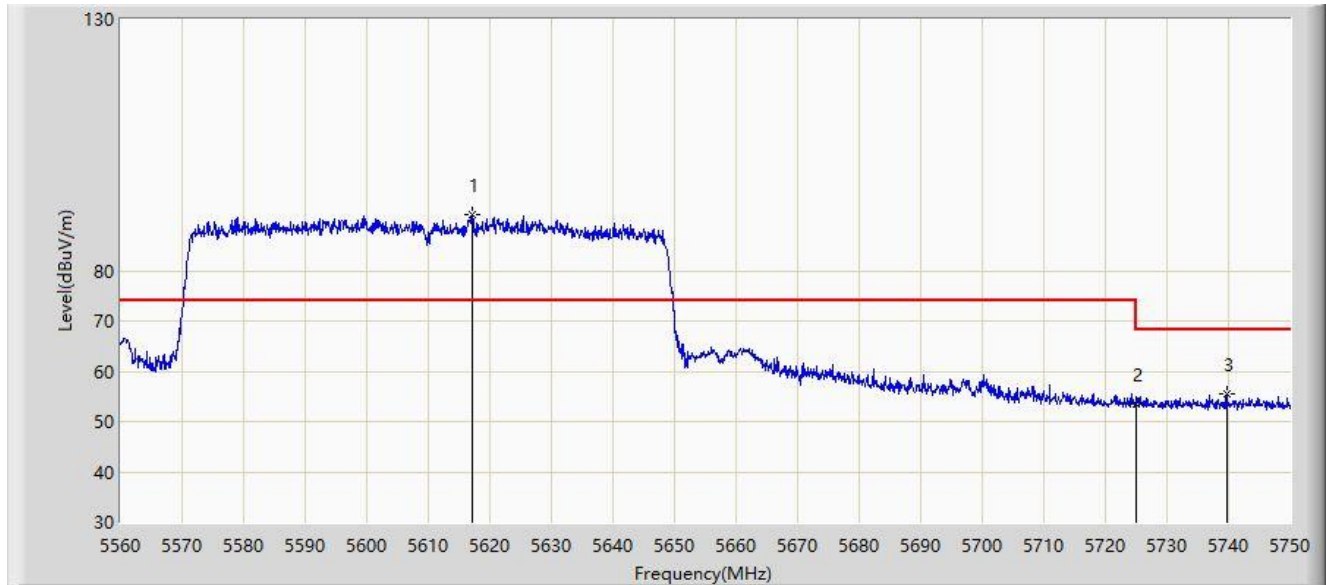


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5617.190	91.089	88.567	N/A	N/A	2.522	PK
2			5725.000	53.376	50.578	-14.824	68.200	2.799	PK
3			5739.645	55.390	52.765	-12.810	68.200	2.624	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:37
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE80 at channel 5775MHz, Ant 1	

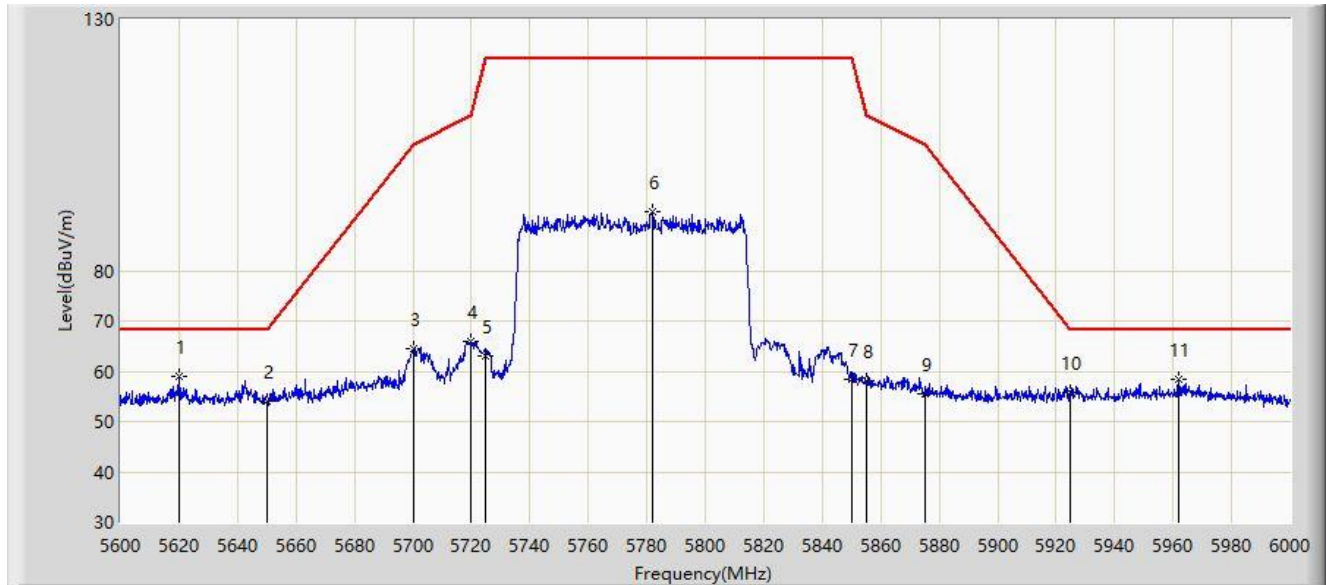


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5619.800	58.871	56.303	-9.329	68.200	2.569	PK
2			5650.000	54.014	51.521	-14.186	68.200	2.492	PK
3			5700.000	64.599	61.810	-40.601	105.200	2.790	PK
4			5720.000	65.820	62.975	-44.980	110.800	2.846	PK
5			5725.000	63.003	60.205	-59.197	122.200	2.799	PK
6			5782.200	91.662	88.819	N/A	N/A	2.844	PK
7			5850.000	58.494	55.314	-63.706	122.200	3.179	PK
8			5855.000	58.219	55.038	-52.581	110.800	3.181	PK
9			5875.000	55.625	52.251	-49.575	105.200	3.374	PK
10			5925.000	55.918	52.476	-12.282	68.200	3.441	PK
11			5961.800	58.354	54.516	-9.846	68.200	3.837	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/04/29 - 17:38
Limit: FCC_5.8G_RE(3m)	Engineer: Flag Yang
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ax-HE80 at channel 5775MHz, Ant 1	

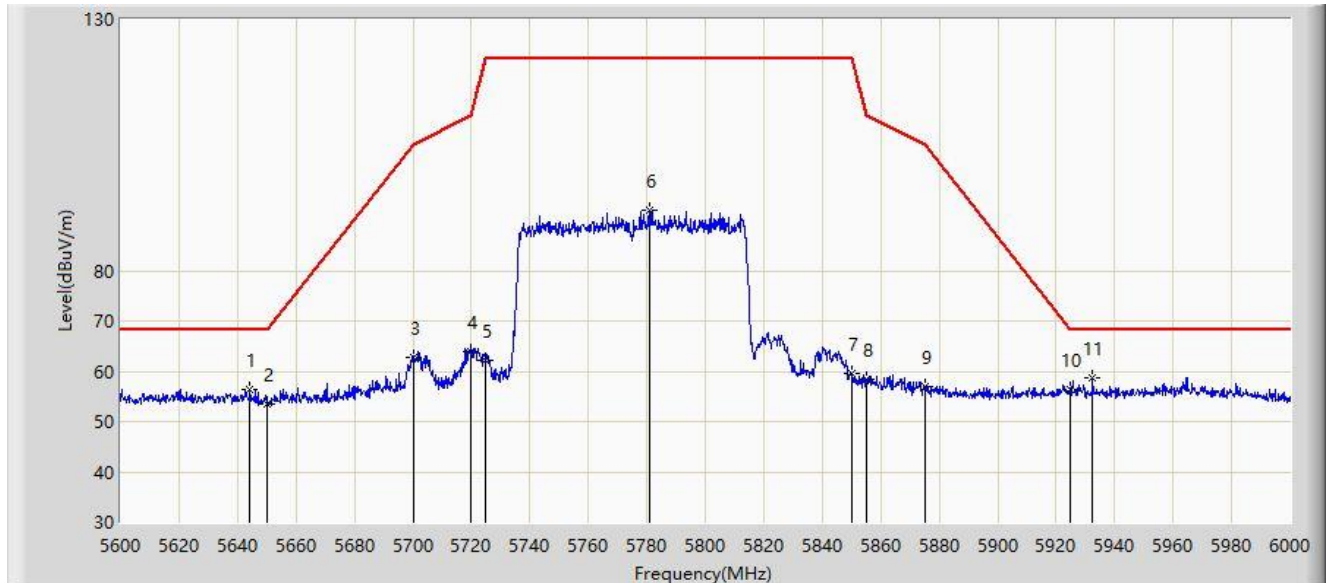


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5644.200	56.399	53.889	-11.801	68.200	2.510	PK
2			5650.000	53.503	51.010	-14.697	68.200	2.492	PK
3			5700.000	62.865	60.076	-42.335	105.200	2.790	PK
4			5720.000	63.862	61.017	-46.938	110.800	2.846	PK
5			5725.000	62.249	59.451	-59.951	122.200	2.799	PK
6			5780.800	92.033	89.189	N/A	N/A	2.844	PK
7			5850.000	59.475	56.295	-62.725	122.200	3.179	PK
8			5855.000	58.519	55.338	-52.281	110.800	3.181	PK
9			5875.000	56.935	53.561	-48.265	105.200	3.374	PK
10			5925.000	56.305	52.863	-11.895	68.200	3.441	PK
11		*	5932.400	58.597	55.132	-9.603	68.200	3.465	PK

Note 1. “*”, means this data is the worst emission level

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:05
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5180MHz, Ant 2	

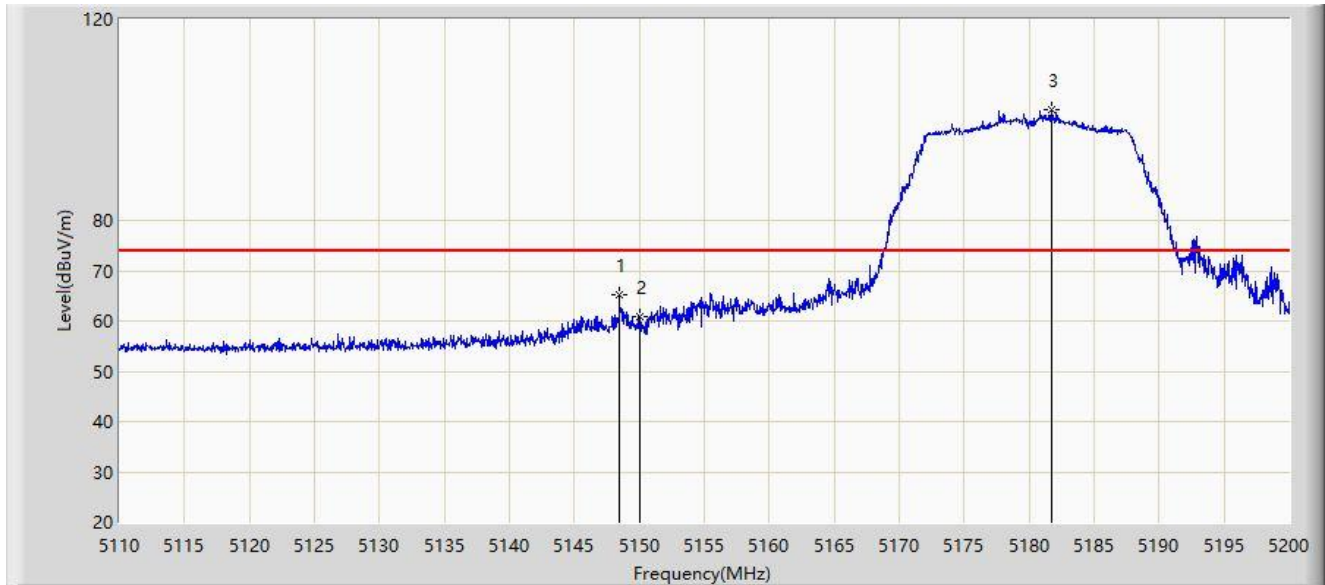


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5148.475	65.111	62.810	-8.889	74.000	2.300	PK
2			5150.000	60.888	58.600	-13.112	74.000	2.287	PK
3		*	5181.775	102.162	99.986	N/A	N/A	2.176	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:07
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5180MHz, Ant 2	

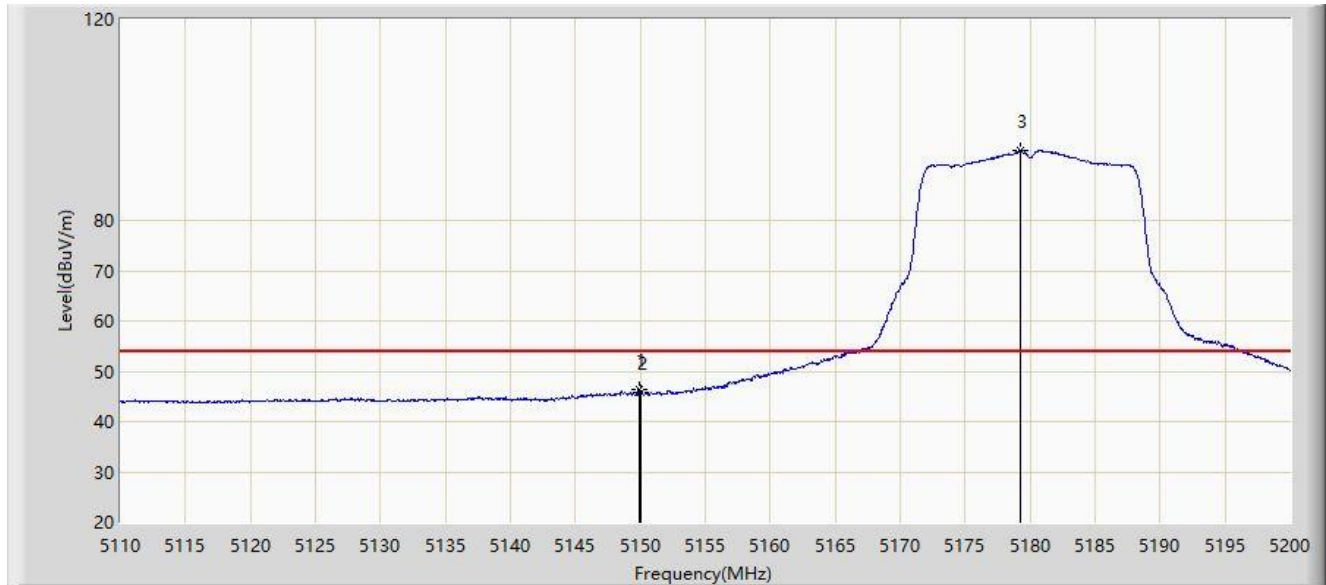


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5149.870	46.258	43.969	-7.742	54.000	2.290	AV
2			5150.000	45.897	43.609	-8.103	54.000	2.287	AV
3		*	5179.255	93.821	91.647	N/A	N/A	2.174	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:04
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5180MHz, Ant 2	

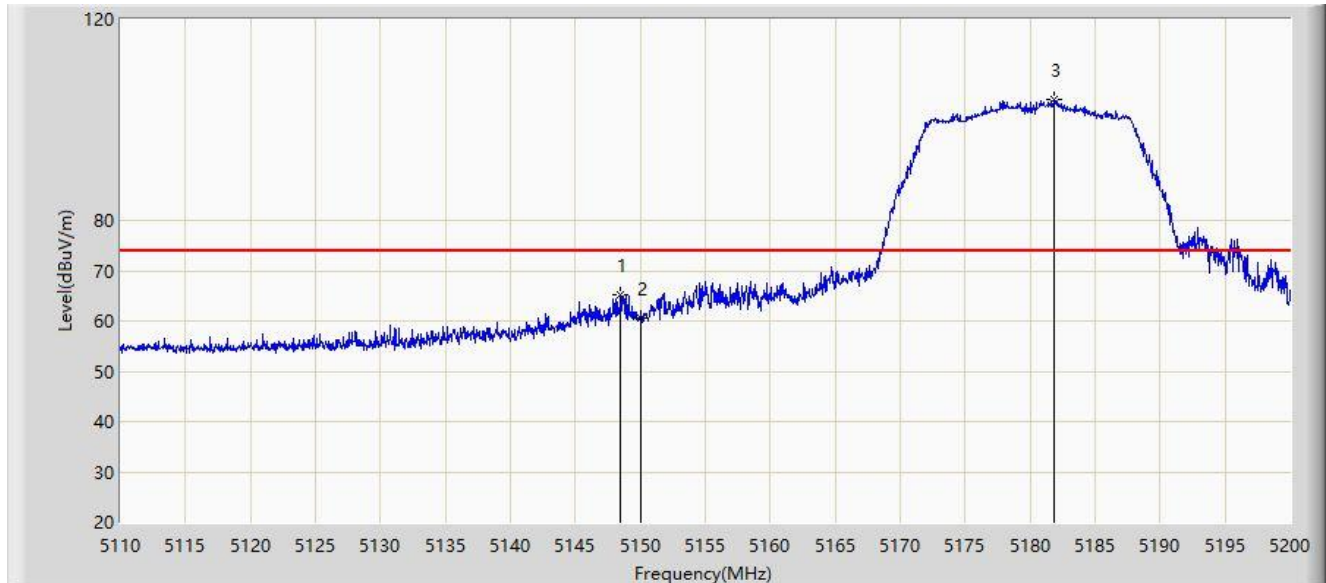


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5148.475	65.111	62.810	-8.889	74.000	2.300	PK
2			5150.000	60.580	58.292	-13.420	74.000	2.287	PK
3		*	5181.865	104.098	101.922	N/A	N/A	2.177	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:02
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5180MHz, Ant 2	

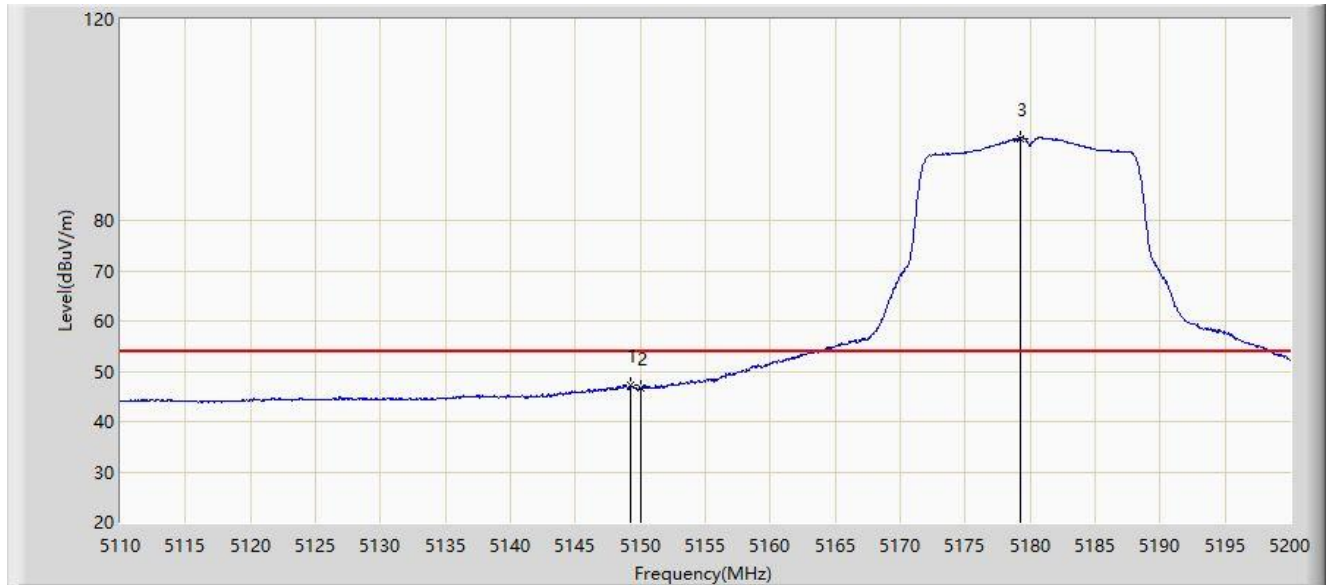


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5149.195	47.159	44.864	-6.841	54.000	2.295	AV
2			5150.000	46.651	44.363	-7.349	54.000	2.287	AV
3		*	5179.255	96.361	94.187	N/A	N/A	2.174	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:16
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5320MHz, Ant 2	

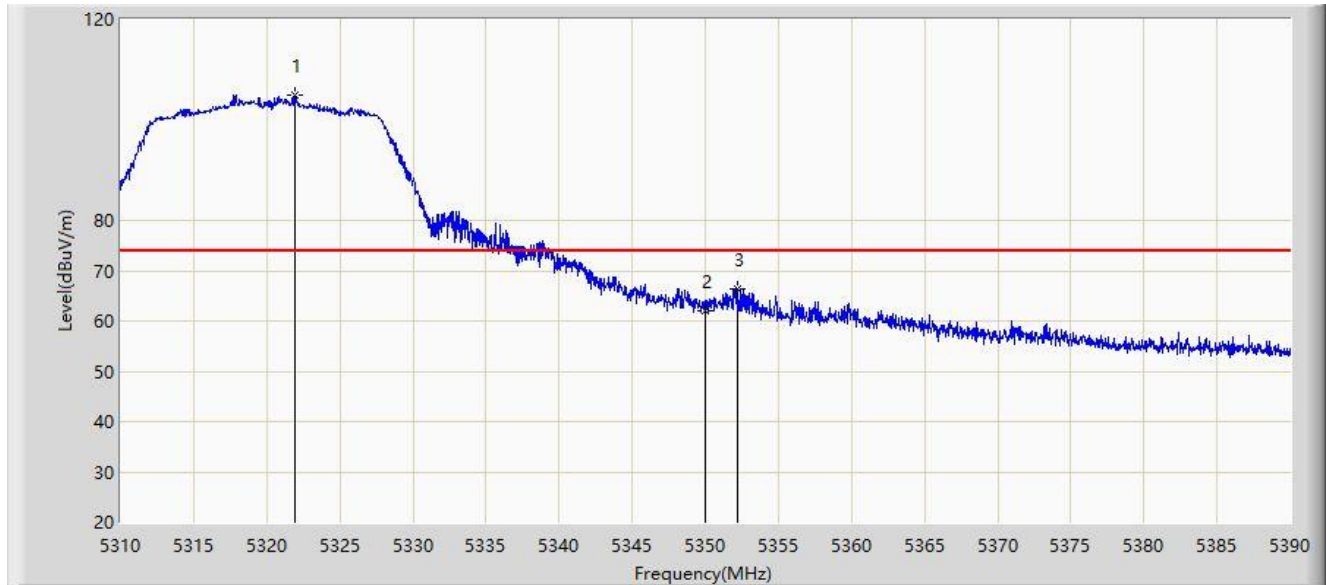


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5321.880	105.001	103.660	N/A	N/A	1.341	PK
2			5350.000	62.128	61.051	-11.872	74.000	1.078	PK
3			5352.240	66.471	65.413	-7.529	74.000	1.058	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:14
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5320MHz, Ant 2	

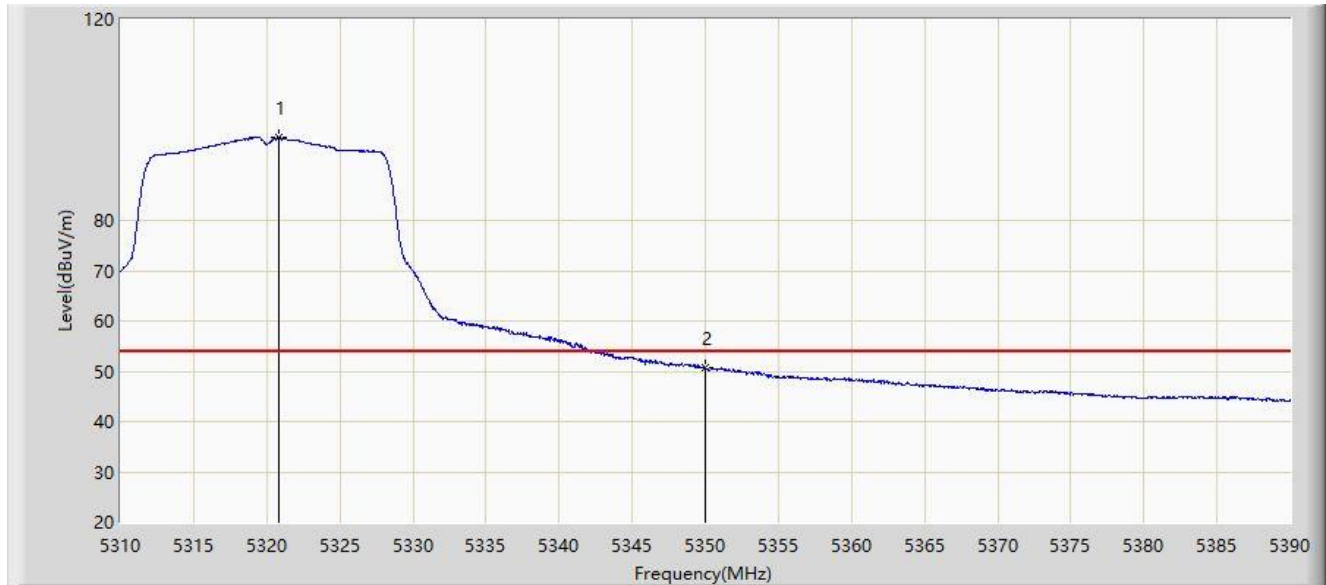


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5320.800	96.406	95.060	N/A	N/A	1.347	AV
2			5350.000	50.857	49.780	-3.143	54.000	1.078	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:17
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5320MHz, Ant 2	

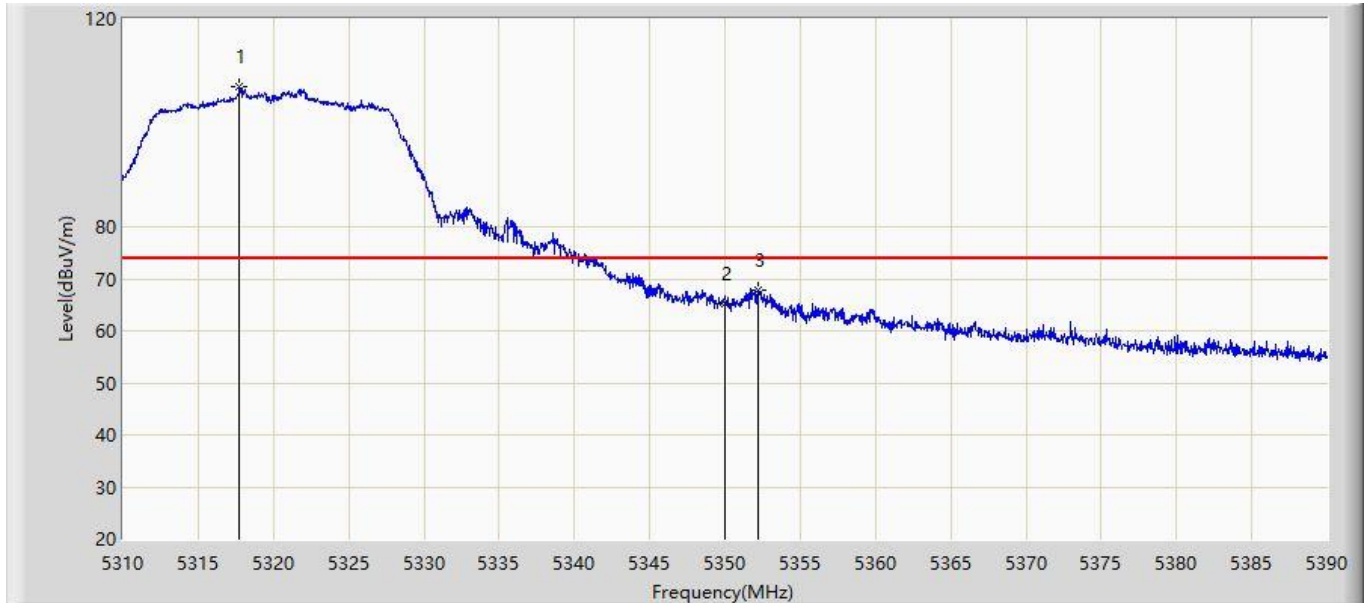


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5317.760	106.901	105.540	N/A	N/A	1.361	PK
2			5350.000	65.164	64.087	-8.836	74.000	1.078	PK
3			5352.240	67.701	66.643	-6.299	74.000	1.058	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:19
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5320MHz, Ant 2	

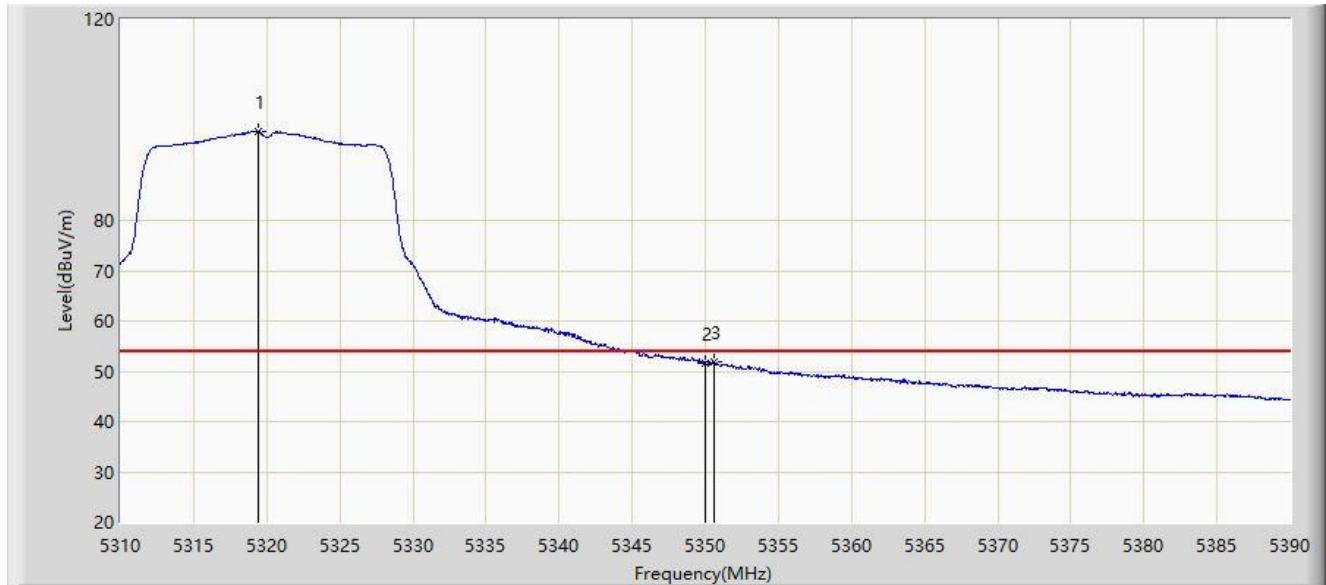


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5319.400	97.546	96.193	N/A	N/A	1.353	AV
2			5350.000	51.561	50.484	-2.439	54.000	1.078	AV
3			5350.640	51.847	50.778	-2.153	54.000	1.069	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:29
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5500MHz, Ant 2	

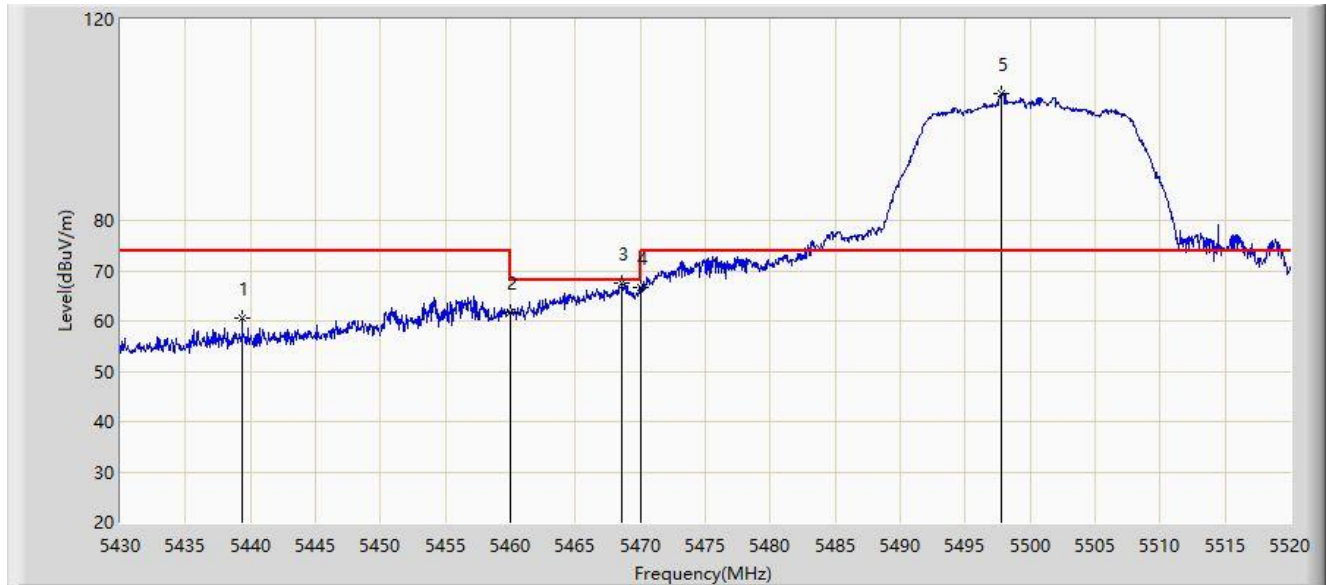


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5439.360	60.594	58.667	-13.406	74.000	1.927	PK
2			5460.000	61.734	59.663	-12.266	74.000	2.071	PK
3			5468.610	67.444	65.400	-0.756	68.200	2.044	PK
4			5470.000	66.598	64.559	-1.602	68.200	2.039	PK
5		*	5497.815	105.257	103.060	N/A	N/A	2.197	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:30
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5500MHz, Ant 2	

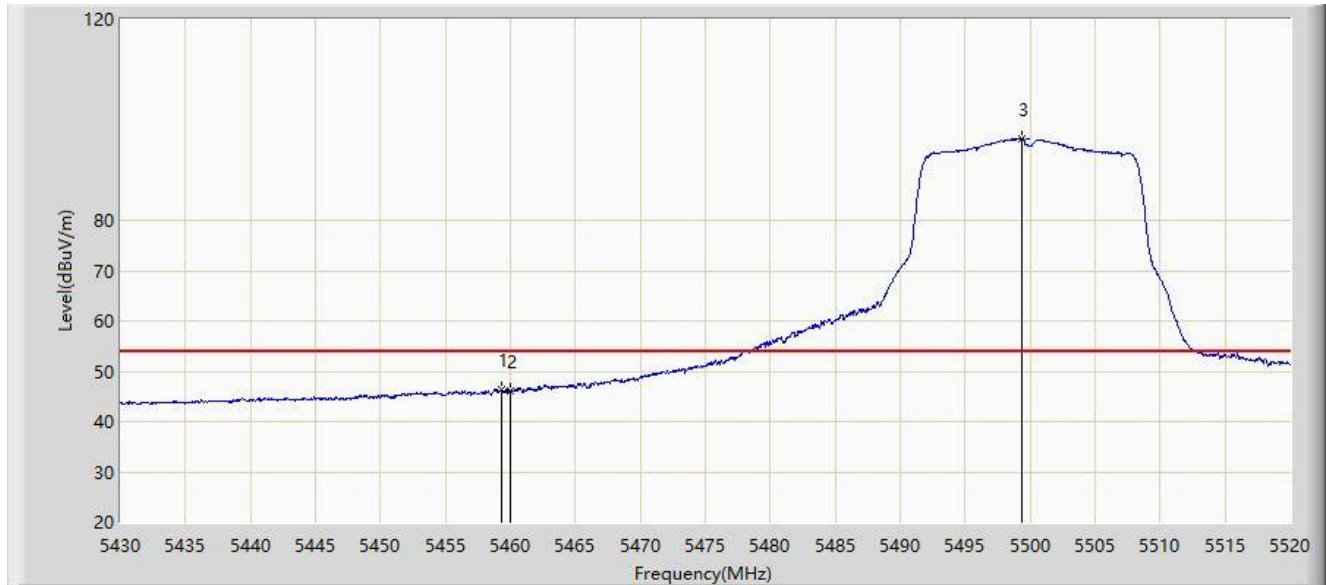

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5459.340	46.341	44.267	-7.659	54.000	2.074	AV
2			5460.000	46.071	44.000	-7.929	54.000	2.071	AV
3		*	5499.390	96.321	94.142	N/A	N/A	2.179	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:31
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5500MHz, Ant 2	




No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5456.775	64.677	62.595	-9.323	74.000	2.082	PK
2			5460.000	61.495	59.424	-12.505	74.000	2.071	PK
3			5466.720	67.087	65.037	-1.113	68.200	2.049	PK
4			5470.000	66.594	64.555	-1.606	68.200	2.039	PK
5		*	5497.815	105.028	102.831	N/A	N/A	2.197	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:32
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5500MHz, Ant 2	

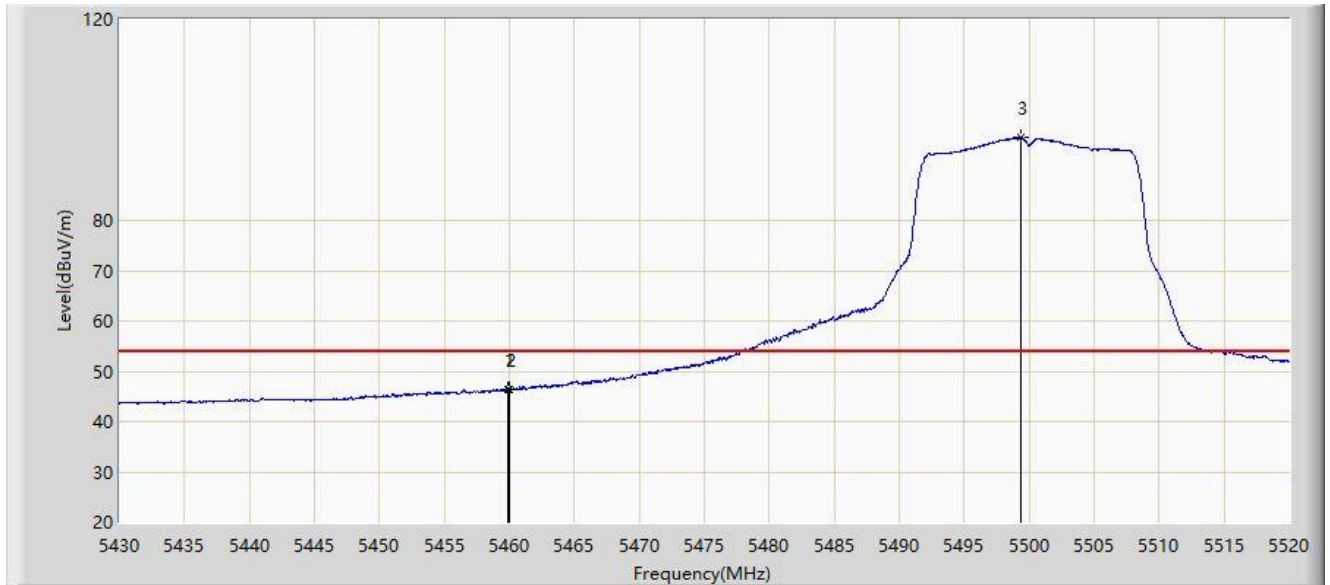


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5459.880	46.514	44.442	-7.486	54.000	2.072	AV
2			5460.000	46.450	44.379	-7.550	54.000	2.071	AV
3		*	5499.390	96.497	94.318	N/A	N/A	2.179	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:35
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5700MHz, Ant 2	

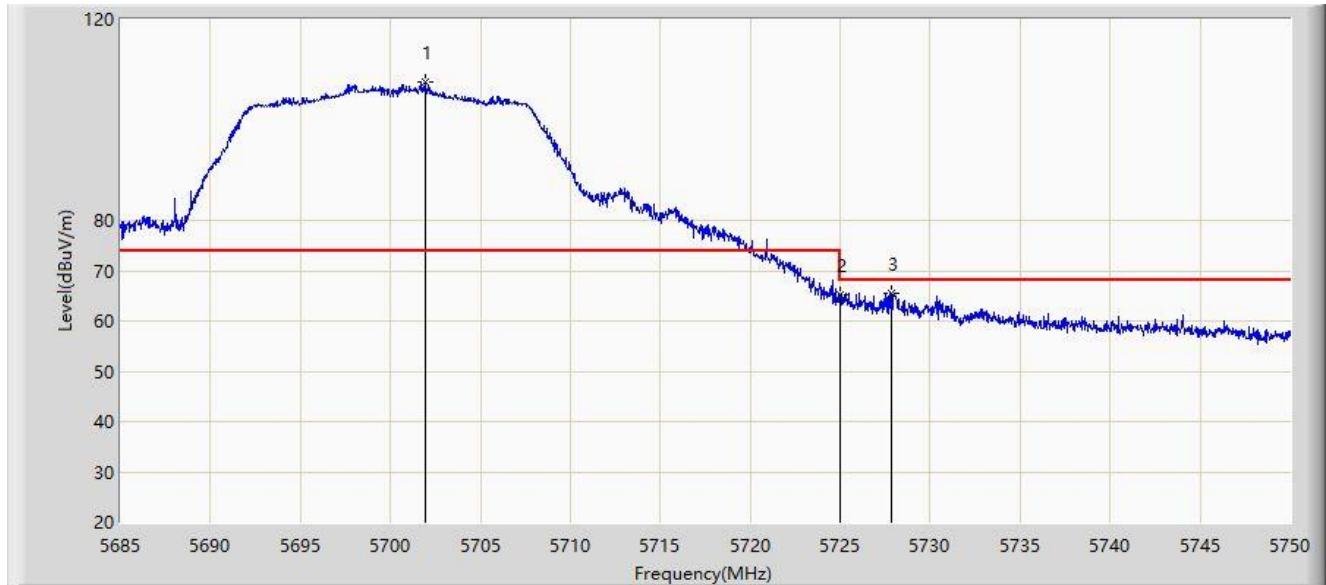


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5701.933	107.437	104.614	N/A	N/A	2.824	PK
2			5725.000	65.195	62.397	-3.005	68.200	2.799	PK
3			5727.868	65.619	62.852	-2.581	68.200	2.766	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:40
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5700MHz, Ant 2	

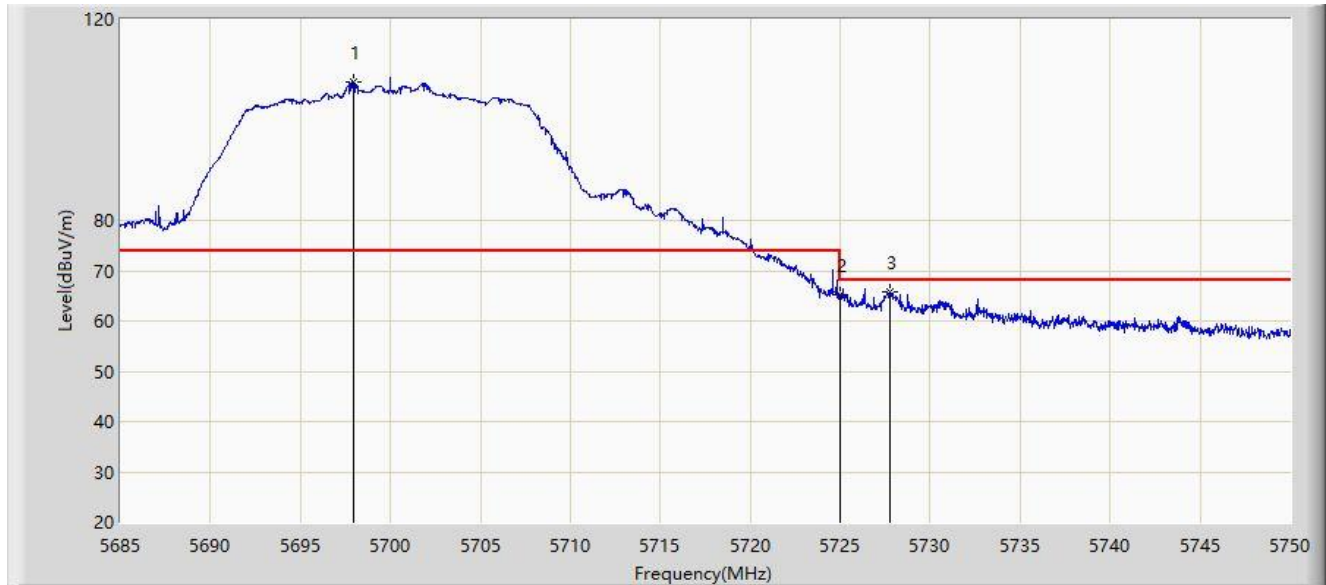


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5697.935	107.470	104.717	N/A	N/A	2.754	PK
2			5725.000	65.154	62.356	-3.046	68.200	2.799	PK
3			5727.770	65.910	63.142	-2.290	68.200	2.768	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:44
Limit: FCC_5.8G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5745MHz, Ant 2	

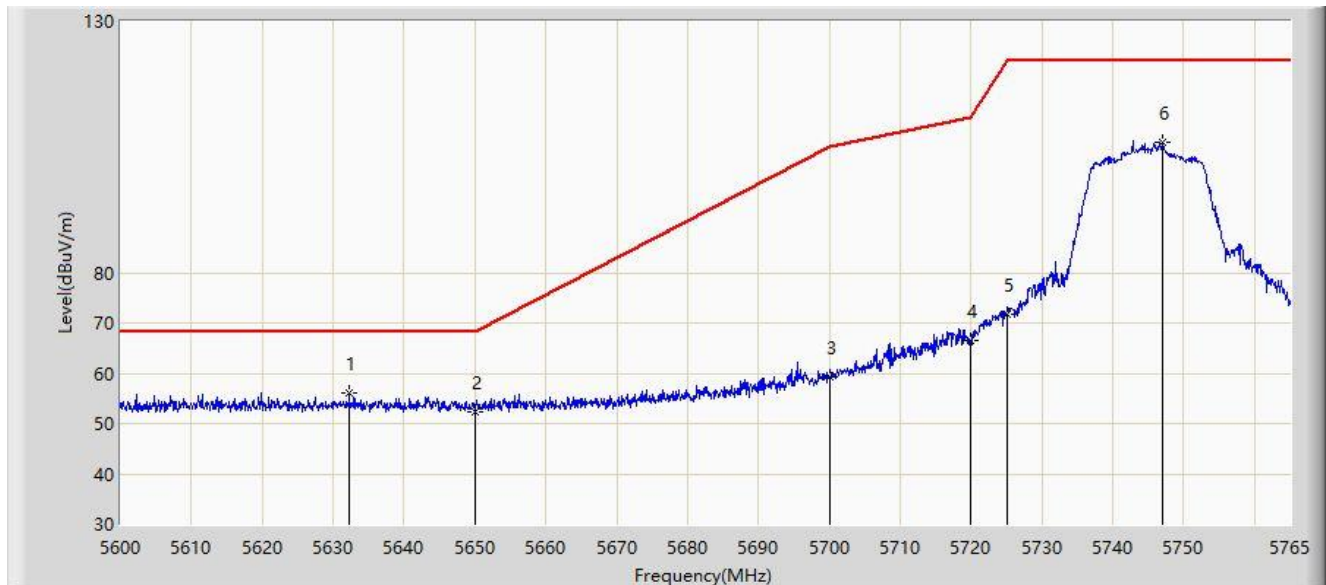


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5632.257	56.103	53.520	-12.097	68.200	2.584	PK
2			5650.000	52.419	49.926	-15.781	68.200	2.492	PK
3			5700.000	59.173	56.384	-46.027	105.200	2.790	PK
4			5720.000	66.656	63.811	-44.144	110.800	2.846	PK
5			5725.000	71.783	68.985	-50.417	122.200	2.799	PK
6			5746.933	105.986	103.335	N/A	N/A	2.652	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:47
Limit: FCC_5.8G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5745MHz, Ant 2	

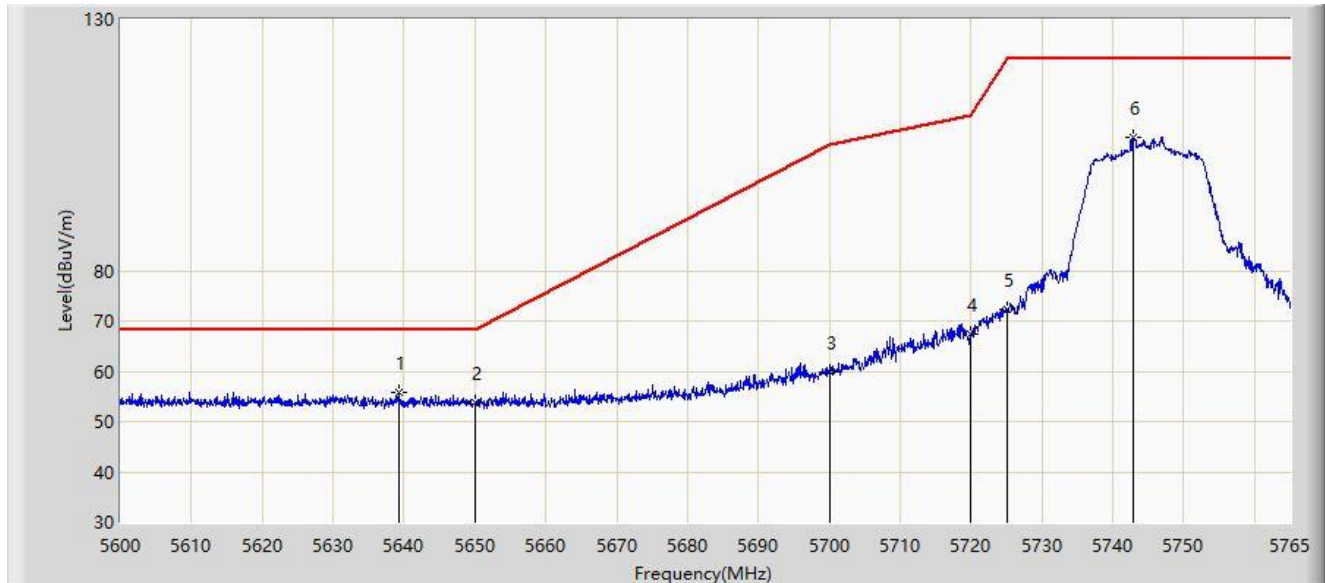


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5639.187	55.695	53.163	-12.505	68.200	2.532	PK
2			5650.000	53.628	51.135	-14.572	68.200	2.492	PK
3			5700.000	59.720	56.931	-45.480	105.200	2.790	PK
4			5720.000	67.474	64.629	-43.326	110.800	2.846	PK
5			5725.000	72.300	69.502	-49.900	122.200	2.799	PK
6			5742.973	106.614	104.029	N/A	N/A	2.585	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:50
Limit: FCC_5.8G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5825MHz, Ant 2	

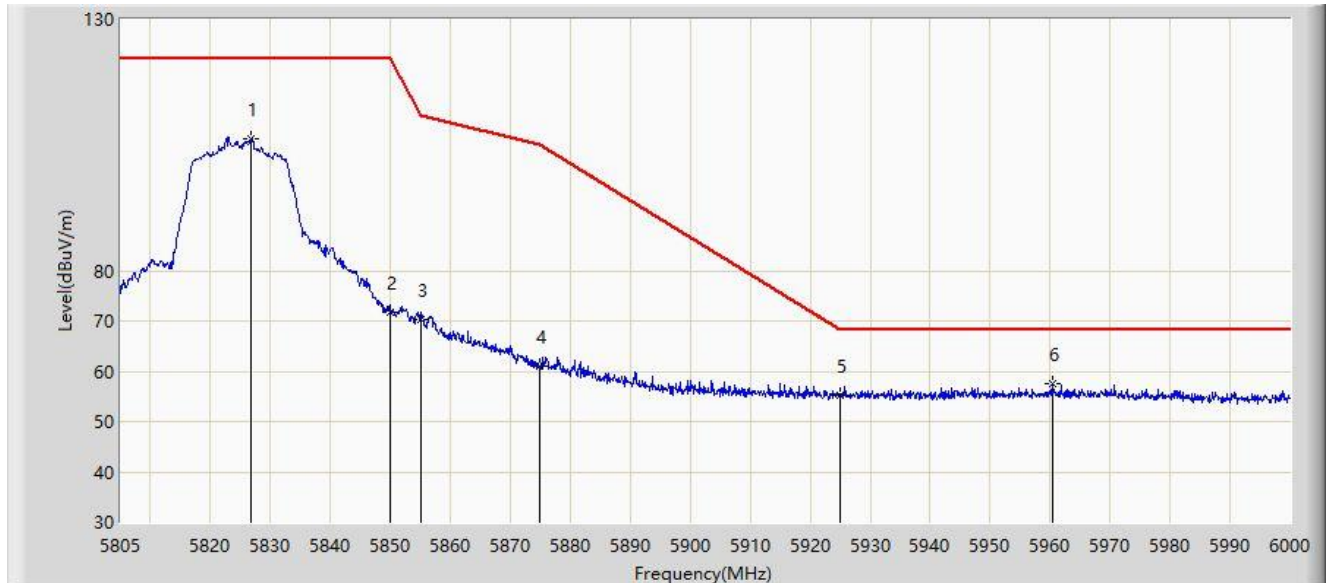


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5826.840	106.232	103.054	N/A	N/A	3.179	PK
2			5850.000	71.651	68.471	-50.549	122.200	3.179	PK
3			5855.000	70.280	67.099	-40.520	110.800	3.181	PK
4			5875.000	61.012	57.638	-44.188	105.200	3.374	PK
5			5925.000	55.305	51.863	-12.895	68.200	3.441	PK
6		*	5960.317	57.617	53.791	-10.583	68.200	3.826	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:51
Limit: FCC_5.8G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11a at 5825MHz, Ant 2	

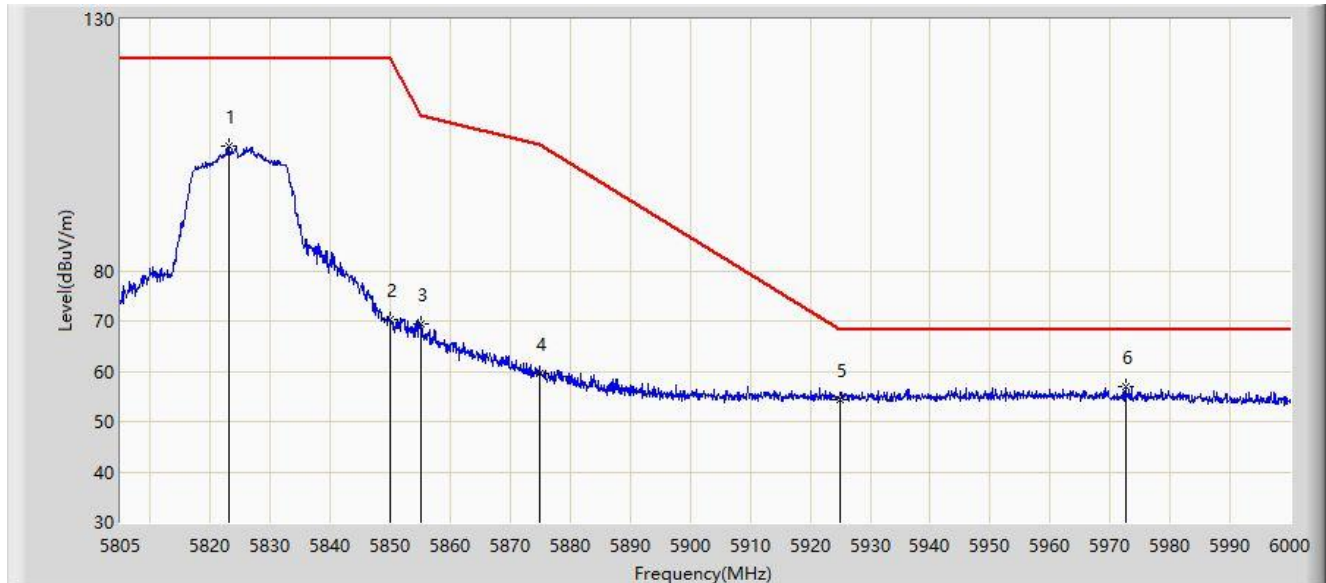


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5823.038	104.699	101.511	N/A	N/A	3.188	PK
2			5850.000	70.318	67.138	-51.882	122.200	3.179	PK
3			5855.000	69.391	66.210	-41.409	110.800	3.181	PK
4			5875.000	59.520	56.146	-45.680	105.200	3.374	PK
5			5925.000	54.441	50.999	-13.759	68.200	3.441	PK
6		*	5972.603	56.836	52.923	-11.364	68.200	3.913	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 11:56
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz, Ant 2	

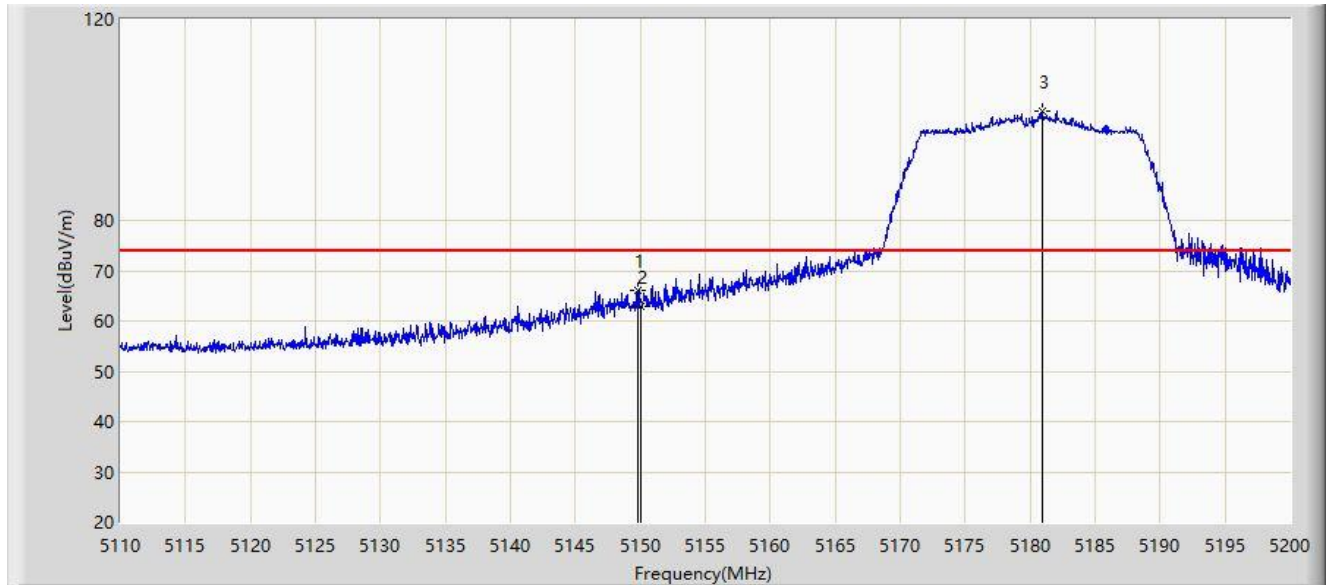


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5149.825	66.010	63.720	-2.190	68.200	2.290	PK
2			5150.000	62.892	60.604	-5.308	68.200	2.287	PK
3		*	5180.920	101.730	99.555	N/A	N/A	2.176	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:10
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz, Ant 2	

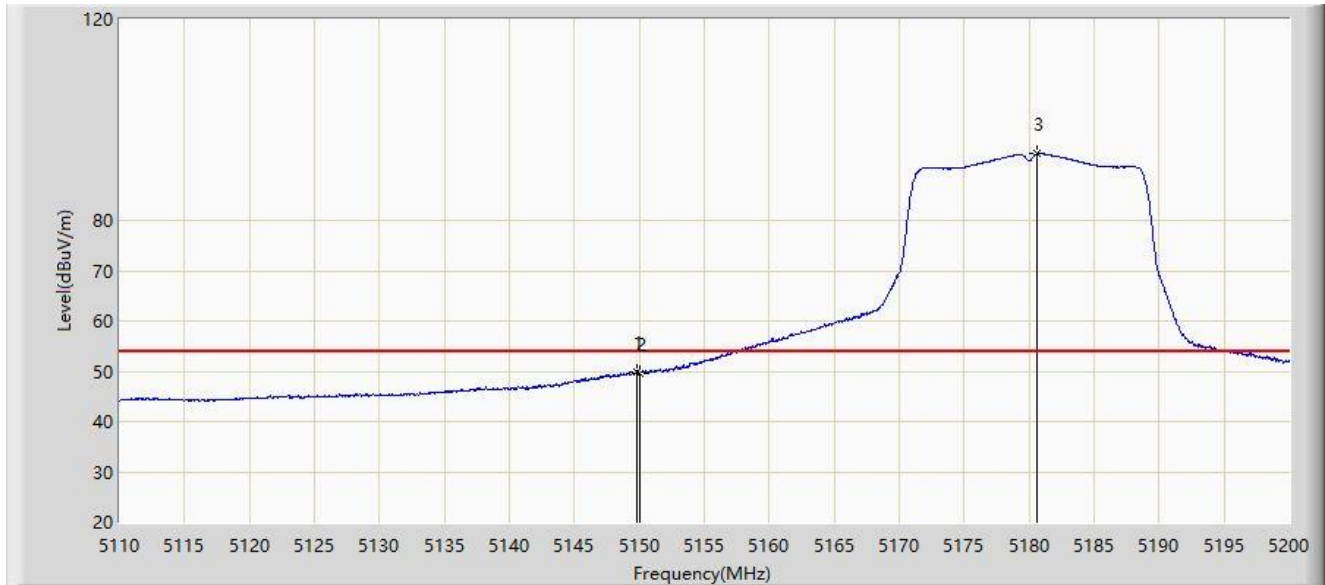


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5149.825	49.756	47.466	-4.244	54.000	2.290	AV
2			5150.000	49.560	47.272	-4.440	54.000	2.287	AV
3		*	5180.650	93.378	91.203	N/A	N/A	2.174	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:14
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz, Ant 2	

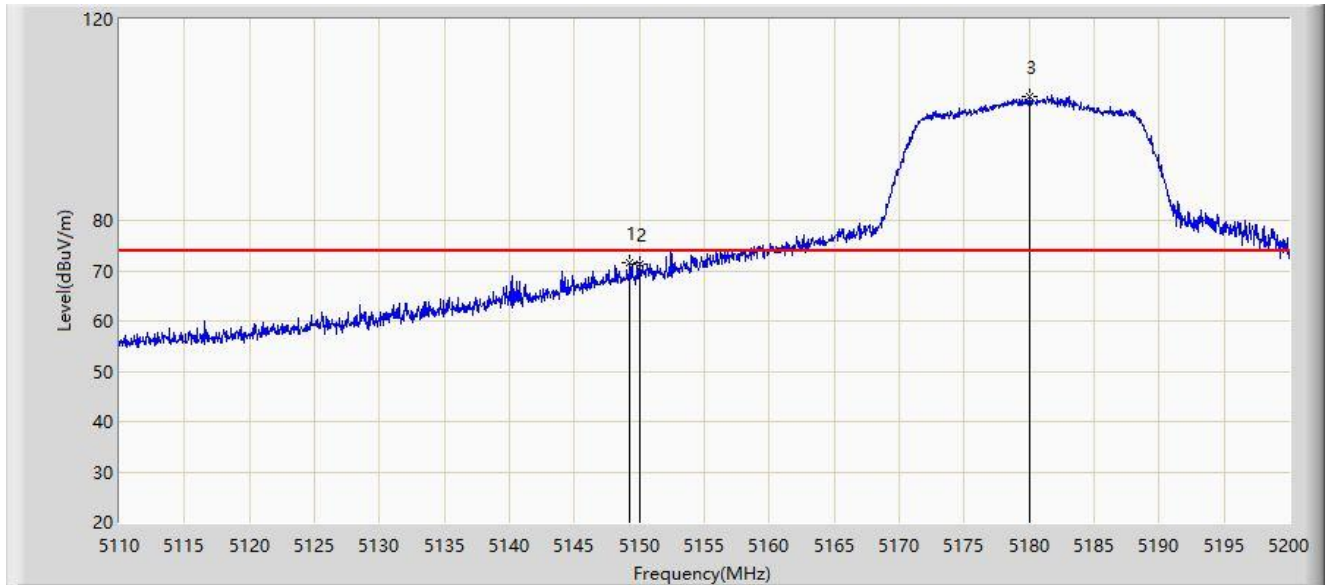


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5149.285	71.595	69.301	-2.405	74.000	2.294	PK
2			5150.000	71.404	69.116	-2.596	74.000	2.287	PK
3		*	5180.065	104.714	102.539	N/A	N/A	2.174	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:16
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5180MHz, Ant 2	

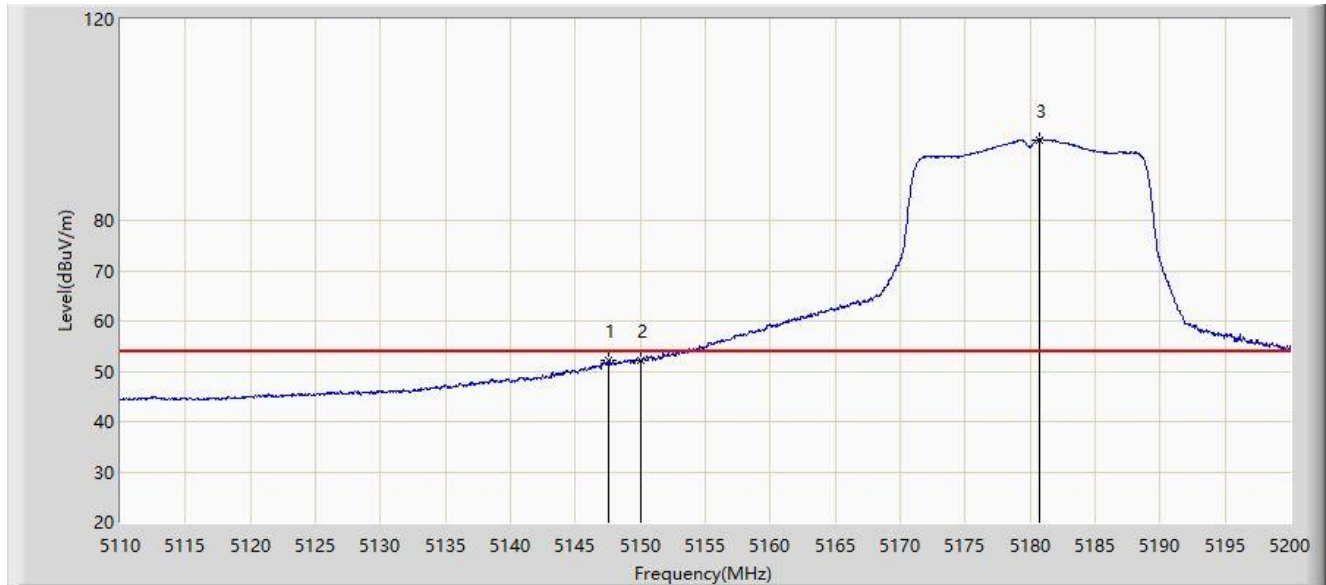


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5147.575	52.133	49.829	-1.867	54.000	2.304	AV
2			5150.000	52.142	49.854	-1.858	54.000	2.287	AV
3		*	5180.695	95.961	93.786	N/A	N/A	2.175	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:18
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz, Ant 2	

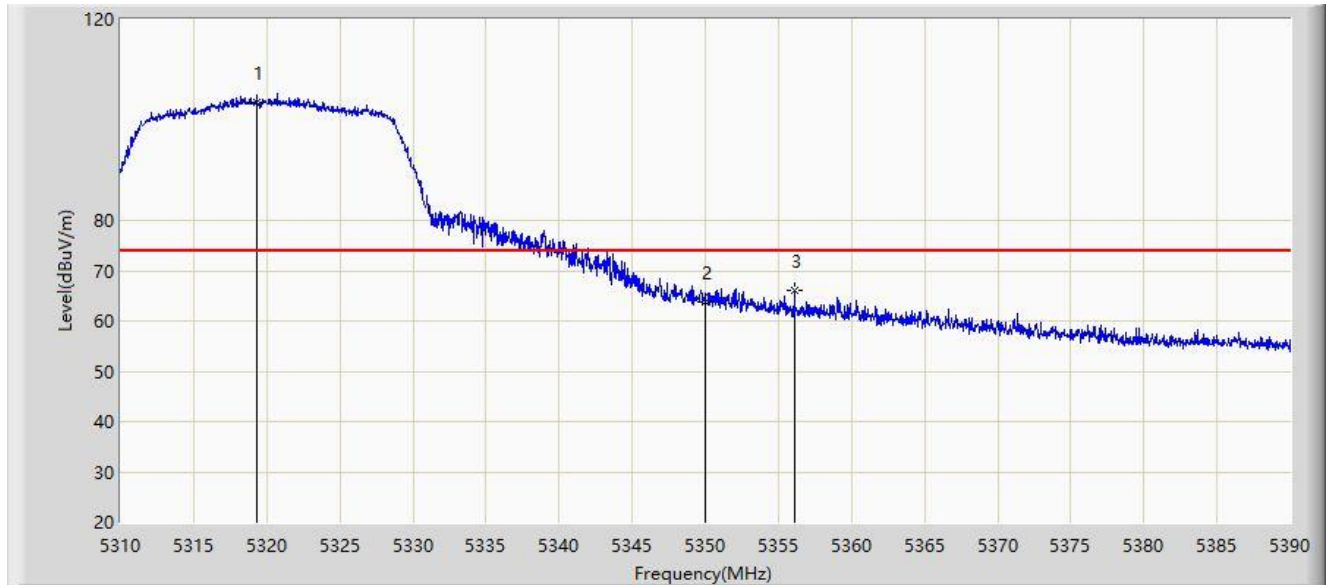


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5319.320	103.508	102.154	N/A	N/A	1.354	PK
2			5350.000	63.767	62.690	-10.233	74.000	1.078	PK
3			5356.120	65.971	64.802	-8.029	74.000	1.169	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:20
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz, Ant 2	

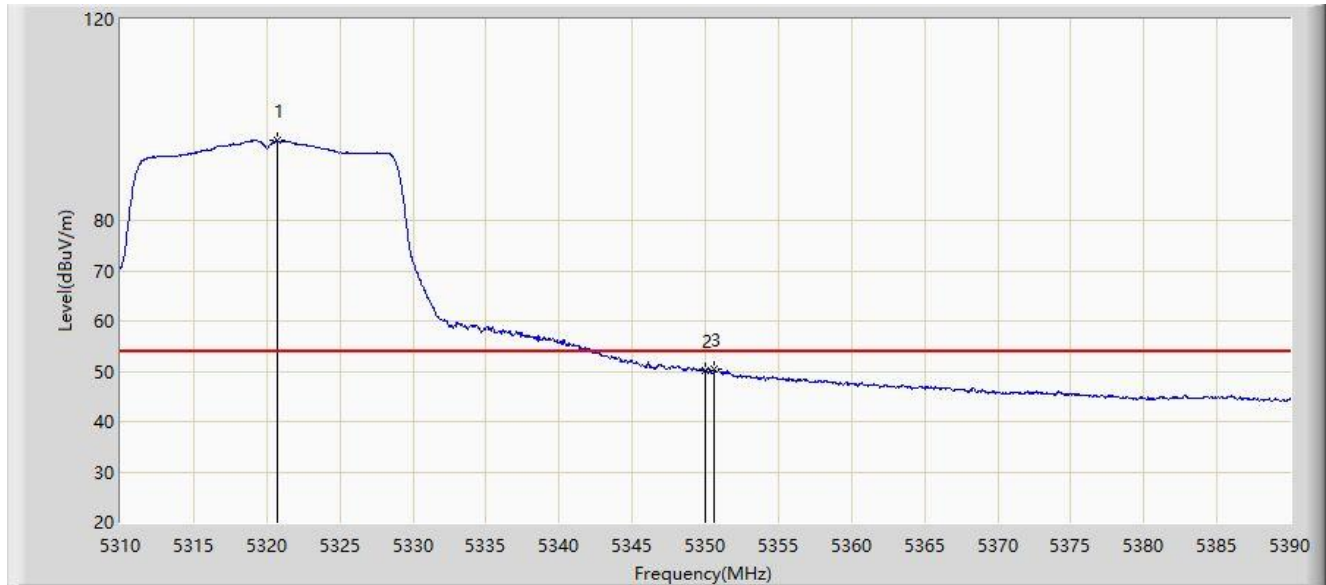


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5320.680	95.939	94.592	N/A	N/A	1.348	AV
2			5350.000	50.049	48.972	-3.951	54.000	1.078	AV
3			5350.640	50.409	49.340	-3.591	54.000	1.069	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:20
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz, Ant 2	

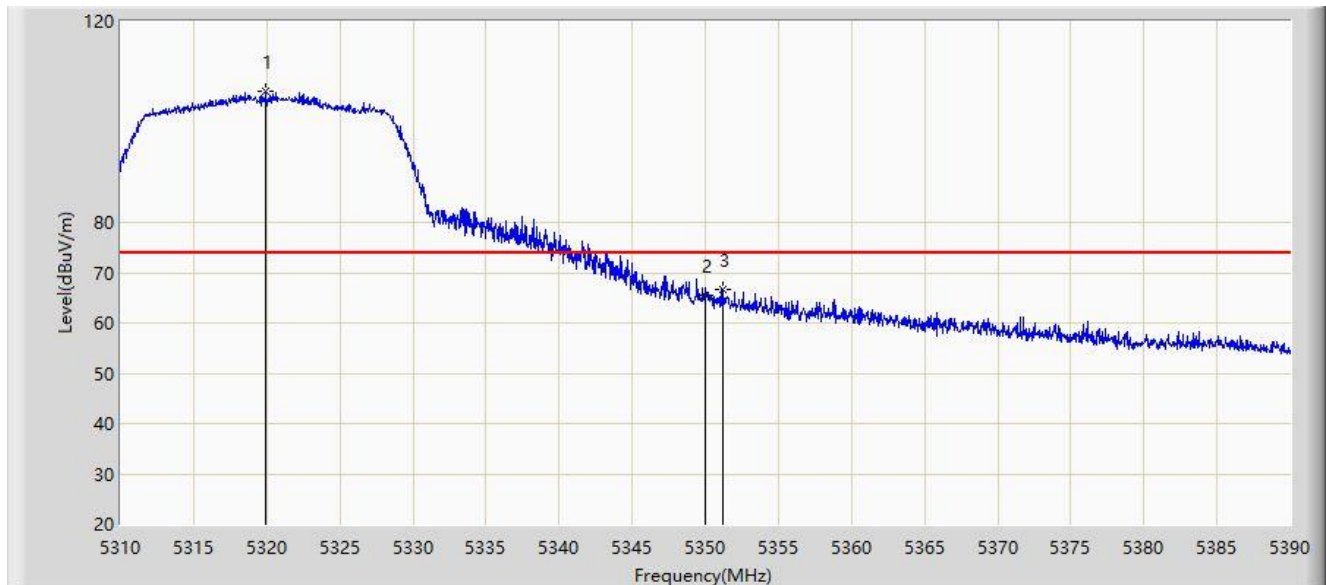


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5319.920	105.952	104.601	N/A	N/A	1.350	PK
2			5350.000	65.608	64.531	-8.392	74.000	1.078	PK
3			5351.240	66.632	65.571	-7.368	74.000	1.061	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:21
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5320MHz, Ant 2	

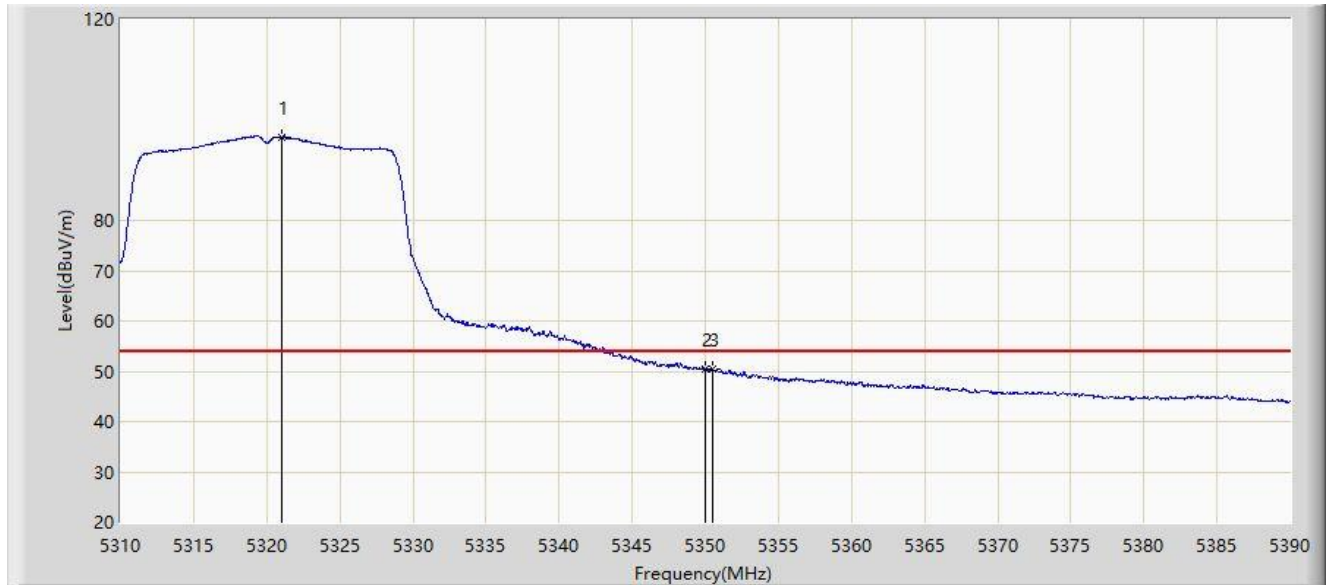


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5321.040	96.588	95.243	N/A	N/A	1.345	AV
2			5350.000	50.401	49.324	-3.599	54.000	1.078	AV
3			5350.480	50.451	49.380	-3.549	54.000	1.071	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:42
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz, Ant 2	

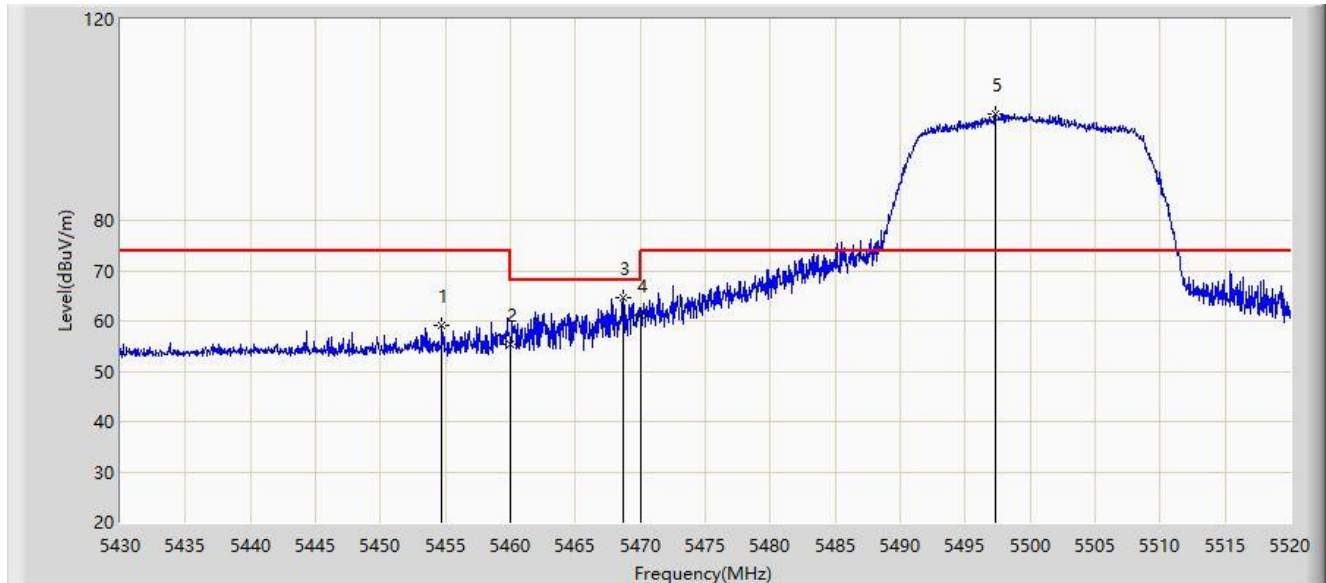


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5454.750	59.020	56.932	-14.980	74.000	2.089	PK
2			5460.000	55.465	53.394	-18.535	74.000	2.071	PK
3			5468.655	64.594	62.551	-3.606	68.200	2.043	PK
4			5470.000	61.179	59.140	-7.021	68.200	2.039	PK
5		*	5497.275	101.284	99.080	N/A	N/A	2.204	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:43
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz, Ant 2	

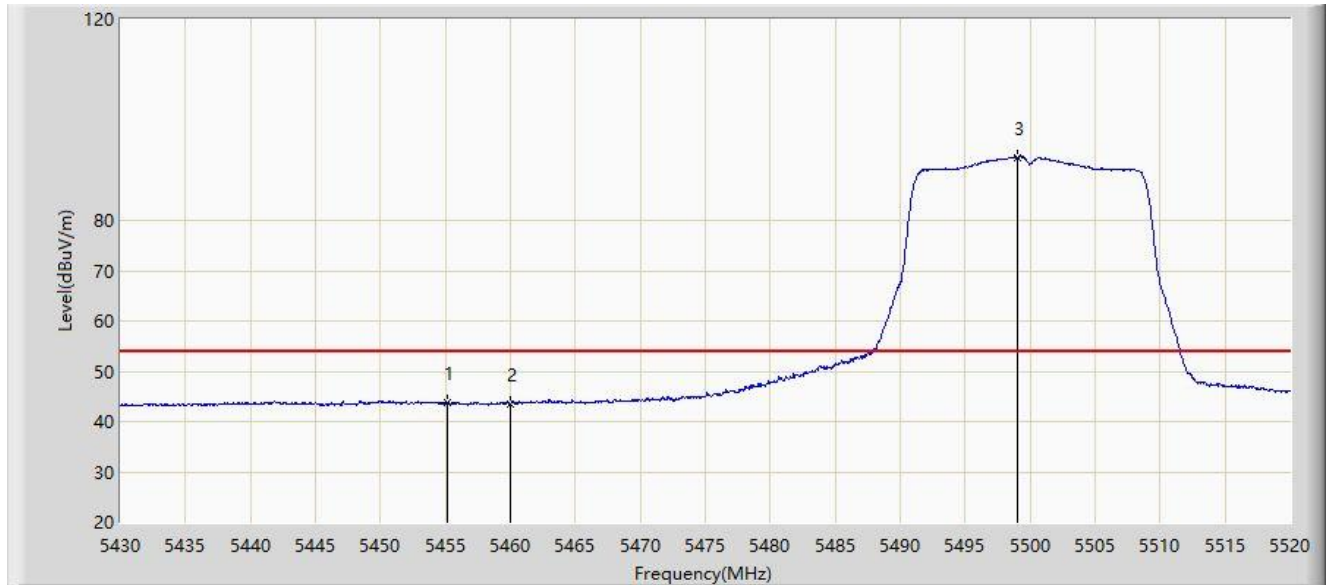


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5455.110	43.780	41.693	-10.220	54.000	2.087	AV
2			5460.000	43.554	41.483	-10.446	54.000	2.071	AV
3		*	5498.985	92.553	90.369	N/A	N/A	2.185	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:44
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz, Ant 2	

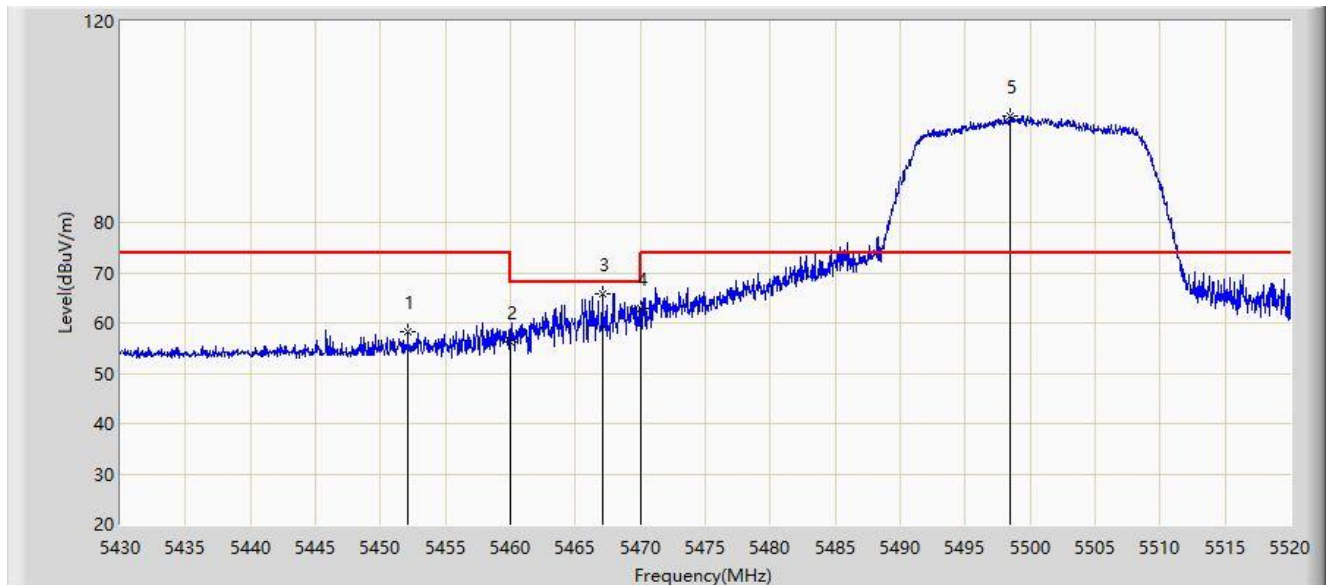


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5452.095	58.173	56.103	-15.827	74.000	2.070	PK
2			5460.000	56.120	54.049	-17.880	74.000	2.071	PK
3			5467.080	65.939	63.891	-2.261	68.200	2.049	PK
4			5470.000	62.925	60.886	-5.275	68.200	2.039	PK
5		*	5498.445	101.243	99.053	N/A	N/A	2.190	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:45
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5500MHz, Ant 2	

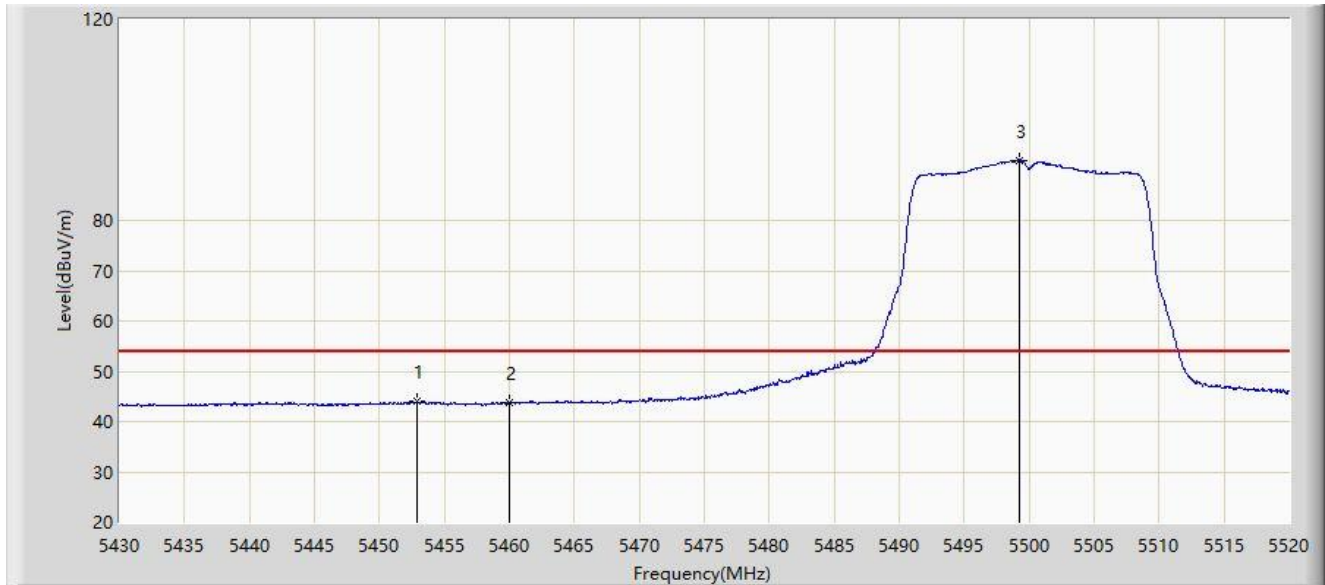


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5452.860	43.935	41.857	-10.065	54.000	2.078	AV
2			5460.000	43.792	41.721	-10.208	54.000	2.071	AV
3		*	5499.255	92.001	89.820	N/A	N/A	2.181	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:46
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz, Ant 2	

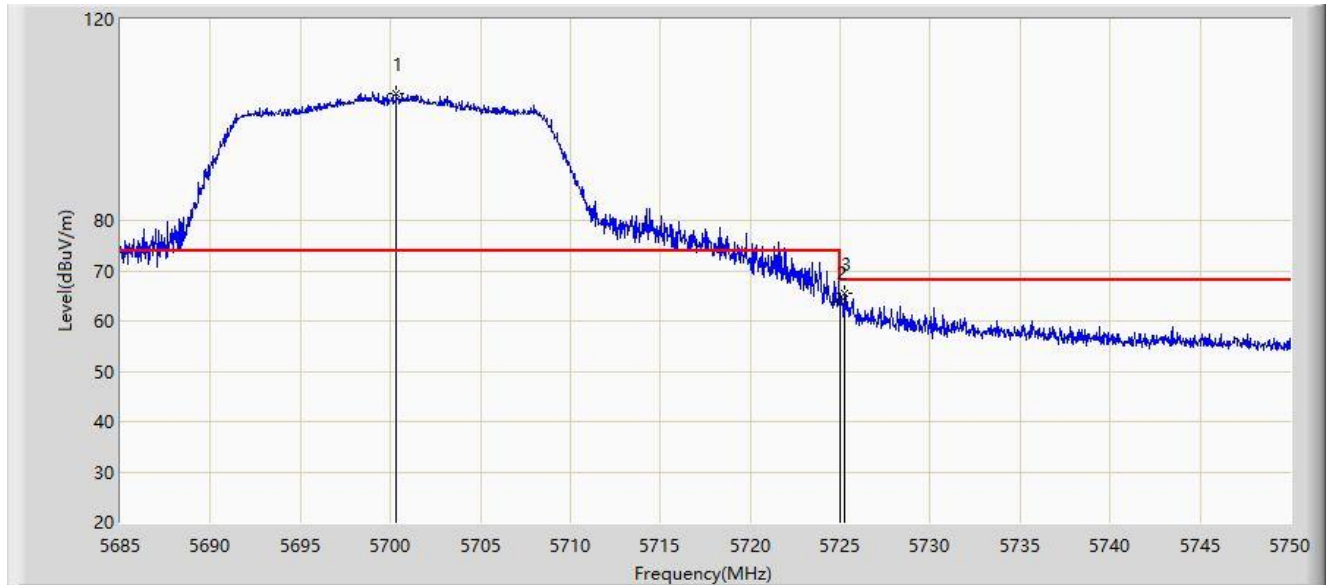


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5700.308	105.288	102.493	N/A	N/A	2.795	PK
2			5725.000	63.874	61.076	-4.326	68.200	2.799	PK
3			5725.235	65.578	62.782	-2.622	68.200	2.796	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:50
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5700MHz, Ant 2	

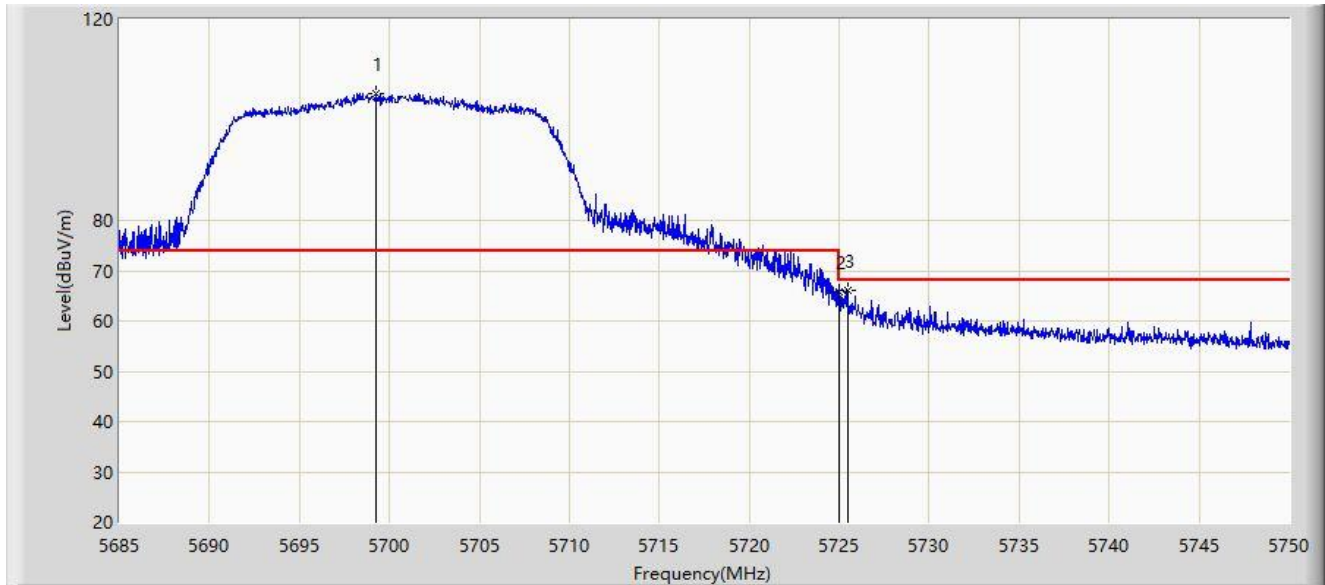


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5699.268	105.223	102.446	N/A	N/A	2.776	PK
2			5725.000	65.891	63.093	-2.309	68.200	2.799	PK
3			5725.462	66.211	63.417	-1.989	68.200	2.794	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:52
Limit: FCC_5.8G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz, Ant 2	

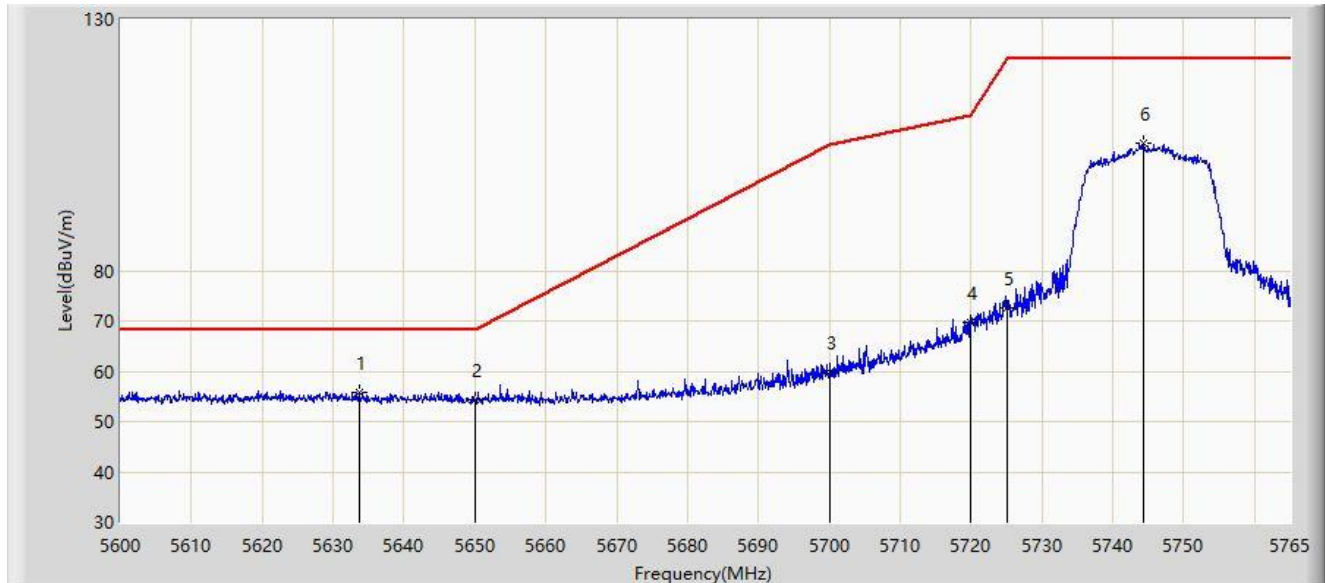


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5633.660	55.881	53.308	-12.319	68.200	2.573	PK
2			5650.000	54.407	51.914	-13.793	68.200	2.492	PK
3			5700.000	59.858	57.069	-45.342	105.200	2.790	PK
4			5720.000	69.847	67.002	-40.953	110.800	2.846	PK
5			5725.000	72.674	69.876	-49.526	122.200	2.799	PK
6			5744.375	105.298	102.690	N/A	N/A	2.608	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:54
Limit: FCC_5.8G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5745MHz, Ant 2	

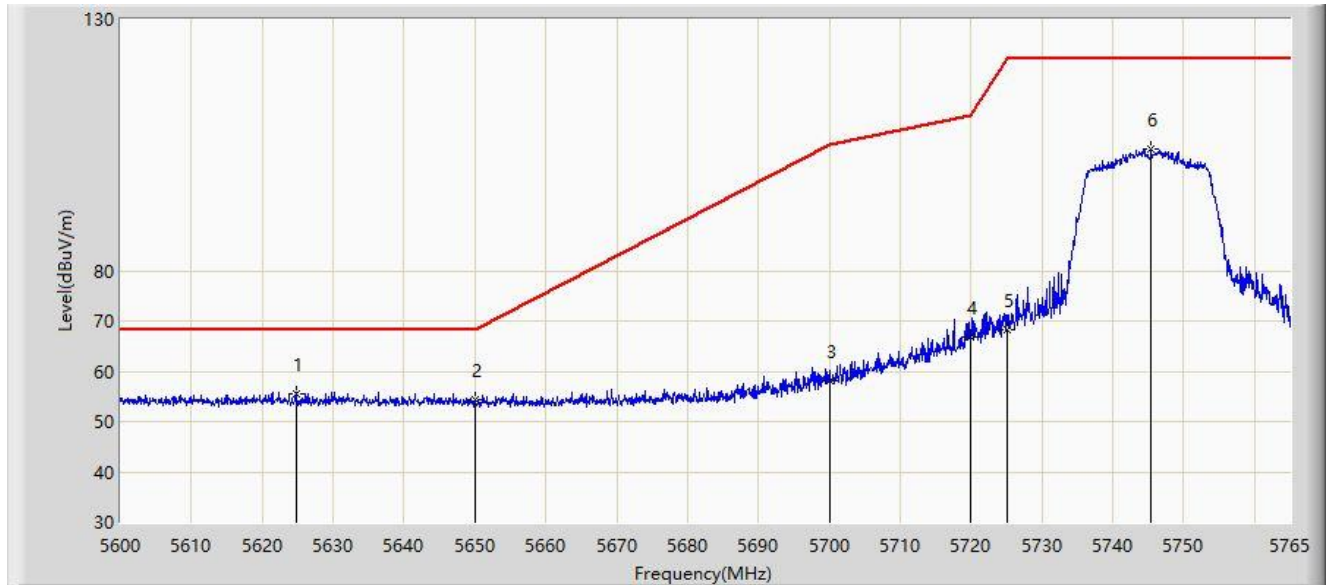


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5624.833	55.622	52.985	-12.578	68.200	2.638	PK
2			5650.000	54.321	51.828	-13.879	68.200	2.492	PK
3			5700.000	58.111	55.322	-47.089	105.200	2.790	PK
4			5720.000	66.761	63.916	-44.039	110.800	2.846	PK
5			5725.000	68.340	65.542	-53.860	122.200	2.799	PK
6			5745.365	104.204	101.579	N/A	N/A	2.625	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:55
Limit: FCC_5.8G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz, Ant 2	

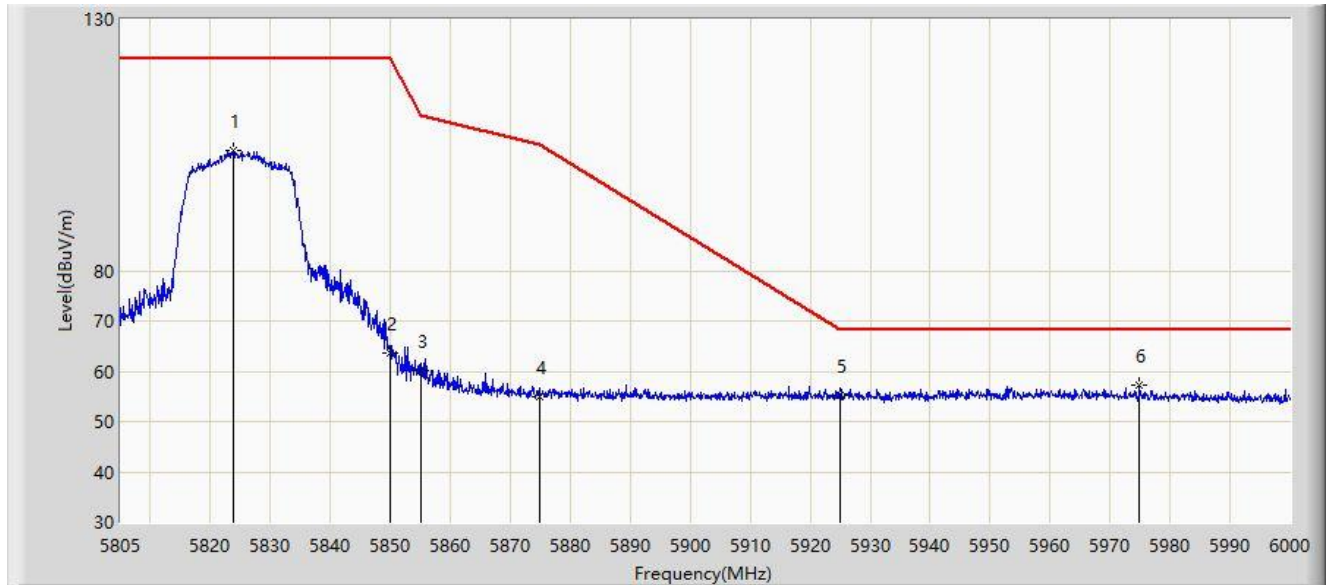


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5823.915	103.828	100.642	N/A	N/A	3.186	PK
2			5850.000	63.489	60.309	-58.711	122.200	3.179	PK
3			5855.000	60.028	56.847	-50.772	110.800	3.181	PK
4			5875.000	54.981	51.607	-50.219	105.200	3.374	PK
5			5925.000	55.342	51.900	-12.858	68.200	3.441	PK
6		*	5974.845	57.203	53.275	-10.997	68.200	3.928	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 13:57
Limit: FCC_5.8G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT20 at 5825MHz, Ant 2	

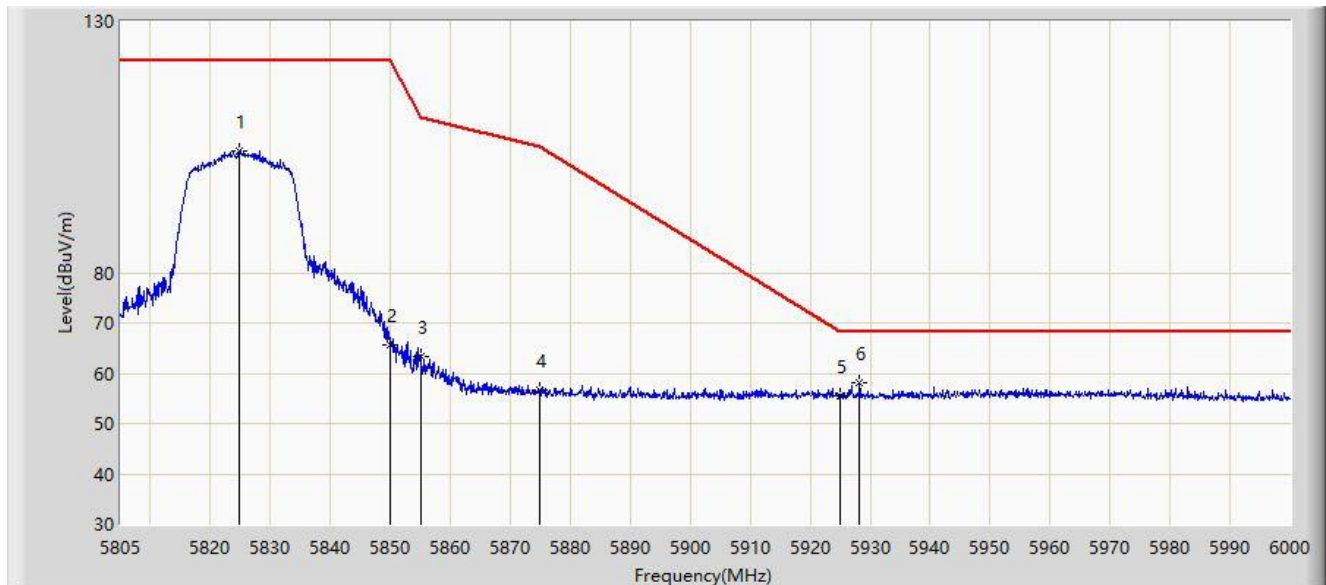


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5824.890	104.135	100.951	N/A	N/A	3.183	PK
2			5850.000	65.669	62.489	-56.531	122.200	3.179	PK
3			5855.000	63.477	60.296	-47.323	110.800	3.181	PK
4			5875.000	56.656	53.282	-48.544	105.200	3.374	PK
5			5925.000	55.613	52.171	-12.587	68.200	3.441	PK
6		*	5928.240	58.038	54.609	-10.162	68.200	3.429	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 14:01
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz, Ant 2	

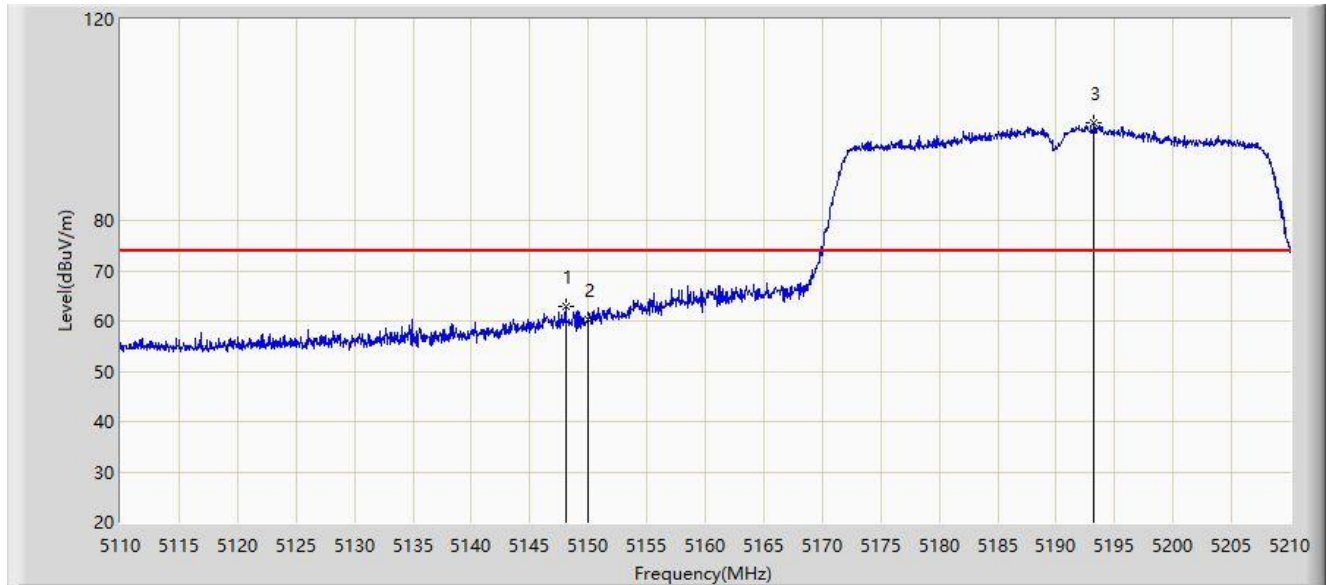


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5148.050	62.761	60.456	-11.239	74.000	2.305	PK
2			5150.000	60.363	58.075	-13.637	74.000	2.287	PK
3		*	5193.250	99.403	97.341	N/A	N/A	2.062	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 14:04
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz, Ant 2	

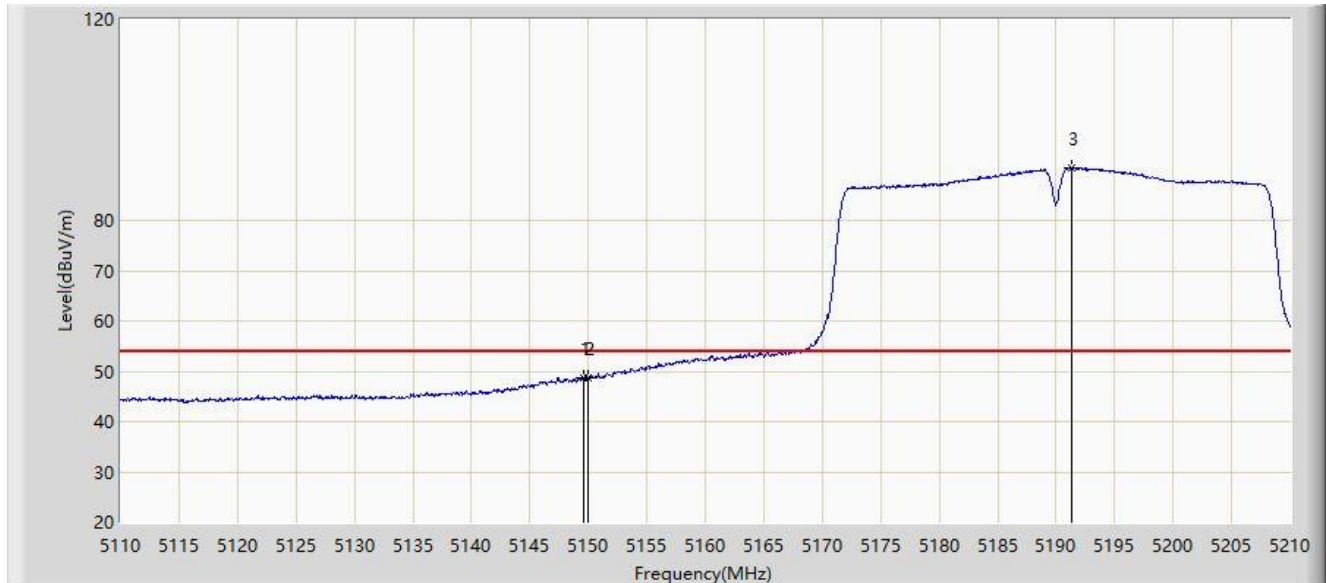


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5149.650	48.817	46.526	-5.183	54.000	2.290	AV
2			5150.000	48.738	46.450	-5.262	54.000	2.287	AV
3		*	5191.300	90.550	88.468	N/A	N/A	2.081	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 14:07
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz, Ant 2	

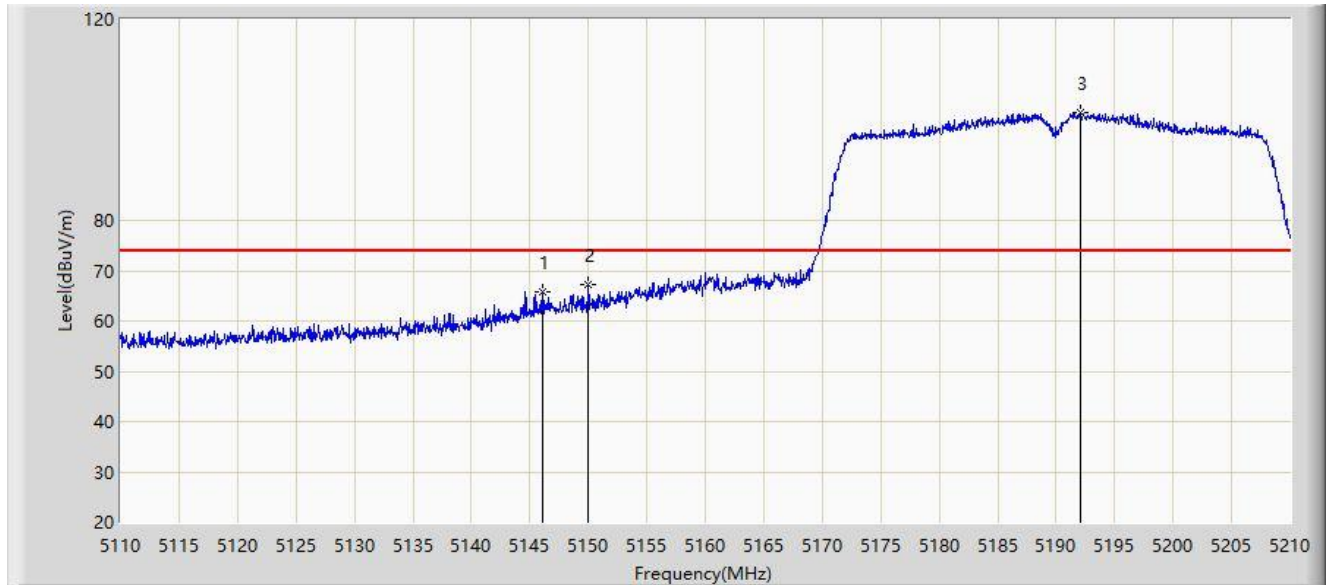


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5146.050	65.879	63.580	-8.121	74.000	2.298	PK
2			5150.000	67.180	64.892	-6.820	74.000	2.287	PK
3		*	5192.050	101.314	99.240	N/A	N/A	2.074	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 14:08
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT40 at 5190MHz, Ant 2	

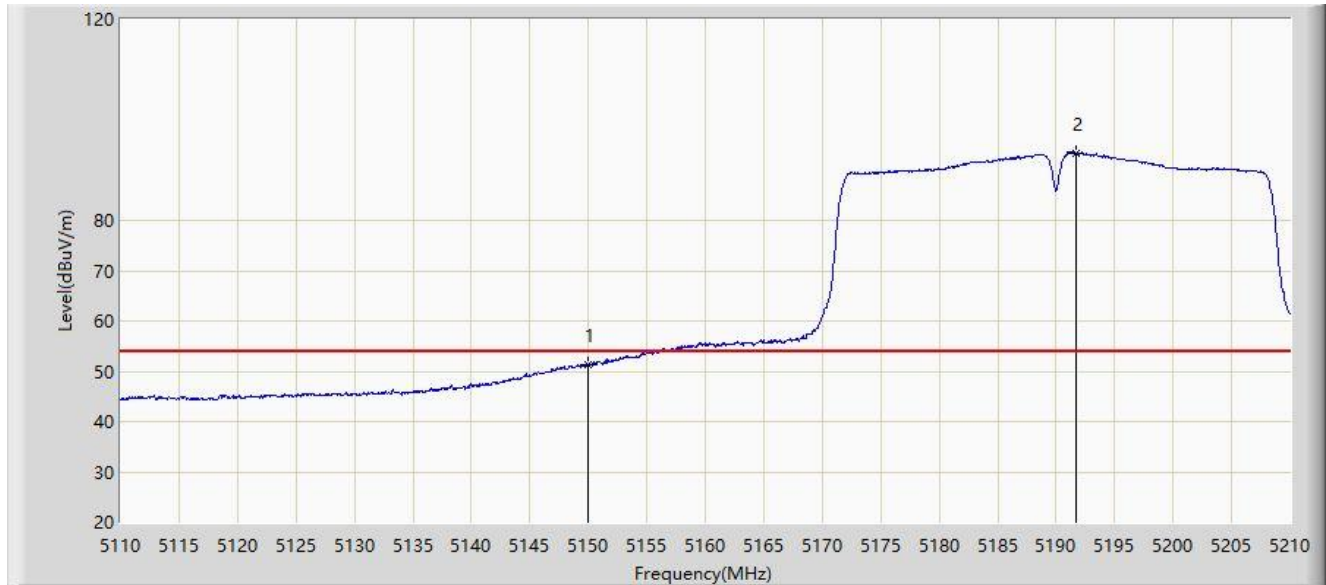


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5150.000	51.357	49.069	-2.643	54.000	2.287	AV
2		*	5191.750	93.436	91.359	N/A	N/A	2.077	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 14:19
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz, Ant 2	

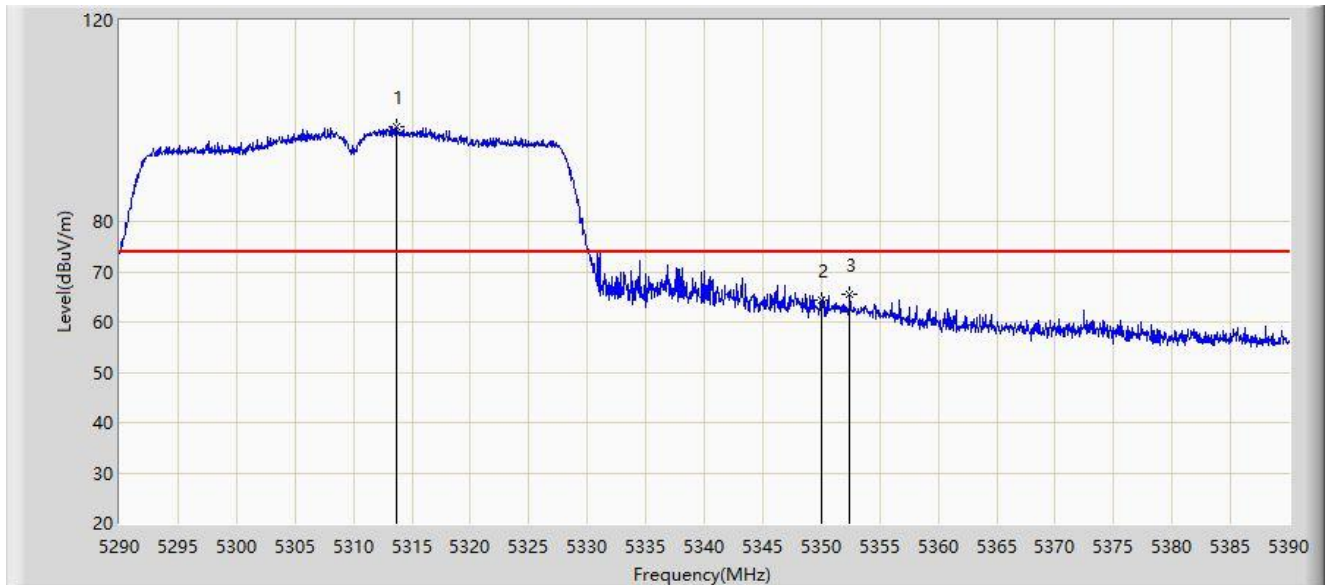


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5313.700	98.916	97.544	N/A	N/A	1.372	PK
2			5350.000	64.381	63.304	-9.619	74.000	1.078	PK
3			5352.450	65.488	64.424	-8.512	74.000	1.064	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 14:20
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz, Ant 2	

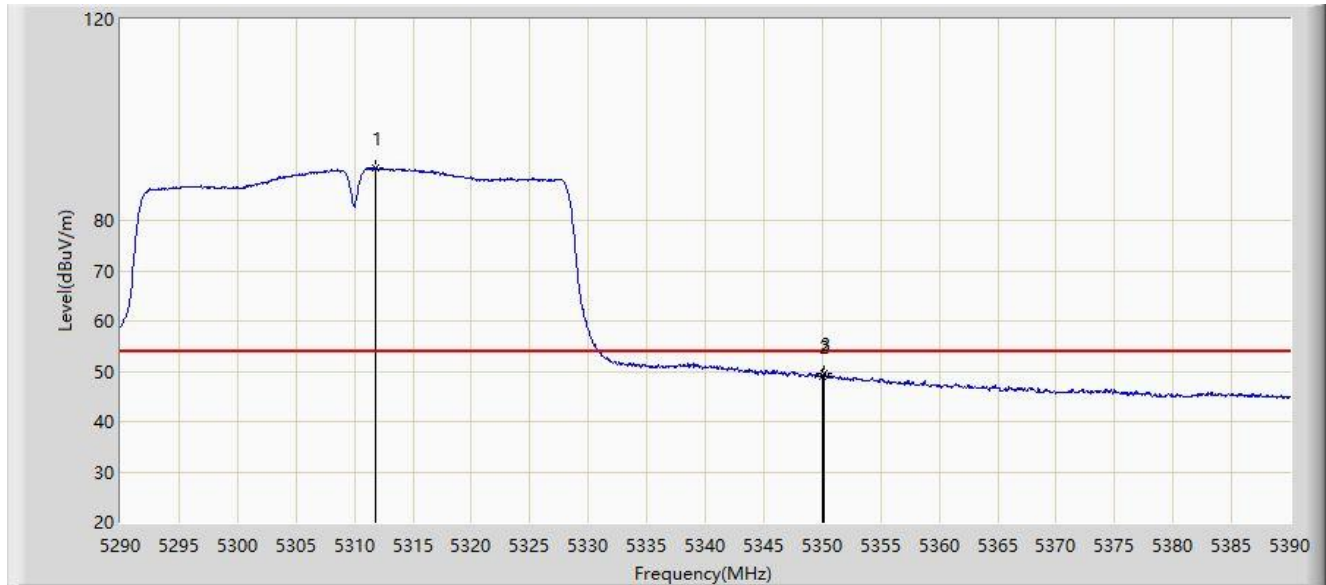


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5311.850	90.356	88.978	N/A	N/A	1.377	AV
2			5350.000	49.042	47.965	-4.958	54.000	1.078	AV
3			5350.150	49.421	48.346	-4.579	54.000	1.076	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 14:18
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz, Ant 2	

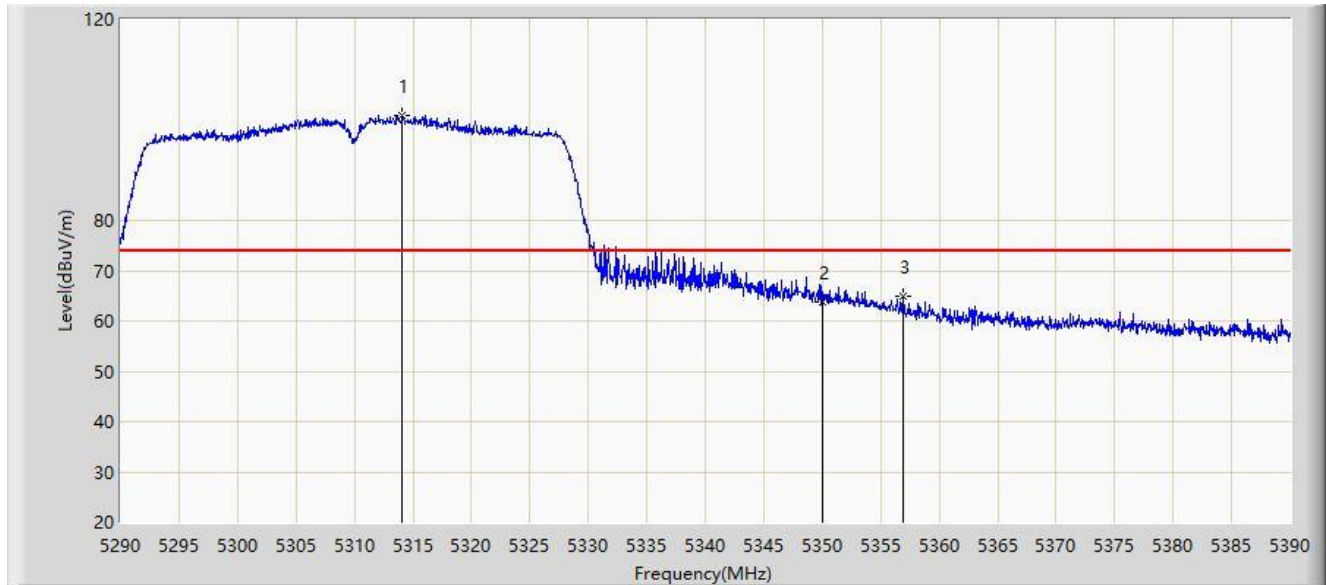


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1		*	5314.100	100.930	99.559	N/A	N/A	1.372	PK
2			5350.000	63.711	62.634	-10.289	74.000	1.078	PK
3			5356.950	65.065	63.872	-8.935	74.000	1.193	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 14:17
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT40 at 5310MHz, Ant 2	

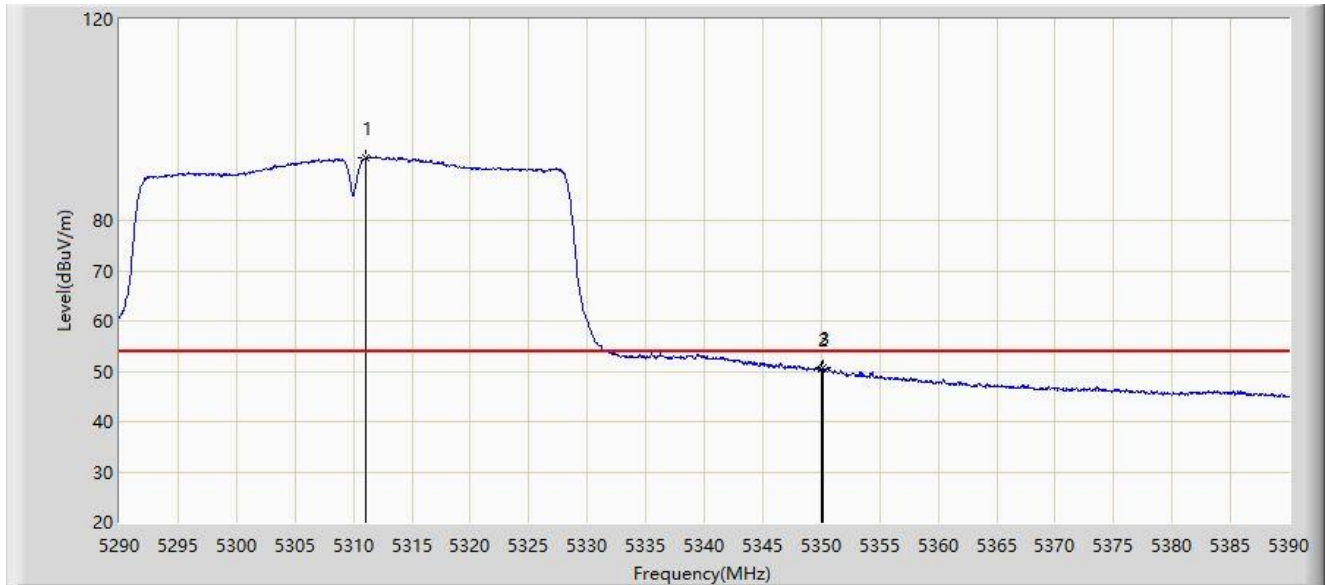


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1		*	5311.050	92.542	91.162	N/A	N/A	1.380	AV
2			5350.000	50.306	49.229	-3.694	54.000	1.078	AV
3			5350.200	50.704	49.629	-3.296	54.000	1.074	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 14:32
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz, Ant 2	

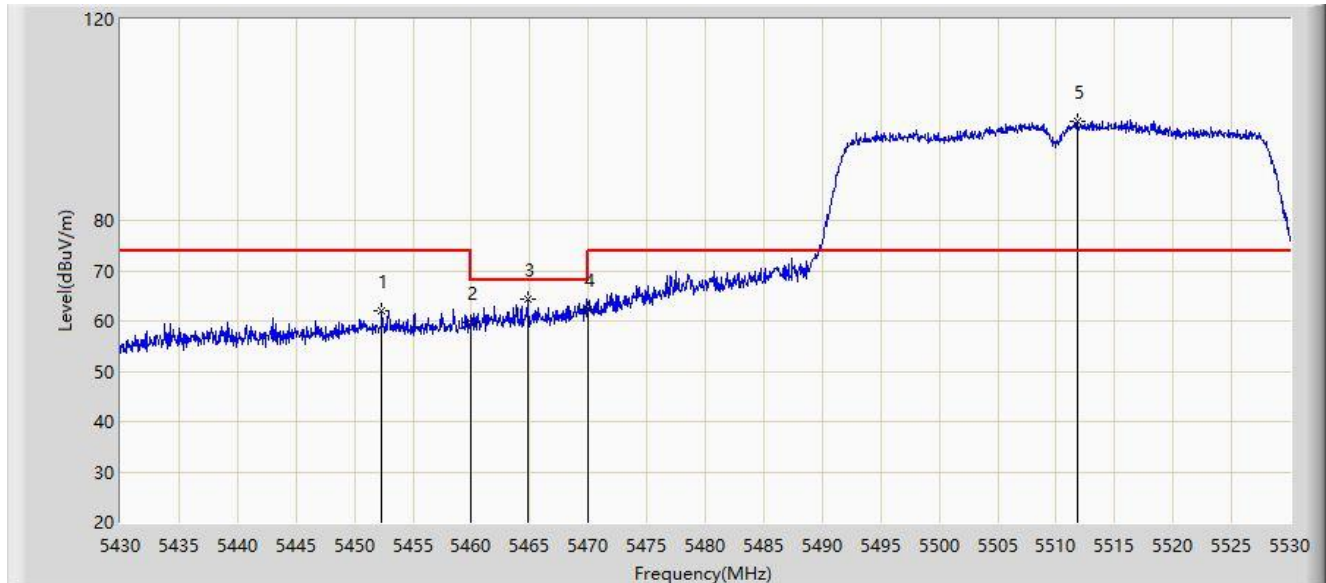


No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5452.350	61.887	59.815	-12.113	74.000	2.073	PK
2			5460.000	59.792	57.721	-14.208	74.000	2.071	PK
3			5464.800	64.211	62.155	-3.989	68.200	2.055	PK
4			5470.000	62.352	60.313	-5.848	68.200	2.039	PK
5		*	5511.800	99.666	97.553	N/A	N/A	2.113	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 14:33
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Horizontal
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz, Ant 2	

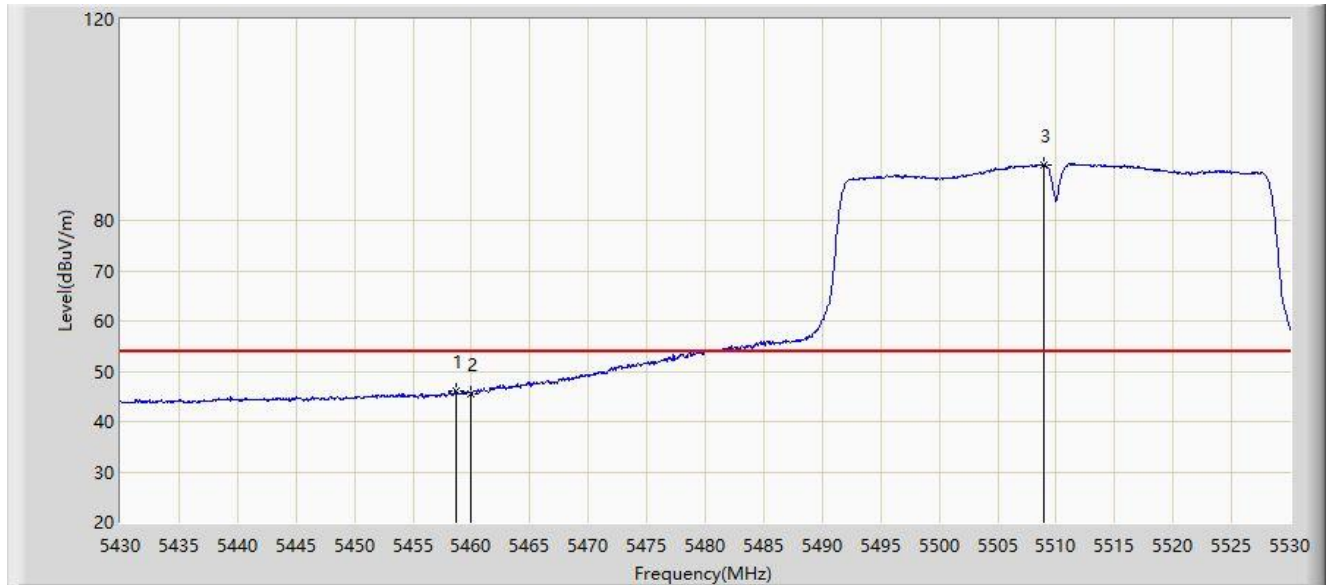


No	Flag	Mark	Frequency (MHz)	Measure Level (dBμV/m)	Reading Level (dBμV)	Margin (dB)	Limit (dBμV/m)	Factor (dB/m)	Type
1			5458.650	46.027	43.951	-7.973	54.000	2.075	AV
2			5460.000	45.545	43.474	-8.455	54.000	2.071	AV
3		*	5508.950	91.054	88.940	N/A	N/A	2.114	AV

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBμV/m) = Reading Level (dBμV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)

Site: NS-AC1	Time: 2022/05/05 - 14:29
Limit: FCC_5G_RE(3m)	Engineer: Ben Wen
Probe: NS-AC1_BBHA9120D	Polarity: Vertical
EUT: Mobile Computer	Power: By PC
Test Mode: Transmit by 802.11ac-VHT40 at 5510MHz, Ant 2	

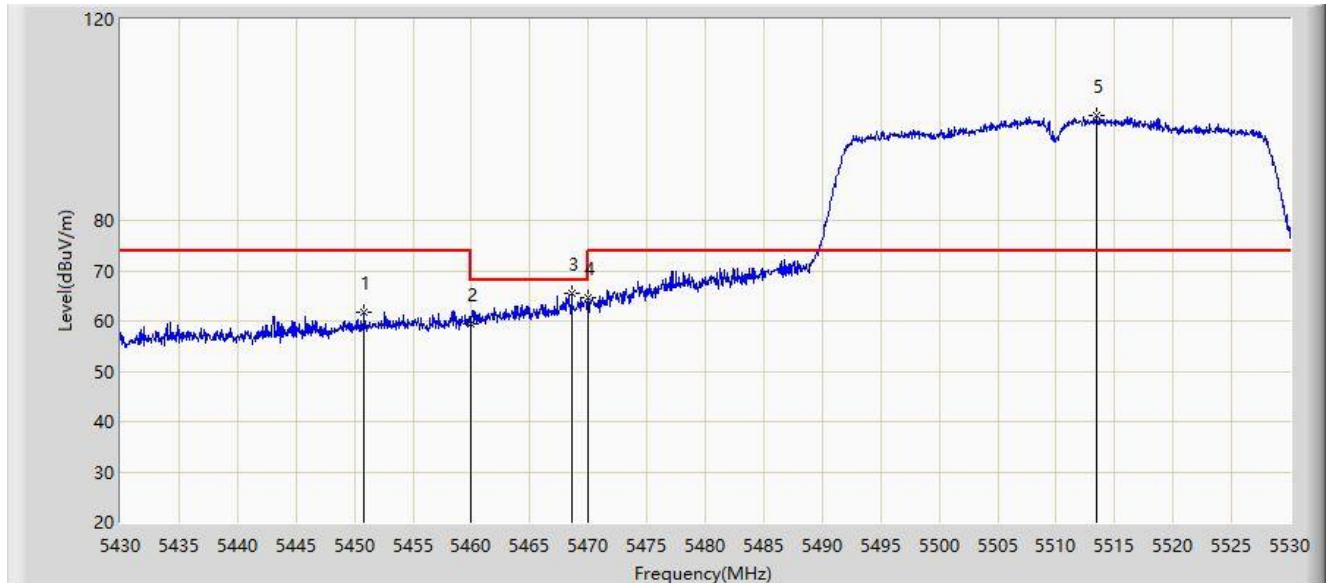

No	Flag	Mark	Frequency (MHz)	Measure Level (dBuV/m)	Reading Level (dBuV)	Margin (dB)	Limit (dBuV/m)	Factor (dB/m)	Type
1			5450.850	61.643	59.587	-12.357	74.000	2.056	PK
2			5460.000	59.562	57.491	-14.438	74.000	2.071	PK
3			5468.600	65.542	63.498	-2.658	68.200	2.044	PK
4			5470.000	64.766	62.727	-3.434	68.200	2.039	PK
5		*	5513.500	100.755	98.642	N/A	N/A	2.114	PK

Note 1. " *", means this data is the worst emission level.

Note 2: Measure Level (dBuV/m) = Reading Level (dBuV) + Factor (dB/m)

Note 3: Factor (dB/m) = Cable Loss (dB) + Antenna Factor (dB/m) - Pre_Amplifier Gain (dB)