



T-Coil HAC Test Report

FOR:

Manufacturer: Honeywell International Inc
Model Name: 70eLG0
FCC ID: HD570ELG0

Test Report #: HAC_HONEY_095_12001_70eLG0_T-Coil

Date of Report: 2013/05/21



FCC Listed #:
A2LA Accredited

IC Recognized #
3462B-1

CETECOM Inc.

411 Dixon Landing Road • Milpitas, CA 95035 • U.S.A.

Phone: + 1 (408) 586 6200 • Fax: + 1 (408) 586 6299 • E-mail: info@cetecomusa.com • <http://www.cetecom.com>

CETECOM Inc. is a Delaware Corporation with Corporation number: 2905571

TABLE OF CONTENTS

1. Assessment.....	4
2. Administrative Data	5
2.1. Identification of the Testing Laboratory Issuing the HAC Test Report.....	5
2.2. Identification of the Client	5
2.3. Identification of the Manufacturer	5
3. Equipment under Test (EUT)	6
3.1. Specification of the Equipment under Test	6
3.2. Identification of the Equipment Under Test (EUT).....	7
3.3. Identification of Accessory equipment.....	7
3.4. Technical Specification of Supported Radio	7
3.5. Supported Air Interfaces.....	8
4. Subject of Investigation	9
4.1. FCC rules and ANSI Measurement Methods	9
4.2. HAC performance and Equipment categorization.....	9
4.2.1. Categories of Hearing Aid Compatibility for wireless devices	9
4.2.2. T-Coil Coupling field intensity	9
4.2.3. Magnetic Field Frequency Response.....	10
5. Measurement Procedure.....	11
5.1. General Requirements.....	11
5.2. Configurations.....	11
5.3. Pre-Measurement Calibration Procedure	12
5.4. Audio Signal Preparation.....	13
5.4.1. GSM/WCDMA.....	13
5.4.2. CDMA.....	13
5.5. EUT Scanning Procedure.....	14

6. The Measurement System	15
6.1. Robot system specification	15
6.2. Isotropic E-Field Probe for Dosimetric Measurements	16
6.3. The IXA-020 probe amplifier	17
7. Uncertainty Assessment	19
7.1. Measurement Uncertainty Budget	19
8. Test results summary	20
8.1. HAC Results for CDMA BC0	20
8.2. HAC Results for CDMA BC1	20
8.3. HAC Results for GSM 850	20
8.4. HAC Results for GSM 1900	21
8.1. HAC Results for WCDMA FDD II	21
8.2. HAC Results for WCDMA FDD V	21
9. References	22
10. Test Equipment	23
11. Report History	24

1. Assessment

The following device was tested against the applicable criteria specified in FCC 20.19 and ANSI C63.19 – 2011 and no deviations were ascertained during the course of the tests performed.

Company	Description	Model #
Honeywell International Inc	Dolphin 70E Enterprise Digital Assistant (EDA)	70eLG0

Responsible for Testing Laboratory:

2013/05/21	Compliance	Franz Engert (Compliance Manager)	
Date	Section	Name	Signature

Responsible for the Report:

2013/05/21	Compliance	Josie Sabado (Project Engineer)	
Date	Section	Name	Signature

The test results of this test report relate exclusively to the test item specified in Section 3. CETECOM Inc. USA does not assume responsibility for any conclusions and generalizations drawn from the test results with regard to other specimens or samples of the type of the equipment represented by the test item. The test report may only be reproduced or published in full. Reproduction or publication of extracts from the report requires the prior written approval of CETECOM Inc. USA.

2. Administrative Data

2.1. Identification of the Testing Laboratory Issuing the HAC Test Report

Company Name:	CETECOM Inc.
Department:	Compliance
Address:	411 Dixon Landing Road Milpitas, CA 95035 U.S.A.
Telephone:	+1 (408) 586 6200
Fax:	+1 (408) 586 6299
Acting Test Lab Manager	Franz Engert
Responsible Project Leader:	Josie Sabado

2.2. Identification of the Client

Applicant's Name:	Honeywell International Inc
Street Address:	700 Visions Drive
City/Zip Code	Skaneateles Falls, NY 13153
Country	USA
Contact Person:	Michael Robinson
Phone No.	315-554-6387
Fax:	315-554-6393
e-mail:	michael.robinson3@honeywell.com

2.3. Identification of the Manufacturer

Same as above client.

3. Equipment under Test (EUT)

3.1. Specification of the Equipment under Test

Prototype/Production:	Pre-Production
Marketing Name:	Dolphin 70E Black
Model No:	70eLG0
FCC-ID:	HD570ELG0
Antenna Type:	Tx/Rx Cellular Antenna: Internal Gain: 0 dbi - low band; 2.1 dbi - high band Rx Cellular Antenna: Internal WLAN/Bluetooth Antenna: Internal Gain: 0.7 dbi - 2.4GHz; 3.1 dbi - 5 GHz
Operating Voltage Range:	Vmin: 3.3V/ Vnom: 3.6V/ Vmax: 4.3V
Operating Temperature Range:	-30°C ~ +70°C
Supported Radios:	GSM/GPRS MS Class 10/EGPRS MS Class 12, Power Class 4/1, Mobile Class B WCDMA/HSDPA/HSUPA HSDPA Category 10 data rate - 14.4 Mbps HSUPA Category 6 data rate - 5.76 Mbps CDMA EVDO, Rev A data rate – 3.1 Mbps Bluetooth v2.1 + EDR 802.11 a/b/g/n, HT20 GPS receiver
Date of Testing:	January 19, 2013 to February 5, 2013
HAC Rated Category:	T4

3.2. Identification of the Equipment Under Test (EUT)

EUT #	Serial Number	HW Version	SW Version
1	12359J002F	3	40.00

3.3. Identification of Accessory equipment

No accessory equipment

3.4. Technical Specification of Supported Radio

Technology	Type(s) of Modulation	Band	Transmit Frequency Range (MHz)
GSM	GMSK	GSM 850	824.2 – 848.8
		PCS 1900	1850.2 – 1909.8
(E)GPRS	GMSK, 8PSK	GSM 850	824.2 – 848.8
		PCS 1900	1850.2 – 1909.8
WCDMA	QPSK, 16 QAM	FDD II	1852.4 – 1907.6
		FDD V	826.4 – 846.6
CDMA	QPSK, HPSK	Band Class 0	824.7 – 848.31
		Band Class 1	1851.25 – 1908.75
EVDO Rev. A	QPSK, 8PSK, 16 QAM	Band Class 0	824.7 – 848.31
		Band Class 1	1851.25 – 1908.75
Bluetooth	GFSK, $\pi/4$ DQPSK, 8DPSK	N/A	2402 – 2480
802.11 b/g/n	BPSK, QPSK, 16-QAM, 64-QAM	N/A	2412 – 2462
802.11 a/n	BPSK, QPSK, 16-QAM, 64-QAM	Sub-Band 1	5180 – 5240
		Sub-Band 2	5260 – 5320
		Sub-Band 3	5500 – 5700
		Sub-Band 4	5745 – 5825

3.5. Supported Air Interfaces

Air Interface	Band	Type Transport	C63.19 Tested	Over the Top Voice Mode	Simultaneous Transmission ¹	Wi-Fi Low Power	GSM Power Reduction
GSM	GSM 850	Voice	Yes	N/A	Yes; WiFi or Bluetooth	N/A	N/A
	PCS 1900						
(E)GPRS	GSM 850	Data	N/A	No	Yes; WiFi or Bluetooth	N/A	N/A
	PCS 1900						
WCDMA	FDD II	Voice	Yes	N/A	Yes; WiFi or Bluetooth	N/A	N/A
	FDD V						
CDMA	Band Class 0	Voice	Yes	N/A	Yes; WiFi or Bluetooth	N/A	N/A
	Band Class 1						
EVDO Rev. A	Band Class 0	Data	N/A	No	Yes; WiFi or Bluetooth	N/A	N/A
	Band Class 1						
Bluetooth	N/A	Data	N/A	No	Yes; GSM, (E)GPRS, WCDMA, CDMA, or EVDO	N/A	N/A
802.11 b/g/n	N/A	Data	N/A	Yes	Yes; GSM, (E)GPRS, WCDMA, CDMA, or EVDO	N/A	N/A
802.11 a/n	Sub-Band 1	Data	N/A	Yes	Yes; GSM, (E)GPRS, WCDMA, CDMA, or EVDO	N/A	N/A
	Sub-Band 2						
	Sub-Band 3						
	Sub-Band 4						

NOTES:

1. Simultaneous transmission mode is not tested

4. Subject of Investigation

The objective of the measurements done by Cetecom Inc. was to determine the HAC rating of the EUT according to requirements in ANSI C63.19 – 2011. The examinations were carried out with the IndexSAR system described in Section 6.

4.1. FCC rules and ANSI Measurement Methods

Chapter 47 of Code of Federal Regulations, Part 20 § 19 specify criteria for Hearing aid-compatible mobile handsets and ANSI C63.19-2011: American National Standard for Methods of Measurement of Compatibility between Wireless Communications Devices and Hearing Aids establish categories for hearing aids and methods of measurement.

4.2. HAC performance and Equipment categorization

4.2.1. Categories of Hearing Aid Compatibility for wireless devices

Category	Telephone parameters WD signal quality [(signal + noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	>30 dB


Results in appendix A show note “Signal Quality Category (T1 is band – T4 is good. Depends on AWF setting”. This statement is incorrect because AWF setting is not used in category assignment.

4.2.2. T-Coil Coupling field intensity


The T-Coil signal shall be ≥ -18 dB (A/m) at 1 kHz for all probe orientations while the wireless device is operating at reference input levels as specified in section 5.4 of this test report.

4.2.3. Magnetic Field Frequency Response

The magnetic field response for wireless devices with a field strength ≤ -15 dB (A/m) at 1 kHz shall be within the constraints of the following plot:

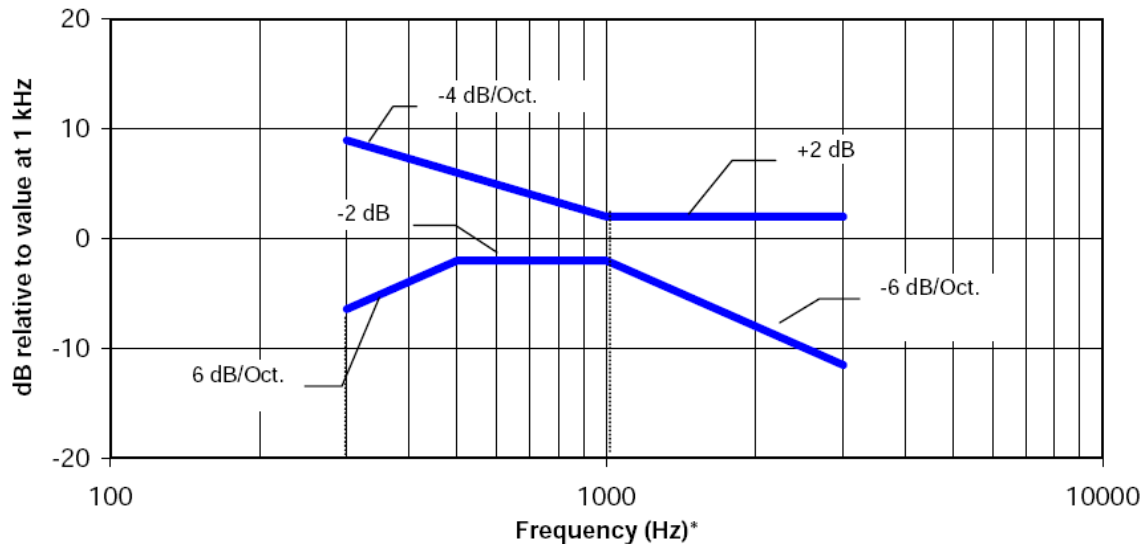

The magnetic field response for wireless devices with a field strength > -15 dB (A/m) at 1 kHz shall be within the constraints of the following plot:

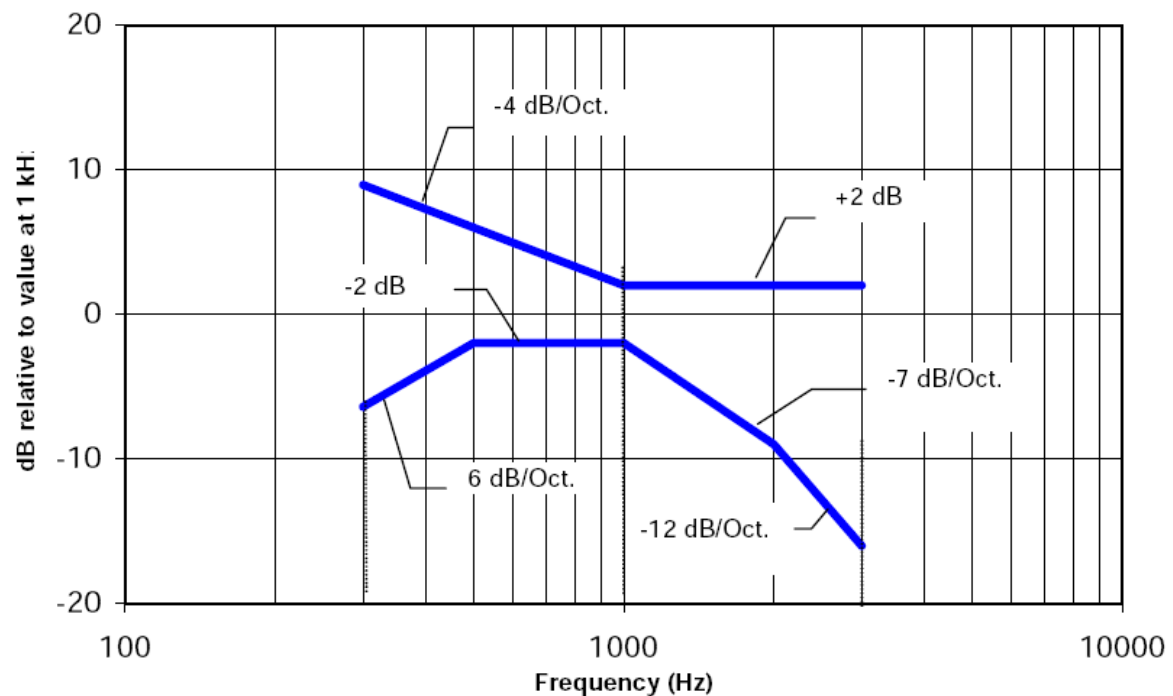

5. Measurement Procedure

ANSI has published an American National Standard on May 2011 (C63.19), which establishes categories for hearing aids and for wireless devices, and provide tests that can be used to assess the electromagnetic characteristics of hearing aids and for wireless devices and assign them to these categories.

5.1. General Requirements

The test was performed in a laboratory with an environment which avoids influence on HAC measurements by ambient EM sources and any reflection from the environment itself. The ambient temperature shall be in the range of 20°C to 26°C and 30-70% humidity.

5.2. Configurations


Device holder and positioning description

The IndexSAR phone holder is a skeletal design. It is designed so that most phones can be held from the bottom without putting any plastic materials in contact with the upper part of the EUT.


Test positions of device

The HAC measurements are performed according to the requirements of ANSI C63.19. It allows centering the wireless device inside a 5 x 5 cm control area marked with 4 points for position adjustment. SARA2's robot arm allows an exact adjustment of the measurement distance from the DUT.

The measurement probe is centered above the mobile phone speaker inside the control area.

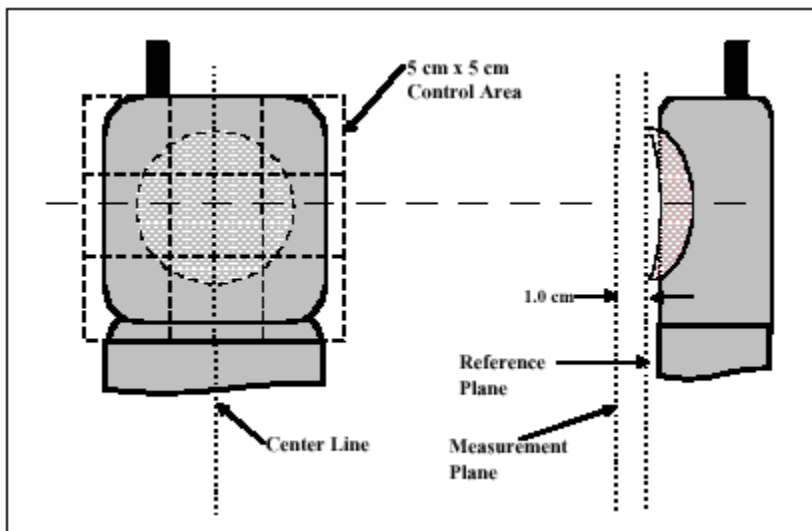

5.3. Pre-Measurement Calibration Procedure

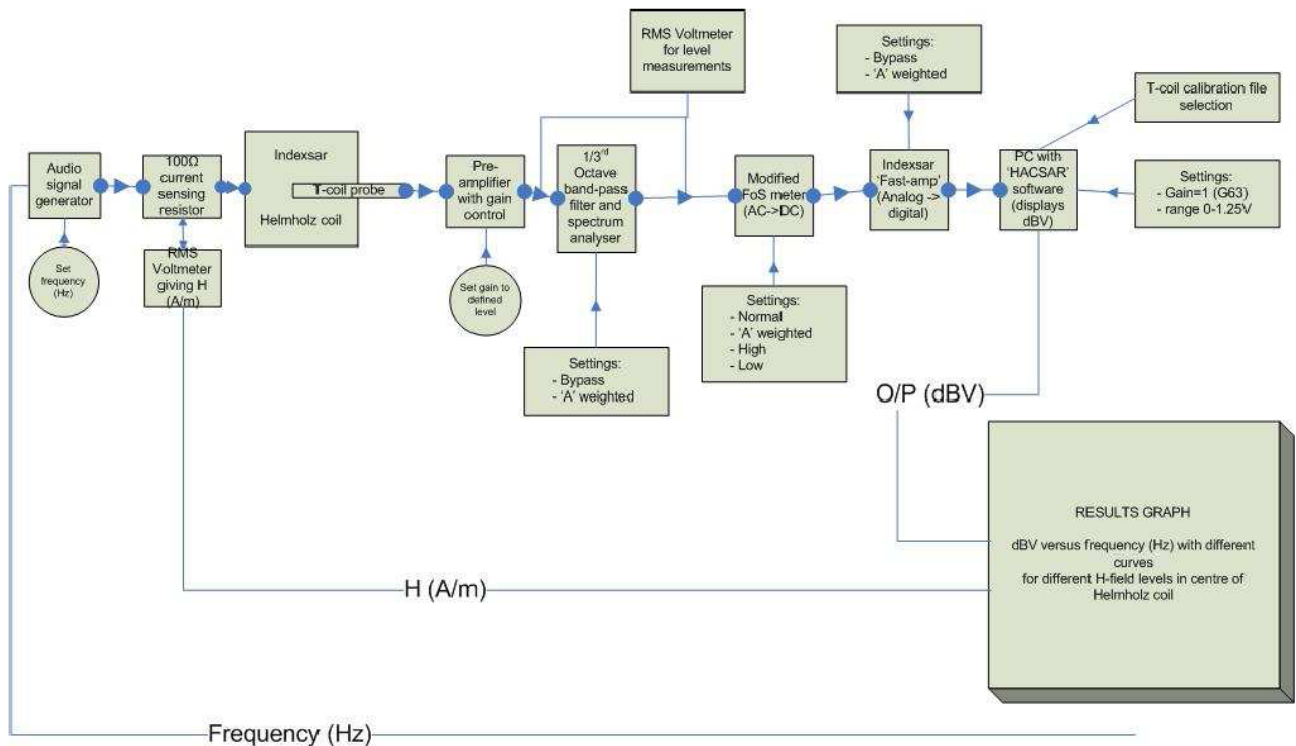

1. Generate a 1 kHz and increase the amplitude until the RMS voltmeter measures 1 V across the 100Ω current sensing resistor.
2. Increase the gain of the preamplifier until the software measures 1 A/m.
3. Open a Tcoil Report window in the software.
4. Adjust the signal generator to each 1/3 Octave Band and measure each.
5. Adjust the 1/3rd Octave band-pass filter until the spectrum is flat along the 0 dB relative to 1 kHz axis.

5.4. Audio Signal Preparation

Normal speech input levels are as follows:

Standard	Technology	Input (dBm0)
TIA/EIA/IS-2000	CDMA	-18
TIA/EIA-136	TDMA (50 Hz)	-18
T1/T1P1/3GPP	UMTS (WCDMA)	-16
iDEN	TDMA (22 Hz and 11 Hz)	-18
J-STD-007	GSM (217 Hz)	-16


5.4.1. GSM/WCDMA

1. Establish a call between the base station simulator and the EUT via a conducted link.
2. Set the voice coder on the base station simulator to “Decoder Cal”. This represents 3.14 dBm0.
3. Measure the voltage at the speech output pin on the speech port of the base station simulator.
4. Calculate the RMS value of the desired input level using the equation

$$(\text{RMS value of Decoder Cal}) * 10^{[3.14 - (\text{desired input level})] / 20}$$
5. Change the voice coder to “Encoder Cal”.
6. Using the audio generator of the base station simulator, generate a 1 kHz test signal.
7. Adjust the level of the 1 kHz test signal to match the desired input level calculated in step 4.

5.4.2. CDMA

Because accurate results may not be possible with voice coders used with CDMA, a P.50 artificial voice signal is used.




1. Establish a call between the base station simulator and the EUT via a conducted link.
2. Set the voice coder on the base station simulator to “Decoder Cal”. This represents 3.14 dBm0.
3. Using the audio analyzer function of the base station simulator, note the RMS value.
4. Calculate the RMS value of the desired input level using the equation

$$(\text{RMS value of Decoder Cal}) * 10^{[3.14 - (\text{desired input level})] / 20}$$
5. Change the voice coder to “Encoder Cal”.
6. Adjust the audio signal generator so that the base station simulator audio analyzer matches the RMS value of the desired input level calculated in step 4.

5.5. EUT Scanning Procedure

All tests are performed with the same configuration of test steps and in accordance with the requirements described in C63.19-2007 Chapter 4.

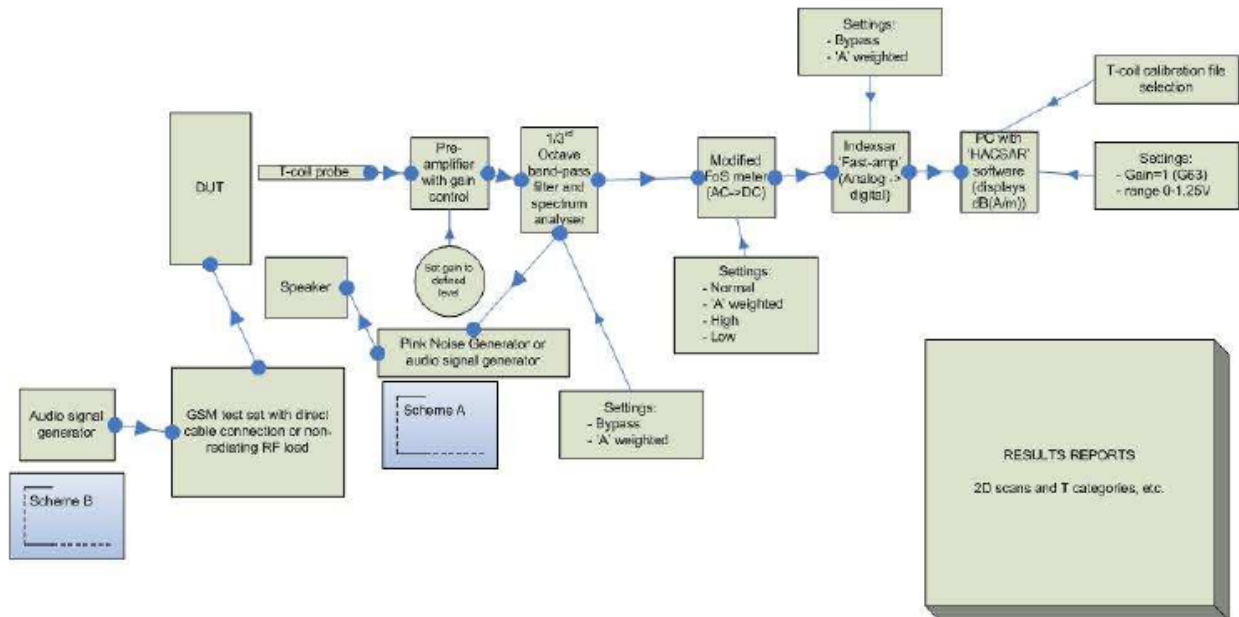


1. Select a probe and place it in the probe holder of the robot.
2. Setup a call at maximum output power on the EUT. Generate the desired audio file at the desired input level.
3. Perform an area scan.
4. Move the probe to the maximum measured point.
5. Measure the ABM1 value with the audio stimulus enabled.
6. Turn off the audio stimulus and measure AMB2.
7. With the axial probe only, perform spectral measurements in each of the 1/3 octave bands.

6. The Measurement System

6.1. Robot system specification

The HAC measurement system being used is the IndexSAR SARA2_HAC system, which consists of a Mitsubishi RV-E2 6-axis robot arm and controller, IndexSAR HAC probe and amplifier. The robot is used to articulate the probe to programmed positions inside the phantom head to obtain the SAR readings from the DUT.

The system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

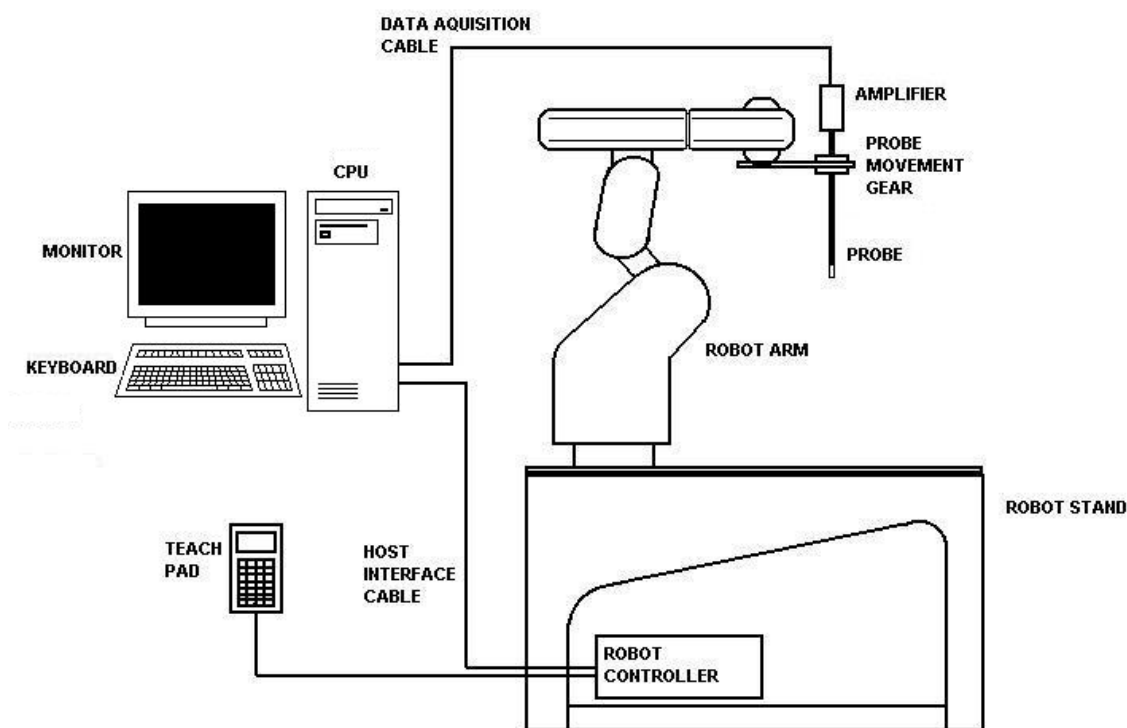


The position and digitized shape of the EUTs are made available to the software for accurate positioning of the probe and reduction of set-up time.

In operation, the system does an area (2D) scan at a fixed distance from the EUT.


The frequency response of the system, the sensitivity of the probe, and the linearity of the field measurements can all be assessed periodically using the same component setup as used for the routine system calibration.

6.2. Isotropic E-Field Probe for Dosimetric Measurements

Two separate probes are provided for measuring audio frequency magnetic fields in both axial and transverse direction. The probes are measured using associated electronics and positioned by the 3-axis Cartesian robot system and the results are processed and presented using the software application running on a PC.

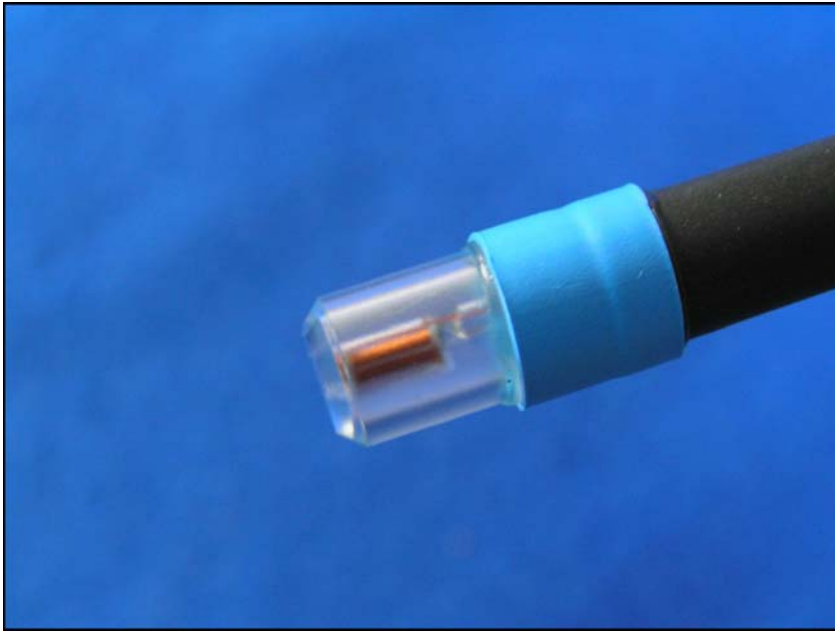


Axial T-coil Probe

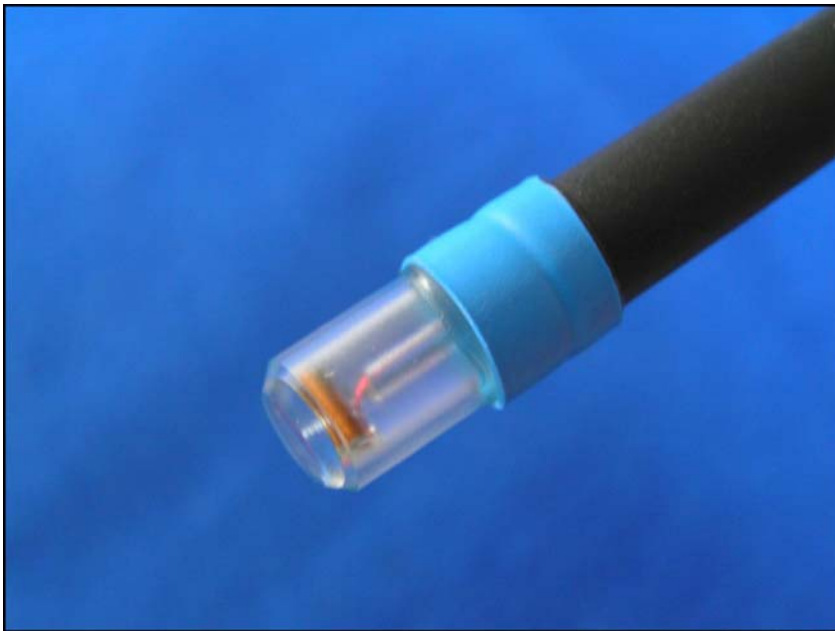

Transverse T-coil probe


When using the single channel T-coil probes, the fast amplifier is used as a voltmeter to measure the rectified and processed output of the audio-frequency T-coil probes. The calibration file for the T-coil probes is set so that only the output of the X-channel is used and the DCP is set to a high value to disable the linearization correction process. Additionally, the test procedure involves setting the conversion factor of the probe before each test using the variable gain of the pre-amplifier module. Consequently, the actual value of the conversion factor in the calibration file is not critical.

6.3. The IXA-020 probe amplifier

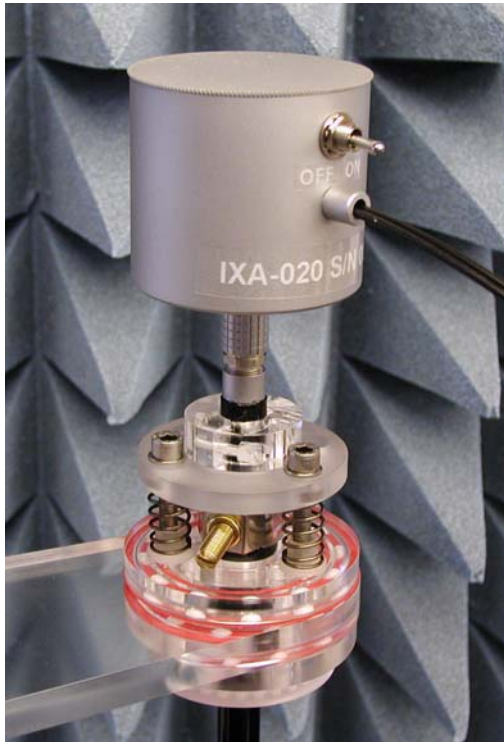


This component is a key component of the measurement system. When used with the T-coil probes, only the X-channel value is used and no linearization procedures are applied.

A block diagram of the fast probe amplifier electronics is shown below.

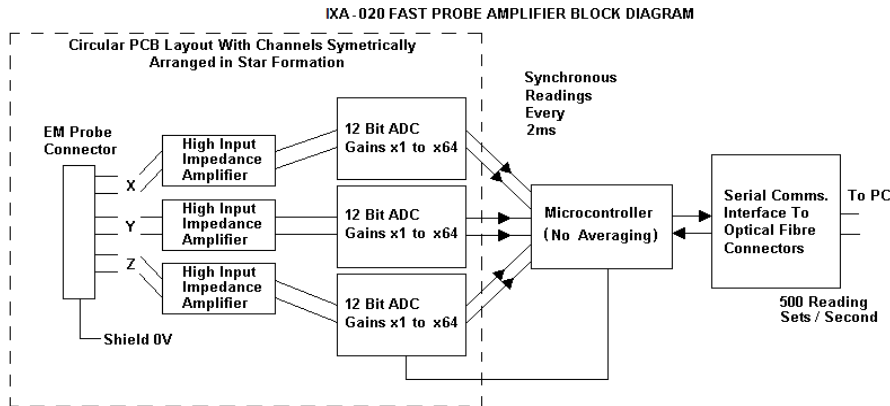

This amplifier has a time constant of approx. 50 μ s, which is much faster than the RF probe response time. The overall system time constant is therefore that of the probe (<1ms) and reading sets for all three channels (simultaneously) are returned every 2ms to the PC. The conversion period is approx. 1 μ s at the start of each 2ms period. This enables the probe to follow pulse modulated signals of periods $\gg$ 2ms. The PC software applies the linearization procedure separately to each reading, so no linearization corrections for the averaging of modulated signals are needed in this case. It is important to ensure that the probe reading frequency and the pulse period are not synchronized and the behavior with pulses of short duration in comparison with the measurement interval needs additional consideration.

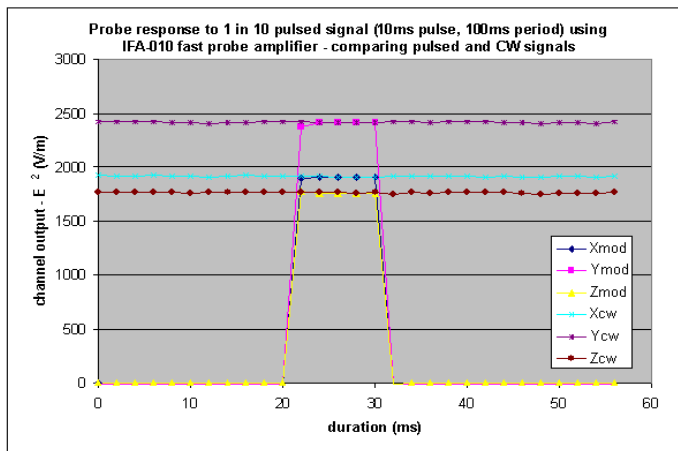

7. Uncertainty Assessment

Measurement uncertainty values were evaluated for HAC measurements. The uncertainty values for components were evaluated according to the procedures given in ANSI C63.19.

7.1. Measurement Uncertainty Budget

Error Contribution	Uncertainty (+/- %)	Distribution	Div.	C ABM1	C ABM2	Std Unc. ABM1	Std. Unc. ABM2
RF reflections	0.8	rect	1.73	1	1	0.46	0.46
ABM noise	25.89	rect	1.73	0	1	0	14.97
Accuracy of level setting	4.71	rect	1.73	1	1	2.72	2.72
Positioning accuracy	4.7	rect	1.73	1	1	2.71	2.71
Probe coil sensitivity	1.799	rect	1.73	1	1	2.72	2.72
Helmholtz field accuracy	2.33	rect	1.73	1	1	1.35	1.35
Equaliser accuracy	12.20	rect	1.73	1	1	7.05	7.05
Reference level setting on Test Set	4.71	rect	1.73	1	1	2.72	2.72
Stability of ABM electronics	2.33	rect	1.73	1	1	1.35	1.35
Combined						9.11	17.53
Expanded (k=2)						18.23	35.05

8. Test results summary

Radial A = East to West Direction

HAC Audio mode was enabled through the EUT user interface. The option to enable this mode is found under Settings > RIL > HAC Audio mode.

8.1. HAC Results for CDMA BC0

Operation Mode	Channel	Frequency (MHz)	Probe Position	ABM 1 (dB A/m)	ABM 2 (dB A/m)	Category	Results (Appendix A)
CDMA RC3, SO68	1013	824.7	Axial	-11.163	-42.158	T4	Plot 1
			Radial A	-12.803	-42.853	T4	
	384	836.52	Axial	-10.237	-41.110	T4	Plot 2
			Radial A	-12.568	-43.412	T4	
	777	848.31	Axial	-7.033	-41.618	T4	Plot 3
			Radial A	-10.651	-42.047	T4	

8.2. HAC Results for CDMA BC1

Operation Mode	Channel	Frequency (MHz)	Probe Position	ABM 1 (dB A/m)	ABM 2 (dB A/m)	Category	Results (Appendix A)
CDMA RC3, SO68	25	1851.25	Axial	-10.164	-41.830	T4	Plot 4
			Radial A	-11.439	-42.270	T4	
	600	1880	Axial	-10.042	-41.012	T4	Plot 5
			Radial A	-12.818	-42.830	T4	
	1175	1908.75	Axial	-9.327	-39.659	T4	Plot 6
			Radial A	-11.476	-41.938	T4	

8.3. HAC Results for GSM 850

Operation Mode	Channel	Frequency (MHz)	Probe Position	ABM 1 (dB A/m)	ABM 2 (dB A/m)	Category	Results (Appendix A)
GSM	128	824.2	Axial	0.817	-29.345	T4	Plot 7
			Radial A	-6.764	-43.223	T4	
	190	836.6	Axial	0.627	-42.765	T4	Plot 8
			Radial A	-6.386	-39.828	T4	
	251	848.8	Axial	0.463	-40.000	T4	Plot 9
			Radial A	-6.071	-37.721	T4	

8.4. HAC Results for GSM 1900

Operation Mode	Channel	Frequency (MHz)	Probe Position	ABM 1 (dB A/m)	ABM 2 (dB A/m)	Category	Results (Appendix A)
GSM	512	1850.2	Axial	0.847	-29.294	T4	Plot 10
			Radial A	-7.129	-42.384	T4	
	661	1880	Axial	0.828	-30.201	T4	Plot 11
			Radial A	-6.439	-40.915	T4	
	810	1909.8	Axial	1.004	-30.903	T4	Plot 12
			Radial A	-5.936	-40.175	T4	

8.1. HAC Results for WCDMA FDD II

Operation Mode	Channel	Frequency (MHz)	Probe Position	ABM 1 (dB A/m)	ABM 2 (dB A/m)	Category	Results (Appendix A)
12.2 kbps AMR	9262	1852.4	Axial	0.874	-33.504	T4	Plot 13
			Radial A	-7.198	-58.416	T4	
	9400	1880	Axial	0.896	-33.012	T4	Plot 14
			Radial A	-7.481	-56.478	T4	
	9538	1907.6	Axial	0.329	-33.098	T4	Plot 15
			Radial A	-7.222	-54.425	T4	

8.2. HAC Results for WCDMA FDD V

Operation Mode	Channel	Frequency (MHz)	Probe Position	ABM 1 (dB A/m)	ABM 2 (dB A/m)	Category	Results (Appendix A)
12.2 kbps AMR	4132	826.4	Axial	-0.592	-45.680	T4	Plot 16
			Radial A	-7.292	-50.173	T4	
	4183	836.6	Axial	0.370	-38.786	T4	Plot 17
			Radial A	-7.240	-52.041	T4	
	4233	846.6	Axial	0.595	-37.266	T4	Plot 18
			Radial A	-7.190	-53.152	T4	

9. References

1. FCC 47 CFR 20 Article 19 – Hearing aid-compatible mobile handsets
2. ANSI C63.19-2011, American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids
3. INDEXSAR – HAC Test System User's Manual, Version 4.9, December 2007.

10. Test Equipment

Instrument description	Supplier / Manufacturer	Model	Serial No.	Calibration (date)	Calibration Due (date)
Bench top Robot	Mitsubishi supplied by IndexSAR	RV-E2	EA1030108	N/A	N/A
Software	IndexSAR	SARA2_HAC v.1.1.3	N/A	N/A	N/A
Axial T-Coil Probe	IndexSAR	IXP-100	T0005	2005-12-21	N/A
Radial T-Coil Probe	IndexSAR	IXP-110	T0006	2005-12-21	N/A
Digital Multimeter	Klein Tools	MM200	0710X-A1	2011-05-02	2013-05-02
Preamplifier	ARTcessories	MicroMIX	N/A	N/A	N/A
Waveform Generator	Agilent	33220A	MY43004303	N/A	N/A
Digital Equalizer	Phonic	i SupraCurve	OIA0D20168	N/A	N/A
100 ohm resistor block	IndexSAR	N/A	N/A	N/A	N/A
Helmholtz Coil	IndexSAR	IXT-020	0004	N/A	N/A
FoS Meter	IndexSAR	IXHM-010	0003	N/A	N/A
Probe Amplifier	IndexSAR	IXA-020	0072	N/A	N/A
Audio Analyzer	Rohde & Schwarz	UPL 16	838205/005	May 2011	May 2013
Digital Radio Comm. Tester	Rohde&Schwarz	CMU200	110229	May 2011	May 2013

11. Report History

2013/05/21: Original Report