

# Dynamic Frequency Selection

## Test Report

Equipment : Dolphin 7800  
Brand Name : Honeywell  
Model No. : Dolphin® 7800  
Filing Type : New Application  
Applicant : Honeywell International Inc  
Manufacturer : 9680 Old Bailes Road, Fort Mill,  
SC 29707 USA  
FCC ID : HD57800LW  
Test Standard(s) : FCC Part 15.407  
Test Freq. Range : 5250~5350 MHz / 5470~5725 MHz  
Submission Type : Original Equipment  
Operating Mode : Client (without radar detection function)

The product sample received on Oct. 13, 2011 and completely tested on Oct. 15, 2011.  
We, SPORTON, would like to declare that the tested sample has been evaluated in accordance with the procedures given in 47 CFR FCC Part 15 Subpart E § 15.407. The test equipment used to perform the test is calibrated and traceable to NML/ROC.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

  
Kevin Liang / Assistant Manager



### **SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan District, Taoyuan City, Taiwan, R.O.C.

## Table of Contents

|                                                                                                                              |           |
|------------------------------------------------------------------------------------------------------------------------------|-----------|
| <b>1 SUMMARY OF THE TEST RESULT .....</b>                                                                                    | <b>4</b>  |
| <b>2 GENERAL INFORMATION.....</b>                                                                                            | <b>5</b>  |
| 2.1 Standard Requirement .....                                                                                               | 5         |
| 2.2 Product Specification Table.....                                                                                         | 5         |
| 2.3 Table for DFS Band Carrier Frequencies .....                                                                             | 5         |
| <b>3 DFS DETECTION THRESHOLDS AND RADAR TEST WAVEFORMS.....</b>                                                              | <b>6</b>  |
| 3.1 Interference Threshold values, Master or Client incorporating In-Service Monitoring.....                                 | 6         |
| 3.2 DFS Response requirement values.....                                                                                     | 6         |
| 3.3 Radar Test Waveforms Minimum Step.....                                                                                   | 6         |
| 3.4 Short Pulse Radar Test Waveforms .....                                                                                   | 7         |
| 3.5 Long Pulse Radar Test Waveform .....                                                                                     | 8         |
| 3.6 Frequency Hopping Radar Test Waveform .....                                                                              | 9         |
| 3.7 Conducted Calibration Setup .....                                                                                        | 10        |
| 3.8 Radar Waveform Calibration Procedure .....                                                                               | 10        |
| 3.9 Calibration Deviation.....                                                                                               | 10        |
| <b>4 TEST SETUP AND TEST RESULT .....</b>                                                                                    | <b>11</b> |
| 4.1 Test setup.....                                                                                                          | 11        |
| 4.2 In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Measurement..... | 16        |
| 4.3 Result of Channel Move Time & Channel Closing Transmission Time & Non-Occupancy Period.....                              | 17        |
| <b>5 MEASURING INSTRUMENTS.....</b>                                                                                          | <b>22</b> |
| <b>6 TEST LOCATION.....</b>                                                                                                  | <b>23</b> |

## REVISION HISTORY

| REPORT NO.  | ISSUED DATE   | VERSION | DESCRIPTION             |
|-------------|---------------|---------|-------------------------|
| FZ162005-01 | Oct. 24, 2011 | Rev. 01 | Initial issue of report |
| FZ162005-21 | Dec. 01, 2015 | Rev. 01 | Update Test Standard(s) |
|             |               |         |                         |
|             |               |         |                         |
|             |               |         |                         |
|             |               |         |                         |
|             |               |         |                         |
|             |               |         |                         |
|             |               |         |                         |
|             |               |         |                         |
|             |               |         |                         |
|             |               |         |                         |
|             |               |         |                         |
|             |               |         |                         |
|             |               |         |                         |

**1 SUMMARY OF THE TEST RESULT**

| <b>Applied Standard: FCC OET Order 06-96A (2006)</b> |                 |                                                                                                         |               |
|------------------------------------------------------|-----------------|---------------------------------------------------------------------------------------------------------|---------------|
| <b>Part</b>                                          | <b>Appendix</b> | <b>Description of Test</b>                                                                              | <b>Result</b> |
| 4.2                                                  | 7.8.3           | In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period | Complies      |

Note: Client without radar detection

## 2 GENERAL INFORMATION

### 2.1 Standard Requirement

FCC 15.407 / KDB 905462 D02 UNII DFS Compliance Procedures New Rules v01r02 : U-NII devices operating in the 5250~5350 MHz / 5470~5725 MHz band. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30 dBm. U-NII devices operating in the 5250~5350 MHz / 5470~5725 MHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

### 2.2 Product Specification Table

| Specification Items | Description                                 |
|---------------------|---------------------------------------------|
| Data Modulation     | OFDM (BPSK / QPSK / 16QAM / 64QAM)          |
| Data Rate (Mbps)    | OFDM (6/9/12/18/24/36/48/54)                |
| DFS Function        | 5260~5320 MHz ; 5500~5700 MHz               |
| Operating Mode      | Client (without radar detection function)   |
| Communication Mode  | IP based system                             |
| Power-on cycle      | NA (No Channel Availability Check Function) |
| MAC Address         | 08:00:28:12:34:56                           |
| SW Version          | Honeywell Ver. 1.72.28.0                    |

### 2.3 Table for DFS Band Carrier Frequencies

DFS Band Carrier Frequencies

| Frequency Band          | Channel No. | Frequency |
|-------------------------|-------------|-----------|
| 5250~5350 MHz<br>Band 2 | 52          | 5260 MHz  |
|                         | 56          | 5280 MHz  |
|                         | 60          | 5300 MHz  |
|                         | 64          | 5320 MHz  |

| Frequency Band          | Channel No. |          | Frequency |          |
|-------------------------|-------------|----------|-----------|----------|
| 5470~5725 MHz<br>Band 3 | 100         | 5800 MHz | 124       | 5620 MHz |
|                         | 104         | 5520 MHz | 128       | 5640 MHz |
|                         | 108         | 5540 MHz | 132       | 5660 MHz |
|                         | 112         | 5560 MHz | 136       | 5680 MHz |
|                         | 116         | 5580 MHz | 140       | 5700 MHz |
|                         | 120         | 5600 MHz |           |          |

### 3 DFS DETECTION THRESHOLDS AND RADAR TEST WAVEFORMS

#### 3.1 Interference Threshold values, Master or Client incorporating In-Service Monitoring

| Maximum Transmit Power                                                       | Value (See Notes 1, 2, and 3) |
|------------------------------------------------------------------------------|-------------------------------|
| EIRP $\geq$ 200 milliwatt                                                    | -64 dBm                       |
| EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz                 | -62 dBm                       |
| EIRP < 200 milliwatt that do not meet the power spectral density requirement | -64 dBm                       |

Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.  
 Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.  
 Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.

#### 3.2 DFS Response requirement values

| Table D.1: DFS requirement values |                                                                                                         |
|-----------------------------------|---------------------------------------------------------------------------------------------------------|
| Parameter                         | Value                                                                                                   |
| Non-occupancy period              | Minimum 30 minutes                                                                                      |
| Channel Availability Check Time   | 60 seconds                                                                                              |
| Channel Move Time                 | 10 seconds See Note 1.                                                                                  |
| Channel Closing Transmission Time | 200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second periods. See Notes 1 and 2. |
| U-NII Detection Bandwidth         | Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.                                 |

Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.  
 Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.  
 Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

#### 3.3 Radar Test Waveforms Minimum Step

Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

## 3.4 Short Pulse Radar Test Waveforms

| Radar Type                                                                                                                           | Pulse Width (μsec) | PRI (μsec)                                                                                                                                                    | Number of Pulses                                                                                                                     | Minimum Percentage of Successful Detection | Minimum Trials |
|--------------------------------------------------------------------------------------------------------------------------------------|--------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------|----------------|
| 0                                                                                                                                    | 1                  | 1428                                                                                                                                                          | 18                                                                                                                                   | See Note 1                                 | See Note 1     |
| 1                                                                                                                                    | 1                  | Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a                                                                     | $\text{Roundup} \left\{ \left( \frac{1}{360} \right) \cdot \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$ | 60%                                        | 30             |
|                                                                                                                                      |                    | Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A |                                                                                                                                      |                                            |                |
| 2                                                                                                                                    | 1-5                | 150-230                                                                                                                                                       | 23-29                                                                                                                                | 60%                                        | 30             |
| 3                                                                                                                                    | 6-10               | 200-500                                                                                                                                                       | 16-18                                                                                                                                | 60%                                        | 30             |
| 4                                                                                                                                    | 11-20              | 200-500                                                                                                                                                       | 12-16                                                                                                                                | 60%                                        | 30             |
| Aggregate (Radar Types 1-4)                                                                                                          |                    |                                                                                                                                                               |                                                                                                                                      | 80%                                        | 120            |
| Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests. |                    |                                                                                                                                                               |                                                                                                                                      |                                            |                |

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

### 3.5 Long Pulse Radar Test Waveform

| Radar Type | Pulse Width (μsec) | Chirp Width (MHz) | PRI (μsec) | Number of Pulses per Burst | Number of Bursts | Minimum Percentage of Successful Detection | Minimum Trials |
|------------|--------------------|-------------------|------------|----------------------------|------------------|--------------------------------------------|----------------|
| 5          | 50-100             | 5-20              | 1000-2000  | 1-3                        | 8-20             | 80%                                        | 30             |

Each waveform is defined as follows:


- The transmission period for the Long Pulse Radar test signal is 12 seconds.
- There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst\_Count.
- Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a Burst will have the same chirp width. Pulses in different Bursts may have different chirp widths. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst\_Count. Each interval is of length  $(12,000,000 / \text{Burst\_Count})$  microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and  $[(12,000,000 / \text{Burst\_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$  microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

**3.6 Frequency Hopping Radar Test Waveform**

| <b>Radar Type</b> | <b>Pulse Width (µsec)</b> | <b>PRI (µsec)</b> | <b>Pulses per Hop</b> | <b>Hopping Rate (kHz)</b> | <b>Hopping Sequence Length (ms)</b> | <b>Minimum Percentage of Successful Detection</b> | <b>Minimum Trials</b> |
|-------------------|---------------------------|-------------------|-----------------------|---------------------------|-------------------------------------|---------------------------------------------------|-----------------------|
| 6                 | 1                         | 333               | 9                     | 0.333                     | 300                                 | 70%                                               | 30                    |

The FCC Type 6 waveform uses a static waveform with 100 bursts in the instruments ARB. In addition, the RF list mode is operated with a list containing 100 frequencies from a randomly generated list and it had be ensured that at least one of the random frequencies falls into the UNII Detection Bandwidth of the DUT. Each burst from the waveform file initiates a trigger pulse at the beginning that switches the RF list from one item to the next one.

### 3.7 Conducted Calibration Setup

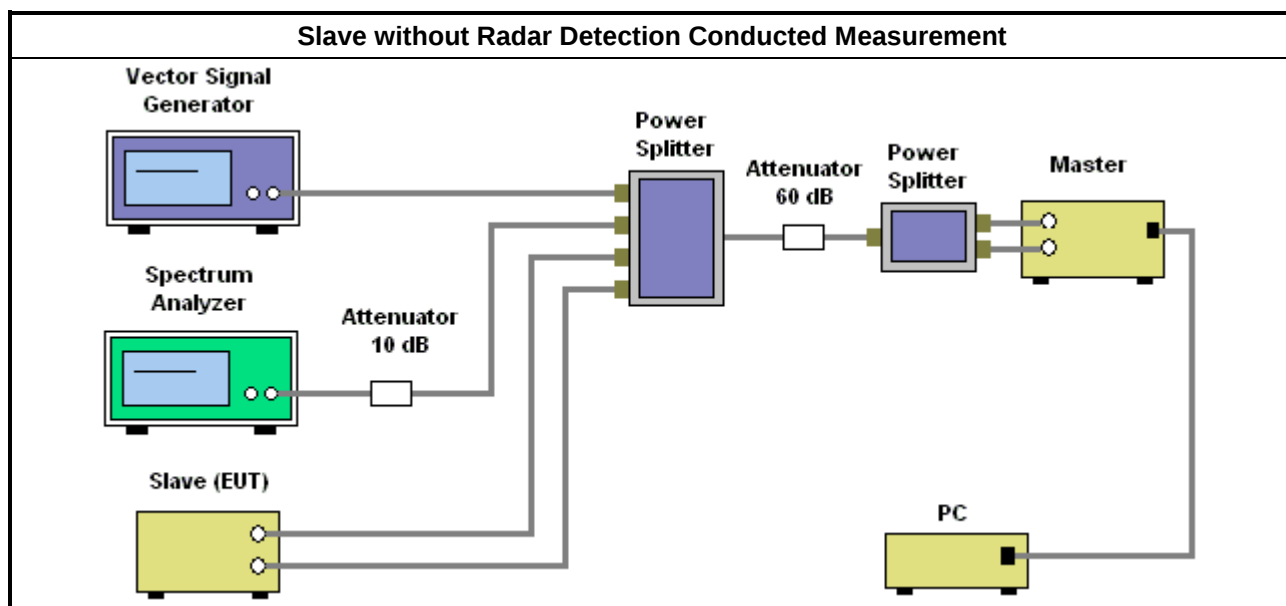

### 3.8 Radar Waveform Calibration Procedure

The Interference **Radar Detection Threshold Level** is  $(-64\text{dBm} + 2.0\text{dBi} + 1\text{ dB}) = -61\text{ dBm}$  that had been taken into account the output power range and antenna gain. The above equipment setup was used to calibrate the conducted Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero spans (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to at least 3 MHz. The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was  $-62\text{ dBm}$ . Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

### 3.9 Calibration Deviation


There is no deviation with the original standard.

## 4 TEST SETUP AND TEST RESULT

### 4.1 Test setup

#### 4.1.1 Test Setup Diagram

Following is the test setup for generate the radar waveforms and used to monitor UNII device.

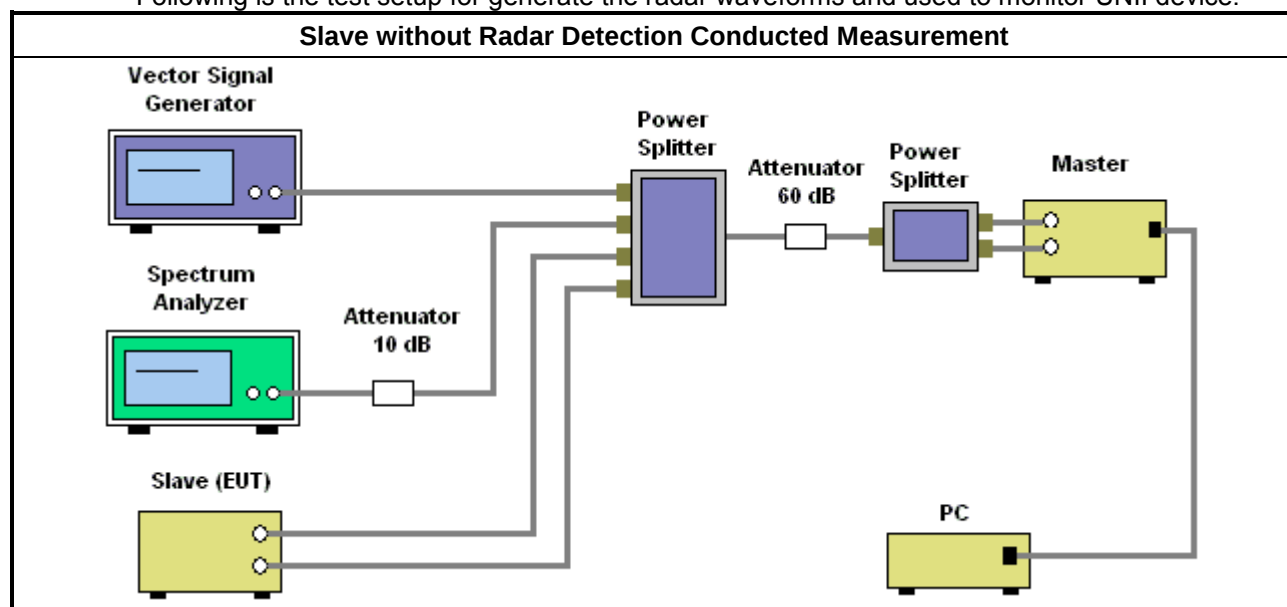


Radar #1 DFS detection threshold level and the burst of pulses on the Channel frequency  
IEEE 802.11a



MARKER 1  
22.84875 ms  
Ref -10 dBm      \*Att 0 dB

RBW 1 MHz      Marker 1 [T1 ]  
\*VBW 1 MHz      -61.82 dBm  
SWT 30 ms      22.848750 ms


1 AF  
CLRWR

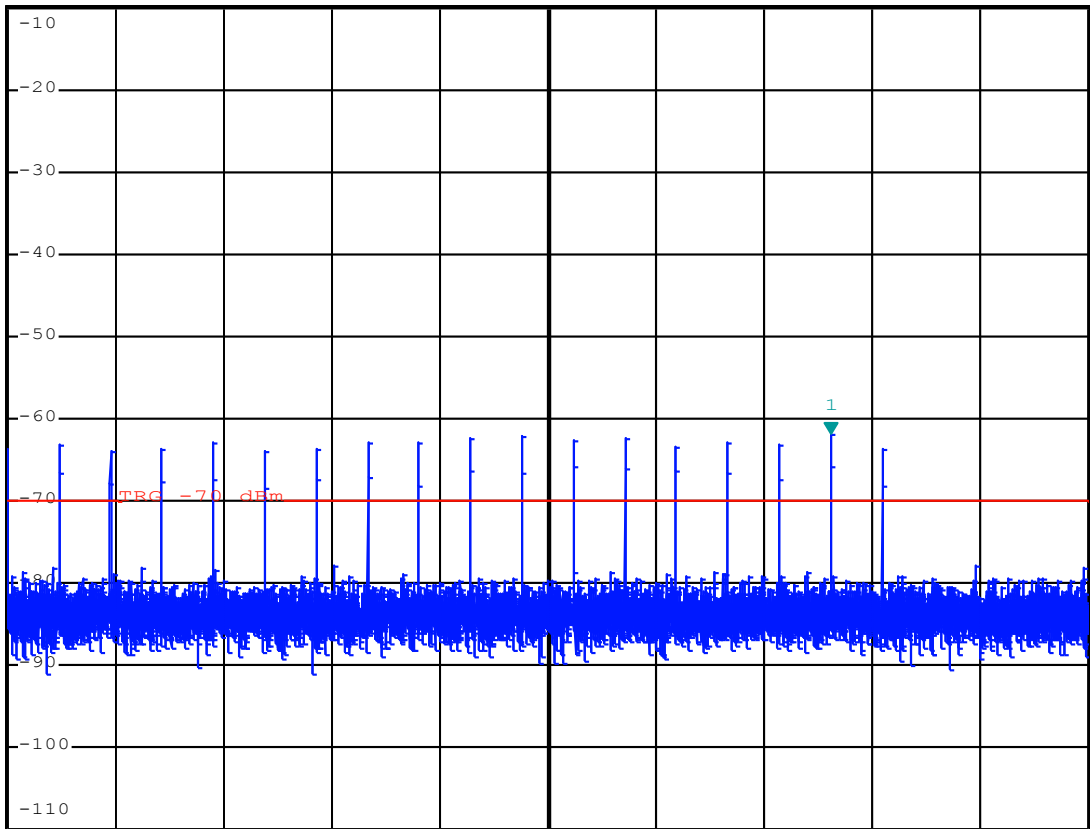

Center 5.5 GHz      3 ms/


Date: 13.OCT.2011 08:19:36

Master (AP) Data Traffic Plot IEEE 802.11a

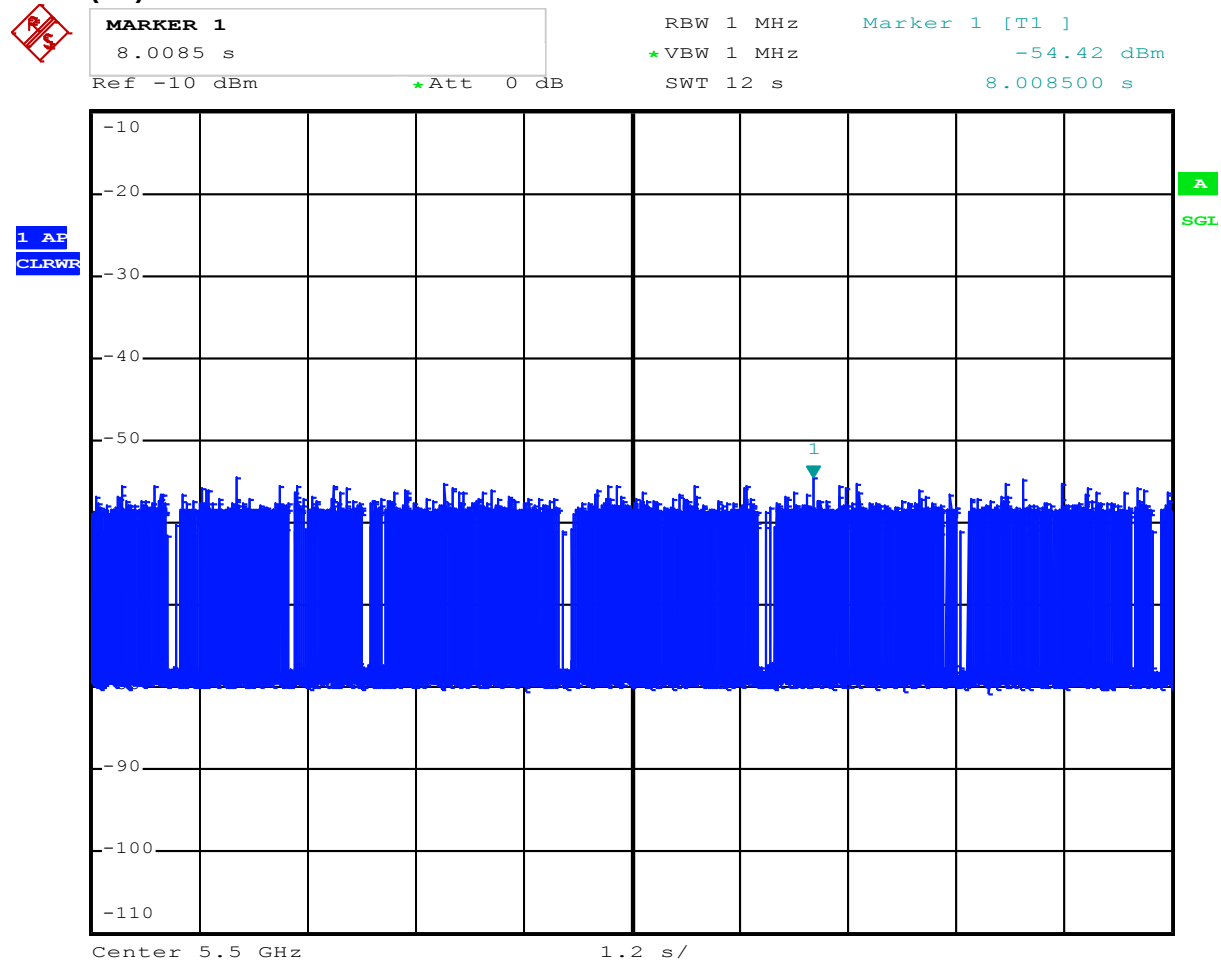

Date: 15.OCT.2011 01:51:11

Data Traffic Plot (Slave) IEEE 802.11a

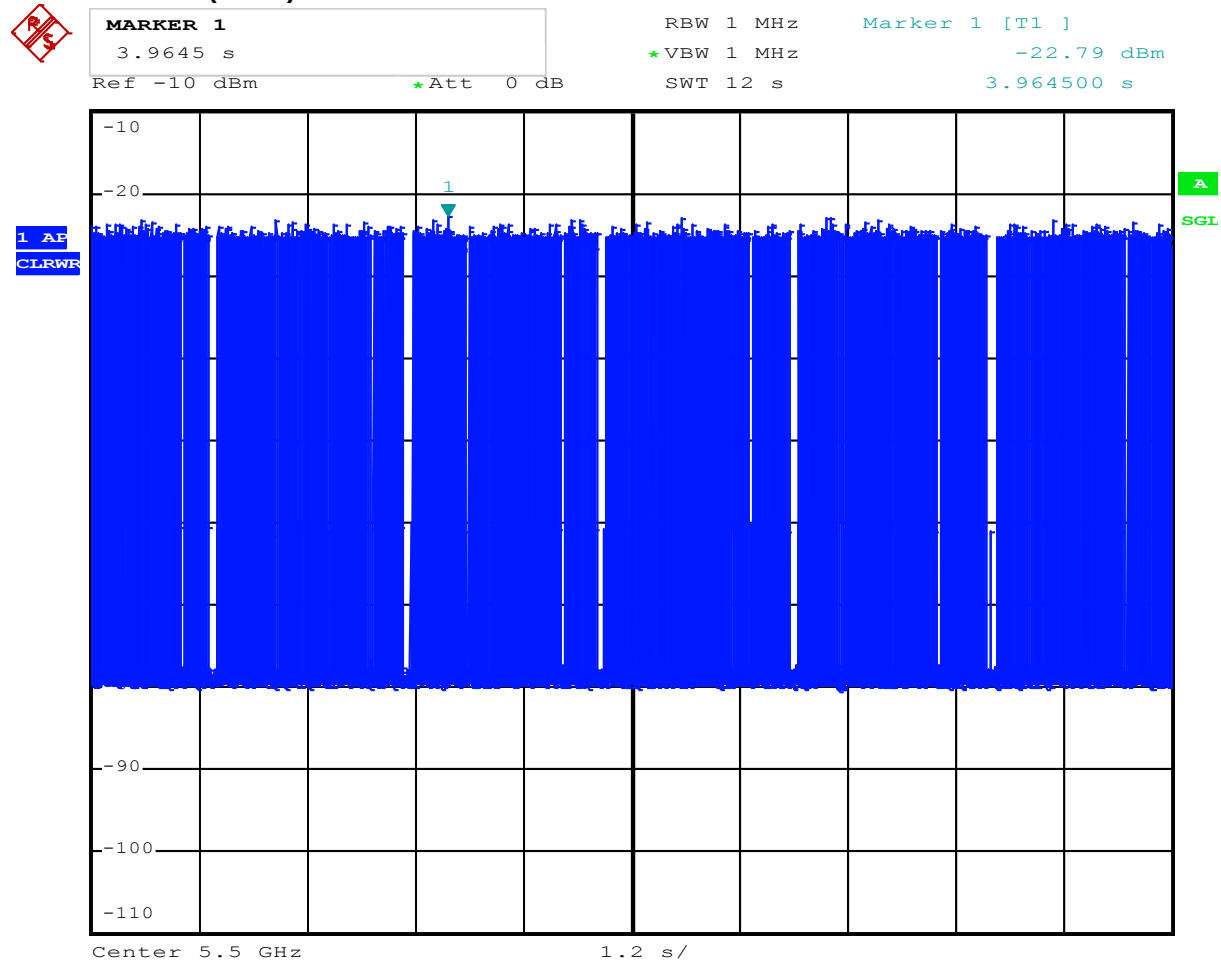

Date: 15.OCT.2011 01:49:46

**4.1.2 Supporting Units**

| Support Unit | Brand | Model No.      | Serial No.           | Software Version    |
|--------------|-------|----------------|----------------------|---------------------|
| Notebook PC  | Dell  | Latitude E5510 | C6DJ1N1              | Win XP SP3          |
| Access Point | 3Com  | WL-605         | FCC ID:<br>O9C-WL605 | WP741_normal_v18.WW |

**4.1.1 Test Setup Operation**

System testing was performed with the designated MPEG test file that streams full motion video from the Access Point to the Client in full motion video mode using the media player with the V2.61 Codec package.. This file is used by IP based systems for loading the test channel during the In-service compliance testing of the U-NII device.

The waveform parameters from within the bounds of the signal type are selected randomly using uniform distribution.

A spectrum analyzer is used as a monitor to verify that the EUT has vacated the Channel within the (Channel Closing Transmission Time and Channel Move Time, and does not transmit on a Channel during the Non-Occupancy Period after the detection and Channel move.

## 4.2 In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Measurement

### 4.2.1 Limit

The EUT has In-Service Monitoring function to continuously monitor the radar signals, If radar is detected, must leave the channel (Shutdown). The Channel Move Time to cease all transmissions on the current Channel upon detection of a Radar Waveform above the DFS Detection Threshold within 10 sec. The total duration of Channel Closing Transmission Time is 260ms. Channel Closing Transmission Time is comprised of 200 ms starting at the beginning of the Channel Move Time plus any additional intermittent control signals between 9.8 sec after 200 ms starting from the end of radar burst. The Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

### 4.2.2 Test Procedures

1. When radar burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating Channel of the U-NII device. A U-NII device operating as a Client Device will associate with the Master at Channel. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test. At time T0 the Radar Waveform generator sends a Burst of pulses for each of the radar types at Detection Threshold + 1dB.
2. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the EUT during the observation time (Channel Move Time). One 12 second plot been reported for the Short Pulse Radar Types 1. The plot for the Short Pulse Radar Types start at the end of the radar burst. The Channel Move Time will be calculated based on the plot of the Short Pulse Radar Type.
3. To measure the total intermittent control signals transmission time. The total intermittent control signals transmission time is measured between 9.8 sec that is calculated 10 sec starting at the beginning of the Channel Move Time and minus 200ms. The spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by:  $Dwell = S / B$ ; where Dwell is the dwell time per spectrum analyzer sampling bin, S is the sweep time and B is the number of spectrum analyzer sampling bins. The total intermittent control signals transmission time is calculated by:  $C = N \times Dwell$ ; where C is the total intermittent control signals transmission time between 9.8 sec, N is the number of spectrum analyzer sampling bins showing total intermittent control signals and Dwell is the dwell time per bin.
4. Measure the EUT for more than 30 minutes following the channel close/move time to verify that the EUT does not resume any transmissions on this Channel.

### 4.2.3 Test Deviation

There is no deviation with the original standard.

#### 4.3 Result of Channel Move Time & Channel Closing Transmission Time & Non-Occupancy Period

**IEEE 802.11a**

| Parameter                                | Test Result  | Limit     |
|------------------------------------------|--------------|-----------|
|                                          | Radar Type 1 |           |
| Test Channel (MHz)                       | 5500 MHz     | -         |
| Channel Move Time (sec)                  | 0.093 s      | < 10s     |
| Intermittent control signals (ms) (Note) | 0 ms         | < 60ms    |
| Non-Occupancy Period (min.)              | 30 min       | $\geq 30$ |

Note: The total intermittent control signals transmission time is measured between 9.8 sec that is calculated 10 sec starting at the beginning of the Channel Move Time and minus 200ms.


## 4.3.1 Channel Move Time Plot

## Radar #1 Channel Move Time IEEE 802.11a



TIME LINE 1  
507.5 ms  
Ref -10 dBm \*Att 0 dB


RBW 1 MHz Marker 2 [T1 ]  
\*VBW 1 MHz -79.21 dBm  
SWT 12 s 10.307500 s

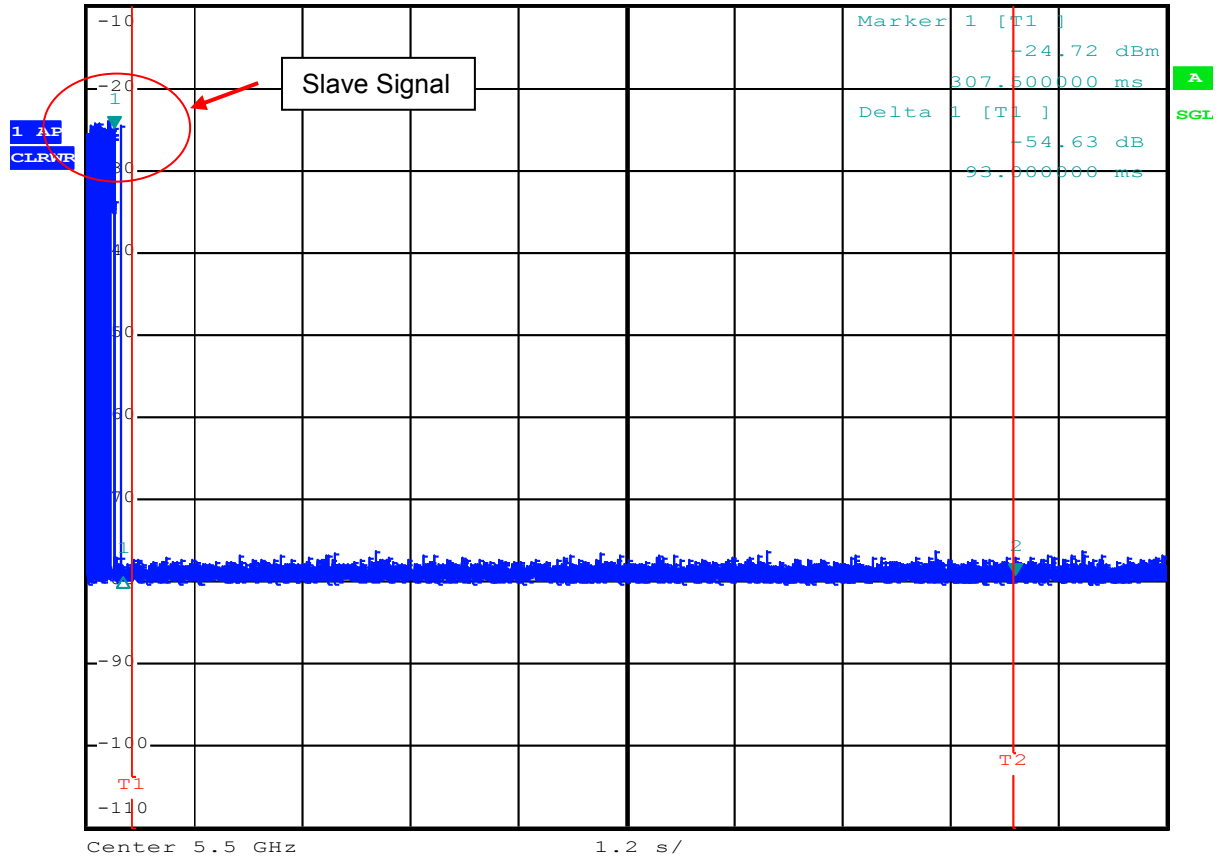

Date: 15.OCT.2011 01:54:10

## 4.3.2 Channel Closing Transmission Time Plot

Radar #1 Channel Closing Transmission Time is comprised of 200 ms starting at the beginning of the Channel Move Time plus 0ms intermittent control signals of 9.8 sec period (IEEE 802.11a)

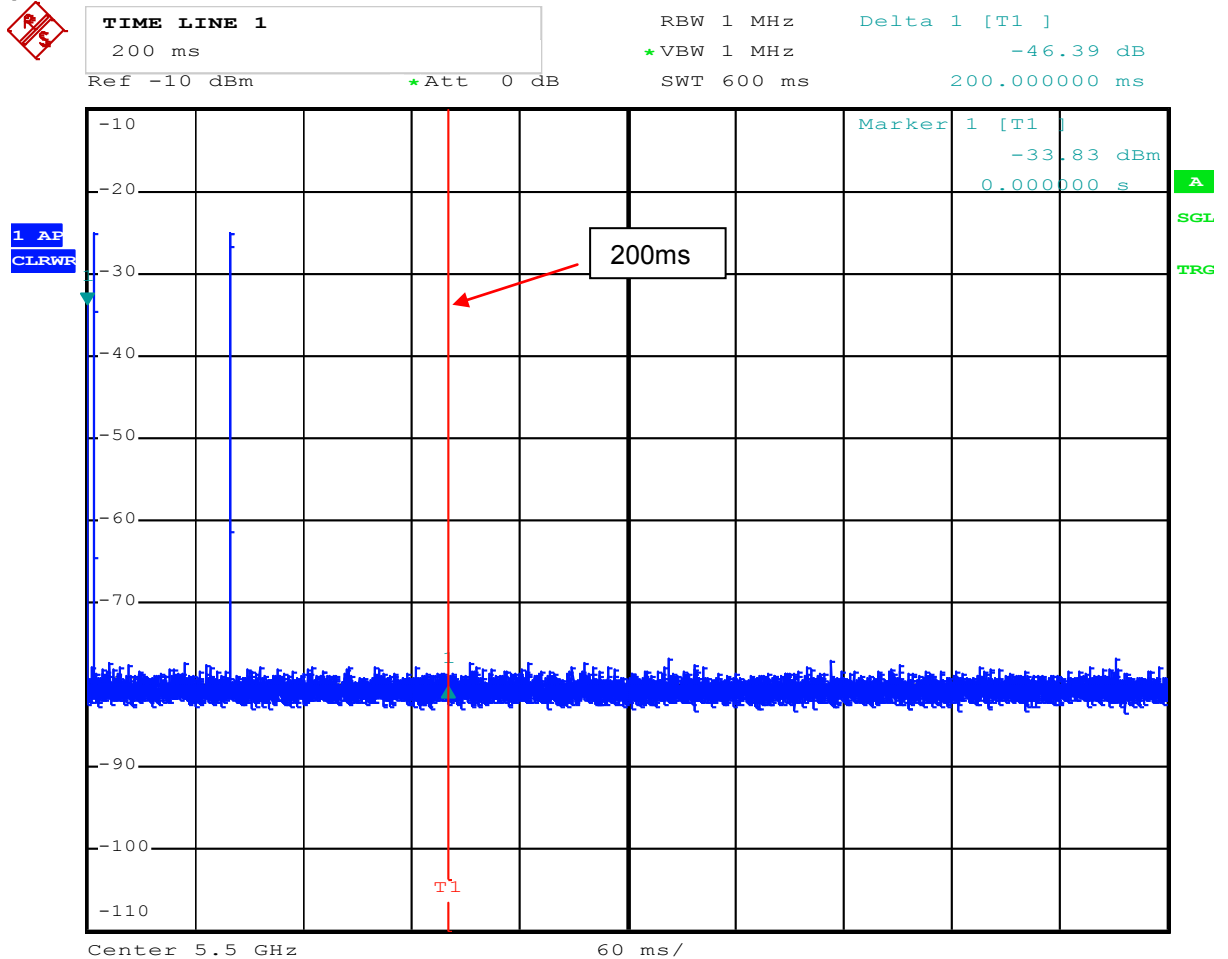


Date: 15.OCT.2011 02:25:14

Non-Occupancy Period Plot  
Associated Test Mode  
Radar #1 Non-Occupancy Period IEEE 802.11a




MARKER 2  
1820.5 s  
Ref -10 dBm \*Att 0 dB

RBW 1 MHz Marker 2 [T1 ]  
\*VBW 1 MHz -77.56 dBm  
SWT 2000 s 1.820500 ks

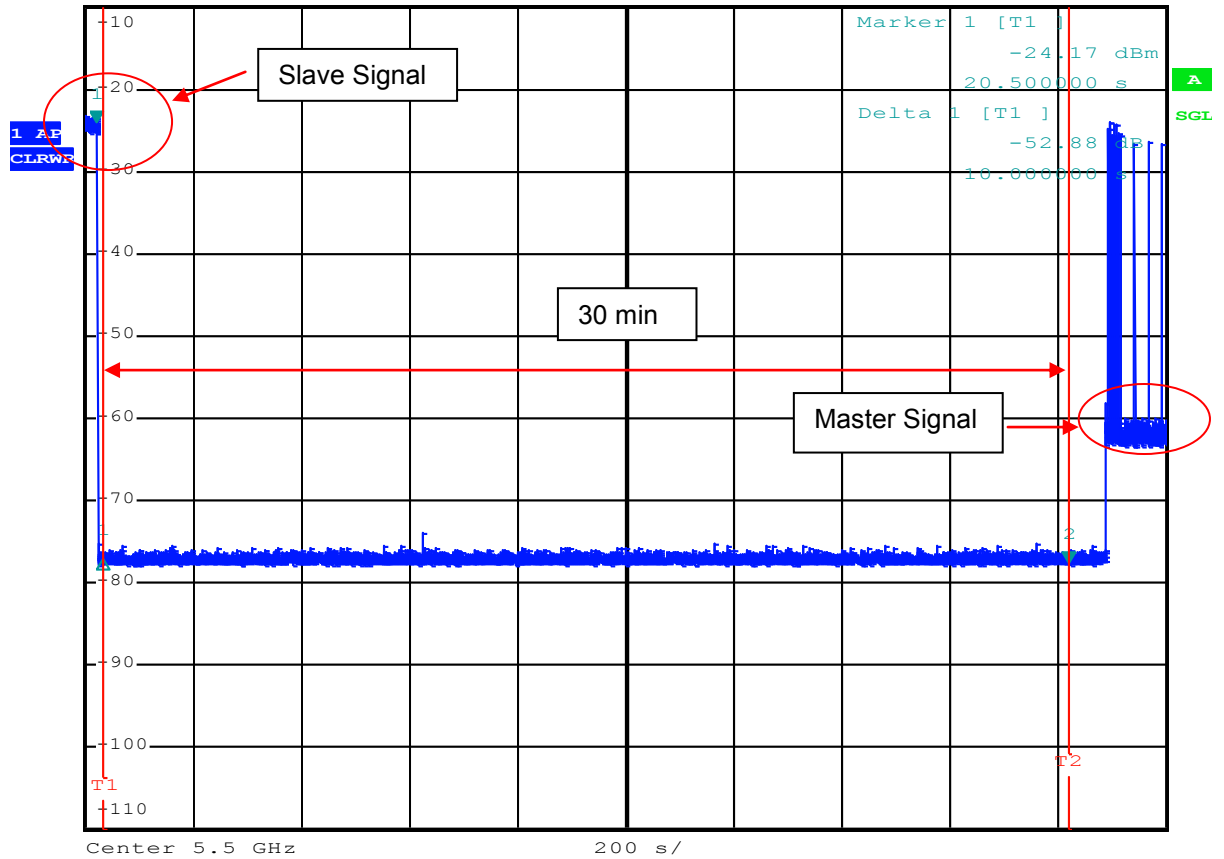

Date: 15.OCT.2011 08:09:15

Non-associated test Mode  
Radar #1 Non-Occupancy Period IEEE 802.11a  
Non-associated test, Master was off. During the 30 minutes observation time, The UUT did not make any transmissions in the DFS band after UUT power up.

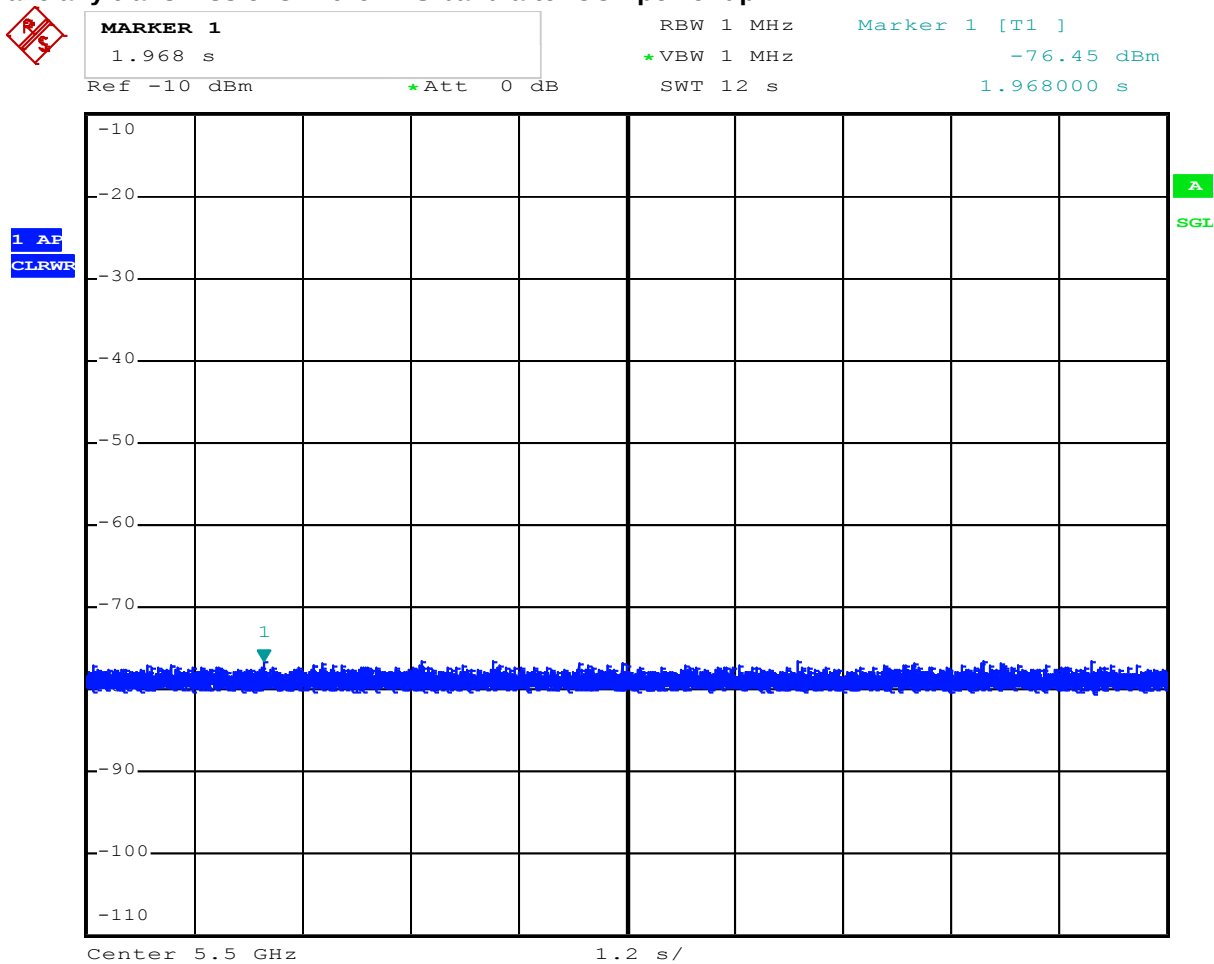

Date: 14.OCT.2011 20:41:35

## 5 MEASURING INSTRUMENTS

| Instrument              | Manufacturer | Model No.    | Serial No.        | Characteristics  | Calibration Date | Remark              |
|-------------------------|--------------|--------------|-------------------|------------------|------------------|---------------------|
| Spectrum Analyzer       | R&S          | FSU26.5      | 100015            | 20 Hz ~ 26.5 GHz | Jan. 06, 2011    | Conducted (TH01-HY) |
| RF Cable-1m             | Jye Bao      | RG142        | CB034-1m          | 20 MHz ~ 7 GHz   | Dec. 02, 2010    | Conducted (TH01-HY) |
| Vector Signal Generator | R&S          | SMU200A      | 102098            | 100 kHz ~ 6 GHz  | Oct. 05, 2011    | Conducted (TH01-HY) |
| RF Power Divider        | HP           | 11636A       | 102934            | N/A              | N/A              | Conducted (TH01-HY) |
| RF Power Splitter       | Anaren       | 44100        | 881840 / 881850   | N/A              | N/A              | Conducted (TH01-HY) |
| RF Power Splitter       | Anaren       | 42100        | 8817950 / 8817960 | N/A              | N/A              | Conducted (TH01-HY) |
| RF Cable-0.5m           | SUHNER       | SUCOFLEX 106 | TH01-HY -01~06    | 1GHz~26.5GHz     | Feb. 02, 2011    | Conducted (TH01-HY) |

Note: Calibration Interval of instruments listed above is one year.

## 6 TEST LOCATION

|        |                                                                                                                                        |
|--------|----------------------------------------------------------------------------------------------------------------------------------------|
| SHIJR  | ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C.<br>TEL : 886-2-2696-2468<br>FAX : 886-2-2696-2255 |
| HWA YA | ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.<br>TEL : 886-3-327-3456<br>FAX : 886-3-318-0055         |
| LINKOU | ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C<br>TEL : 886-2-2601-1640<br>FAX : 886-2-2601-1695               |
| DUNGHU | ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C.<br>TEL : 886-2-2631-4739<br>FAX : 886-2-2631-9740            |
| JUNGHE | ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C.<br>TEL : 886-2-8227-2020<br>FAX : 886-2-8227-2626           |
| NEIHU  | ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C.<br>TEL : 886-2-2794-8886<br>FAX : 886-2-2794-9777         |
| JHUBEI | ADD : No.8, Lane 728, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C.<br>TEL : 886-3-656-9065<br>FAX : 886-3-656-9085       |

## **Appendix A. Test Photos**

## 1. Photographs of DFS Test Configuration

**FRONT VIEW**

