



FCC RADIO TEST REPORT

FCC ID : HLZA24003
Equipment : Tablet PC
Brand Name : acer
Model Name : A24003
Marketing Name : Acer Iconia Tab A10, A10-21
Applicant : Acer Incorporated
8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City
22181, Taiwan (R.O.C)
Manufacturer : Acer Incorporated
8F., No. 88, Sec. 1, Xintai 5th Rd., Xizhi Dist., New Taipei City
22181, Taiwan (R.O.C)
Standard : FCC Part 15 Subpart E §15.407

The product was received on May 28, 2024 and testing was performed from Jun. 03, 2024 to Jun. 26, 2024. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Louis Wu

Approved by: Louis Wu

Sporton International Inc. Wensan Laboratory

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
1 General Description	5
1.1 Product Feature of Equipment Under Test.....	5
1.2 Modification of EUT	5
1.3 Testing Location	6
1.4 Applicable Standards.....	6
2 Test Configuration of Equipment Under Test	7
2.1 Carrier Frequency and Channel	7
2.2 Test Mode.....	8
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	10
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 Test Result	12
3.1 26dB & 99% Occupied Bandwidth Measurement	12
3.2 Maximum Conducted Output Power Measurement	13
3.3 Power Spectral Density Measurement	15
3.4 Unwanted Emissions Measurement.....	17
3.5 AC Conducted Emission Measurement.....	22
3.6 Antenna Requirements.....	24
4 List of Measuring Equipment.....	25
5 Measurement Uncertainty	26
Appendix A. Conducted Test Results	
Appendix B. AC Conducted Emission Test Result	
Appendix C. Radiated Spurious Emission Test Data	
Appendix D. Duty Cycle Plots	
Appendix E. Setup Photographs	



History of this test report

Report No.	Version	Description	Issue Date
FR452713D	01	Initial issue of report	Jul. 02, 2024
FR452713D	02	Revise List of Measuring Equipment and Appendix D This report is an updated version, replacing the report issued on Jul. 02, 2024.	Jul. 05, 2024

Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.403(i)	26dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.407(a)	Maximum Conducted Output Power	Pass	-
3.3	15.407(a)	Power Spectral Density	Pass	-
3.4	15.407(b)	Unwanted Emissions	Pass	3.97 dB under the limit at 5725.94 MHz
3.5	15.207	AC Conducted Emission	Pass	7.41 dB under the limit at 0.16 MHz
3.6	15.203	Antenna Requirement	Pass	-

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

Reviewed by: Danny Lee

Report Producer: Rebecca Wu

1 General Description

1.1 Product Feature of Equipment Under Test

Product Feature		
General Specs Bluetooth, Wi-Fi 2.4GHz 802.11b/g/n/ax, Wi-Fi 5GHz 802.11a/n/ac/ax and GNSS.		
Antenna Type WLAN: PIFA Antenna Bluetooth: PIFA Antenna GPS / BDS: PIFA Antenna		

Antenna information		
5150 MHz ~ 5250 MHz	Peak Gain (dBi)	2.95
5250 MHz ~ 5350 MHz	Peak Gain (dBi)	3.27
5470 MHz ~ 5725 MHz	Peak Gain (dBi)	5.14

SKU List				
	SKU1_ 4G+64G	SKU2_ 4G+64G	SKU3_ 4G+128G	SKU4_ 4G+128G
Memory	Shenzhen Gcai Electronic Technology Co., /4GB/GD84D32MJ0-42C2	Rayson/4GB/RS1G32LF4 D2BDS-53BT	Shenzhen Gcai Electronic Technology Co., /4GB/GD84D32MJ0-42C2	Rayson/4GB/RS1G32LO4D 2BDS-53BT
eMMC	Rayson/64GB/RS70B64G 4S16G	Shenzhen Techwinsemi Technology Co., Ltd./64GB/UEMCGS63S0	Rayson/128GB/RS70BT7 G4S09F	Shenzhen Techwinsemi Technology Co., Ltd./128GB/UEMDGS63S0

Remark: The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

1.2 Modification of EUT

No modifications made to the EUT during the testing.



1.3 Testing Location

Test Site	Sporton International Inc. Wensan Laboratory
Test Site Location	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
Test Site No.	Sporton Site No.
	TH05-HY, CO07-HY, 03CH21-HY

Note: The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786

1.4 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01.
- ♦ ANSI C63.10-2013

Remark:

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz) radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5150-5250 MHz Band 1 (U-NII-1)	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5250-5350 MHz Band 2 (U-NII-2A)	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290		

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
5470-5725 MHz Band 3 (U-NII-2C)	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700

Note:

1. The above Frequency and Channel with "*" are 802.11n HT40 and 802.11ac VHT40 and 802.11ax HE40.
2. The above Frequency and Channel with "[#]" are 802.11ac VHT80 and 802.11ax HE80.

2.2 Test Mode

The power for 802.11n and 802.11ac mode is smaller than 802.11ax mode, so all other conducted and radiated test is covered by 802.11ax mode.

The final test modes include the worst data rates for each modulation shown in the table below.

Single Mode

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20 (Covered by HE20)	MCS0
802.11n HT40 (Covered by HE40)	MCS0
802.11ac VHT20 (Covered by HE20)	MCS0
802.11ac VHT40 (Covered by HE40)	MCS0
802.11ac VHT80 (Covered by HE80)	MCS0
802.11ax HE20	MCS0
802.11ax HE40	MCS0
802.11ax HE80	MCS0

Test Cases	
AC Conducted Emission	Mode 1 : Bluetooth Link + WLAN (2.4GHz) Link + H-Pattern + Earphone + SD Card + USB Cable (Charging from Adapter) for SKU4
	Mode 2 : Bluetooth Link + WLAN (5GHz) Link + MPEG4 (Color Bar) + Earphone + SD Card + USB Cable (Charging from Adapter) for SKU4
	Mode 3 : Bluetooth Link + WLAN (2.4GHz) Idle + Camera (Front) + Earphone + SD Card + USB Cable (Data Link with Notebook) (Read) for SKU4
	Mode 4 : Bluetooth Link + WLAN (5GHz) Idle + Camera (Rear) + Earphone + SD Card + USB Cable (Data Link with Notebook)(Write) for SKU4
	Mode 5 : Bluetooth Link + WLAN (2.4GHz) Link + GPS RX + Earphone + SD Card + USB Cable (Data Link with Notebook) (Read) for SKU4
Remark: - The worst case of Conducted Emission is mode 3; only the test data of it was reported. - For Radiated Test Cases, the tests were performed with SKU3.	

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11a	802.11a	802.11a
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140


Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ax HE20	802.11ax HE20	802.11ax HE20
L	Low	36	52	100
M	Middle	44	60	116
H	High	48	64	140

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ax HE40	802.11ax HE40	802.11ax HE40
L	Low	38	54	102
M	Middle	-	-	110
H	High	46	62	134

Ch. #		Band I : 5150-5250 MHz	Band II : 5250-5350 MHz	Band III : 5470-5725MHz
		802.11ax HE80	802.11ax HE80	802.11ax HE80
L	Low	-	-	106
M	Middle	42	58	-
H	High	-	-	-

Remark: For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.

2.3 Connection Diagram of Test System

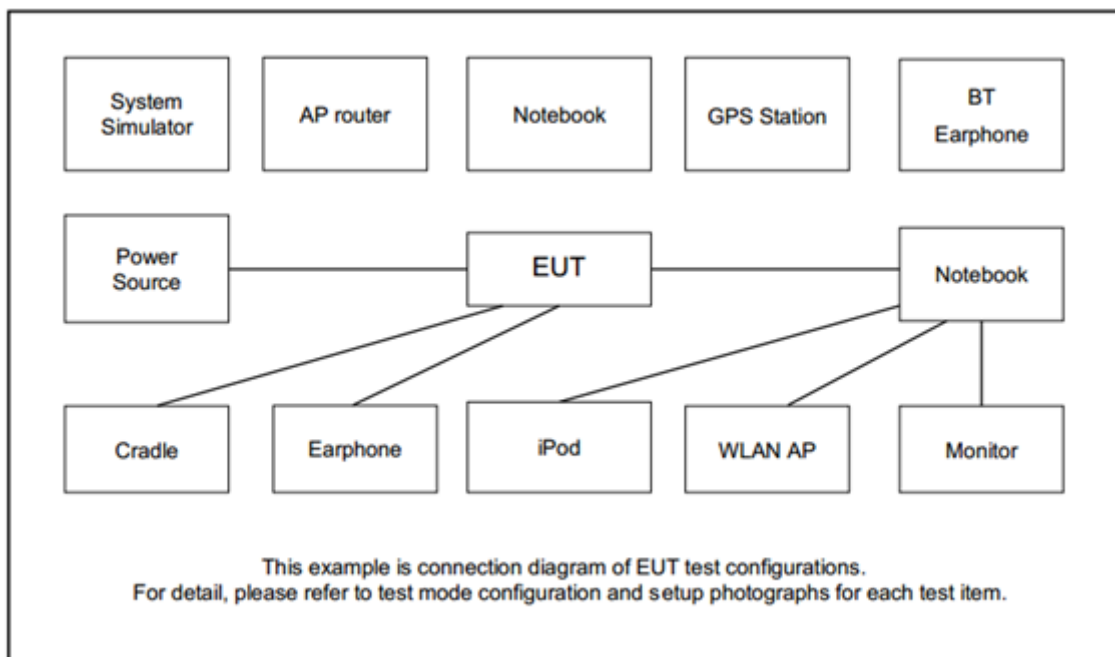

2.4 Support Unit used in test configuration and system

Item	Equipment	Brand Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Bluetooth Earphone	Sony Ericsson	SBH20	PY7-RD0010	N/A	N/A
2.	GPS Emulator	Spectracom	GSG-6	N/A	N/A	N/A
3.	Earphone + Mic	Samsung	Ecouteur	N/A	Unshielded, 1.8m	N/A
4.	WLAN AP	ASUS	RT-AC52	MSQ-RTAC4A00	N/A	Unshielded, 1.8 m
5.	Notebook	DELL	Latitude 3400	FCC DoC	N/A	AC I/P: Unshielded, 1.2 m DC O/P: Shielded, 1.8 m
6.	iPod	Apple	A1199	FCC DoC	Shielded, 1.0m	N/A
7.	iPod Earphone	Apple	N/A	Verification	Unshielded, 1.0 m	N/A

2.5 EUT Operation Test Setup

The RF test items, utility “ADB commend” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 4.2 + 10 = 14.2 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 26dB & 99% Occupied Bandwidth Measurement

3.1.1 Description of 26dB & 99% Occupied Bandwidth

This section is for reporting purpose only.

There is no restriction limits for bandwidth.


3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01. Section C) Emission bandwidth
2. Set RBW = approximately 1% of the emission bandwidth.
3. Set the VBW > RBW.
4. Detector = Peak.
5. Trace mode = max hold
6. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.
7. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW) $\geq 3 * RBW$.
8. Measure and record the results in the test report.

3.1.4 Test Setup

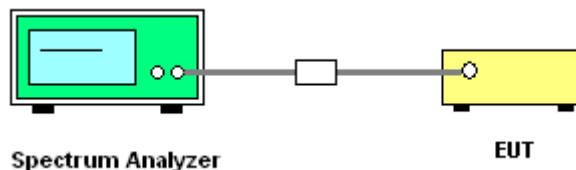

3.1.5 Test Result of 26dB & 99% Occupied Bandwidth

Please refer to Appendix A.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

■ For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For the 5.25–5.725 GHz bands:

■ The maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm $10 \log B$, where B is the 26 dB emission bandwidth in megahertz.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.


3.2.3 Test Procedures

The testing follows Method PM-G of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM-G (Measurement using a gated RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit at its maximum power control level.
3. Measure the average power of the transmitter.
4. Since the measurement is made only during the ON time of the transmitter, no duty cycle correction factor is required.

3.2.4 Test Setup

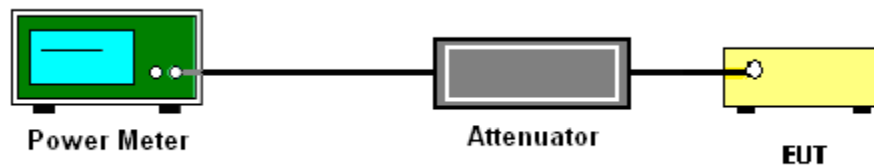

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.



3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For the 5.15–5.25 GHz bands:

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band. For an indoor access point operating in the band 5.15-5.25 GHz, the maximum power spectral density shall not exceed 17 dBm in any 1.0 MHz band.

For the 5.25–5.725 GHz bands:

The maximum power spectral density shall not exceed 11 dBm in any 1.0 MHz band.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


Section F) Maximum power spectral density.

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
 - Set span to encompass the entire emission bandwidth (EBW) of the signal.
 - Set RBW = 1 MHz.
 - Set VBW $\geq$ 3 MHz.
 - Number of points in sweep $\geq$ 2 Span / RBW.
 - Sweep time = auto.
 - Detector = RMS
 - Trace average at least 100 traces in power averaging mode.
 - Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.
1. The RF output of EUT is connected to the spectrum analyzer by a low loss cable.
 2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.

3.3.4 Test Setup

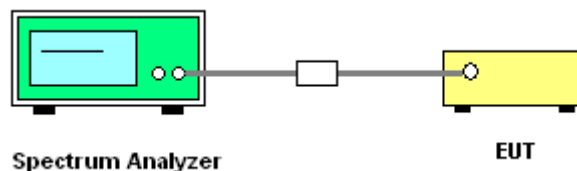

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Unwanted Emissions Measurement

This section is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz.

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz. Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz.

- (2) Unwanted spurious emissions falls in restricted bands shall comply with the general field strength limits as below table:

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

Note: The following formula is used to convert the EIRP to field strength.

$$E = \frac{1000000\sqrt{30P}}{3} \text{ } \mu\text{V/m, where P is the eirp (Watts)}$$

EIRP (dBm)	Field Strength at 3m (dB μ V/m)
- 27	68.3

(3) KDB789033 D02 v02r01 G)2)c)

(i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.

(ii) Section 15.407(b)(4) specifies the unwanted emissions limit for the U-NII-3 band. A band emissions mask is specified in Section 15.407(b)(4)(i). The emission limits are based on the use of a peak detector.

3.4.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.4.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Section G) Unwanted emissions measurement.

(1) Procedure for Unwanted Emissions Measurements Below 1000 MHz

- RBW = 120 kHz
- VBW = 300 kHz
- Detector = Peak
- Trace mode = max hold

(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW $\geq$ 3 MHz
- Detector = Peak
- Sweep time = auto
- Trace mode = max hold


(3) Procedures for Average Unwanted Emissions Measurements Above 1000 MHz

- RBW = 1 MHz
- VBW = 10 Hz, when duty cycle is no less than 98 percent.
- VBW $\geq$ $1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.


2. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
3. The EUT is set 3 meters away from the receiving antenna which is mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT is arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-”.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-”.

3.4.4 Test Setup


For radiated emissions below 30MHz

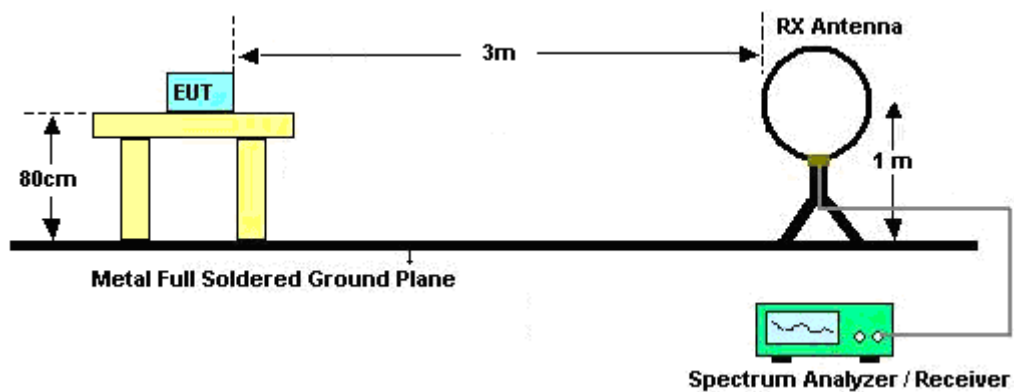


For radiated emissions from 30MHz to 1GHz

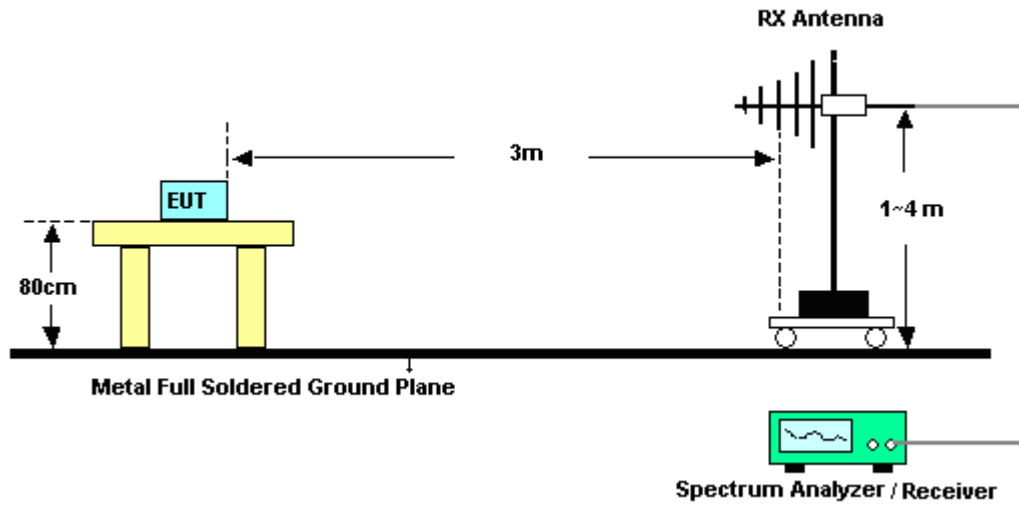

For radiated test from 1GHz to 18GHz

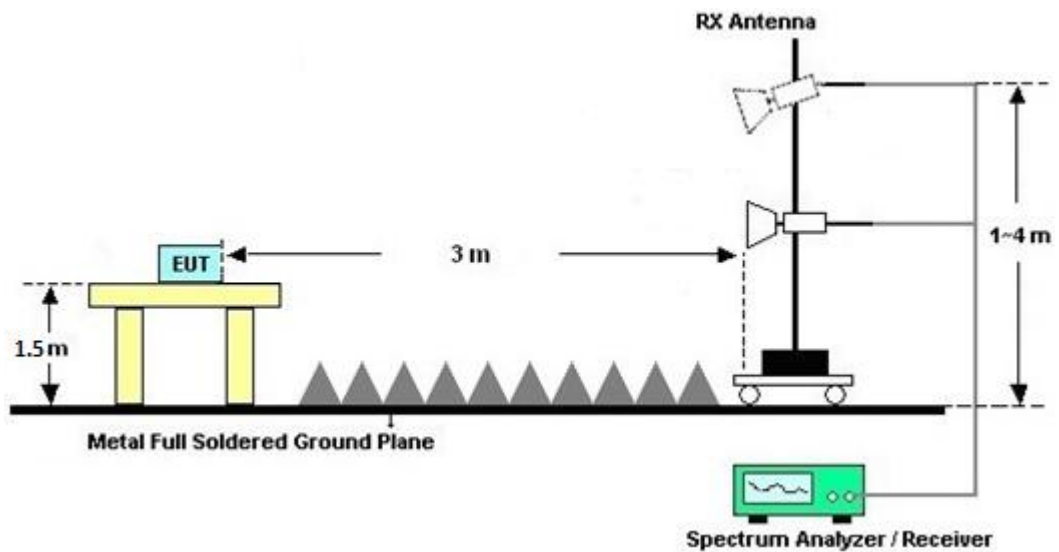

For radiated test above 18GHz

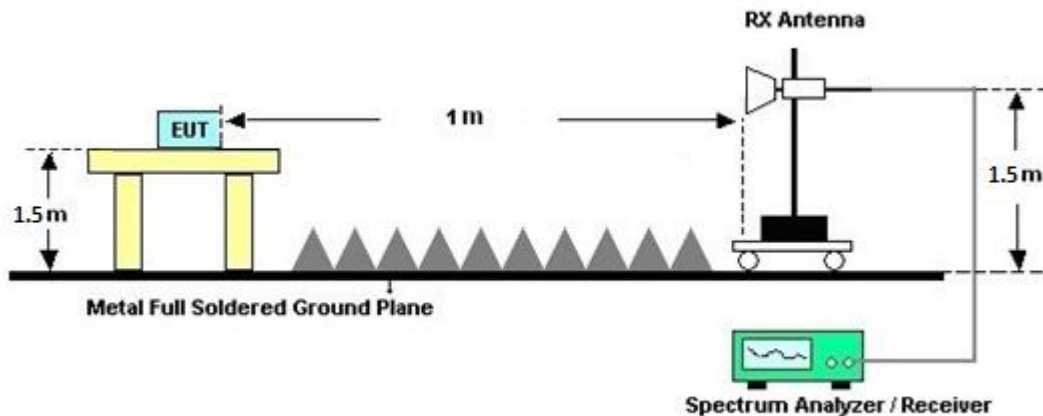

3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

3.5.3 Test Procedures

1. The EUT is placed 0.4 meter away from the conducting wall of the shielding room, and is kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN shall be used.
6. Both Line and Neutral shall be tested in order to find out the maximum conducted emission.
7. The frequency range from 150 kHz to 30 MHz is scanned.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

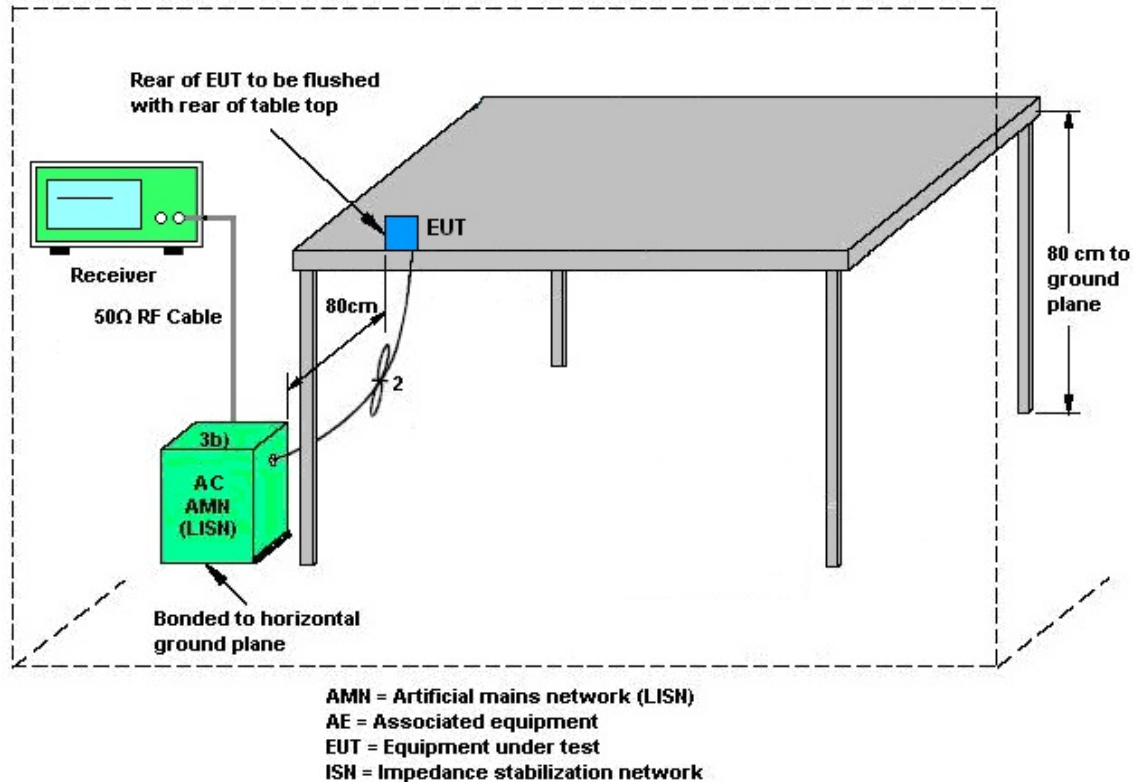

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.



4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 07, 2023	Jun. 03, 2024~ Jun. 24, 2024	Nov. 06, 2024	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	17I00015SNO 35 (NO:109)	10MHz~6GHz	Jan. 15, 2024	Jun. 03, 2024~ Jun. 24, 2024	Jan. 14, 2025	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV3044	101466	10HZ~44GHZ	Jan. 24, 2024	Jun. 03, 2024~ Jun. 24, 2024	Jan. 23, 2025	Conducted (TH05-HY)
Power Divider	Woken	2Way SMA	DCMD38W1E 2	N/A	N/A	Jun. 03, 2024~ Jun. 24, 2024	N/A	Conducted (TH05-HY)
Software1	Sporton	BTWiFi_Final_v ersion:1.0(2024- 04-11)	N/A	Conducted Items	N/A	Jun. 03, 2024~ Jun. 24, 2024	N/A	Conducted (TH05-HY)
Software2	Raditeq	RadiMation 2021.1.8	N/A	Conducted Power	N/A	Jun. 03, 2024~ Jun. 24, 2024	N/A	Conducted (TH05-HY)
LOOP Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 12, 2023	Jun. 12, 2024~ Jun. 26, 2024	Sep. 11, 2024	Radiation (03CH21-HY)
Bilog Antenna	TESEQ & WOKEN	CBL 6111D & 00802N1D-06	63303 & 001	30MHz~1GHz	Oct. 15, 2023	Jun. 12, 2024~ Jun. 26, 2024	Oct. 14, 2024	Radiation (03CH21-HY)
Double Ridged Guide Horn Antenna	RFSPIN	DRH18-E	LE2C03A18EN	1GHz~18GHz	Jul. 12, 2023	Jun. 12, 2024~ Jun. 26, 2024	Jul. 11, 2024	Radiation (03CH21-HY)
SHF-EHF Horn Antenna	SCHWARZBECK	BBHA 9170	1223	18GHz~40GHz	Jul. 10, 2023	Jun. 12, 2024~ Jun. 26, 2024	Jul. 09, 2024	Radiation (03CH21-HY)
Amplifier	SONOMA	310N	421580	30MHz~1GHz	Jul. 15, 2023	Jun. 12, 2024~ Jun. 26, 2024	Jul. 14, 2024	Radiation (03CH21-HY)
Amplifier	EMEC	EM01G18GA	060876	1GHz~18GHz	Sep. 28, 2023	Jun. 12, 2024~ Jun. 26, 2024	Sep. 27, 2024	Radiation (03CH21-HY)
Preamplifier	EMEC	EM18G40G	060871	18GHz~40GHz	Aug. 30, 2023	Jun. 12, 2024~ Jun. 26, 2024	Aug. 29, 2024	Radiation (03CH21-HY)
Spectrum Analyzer	Keysight	N9010B	MY62170358	10Hz~44GHz	Aug. 28, 2023	Jun. 12, 2024~ Jun. 26, 2024	Aug. 27, 2024	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	803951/2	9kHz~30MHz	Mar. 06, 2024	Jun. 12, 2024~ Jun. 26, 2024	Mar. 05, 2025	Radiation (03CH21-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	804397/2,8046 12/2,804614/2	30MHz~40GHz	Oct. 24, 2023	Jun. 12, 2024~ Jun. 26, 2024	Oct. 23, 2024	Radiation (03CH21-HY)
Hygrometer	TECPEL	DTM-303A	TP211568	N/A	Oct. 30, 2023	Jun. 12, 2024~ Jun. 26, 2024	Oct. 14, 2024	Radiation (03CH21-HY)
Controller	EMEC	EM 1000	N/A	Control Turn table & Ant Mast	N/A	Jun. 12, 2024~ Jun. 26, 2024	N/A	Radiation (03CH21-HY)
Antenna Mast	EMEC	AM-BS-4500-B	N/A	1~4m	N/A	Jun. 12, 2024~ Jun. 26, 2024	N/A	Radiation (03CH21-HY)
Turn Table	EMEC	TT 2000	N/A	0~360 Degree	N/A	Jun. 12, 2024~ Jun. 26, 2024	N/A	Radiation (03CH21-HY)
Software	Audix	E3 6.2009-8-24	RK-001053	N/A	N/A	Jun. 12, 2024~ Jun. 26, 2024	N/A	Radiation (03CH21-HY)
AC Power Source	ACPOWER	AFC-11003G	F317040033	N/A	N/A	Jun. 04, 2024	N/A	Conduction (CO07-HY)
Software	Rohde & Schwarz	EMC32 V10.30	N/A	N/A	N/A	Jun. 04, 2024	N/A	Conduction (CO07-HY)
Pulse Limiter	SCHWARZBECK	VTSD 9561-F N	9561-F N00373	9kHz~200MHz	Oct. 20, 2023	Jun. 04, 2024	Oct. 19, 2024	Conduction (CO07-HY)
RF Cable	HUBER + SUHNER	RG 214/U	1358175	9kHz~30MHz	Mar. 14, 2024	Jun. 04, 2024	Mar. 13, 2025	Conduction (CO07-HY)
Two-Line V-Network	TESEQ	NNB 51	45051	N/A	Mar. 10, 2024	Jun. 04, 2024	Mar. 09, 2025	Conduction (CO07-HY)
Four-Line V-Network	TESEQ	NNB 52	36122	N/A	Mar. 07, 2024	Jun. 04, 2024	Mar. 06, 2025	Conduction (CO07-HY)
EMI Test Receiver	Rohde & Schwarz	ESR3	102317	9kHz~3.6GHz	Sep. 20, 2023	Jun. 04, 2024	Sep. 19, 2024	Conduction (CO07-HY)

5 Measurement Uncertainty

Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.44 dB
--	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	6.40 dB
--	---------

Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.60 dB
--	---------

Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.60 dB
--	---------

Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.50 dB
--	---------

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Wei Shun	Temperature:	21~25	°C
Test Date:	2024/06/03 ~ 2024/06/24	Relative Humidity:	51~54	%

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		-	Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	36	5180	17.33	-	26.42	-	-	-	22.39	-	-	-
11a	6Mbps	1	44	5220	17.34	-	26.15	-	-	-	22.39	-		-
11a	6Mbps	1	48	5240	17.24	-	16.96	-	-	-	22.37	-		-

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 single antenna												
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)		FCC Conducted Power Limit (dBm)		DG (dBi)		-	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	36	5180	9.19	-	24.00	-	2.95	-	-	Pass
11a	6Mbps	1	44	5220	9.49	-	24.00	-	2.95	-		Pass
11a	6Mbps	1	48	5240	9.98	-	24.00	-	2.95	-		Pass
HT20	MCS0	1	36	5180	8.90	-	24.00	-	2.95	-		Pass
HT20	MCS0	1	44	5220	9.18	-	24.00	-	2.95	-		Pass
HT20	MCS0	1	48	5240	9.71	-	24.00	-	2.95	-		Pass
HT40	MCS0	1	38	5190	8.96	-	24.00	-	2.95	-		Pass
HT40	MCS0	1	46	5230	9.17	-	24.00	-	2.95	-		Pass
VHT20	MCS0	1	36	5180	9.00	-	24.00	-	2.95	-		Pass
VHT20	MCS0	1	44	5220	9.28	-	24.00	-	2.95	-		Pass
VHT20	MCS0	1	48	5240	9.81	-	24.00	-	2.95	-		Pass
VHT40	MCS0	1	38	5190	9.06	-	24.00	-	2.95	-		Pass
VHT40	MCS0	1	46	5230	9.27	-	24.00	-	2.95	-		Pass
VHT80	MCS0	1	42	5210	9.83	-	24.00	-	2.95	-		Pass

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)		Average PSD Limit (dBm/MHz)		DG (dBi)		-	Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	36	5180	0.14	-	-2.37	-	11.00	-	2.95	-	-	Pass
11a	6Mbps	1	44	5220	0.14	-	-2.11	-	11.00	-	2.95	-		Pass
11a	6Mbps	1	48	5240	0.14	-	-1.61	-	11.00	-	2.95	-		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
11a	6Mbps	1	52	5260	17.27	-	26.10	-	23.37	-	29.37	-	23.98	-	-
11a	6Mbps	1	60	5300	17.28	-	26.38	-	23.37	-	29.37	-	23.98	-	
11a	6Mbps	1	64	5320	17.34	-	26.68	-	23.39	-	29.39	-	23.98	-	

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A single antenna												
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)		FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	52	5260	9.92	-	23.98	-	3.27	-	26.99	Pass
11a	6Mbps	1	60	5300	9.49	-	23.98	-	3.27	-	26.99	Pass
11a	6Mbps	1	64	5320	9.95	-	23.98	-	3.27	-	26.99	Pass
HT20	MCS0	1	52	5260	9.65	-	23.98	-	3.27	-	26.99	Pass
HT20	MCS0	1	60	5300	9.19	-	23.98	-	3.27	-	26.99	Pass
HT20	MCS0	1	64	5320	9.76	-	23.98	-	3.27	-	26.99	Pass
HT40	MCS0	1	54	5270	9.61	-	23.98	-	3.27	-	26.99	Pass
HT40	MCS0	1	62	5310	9.48	-	23.98	-	3.27	-	26.99	Pass
VHT20	MCS0	1	52	5260	9.75	-	23.98	-	3.27	-	26.99	Pass
VHT20	MCS0	1	60	5300	9.29	-	23.98	-	3.27	-	26.99	Pass
VHT20	MCS0	1	64	5320	9.86	-	23.98	-	3.27	-	26.99	Pass
VHT40	MCS0	1	54	5270	9.71	-	23.98	-	3.27	-	26.99	Pass
VHT40	MCS0	1	62	5310	9.58	-	23.98	-	3.27	-	26.99	Pass
VHT80	MCS0	1	58	5290	9.81	-	23.98	-	3.27	-	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2A single antenna														
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)		Average PSD Limit (dBm/MHz)		DG (dBi)		-	Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	52	5260	0.14	-	-1.70	-	11.00	-	3.27	-	-	Pass
11a	6Mbps	1	60	5300	0.14	-	-2.09	-	11.00	-	3.27	-		Pass
11a	6Mbps	1	64	5320	0.14	-	-1.63	-	11.00	-	3.27	-		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C single antenna																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
11a	6Mbps	1	100	5500	17.55	-	27.47	-	23.44	-	29.44	-	23.98	-	----	----
11a	6Mbps	1	116	5580	17.55	-	27.10	-	23.44	-	29.44	-	23.98	-	----	----
11a	6Mbps	1	140	5700	17.54	-	27.25	-	23.44	-	29.44	-	23.98	-	----	----

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C single antenna												
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Average Conducted Power (dBm)		FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	100	5500	7.46	-	23.98	-	5.14	-	26.99	Pass
11a	6Mbps	1	116	5580	7.67	-	23.98	-	5.14	-	26.99	Pass
11a	6Mbps	1	140	5700	7.92	-	23.98	-	5.14	-	26.99	Pass
HT20	MCS0	1	100	5500	7.29	-	23.98	-	5.14	-	26.99	Pass
HT20	MCS0	1	116	5580	7.49	-	23.98	-	5.14	-	26.99	Pass
HT20	MCS0	1	140	5700	7.73	-	23.98	-	5.14	-	26.99	Pass
HT40	MCS0	1	102	5510	7.54	-	23.98	-	5.14	-	26.99	Pass
HT40	MCS0	1	110	5550	7.51	-	23.98	-	5.14	-	26.99	Pass
HT40	MCS0	1	134	5670	7.27	-	23.98	-	5.14	-	26.99	Pass
VHT20	MCS0	1	100	5500	7.39	-	23.98	-	5.14	-	26.99	Pass
VHT20	MCS0	1	116	5580	7.59	-	23.98	-	5.14	-	26.99	Pass
VHT20	MCS0	1	140	5700	7.83	-	23.98	-	5.14	-	26.99	Pass
VHT40	MCS0	1	102	5510	7.64	-	23.98	-	5.14	-	26.99	Pass
VHT40	MCS0	1	110	5550	7.61	-	23.98	-	5.14	-	26.99	Pass
VHT40	MCS0	1	134	5670	7.37	-	23.98	-	5.14	-	26.99	Pass
VHT80	MCS0	1	106	5530	7.09	-	23.98	-	5.14	-	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2C single antenna														
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)		Average PSD Limit (dBm/MHz)		DG (dBi)		-	Pass /Fail
					Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
11a	6Mbps	1	100	5500	0.14	-	-4.37	-	11.00	-	5.14	-	-	Pass
11a	6Mbps	1	116	5580	0.14	-	-4.23	-	11.00	-	5.14	-		Pass
11a	6Mbps	1	140	5700	0.14	-	-3.86	-	11.00	-	5.14	-		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-1 single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		-	Note
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	36	5180	Full	19.30	-	26.51	-	-	-	22.86	-	-	-
HE20	MCS0	1	44	5220	Full	19.39	-	26.42	-	-	-	22.87	-		
HE20	MCS0	1	48	5240	Full	19.34	-	27.31	-	-	-	22.86	-		
HE40	MCS0	1	38	5190	Full	38.57	-	48.05	-	-	-	23.01	-		
HE40	MCS0	1	46	5230	Full	38.62	-	48.58	-	-	-	23.01	-		
HE80	MCS0	1	42	5210	Full	77.57	-	87.39	-	-	-	23.01	-		

TEST RESULTS DATA
Average Power Table

FCC U-NII-1 single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)		FCC Conducted Power Limit (dBm)		DG (dBi)		-	Pass/Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	36	5180	Full	9.10	-	24.00	-	2.95	-	-	Pass
HE20	MCS0	1	44	5220	Full	9.38	-	24.00	-	2.95	-		Pass
HE20	MCS0	1	48	5240	Full	9.91	-	24.00	-	2.95	-		Pass
HE40	MCS0	1	38	5190	Full	9.16	-	24.00	-	2.95	-		Pass
HE40	MCS0	1	46	5230	Full	9.37	-	24.00	-	2.95	-		Pass
HE80	MCS0	1	42	5210	Full	9.93	-	24.00	-	2.95	-		Pass

TEST RESULTS DATA
Power Spectral Density

FCC U-NII-1 single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)		Average PSD Limit (dBm/MHz)		DG (dBi)		-	Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	36	5180	Full	0.13	-	-3.09	-	11.00	-	2.95	-	-	Pass
HE20	MCS0	1	44	5220	Full	0.13	-	-2.78	-	11.00	-	2.95	-		Pass
HE20	MCS0	1	48	5240	Full	0.13	-	-2.30	-	11.00	-	2.95	-		Pass
HE40	MCS0	1	38	5190	Full	0.07	-	-6.03	-	11.00	-	2.95	-		Pass
HE40	MCS0	1	46	5230	Full	0.07	-	-5.56	-	11.00	-	2.95	-		Pass
HE80	MCS0	1	42	5210	Full	0.16	-	-7.82	-	11.00	-	2.95	-		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2A single antenna																
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth (MHz)		26 dB Bandwidth (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		Note
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	
HE20	MCS0	1	52	5260	Full	19.36	-	26.73	-	23.87	-	29.87	-	23.98	-	-
HE20	MCS0	1	60	5300	Full	19.33	-	26.88	-	23.86	-	29.86	-	23.98	-	-
HE20	MCS0	1	64	5320	Full	19.38	-	26.58	-	23.87	-	29.87	-	23.98	-	-
HE40	MCS0	1	54	5270	Full	38.54	-	47.76	-	23.98	-	30.00	-	23.98	-	-
HE40	MCS0	1	62	5310	Full	38.61	-	48.77	-	23.98	-	30.00	-	23.98	-	-
HE80	MCS0	1	58	5290	Full	77.57	-	87.42	-	23.98	-	30.00	-	23.98	-	-

TEST RESULTS DATA
Average Power Table

FCC U-NII-2A single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)		FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	52	5260	Full	9.85	-	23.98	-	3.27	-	26.99	Pass
HE20	MCS0	1	60	5300	Full	9.39	-	23.98	-	3.27	-	26.99	Pass
HE20	MCS0	1	64	5320	Full	9.96	-	23.98	-	3.27	-	26.99	Pass
HE40	MCS0	1	54	5270	Full	9.81	-	23.98	-	3.27	-	26.99	Pass
HE40	MCS0	1	62	5310	Full	9.68	-	23.98	-	3.27	-	26.99	Pass
HE80	MCS0	1	58	5290	Full	9.91	-	23.98	-	3.27	-	26.99	Pass

TEST RESULTS DATA
Power Spectral Density

U-NII-2A single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)		Average PSD Limit (dBm/MHz)		DG (dBi)		-	Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	52	5260	Full	0.13	-	-2.26	-	11.00	-	3.27	-	-	Pass
HE20	MCS0	1	60	5300	Full	0.13	-	-2.74	-	11.00	-	3.27	-		Pass
HE20	MCS0	1	64	5320	Full	0.13	-	-2.25	-	11.00	-	3.27	-		Pass
HE40	MCS0	1	54	5270	Full	0.07	-	-5.17	-	11.00	-	3.27	-		Pass
HE40	MCS0	1	62	5310	Full	0.07	-	-5.47	-	11.00	-	3.27	-		Pass
HE80	MCS0	1	58	5290	Full	0.16	-	-8.00	-	11.00	-	3.27	-		Pass

TEST RESULTS DATA
26dB and 99% OBW

U-NII-2C single antenna																	
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	99% Bandwidth In U-NII 2C (MHz)		26 dB Bandwidth In U-NII 2C (MHz)		IC 99% Bandwidth Power Limit (dBm)		IC 99% Bandwidth EIRP Limit (dBm)		FCC 26dB Bandwidth Power Limit (dBm)		6 dB Bandwidth for Straddle Channel (MHz)	
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2
HE20	MCS0	1	100	5500	Full	19.48	-	28.34	-	23.89	-	29.89	-	23.98	-	----	----
HE20	MCS0	1	116	5580	Full	19.52	-	26.65	-	23.90	-	29.90	-	23.98	-	----	----
HE20	MCS0	1	140	5700	Full	19.46	-	28.02	-	23.89	-	29.89	-	23.98	-	----	----
HE40	MCS0	1	102	5510	Full	38.81	-	48.69	-	23.98	-	30.00	-	23.98	-	----	----
HE40	MCS0	1	110	5550	Full	38.82	-	48.88	-	23.98	-	30.00	-	23.98	-	----	----
HE40	MCS0	1	134	5670	Full	38.89	-	50.22	-	23.98	-	30.00	-	23.98	-	----	----
HE80	MCS0	1	106	5530	Full	77.83	-	89.95	-	23.98	-	30.00	-	23.98	-	----	----

TEST RESULTS DATA
Average Power Table

FCC U-NII-2C single antenna													
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Average Conducted Power (dBm)		FCC Conducted Power Limit (dBm)		DG (dBi)		EIRP Power Limit (dBm)	Pass/Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	100	5500	Full	7.49	-	23.98	-	5.14	-	26.99	Pass
HE20	MCS0	1	116	5580	Full	7.69	-	23.98	-	5.14	-	26.99	Pass
HE20	MCS0	1	140	5700	Full	7.93	-	23.98	-	5.14	-	26.99	Pass
HE40	MCS0	1	102	5510	Full	7.74	-	23.98	-	5.14	-	26.99	Pass
HE40	MCS0	1	110	5550	Full	7.71	-	23.98	-	5.14	-	26.99	Pass
HE40	MCS0	1	134	5670	Full	7.47	-	23.98	-	5.14	-	26.99	Pass
HE80	MCS0	1	106	5530	Full	7.18	-	23.98	-	5.14	-	26.99	Pass

TEST RESULTS DATA
Power Spectral Density


U-NII-2C single antenna															
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	RU Config	Duty Factor (dB)		Average Power Density with Duty Factor (dBm/MHz)		Average PSD Limit (dBm/MHz)		DG (dBi)		-	Pass /Fail
						Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2	Ant 1	Ant 2		
HE20	MCS0	1	100	5500	Full	0.13	-	-4.96	-	11.00	-	5.14	-	-	Pass
HE20	MCS0	1	116	5580	Full	0.13	-	-4.83	-	11.00	-	5.14	-		Pass
HE20	MCS0	1	140	5700	Full	0.13	-	-4.70	-	11.00	-	5.14	-		Pass
HE40	MCS0	1	102	5510	Full	0.07	-	-7.34	-	11.00	-	5.14	-		Pass
HE40	MCS0	1	110	5550	Full	0.07	-	-7.61	-	11.00	-	5.14	-		Pass
HE40	MCS0	1	134	5670	Full	0.07	-	-7.17	-	11.00	-	5.14	-		Pass
HE80	MCS0	1	106	5530	Full	0.16	-	-10.84	-	11.00	-	5.14	-		Pass



Test Result of 26dB & 99% Occupied Bandwidth


<Ant. 1>

<802.11a>

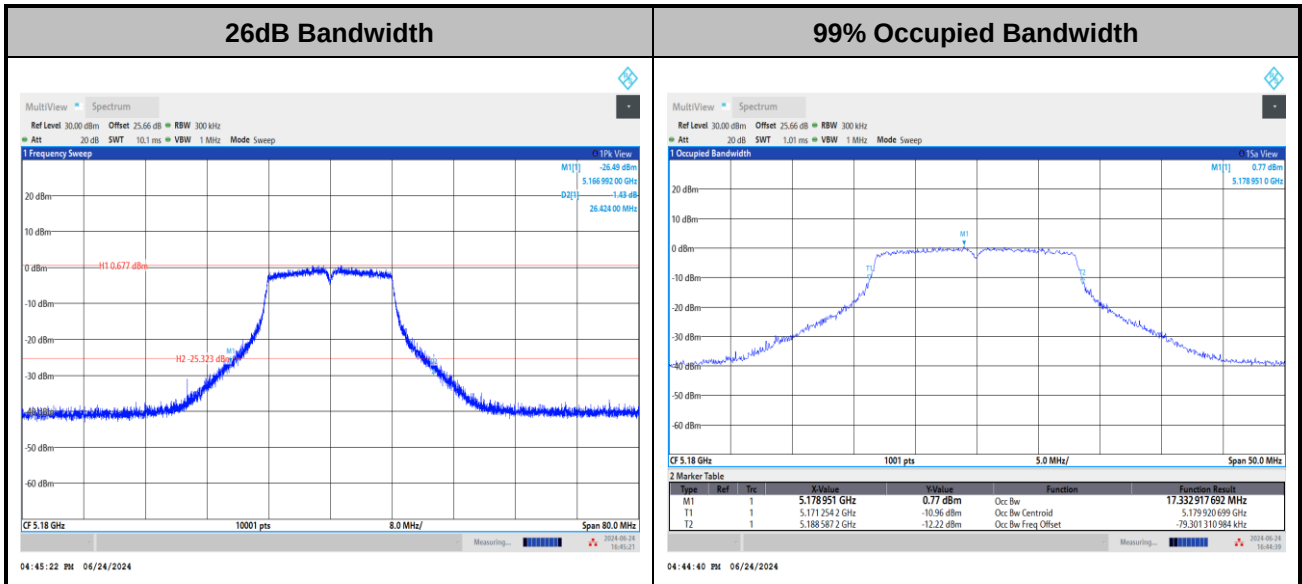

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.


<802.11ax HE20>

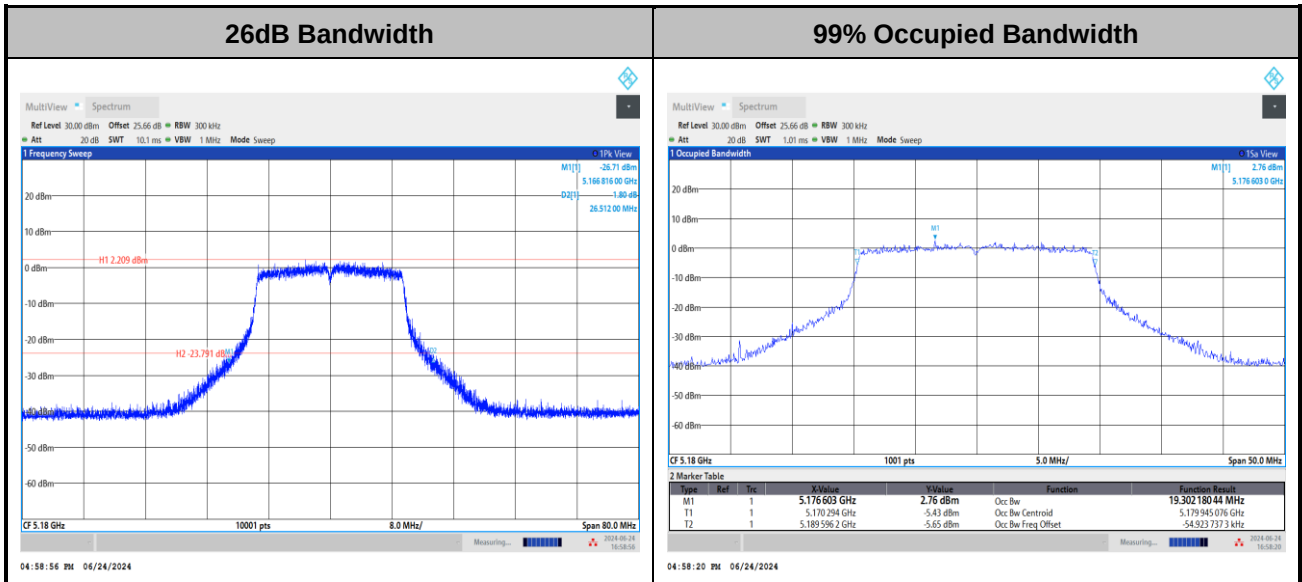


Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<802.11ax HE40>

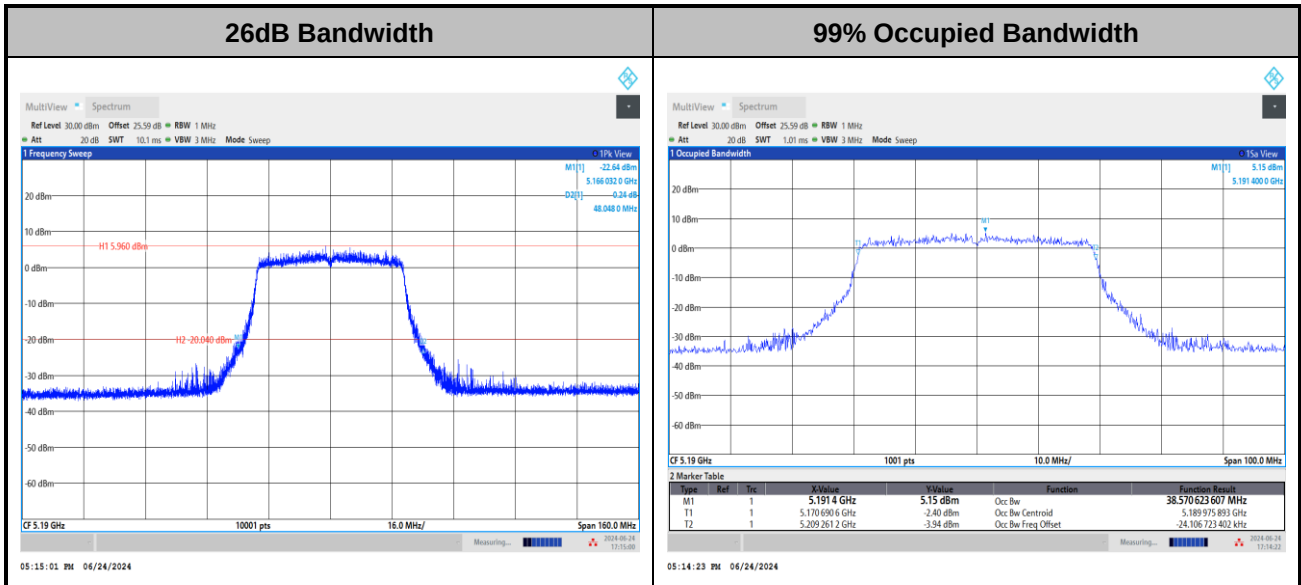


<802.11ax HE80>

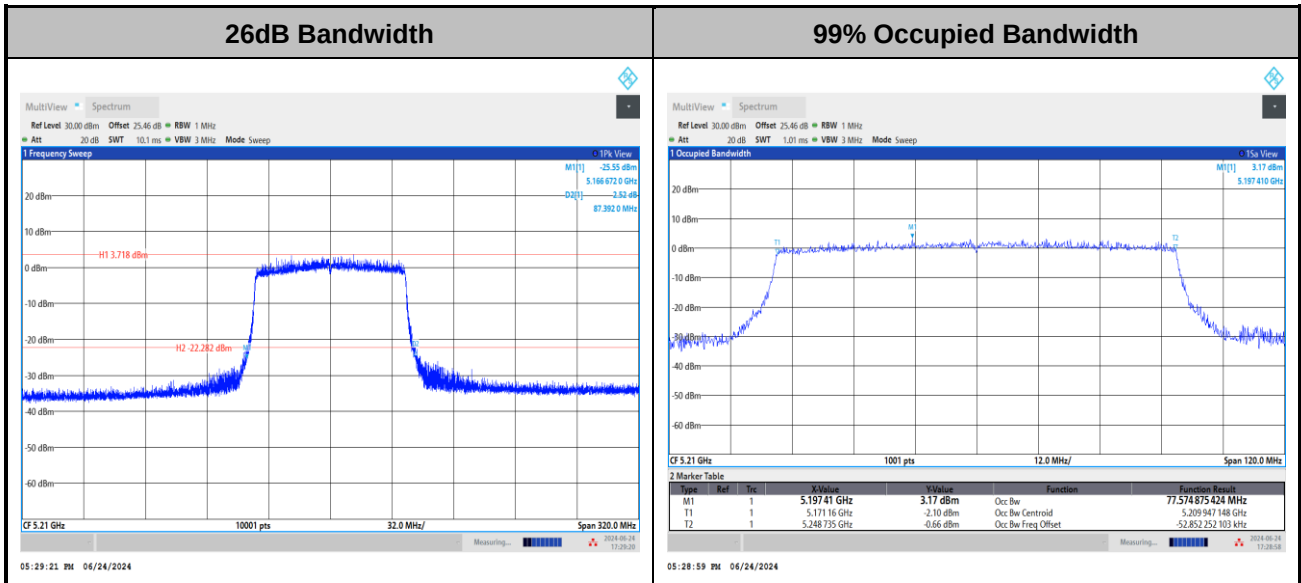


Test Result of Power Spectral Density

<802.11a>

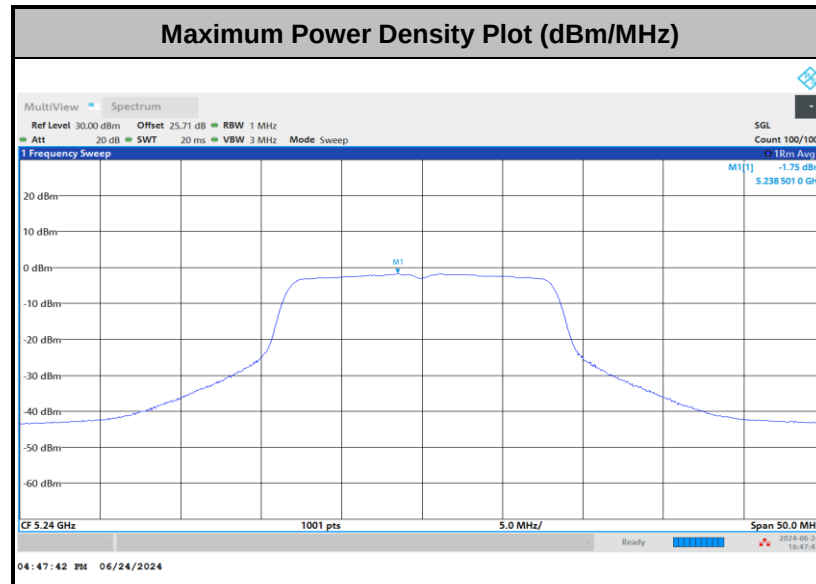


<802.11ax HE20>

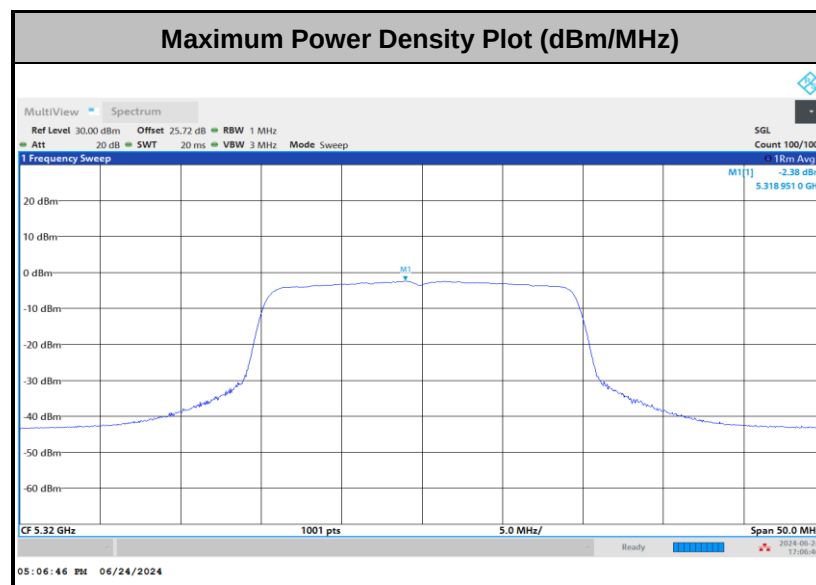




<802.11ax HE40>

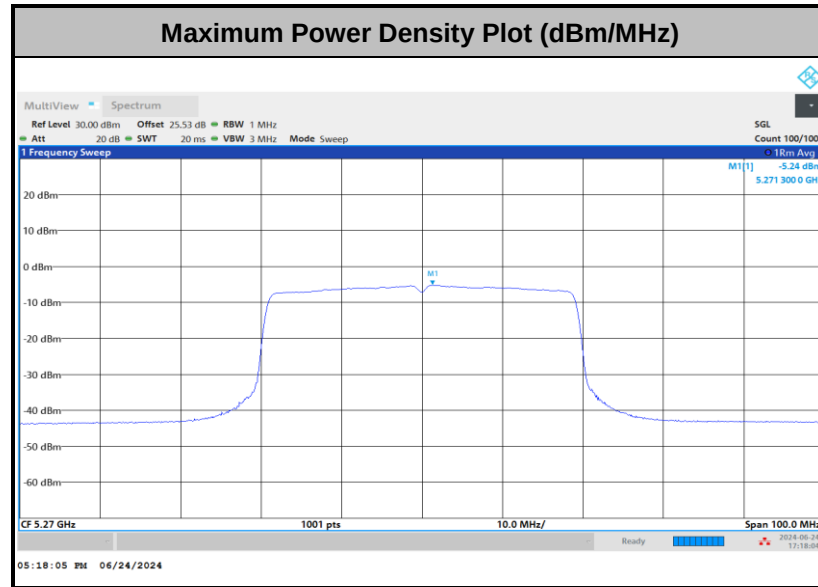

<802.11ax HE80>

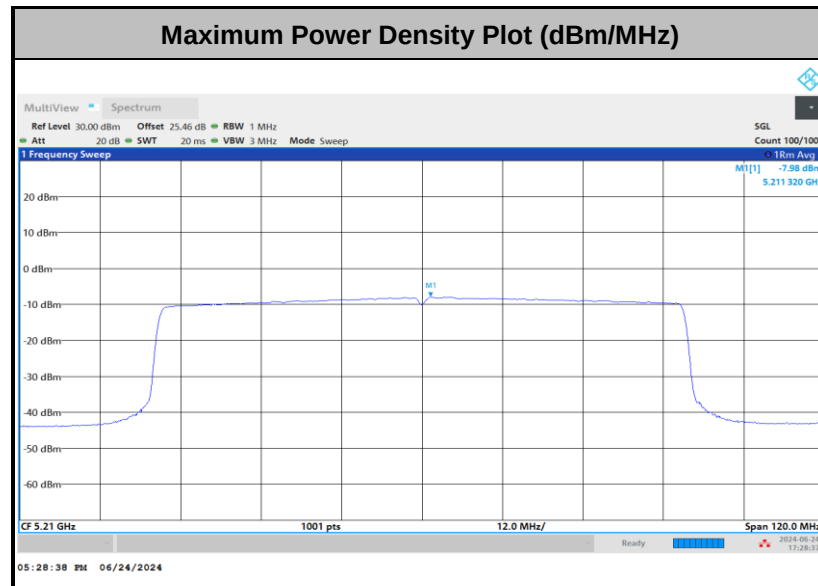




Appendix B. AC Conducted Emission Test Results

Test Engineer :	Louis Chung	Temperature :	22.8~24.6℃
		Relative Humidity :	53.4~61.2%

EUT Information

Report NO : 452713
Test Mode : Mode 3
Test Voltage : Power from system
Phase : Line

Full Spectrum

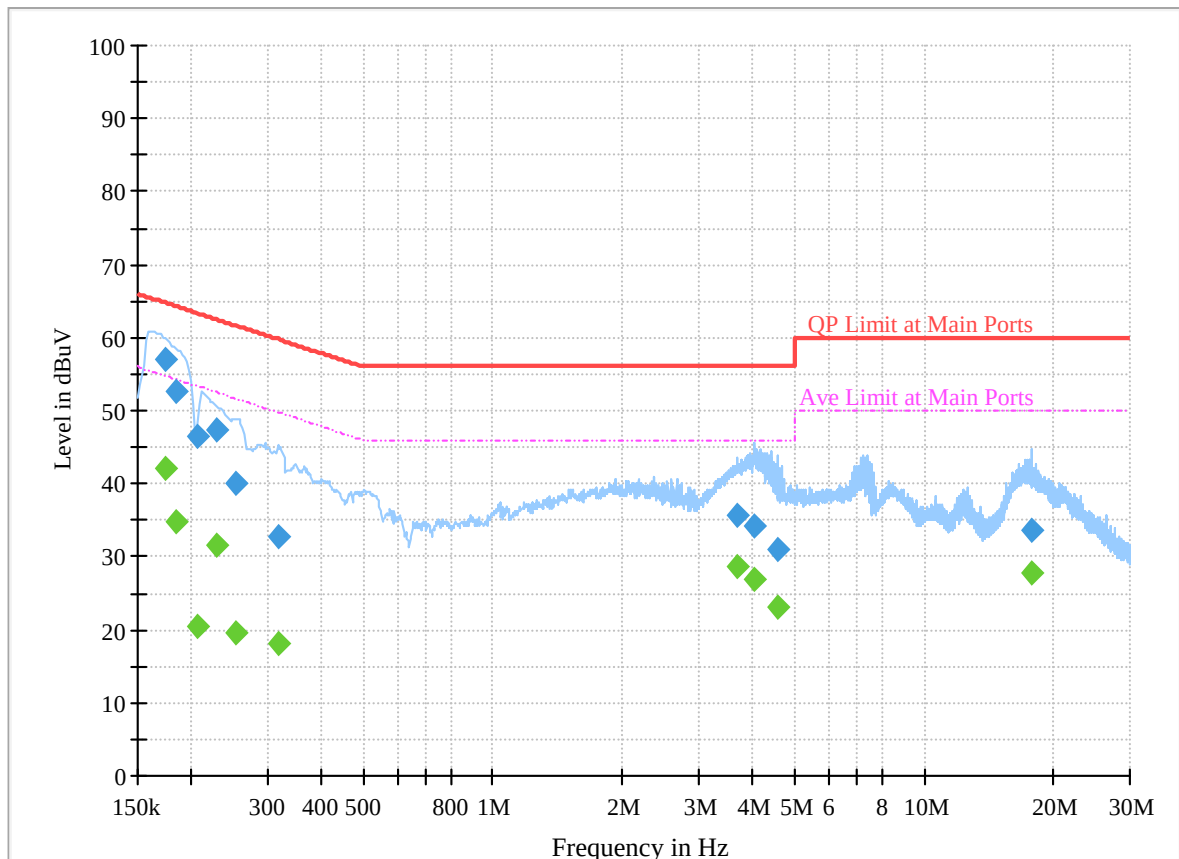

Final_Result


Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.173310	---	42.09	54.80	12.71	L1	OFF	19.9
0.173310	57.06	---	64.80	7.74	L1	OFF	19.9
0.183750	---	34.82	54.31	19.49	L1	OFF	19.9
0.183750	52.52	---	64.31	11.79	L1	OFF	19.9
0.206250	---	20.43	53.36	32.93	L1	OFF	19.9
0.206250	46.63	---	63.36	16.73	L1	OFF	19.9
0.228750	---	31.65	52.50	20.85	L1	OFF	19.9
0.228750	47.46	---	62.50	15.04	L1	OFF	19.9
0.253500	---	19.59	51.64	32.05	L1	OFF	19.9
0.253500	40.00	---	61.64	21.64	L1	OFF	19.9
0.319740	---	18.08	49.71	31.63	L1	OFF	19.9
0.319740	32.66	---	59.71	27.05	L1	OFF	19.9
3.679350	---	28.72	46.00	17.28	L1	OFF	20.0
3.679350	35.62	---	56.00	20.38	L1	OFF	20.0
4.026750	---	26.80	46.00	19.20	L1	OFF	20.0
4.026750	34.21	---	56.00	21.79	L1	OFF	20.0
4.569900	---	23.15	46.00	22.85	L1	OFF	20.0
4.569900	31.07	---	56.00	24.93	L1	OFF	20.0
17.697030	---	27.74	50.00	22.26	L1	OFF	20.1

17.697030	33.55	---	60.00	26.45	L1	OFF	20.1
-----------	-------	-----	-------	-------	----	-----	------

EUT Information

Report NO : 452713
Test Mode : Mode 3
Test Voltage : Power from system
Phase : Neutral

Full Spectrum

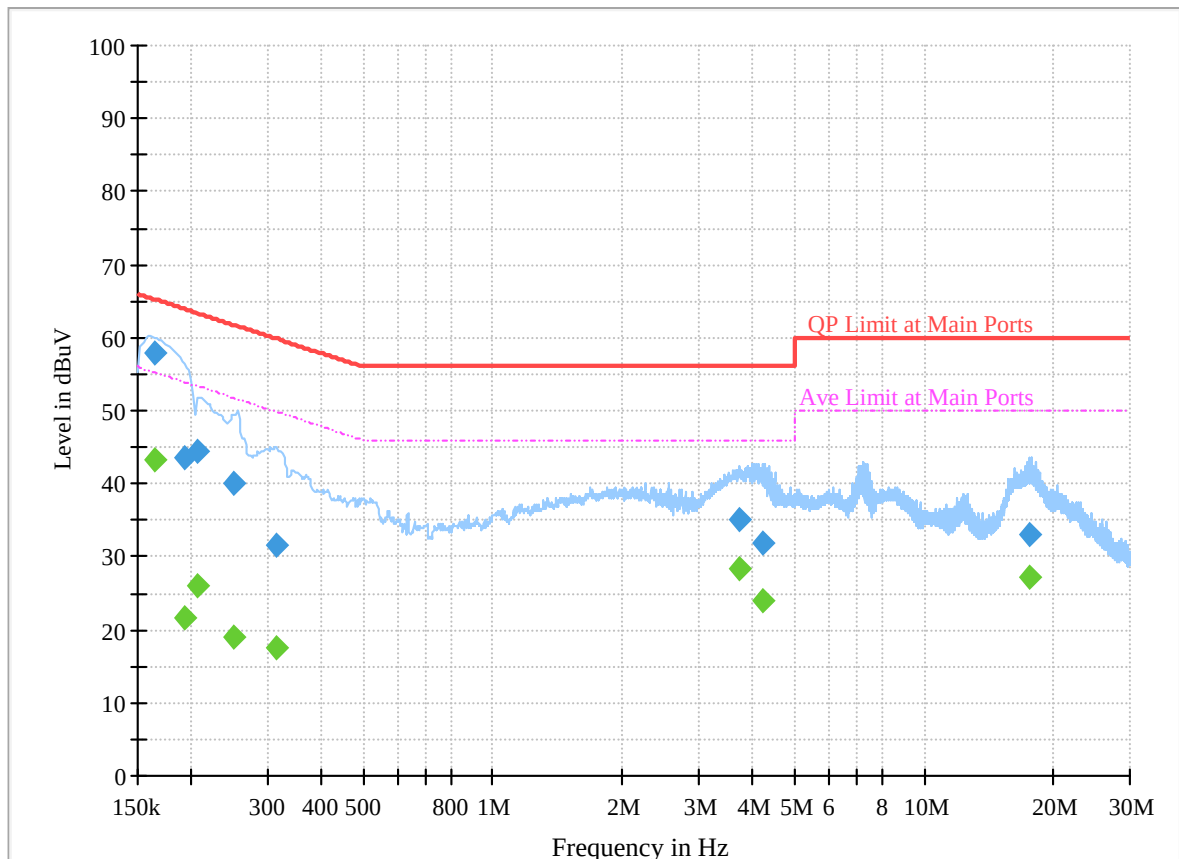

Final_Result

Frequency (MHz)	QuasiPeak (dBuV)	CAverage (dBuV)	Limit (dBuV)	Margin (dB)	Line	Filter	Corr. (dB)
0.164670	---	43.34	55.23	11.89	N	OFF	19.9
0.164670	57.82	---	65.23	7.41	N	OFF	19.9
0.192750	---	21.66	53.92	32.26	N	OFF	19.9
0.192750	43.46	---	63.92	20.46	N	OFF	19.9
0.206250	---	25.92	53.36	27.44	N	OFF	19.9
0.206250	44.43	---	63.36	18.93	N	OFF	19.9
0.249450	---	18.94	51.78	32.84	N	OFF	19.9
0.249450	40.02	---	61.78	21.76	N	OFF	19.9
0.314250	---	17.50	49.86	32.36	N	OFF	19.9
0.314250	31.65	---	59.86	28.21	N	OFF	19.9
3.728040	---	28.26	46.00	17.74	N	OFF	20.0
3.728040	35.05	---	56.00	20.95	N	OFF	20.0
4.236000	---	23.88	46.00	22.12	N	OFF	20.0
4.236000	31.95	---	56.00	24.05	N	OFF	20.0
17.508840	---	27.10	50.00	22.90	N	OFF	20.2
17.508840	33.05	---	60.00	26.95	N	OFF	20.2



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Jack Cheng, Ray Lung, and Sky Chang	Temperature :	18~26℃
		Relative Humidity :	50~70%

C1. Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	1	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	1	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	1	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-1	5.15-5.25	1	802.11ax HE20	36	5180	MCS0	Full RU	-
Mode 5	U-NII-1	5.15-5.25	1	802.11ax HE20	44	5220	MCS0	Full RU	-
Mode 6	U-NII-1	5.15-5.25	1	802.11ax HE20	48	5240	MCS0	Full RU	-
Mode 7	U-NII-1	5.15-5.25	1	802.11ax HE40	38	5190	MCS0	Full RU	-
Mode 8	U-NII-1	5.15-5.25	1	802.11ax HE40	46	5230	MCS0	Full RU	-
Mode 9	U-NII-1	5.15-5.25	1	802.11ax HE80	42	5210	MCS0	Full RU	-
Mode 10	U-NII-2A	5.25-5.35	1	802.11a	52	5260	6Mbps	-	-
Mode 11	U-NII-2A	5.25-5.35	1	802.11a	60	5300	6Mbps	-	-
Mode 12	U-NII-2A	5.25-5.35	1	802.11a	64	5320	6Mbps	-	-
Mode 13	U-NII-2A	5.25-5.35	1	802.11ax HE20	52	5260	MCS0	Full RU	-
Mode 14	U-NII-2A	5.25-5.35	1	802.11ax HE20	60	5300	MCS0	Full RU	-
Mode 15	U-NII-2A	5.25-5.35	1	802.11ax HE20	64	5320	MCS0	Full RU	-
Mode 16	U-NII-2A	5.25-5.35	1	802.11ax HE40	54	5270	MCS0	Full RU	-
Mode 17	U-NII-2A	5.25-5.35	1	802.11ax HE40	62	5310	MCS0	Full RU	-
Mode 18	U-NII-2A	5.25-5.35	1	802.11ax HE80	58	5290	MCS0	Full RU	-
Mode 19	U-NII-2C	5.47-5.725	1	802.11a	100	5500	6Mbps	-	-
Mode 20	U-NII-2C	5.47-5.725	1	802.11a	116	5580	6Mbps	-	-
Mode 21	U-NII-2C	5.47-5.725	1	802.11a	140	5700	6Mbps	-	-
Mode 22	U-NII-2C	5.47-5.725	1	802.11ax HE20	100	5500	MCS0	Full RU	-
Mode 23	U-NII-2C	5.47-5.725	1	802.11ax HE20	116	5580	MCS0	Full RU	-
Mode 24	U-NII-2C	5.47-5.725	1	802.11ax HE20	140	5700	MCS0	Full RU	-
Mode 25	U-NII-2C	5.47-5.725	1	802.11ax HE40	102	5510	MCS0	Full RU	-
Mode 26	U-NII-2C	5.47-5.725	1	802.11ax HE40	110	5550	MCS0	Full RU	-
Mode 27	U-NII-2C	5.47-5.725	1	802.11ax HE40	134	5670	MCS0	Full RU	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 28	U-NII-2C	5.47-5.725	1	802.11ax HE80	106	5530	MCS0	Full RU	-
Mode 29	U-NII-2C	5.47-5.725	1	802.11a	140	5700	6Mbps	-	SHF
Mode 30	U-NII-2C	5.47-5.725	1	802.11a	140	5700	6Mbps	-	LF





**C2. Summary of each worse mode**

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
1	802.11a	36	5146.34	41.90	54.00	-12.10	V	Avg.	Pass	-	Band Edge
	802.11a	36	15540.00	42.66	54.00	-11.34	H	Avg.	Pass	-	Harmonic
2	802.11a	44	5100.98	40.03	54.00	-13.97	V	Avg.	Pass	-	Band Edge
	802.11a	44	15660.00	42.72	54.00	-11.28	V	Avg.	Pass	-	Harmonic
3	802.11a	48	5075.60	39.94	54.00	-14.06	H	Avg.	Pass	-	Band Edge
	802.11a	48	15720.00	43.06	54.00	-10.94	V	Avg.	Pass	-	Harmonic
4	802.11ax HE20	36	5145.26	41.56	54.00	-12.44	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	36	15540.00	42.48	54.00	-11.52	V	Avg.	Pass	Full RU	Harmonic
5	802.11ax HE20	44	5064.46	40.26	54.00	-13.74	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	44	15660.00	42.53	54.00	-11.47	V	Avg.	Pass	Full RU	Harmonic
6	802.11ax HE20	48	5067.92	40.31	54.00	-13.69	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	48	15720.00	42.90	54.00	-11.10	H	Avg.	Pass	Full RU	Harmonic
7	802.11ax HE40	38	5149.91	44.60	54.00	-9.40	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	38	15570.00	42.69	54.00	-11.31	V	Avg.	Pass	Full RU	Harmonic
8	802.11ax HE40	46	5070.15	40.31	54.00	-13.69	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	46	15690.00	42.78	54.00	-11.22	V	Avg.	Pass	Full RU	Harmonic
9	802.11ax HE80	42	5144.69	46.80	54.00	-7.20	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE80	42	15630.00	43.18	54.00	-10.82	V	Avg.	Pass	Full RU	Harmonic
10	802.11a	52	5066.30	39.93	54.00	-14.07	H	Avg.	Pass	-	Band Edge
	802.11a	52	15780.00	43.03	54.00	-10.97	H	Avg.	Pass	-	Harmonic
11	802.11a	60	5045.00	40.12	54.00	-13.88	H	Avg.	Pass	-	Band Edge
	802.11a	60	15900.00	42.64	54.00	-11.36	H	Avg.	Pass	-	Harmonic
12	802.11a	64	5350.94	41.38	54.00	-12.62	V	Avg.	Pass	-	Band Edge
	802.11a	64	15960.00	42.68	54.00	-11.32	H	Avg.	Pass	-	Harmonic
13	802.11ax HE20	52	5088.40	40.22	54.00	-13.78	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	52	15780.00	42.87	54.00	-11.13	V	Avg.	Pass	Full RU	Harmonic
14	802.11ax HE20	60	5061.20	40.56	54.00	-13.44	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	60	15900.00	42.39	54.00	-11.61	H	Avg.	Pass	Full RU	Harmonic
15	802.11ax HE20	64	5352.62	43.41	54.00	-10.59	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	64	15960.00	42.47	54.00	-11.53	H	Avg.	Pass	Full RU	Harmonic
16	802.11ax HE40	54	5119.88	40.35	54.00	-13.65	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	54	15810.00	42.70	54.00	-11.30	V	Avg.	Pass	Full RU	Harmonic







Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	RU	Remark
17	802.11ax HE40	62	5350.95	47.37	54.00	-6.63	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	62	15930.00	42.46	54.00	-11.54	V	Avg.	Pass	Full RU	Harmonic
18	802.11ax HE80	58	5365.31	49.74	54.00	-4.26	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE80	58	15870.00	43.29	54.00	-10.71	H	Avg.	Pass	Full RU	Harmonic
19	802.11a	100	5456.50	39.82	54.00	-14.18	V	Avg.	Pass	-	Band Edge
	802.11a	100	11000.00	39.58	54.00	-14.42	V	Avg.	Pass	-	Harmonic
20	802.11a	116	5457.18	38.08	54.00	-15.92	H	Avg.	Pass	-	Band Edge
	802.11a	116	11160.00	39.79	54.00	-14.21	V	Avg.	Pass	-	Harmonic
21	802.11a	140	5725.94	64.23	68.20	-3.97	V	Peak	Pass	-	Band Edge
	802.11a	140	11400.00	40.45	54.00	-13.55	V	Avg.	Pass	-	Harmonic
22	802.11ax HE20	100	5458.60	41.93	54.00	-12.07	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	100	11000.00	39.93	54.00	-14.07	H	Avg.	Pass	Full RU	Harmonic
23	802.11ax HE20	116	5453.27	38.47	54.00	-15.53	H	Avg.	Pass	Full RU	Band Edge
	802.11ax HE20	116	11160.00	40.28	54.00	-13.72	H	Avg.	Pass	Full RU	Harmonic
24	802.11ax HE20	140	5726.52	61.00	68.20	-7.20	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE20	140	11400.00	40.79	54.00	-13.21	H	Avg.	Pass	Full RU	Harmonic
25	802.11ax HE40	102	5469.20	59.85	68.20	-8.35	H	Peak	Pass	Full RU	Band Edge
	802.11ax HE40	102	11020.00	39.63	54.00	-14.37	H	Avg.	Pass	Full RU	Harmonic
26	802.11ax HE40	110	5453.80	38.53	54.00	-15.47	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE40	110	11100.00	39.68	54.00	-14.32	H	Avg.	Pass	Full RU	Harmonic
27	802.11ax HE40	134	5730.80	58.19	68.20	-10.01	V	Peak	Pass	Full RU	Band Edge
	802.11ax HE40	134	11340.00	40.11	54.00	-13.89	V	Avg.	Pass	Full RU	Harmonic
28	802.11ax HE80	106	5449.72	42.75	54.00	-11.25	V	Avg.	Pass	Full RU	Band Edge
	802.11ax HE80	106	11060.00	40.36	54.00	-13.64	H	Avg.	Pass	Full RU	Harmonic
29	SHF	140	38871.33	40.44	54.00	-13.56	H	Avg.	Pass	-	SHF
30	LF	140	72.68	27.93	40	-12.07	V	QP	Pass	-	LF

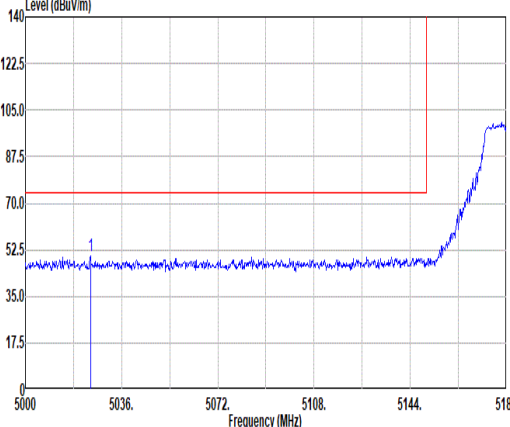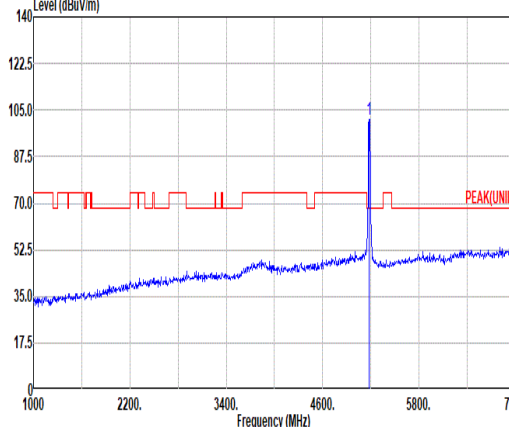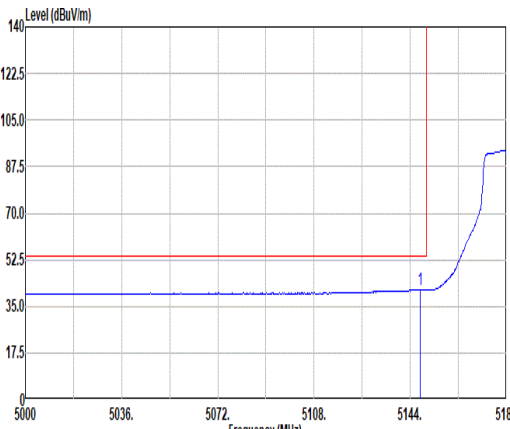
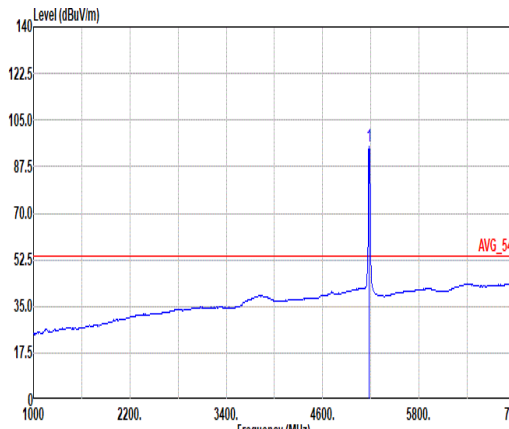


Mode	1																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto						Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5024.30</td><td>49.98</td><td>74.00</td><td>-24.02</td><td>39.04</td><td>32.65</td><td>12.30</td><td>34.01</td><td>0.00</td><td>120</td><td>153</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5024.30	49.98	74.00	-24.02	39.04	32.65	12.30	34.01	0.00	120	153	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>101.58</td><td>-----</td><td>-----</td><td>90.72</td><td>32.60</td><td>12.54</td><td>34.28</td><td>0.00</td><td>120</td><td>153</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	101.58	-----	-----	90.72	32.60	12.54	34.28	0.00	120	153
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5024.30	49.98	74.00	-24.02	39.04	32.65	12.30	34.01	0.00	120	153	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5180.00	101.58	-----	-----	90.72	32.60	12.54	34.28	0.00	120	153	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto						Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5147.70</td><td>41.29</td><td>54.00</td><td>-12.71</td><td>30.42</td><td>32.60</td><td>12.49</td><td>34.22</td><td>0.00</td><td>120</td><td>153</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5147.70	41.29	54.00	-12.71	30.42	32.60	12.49	34.22	0.00	120	153	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>95.05</td><td>-----</td><td>-----</td><td>84.19</td><td>32.60</td><td>12.53</td><td>34.27</td><td>0.00</td><td>120</td><td>153</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	95.05	-----	-----	84.19	32.60	12.53	34.27	0.00	120	153
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5147.70	41.29	54.00	-12.71	30.42	32.60	12.49	34.22	0.00	120	153	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1	5180.00	95.05	-----	-----	84.19	32.60	12.53	34.27	0.00	120	153	AVERAGE																																																																																							

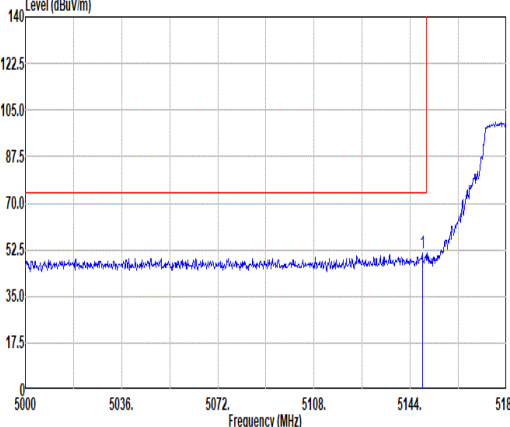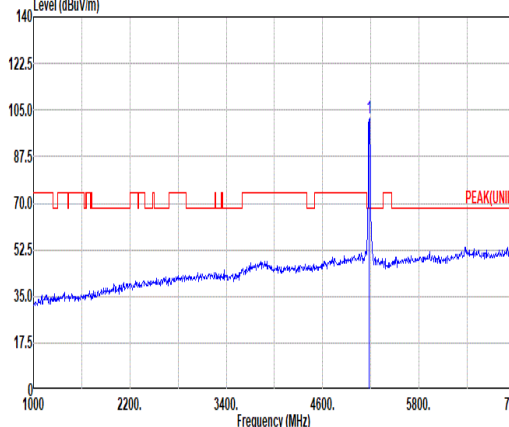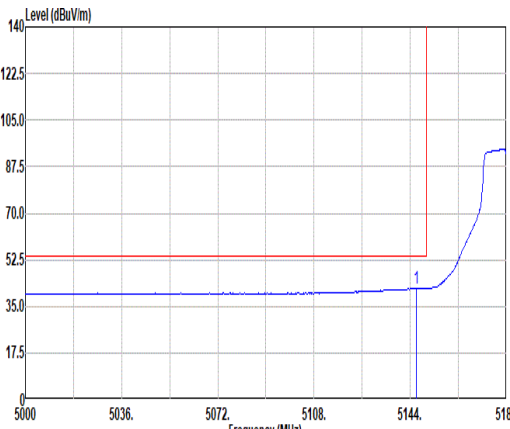
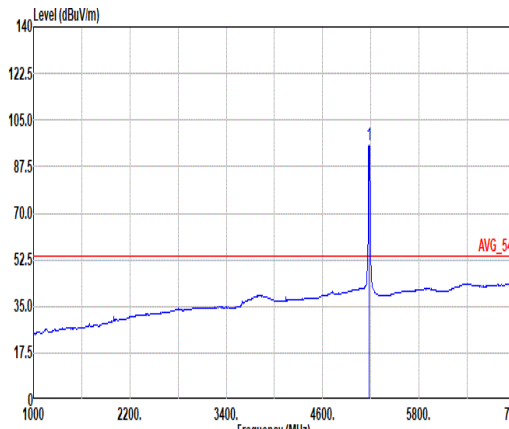


Mode	1																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.50</td><td>51.34</td><td>74.00</td><td>-22.66</td><td>40.48</td><td>32.60</td><td>12.49</td><td>34.23</td><td>0.00</td><td>362</td><td>222</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.50	51.34	74.00	-22.66	40.48	32.60	12.49	34.23	0.00	362	222	PEAK	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>101.99</td><td>-----</td><td>-----</td><td>91.13</td><td>32.60</td><td>12.55</td><td>34.29</td><td>0.00</td><td>362</td><td>222</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	101.99	-----	-----	91.13	32.60	12.55	34.29	0.00	362	222
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5148.50	51.34	74.00	-22.66	40.48	32.60	12.49	34.23	0.00	362	222	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	101.99	-----	-----	91.13	32.60	12.55	34.29	0.00	362	222	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5146.34</td><td>41.90</td><td>54.00</td><td>-12.10</td><td>31.03</td><td>32.60</td><td>12.49</td><td>34.22</td><td>0.00</td><td>362</td><td>222</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5146.34	41.90	54.00	-12.10	31.03	32.60	12.49	34.22	0.00	362	222	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>95.43</td><td>-----</td><td>-----</td><td>84.57</td><td>32.60</td><td>12.53</td><td>34.27</td><td>0.00</td><td>362</td><td>222</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	95.43	-----	-----	84.57	32.60	12.53	34.27	0.00	362	222
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5146.34	41.90	54.00	-12.10	31.03	32.60	12.49	34.22	0.00	362	222	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	95.43	-----	-----	84.57	32.60	12.53	34.27	0.00	362	222	AVERAGE																																																																																							



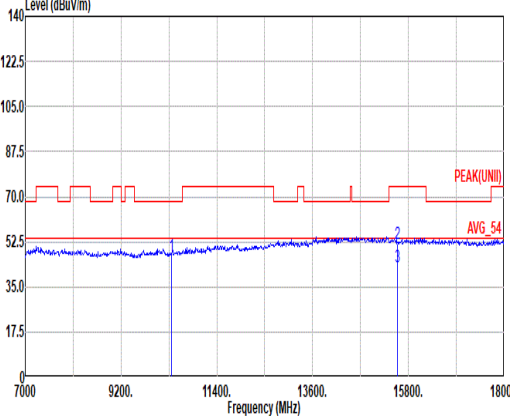
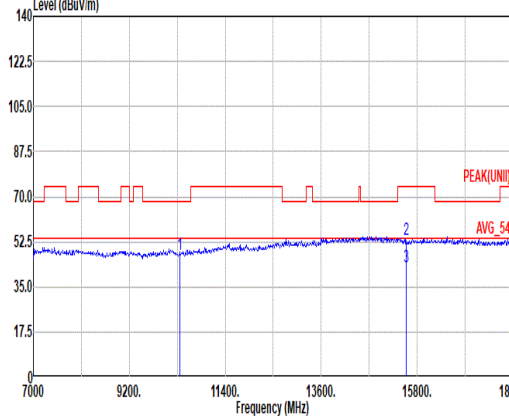


Mode	1																																																																																	
	Harmonic																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal						Vertical																																																																											
Peak Avg																																																																																		
	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL																																																																																	
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>47.24</td><td>68.20</td><td>-20.96</td><td>31.03</td><td>37.38</td><td>18.10</td><td>39.72</td><td>0.45</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15540.00</td><td>51.66</td><td>74.00</td><td>-22.34</td><td>33.84</td><td>40.54</td><td>22.40</td><td>45.55</td><td>0.43</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15540.00</td><td>42.66</td><td>54.00</td><td>-11.34</td><td>24.84</td><td>40.54</td><td>22.40</td><td>45.55</td><td>0.43</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	47.24	68.20	-20.96	31.03	37.38	18.10	39.72	0.45	--	--	PEAK	2	15540.00	51.66	74.00	-22.34	33.84	40.54	22.40	45.55	0.43	--	--	PEAK	3	15540.00	42.66	54.00	-11.34	24.84	40.54	22.40	45.55	0.43	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	10360.00	47.24	68.20	-20.96	31.03	37.38	18.10	39.72	0.45	--	--	PEAK																																																																						
2	15540.00	51.66	74.00	-22.34	33.84	40.54	22.40	45.55	0.43	--	--	PEAK																																																																						
3	15540.00	42.66	54.00	-11.34	24.84	40.54	22.40	45.55	0.43	--	--	AVERAGE																																																																						
Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL																																																																																		
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>47.64</td><td>68.20</td><td>-20.56</td><td>31.43</td><td>37.38</td><td>18.10</td><td>39.72</td><td>0.45</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15540.00</td><td>53.10</td><td>74.00</td><td>-20.90</td><td>35.28</td><td>40.54</td><td>22.40</td><td>45.55</td><td>0.43</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15540.00</td><td>42.64</td><td>54.00</td><td>-11.36</td><td>24.82</td><td>40.54</td><td>22.40</td><td>45.55</td><td>0.43</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10360.00	47.64	68.20	-20.56	31.43	37.38	18.10	39.72	0.45	--	--	PEAK	2	15540.00	53.10	74.00	-20.90	35.28	40.54	22.40	45.55	0.43	--	--	PEAK	3	15540.00	42.64	54.00	-11.36	24.82	40.54	22.40	45.55	0.43	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																							
1	10360.00	47.64	68.20	-20.56	31.43	37.38	18.10	39.72	0.45	--	--	PEAK																																																																						
2	15540.00	53.10	74.00	-20.90	35.28	40.54	22.40	45.55	0.43	--	--	PEAK																																																																						
3	15540.00	42.64	54.00	-11.36	24.82	40.54	22.40	45.55	0.43	--	--	AVERAGE																																																																						

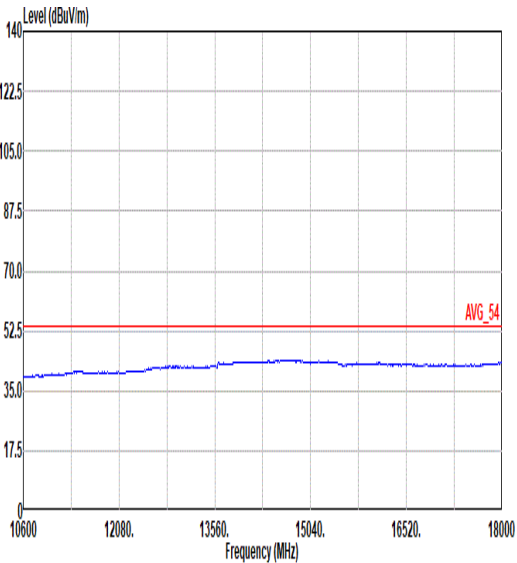
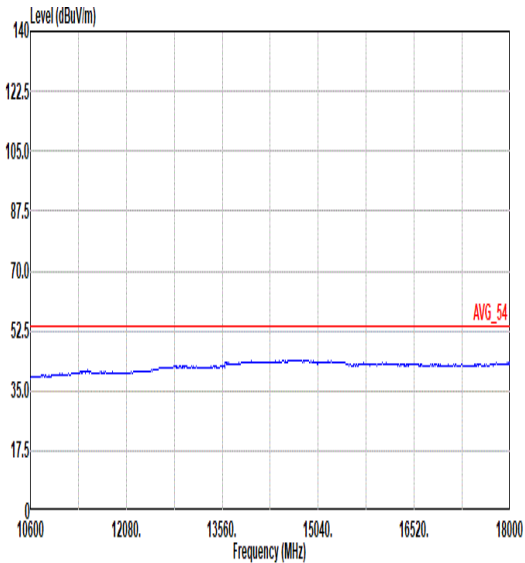


Mode	1	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL

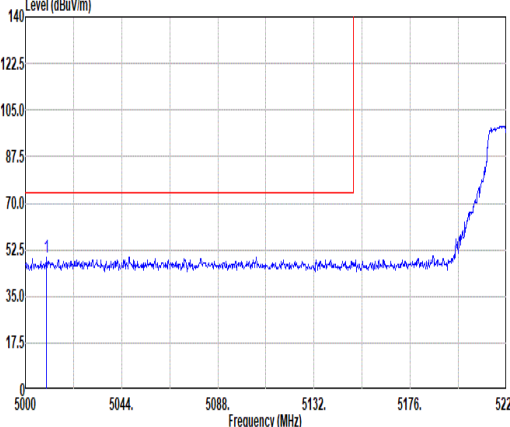
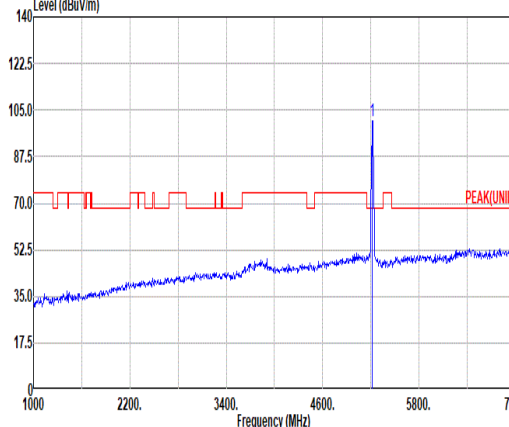
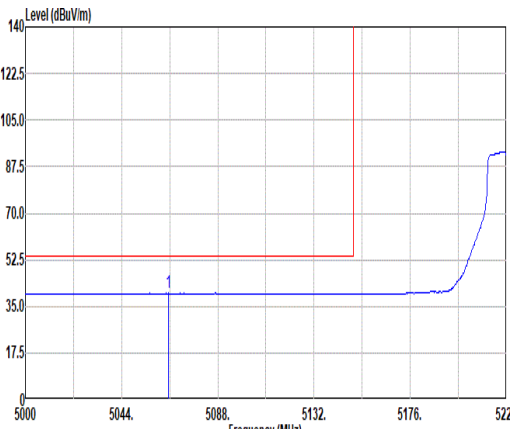
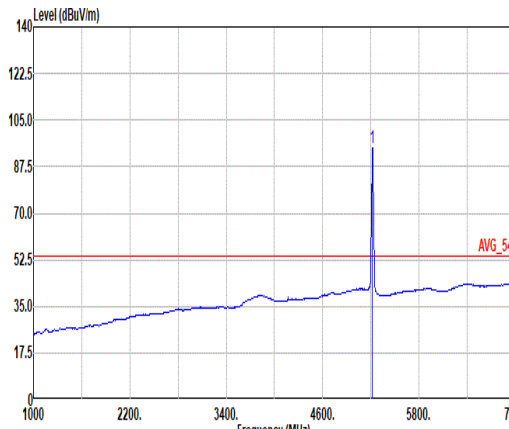


Mode	2																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5009.68</td><td>49.89</td><td>74.00</td><td>-24.11</td><td>38.93</td><td>32.68</td><td>12.27</td><td>33.99</td><td>0.00</td><td>100</td><td>144</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5009.68	49.89	74.00	-24.11	38.93	32.68	12.27	33.99	0.00	100	144	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>101.06</td><td>-----</td><td>-----</td><td>90.20</td><td>32.60</td><td>12.60</td><td>34.34</td><td>0.00</td><td>100</td><td>144</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	101.06	-----	-----	90.20	32.60	12.60	34.34	0.00	100	144
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5009.68	49.89	74.00	-24.11	38.93	32.68	12.27	33.99	0.00	100	144	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	101.06	-----	-----	90.20	32.60	12.60	34.34	0.00	100	144	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto						Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5065.56</td><td>39.94</td><td>54.00</td><td>-14.06</td><td>29.06</td><td>32.60</td><td>12.36</td><td>34.00</td><td>0.00</td><td>100</td><td>144</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5065.56	39.94	54.00	-14.06	29.06	32.60	12.36	34.00	0.00	100	144	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5220.00</td><td>94.50</td><td>-----</td><td>-----</td><td>83.64</td><td>32.60</td><td>12.60</td><td>34.34</td><td>0.00</td><td>100</td><td>144</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5220.00	94.50	-----	-----	83.64	32.60	12.60	34.34	0.00	100	144
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5065.56	39.94	54.00	-14.06	29.06	32.60	12.36	34.00	0.00	100	144	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5220.00	94.50	-----	-----	83.64	32.60	12.60	34.34	0.00	100	144	AVERAGE																																																																																							

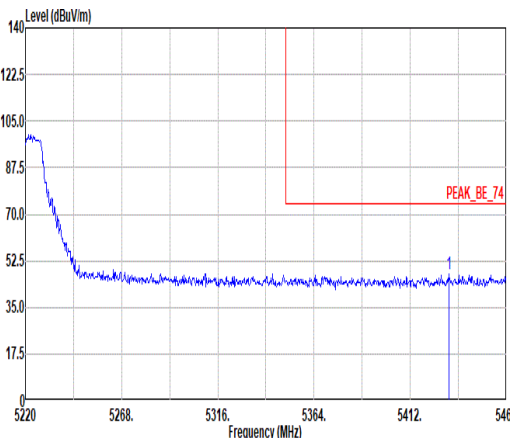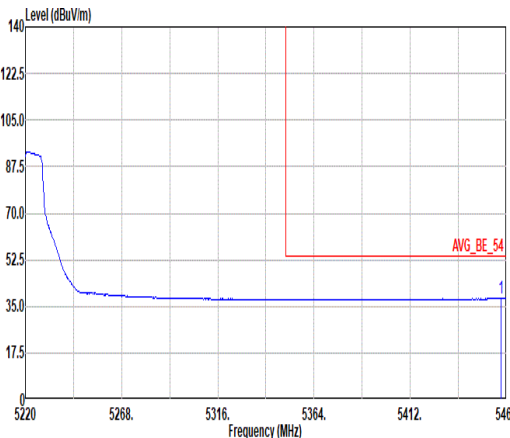

Mode	2																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																							
ANT	1																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5431.20</td><td>47.58</td><td>74.00</td><td>-26.42</td><td>36.94</td><td>32.46</td><td>12.89</td><td>34.71</td><td>0.00</td><td>100</td><td>144</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5431.20	47.58	74.00	-26.42	36.94	32.46	12.89	34.71	0.00	100	144	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5431.20	47.58	74.00	-26.42	36.94	32.46	12.89	34.71	0.00	100	144	PEAK																																												
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.36</td><td>38.07</td><td>54.00</td><td>-15.93</td><td>27.38</td><td>32.53</td><td>12.92</td><td>34.76</td><td>0.00</td><td>100</td><td>144</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.36	38.07	54.00	-15.93	27.38	32.53	12.92	34.76	0.00	100	144	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5457.36	38.07	54.00	-15.93	27.38	32.53	12.92	34.76	0.00	100	144	AVERAGE																																												

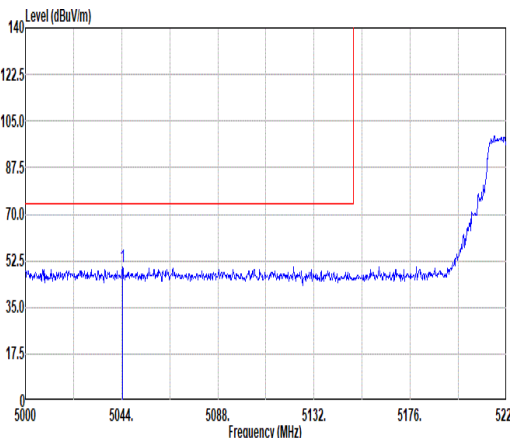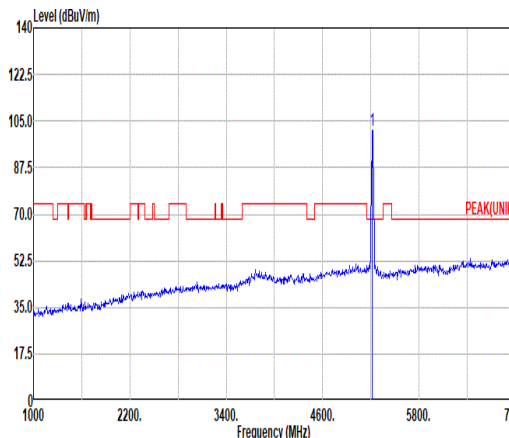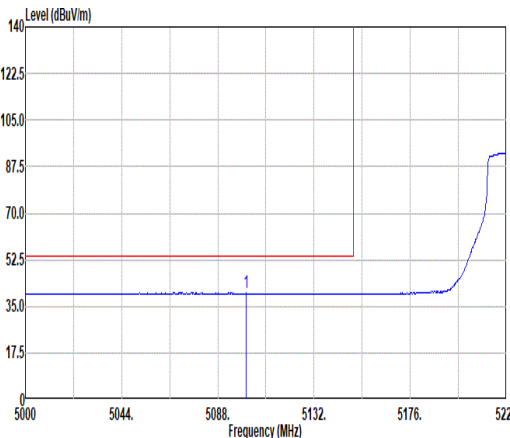
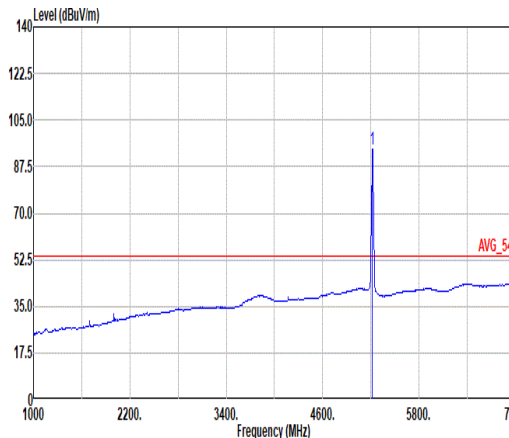


Mode	2																																																																																											
	Band Edge - L																																																																																											
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																											
ANT	1																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 5044.44</td><td>50.37</td><td>74.00</td><td>-23.63</td><td>39.48</td><td>32.61</td><td>12.33</td><td>34.05</td><td>0.00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>372 205 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5044.44	50.37	74.00	-23.63	39.48	32.61	12.33	34.05	0.00									372 205 PEAK	 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 5220.00</td><td>101.41</td><td>-----</td><td>-----</td><td>90.55</td><td>32.60</td><td>12.60</td><td>34.34</td><td>0.00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>372 205 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5220.00	101.41	-----	-----	90.55	32.60	12.60	34.34	0.00									372 205 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 5044.44	50.37	74.00	-23.63	39.48	32.61	12.33	34.05	0.00																																																																																				
								372 205 PEAK																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 5220.00	101.41	-----	-----	90.55	32.60	12.60	34.34	0.00																																																																																				
								372 205 PEAK																																																																																				
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 5100.90</td><td>40.03</td><td>54.00</td><td>-13.97</td><td>29.15</td><td>32.60</td><td>12.42</td><td>34.14</td><td>0.00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>372 205 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5100.90	40.03	54.00	-13.97	29.15	32.60	12.42	34.14	0.00									372 205 AVERAGE	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 5220.00</td><td>94.07</td><td>-----</td><td>-----</td><td>83.21</td><td>32.60</td><td>12.60</td><td>34.34</td><td>0.00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>372 205 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5220.00	94.07	-----	-----	83.21	32.60	12.60	34.34	0.00									372 205 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 5100.90	40.03	54.00	-13.97	29.15	32.60	12.42	34.14	0.00																																																																																				
								372 205 AVERAGE																																																																																				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																				
1 5220.00	94.07	-----	-----	83.21	32.60	12.60	34.34	0.00																																																																																				
								372 205 AVERAGE																																																																																				





Mode	2																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																							
ANT	1																																																							
Pol.	Vertical						Fundamental																																																	
Peak	Level (dBuV/m) Frequency (MHz) PEAK_BE_74 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5456.40</td><td>47.74</td><td>74.00</td><td>-26.26</td><td>37.05</td><td>32.53</td><td>12.92</td><td>34.76</td><td>0.00</td><td>372</td><td>205</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5456.40	47.74	74.00	-26.26	37.05	32.53	12.92	34.76	0.00	372	205	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5456.40	47.74	74.00	-26.26	37.05	32.53	12.92	34.76	0.00	372	205	PEAK																																												
Avg	Level (dBuV/m) Frequency (MHz) AVG_BE_54 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5455.20</td><td>38.04</td><td>54.00</td><td>-15.96</td><td>27.35</td><td>32.52</td><td>12.92</td><td>34.75</td><td>0.00</td><td>372</td><td>205</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5455.20	38.04	54.00	-15.96	27.35	32.52	12.92	34.75	0.00	372	205	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5455.20	38.04	54.00	-15.96	27.35	32.52	12.92	34.75	0.00	372	205	AVERAGE																																												



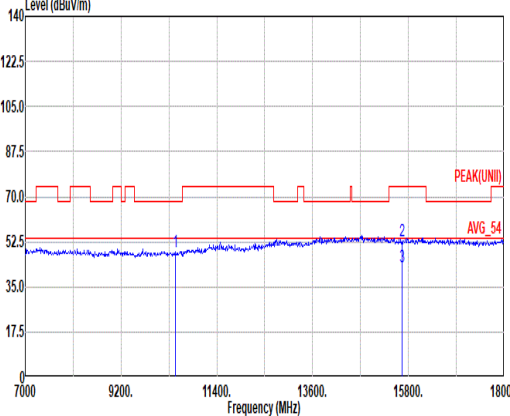
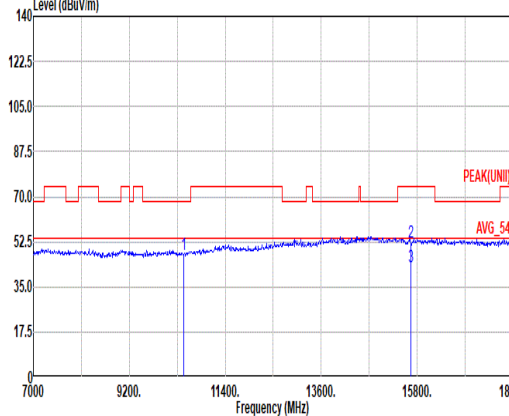


Mode	2																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																																																							
ANT	1																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10440.00</td><td>48.55</td><td>68.20</td><td>-19.65</td><td>32.63</td><td>37.14</td><td>18.17</td><td>39.84</td><td>0.45</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15668.00</td><td>52.89</td><td>74.00</td><td>-21.11</td><td>35.25</td><td>40.46</td><td>22.50</td><td>45.75</td><td>0.43</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15668.00</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>25.04</td><td>40.46</td><td>22.50</td><td>45.75</td><td>0.43</td><td>--</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	48.55	68.20	-19.65	32.63	37.14	18.17	39.84	0.45	--	PEAK	2	15668.00	52.89	74.00	-21.11	35.25	40.46	22.50	45.75	0.43	--	PEAK	3	15668.00	42.68	54.00	-11.32	25.04	40.46	22.50	45.75	0.43	--	AVERAGE	 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>10440.00</td><td>47.66</td><td>68.20</td><td>-20.54</td><td>31.74</td><td>37.14</td><td>18.17</td><td>39.84</td><td>0.45</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15668.00</td><td>52.18</td><td>74.00</td><td>-21.82</td><td>34.54</td><td>40.46</td><td>22.50</td><td>45.75</td><td>0.43</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15668.00</td><td>42.72</td><td>54.00</td><td>-11.28</td><td>25.08</td><td>40.46</td><td>22.50</td><td>45.75</td><td>0.43</td><td>--</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	47.66	68.20	-20.54	31.74	37.14	18.17	39.84	0.45	--	PEAK	2	15668.00	52.18	74.00	-21.82	34.54	40.46	22.50	45.75	0.43	--	PEAK	3	15668.00	42.72	54.00	-11.28	25.08	40.46	22.50	45.75	0.43	--	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	10440.00	48.55	68.20	-19.65	32.63	37.14	18.17	39.84	0.45	--	PEAK																																																																																																																													
2	15668.00	52.89	74.00	-21.11	35.25	40.46	22.50	45.75	0.43	--	PEAK																																																																																																																													
3	15668.00	42.68	54.00	-11.32	25.04	40.46	22.50	45.75	0.43	--	AVERAGE																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																														
1	10440.00	47.66	68.20	-20.54	31.74	37.14	18.17	39.84	0.45	--	PEAK																																																																																																																													
2	15668.00	52.18	74.00	-21.82	34.54	40.46	22.50	45.75	0.43	--	PEAK																																																																																																																													
3	15668.00	42.72	54.00	-11.28	25.08	40.46	22.50	45.75	0.43	--	AVERAGE																																																																																																																													

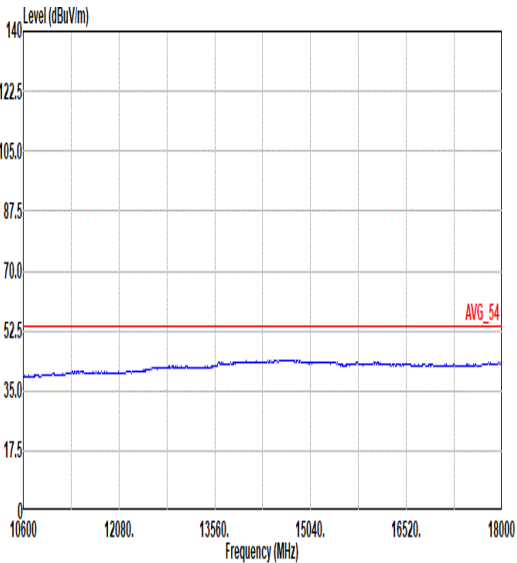
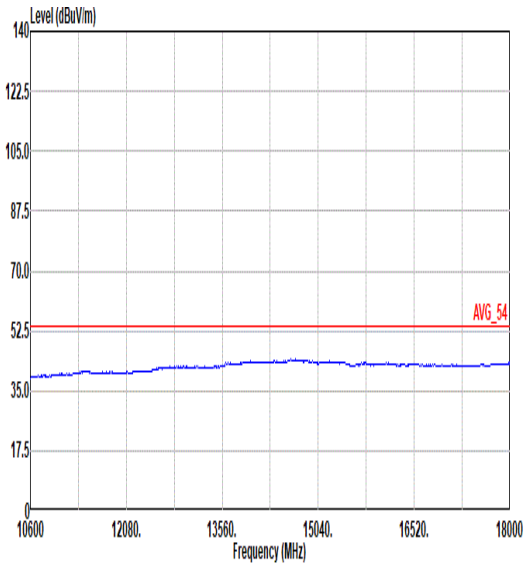


Mode	2	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL

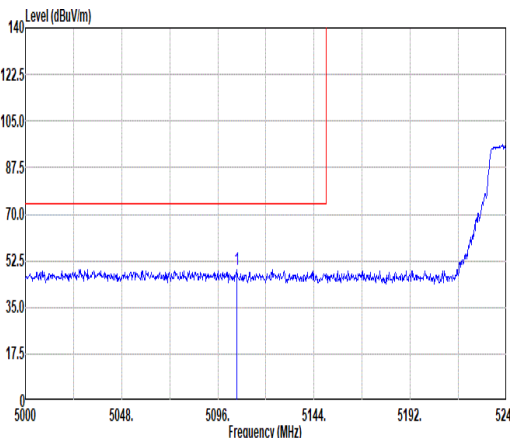
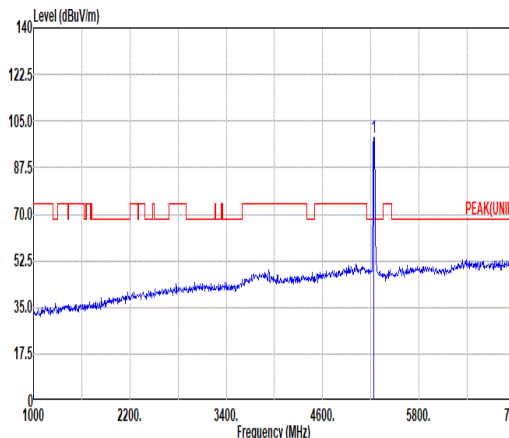
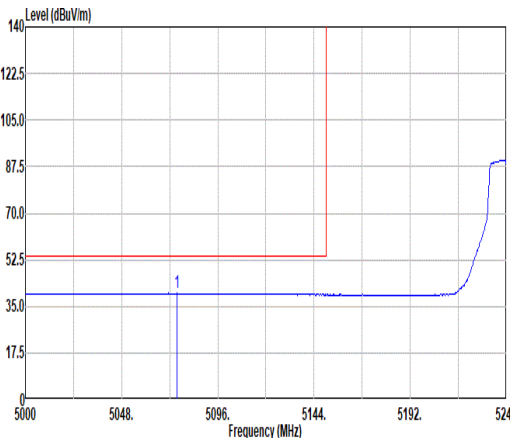
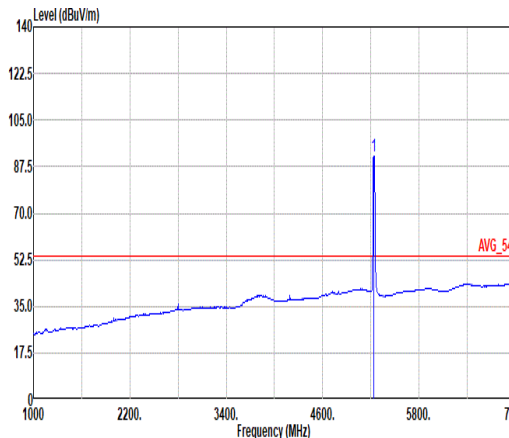


Mode	3																																																																																																
	Band Edge - L																																																																																																
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																
ANT	1																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5105.60</td><td>49.31</td><td>74.00</td><td>-24.69</td><td>38.44</td><td>32.60</td><td>12.42</td><td>34.15</td><td>0.00</td><td>100</td><td>70 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5105.60	49.31	74.00	-24.69	38.44	32.60	12.42	34.15	0.00	100	70 PEAK	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>98.91</td><td>-----</td><td>-----</td><td>88.07</td><td>32.60</td><td>12.63</td><td>34.39</td><td>0.00</td><td>100</td><td>70 PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	98.91	-----	-----	88.07	32.60	12.63	34.39	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5105.60	49.31	74.00	-24.69	38.44	32.60	12.42	34.15	0.00	100	70 PEAK																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5240.00	98.91	-----	-----	88.07	32.60	12.63	34.39	0.00	100	70 PEAK																																																																																						
Avg																																																																																																	
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5075.60</td><td>39.94</td><td>54.00</td><td>-14.06</td><td>29.06</td><td>32.60</td><td>12.38</td><td>34.10</td><td>0.00</td><td>100</td><td>70 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5075.60	39.94	54.00	-14.06	29.06	32.60	12.38	34.10	0.00	100	70 AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>91.40</td><td>-----</td><td>-----</td><td>80.56</td><td>32.60</td><td>12.62</td><td>34.38</td><td>0.00</td><td>100</td><td>70 AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	91.40	-----	-----	80.56	32.60	12.62	34.38	0.00	100
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5075.60	39.94	54.00	-14.06	29.06	32.60	12.38	34.10	0.00	100	70 AVERAGE																																																																																						
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																							
1	5240.00	91.40	-----	-----	80.56	32.60	12.62	34.38	0.00	100	70 AVERAGE																																																																																						

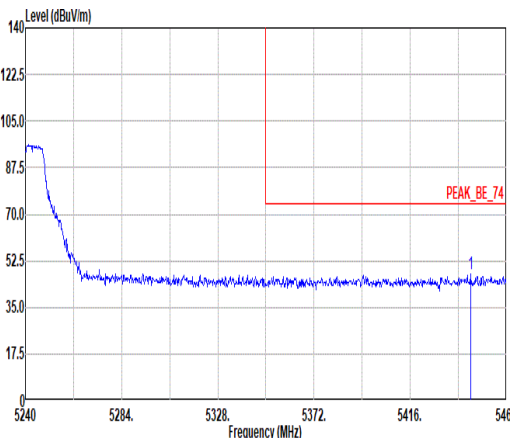
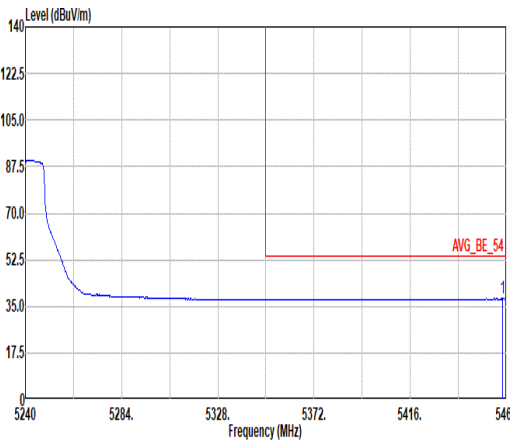


Mode	3																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																							
ANT	1																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5443.50</td><td>47.68</td><td>74.00</td><td>-26.32</td><td>37.02</td><td>32.49</td><td>12.90</td><td>34.73</td><td>0.00</td><td>100</td><td>70</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5443.50	47.68	74.00	-26.32	37.02	32.49	12.90	34.73	0.00	100	70	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5443.50	47.68	74.00	-26.32	37.02	32.49	12.90	34.73	0.00	100	70	PEAK																																												
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5450.24</td><td>37.92</td><td>54.00</td><td>-16.08</td><td>27.23</td><td>32.53</td><td>12.92</td><td>34.76</td><td>0.00</td><td>100</td><td>70</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5450.24	37.92	54.00	-16.08	27.23	32.53	12.92	34.76	0.00	100	70	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5450.24	37.92	54.00	-16.08	27.23	32.53	12.92	34.76	0.00	100	70	AVERAGE																																												

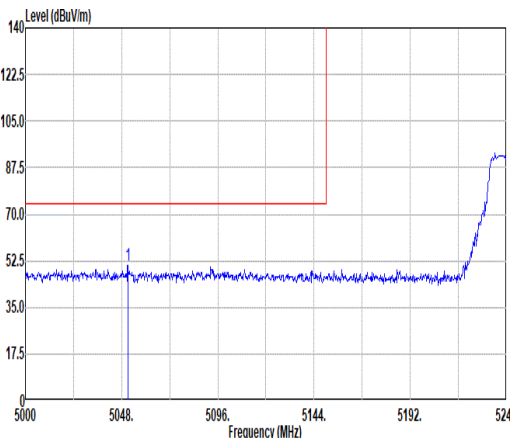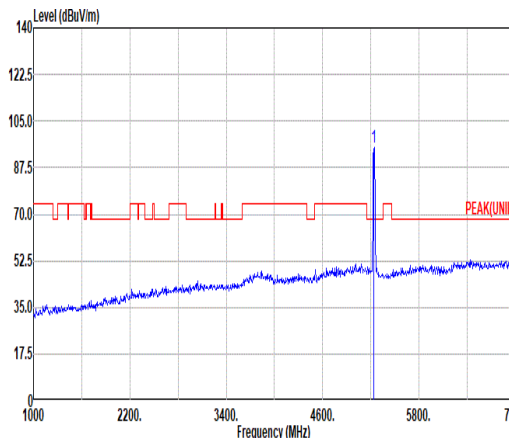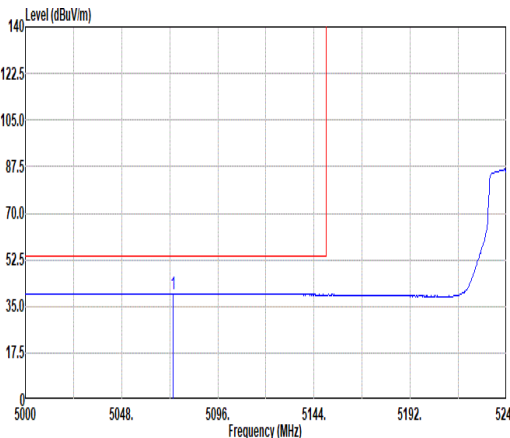
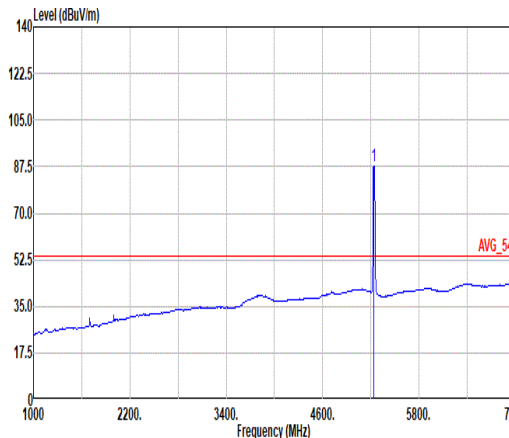


Mode	3																																																																															
	Band Edge - L																																																																															
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																															
ANT	1																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5051.12</td><td>50.69</td><td>74.00</td><td>-23.31</td><td>39.81</td><td>32.60</td><td>12.34</td><td>34.06</td><td>0.00</td><td>300 165 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5051.12	50.69	74.00	-23.31	39.81	32.60	12.34	34.06	0.00	300 165 PEAK	 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5240.00</td><td>95.12</td><td>-----</td><td>-----</td><td>84.28</td><td>32.60</td><td>12.63</td><td>34.39</td><td>0.00</td><td>300 165 PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5240.00	95.12	-----	-----	84.28	32.60	12.63	34.39	0.00	300 165 PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																							
1 5051.12	50.69	74.00	-23.31	39.81	32.60	12.34	34.06	0.00	300 165 PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																							
1 5240.00	95.12	-----	-----	84.28	32.60	12.63	34.39	0.00	300 165 PEAK																																																																							
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5073.60</td><td>39.88</td><td>54.00</td><td>-14.12</td><td>29.01</td><td>32.60</td><td>12.37</td><td>34.10</td><td>0.00</td><td>300 165 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5073.60	39.88	54.00	-14.12	29.01	32.60	12.37	34.10	0.00	300 165 AVERAGE	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 5240.00</td><td>87.92</td><td>-----</td><td>-----</td><td>77.00</td><td>32.60</td><td>12.63</td><td>34.39</td><td>0.00</td><td>300 165 AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5240.00	87.92	-----	-----	77.00	32.60	12.63	34.39	0.00	300 165 AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																							
1 5073.60	39.88	54.00	-14.12	29.01	32.60	12.37	34.10	0.00	300 165 AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																							
1 5240.00	87.92	-----	-----	77.00	32.60	12.63	34.39	0.00	300 165 AVERAGE																																																																							

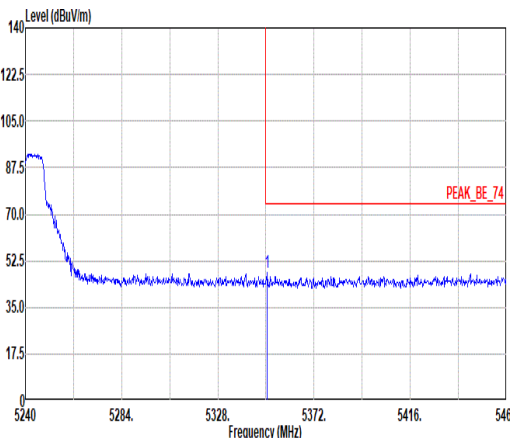
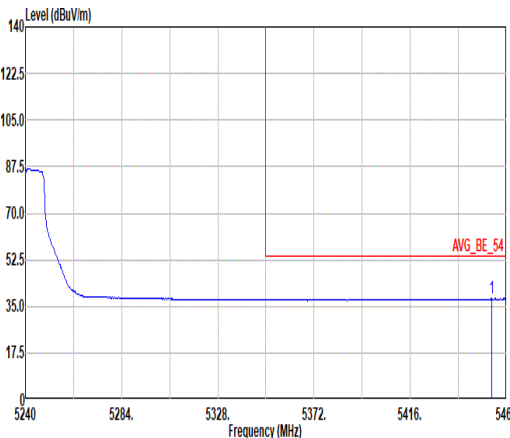


Mode	3																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																							
ANT	1																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.66</td><td>47.87</td><td>74.00</td><td>-26.13</td><td>37.25</td><td>32.40</td><td>12.79</td><td>34.57</td><td>0.00</td><td>300</td><td>165</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.66	47.87	74.00	-26.13	37.25	32.40	12.79	34.57	0.00	300	165	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5350.66	47.87	74.00	-26.13	37.25	32.40	12.79	34.57	0.00	300	165	PEAK																																												
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5453.18</td><td>37.86</td><td>54.00</td><td>-16.14</td><td>27.19</td><td>32.51</td><td>12.91</td><td>34.75</td><td>0.00</td><td>300</td><td>165</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5453.18	37.86	54.00	-16.14	27.19	32.51	12.91	34.75	0.00	300	165	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5453.18	37.86	54.00	-16.14	27.19	32.51	12.91	34.75	0.00	300	165	AVERAGE																																												



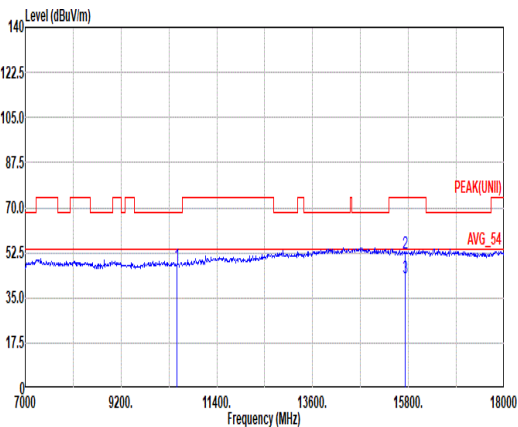
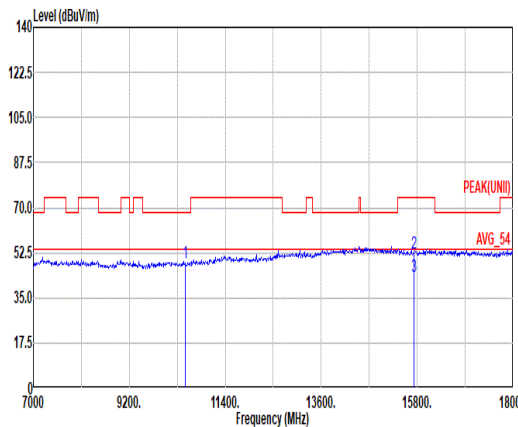


Mode	3																																																																																																																																													
	Harmonic																																																																																																																																													
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																																																													
ANT	1																																																																																																																																													
Pol.	Horizontal	Vertical																																																																																																																																												
Peak Avg	 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>47.65</td><td>68.20</td><td>-20.55</td><td>31.00</td><td>37.10</td><td>18.20</td><td>39.90</td><td>0.45</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15720.00</td><td>52.07</td><td>74.00</td><td>-21.93</td><td>34.14</td><td>40.78</td><td>22.56</td><td>45.85</td><td>0.44</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15720.00</td><td>42.94</td><td>54.00</td><td>-11.06</td><td>25.01</td><td>40.78</td><td>22.56</td><td>45.85</td><td>0.44</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	47.65	68.20	-20.55	31.00	37.10	18.20	39.90	0.45	--	--	PEAK	2	15720.00	52.07	74.00	-21.93	34.14	40.78	22.56	45.85	0.44	--	--	PEAK	3	15720.00	42.94	54.00	-11.06	25.01	40.78	22.56	45.85	0.44	--	--	AVERAGE	 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>48.61</td><td>68.20</td><td>-19.59</td><td>32.76</td><td>37.10</td><td>18.20</td><td>39.90</td><td>0.45</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15720.00</td><td>52.11</td><td>74.00</td><td>-21.89</td><td>34.18</td><td>40.78</td><td>22.56</td><td>45.85</td><td>0.44</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15720.00</td><td>43.06</td><td>54.00</td><td>-10.94</td><td>25.13</td><td>40.78</td><td>22.56</td><td>45.85</td><td>0.44</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	48.61	68.20	-19.59	32.76	37.10	18.20	39.90	0.45	--	--	PEAK	2	15720.00	52.11	74.00	-21.89	34.18	40.78	22.56	45.85	0.44	--	--	PEAK	3	15720.00	43.06	54.00	-10.94	25.13	40.78	22.56	45.85	0.44	--	--	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	10480.00	47.65	68.20	-20.55	31.00	37.10	18.20	39.90	0.45	--	--	PEAK																																																																																																																																		
2	15720.00	52.07	74.00	-21.93	34.14	40.78	22.56	45.85	0.44	--	--	PEAK																																																																																																																																		
3	15720.00	42.94	54.00	-11.06	25.01	40.78	22.56	45.85	0.44	--	--	AVERAGE																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	10480.00	48.61	68.20	-19.59	32.76	37.10	18.20	39.90	0.45	--	--	PEAK																																																																																																																																		
2	15720.00	52.11	74.00	-21.89	34.18	40.78	22.56	45.85	0.44	--	--	PEAK																																																																																																																																		
3	15720.00	43.06	54.00	-10.94	25.13	40.78	22.56	45.85	0.44	--	--	AVERAGE																																																																																																																																		



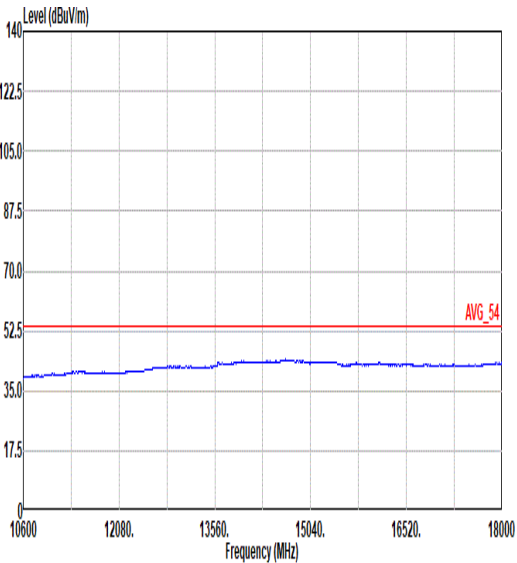
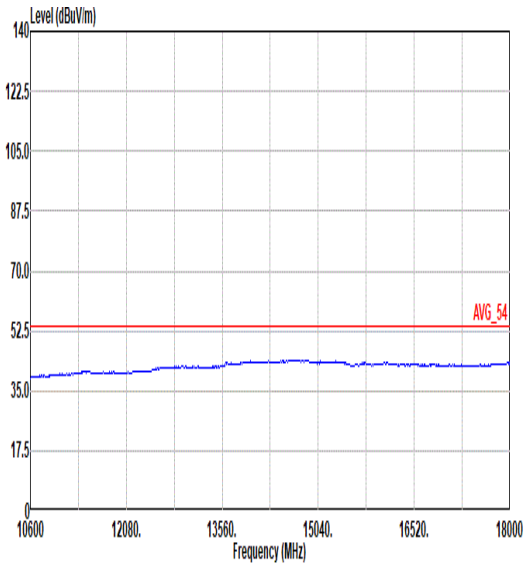


Mode	3	
	Harmonic	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL

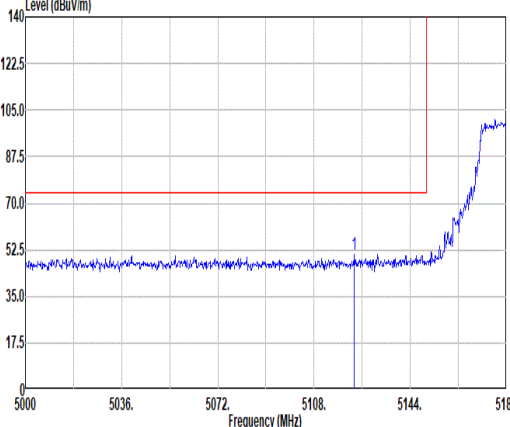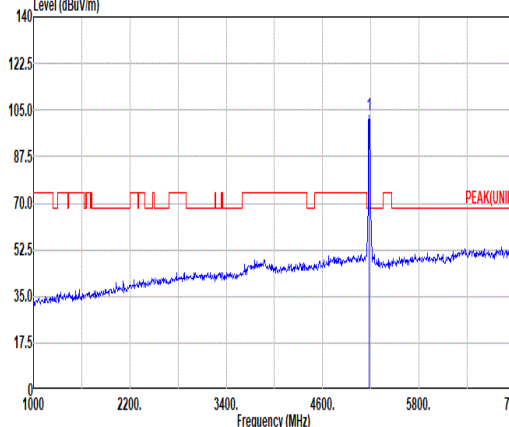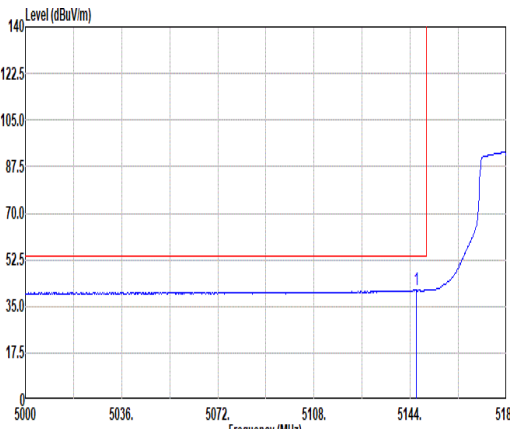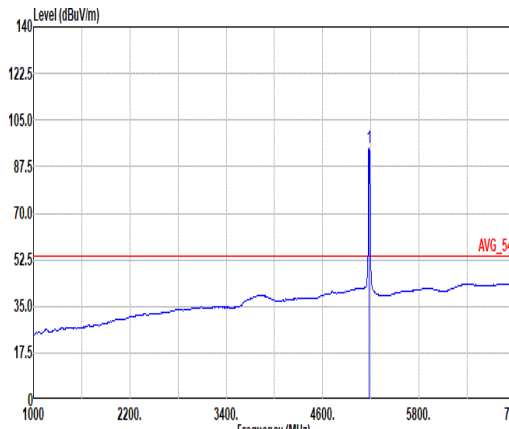

Mode	4																																																																																																																															
	Band Edge																																																																																																																															
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																																															
ANT	1																																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																																														
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 5123.12</td><td>50.61</td><td>74.00</td><td>-23.39</td><td>39.74</td><td>32.60</td><td>12.45</td><td>34.18</td><td>0.00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>126</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>154</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5123.12	50.61	74.00	-23.39	39.74	32.60	12.45	34.18	0.00									126									154									PEAK	 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 5180.00</td><td>102.99</td><td>-----</td><td>-----</td><td>92.13</td><td>32.60</td><td>12.53</td><td>34.27</td><td>0.00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>126</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>154</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5180.00	102.99	-----	-----	92.13	32.60	12.53	34.27	0.00									126									154									PEAK
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																								
1 5123.12	50.61	74.00	-23.39	39.74	32.60	12.45	34.18	0.00																																																																																																																								
								126																																																																																																																								
								154																																																																																																																								
								PEAK																																																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																								
1 5180.00	102.99	-----	-----	92.13	32.60	12.53	34.27	0.00																																																																																																																								
								126																																																																																																																								
								154																																																																																																																								
								PEAK																																																																																																																								
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.270kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 5146.16</td><td>41.16</td><td>54.00</td><td>-12.84</td><td>30.29</td><td>32.60</td><td>12.49</td><td>34.22</td><td>0.00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>126</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>154</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5146.16	41.16	54.00	-12.84	30.29	32.60	12.49	34.22	0.00									126									154									AVERAGE	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.270kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr><tr><td>1 5180.00</td><td>94.44</td><td>-----</td><td>-----</td><td>83.58</td><td>32.60</td><td>12.53</td><td>34.27</td><td>0.00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>126</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>154</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5180.00	94.44	-----	-----	83.58	32.60	12.53	34.27	0.00									126									154									AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																								
1 5146.16	41.16	54.00	-12.84	30.29	32.60	12.49	34.22	0.00																																																																																																																								
								126																																																																																																																								
								154																																																																																																																								
								AVERAGE																																																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																								
1 5180.00	94.44	-----	-----	83.58	32.60	12.53	34.27	0.00																																																																																																																								
								126																																																																																																																								
								154																																																																																																																								
								AVERAGE																																																																																																																								

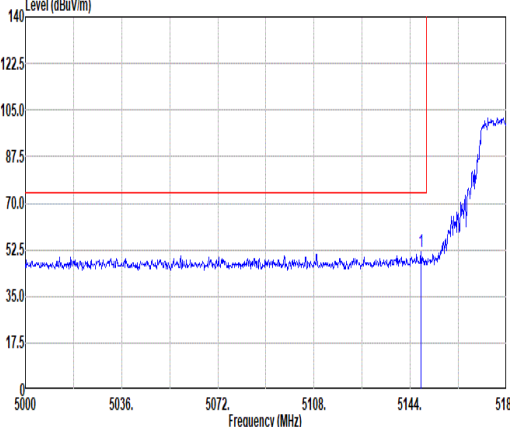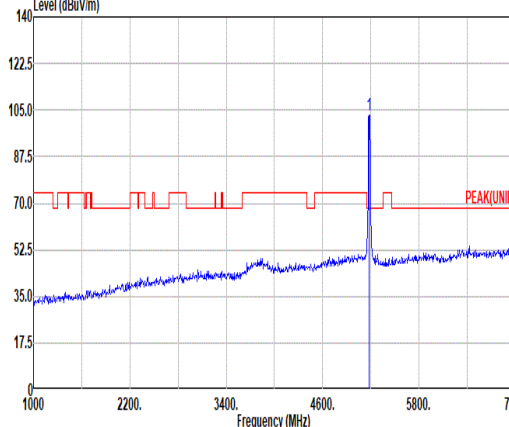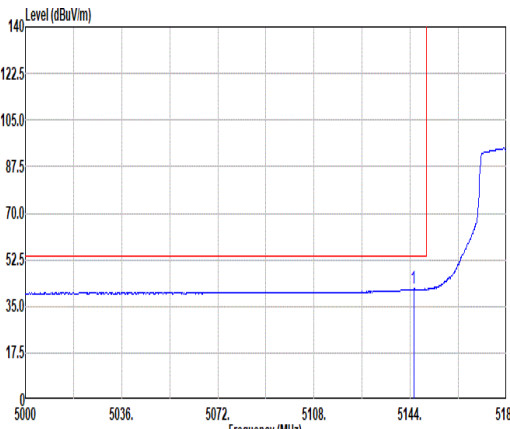
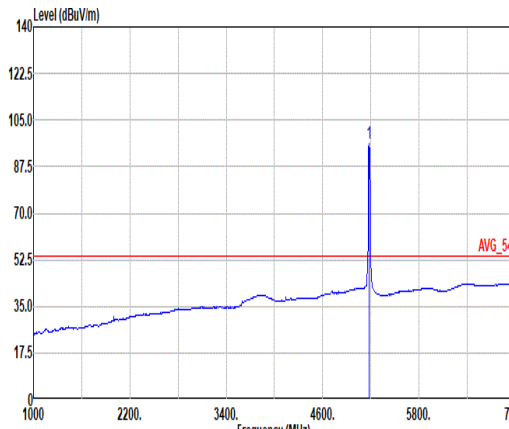


Mode	4																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.14</td><td>51.86</td><td>74.00</td><td>-22.14</td><td>40.99</td><td>32.60</td><td>12.49</td><td>34.22</td><td>0.00</td><td>336</td><td>222</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.14	51.86	74.00	-22.14	40.99	32.60	12.49	34.22	0.00	336	222	PEAK	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>103.00</td><td>-----</td><td>-----</td><td>92.14</td><td>32.60</td><td>12.53</td><td>34.27</td><td>0.00</td><td>336</td><td>222</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	103.00	-----	-----	92.14	32.60	12.53	34.27	0.00	336	222
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5148.14	51.86	74.00	-22.14	40.99	32.60	12.49	34.22	0.00	336	222	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	103.00	-----	-----	92.14	32.60	12.53	34.27	0.00	336	222	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.270kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5145.26</td><td>41.56</td><td>54.00</td><td>-12.44</td><td>30.69</td><td>32.60</td><td>12.49</td><td>34.22</td><td>0.00</td><td>336</td><td>222</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5145.26	41.56	54.00	-12.44	30.69	32.60	12.49	34.22	0.00	336	222	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.270kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5180.00</td><td>95.09</td><td>-----</td><td>-----</td><td>85.03</td><td>32.60</td><td>12.53</td><td>34.27</td><td>0.00</td><td>336</td><td>222</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	95.09	-----	-----	85.03	32.60	12.53	34.27	0.00	336	222
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5145.26	41.56	54.00	-12.44	30.69	32.60	12.49	34.22	0.00	336	222	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5180.00	95.09	-----	-----	85.03	32.60	12.53	34.27	0.00	336	222	AVERAGE																																																																																							



Mode	4																																																																																																																																							
	Harmonic																																																																																																																																							
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																																																							
ANT	1																																																																																																																																							
Pol.	Horizontal	Vertical																																																																																																																																						
Peak Avg	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 10360.00</td><td>47.10</td><td>68.20</td><td>-21.10</td><td>30.09</td><td>37.38</td><td>18.10</td><td>39.72</td><td>0.45</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2 15540.00</td><td>51.27</td><td>74.00</td><td>-22.73</td><td>33.45</td><td>40.54</td><td>22.40</td><td>45.55</td><td>0.43</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3 15540.00</td><td>42.47</td><td>54.00</td><td>-11.53</td><td>24.65</td><td>40.54</td><td>22.40</td><td>45.55</td><td>0.43</td><td>--</td><td>--</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10360.00	47.10	68.20	-21.10	30.09	37.38	18.10	39.72	0.45	--	--	PEAK	2 15540.00	51.27	74.00	-22.73	33.45	40.54	22.40	45.55	0.43	--	--	PEAK	3 15540.00	42.47	54.00	-11.53	24.65	40.54	22.40	45.55	0.43	--	--	AVERAGE	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 10360.00</td><td>46.90</td><td>68.20</td><td>-21.30</td><td>30.69</td><td>37.38</td><td>18.10</td><td>39.72</td><td>0.45</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2 15540.00</td><td>51.26</td><td>74.00</td><td>-22.74</td><td>33.44</td><td>40.54</td><td>22.40</td><td>45.55</td><td>0.43</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3 15540.00</td><td>42.48</td><td>54.00</td><td>-11.52</td><td>24.66</td><td>40.54</td><td>22.40</td><td>45.55</td><td>0.43</td><td>--</td><td>--</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1 10360.00	46.90	68.20	-21.30	30.69	37.38	18.10	39.72	0.45	--	--	PEAK	2 15540.00	51.26	74.00	-22.74	33.44	40.54	22.40	45.55	0.43	--	--	PEAK	3 15540.00	42.48	54.00	-11.52	24.66	40.54	22.40	45.55	0.43	--	--	AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1 10360.00	47.10	68.20	-21.10	30.09	37.38	18.10	39.72	0.45	--	--	PEAK																																																																																																																													
2 15540.00	51.27	74.00	-22.73	33.45	40.54	22.40	45.55	0.43	--	--	PEAK																																																																																																																													
3 15540.00	42.47	54.00	-11.53	24.65	40.54	22.40	45.55	0.43	--	--	AVERAGE																																																																																																																													
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																														
1 10360.00	46.90	68.20	-21.30	30.69	37.38	18.10	39.72	0.45	--	--	PEAK																																																																																																																													
2 15540.00	51.26	74.00	-22.74	33.44	40.54	22.40	45.55	0.43	--	--	PEAK																																																																																																																													
3 15540.00	42.48	54.00	-11.52	24.66	40.54	22.40	45.55	0.43	--	--	AVERAGE																																																																																																																													

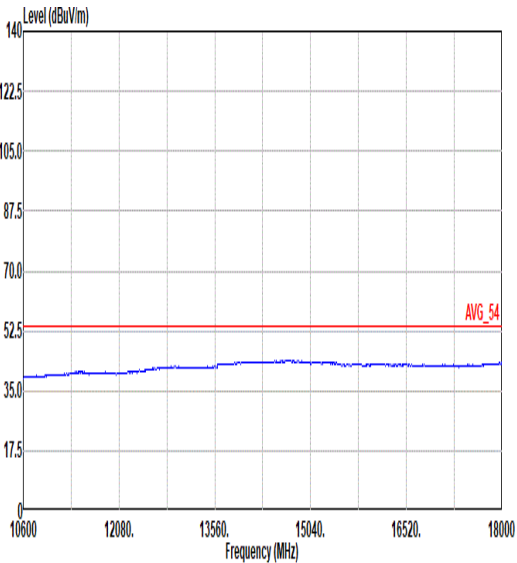
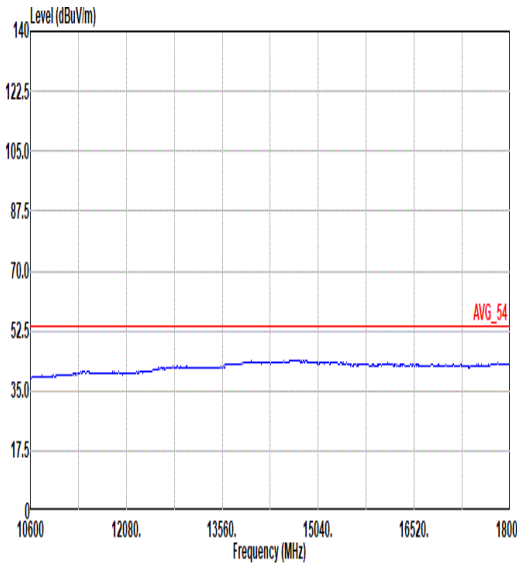


Mode	4	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL







Mode	5																																																																																																																															
	Band Edge - L																																																																																																																															
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																																																																																															
ANT	1																																																																																																																															
Pol.	Horizontal	Fundamental																																																																																																																														
Peak	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 5011.22</td><td>50.30</td><td>74.00</td><td>-23.70</td><td>39.33</td><td>32.68</td><td>12.28</td><td>33.99</td><td>0.00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>150</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5011.22	50.30	74.00	-23.70	39.33	32.68	12.28	33.99	0.00									400									150									PEAK	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 5220.00</td><td>100.95</td><td>-----</td><td>-----</td><td>90.09</td><td>32.60</td><td>12.59</td><td>34.33</td><td>0.00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>150</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>PEAK</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5220.00	100.95	-----	-----	90.09	32.60	12.59	34.33	0.00									400									150									PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																								
1 5011.22	50.30	74.00	-23.70	39.33	32.68	12.28	33.99	0.00																																																																																																																								
								400																																																																																																																								
								150																																																																																																																								
								PEAK																																																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																								
1 5220.00	100.95	-----	-----	90.09	32.60	12.59	34.33	0.00																																																																																																																								
								400																																																																																																																								
								150																																																																																																																								
								PEAK																																																																																																																								
Avg	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.270kHz SWT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 5000.30</td><td>40.16</td><td>54.00</td><td>-13.84</td><td>29.29</td><td>32.60</td><td>12.38</td><td>34.11</td><td>0.00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>150</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5000.30	40.16	54.00	-13.84	29.29	32.60	12.38	34.11	0.00									400									150									AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.270kHz SWT:Auto <table><thead><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th></tr></thead><tbody><tr><td>1 5220.00</td><td>94.25</td><td>-----</td><td>-----</td><td>83.41</td><td>32.60</td><td>12.60</td><td>34.36</td><td>0.00</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>400</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>150</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td></td><td>AVERAGE</td></tr></tbody></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	1 5220.00	94.25	-----	-----	83.41	32.60	12.60	34.36	0.00									400									150									AVERAGE
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																								
1 5000.30	40.16	54.00	-13.84	29.29	32.60	12.38	34.11	0.00																																																																																																																								
								400																																																																																																																								
								150																																																																																																																								
								AVERAGE																																																																																																																								
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																																																								
1 5220.00	94.25	-----	-----	83.41	32.60	12.60	34.36	0.00																																																																																																																								
								400																																																																																																																								
								150																																																																																																																								
								AVERAGE																																																																																																																								

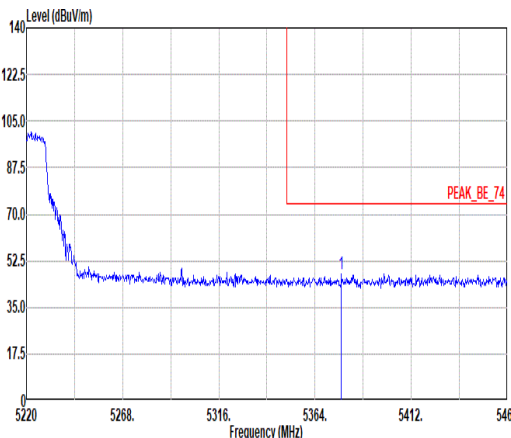
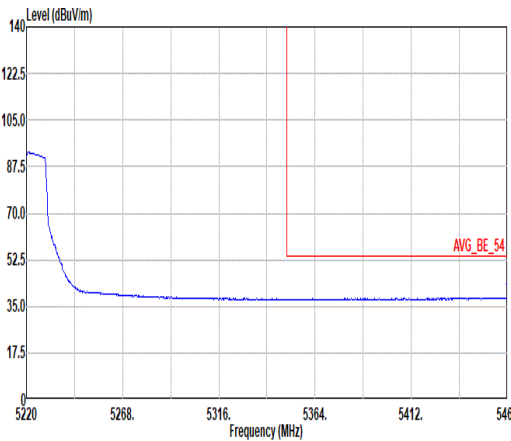


Mode	5																																							
	Band Edge - R																																							
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																							
ANT	1																																							
Pol.	Horizontal	Fundamental																																						
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5377.20</td><td>47.56</td><td>74.00</td><td>-26.44</td><td>36.95</td><td>32.40</td><td>12.83</td><td>34.62</td><td>0.00</td><td>400 150 PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5377.20	47.56	74.00	-26.44	36.95	32.40	12.83	34.62	0.00	400 150 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																															
1 5377.20	47.56	74.00	-26.44	36.95	32.40	12.83	34.62	0.00	400 150 PEAK																															
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.270kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr><tr><td>1 5460.00</td><td>38.30</td><td>54.00</td><td>-15.70</td><td>27.60</td><td>32.54</td><td>12.92</td><td>34.76</td><td>0.00</td><td>400 150 AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 5460.00	38.30	54.00	-15.70	27.60	32.54	12.92	34.76	0.00	400 150 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																															
1 5460.00	38.30	54.00	-15.70	27.60	32.54	12.92	34.76	0.00	400 150 AVERAGE																															

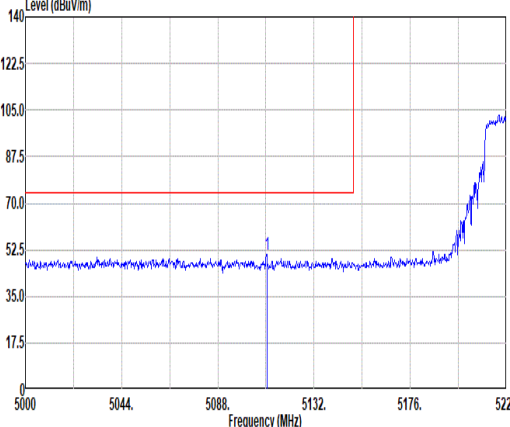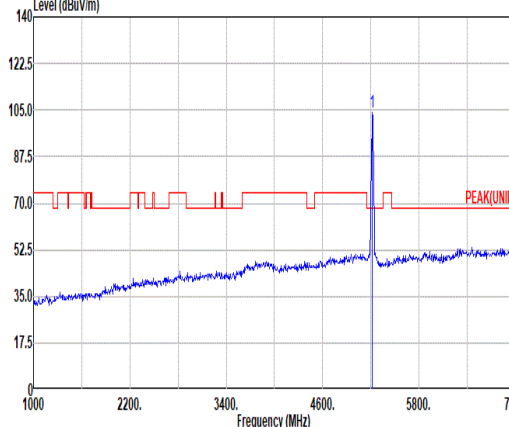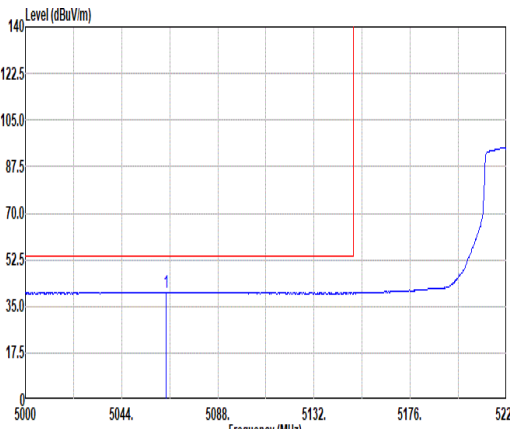
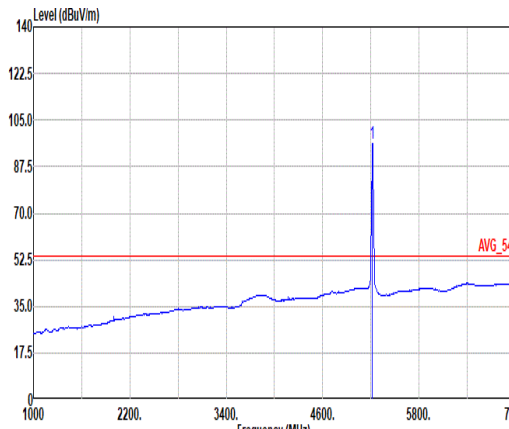


Mode	5																																																																																																																																
	Band Edge - L																																																																																																																																
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																																																																																																
ANT	1																																																																																																																																
Pol.	Vertical						Fundamental																																																																																																																										
Peak																																																																																																																																	
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																																																										
Avg																																																																																																																																	
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.270kHz SMT:Auto						Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.270kHz SMT:Auto																																																																																																																										
<table><tr><th rowspan="2"></th><th rowspan="2">Freq</th><th colspan="3">Limit</th><th colspan="3">Read</th><th rowspan="2">Ant</th><th rowspan="2">Cable</th><th rowspan="2">Preamp</th><th rowspan="2">Aux</th><th rowspan="2">APos</th><th rowspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>5110.44</td><td>50.91</td><td>74.00</td><td>-23.09</td><td>40.04</td><td>32.60</td><td>12.43</td><td>34.16</td><td>0.00</td><td>353</td><td>220</td><td>PEAK</td><td></td><td></td></tr></table>														Freq	Limit			Read			Ant	Cable	Preamp	Aux	APos	TPos	Remark	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg				1	5110.44	50.91	74.00	-23.09	40.04	32.60	12.43	34.16	0.00	353	220	PEAK			<table><tr><th rowspan="2"></th><th rowspan="2">Freq</th><th colspan="3">Limit</th><th colspan="3">Read</th><th rowspan="2">Ant</th><th rowspan="2">Cable</th><th rowspan="2">Preamp</th><th rowspan="2">Aux</th><th rowspan="2">APos</th><th rowspan="2">TPos</th><th rowspan="2">Remark</th></tr><tr><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th><th></th></tr><tr><td>1</td><td>5220.00</td><td>103.84</td><td>-----</td><td>-----</td><td>92.98</td><td>32.60</td><td>12.60</td><td>34.34</td><td>0.00</td><td>353</td><td>220</td><td>PEAK</td><td></td><td></td></tr></table>														Freq	Limit			Read			Ant	Cable	Preamp	Aux	APos	TPos	Remark	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg				1	5220.00	103.84	-----	-----	92.98	32.60	12.60	34.34	0.00	353	220	PEAK		
	Freq	Limit			Read			Ant	Cable	Preamp	Aux	APos			TPos	Remark																																																																																																																	
		Level	Line	Margin	Level	Factor	Loss						Factor																																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1	5110.44	50.91	74.00	-23.09	40.04	32.60	12.43	34.16	0.00	353	220	PEAK																																																																																																																					
	Freq	Limit			Read			Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																			
		Level	Line	Margin	Level	Factor	Loss								Factor																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																						
1	5220.00	103.84	-----	-----	92.98	32.60	12.60	34.34	0.00	353	220	PEAK																																																																																																																					

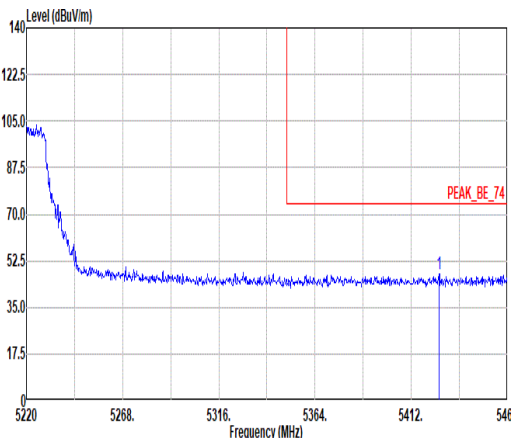
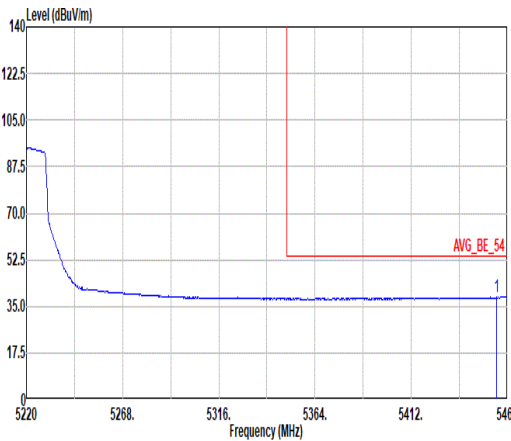


Mode	5																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																							
ANT	1																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5425.92</td><td>47.78</td><td>74.00</td><td>-26.22</td><td>37.14</td><td>32.45</td><td>12.89</td><td>34.70</td><td>0.00</td><td>353</td><td>220</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5425.92	47.78	74.00	-26.22	37.14	32.45	12.89	34.70	0.00	353	220	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5425.92	47.78	74.00	-26.22	37.14	32.45	12.89	34.70	0.00	353	220	PEAK																																												
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.270kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5454.72</td><td>38.42</td><td>54.00</td><td>-15.58</td><td>27.74</td><td>32.52</td><td>12.91</td><td>34.75</td><td>0.00</td><td>353</td><td>220</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.72	38.42	54.00	-15.58	27.74	32.52	12.91	34.75	0.00	353	220	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5454.72	38.42	54.00	-15.58	27.74	32.52	12.91	34.75	0.00	353	220	AVERAGE																																												



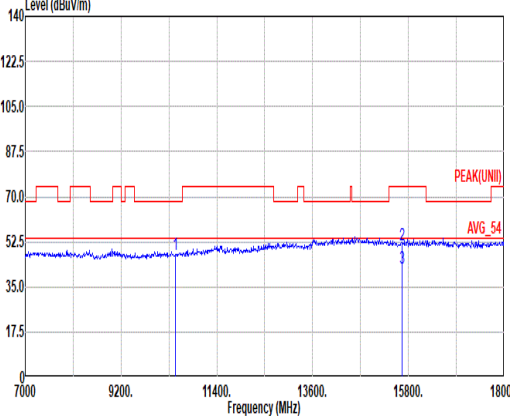
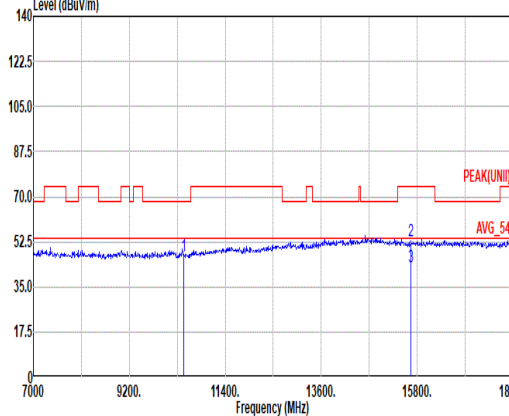


Mode	5																																																																													
	Harmonic																																																																													
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																																													
ANT	1																																																																													
Pol.	Horizontal						Vertical																																																																							
Peak Avg																																																																														
	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL						Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL																																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>47.50</td><td>68.20</td><td>-20.70</td><td>31.58</td><td>37.14</td><td>18.17</td><td>39.84</td><td>0.45</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15660.00</td><td>51.04</td><td>74.00</td><td>-22.96</td><td>33.40</td><td>40.46</td><td>22.50</td><td>45.75</td><td>0.43</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15660.00</td><td>42.51</td><td>54.00</td><td>-11.49</td><td>24.87</td><td>40.46</td><td>22.50</td><td>45.75</td><td>0.43</td><td>--</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	47.50	68.20	-20.70	31.58	37.14	18.17	39.84	0.45	--	PEAK	2	15660.00	51.04	74.00	-22.96	33.40	40.46	22.50	45.75	0.43	--	PEAK	3	15660.00	42.51	54.00	-11.49	24.87	40.46	22.50	45.75	0.43	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																				
1	10440.00	47.50	68.20	-20.70	31.58	37.14	18.17	39.84	0.45	--	PEAK																																																																			
2	15660.00	51.04	74.00	-22.96	33.40	40.46	22.50	45.75	0.43	--	PEAK																																																																			
3	15660.00	42.51	54.00	-11.49	24.87	40.46	22.50	45.75	0.43	--	AVERAGE																																																																			

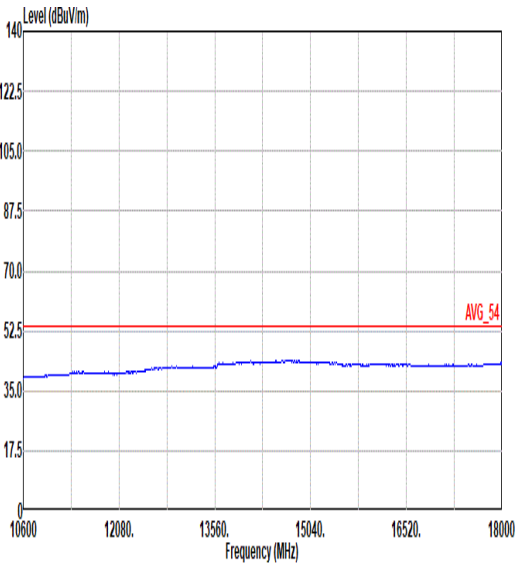
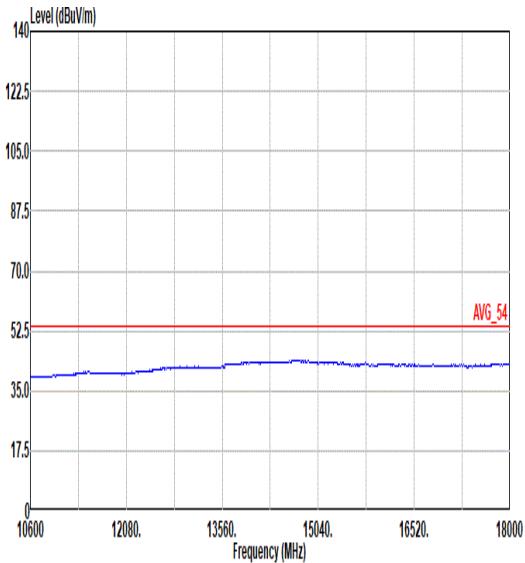


Mode	5	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL

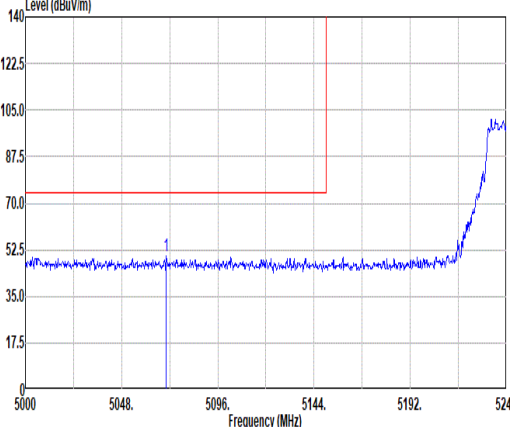
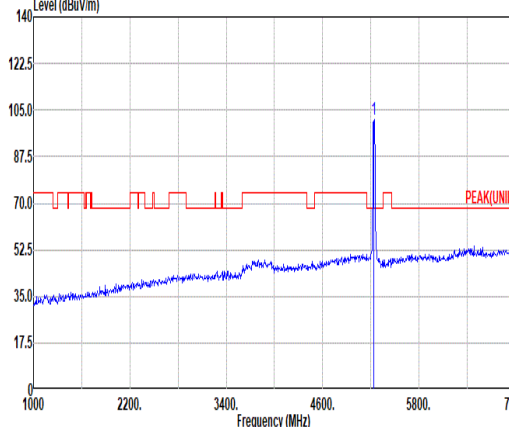
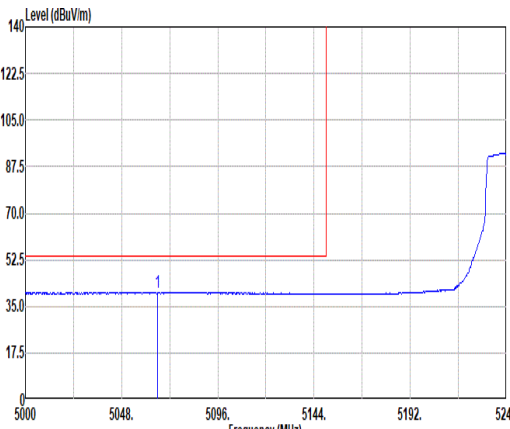
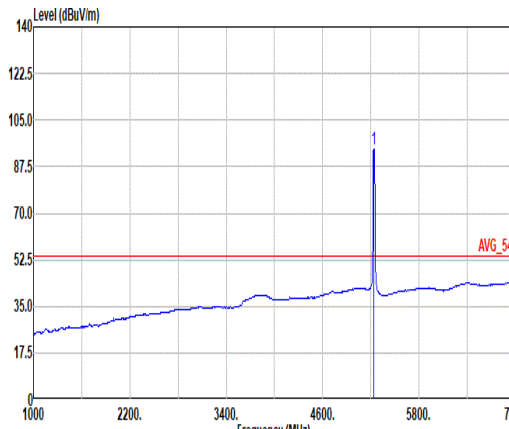


Mode	6																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5070.32</td><td>50.40</td><td>74.00</td><td>-23.60</td><td>39.52</td><td>32.60</td><td>12.37</td><td>34.09</td><td>0.00</td><td>301</td><td>153</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5070.32	50.40	74.00	-23.60	39.52	32.60	12.37	34.09	0.00	301	153	PEAK	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>101.32</td><td>-----</td><td>-----</td><td>90.48</td><td>32.60</td><td>12.63</td><td>34.39</td><td>0.00</td><td>301</td><td>153</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	101.32	-----	-----	90.48	32.60	12.63	34.39	0.00	301	153
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5070.32	50.40	74.00	-23.60	39.52	32.60	12.37	34.09	0.00	301	153	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5240.00	101.32	-----	-----	90.48	32.60	12.63	34.39	0.00	301	153	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.270kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5065.76</td><td>40.17</td><td>54.00</td><td>-13.83</td><td>29.29</td><td>32.60</td><td>12.36</td><td>34.00</td><td>0.00</td><td>301</td><td>153</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5065.76	40.17	54.00	-13.83	29.29	32.60	12.36	34.00	0.00	301	153	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.270kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>94.17</td><td>-----</td><td>-----</td><td>83.33</td><td>32.60</td><td>12.62</td><td>34.38</td><td>0.00</td><td>301</td><td>153</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	94.17	-----	-----	83.33	32.60	12.62	34.38	0.00	301	153
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5065.76	40.17	54.00	-13.83	29.29	32.60	12.36	34.00	0.00	301	153	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5240.00	94.17	-----	-----	83.33	32.60	12.62	34.38	0.00	301	153	AVERAGE																																																																																							

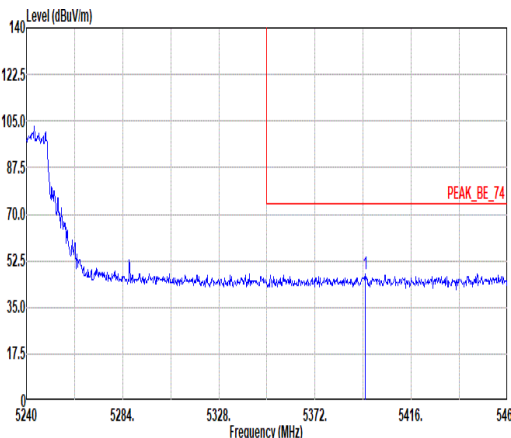
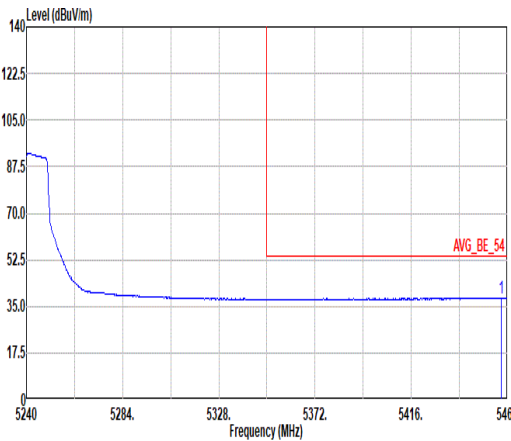


Mode	6																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																							
ANT	1																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5395.10</td><td>47.69</td><td>74.00</td><td>-26.31</td><td>37.09</td><td>32.40</td><td>12.85</td><td>34.65</td><td>0.00</td><td>301</td><td>153</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5395.10	47.69	74.00	-26.31	37.09	32.40	12.85	34.65	0.00	301	153	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5395.10	47.69	74.00	-26.31	37.09	32.40	12.85	34.65	0.00	301	153	PEAK																																												
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.270kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5457.14</td><td>38.21</td><td>54.00</td><td>-15.79</td><td>27.52</td><td>32.53</td><td>12.92</td><td>34.76</td><td>0.00</td><td>301</td><td>153</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5457.14	38.21	54.00	-15.79	27.52	32.53	12.92	34.76	0.00	301	153	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5457.14	38.21	54.00	-15.79	27.52	32.53	12.92	34.76	0.00	301	153	AVERAGE																																												

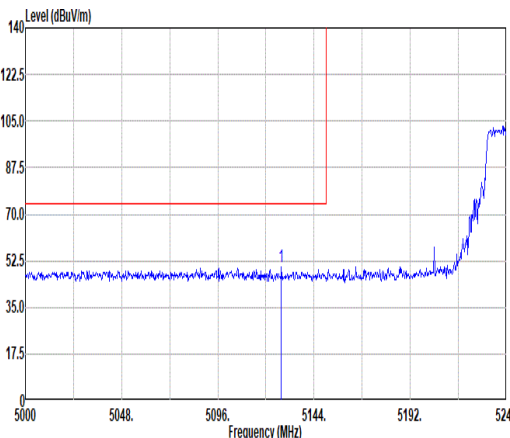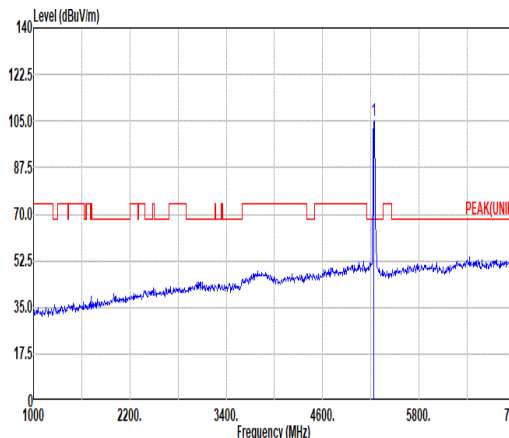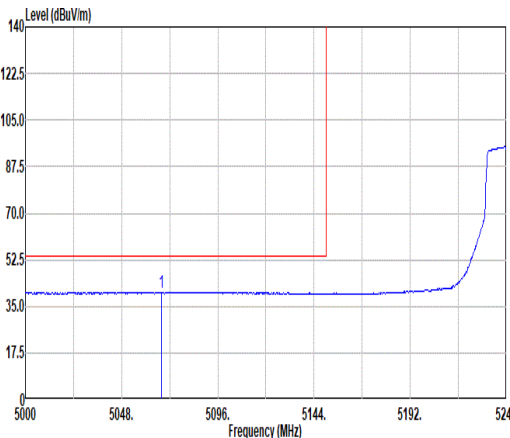
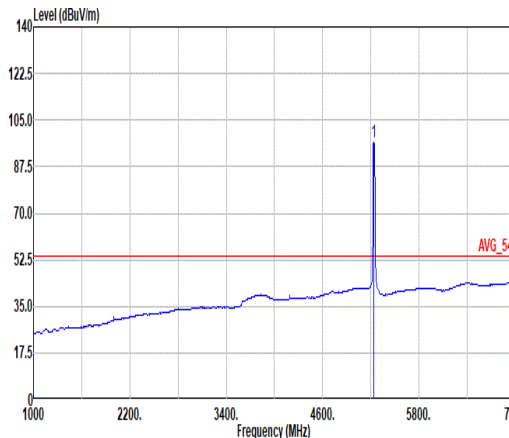


Mode	6																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5127.68</td><td>49.94</td><td>74.00</td><td>-24.06</td><td>39.07</td><td>32.60</td><td>12.46</td><td>34.19</td><td>0.00</td><td>346</td><td>223</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5127.68	49.94	74.00	-24.06	39.07	32.60	12.46	34.19	0.00	346	223	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>105.20</td><td>-----</td><td>-----</td><td>94.36</td><td>32.60</td><td>12.63</td><td>34.39</td><td>0.00</td><td>346</td><td>223</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	105.20	-----	-----	94.36	32.60	12.63	34.39	0.00	346	223
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5127.68	49.94	74.00	-24.06	39.07	32.60	12.46	34.19	0.00	346	223	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5240.00	105.20	-----	-----	94.36	32.60	12.63	34.39	0.00	346	223	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.270kHz SMT:Auto						Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.270kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5067.92</td><td>40.31</td><td>54.00</td><td>-13.69</td><td>29.43</td><td>32.60</td><td>12.37</td><td>34.09</td><td>0.00</td><td>346</td><td>223</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5067.92	40.31	54.00	-13.69	29.43	32.60	12.37	34.09	0.00	346	223	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>96.42</td><td>-----</td><td>-----</td><td>85.58</td><td>32.60</td><td>12.62</td><td>34.38</td><td>0.00</td><td>346</td><td>223</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	96.42	-----	-----	85.58	32.60	12.62	34.38	0.00	346	223
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5067.92	40.31	54.00	-13.69	29.43	32.60	12.37	34.09	0.00	346	223	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5240.00	96.42	-----	-----	85.58	32.60	12.62	34.38	0.00	346	223	AVERAGE																																																																																							

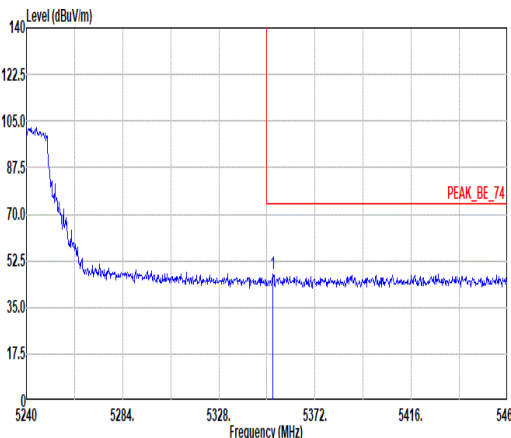
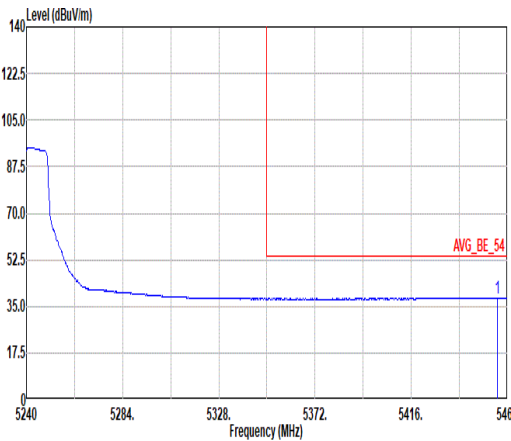


Mode	6																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																						
ANT	1																																																						
Pol.	Vertical						Fundamental																																																
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5352.64</td><td>47.49</td><td>74.00</td><td>-26.51</td><td>36.88</td><td>32.40</td><td>12.79</td><td>34.58</td><td>0.00</td><td>346</td><td>223</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5352.64	47.49	74.00	-26.51	36.88	32.40	12.79	34.58	0.00	346	223	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5352.64	47.49	74.00	-26.51	36.88	32.40	12.79	34.58	0.00	346	223	PEAK																																											
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.270kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5455.38</td><td>38.27</td><td>54.00</td><td>-15.73</td><td>27.58</td><td>32.52</td><td>12.92</td><td>34.75</td><td>0.00</td><td>346</td><td>223</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5455.38	38.27	54.00	-15.73	27.58	32.52	12.92	34.75	0.00	346	223	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5455.38	38.27	54.00	-15.73	27.58	32.52	12.92	34.75	0.00	346	223	AVERAGE																																											



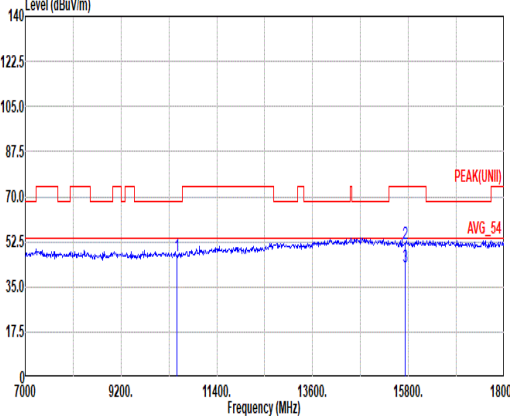
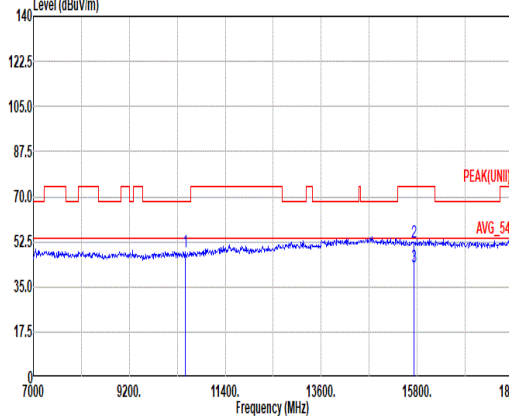


Mode	6																																																																																																																																																													
	Harmonic																																																																																																																																																													
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																																																																																																													
ANT	1																																																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																																																							
Peak Avg																																																																																																																																																														
	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL						Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL																																																																																																																																																							
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>47.07</td><td>68.20</td><td>-21.13</td><td>31.22</td><td>37.10</td><td>18.20</td><td>39.90</td><td>0.45</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15720.00</td><td>51.70</td><td>74.00</td><td>-22.30</td><td>33.77</td><td>40.78</td><td>22.56</td><td>45.85</td><td>0.44</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15720.00</td><td>42.90</td><td>54.00</td><td>-11.10</td><td>24.97</td><td>40.78</td><td>22.56</td><td>45.85</td><td>0.44</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	47.07	68.20	-21.13	31.22	37.10	18.20	39.90	0.45	--	--	PEAK	2	15720.00	51.70	74.00	-22.30	33.77	40.78	22.56	45.85	0.44	--	--	PEAK	3	15720.00	42.90	54.00	-11.10	24.97	40.78	22.56	45.85	0.44	--	--	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>48.65</td><td>68.20</td><td>-19.55</td><td>32.80</td><td>37.10</td><td>18.20</td><td>39.90</td><td>0.45</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15720.00</td><td>52.48</td><td>74.00</td><td>-21.52</td><td>34.55</td><td>40.78</td><td>22.56</td><td>45.85</td><td>0.44</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15720.00</td><td>42.84</td><td>54.00</td><td>-11.16</td><td>24.91</td><td>40.78</td><td>22.56</td><td>45.85</td><td>0.44</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	48.65	68.20	-19.55	32.80	37.10	18.20	39.90	0.45	--	--	PEAK	2	15720.00	52.48	74.00	-21.52	34.55	40.78	22.56	45.85	0.44	--	--	PEAK	3	15720.00	42.84	54.00	-11.16	24.91	40.78	22.56	45.85	0.44	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																				
1	10480.00	47.07	68.20	-21.13	31.22	37.10	18.20	39.90	0.45	--	--	PEAK																																																																																																																																																		
2	15720.00	51.70	74.00	-22.30	33.77	40.78	22.56	45.85	0.44	--	--	PEAK																																																																																																																																																		
3	15720.00	42.90	54.00	-11.10	24.97	40.78	22.56	45.85	0.44	--	--	AVERAGE																																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																				
1	10480.00	48.65	68.20	-19.55	32.80	37.10	18.20	39.90	0.45	--	--	PEAK																																																																																																																																																		
2	15720.00	52.48	74.00	-21.52	34.55	40.78	22.56	45.85	0.44	--	--	PEAK																																																																																																																																																		
3	15720.00	42.84	54.00	-11.16	24.91	40.78	22.56	45.85	0.44	--	--	AVERAGE																																																																																																																																																		

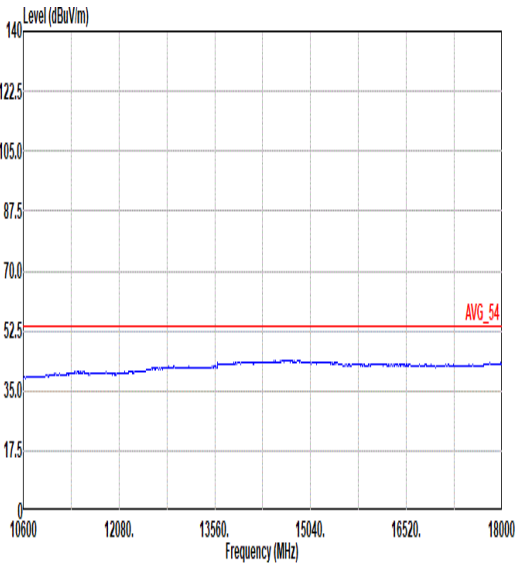
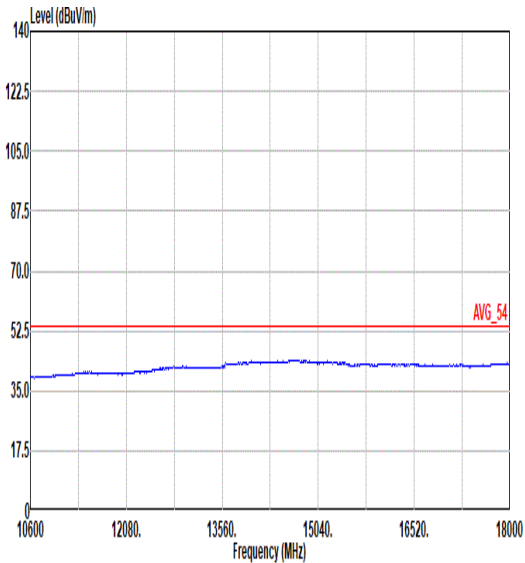


Mode	6	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL

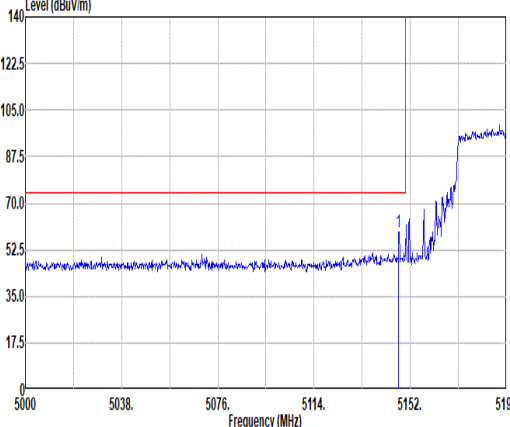
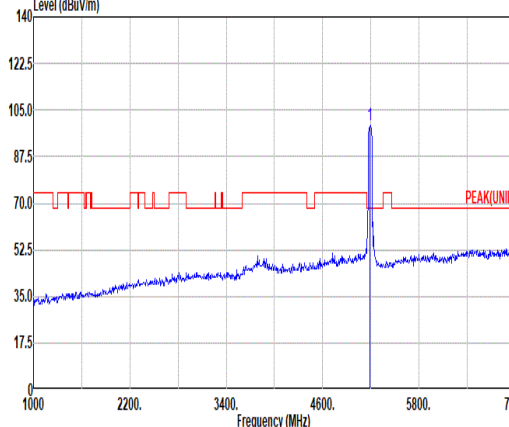
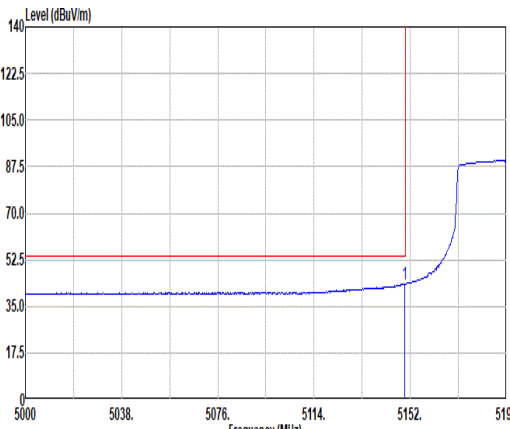
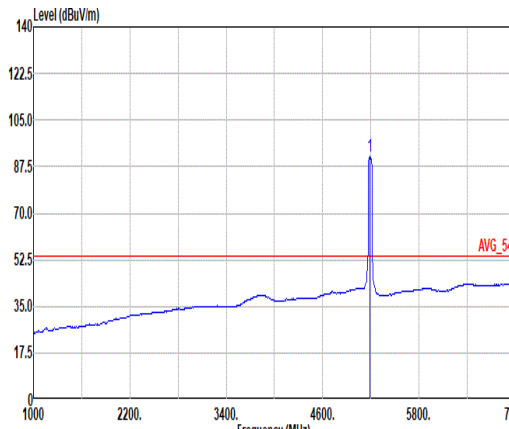


		7																																																																																																	
Mode	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5147.44</td><td>59.32</td><td>74.00</td><td>-14.68</td><td>48.45</td><td>32.60</td><td>12.49</td><td>34.22</td><td>0.00</td><td>138</td><td>156</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.44	59.32	74.00	-14.68	48.45	32.60	12.49	34.22	0.00	138	156	PEAK	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>99.47</td><td>-----</td><td>-----</td><td>88.61</td><td>32.60</td><td>12.56</td><td>34.30</td><td>0.00</td><td>138</td><td>156</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	99.47	-----	-----	88.61	32.60	12.56	34.30	0.00	138	156
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5147.44	59.32	74.00	-14.68	48.45	32.60	12.49	34.22	0.00	138	156	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5190.00	99.47	-----	-----	88.61	32.60	12.56	34.30	0.00	138	156	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.560kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.91</td><td>43.38</td><td>54.00</td><td>-10.62</td><td>32.52</td><td>32.60</td><td>12.49</td><td>34.23</td><td>0.00</td><td>138</td><td>156</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.91	43.38	54.00	-10.62	32.52	32.60	12.49	34.23	0.00	138	156	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.560kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>91.22</td><td>-----</td><td>-----</td><td>80.36</td><td>32.60</td><td>12.55</td><td>34.29</td><td>0.00</td><td>138</td><td>156</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	91.22	-----	-----	80.36	32.60	12.55	34.29	0.00	138	156
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.91	43.38	54.00	-10.62	32.52	32.60	12.49	34.23	0.00	138	156	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5190.00	91.22	-----	-----	80.36	32.60	12.55	34.29	0.00	138	156	AVERAGE																																																																																							

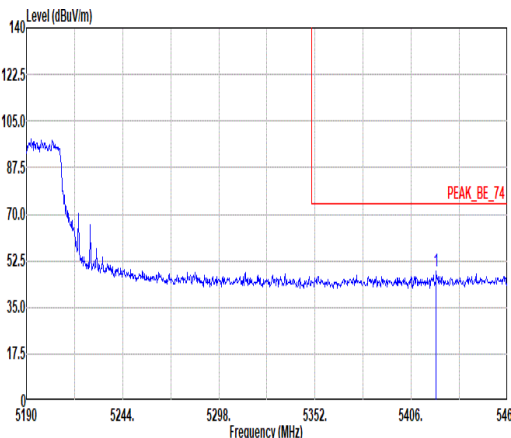
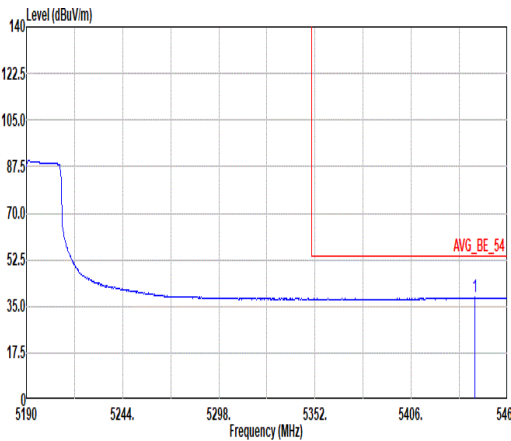


Mode	7																																													
	Band Edge - R																																													
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																													
ANT	1																																													
Pol.	Horizontal	Fundamental																																												
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5420.04</td><td>48.39</td><td>74.00</td><td>-25.61</td><td>37.76</td><td>32.44</td><td>12.88</td><td>34.69</td><td>0.00</td><td>138</td><td>156</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5420.04	48.39	74.00	-25.61	37.76	32.44	12.88	34.69	0.00	138	156	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5420.04	48.39	74.00	-25.61	37.76	32.44	12.88	34.69	0.00	138	156	PEAK																																		
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.560kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5441.64</td><td>38.34</td><td>54.00</td><td>-15.66</td><td>27.69</td><td>32.48</td><td>12.90</td><td>34.73</td><td>0.00</td><td>138</td><td>156</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5441.64	38.34	54.00	-15.66	27.69	32.48	12.90	34.73	0.00	138	156	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																				
1	5441.64	38.34	54.00	-15.66	27.69	32.48	12.90	34.73	0.00	138	156	AVERAGE																																		

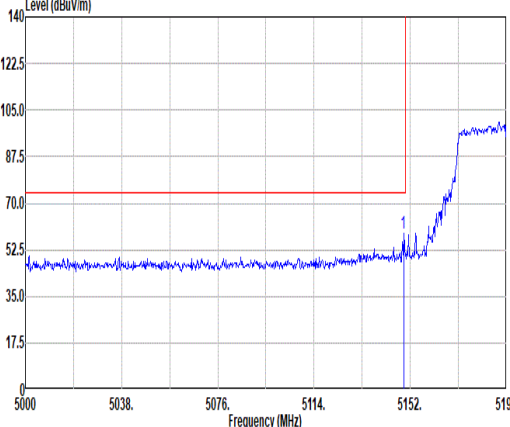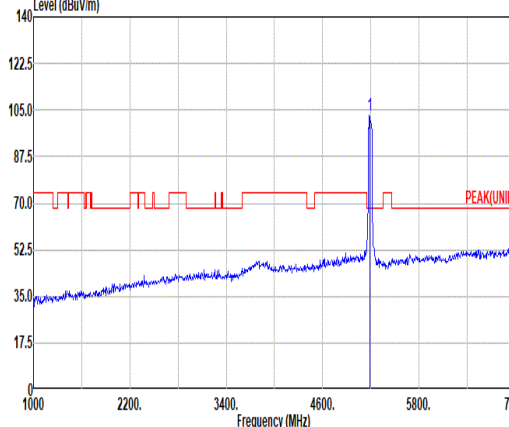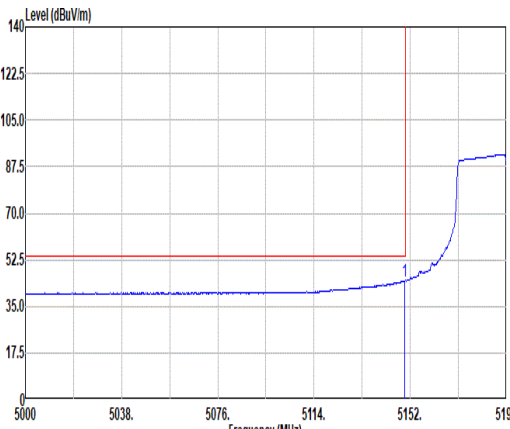
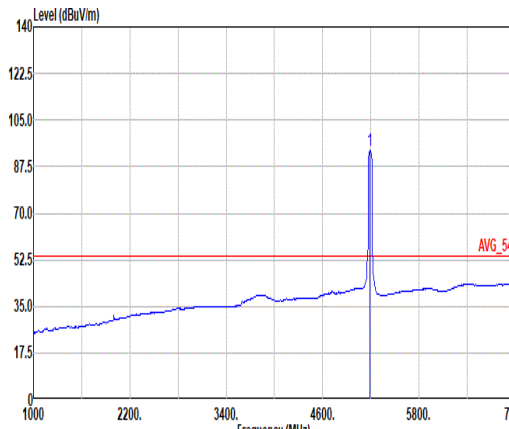


Mode	7																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.34</td><td>58.43</td><td>74.00</td><td>-15.57</td><td>47.57</td><td>32.60</td><td>12.49</td><td>34.23</td><td>0.00</td><td>300</td><td>217</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.34	58.43	74.00	-15.57	47.57	32.60	12.49	34.23	0.00	300	217	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>102.84</td><td>-----</td><td>-----</td><td>91.98</td><td>32.60</td><td>12.54</td><td>34.28</td><td>0.00</td><td>300</td><td>217</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	102.84	-----	-----	91.98	32.60	12.54	34.28	0.00	300	217
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.34	58.43	74.00	-15.57	47.57	32.60	12.49	34.23	0.00	300	217	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5190.00	102.84	-----	-----	91.98	32.60	12.54	34.28	0.00	300	217	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.560kHz SMT:Auto						Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.560kHz SMT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.91</td><td>44.60</td><td>54.00</td><td>-9.40</td><td>33.74</td><td>32.60</td><td>12.49</td><td>34.23</td><td>0.00</td><td>300</td><td>217</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.91	44.60	54.00	-9.40	33.74	32.60	12.49	34.23	0.00	300	217	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>93.46</td><td>-----</td><td>-----</td><td>82.60</td><td>32.60</td><td>12.55</td><td>34.29</td><td>0.00</td><td>300</td><td>217</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	93.46	-----	-----	82.60	32.60	12.55	34.29	0.00	300	217
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5149.91	44.60	54.00	-9.40	33.74	32.60	12.49	34.23	0.00	300	217	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5190.00	93.46	-----	-----	82.60	32.60	12.55	34.29	0.00	300	217	AVERAGE																																																																																							

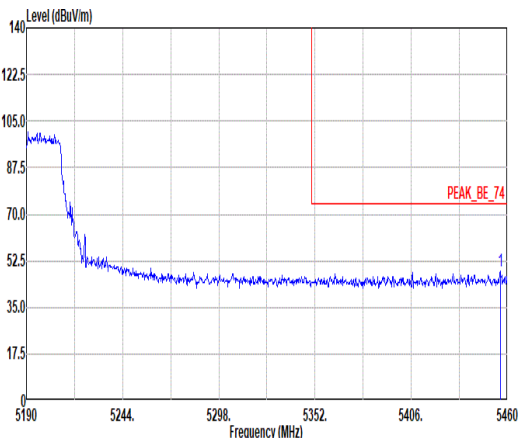
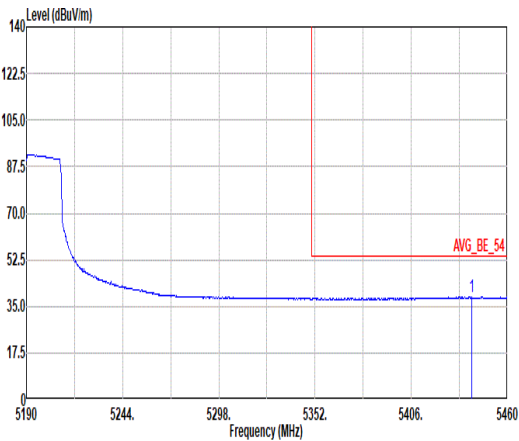


Mode	7																																													
	Band Edge - R																																													
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																													
ANT	1																																													
Pol.	Vertical	Fundamental																																												
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5439.95</td><td>48.45</td><td>74.00</td><td>-25.55</td><td>37.76</td><td>32.52</td><td>12.92</td><td>34.75</td><td>0.00</td><td>300</td><td>217</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5439.95	48.45	74.00	-25.55	37.76	32.52	12.92	34.75	0.00	300	217	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5439.95	48.45	74.00	-25.55	37.76	32.52	12.92	34.75	0.00	300	217	PEAK																																		
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.560kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5439.75</td><td>38.45</td><td>54.00</td><td>-15.55</td><td>27.00</td><td>32.48</td><td>12.90</td><td>34.73</td><td>0.00</td><td>300</td><td>217</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5439.75	38.45	54.00	-15.55	27.00	32.48	12.90	34.73	0.00	300	217	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																				
1	5439.75	38.45	54.00	-15.55	27.00	32.48	12.90	34.73	0.00	300	217	AVERAGE																																		



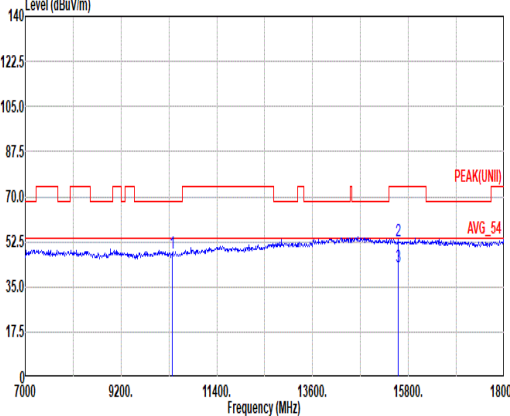
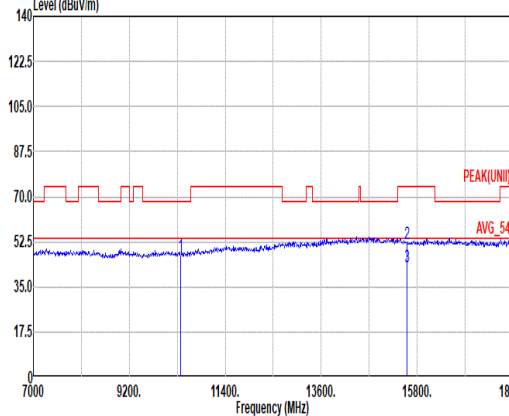


Mode	7																																																																																																																									
	Harmonic																																																																																																																									
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																																																																									
ANT	1																																																																																																																									
Pol.	Horizontal	Vertical																																																																																																																								
Peak Avg	 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 10380.00</td><td>48.23</td><td>68.20</td><td>-19.97</td><td>32.07</td><td>37.34</td><td>18.12</td><td>39.75</td><td>0.45</td><td>-- -- PEAK</td></tr><tr><td>2 15570.00</td><td>52.77</td><td>74.00</td><td>-21.23</td><td>35.01</td><td>40.50</td><td>22.43</td><td>45.60</td><td>0.43</td><td>-- -- PEAK</td></tr><tr><td>3 15570.00</td><td>42.61</td><td>54.00</td><td>-11.39</td><td>24.85</td><td>40.50</td><td>22.43</td><td>45.60</td><td>0.43</td><td>-- -- AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 10380.00	48.23	68.20	-19.97	32.07	37.34	18.12	39.75	0.45	-- -- PEAK	2 15570.00	52.77	74.00	-21.23	35.01	40.50	22.43	45.60	0.43	-- -- PEAK	3 15570.00	42.61	54.00	-11.39	24.85	40.50	22.43	45.60	0.43	-- -- AVERAGE	 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm deg</th></tr></thead><tbody><tr><td>1 10380.00</td><td>47.11</td><td>68.20</td><td>-21.09</td><td>30.95</td><td>37.34</td><td>18.12</td><td>39.75</td><td>0.45</td><td>-- -- PEAK</td></tr><tr><td>2 15570.00</td><td>51.90</td><td>74.00</td><td>-22.10</td><td>34.14</td><td>40.50</td><td>22.43</td><td>45.60</td><td>0.43</td><td>-- -- PEAK</td></tr><tr><td>3 15570.00</td><td>42.69</td><td>54.00</td><td>-11.31</td><td>24.93</td><td>40.50</td><td>22.43</td><td>45.60</td><td>0.43</td><td>-- -- AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg	1 10380.00	47.11	68.20	-21.09	30.95	37.34	18.12	39.75	0.45	-- -- PEAK	2 15570.00	51.90	74.00	-22.10	34.14	40.50	22.43	45.60	0.43	-- -- PEAK	3 15570.00	42.69	54.00	-11.31	24.93	40.50	22.43	45.60	0.43	-- -- AVERAGE
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 10380.00	48.23	68.20	-19.97	32.07	37.34	18.12	39.75	0.45	-- -- PEAK																																																																																																																	
2 15570.00	52.77	74.00	-21.23	35.01	40.50	22.43	45.60	0.43	-- -- PEAK																																																																																																																	
3 15570.00	42.61	54.00	-11.39	24.85	40.50	22.43	45.60	0.43	-- -- AVERAGE																																																																																																																	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm deg																																																																																																																	
1 10380.00	47.11	68.20	-21.09	30.95	37.34	18.12	39.75	0.45	-- -- PEAK																																																																																																																	
2 15570.00	51.90	74.00	-22.10	34.14	40.50	22.43	45.60	0.43	-- -- PEAK																																																																																																																	
3 15570.00	42.69	54.00	-11.31	24.93	40.50	22.43	45.60	0.43	-- -- AVERAGE																																																																																																																	

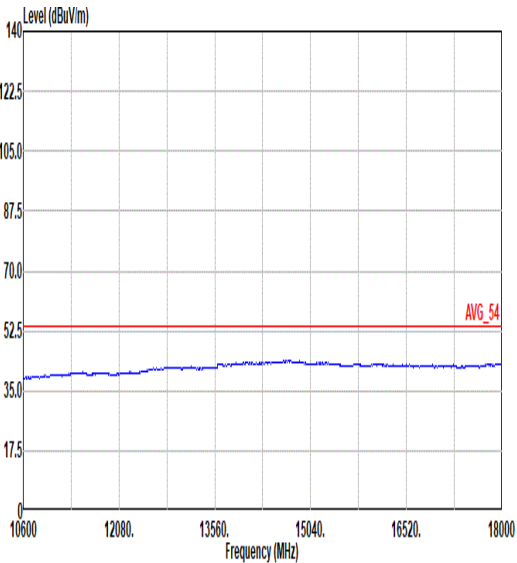
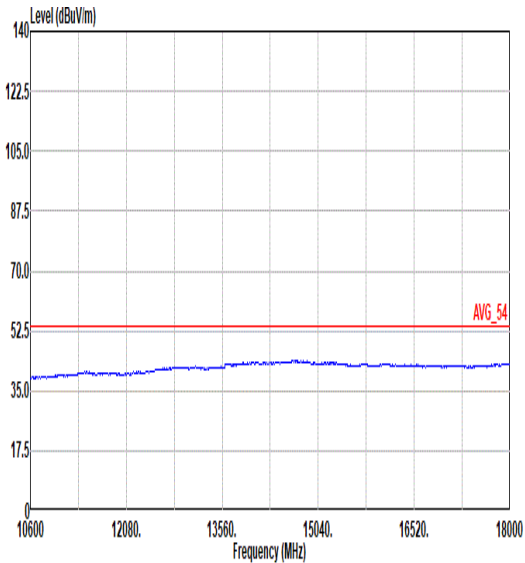


Mode	7	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL

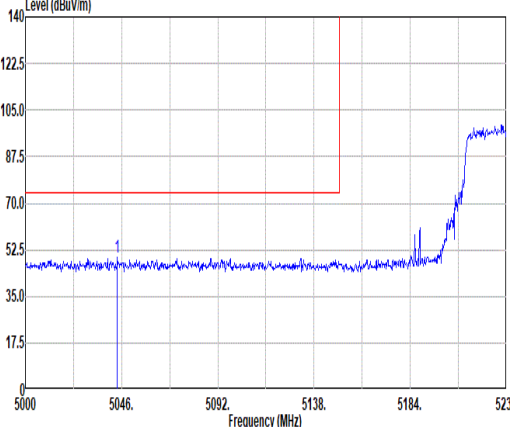
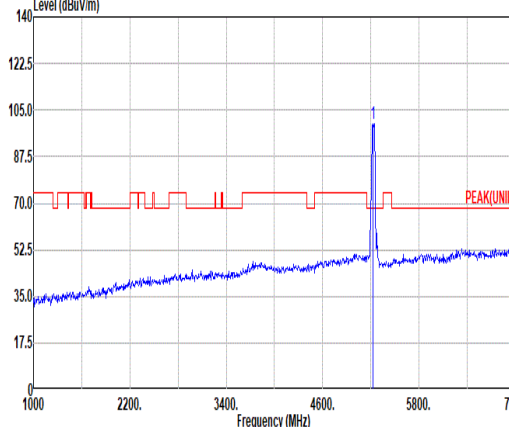
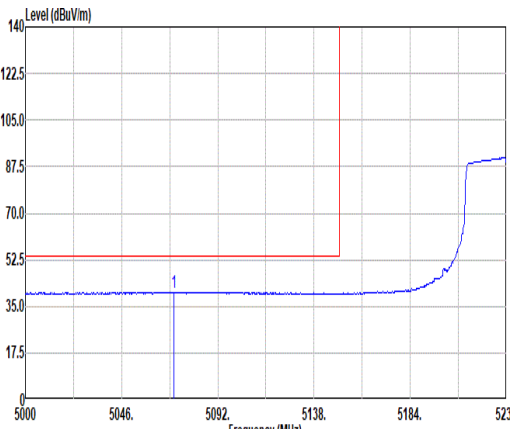
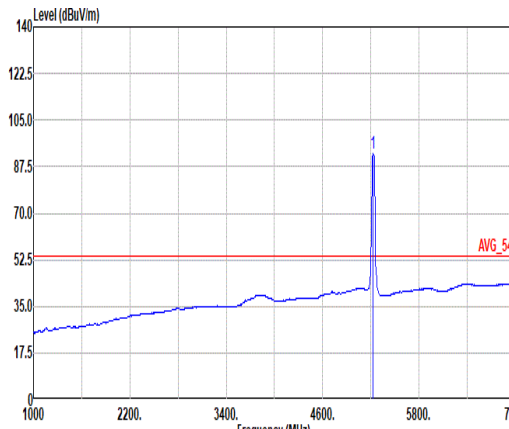


Mode	8																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5043.93</td><td>49.43</td><td>74.00</td><td>-24.57</td><td>38.54</td><td>32.61</td><td>12.33</td><td>34.05</td><td>0.00</td><td>377</td><td>151</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5043.93	49.43	74.00	-24.57	38.54	32.61	12.33	34.05	0.00	377	151	PEAK	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>99.90</td><td>-----</td><td>-----</td><td>89.06</td><td>32.60</td><td>12.63</td><td>34.39</td><td>0.00</td><td>377</td><td>151</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	99.90	-----	-----	89.06	32.60	12.63	34.39	0.00	377	151
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5043.93	49.43	74.00	-24.57	38.54	32.61	12.33	34.05	0.00	377	151	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5230.00	99.90	-----	-----	89.06	32.60	12.63	34.39	0.00	377	151	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.560kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5070.84</td><td>40.26</td><td>54.00</td><td>-13.74</td><td>29.38</td><td>32.60</td><td>12.37</td><td>34.09</td><td>0.00</td><td>377</td><td>151</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5070.84	40.26	54.00	-13.74	29.38	32.60	12.37	34.09	0.00	377	151	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.560kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>92.22</td><td>-----</td><td>-----</td><td>81.38</td><td>32.60</td><td>12.61</td><td>34.37</td><td>0.00</td><td>377</td><td>151</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	92.22	-----	-----	81.38	32.60	12.61	34.37	0.00	377	151
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5070.84	40.26	54.00	-13.74	29.38	32.60	12.37	34.09	0.00	377	151	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5230.00	92.22	-----	-----	81.38	32.60	12.61	34.37	0.00	377	151	AVERAGE																																																																																							

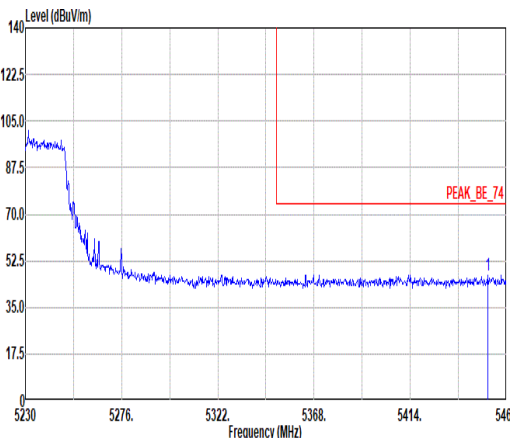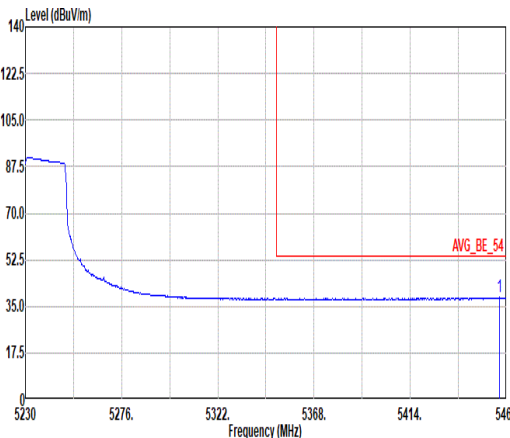

Mode	8																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																							
ANT	1																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5451.26</td><td>47.28</td><td>74.00</td><td>-26.72</td><td>36.61</td><td>32.51</td><td>12.91</td><td>34.75</td><td>0.00</td><td>377</td><td>151</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5451.26	47.28	74.00	-26.72	36.61	32.51	12.91	34.75	0.00	377	151	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5451.26	47.28	74.00	-26.72	36.61	32.51	12.91	34.75	0.00	377	151	PEAK																																												
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.560kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5456.78</td><td>38.33</td><td>54.00</td><td>-15.67</td><td>27.64</td><td>32.53</td><td>12.92</td><td>34.76</td><td>0.00</td><td>377</td><td>151</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5456.78	38.33	54.00	-15.67	27.64	32.53	12.92	34.76	0.00	377	151	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5456.78	38.33	54.00	-15.67	27.64	32.53	12.92	34.76	0.00	377	151	AVERAGE																																												

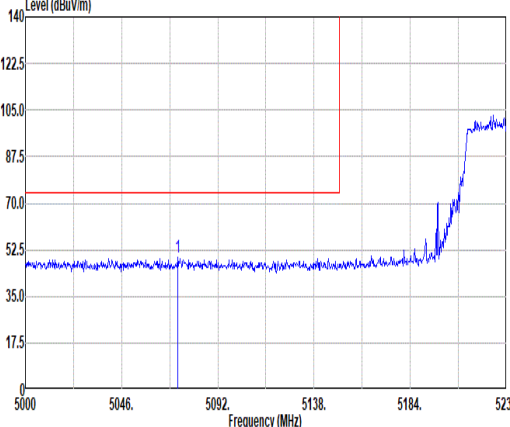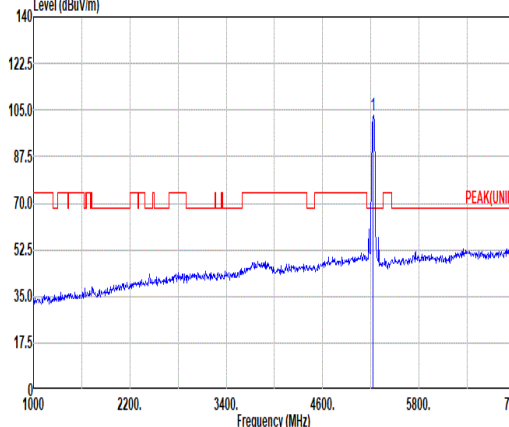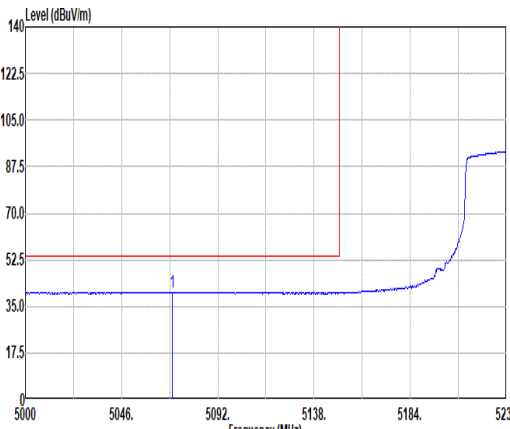
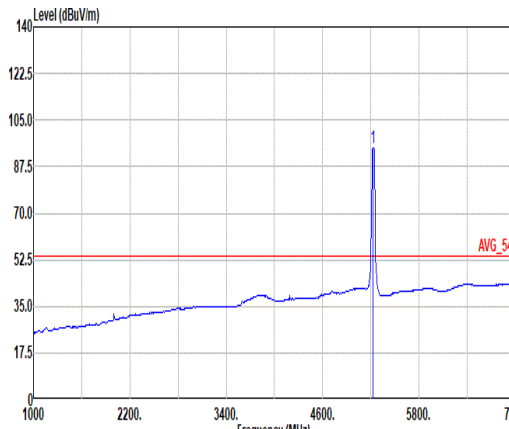


Mode	8																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5072.68</td><td>49.63</td><td>74.00</td><td>-24.37</td><td>38.76</td><td>32.60</td><td>12.37</td><td>34.10</td><td>0.00</td><td>331</td><td>217</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5072.68	49.63	74.00	-24.37	38.76	32.60	12.37	34.10	0.00	331	217	PEAK	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>102.81</td><td>-----</td><td>-----</td><td>91.97</td><td>32.60</td><td>12.62</td><td>34.38</td><td>0.00</td><td>331</td><td>217</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	102.81	-----	-----	91.97	32.60	12.62	34.38	0.00	331	217
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5072.68	49.63	74.00	-24.37	38.76	32.60	12.37	34.10	0.00	331	217	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5230.00	102.81	-----	-----	91.97	32.60	12.62	34.38	0.00	331	217	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.560kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5070.15</td><td>40.31</td><td>54.00</td><td>-13.69</td><td>29.43</td><td>32.60</td><td>12.37</td><td>34.09</td><td>0.00</td><td>331</td><td>217</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5070.15	40.31	54.00	-13.69	29.43	32.60	12.37	34.09	0.00	331	217	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.560kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th>Loss Factor</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5230.00</td><td>94.49</td><td>-----</td><td>-----</td><td>83.65</td><td>32.60</td><td>12.61</td><td>34.37</td><td>0.00</td><td>331</td><td>217</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	94.49	-----	-----	83.65	32.60	12.61	34.37	0.00	331	217
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5070.15	40.31	54.00	-13.69	29.43	32.60	12.37	34.09	0.00	331	217	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor	Loss Factor	Factor																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5230.00	94.49	-----	-----	83.65	32.60	12.61	34.37	0.00	331	217	AVERAGE																																																																																							





Mode	8																																																						
	Band Edge - R																																																						
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																						
ANT	1																																																						
Pol.	Vertical						Fundamental																																																
Peak	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5447.35</td><td>48.50</td><td>74.00</td><td>-25.50</td><td>37.04</td><td>32.49</td><td>12.91</td><td>34.74</td><td>0.00</td><td>331</td><td>217</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5447.35	48.50	74.00	-25.50	37.04	32.49	12.91	34.74	0.00	331	217	PEAK	Blank				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 5447.35	48.50	74.00	-25.50	37.04	32.49	12.91	34.74	0.00	331	217	PEAK																																												
Avg	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.560kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5457.70</td><td>38.56</td><td>54.00</td><td>-15.44</td><td>27.07</td><td>32.53</td><td>12.92</td><td>34.76</td><td>0.00</td><td>331</td><td>217</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5457.70	38.56	54.00	-15.44	27.07	32.53	12.92	34.76	0.00	331	217	AVERAGE	Blank				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 5457.70	38.56	54.00	-15.44	27.07	32.53	12.92	34.76	0.00	331	217	AVERAGE																																												



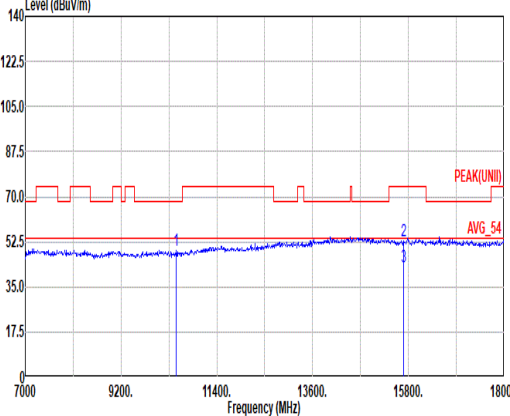
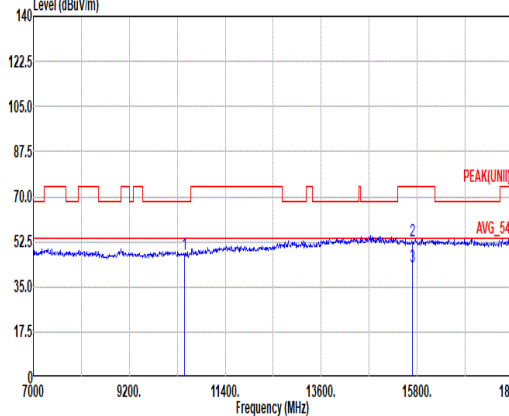


Mode	8																																																																																	
	Harmonic																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal						Vertical																																																																											
Peak Avg																																																																																		
	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL						Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL																																																																											
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10460.00</td><td>48.89</td><td>68.20</td><td>-19.31</td><td>33.02</td><td>37.10</td><td>18.19</td><td>39.87</td><td>0.45</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15690.00</td><td>52.95</td><td>74.00</td><td>-21.05</td><td>35.14</td><td>40.64</td><td>22.53</td><td>45.80</td><td>0.44</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15690.00</td><td>42.64</td><td>54.00</td><td>-11.36</td><td>24.83</td><td>40.64</td><td>22.53</td><td>45.80</td><td>0.44</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10460.00	48.89	68.20	-19.31	33.02	37.10	18.19	39.87	0.45	--	--	PEAK	2	15690.00	52.95	74.00	-21.05	35.14	40.64	22.53	45.80	0.44	--	--	PEAK	3	15690.00	42.64	54.00	-11.36	24.83	40.64	22.53	45.80	0.44	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	10460.00	48.89	68.20	-19.31	33.02	37.10	18.19	39.87	0.45	--	--	PEAK																																																																						
2	15690.00	52.95	74.00	-21.05	35.14	40.64	22.53	45.80	0.44	--	--	PEAK																																																																						
3	15690.00	42.64	54.00	-11.36	24.83	40.64	22.53	45.80	0.44	--	--	AVERAGE																																																																						

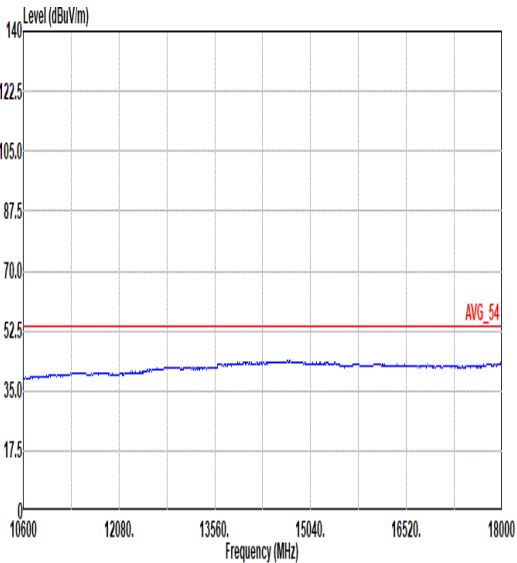
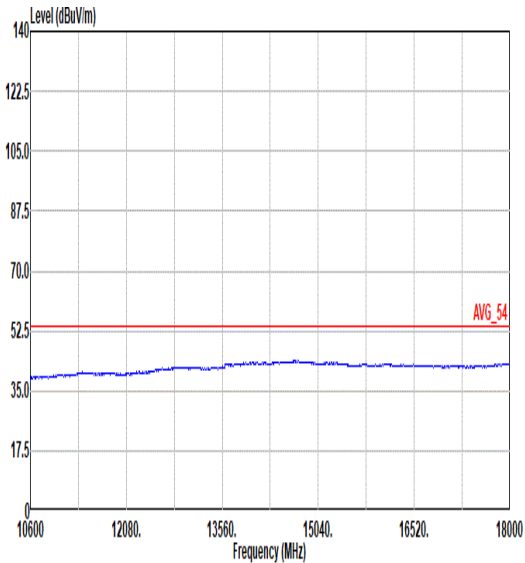


Mode	8	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL

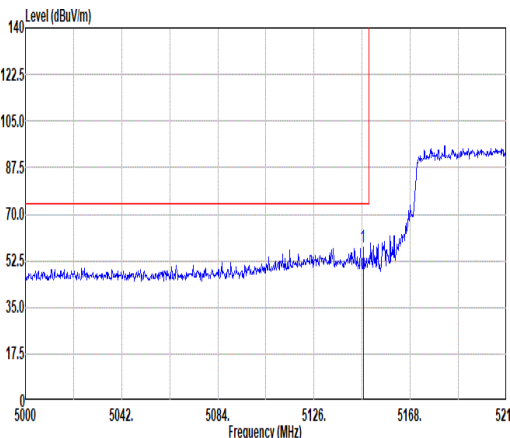
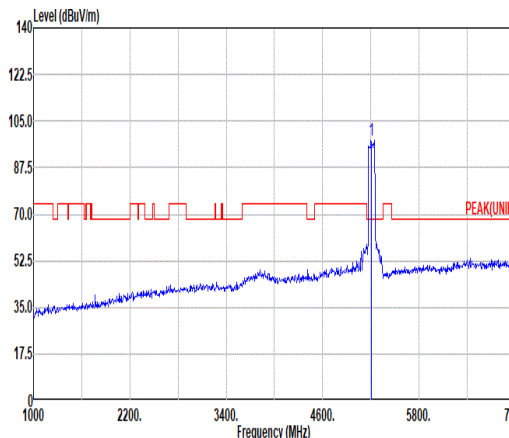
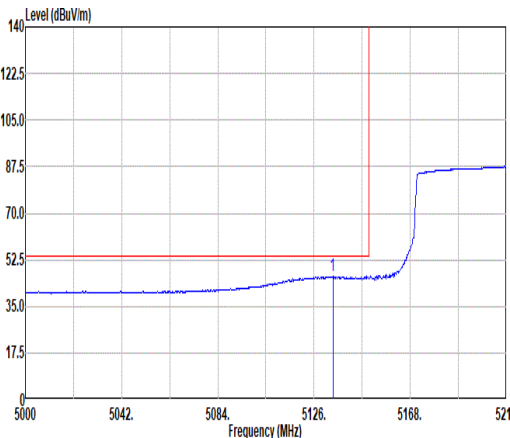
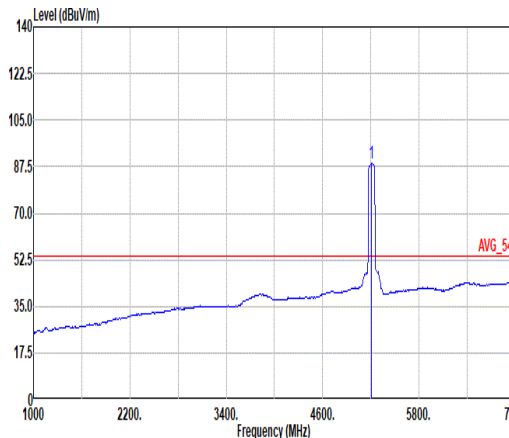


Mode	9																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5147.42</td><td>57.84</td><td>74.00</td><td>-16.16</td><td>46.97</td><td>32.60</td><td>12.49</td><td>34.22</td><td>0.00</td><td>100</td><td>154</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.42	57.84	74.00	-16.16	46.97	32.60	12.49	34.22	0.00	100	154	PEAK	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>97.95</td><td>-----</td><td>-----</td><td>87.09</td><td>32.60</td><td>12.57</td><td>34.31</td><td>0.00</td><td>100</td><td>154</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	97.95	-----	-----	87.09	32.60	12.57	34.31	0.00	100	154
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5147.42	57.84	74.00	-16.16	46.97	32.60	12.49	34.22	0.00	100	154	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5210.00	97.95	-----	-----	87.09	32.60	12.57	34.31	0.00	100	154	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5134.19</td><td>46.26</td><td>54.00</td><td>-7.74</td><td>35.39</td><td>32.60</td><td>12.47</td><td>34.20</td><td>0.00</td><td>100</td><td>154</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5134.19	46.26	54.00	-7.74	35.39	32.60	12.47	34.20	0.00	100	154	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>88.81</td><td>-----</td><td>-----</td><td>77.95</td><td>32.60</td><td>12.59</td><td>34.33</td><td>0.00</td><td>100</td><td>154</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	88.81	-----	-----	77.95	32.60	12.59	34.33	0.00	100	154
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5134.19	46.26	54.00	-7.74	35.39	32.60	12.47	34.20	0.00	100	154	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5210.00	88.81	-----	-----	77.95	32.60	12.59	34.33	0.00	100	154	AVERAGE																																																																																							

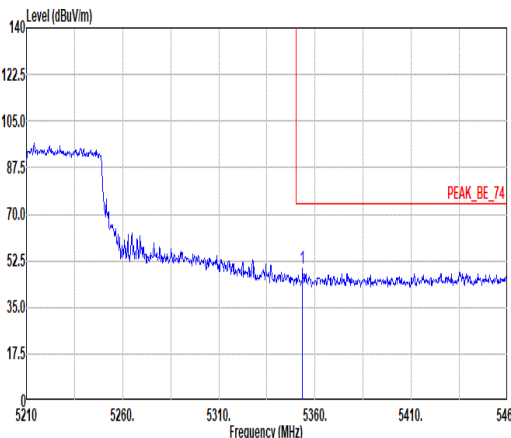
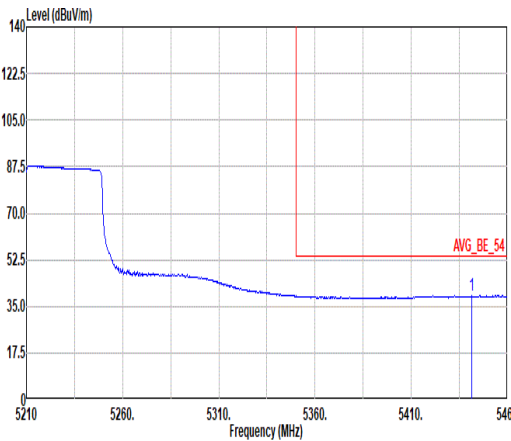


Mode	9																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																							
ANT	1																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5353.50</td><td>49.80</td><td>74.00</td><td>-24.20</td><td>39.19</td><td>32.40</td><td>12.79</td><td>34.58</td><td>0.00</td><td>100</td><td>154</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5353.50	49.80	74.00	-24.20	39.19	32.40	12.79	34.58	0.00	100	154	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5353.50	49.80	74.00	-24.20	39.19	32.40	12.79	34.58	0.00	100	154	PEAK																																												
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:1.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5441.25</td><td>39.01</td><td>54.00</td><td>-14.99</td><td>28.36</td><td>32.48</td><td>12.90</td><td>34.73</td><td>0.00</td><td>100</td><td>154</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5441.25	39.01	54.00	-14.99	28.36	32.48	12.90	34.73	0.00	100	154	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5441.25	39.01	54.00	-14.99	28.36	32.48	12.90	34.73	0.00	100	154	AVERAGE																																												

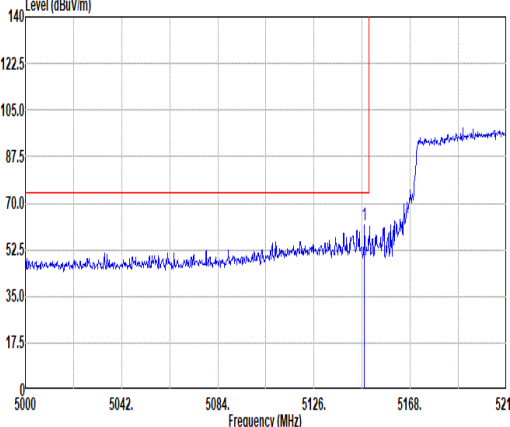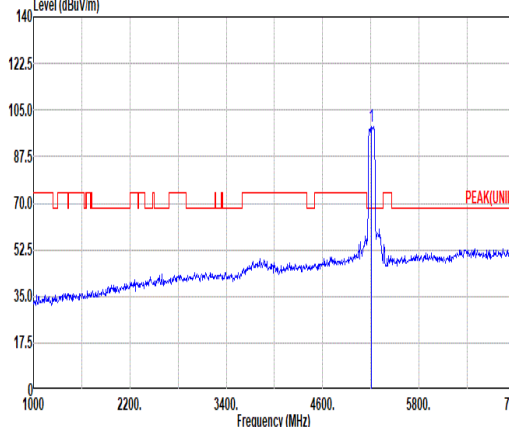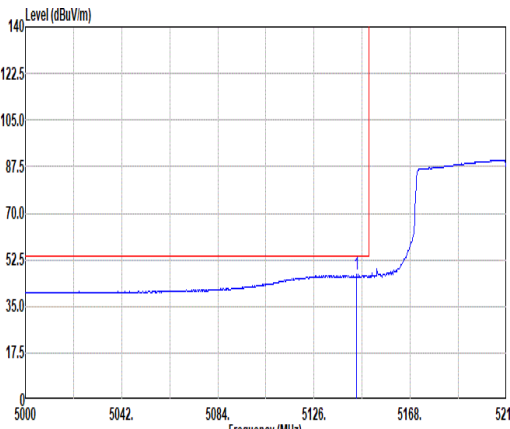
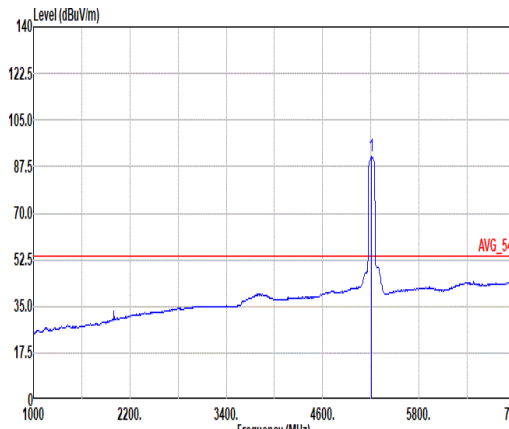


Mode	9																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto						Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto																																																																																												
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SMT:Auto						Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SMT:Auto																																																																																												
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5148.05</td><td>61.87</td><td>74.00</td><td>-12.13</td><td>51.00</td><td>32.60</td><td>12.49</td><td>34.22</td><td>0.00</td><td>395</td><td>220</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.05	61.87	74.00	-12.13	51.00	32.60	12.49	34.22	0.00	395	220	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>98.91</td><td>-----</td><td>-----</td><td>88.07</td><td>32.60</td><td>12.62</td><td>34.38</td><td>0.00</td><td>395</td><td>220</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	98.91	-----	-----	88.07	32.60	12.62	34.38	0.00	395	220	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5148.05	61.87	74.00	-12.13	51.00	32.60	12.49	34.22	0.00	395	220	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5210.00	98.91	-----	-----	88.07	32.60	12.62	34.38	0.00	395	220	PEAK																																																																																							
<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5144.69</td><td>46.80</td><td>54.00</td><td>-7.20</td><td>35.94</td><td>32.60</td><td>12.48</td><td>34.22</td><td>0.00</td><td>395</td><td>220</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5144.69	46.80	54.00	-7.20	35.94	32.60	12.48	34.22	0.00	395	220	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>91.17</td><td>-----</td><td>-----</td><td>80.31</td><td>32.60</td><td>12.58</td><td>34.32</td><td>0.00</td><td>395</td><td>220</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	91.17	-----	-----	80.31	32.60	12.58	34.32	0.00	395	220	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5144.69	46.80	54.00	-7.20	35.94	32.60	12.48	34.22	0.00	395	220	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5210.00	91.17	-----	-----	80.31	32.60	12.58	34.32	0.00	395	220	AVERAGE																																																																																							

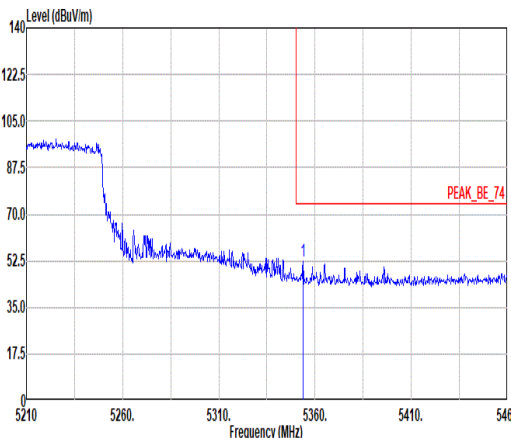
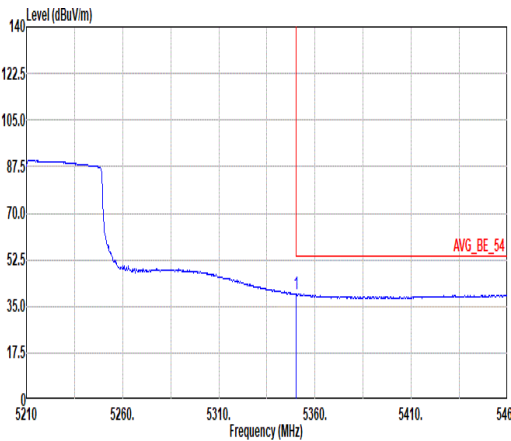


Mode	9																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																							
ANT	1																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5353.75</td><td>52.18</td><td>74.00</td><td>-21.82</td><td>41.57</td><td>32.40</td><td>12.79</td><td>34.58</td><td>0.00</td><td>395</td><td>220</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5353.75	52.18	74.00	-21.82	41.57	32.40	12.79	34.58	0.00	395	220	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5353.75	52.18	74.00	-21.82	41.57	32.40	12.79	34.58	0.00	395	220	PEAK																																												
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:1.100kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.25</td><td>39.83</td><td>54.00</td><td>-14.17</td><td>29.21</td><td>32.40</td><td>12.79</td><td>34.57</td><td>0.00</td><td>395</td><td>220</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.25	39.83	54.00	-14.17	29.21	32.40	12.79	34.57	0.00	395	220	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5350.25	39.83	54.00	-14.17	29.21	32.40	12.79	34.57	0.00	395	220	AVERAGE																																												



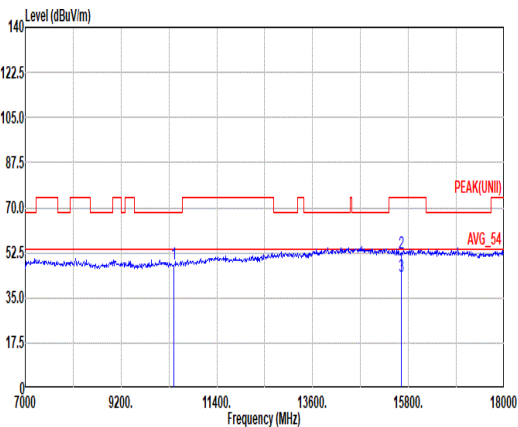
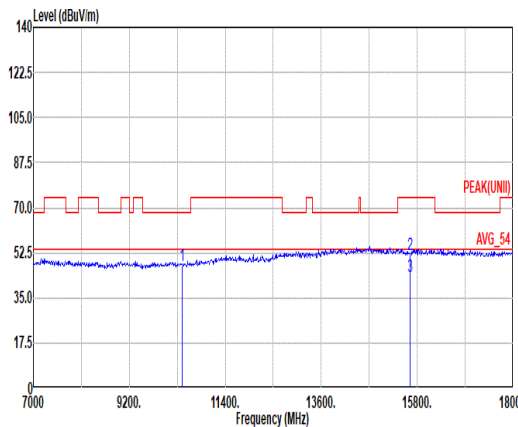


Mode	9																																																																																	
	Harmonic																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz																																																																																	
ANT	1																																																																																	
Pol.	Horizontal						Vertical																																																																											
Peak Avg																																																																																		
	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL						Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL																																																																											
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10420.00</td><td>48.08</td><td>68.20</td><td>-20.12</td><td>32.07</td><td>37.22</td><td>18.15</td><td>39.81</td><td>0.45</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15630.00</td><td>52.34</td><td>74.00</td><td>-21.66</td><td>34.69</td><td>40.44</td><td>22.48</td><td>45.70</td><td>0.43</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15630.00</td><td>43.12</td><td>54.00</td><td>-10.88</td><td>25.47</td><td>40.44</td><td>22.48</td><td>45.70</td><td>0.43</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10420.00	48.08	68.20	-20.12	32.07	37.22	18.15	39.81	0.45	--	--	PEAK	2	15630.00	52.34	74.00	-21.66	34.69	40.44	22.48	45.70	0.43	--	--	PEAK	3	15630.00	43.12	54.00	-10.88	25.47	40.44	22.48	45.70	0.43	--	--	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	10420.00	48.08	68.20	-20.12	32.07	37.22	18.15	39.81	0.45	--	--	PEAK																																																																						
2	15630.00	52.34	74.00	-21.66	34.69	40.44	22.48	45.70	0.43	--	--	PEAK																																																																						
3	15630.00	43.12	54.00	-10.88	25.47	40.44	22.48	45.70	0.43	--	--	AVERAGE																																																																						

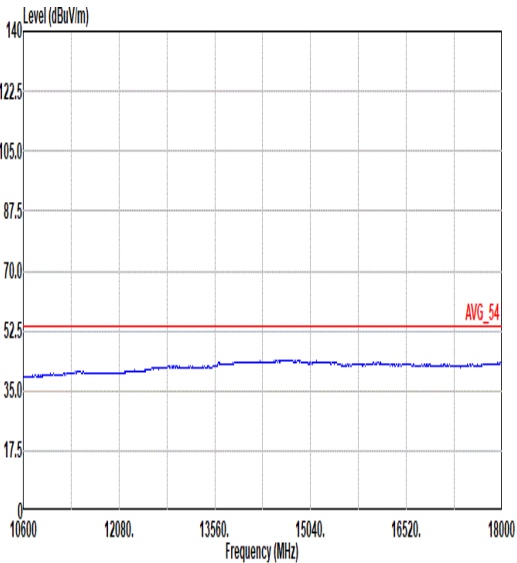
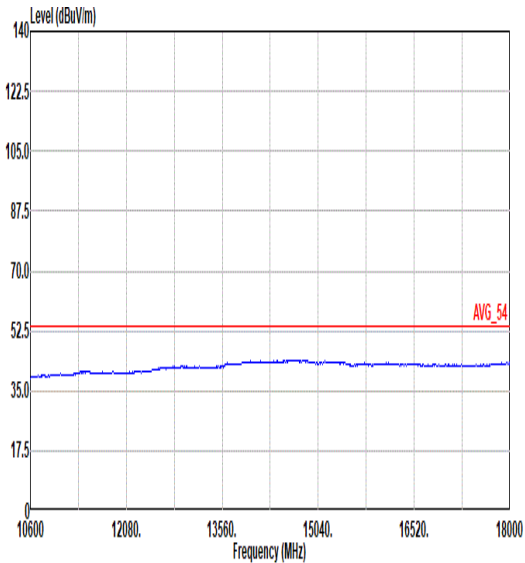


Mode	9	
	Harmonic	
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full RU_5210MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL

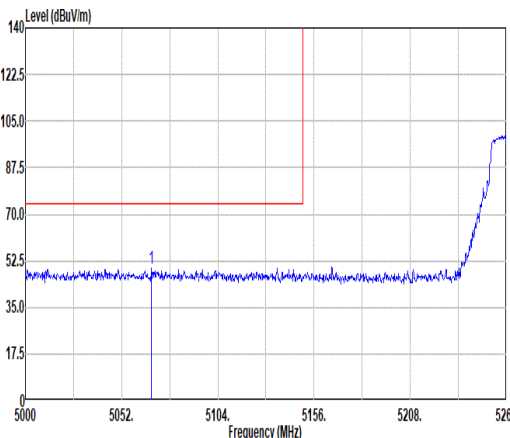
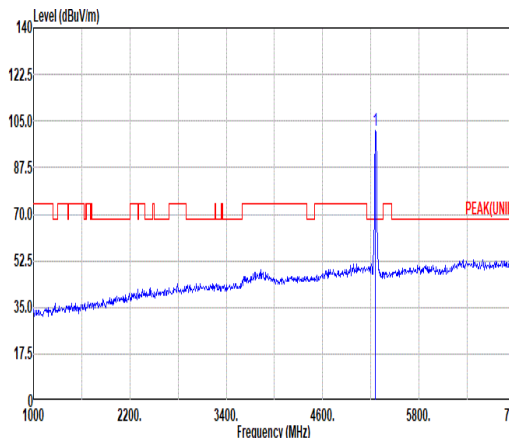
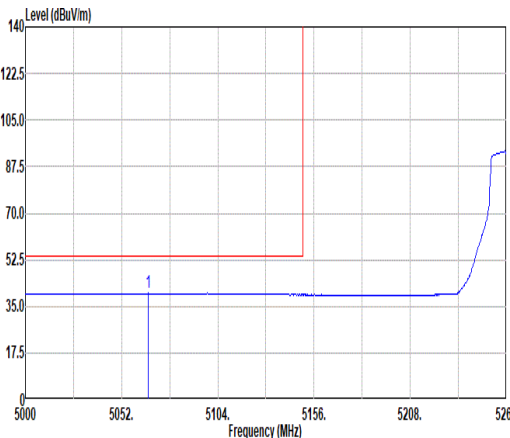
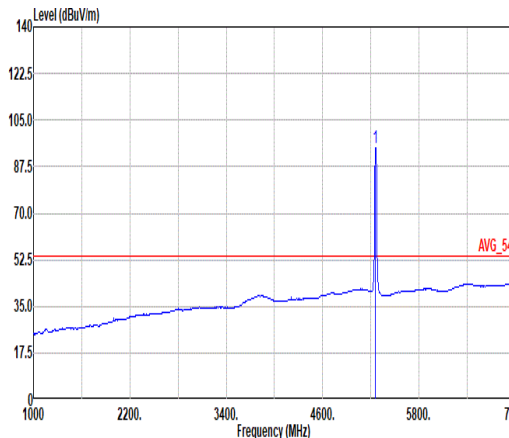


Mode	10																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5068.12</td><td>49.67</td><td>74.00</td><td>-24.33</td><td>38.79</td><td>32.60</td><td>12.37</td><td>34.09</td><td>0.00</td><td>122</td><td>127</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5068.12	49.67	74.00	-24.33	38.79	32.60	12.37	34.09	0.00	122	127	PEAK	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5260.00</td><td>101.63</td><td>-----</td><td>-----</td><td>90.81</td><td>32.58</td><td>12.66</td><td>34.42</td><td>0.00</td><td>122</td><td>127</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	101.63	-----	-----	90.81	32.58	12.66	34.42	0.00	122	127
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5068.12	49.67	74.00	-24.33	38.79	32.60	12.37	34.09	0.00	122	127	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5260.00	101.63	-----	-----	90.81	32.58	12.66	34.42	0.00	122	127	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5066.30</td><td>39.93</td><td>54.00</td><td>-14.07</td><td>29.05</td><td>32.60</td><td>12.36</td><td>34.00</td><td>0.00</td><td>122</td><td>127</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5066.30	39.93	54.00	-14.07	29.05	32.60	12.36	34.00	0.00	122	127	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5260.00</td><td>94.74</td><td>-----</td><td>-----</td><td>83.92</td><td>32.58</td><td>12.66</td><td>34.42</td><td>0.00</td><td>122</td><td>127</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5260.00	94.74	-----	-----	83.92	32.58	12.66	34.42	0.00	122	127
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5066.30	39.93	54.00	-14.07	29.05	32.60	12.36	34.00	0.00	122	127	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5260.00	94.74	-----	-----	83.92	32.58	12.66	34.42	0.00	122	127	AVERAGE																																																																																							

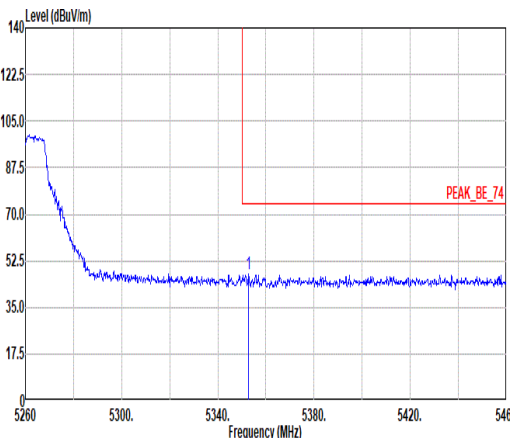
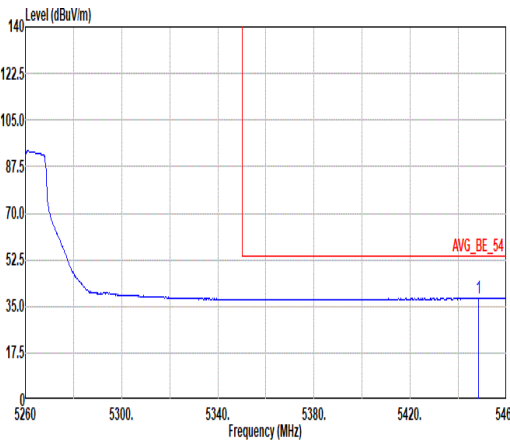


Mode	10																																																							
	Band Edge - R																																																							
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																							
ANT	1																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5352.60</td><td>47.40</td><td>74.00</td><td>-26.60</td><td>36.79</td><td>32.40</td><td>12.79</td><td>34.58</td><td>0.00</td><td>122</td><td>127</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5352.60	47.40	74.00	-26.60	36.79	32.40	12.79	34.58	0.00	122	127	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5352.60	47.40	74.00	-26.60	36.79	32.40	12.79	34.58	0.00	122	127	PEAK																																												
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5448.40</td><td>38.12</td><td>54.00</td><td>-15.88</td><td>27.45</td><td>32.50</td><td>12.91</td><td>34.74</td><td>0.00</td><td>122</td><td>127</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5448.40	38.12	54.00	-15.88	27.45	32.50	12.91	34.74	0.00	122	127	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5448.40	38.12	54.00	-15.88	27.45	32.50	12.91	34.74	0.00	122	127	AVERAGE																																												

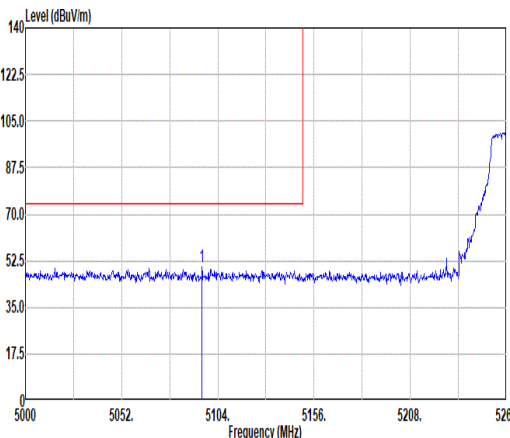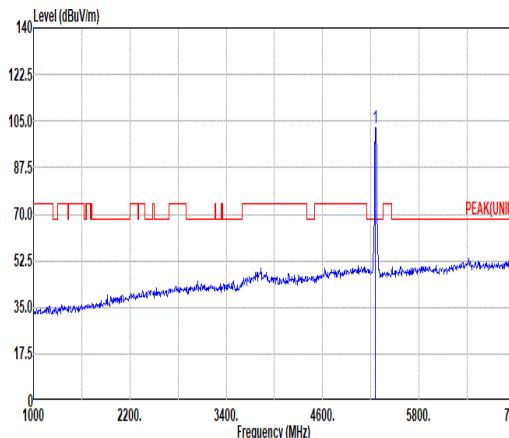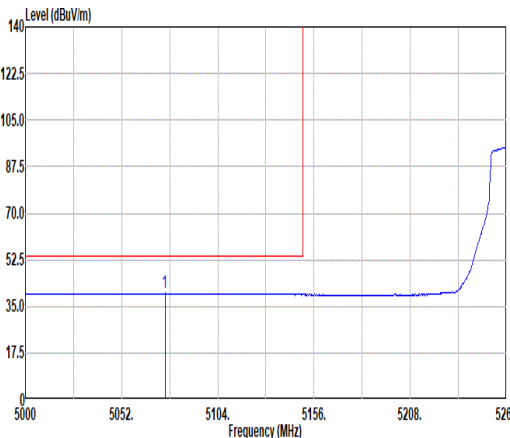
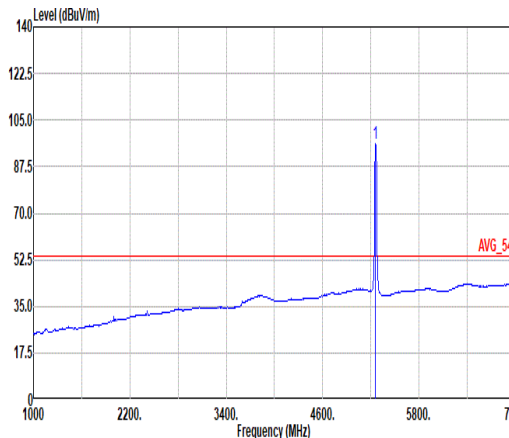


Mode	10																																																																																	
	Band Edge - L																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																	
ANT	1																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5095.42</td><td>50.30</td><td>74.00</td><td>-23.70</td><td>39.42</td><td>32.60</td><td>12.41</td><td>34.13</td><td>0.00</td><td>363 225 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5095.42	50.30	74.00	-23.70	39.42	32.60	12.41	34.13	0.00	363 225 PEAK	 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5260.00</td><td>102.55</td><td>-----</td><td>-----</td><td>91.73</td><td>32.58</td><td>12.66</td><td>34.42</td><td>0.00</td><td>363 225 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5260.00	102.55	-----	-----	91.73	32.58	12.66	34.42	0.00	363 225 PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5095.42	50.30	74.00	-23.70	39.42	32.60	12.41	34.13	0.00	363 225 PEAK																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5260.00	102.55	-----	-----	91.73	32.58	12.66	34.42	0.00	363 225 PEAK																																																																									
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5075.40</td><td>39.89</td><td>54.00</td><td>-14.11</td><td>29.01</td><td>32.60</td><td>12.38</td><td>34.10</td><td>0.00</td><td>363 225 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5075.40	39.89	54.00	-14.11	29.01	32.60	12.38	34.10	0.00	363 225 AVERAGE	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5260.00</td><td>96.05</td><td>-----</td><td>-----</td><td>85.23</td><td>32.58</td><td>12.66</td><td>34.42</td><td>0.00</td><td>363 225 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5260.00	96.05	-----	-----	85.23	32.58	12.66	34.42	0.00	363 225 AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5075.40	39.89	54.00	-14.11	29.01	32.60	12.38	34.10	0.00	363 225 AVERAGE																																																																									
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1 5260.00	96.05	-----	-----	85.23	32.58	12.66	34.42	0.00	363 225 AVERAGE																																																																									

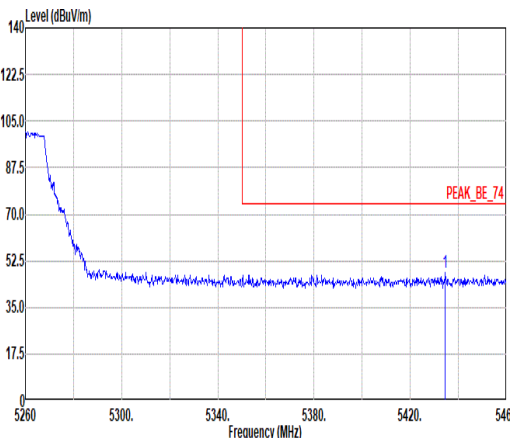
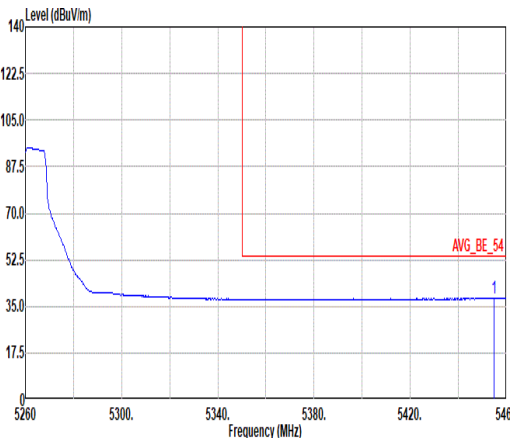


Mode	10																																																							
	Band Edge - R																																																							
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																							
ANT	1																																																							
Pol.	Vertical						Fundamental																																																	
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5434.60</td><td>48.00</td><td>74.00</td><td>-26.00</td><td>37.36</td><td>32.47</td><td>12.89</td><td>34.72</td><td>0.00</td><td>363</td><td>225</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5434.60	48.00	74.00	-26.00	37.36	32.47	12.89	34.72	0.00	363	225	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5434.60	48.00	74.00	-26.00	37.36	32.47	12.89	34.72	0.00	363	225	PEAK																																												
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5454.00</td><td>38.05</td><td>54.00</td><td>-15.95</td><td>27.37</td><td>32.52</td><td>12.91</td><td>34.75</td><td>0.00</td><td>363</td><td>225</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.00	38.05	54.00	-15.95	27.37	32.52	12.91	34.75	0.00	363	225	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5454.00	38.05	54.00	-15.95	27.37	32.52	12.91	34.75	0.00	363	225	AVERAGE																																												



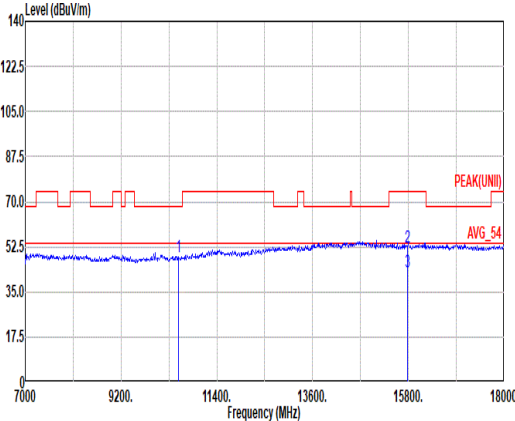
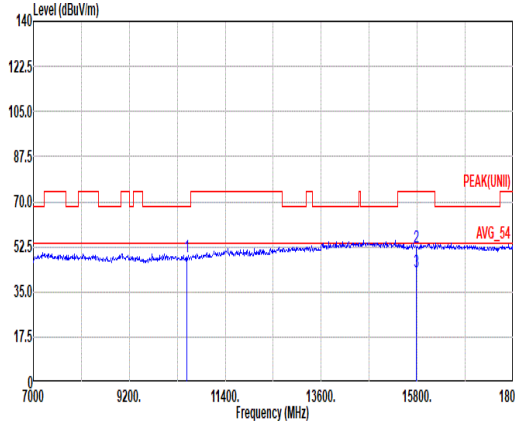


Mode	10																																																																																		
	Harmonic																																																																																		
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																		
ANT	1																																																																																		
Pol.	Horizontal						Vertical																																																																												
Peak Avg																																																																																			
	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL						Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL																																																																												
<table><tr><th></th><th></th><th>Limit</th><th></th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10520.00</td><td>48.76</td><td>68.20</td><td>-19.44</td><td>32.84</td><td>37.18</td><td>18.24</td><td>39.94</td><td>0.44</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>15780.00</td><td>52.20</td><td>74.00</td><td>-21.80</td><td>34.27</td><td>40.84</td><td>22.61</td><td>45.96</td><td>0.44</td><td>--</td><td>PEAK</td></tr><tr><td>3</td><td>15780.00</td><td>43.03</td><td>54.00</td><td>-10.97</td><td>25.10</td><td>40.84</td><td>22.61</td><td>45.96</td><td>0.44</td><td>--</td><td>AVERAGE</td></tr></table>														Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10520.00	48.76	68.20	-19.44	32.84	37.18	18.24	39.94	0.44	--	PEAK	2	15780.00	52.20	74.00	-21.80	34.27	40.84	22.61	45.96	0.44	--	PEAK	3	15780.00	43.03	54.00	-10.97	25.10	40.84	22.61	45.96	0.44	--	AVERAGE
		Limit		Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor		Remark																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																								
1	10520.00	48.76	68.20	-19.44	32.84	37.18	18.24	39.94	0.44	--	PEAK																																																																								
2	15780.00	52.20	74.00	-21.80	34.27	40.84	22.61	45.96	0.44	--	PEAK																																																																								
3	15780.00	43.03	54.00	-10.97	25.10	40.84	22.61	45.96	0.44	--	AVERAGE																																																																								

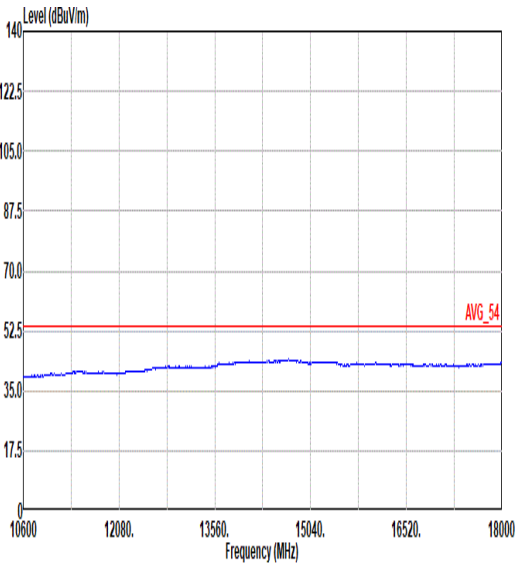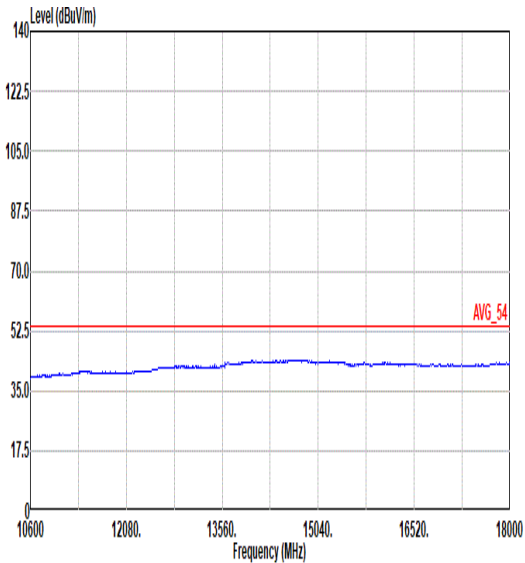

Mode	10	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL

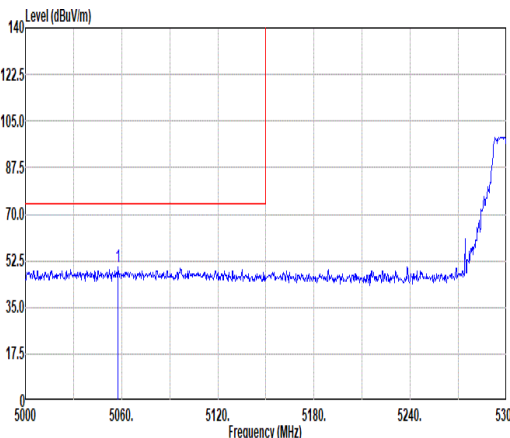
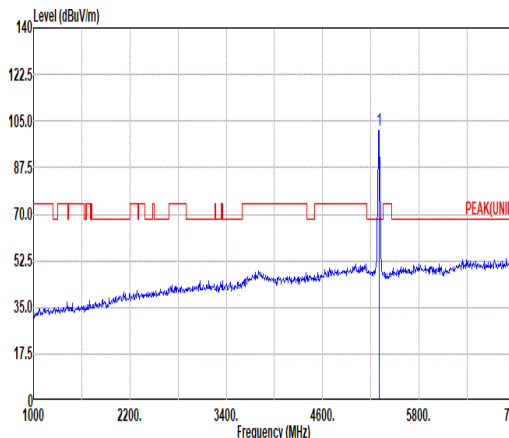
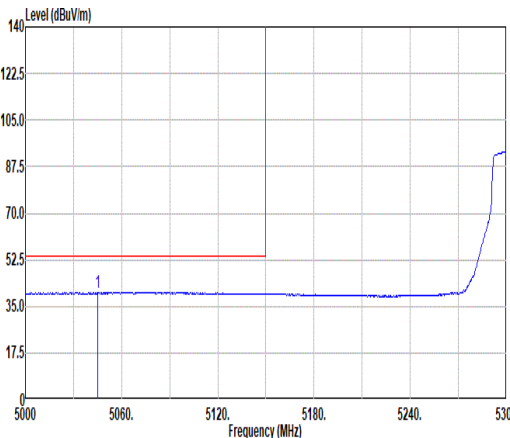
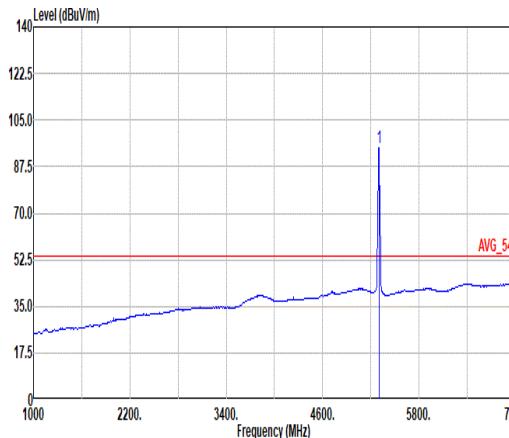


		11																																																																																															
Mode	Band Edge - L																																																																																																
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																
ANT	1																																																																																																
Pol.	Horizontal						Fundamental																																																																																										
Peak																																																																																																	
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5057.90</td><td>49.99</td><td>74.00</td><td>-24.01</td><td>39.11</td><td>32.60</td><td>12.35</td><td>34.07</td><td>0.00</td><td>100</td><td>125</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5057.90	49.99	74.00	-24.01	39.11	32.60	12.35	34.07	0.00	100	125	PEAK	Site : 03CH21-HY Condition: PEAK(UNI) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5300.00</td><td>101.54</td><td>-----</td><td>-----</td><td>90.81</td><td>32.50</td><td>12.72</td><td>34.49</td><td>0.00</td><td>100</td><td>125</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5300.00	101.54	-----	-----	90.81	32.50	12.72	34.49	0.00	100	125
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																									
1 5057.90	49.99	74.00	-24.01	39.11	32.60	12.35	34.07	0.00	100	125	PEAK																																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																									
1 5300.00	101.54	-----	-----	90.81	32.50	12.72	34.49	0.00	100	125	PEAK																																																																																						
Avg																																																																																																	
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5045.00</td><td>40.12</td><td>54.00</td><td>-13.88</td><td>29.23</td><td>32.61</td><td>12.33</td><td>34.05</td><td>0.00</td><td>100</td><td>125</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5045.00	40.12	54.00	-13.88	29.23	32.61	12.33	34.05	0.00	100	125	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th></th><th></th></tr><tr><td>1 5300.00</td><td>94.51</td><td>-----</td><td>-----</td><td>83.77</td><td>32.51</td><td>12.71</td><td>34.48</td><td>0.00</td><td>100</td><td>125</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB			1 5300.00	94.51	-----	-----	83.77	32.51	12.71	34.48	0.00	100	125
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																									
1 5045.00	40.12	54.00	-13.88	29.23	32.61	12.33	34.05	0.00	100	125	AVERAGE																																																																																						
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB																																																																																									
1 5300.00	94.51	-----	-----	83.77	32.51	12.71	34.48	0.00	100	125	AVERAGE																																																																																						





Mode	11																																																						
	Band Edge - R																																																						
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																						
ANT	1																																																						
Pol.	Horizontal						Fundamental																																																
Peak	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5353.60</td><td>47.88</td><td>74.00</td><td>-26.12</td><td>37.27</td><td>32.40</td><td>12.79</td><td>34.58</td><td>0.00</td><td>100</td><td>125</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5353.60	47.88	74.00	-26.12	37.27	32.40	12.79	34.58	0.00	100	125	PEAK	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5353.60	47.88	74.00	-26.12	37.27	32.40	12.79	34.58	0.00	100	125	PEAK																																											
Avg	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5352.48</td><td>38.52</td><td>54.00</td><td>-15.48</td><td>27.91</td><td>32.40</td><td>12.79</td><td>34.58</td><td>0.00</td><td>100</td><td>125</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5352.48	38.52	54.00	-15.48	27.91	32.40	12.79	34.58	0.00	100	125	AVERAGE	Blank				
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5352.48	38.52	54.00	-15.48	27.91	32.40	12.79	34.58	0.00	100	125	AVERAGE																																											

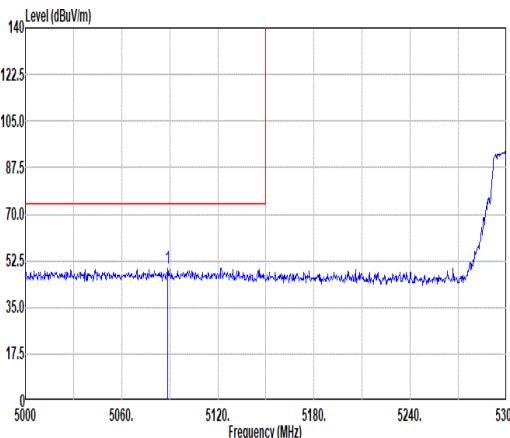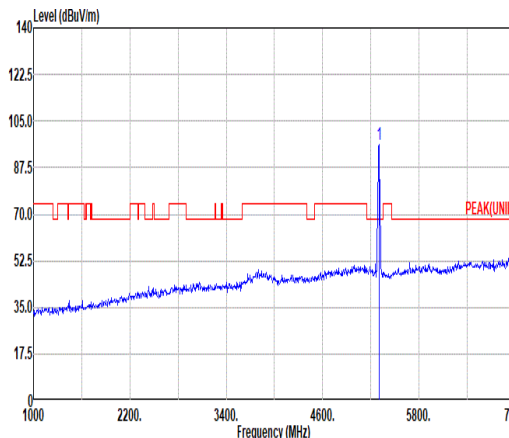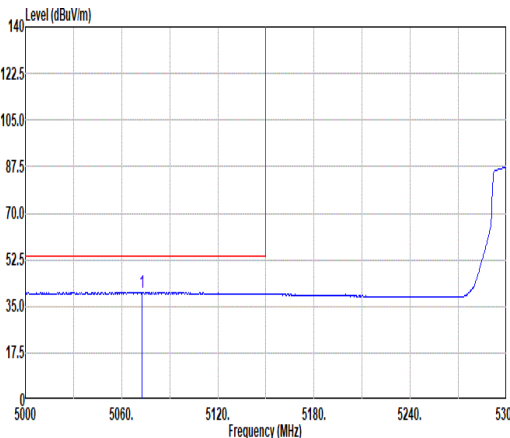
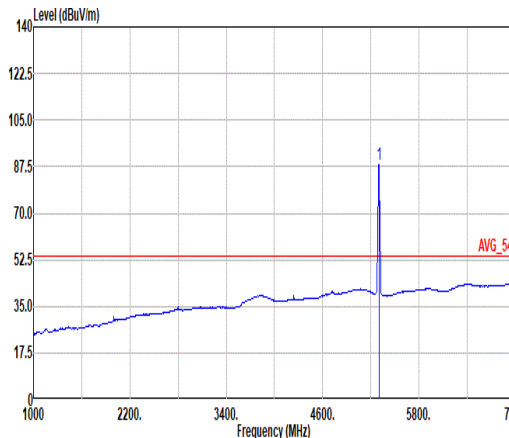


Mode	11																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Vertical						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5088.80</td><td>49.76</td><td>74.00</td><td>-24.24</td><td>38.88</td><td>32.60</td><td>12.40</td><td>34.12</td><td>0.00</td><td>300</td><td>284</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5088.80	49.76	74.00	-24.24	38.88	32.60	12.40	34.12	0.00	300	284	PEAK	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5300.00</td><td>96.06</td><td>-----</td><td>-----</td><td>85.33</td><td>32.50</td><td>12.72</td><td>34.49</td><td>0.00</td><td>300</td><td>284</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5300.00	96.06	-----	-----	85.33	32.50	12.72	34.49	0.00	300	284
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5088.80	49.76	74.00	-24.24	38.88	32.60	12.40	34.12	0.00	300	284	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5300.00	96.06	-----	-----	85.33	32.50	12.72	34.49	0.00	300	284	PEAK																																																																																							
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5072.90</td><td>40.11</td><td>54.00</td><td>-13.89</td><td>29.24</td><td>32.60</td><td>12.37</td><td>34.10</td><td>0.00</td><td>300</td><td>284</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5072.90	40.11	54.00	-13.89	29.24	32.60	12.37	34.10	0.00	300	284	AVERAGE	Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5300.00</td><td>88.47</td><td>-----</td><td>-----</td><td>77.73</td><td>32.51</td><td>12.71</td><td>34.48</td><td>0.00</td><td>300</td><td>284</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5300.00	88.47	-----	-----	77.73	32.51	12.71	34.48	0.00	300	284
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5072.90	40.11	54.00	-13.89	29.24	32.60	12.37	34.10	0.00	300	284	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5300.00	88.47	-----	-----	77.73	32.51	12.71	34.48	0.00	300	284	AVERAGE																																																																																							

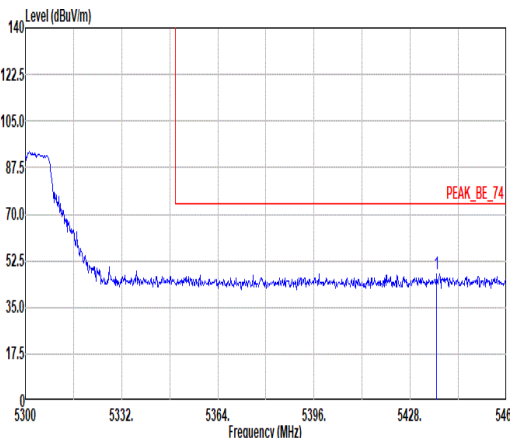
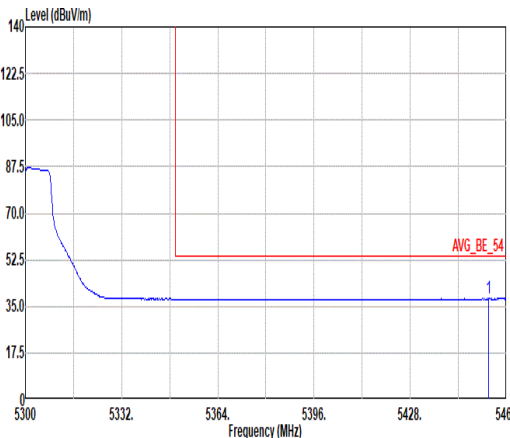


Mode	11																																																						
	Band Edge - R																																																						
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																						
ANT	1																																																						
Pol.	Vertical						Fundamental																																																
Peak	 Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5436.00</td><td>47.49</td><td>74.00</td><td>-26.51</td><td>36.04</td><td>32.47</td><td>12.90</td><td>34.72</td><td>0.00</td><td>300</td><td>204</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5436.00	47.49	74.00	-26.51	36.04	32.47	12.90	34.72	0.00	300	204	PEAK	Blank				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 5436.00	47.49	74.00	-26.51	36.04	32.47	12.90	34.72	0.00	300	204	PEAK																																												
Avg	 Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SMT:Auto <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1 5454.00</td><td>37.94</td><td>54.00</td><td>-16.06</td><td>27.26</td><td>32.52</td><td>12.91</td><td>34.75</td><td>0.00</td><td>300</td><td>204</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5454.00	37.94	54.00	-16.06	27.26	32.52	12.91	34.75	0.00	300	204	AVERAGE	Blank				
Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	cm	deg	Remark																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																													
1 5454.00	37.94	54.00	-16.06	27.26	32.52	12.91	34.75	0.00	300	204	AVERAGE																																												



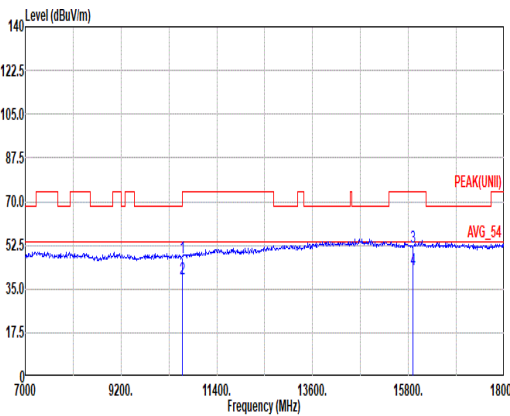
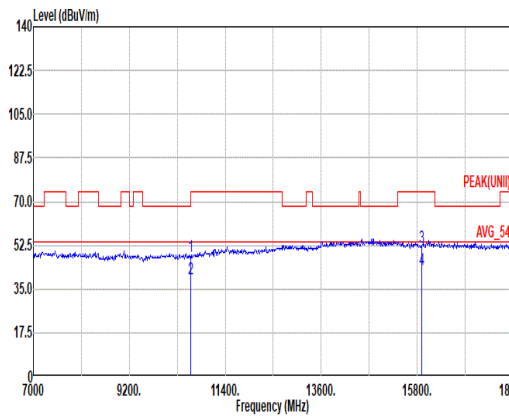


Mode	11																																																																																																						
	Harmonic																																																																																																						
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																						
ANT	1																																																																																																						
Pol.	Horizontal																																																																																																						
Peak Avg	 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th colspan="2">Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10600.00</td><td>47.45</td><td>74.00</td><td>-26.55</td><td>31.30</td><td>37.40</td><td>18.31</td><td>40.00</td><td>0.44</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>10600.00</td><td>38.84</td><td>54.00</td><td>-15.16</td><td>22.69</td><td>37.40</td><td>18.31</td><td>40.00</td><td>0.44</td><td>--</td><td>--</td><td>AVERAGE</td></tr><tr><td>3</td><td>15900.00</td><td>51.99</td><td>74.00</td><td>-22.01</td><td>34.30</td><td>40.70</td><td>22.71</td><td>46.16</td><td>0.44</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>15900.00</td><td>42.64</td><td>54.00</td><td>-11.36</td><td>24.95</td><td>40.70</td><td>22.71</td><td>46.16</td><td>0.44</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>															Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq		Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	47.45	74.00	-26.55	31.30	37.40	18.31	40.00	0.44	--	--	PEAK	2	10600.00	38.84	54.00	-15.16	22.69	37.40	18.31	40.00	0.44	--	--	AVERAGE	3	15900.00	51.99	74.00	-22.01	34.30	40.70	22.71	46.16	0.44	--	--	PEAK	4	15900.00	42.64	54.00	-11.36	24.95	40.70	22.71	46.16	0.44	--	--	AVERAGE
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq		Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																														
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	10600.00	47.45	74.00	-26.55	31.30	37.40	18.31	40.00	0.44	--	--	PEAK																																																																																											
2	10600.00	38.84	54.00	-15.16	22.69	37.40	18.31	40.00	0.44	--	--	AVERAGE																																																																																											
3	15900.00	51.99	74.00	-22.01	34.30	40.70	22.71	46.16	0.44	--	--	PEAK																																																																																											
4	15900.00	42.64	54.00	-11.36	24.95	40.70	22.71	46.16	0.44	--	--	AVERAGE																																																																																											
Peak Avg	 Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th colspan="2">Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Factor</th><th></th><th></th></tr><tr><th colspan="2"></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10600.00</td><td>48.32</td><td>74.00</td><td>-25.68</td><td>32.17</td><td>37.40</td><td>18.31</td><td>40.00</td><td>0.44</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>10600.00</td><td>38.96</td><td>54.00</td><td>-15.04</td><td>22.81</td><td>37.40</td><td>18.31</td><td>40.00</td><td>0.44</td><td>--</td><td>--</td><td>AVERAGE</td></tr><tr><td>3</td><td>15900.00</td><td>51.78</td><td>74.00</td><td>-22.22</td><td>34.09</td><td>40.70</td><td>22.71</td><td>46.16</td><td>0.44</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>15900.00</td><td>42.59</td><td>54.00</td><td>-11.41</td><td>24.90</td><td>40.70</td><td>22.71</td><td>46.16</td><td>0.44</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>															Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq		Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10600.00	48.32	74.00	-25.68	32.17	37.40	18.31	40.00	0.44	--	--	PEAK	2	10600.00	38.96	54.00	-15.04	22.81	37.40	18.31	40.00	0.44	--	--	AVERAGE	3	15900.00	51.78	74.00	-22.22	34.09	40.70	22.71	46.16	0.44	--	--	PEAK	4	15900.00	42.59	54.00	-11.41	24.90	40.70	22.71	46.16	0.44	--	--	AVERAGE
			Limit		Read		Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																										
Freq		Level	Line Margin	Level	Factor	Loss	Factor	Factor	Factor																																																																																														
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																											
1	10600.00	48.32	74.00	-25.68	32.17	37.40	18.31	40.00	0.44	--	--	PEAK																																																																																											
2	10600.00	38.96	54.00	-15.04	22.81	37.40	18.31	40.00	0.44	--	--	AVERAGE																																																																																											
3	15900.00	51.78	74.00	-22.22	34.09	40.70	22.71	46.16	0.44	--	--	PEAK																																																																																											
4	15900.00	42.59	54.00	-11.41	24.90	40.70	22.71	46.16	0.44	--	--	AVERAGE																																																																																											



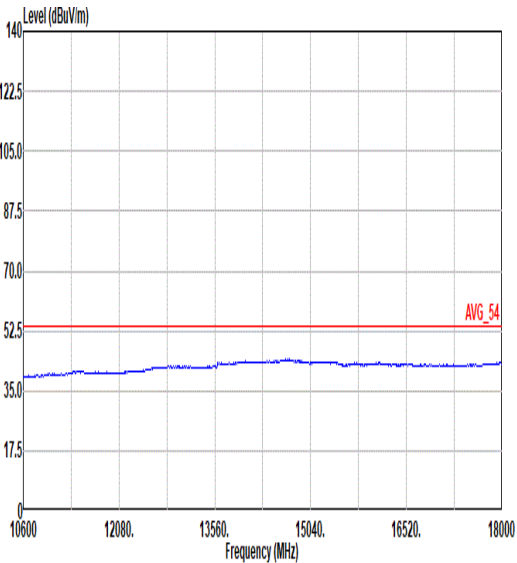
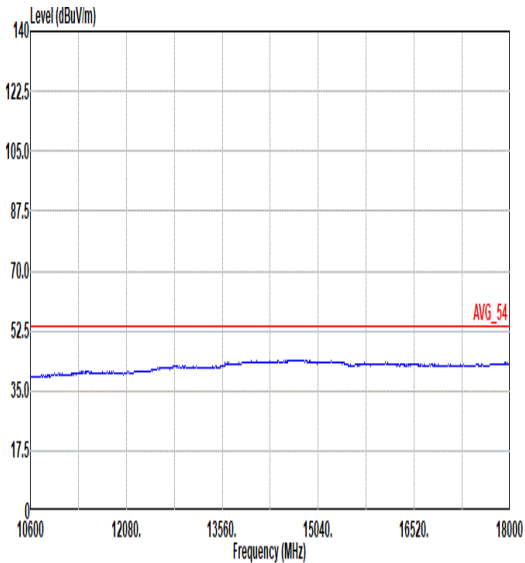


Mode	11	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL

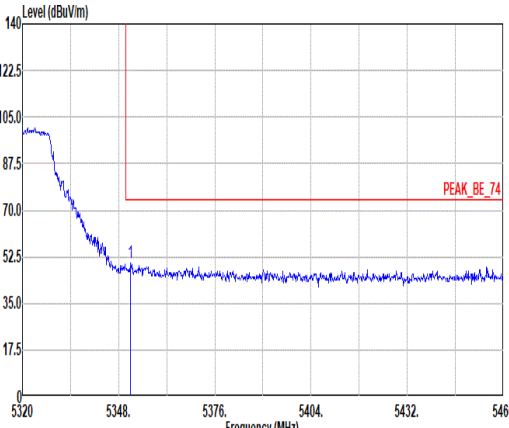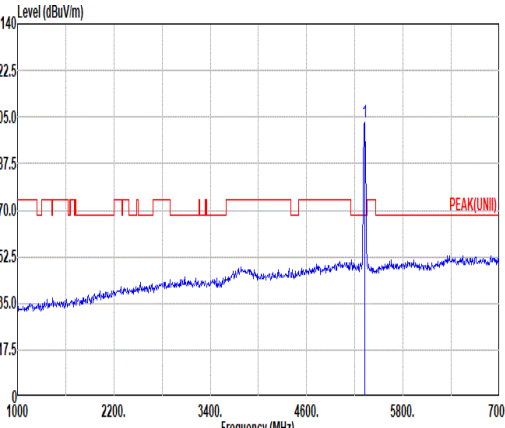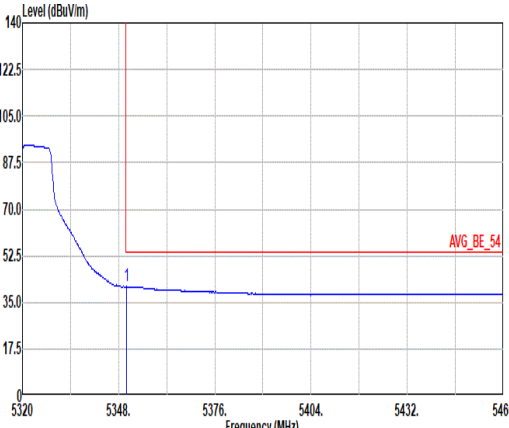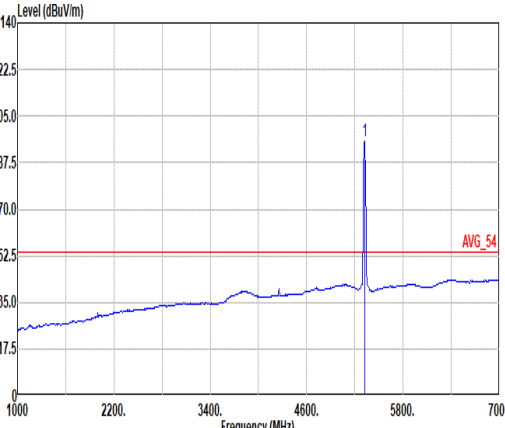

Mode	12																																																																																																		
	Band Edge																																																																																																		
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																		
ANT	1																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto						Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 5351.50</td><td>50.03</td><td>74.00</td><td>-23.97</td><td>39.41</td><td>32.40</td><td>12.79</td><td>34.57</td><td>0.00</td><td>111</td><td>110</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5351.50	50.03	74.00	-23.97	39.41	32.40	12.79	34.57	0.00	111	110	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 5320.00</td><td>102.85</td><td>-----</td><td>-----</td><td>92.17</td><td>32.46</td><td>12.74</td><td>34.52</td><td>0.00</td><td>111</td><td>110</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5320.00	102.85	-----	-----	92.17	32.46	12.74	34.52	0.00	111	110
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1 5351.50	50.03	74.00	-23.97	39.41	32.40	12.79	34.57	0.00	111	110	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1 5320.00	102.85	-----	-----	92.17	32.46	12.74	34.52	0.00	111	110	PEAK																																																																																								
Avg																																																																																																			
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto						Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto																																																																																												
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 5350.24</td><td>41.11</td><td>54.00</td><td>-12.89</td><td>30.49</td><td>32.40</td><td>12.79</td><td>34.57</td><td>0.00</td><td>111</td><td>110</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5350.24	41.11	54.00	-12.89	30.49	32.40	12.79	34.57	0.00	111	110	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 5320.00</td><td>95.62</td><td>-----</td><td>-----</td><td>84.94</td><td>32.46</td><td>12.74</td><td>34.52</td><td>0.00</td><td>111</td><td>110</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1 5320.00	95.62	-----	-----	84.94	32.46	12.74	34.52	0.00	111	110
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1 5350.24	41.11	54.00	-12.89	30.49	32.40	12.79	34.57	0.00	111	110	AVERAGE																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																									
1 5320.00	95.62	-----	-----	84.94	32.46	12.74	34.52	0.00	111	110	AVERAGE																																																																																								

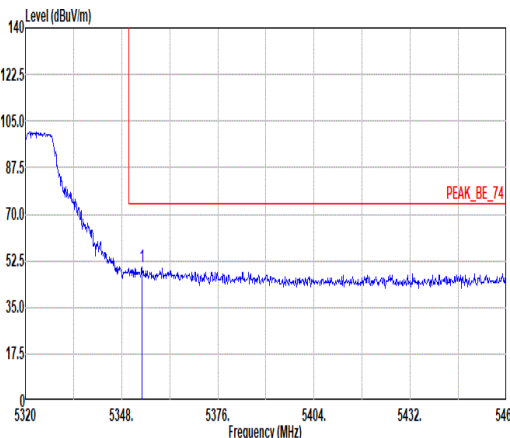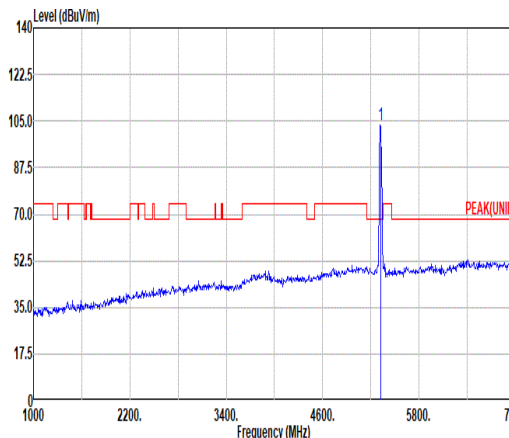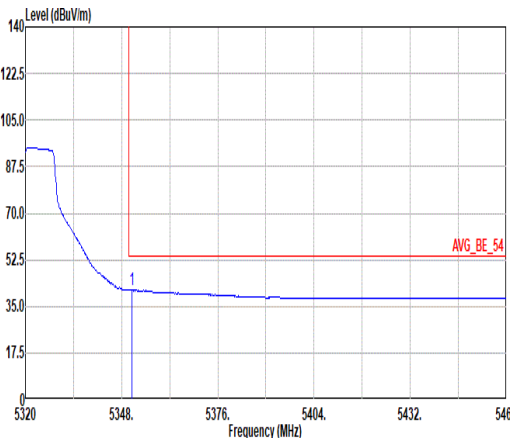
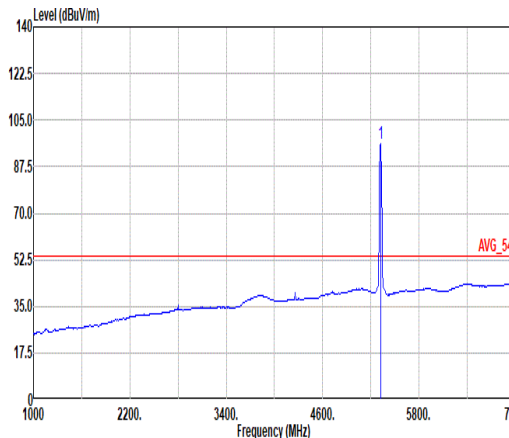


Mode	12																																																																																																																
	Band Edge																																																																																																																
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																																
ANT	1																																																																																																																
Pol.	Vertical						Fundamental																																																																																																										
Peak																																																																																																																	
	Site : 03CH21-HY Condition: PEAK_BE_74 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto						Site : 03CH21-HY Condition: PEAK(UNI) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto																																																																																																										
Avg																																																																																																																	
	Site : 03CH21-HY Condition: AVG_BE_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto						Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL : RBW:1000.000kHz VBW:0.200kHz SWT:Auto																																																																																																										
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5353.88</td><td>50.25</td><td>74.00</td><td>-23.75</td><td>39.64</td><td>32.40</td><td>12.79</td><td>34.58</td><td>0.00</td><td>287</td><td>241</td><td>PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5353.88	50.25	74.00	-23.75	39.64	32.40	12.79	34.58	0.00	287	241	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>103.33</td><td>-----</td><td>-----</td><td>92.63</td><td>32.47</td><td>12.74</td><td>34.51</td><td>0.00</td><td>287</td><td>241</td><td>PEAK</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	103.33	-----	-----	92.63	32.47	12.74	34.51	0.00	287	241	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5353.88	50.25	74.00	-23.75	39.64	32.40	12.79	34.58	0.00	287	241	PEAK																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5320.00	103.33	-----	-----	92.63	32.47	12.74	34.51	0.00	287	241	PEAK																																																																																																					
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.94</td><td>41.38</td><td>54.00</td><td>-12.62</td><td>30.76</td><td>32.40</td><td>12.79</td><td>34.57</td><td>0.00</td><td>287</td><td>241</td><td>AVERAGE</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.94	41.38	54.00	-12.62	30.76	32.40	12.79	34.57	0.00	287	241	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>96.00</td><td>-----</td><td>-----</td><td>85.40</td><td>32.46</td><td>12.74</td><td>34.52</td><td>0.00</td><td>287</td><td>241</td><td>AVERAGE</td></tr></table>														Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	96.00	-----	-----	85.40	32.46	12.74	34.52	0.00	287	241	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5350.94	41.38	54.00	-12.62	30.76	32.40	12.79	34.57	0.00	287	241	AVERAGE																																																																																																					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	5320.00	96.00	-----	-----	85.40	32.46	12.74	34.52	0.00	287	241	AVERAGE																																																																																																					



Mode	12																																																																																																																																																																																		
	Harmonic																																																																																																																																																																																		
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																																																																																																		
ANT	1																																																																																																																																																																																		
Pol.	Horizontal						Vertical																																																																																																																																																																												
Peak Avg																																																																																																																																																																																			
	Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10640.00</td><td>49.35</td><td>74.00</td><td>-24.65</td><td>33.12</td><td>37.48</td><td>18.34</td><td>40.03</td><td>0.44</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>10640.00</td><td>38.91</td><td>54.00</td><td>-15.09</td><td>22.68</td><td>37.48</td><td>18.34</td><td>40.03</td><td>0.44</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr><tr><td>3</td><td>15960.00</td><td>53.59</td><td>74.00</td><td>-20.41</td><td>35.94</td><td>40.70</td><td>22.77</td><td>46.26</td><td>0.44</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>15960.00</td><td>42.68</td><td>54.00</td><td>-11.32</td><td>25.03</td><td>40.70</td><td>22.77</td><td>46.26</td><td>0.44</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table> Site : 03CH21-HY Condition: PEAK(UNII) 3m DRH18-E_LE2C03A18EN_230712 VERTICAL <table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10640.00</td><td>47.87</td><td>74.00</td><td>-26.13</td><td>31.64</td><td>37.48</td><td>18.34</td><td>40.03</td><td>0.44</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>2</td><td>10640.00</td><td>38.90</td><td>54.00</td><td>-15.10</td><td>22.67</td><td>37.48</td><td>18.34</td><td>40.03</td><td>0.44</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr><tr><td>3</td><td>15960.00</td><td>52.16</td><td>74.00</td><td>-21.84</td><td>34.51</td><td>40.70</td><td>22.77</td><td>46.26</td><td>0.44</td><td>--</td><td>--</td><td>--</td><td>PEAK</td></tr><tr><td>4</td><td>15960.00</td><td>42.67</td><td>54.00</td><td>-11.33</td><td>25.02</td><td>40.70</td><td>22.77</td><td>46.26</td><td>0.44</td><td>--</td><td>--</td><td>--</td><td>AVERAGE</td></tr></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	10640.00	49.35	74.00	-24.65	33.12	37.48	18.34	40.03	0.44	--	--	--	PEAK	2	10640.00	38.91	54.00	-15.09	22.68	37.48	18.34	40.03	0.44	--	--	--	AVERAGE	3	15960.00	53.59	74.00	-20.41	35.94	40.70	22.77	46.26	0.44	--	--	--	PEAK	4	15960.00	42.68	54.00	-11.32	25.03	40.70	22.77	46.26	0.44	--	--	--	AVERAGE		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg		1	10640.00	47.87	74.00	-26.13	31.64	37.48	18.34	40.03	0.44	--	--	--	PEAK	2	10640.00	38.90	54.00	-15.10	22.67	37.48	18.34	40.03	0.44	--	--	--	AVERAGE	3	15960.00	52.16	74.00	-21.84	34.51	40.70	22.77	46.26	0.44	--	--	--	PEAK	4	15960.00	42.67	54.00	-11.33	25.02	40.70	22.77	46.26	0.44	--	--	--
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																							
1	10640.00	49.35	74.00	-24.65	33.12	37.48	18.34	40.03	0.44	--	--	--	PEAK																																																																																																																																																																						
2	10640.00	38.91	54.00	-15.09	22.68	37.48	18.34	40.03	0.44	--	--	--	AVERAGE																																																																																																																																																																						
3	15960.00	53.59	74.00	-20.41	35.94	40.70	22.77	46.26	0.44	--	--	--	PEAK																																																																																																																																																																						
4	15960.00	42.68	54.00	-11.32	25.03	40.70	22.77	46.26	0.44	--	--	--	AVERAGE																																																																																																																																																																						
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																																																																																							
1	10640.00	47.87	74.00	-26.13	31.64	37.48	18.34	40.03	0.44	--	--	--	PEAK																																																																																																																																																																						
2	10640.00	38.90	54.00	-15.10	22.67	37.48	18.34	40.03	0.44	--	--	--	AVERAGE																																																																																																																																																																						
3	15960.00	52.16	74.00	-21.84	34.51	40.70	22.77	46.26	0.44	--	--	--	PEAK																																																																																																																																																																						
4	15960.00	42.67	54.00	-11.33	25.02	40.70	22.77	46.26	0.44	--	--	--	AVERAGE																																																																																																																																																																						

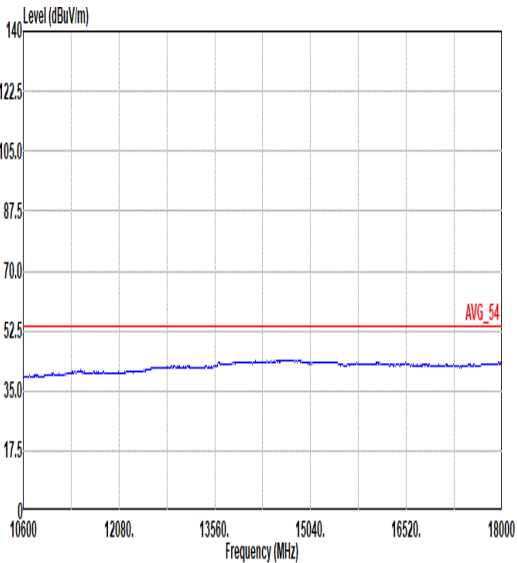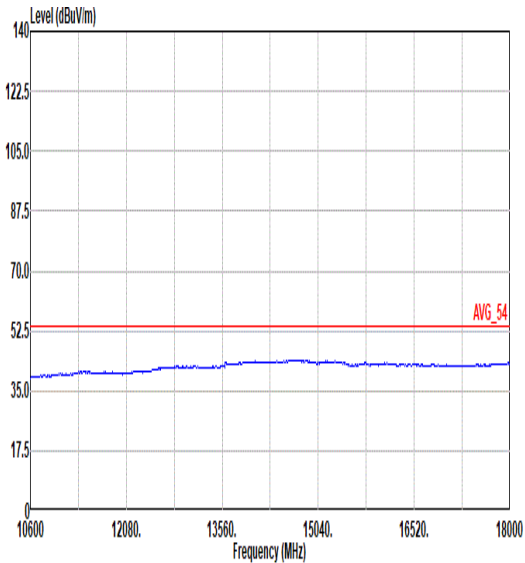

Mode	12	
	Harmonic	
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz	
ANT	1	
Pol.	Horizontal	Vertical
10.6G ~18G Avg	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 HORIZONTAL	 Site : 03CH21-HY Condition: AVG_54 3m DRH18-E_LE2C03A18EN_230712 VERTICAL