

ANTENNA INFORMATION

OEM	Acer	
ODM	HuaQin	
Platform model name	SFG14-74/ SFG14-74T	
Intel platform (ex: Yes, No or NA)	Intel ARL	
Platform type (ex: regular NB, convertible PC, AIO...etc)	Regular NB	
SAR minimum separation (mm)	FCC (1g)	7.73
	ISED (1g)	5.82
	ISED (10g)	3.1

Antenna manufacturer	Company name	Wistron Neweb Corporation
	Address	20 Park Ave.II , Hsinchu Science Park,Hsinchu 308,Taiwan
Test location	Company name	Wistron Neweb Corporation
	Address	20 Park Ave.II , Hsinchu Science Park,Hsinchu 308,Taiwan
Test Personnel	Name(Full name)	Limin Chang
	E-mail	Limin.Chang@wnc.com.tw
	Tel/Mobile	03-6667799
Testing date		2024/12/04

Antenna Part number	Main	81EACB15.G53 (HQ260060007A0)
	Aux	81EACB15.G54 (HQ26006000790)
Antenna type (ex: PIFA, Dipole...etc)		PIFA

Antenna Peak gain w/ cable loss (dBi)*										
	2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6675MHz	7.0 GHz 6875-7125MHz
Main	0.99	2.65	2.65	1.84	0.34	0.34	2.28	1.57	1.42	2.62
Aux	-1.52	2.36	2.36	1.65	1.72	1.37	0.93	0.25	0.82	0.62

Cable Assembly Part Number and Information					
	Cable PN	Cable length(mm)	Cable diameter(mm)	Impedance(ohm)	Connector type
Main	60EACB0H.013	258	1.13	50	I-pex MHF4L
Aux	60EACB0H.014	423	1.13	50	I-pex MHF4L

* 3D Antenna Peak Gain required being test in system basis.

Table of Contents

Cover page.....	1
1. Intel Reference Gain and Type.....	3
2. Document Revision History.....	3
3. Test & System Description	
3.1 Measurement Method and System.....	4
3.2 Test setup.....	4
3.3 Equipment list.....	5
4. Radiation characteristics of antenna loaded in Host Platform.....	6
Annex A. Photographs	
A.1 Setup Photo.....	16
A.2 Test sample.....	17
Annex B. Antenna Location	
B.1 Antenna Host Platform Location Information.....	19
B.2 Antenna dimensional information for SAR evaluation.....	20

1. Intel Reference Gain and Type

Antenna Peak gain w/ cable loss (dBi)											
Band/Frequency		2.4GHz 2400-2483.5 MHz	5.2GHz 5150-5250MHz	5.3GHz 5250-5350MHz	5.6GHz 5470-5725MHz	5.8GHz 5725-5850MHz	5.9GHz 5850-5895MHz	6.2GHz 5925-6425MHz	6.5GHz 6425-6525MHz	6.7GHz 6525-6875MHz	7.0 GHz 6875-7125MHz
Design	EU/UK	3.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00
PIFA	For WiFi 6E and earlier	3.24	3.64	3.73	4.77	4.97	4.72	4.83	4.30	5.37	5.59
	From WiFi 7	2.95	5.11	4.55	5.15	5.13	4.45	5.02	5.02	4.96	4.96
Dipole	For WiFi 6E and earlier	2.89	2.92	3.19	4.41	4.22	4.22	4.83	4.30	4.49	5.34
	From WiFi 7	2.95	4.03	4.11	5.15	5.13	4.45	5.02	4.71	4.49	4.96
Monopole	From WiFi 7	2.83	4.57	4.44	4.95	4.95	4.43	4.87	4.91	4.91	4.79

3D Peak Antenna gain should be equal or greater than -2 dBi

If a host integrator plans to use a lower gain antenna of the same type, additional CBP(FCC)/EDT(EU) testing need to be performed while the module is installed in the host.

2. Document Revision History

Revision #	Revision Details	Issued Date
Rev. 00	First Issue	

3. Test & System Description


3.1 Measurement Method and System

<insert test description here for test method>

This Crayfish_ARH test report is prepared for host antenna testing under a Full Anechoic Chamber(WNC's SG24L)

3.2 Test setup

<insert test diagram here for test site utilized>

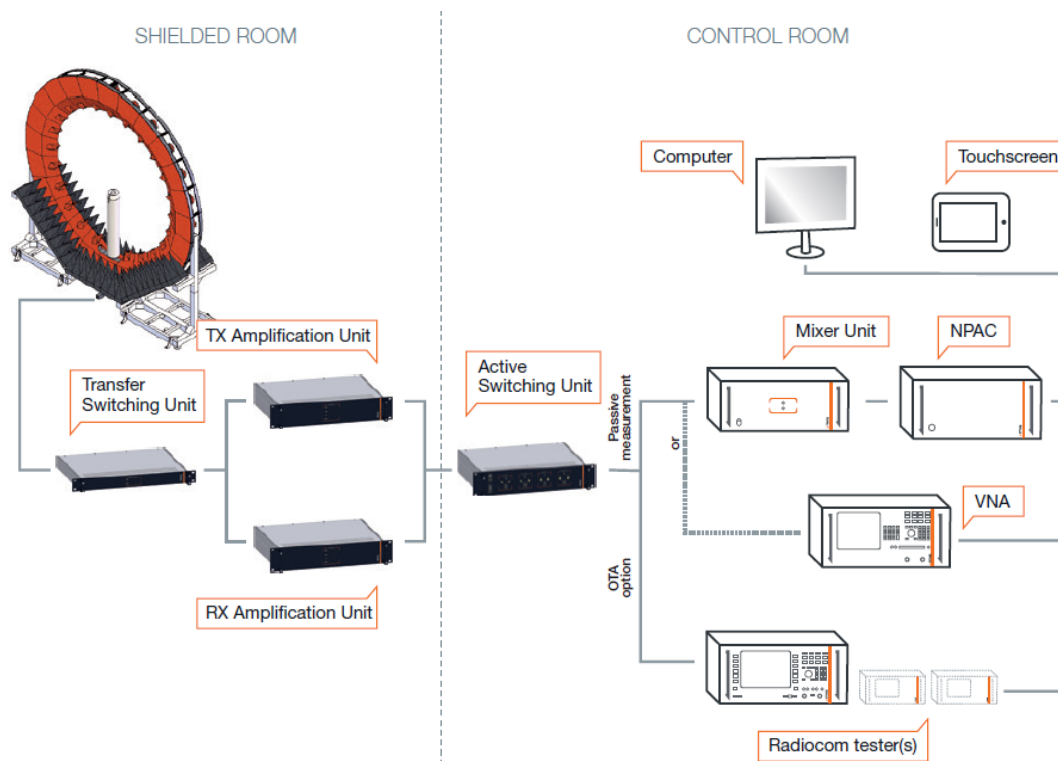

3.3 Equipment list

<insert test diagram here for test site utilized>


Device	Type / Model	Serial #	Manufacture	Cal. Date	Cal. Du Date
Anechoic Chamber	555-FAC		ChamPro	2024-06-6	2025-06
Antenna Measurement System	SG24-L		MVG-SATIMO	2024-06-6	2025-06
Network Analyzer	VNA / E5080B	MY59203136	Keysight	2024-06-6	2025-06
Tx Amplifier Unit	SG24 Series Accessories		MVG-SATIMO	2024-06-6	2025-06
Rx Amplifier Unit	SG24 Series Accessories		MVG-SATIMO	2024-06-6	2025-06
Probe Select Unit	SG24 Series Accessories		MVG-SATIMO	2024-06-6	2025-06
Motion Control Unit	SG24 Series Accessories		MVG-SATIMO	2024-06-6	2025-06
Power and Control Unit	SG24 Series Accessories		MVG-SATIMO	2024-06-6	2025-06
Array Control Unit	SG24 Series Accessories		MVG-SATIMO	2024-06-6	2025-06
Turn Table	SG24 Series Accessories		MVG-SATIMO	2024-06-6	2025-06
Goniometer	SG24 Series Accessories		MVG-SATIMO	2024-06-6	2025-06
Control Software	WaveStudio		MVG-SATIMO	N/A	N/A
Uninterruptible Power Supply	FT-130H-U		FTUPS	N/A	N/A
Wide Band Dipole	WD6000		MVG-SATIMO	2024-06-6	2025-06

4. Radiation characteristics of antenna loaded in Host Platform

Main Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	0.99

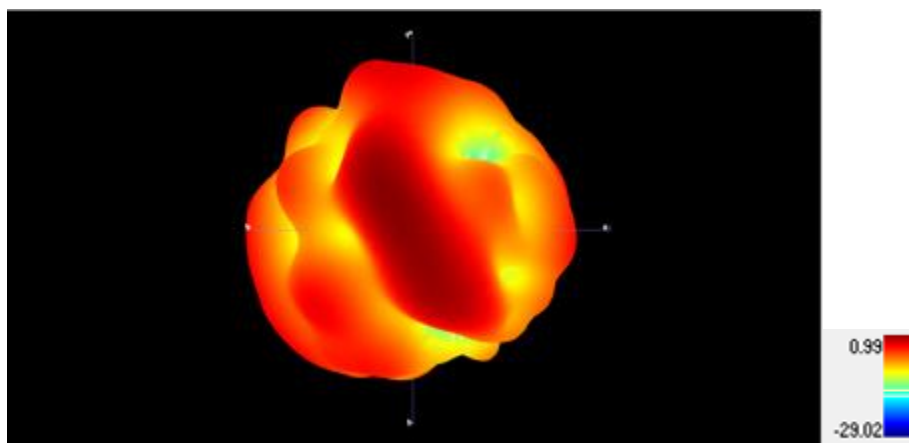


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.65

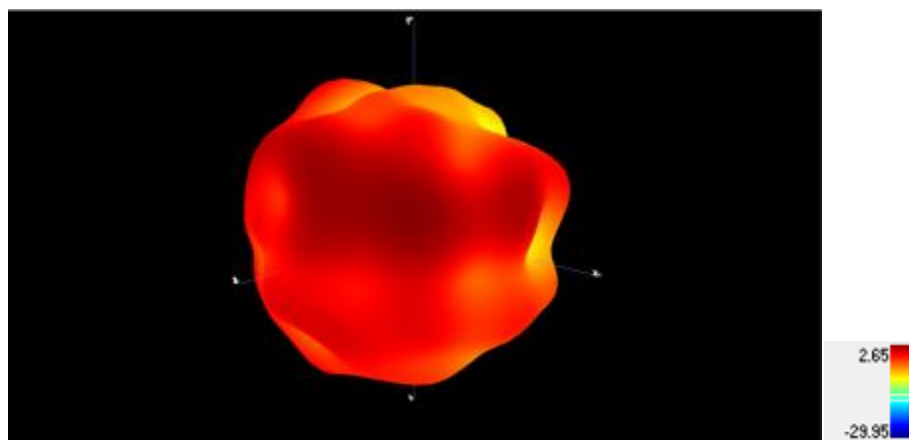


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.65

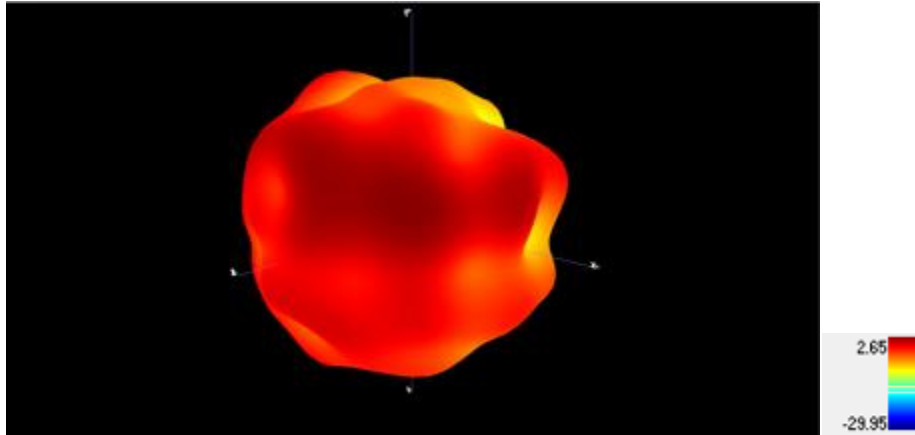


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	1.84

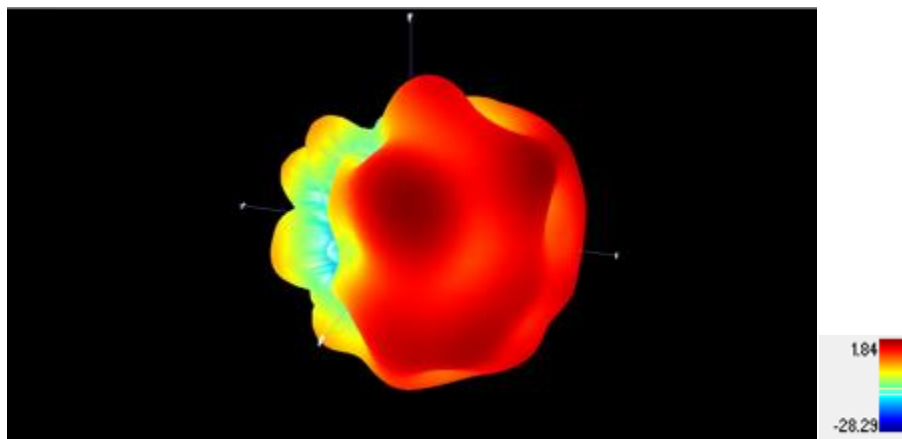


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	0.34

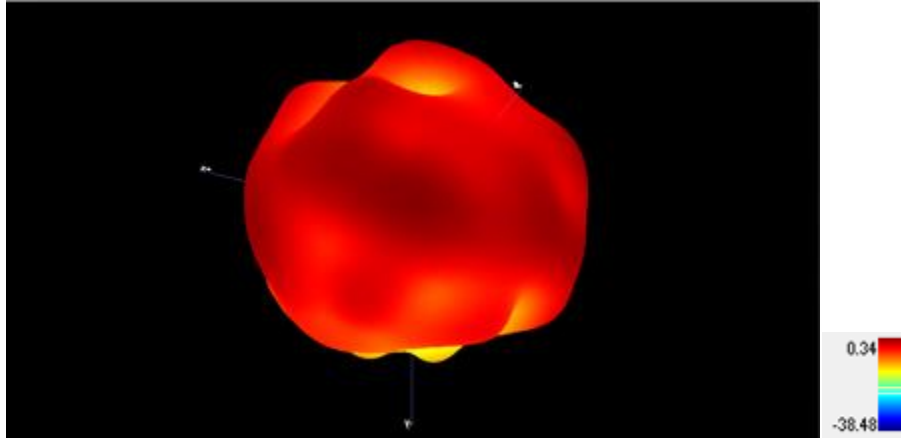


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	0.34

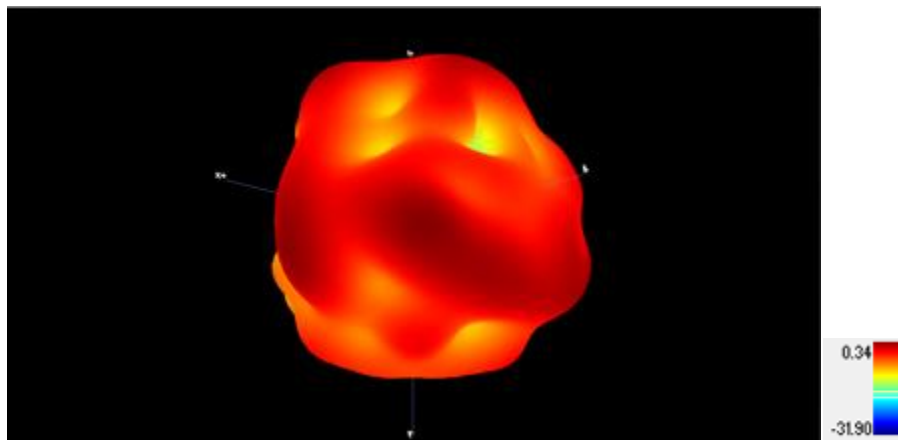


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	2.28

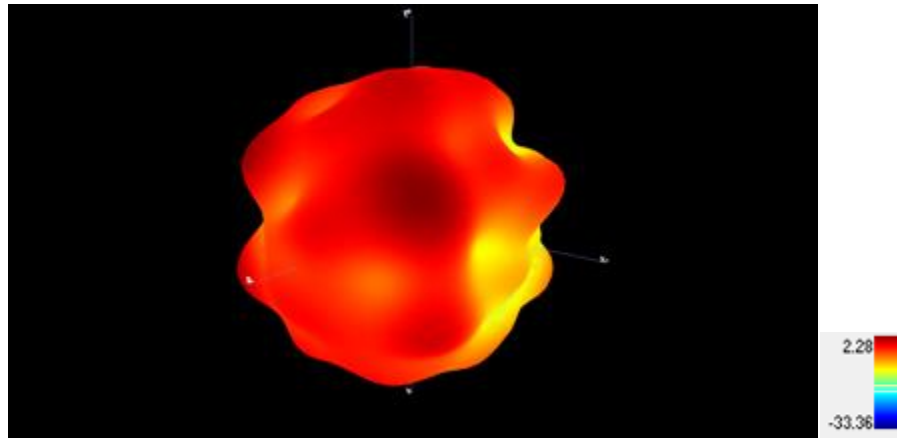


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	1.57

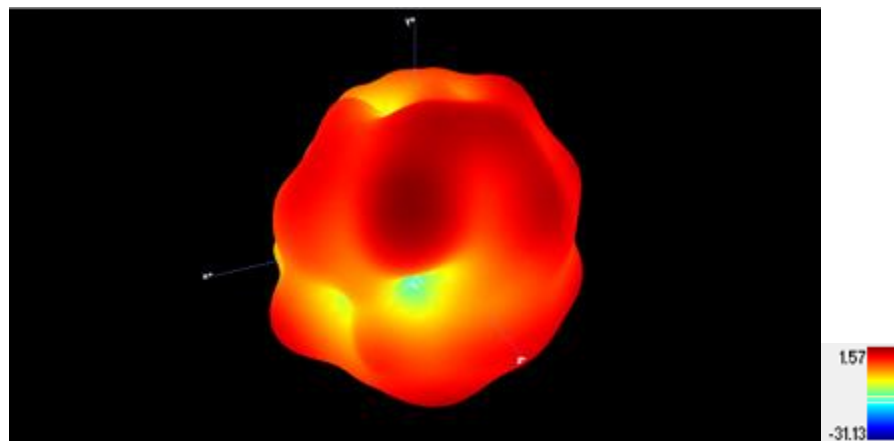


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	1.42

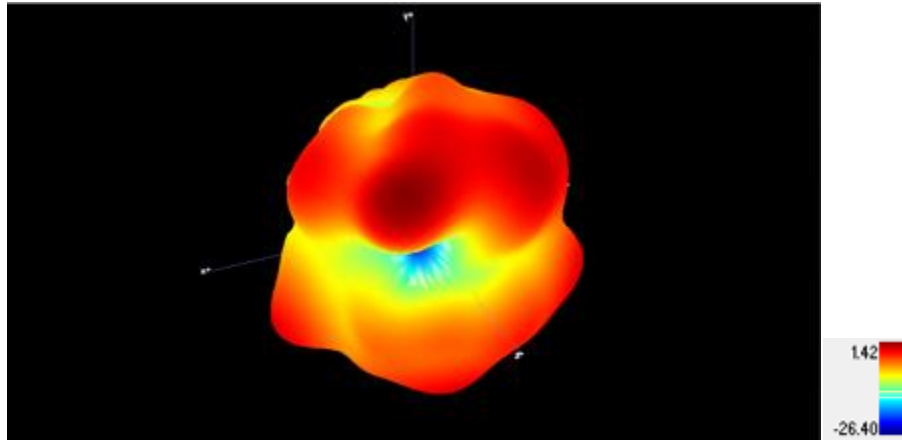

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	2.62

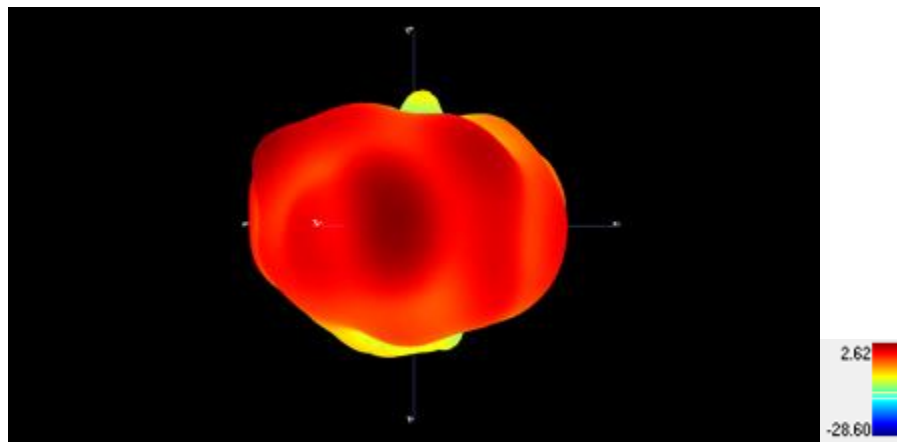

Auxiliary Antenna


Max Antenna 3D Radiation Pattern 2400 – 2483.5 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
2400-2483.5	-1.52

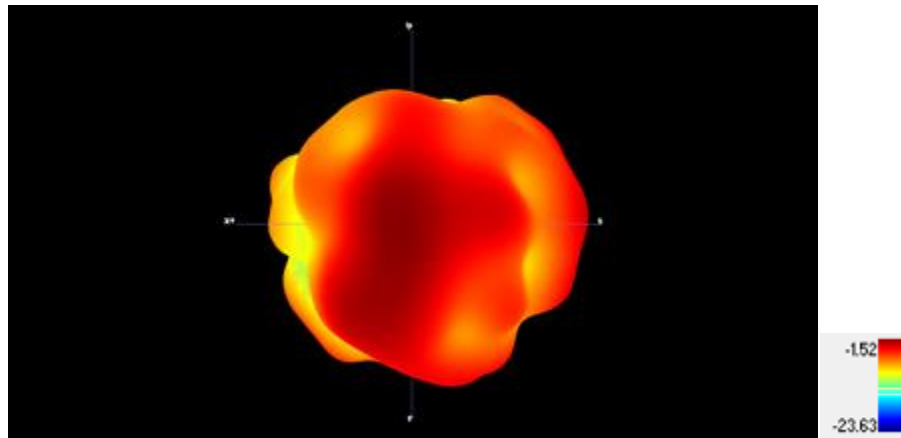


Max Antenna 3D Radiation Pattern 5150-5250 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5150-5250	2.36

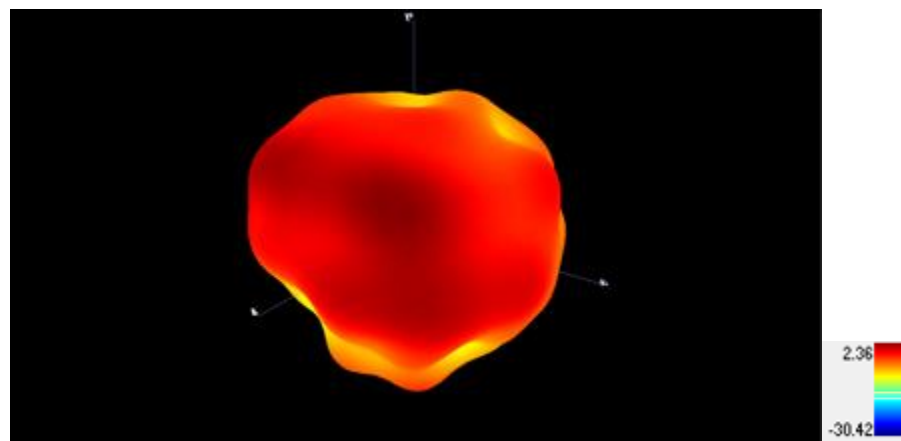


Max Antenna 3D Radiation Pattern 5250-5350 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5250-5350	2.36

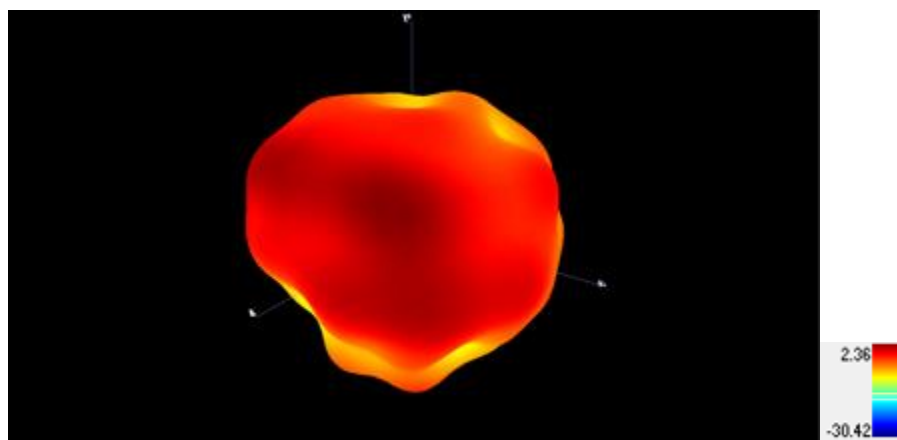


Max Antenna 3D Radiation Pattern 5470-5725 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5470-5725	1.65

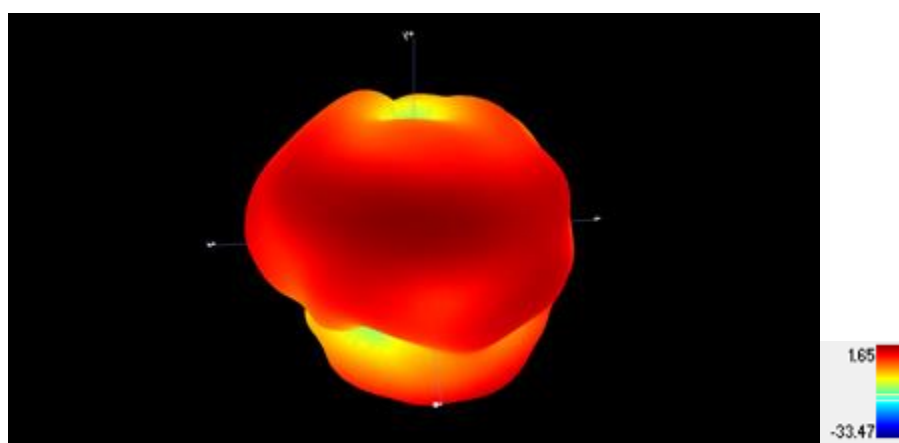


Max Antenna 3D Radiation Pattern 5725-5850 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5725-5850	1.72

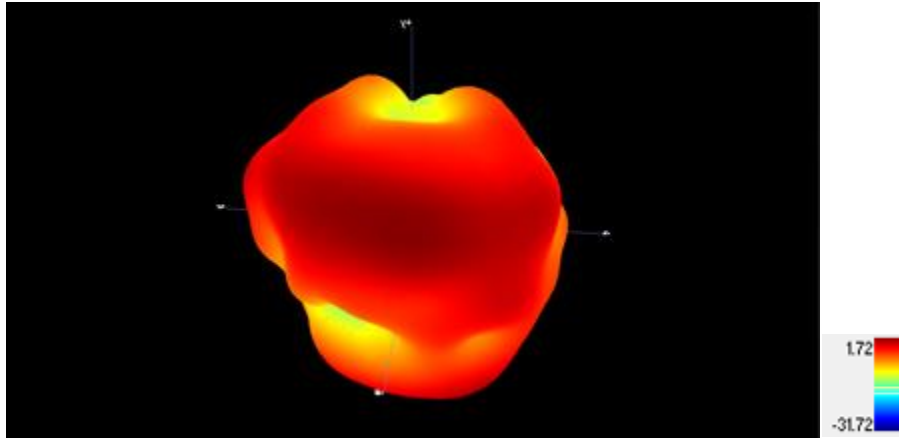


Max Antenna 3D Radiation Pattern 5850-5895 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5850-5895	1.37

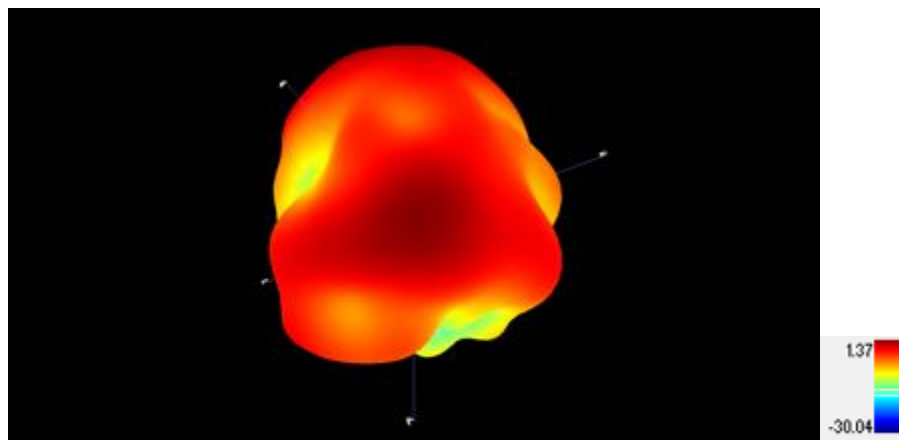


Max Antenna 3D Radiation Pattern 5925-6425 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
5925-6425	0.93

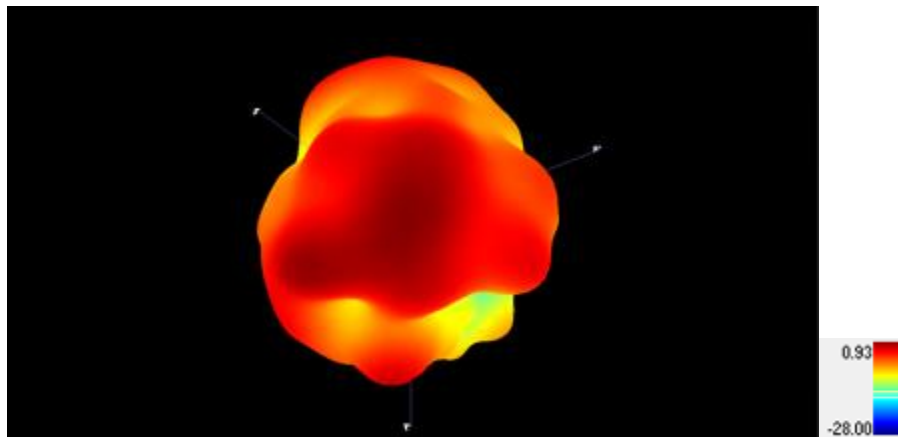


Max Antenna 3D Radiation Pattern 6425-6525 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6425-6525	0.25

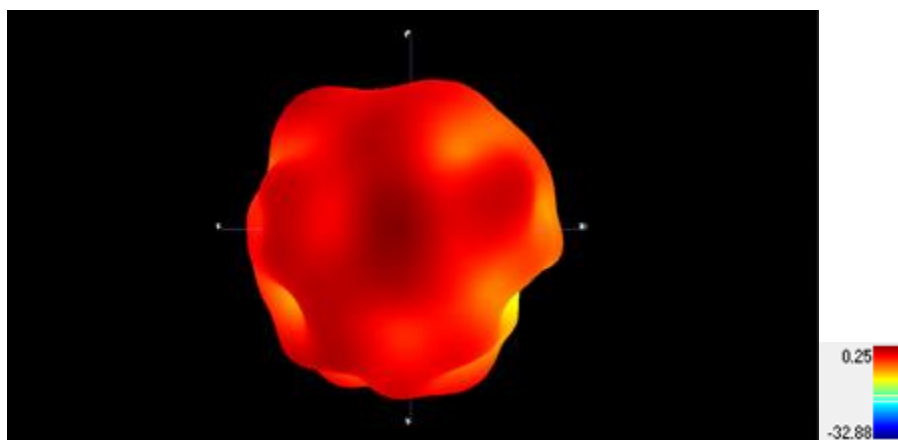


Max Antenna 3D Radiation Pattern 6525-6875 MHz

Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6525-6875	0.82

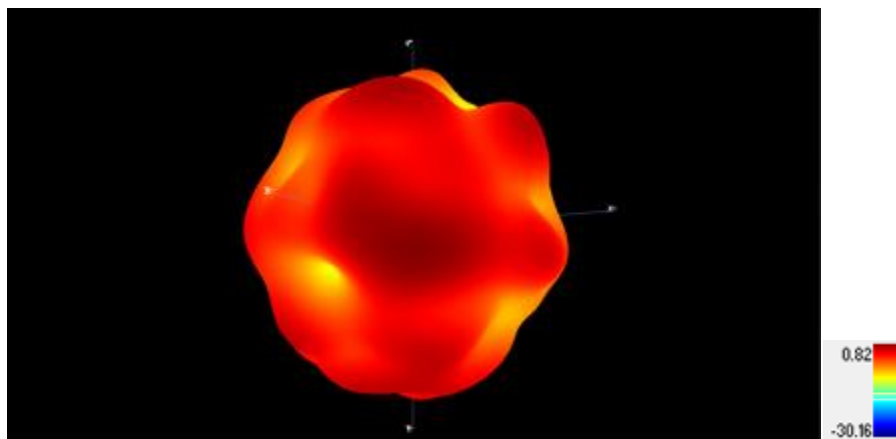

Max Antenna 3D Radiation Pattern 6875-7125 MHz


Frequency (MHz)	Peak Gain w/ Cable Loss (dBi)
6875-7125	0.62

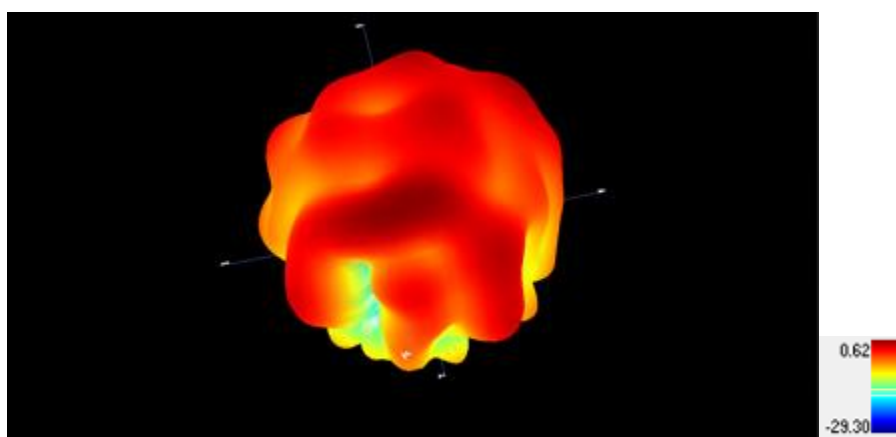

Annex A. Photographs

A.1 Setup Photo


<insert test diagram here for test site utilized>

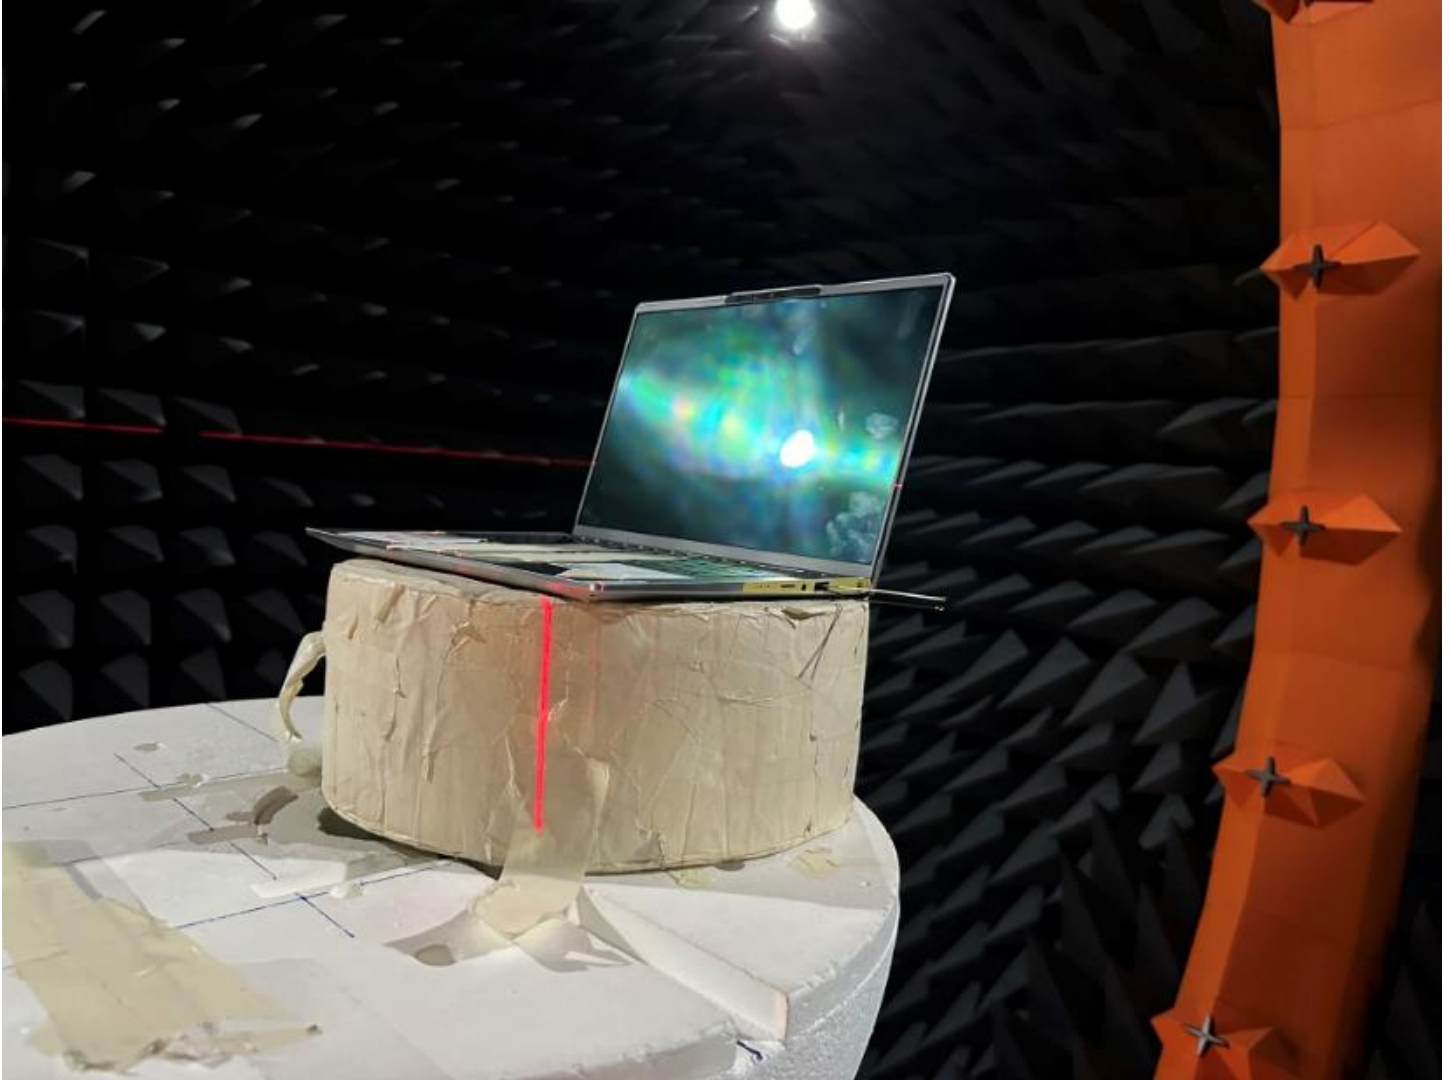

A.2 Test sample


Main Antenna

Antenna Drawing

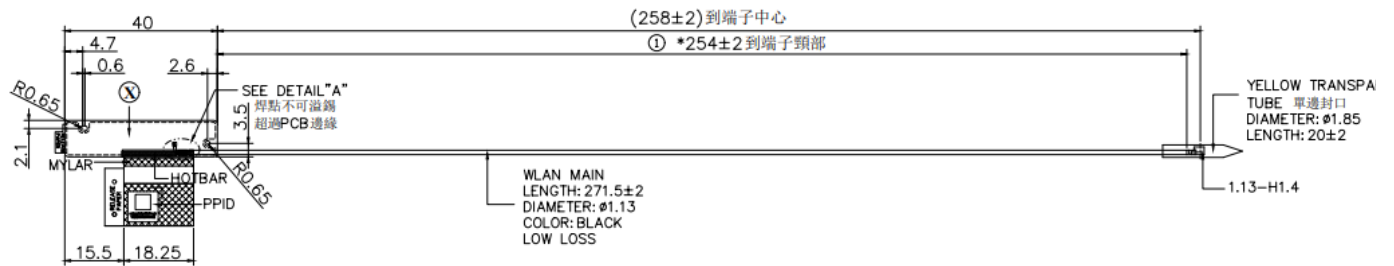


Antenna Photo

Front

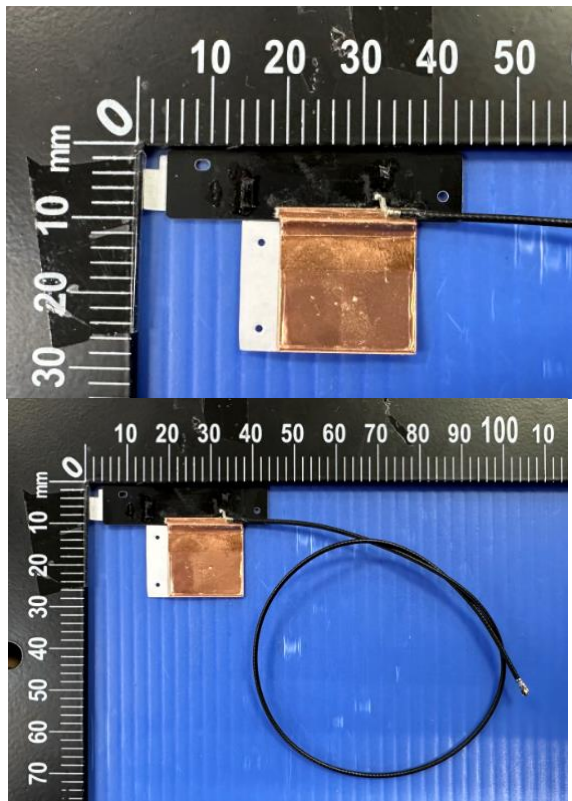


Back

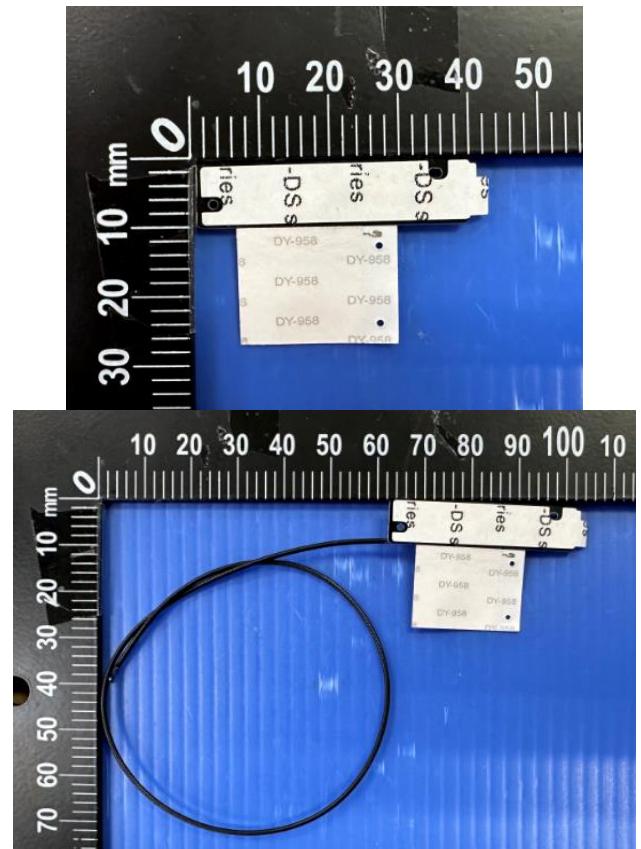

Note: antenna photo should include L type ruler


Aux Antenna

Antenna Drawing

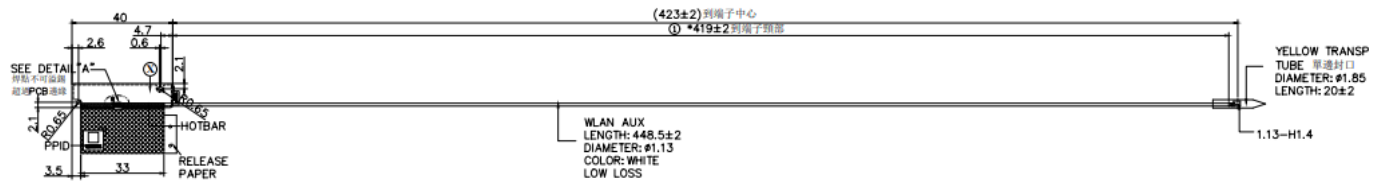


Antenna Photo

Front

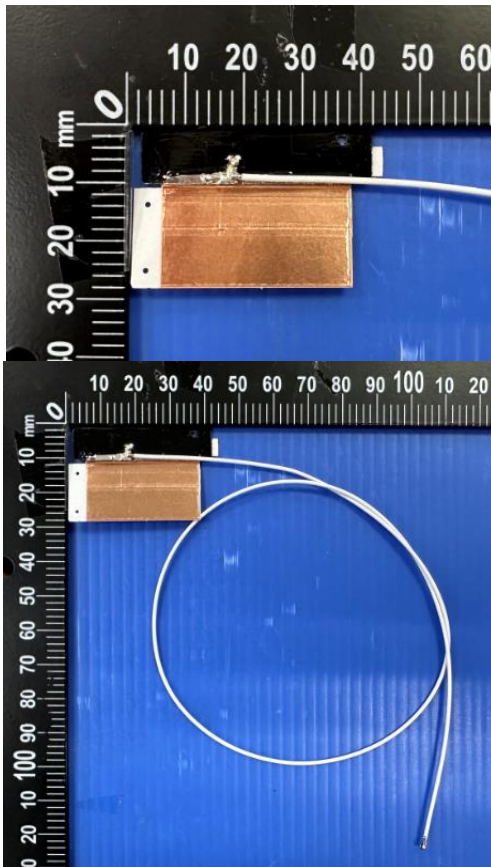

Back

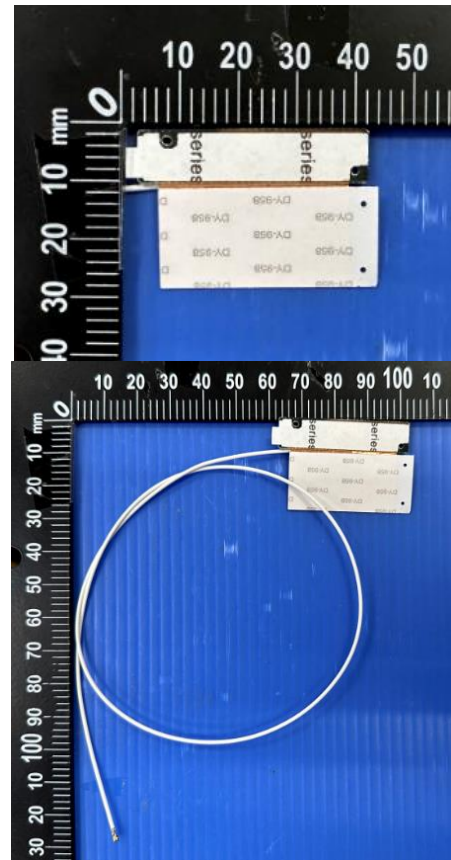


Note: antenna photo should include L type ruler

Annex B. Antenna Location

B.1 Antenna Host Platform Location Information


Include a dimensioned photo(s) or dimensioned drawing(s) of Main and Aux antenna placements (measurements are not required for receive-only antenna).

Any antenna that transmits must show dimensions to bottom of laptop. Provide a description of the materials that are used for supporting or surrounding transmit antennas; for example, non-conductive plastics vs. conductive coated plastic or metallic materials.

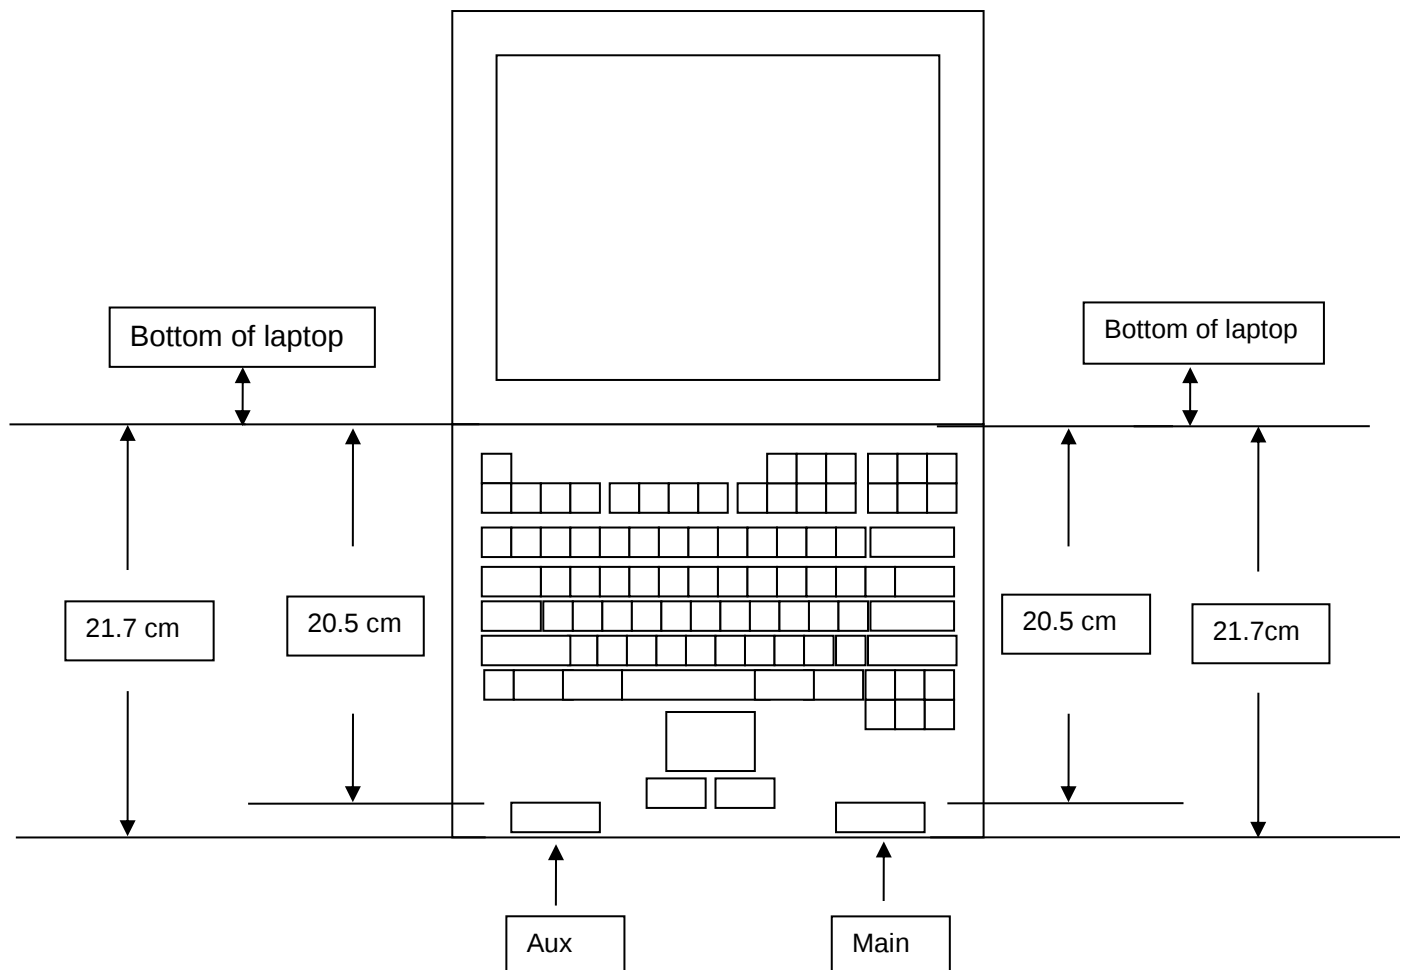


B.2 Antenna dimensional information for SAR evaluation

Include a dimensioned photo(s) or dimensioned drawing(s) showing the distance (mm) between the transmit antennas and the user. For notebook/laptop hosts show lapheld position (example below). For tablet hosts show all orientations including lapheld, primary & secondary portrait, primary & secondary landscape positions. Include a description of any proximity sensors or power throttling implementations that limit or exclude use of any host orientation.

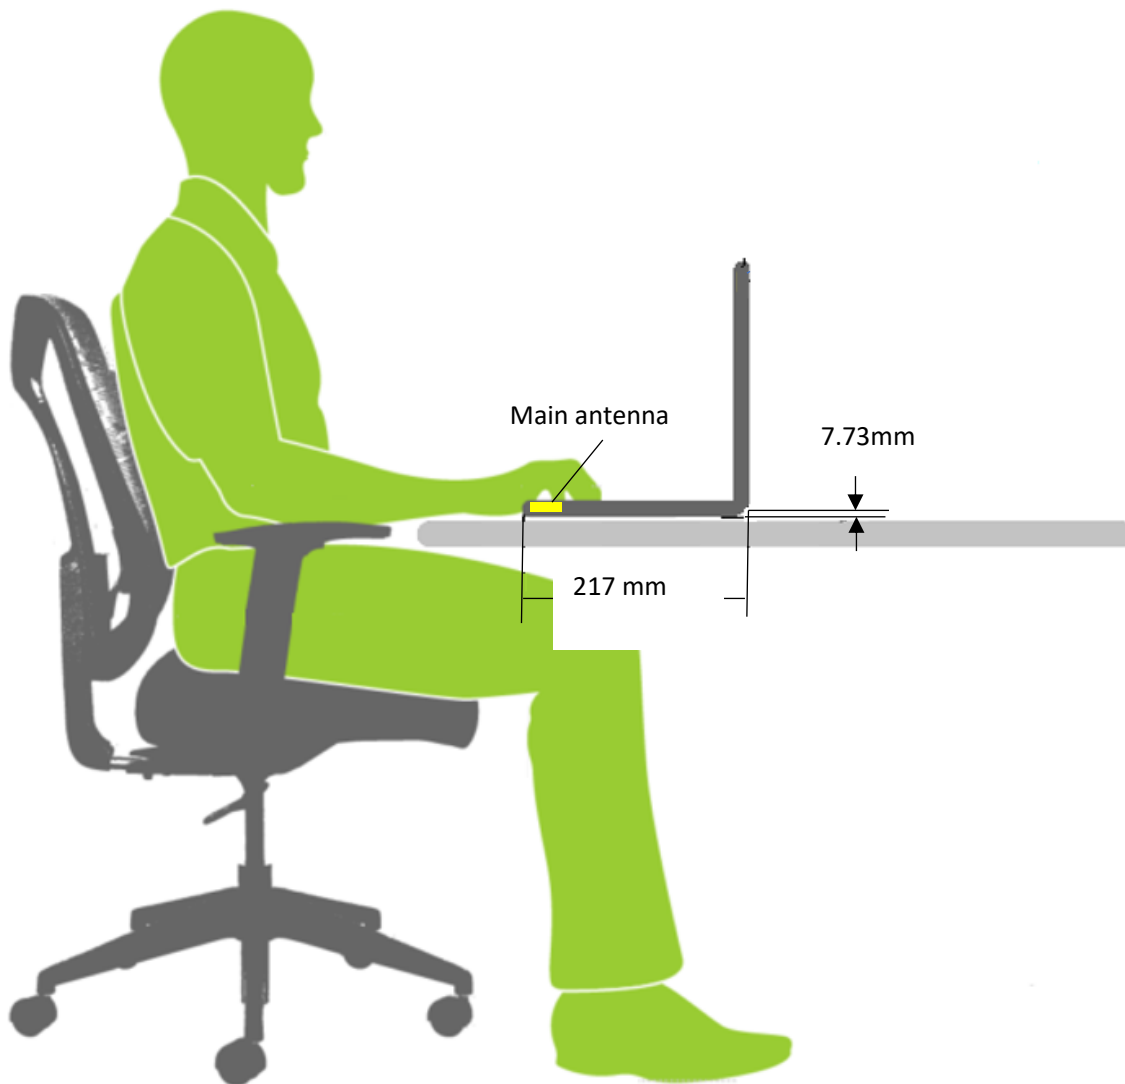

Measuring Surface	Antenna	Separation Distance(antenna-to- Surface)(mm)	1g SAR
Bottom Side	Main	7.73	FCC/ISED
	Aux	7.73	FCC/ISED

Antennas on the keyboard section

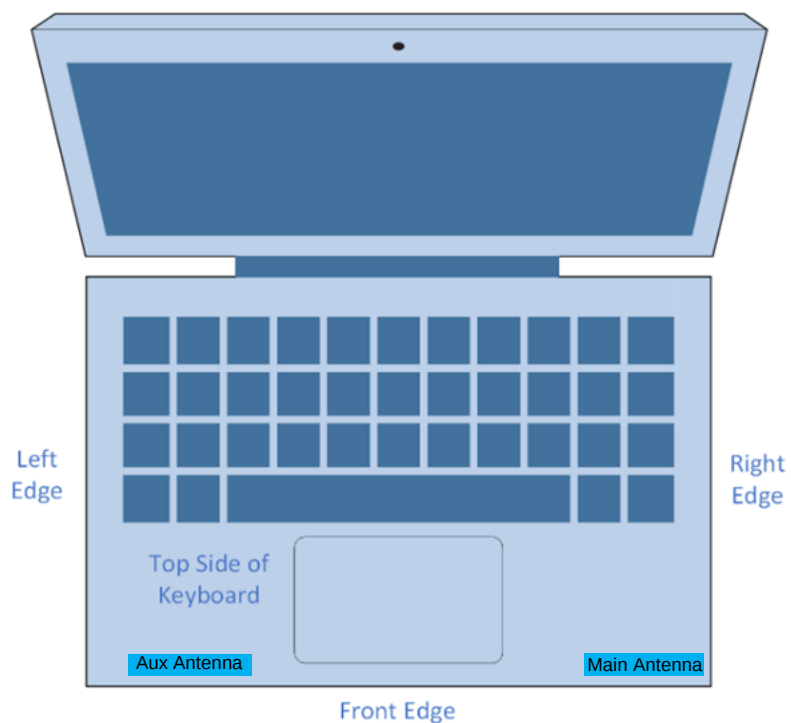

Measuring Surface	Antenna	Separation Distance(antenna-to-Surface)(mm)	1g or 10g SAR
Bottom Side	Main	7.73	1g (FCC/ISED)
	Aux	7.73	1g (FCC/ISED)
Front Edge	Main	5.82	1g (ISED)
	Aux	5.82	1g (ISED)
Left Edge	Main	235	10g (ISED)
	Aux	38	10g (ISED)
Right Edge	Main	38	10g (ISED)
	Aux	235	10g (ISED)
Top side of Keyboard	Main	3.1	10g (ISED)
	Aux	3.1	10g (ISED)