



2. Maximum Average Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Duty Factor (dB)	Total Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	-6.81	5.48	-1.33	<=30	Pass
NVNT	BLE 1M	2440	-6.26	5.48	-0.78	<=30	Pass
NVNT	BLE 1M	2480	-5.37	5.5	0.13	<=30	Pass


Test Graphs Average Power NVNT BLE 1M 2402MHz

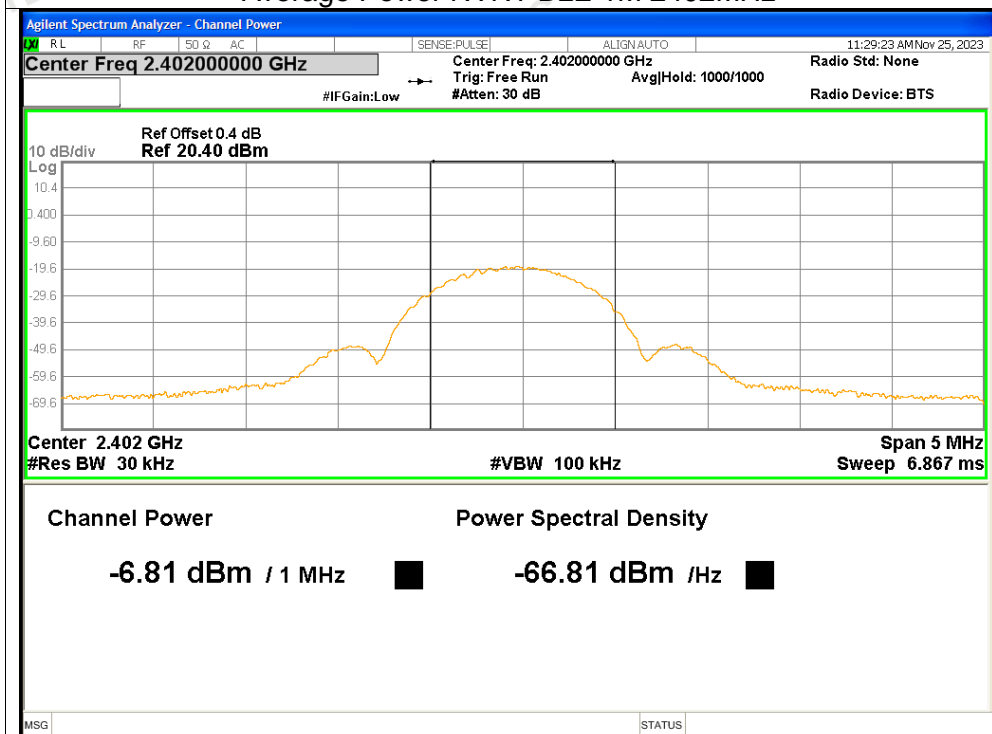

Average Power NVNT BLE 1M 2440MHz

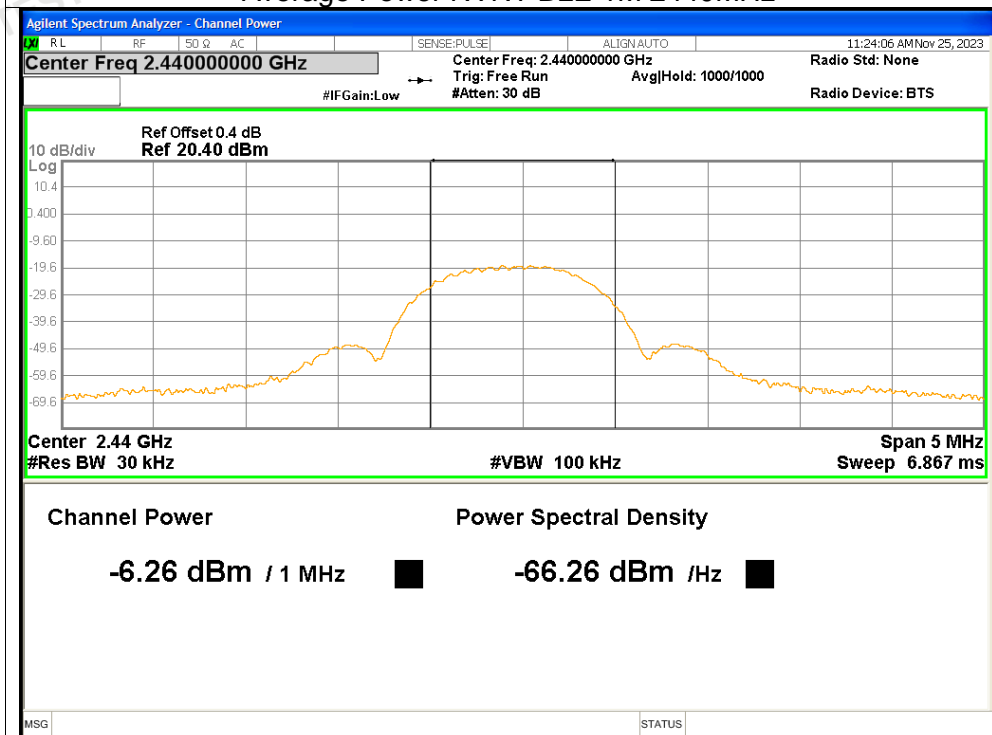


Average Power NVNT BLE 1M 2480MHz

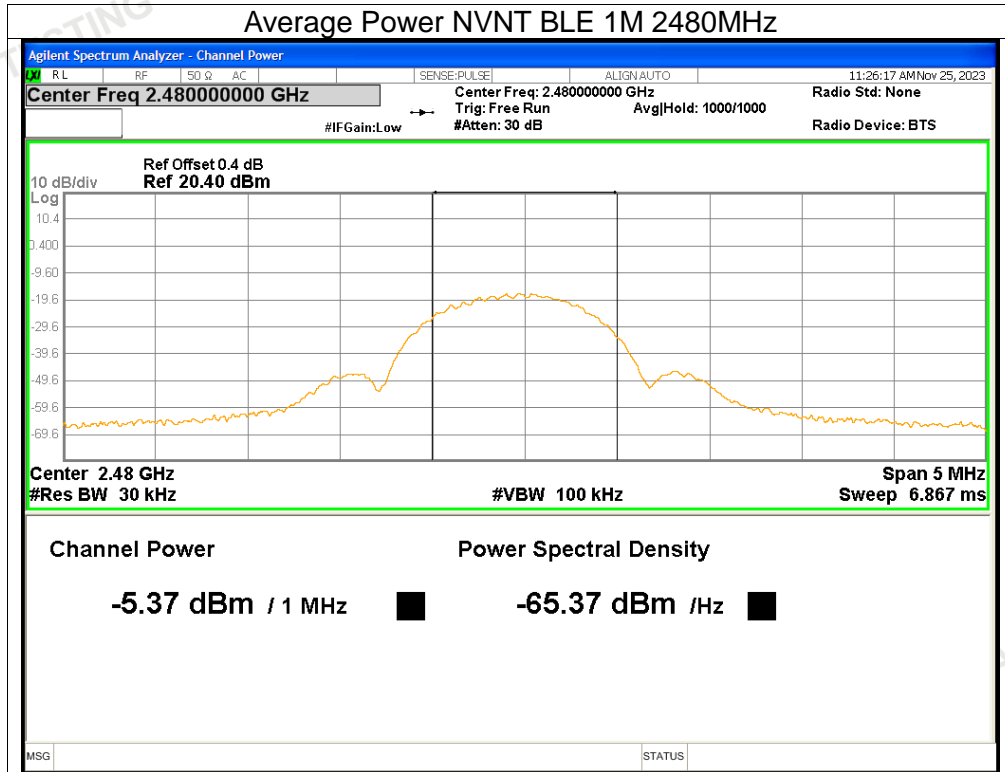


3. Maximum Peak Conducted Output Power

Condition	Mode	Frequency (MHz)	Conducted Power (dBm)	Limit (dBm)	Verdict
NVNT	BLE 1M	2402	-0.95	<=30	Pass
NVNT	BLE 1M	2440	-0.16	<=30	Pass
NVNT	BLE 1M	2480	0.65	<=30	Pass


Test Graphs Peak Power NVNT BLE 1M 2402MHz

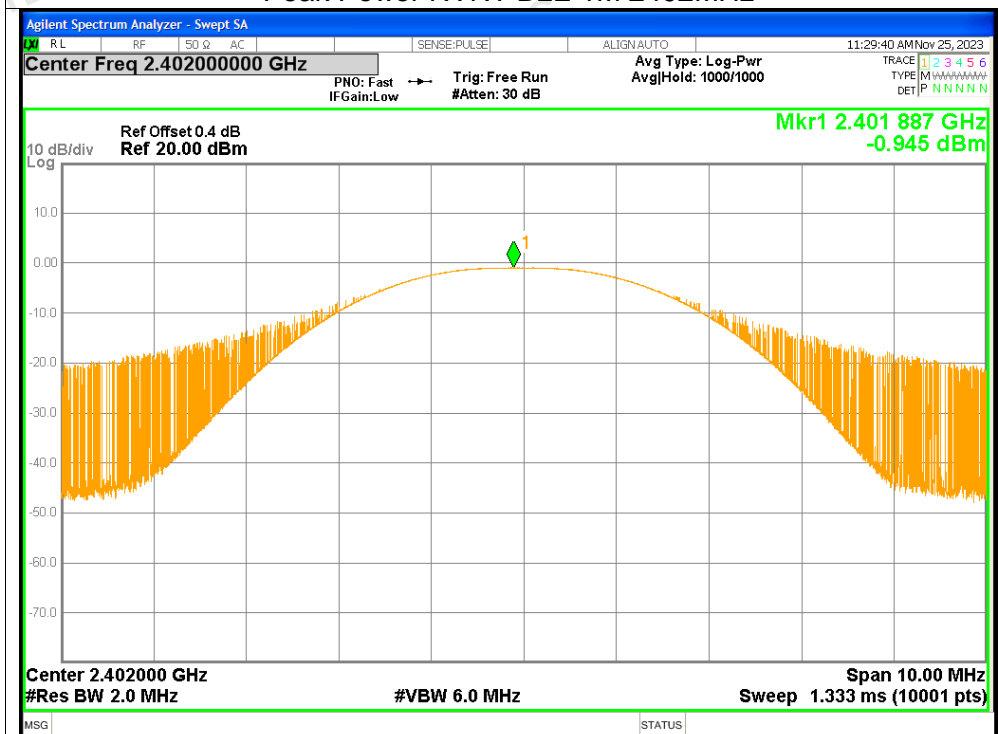

Peak Power NVNT BLE 1M 2440MHz


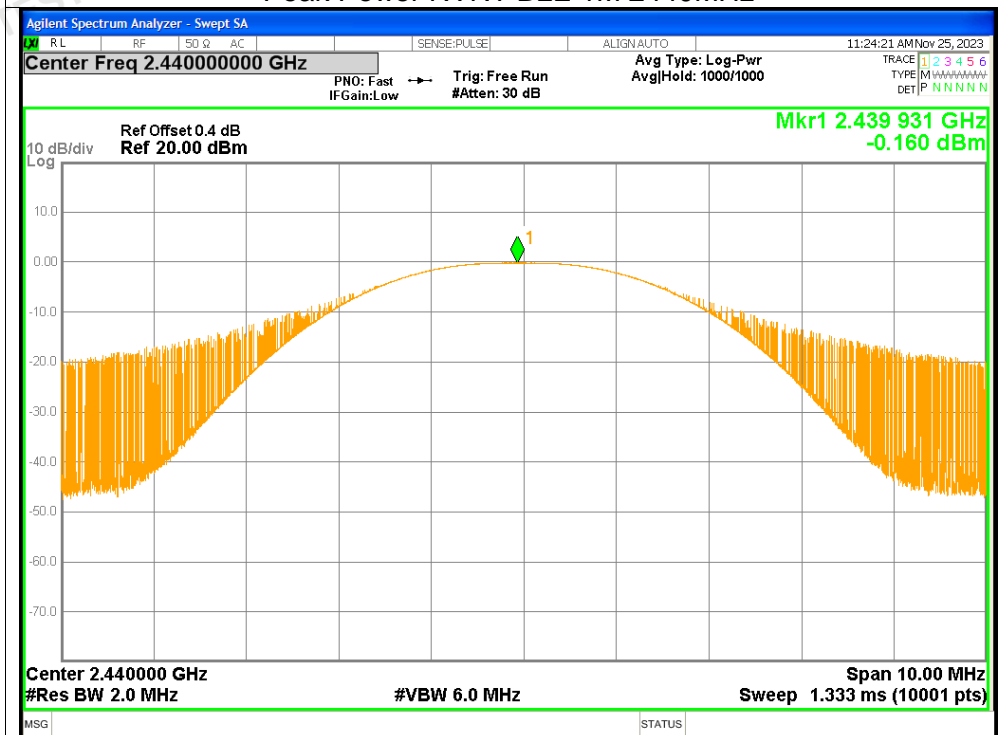


Peak Power NVNT BLE 1M 2480MHz

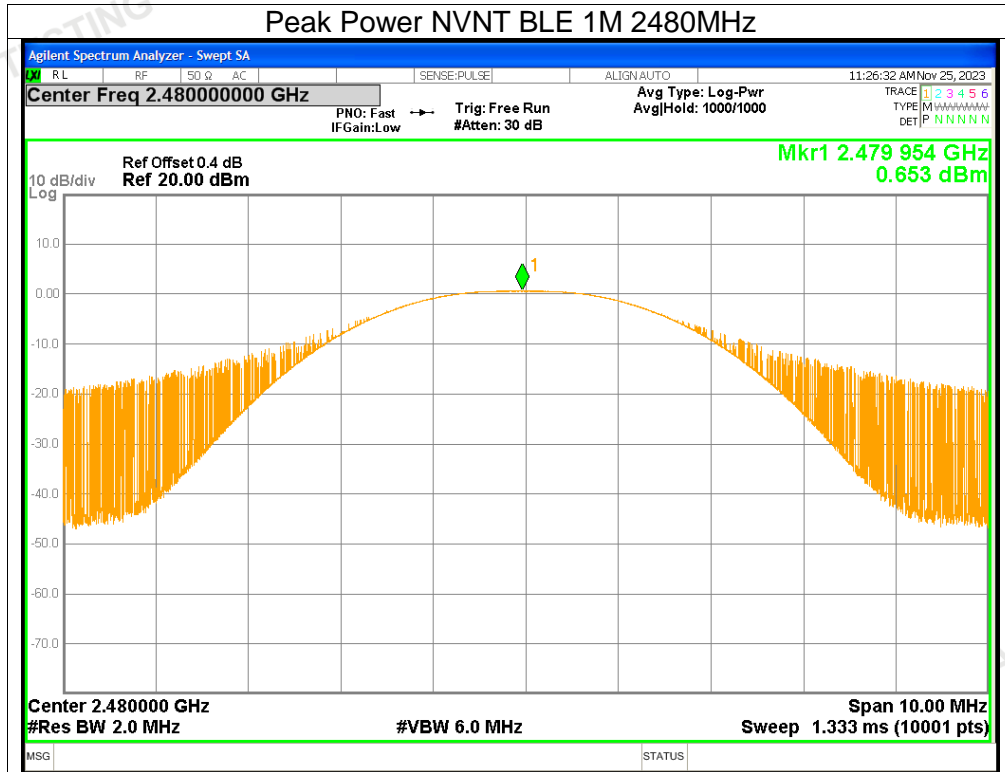


4. -6dB Bandwidth

Condition	Mode	Frequency (MHz)	-6 dB Bandwidth (MHz)	Limit -6 dB Bandwidth (MHz)	Verdict
NVNT	BLE 1M	2402	0.733	≥ 0.5	Pass
NVNT	BLE 1M	2440	0.7402	≥ 0.5	Pass
NVNT	BLE 1M	2480	0.7311	≥ 0.5	Pass

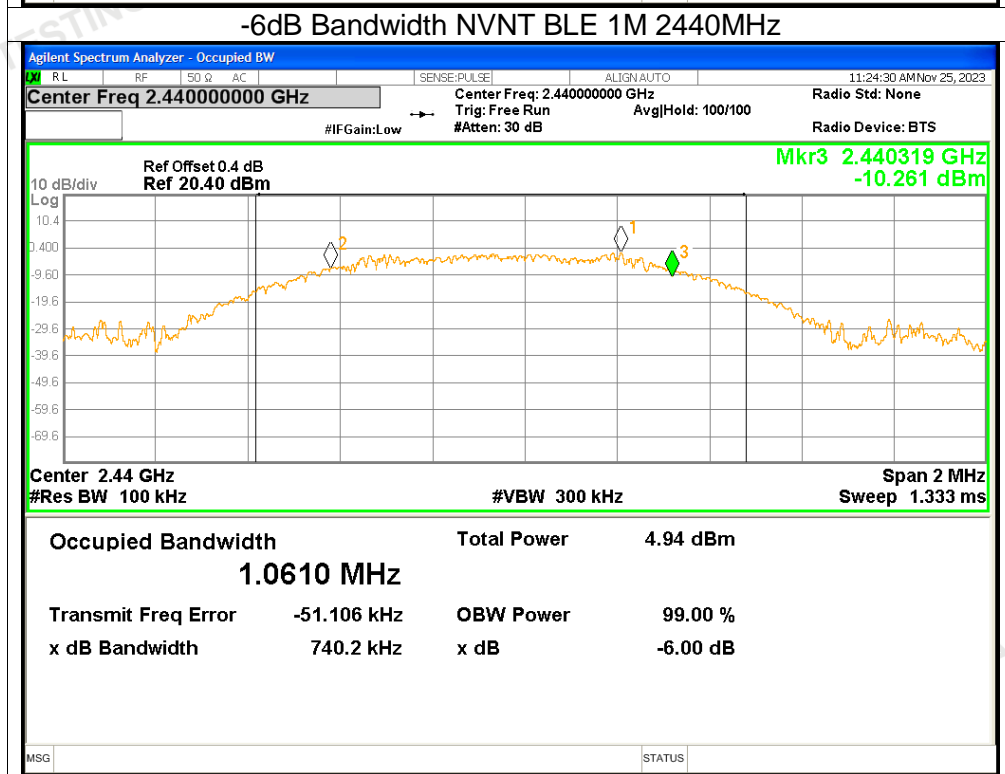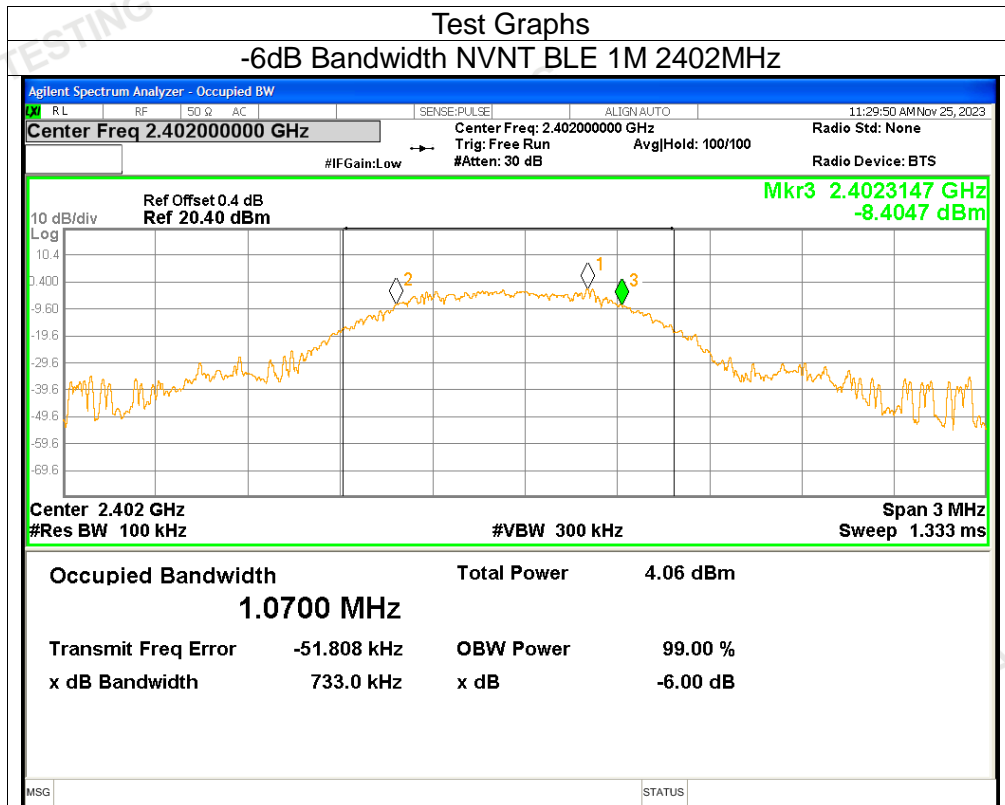


-6dB Bandwidth NVNT BLE 1M 2480MHz

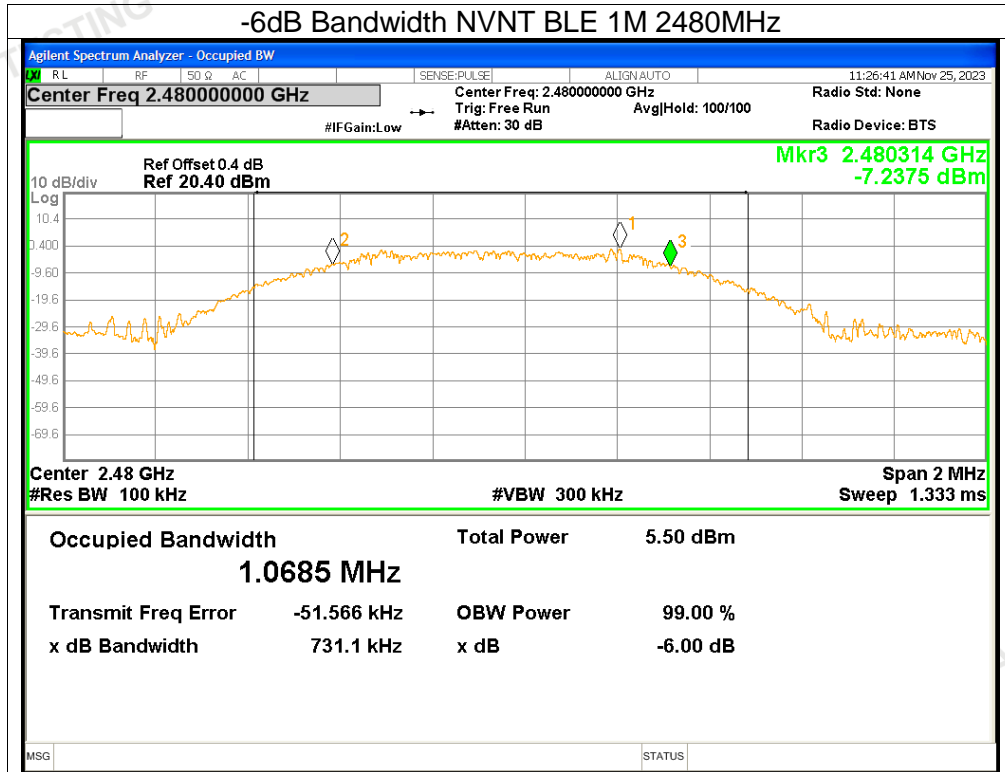


5. Maximum Power Spectral Density Level

Condition	Mode	Frequency (MHz)	PSD (dBm/3kHz)	Limit (dBm/3kHz)	Verdict
NVNT	BLE 1M	2402	-16.46	≤ 8	Pass
NVNT	BLE 1M	2440	-15.97	≤ 8	Pass
NVNT	BLE 1M	2480	-14.97	≤ 8	Pass


Test Graphs PSD NVNT BLE 1M 2402MHz

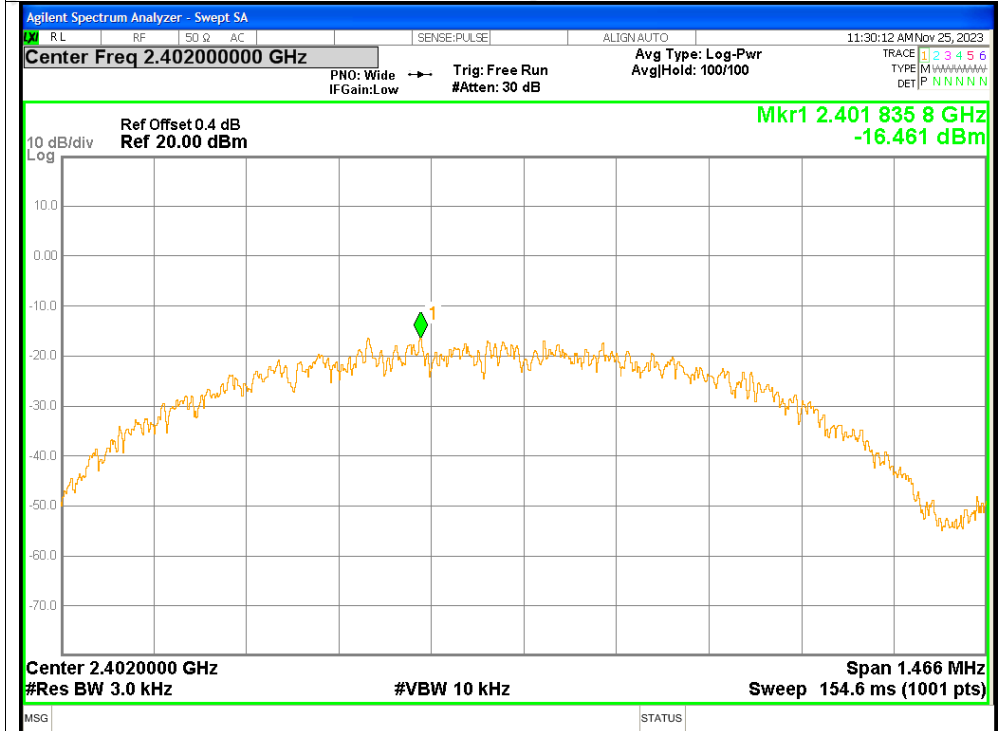

PSD NVNT BLE 1M 2440MHz

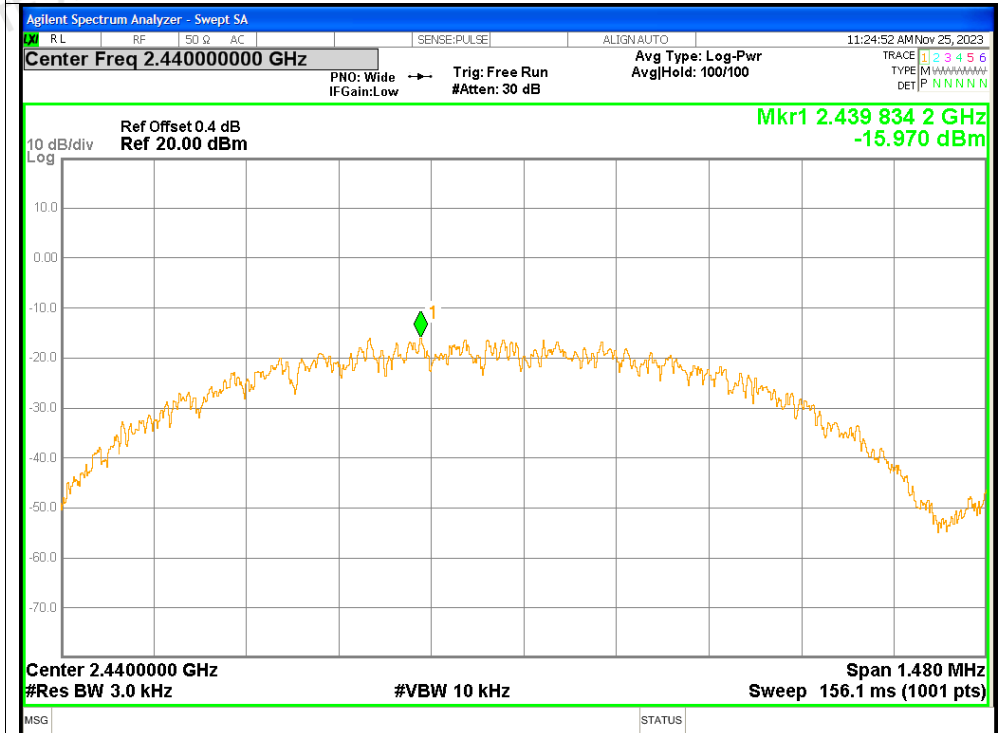

PSD NVNT BLE 1M 2480MHz

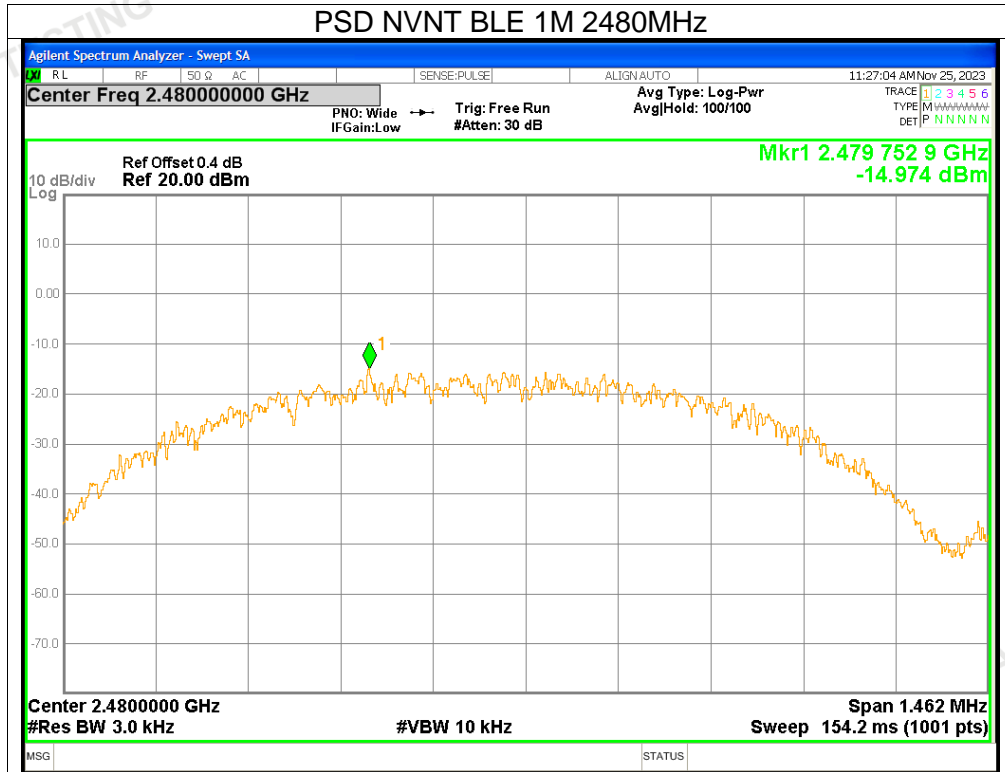

6. Band Edge

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-34.46	<=-20	Pass
NVNT	BLE 1M	2480	-41	<=-20	Pass

7. Conducted RF Spurious Emission

Condition	Mode	Frequency (MHz)	Max Value (dBc)	Limit (dBc)	Verdict
NVNT	BLE 1M	2402	-40.24	<=-20	Pass
NVNT	BLE 1M	2440	-37.8	<=-20	Pass
NVNT	BLE 1M	2480	-35.37	<=-20	Pass

APPENDIX 2- EUT TEST PHOTO

Note: See test photos in setup photo document for the actual connections between Product and support equipment.

*****END OF THE REPORT*****