

## MEASUREMENT/TECHNICAL REPORT

### FCC Part 15 Section 15-209

**Honeywell**

**FCC ID: HS9-RTU-B07**

February 08th, 2002

This report concerns (check one): Original grant   X   Class II change\_\_\_\_\_

Equipment type: ACCESS CONTROL TERMINAL (ex.: computer, printer, modem, etc.)

Deferred grant request per 47 CFR 0.457(d)(1)(ii)? yes \_\_\_\_\_ no   X  

If yes, defer until: \_\_\_\_\_ date

Company Name agrees to notify the Commission by \_\_\_\_\_ date

of the intended date of announcement of the product so that the grant can be issued on that date.

Report prepared by: Giuseppe MECCHIA



TÜV ITALIA S.R.L.  
Via Montalenghe 12  
10010 Scarmagno ( TO ) Italy

Phone : 0125 - 525441  
Fax : 0125 - 525499

	<b>Table of Contents</b>	<b>Page</b>
1	GENERAL INFORMATION .....	3
1.1	Product Description .....	3
1.2	Related Submittal(s)/Grant(s) .....	3
1.3	Tested System Details .....	4
1.4	Test Methodology.....	5
1.5	Test Facility.....	5
1.6	Test Equipment List .....	5
2	PRODUCT LABELING .....	6
	Figure 2.1 FCC ID Label .....	6
	Figure 2.2 Location of the Label on EUT .....	7
3	SYSTEM TEST CONFIGURATION.....	8
3.1	Justification.....	8
3.2	EUT Exercise Software .....	8
3.3	Special Accessories.....	9
3.4	Equipment Modifications.....	9
3.5	Configuration of the Tested System.....	10
	Figure 3.1 Configuration of the Tested System.....	10
4	BLOCK DIAGRAM(S) OF THE EUT.....	11
4.1	Block Diagram Description.....	11
	Figure 4.1 Block Diagram of the EUT .....	12
	Figure 4.2 Block Diagram of transceiver .....	13
5	CONDUCTED AND RADIATED MEASUREMENT PHOTOS.....	14
6	CONDUCTED EMISSION DATA .....	15
7	RADIATED EMISSION DATA .....	16
7.2	Field Strength Calculation.....	19
8	PHOTOS OF TESTED EUT .....	20
	User Manual .....	21

## 1 GENERAL INFORMATION

### 1.1 Product Description

The RTU-B07 is a dual antenna proximity reader for access control and time & attendance applications. It can be mounted on vertical (walls, doors) and horizontal (turnstiles, pedestals) surfaces in a stand alone configuration or bounded with FCC verified modules (display or keyboard modules).

The RTU-B07 includes an OEM proximity reader, made by HID Corporation that allows the user to read HID cards from up to 4cm away from the internal antennas. The HID OEM proxy reader is provided by HID without the antenna coil that is included in the CPU board (51790AA).

The RTU-B07 terminal a couple of multi-color LED (one LED for each antenna) and a buzzer to signal messages to the user.

Each of the two antennas can be assigned to a specific “clock-in” and “clock-out” function. During normal operations, the module alternate the card readout on the antennas until a valid modulation is detected from an active card. Then the card code and the direction are sent.

The RTU-B07 terminal communicates with the controller (CTU-A04) via an Echelon LonWorks™ network at a speed of 78 Kbps. The RTU-B07 terminal is powered by a DC 12V (+/-2V) power supply (provided by RTU-Q01).

Note: LonWorks™ is a registered trademark of Echelon™ Corporation

From an FCC point of view the EUT in an intentional radiator (125kHz tranceiver) mounted inside a class B verified equipment. According to customer request this approval will cover the complete unit and therefore the FCC ID code will be place directly on case of the terminal.

### 1.2 Related Submittal(s)/Grant(s)

None

### 1.3 Tested System Details

The FCC IDs for all equipment, plus descriptions of all cables used in the tested system (including inserted cards, which have grants) are:

Model & Serial No.	FCC ID	Description	Cable Descriptions
<b>RTU-B07 (1) s/n EMC-2002-073</b>	<b>HS9-RTU-B07</b>	<b>Access control Terminal</b>	<b>Unshielded power cord Unshielded signal cables</b>
RTU-Q01 S/n EMC-2001-286	Verified	Power supply	Unshielded power cord Unshielded signal cables
CTU-A04 S/n 1520096CA	Verified	Controller	Unshielded power cord Unshielded signal cables

(1) EUT submitted for grant.

## 1.4 Test Methodology

Both conducted and radiated testing were performed according to the ANSI C63.4-1992 test procedures . Radiated testing was performed at an antenna to EUT distance of 3 meters.

## 1.5 Test Facility

### TÜV ITALIA test site No. 3 – semi-anechoic chamber

The semi-anechoic chamber test site and conducted measurement facility used to collect the radiated data are located at Via Montalenghe 12, Scarmagno, Italy. This site has been fully described in a report dated May 12, 2000 submitted to your office, and accepted in a letter dated May 30, 2000 (registration Number: 90860)

## 1.6 Test equipment list:

Description	Model	serial No.	Cal due date
Test receiver	Rohde & Sch.ESH3	s/n 881364/012	10/02
Spectrum analyzer	HP 8568B+QP adapter	s/n 2601A02134	04/02
LISN	Schwarz. NNLA 8120	s/n 8120471A	02/03
Loop antenna	Rohde & Sch.HFH2-Z2	s/n 881058/6	07/02
Biconical antenna	Tensor 4104	s/n 2222	03/02
Log-periodic antenna	Electro-metrix LPA-25	s/n 1117	03/02

## 2 PRODUCT LABELING

### Figure 2.1 FCC ID Label

See Label Exhibit.

Test Report No. RD2002/031  
Date February 08th, 2002

FCC ID: HS9-RTU-B07

**Figure 2.2 Location of the Label on EUT**

See Label Exhibit.

## 3 SYSTEM TEST CONFIGURATION

### 3.1 Justification

The EUT was configured for testing in a typical fashion (as a customer would normally use it).

In order to simulate a real application , the EUT has been connected to a power supply, and a controller and operated according to normal use. (see Figure 3.1).

The EUT has been tested in both vertical and horizontal position simulating real operating placement:

- vertical on walls and doors and
- horizontal on turnstiles and pedestal surfaces.

Worst case for transmitter emissions has been determined to be the vertical position.

Conducted emission testing was performed on the power mains cord of the power supply RTU-Q01.

### 3.2 EUT Exercise Software

The HID proxy reader continuously sends bursts at 125KHz to the antenna coil short and acquires back (form the same antenna coil) any modulation on the transmitted carrier. If a card with a RF-TAG is placed near the RTU-B07 antenna coil, the 125KHz wave on the coil energises the TAG. The TAG then modulate the 125KHz with an encoded frame that include the identification code. That frame is then decoded by the HID reader module that sends the identification code via a synchronous serial interface (clock+data line).

The identification code is then sent to the controller (CTU-A04) via the LonWorks™ network message. When the controller receives that message, it verifies the access rights of the user. If the cardholder has the correct access rights, it sends a message to the RTU-B07 in order to provide a specific message (i.e. Green="Access granted", Red long="Access forbidden", Red short="Invalid card", etc) and turn on the LEDs (green/red) and buzzer accordingly.

Note: LonWorks™ is a registered trademark of Echelon™ Corporation.

### **3.3 Special Accessories**

None.


As shown in Figure 3.1 all interface cables used for compliance testing are unshielded as readily available on the market.

### **3.4 Equipment Modifications**

To achieve compliance to Class B levels, no changes were made during compliance testing.

### 3.5 Configuration of the Tested System

Figure 3.1 Configuration of the Tested System

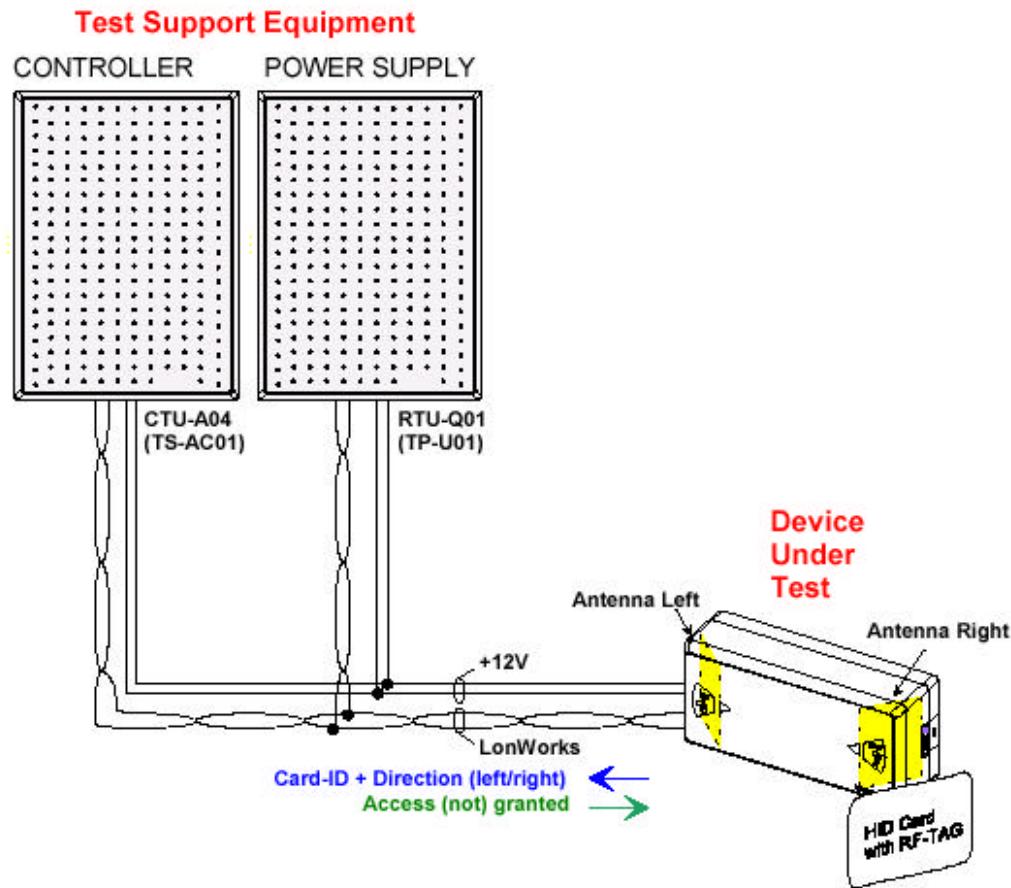

**Note:**

Both the power supply and the LonWorks™ cables are not shielded. The LonWorks™ cable is a twisted pair. LonWorks™ is a registered trademark of Echelon™ Corporation

## 4 BLOCK DIAGRAM(S) OF THE EUT

### 4.1 Block Diagram Description

The **Board 51810AB** of the EUT is provided with:

#### **Crystals and oscillators:**

Y1: 10 MHz      CPU

#### **RF suppression devices:**

##### ***VDC EMI Filters:***

FL1:                    M2022-A Coilcraft  
C18,C21:            10nF SMD 10% 0805

##### ***Lowwork EMI Filter***

FL2:                    M2022-A Coilcraft

##### ***EMS Shield:***

Shield1:              Shield component FTT10 custom Dating - code 3900698AA

Test Report No. RD2002/031  
Date February 08th, 2002

FCC ID: HS9-RTU-B07

**Fig. 4.1 - Block Diagram of the EUT**

**See Block Diagram Exhibit.**

Test Report No. RD2002/031  
Date February 08th, 2002

FCC ID: HS9-RTU-B07

**Fig. 4.2 - Block Diagram of Transceiver**

See block diagram Exhibit.

Test Report No. RD2002/031  
Date February 08th, 2002

FCC ID: HS9-RTU-B07

## 5 CONDUCTED AND RADIATED MEASUREMENT PHOTOS

See Test Setup Photos Exhibit.

## 6 CONDUCTED EMISSION DATA

### 6.1 Tests of the worst case configuration.

The conducted tests are performed with a receiver in quasi-peak mode.

	Frequency (MHz)	Measured* (dB $\mu$ V)	Limit (dB $\mu$ V)
neutral	0.47	14	48
	7.6	19	
	14.6	28	
	16	29	
	19.6	33	
	21.1	30	
line	0.47	13	48
	7.6	20	
	14.6	27	
	16	28	
	19.6	33	
	21.1	31	

\* All readings are quasi-peak

Test Personnel:

Tester Signature



Date February 05, 2002

Typed/Printed Name Giuseppe MECCHIA.

## 7 RADIATED EMISSION DATA

- frequency range 125 kHz – 1 GHz
- (from the lowest frequency generated to 1GHz: it includes a digital device)

### 7.1 Tests of the worst case configuration

The following data list the significant emission frequencies, measured levels, correction factors (including cable and antenna corrections), the corrected reading, plus the limit. Field strength calculation is given in paragraph 7.2.

Judgement: Passed by 48.1 dB

Fundamental and harmonics (limits according to section 15.209).

Frequency (kHz)	Receiver* Corrected Reading (dB $\mu$ V/m)	3 Meter Limit (dB $\mu$ V/m)
125	78	136.7
250	38	95.6
375	44	92.1
625	37	87.7

Frequency (kHz)	Receiver* Corrected Reading (dB $\mu$ V/m)	10 Meter Limit (dB $\mu$ V/m)
125	49	107.7

\* below 30 MHz readings are quasi-peak with an IF bandwidth of 9 kHz,

### **Extrapolation data**

Measurements were taken at the fundamental frequency of the intentional radiator with the Rohde & Schwarz loop antenna at the distances of 3 and 10 meters. The antenna was placed at a fixed height of 1 meter. **Measurements were taken in the three orthogonal orientation to find the maximum emission, vertical was observed to be worst case.** The turntable was rotated to maximize the emission. The first measurement was taken at 3 meters, then the antenna was moved to 10 meters and the emission was measured. These readings were then plotted to extrapolate the correct reading at a distance of 30 and 300 meters. The limit was then calculated using approximately a 60dB/decade falloff rate (exactly 59dB from 3 to 10 meters) to show the correct limit at a distance of 30 meters. These limits were then plotted on the graph to extrapolate the limits at 10 and 3 meters. Reference measurements standards Part 15 section 15.31(f)(2).

Spurious emissions (limits according to section 15.209).

Judgement: Passed by 3 dB

Frequency (MHz)	Polarity (V/H)	Receiver* Reading (dB $\mu$ V)	Correction Factor (dB/m)	Corrected Reading (dB $\mu$ V/m)	3 Meter Limit (dB $\mu$ V/m)
39.9	V	20.3	13.5	33.8	40
71.8	H	29.2	7.8	37	40
113.3	V	23.3	14	37.3	43.5
144.2	V	23.4	15.7	39.1	43.5
409.6	H	19.7	21	40.7	46
460.8	H	17.8	22.3	40.1	46

\* above 30 MHz readings are quasi-peak, with an IF bandwidth of 120 kHz,

Test Personnel:

Tester Signature

 Date February 07, 2002

Typed/Printed Name Giuseppe MECCHIA.

## 7.2 Field Strength Calculation

7.2.1 The field strength is calculated by adding the Antenna and Cable Factor to the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF$$

where

FS = Field Strength

RA = Receiver Amplitude

AF = Antenna Factor

CF = Cable Attenuation Factor

Assume a receiver reading of 29.2 dB $\mu$ V is obtained. The Antenna and Cable Factor of 7.8 is added, giving a field strength of 37 dB $\mu$ V/m. The 37 dB $\mu$ V/m value was mathematically converted to its corresponding level in  $\mu$ V/m.

$$FS = 29.2 + 7.8 = 37 \text{ dB}\mu\text{V/m}$$

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(37 \text{ dB}\mu\text{V/m})/20] = 70.8 \mu\text{V/m}$$

## 8 PHOTOS OF TESTED EUT

- Fig. 8.1 Upper view**
- Fig. 8.2 Lower view**
- Fig. 8.3 Unit partially disassembled**
- Fig. 8.4 51810AB CPU board - side 1**
- Fig. 8.5 51810AB CPU board - side 2**
- Fig. 8.6 4068 module – side 1 (already provided by HID Corporation)**
- Fig. 8.7 4068 module – side 2 (already provided by HID Corporation)**

See attached files: internal\_photos and external\_photos

Test Report No. RD2002/031  
Date February 08th, 2002

FCC ID: HS9-RTU-B07