



**MOBILE DEVICES BUSINESS  
PRODUCT SAFETY AND COMPLIANCE  
EMC LABORATORY**

**EMC TEST REPORT**

**Test Report Number** – 22298-1

**Report Date** – October 27, 2008

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature: 

Name: Thanigaiselvan Palaniswami

Title: EMC Engineer

Date: October 27, 2008

This report must not be reproduced, except in full, without written approval from this laboratory.

**THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.**

A2LA Certificate Number: 2518-02

**Test Report Details**..... 3

**Applicable Standards**..... 3

**Summary of Testing**..... 4

**Equipment and Cable Configurations** ..... 5

**Measurement Procedures and Data** ..... 6

**RF POWER OUTPUT**..... 6

**RADIATED POWER (EIRP AND ERP)** ..... 8

**OCCUPIED BANDWIDTH**..... 9

**SPURIOUS EMISSIONS AT ANTENNA TERMINALS**..... 22

**FIELD STRENGTH OF SPURIOUS EMISSIONS** ..... 29

**FREQUENCY STABILITY**..... 36

**FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS** 43

**AC LINE CONDUCTED EMISSIONS**..... 45

**Test Report Details**

Tests Performed By: Motorola Mobile Devices business (MDb)  
 Product Safety and Compliance Group  
 600 North US Hwy 45  
 Libertyville, IL 60048  
 PH (847) 523-6167 Fax (847) 523-4538  
 Motorola MDb FRN: 0004321311  
 FCC Registration Number: 316588  
 Industry Canada Number: 109O-1

Tests Requested By: Motorola Inc.  
 Mobile Devices Business  
 600 North US Hwy 45  
 Libertyville, IL 60048

Product Type : Cellular Phone

Signaling Capability: GSM 850 & 1900, EDGE 850 & 1900, WCDMA 850 & 1900, Bluetooth, WLAN

FCC ID: IHDP56JH1

Serial Numbers: 004401028823223, 04401028823165, 004401028823140

Testing Complete Date: October 27, 2008

**Applicable Standards**

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- X   Part 2
- X   Part 22 Subpart H - Public Mobile Services
- X   Part 24 Subpart E – Personal Communications Services

Applicable Standards: ANSI 63.4 2003, ANSI/TIA-603-C-2004

**Summary of Testing**

Test #	Test Name	Pass/Fail
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	Pass
3	EIRP (Effective Isotropic Radiated Power)	Pass
4	Occupied Bandwidth	Pass
5	Spurious Emissions at Antenna Terminal	Pass
6	Field Strength of Spurious Emissions	Pass
7	Frequency Stability	Pass
8	Field Strength of Spurious Emissions from Unintentional Radiators	Pass
9	AC Line Conducted Emissions	Pass

Test #	Test Name	Margin with respect to the Limit
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	See results
3	EIRP (Effective Isotropic Radiated Power)	See results
4	Occupied Bandwidth	See Plots
5	Spurious Emissions at Antenna Terminal	See results
6	Field Strength of Spurious Emissions	See results
7	Frequency Stability	See results
8	Field Strength of Spurious Emissions from Unintentional Radiators	Below noise floor
9	AC Line Conducted Emissions	See Plots

The margin with respect to the limit is the minimum margin for all modes and bands.

**General and Special Conditions**

The EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

**Equipment and Cable Configurations**

The EUT was tested in a stand-alone configuration that is representative of typical use.

<b>Manufacturer</b>	<b>Equipment Type</b>	<b>Model No.</b>	<b>Serial Number</b>	<b>Calibration Due Date</b>
Rohde Schwarz	Receiver	ESI26	838786/010	2/28/09
Rohde Schwarz	Receiver	ESI26	100001	6/03/09
Hewlett Packard	EMC Analyzer	E7405	US39440191	5/08/09
Rohde & Schwarz	Spectrum Analyzer	1166.1660.26	200432	1/10/09
Hewlett Packard	Signal Generator	83712A	3429A00286	6/19/09
ETS	DRG Horn Antenna	3115	6222	5/02/09
A.H. Systems	DRG Horn Antenna	SAS 200/571	265	1/18/09
ETS	Log-Periodic Antenna	3148	1188	07/30/09
ETS	Biconical Antenna	3110B	3370	07/29/09
ETS	Log-Periodic Antenna	3148	1189	10/10/08
ETS	Biconical Antenna	3110B	3369	10/04/08
Attenuator	Weinschel	AS-6	6675	6/13/09
Attenuator	Weinschel	AS-6	6677	6/17/09
Thermotron	Environmental Chamber	S-4	31580	2/11/09
Agilent	Power Meter	E4416A	GB41293263	12/27/08
Agilent	Power Sensor	E9323A	MY44420341	12/27/08
Agilent	Microwave Preamplifier	8449B	3008A01442	2/25/09
ETS	LISN	3810/2NM	2179	1/23/09
ETS	LISN	3810/2NM	00023630	1/23/09

All test equipment was within their calibration date during the time of testing. When equipment went out of calibration during testing it was replaced using a similar piece of calibrated equipment. All these equipments are listed in the equipment list.

Note that the Agilent power meter, power sensor, and the preamplifier are on a two-year calibration cycle. All other equipment is on a one-year calibration cycle.

**Measurement Procedures and Data**

**RF POWER OUTPUT**

**Measurement Procedure**

The RF output port of the equipment under test is directly coupled to the input of an Agilent power meter through a 20dB passive attenuator, adaptor (if needed), and specialized RF connector.

**Measurement Results**

**GSM 850**

Frequency (MHz)	Power (dBm)
824.2	32.38
836.6	32.41
848.8	32.35

**GSM 1900**

Frequency (MHz)	Power (dBm)
1850.2	30.00
1880.0	29.95
1909.8	29.82

**EDGE 850**

Frequency (MHz)	Power (dBm)
824.2	27.42
836.6	27.43
848.8	27.42

**EDGE 1900**

Frequency (MHz)	Power (dBm)
1850.2	26.45
1880.0	26.65
1909.8	26.66

**WCDMA Modes**

Band	Channel	Conducted power (dBm) for WCDMA modes		Conducted Power (dBm) for WCDMA – HSDPA (Rel 5) Modes				Conducted Power (dBm) for WCDMA – HSPA (Rel 6) Modes				
		RMC	AMR	Sub test 1	Sub test 2	Sub test 3	Sub test 4	Sub test 1	Sub test 2	Sub test 3	Sub test 4	Sub test 5
WCDMA 850	4132	23.59	23.48	23.46	23.59	23.56	23.59	23.11	23.17	23.25	23.19	23.24
	4180	23.62	23.54	23.55	23.65	23.63	23.65	23.15	23.19	23.05	23.21	23.16
	4233	23.69	23.64	23.61	23.65	23.65	23.66	23.26	23.28	23.32	23.30	23.29
WCDMA 1900	9262	23.50	23.44	23.40	23.44	23.44	23.46	23.19	23.34	23.35	23.20	23.44
	9400	23.70	23.57	23.53	23.59	23.61	23.63	23.53	23.56	23.57	23.60	23.74
	9538	23.70	23.83	23.68	23.70	23.72	23.71	23.44	23.47	23.48	23.40	23.53

All WCDMA testing was done in RMC mode.

**RADIATED POWER (EIRP AND ERP)****Measurement Procedure**

The phone was tested in a 16' anechoic chamber with a 2-axis position system that permits taking complete spherical scans of the EUT's radiation patterns. For all tests, the phone was supported in a free space type environment, vertically oriented in the chamber.

All measurements were made with the phone placed in a call using a mobile station test set. The phone was weakly coupled to the test set and configured to transmit in full data rate mode. Radiated power was measured at each 15 degree step. The radiated power was measured using a peak detector for all bands in the Spectrum Analyzers. From these measurements, the software calculates the angle at which maximum radiated power occurs for each case, and the radiated power at this angle was extracted from the data. To get ERP (effective radiated power referenced to a half-wave dipole), subtract 2.1 dB from these numbers.

**Measurement Results**

<b>Band</b>	<b>EIRP dBm</b>	<b>ERP dBm</b>
GSM 850	32.72	<b>30.62</b>
GSM 1900	<b>31.22</b>	29.12
EDGE 850	30.50	<b>28.40</b>
EDGE 1900	<b>30.56</b>	28.46
WCDMA 850	24.62	<b>22.52</b>
WCDMA1900	<b>25.84</b>	23.74

For all measurement, calibration was performed via gain substitution with a half-wave dipole.

**OCCUPIED BANDWIDTH**

**Measurement Procedure**

The RF output port of the equipment under test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. The analyzer is set for Peak Detector and each trace is set for Max Hold. A fully charged battery was used for the supply voltage.

The middle channel within the designated frequency block was measured. For digital modulation, the lower and upper band edge plots are displayed.

**Measurement Results**


Attached

Plot	Equipment Settings					
	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Sweep Points (#)	Trace Mode	Detector	Samples (≥ #)
Reference Plot - GSM 850	300	Auto	1001	Max Hold	Peak	30
OCBW - GSM 850	3	Auto	1001	Max Hold	Peak	30
Lower Band Edge - GSM 850	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - GSM 850	1	Auto	2004	Max Hold	Peak	30
Reference Plot - GSM 1900	300	Auto	1001	Max Hold	Peak	30
OCBW - GSM 1900	3	Auto	1001	Max Hold	Peak	30
Lower Band Edge - GSM 1900	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - GSM 1900	1	Auto	2004	Max Hold	Peak	30


- Notes: 1) When the video bandwidth is set to Auto the video bandwidth self adjusts for <sup>3</sup> the resolution bandwidth.
- 2) The plotted data shown for the band edge measurements is representative of data taken with a true 3 kHz resolution bandwidth filter. The raw data was taken using a 1 kHz resolution bandwidth and was integrated to produce a response representative of data taken using a true 3 kHz resolution bandwidth filter.

**Measurement Results – GSM 850**


**GSM 850 – Reference Level Plot – Channel 190 (836.60 MHz)**

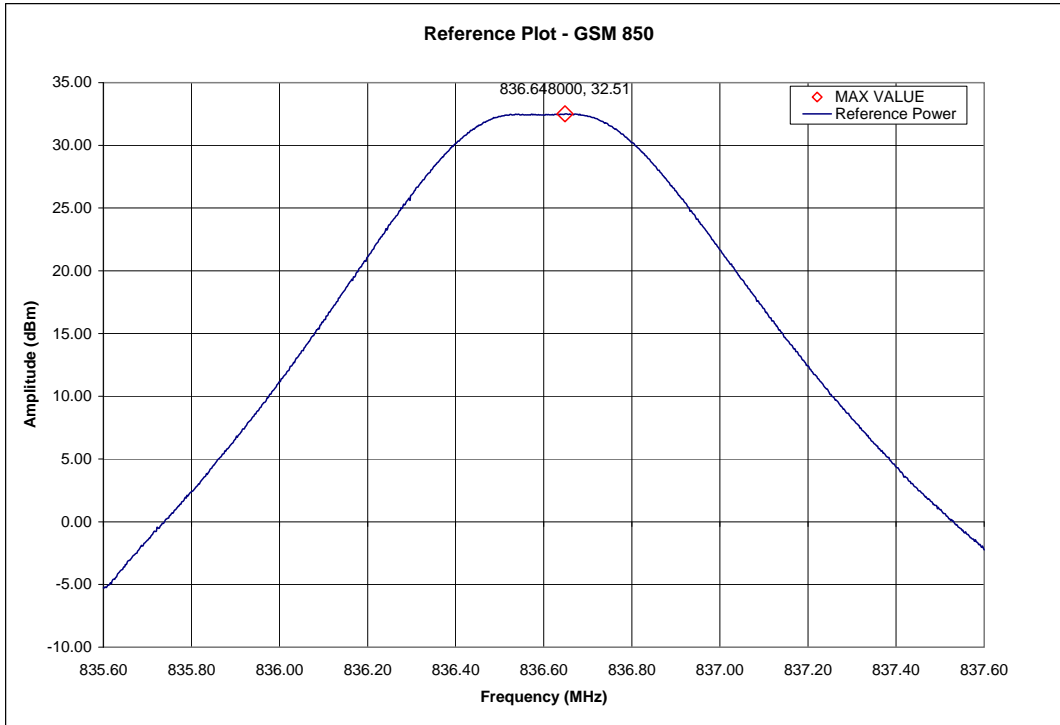


**GSM 850 – Channel 190 (836.60 MHz) – Occupied Bandwidth**

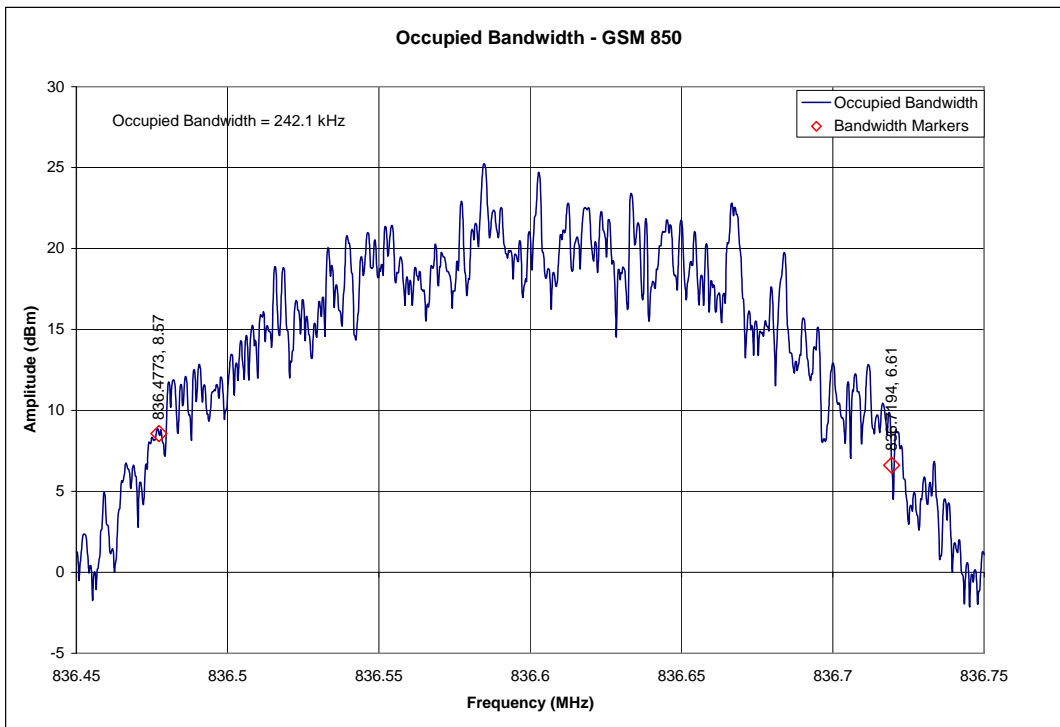

**GSM 850 – Lower Band Edge – Channel 128 (824.2 MHz)**

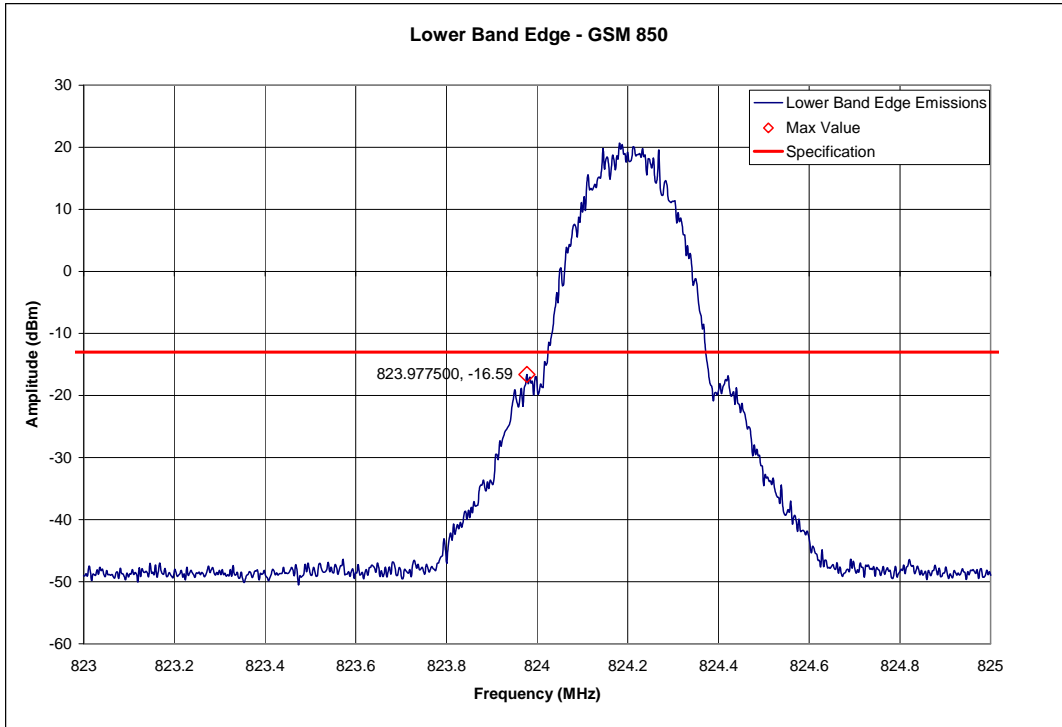


**GSM 850 – Upper Band Edge – Channel 251 (848.8 MHz)**

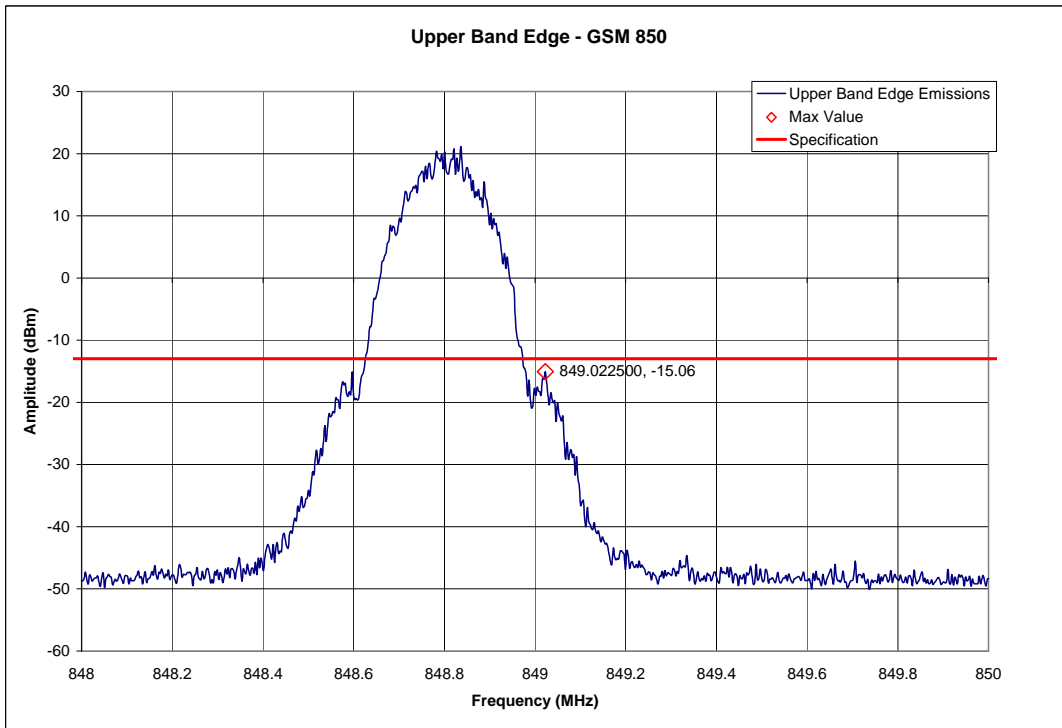


**Measurement Results – GSM 1900**


**GSM 1900 – Reference Level Plot – Channel 661 (1880.00 MHz)**

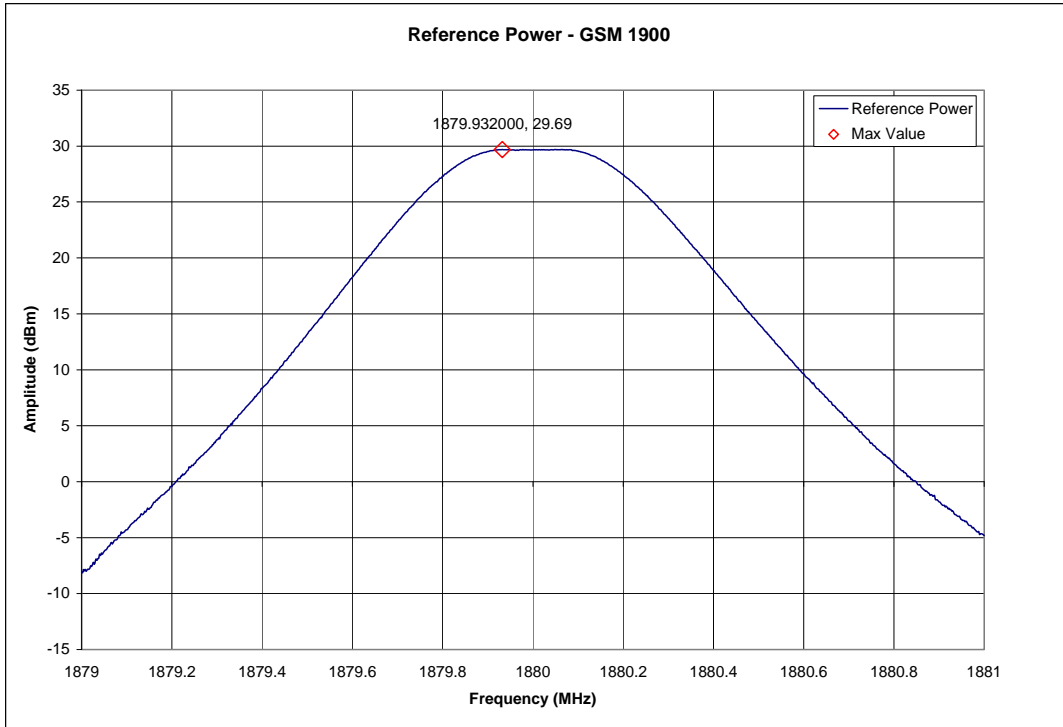


**GSM 1900 – Channel 661 (1880.00 MHz) – Occupied Bandwidth**

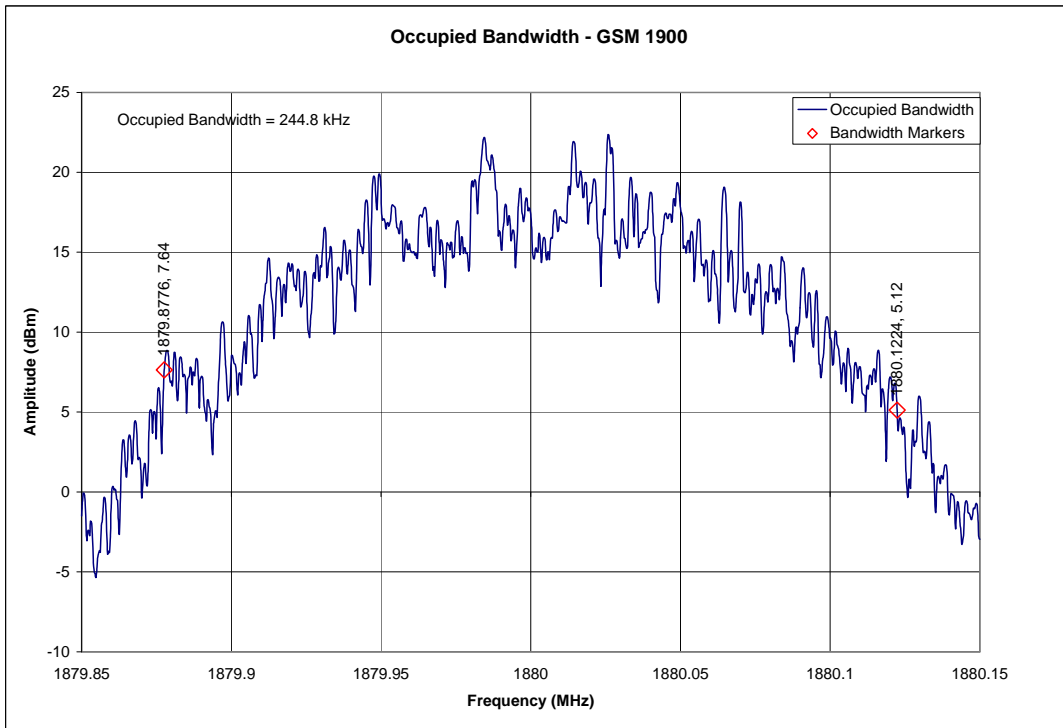

**GSM 1900 – Lower Band Edge – Channel 512 (1850.2 MHz)**

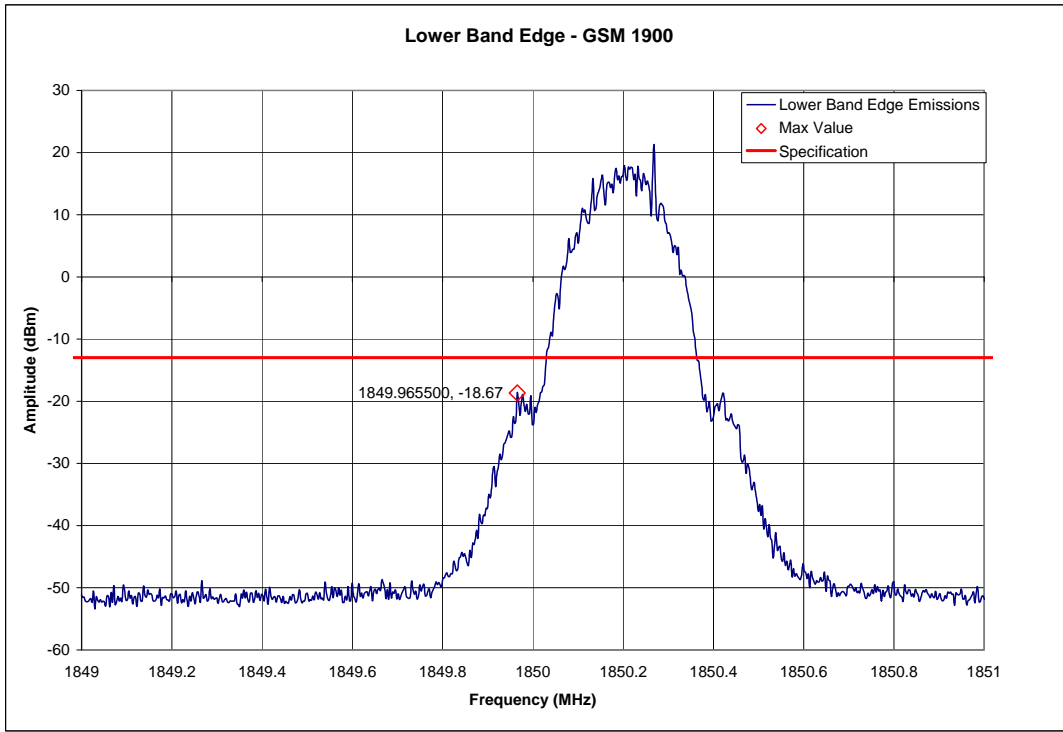


**GSM 1900 – Upper Band Edge – Channel 810 (1909.8 MHz)**

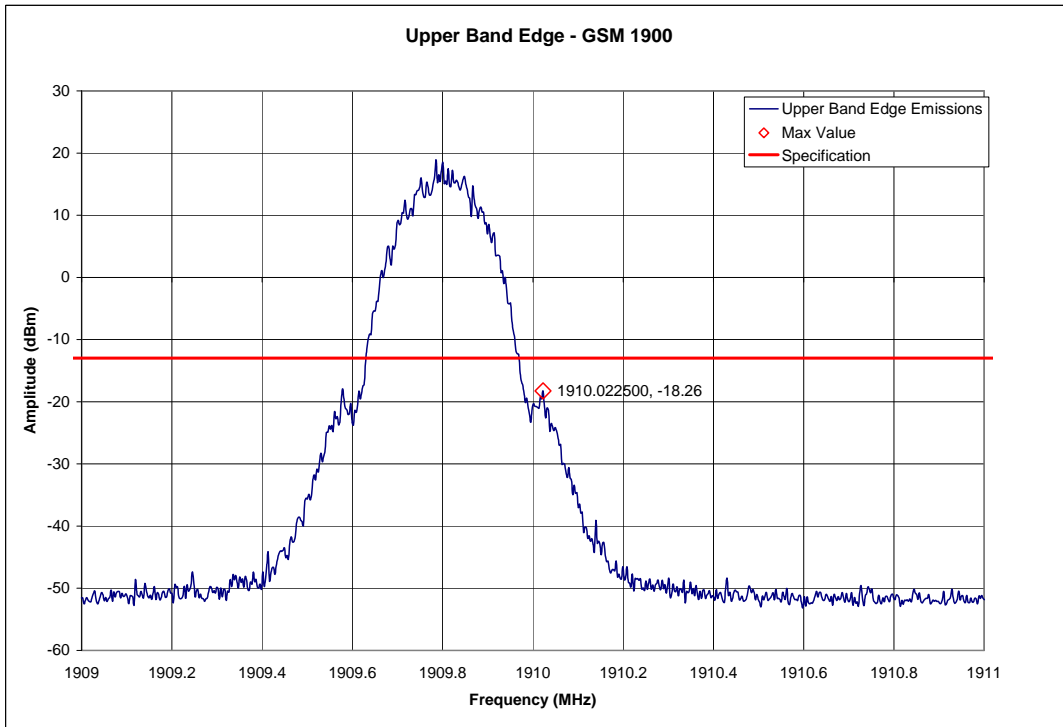


**Measurement Results – EDGE 850**


**EDGE 850 – Channel 190 (836.60 MHz) – Occupied Bandwidth**

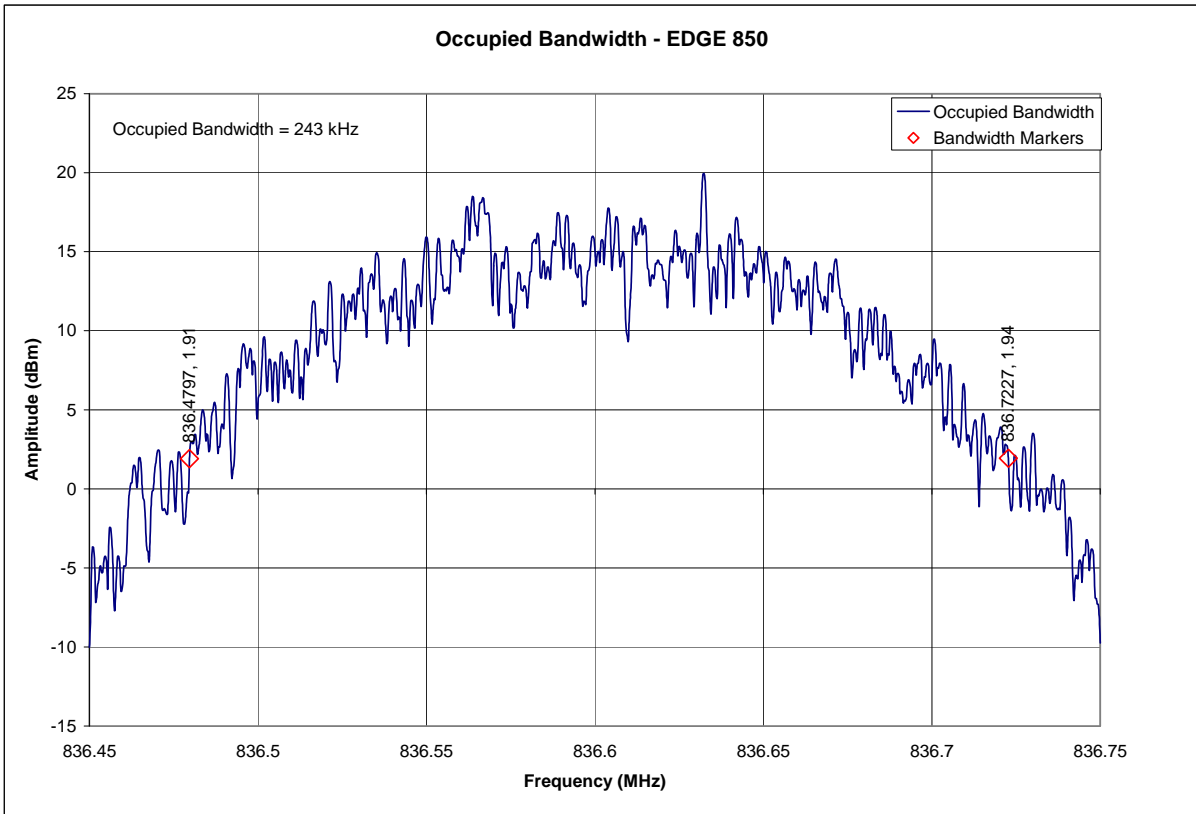

**EDGE 850 – Lower Band Edge – Channel 128 (824.2 MHz)**

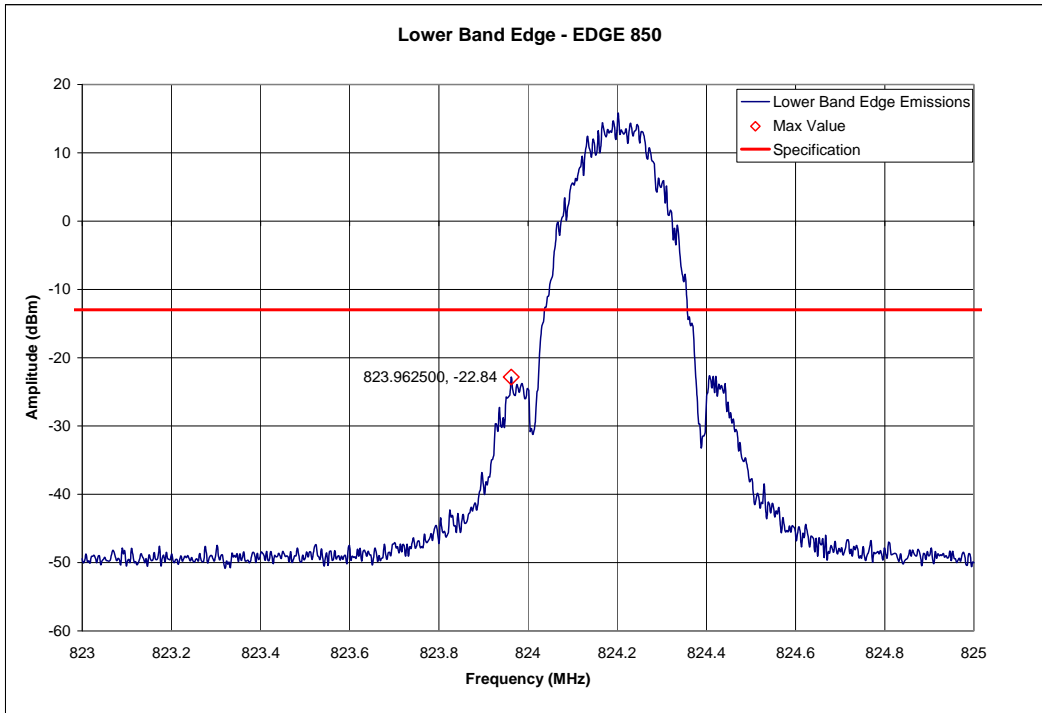


**EDGE 850 – Upper Band Edge – Channel 251 (848.8 MHz)**

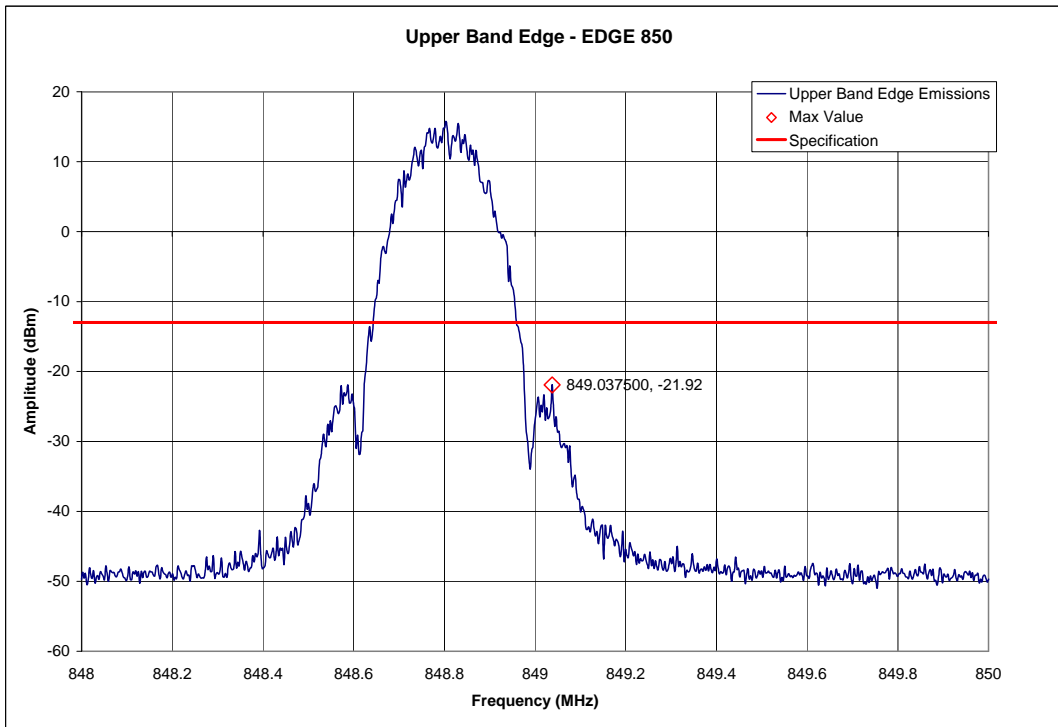


**Measurement Results – EDGE 1900**


**EDGE 1900 – Channel 661 (1880.00 MHz) – Occupied Bandwidth**

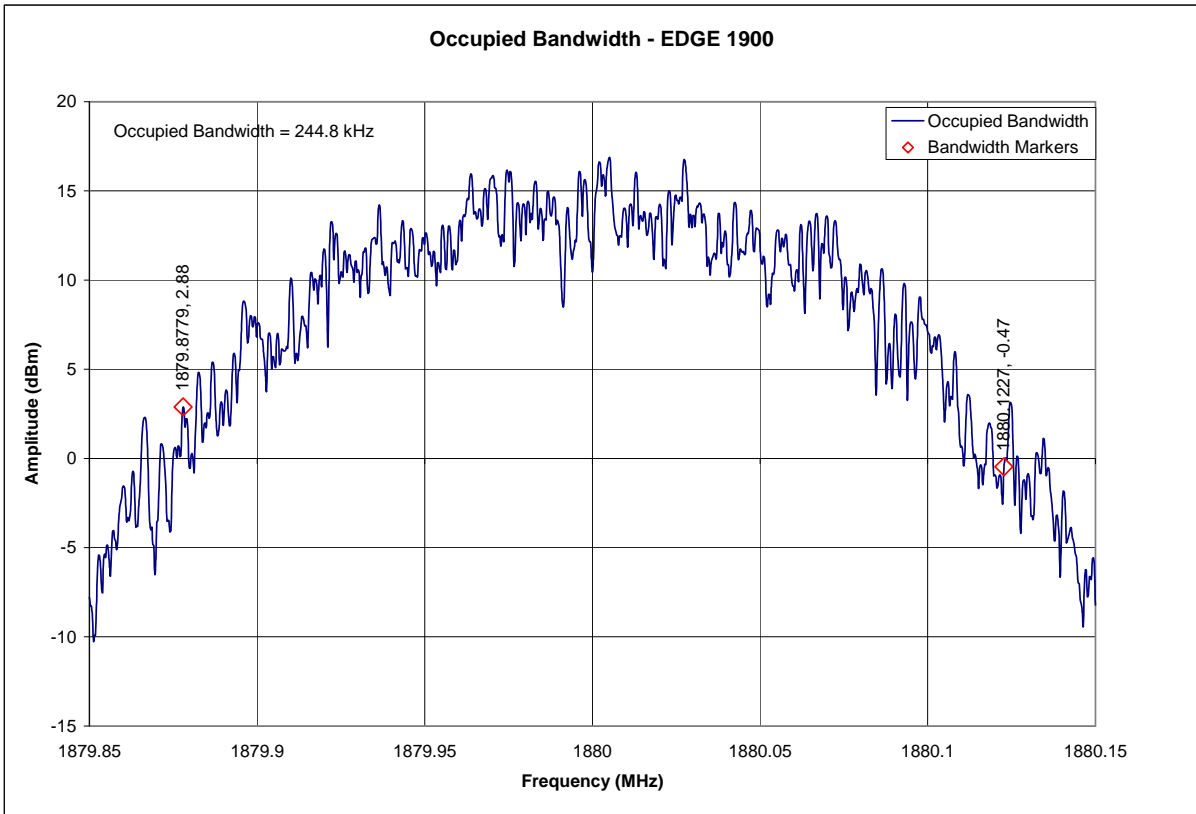

**EDGE 1900 – Lower Band Edge – Channel 512 (1850.2 MHz)**

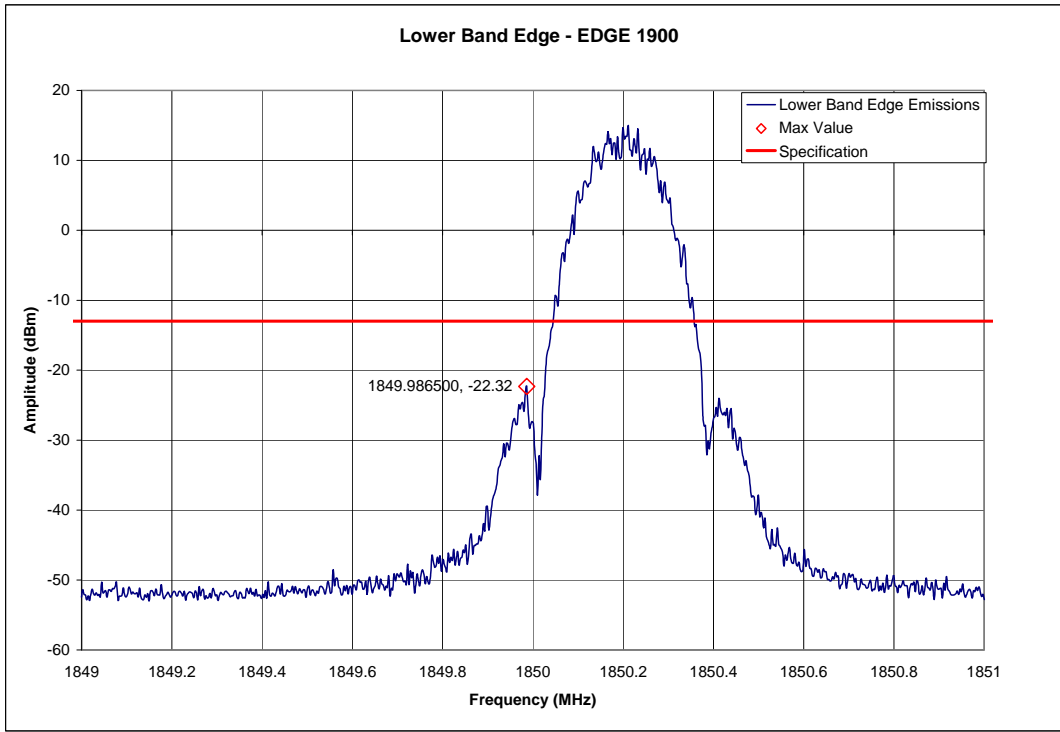


**EDGE 1900 – Upper Band Edge – Channel 810 (1909.8 MHz)**

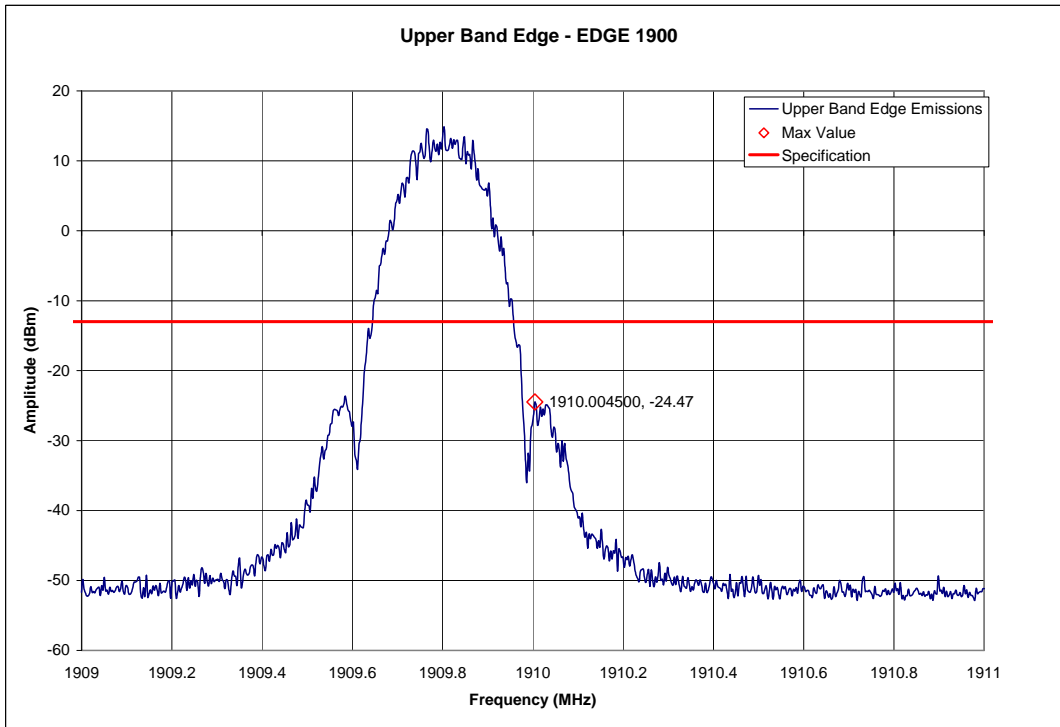


**Measurement Results – WCDMA 850**


**WCDMA 850 – Reference Level Plot – Channel 4180 (836.00 MHz)**

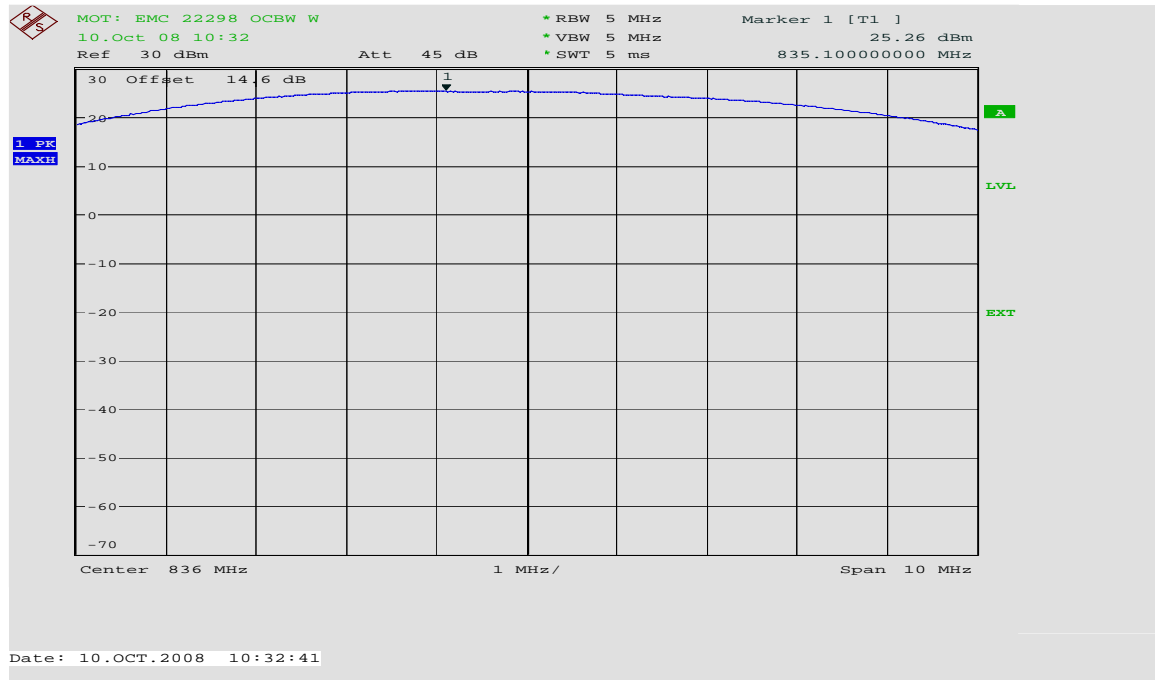


**WCDMA 850 – Occupied Bandwidth – Channel 4180 (836.00 MHz)**

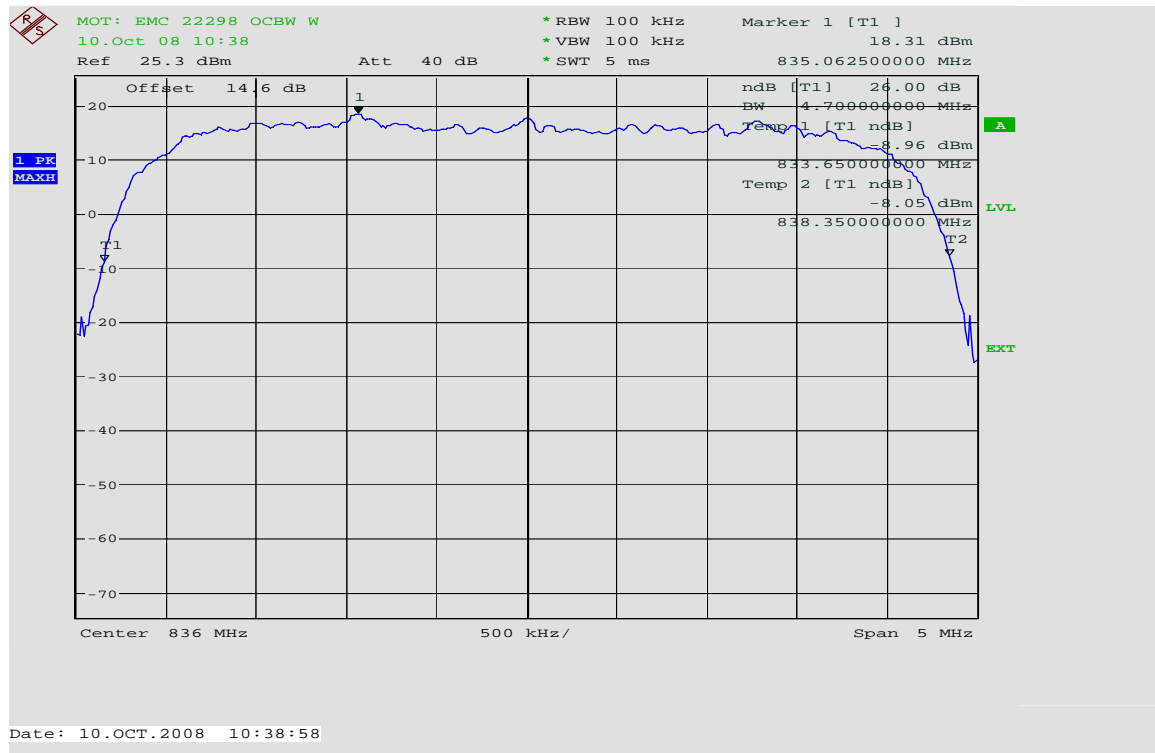

### WCDMA 850 – Lower Band Edge – Channel 4132 (826.40 MHz)

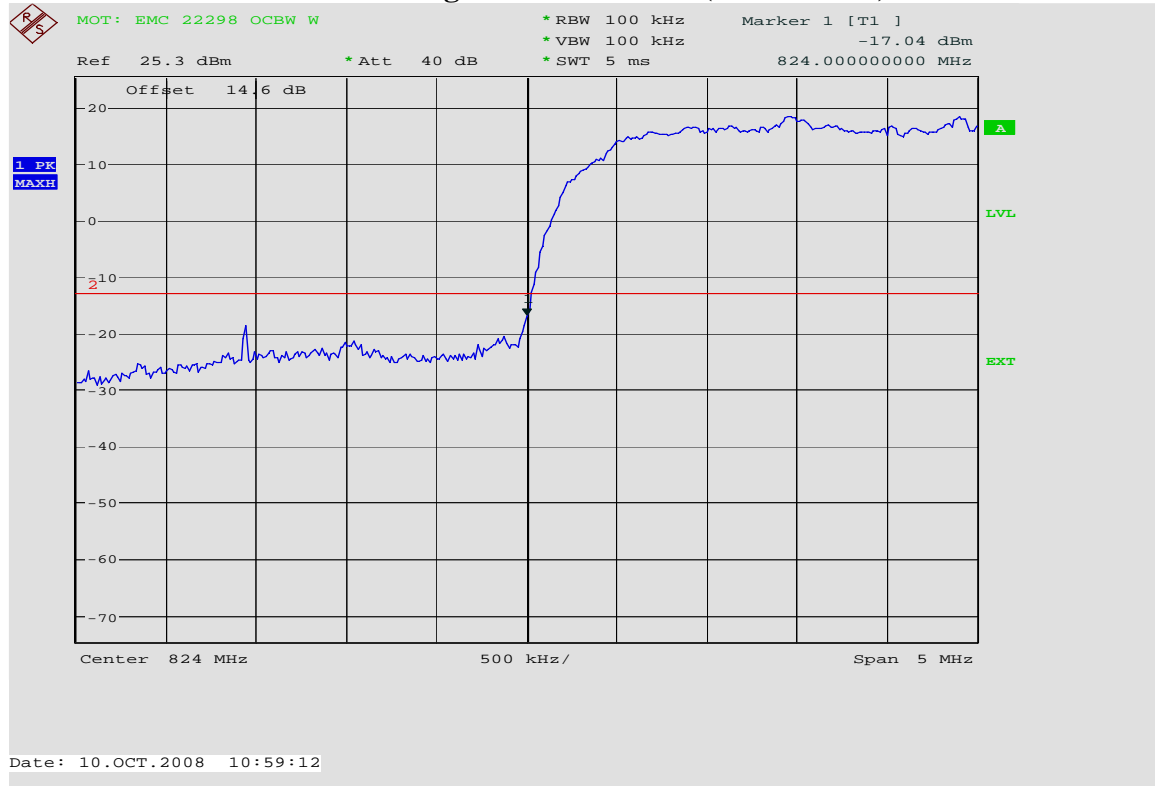


### WCDMA 850 – Upper Band Edge – Channel 4233 (846.60 MHz)

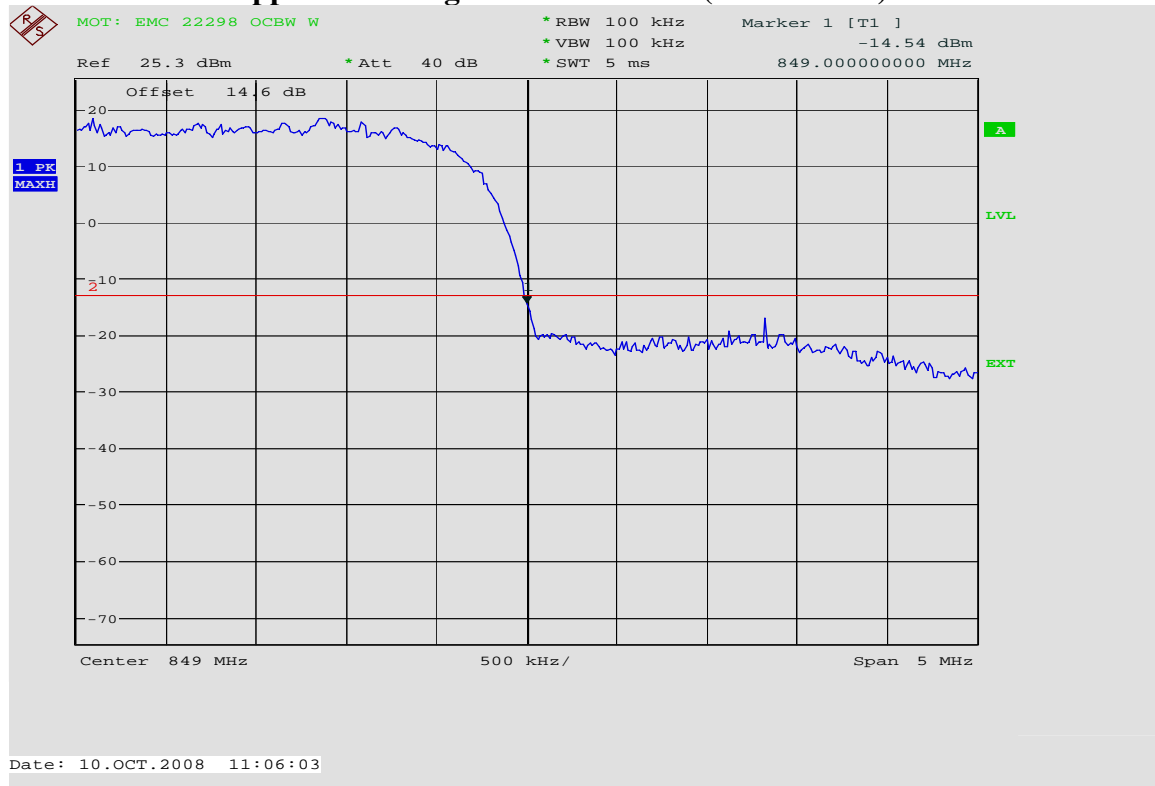


**Measurement Results – WCDMA 1900**


**WCDMA 1900 – Reference Level Plot – Channel 9400 (1880.00 MHz)**

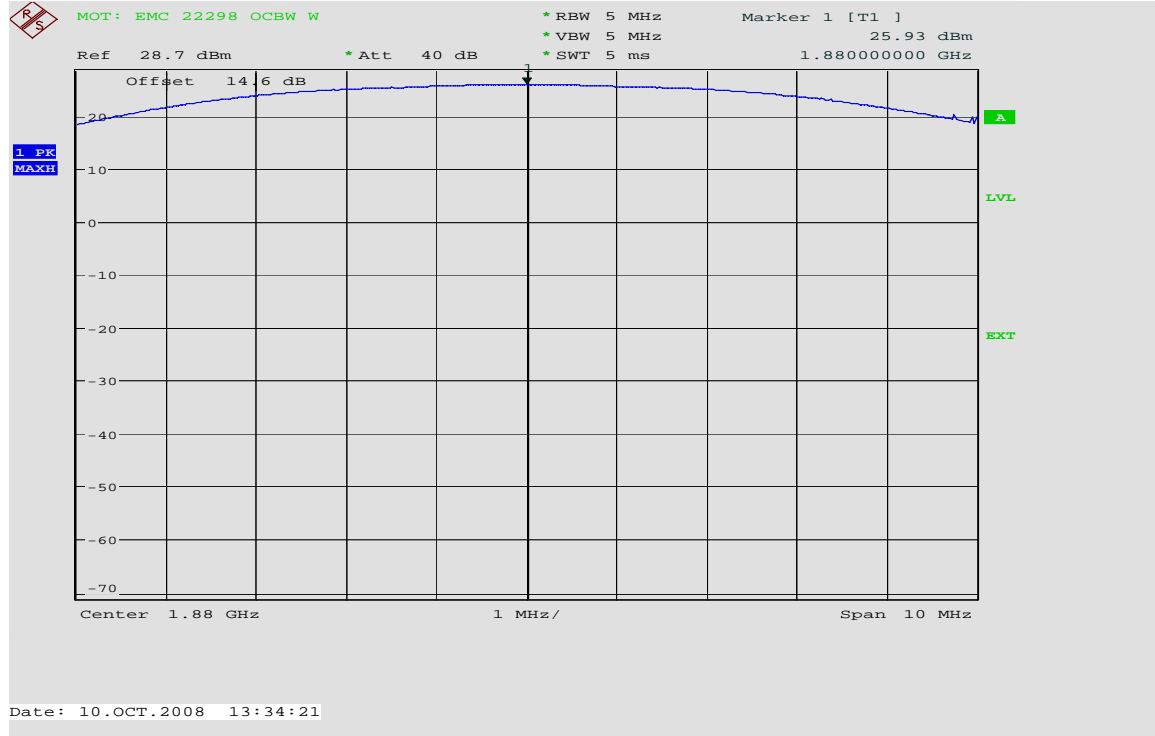


**WCDMA 1900 – Occupied Bandwidth – Channel 9400 (1880.00 MHz)**

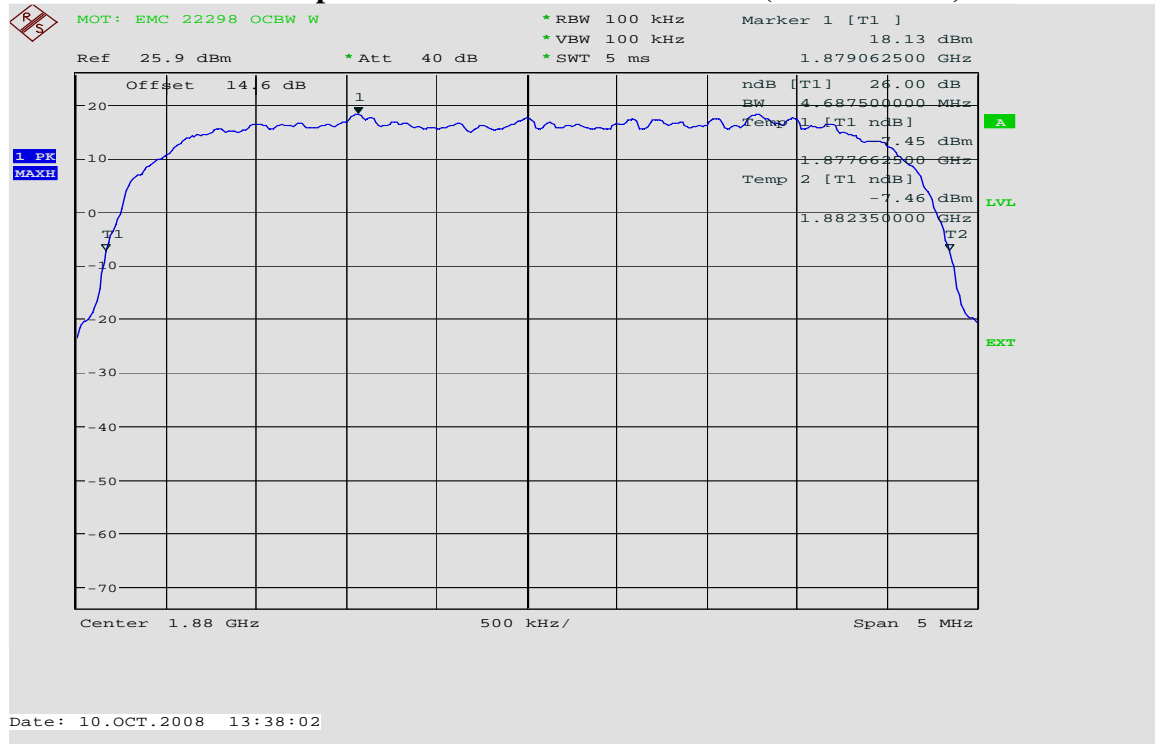

### WCDMA 1900 – Lower Band Edge – Channel 9262 (1852.40 MHz)

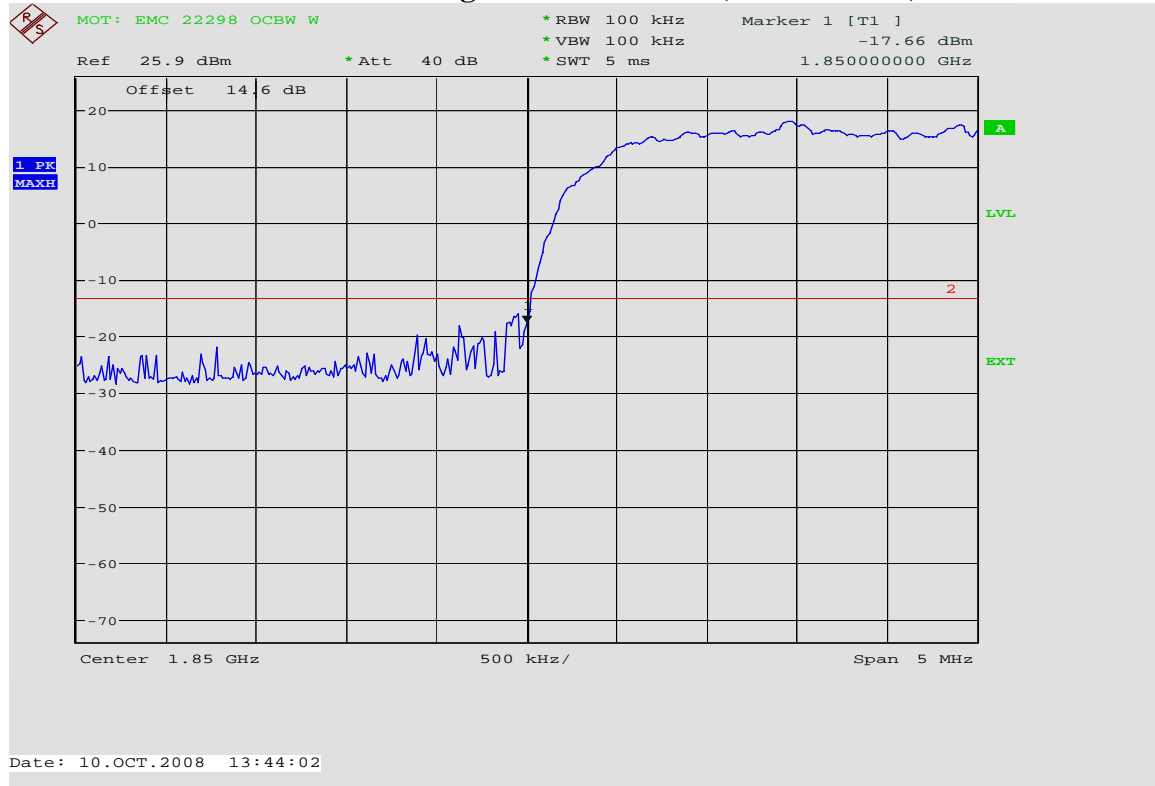

### WCDMA 1900 – Upper Band Edge – Channel 9538 (1907.60 MHz)

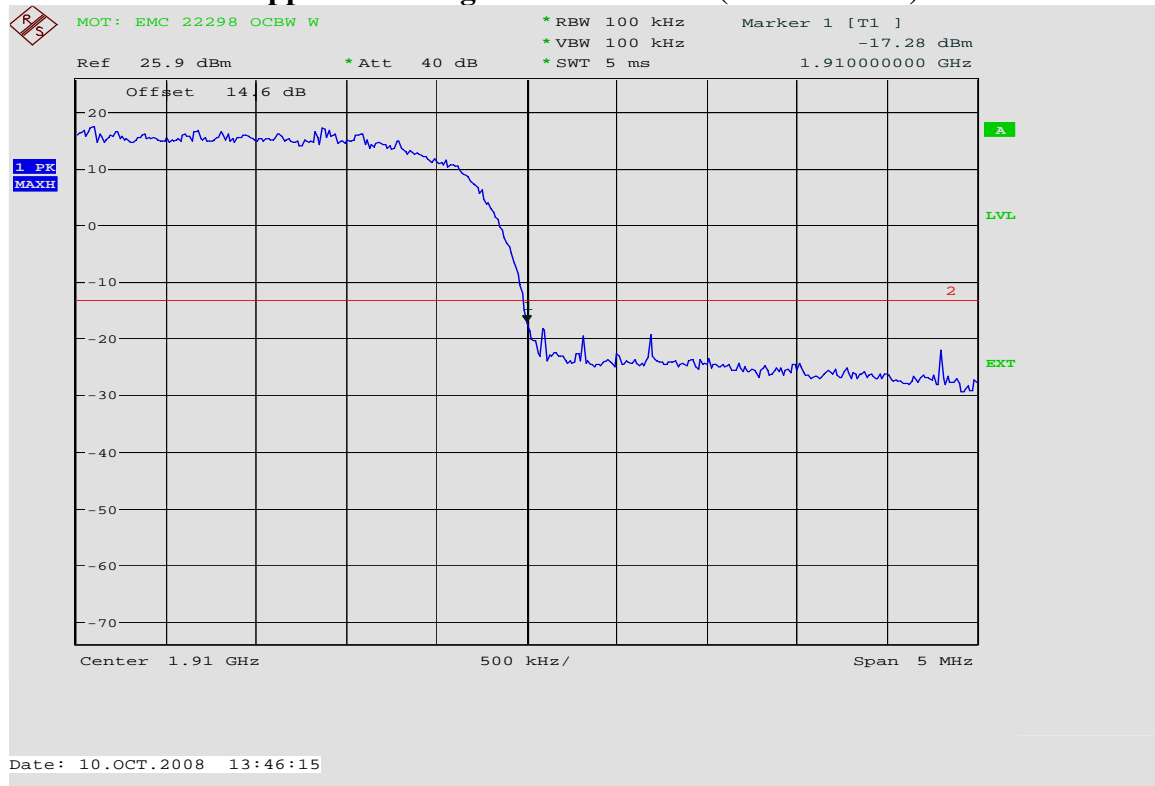

**SPURIOUS EMISSIONS AT ANTENNA TERMINALS****Measurement Procedure**

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.

The spectrum analyzer settings were as follows:

Units	dBm
Divisions	10 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto


**Measurement Results**

Attached

**Measurement Results – GSM 850**

**Conducted Spurious and Harmonic Emissions**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-45.8
3rd harmonic	-13	-37.3
4th harmonic	-13	-51.2
5th harmonic	-13	*
6th harmonic	-13	-51.9
7th harmonic	-13	*
8th harmonic	-13	-49.5
9th harmonic	-13	*
10th harmonic	-13	*

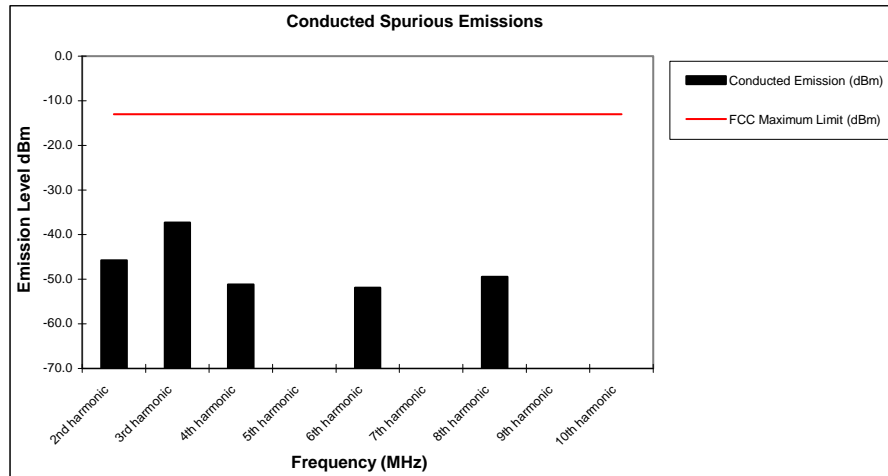

Notes:


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – GSM 1900**

**Conducted Spurious and Harmonic Emissions**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-48.4
3rd harmonic	-13	-50.8
4th harmonic	-13	-48.2
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

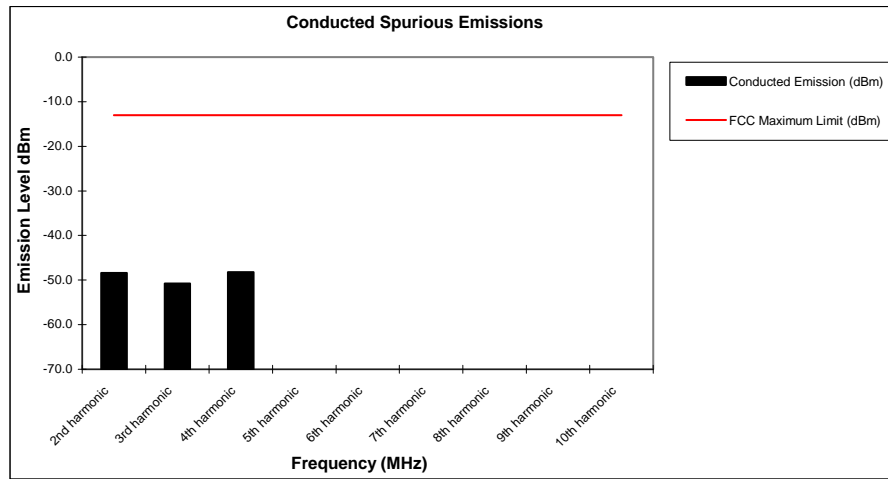

Notes:


- \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – EDGE 850**

**Conducted Spurious and Harmonic Emissions**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-48.4
3rd harmonic	-13	-43.0
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

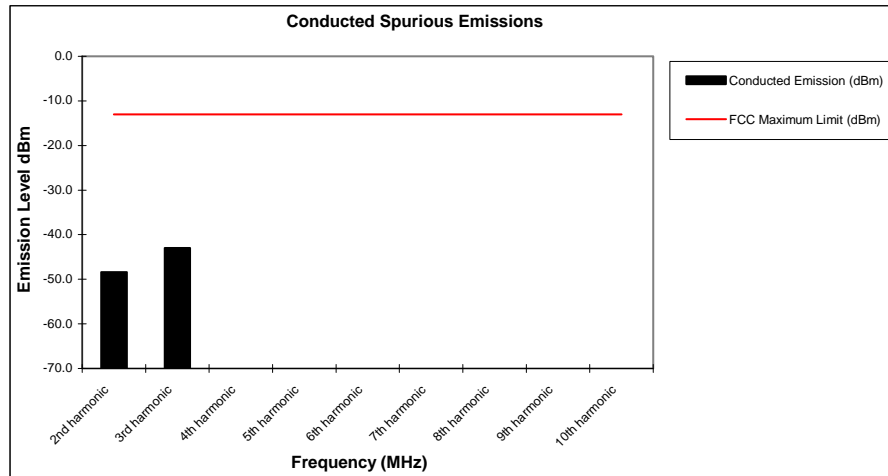

Notes:


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – EDGE 1900**

**Conducted Spurious and Harmonic Emissions**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-49.5
3rd harmonic	-13	*
4th harmonic	-13	-48.0
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

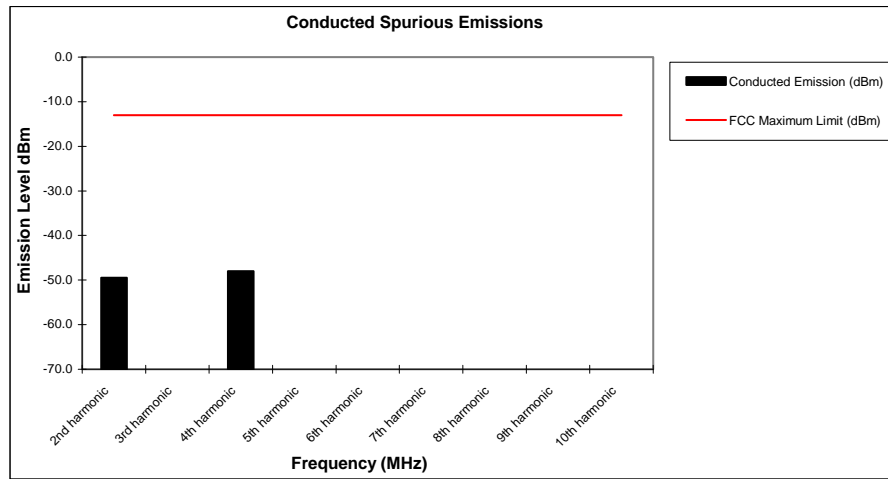

Notes:


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – WCDMA 850**

**Conducted Spurious and Harmonic Emissions**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-47.2
3rd harmonic	-13	*
4th harmonic	-13	-33.6
5th harmonic	-13	-33.1
6th harmonic	-13	*
7th harmonic	-13	-41.6
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

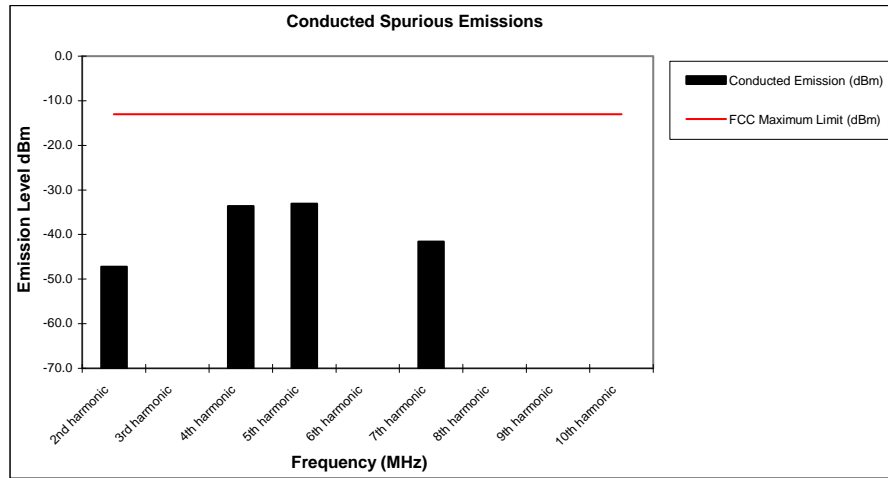

Notes:


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – WCDMA 1900**

**Conducted Spurious and Harmonic Emissions**

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	*
3rd harmonic	-13	*
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

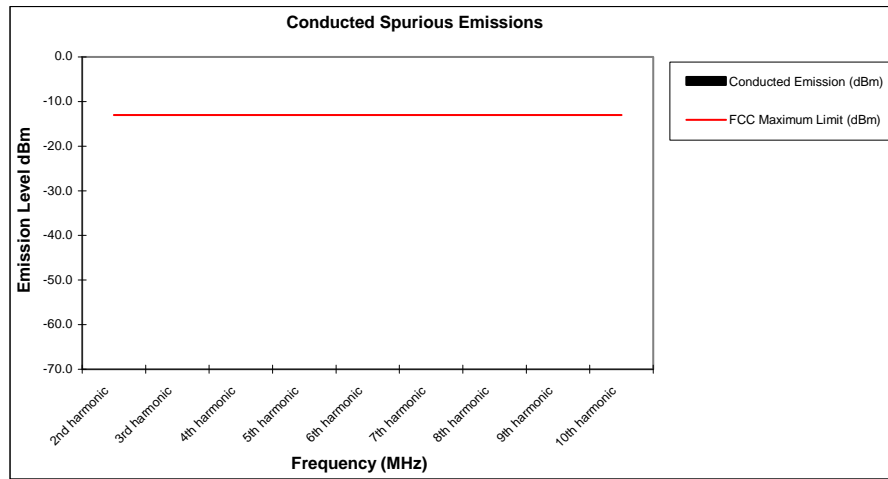

Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**FIELD STRENGTH OF SPURIOUS EMISSIONS****Measurement Procedure**

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

The settings of the receiver were as follows:


Units	dBm
Divisions	5 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto

Measurement Results  
Attached

**Measurement Results – GSM 850**

**Radiated Spurious and Harmonic Emissions**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-49.3	-47.9
3rd harmonic	-13	-40.0	-36.9
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

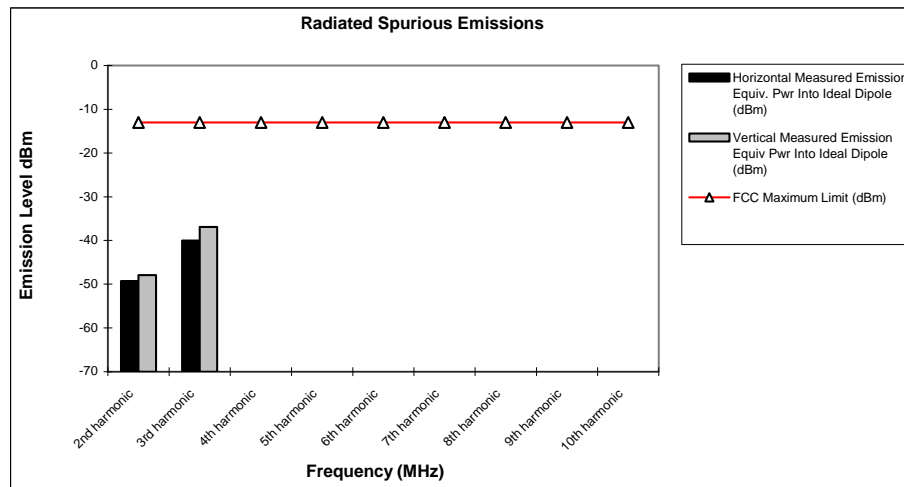

Notes:


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – GSM 1900**

**Radiated Spurious and Harmonic Emissions**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

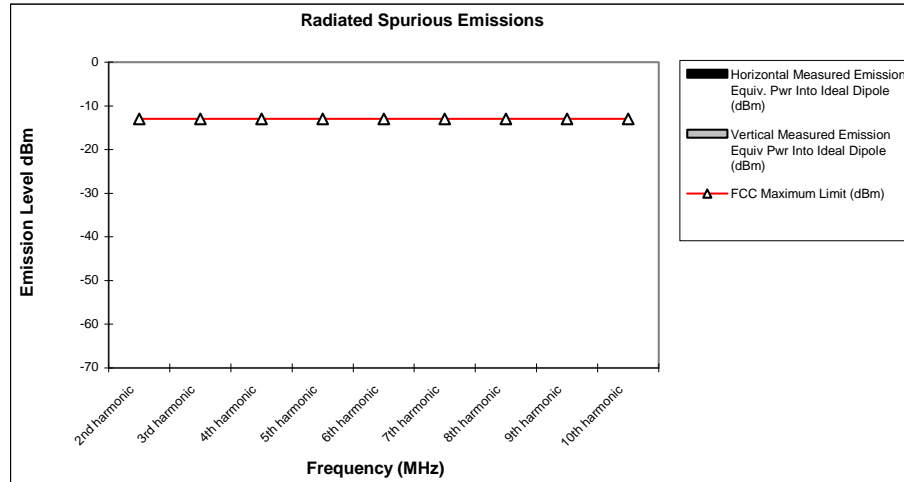

Notes:


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – EDGE 850**

**Radiated Spurious and Harmonic Emissions**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	-29.5	-36.9
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

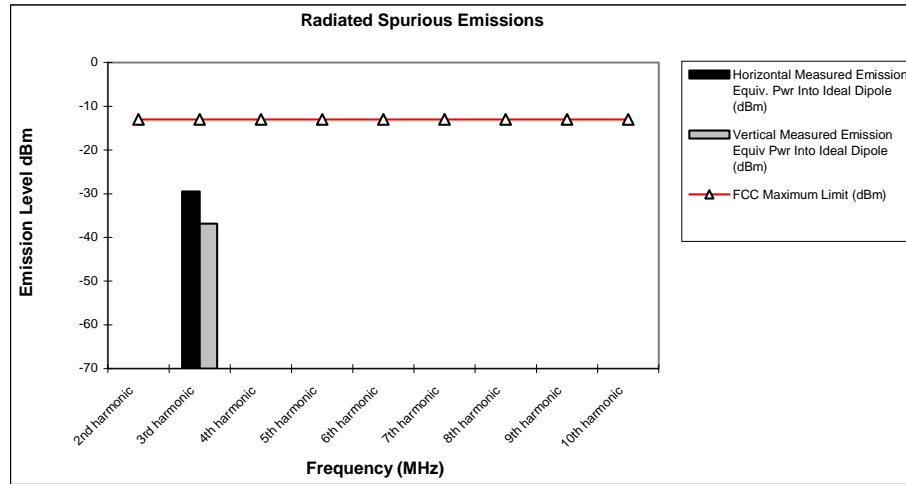

Notes:


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – EDGE 1900**

**Radiated Spurious and Harmonic Emissions**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

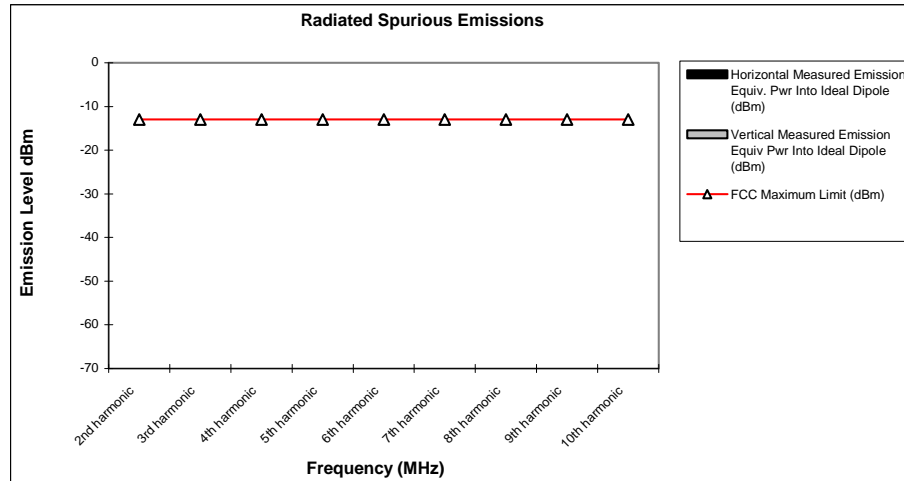

Notes:


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – WCDMA 850**

**Radiated Spurious and Harmonic Emissions**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	-44.8	-44.0
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

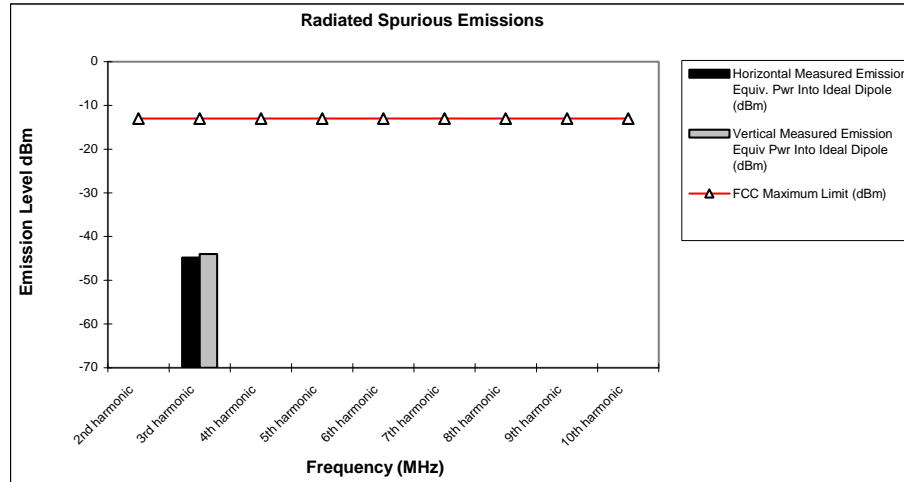

Notes:


1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**Measurement Results – WCDMA 1900**

**Radiated Spurious and Harmonic Emissions**

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-25.7	-26.4
3rd harmonic	-13	-31.4	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

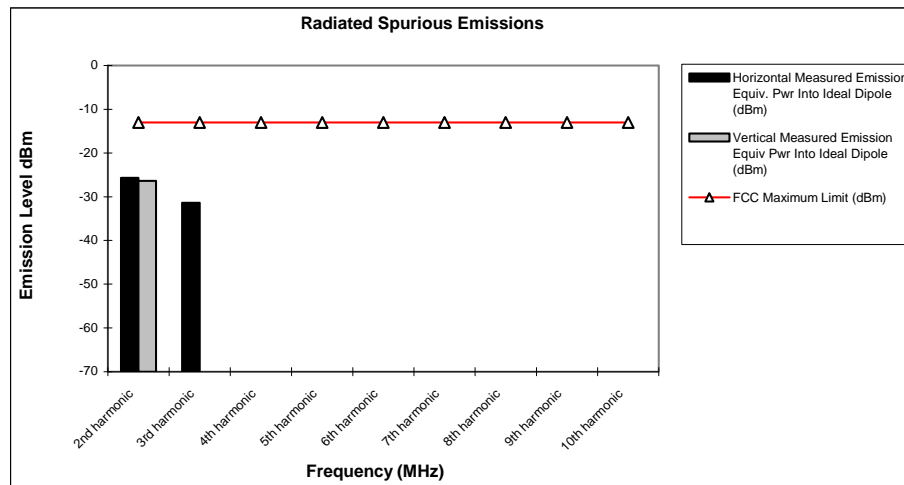

**Notes:**

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

**FREQUENCY STABILITY****Measurement Procedure**

The equipment under test is placed in an environmental chamber. The antenna port of the Equipment Under Test is directly coupled to the input of the measurement equipment through a specialized RF connector. A power supply is attached as the primary voltage supply.

Frequency measurements are made at the extremes of the temperature range  $-30^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$  and at intervals of  $10^{\circ}\text{C}$  with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured.

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured. A battery eliminator was used for the input supply voltage.

**Measurement Results**


Attached

**Measurement Results – GSM 850**

**Frequency Stability**

**Mode:** GSM 850      **Operating Frequency:** 836.6 MHz  
**Channel:** 190      **Deviation Limit (PPM):** 0.1 ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-42.05	-0.050	100%	3.90
-20 C	-20.15	-0.024	100%	3.90
-10 C	-59.04	-0.071	100%	3.90
0 C	-11.94	-0.014	100%	3.90
10 C	-55.45	-0.066	100%	3.90
20 C	-45.52	-0.054	100%	3.90
30 C	-53.95	-0.064	100%	3.90
40 C	-61.71	-0.074	100%	3.90
50 C	-42.22	-0.050	100%	3.90
60 C	-32.20	-0.038	100%	3.90
20 C	-43.58	-0.052	Battery Endpoint	3.30

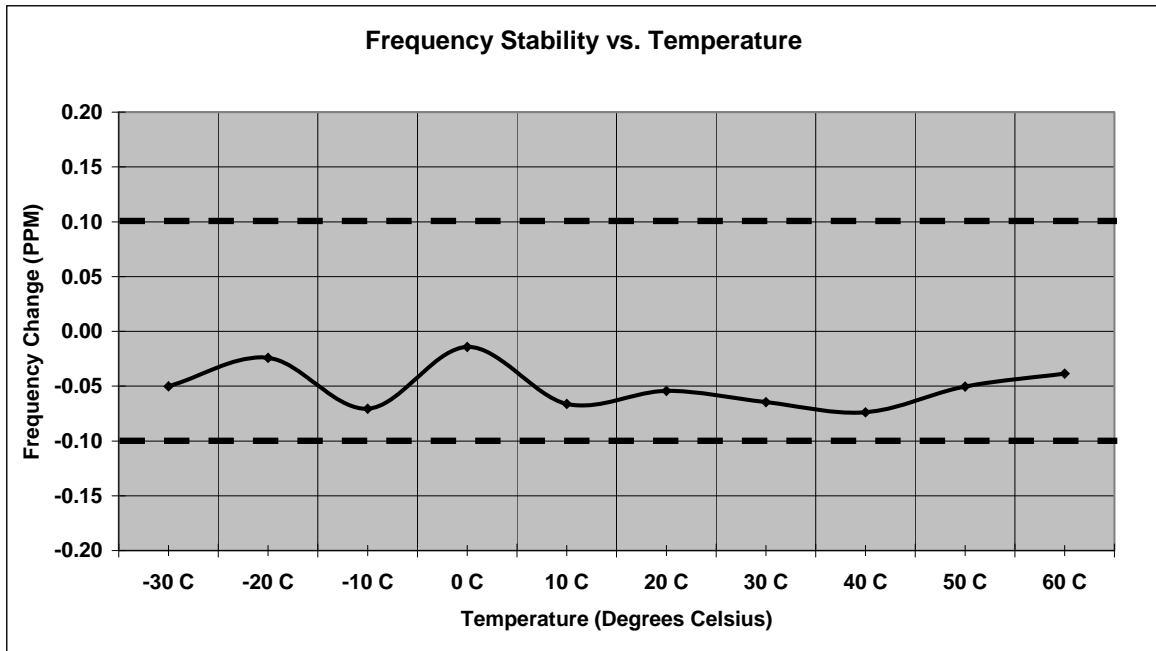


**Measurement Results – GSM 1900**

**Frequency Stability**

**Mode:** GSM 1900      **Operating Frequency:** 1880.0 MHz  
**Channel:** 661      **Deviation Limit (PPM):** 0.1ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-79.30	-0.042	100%	3.90
-20 C	-49.60	-0.026	100%	3.90
-10 C	-97.73	-0.052	100%	3.90
0 C	-85.71	-0.046	100%	3.90
10 C	-93.59	-0.050	100%	3.90
20 C	-71.04	-0.038	100%	3.90
30 C	-99.05	-0.053	100%	3.90
40 C	-121.01	-0.064	100%	3.90
50 C	-88.71	-0.047	100%	3.90
60 C	-74.70	-0.040	100%	3.90
20 C	-80.95	-0.043	Battery Endpoint	3.30

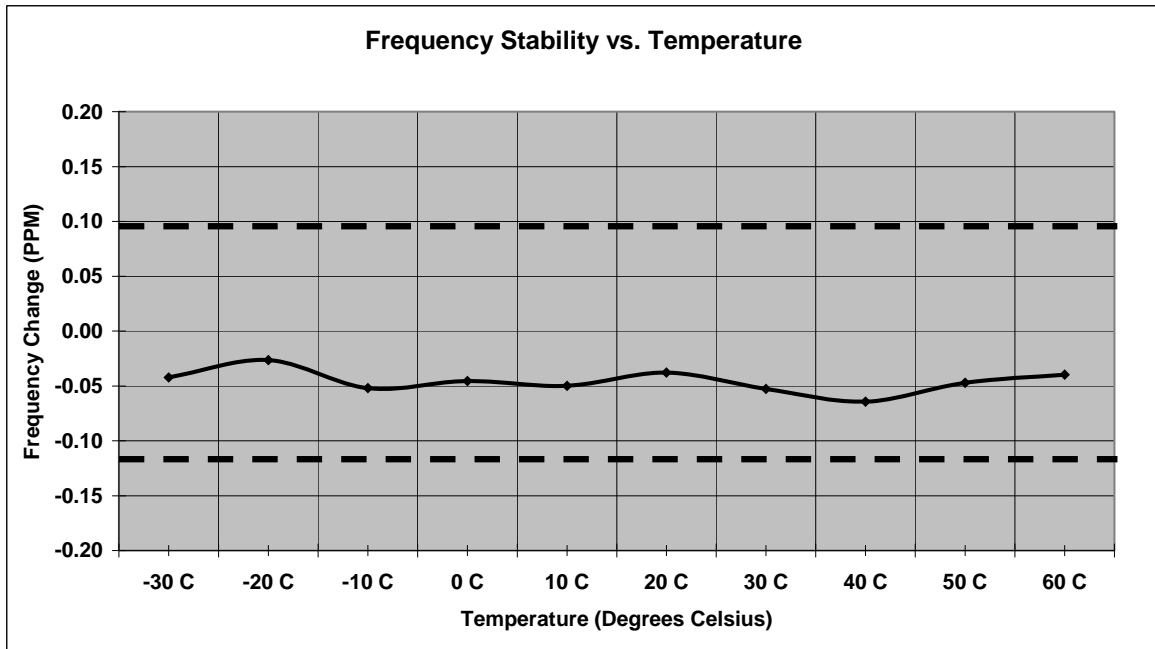


**Measurement Results – EDGE 850**

## Frequency Stability

**Mode:** EDGE 850      **Operating Frequency:** 836.6 MHz  
**Channel:** 190      **Deviation Limit (PPM):** 0.1 ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-37.24	-0.045	100%	3.90
-20 C	-39.73	-0.047	100%	3.90
-10 C	-50.44	-0.060	100%	3.90
0 C	-54.19	-0.065	100%	3.90
10 C	-47.58	-0.057	100%	3.90
20 C	-47.59	-0.057	100%	3.90
30 C	-59.57	-0.071	100%	3.90
40 C	-62.08	-0.074	100%	3.90
50 C	-33.20	-0.040	100%	3.90
60 C	-24.33	-0.029	100%	3.90
20 C	-30.17	-0.036	Battery Endpoint	3.30

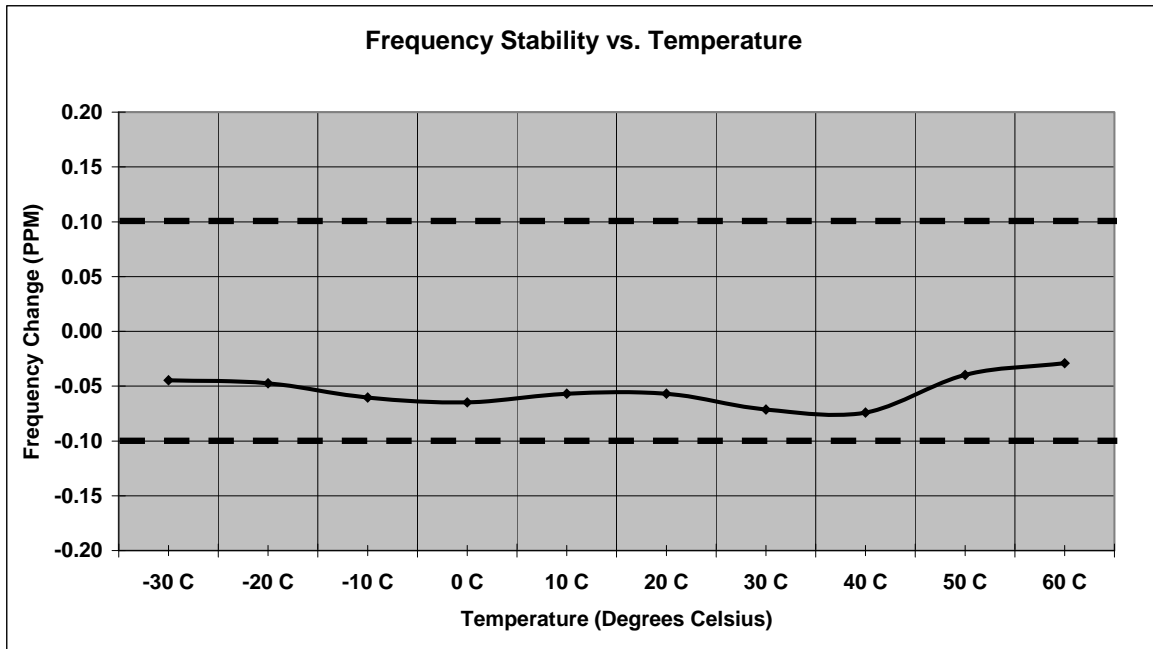


**Measurement Results – EDGE 1900**

## Frequency Stability

**Mode:** EDGE 1900      **Operating Frequency:** 1880.0 MHz  
**Channel:** 661      **Deviation Limit (PPM):** 0.1ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-80.82	-0.043	100%	3.90
-20 C	-51.36	-0.027	100%	3.90
-10 C	-93.80	-0.050	100%	3.90
0 C	-68.84	-0.037	100%	3.90
10 C	-98.23	-0.052	100%	3.90
20 C	-80.53	-0.043	100%	3.90
30 C	-101.58	-0.054	100%	3.90
40 C	-75.11	-0.040	100%	3.90
50 C	-52.01	-0.028	100%	3.90
60 C	-70.95	-0.038	100%	3.90
20 C	-55.31	-0.029	Battery Endpoint	3.30

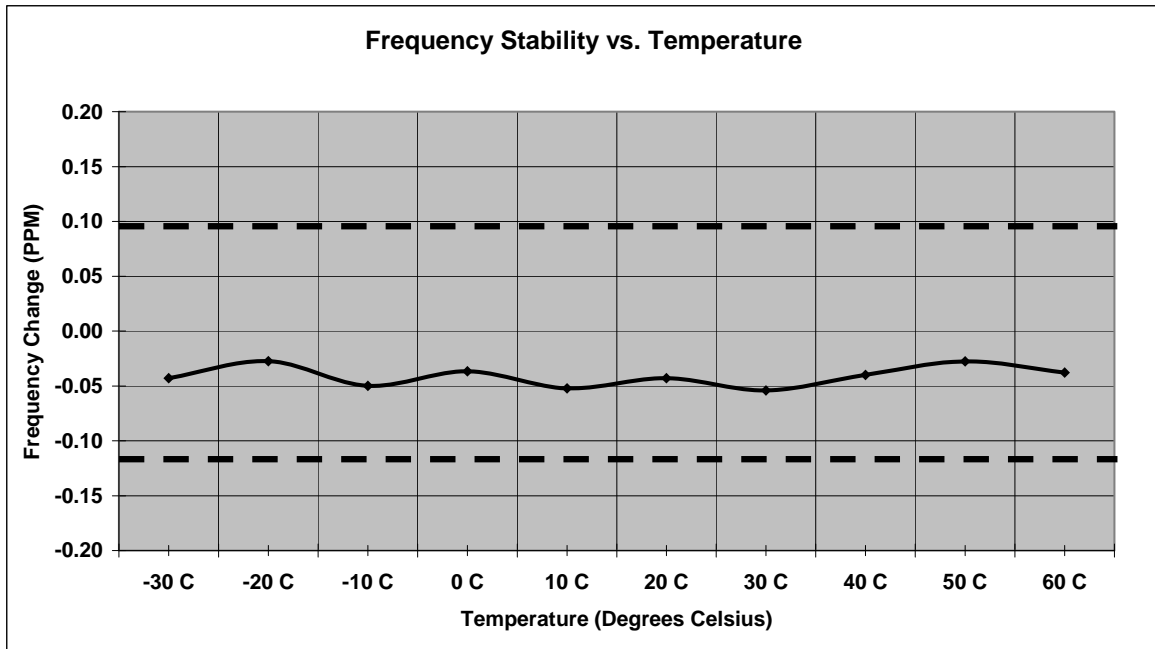


**Measurement Results – WCDMA 850**

## Frequency Stability

**Mode:** WCDMA 800      **Operating Frequency:** 836.00 MHz  
**Channel:** 4180          **Deviation Limit (PPM):** 0.359ppm (+/-300 Hz)

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-29.12	-0.035	100%	3.90
-20 C	-25.42	-0.030	100%	3.90
-10 C	-21.71	-0.026	100%	3.90
0 C	-25.07	-0.030	100%	3.90
10 C	-26.82	-0.032	100%	3.90
20 C	-23.29	-0.028	100%	3.90
30 C	-30.62	-0.037	100%	3.90
40 C	-33.80	-0.040	100%	3.90
50 C	-25.69	-0.031	100%	3.90
60 C	-20.98	-0.025	100%	3.90
20 C	-27.60	-0.033	Battery Endpoint	3.30

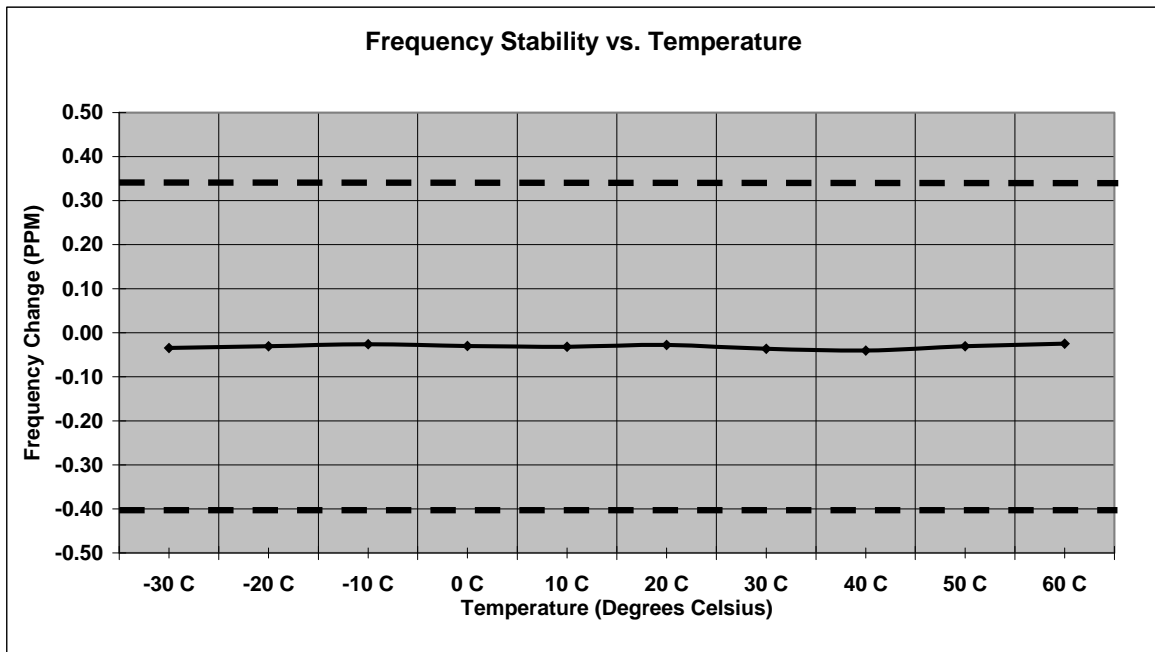


**Measurement Results – WCDMA 1900**

## Frequency Stability

**Mode:** WCDMA 1900      **Operating Frequency:** 1880.0 MHz  
**Channel:** 9400      **Deviation Limit (PPM):** 0.359ppm (+/-300Hz)

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-62.91	-0.033	100%	3.90
-20 C	-52.68	-0.028	100%	3.90
-10 C	-70.27	-0.037	100%	3.90
0 C	-52.57	-0.028	100%	3.90
10 C	-53.87	-0.029	100%	3.90
20 C	49.02	0.026	100%	3.90
30 C	-60.32	-0.032	100%	3.90
40 C	50.48	0.027	100%	3.90
50 C	-54.63	-0.029	100%	3.90
60 C	35.61	0.019	100%	3.90
20 C	-52.43	-0.028	Battery Endpoint	3.30

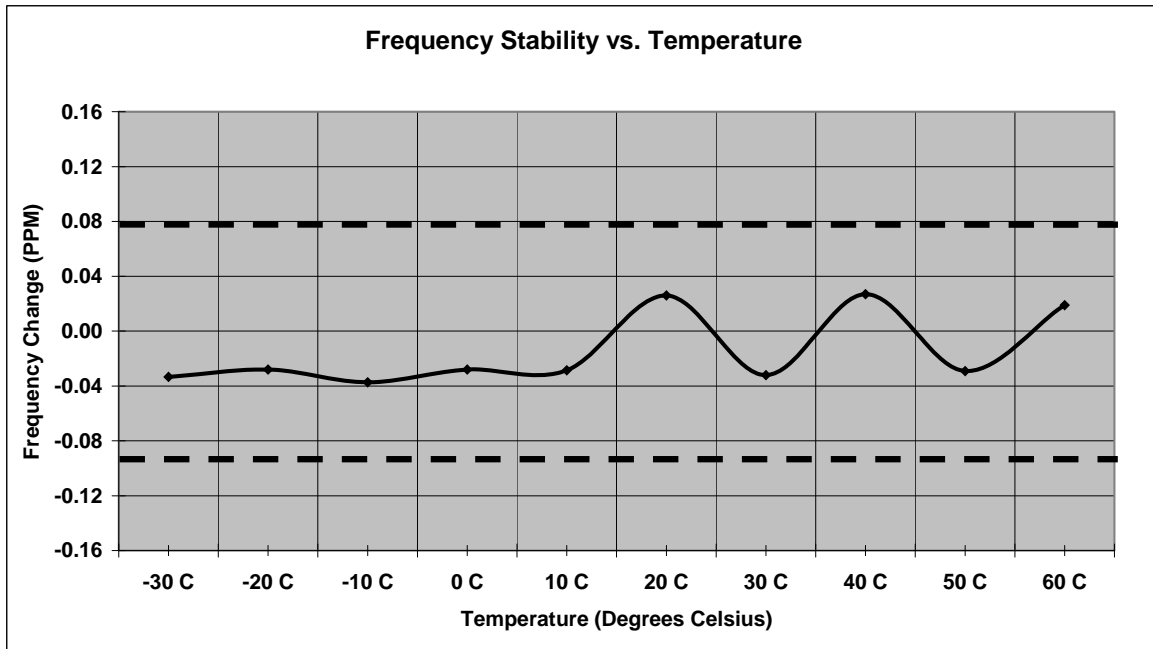

**FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS****Measurement Procedure**

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna. A fully charged battery was used for the supply voltage.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

Field Strength (dBuV/m) = EMI Receiver Level (dBuV) + Cable Loss (dB) - Amplifier Gain (dB) + Antenna Correction Factor (1/m)


**Measurement Results**

Attached

**Measurement Results – All Operating Modes**

**Receiver Radiated Spurious Emissions**

Frequency (MHz)	FCC Maximum Limit (dBuV/m)	Horizontal Measured Field Strength (dBuV/m)	Vertical Measured Field Strength (dBuV/m)
Local Oscillator	54	*	*
2nd harmonic	54	*	*
3rd harmonic	54	*	*
4th harmonic	54	*	*
5th harmonic	54	*	*
6th harmonic	40	*	*
7th harmonic	40	*	*
8th harmonic	40	*	*
9th harmonic	40	*	*
10th harmonic	40	*	*

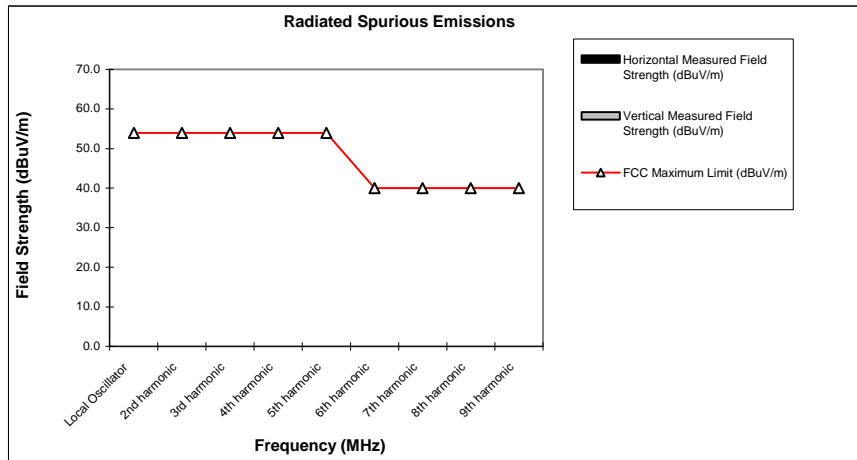

Notes:

1. \* Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific frequency for the low, mid, and high channels.

**AC LINE CONDUCTED EMISSIONS****Measurement Procedure**

Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50  $\Omega$  LISN port, where permitted, terminated into a 50  $\Omega$  noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.


All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50  $\Omega$  measuring port is terminated by a 50  $\Omega$  radio-noise meter or a 50  $\Omega$  resistive load. All other ports are terminated in 50  $\Omega$ .

Detectors – Quasi Peak and Average


**Measurement Results**

Attached:


**GSM 850 Channel 190 - Tx Mode - Line Coupling**

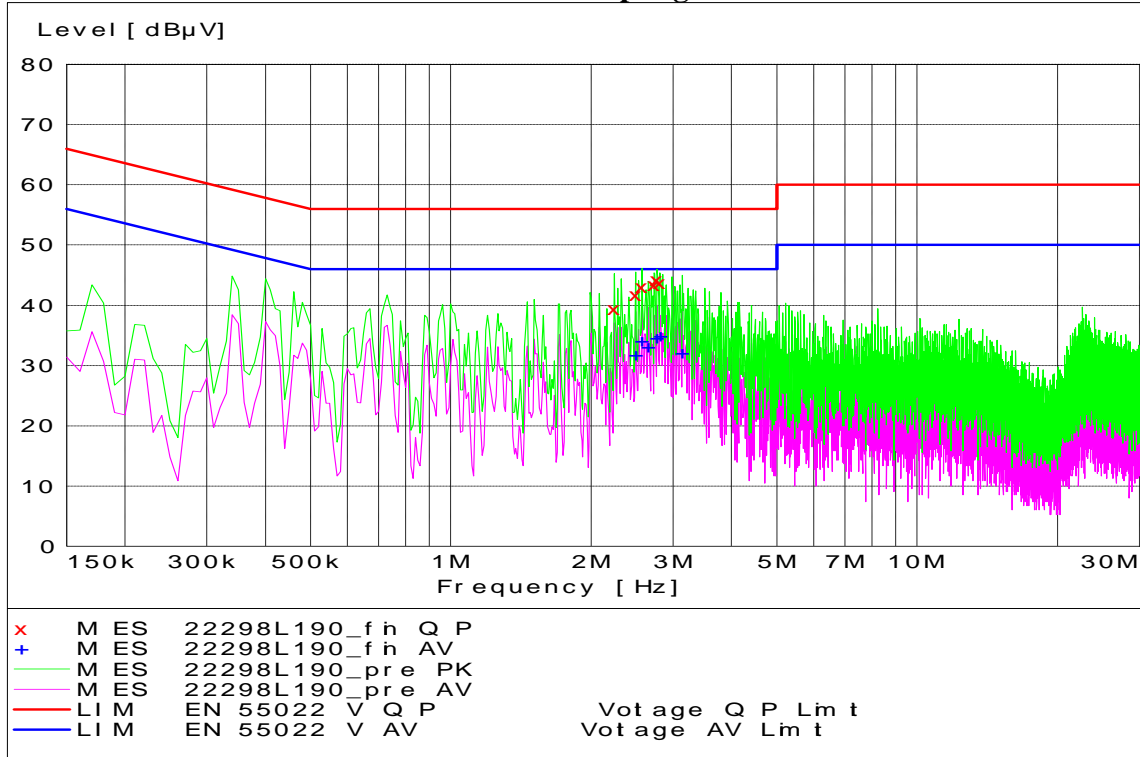


**GSM 850 Channel 190 - Tx Mode - Neutral Coupling**

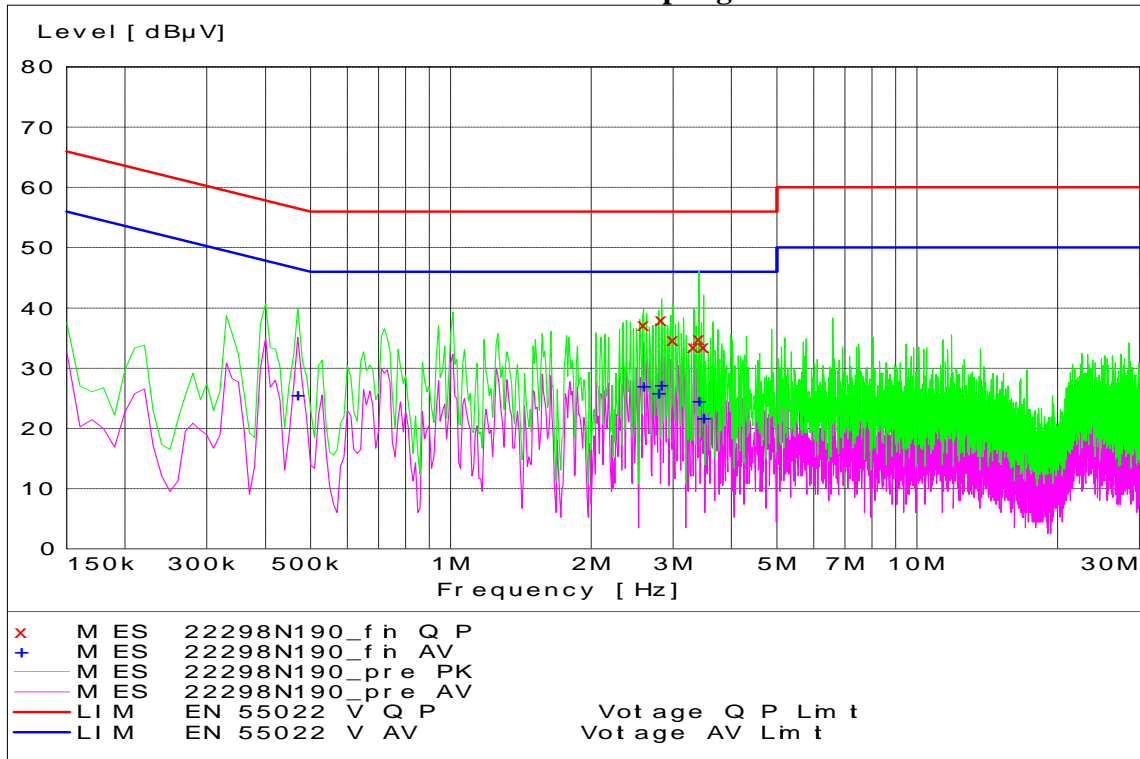


**GSM 1900 Channel 661 - Tx Mode - Line Coupling**

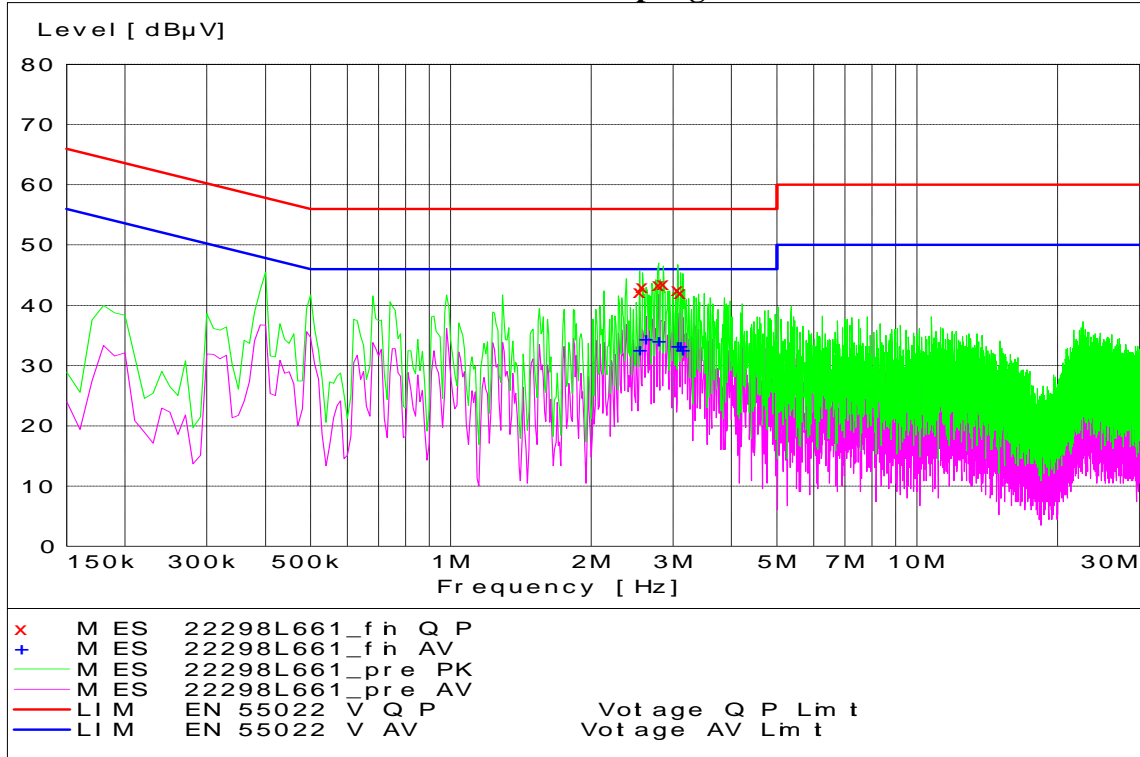


**GSM 1900 Channel 661 - Tx Mode - Neutral Coupling**

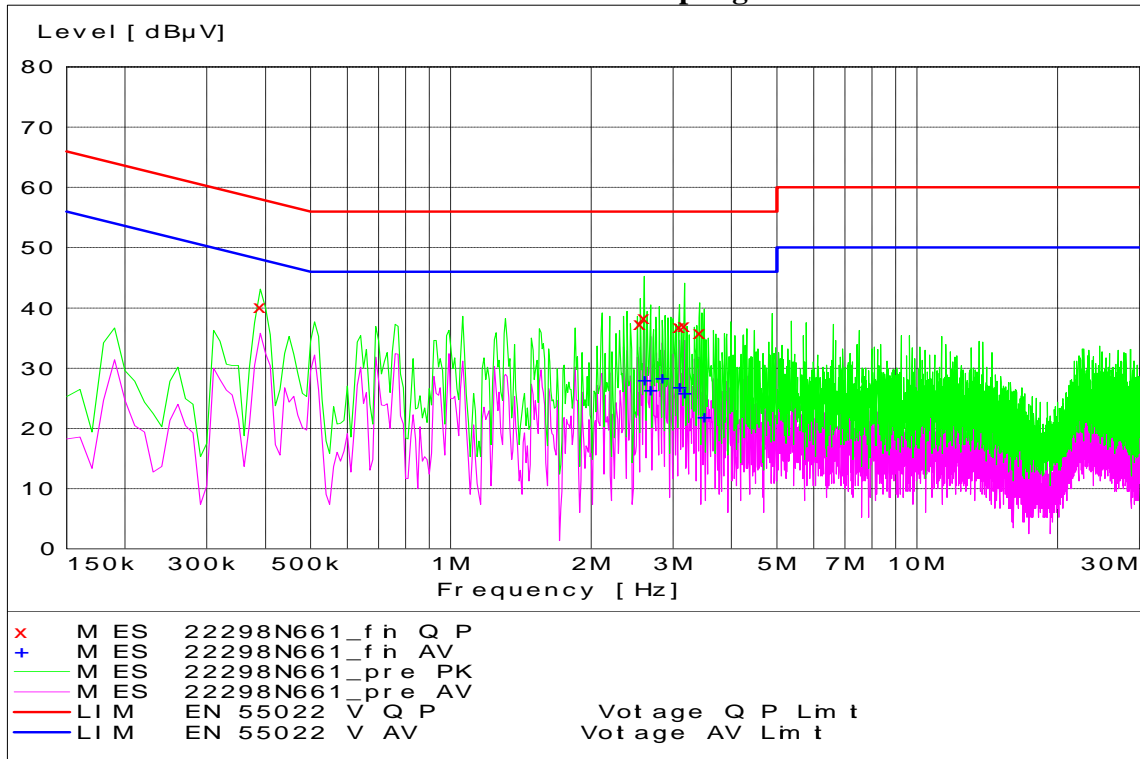


**WCDMA 850 Channel 4180 - Tx Mode - Line Coupling**

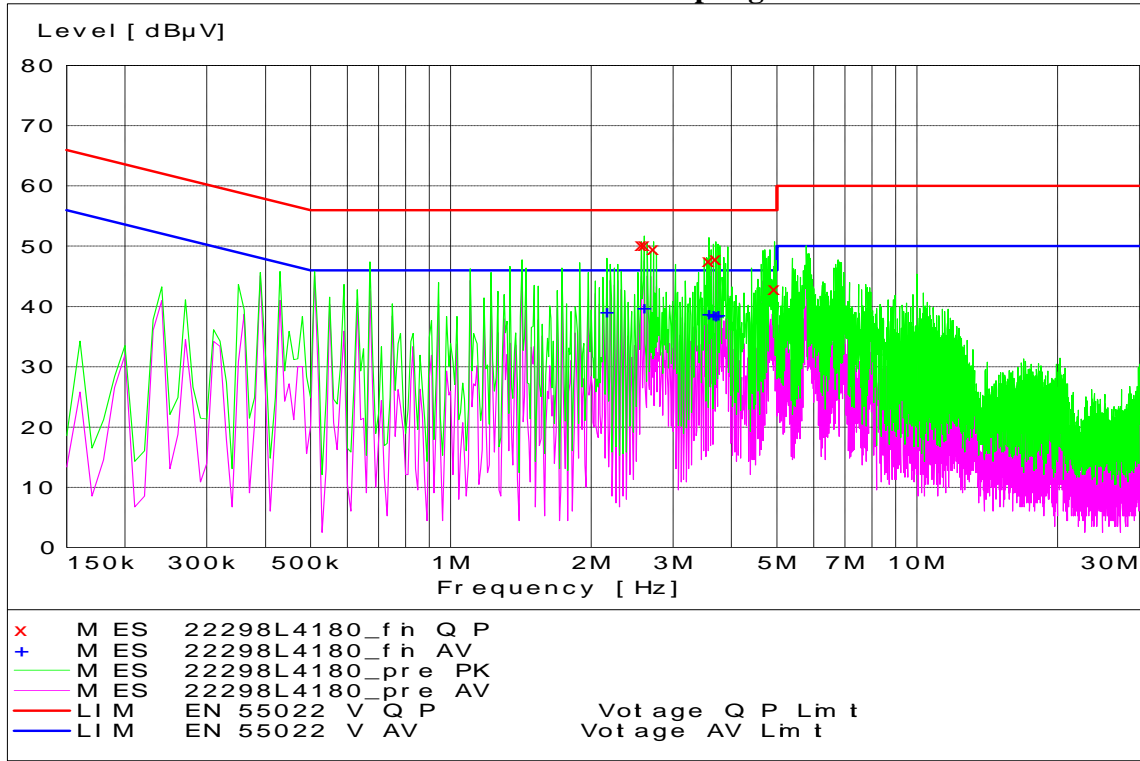


**WCDMA 850 Channel 4180 - Tx Mode - Neutral Coupling**

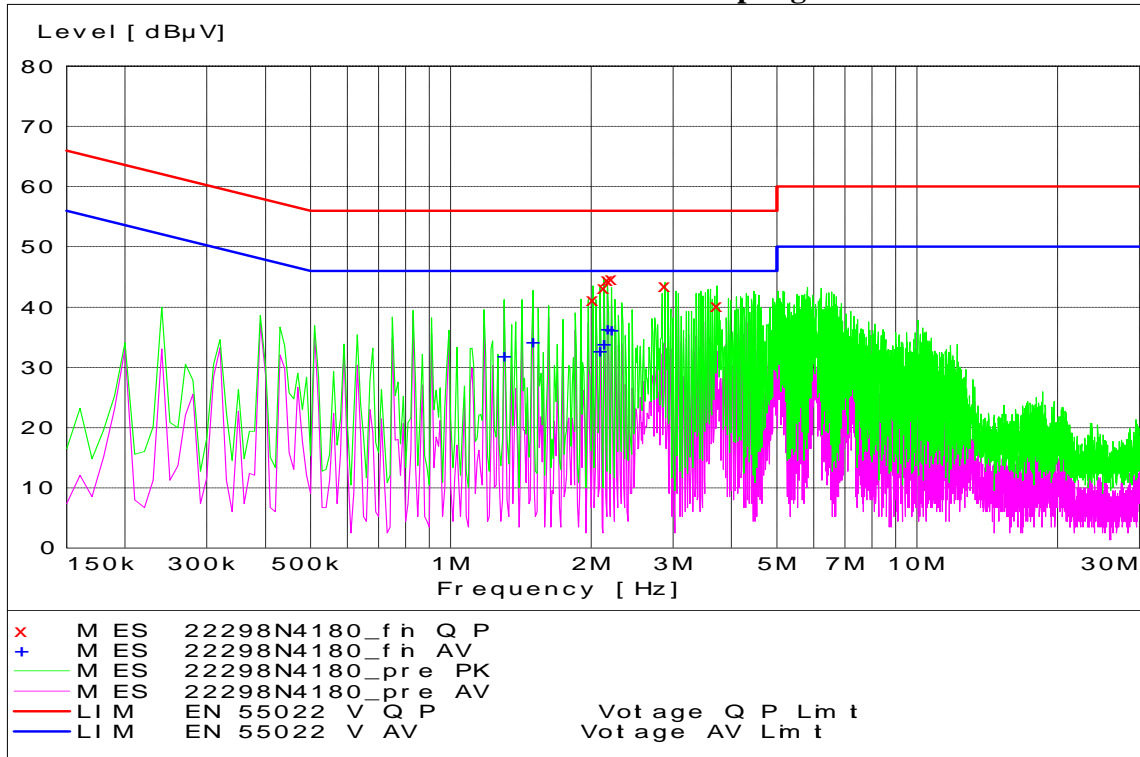

**WCDMA 1900 Channel 9400 - Tx Mode - Line Coupling**

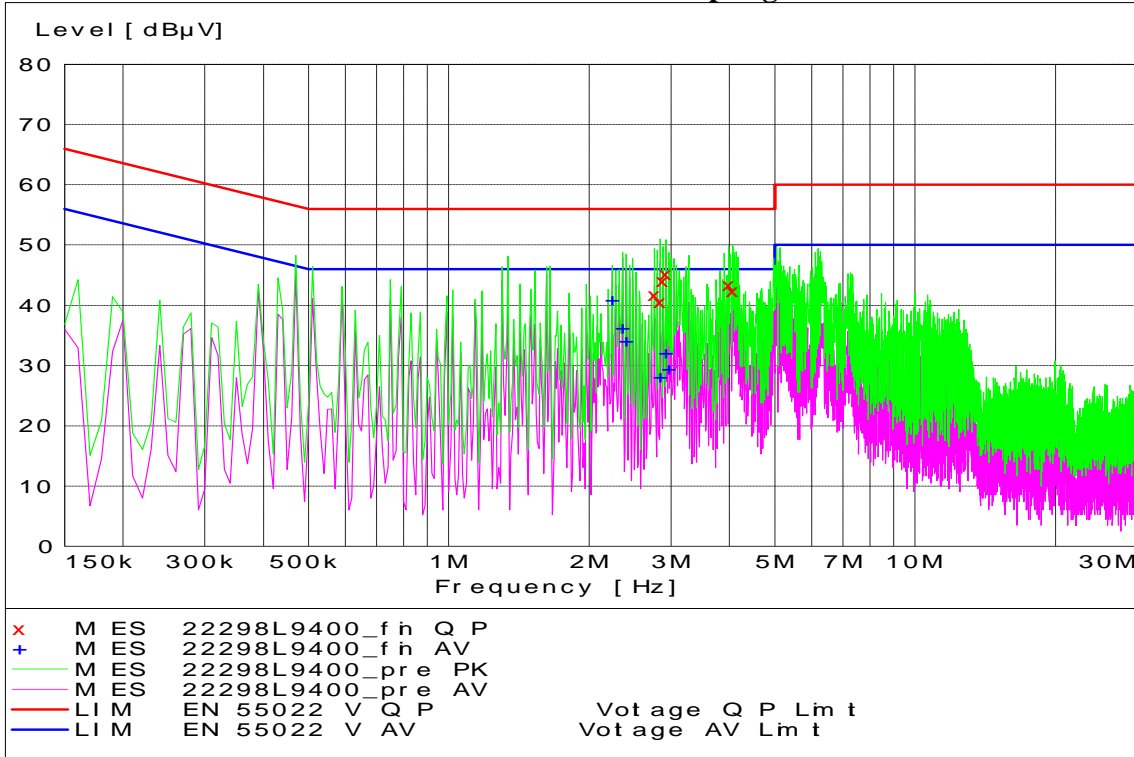

**WCDMA 1900 Channel 9400 - Tx Mode - Neutral Coupling**

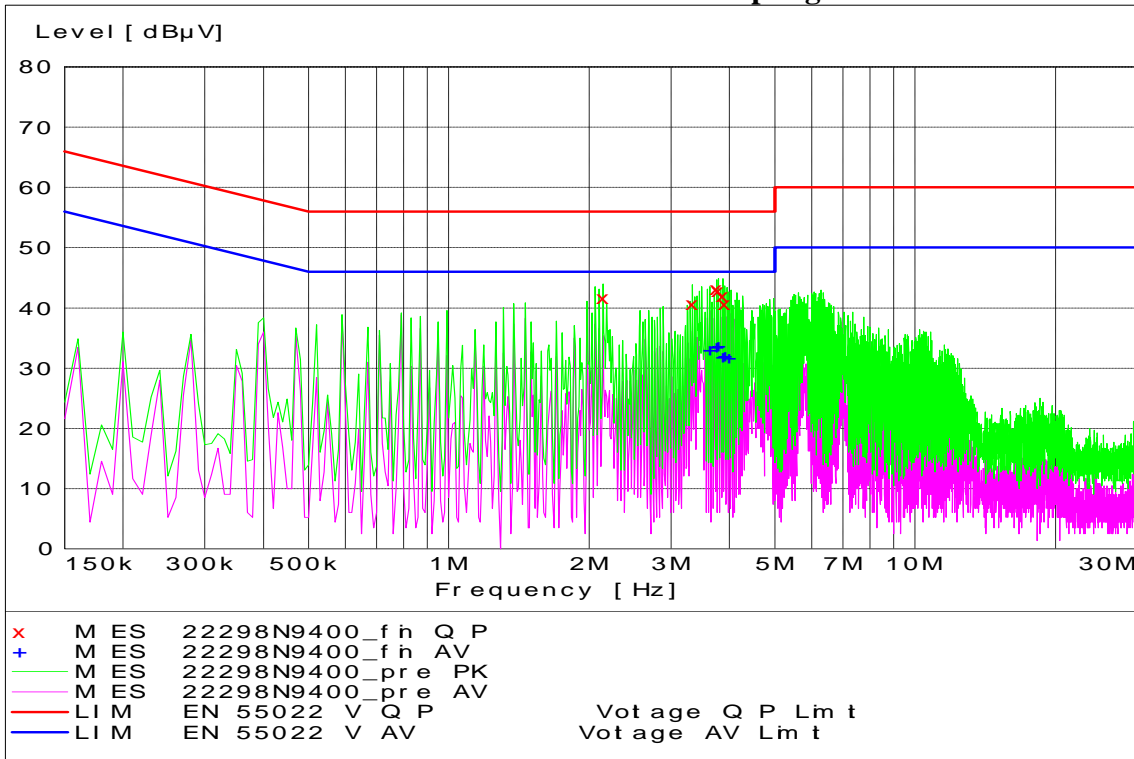

**End of Test Report**