



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2305-1  
**FCC ID** : IHDT56AL5  
**STANDARD** : 47 CFR Part 2, 22, 24, 27  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)  
**TEST DATE(S)** : Mar. 11, 2023 ~ Apr. 04, 2023

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY...3
SUMMARY OF TEST RESULT...4
1 GENERAL DESCRIPTION...5
1.1 Applicant...5
1.2 Manufacturer...5
1.3 Product Feature of Equipment Under Test...5
1.4 Product Specification of Equipment Under Test...5
1.5 Specification of Accessory...6
1.6 Modification of EUT...6
1.7 Maximum ERP/EIRP Power and Emission Designator...7
1.8 Testing Location...9
1.9 Test Software...9
1.10 Applicable Standards...10
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST...11
2.1 Test Mode...11
2.2 Connection Diagram of Test System...13
2.3 Support Unit used in test configuration and system...13
2.4 Measurement Results Explanation Example...14
2.5 Frequency List of Low/Middle/High Channels...14
3 CONDUCTED TEST ITEMS...18
3.1 Measuring Instruments...18
3.2 Test Setup...18
3.3 Test Result of Conducted Test...18
3.4 Conducted Output Power and ERP/EIRP...19
3.5 Peak-to-Average Ratio...20
3.6 Occupied Bandwidth...21
3.7 Conducted Band Edge...22
3.8 Conducted Spurious Emission...24
3.9 Frequency Stability...25
4 RADIATED TEST ITEMS...26
4.1 Measuring Instruments...26
4.2 Test Setup...26
4.3 Test Result of Radiated Test...27
4.4 Radiated Spurious Emission...28
5 LIST OF MEASURING EQUIPMENT...29
6 UNCERTAINTY OF EVALUATION...30
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS





## SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§22.913(a)(5)	Effective Radiated Power (5G NR n5, n26)	ERP < 7 Watt		
	§27.50(c)(10)	Effective Radiated Power (5G NR n12, n71)	ERP < 3 Watt		
	§24.232(c) §27.50(h)(2)	Equivalent Isotropic Radiated Power (5G NR n2, n25)	EIRP < 2Watt		
3.5	§24.232(d)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §22.917(a) §24.238(a) §27.53(g)	Conducted Band Edge Measurement (5G NR n5, n26) (5G NR n2, n25) (5G NR n12, n71)	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.8	§2.1051 §22.917(a) §24.238(a) §27.53(g)	Conducted Spurious Emission (5G NR n5, n26) (5G NR n2, n25) (5G NR n12, n71)	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.9	§2.1055 §22.355	Frequency Stability Temperature & Voltage	< 2.5 ppm for Part 22	PASS	-
	§24.235 §27.54		Within Authorized Band		
4.4	§2.1053 §22.917(a) §24.238(a) §27.53(g)	Radiated Spurious Emission (5G NR n5, n26) (5G NR n2, n25) (5G NR n12, n71)	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 39.53 dB at 7515.000 MHz

**Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

**Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2305-1
FCC ID	IHDT56AL5
IMEI Code	Conducted : 351048560017430/351072410011450 Radiation : 351048560020038/351048560020046
HW Version	DVT2
SW Version	TTT33.46
EUT Stage	Identical Prototype

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx Frequency	5G NR n2 : 1850 MHz ~ 1910 MHz 5G NR n5 : 824 MHz ~ 849 MHz 5G NR n12 : 699 MHz ~ 716 MHz 5G NR n25 : 1850 MHz ~ 1915 MHz 5G NR n26 : 814 MHz ~ 849 MHz 5G NR n71: 663 MHz ~ 698 MHz
Rx Frequency	5G NR n2 : 1930 MHz ~ 1990 MHz 5G NR n5 : 869 MHz ~ 894 MHz 5G NR n12: 729 MHz ~ 746 MHz 5G NR n25 : 1930 MHz ~ 1995 MHz 5G NR n26 : 859 MHz ~ 894 MHz 5G NR n71: 617 MHz ~ 652 MHz
Bandwidth	<b>For SCS 15kHz:</b> n2, n25: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz n5: 5MHz / 10MHz / 15MHz / 20MHz / 25MHz n12: 5MHz / 10MHz / 15MHz n26, n71: 5MHz / 10MHz / 15MHz / 20MHz <b>For SCS 30kHz:</b> n2, n25: 10MHz / 15MHz / 20MHz / 25MHz / 30MHz / 40MHz



	n5: 10MHz / 15MHz / 20MHz / 25MHz n12: 10MHz / 15MHz n26, n71: 10MHz / 15MHz / 20MHz
Antenna Gain	<Ant. 0> n2: -5.4 dBi n5: -7.1 dBi n12: -6.5 dBi n25: -5.4 dBi n26: -7.1 dBi n71: -7.8 dBi <Ant. 1> n2: -5.0 dBi n5: -8.1 dBi n12: -7.7 dBi n25: -5.0 dBi n26: -8.1 dBi n71: -9.0 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM

Remark:

1. The maximum ERP/EIRP is calculated from output power and antenna gain, only the maximum ERP/EIRP of Ant.0 are shown in the report.
2. 5G NR bands support SA&NSA mode, n12/n26 support SA mode only. According to the maximum power between SA and NSA mode, SA covers NSA mode.
3. 5G NR bands support SCS 15kHz and SCS 30kHz. According to the maximum power, SCS 15kHz covers SCS 30kHz.
4. All the supported ENDC combinations are verified conducted power, only the ENDC combination with highest power are shown in the report.
5. The EN-DC mode combination could be referred to the product spec.

### 1.5 Specification of Accessory

Specification of Accessory				
AC Adapter 1	Brand Name	Motorola(Chenyang)	Model Name	MC-681N
AC Adapter 2	Brand Name	Motorola(Acbel)	Model Name	MC-681N
Battery	Brand Name	Motorola(Amperex)	Model Name	PG44
USB Cable 1	Brand Name	Motorola (Saibao)	Model Name	SC18D86731
USB Cable 2	Brand Name	Motorola (Saibao)	Model Name	SC18D71644

### 1.6 Modification of EUT

No modifications are made to the EUT during all test items.



### 1.7 Maximum ERP/EIRP Power and Emission Designator

5G NR n2		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1852.5 ~ 1907.5	0.0625	4M47G7D	0.0501	4M47W7D
10	1855.0 ~ 1905.0	0.0619	9M29G7D	0.0506	9M30W7D
15	1857.5 ~ 1902.5	0.0619	14M1G7D	0.0518	14M1W7D
20	1860.0 ~ 1900.0	0.0631	18M9G7D	0.0528	18M9W7D
25	1862.5 ~ 1897.5	0.0607	23M7G7D	0.0501	23M7W7D
30	1865.0 ~ 1895.0	0.0601	28M6G7D	0.0493	28M6W7D
40	1870.0 ~ 1890.0	0.0647	38M6G7D	0.0526	38M5W7D

5G NR n25		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
5	1852.5 ~ 1912.5	0.0628	4M47G7D	0.0512	4M47W7D
10	1855.0 ~ 1910.0	0.0627	9M29G7D	0.0485	9M30W7D
15	1857.5 ~ 1907.5	0.0624	14M1G7D	0.0493	14M1W7D
20	1860.0 ~ 1905.0	0.0638	18M9G7D	0.0491	18M9W7D
25	1862.5 ~ 1902.5	0.0608	23M7G7D	0.0476	23M7W7D
30	1865.0 ~ 1900.0	0.0607	28M6G7D	0.0471	28M6W7D
40	1870.0 ~ 1895.0	0.0658	38M6G7D	0.0501	38M5W7D

5G NR n5		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.0252	4M47G7D	0.0199	4M48W7D
10	829.0 ~ 844.0	0.0251	9M28G7D	0.0200	9M29W7D
15	831.5 ~ 841.5	0.0255	14M1G7D	0.0200	14M1W7D
20	834.0 ~ 839.0	0.0259	18M9G7D	0.0202	18M9W7D
25	836.5	0.0263	23M8G7D	0.0206	23M8W7D



5G NR n26		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	826.5 ~ 846.5	0.0260	4M47G7D	0.0207	4M48W7D
10	829.0 ~ 844.0	0.0262	9M28G7D	0.0206	9M29W7D
15	831.5 ~ 841.5	0.0265	14M1G7D	0.0208	14M1W7D
20	834.0 ~ 839.0	0.0268	18M9G7D	0.0209	18M9W7D

5G NR n12		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	701.5 ~ 713.5	0.0287	4M47G7D	0.0224	4M47W7D
10	704.0~ 711.0	0.0284	9M25G7D	0.0223	9M27W7D
15	706.5 ~ 708.5	0.0291	14M1G7D	0.0229	14M1W7D

5G NR n71		PI/2 BPSK / QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum ERP(W)	Emission Designator (99%OBW)	Maximum ERP(W)	Emission Designator (99%OBW)
5	665.5 ~ 695.5	0.0222	4M46G7D	0.0177	4M47W7D
10	668.0 ~ 693.0	0.0224	9M28G7D	0.0177	9M28W7D
15	670.5 ~ 690.5	0.0225	14M1G7D	0.0179	14M1W7D
20	673.0 ~ 688.0	0.0226	18M9G7D	0.0179	19M0W7D

Note:

- 5G NR n26 overlaps the entire frequency range of 5G NR n5. Therefore, the test results provided in this report covers 5G NR n5 and the portion of 5G NR n26 subject to Part 22, and 5G NR n5 supports BW 25MHz, it is tested in the report.
- 5G NR n25 overlaps the entire frequency range of 5G NR n2. Therefore, the test results provided in this report covers 5G NR n25 as well as 5G NR n2.
- All modulations have been tested, only the worst test results of PSK & QAM are shown in the report.



### 1.8 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH04-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055 People's Republic of China TEL: +86-755-86379589 FAX: +86-755-86379595		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-SZ	CN1256	421272

Test data subcontracted: Conducted test case in section 3 of this report.

### 1.9 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-KS	AUDIX	E3	6.2009-8-24al



## 1.10 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 2, 22, 24, 27
- ♦ ANSI C63.26-2015
- ♦ FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- ♦ FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:**

All test items were verified and recorded according to the standards and without any deviation during the test.




## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode

Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (X plane) were recorded in this report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.


Orthogonal Planes of EUT	X Plane	Y Plane	Z Plane
			

Test Items	5G NR	Bandwidth (MHz)													Modulation					RB #		Test Channel					
		5	10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H			
Max. Output Power	n2	v	v	v	v	v	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	
	n5	v	v	v	v	v	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	n12	v	v	v	-	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	n25	v	v	v	v	v	v	v	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	n26	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
	n71	v	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	v	v	v
Peak-to-Average Ratio	n5				v	-	-	-	-	-	-	-	-	v	v					v	v	v	v	v	v	v	
	n12		v		-	-	-	-	-	-	-	-	-	v	v					v	v	v	v	v	v	v	
	n25			v		-	-	-	-	-	-	-	-	v	v					v	v	v	v	v	v	v	
	n26			v		-	-	-	-	-	-	-	-	v	v					v	v	v	v	v	v	v	
	n71			v		-	-	-	-	-	-	-	-	v	v					v	v	v	v	v	v	v	
26dB and 99% Bandwidth	n5				v	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v					v		
	n12	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v					v		
	n25	v	v	v	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v					v		
	n26	v	v	v	v	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v					v		
	n71	v	v	v	v	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v					v		



Test Items	5G NR	Bandwidth (MHz)													Modulation					RB #		Test Channel		
		5	10	15	20	25	30	40	50	60	70	80	90	100	PI/2 BPSK	QPSK	16QAM	64QAM	256 QAM	1	Full	L	M	H
Conducted Band Edge	n5				v	-	-	-	-	-	-	-	-	v	v				v	v	v		v	
	n12	v	v	v	-	-	-	-	-	-	-	-	-	v	v				v	v	v		v	
	n25	v			v			v	-	-	-	-	-	v	v				v	v	v		v	
	n26	v	v		v	-	-	-	-	-	-	-	-	v	v				v	v	v		v	
	n71	v	v		v	-	-	-	-	-	-	-	-	v	v				v	v	v		v	
Conducted Spurious Emission	n5				v	-	-	-	-	-	-	-	-	v	v				v		v	v	v	
	n12	v	v	v	-	-	-	-	-	-	-	-	-	v	v				v		v	v	v	
	n25	v			v			v	-	-	-	-	-	v	v				v		v	v	v	
	n26	v	v		v	-	-	-	-	-	-	-	-	v	v				v		v	v	v	
	n71	v	v		v	-	-	-	-	-	-	-	-	v	v				v		v	v	v	
Frequency Stability	n5				v	-	-	-	-	-	-	-	-		v				v		v			
	n12		v		-	-	-	-	-	-	-	-	-		v				v		v			
	n25			v				v	-	-	-	-	-		v				v		v			
	n26			v				v	-	-	-	-	-		v				v		v			
	n71			v				v	-	-	-	-	-		v				v		v			
E.R.P / E.I.R.P	n2	v	v	v	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n5	v	v	v	v	v	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n12	v	v	v	-	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n25	v	v	v	v	v	v	v	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n26	v	v	v	v	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
	n71	v	v	v	v	-	-	-	-	-	-	-	-	v	v	v	v	v	v	v	v	v	v	
Radiated Spurious Emission	n5	Worst Case																				v		
	n12	Worst Case																				v	v	v
	n25	Worst Case																				v	v	v
	n26	Worst Case																				v	v	v
	n71	Worst Case																				v	v	v
Note	1. The mark "v" means that this configuration is chosen for testing 2. The mark "-" means that this bandwidth is not supported. 3. The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported. 4. Frequency Stability : Normal Voltage = 3.91V ; Low Voltage =3.4V. ; High Voltage =4.5V																							

## 2.2 Connection Diagram of Test System

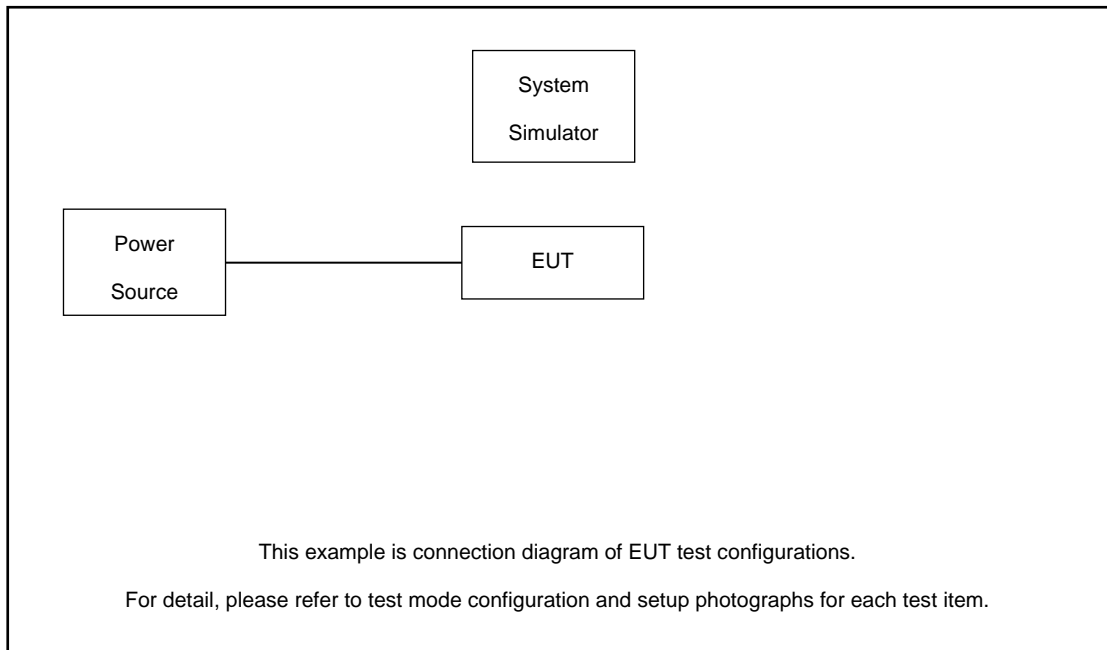

The EUT has been configuration operated in a manner tended to maximize its emission characteristics in a typical application.

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m



## 2.4 Measurement Results Explanation Example

### For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss.

$$\text{Offset} = \text{RF cable loss.}$$

Following shows an offset computation example with cable loss 7.60 dB.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)}. \\ &= 7.60 \text{ (dB)} \end{aligned}$$

## 2.5 Frequency List of Low/Middle/High Channels

Note: BW 5MHz is only for SCS15kHz.

5G NR n2 Channel and Frequency List for SCS 15k/30k				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	374000	376000	378000
	Frequency	1870	1880	1890
30	Channel	373000	376000	379000
	Frequency	1865	1880	1895
25	Channel	372500	376000	379500
	Frequency	1862.5	1880	1897.5
20	Channel	372000	376000	380000
	Frequency	1860	1880	1900
15	Channel	371500	376000	380500
	Frequency	1857.5	1880	1902.5
10	Channel	371000	376000	381000
	Frequency	1855	1880	1905
5	Channel	370500	376000	381500
	Frequency	1852.5	1880	1907.5



5G NR n5 Channel and Frequency List for SCS 15k/30k				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
25	Channel	-	167300	-
	Frequency	-	836.5	-
20	Channel	166800	167300	167800
	Frequency	834	836.5	839
15	Channel	166300	167300	168300
	Frequency	831.5	836.5	841.5
10	Channel	165800	167300	168800
	Frequency	829	836.5	844
5	Channel	165300	167300	169300
	Frequency	826.5	836.5	846.5

5G NR n12 Channel and Frequency List for SCS 15k/30k				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
15	Channel	141300	141500	141700
	Frequency	706.5	707.5	708.5
10	Channel	140800	141500	142200
	Frequency	704	707.5	711
5	Channel	140300	141500	142700
	Frequency	701.5	707.5	713.5



5G NR n25 Channel and Frequency List for SCS 15k/30k				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
40	Channel	390000	392500	395000
	Frequency	1870	1882.5	1895
30	Channel	389000	392500	396000
	Frequency	1865	1882.5	1900
25	Channel	388500	392500	396500
	Frequency	1862.5	1882.5	1902.5
20	Channel	372000	376500	381000
	Frequency	1860	1882.5	1905
15	Channel	371500	376500	381500
	Frequency	1857.5	1882.5	1907.5
10	Channel	371000	376500	382000
	Frequency	1855	1882.5	1910
5	Channel	370500	376500	382500
	Frequency	1852.5	1882.5	1912.5

5G NR n26 Channel and Frequency List for SCS 15k/30k				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	175800	176300	176800
	Frequency	834	836.5	839
15	Channel	175300	176300	177300
	Frequency	831.5	836.5	841.5
10	Channel	174800	176300	177800
	Frequency	829	836.5	844
5	Channel	174300	176300	178300
	Frequency	826.5	836.5	846.5



5G NR n71 Channel and Frequency List for SCS 15k/30k				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
20	Channel	134600	136100	137600
	Frequency	673	680.5	688
15	Channel	134100	136100	138100
	Frequency	670.5	680.5	690.5
10	Channel	133600	136100	138600
	Frequency	668	680.5	693
5	Channel	133100	136100	139100
	Frequency	665.5	680.5	695.5


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power

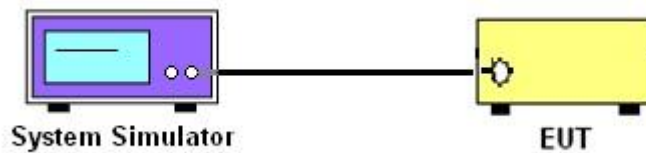

##### 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

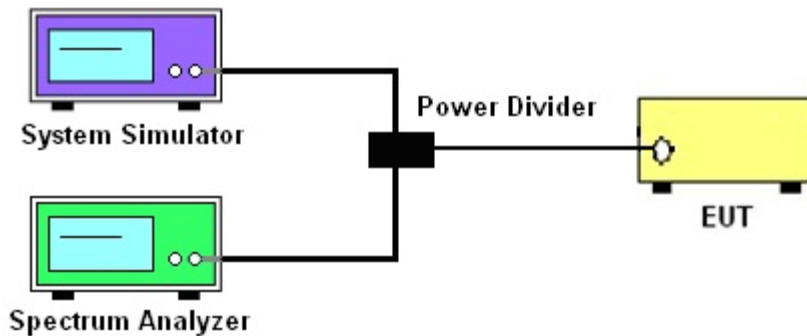

##### 3.2.3 Frequency Stability

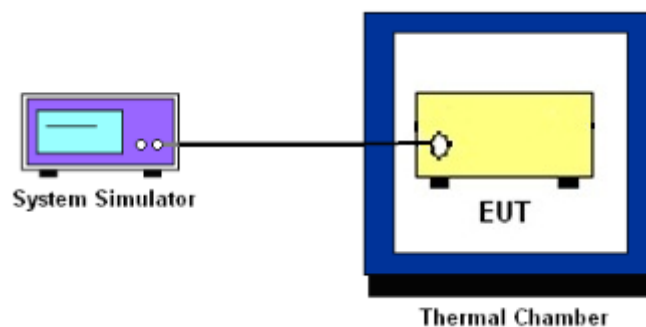

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



### 3.4 Conducted Output Power and ERP/EIRP

#### 3.4.1 Description of the Conducted Output Power Measurement and ERP/EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The ERP of mobile transmitters must not exceed 7 Watts for 5G NR n5, n26.

The ERP of mobile transmitters must not exceed 3 Watts for 5G NR n12, n71.

The EIRP of mobile transmitters must not exceed 2 Watts for 5G NR n2, n25.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



## **3.5 Peak-to-Average Ratio**

### **3.5.1 Description of the PAR Measurement**

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **3.5.2 Test Procedures**

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



### 3.6 Occupied Bandwidth

#### 3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

#### 3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



## 3.7 Conducted Band Edge

### 3.7.1 Description of Conducted Band Edge Measurement

22.917(a)

For operations in the 824 – 849 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power  $P(\text{Watts})$  in a 100kHz bandwidth. However, in the 1MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

24.238 (a)

For operations in the 1850-1910 and 1930-1990 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power  $P(\text{Watts})$  in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

27.53 (g)

For operations in the 600MHz band and 698 -746 MHz band, the FCC limit is  $43 + 10\log_{10}(P[\text{Watts}])$  dB below the transmitter power  $P(\text{Watts})$  in a 100 kHz bandwidth. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.



### 3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)

$$= P(W) - [43 + 10\log(P)] \text{ (dB)}$$

$$= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm}.$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.



### 3.8 Conducted Spurious Emission

#### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
= P(W)- [43 + 10log(P)] (dB)  
= [30 + 10log(P)] (dBm) - [43 + 10log(P)] (dB)  
= -13dBm.



## 3.9 Frequency Stability

### 3.9.1 Description of Frequency Stability Measurement

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### 3.9.2 Test Procedures for Temperature Variation

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### 3.9.3 Test Procedures for Voltage Variation

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


#### 4.2.1 For radiated test below 30MHz

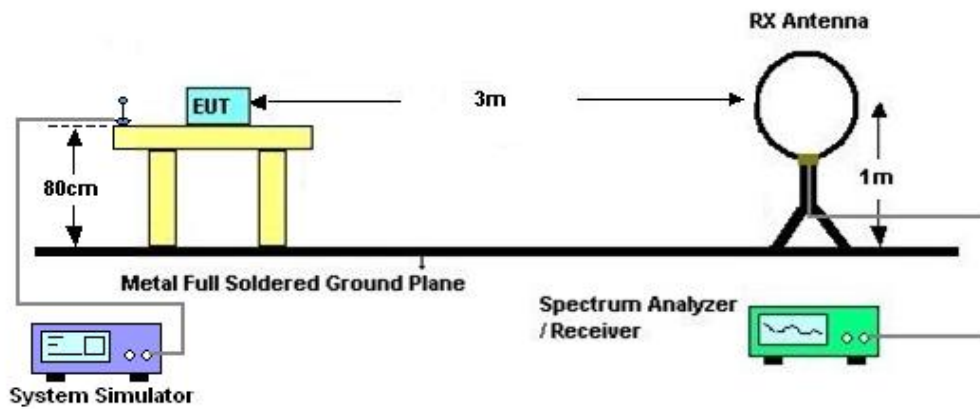

#### 4.2.2 For radiated test from 30MHz to 1GHz

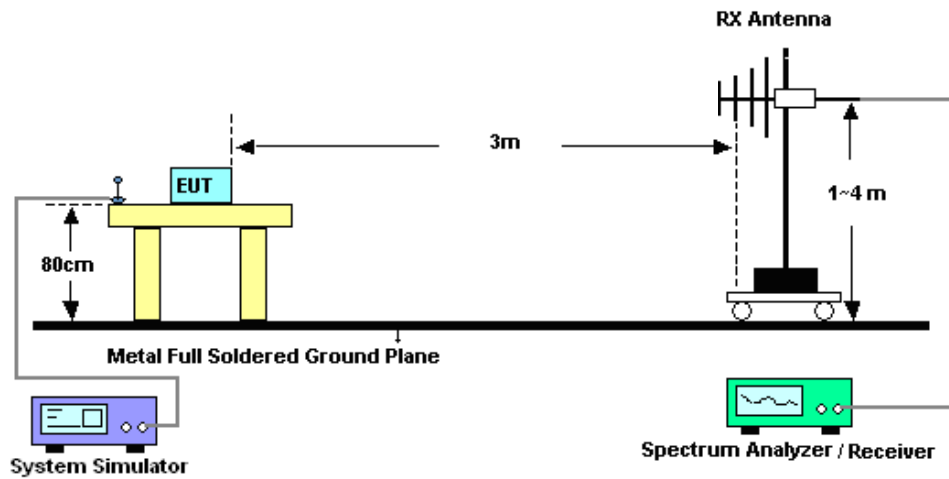

#### 4.2.3 For radiated test above 1GHz

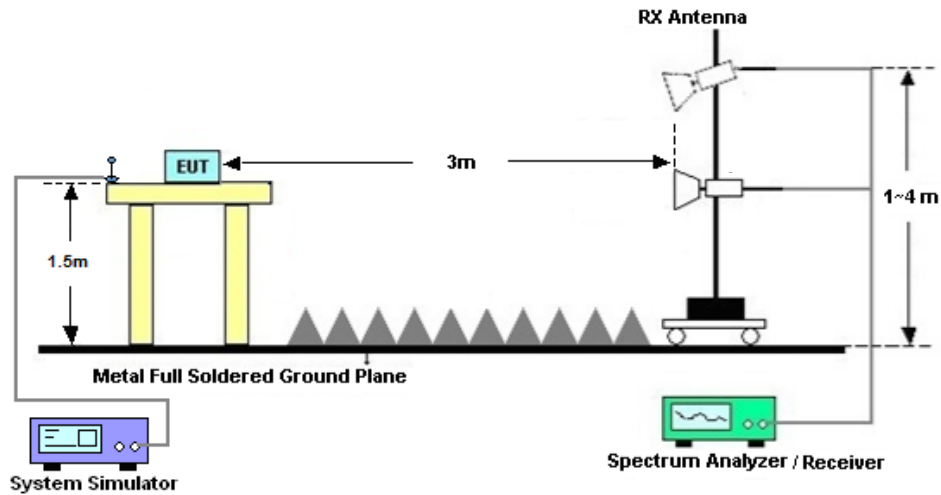

#### 4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



## 4.4 Radiated Spurious Emission

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)]$  (dB)  
=  $[30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
= -13dBm.



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 12, 2022	Mar. 11, 2023~Apr. 04, 2023	Oct. 11, 2023	Conducted (TH01-SZ)
Power Divider	TOJOIN	PS-2SM-04 265	60.06.020.007 7	0.4GHz~26.5GHz	Dec. 25, 2022	Mar. 11, 2023~Apr. 04, 2023	Dec. 24, 2023	Conducted (TH01-SZ)
Thermal Chamber	Ten Billion Hongzhangroup	LP-150U	H2014081803	-40~+150°C	Jul. 07, 2022	Mar. 11, 2023~Apr. 04, 2023	Jul. 06, 2023	Conducted (TH01-SZ)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 12, 2022	Mar. 30, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100321	9kHz~30MHz	Oct. 16, 2022	Mar. 30, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	May 24, 2022	Mar. 30, 2023	May 23, 2023	Radiation (03CH04-KS)
Horn Antenna	Schwarzbeck	BBHA9120D	1284	1GHz~18GHz	Oct. 16, 2022	Mar. 30, 2023	Oct. 15, 2023	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 08, 2023	Mar. 30, 2023	Jan. 07, 2024	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	187289	9KHz-1GHz	May 24, 2022	Mar. 30, 2023	May 23, 2023	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2023	Mar. 30, 2023	Jan. 04, 2024	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 12, 2022	Mar. 30, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 12, 2022	Mar. 30, 2023	Oct. 11, 2023	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 30, 2023	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 30, 2023	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 30, 2023	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



## 6 Uncertainty of Evaluation

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Power	±1.34 dB
Conducted Emissions	±1.34 dB
Occupied Channel Bandwidth	±0.13 %

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.3dB
---	-------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.8dB
---	-------

----- THE END -----



## Appendix A. Test Results of Conducted Test

Test Engineer :	Jung Guo	Temperature :	22~23°C
		Relative Humidity :	40~42%

## FR1 N2(ANT0) – SCS 15k

### Transmitter Conducted Output Power and EIRP, ( $G_T - L_C$ )=-5.4dBi

NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power (dBm)	EIRP (dBm)	EIRP (W)
2	15	5	370500	1852.5	DFT-s-OFDM QPSK	1@1	23.29	17.89	0.0615
2	15	5	370500	1852.5	DFT-s-OFDM 16 QAM	1@1	22.39	16.99	0.0500
2	15	5	376000	1880	DFT-s-OFDM QPSK	1@1	23.24	17.84	0.0608
2	15	5	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.4	17	0.0501
2	15	5	381500	1907.5	DFT-s-OFDM QPSK	1@1	23.36	17.96	0.0625
2	15	5	381500	1907.5	DFT-s-OFDM 16 QAM	1@1	22.39	16.99	0.0500
2	15	10	371000	1855	DFT-s-OFDM QPSK	1@1	23.31	17.91	0.0618
2	15	10	371000	1855	DFT-s-OFDM 16 QAM	1@1	22.38	16.98	0.0499
2	15	10	376000	1880	DFT-s-OFDM QPSK	1@1	23.32	17.92	0.0619
2	15	10	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.44	17.04	0.0506
2	15	10	381000	1905	DFT-s-OFDM QPSK	1@1	23.2	17.8	0.0603
2	15	10	381000	1905	DFT-s-OFDM 16 QAM	1@1	22.35	16.95	0.0495
2	15	15	371500	1857.5	DFT-s-OFDM QPSK	1@1	23.3	17.9	0.0617
2	15	15	371500	1857.5	DFT-s-OFDM 16 QAM	1@1	22.47	17.07	0.0509
2	15	15	376000	1880	DFT-s-OFDM QPSK	1@1	23.32	17.92	0.0619
2	15	15	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.54	17.14	0.0518
2	15	15	380500	1902.5	DFT-s-OFDM QPSK	1@1	23.15	17.75	0.0596
2	15	15	380500	1902.5	DFT-s-OFDM 16 QAM	1@1	22.33	16.93	0.0493
2	15	20	372000	1860	DFT-s-OFDM QPSK	1@1	23.29	17.89	0.0615
2	15	20	372000	1860	DFT-s-OFDM 16 QAM	1@1	22.45	17.05	0.0507
2	15	20	376000	1880	DFT-s-OFDM QPSK	1@1	23.4	18	0.0631
2	15	20	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.63	17.23	0.0528
2	15	20	380000	1900	DFT-s-OFDM QPSK	1@1	23.28	17.88	0.0614
2	15	20	380000	1900	DFT-s-OFDM 16 QAM	1@1	22.41	17.01	0.0502
2	15	25	372500	1862.5	DFT-s-OFDM QPSK	1@1	23.06	17.66	0.0583
2	15	25	372500	1862.5	DFT-s-OFDM 16 QAM	1@1	22.29	16.89	0.0489
2	15	25	376000	1880	DFT-s-OFDM QPSK	1@1	23.23	17.83	0.0607
2	15	25	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.4	17	0.0501
2	15	25	379500	1897.5	DFT-s-OFDM QPSK	1@1	23.1	17.7	0.0589
2	15	25	379500	1897.5	DFT-s-OFDM 16 QAM	1@1	22.23	16.83	0.0482
2	15	30	373000	1865	DFT-s-OFDM QPSK	1@1	23.17	17.77	0.0598
2	15	30	373000	1865	DFT-s-OFDM 16 QAM	1@1	22.29	16.89	0.0489
2	15	30	376000	1880	DFT-s-OFDM QPSK	1@1	23.15	17.75	0.0596
2	15	30	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.33	16.93	0.0493
2	15	30	379000	1895	DFT-s-OFDM QPSK	1@1	23.19	17.79	0.0601
2	15	30	379000	1895	DFT-s-OFDM 16 QAM	1@1	22.25	16.85	0.0484
2	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	108@54	23.3	17.9	0.0617
2	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@1	23.18	17.78	0.0600
2	15	40	374000	1870	DFT-s-OFDM PI/2 BPSK	1@214	23.13	17.73	0.0593
2	15	40	374000	1870	DFT-s-OFDM QPSK	108@54	23.31	17.91	0.0618
2	15	40	374000	1870	DFT-s-OFDM QPSK	1@1	23.16	17.76	0.0597
2	15	40	374000	1870	DFT-s-OFDM QPSK	1@214	23.22	17.82	0.0605
2	15	40	374000	1870	DFT-s-OFDM 16 QAM	108@54	22.4	17	0.0501

2	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@1	22.29	16.89	0.0489
2	15	40	374000	1870	DFT-s-OFDM 16 QAM	1@214	22.32	16.92	0.0492
2	15	40	374000	1870	DFT-s-OFDM 64 QAM	108@54	20.79	15.39	0.0346
2	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@1	20.45	15.05	0.0320
2	15	40	374000	1870	DFT-s-OFDM 64 QAM	1@214	20.49	15.09	0.0323
2	15	40	374000	1870	DFT-s-OFDM 256 QAM	108@54	18.86	13.46	0.0222
2	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@1	18.38	12.98	0.0199
2	15	40	374000	1870	DFT-s-OFDM 256 QAM	1@214	18.7	13.3	0.0214
2	15	40	374000	1870	CP-OFDM QPSK	108@54	21.81	16.41	0.0438
2	15	40	374000	1870	CP-OFDM QPSK	1@1	21.61	16.21	0.0418
2	15	40	374000	1870	CP-OFDM QPSK	1@214	21.67	16.27	0.0424
2	15	40	376000	1880	DFT-s-OFDM PI/2 BPSK	108@54	23.24	17.84	0.0608
2	15	40	376000	1880	DFT-s-OFDM PI/2 BPSK	1@1	23.14	17.74	0.0594
2	15	40	376000	1880	DFT-s-OFDM PI/2 BPSK	1@214	23.21	17.81	0.0604
2	15	40	376000	1880	DFT-s-OFDM QPSK	108@54	23.34	17.94	0.0622
2	15	40	376000	1880	DFT-s-OFDM QPSK	1@1	23.13	17.73	0.0593
2	15	40	376000	1880	DFT-s-OFDM QPSK	1@214	23.12	17.72	0.0592
2	15	40	376000	1880	DFT-s-OFDM 16 QAM	108@54	22.3	16.9	0.0490
2	15	40	376000	1880	DFT-s-OFDM 16 QAM	1@1	22.22	16.82	0.0481
2	15	40	376000	1880	DFT-s-OFDM 16 QAM	1@214	22.23	16.83	0.0482
2	15	40	376000	1880	DFT-s-OFDM 64 QAM	108@54	20.74	15.34	0.0342
2	15	40	376000	1880	DFT-s-OFDM 64 QAM	1@1	20.51	15.11	0.0324
2	15	40	376000	1880	DFT-s-OFDM 64 QAM	1@214	20.44	15.04	0.0319
2	15	40	376000	1880	DFT-s-OFDM 256 QAM	108@54	18.72	13.32	0.0215
2	15	40	376000	1880	DFT-s-OFDM 256 QAM	1@1	18.53	13.13	0.0206
2	15	40	376000	1880	DFT-s-OFDM 256 QAM	1@214	18.31	12.91	0.0195
2	15	40	376000	1880	CP-OFDM QPSK	108@54	21.79	16.39	0.0436
2	15	40	376000	1880	CP-OFDM QPSK	1@1	21.6	16.2	0.0417
2	15	40	376000	1880	CP-OFDM QPSK	1@214	21.38	15.98	0.0396
2	15	40	378000	1890	DFT-s-OFDM PI/2 BPSK	108@54	23.25	17.85	0.0610
2	15	40	378000	1890	DFT-s-OFDM PI/2 BPSK	1@1	23.24	17.84	0.0608
2	15	40	378000	1890	DFT-s-OFDM PI/2 BPSK	1@214	23.45	18.05	0.0638
2	15	40	378000	1890	DFT-s-OFDM QPSK	108@54	23.2	17.8	0.0603
2	15	40	378000	1890	DFT-s-OFDM QPSK	1@1	23.2	17.8	0.0603
2	15	40	378000	1890	DFT-s-OFDM QPSK	1@214	23.51	18.11	0.0647
2	15	40	378000	1890	DFT-s-OFDM 16 QAM	108@54	22.3	16.9	0.0490
2	15	40	378000	1890	DFT-s-OFDM 16 QAM	1@1	22.38	16.98	0.0499
2	15	40	378000	1890	DFT-s-OFDM 16 QAM	1@214	22.61	17.21	0.0526
2	15	40	378000	1890	DFT-s-OFDM 64 QAM	108@54	20.67	15.27	0.0337
2	15	40	378000	1890	DFT-s-OFDM 64 QAM	1@1	20.59	15.19	0.0330
2	15	40	378000	1890	DFT-s-OFDM 64 QAM	1@214	20.88	15.48	0.0353
2	15	40	378000	1890	DFT-s-OFDM 256 QAM	108@54	18.71	13.31	0.0214
2	15	40	378000	1890	DFT-s-OFDM 256 QAM	1@1	18.83	13.43	0.0220
2	15	40	378000	1890	DFT-s-OFDM 256 QAM	1@214	18.94	13.54	0.0226
2	15	40	378000	1890	CP-OFDM QPSK	108@54	21.71	16.31	0.0428
2	15	40	378000	1890	CP-OFDM QPSK	1@1	21.92	16.52	0.0449
2	15	40	378000	1890	CP-OFDM QPSK	1@214	22.06	16.66	0.0463

## FR1 N5(ANT0) – SCS 15k

### Transmitter Conducted Output Power And ERP, ( $G_T - L_C$ )=-7.1dBi

NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power (dBm)	ERP (dBm)	ERP (W)
5	15	5	165300	826.5	DFT-s-OFDM QPSK	1@1	23.24	13.99	0.0251
5	15	5	165300	826.5	DFT-s-OFDM 16 QAM	1@1	22.23	12.98	0.0199
5	15	5	167300	836.5	DFT-s-OFDM QPSK	1@1	23.26	14.01	0.0252
5	15	5	167300	836.5	DFT-s-OFDM 16 QAM	1@1	22.2	12.95	0.0197
5	15	5	169300	846.5	DFT-s-OFDM QPSK	1@1	23.09	13.84	0.0242
5	15	5	169300	846.5	DFT-s-OFDM 16 QAM	1@1	22.06	12.81	0.0191
5	15	10	165800	829	DFT-s-OFDM QPSK	1@1	23.23	13.98	0.0250
5	15	10	165800	829	DFT-s-OFDM 16 QAM	1@1	22.23	12.98	0.0199
5	15	10	167300	836.5	DFT-s-OFDM QPSK	1@1	23.24	13.99	0.0251
5	15	10	167300	836.5	DFT-s-OFDM 16 QAM	1@1	22.25	13	0.0200
5	15	10	168800	844	DFT-s-OFDM QPSK	1@1	23.2	13.95	0.0248
5	15	10	168800	844	DFT-s-OFDM 16 QAM	1@1	22.14	12.89	0.0195
5	15	15	166300	831.5	DFT-s-OFDM QPSK	1@1	23.25	14	0.0251
5	15	15	166300	831.5	DFT-s-OFDM 16 QAM	1@1	22.25	13	0.0200
5	15	15	167300	836.5	DFT-s-OFDM QPSK	1@1	23.31	14.06	0.0255
5	15	15	167300	836.5	DFT-s-OFDM 16 QAM	1@1	22.21	12.96	0.0198
5	15	15	168300	841.5	DFT-s-OFDM QPSK	1@1	23.29	14.04	0.0254
5	15	15	168300	841.5	DFT-s-OFDM 16 QAM	1@1	22.24	12.99	0.0199
5	15	20	166800	834	DFT-s-OFDM QPSK	1@1	23.31	14.06	0.0255
5	15	20	166800	834	DFT-s-OFDM 16 QAM	1@1	22.26	13.01	0.0200
5	15	20	167300	836.5	DFT-s-OFDM QPSK	1@1	23.36	14.11	0.0258
5	15	20	167300	836.5	DFT-s-OFDM 16 QAM	1@1	22.3	13.05	0.0202
5	15	20	167800	839	DFT-s-OFDM QPSK	1@1	23.39	14.14	0.0259
5	15	20	167800	839	DFT-s-OFDM 16 QAM	1@1	22.28	13.03	0.0201
5	15	25	167300	836.5	DFT-s-OFDM Pi/2 BPSK	64@32	23.34	14.09	0.0256
5	15	25	167300	836.5	DFT-s-OFDM Pi/2 BPSK	1@1	23.45	14.2	0.0263
5	15	25	167300	836.5	DFT-s-OFDM Pi/2 BPSK	1@131	23.21	13.96	0.0249
5	15	25	167300	836.5	DFT-s-OFDM QPSK	64@32	23.33	14.08	0.0256
5	15	25	167300	836.5	DFT-s-OFDM QPSK	1@1	23.44	14.19	0.0262
5	15	25	167300	836.5	DFT-s-OFDM QPSK	1@131	23.22	13.97	0.0249
5	15	25	167300	836.5	DFT-s-OFDM 16 QAM	64@32	22.38	13.13	0.0206
5	15	25	167300	836.5	DFT-s-OFDM 16 QAM	1@1	22.31	13.06	0.0202
5	15	25	167300	836.5	DFT-s-OFDM 16 QAM	1@131	22.18	12.93	0.0196
5	15	25	167300	836.5	DFT-s-OFDM 64 QAM	64@32	20.85	11.6	0.0145
5	15	25	167300	836.5	DFT-s-OFDM 64 QAM	1@1	20.71	11.46	0.0140
5	15	25	167300	836.5	DFT-s-OFDM 64 QAM	1@131	20.57	11.32	0.0136
5	15	25	167300	836.5	DFT-s-OFDM 256 QAM	64@32	18.87	9.62	0.0092
5	15	25	167300	836.5	DFT-s-OFDM 256 QAM	1@1	18.66	9.41	0.0087
5	15	25	167300	836.5	DFT-s-OFDM 256 QAM	1@131	18.39	9.14	0.0082
5	15	25	167300	836.5	CP-OFDM QPSK	67@33	21.89	12.64	0.0184
5	15	25	167300	836.5	CP-OFDM QPSK	1@1	21.89	12.64	0.0184
5	15	25	167300	836.5	CP-OFDM QPSK	1@131	21.73	12.48	0.0177

## Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
5	15	25	167300	836.5	DFT-s-OFDM QPSK	128@0	0.0059	PASS	NV
5	15	25	167300	836.5	DFT-s-OFDM QPSK	128@0	0.0054	PASS	LV
5	15	25	167300	836.5	DFT-s-OFDM QPSK	128@0	0.0060	PASS	HV
5	15	25	167300	836.5	DFT-s-OFDM QPSK	128@0	0.0064	PASS	-30°C
5	15	25	167300	836.5	DFT-s-OFDM QPSK	128@0	0.0046	PASS	-20°C
5	15	25	167300	836.5	DFT-s-OFDM QPSK	128@0	0.0058	PASS	-10°C
5	15	25	167300	836.5	DFT-s-OFDM QPSK	128@0	0.0022	PASS	0°C
5	15	25	167300	836.5	DFT-s-OFDM QPSK	128@0	0.0057	PASS	10°C
5	15	25	167300	836.5	DFT-s-OFDM QPSK	128@0	0.0059	PASS	20°C
5	15	25	167300	836.5	DFT-s-OFDM QPSK	128@0	0.0039	PASS	30°C
5	15	25	167300	836.5	DFT-s-OFDM QPSK	128@0	0.0033	PASS	40°C
5	15	25	167300	836.5	DFT-s-OFDM QPSK	128@0	0.0055	PASS	50°C


## Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
5	15	25	167300	836.5	DFT-s-OFDM PI/2 BPSK	128@0	4.66	13	PASS
5	15	25	167300	836.5	DFT-s-OFDM PI/2 BPSK	1@0	3.9	13	PASS
5	15	25	167300	836.5	DFT-s-OFDM QPSK	128@0	5.77	13	PASS
5	15	25	167300	836.5	DFT-s-OFDM QPSK	1@0	5.1	13	PASS

N5(25M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH



N5(25M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Mid\_CH

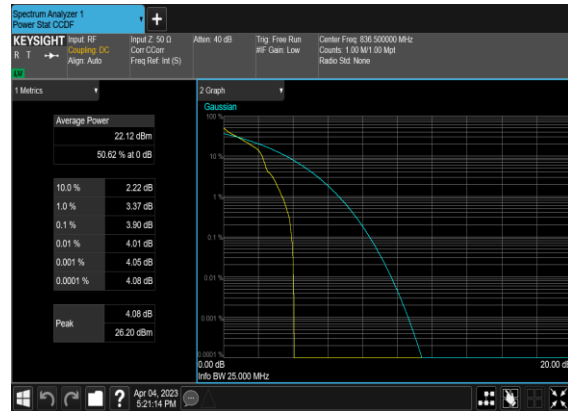

N5(25M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH




N5(25M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH




## Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
5	15	25	167300	836.5	DFT-s-OFDM PI/2 BPSK	128@0	22.87	23.63
5	15	25	167300	836.5	DFT-s-OFDM QPSK	128@0	22.903	23.67
5	15	25	167300	836.5	CP-OFDM QPSK	133@0	23.789	24.57
5	15	25	167300	836.5	CP-OFDM 16 QAM	133@0	23.725	24.57
5	15	25	167300	836.5	CP-OFDM 64 QAM	133@0	23.754	24.53
5	15	25	167300	836.5	CP-OFDM 256 QAM	133@0	23.784	24.52


### N5(25M)\_DFT-s-OFDM\_PI\_2- BPSK\_Outer\_Full\_Mid\_CH

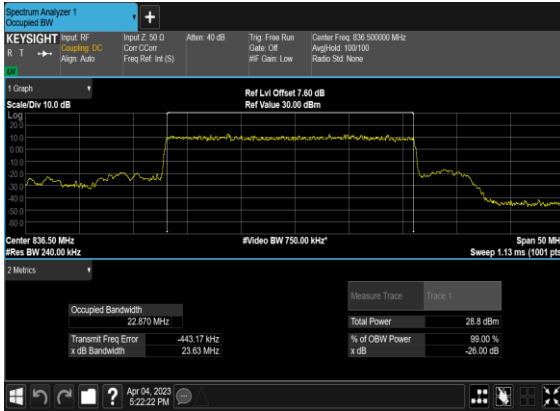

### N5(25M)\_DFT-s- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

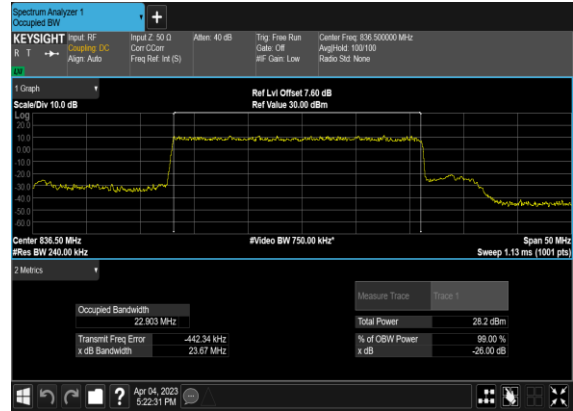


### N5(25M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

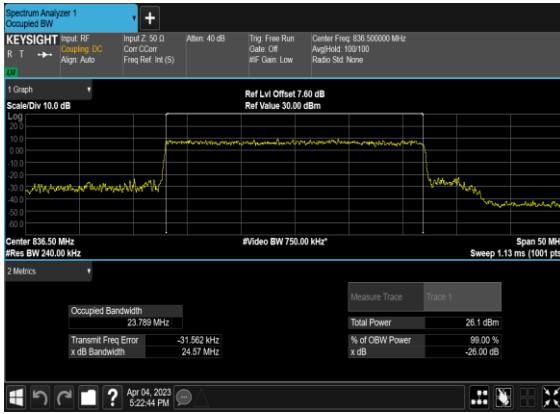


### N5(25M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH



### N5(25M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

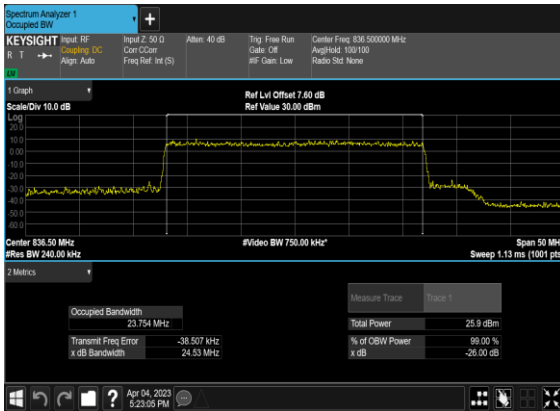


### N5(25M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

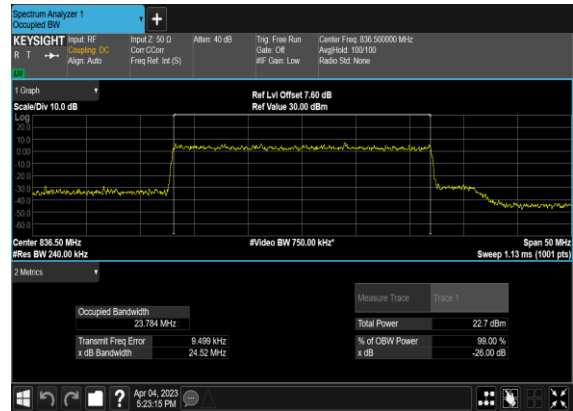


# Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
5	15	25	167300	836.5	DFT-s-OFDM BPSK	1@0	see graph	---
5	15	25	167300	836.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
5	15	25	167300	836.5	DFT-s-OFDM QPSK	1@0	see graph	---
5	15	25	167300	836.5	DFT-s-OFDM QPSK	1@0	see graph	PASS

N5(25M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

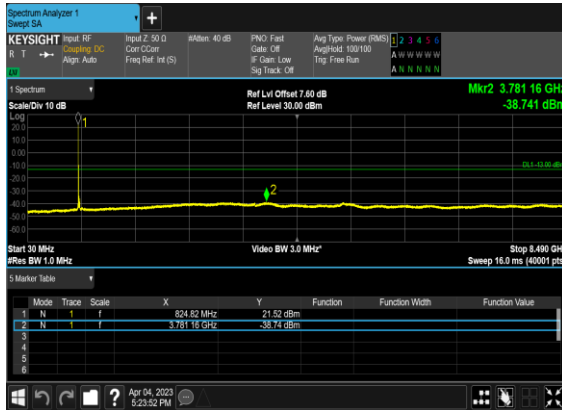


N5(25M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

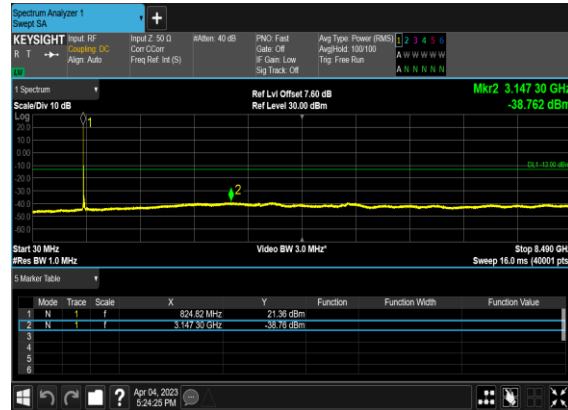


## Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
5	15	25	167300	836.5	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
5	15	25	167300	836.5	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
5	15	25	167300	836.5	DFT-s-OFDM BPSK	1@132	see graph	<b>PASS</b>
5	15	25	167300	836.5	DFT-s-OFDM QPSK	1@132	see graph	<b>PASS</b>
5	15	25	167300	836.5	DFT-s-OFDM BPSK	128@0	see graph	<b>PASS</b>
5	15	25	167300	836.5	DFT-s-OFDM QPSK	128@0	see graph	<b>PASS</b>


N5(25M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

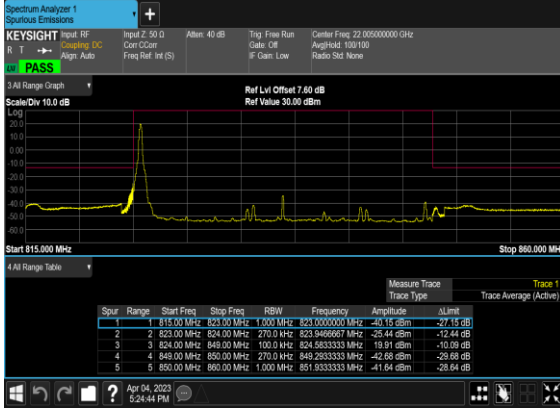


N5(25M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

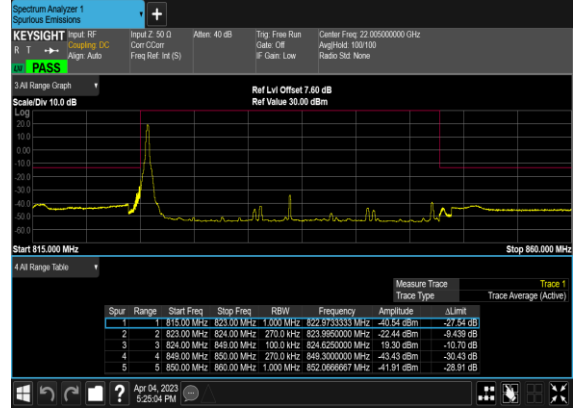


N5(25M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Right\_Mid\_CH

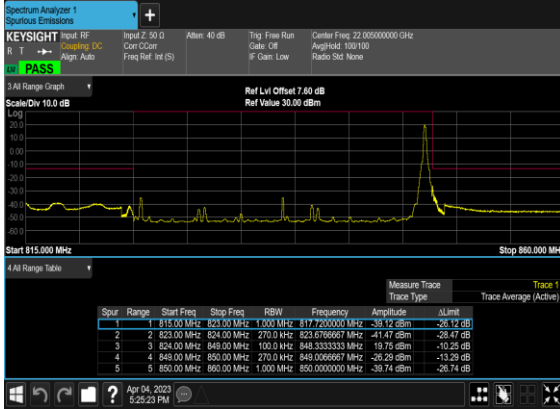


N5(25M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Right\_Mid\_CH

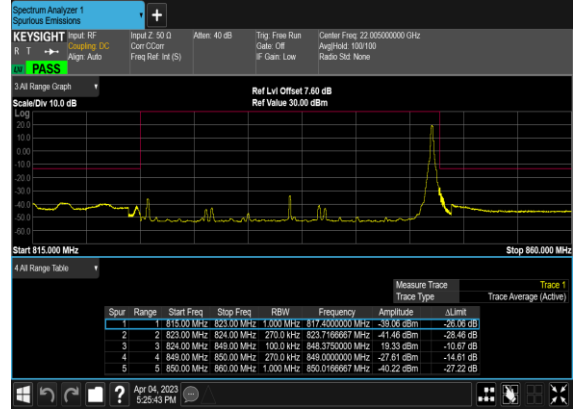

N5(25M)\_DFT-s-  
OFDM\_BPSK\_Outer\_Full\_Mid\_CH

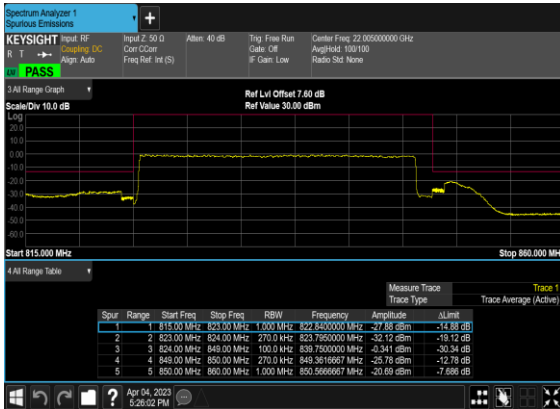

N5(25M)\_DFT-s-  
OFDM\_QPSK\_Outer\_Full\_Mid\_CH

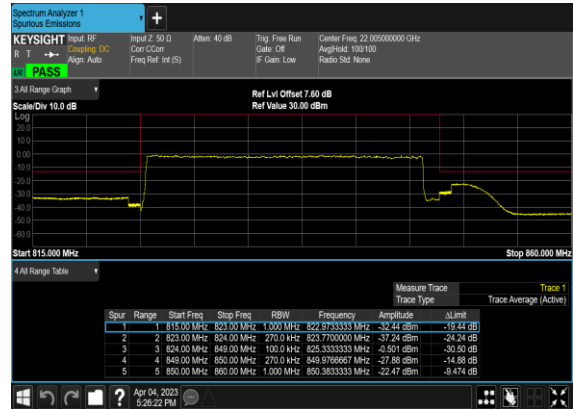

## FR1 N12(ANT0) – SCS 15k

### Transmitter Conducted Output Power And ERP, (G<sub>T</sub> - L<sub>C</sub>)=-6.5dBi

NR Band	SCS	BandWidth	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power (dBm)	ERP (dBm)	ERP (W)
12	15	5	140300	701.5	DFT-s-OFDM QPSK	1@1	23.23	14.58	0.0287
12	15	5	140300	701.5	DFT-s-OFDM 16 QAM	1@1	22.15	13.5	0.0224
12	15	5	141500	707.5	DFT-s-OFDM QPSK	1@1	23.1	14.45	0.0279
12	15	5	141500	707.5	DFT-s-OFDM 16 QAM	1@1	22.13	13.48	0.0223
12	15	5	142700	713.5	DFT-s-OFDM QPSK	1@1	22.95	14.3	0.0269
12	15	5	142700	713.5	DFT-s-OFDM 16 QAM	1@1	22	13.35	0.0216
12	15	10	140800	704	DFT-s-OFDM QPSK	1@1	23.19	14.54	0.0284
12	15	10	140800	704	DFT-s-OFDM 16 QAM	1@1	22.13	13.48	0.0223
12	15	10	141500	707.5	DFT-s-OFDM QPSK	1@1	23.18	14.53	0.0284
12	15	10	141500	707.5	DFT-s-OFDM 16 QAM	1@1	22.11	13.46	0.0222
12	15	10	142200	711	DFT-s-OFDM QPSK	1@1	23.07	14.42	0.0277
12	15	10	142200	711	DFT-s-OFDM 16 QAM	1@1	22.05	13.4	0.0219
12	15	15	141300	706.5	DFT-s-OFDM PI/2 BPSK	36@18	23.19	14.54	0.0284
12	15	15	141300	706.5	DFT-s-OFDM PI/2 BPSK	1@1	23.19	14.54	0.0284
12	15	15	141300	706.5	DFT-s-OFDM PI/2 BPSK	1@77	22.98	14.33	0.0271
12	15	15	141300	706.5	DFT-s-OFDM QPSK	36@18	23.15	14.5	0.0282
12	15	15	141300	706.5	DFT-s-OFDM QPSK	1@1	23.23	14.58	0.0287
12	15	15	141300	706.5	DFT-s-OFDM QPSK	1@77	22.93	14.28	0.0268
12	15	15	141300	706.5	DFT-s-OFDM 16 QAM	36@18	22.25	13.6	0.0229
12	15	15	141300	706.5	DFT-s-OFDM 16 QAM	1@1	22.18	13.53	0.0225
12	15	15	141300	706.5	DFT-s-OFDM 16 QAM	1@77	21.98	13.33	0.0215
12	15	15	141300	706.5	DFT-s-OFDM 64 QAM	36@18	20.66	12.01	0.0159
12	15	15	141300	706.5	DFT-s-OFDM 64 QAM	1@1	20.9	12.25	0.0168
12	15	15	141300	706.5	DFT-s-OFDM 64 QAM	1@77	20.67	12.02	0.0159
12	15	15	141300	706.5	DFT-s-OFDM 256 QAM	36@18	18.74	10.09	0.0102
12	15	15	141300	706.5	DFT-s-OFDM 256 QAM	1@1	18.87	10.22	0.0105
12	15	15	141300	706.5	DFT-s-OFDM 256 QAM	1@77	18.64	9.99	0.0100
12	15	15	141300	706.5	CP-OFDM QPSK	39@19	21.7	13.05	0.0202
12	15	15	141300	706.5	CP-OFDM QPSK	1@1	21.88	13.23	0.0210
12	15	15	141300	706.5	CP-OFDM QPSK	1@77	21.37	12.72	0.0187
12	15	15	141500	707.5	DFT-s-OFDM PI/2 BPSK	36@18	23.12	14.47	0.0280
12	15	15	141500	707.5	DFT-s-OFDM PI/2 BPSK	1@1	23.17	14.52	0.0283
12	15	15	141500	707.5	DFT-s-OFDM PI/2 BPSK	1@77	22.95	14.3	0.0269
12	15	15	141500	707.5	DFT-s-OFDM QPSK	36@18	23.01	14.36	0.0273
12	15	15	141500	707.5	DFT-s-OFDM QPSK	1@1	23.1	14.45	0.0279
12	15	15	141500	707.5	DFT-s-OFDM QPSK	1@77	22.88	14.23	0.0265
12	15	15	141500	707.5	DFT-s-OFDM 16 QAM	36@18	22.09	13.44	0.0221
12	15	15	141500	707.5	DFT-s-OFDM 16 QAM	1@1	22.05	13.4	0.0219
12	15	15	141500	707.5	DFT-s-OFDM 16 QAM	1@77	21.83	13.18	0.0208
12	15	15	141500	707.5	DFT-s-OFDM 64 QAM	36@18	20.51	11.86	0.0153

12	15	15	141500	707.5	DFT-s-OFDM 64 QAM	1@1	20.69	12.04	0.0160
12	15	15	141500	707.5	DFT-s-OFDM 64 QAM	1@77	20.6	11.95	0.0157
12	15	15	141500	707.5	DFT-s-OFDM 256 QAM	36@18	18.73	10.08	0.0102
12	15	15	141500	707.5	DFT-s-OFDM 256 QAM	1@1	18.74	10.09	0.0102
12	15	15	141500	707.5	DFT-s-OFDM 256 QAM	1@77	18.51	9.86	0.0097
12	15	15	141500	707.5	CP-OFDM QPSK	39@19	21.63	12.98	0.0199
12	15	15	141500	707.5	CP-OFDM QPSK	1@1	21.89	13.24	0.0211
12	15	15	141500	707.5	CP-OFDM QPSK	1@77	21.43	12.78	0.0190
12	15	15	141700	708.5	DFT-s-OFDM PI/2 BPSK	36@18	23.14	14.49	0.0281
12	15	15	141700	708.5	DFT-s-OFDM PI/2 BPSK	1@1	23.17	14.52	0.0283
12	15	15	141700	708.5	DFT-s-OFDM PI/2 BPSK	1@77	22.93	14.28	0.0268
12	15	15	141700	708.5	DFT-s-OFDM QPSK	36@18	23.15	14.5	0.0282
12	15	15	141700	708.5	DFT-s-OFDM QPSK	1@1	23.29	14.64	0.0291
12	15	15	141700	708.5	DFT-s-OFDM QPSK	1@77	22.97	14.32	0.0270
12	15	15	141700	708.5	DFT-s-OFDM 16 QAM	36@18	22.19	13.54	0.0226
12	15	15	141700	708.5	DFT-s-OFDM 16 QAM	1@1	22.17	13.52	0.0225
12	15	15	141700	708.5	DFT-s-OFDM 16 QAM	1@77	21.91	13.26	0.0212
12	15	15	141700	708.5	DFT-s-OFDM 64 QAM	36@18	20.66	12.01	0.0159
12	15	15	141700	708.5	DFT-s-OFDM 64 QAM	1@1	20.87	12.22	0.0167
12	15	15	141700	708.5	DFT-s-OFDM 64 QAM	1@77	20.61	11.96	0.0157
12	15	15	141700	708.5	DFT-s-OFDM 256 QAM	36@18	18.71	10.06	0.0101
12	15	15	141700	708.5	DFT-s-OFDM 256 QAM	1@1	18.76	10.11	0.0103
12	15	15	141700	708.5	DFT-s-OFDM 256 QAM	1@77	18.52	9.87	0.0097
12	15	15	141700	708.5	CP-OFDM QPSK	39@19	21.66	13.01	0.0200
12	15	15	141700	708.5	CP-OFDM QPSK	1@1	21.82	13.17	0.0207
12	15	15	141700	708.5	CP-OFDM QPSK	1@77	21.42	12.77	0.0189

## Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
12	15	10	141500	707.5	DFT-s-OFDM QPSK	50@0	0.0033	PASS	NV
12	15	10	141500	707.5	DFT-s-OFDM QPSK	50@0	0.0044	PASS	LV
12	15	10	141500	707.5	DFT-s-OFDM QPSK	50@0	0.0044	PASS	HV
12	15	10	141500	707.5	DFT-s-OFDM QPSK	50@0	0.0070	PASS	-30°C
12	15	10	141500	707.5	DFT-s-OFDM QPSK	50@0	0.0069	PASS	-20°C
12	15	10	141500	707.5	DFT-s-OFDM QPSK	50@0	0.0050	PASS	-10°C
12	15	10	141500	707.5	DFT-s-OFDM QPSK	50@0	0.0040	PASS	0°C
12	15	10	141500	707.5	DFT-s-OFDM QPSK	50@0	0.0029	PASS	10°C
12	15	10	141500	707.5	DFT-s-OFDM QPSK	50@0	0.0033	PASS	20°C
12	15	10	141500	707.5	DFT-s-OFDM QPSK	50@0	0.0065	PASS	30°C
12	15	10	141500	707.5	DFT-s-OFDM QPSK	50@0	0.0024	PASS	40°C
12	15	10	141500	707.5	DFT-s-OFDM QPSK	50@0	0.0043	PASS	50°C

## Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
12	15	10	140800	704.0	DFT-s-OFDM PI/2 BPSK	50@0	4.43	13	PASS
12	15	10	140800	704.0	DFT-s-OFDM PI/2 BPSK	1@0	4.06	13	PASS
12	15	10	140800	704.0	DFT-s-OFDM QPSK	50@0	5.47	13	PASS
12	15	10	140800	704.0	DFT-s-OFDM QPSK	1@0	4.81	13	PASS
12	15	10	141500	707.5	DFT-s-OFDM PI/2 BPSK	50@0	4.34	13	PASS
12	15	10	141500	707.5	DFT-s-OFDM PI/2 BPSK	1@0	4.07	13	PASS
12	15	10	141500	707.5	DFT-s-OFDM QPSK	50@0	5.55	13	PASS
12	15	10	141500	707.5	DFT-s-OFDM QPSK	1@0	4.85	13	PASS
12	15	10	142200	711.0	DFT-s-OFDM PI/2 BPSK	50@0	4.42	13	PASS
12	15	10	142200	711.0	DFT-s-OFDM PI/2 BPSK	1@0	4.15	13	PASS
12	15	10	142200	711.0	DFT-s-OFDM QPSK	50@0	5.5	13	PASS
12	15	10	142200	711.0	DFT-s-OFDM QPSK	1@0	4.86	13	PASS

N12(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Low\_CH




N12(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Low\_CH



N12(10M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH



N12(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

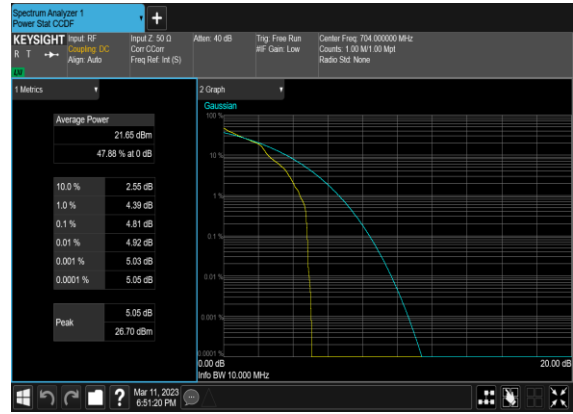

N12(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH



N12(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Mid\_CH



N12(10M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH



N12(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH




N12(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_High\_CH



N12(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_High\_CH



N12(10M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH

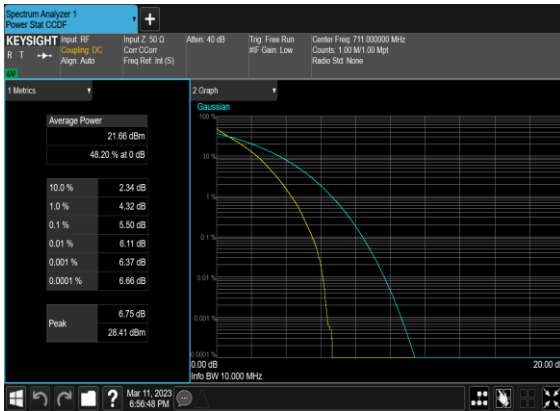


N12(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH



## Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
12	15	5	141500	707.5	DFT-s-OFDM PI/2 BPSK	25@0	4.4649	4.724
12	15	5	141500	707.5	DFT-s-OFDM QPSK	25@0	4.469	4.773
12	15	5	141500	707.5	CP-OFDM QPSK	25@0	4.4607	4.768
12	15	5	141500	707.5	CP-OFDM 16 QAM	25@0	4.4747	4.802
12	15	5	141500	707.5	CP-OFDM 64 QAM	25@0	4.4618	4.79
12	15	5	141500	707.5	CP-OFDM 256 QAM	25@0	4.4624	4.768
12	15	10	141500	707.5	DFT-s-OFDM PI/2 BPSK	50@0	8.9142	9.358
12	15	10	141500	707.5	DFT-s-OFDM QPSK	50@0	8.8878	9.357
12	15	10	141500	707.5	CP-OFDM QPSK	52@0	9.2454	9.696
12	15	10	141500	707.5	CP-OFDM 16 QAM	52@0	9.2627	9.735
12	15	10	141500	707.5	CP-OFDM 64 QAM	52@0	9.2601	9.711
12	15	10	141500	707.5	CP-OFDM 256 QAM	52@0	9.2671	9.742
12	15	15	141500	707.5	DFT-s-OFDM PI/2 BPSK	75@0	13.374	13.96
12	15	15	141500	707.5	DFT-s-OFDM QPSK	75@0	13.364	14.02
12	15	15	141500	707.5	CP-OFDM QPSK	79@0	14.099	14.68
12	15	15	141500	707.5	CP-OFDM 16 QAM	79@0	14.121	14.69
12	15	15	141500	707.5	CP-OFDM 64 QAM	79@0	14.118	14.63
12	15	15	141500	707.5	CP-OFDM 256 QAM	79@0	14.092	14.67


### N12(5M)\_DFT-s-OFDM\_PI\_2- BPSK\_Outer\_Full\_Mid\_CH

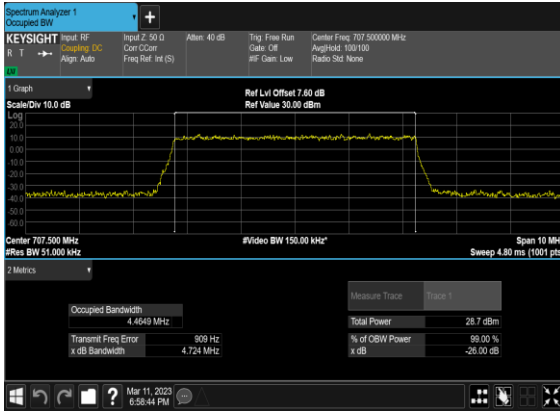

### N12(5M)\_DFT-s- OFDM\_QPSK\_Outer\_Full\_Mid\_CH




### N12(5M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

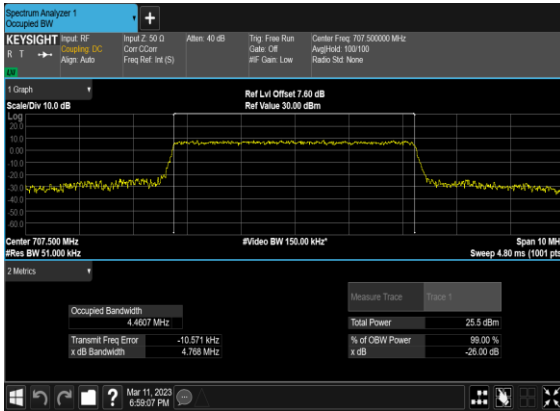


### N12(5M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH




### N12(5M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

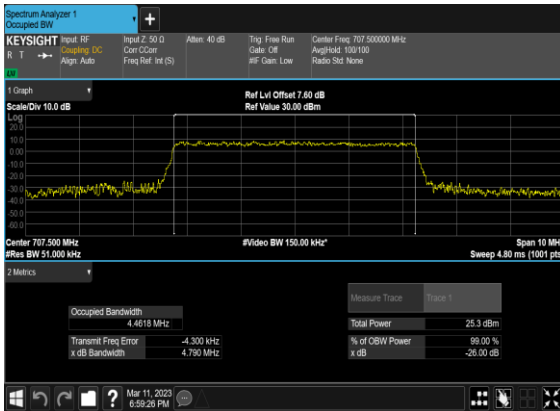


### N12(5M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

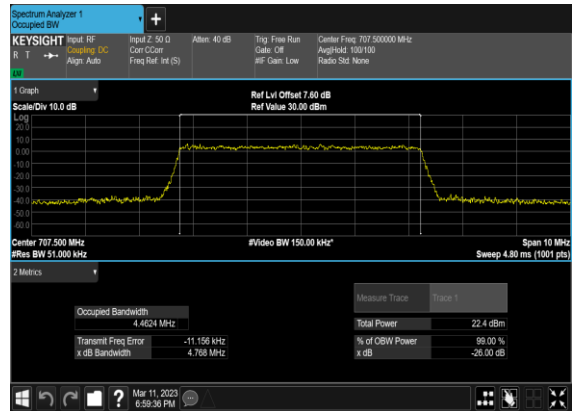


### N12(10M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH

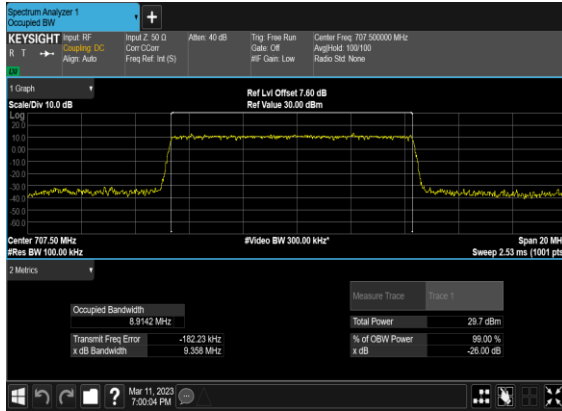


### N12(10M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

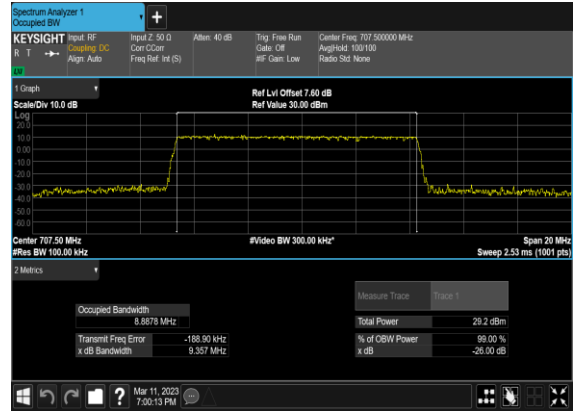


### N12(10M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

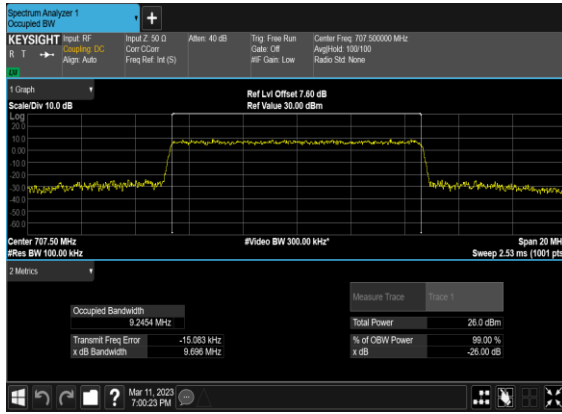


### N12(10M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

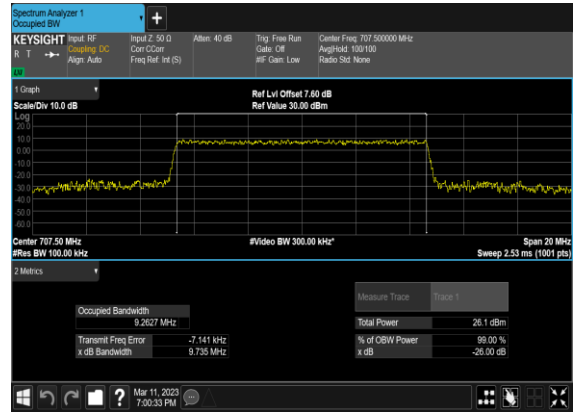


### N12(10M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

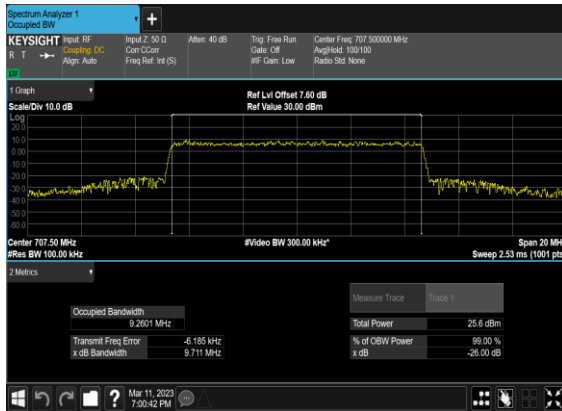


### N12(10M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

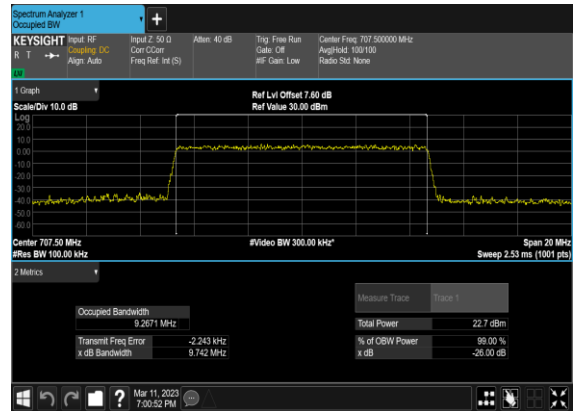


### N12(15M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH

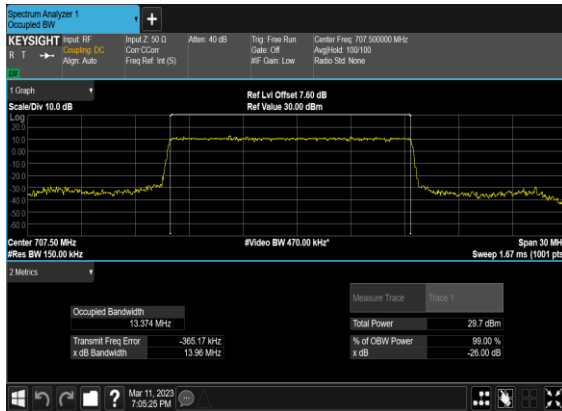


### N12(15M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

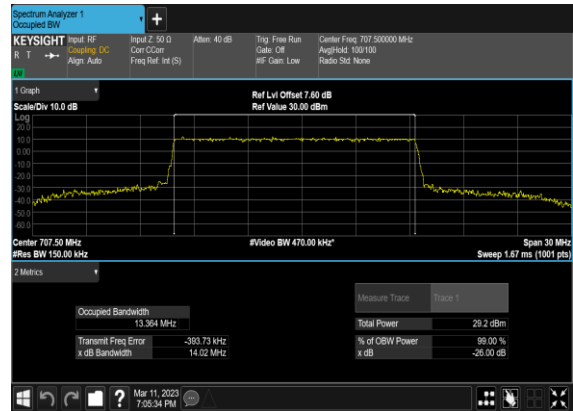


### N12(15M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

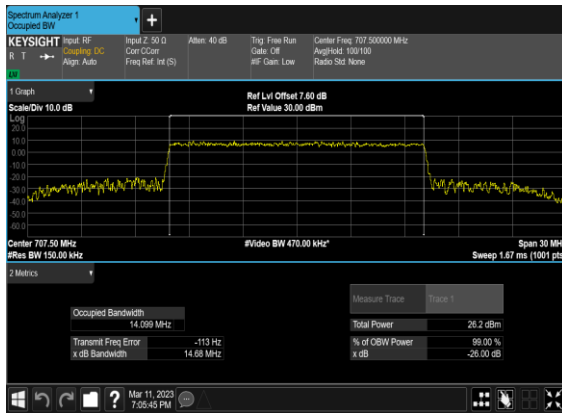


### N12(15M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

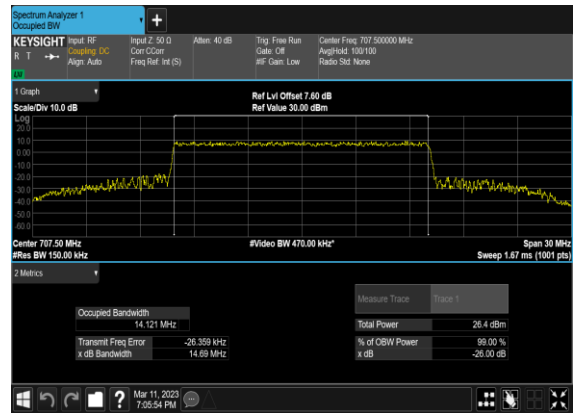

### N12(15M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

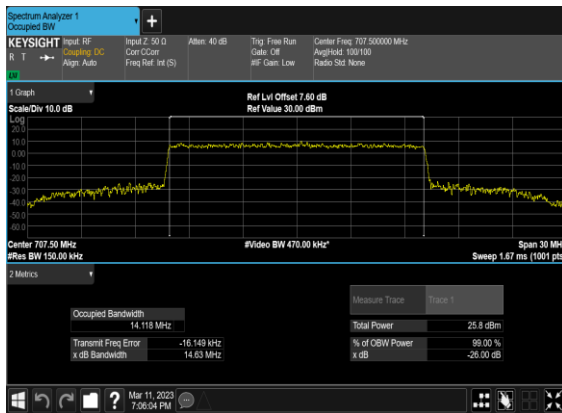

### N12(15M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

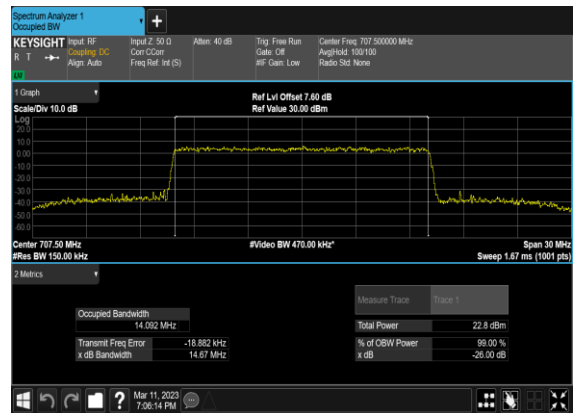

## Conducted Spurious Emissions

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
12	15	5	140300	701.5	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	5	140300	701.5	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
12	15	5	140300	701.5	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	5	140300	701.5	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
12	15	5	141500	707.5	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	5	141500	707.5	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
12	15	5	141500	707.5	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	5	141500	707.5	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
12	15	5	142700	713.5	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	5	142700	713.5	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
12	15	5	142700	713.5	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	5	142700	713.5	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
12	15	10	140800	704.0	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	10	140800	704.0	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
12	15	10	140800	704.0	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	10	140800	704.0	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
12	15	10	141500	707.5	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	10	141500	707.5	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
12	15	10	141500	707.5	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	10	141500	707.5	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
12	15	10	142200	711.0	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	10	142200	711.0	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>

12	15	10	142200	711.0	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	10	142200	711.0	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
12	15	15	141300	706.5	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	15	141300	706.5	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
12	15	15	141300	706.5	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	15	141300	706.5	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
12	15	15	141500	707.5	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	15	141500	707.5	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
12	15	15	141500	707.5	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	15	141500	707.5	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
12	15	15	141700	708.5	DFT-s-OFDM BPSK	1@0	see graph	---
12	15	15	141700	708.5	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
12	15	15	141700	708.5	DFT-s-OFDM QPSK	1@0	see graph	---
12	15	15	141700	708.5	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>


N12(5M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH




N12(5M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH




N12(5M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

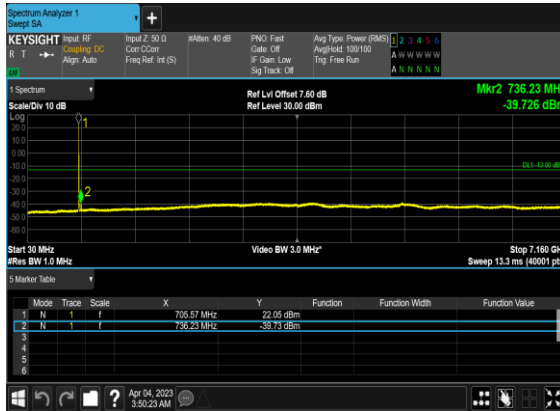


N12(5M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

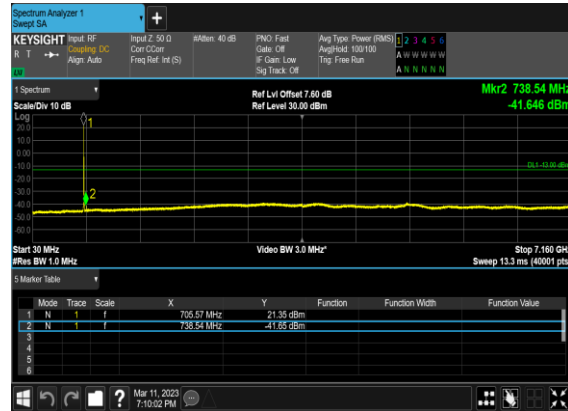

N12(5M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

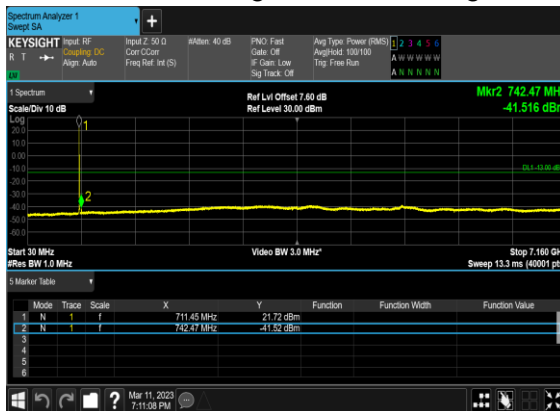

N12(5M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

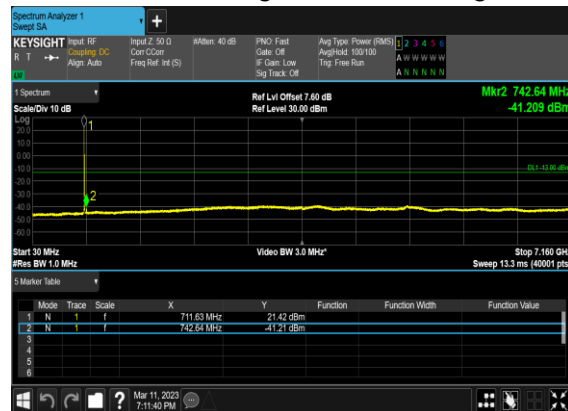


N12(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH




N12(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH




N12(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

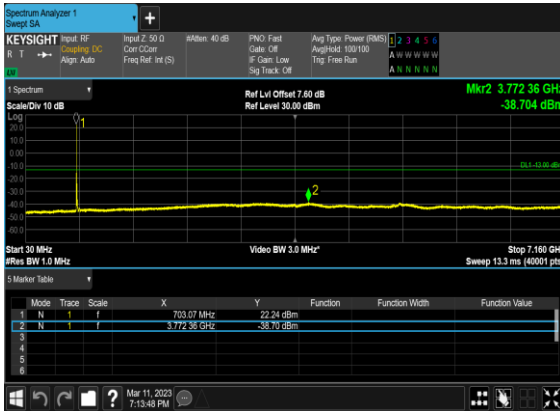


N12(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

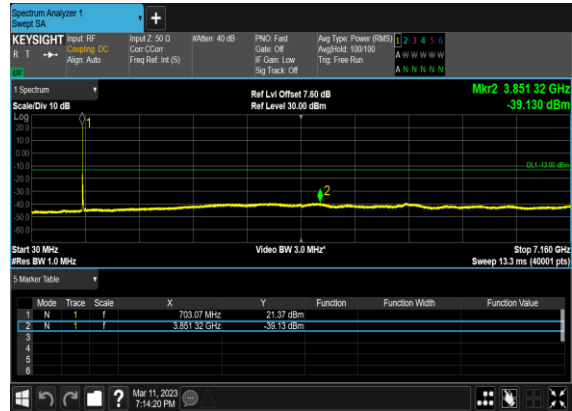


N12(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

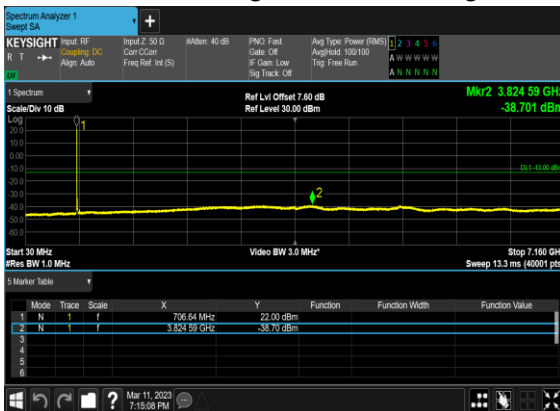

N12(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

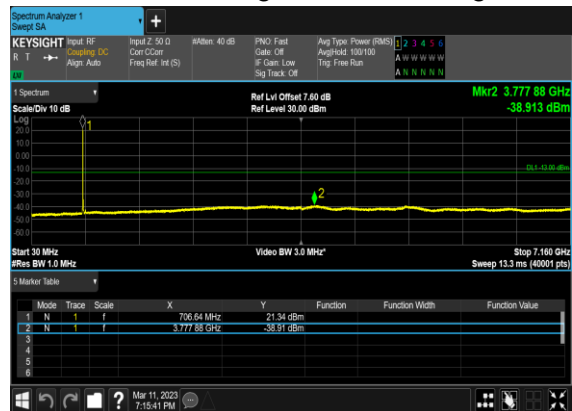


N12(15M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

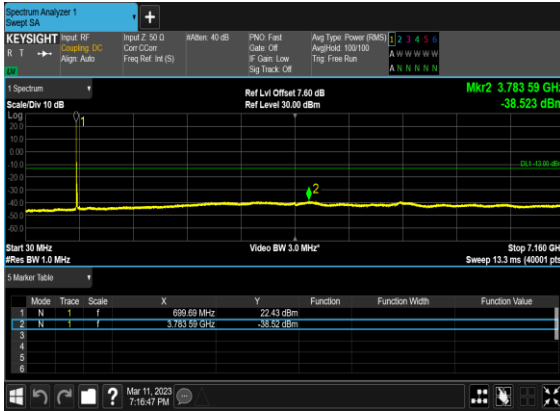


N12(15M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH



N12(15M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

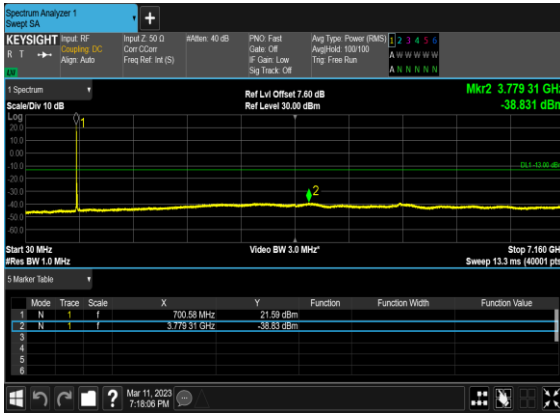


N12(15M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

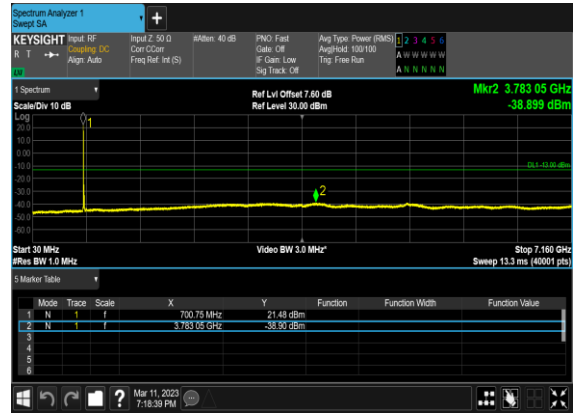

N12(15M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH




N12(15M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

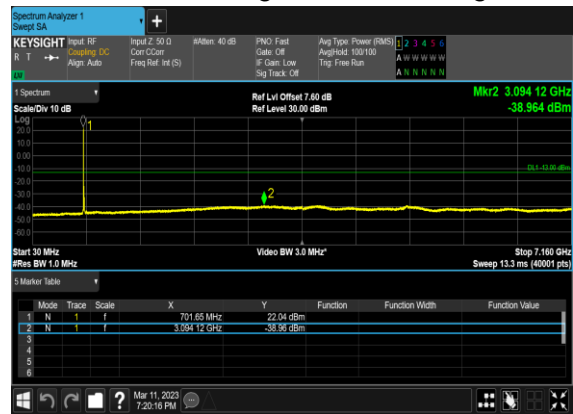


## Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
12	15	5	140300	701.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
12	15	5	140300	701.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
12	15	5	140300	701.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
12	15	5	140300	701.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
12	15	5	142700	713.5	DFT-s-OFDM BPSK	1@24	see graph	PASS
12	15	5	142700	713.5	DFT-s-OFDM QPSK	1@24	see graph	PASS
12	15	5	142700	713.5	DFT-s-OFDM BPSK	25@0	see graph	PASS
12	15	5	142700	713.5	DFT-s-OFDM QPSK	25@0	see graph	PASS
12	15	10	140800	704.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
12	15	10	140800	704.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
12	15	10	140800	704.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
12	15	10	140800	704.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
12	15	10	142200	711.0	DFT-s-OFDM BPSK	1@51	see graph	PASS
12	15	10	142200	711.0	DFT-s-OFDM QPSK	1@51	see graph	PASS
12	15	10	142200	711.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
12	15	10	142200	711.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
12	15	15	141300	706.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
12	15	15	141300	706.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
12	15	15	141300	706.5	DFT-s-OFDM BPSK	75@0	see graph	PASS
12	15	15	141300	706.5	DFT-s-OFDM QPSK	75@0	see graph	PASS
12	15	15	141700	708.5	DFT-s-OFDM BPSK	1@78	see graph	PASS
12	15	15	141700	708.5	DFT-s-OFDM QPSK	1@78	see graph	PASS
12	15	15	141700	708.5	DFT-s-OFDM BPSK	75@0	see graph	PASS
12	15	15	141700	708.5	DFT-s-OFDM QPSK	75@0	see graph	PASS

### N12(5M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

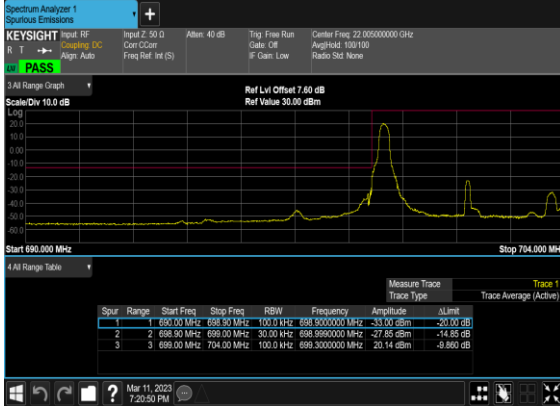


### N12(5M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

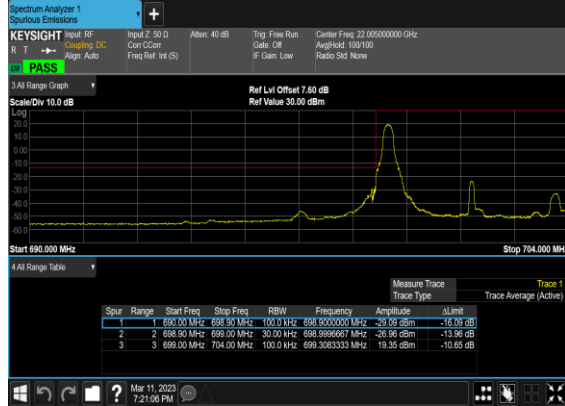


### N12(5M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Low\_CH




### N12(5M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH

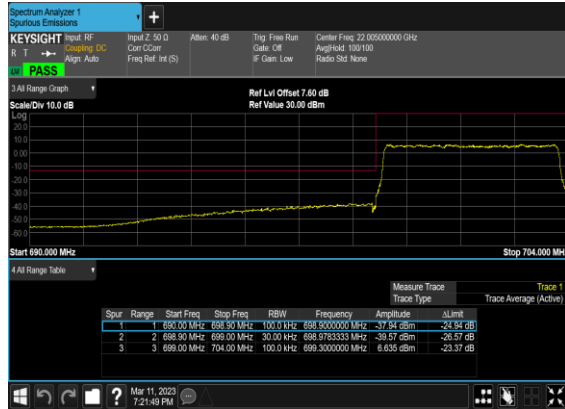

### N12(5M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH

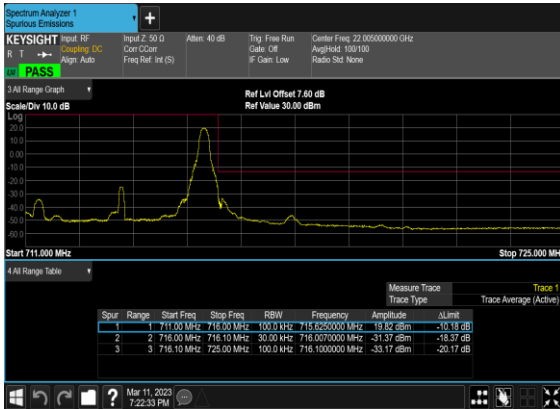


### N12(5M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

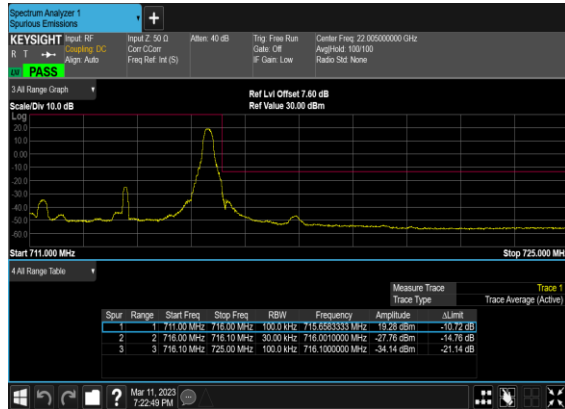


N12(5M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_High\_CH




N12(5M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH

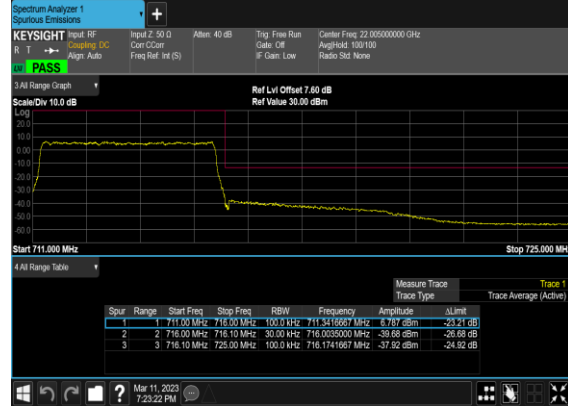


N12(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

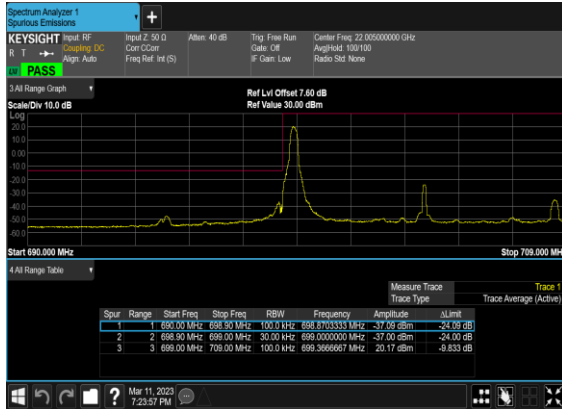


N12(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

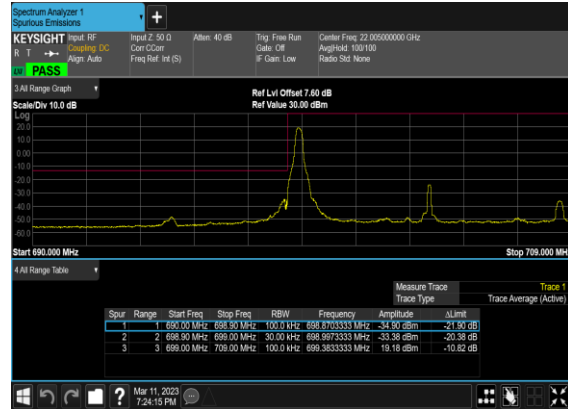


N12(10M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Low\_CH

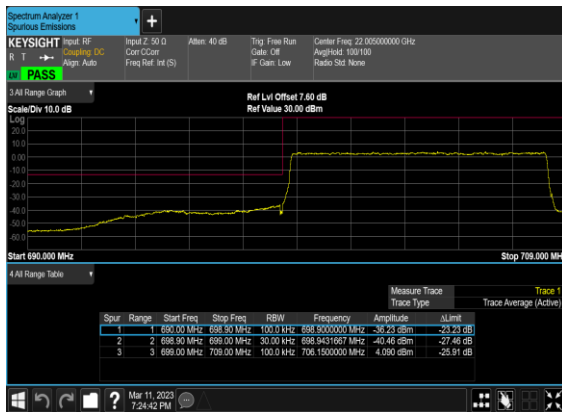

N12(10M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH

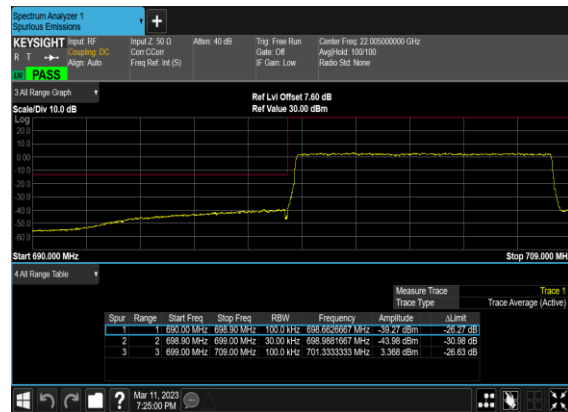


N12(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH

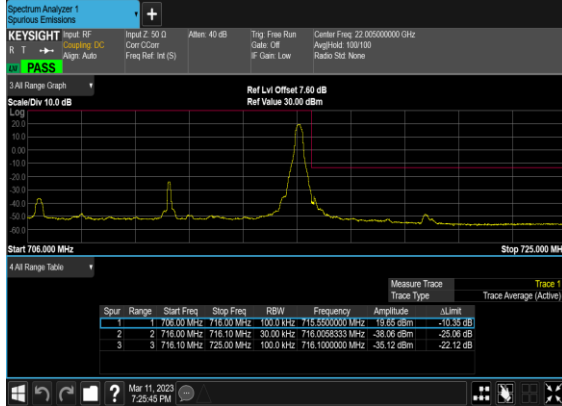

N12(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH




N12(10M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_High\_CH

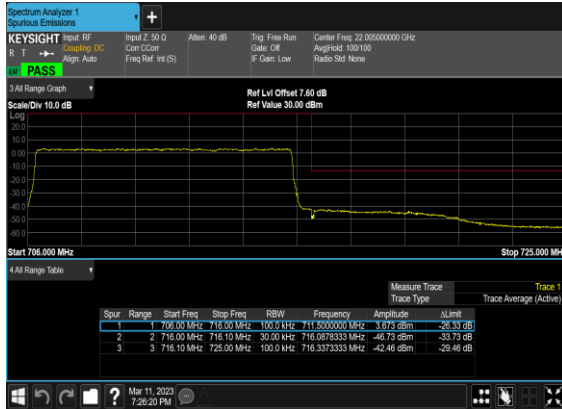

N12(10M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH



N12(15M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

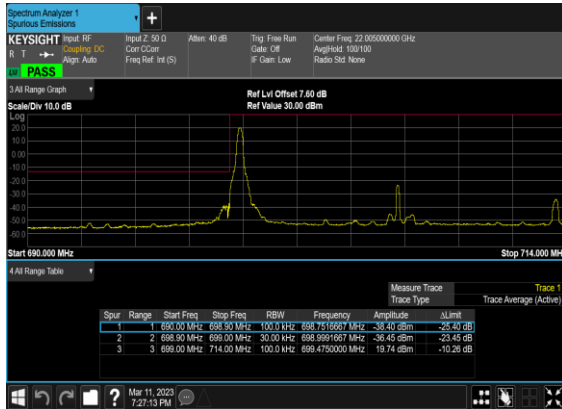

N12(15M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

