



RF - TEST REPORT

- FCC Part 15.247 -

Type / Model Name : Renfert CONNECT stick

Product Description : 802.11b/g/n Wifi Stick

Applicant : Renfert GmbH

Address : Untere Gießwiesen 2

78247 Hilzingen, Germany

Manufacturer : Renfert GmbH

Address : Untere Gießwiesen 2

78247 Hilzingen, Germany

Test Result according to the standards
listed in clause 1 test standards:

POSITIVE

Test Report No. : 80163851-00 Rev_2

26. October 2023

Date of issue



Deutsche
Akkreditierungsstelle
D-PL-12030-01-03
D-PL-12030-01-04

Contents

1	<u>TEST STANDARDS</u>	<u>3</u>
2	<u>EQUIPMENT UNDER TEST</u>	<u>4</u>
2.1	Information provided by the client	4
2.2	Sampling	4
2.3	Photo documentation	4
2.5	Equipment type	4
2.6	Short description of the equipment under test (EUT)	4
2.7	Variants of the EUT	4
2.8	Operation frequency and channel plan	4
2.9	Transmit operating modes	5
2.10	Antenna	5
2.11	Power supply system utilised	5
2.12	Peripheral devices and interface cables	5
2.13	Determination of worst-case conditions for final measurement	5
3	<u>TEST RESULT SUMMARY</u>	<u>7</u>
3.1	Revision history of test report	7
3.2	Final assessment	7
4	<u>TEST ENVIRONMENT</u>	<u>8</u>
4.1	Address of the test laboratory	8
4.2	Environmental conditions	8
4.3	Statement of the measurement uncertainty	8
4.4	Conformity Decision Rule	9
4.5	Measurement protocol for FCC and ISED	9
5	<u>TEST CONDITIONS AND RESULTS</u>	<u>12</u>
5.1	AC power line conducted emissions	12
5.2	DTS Bandwidth	16
5.3	Maximum peak conducted output power	20
5.4	Power spectral density	22
5.5	Unwanted emissions, radiated	27
5.6	Antenna application	38
6	<u>USED TEST EQUIPMENT AND ACCESSORIES</u>	<u>39</u>

ATTACHMENT A as separate supplement

ATTACHMENT B as separate supplement

2 EQUIPMENT UNDER TEST

2.1 Information provided by the client

Please note, we do not take any responsibility for information provided by the client or his representative which may have an influence on the validity of the test results.

2.2 Sampling

The customer is responsible for the choice of sample. Sample configuration, start-up and operation is carried out by the customer or according to his/her instructions.

2.3 Photo documentation

For detailed photos of the EUT refer to ATTACHMENT A.

For detailed photos of the respective test setup refer to ATTACHMENT B.

2.4 General remarks

FCC ID: 2A5CG-01

2.5 Equipment type

WLAN - Client

2.6 Short description of the equipment under test (EUT)

The EUT is a Wifi Stick to connect a dental equipment from Renfert, which is labeled "App-Ready", with a local Wifi, to make the device accessible by the Renfert CONNECT App. For this purpose the EUT will be plugged into a specific interface of the dental equipment.

Number of tested samples: 1
Serial number: B1
Firmware version: 03

2.7 Variants of the EUT

There are no variants.

2.8 Operation frequency and channel plan

The operating frequency is 2400 MHz to 2483.5 MHz.

Channel plan WLAN Standard 802.11b, g, n HT 20

Channel	Frequency (MHz)
1	2412
2	2417
3	2422
4	2427
5	2432
6	2437
7	2442
8	2447
9	2452
10	2457
11	2462

2.9 Transmit operating modes

The EUT use DSSS or OFDM modulation and provide following data rates with auto-fall-back:

- 802.11b 11, 5.5, 2, 1 Mbps (Mbps = megabits per second)
- 802.11g 54, 48, 36, 24, 18, 12, 9, 6 Mbps
- 802.11n, HT20 MCS 0 - 7

2.10 Antenna

Brand	Antenna Type	Model	2.4 GHz Gain
Ethertronics	Chip	M830520	1.1 dBi

2.11 Power supply system utilised

Power supply voltage, V_{nom} : 3.3 V DC

2.12 Peripheral devices and interface cables

The following peripheral devices and interface cables are connected during the measurements:

- Laptop Model : CSA 02-01/01-11-006
- Laptop Power Supply Model : FUJITSU ADP-80NB A
- FTDI Debug Adapter Model : DELOCK 65370 USB 3.0-A Buchse

2.13 Determination of worst-case conditions for final measurement

Preliminary tests in all three orthogonal axes are performed to find the worst case mode from all possible combinations between available modulations and data rates. the settings of the EUT are changed to locate at which position and at what setting of the EUT the maximum of the emissions is generated.

For the final test the following channels and test modes are selected:

WLAN	Available channel	Tested channels	Power setting	Modulation	Data rate
802.11b	1 to 11	1, 6, 11	P15	DSSS	1 Mbps
802.11n HT20	1 to 11	1, 6, 11	P15	OFDM	MCS0

2.13.1 Test jig

No test jig is used.

2.13.2 Test software

Special test software is used.

CC31XX/CC32XX Radio Tool v1.0.3.11

Radio Tool

Target Device: CC3220 UART

Connection Status: **Connected**

Testing Status: **Tx Running**

Details

Chip ID: 0x18 (CC3235S)

ROM Ver.: 0x2222

FW Ver.: 4.3.0.5, 31.3.1.0.5, 3.1.0.18

Host Driver Ver.: 3.0.1.54

MAC Addr.: W R 6C:30:2A:18:52:95

CC32xx App Ver.: 0.17

Radio Tool Library Version

CC31XX SPI: 1.0.3.11

CC31XX UART: 1.0.3.11

CC32XX UART: 1.0.3.11

Set Up TX RX Current

Transmission Mode

☐ Packetized ☒ Continuous ☐ Carrier Wave (CW)

Stop Tx Testing

TX Configuration

Channel: 11 (2462MHz) Destination MAC Address: 01:23:45:67:89:AB

Rate: 1 Mbps (DSSS) Amount: 0 packets (0 for infinite)

Data Pattern: All 0 Size: 100 Bytes Tone: 0

802.11b Preamble: Long Delay: 100 mSec Power (0-15): 15

CCA Threshold: -68dBm (DEFAULT) Country: US ☐ Override CCA

Description

Place your cursor on any field to see details

Clear Log Export Log Copy to Clipboard Online Tool Guide About

Size=100, Amount=0, Pattern=ALL_0_PATTERN, CCA=0, CCA_T=SL_TX_INHIBIT_THRESHOLD_DEFAULT Dest=01:23:45:67:89:AB, Country=US

[22.05.2023 13:33:44] Tx Stopping...

[22.05.2023 13:33:44] Tx Testing Finished

[22.05.2023 13:33:47] TX Started, Mode=Continuous, CH=CHANNEL_11, FW=15, Rate=RATE_1M, Preamble=LONG_PREAMBLE_MODE, Size=100, Amount=0, Pattern=ALL_0_PATTERN, CCA=0, CCA_T=SL_TX_INHIBIT_THRESHOLD_DEFAULT Dest=01:23:45:67:89:AB, Country=US

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

3 TEST RESULT SUMMARY

FCC Rule Part	Description	Result
15.207(a)	AC power line conducted emissions	Passed
15.247(a)(2)	-6 dB EBW	Passed
15.247(b)(3)	Maximum peak conducted output power	Passed
15.247(b)(4)	Defacto limit	Passed
15.247(d)	Unwanted emission, radiated	Passed
15.247(d)	Emissions in restricted bands	Passed
15.247(e)	PSD	Passed
15.35(c)	Pulsed operation	Passed
15.203	Antenna requirement	Passed

3.1 Revision history of test report

Test report No	Rev.	Issue Date	Changes
80163851-00	0	15 June 2023	Initial test report
80163851-00	1	26 September 2023	Updated 5.2, 5.3, 5.4 to include 802.11g-Mode
80163851-00	2	26 October 2023	Updated 5.3 Radiated Power

The test report with the highest revision number replaces the previous test reports.

3.2 Final assessment

The equipment under test fulfills the requirements cited in clause 1 test standards.

Date of receipt of test sample : acc. to storage records

Testing commenced on : 22 May 2023

Testing concluded on : 25 May 2023

Checked by:

Tested by:

Klaus Gegenfurtner
Teamleader Radio

Lukas Scheuermann
Radio Team

4 TEST ENVIRONMENT

4.1 Address of the test laboratory

**CSA Group Bayern GmbH
Ohmstrasse 1-4
94342 STRASSKIRCHEN
GERMANY**

4.2 Environmental conditions

During the measurement the environmental conditions were within the listed ranges:

Temperature: 15 - 35 °C

Humidity: 30 - 60 %

Atmospheric pressure: 86 - 106 kPa

4.3 Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. It is noted that the expanded measurement uncertainty corresponds to the measurement results from the standard measurement uncertainty multiplied by the coverage factor $k = 2$. The true value is located in the corresponding interval with a probability of 95 %. The measurement uncertainty was calculated for all measurements listed in this test report on basis of the ETSI Technical Report TR 100 028 Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics; Part 1 and Part 2. The results are documented in the quality system acc. to DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

Measurement Type	Range	Confidence Level	Calculated Uncertainty
AC power line conducted emissions	0.15 MHz to 30 MHz	95%	± 3.29 dB
EBW and OBW	2400 MHz to 3000 MHz	95%	$\pm 2.5 \times 10^{-7}$
Maximum peak conducted output power	2400 MHz to 3000 MHz	95%	± 0.62 dB
Power spectral density	2400 MHz to 3000 MHz	95%	± 0.62 dB
Conducted Spurious Emissions	9 kHz to 10000 MHz	95%	± 2.15 dB
Conducted Spurious Emissions	10000 MHz to 40000 MHz	95%	± 3.47 dB
Radiated Spurious Emissions	9 kHz to 30 MHz	95%	± 3.53 dB
Radiated Spurious Emissions	30 MHz to 1000 MHz	95%	± 3.71 dB
Radiated Spurious Emissions	1000 MHz to 10000 MHz	95%	± 2.34 dB
Field strength of the fundamental	100 kHz to 100 MHz	95%	± 3.53 dB

4.4 Conformity Decision Rule

The applied conformity decision rule is based on ILAC G8:09/2019 clause 4.2.1 Binary Statement for Simple Acceptance Rule ($w = 0$).

Details can be found in the procedure CSA_B_V50_29.

4.5 Measurement protocol for FCC and ISED

4.5.1 General information

CSA Group Bayern GmbH is recognized as wireless testing laboratory under the CAB identifier:

FCC: DE 0011
ISED: DE0009

4.5.2 General Standard information

The test methods used comply with ANSI C63.10 - "Testing Unlicensed Wireless Devices".


4.5.2.1 Justification

The equipment under test (EUT) is configured in a typical user arrangement in accordance with the manufacturer's instructions.

4.5.3 Details of test procedures

4.5.3.1 Conducted emission

Test setup according ANSI C63.10

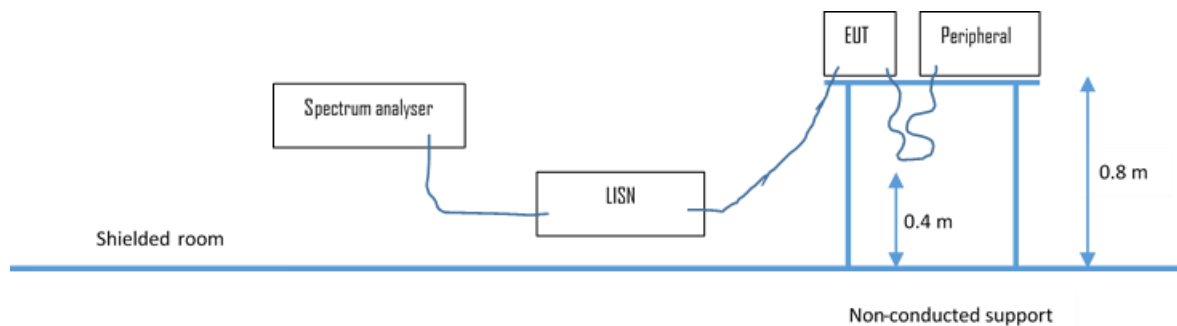

The final level, expressed in dB μ V, is arrived at by taking the reading directly from the Spectrum analyser. This level is compared to the limit.

To convert between dB μ V and μ V, the following conversions apply:


$$\text{dB}\mu\text{V} = 20(\log \mu\text{V})$$

$$\mu\text{V} = \text{Inverse log}(\text{dB}\mu\text{V}/20)$$

Conducted emissions on the 50 Hz and/or 60 Hz power interface of the EUT are measured in the frequency range of 150 kHz to 30 MHz. The measurements are performed using a receiver, which has CISPR characteristic bandwidth and quasi-peak detection and a Line Impedance Stabilization Network (LISN) with 50 Ω / 50 μ H (CISPR 16) characteristics. The receiver is protected by means of an impedance matched pulse limiter connected directly to the RF input. Table top equipment is placed on a non-conducting table 80 centimetres above the floor and is positioned 40 centimetres from the vertical ground plane (wall) of the screen room. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emission is re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.


4.5.3.2 Radiated emission

4.5.3.3 OATS1 test site (9 kHz - 30 MHz):
Test setup according ANSI C63.10

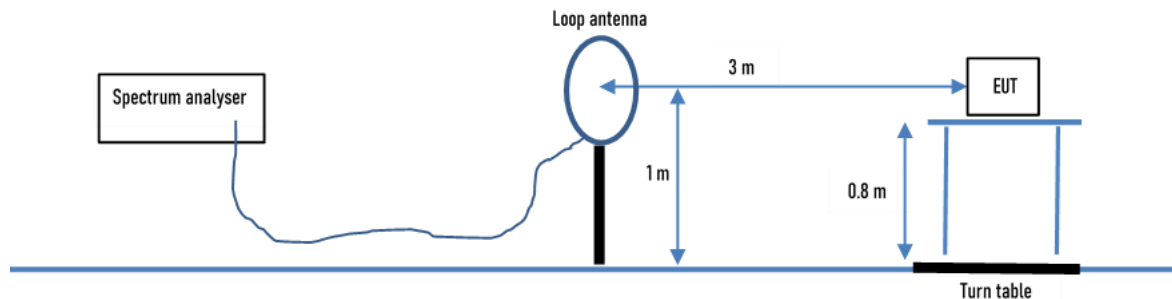

Emissions from the EUT are measured in the frequency range of 9 MHz to 30 MHz using a tuned receiver and a calibrated loop antenna. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. The antenna is positioned 3, 10 or 30 metres horizontally from the EUT and is repeated vertically. To locate maximum emissions from the test sample the antenna is varied along the site axis and the EUT is rotated 360 degrees.

4.5.3.4 OATS1 test site (30 MHz - 1 GHz):
Test setup according ANSI C63.10.

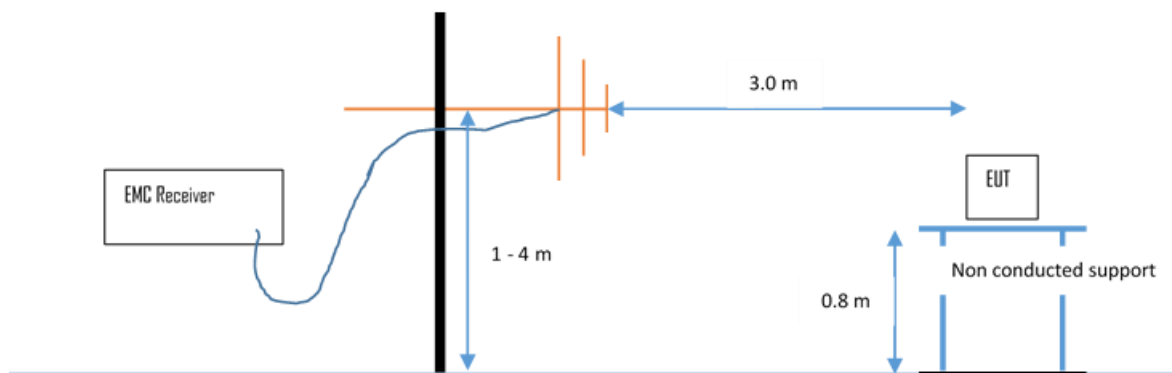

Spurious emissions from the EUT are measured in the frequency range of 30 MHz to 1000 MHz using a tuned receiver and appropriate broadband linearly polarised antennas. Measurements between 30 MHz and 1000 MHz are made with 120 kHz/6 dB bandwidth and quasi-peak detection. Table top equipment is placed on a 1.0 X 1.5 m non-conducting table 80 centimetres above the ground plane. Floor standing equipment is placed directly on the turntable/ground plane. Cables to simulators/testers (if used in this test) are routed through the center of the table and to a screened room located outside the test area. To locate maximum emissions from the test sample the antenna is varied in height from 1 to 4 metres and the EUT is rotated 360 degrees. The final level in dB μ V/m is calculated by taking the reading from the EMI receiver (Level dB μ V) and adding the correction factors and cable loss factor (dB). The FCC limit is subtracted from this result in order to provide the limit margin listed in the measurement protocol.

The resolution bandwidth setting:


30 MHz – 1000 MHz: RBW: 120 kHz

Example:

Frequency (MHz)	Level (dB μ V)	+	Factor (dB)	=	Level (dB μ V/m)	-	Limit (dB μ V/m)	=	Delta (dB)
719.0	75.0	+	32.6	=	107.6	-	110.0	=	-2.4


4.5.3.4.1 Anechoic chamber 1 (1000 MHz – 18000 MHz)

Test setup according ANSI C63.10.

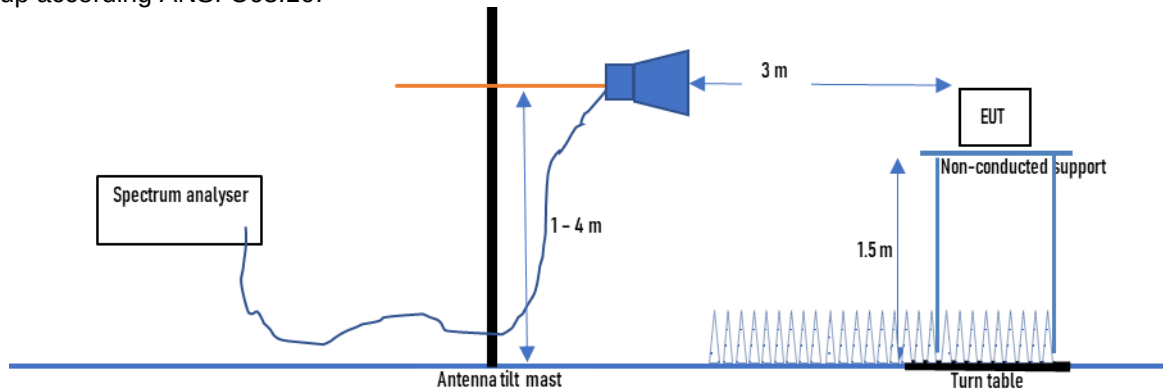

Radiated emissions from the EUT are measured in the frequency range 1 GHz up to 18 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Table top equipment is placed on a non-conducting table, 1.5 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the center, forming a bundle 30 cm to 40 cm long. Measurements are made in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements.

4.5.3.5 Anechoic chamber 1 (18 GHz – 40 GHz)

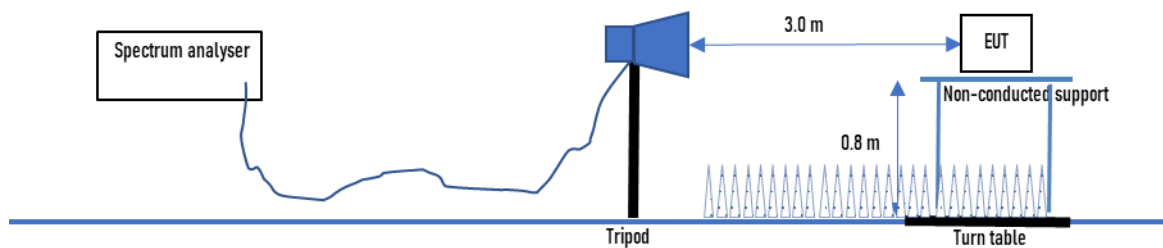

Emissions from the EUT are measured in the frequency range 18 GHz up to 40 GHz as specified in 47 CFR Part 15, Subpart A, Section 15.33, using a spectrum analyser and appropriate linearly polarized antennas. Table top equipment is placed on a non-conducting table, 0.8 metre above the ground plane. The turntable is fully covered with the appropriate absorber (Type VHP-12). Any controlling device is positioned such that it does not significantly influence the measurement results. Interconnecting cables that hang closer than 40 cm to the ground plane are folded back and forth in the center, forming a bundle 30 cm to 40 cm long. Measurements are made in three orientations of the EUT and the horizontal and vertical polarization planes of measurement antenna in a fully anechoic room. The measurement antenna is adjusted and the EUT orientated to permit the measurement of the maximum emission from the EUT. The conditions determined as worst-case will then be used for the final measurements. Where appropriate, the test distance may be reduced in order to detect emissions under better uncertainty. The limit are adopted.

5 TEST CONDITIONS AND RESULTS

5.1 AC power line conducted emissions

For test instruments and accessories used see section 6 Part A 4.

5.1.1 Description of the test location

Test location: Shielded Room S2

5.1.2 Applicable standard

According to FCC Part 15, Section 15.207(a):

Except as shown in paragraphs (b) and (c) of this Section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the given limits.

5.1.3 Description of Measurement

The measurements are performed following the procedures set out in ANSI C63.10 described under item 4.4.3. If the minimum limit margin appears to be less than 20 dB with a peak mode measurement, the emissions are re-measured using a tuned receiver with quasi-peak and average detection and recorded on the data sheets.

5.1.4 Test result

Frequency range: 0.15 MHz - 30 MHz

Min. limit margin -12.15 dB at 0.1815 MHz

Limit according to FCC Part 15, Section 15.207(a):


Frequency of Emission (MHz)	Conducted Limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56 *	56 to 46 *
0.5-5	56	46
5-30	60	50

* Decreases with the logarithm of the frequency

The requirements are **FULFILLED**.


Remarks: For detailed test result please refer to following test protocols

5.1.5 Test protocol

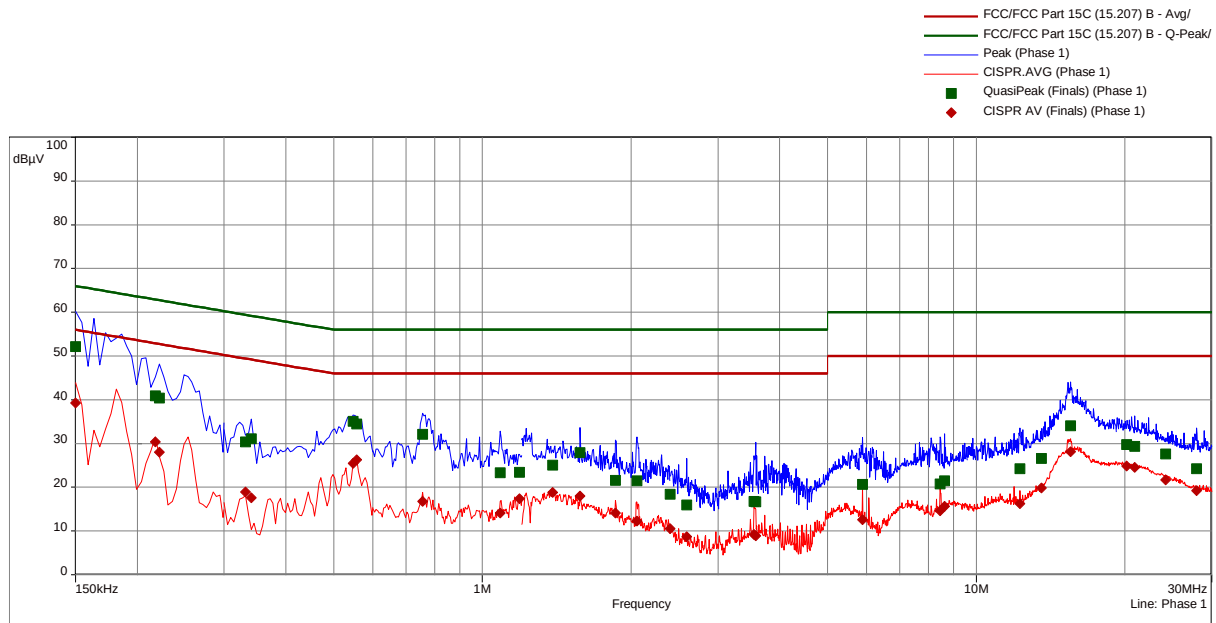

freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB		dB
0.15	1	52.2	-13.8	66	39.25	-16.75	56	Phase 1	10.08
0.2175	1	40.95	-21.97	62.9	30.41	-22.5	52.9	Phase 1	10.10
0.222	1	40.42	-22.33	62.7	27.98	-24.76	52.7	Phase 1	10.11
0.3315	2	30.36	-29.06	59.4	18.92	-30.49	49.4	Phase 1	10.14
0.3405	2	31.08	-28.11	59.2	17.55	-31.64	49.2	Phase 1	10.14
0.5475	2	35.06	-20.94	56	25.5	-20.5	46	Phase 1	10.17
0.5565	2	34.42	-21.58	56	26.33	-19.67	46	Phase 1	10.17
0.7575	3	32.11	-23.89	56	16.79	-29.21	46	Phase 1	10.19
1.086	3	23.33	-32.67	56	14.14	-31.86	46	Phase 1	10.19
1.1895	3	23.41	-32.59	56	17.42	-28.58	46	Phase 1	10.21
1.389	4	25.08	-30.92	56	18.8	-27.2	46	Phase 1	10.23
1.578	4	27.92	-28.08	56	18.03	-27.97	46	Phase 1	10.25
1.8615	4	21.56	-34.44	56	14.08	-31.92	46	Phase 1	10.25
2.055	4	21.51	-34.49	56	12.28	-33.72	46	Phase 1	10.25
2.4	5	18.45	-37.55	56	10.59	-35.41	46	Phase 1	10.29
2.5935	5	15.98	-40.02	56	8.7	-37.3	46	Phase 1	10.30
3.5475	5	16.74	-39.26	56	9.19	-36.81	46	Phase 1	10.32
3.5745	5	16.69	-39.31	56	8.92	-37.08	46	Phase 1	10.33
5.8845	6	20.63	-39.37	60	12.59	-37.41	50	Phase 1	10.47
8.4585	6	20.73	-39.27	60	14.64	-35.36	50	Phase 1	10.55
8.634	6	21.5	-38.5	60	15.69	-34.31	50	Phase 1	10.55

12.26	7	24.2	-35.8	60	16.23	-33.77	50	Phase 1	10.75
13.56	7	26.56	-33.44	60	19.89	-30.11	50	Phase 1	10.82
15.527	7	34.08	-25.92	60	28.11	-21.89	50	Phase 1	10.85
20.168	8	29.79	-30.21	60	24.86	-25.14	50	Phase 1	10.95
20.928	8	29.32	-30.68	60	24.53	-25.47	50	Phase 1	10.97
24.164	8	27.66	-32.34	60	21.73	-28.27	50	Phase 1	11.03
27.921	8	24.25	-35.75	60	19.26	-30.74	50	Phase 1	10.91

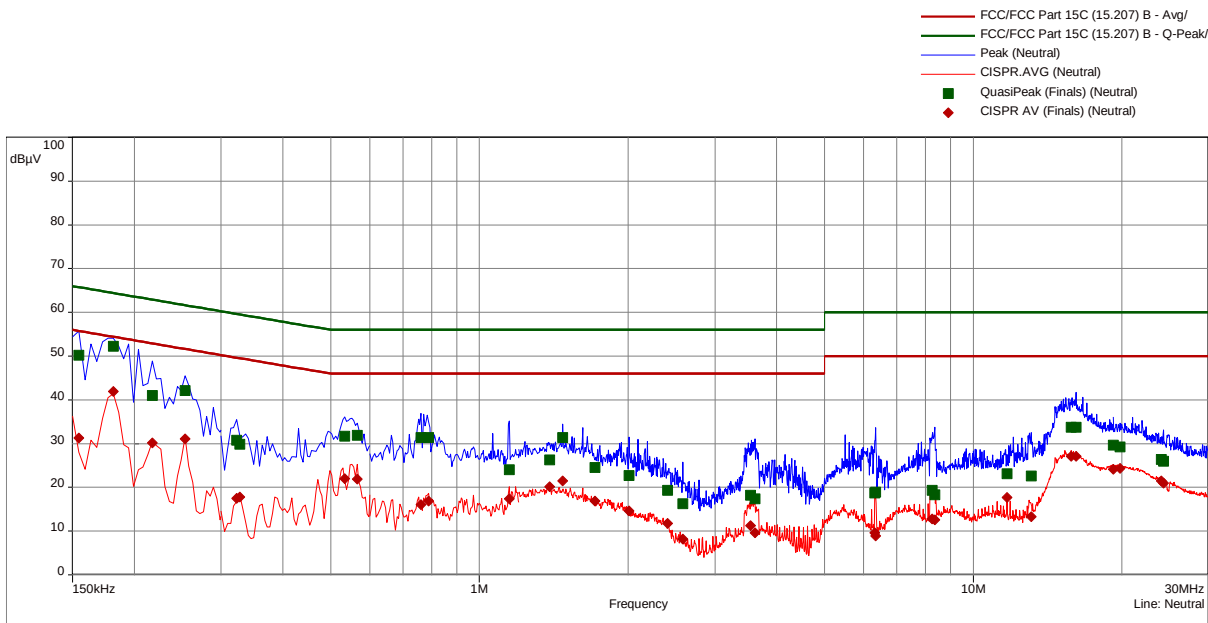

FCC/FCC Part 15C (15.207)B

freq	SR	QP	margin	limit	AV	margin	limit	line	corr
MHz		dB(μV)	dB	dB	dB(μV)	dB	dB		dB
0.1545	9	50.22	-15.53	65.8	31.27	-24.49	55.8	Neutral	10.14
0.1815	9	52.26	-12.15	64.4	41.89	-12.52	54.4	Neutral	10.14
0.2175	9	41	-21.91	62.9	30.21	-22.71	52.9	Neutral	10.15
0.2535	9	42.15	-19.49	61.6	31.09	-20.55	51.6	Neutral	10.16
0.3225	10	30.81	-28.83	59.6	17.51	-32.13	49.6	Neutral	10.17
0.327	10	29.91	-29.62	59.5	17.79	-31.74	49.5	Neutral	10.17
0.534	10	31.75	-24.25	56	21.98	-24.02	46	Neutral	10.17
0.5655	10	31.91	-24.09	56	21.91	-24.09	46	Neutral	10.17
0.762	11	31.37	-24.63	56	16.09	-29.91	46	Neutral	10.20
0.789	11	31.42	-24.58	56	16.84	-29.16	46	Neutral	10.21
1.149	11	24.05	-31.95	56	17.37	-28.63	46	Neutral	10.25
1.389	12	26.33	-29.67	56	20.14	-25.86	46	Neutral	10.28
1.4745	12	31.37	-24.63	56	21.48	-24.52	46	Neutral	10.28
1.713	12	24.51	-31.49	56	16.88	-29.12	46	Neutral	10.29
2.01	12	22.66	-33.34	56	14.62	-31.38	46	Neutral	10.28

2.4045	13	19.31	-36.69	56	11.75	-34.25	46	Neutral	10.31
2.58	13	16.27	-39.73	56	8.23	-37.77	46	Neutral	10.32
3.5385	13	18.24	-37.76	56	11.3	-34.7	46	Neutral	10.34
3.615	13	17.36	-38.64	56	9.58	-36.42	46	Neutral	10.35
6.3255	14	18.75	-41.25	60	9.62	-40.38	50	Neutral	10.52
6.339	14	18.9	-41.1	60	8.92	-41.08	50	Neutral	10.52
8.2605	14	19.38	-40.62	60	12.76	-37.24	50	Neutral	10.58
8.3595	14	18.3	-41.7	60	12.55	-37.45	50	Neutral	10.58
11.697	15	23.1	-36.9	60	17.74	-32.26	50	Neutral	10.72
13.101	15	22.56	-37.44	60	13.32	-36.68	50	Neutral	10.83
15.801	15	33.74	-26.26	60	27.15	-22.85	50	Neutral	10.90
16.152	15	33.74	-26.26	60	27.13	-22.87	50	Neutral	10.91
19.232	16	29.7	-30.3	60	24.12	-25.88	50	Neutral	11.02
19.826	16	29.26	-30.74	60	24.3	-25.7	50	Neutral	11.06
24.056	16	26.36	-33.64	60	21.48	-28.52	50	Neutral	10.98
24.281	16	25.97	-34.03	60	20.96	-29.04	50	Neutral	10.97

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

5.2 DTS Bandwidth

For test instruments and accessories used see section 6 Part **CPC 3**.

5.2.1 Description of the test location

Test location: Shielded Room S6

5.2.2 Applicable standard

According to FCC Part 15, Section 15.247(a)(2):

Systems using digital modulation techniques may operate in the 902 - 928 MHz, 2400 – 2483.5 MHz and 5725 – 5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

5.2.3 Description of Measurement

The bandwidth was measured at an amplitude level reduced from the reference level of a modulated channel by a ratio of -6 dB. The reference level is the level of the highest signal amplitude observed at the transmitter at either the fundamental frequency or the first order modulation products in all typical modes of operation, including the unmodulated carrier, even if atypical. An alternative is to use the bandwidth measurement of the analyser.

Spectrum analyser settings for DTS BW:

RBW: 100 kHz, VBW: 300 kHz, Detector: Max peak, Sweep time: 5 s, Span: 2 EBW;

5.2.4 Test result


FCC §15.247 (a)(2) RSS-247 5.2 (a)				
Modulation	Channel	Frequency	DTS-BW	min. Limit
		MHz	MHz	MHz
802.11b, 1 Mbps	CH1	2412	9.99	0.5
	CH6	2437	9.98	0.5
	CH11	2462	10.03	0.5
802.11g, 6 Mbps	CH1	2412	15.15	0.5
	CH6	2437	15.16	0.5
	CH11	2462	15.14	0.5
802.11n, HT20, MCS0	CH1	2412	15.15	0.5
	CH6	2437	15.13	0.5
	CH11	2462	15.15	0.5

The requirements are **FULFILLED**.


Remarks: For detailed test results please refer to following test protocols.

5.2.5 Test protocols EBW


802.11b, Channel 1 (2412 MHz)

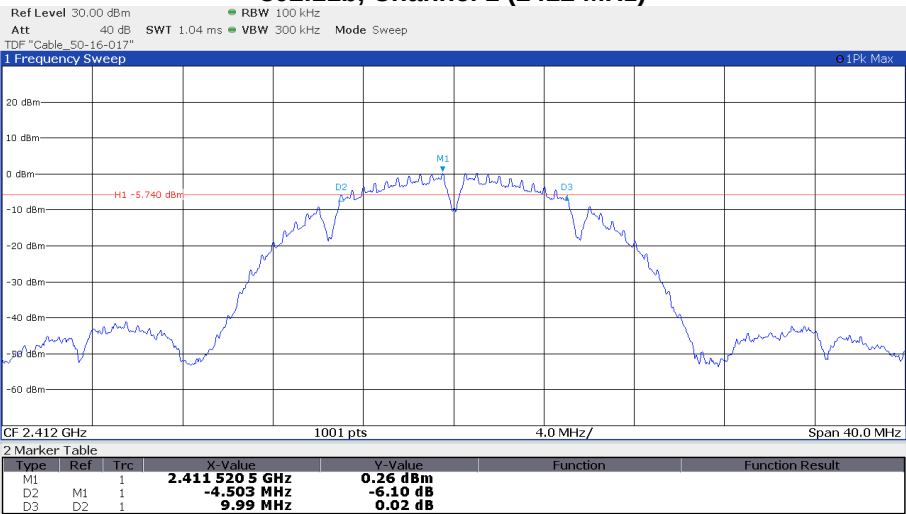

802.11b, Channel 6 (2437 MHz)

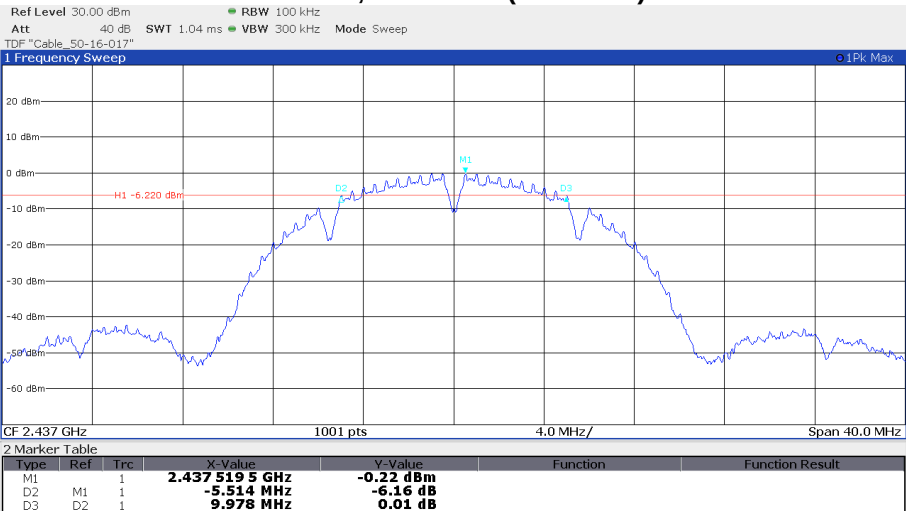


802.11b, Channel 11 (2462 MHz)

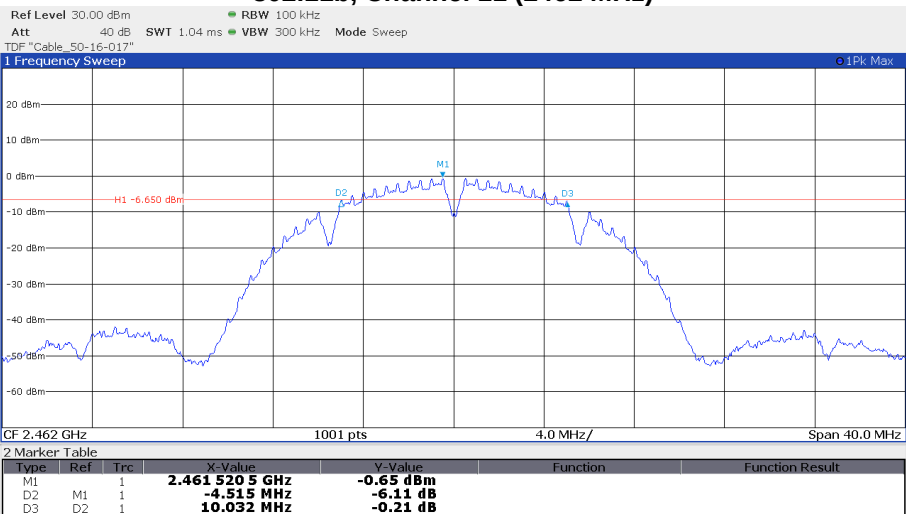


802.11g, Channel 1 (2412 MHz)




802.11g, Channel 6 (2437 MHz)

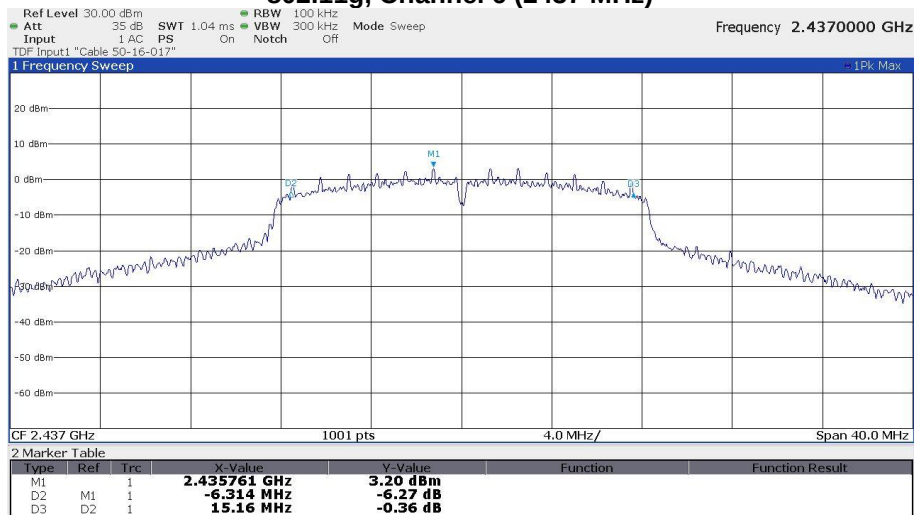


802.11g, Channel 11 (2462 MHz)

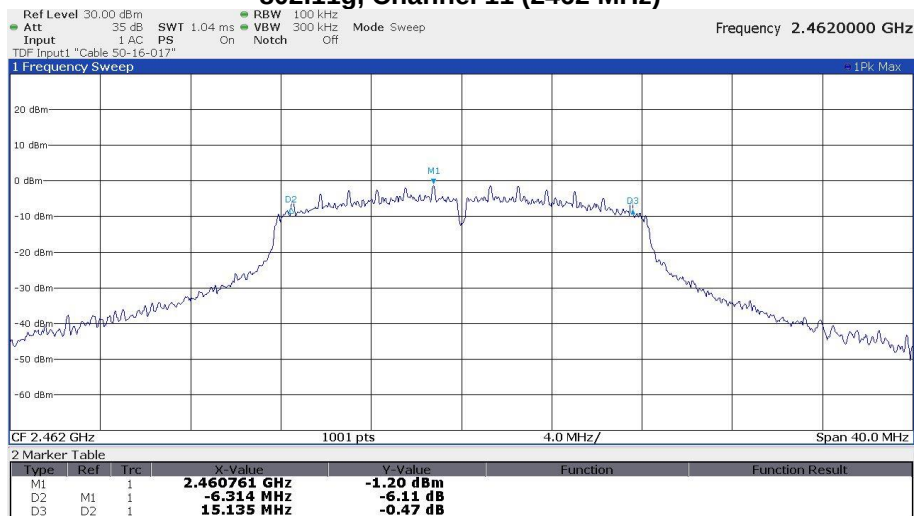


802.11n, Channel 1 (2412 MHz)

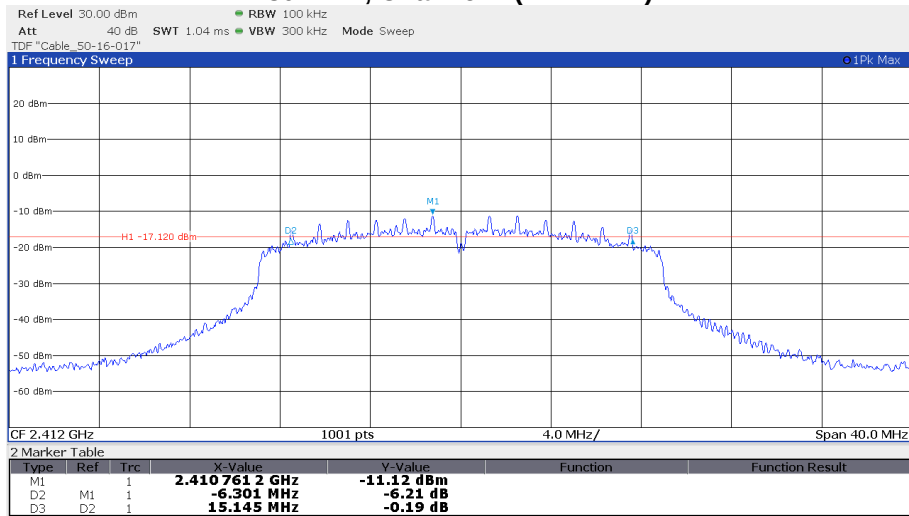

802.11n, Channel 6 (2437 MHz)

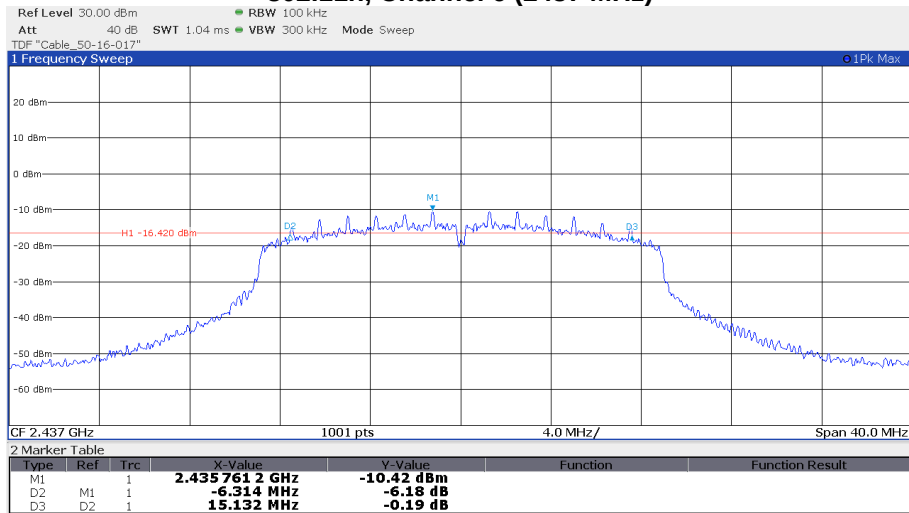

802.11n, Channel 11 (2462 MHz)

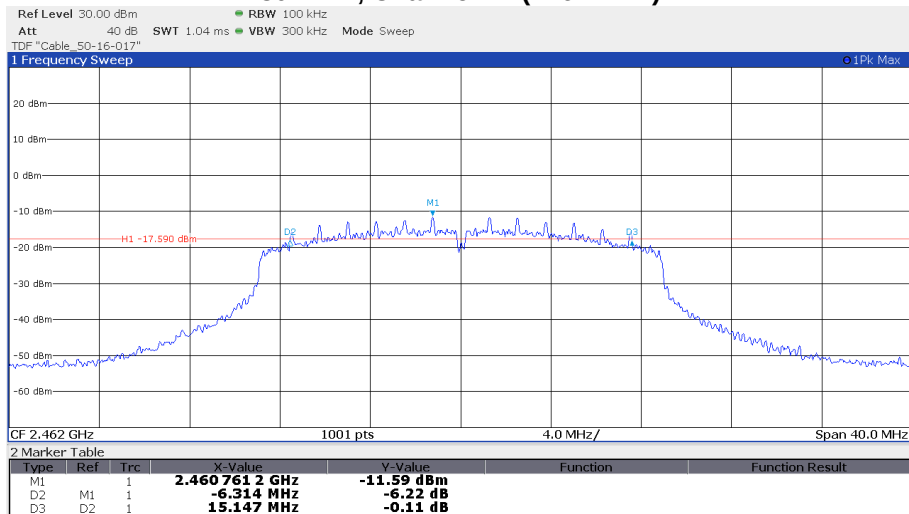

5.3 Maximum peak conducted output power

For test instruments and accessories used see section 6 Part **CPC 3**.

5.3.1 Description of the test location

Test location: Shielded Room S6

5.3.2 Applicable standard

According to FCC Part 15, Section 15.247(b)(3):

For systems using digital modulation in the 2400 – 2483.5 MHz the maximum peak output power of the transmitter shall not exceed 1 Watt. The limit is based on transmitting antennas of directional gain that do not exceed 6 dBi.

5.3.3 Description of Measurement

The maximum peak conducted output power is measured using a spectrum analyser following the procedure set out in ANSI C63.10, item 11.9.1.1. The EUT is set in TX continuous mode while measuring.

5.3.4 Test result

Radiated Measurement						
FCC §15.247 (b)(3 & 4)						
Modulation	Channel	Frequency	Measured fieldstrength	Calculated EIRP	EIRP Limit	Margin
		MHz	dB(μV/m)	dBm	dBm	dB
802.11b, 1 Mbps	CH1	2412	110.10	14.9	36	-21.1
	CH6	2437	110.48	15.3	36	-20.7
	CH11	2462	111.99	16.8	36	-19.2
802.11n, HT20, MCS0	CH1	2412	113.73	18.5	36	-17.5
	CH6	2437	113.04	17.8	36	-18.2
	CH11	2462	113.92	18.7	36	-17.3

Conducted Measurement					
FCC §15.247 (b)(3) RSS-247 5.4 (d)					
Modulation	Channel	Frequency	Measured Conducted TX Power	Conducted Tx-Power Limit	Margin
		MHz	dBm	dBm	dB
802.11b, 1 Mbps	CH1	2412	15.4	30.0	-14.6
	CH6	2437	15.3	30.0	-14.7
	CH11	2462	15.6	30.0	-14.4
802.11g, 6 Mbps	CH1	2412	18.8	30.0	-11.2
	CH6	2437	19.6	30.0	-10.4
	CH11	2462	18.7	30.0	-11.3
802.11n, HT20, MCS0	CH1	2412	18.9	30.0	-11.1
	CH6	2437	19.3	30.0	-10.7
	CH11	2462	18.7	30.0	-11.4

Peak Power Limit according to FCC Part 15, Section 15.247(b)(3):

Frequency (MHz)	Peak Power Limit	
	(dBm)	(Watt)
902-928	30	1.0
2400-2483.5	30	1.0
5725-5850	30	1.0

The requirements are **FULFILLED**.

Remarks:

None.

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

5.4 Power spectral density

For test instruments and accessories used see section 6 Part **CPC 3**.

5.4.1 Description of the test location

Test location: Shielded Room S6

5.4.2 Applicable standard

According to FCC Part 15, Section 15.247(e):

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

5.4.3 Description of Measurement

The measurement is performed using the procedure set out in ANSI C63.10, item 11.10.21. The power measurement was done as peak power measurement. Therefore, the PKPSD is measured. The max peak was located and with the spectrum analyser and a marker set to peak.

Spectrum analyser settings:

RBW: 3 kHz, VBW: 10 kHz, Detector: Peak, Sweep time: 10 s,

5.4.4 Test result

Conducted Measurement					
FCC §15.247 (e) RSS-247 5.2 (b)					
Modulation	Channel	Frequency	Measured Conducted PSD	Conducted PSD Limit	Margin
		MHz	dBm/3kHz	dBm/3kHz	dB
802.11b, 1 Mbps	CH1	2412	-12.0	8.0	-20.0
	CH6	2437	-11.8	8.0	-19.8
	CH11	2462	-11.5	8.0	-19.5
802.11g, 6 Mbps	CH1	2412	-16.5	8.0	-24.5
	CH6	2437	-13.0	8.0	-21.0
	CH11	2462	-16.7	8.0	-24.7
802.11n, HT20, MCS0	CH1	2412	-16.0	8.0	-24.0
	CH6	2437	-12.0	8.0	-20.0
	CH11	2462	-16.0	8.0	-24.0

Power spectral density limit according to FCC Part 15, Section 15.247(e):




Frequency (MHz)	Power spectral density limit
	(dBm/3 kHz)
2400 - 2483.5	8

The requirements are **FULFILLED**.


Remarks: For detailed test results please refer to following test protocols.

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.


5.4.5 Power spectral density plots

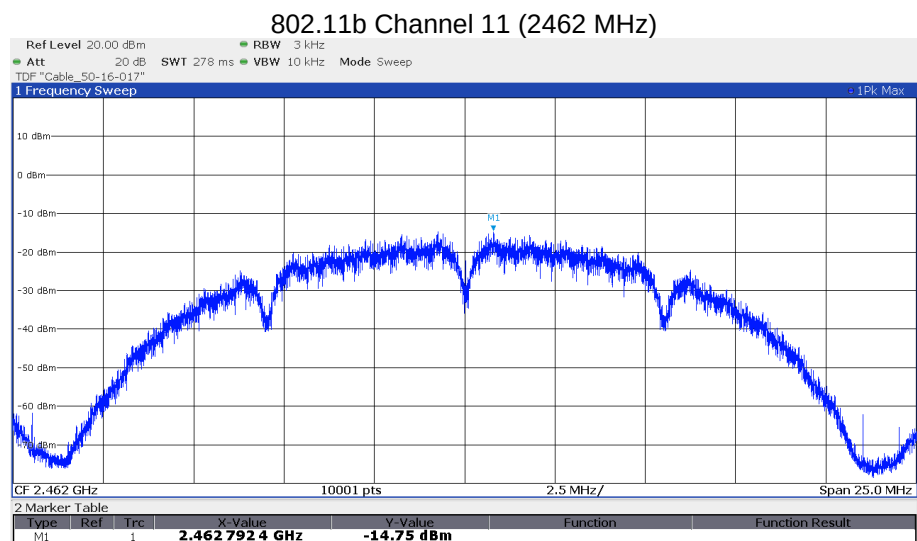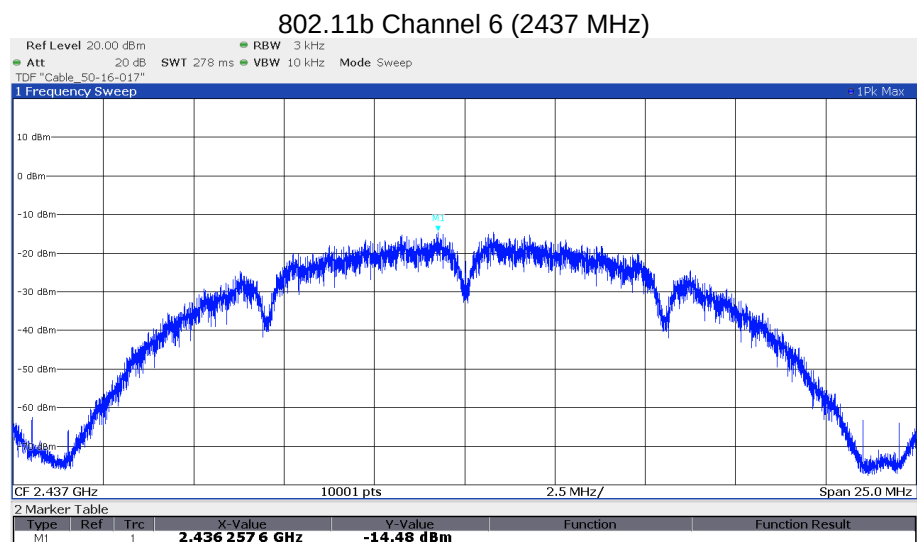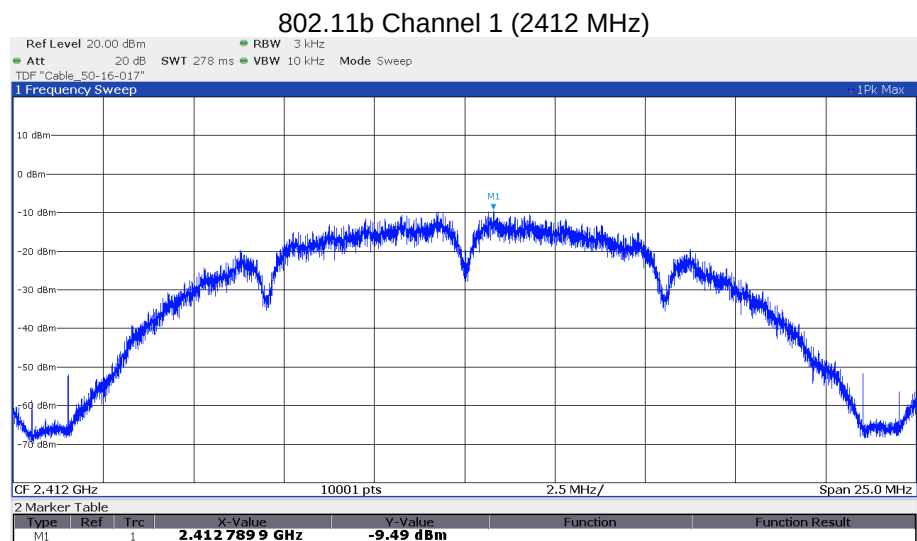


802.11g Channel 1 (2412 MHz)

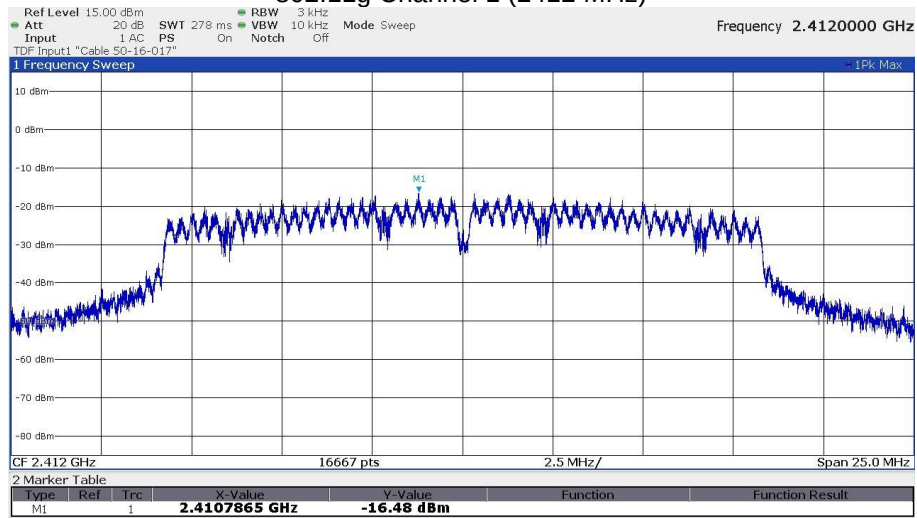


802.11g Channel 6 (2437 MHz)

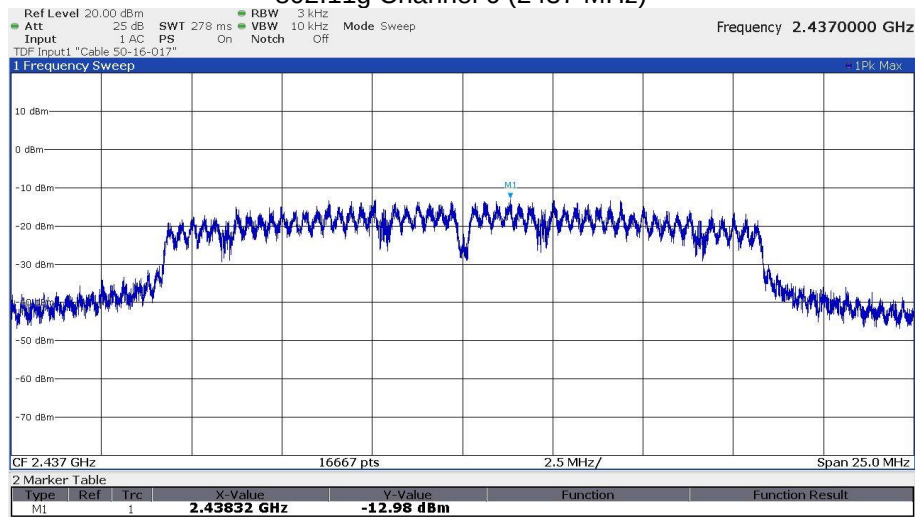


802.11g Channel 11 (2462 MHz)

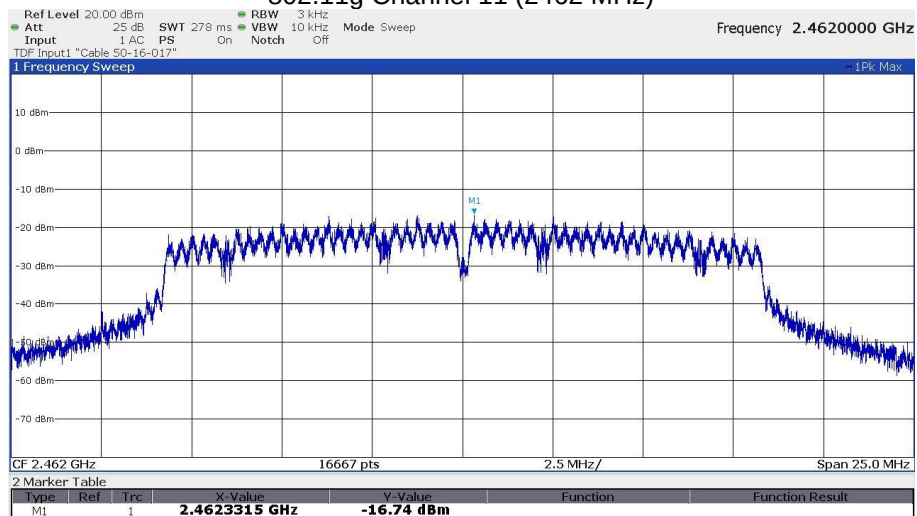


802.11n Channel 1 (2412 MHz)

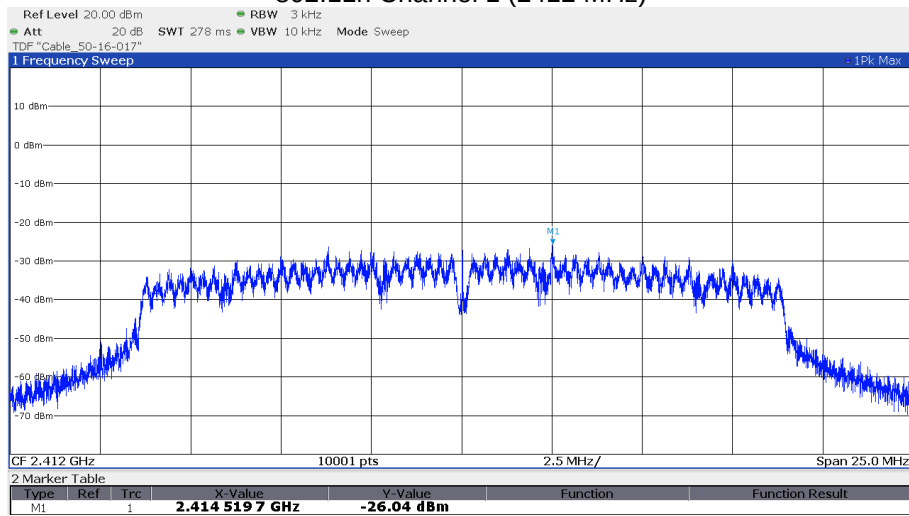

802.11n Channel 6 (2437 MHz)

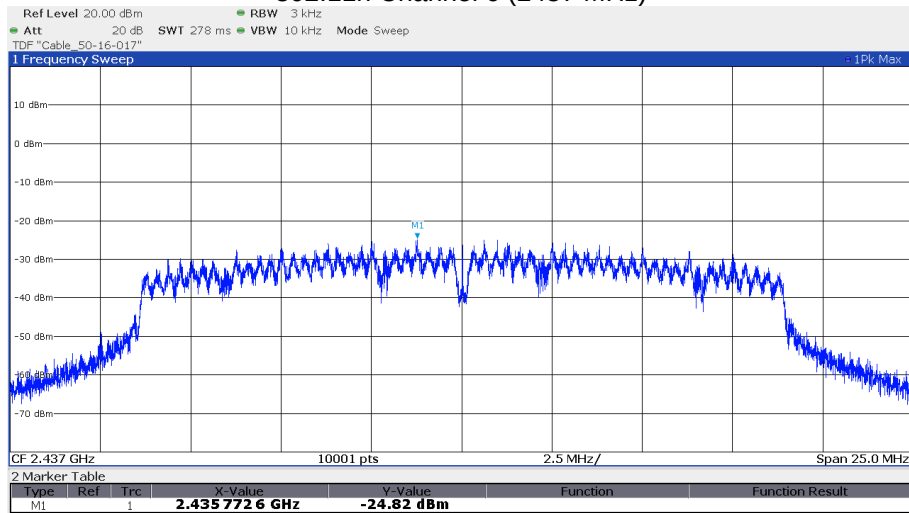

802.11n Channel 11 (2462 MHz)

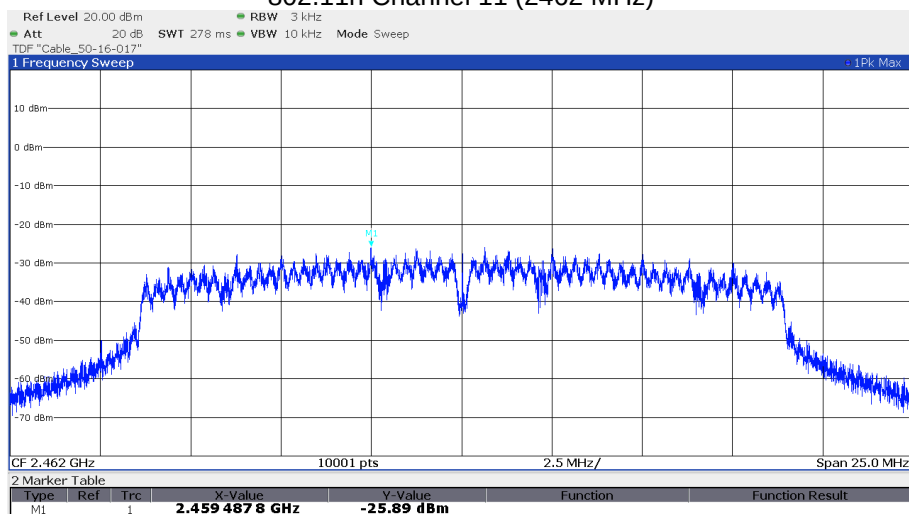

5.5 Unwanted emissions, radiated

For test instruments and accessories used see section 6 Part **SER1, SER 2, SER 3.**

5.5.1 Description of the test location

Test location: OATS 1
Test location: Anechoic chamber 1
Test distance: 3 m

According to FCC Part 15, Section 15.205(a):

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limit specified in Section 15.209(a).

5.5.2 Description of Measurement

The restricted bands are measured radiated. The span of the spectrum analyser is set wide enough to capture the restricted band and measure the peak level of the emission operating on the channel closest to the band edge, as well as any modulation products which fall outside of the authorized band of operation. The restricted bands are measured falling emissions into it and the nearest restricted band are checked for emissions also the restricted band for the harmonics of the carrier.

Spectrum analyser settings:


9 kHz – 150 kHz RBW: 200 Hz
150 kHz - 30 MHz RBW: 9 kHz
30 MHz – 1000 MHz: RBW: 120 kHz
1000 MHz – 25 GHz: RBW: 1 MHz, VBW: 3 MHz, Sweep: Auto, Detector function: Peak

5.5.3 Test result

5.5.3.1 Frequency Range 9 kHz – 30 MHz

Note: No emissions from the EUT could be identified. Data shows noise from the measurement site.


Frequency (MHz)	Reading (dBµV)	Correction * (dB)	Field strength (dBµV/m)	Limit (dBµV/m)	Dlimit (dB)
0.010	33.3	-59.4	-26.1	47.6	-73.7
0.100	11.8	18.3	-49.9	27.6	-77.5
0.500	14.1	17.1	-8.8	33.6	-42.4
3.000	10.0	17.9	-12.1	30.0	-42.1
10.000	14.9	16.4	-8.7	30.0	-38.7
25.000	10.2	18.3	-11.6	30.0	-41.6

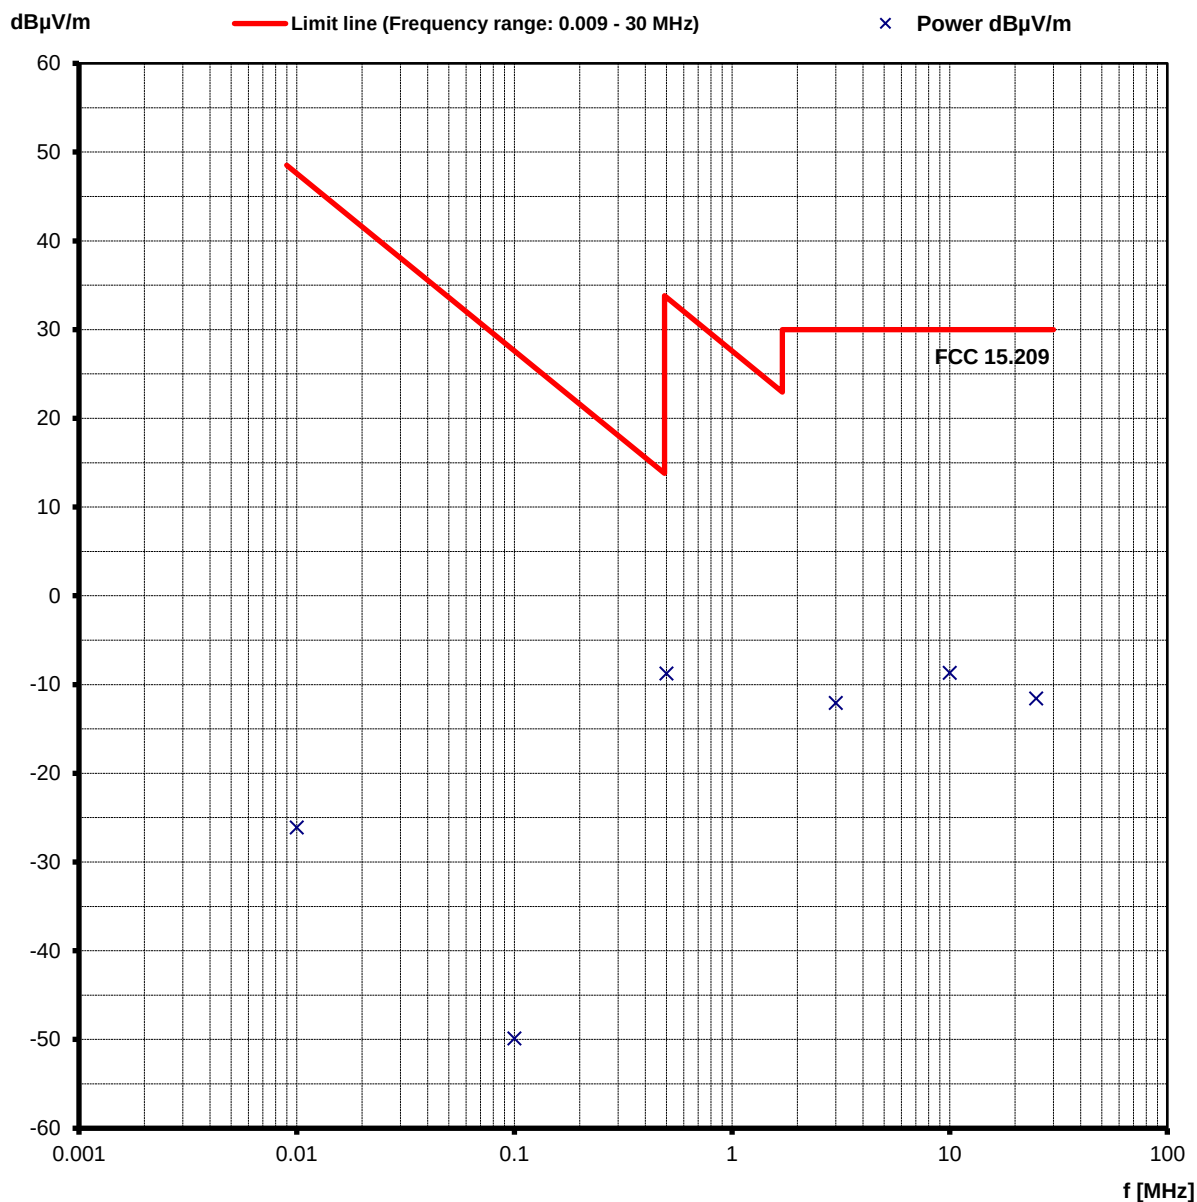

5.5.3.2 Frequency Range 30 MHz – 1 GHz

Note: No emissions from the EUT could be identified. Data shows noise from the measurement site.

Frequency (MHz)	Reading Vert. (dBμV)	Reading Hor. (dBμV)	Correct. Vert. (dB)	Correct. Hor. (dB)	Level Vert. (dBμV/m)	Level Hor. (dBμV/m)	Limit (dBμV/m)	Dlimit (dB)
50.00	6.2	3.7	15.2	14.2	21.4	17.9	40.0	-18.6
150.00	6.1	4.9	13.9	14.8	20.0	19.7	43.5	-23.5
350.00	5.8	6.2	18.4	18.0	24.2	24.2	46.0	-21.8
550.00	6.8	5.4	24.0	23.8	30.8	29.2	46.0	-15.2
750.00	6.7	6.8	28.3	27.7	35.0	34.5	46.0	-11.0



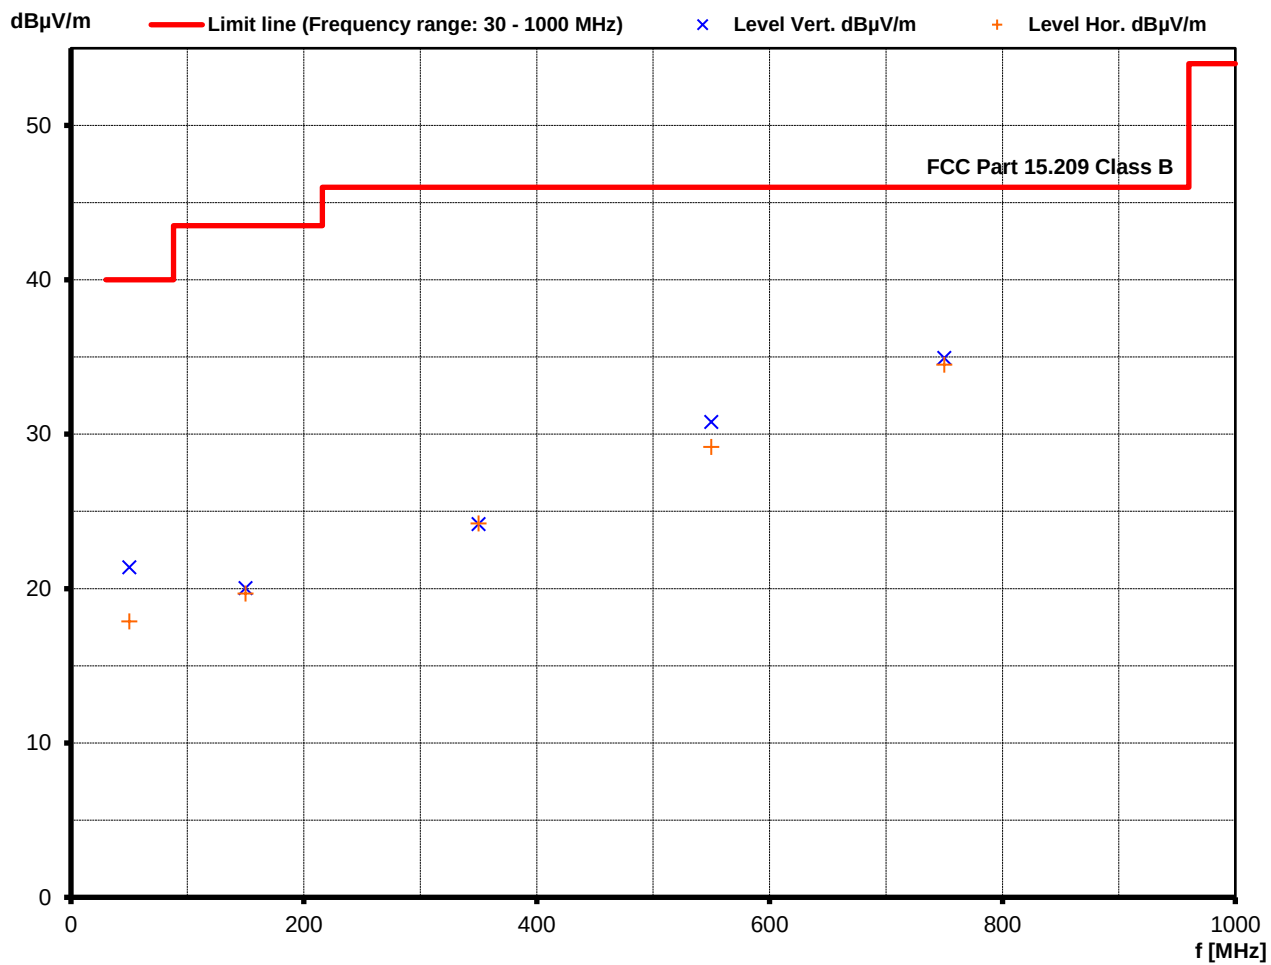



The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.

5.5.3.3 Frequency Range 1 GHz – 25 GHz



WLAN Standard 802.11b


CH1

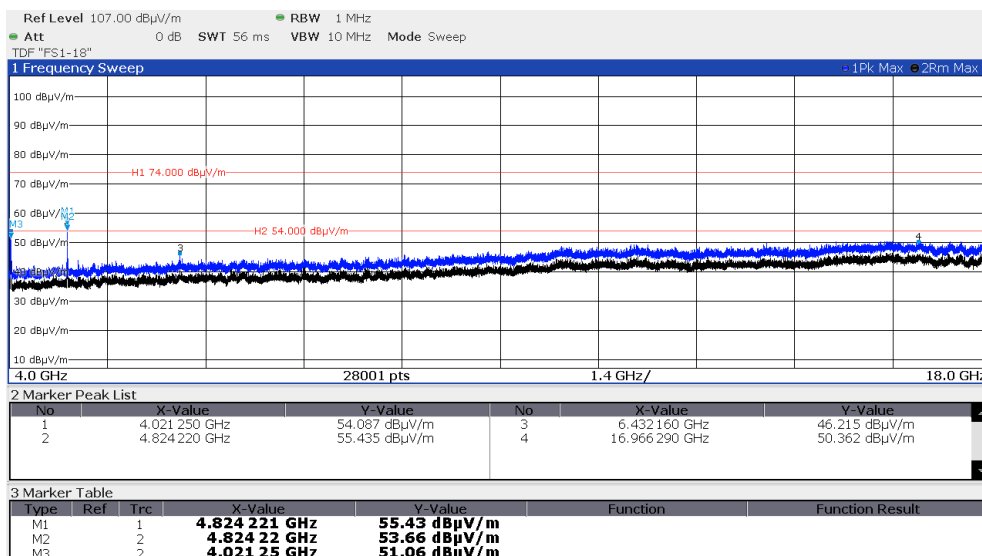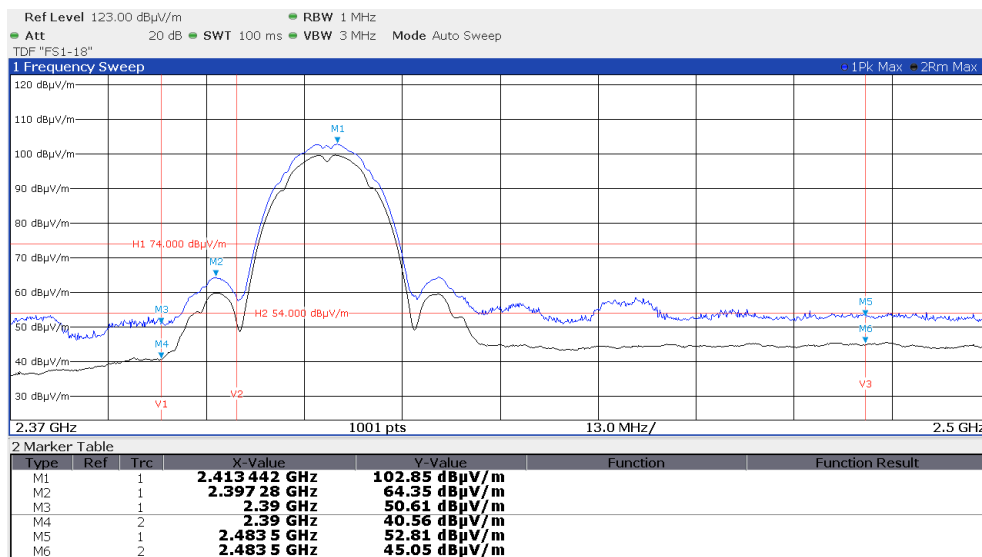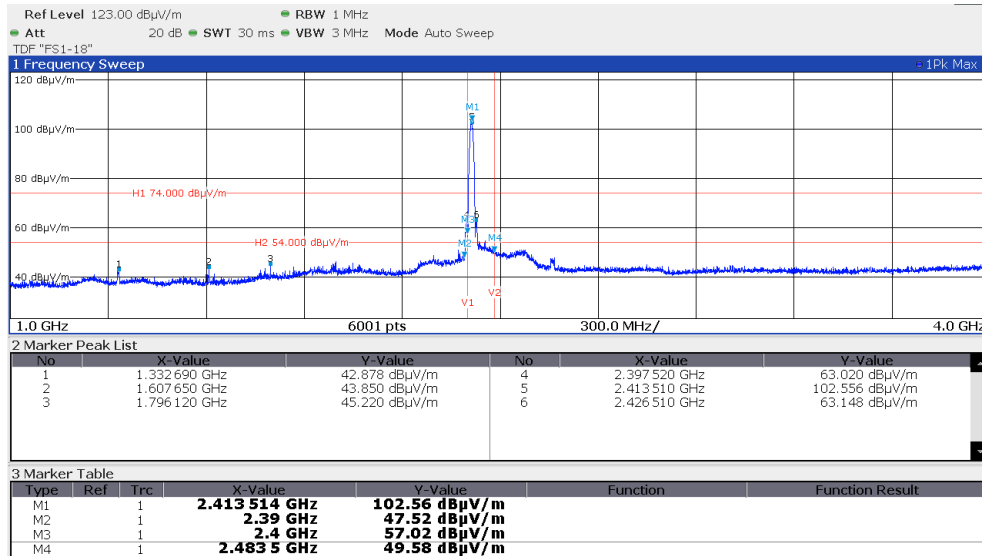

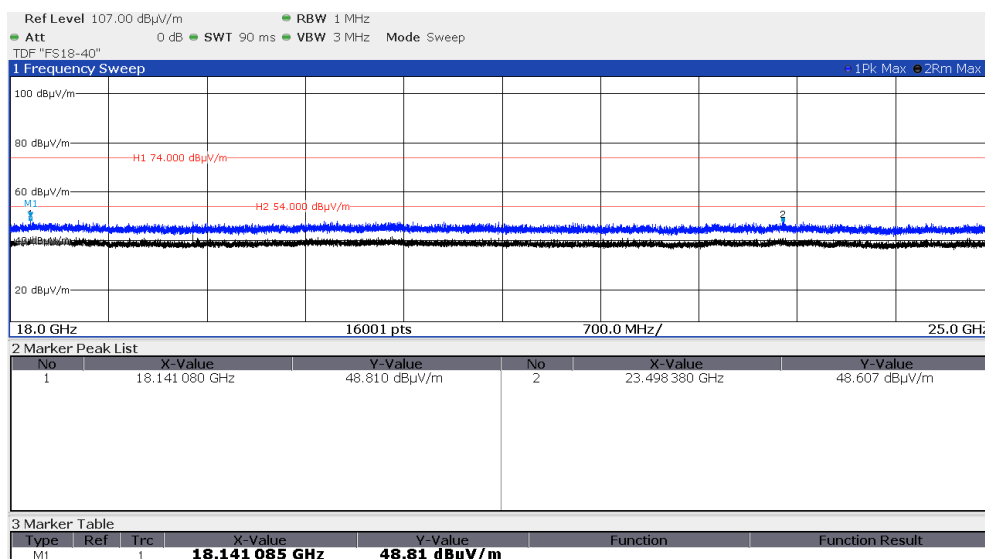


CH6

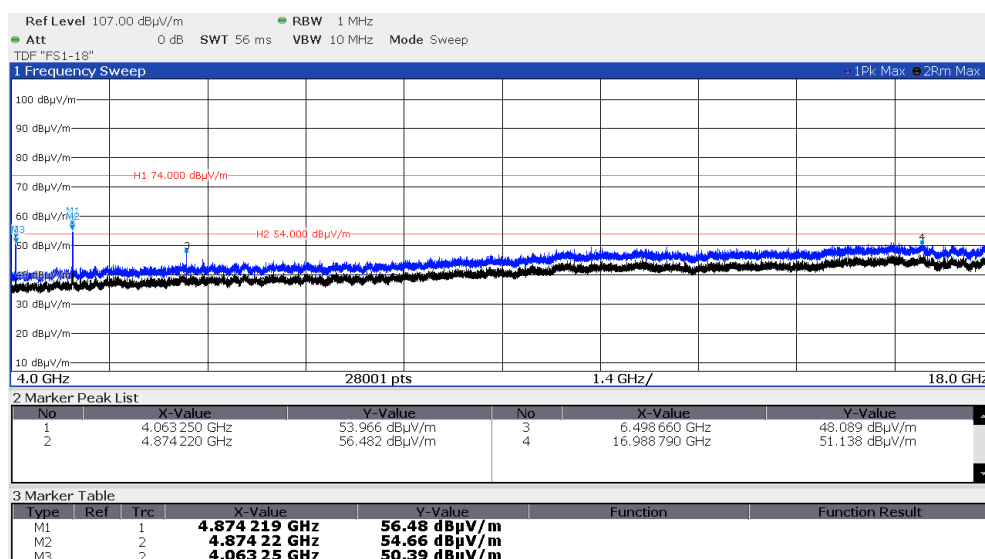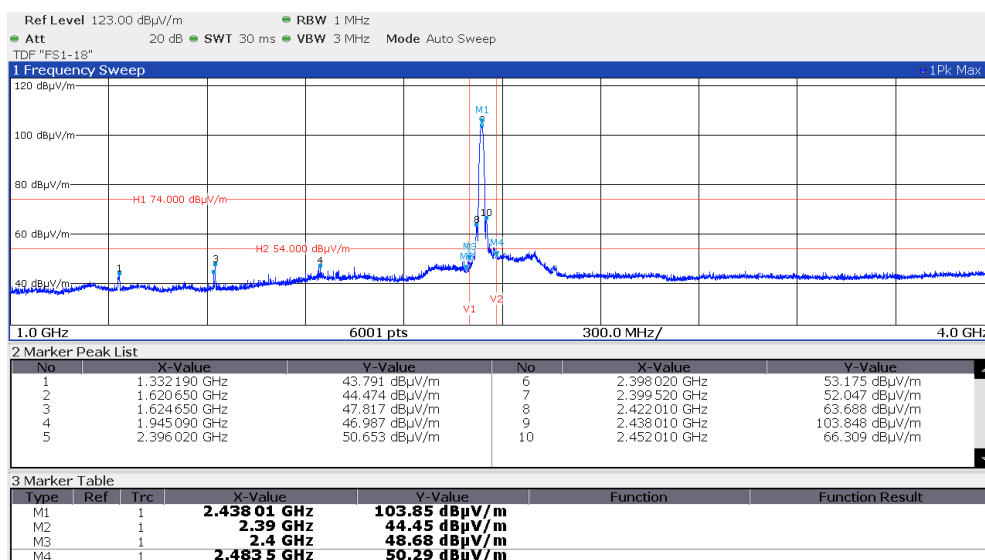




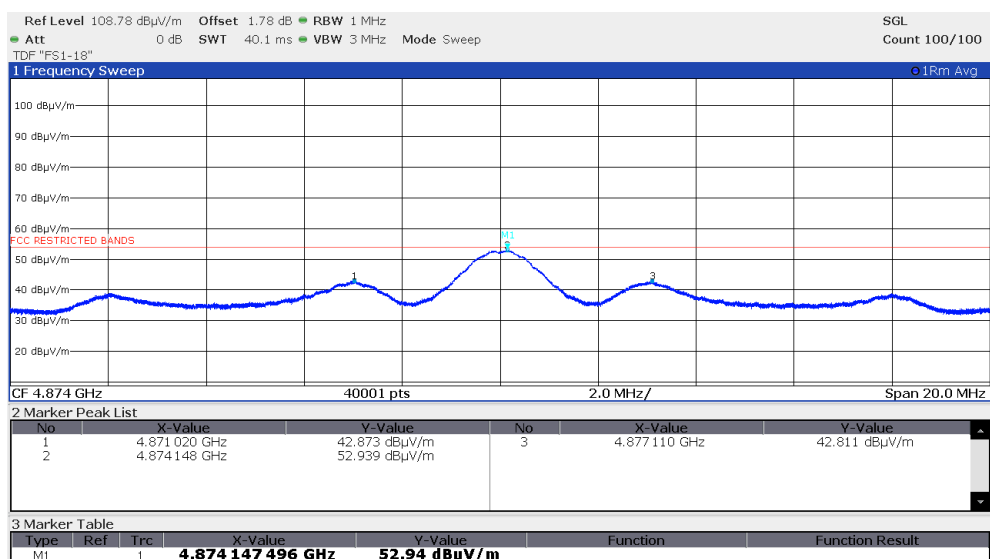


Note: Measurement of Emission according to ANSI 63.10 11.12.2.5.2



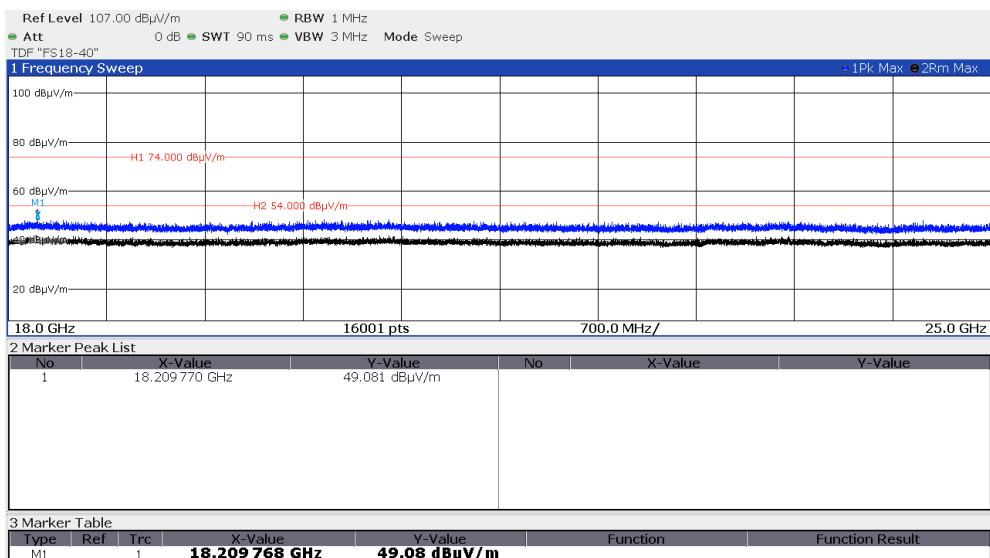



CH11

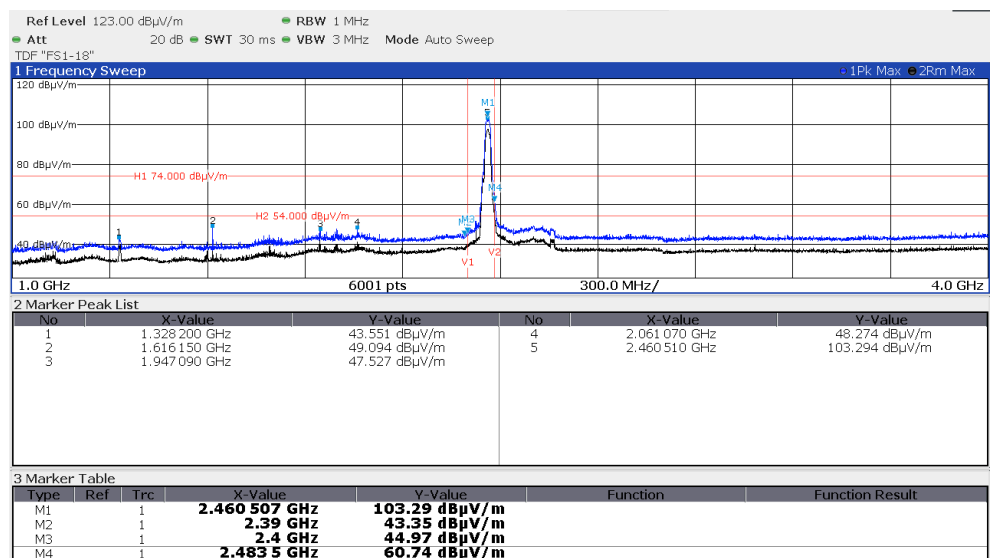

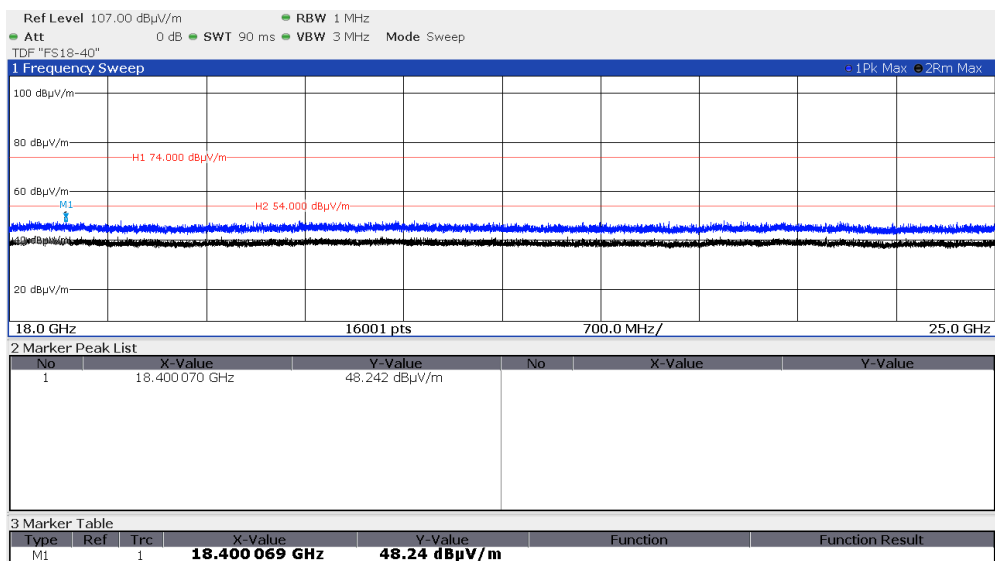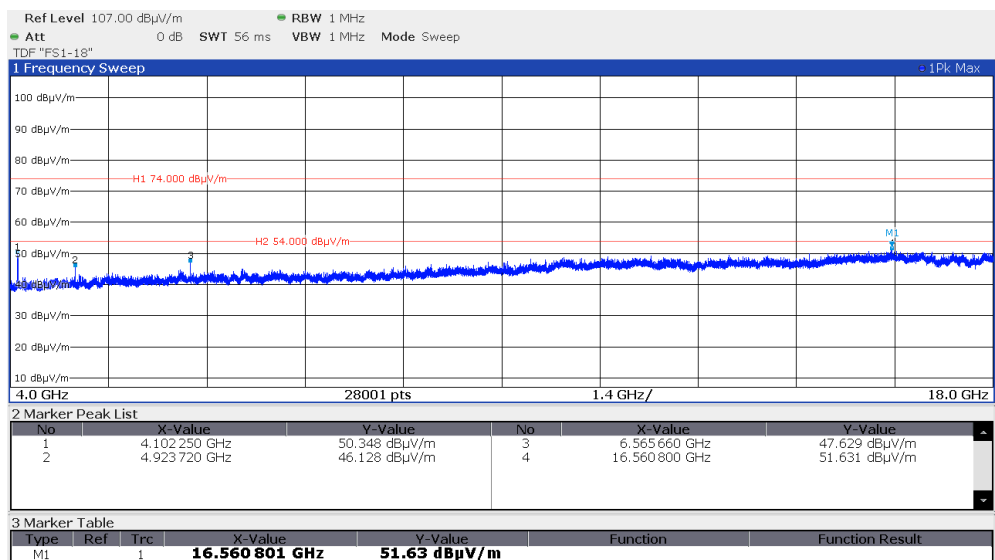
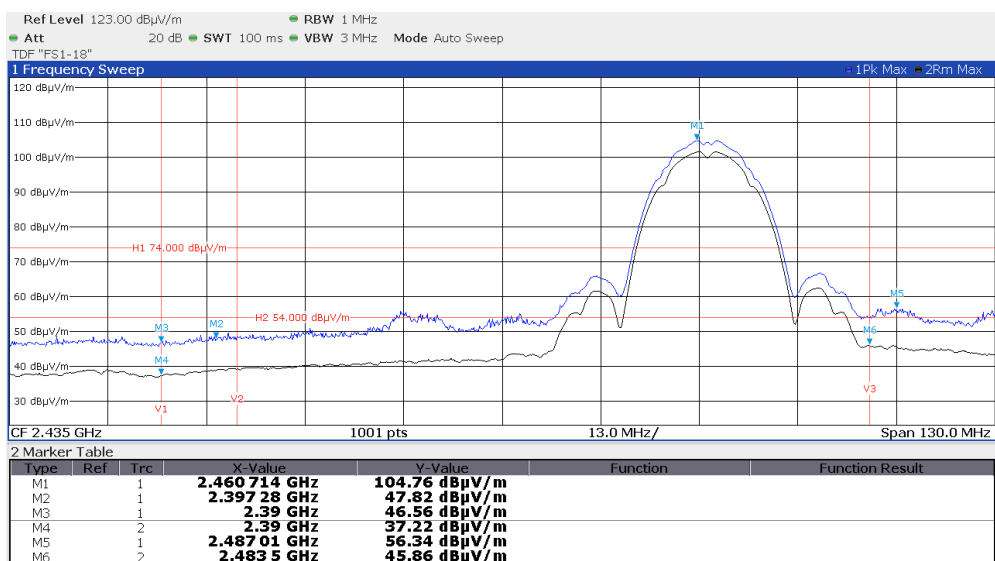



WLAN Standard 802.11n
CH1

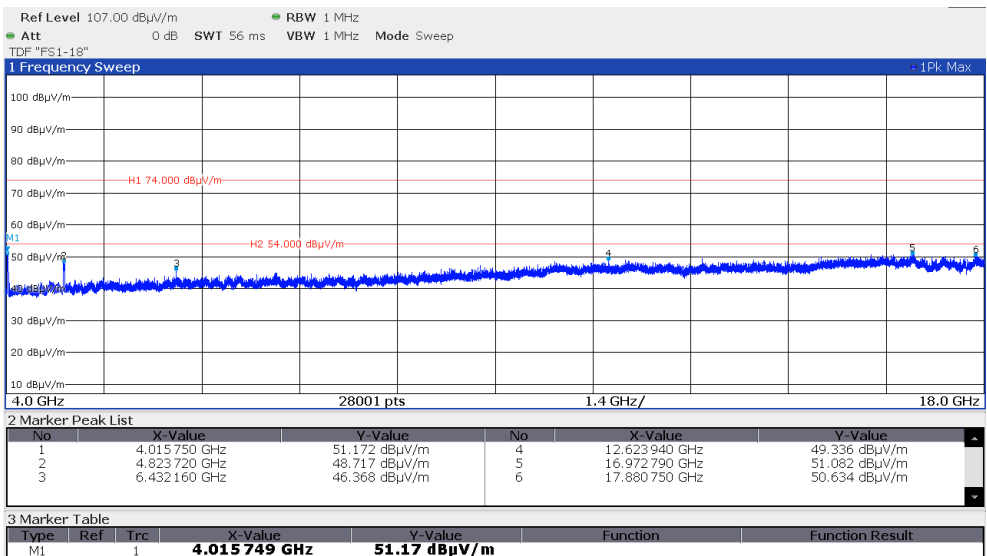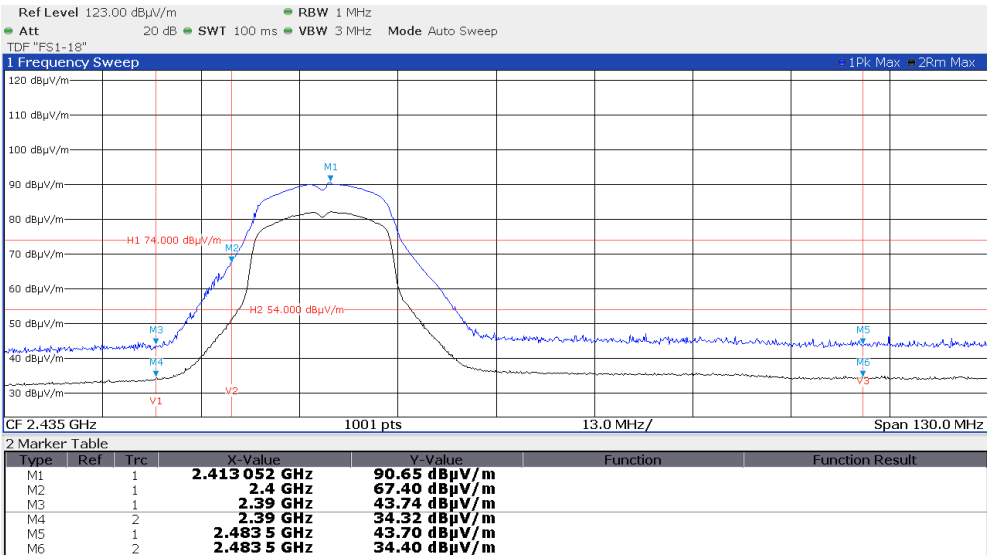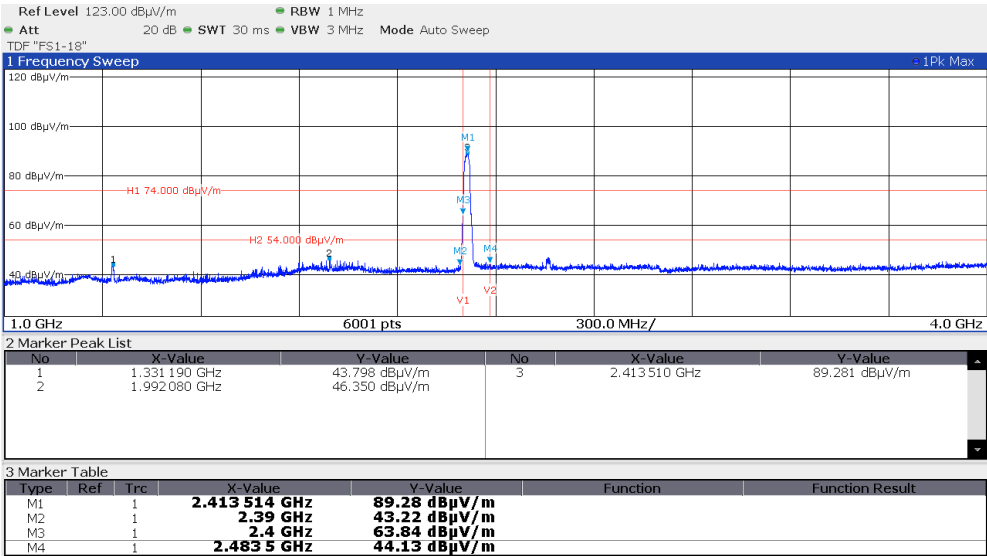


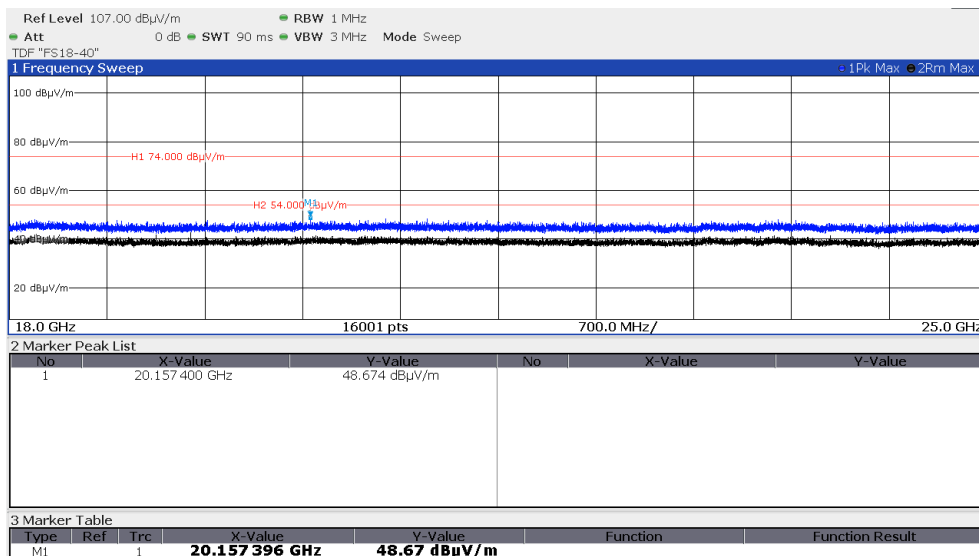



CH6

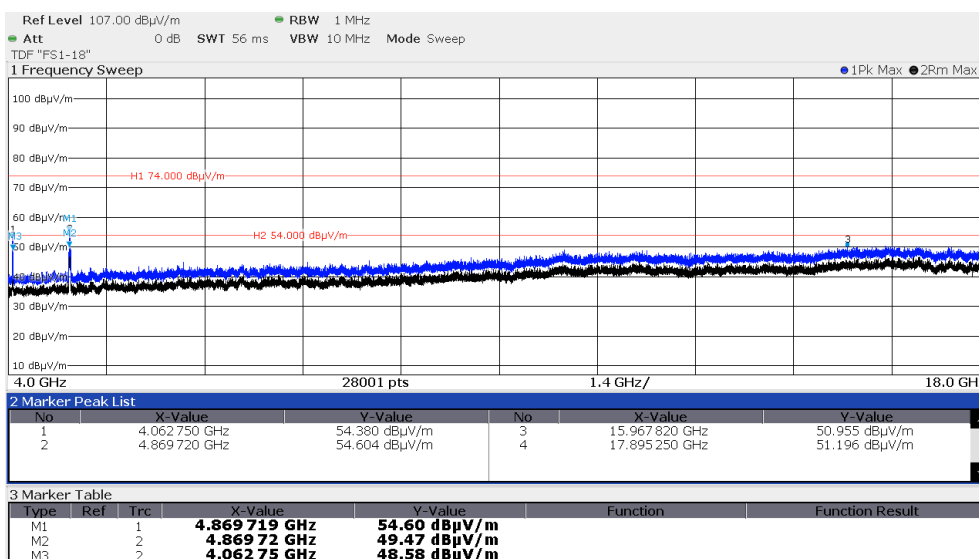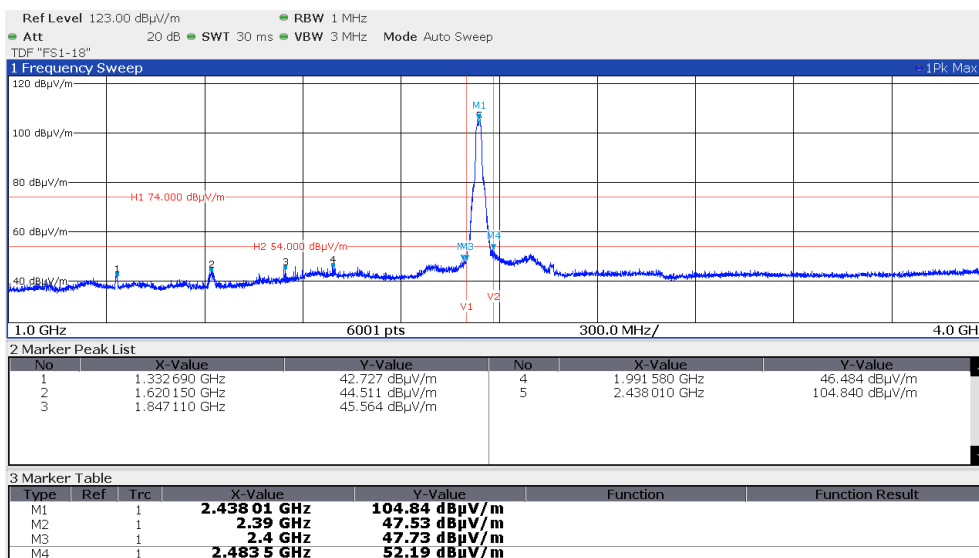

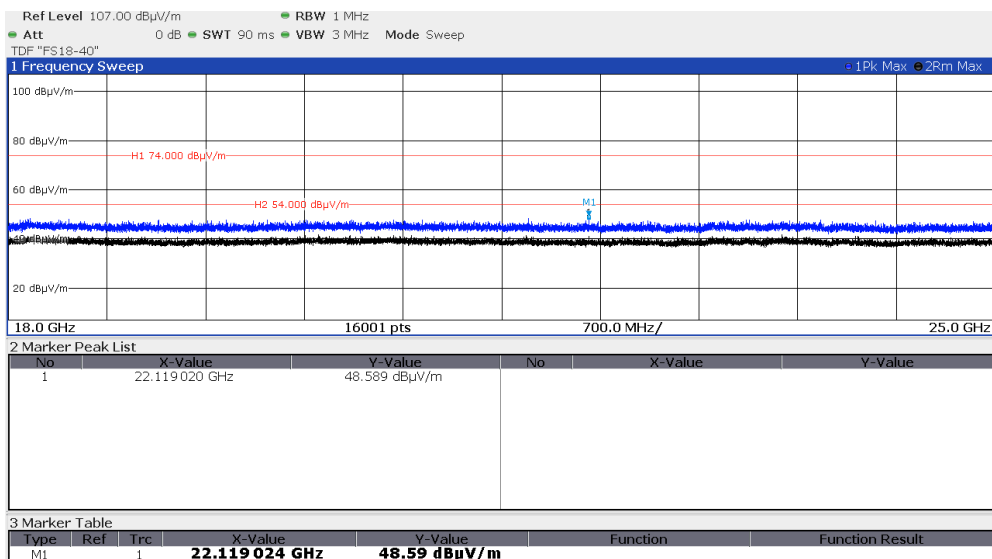

CH11

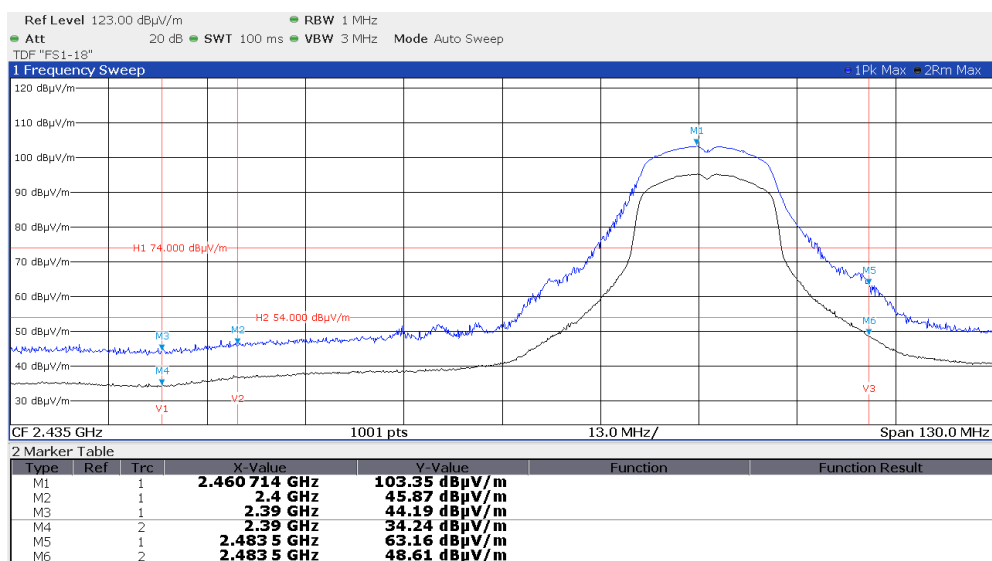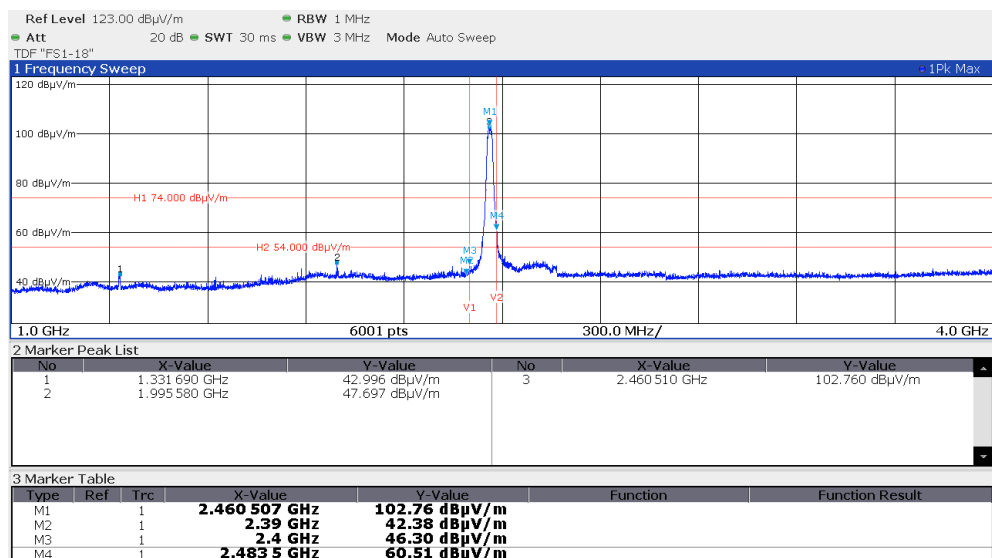

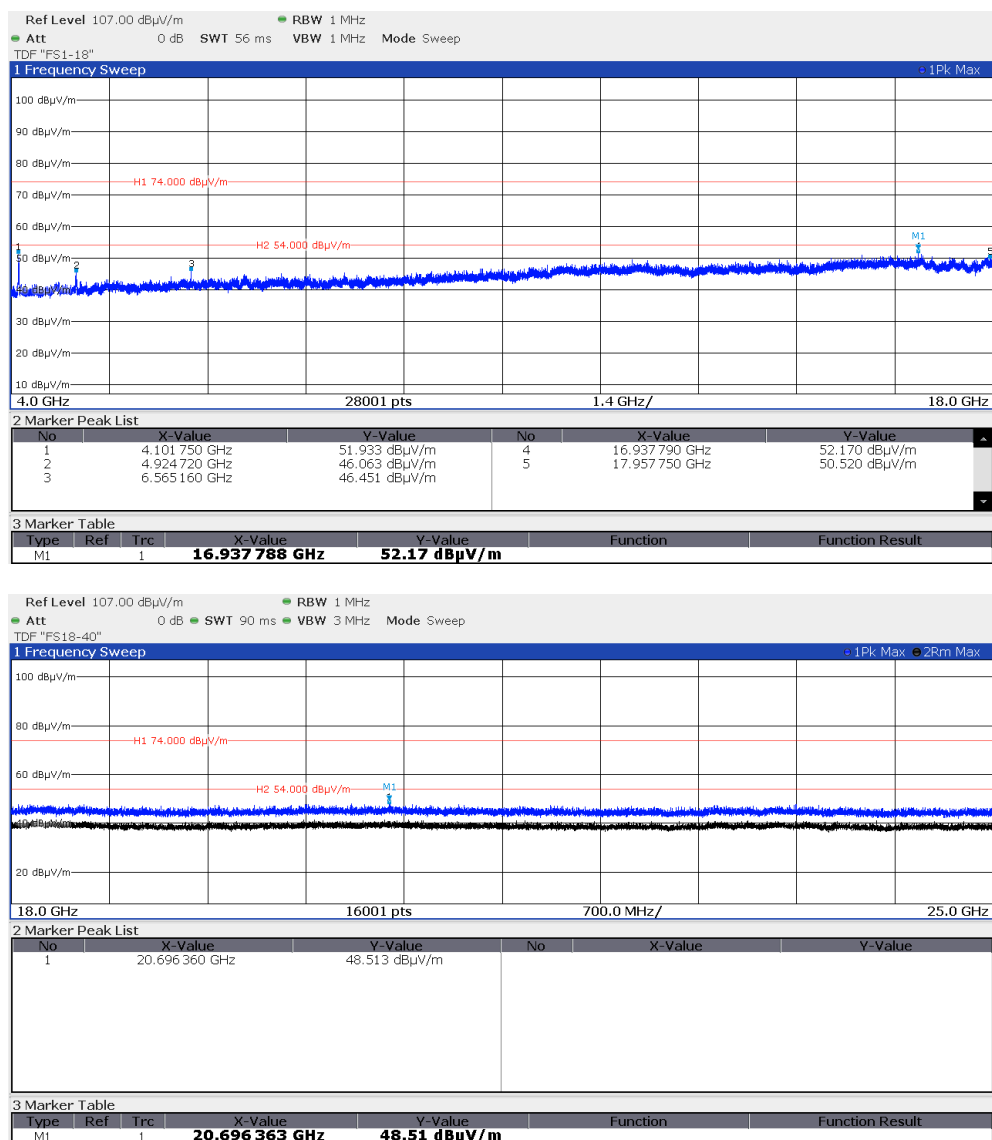

Radiated limits according to FCC Part 15 Section 15.209(a) for spurious emissions which fall in restricted bands:

Frequency (MHz)	Field strength of spurious emissions		Measurement distance
	(µV/m)	dB(µV/m)	(metres)
0.009-0.490	2400/F (kHz)		300
0.490-1.705	24000/F (kHz)		30
1.705-30	30	29.5	30
30-88	100	40	3
88-216	150	43.5	3
216-960	200	46	3
Above 960	500	54	3

Restricted bands of operation:

The field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	399.9 – 410	4.5 – 5.15
0.495 – 0.505	16.69475 – 16.69525	608 – 614	5.35 – 5.46
2.1735 – 2.1905	16.80425 – 16.80475	960 – 1240	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1300 – 1427	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1435 – 1626.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1645.5 – 1646.5	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1660 – 1710	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	1718.8 – 1722.2	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2200 – 2300	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2310 – 2390	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2483.5 – 2500	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	2690 – 2900	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3260 – 3267	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3332 – 3339	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3345.8 – 3358	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4	3600 – 4400	Above 38.6

The requirements are **FULFILLED**.

Remarks: The measurement was performed up to the 10th harmonic.

5.6 Antenna application

5.6.1 Applicable standard

According to FCC Part 15C, Section 15.203:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit that broken antennas can be replaced by the user, but the use of a standard antenna jack is prohibited.

The EUT has an integrated antenna. No other antenna can be used with the device.

All supplied antennas meet the requirements of part 15.203 and 15.204.

Remarks: None.

6 USED TEST EQUIPMENT AND ACCESSORIES

All test instruments used are calibrated and verified regularly. The calibration history is available on request.

Test ID	Model Type	Equipment No.	Next Calib.	Last Calib.	Next Verif.	Last Verif.
A 4	BAT-EMC 2022.0.23.0	01-02/68-13-001				
	ESCI	02-02/03-15-001	17/06/2023	17/06/2022		
	ESH 2 - Z 5	02-02/20-05-004	13/10/2025	13/10/2022	17/10/2023	17/04/2023
	N-4000-BNC	02-02/50-05-138				
	ESH 3 - Z 2	02-02/50-05-155	09/11/2025	09/11/2022	09/05/2023	09/11/2022
CPC 3	FSW43	02-02/11-15-001	04/05/2024	04/05/2023		
	minibend KR-16	02-02/50-16-017				
SER 1	FMZB 1516	01-02/24-01-018	15/12/2023	15/12/2022		
	ESCI	02-02/03-05-004	16/09/2023	16/09/2022		
SER 2	ESVS 30	02-02/03-05-006	27/07/2023	27/07/2022		
	VULB 9168	02-02/24-05-005	20/04/2024	20/04/2023	03/07/2023	03/07/2022
	NW-2000-NB	02-02/50-05-113				
	KK-EF393/U-16N-21N20 m	02-02/50-12-018				
	KK-SD_7/8-2X21N-33,0M	02-02/50-15-028				
	50F-003 N 3 dB	02-02/50-21-010				
SER 3	FSW43	02-02/11-15-001	04/05/2024	04/05/2023		
	AMF-6D-01002000-22-10P	02-02/17-15-004				
	LNA-40-18004000-33-5P	02-02/17-20-002				
	3117	02-02/24-05-009	23/06/2023	23/06/2022		
	BBHA 9170	02-02/24-05-013	21/03/2026	21/03/2023	21/03/2024	21/03/2023
	BAM 4,5-P	02-02/50-17-024				
	NCD	02-02/50-17-025				
	KK-SF106-2X11N-6,5M	02-02/50-18-016				
	KMS116-GL140SE-KMS116-	02-02/50-20-026				
	BAT-EMC 2022.0.23.0	02-02/68-13-001				

The test report merely corresponds to the test sample. It is not permitted to copy extracts of these test results without the written permission of the test laboratory.