




Appendix B. AC Conducted Emission Test Results

Test Engineer :	FangMing Liang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

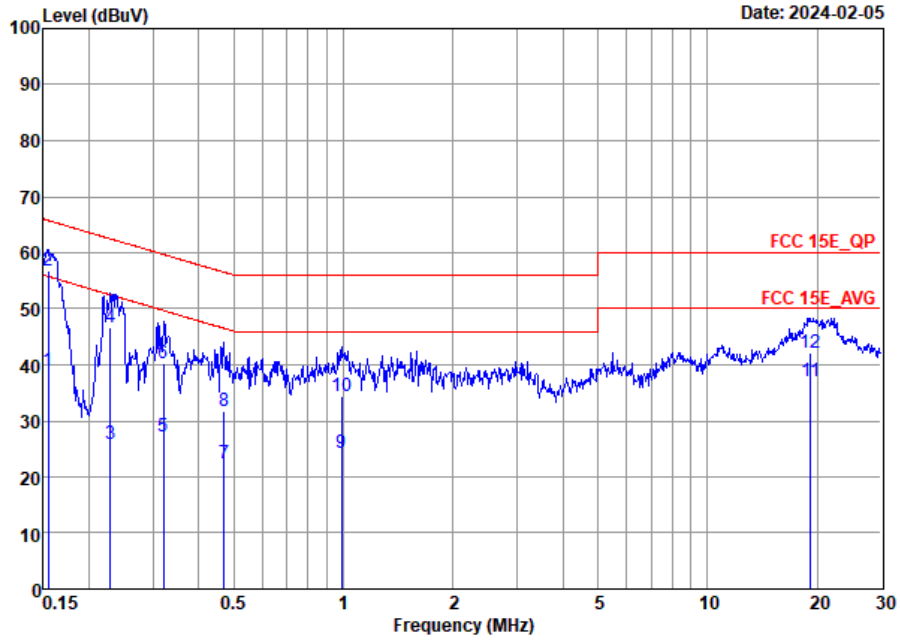


Site : C001-SZ
 Condition: FCC 15E_QP AC LISN 100063_L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.15	39.06	-16.68	55.74	18.69	10.23	10.14	Average
2 *	0.15	56.86	-8.88	65.74	36.49	10.23	10.14	QP
3	0.23	25.75	-26.73	52.48	5.40	10.20	10.15	Average
4	0.23	46.65	-15.83	62.48	26.30	10.20	10.15	QP
5	0.32	27.07	-22.64	49.71	6.49	10.42	10.16	Average
6	0.32	40.37	-19.34	59.71	19.79	10.42	10.16	QP
7	0.47	22.33	-24.16	46.49	2.10	10.07	10.16	Average
8	0.47	31.63	-24.86	56.49	11.40	10.07	10.16	QP
9	0.99	24.20	-21.80	46.00	3.80	10.24	10.16	Average
10	0.99	34.30	-21.70	56.00	13.90	10.24	10.16	QP
11	19.22	36.96	-13.04	50.00	16.30	10.11	10.55	Average
12	19.22	42.16	-17.84	60.00	21.50	10.11	10.55	QP



Test Engineer :	FangMing Liang	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

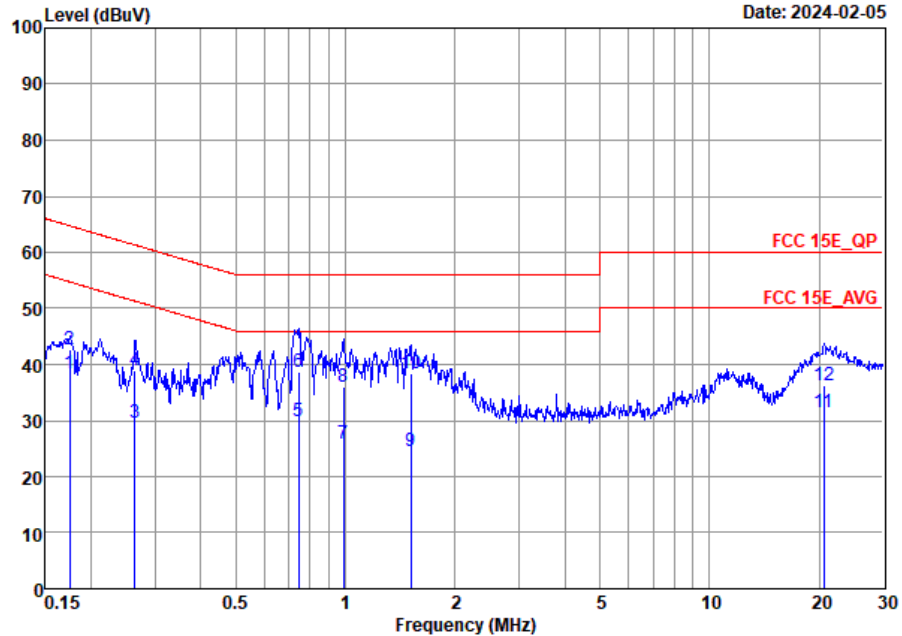

Site : CO01-SZ
 Condition: FCC 15E QP AC LISN 100063 N NEUTRAL

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17	38.31	-16.41	54.72	17.70	10.47	10.14	Average
2	0.17	42.71	-22.01	64.72	22.10	10.47	10.14	QP
3	0.26	29.61	-21.68	51.29	9.21	10.25	10.15	Average
4	0.26	38.91	-22.38	61.29	18.51	10.25	10.15	QP
5 *	0.74	29.76	-16.24	46.00	9.30	10.30	10.16	Average
6	0.74	38.66	-17.34	56.00	18.20	10.30	10.16	QP
7	0.99	25.90	-20.10	46.00	5.50	10.24	10.16	Average
8	0.99	36.00	-20.00	56.00	15.60	10.24	10.16	QP
9	1.51	24.64	-21.36	46.00	4.01	10.43	10.20	Average
10	1.51	38.34	-17.66	56.00	17.71	10.43	10.20	QP
11	20.59	31.59	-18.41	50.00	10.90	10.10	10.59	Average
12	20.59	36.19	-23.81	60.00	15.50	10.10	10.59	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission Test Data

Test Engineer :	Shunping You	Relative Humidity :	50%
		Temperature :	23~24

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	5+7	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	5+7	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	5+7	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	5+7	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	5+7	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	5+7	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	5+7	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	5+7	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	5+7	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	5+7	802.11n HT20	36	5180	MCS0	-	-
Mode 11	U-NII-1	5.15-5.25	5+7	802.11n HT20	44	5220	MCS0	-	-
Mode 12	U-NII-1	5.15-5.25	5+7	802.11n HT20	48	5240	MCS0	-	-
Mode 13	U-NII-2A	5.25-5.35	5+7	802.11n HT20	52	5260	MCS0	-	-
Mode 14	U-NII-2A	5.25-5.35	5+7	802.11n HT20	60	5300	MCS0	-	-
Mode 15	U-NII-2A	5.25-5.35	5+7	802.11n HT20	64	5320	MCS0	-	-
Mode 16	U-NII-2C	5.47-5.725	5+7	802.11n HT20	100	5500	MCS0	-	-
Mode 17	U-NII-2C	5.47-5.725	5+7	802.11n HT20	116	5580	MCS0	-	-
Mode 18	U-NII-2C	5.47-5.725	5+7	802.11n HT20	140	5700	MCS0	-	-
Mode 19	U-NII-1	5.15-5.25	5+7	802.11n HT40	38	5190	MCS0	-	-
Mode 20	U-NII-1	5.15-5.25	5+7	802.11n HT40	46	5230	MCS0	-	-
Mode 21	U-NII-2A	5.25-5.35	5+7	802.11n HT40	54	5270	MCS0	-	-
Mode 22	U-NII-2A	5.25-5.35	5+7	802.11n HT40	62	5310	MCS0	-	-
Mode 23	U-NII-2C	5.47-5.725	5+7	802.11n HT40	102	5510	MCS0	-	-
Mode 24	U-NII-2C	5.47-5.725	5+7	802.11n HT40	134	5670	MCS0	-	-
Mode 25	U-NII-1	5.15-5.25	5+7	802.11ac VHT80	42	5210	MCS0	-	-
Mode 26	U-NII-2A	5.25-5.35	5+7	802.11ac VHT80	58	5290	MCS0	-	-
Mode 27	U-NII-2C	5.47-5.725	5+7	802.11ac VHT80	106	5530	MCS0	-	-
Mode 28	U-NII-2A	5.25-5.35	5+7	802.11ac VHT160	50	5250	MCS0	-	-
Mode 29	U-NII-1	5.15-5.25	5+7	802.11ax HE20	36	5180	MCS0	Full RU	-
Mode 30	U-NII-1	5.15-5.25	5+7	802.11ax HE20	44	5220	MCS0	Full RU	-
Mode 31	U-NII-1	5.15-5.25	5+7	802.11ax HE20	48	5240	MCS0	Full RU	-
Mode 32	U-NII-2A	5.25-5.35	5+7	802.11ax HE20	52	5260	MCS0	Full RU	-
Mode 33	U-NII-2A	5.25-5.35	5+7	802.11ax HE20	60	5300	MCS0	Full RU	-
Mode 34	U-NII-2A	5.25-5.35	5+7	802.11ax HE20	64	5320	MCS0	Full RU	-
Mode 35	U-NII-2C	5.47-5.725	5+7	802.11ax HE20	100	5500	MCS0	Full RU	-
Mode 36	U-NII-2C	5.47-5.725	5+7	802.11ax HE20	116	5580	MCS0	Full RU	-
Mode 37	U-NII-2C	5.47-5.725	5+7	802.11ax HE20	140	5700	MCS0	Full RU	-



Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 38	U-NII-1	5.15-5.25	5+7	802.11ax HE40	38	5190	MCS0	Full RU	-
Mode 39	U-NII-1	5.15-5.25	5+7	802.11ax HE40	46	5230	MCS0	Full RU	-
Mode 40	U-NII-2A	5.25-5.35	5+7	802.11ax HE40	54	5270	MCS0	Full RU	-
Mode 41	U-NII-2A	5.25-5.35	5+7	802.11ax HE40	62	5310	MCS0	Full RU	-
Mode 42	U-NII-2C	5.47-5.725	5+7	802.11ax HE40	102	5510	MCS0	Full RU	-
Mode 43	U-NII-2C	5.47-5.725	5+7	802.11ax HE40	134	5670	MCS0	Full RU	-
Mode 44	U-NII-1	5.15-5.25	5+7	802.11ax HE80	42	5210	MCS0	Full RU	-
Mode 45	U-NII-2A	5.25-5.35	5+7	802.11ax HE80	58	5290	MCS0	Full RU	-
Mode 46	U-NII-2C	5.47-5.725	5+7	802.11ax HE80	106	5530	MCS0	Full RU	-
Mode 47	U-NII-2A	5.25-5.35	5+7	802.11ax HE160	50	5250	MCS0	Full RU	-
Mode 48	U-NII-1	5.15-5.25	5+7	802.11ax HE20	36	5180	MCS0	Partial_RU 26/0	-
Mode 49	U-NII-2A	5.25-5.35	5+7	802.11ax HE20	64	5320	MCS0	Partial_RU 52/40	-
Mode 50	U-NII-2C	5.47-5.725	5+7	802.11ax HE20	100	5500	MCS0	Partial_RU 26/0	-
Mode 51	U-NII-2C	5.47-5.725	5+7	802.11ax HE20	140	5700	MCS0	Partial_RU 52/40	-
Mode 52	U-NII-3	5.725-5.85	5+7	802.11a	149	5745	6Mbps	-	-
Mode 53	U-NII-3	5.725-5.85	5+7	802.11a	157	5785	6Mbps	-	-
Mode 54	U-NII-3	5.725-5.85	5+7	802.11a	165	5825	6Mbps	-	-
Mode 55	U-NII-3	5.725-5.85	5+7	802.11n HT20	149	5745	MCS0	-	-
Mode 56	U-NII-3	5.725-5.85	5+7	802.11n HT20	157	5785	MCS0	-	-
Mode 57	U-NII-3	5.725-5.85	5+7	802.11n HT20	165	5825	MCS0	-	-
Mode 58	U-NII-3	5.725-5.85	5+7	802.11n HT40	151	5755	MCS0	-	-
Mode 59	U-NII-3	5.725-5.85	5+7	802.11n HT40	159	5795	MCS0	-	-
Mode 60	U-NII-3	5.725-5.85	5+7	802.11ac VHT80	155	5775	MCS0	-	-
Mode 61	U-NII-3	5.725-5.85	5+7	802.11ax HE20	149	5745	MCS0	Full RU	-
Mode 62	U-NII-3	5.725-5.85	5+7	802.11ax HE20	157	5785	MCS0	Full RU	-
Mode 63	U-NII-3	5.725-5.85	5+7	802.11ax HE20	165	5825	MCS0	Full RU	-
Mode 64	U-NII-3	5.725-5.85	5+7	802.11ax HE40	151	5755	MCS0	Full RU	-
Mode 65	U-NII-3	5.725-5.85	5+7	802.11ax HE40	159	5795	MCS0	Full RU	-
Mode 66	U-NII-3	5.725-5.85	5+7	802.11ax HE80	155	5775	MCS0	Full RU	-
Mode 67	U-NII-3	5.725-5.85	5+7	802.11ax HE20	149	5745	MCS0	Partial_RU 26/0	-
Mode 68	U-NII-3	5.725-5.85	5+7	802.11ax HE20	165	5825	MCS0	Partial_RU 26/8	-
Mode 69	U-NII-1	5.15-5.25	5+7	802.11ac VHT80	42	5210	MCS0	-	LF
Mode 70	U-NII-3	5.725-5.85	5+7	802.11ax HE80	155	5775	MCS0	Full RU	LF
Mode 71	Co-location	2400-2483.5	3	Bluetooth-LE_GSFK	00	2402	2Mbps		-
		5.15-5.25	5+7	802.11ac VHT80	42	5210	MCS0		-
		LTE Band 41 Link							



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	-	-	-	-	-	-	-	Band Edge
	802.11a	36	10360.00	45.91	68.30	-22.39	V	Peak	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
	802.11a	44	10440.00	45.87	68.30	-22.43	V	Peak	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
	802.11a	48	10480.00	48.11	68.30	-20.19	V	Peak	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
	802.11a	52	10520.00	46.09	68.30	-22.21	H	Peak	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
	802.11a	60	10600.00	46.97	74.00	-27.03	H	Peak	Pass	Harmonic
6	802.11a	64	-	-	-	-	-	-	-	Band Edge
6	802.11a	64	10640.00	48.03	74.00	-25.97	V	Peak	Pass	Harmonic
7	802.11a	100	-	-	-	-	-	-	-	Band Edge
7	802.11a	100	16500.00	46.35	68.30	-21.95	V	Peak	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	16740.00	45.71	68.30	-22.59	V	Peak	Pass	Harmonic
9	802.11a	140	-	-	-	-	-	-	-	Band Edge
9	802.11a	140	17100.00	46.01	68.30	-22.29	V	Peak	Pass	Harmonic
10	802.11n HT20	36	5146.52	49.75	54.00	-4.25	H	AVERAGE	Pass	Band Edge
10	802.11n HT20	36	10360.00	46.21	68.30	-22.09	V	Peak	Pass	Harmonic
11	802.11n HT20	44	-	-	-	-	-	-	-	Band Edge
11	802.11n HT20	44	10440.00	46.03	68.30	-22.27	V	Peak	Pass	Harmonic
12	802.11n HT20	48	-	-	-	-	-	-	-	Band Edge
12	802.11n HT20	48	10480.00	47.35	68.30	-20.95	H	Peak	Pass	Harmonic
13	802.11n HT20	52	-	-	-	-	-	-	-	Band Edge
13	802.11n HT20	52	10520.00	47.27	68.30	-21.03	H	Peak	Pass	Harmonic
14	802.11n HT20	60	-	-	-	-	-	-	-	Band Edge
14	802.11n HT20	60	15900.00	46.96	74.00	-27.04	V	Peak	Pass	Harmonic
15	802.11n HT20	64	5350.10	49.61	54.00	-4.39	V	AVERAGE	Pass	Band Edge
15	802.11n HT20	64	10640.00	47.64	74.00	-26.36	V	Peak	Pass	Harmonic
16	802.11n HT20	100	5469.55	63.60	68.30	-4.70	V	PEAK	Pass	Band Edge
16	802.11n HT20	100	16500.00	46.16	68.30	-22.14	V	Peak	Pass	Harmonic
17	802.11n HT20	116	-	-	-	-	-	-	-	Band Edge
17	802.11n HT20	116	16740.00	46.48	68.30	-21.82	V	Peak	Pass	Harmonic
18	802.11n HT20	140	5726.85	61.48	68.30	-6.82	H	PEAK	Pass	Band Edge
18	802.11n HT20	140	17100.00	46.68	68.30	-21.62	H	Peak	Pass	Harmonic
19	802.11n HT40	38	5148.58	50.16	54.00	-3.84	H	AVERAGE	Pass	Band Edge
19	802.11n HT40	38	-	-	-	-	-	-	-	Harmonic
20	802.11n HT40	46	5147.89	43.80	54.00	-10.20	H	AVERAGE	Pass	Band Edge
20	802.11n HT40	46	-	-	-	-	-	-	-	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
21	802.11n HT40	54	5139.86	40.61	54.00	-13.39	H	AVERAGE	Pass	Band Edge
	802.11n HT40	54	-	-	-	-	-	-	-	Harmonic
22	802.11n HT40	62	5350.50	49.31	54.00	-4.69	V	AVERAGE	Pass	Band Edge
	802.11n HT40	62	-	-	-	-	-	-	-	Harmonic
23	802.11n HT40	102	5459.92	50.85	54.00	-3.15	V	AVERAGE	Pass	Band Edge
	802.11n HT40	102	-	-	-	-	-	-	-	Harmonic
24	802.11n HT40	134	5725.29	53.44	68.30	-14.86	V	PEAK	Pass	Band Edge
	802.11n HT40	134	-	-	-	-	-	-	-	Harmonic
25	802.11ac VHT80	42	5147.21	50.94	54.00	-3.06	H	AVERAGE	Pass	Band Edge
	802.11ac VHT80	42	10420.00	47.08	68.30	-21.22	H	Peak	Pass	Harmonic
26	802.11ac VHT80	58	5356.13	45.44	54.00	-8.56	V	AVERAGE	Pass	Band Edge
26	802.11ac VHT80	58	-	-	-	-	-	-	-	Harmonic
27	802.11ac VHT80	106	5459.08	47.56	54.00	-6.44	V	AVERAGE	Pass	Band Edge
27	802.11ac VHT80	106	-	-	-	-	-	-	-	Harmonic
28	802.11ac VHT160	50	5117.25	49.77	54.00	-4.23	H	AVERAGE	Pass	Band Edge
28	802.11ac VHT160	50	10500.00	46.28	68.30	-22.02	H	Peak	Pass	Harmonic
29	802.11ax HE20	36	5149.58	47.46	54.00	-6.54	H	AVERAGE	Pass	Band Edge
29	802.11ax HE20	36	10360.00	46.15	68.30	-22.15	V	Peak	Pass	Harmonic
30	802.11ax HE20	44	-	-	-	-	-	-	-	Band Edge
30	802.11ax HE20	44	10440.00	46.48	68.30	-21.82	H	Peak	Pass	Harmonic
31	802.11ax HE20	48	-	-	-	-	-	-	-	Band Edge
31	802.11ax HE20	48	10480.00	46.90	68.30	-21.40	H	Peak	Pass	Harmonic
32	802.11ax HE20	52	-	-	-	-	-	-	-	Band Edge
32	802.11ax HE20	52	10520.00	46.51	68.30	-21.79	V	Peak	Pass	Harmonic
33	802.11ax HE20	60	-	-	-	-	-	-	-	Band Edge
33	802.11ax HE20	60	10600.00	47.35	74.00	-26.65	H	Peak	Pass	Harmonic
34	802.11ax HE20	64	5350.94	46.43	54.00	-7.57	V	AVERAGE	Pass	Band Edge
34	802.11ax HE20	64	10640.00	47.51	74.00	-26.49	V	Peak	Pass	Harmonic
35	802.11ax HE20	100	5459.95	43.69	54.00	-10.31	V	AVERAGE	Pass	Band Edge
35	802.11ax HE20	100	16500.00	46.47	68.30	-21.83	V	Peak	Pass	Harmonic
36	802.11ax HE20	116	-	-	-	-	-	-	-	Band Edge
36	802.11ax HE20	116	16740.00	45.32	68.30	-22.98	V	Peak	Pass	Harmonic
37	802.11ax HE20	140	5725.16	54.68	68.30	-13.62	V	PEAK	Pass	Band Edge
37	802.11ax HE20	140	17100.00	46.08	68.30	-22.22	H	Peak	Pass	Harmonic
38	802.11ax HE40	38	5148.20	49.46	54.00	-4.54	H	AVERAGE	Pass	Band Edge
38	802.11ax HE40	38	-	-	-	-	-	-	-	Harmonic
39	802.11ax HE40	46	5147.20	40.98	54.00	-13.02	H	AVERAGE	Pass	Band Edge
39	802.11ax HE40	46	-	-	-	-	-	-	-	Harmonic
40	802.11ax HE40	54	5058.05	39.90	54.00	-14.10	V	AVERAGE	Pass	Band Edge
40	802.11ax HE40	54	-	-	-	-	-	-	-	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
41	802.11ax HE40	62	5353.35	45.63	54.00	-8.37	V	AVERAGE	Pass	Band Edge
	802.11ax HE40	62	-	-	-	-	-	-	-	Harmonic
42	802.11ax HE40	102	5458.64	47.24	54.00	-6.76	V	AVERAGE	Pass	Band Edge
	802.11ax HE40	102	-	-	-	-	-	-	-	Harmonic
43	802.11ax HE40	134	5725.58	54.45	68.30	-13.85	V	PEAK	Pass	Band Edge
	802.11ax HE40	134	-	-	-	-	-	-	-	Harmonic
44	802.11ax HE80	42	5147.63	48.97	54.00	-5.03	H	AVERAGE	Pass	Band Edge
	802.11ax HE80	42	-	-	-	-	-	-	-	Harmonic
45	802.11ax HE80	58	5355.11	47.65	54.00	-6.35	V	AVERAGE	Pass	Band Edge
	802.11ax HE80	58	-	-	-	-	-	-	-	Harmonic
46	802.11ax HE80	106	5455.12	49.64	54.00	-4.36	V	AVERAGE	Pass	Band Edge
46	802.11ax HE80	106	-	-	-	-	-	-	-	Harmonic
47	802.11ax HE160	50	5117.25	50.82	54.00	-3.18	H	AVERAGE	Pass	Band Edge
47	802.11ax HE160	50	10500.00	46.72	68.30	-21.58	H	Peak	Pass	Harmonic
48	802.11ax HE20	36	5055.98	39.83	54.00	-14.17	H	AVERAGE	Pass	Band Edge
48	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
49	802.11ax HE20	64	5402.46	38.64	54.00	-15.36	H	AVERAGE	Pass	Band Edge
49	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
50	802.11ax HE20	100	5372.65	38.65	54.00	-15.35	V	AVERAGE	Pass	Band Edge
50	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
51	802.11ax HE20	140	5748.62	50.01	68.30	-18.29	V	PEAK	Pass	Band Edge
51	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
52	802.11a	149	-	-	-	-	-	-	-	Band Edge
52	802.11a	149	17235.00	47.04	68.30	-21.26	V	Peak	Pass	Harmonic
53	802.11a	157	-	-	-	-	-	-	-	Band Edge
53	802.11a	157	17355.00	47.39	68.30	-20.91	H	Peak	Pass	Harmonic
54	802.11a	165	-	-	-	-	-	-	-	Band Edge
54	802.11a	165	17475.00	47.37	68.30	-20.93	H	Peak	Pass	Harmonic
55	802.11n HT20	149	5630.16	48.92	68.30	-19.38	V	PEAK	Pass	Band Edge
55	802.11n HT20	149	17235.00	46.83	68.30	-21.47	H	Peak	Pass	Harmonic
56	802.11n HT20	157	-	-	-	-	-	-	-	Band Edge
56	802.11n HT20	157	17355.00	48.74	68.30	-19.56	H	Peak	Pass	Harmonic
57	802.11n HT20	165	5939.75	49.45	68.30	-18.85	V	PEAK	Pass	Band Edge
57	802.11n HT20	165	17475.00	47.80	68.30	-20.50	V	Peak	Pass	Harmonic
58	802.11n HT40	151	5941.42	51.09	68.30	-17.21	V	PEAK	Pass	Band Edge
58	802.11n HT40	151	-	-	-	-	-	-	-	Harmonic
59	802.11n HT40	159	5937.45	50.59	68.30	-17.71	H	PEAK	Pass	Band Edge
59	802.11n HT40	159	-	-	-	-	-	-	-	Harmonic
60	802.11ac VHT80	155	5948.95	51.96	68.30	-16.34	V	PEAK	Pass	Band Edge
60	802.11ac VHT80	155	17325.00	45.92	68.30	-22.38	V	Peak	Pass	Harmonic



Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
61	802.11ax HE20	149	5616.53	48.83	68.30	-19.47	V	PEAK	Pass	Band Edge
61	802.11ax HE20	149	17235.00	45.97	68.30	-22.33	V	Peak	Pass	Harmonic
62	802.11ax HE20	157	-	-	-	-	-	-	-	Band Edge
62	802.11ax HE20	157	17355.00	46.86	68.30	-21.44	H	Peak	Pass	Harmonic
63	802.11ax HE20	165	5938.88	50.18	68.30	-18.12	H	PEAK	Pass	Band Edge
63	802.11ax HE20	165	17475.00	48.25	68.30	-20.05	V	Peak	Pass	Harmonic
64	802.11ax HE40	151	5924.65	50.81	68.46	-17.65	V	PEAK	Pass	Band Edge
64	802.11ax HE40	151	-	-	-	-	-	-	-	Harmonic
65	802.11ax HE40	159	5600.78	49.72	68.30	-18.58	V	PEAK	Pass	Band Edge
65	802.11ax HE40	159	-	-	-	-	-	-	-	Harmonic
66	802.11ax HE80	155	5636.23	50.57	68.30	-17.73	V	PEAK	Pass	Band Edge
66	802.11ax HE80	155	-	-	-	-	-	-	-	Harmonic
67	802.11ax HE20	149	5640.89	48.09	68.30	-20.21	H	PEAK	Pass	Band Edge
67	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
68	802.11ax HE20	165	5926.25	50.43	68.30	-17.87	V	PEAK	Pass	Band Edge
68	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
69	802.11ac VHT80	42	33.88	25.33	40	-14.67	V	PEAK	Pass	LF
70	802.11ac VHT80	155	33.88	24.4	40	-15.6	V	PEAK	Pass	LF
71	Co-location	42	5147.42	49.64	54.00	-4.36	H	Average	Pass	Band Edge
		42	10420	45.77	68.3	-22.53	H	PEAK	Pass	Harmonic



Mode	1																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																
ANT	5+7																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-02-18</p>	<p>Date: 2024-02-18</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.35</td> <td>68.30</td> <td>-22.95</td> <td>56.00</td> <td>37.62</td> <td>10.73</td> <td>59.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>46.00</td> <td>74.00</td> <td>-28.00</td> <td>51.66</td> <td>40.56</td> <td>12.72</td> <td>58.94</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	45.35	68.30	-22.95	56.00	37.62	10.73	59.00	--	--	Peak	2	15540.00	46.00	74.00	-28.00	51.66	40.56	12.72	58.94	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.91</td> <td>68.30</td> <td>-22.39</td> <td>56.56</td> <td>37.62</td> <td>10.73</td> <td>59.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>45.06</td> <td>74.00</td> <td>-28.94</td> <td>50.72</td> <td>40.56</td> <td>12.72</td> <td>58.94</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10360.00	45.91	68.30	-22.39	56.56	37.62	10.73	59.00	--	--	Peak	2	15540.00	45.06	74.00	-28.94	50.72	40.56	12.72	58.94	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10360.00	45.35	68.30	-22.95	56.00	37.62	10.73	59.00	--	--	Peak																																																																																						
2	15540.00	46.00	74.00	-28.00	51.66	40.56	12.72	58.94	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10360.00	45.91	68.30	-22.39	56.56	37.62	10.73	59.00	--	--	Peak																																																																																						
2	15540.00	45.06	74.00	-28.94	50.72	40.56	12.72	58.94	--	--	Peak																																																																																						



Mode	2																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																	
ANT	5+7																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>45.84</td> <td>68.30</td> <td>-22.46</td> <td>56.30</td> <td>37.66</td> <td>10.79</td> <td>58.91</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>45.89</td> <td>74.00</td> <td>-28.11</td> <td>51.63</td> <td>40.60</td> <td>12.72</td> <td>59.06</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10440.00	45.84	68.30	-22.46	56.30	37.66	10.79	58.91	--	--	Peak	2	15660.00	45.89	74.00	-28.11	51.63	40.60	12.72	59.06	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>45.87</td> <td>68.30</td> <td>-22.43</td> <td>56.33</td> <td>37.66</td> <td>10.79</td> <td>58.91</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>45.60</td> <td>74.00</td> <td>-28.40</td> <td>51.34</td> <td>40.60</td> <td>12.72</td> <td>59.06</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10440.00	45.87	68.30	-22.43	56.33	37.66	10.79	58.91	--	--	Peak	2	15660.00	45.60	74.00	-28.40	51.34	40.60	12.72	59.06	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10440.00	45.84	68.30	-22.46	56.30	37.66	10.79	58.91	--	--	Peak																																																																																							
2	15660.00	45.89	74.00	-28.11	51.63	40.60	12.72	59.06	--	--	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10440.00	45.87	68.30	-22.43	56.33	37.66	10.79	58.91	--	--	Peak																																																																																							
2	15660.00	45.60	74.00	-28.40	51.34	40.60	12.72	59.06	--	--	Peak																																																																																							



Mode	3																																																																																																		
	Harmonic																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																		
ANT	5+7																																																																																																		
Pol.	Horizontal	Vertical																																																																																																	
Peak Avg	<p>Date: 2024-02-18</p>	<p>Date: 2024-02-18</p>																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.55</td> <td>68.30</td> <td>-21.75</td> <td>56.91</td> <td>37.69</td> <td>10.82</td> <td>58.87</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>47.62</td> <td>74.00</td> <td>-26.38</td> <td>53.41</td> <td>40.62</td> <td>12.71</td> <td>59.12</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	46.55	68.30	-21.75	56.91	37.69	10.82	58.87	--	--	Peak	2	15720.00	47.62	74.00	-26.38	53.41	40.62	12.71	59.12	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>48.11</td> <td>68.30</td> <td>-20.19</td> <td>58.47</td> <td>37.69</td> <td>10.82</td> <td>58.87</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>46.74</td> <td>74.00</td> <td>-27.26</td> <td>52.53</td> <td>40.62</td> <td>12.71</td> <td>59.12</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	48.11	68.30	-20.19	58.47	37.69	10.82	58.87	--	--	Peak	2	15720.00	46.74	74.00	-27.26	52.53	40.62	12.71	59.12	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10480.00	46.55	68.30	-21.75	56.91	37.69	10.82	58.87	--	--	Peak																																																																																								
2	15720.00	47.62	74.00	-26.38	53.41	40.62	12.71	59.12	--	--	Peak																																																																																								
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10480.00	48.11	68.30	-20.19	58.47	37.69	10.82	58.87	--	--	Peak																																																																																								
2	15720.00	46.74	74.00	-27.26	52.53	40.62	12.71	59.12	--	--	Peak																																																																																								



Mode	4																																																																																																
	Harmonic																																																																																																
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																
ANT	5+7																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-02-18</p>	<p>Date: 2024-02-18</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>46.09</td> <td>68.30</td> <td>-22.21</td> <td>56.35</td> <td>37.71</td> <td>10.85</td> <td>58.82</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>48.35</td> <td>74.00</td> <td>-25.65</td> <td>54.19</td> <td>40.63</td> <td>12.71</td> <td>59.18</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10520.00	46.09	68.30	-22.21	56.35	37.71	10.85	58.82	--	--	Peak	2	15780.00	48.35	74.00	-25.65	54.19	40.63	12.71	59.18	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>45.89</td> <td>68.30</td> <td>-22.41</td> <td>56.15</td> <td>37.71</td> <td>10.85</td> <td>58.82</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>46.85</td> <td>74.00</td> <td>-27.15</td> <td>52.69</td> <td>40.63</td> <td>12.71</td> <td>59.18</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10520.00	45.89	68.30	-22.41	56.15	37.71	10.85	58.82	--	--	Peak	2	15780.00	46.85	74.00	-27.15	52.69	40.63	12.71	59.18	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10520.00	46.09	68.30	-22.21	56.35	37.71	10.85	58.82	--	--	Peak																																																																																						
2	15780.00	48.35	74.00	-25.65	54.19	40.63	12.71	59.18	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10520.00	45.89	68.30	-22.41	56.15	37.71	10.85	58.82	--	--	Peak																																																																																						
2	15780.00	46.85	74.00	-27.15	52.69	40.63	12.71	59.18	--	--	Peak																																																																																						



Mode	5																																																																																																		
	Harmonic																																																																																																		
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																		
ANT	5+7																																																																																																		
Pol.	Horizontal	Vertical																																																																																																	
Peak Avg	<p>Date: 2024-02-18</p>	<p>Date: 2024-02-18</p>																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>46.97</td> <td>74.00</td> <td>-27.03</td> <td>57.01</td> <td>37.78</td> <td>10.91</td> <td>58.73</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>45.79</td> <td>74.00</td> <td>-28.21</td> <td>51.71</td> <td>40.67</td> <td>12.71</td> <td>59.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	46.97	74.00	-27.03	57.01	37.78	10.91	58.73	--	--	Peak	2	15900.00	45.79	74.00	-28.21	51.71	40.67	12.71	59.30	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>45.83</td> <td>74.00</td> <td>-28.17</td> <td>55.87</td> <td>37.78</td> <td>10.91</td> <td>58.73</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>46.51</td> <td>74.00</td> <td>-27.49</td> <td>52.43</td> <td>40.67</td> <td>12.71</td> <td>59.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	45.83	74.00	-28.17	55.87	37.78	10.91	58.73	--	--	Peak	2	15900.00	46.51	74.00	-27.49	52.43	40.67	12.71	59.30	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10600.00	46.97	74.00	-27.03	57.01	37.78	10.91	58.73	--	--	Peak																																																																																								
2	15900.00	45.79	74.00	-28.21	51.71	40.67	12.71	59.30	--	--	Peak																																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10600.00	45.83	74.00	-28.17	55.87	37.78	10.91	58.73	--	--	Peak																																																																																								
2	15900.00	46.51	74.00	-27.49	52.43	40.67	12.71	59.30	--	--	Peak																																																																																								



Mode	6																																																																																																		
	Harmonic																																																																																																		
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																		
ANT	5+7																																																																																																		
Pol.	Horizontal	Vertical																																																																																																	
Peak Avg	<p>Date: 2024-02-18</p>	<p>Date: 2024-02-18</p>																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>47.46</td> <td>74.00</td> <td>-26.54</td> <td>57.40</td> <td>37.81</td> <td>10.94</td> <td>58.69</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>46.45</td> <td>74.00</td> <td>-27.55</td> <td>52.43</td> <td>40.69</td> <td>12.70</td> <td>59.37</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	47.46	74.00	-26.54	57.40	37.81	10.94	58.69	--	--	Peak	2	15960.00	46.45	74.00	-27.55	52.43	40.69	12.70	59.37	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>48.03</td> <td>74.00</td> <td>-25.97</td> <td>57.97</td> <td>37.81</td> <td>10.94</td> <td>58.69</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>46.55</td> <td>74.00</td> <td>-27.45</td> <td>52.53</td> <td>40.69</td> <td>12.70</td> <td>59.37</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	48.03	74.00	-25.97	57.97	37.81	10.94	58.69	--	--	Peak	2	15960.00	46.55	74.00	-27.45	52.53	40.69	12.70	59.37	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10640.00	47.46	74.00	-26.54	57.40	37.81	10.94	58.69	--	--	Peak																																																																																								
2	15960.00	46.45	74.00	-27.55	52.43	40.69	12.70	59.37	--	--	Peak																																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10640.00	48.03	74.00	-25.97	57.97	37.81	10.94	58.69	--	--	Peak																																																																																								
2	15960.00	46.55	74.00	-27.45	52.53	40.69	12.70	59.37	--	--	Peak																																																																																								



Mode	7																																																																																																
	Harmonic																																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																
ANT	5+7																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-02-18</p>	<p>Date: 2024-02-18</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.27</td> <td>74.00</td> <td>-27.73</td> <td>55.26</td> <td>38.10</td> <td>11.21</td> <td>58.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>45.84</td> <td>68.30</td> <td>-22.46</td> <td>50.83</td> <td>40.95</td> <td>12.91</td> <td>58.85</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11000.00	46.27	74.00	-27.73	55.26	38.10	11.21	58.30	--	--	Peak	2	16500.00	45.84	68.30	-22.46	50.83	40.95	12.91	58.85	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>45.86</td> <td>74.00</td> <td>-28.14</td> <td>54.85</td> <td>38.10</td> <td>11.21</td> <td>58.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>46.35</td> <td>68.30</td> <td>-21.95</td> <td>51.34</td> <td>40.95</td> <td>12.91</td> <td>58.85</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11000.00	45.86	74.00	-28.14	54.85	38.10	11.21	58.30	--	--	Peak	2	16500.00	46.35	68.30	-21.95	51.34	40.95	12.91	58.85	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11000.00	46.27	74.00	-27.73	55.26	38.10	11.21	58.30	--	--	Peak																																																																																						
2	16500.00	45.84	68.30	-22.46	50.83	40.95	12.91	58.85	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11000.00	45.86	74.00	-28.14	54.85	38.10	11.21	58.30	--	--	Peak																																																																																						
2	16500.00	46.35	68.30	-21.95	51.34	40.95	12.91	58.85	--	--	Peak																																																																																						



Mode	8																																																																																																
	Harmonic																																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																
ANT	5+7																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-02-18</p>	<p>Date: 2024-02-18</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>47.33</td> <td>74.00</td> <td>-26.67</td> <td>55.90</td> <td>38.26</td> <td>11.29</td> <td>58.12</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>44.68</td> <td>68.30</td> <td>-23.62</td> <td>49.18</td> <td>41.07</td> <td>13.01</td> <td>58.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11160.00	47.33	74.00	-26.67	55.90	38.26	11.29	58.12	--	--	Peak	2	16740.00	44.68	68.30	-23.62	49.18	41.07	13.01	58.58	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>48.07</td> <td>74.00</td> <td>-25.93</td> <td>56.64</td> <td>38.26</td> <td>11.29</td> <td>58.12</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>45.71</td> <td>68.30</td> <td>-22.59</td> <td>50.21</td> <td>41.07</td> <td>13.01</td> <td>58.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11160.00	48.07	74.00	-25.93	56.64	38.26	11.29	58.12	--	--	Peak	2	16740.00	45.71	68.30	-22.59	50.21	41.07	13.01	58.58	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11160.00	47.33	74.00	-26.67	55.90	38.26	11.29	58.12	--	--	Peak																																																																																						
2	16740.00	44.68	68.30	-23.62	49.18	41.07	13.01	58.58	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11160.00	48.07	74.00	-25.93	56.64	38.26	11.29	58.12	--	--	Peak																																																																																						
2	16740.00	45.71	68.30	-22.59	50.21	41.07	13.01	58.58	--	--	Peak																																																																																						



Mode	9																																																																													
	Harmonic																																																																													
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																													
ANT	5+7																																																																													
Pol.	Horizontal	Vertical																																																																												
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>11400.00</td> <td>47.13</td> <td>74.00</td> <td>-26.87</td> <td>55.08</td> <td>38.50</td> <td>11.41</td> <td>57.86</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>17100.00</td> <td>45.47</td> <td>68.30</td> <td>-22.83</td> <td>49.25</td> <td>41.24</td> <td>13.14</td> <td>58.16</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	11400.00	47.13	74.00	-26.87	55.08	38.50	11.41	57.86	--	Peak	17100.00	45.47	68.30	-22.83	49.25	41.24	13.14	58.16	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>11400.00</td> <td>47.10</td> <td>74.00</td> <td>-26.90</td> <td>55.05</td> <td>38.50</td> <td>11.41</td> <td>57.86</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>17100.00</td> <td>46.01</td> <td>68.30</td> <td>-22.29</td> <td>49.79</td> <td>41.24</td> <td>13.14</td> <td>58.16</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	11400.00	47.10	74.00	-26.90	55.05	38.50	11.41	57.86	--	Peak	17100.00	46.01	68.30	-22.29	49.79	41.24	13.14	58.16	--	Peak
	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																						
11400.00	47.13	74.00	-26.87	55.08	38.50	11.41	57.86	--	Peak																																																																					
17100.00	45.47	68.30	-22.83	49.25	41.24	13.14	58.16	--	Peak																																																																					
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																						
11400.00	47.10	74.00	-26.90	55.05	38.50	11.41	57.86	--	Peak																																																																					
17100.00	46.01	68.30	-22.29	49.79	41.24	13.14	58.16	--	Peak																																																																					



Mode	10																																																																																	
	Band Edge																																																																																	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																	
ANT	5+7																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.34</td> <td>60.59</td> <td>74.00</td> <td>-13.41</td> <td>51.09</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>100</td> <td>350</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5146.34	60.59	74.00	-13.41	51.09	34.42	7.92	32.84	100	350	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>101.35</td> <td>-----</td> <td>-----</td> <td>91.86</td> <td>34.45</td> <td>7.94</td> <td>32.90</td> <td>100</td> <td>350</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	101.35	-----	-----	91.86	34.45	7.94	32.90	100	350	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5146.34	60.59	74.00	-13.41	51.09	34.42	7.92	32.84	100	350	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5180.00	101.35	-----	-----	91.86	34.45	7.94	32.90	100	350	PEAK																																																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.52</td> <td>49.75</td> <td>54.00</td> <td>-4.25</td> <td>40.25</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>100</td> <td>350</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5146.52	49.75	54.00	-4.25	40.25	34.42	7.92	32.84	100	350	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>94.33</td> <td>-----</td> <td>-----</td> <td>84.84</td> <td>34.44</td> <td>7.94</td> <td>32.89</td> <td>100</td> <td>350</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	94.33	-----	-----	84.84	34.44	7.94	32.89	100	350	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5146.52	49.75	54.00	-4.25	40.25	34.42	7.92	32.84	100	350	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5180.00	94.33	-----	-----	84.84	34.44	7.94	32.89	100	350	AVERAGE																																																																							



Mode	10																																																																						
	Band Edge																																																																						
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																						
ANT	5+7																																																																						
Pol.	Vertical	Fundamental																																																																					
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.58</td> <td>56.33</td> <td>74.00</td> <td>-17.67</td> <td>46.84</td> <td>34.42</td> <td>7.92</td> <td>32.85</td> <td>109</td> <td>280</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.58	56.33	74.00	-17.67	46.84	34.42	7.92	32.85	109	280	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>100.31</td> <td>-----</td> <td>90.82</td> <td>34.45</td> <td>7.94</td> <td>32.90</td> <td>109</td> <td>280</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	100.31	-----	90.82	34.45	7.94	32.90	109	280	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																															
1	5149.58	56.33	74.00	-17.67	46.84	34.42	7.92	32.85	109	280	PEAK																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																															
1	5180.00	100.31	-----	90.82	34.45	7.94	32.90	109	280	PEAK																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>48.01</td> <td>54.00</td> <td>-5.99</td> <td>38.52</td> <td>34.42</td> <td>7.92</td> <td>32.85</td> <td>109</td> <td>280</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	48.01	54.00	-5.99	38.52	34.42	7.92	32.85	109	280	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>92.73</td> <td>-----</td> <td>83.24</td> <td>34.45</td> <td>7.94</td> <td>32.90</td> <td>109</td> <td>280</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	92.73	-----	83.24	34.45	7.94	32.90	109	280	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																															
1	5149.94	48.01	54.00	-5.99	38.52	34.42	7.92	32.85	109	280	AVERAGE																																																												
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																															
1	5180.00	92.73	-----	83.24	34.45	7.94	32.90	109	280	AVERAGE																																																													



Mode	10																																																																																				
	Harmonic																																																																																				
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																				
ANT	5+7																																																																																				
Pol.	Horizontal	Vertical																																																																																			
Peak Avg	<p>Date: 2024-02-18</p>	<p>Date: 2024-02-18</p>																																																																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>45.87</td> <td>68.30</td> <td>-22.43</td> <td>56.52</td> <td>37.62</td> <td>10.73</td> <td>59.00</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15540.00</td> <td>45.49</td> <td>74.00</td> <td>-28.51</td> <td>51.15</td> <td>40.56</td> <td>12.72</td> <td>58.94</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 10360.00	45.87	68.30	-22.43	56.52	37.62	10.73	59.00	-- -- Peak	2 15540.00	45.49	74.00	-28.51	51.15	40.56	12.72	58.94	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 10360.00</td> <td>46.21</td> <td>68.30</td> <td>-22.09</td> <td>56.86</td> <td>37.62</td> <td>10.73</td> <td>59.00</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15540.00</td> <td>45.98</td> <td>74.00</td> <td>-28.02</td> <td>51.64</td> <td>40.56</td> <td>12.72</td> <td>58.94</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 10360.00	46.21	68.30	-22.09	56.86	37.62	10.73	59.00	-- -- Peak	2 15540.00	45.98	74.00	-28.02	51.64	40.56	12.72	58.94
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																														
1 10360.00	45.87	68.30	-22.43	56.52	37.62	10.73	59.00	-- -- Peak																																																																													
2 15540.00	45.49	74.00	-28.51	51.15	40.56	12.72	58.94	-- -- Peak																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																														
1 10360.00	46.21	68.30	-22.09	56.86	37.62	10.73	59.00	-- -- Peak																																																																													
2 15540.00	45.98	74.00	-28.02	51.64	40.56	12.72	58.94	-- -- Peak																																																																													



Mode	11																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz																																																																																																	
ANT	5+7																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>45.38</td> <td>68.30</td> <td>-22.92</td> <td>55.84</td> <td>37.66</td> <td>10.79</td> <td>58.91</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>46.36</td> <td>74.00</td> <td>-27.64</td> <td>52.10</td> <td>40.60</td> <td>12.72</td> <td>59.06</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10440.00	45.38	68.30	-22.92	55.84	37.66	10.79	58.91	--	--	Peak	2	15660.00	46.36	74.00	-27.64	52.10	40.60	12.72	59.06	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>46.03</td> <td>68.30</td> <td>-22.27</td> <td>56.49</td> <td>37.66</td> <td>10.79</td> <td>58.91</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>46.43</td> <td>74.00</td> <td>-27.57</td> <td>52.17</td> <td>40.60</td> <td>12.72</td> <td>59.06</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10440.00	46.03	68.30	-22.27	56.49	37.66	10.79	58.91	--	--	Peak	2	15660.00	46.43	74.00	-27.57	52.17	40.60	12.72	59.06	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10440.00	45.38	68.30	-22.92	55.84	37.66	10.79	58.91	--	--	Peak																																																																																							
2	15660.00	46.36	74.00	-27.64	52.10	40.60	12.72	59.06	--	--	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	10440.00	46.03	68.30	-22.27	56.49	37.66	10.79	58.91	--	--	Peak																																																																																							
2	15660.00	46.43	74.00	-27.57	52.17	40.60	12.72	59.06	--	--	Peak																																																																																							



Mode	12																																																																																																
	Harmonic																																																																																																
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz																																																																																																
ANT	5+7																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-02-18</p>	<p>Date: 2024-02-18</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>47.35</td> <td>68.30</td> <td>-20.95</td> <td>57.71</td> <td>37.69</td> <td>10.82</td> <td>58.87</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>46.39</td> <td>74.00</td> <td>-27.61</td> <td>52.18</td> <td>40.62</td> <td>12.71</td> <td>59.12</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10480.00	47.35	68.30	-20.95	57.71	37.69	10.82	58.87	--	--	Peak	2	15720.00	46.39	74.00	-27.61	52.18	40.62	12.71	59.12	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.75</td> <td>68.30</td> <td>-21.55</td> <td>57.11</td> <td>37.69</td> <td>10.82</td> <td>58.87</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>46.97</td> <td>74.00</td> <td>-27.03</td> <td>52.76</td> <td>40.62</td> <td>12.71</td> <td>59.12</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10480.00	46.75	68.30	-21.55	57.11	37.69	10.82	58.87	--	--	Peak	2	15720.00	46.97	74.00	-27.03	52.76	40.62	12.71	59.12	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10480.00	47.35	68.30	-20.95	57.71	37.69	10.82	58.87	--	--	Peak																																																																																						
2	15720.00	46.39	74.00	-27.61	52.18	40.62	12.71	59.12	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10480.00	46.75	68.30	-21.55	57.11	37.69	10.82	58.87	--	--	Peak																																																																																						
2	15720.00	46.97	74.00	-27.03	52.76	40.62	12.71	59.12	--	--	Peak																																																																																						



Mode	13																																																																																																
	Harmonic																																																																																																
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz																																																																																																
ANT	5+7																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-02-18</p>	<p>Date: 2024-02-18</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>47.27</td> <td>68.30</td> <td>-21.03</td> <td>57.53</td> <td>37.71</td> <td>10.85</td> <td>58.82</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>47.00</td> <td>74.00</td> <td>-27.00</td> <td>52.84</td> <td>40.63</td> <td>12.71</td> <td>59.18</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10520.00	47.27	68.30	-21.03	57.53	37.71	10.85	58.82	--	--	Peak	2	15780.00	47.00	74.00	-27.00	52.84	40.63	12.71	59.18	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>45.96</td> <td>68.30</td> <td>-22.34</td> <td>56.22</td> <td>37.71</td> <td>10.85</td> <td>58.82</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>47.02</td> <td>74.00</td> <td>-26.98</td> <td>52.86</td> <td>40.63</td> <td>12.71</td> <td>59.18</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	10520.00	45.96	68.30	-22.34	56.22	37.71	10.85	58.82	--	--	Peak	2	15780.00	47.02	74.00	-26.98	52.86	40.63	12.71	59.18	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10520.00	47.27	68.30	-21.03	57.53	37.71	10.85	58.82	--	--	Peak																																																																																						
2	15780.00	47.00	74.00	-27.00	52.84	40.63	12.71	59.18	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	10520.00	45.96	68.30	-22.34	56.22	37.71	10.85	58.82	--	--	Peak																																																																																						
2	15780.00	47.02	74.00	-26.98	52.86	40.63	12.71	59.18	--	--	Peak																																																																																						



Mode	14																																																																																																		
	Harmonic																																																																																																		
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz																																																																																																		
ANT	5+7																																																																																																		
Pol.	Horizontal	Vertical																																																																																																	
Peak Avg	<p>Date: 2024-02-18</p>	<p>Date: 2024-02-18</p>																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>46.65</td> <td>74.00</td> <td>-27.35</td> <td>56.69</td> <td>37.78</td> <td>10.91</td> <td>58.73</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>45.87</td> <td>74.00</td> <td>-28.13</td> <td>51.79</td> <td>40.67</td> <td>12.71</td> <td>59.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	46.65	74.00	-27.35	56.69	37.78	10.91	58.73	--	--	Peak	2	15900.00	45.87	74.00	-28.13	51.79	40.67	12.71	59.30	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>46.12</td> <td>74.00</td> <td>-27.88</td> <td>56.16</td> <td>37.78</td> <td>10.91</td> <td>58.73</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>46.96</td> <td>74.00</td> <td>-27.04</td> <td>52.88</td> <td>40.67</td> <td>12.71</td> <td>59.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10600.00	46.12	74.00	-27.88	56.16	37.78	10.91	58.73	--	--	Peak	2	15900.00	46.96	74.00	-27.04	52.88	40.67	12.71	59.30	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10600.00	46.65	74.00	-27.35	56.69	37.78	10.91	58.73	--	--	Peak																																																																																								
2	15900.00	45.87	74.00	-28.13	51.79	40.67	12.71	59.30	--	--	Peak																																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10600.00	46.12	74.00	-27.88	56.16	37.78	10.91	58.73	--	--	Peak																																																																																								
2	15900.00	46.96	74.00	-27.04	52.88	40.67	12.71	59.30	--	--	Peak																																																																																								



Mode	15																																																																					
	Band Edge																																																																					
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																					
ANT	5+7																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5350.52</td> <td>57.74</td> <td>74.00</td> <td>-16.26</td> <td>48.00</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>337</td> <td>55 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5350.52	57.74	74.00	-16.26	48.00	34.58	8.33	33.17	337	55 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>100.92</td> <td>-----</td> <td>-----</td> <td>91.24</td> <td>34.55</td> <td>8.25</td> <td>33.12</td> <td>337</td> <td>55 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	100.92	-----	-----	91.24	34.55	8.25	33.12	337	55 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5350.52	57.74	74.00	-16.26	48.00	34.58	8.33	33.17	337	55 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5320.00	100.92	-----	-----	91.24	34.55	8.25	33.12	337	55 PEAK																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5350.10</td> <td>49.44</td> <td>54.00</td> <td>-4.56</td> <td>39.70</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>337</td> <td>55 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5350.10	49.44	54.00	-4.56	39.70	34.58	8.33	33.17	337	55 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>93.78</td> <td>-----</td> <td>-----</td> <td>84.10</td> <td>34.55</td> <td>8.25</td> <td>33.12</td> <td>337</td> <td>55 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	93.78	-----	-----	84.10	34.55	8.25	33.12	337	55 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5350.10	49.44	54.00	-4.56	39.70	34.58	8.33	33.17	337	55 AVERAGE																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5320.00	93.78	-----	-----	84.10	34.55	8.25	33.12	337	55 AVERAGE																																																													



Mode	15																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																	
ANT	5+7																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5332.06</td> <td>58.89</td> <td>74.00</td> <td>-15.11</td> <td>49.15</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>191</td> <td>279 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5332.06	58.89	74.00	-15.11	49.15	34.58	8.33	33.17	191	279 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>100.21</td> <td>-----</td> <td>-----</td> <td>90.53</td> <td>34.55</td> <td>8.25</td> <td>33.12</td> <td>191</td> <td>279 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5320.00	100.21	-----	-----	90.53	34.55	8.25	33.12	191	279 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5332.06	58.89	74.00	-15.11	49.15	34.58	8.33	33.17	191	279 PEAK																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5320.00	100.21	-----	-----	90.53	34.55	8.25	33.12	191	279 PEAK																																																																								
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.10</td> <td>49.61</td> <td>54.00</td> <td>-4.39</td> <td>39.87</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>191</td> <td>279 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5350.10	49.61	54.00	-4.39	39.87	34.58	8.33	33.17	191	279 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>92.89</td> <td>-----</td> <td>-----</td> <td>83.21</td> <td>34.55</td> <td>8.25</td> <td>33.12</td> <td>191</td> <td>279 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark	1	5320.00	92.89	-----	-----	83.21	34.55	8.25	33.12	191	279 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5350.10	49.61	54.00	-4.39	39.87	34.58	8.33	33.17	191	279 AVERAGE																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	Remark																																																																								
1	5320.00	92.89	-----	-----	83.21	34.55	8.25	33.12	191	279 AVERAGE																																																																								







Mode	15																																																																																																		
	Harmonic																																																																																																		
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																																		
ANT	5+7																																																																																																		
Pol.	Horizontal	Vertical																																																																																																	
Peak Avg	<p>Date: 2024-02-18</p>	<p>Date: 2024-02-18</p>																																																																																																	
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>47.26</td> <td>74.00</td> <td>-26.74</td> <td>57.20</td> <td>37.81</td> <td>10.94</td> <td>58.69</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>46.22</td> <td>74.00</td> <td>-27.78</td> <td>52.20</td> <td>40.69</td> <td>12.70</td> <td>59.37</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	47.26	74.00	-26.74	57.20	37.81	10.94	58.69	--	--	Peak	2	15960.00	46.22	74.00	-27.78	52.20	40.69	12.70	59.37	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>47.64</td> <td>74.00</td> <td>-26.36</td> <td>57.58</td> <td>37.81</td> <td>10.94</td> <td>58.69</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>46.02</td> <td>74.00</td> <td>-27.98</td> <td>52.00</td> <td>40.69</td> <td>12.70</td> <td>59.37</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	47.64	74.00	-26.36	57.58	37.81	10.94	58.69	--	--	Peak	2	15960.00	46.02	74.00	-27.98	52.00	40.69	12.70	59.37	--	--
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10640.00	47.26	74.00	-26.74	57.20	37.81	10.94	58.69	--	--	Peak																																																																																								
2	15960.00	46.22	74.00	-27.78	52.20	40.69	12.70	59.37	--	--	Peak																																																																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																											
1	10640.00	47.64	74.00	-26.36	57.58	37.81	10.94	58.69	--	--	Peak																																																																																								
2	15960.00	46.02	74.00	-27.98	52.00	40.69	12.70	59.37	--	--	Peak																																																																																								



Mode	16																																																																																							
	Band Edge																																																																																							
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																							
ANT	5+7																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.90</td> <td>55.77</td> <td>74.00</td> <td>-18.23</td> <td>46.05</td> <td>34.66</td> <td>8.41</td> <td>33.35</td> <td>204</td> <td>281</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.55</td> <td>61.15</td> <td>68.30</td> <td>-7.15</td> <td>51.44</td> <td>34.67</td> <td>8.40</td> <td>33.36</td> <td>204</td> <td>281</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.90	55.77	74.00	-18.23	46.05	34.66	8.41	33.35	204	281	PEAK	2	5469.55	61.15	68.30	-7.15	51.44	34.67	8.40	33.36	204	281	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>99.15</td> <td>-----</td> <td>-----</td> <td>89.50</td> <td>34.69</td> <td>8.36</td> <td>33.40</td> <td>204</td> <td>281</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	99.15	-----	-----	89.50	34.69	8.36	33.40	204	281	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5458.90	55.77	74.00	-18.23	46.05	34.66	8.41	33.35	204	281	PEAK																																																																													
2	5469.55	61.15	68.30	-7.15	51.44	34.67	8.40	33.36	204	281	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5500.00	99.15	-----	-----	89.50	34.69	8.36	33.40	204	281	PEAK																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.80</td> <td>45.91</td> <td>54.00</td> <td>-8.09</td> <td>36.19</td> <td>34.66</td> <td>8.41</td> <td>33.35</td> <td>204</td> <td>281</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.80	45.91	54.00	-8.09	36.19	34.66	8.41	33.35	204	281	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>92.37</td> <td>-----</td> <td>-----</td> <td>82.72</td> <td>34.69</td> <td>8.36</td> <td>33.40</td> <td>204</td> <td>281</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	92.37	-----	-----	82.72	34.69	8.36	33.40	204	281	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5459.80	45.91	54.00	-8.09	36.19	34.66	8.41	33.35	204	281	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5500.00	92.37	-----	-----	82.72	34.69	8.36	33.40	204	281	AVERAGE																																																																													

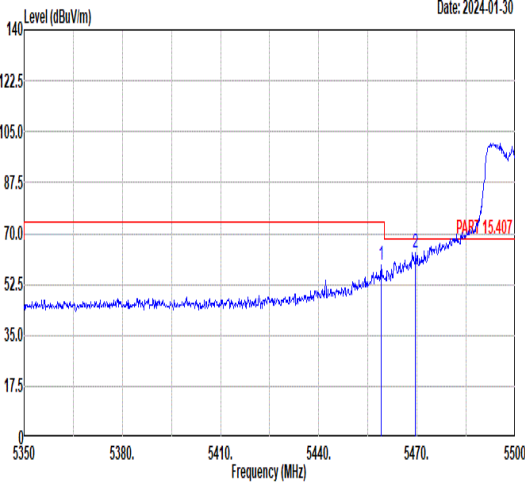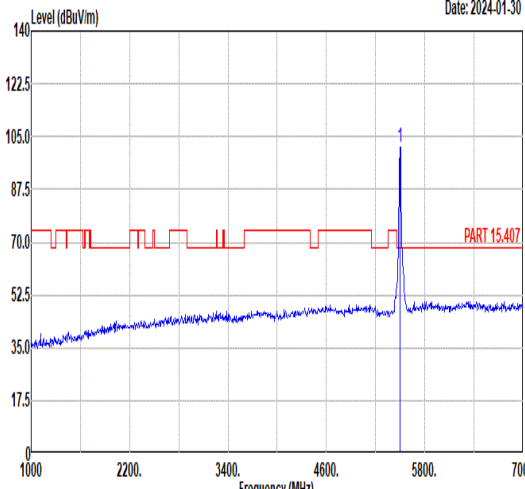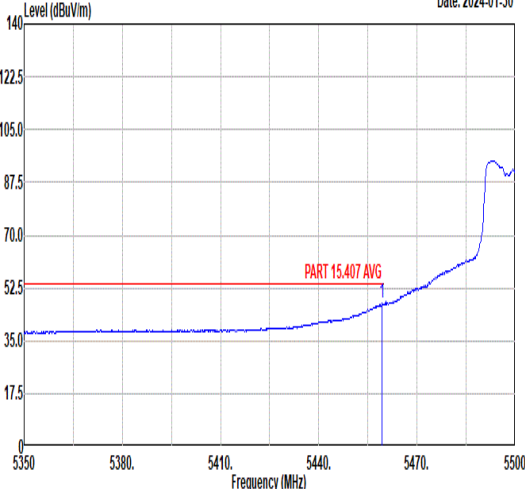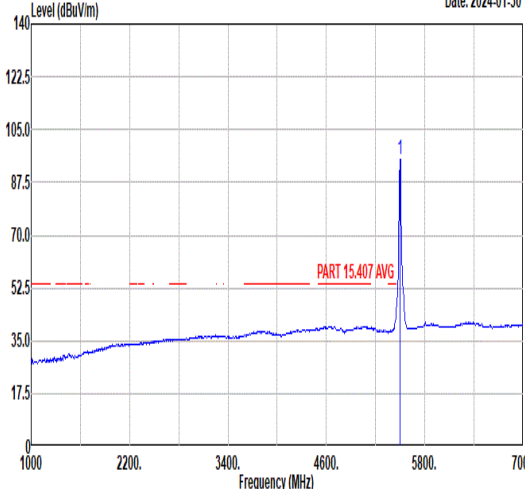

Mode	16																																																																																							
	Band Edge																																																																																							
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																							
ANT	5+7																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	 <p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.05</td> <td>59.25</td> <td>74.00</td> <td>-14.75</td> <td>49.53</td> <td>34.66</td> <td>8.41</td> <td>33.35</td> <td>187</td> <td>294</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.55</td> <td>63.60</td> <td>68.30</td> <td>-4.70</td> <td>53.89</td> <td>34.67</td> <td>8.40</td> <td>33.36</td> <td>187</td> <td>294</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.05	59.25	74.00	-14.75	49.53	34.66	8.41	33.35	187	294	PEAK	2	5469.55	63.60	68.30	-4.70	53.89	34.67	8.40	33.36	187	294	PEAK	 <p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>101.51</td> <td>-----</td> <td>-----</td> <td>91.86</td> <td>34.69</td> <td>8.36</td> <td>33.40</td> <td>187</td> <td>294</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	101.51	-----	-----	91.86	34.69	8.36	33.40	187	294	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5459.05	59.25	74.00	-14.75	49.53	34.66	8.41	33.35	187	294	PEAK																																																																													
2	5469.55	63.60	68.30	-4.70	53.89	34.67	8.40	33.36	187	294	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5500.00	101.51	-----	-----	91.86	34.69	8.36	33.40	187	294	PEAK																																																																													
Avg	 <p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.35</td> <td>47.33</td> <td>54.00</td> <td>-6.67</td> <td>37.61</td> <td>34.66</td> <td>8.41</td> <td>33.35</td> <td>187</td> <td>294</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.35	47.33	54.00	-6.67	37.61	34.66	8.41	33.35	187	294	AVERAGE	 <p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>95.21</td> <td>-----</td> <td>-----</td> <td>85.55</td> <td>34.70</td> <td>8.36</td> <td>33.40</td> <td>187</td> <td>294</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	95.21	-----	-----	85.55	34.70	8.36	33.40	187	294	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5459.35	47.33	54.00	-6.67	37.61	34.66	8.41	33.35	187	294	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5500.00	95.21	-----	-----	85.55	34.70	8.36	33.40	187	294	AVERAGE																																																																													



Mode	16																																																																																																
	Harmonic																																																																																																
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																
ANT	5+7																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<p>Date: 2024-02-18</p>	<p>Date: 2024-02-18</p>																																																																																															
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.58</td> <td>74.00</td> <td>-27.42</td> <td>55.57</td> <td>38.10</td> <td>11.21</td> <td>58.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>46.06</td> <td>68.30</td> <td>-22.24</td> <td>51.05</td> <td>40.95</td> <td>12.91</td> <td>58.85</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11000.00	46.58	74.00	-27.42	55.57	38.10	11.21	58.30	--	--	Peak	2	16500.00	46.06	68.30	-22.24	51.05	40.95	12.91	58.85	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.89</td> <td>74.00</td> <td>-27.11</td> <td>55.88</td> <td>38.10</td> <td>11.21</td> <td>58.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>46.16</td> <td>68.30</td> <td>-22.14</td> <td>51.15</td> <td>40.95</td> <td>12.91</td> <td>58.85</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	11000.00	46.89	74.00	-27.11	55.88	38.10	11.21	58.30	--	--	Peak	2	16500.00	46.16	68.30	-22.14	51.15	40.95	12.91	58.85	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11000.00	46.58	74.00	-27.42	55.57	38.10	11.21	58.30	--	--	Peak																																																																																						
2	16500.00	46.06	68.30	-22.24	51.05	40.95	12.91	58.85	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																										
1	11000.00	46.89	74.00	-27.11	55.88	38.10	11.21	58.30	--	--	Peak																																																																																						
2	16500.00	46.16	68.30	-22.14	51.15	40.95	12.91	58.85	--	--	Peak																																																																																						



Mode	17																																																																																												
	Harmonic																																																																																												
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																												
ANT	5+7																																																																																												
Pol.	Horizontal	Vertical																																																																																											
Peak Avg	<p>Date: 2024-02-18</p>	<p>Date: 2024-02-18</p>																																																																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>48.13</td> <td>74.00</td> <td>-25.87</td> <td>56.70</td> <td>38.26</td> <td>11.29</td> <td>58.12</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2 16740.00</td> <td>45.66</td> <td>68.30</td> <td>-22.64</td> <td>50.16</td> <td>41.07</td> <td>13.01</td> <td>58.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11160.00	48.13	74.00	-25.87	56.70	38.26	11.29	58.12	--	--	Peak	2 16740.00	45.66	68.30	-22.64	50.16	41.07	13.01	58.58	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>46.87</td> <td>74.00</td> <td>-27.13</td> <td>55.44</td> <td>38.26</td> <td>11.29</td> <td>58.12</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2 16740.00</td> <td>46.48</td> <td>68.30</td> <td>-21.82</td> <td>50.98</td> <td>41.07</td> <td>13.01</td> <td>58.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 11160.00	46.87	74.00	-27.13	55.44	38.26	11.29	58.12	--	--	Peak	2 16740.00	46.48	68.30	-21.82	50.98	41.07	13.01	58.58	--	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																						
1 11160.00	48.13	74.00	-25.87	56.70	38.26	11.29	58.12	--	--	Peak																																																																																			
2 16740.00	45.66	68.30	-22.64	50.16	41.07	13.01	58.58	--	--	Peak																																																																																			
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																						
1 11160.00	46.87	74.00	-27.13	55.44	38.26	11.29	58.12	--	--	Peak																																																																																			
2 16740.00	46.48	68.30	-21.82	50.98	41.07	13.01	58.58	--	--	Peak																																																																																			



Mode	18																																																																																	
	Band Edge																																																																																	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																	
ANT	5+7																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5726.85</td> <td>61.48</td> <td>68.30</td> <td>-6.82</td> <td>51.09</td> <td>35.06</td> <td>8.68</td> <td>33.35</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>259 58 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5726.85	61.48	68.30	-6.82	51.09	35.06	8.68	33.35								259 58 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>102.35</td> <td>-----</td> <td>-----</td> <td>92.13</td> <td>35.01</td> <td>8.57</td> <td>33.36</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>259 58 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5700.00	102.35	-----	-----	92.13	35.01	8.57	33.36								259 58 PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 5726.85	61.48	68.30	-6.82	51.09	35.06	8.68	33.35																																																																											
							259 58 PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 5700.00	102.35	-----	-----	92.13	35.01	8.57	33.36																																																																											
							259 58 PEAK																																																																											
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>95.83</td> <td>-----</td> <td>-----</td> <td>85.61</td> <td>35.01</td> <td>8.57</td> <td>33.36</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>259 58 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5700.00	95.83	-----	-----	85.61	35.01	8.57	33.36								259 58 AVERAGE																																								
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																											
1 5700.00	95.83	-----	-----	85.61	35.01	8.57	33.36																																																																											
							259 58 AVERAGE																																																																											



Mode	18																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																									
ANT	5+7																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5726.13</td> <td>60.48</td> <td>68.30</td> <td>-7.82</td> <td>50.09</td> <td>35.06</td> <td>8.68</td> <td>33.35</td> <td>200</td> <td>325</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5726.13	60.48	68.30	-7.82	50.09	35.06	8.68	33.35	200	325	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>102.96</td> <td>-----</td> <td>-----</td> <td>92.70</td> <td>35.02</td> <td>8.60</td> <td>33.36</td> <td>200</td> <td>325</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	102.96	-----	-----	92.70	35.02	8.60	33.36	200	325	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5726.13	60.48	68.30	-7.82	50.09	35.06	8.68	33.35	200	325	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	102.96	-----	-----	92.70	35.02	8.60	33.36	200	325	PEAK																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>96.24</td> <td>-----</td> <td>-----</td> <td>85.98</td> <td>35.02</td> <td>8.60</td> <td>33.36</td> <td>200</td> <td>325</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	96.24	-----	-----	85.98	35.02	8.60	33.36	200	325	AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	96.24	-----	-----	85.98	35.02	8.60	33.36	200	325	AVERAGE																																																															



Mode	18																																																																												
	Harmonic																																																																												
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																												
ANT	5+7																																																																												
Pol.	Horizontal	Vertical																																																																											
Peak Avg	<p>Date: 2024-02-18</p>	<p>Date: 2024-02-18</p>																																																																											
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>11400.00</td> <td>46.49</td> <td>74.00</td> <td>-27.51</td> <td>54.44</td> <td>38.50</td> <td>11.41</td> <td>57.86</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>17100.00</td> <td>46.68</td> <td>68.30</td> <td>-21.62</td> <td>50.46</td> <td>41.24</td> <td>13.14</td> <td>58.16</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	11400.00	46.49	74.00	-27.51	54.44	38.50	11.41	57.86	--	Peak	17100.00	46.68	68.30	-21.62	50.46	41.24	13.14	58.16	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>11400.00</td> <td>46.80</td> <td>74.00</td> <td>-27.20</td> <td>54.75</td> <td>38.50</td> <td>11.41</td> <td>57.86</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>17100.00</td> <td>45.22</td> <td>68.30</td> <td>-23.08</td> <td>49.00</td> <td>41.24</td> <td>13.14</td> <td>58.16</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	11400.00	46.80	74.00	-27.20	54.75	38.50	11.41	57.86	--	Peak	17100.00	45.22	68.30	-23.08	49.00	41.24	13.14	58.16	--
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																					
11400.00	46.49	74.00	-27.51	54.44	38.50	11.41	57.86	--	Peak																																																																				
17100.00	46.68	68.30	-21.62	50.46	41.24	13.14	58.16	--	Peak																																																																				
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																					
11400.00	46.80	74.00	-27.20	54.75	38.50	11.41	57.86	--	Peak																																																																				
17100.00	45.22	68.30	-23.08	49.00	41.24	13.14	58.16	--	Peak																																																																				



Mode	19																																																																													
	Band Edge - L																																																																													
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																													
ANT	5+7																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>MHz</th> <th>dBuV/m</th> </tr> <tr> <th></th> <th></th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.25</td> <td>59.36</td> <td>74.00</td> <td>-14.64</td> <td>49.86</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>298</td> <td>52 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor			MHz	dBuV/m			dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.25	59.36	74.00	-14.64	49.86	34.42	7.92	32.84	298	52 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>MHz</th> <th>dBuV/m</th> </tr> <tr> <th></th> <th></th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>99.02</td> <td>-----</td> <td>-----</td> <td>89.54</td> <td>34.45</td> <td>7.94</td> <td>32.91</td> <td>298</td> <td>52 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor			MHz	dBuV/m			dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	99.02	-----	-----	89.54	34.45	7.94	32.91	298	52 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line Margin	Level Factor	Loss Factor			MHz	dBuV/m																																																																						
		dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5147.25	59.36	74.00	-14.64	49.86	34.42	7.92	32.84	298	52 PEAK																																																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor			MHz	dBuV/m																																																																						
		dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5190.00	99.02	-----	-----	89.54	34.45	7.94	32.91	298	52 PEAK																																																																				
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>MHz</th> <th>dBuV/m</th> </tr> <tr> <th></th> <th></th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.58</td> <td>50.16</td> <td>54.00</td> <td>-3.84</td> <td>40.66</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>298</td> <td>52 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor			MHz	dBuV/m			dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.58	50.16	54.00	-3.84	40.66	34.42	7.92	32.84	298	52 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>MHz</th> <th>dBuV/m</th> </tr> <tr> <th></th> <th></th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>92.71</td> <td>-----</td> <td>-----</td> <td>83.23</td> <td>34.45</td> <td>7.94</td> <td>32.91</td> <td>298</td> <td>52 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor			MHz	dBuV/m			dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	92.71	-----	-----	83.23	34.45	7.94	32.91	298	52 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor			MHz	dBuV/m																																																																						
		dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5148.58	50.16	54.00	-3.84	40.66	34.42	7.92	32.84	298	52 AVERAGE																																																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line Margin	Level Factor	Loss Factor			MHz	dBuV/m																																																																						
		dB	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	5190.00	92.71	-----	-----	83.23	34.45	7.94	32.91	298	52 AVERAGE																																																																				



	19	
Mode	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz	
ANT	5+7	
Pol.	Horizontal	Fundamental
Peak	<p style="text-align: right;">Date: 2024-01-30</p>	
	Blank	
Avg	<p style="text-align: right;">Date: 2024-01-30</p>	
	Blank	



Mode	19																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																																	
ANT	5+7																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.53</td> <td>58.37</td> <td>74.00</td> <td>-15.63</td> <td>48.88</td> <td>34.42</td> <td>7.92</td> <td>32.85</td> <td>400</td> <td>37</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.53	58.37	74.00	-15.63	48.88	34.42	7.92	32.85	400	37	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>95.75</td> <td>-----</td> <td>-----</td> <td>86.26</td> <td>34.45</td> <td>7.94</td> <td>32.90</td> <td>400</td> <td>37</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	95.75	-----	-----	86.26	34.45	7.94	32.90	400	37	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5149.53	58.37	74.00	-15.63	48.88	34.42	7.92	32.85	400	37	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5190.00	95.75	-----	-----	86.26	34.45	7.94	32.90	400	37	PEAK																																																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.53</td> <td>48.31</td> <td>54.00</td> <td>-5.69</td> <td>38.82</td> <td>34.42</td> <td>7.92</td> <td>32.85</td> <td>400</td> <td>37</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.53	48.31	54.00	-5.69	38.82	34.42	7.92	32.85	400	37	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>88.83</td> <td>-----</td> <td>-----</td> <td>79.34</td> <td>34.44</td> <td>7.94</td> <td>32.89</td> <td>400</td> <td>37</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	88.83	-----	-----	79.34	34.44	7.94	32.89	400	37	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5149.53	48.31	54.00	-5.69	38.82	34.42	7.92	32.85	400	37	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5190.00	88.83	-----	-----	79.34	34.44	7.94	32.89	400	37	AVERAGE																																																																							



	19	
Mode	Band Edge - R	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz	
ANT	5+7	
Pol.	Vertical	Fundamental
Peak		
	Blank	
Avg		
	Blank	



Mode	20																																																																				
	Band Edge - L																																																																				
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																				
ANT	5+7																																																																				
Pol.	Horizontal	Fundamental																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.20</td> <td>54.52</td> <td>74.00</td> <td>-19.48</td> <td>45.02</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>329</td> <td>51 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.20	54.52	74.00	-19.48	45.02	34.42	7.92	32.84	329	51 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>99.13</td> <td>-----</td> <td>89.64</td> <td>34.47</td> <td>7.98</td> <td>32.96</td> <td>329</td> <td>51 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	99.13	-----	89.64	34.47	7.98	32.96	329	51 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																													
1	5147.20	54.52	74.00	-19.48	45.02	34.42	7.92	32.84	329	51 PEAK																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																													
1	5230.00	99.13	-----	89.64	34.47	7.98	32.96	329	51 PEAK																																																												
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.89</td> <td>43.80</td> <td>54.00</td> <td>-10.20</td> <td>34.30</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>329</td> <td>51 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.89	43.80	54.00	-10.20	34.30	34.42	7.92	32.84	329	51 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>92.15</td> <td>-----</td> <td>82.64</td> <td>34.48</td> <td>8.01</td> <td>32.98</td> <td>329</td> <td>51 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	92.15	-----	82.64	34.48	8.01	32.98	329	51 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																													
1	5147.89	43.80	54.00	-10.20	34.30	34.42	7.92	32.84	329	51 AVERAGE																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																													
1	5230.00	92.15	-----	82.64	34.48	8.01	32.98	329	51 AVERAGE																																																												



Mode	20																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																					
ANT	5+7																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5375.36</td> <td>48.75</td> <td>74.00</td> <td>-25.25</td> <td>38.96</td> <td>34.60</td> <td>8.40</td> <td>33.21</td> <td>329</td> <td>51</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5375.36	48.75	74.00	-25.25	38.96	34.60	8.40	33.21	329	51	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5375.36	48.75	74.00	-25.25	38.96	34.60	8.40	33.21	329	51	PEAK																											
Avg	<p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5358.57</td> <td>38.90</td> <td>54.00</td> <td>-15.10</td> <td>29.14</td> <td>34.59</td> <td>8.35</td> <td>33.18</td> <td>329</td> <td>51</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5358.57	38.90	54.00	-15.10	29.14	34.59	8.35	33.18	329	51	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5358.57	38.90	54.00	-15.10	29.14	34.59	8.35	33.18	329	51	AVERAGE																											



Mode	20																																																											
	Band Edge - L																																																											
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																											
ANT	5+7																																																											
Pol.	Vertical	Fundamental																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.28</td> <td>52.26</td> <td>74.00</td> <td>-21.74</td> <td>42.76</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>385</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	5146.28	52.26	74.00	-21.74	42.76	34.42	7.92	32.84	385	0 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>94.95</td> <td>-----</td> <td>-----</td> <td>85.44</td> <td>34.48</td> <td>8.01</td> <td>32.98</td> <td>385</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	5230.00	94.95	-----	-----	85.44	34.48	8.01	32.98	385	0 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																		
1	5146.28	52.26	74.00	-21.74	42.76	34.42	7.92	32.84	385	0 PEAK																																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																		
1	5230.00	94.95	-----	-----	85.44	34.48	8.01	32.98	385	0 PEAK																																																		
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5146.05</td> <td>42.76</td> <td>54.00</td> <td>-11.24</td> <td>33.26</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>385</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	5146.05	42.76	54.00	-11.24	33.26	34.42	7.92	32.84	385	0 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>87.95</td> <td>-----</td> <td>-----</td> <td>78.43</td> <td>34.49</td> <td>8.02</td> <td>32.99</td> <td>385</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	5230.00	87.95	-----	-----	78.43	34.49	8.02	32.99	385	0 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																		
1	5146.05	42.76	54.00	-11.24	33.26	34.42	7.92	32.84	385	0 AVERAGE																																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																																		
1	5230.00	87.95	-----	-----	78.43	34.49	8.02	32.99	385	0 AVERAGE																																																		





Mode	20																															
	Band Edge - R																															
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																															
ANT	5+7																															
Pol.	Vertical	Fundamental																														
Peak	<p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5387.78</td> <td>48.24</td> <td>74.00</td> <td>-25.76</td> <td>38.43</td> <td>34.61</td> <td>8.43</td> <td>33.23</td> <td>385</td> <td>0 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5387.78	48.24	74.00	-25.76	38.43	34.61	8.43	33.23	385	0 PEAK	Blank
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																							
1 5387.78	48.24	74.00	-25.76	38.43	34.61	8.43	33.23	385	0 PEAK																							
Avg	<p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5388.93</td> <td>38.57</td> <td>54.00</td> <td>-15.43</td> <td>28.76</td> <td>34.61</td> <td>8.43</td> <td>33.23</td> <td>385</td> <td>0 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5388.93	38.57	54.00	-15.43	28.76	34.61	8.43	33.23	385	0 AVERAGE	Blank
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																							
1 5388.93	38.57	54.00	-15.43	28.76	34.61	8.43	33.23	385	0 AVERAGE																							



Mode	21																																																																											
	Band Edge - L																																																																											
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																											
ANT	5+7																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5080.73</td> <td>50.21</td> <td>74.00</td> <td>-23.79</td> <td>40.70</td> <td>34.37</td> <td>7.87</td> <td>32.73</td> <td>200</td> <td>56</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5080.73	50.21	74.00	-23.79	40.70	34.37	7.87	32.73	200	56	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>98.59</td> <td>-----</td> <td>-----</td> <td>89.01</td> <td>34.51</td> <td>8.10</td> <td>33.03</td> <td>200</td> <td>56</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	98.59	-----	-----	89.01	34.51	8.10	33.03	200	56	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5080.73	50.21	74.00	-23.79	40.70	34.37	7.87	32.73	200	56	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5270.00	98.59	-----	-----	89.01	34.51	8.10	33.03	200	56	PEAK																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5139.86</td> <td>40.61</td> <td>54.00</td> <td>-13.39</td> <td>31.12</td> <td>34.41</td> <td>7.91</td> <td>32.83</td> <td>200</td> <td>56</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5139.86	40.61	54.00	-13.39	31.12	34.41	7.91	32.83	200	56	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>92.10</td> <td>-----</td> <td>-----</td> <td>82.49</td> <td>34.52</td> <td>8.14</td> <td>33.05</td> <td>200</td> <td>56</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	92.10	-----	-----	82.49	34.52	8.14	33.05	200	56	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5139.86	40.61	54.00	-13.39	31.12	34.41	7.91	32.83	200	56	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5270.00	92.10	-----	-----	82.49	34.52	8.14	33.05	200	56	AVERAGE																																																																	

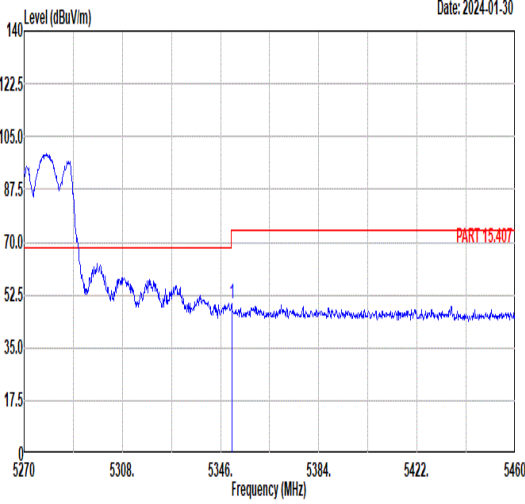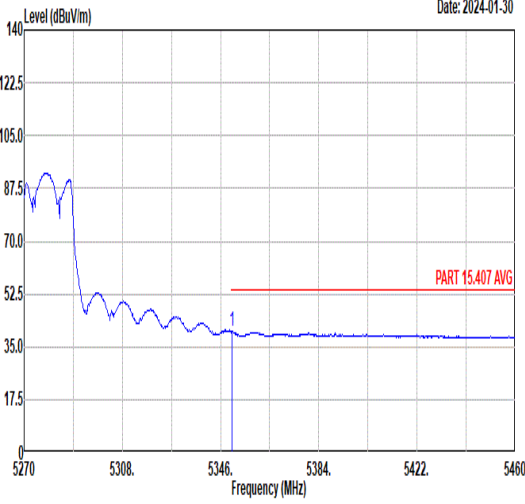

Mode	21																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																									
ANT	5+7																																									
Pol.	Horizontal	Fundamental																																								
Peak	 <p style="text-align: right; font-size: small;">Date: 2024-01-30</p> <table border="1" style="width: 100%; font-size: x-small; border-collapse: collapse;"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.37</td> <td>49.41</td> <td>74.00</td> <td>-24.59</td> <td>39.67</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>200</td> <td>56</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.37	49.41	74.00	-24.59	39.67	34.58	8.33	33.17	200	56	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5350.37	49.41	74.00	-24.59	39.67	34.58	8.33	33.17	200	56	PEAK																															
Avg	 <p style="text-align: right; font-size: small;">Date: 2024-01-30</p> <table border="1" style="width: 100%; font-size: x-small; border-collapse: collapse;"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.56</td> <td>40.04</td> <td>54.00</td> <td>-13.96</td> <td>30.30</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>200</td> <td>56</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.56	40.04	54.00	-13.96	30.30	34.58	8.33	33.17	200	56	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5350.56	40.04	54.00	-13.96	30.30	34.58	8.33	33.17	200	56	AVERAGE																															



Mode	21																																																																							
	Band Edge - L																																																																							
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																							
ANT	5+7																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5035.37</td> <td>50.28</td> <td>74.00</td> <td>-23.72</td> <td>40.77</td> <td>34.33</td> <td>7.84</td> <td>32.66</td> <td>359</td> <td>22</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5035.37	50.28	74.00	-23.72	40.77	34.33	7.84	32.66	359	22	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>96.58</td> <td>-----</td> <td>-----</td> <td>87.00</td> <td>34.51</td> <td>8.09</td> <td>33.02</td> <td>359</td> <td>22</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	96.58	-----	-----	87.00	34.51	8.09	33.02	359	22	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor		Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1	5035.37	50.28	74.00	-23.72	40.77	34.33	7.84	32.66	359	22	PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor		Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1	5270.00	96.58	-----	-----	87.00	34.51	8.09	33.02	359	22	PEAK																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.96</td> <td>39.96</td> <td>54.00</td> <td>-14.04</td> <td>30.46</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>359</td> <td>22</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.96	39.96	54.00	-14.04	30.46	34.42	7.92	32.84	359	22	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>89.08</td> <td>-----</td> <td>-----</td> <td>79.47</td> <td>34.52</td> <td>8.14</td> <td>33.05</td> <td>359</td> <td>22</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	89.08	-----	-----	79.47	34.52	8.14	33.05	359	22	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor		Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1	5147.96	39.96	54.00	-14.04	30.46	34.42	7.92	32.84	359	22	AVERAGE																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor		Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1	5270.00	89.08	-----	-----	79.47	34.52	8.14	33.05	359	22	AVERAGE																																																													



	21	
Mode	Band Edge - R	
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz	
ANT	5+7	
Pol.	Vertical	Fundamental
Peak		
	Blank	
Avg		
	Blank	







Mode	22																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																									
ANT	5+7																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5076.88</td> <td>50.02</td> <td>74.00</td> <td>-23.98</td> <td>40.52</td> <td>34.36</td> <td>7.87</td> <td>32.73</td> <td>186</td> <td>54 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5076.88	50.02	74.00	-23.98	40.52	34.36	7.87	32.73	186	54 PEAK	<p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>98.65</td> <td>-----</td> <td>-----</td> <td>89.01</td> <td>34.54</td> <td>8.18</td> <td>33.08</td> <td>186</td> <td>54 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5310.00	98.65	-----	-----	89.01	34.54	8.18	33.08	186	54 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																		
1	5076.88	50.02	74.00	-23.98	40.52	34.36	7.87	32.73	186	54 PEAK																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																		
1	5310.00	98.65	-----	-----	89.01	34.54	8.18	33.08	186	54 PEAK																																																																
Avg	<p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.56</td> <td>41.33</td> <td>54.00</td> <td>-12.67</td> <td>31.83</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>186</td> <td>54 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.56	41.33	54.00	-12.67	31.83	34.42	7.92	32.84	186	54 AVERAGE	<p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>91.79</td> <td>-----</td> <td>-----</td> <td>82.15</td> <td>34.54</td> <td>8.18</td> <td>33.08</td> <td>186</td> <td>54 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5310.00	91.79	-----	-----	82.15	34.54	8.18	33.08	186	54 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																		
1	5147.56	41.33	54.00	-12.67	31.83	34.42	7.92	32.84	186	54 AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																		
1	5310.00	91.79	-----	-----	82.15	34.54	8.18	33.08	186	54 AVERAGE																																																																





Mode	22																																					
	Band Edge - R																																					
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																					
ANT	5+7																																					
Pol.	Horizontal	Fundamental																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5357.55</td> <td>57.55</td> <td>74.00</td> <td>-16.45</td> <td>47.80</td> <td>34.58</td> <td>8.35</td> <td>33.18</td> <td>186</td> <td>54</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5357.55	57.55	74.00	-16.45	47.80	34.58	8.35	33.18	186	54	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5357.55	57.55	74.00	-16.45	47.80	34.58	8.35	33.18	186	54	PEAK																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.05</td> <td>48.49</td> <td>54.00</td> <td>-5.51</td> <td>38.75</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>186</td> <td>54</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5350.05	48.49	54.00	-5.51	38.75	34.58	8.33	33.17	186	54	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5350.05	48.49	54.00	-5.51	38.75	34.58	8.33	33.17	186	54	AVERAGE																											

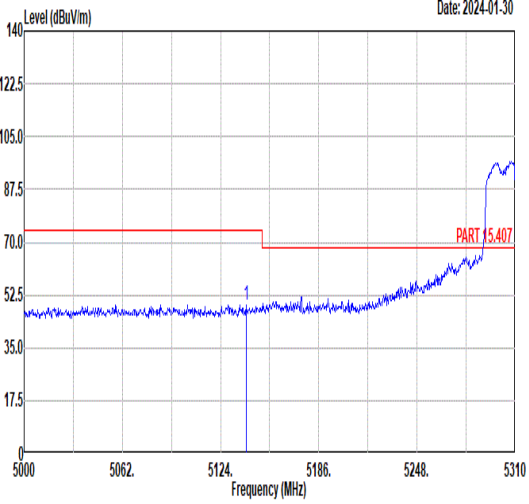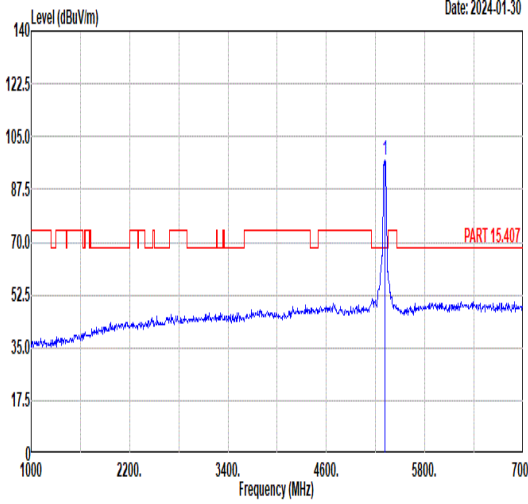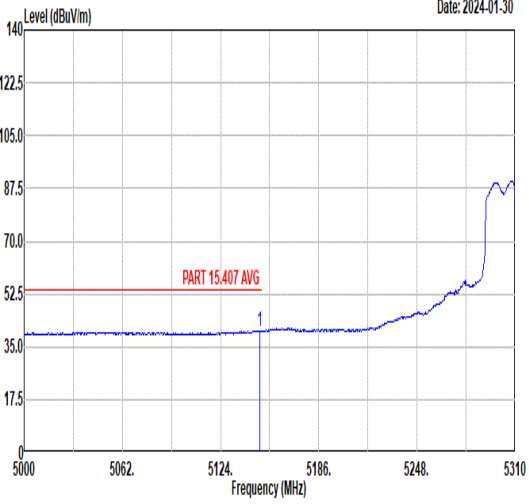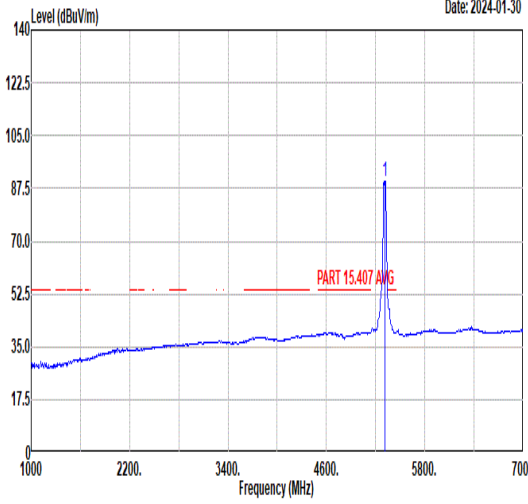

		22																																																																																
Mode		Band Edge - L																																																																																
		U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																
ANT		5+7																																																																																
Pol.	Vertical	Fundamental																																																																																
Peak	 <p style="text-align: right;">Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5140.43</td> <td>49.06</td> <td>74.00</td> <td>-24.94</td> <td>39.57</td> <td>34.41</td> <td>7.91</td> <td>32.83</td> <td>318</td> <td>275</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5140.43	49.06	74.00	-24.94	39.57	34.41	7.91	32.83	318	275	PEAK	 <p style="text-align: right;">Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>97.39</td> <td>-----</td> <td>-----</td> <td>87.72</td> <td>34.55</td> <td>8.23</td> <td>33.11</td> <td>318</td> <td>275</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	97.39	-----	-----	87.72	34.55	8.23	33.11	318	275	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5140.43	49.06	74.00	-24.94	39.57	34.41	7.91	32.83	318	275	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5310.00	97.39	-----	-----	87.72	34.55	8.23	33.11	318	275	PEAK																																																																							
Avg	 <p style="text-align: right;">Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.80</td> <td>40.36</td> <td>54.00</td> <td>-13.64</td> <td>30.86</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>318</td> <td>275</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.80	40.36	54.00	-13.64	30.86	34.42	7.92	32.84	318	275	AVERAGE	 <p style="text-align: right;">Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>89.86</td> <td>-----</td> <td>-----</td> <td>80.18</td> <td>34.55</td> <td>8.25</td> <td>33.12</td> <td>318</td> <td>275</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5310.00	89.86	-----	-----	80.18	34.55	8.25	33.12	318	275	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5148.80	40.36	54.00	-13.64	30.86	34.42	7.92	32.84	318	275	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5310.00	89.86	-----	-----	80.18	34.55	8.25	33.12	318	275	AVERAGE																																																																							

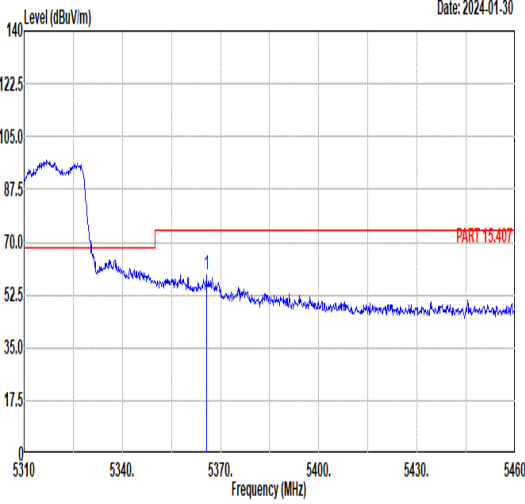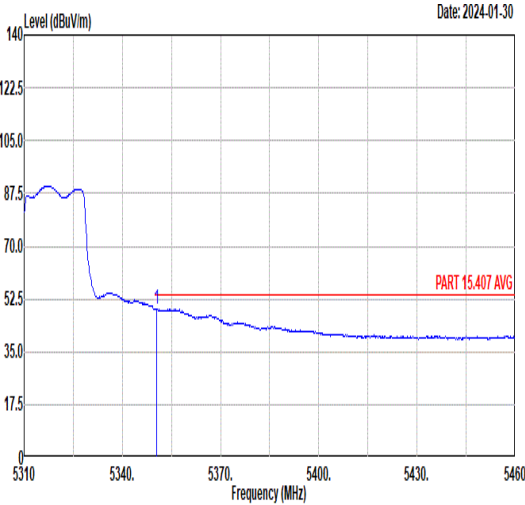

Mode	22																																								
	Band Edge - R																																								
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																								
ANT	5+7																																								
Pol.	Vertical	Fundamental																																							
Peak	 <table border="1" data-bbox="268 1131 734 1254"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5365.65</td> <td>59.11</td> <td>74.00</td> <td>-14.89</td> <td>49.35</td> <td>34.59</td> <td>8.37</td> <td>33.20</td> <td>318</td> <td>275 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5365.65	59.11	74.00	-14.89	49.35	34.59	8.37	33.20	318	275 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																
1	5365.65	59.11	74.00	-14.89	49.35	34.59	8.37	33.20	318	275 PEAK																															
Avg	 <table border="1" data-bbox="268 1807 734 1930"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.50</td> <td>49.31</td> <td>54.00</td> <td>-4.69</td> <td>39.57</td> <td>34.58</td> <td>8.33</td> <td>33.17</td> <td>318</td> <td>275 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.50	49.31	54.00	-4.69	39.57	34.58	8.33	33.17	318	275 AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																
1	5350.50	49.31	54.00	-4.69	39.57	34.58	8.33	33.17	318	275 AVERAGE																															



Mode	23																																																																																							
	Band Edge - L																																																																																							
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																							
ANT	5+7																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.32</td> <td>56.54</td> <td>74.00</td> <td>-17.46</td> <td>46.82</td> <td>34.66</td> <td>8.41</td> <td>33.35</td> <td>194</td> <td>58</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.36</td> <td>60.79</td> <td>68.30</td> <td>-7.51</td> <td>51.08</td> <td>34.67</td> <td>8.40</td> <td>33.36</td> <td>194</td> <td>58</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.32	56.54	74.00	-17.46	46.82	34.66	8.41	33.35	194	58	PEAK	2	5469.36	60.79	68.30	-7.51	51.08	34.67	8.40	33.36	194	58	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>97.82</td> <td>-----</td> <td>-----</td> <td>88.17</td> <td>34.72</td> <td>8.33</td> <td>33.40</td> <td>194</td> <td>58</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	97.82	-----	-----	88.17	34.72	8.33	33.40	194	58	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5458.32	56.54	74.00	-17.46	46.82	34.66	8.41	33.35	194	58	PEAK																																																																													
2	5469.36	60.79	68.30	-7.51	51.08	34.67	8.40	33.36	194	58	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5510.00	97.82	-----	-----	88.17	34.72	8.33	33.40	194	58	PEAK																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>47.08</td> <td>54.00</td> <td>-6.92</td> <td>37.36</td> <td>34.66</td> <td>8.41</td> <td>33.35</td> <td>194</td> <td>58</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.92	47.08	54.00	-6.92	37.36	34.66	8.41	33.35	194	58	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>91.42</td> <td>-----</td> <td>-----</td> <td>81.77</td> <td>34.70</td> <td>8.35</td> <td>33.40</td> <td>194</td> <td>58</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	91.42	-----	-----	81.77	34.70	8.35	33.40	194	58	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5459.92	47.08	54.00	-6.92	37.36	34.66	8.41	33.35	194	58	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5510.00	91.42	-----	-----	81.77	34.70	8.35	33.40	194	58	AVERAGE																																																																													



Mode	23																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																									
ANT	5+7																																									
Pol.	Horizontal	Fundamental																																								
Peak	<p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5726.50</td> <td>49.42</td> <td>68.30</td> <td>-18.88</td> <td>39.03</td> <td>35.06</td> <td>8.68</td> <td>33.35</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>194</td> <td>58 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5726.50	49.42	68.30	-18.88	39.03	35.06	8.68	33.35							194	58 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1 5726.50	49.42	68.30	-18.88	39.03	35.06	8.68	33.35																																			
						194	58 PEAK																																			



Mode	23																																																																																							
	Band Edge - L																																																																																							
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																							
ANT	5+7																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.64</td> <td>60.19</td> <td>74.00</td> <td>-13.81</td> <td>50.47</td> <td>34.66</td> <td>8.41</td> <td>33.35</td> <td>296</td> <td>274</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5466.96</td> <td>63.05</td> <td>68.30</td> <td>-5.25</td> <td>53.34</td> <td>34.67</td> <td>8.40</td> <td>33.36</td> <td>296</td> <td>274</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.64	60.19	74.00	-13.81	50.47	34.66	8.41	33.35	296	274	PEAK	2	5466.96	63.05	68.30	-5.25	53.34	34.67	8.40	33.36	296	274	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>98.57</td> <td>-----</td> <td>-----</td> <td>88.92</td> <td>34.70</td> <td>8.35</td> <td>33.40</td> <td>296</td> <td>274</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	98.57	-----	-----	88.92	34.70	8.35	33.40	296	274	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5458.64	60.19	74.00	-13.81	50.47	34.66	8.41	33.35	296	274	PEAK																																																																													
2	5466.96	63.05	68.30	-5.25	53.34	34.67	8.40	33.36	296	274	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5510.00	98.57	-----	-----	88.92	34.70	8.35	33.40	296	274	PEAK																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.92</td> <td>50.85</td> <td>54.00</td> <td>-3.15</td> <td>41.13</td> <td>34.66</td> <td>8.41</td> <td>33.35</td> <td>296</td> <td>274</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.92	50.85	54.00	-3.15	41.13	34.66	8.41	33.35	296	274	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>91.30</td> <td>-----</td> <td>-----</td> <td>81.65</td> <td>34.70</td> <td>8.35</td> <td>33.40</td> <td>296</td> <td>274</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5510.00	91.30	-----	-----	81.65	34.70	8.35	33.40	296	274	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5459.92	50.85	54.00	-3.15	41.13	34.66	8.41	33.35	296	274	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5510.00	91.30	-----	-----	81.65	34.70	8.35	33.40	296	274	AVERAGE																																																																													



Mode	23																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																									
ANT	5+7																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5755.06</td> <td>49.77</td> <td>68.30</td> <td>-18.53</td> <td>39.22</td> <td>35.11</td> <td>8.79</td> <td>33.35</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>296</td> <td>274 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5755.06	49.77	68.30	-18.53	39.22	35.11	8.79	33.35							296	274 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																			
1 5755.06	49.77	68.30	-18.53	39.22	35.11	8.79	33.35																																			
						296	274 PEAK																																			



Mode	24																																																																																							
	Band Edge - L																																																																																							
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																							
ANT	5+7																																																																																							
Pol.	Horizontal	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5373.68</td> <td>48.20</td> <td>74.00</td> <td>-25.80</td> <td>38.42</td> <td>34.60</td> <td>8.39</td> <td>33.21</td> <td>200</td> <td>61</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5466.80</td> <td>47.90</td> <td>68.30</td> <td>-20.40</td> <td>38.19</td> <td>34.67</td> <td>8.40</td> <td>33.36</td> <td>200</td> <td>61</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5373.68	48.20	74.00	-25.80	38.42	34.60	8.39	33.21	200	61	PEAK	2	5466.80	47.90	68.30	-20.40	38.19	34.67	8.40	33.36	200	61	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>98.71</td> <td>-----</td> <td>-----</td> <td>88.58</td> <td>34.98</td> <td>8.51</td> <td>33.36</td> <td>200</td> <td>61</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5670.00	98.71	-----	-----	88.58	34.98	8.51	33.36	200	61	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5373.68	48.20	74.00	-25.80	38.42	34.60	8.39	33.21	200	61	PEAK																																																																													
2	5466.80	47.90	68.30	-20.40	38.19	34.67	8.40	33.36	200	61	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5670.00	98.71	-----	-----	88.58	34.98	8.51	33.36	200	61	PEAK																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5389.36</td> <td>38.60</td> <td>54.00</td> <td>-15.40</td> <td>28.79</td> <td>34.61</td> <td>8.43</td> <td>33.23</td> <td>200</td> <td>61</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5389.36	38.60	54.00	-15.40	28.79	34.61	8.43	33.23	200	61	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>91.81</td> <td>-----</td> <td>-----</td> <td>81.76</td> <td>34.96</td> <td>8.46</td> <td>33.37</td> <td>200</td> <td>61</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5670.00	91.81	-----	-----	81.76	34.96	8.46	33.37	200	61	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5389.36	38.60	54.00	-15.40	28.79	34.61	8.43	33.23	200	61	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5670.00	91.81	-----	-----	81.76	34.96	8.46	33.37	200	61	AVERAGE																																																																													



Mode	24																																	
	Band Edge - R																																	
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																	
ANT	5+7																																	
Pol.	Horizontal	Fundamental																																
Peak	<p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5728.52</td> <td>52.49</td> <td>68.30</td> <td>-15.81</td> <td>42.09</td> <td>35.06</td> <td>8.69</td> <td>33.35</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5728.52	52.49	68.30	-15.81	42.09	35.06	8.69	33.35	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																											
1 5728.52	52.49	68.30	-15.81	42.09	35.06	8.69	33.35																											







Mode	24																																																																																				
	Band Edge - L																																																																																				
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																				
ANT	5+7																																																																																				
Pol.	Vertical	Fundamental																																																																																			
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5399.60</td> <td>48.30</td> <td>74.00 -25.70</td> <td>38.47</td> <td>34.62</td> <td>8.46</td> <td>33.25</td> <td>200</td> <td>324</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.04</td> <td>47.20</td> <td>68.30 -21.10</td> <td>37.49</td> <td>34.67</td> <td>8.40</td> <td>33.36</td> <td>200</td> <td>324</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5399.60	48.30	74.00 -25.70	38.47	34.62	8.46	33.25	200	324	PEAK	2	5469.04	47.20	68.30 -21.10	37.49	34.67	8.40	33.36	200	324	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>98.91</td> <td>-----</td> <td>88.89</td> <td>34.95</td> <td>8.44</td> <td>33.37</td> <td>200</td> <td>324</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5670.00	98.91	-----	88.89	34.95	8.44	33.37	200	324	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																													
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	5399.60	48.30	74.00 -25.70	38.47	34.62	8.46	33.25	200	324	PEAK																																																																											
2	5469.04	47.20	68.30 -21.10	37.49	34.67	8.40	33.36	200	324	PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	5670.00	98.91	-----	88.89	34.95	8.44	33.37	200	324	PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5430.32</td> <td>38.56</td> <td>54.00 -15.44</td> <td>28.77</td> <td>34.64</td> <td>8.45</td> <td>33.30</td> <td>200</td> <td>324</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5430.32	38.56	54.00 -15.44	28.77	34.64	8.45	33.30	200	324	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>92.25</td> <td>-----</td> <td>82.16</td> <td>34.97</td> <td>8.49</td> <td>33.37</td> <td>200</td> <td>324</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5670.00	92.25	-----	82.16	34.97	8.49	33.37	200	324	AVERAGE											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	5430.32	38.56	54.00 -15.44	28.77	34.64	8.45	33.30	200	324	AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	5670.00	92.25	-----	82.16	34.97	8.49	33.37	200	324	AVERAGE																																																																											



Mode	24																																					
	Band Edge - R																																					
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																					
ANT	5+7																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.29</td> <td>53.44</td> <td>68.30</td> <td>-14.86</td> <td>43.06</td> <td>35.06</td> <td>8.68</td> <td>33.36</td> <td>200</td> <td>324</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5725.29	53.44	68.30	-14.86	43.06	35.06	8.68	33.36	200	324	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5725.29	53.44	68.30	-14.86	43.06	35.06	8.68	33.36	200	324	PEAK																											

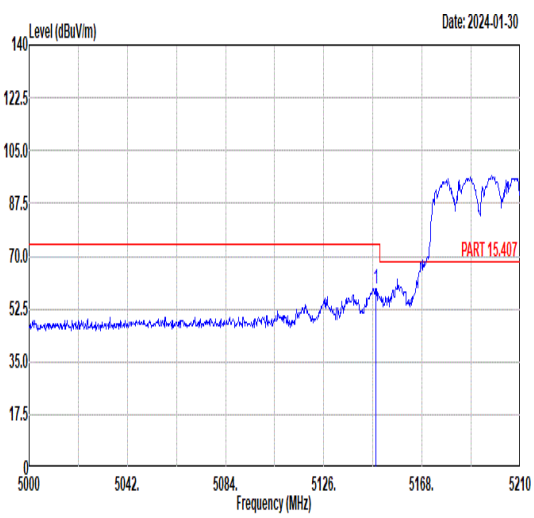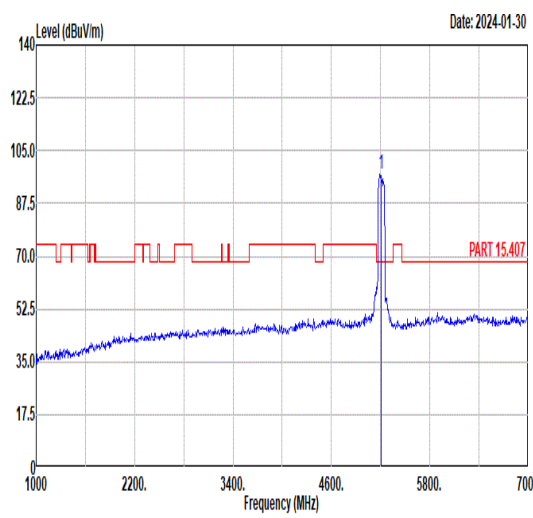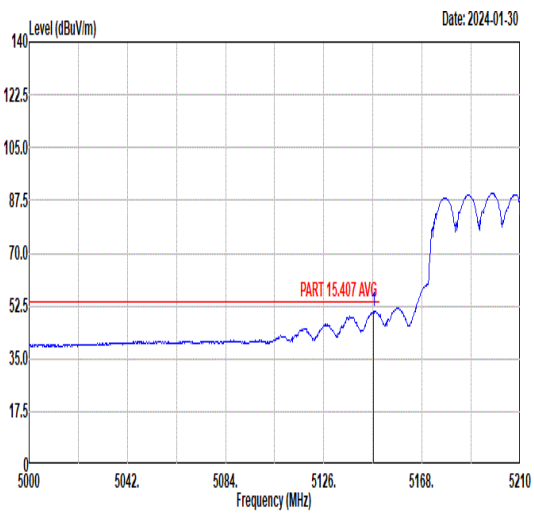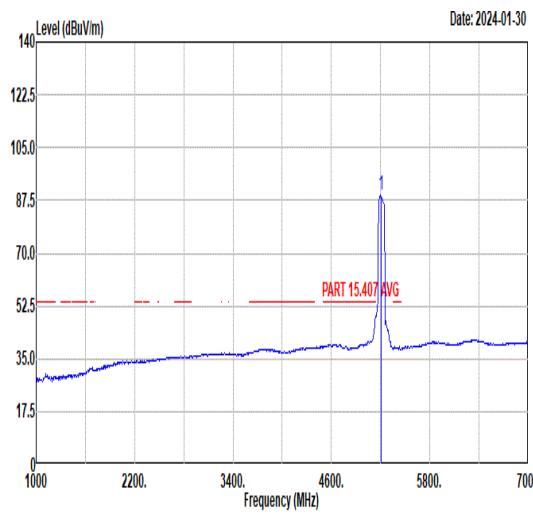

Mode	25																																																																							
	Band Edge - L																																																																							
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																							
ANT	5+7																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.26</td> <td>59.21</td> <td>74.00</td> <td>-14.79</td> <td>49.71</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>342</td> <td>42</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.26	59.21	74.00	-14.79	49.71	34.42	7.92	32.84	342	42	PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>97.03</td> <td>-----</td> <td>-----</td> <td>87.55</td> <td>34.45</td> <td>7.94</td> <td>32.91</td> <td>342</td> <td>42</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	97.03	-----	-----	87.55	34.45	7.94	32.91	342	42	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1	5148.26	59.21	74.00	-14.79	49.71	34.42	7.92	32.84	342	42	PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1	5210.00	97.03	-----	-----	87.55	34.45	7.94	32.91	342	42	PEAK																																																													
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.21</td> <td>50.94</td> <td>54.00</td> <td>-3.06</td> <td>41.44</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>342</td> <td>42</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.21	50.94	54.00	-3.06	41.44	34.42	7.92	32.84	342	42	AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>89.34</td> <td>-----</td> <td>-----</td> <td>79.86</td> <td>34.46</td> <td>7.95</td> <td>32.93</td> <td>342</td> <td>42</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	89.34	-----	-----	79.86	34.46	7.95	32.93	342	42	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1	5147.21	50.94	54.00	-3.06	41.44	34.42	7.92	32.84	342	42	AVERAGE																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1	5210.00	89.34	-----	-----	79.86	34.46	7.95	32.93	342	42	AVERAGE																																																													





Mode	25																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																					
ANT	5+7																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5406.75</td> <td>48.88</td> <td>74.00</td> <td>-25.12</td> <td>39.04</td> <td>34.62</td> <td>8.48</td> <td>33.26</td> <td>342</td> <td>42</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5406.75	48.88	74.00	-25.12	39.04	34.62	8.48	33.26	342	42	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																															
1	5406.75	48.88	74.00	-25.12	39.04	34.62	8.48	33.26	342	42	PEAK																											
Avg	<p>Date: 2024-01-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5422.50</td> <td>38.64</td> <td>54.00</td> <td>-15.36</td> <td>28.83</td> <td>34.64</td> <td>8.46</td> <td>33.29</td> <td>342</td> <td>42</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5422.50	38.64	54.00	-15.36	28.83	34.64	8.46	33.29	342	42	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																															
1	5422.50	38.64	54.00	-15.36	28.83	34.64	8.46	33.29	342	42	AVERAGE																											



Mode	25																																																																							
	Band Edge - L																																																																							
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																							
ANT	5+7																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>59.10</td> <td>74.00</td> <td>-14.90</td> <td>49.61</td> <td>34.42</td> <td>7.92</td> <td>32.85</td> <td>400</td> <td>28</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	59.10	74.00	-14.90	49.61	34.42	7.92	32.85	400	28	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>94.94</td> <td>-----</td> <td>-----</td> <td>85.46</td> <td>34.46</td> <td>7.95</td> <td>32.93</td> <td>400</td> <td>28</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	94.94	-----	-----	85.46	34.46	7.95	32.93	400	28	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor		Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1	5149.94	59.10	74.00	-14.90	49.61	34.42	7.92	32.85	400	28	PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor		Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1	5210.00	94.94	-----	-----	85.46	34.46	7.95	32.93	400	28	PEAK																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>49.59</td> <td>54.00</td> <td>-4.41</td> <td>40.10</td> <td>34.42</td> <td>7.92</td> <td>32.85</td> <td>400</td> <td>28</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.94	49.59	54.00	-4.41	40.10	34.42	7.92	32.85	400	28	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>86.56</td> <td>-----</td> <td>-----</td> <td>77.08</td> <td>34.46</td> <td>7.95</td> <td>32.93</td> <td>400</td> <td>28</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	86.56	-----	-----	77.08	34.46	7.95	32.93	400	28	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor		Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1	5149.94	49.59	54.00	-4.41	40.10	34.42	7.92	32.85	400	28	AVERAGE																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor		Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1	5210.00	86.56	-----	-----	77.08	34.46	7.95	32.93	400	28	AVERAGE																																																													

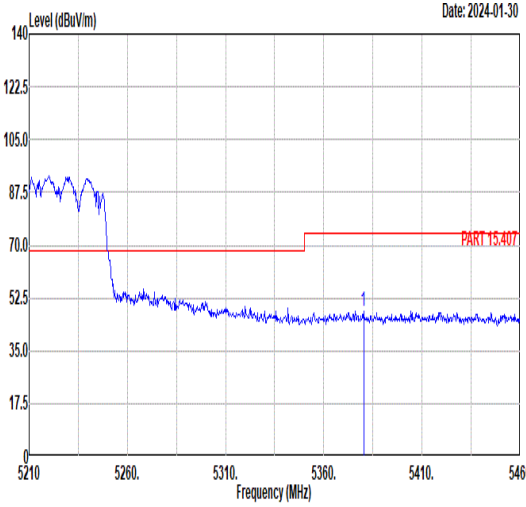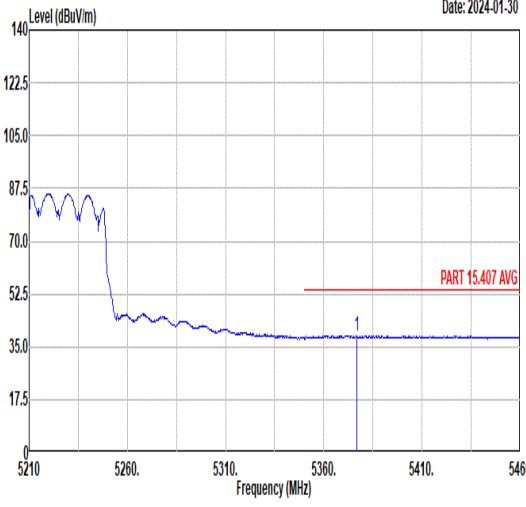

Mode	25																																		
	Band Edge - R																																		
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																		
ANT	5+7																																		
Pol.	Vertical	Fundamental																																	
Peak	 <p>Date: 2024-01-30</p> <table border="1" data-bbox="263 1131 790 1254"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Read Level</th> <th>Ant Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5380.25</td> <td>48.14</td> <td>74.00</td> <td>-25.86</td> <td>38.35</td> <td>34.60</td> <td>8.41</td> <td>33.22</td> <td>400</td> <td>28</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Line	Margin	Read Level	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5380.25	48.14	74.00	-25.86	38.35	34.60	8.41	33.22	400	28	PEAK	Blank
Limit Freq	Level	Line	Margin	Read Level	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																										
1 5380.25	48.14	74.00	-25.86	38.35	34.60	8.41	33.22	400	28	PEAK																									
Avg	 <p>Date: 2024-01-30</p> <table border="1" data-bbox="263 1814 790 1937"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Read Level</th> <th>Ant Level</th> <th>Cable Factor</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5377.00</td> <td>38.57</td> <td>54.00</td> <td>-15.43</td> <td>28.78</td> <td>34.60</td> <td>8.40</td> <td>33.21</td> <td>400</td> <td>28</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Line	Margin	Read Level	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5377.00	38.57	54.00	-15.43	28.78	34.60	8.40	33.21	400	28	AVERAGE	Blank
Limit Freq	Level	Line	Margin	Read Level	Ant Level	Cable Factor	Preamp Loss	APos	TPos	Remark																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																										
1 5377.00	38.57	54.00	-15.43	28.78	34.60	8.40	33.21	400	28	AVERAGE																									



Mode	25																																																																								
	Harmonic																																																																								
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																								
ANT	5+7																																																																								
Pol.	Horizontal	Vertical																																																																							
Peak Avg	<p>Date: 2024-02-24</p>	<p>Date: 2024-02-24</p>																																																																							
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10420.00</td> <td>47.08</td> <td>68.30</td> <td>-21.22</td> <td>57.59</td> <td>37.65</td> <td>10.77</td> <td>58.93</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15630.00</td> <td>46.34</td> <td>74.00</td> <td>-27.66</td> <td>52.06</td> <td>40.59</td> <td>12.72</td> <td>59.03</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg	1 10420.00	47.08	68.30	-21.22	57.59	37.65	10.77	58.93	-- -- Peak	2 15630.00	46.34	74.00	-27.66	52.06	40.59	12.72	59.03	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10420.00</td> <td>45.61</td> <td>68.30</td> <td>-22.69</td> <td>56.12</td> <td>37.65</td> <td>10.77</td> <td>58.93</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15630.00</td> <td>46.08</td> <td>74.00</td> <td>-27.92</td> <td>51.80</td> <td>40.59</td> <td>12.72</td> <td>59.03</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg	1 10420.00	45.61	68.30	-22.69	56.12	37.65	10.77	58.93	-- -- Peak	2 15630.00	46.08	74.00	-27.92	51.80	40.59	12.72	59.03
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg																																																																	
1 10420.00	47.08	68.30	-21.22	57.59	37.65	10.77	58.93	-- -- Peak																																																																	
2 15630.00	46.34	74.00	-27.66	52.06	40.59	12.72	59.03	-- -- Peak																																																																	
Limit	Read	Ant	Cable	Preamp	Apos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg																																																																	
1 10420.00	45.61	68.30	-22.69	56.12	37.65	10.77	58.93	-- -- Peak																																																																	
2 15630.00	46.08	74.00	-27.92	51.80	40.59	12.72	59.03	-- -- Peak																																																																	



	26																																																																																	
Mode	Band Edge - L																																																																																	
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																																																																	
ANT	5+7																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5138.62</td> <td>51.88</td> <td>74.00</td> <td>-22.12</td> <td>42.39</td> <td>34.41</td> <td>7.91</td> <td>32.83</td> <td>200</td> <td>53</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5138.62	51.88	74.00	-22.12	42.39	34.41	7.91	32.83	200	53	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>94.43</td> <td>-----</td> <td>-----</td> <td>84.80</td> <td>34.53</td> <td>8.17</td> <td>33.07</td> <td>200</td> <td>53</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	94.43	-----	-----	84.80	34.53	8.17	33.07	200	53	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5138.62	51.88	74.00	-22.12	42.39	34.41	7.91	32.83	200	53	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5290.00	94.43	-----	-----	84.80	34.53	8.17	33.07	200	53	PEAK																																																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.48</td> <td>41.66</td> <td>54.00</td> <td>-12.34</td> <td>32.16</td> <td>34.42</td> <td>7.92</td> <td>32.84</td> <td>200</td> <td>53</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.48	41.66	54.00	-12.34	32.16	34.42	7.92	32.84	200	53	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>87.41</td> <td>-----</td> <td>-----</td> <td>77.74</td> <td>34.55</td> <td>8.22</td> <td>33.10</td> <td>200</td> <td>53</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5290.00	87.41	-----	-----	77.74	34.55	8.22	33.10	200	53	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5148.48	41.66	54.00	-12.34	32.16	34.42	7.92	32.84	200	53	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5290.00	87.41	-----	-----	77.74	34.55	8.22	33.10	200	53	AVERAGE																																																																							