



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2453-3, XT2453-4, XT2453-5, XT2453V  
**FCC ID** : IHDT56AR7  
**STANDARD** : 47 CFR Part 2, 27 Subpart O (3700-3980MHz)  
**CLASSIFICATION** : PCS Licensed Transmitter Held to Ear (PCE)  
**TEST DATE(S)** : Mar. 15, 2024 ~ Mar 28, 2024

We, Sporton International Inc. (KunShan), would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI C63.26-2015 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (KunShan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



**Sporton International Inc. (Kunshan)**

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300  
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY...3
SUMMARY OF TEST RESULT...4
1 GENERAL DESCRIPTION...5
1.1 Applicant...5
1.2 Manufacturer...5
1.3 Product Feature of Equipment Under Test...5
1.4 Product Specification of Equipment Under Test...5
1.5 Modification of EUT...6
1.6 Maximum EIRP and Emission Designator...6
1.7 Testing Location...7
1.8 Test Software...8
1.9 Applicable Standards...8
1.10 Specification of Accessory...8
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST...9
2.1 Test Mode...9
2.2 Connection Diagram of Test System...11
2.3 Support Unit used in test configuration and system...11
2.4 Measurement Results Explanation Example...11
2.5 Frequency List of Low/Middle/High Channels...12
3 CONDUCTED TEST ITEMS...15
3.1 Measuring Instruments...15
3.2 Test Setup...15
3.3 Test Result of Conducted Test...15
3.4 Conducted Output Power and EIRP...16
3.5 Peak-to-Average Ratio...17
3.6 Occupied Bandwidth...18
3.7 Conducted Band Edge...19
3.8 Conducted Spurious Emission...20
3.9 Frequency Stability...21
4 RADIATED TEST ITEMS...22
4.1 Measuring Instruments...22
4.2 Test Setup...22
4.3 Test Result of Radiated Test...23
4.4 Radiated Spurious Emission...24
5 LIST OF MEASURING EQUIPMENT...25
6 MEASUREMENT UNCERTAINTY...26
APPENDIX A. TEST RESULTS OF CONDUCTED TEST
APPENDIX B. TEST RESULTS OF RADIATED TEST
APPENDIX C. TEST SETUP PHOTOGRAPHS





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.4	§2.1046	Conducted Output Power	Reporting Only	PASS	-
	§27.50(j)(3)	Equivalent Isotropic Radiated Power (5G NR n77, n78)	EIRP < 1Watt		
3.5	§27.50(j)(4)	Peak-to-Average Ratio	<13 dB	PASS	-
3.6	§2.1049	Occupied Bandwidth	Reporting Only	PASS	-
3.7	§2.1051 §27.53(l)(2)	Conducted Band Edge Measurement (5G NR n77, n78)	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.8	§2.1051 §27.53(l)(2)	Conducted Spurious Emission (5G NR n77, n78)	< 43+10log <sub>10</sub> (P[Watts])	PASS	-
3.9	§27.54	Frequency Stability Temperature & Voltage	Within Authorized Band	PASS	-
4.4	§2.1053 §27.53(l)(2)	Radiated Spurious Emission (5G NR n77, n78)	< 43+10log <sub>10</sub> (P[Watts])	PASS	Under limit 32.03 dB at 11376.00 MHz

**Conformity Assessment Condition:**

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2453-3, XT2453-4, XT2453-5, XT2453V
FCC ID	IHDT56AR7
IMEI Code	Conducted : 358394210026253/358394210026261 Radiation : 358394210031030/358394210031048
HW Version	DVT2
SW Version	U3UC34.22
EUT Stage	Identical Prototype

Note: The four model names are only for market segment, no other difference.

## 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency	5G NR n77: 3700 MHz ~ 3980 MHz 5G NR n78: 3700 MHz ~ 3800 MHz
SCS	15kHz, 30kHz
Bandwidth	n77/n78 (15kHz): 10 / 15 / 20 / 25 / 30 / 40 / 50MHz n77/n78 (30kHz): 10 / 15 / 20 / 25 / 30 / 40 / 50 / 60 / 70 / 80 / 90 / 100MHz
Antenna Gain	<Ant. 3> 5G NR n77: -5.82 dBi 5G NR n78: -5.82 dBi <Ant. 4> 5G NR n77: -1.89 dBi 5G NR n78: -1.89 dBi <Ant. 6> 5G NR n77: -2.96 dBi 5G NR n78: -2.96 dBi <Ant. 8> 5G NR n77: -3.0 dBi 5G NR n78: -3.0 dBi
Type of Modulation	CP-OFDM: QPSK / 16QAM / 64QAM / 256QAM DFT-s-OFDM: PI/2 BPSK / QPSK / 16QAM / 64QAM / 256QAM



Remark:

1. The maximum EIRP is calculated from max output power and max antenna gain, only the maximum EIRP of Ant.4 for n77/n78 SISO, and Ant.(4+6) for n77/n78 MIMO are shown in the report.
2. The device supports n77/n78(1T4R) SRS resources on Antenna 3/4/6/8, only the test data of worst Antenna 4 is showed in the report according to the maximum power.
3. The device supports HPUE(PC2) for 5G NR n77/n78 SISO mode, HPUE(PC2) for 5G NR n78 MIMO mode, and HPUE(PC1.5) for n77 MIMO mode.
4. 5G NR n77/n78 UL\_MIMO mode only supports CP-OFDM Modulation, n77 UL MIMO PC1.5 is correlated, the n77 MIMO Antenna gain =  $10 \log[(10^{G1/20} + 10^{G2/20})^2 / 2]$ . n78 UL MIMO PC2 is uncorrelated, the n78 MIMO Antenna gain is the maximum gain from the MIMO Antenna. The conducted BE/Spurious are tested at single antenna port and add  $10 \cdot \log(N_{ANT})$  according to KDB 662911 D01.
5. 5G NR n77/n78 support UL MIMO mode for Ant(4+8) / Ant(4+6), only the worst test data of Ant(4+6) is shown in the report.
6. 5G NR n77/n78 support SA and NSA mode. The whole testing has assessed SA mode for n77 by referring to the higher conducted power for conducted test items.
7. All the supported EN-DC combinations are verified conducted power, only the EN-DC combination with highest power are shown in the report.
8. The EN-DC mode combination could be referred to the product spec.

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Maximum EIRP and Emission Designator

5G NR n77 UL MIMO		QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3705.00 ~ 3975.00	0.6232	9M27G7D	0.5821	9M29W7D
15	3705.52 ~ 3972.48	0.6157	14M1G7D	0.5755	14M1W7D
20	3710.01 ~ 3969.99	0.6347	18M9G7D	0.5923	19M0W7D
25	3712.50 ~ 3967.50	0.6442	23M7G7D	0.5891	23M8W7D
30	3715.02 ~ 3964.98	0.6396	28M6G7D	0.5869	28M5W7D
40	3720.00 ~ 3960.00	0.6516	38M6G7D	0.5893	38M6W7D
50	3725.01 ~ 3954.99	0.6625	48M2G7D	0.5848	48M2W7D
60	3730.02 ~ 3949.98	0.6442	57M9G7D	0.5913	57M9W7D
70	3735.00 ~ 3945.00	0.6751	67M6G7D	0.6234	67M7W7D
80	3740.01 ~ 3939.99	0.6741	77M4G7D	0.6282	77M7W7D
90	3745.02 ~ 3934.98	0.6654	87M8G7D	0.6162	87M8W7D
100	3750.00 ~ 3930.00	0.7291	97M6G7D	0.6377	97M9W7D



5G NR n78 UL MIMO		QPSK		16QAM / 64QAM / 256QAM	
BW (MHz)	Frequency Range (MHz)	Maximum EIRP(W)	Emission Designator (99%OBW)	Maximum EIRP(W)	Emission Designator (99%OBW)
10	3705.00 ~ 3795.00	0.2265	9M27G7D	0.1942	9M29W7D
15	3707.52 ~ 3792.48	0.1864	14M1G7D	0.1577	14M1W7D
20	3710.01 ~ 3789.99	0.1908	18M9G7D	0.1611	19M0W7D
25	3712.50 ~ 3787.50	0.2021	23M7G7D	0.1738	23M8W7D
30	3715.02 ~ 3784.98	0.1930	28M6G7D	0.1670	28M5W7D
40	3720.00 ~ 3780.00	0.1841	38M6G7D	0.1667	38M6W7D
50	3725.01 ~ 3774.99	0.1871	48M2G7D	0.1631	48M2W7D
60	3730.02 ~ 3769.98	0.2295	57M9G7D	0.1987	57M9W7D
70	3735.00 ~ 3765.00	0.2598	67M6G7D	0.1997	67M7W7D
80	3740.01 ~ 3759.99	0.2258	77M4G7D	0.2001	77M7W7D
90	3745.02 ~ 3754.98	0.2529	87M8G7D	0.1983	87M8W7D
100	3750.00 ~ 3750.00	0.2667	97M6G7D	0.2052	97M9W7D

Note:

- 5G NR Band n77 overlaps the entire frequency range of Band n78, and n77 power > n78 power, therefore the conducted test results of n77 provided in this report cover n78.
- SCS 15KHz & 30KHz, SISO & MIMO mode, and all modulations have been tested, and only the worst test results are shown here.

### 1.7 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

<b>Test Firm</b>	Sporton International Inc. (Kunshan)		
<b>Test Site Location</b>	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	03CH04-KS TH01-KS	CN1257	314309



### 1.8 Test Software

Item	Site	Manufacture	Name	Version
1.	TH01-KS	SPORTON	FCC_5GNR_China_2 01027	1.0
2.	03CH04-KS	AUDIX	E3	210616

### 1.9 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- 47 CFR Part 2, 27
- ANSI C63.26-2015
- FCC KDB 971168 D01 Power Meas License Digital Systems v03r01
- FCC KDB 412172 D01 Determining ERP and EIRP v01r01

**Remark:** All test items were verified and recorded according to the standards and without any deviation during the test.

### 1.10 Specification of Accessory

Specification of Accessory				
Battery 1	Brand Name	Motorola	Model Name	QR11
Battery 2	Brand Name	Motorola	Model Name	QR31
USB Cable 1	Brand Name	Motorola(CABLETECH)	Model Name	SC18E05246
USB Cable 2	Brand Name	Motorola(SAIBAO)	Model Name	SC18D86732

## 2 Test Configuration of Equipment Under Test

### 2.1 Test Mode




Antenna port conducted and radiated test items are performed according to KDB 971168 D01 Power Meas License Digital Systems v03r01 with maximum output power.

For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.

The EUT is a folding phone, pretest the open status and closed status, only the worst status perform final test and record in the report.


For the accessories, pretest standalone mode / Earphone mode / Adapter mode / Wireless charging mode, only the worst status perform final test and record in the report.

The device is investigated from 30MHz to 10 times of fundamental signal for radiated spurious emission test under different RB size/offset and modulations in exploratory test. Subsequently, only the worst case emissions are reported.

	X Plane	Y Plane	Z Plane
<b>Orthogonal Planes of EUT</b>			



## 2.2 Connection Diagram of Test System

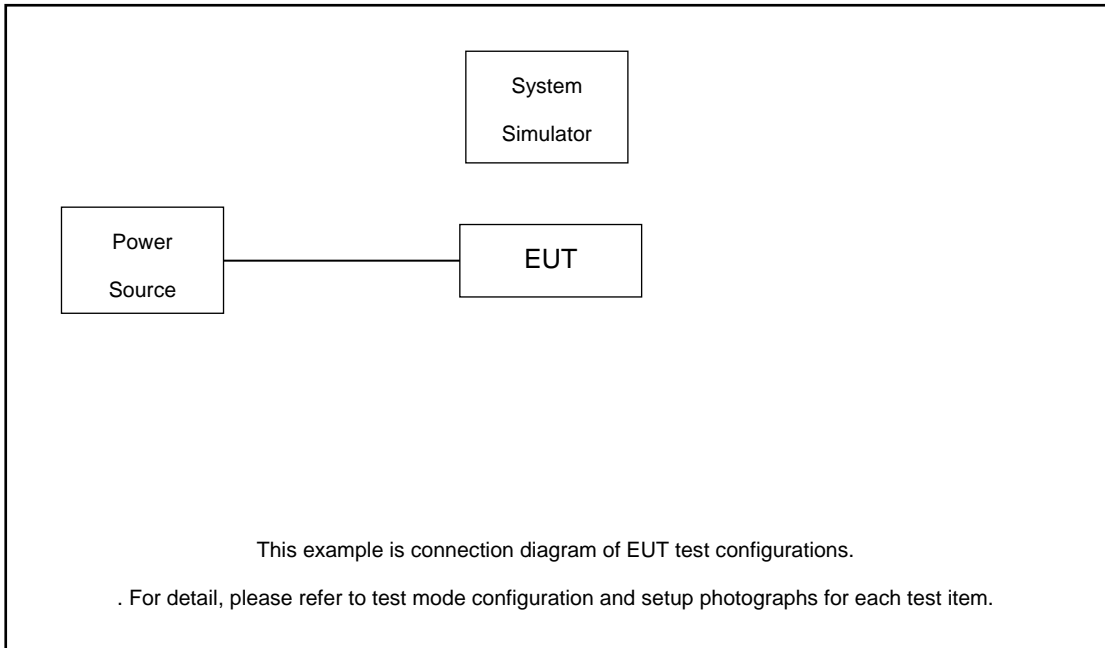

## 2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	DC Power Supply	GW	GPS-3030D	N/A	N/A	Unshielded, 1.8 m
2.	LTE Base Station	Anritsu	MT8821C	N/A	N/A	Unshielded, 1.8 m
3.	NR Base Station	Anritsu	MT8000A	N/A	N/A	Unshielded, 1.8 m

## 2.4 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

$$\text{Offset} = \text{RF cable loss} + \text{attenuator factor}.$$

Following shows an offset computation example with cable loss 6.5 dB and 20dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 6.5 + 20 = 26.5 \text{ (dB)} \end{aligned}$$



### 2.5 Frequency List of Low/Middle/High Channels

5G n77 (15kHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647667	656000	664332
	Frequency	3715.005	3840	3964.98
25	Channel	647500	656000	664500
	Frequency	3712.5	3840	3967.5
20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99
15	Channel	647167	656000	664833
	Frequency	3707.505	3840	3972.495
10	Channel	647000	656000	665000
	Frequency	3705	3840	3975

5G n77 (30kHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000	656000	662000
	Frequency	3750	3840	3930
90	Channel	649668	656000	662332
	Frequency	3745.02	3840	3934.98
80	Channel	649334	656000	662666
	Frequency	3740.01	3840	3939.99
70	Channel	649000	656000	663000
	Frequency	3735	3840	3945
60	Channel	648668	656000	663332
	Frequency	3730.02	3840	3949.98
50	Channel	648334	656000	663666
	Frequency	3725.01	3840	3954.99
40	Channel	648000	656000	664000
	Frequency	3720	3840	3960
30	Channel	647668	656000	664332
	Frequency	3715.02	3840	3964.98
25	Channel	647500	656000	664500
	Frequency	3712.5	3840	3967.5



20	Channel	647334	656000	664666
	Frequency	3710.01	3840	3969.99
15	Channel	647168	656000	664832
	Frequency	3707.52	3840	3972.48
10	Channel	647000	656000	665000
	Frequency	3705	3840	3975

5G n78(15kHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
50	Channel	648334	650000	651666
	Frequency	3725.01	3750	3774.99
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
30	Channel	647667	650000	652333
	Frequency	3715.005	3750	3784.995
25	Channel	647500	650000	652500
	Frequency	3712.5	3750	3787.5
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99
15	Channel	647167	650000	652833
	Frequency	3707.505	3750	3792.495
10	Channel	647000	650000	653000
	Frequency	3705	3750	3795



5G n78(30kHz) Channel and Frequency List				
BW [MHz]	Channel/Frequency(MHz)	Lowest	Middle	Highest
100	Channel	650000		
	Frequency	3750		
90	Channel	649668	650000	650332
	Frequency	3745.02	3750	3754.98
80	Channel	649334	650000	650666
	Frequency	3740.01	3750	3759.99
70	Channel	649000	650000	651000
	Frequency	3735	3750	3765
60	Channel	648668	650000	651332
	Frequency	3730.02	3750	3769.98
50	Channel	648334	650000	651666
	Frequency	3725.01	3750	3774.99
40	Channel	648000	650000	652000
	Frequency	3720	3750	3780
30	Channel	647668	650000	652332
	Frequency	3715.02	3750	3784.98
25	Channel	647500	650000	652500
	Frequency	3712.5	3750	3787.5
20	Channel	647334	650000	652666
	Frequency	3710.01	3750	3789.99
15	Channel	647168	650000	652832
	Frequency	3707.52	3750	3792.48
10	Channel	647000	650000	653000
	Frequency	3705	3750	3795


### 3 Conducted Test Items

#### 3.1 Measuring Instruments


See list of measuring instruments of this test report.

#### 3.2 Test Setup


##### 3.2.1 Conducted Output Power

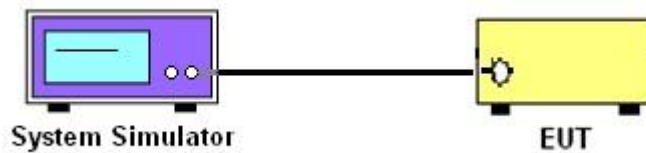

##### 3.2.2 Peak-to-Average Ratio, Occupied Bandwidth, Conducted Band-Edge and Conducted Spurious Emission

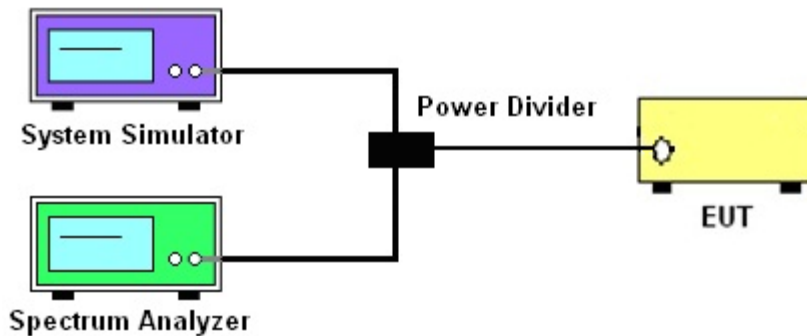

##### 3.2.3 Frequency Stability

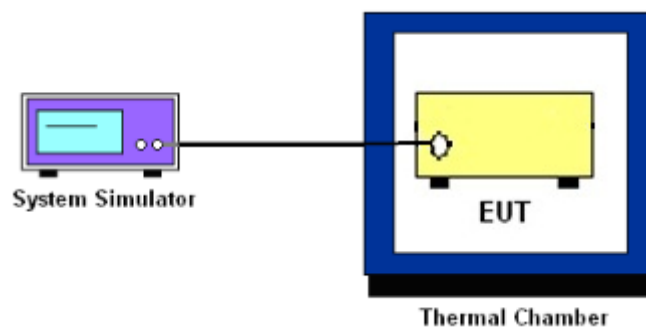

### 3.3 Test Result of Conducted Test

Please refer to Appendix A.



### 3.4 Conducted Output Power and EIRP

#### 3.4.1 Description of the Conducted Output Power Measurement and EIRP Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to force the EUT transmitting at maximum output power. The measured power in the radio frequency on the transmitter output terminals shall be reported.

The EIRP of mobile transmitters must not exceed 1 Watts for 5G NR n77, n78.

According to KDB 412172 D01 Power Approach,

$EIRP = P_T + G_T - L_C$ ,  $ERP = EIRP - 2.15$ , where

$P_T$  = transmitter output power in dBm

$G_T$  = gain of the transmitting antenna in dBi

$L_C$  = signal attenuation in the connecting cable between the transmitter and antenna in dB

#### 3.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.2
2. The transmitter output port was connected to the system simulator.
3. Set EUT at maximum power through the system simulator.
4. Select lowest, middle, and highest channels for each band and different modulation.
5. Measure and record the power level from the system simulator.



## **3.5 Peak-to-Average Ratio**

### **3.5.1 Description of the PAR Measurement**

Power Complementary Cumulative Distribution Function (CCDF) curves provide a means for characterizing the power peaks of a digitally modulated signal on a statistical basis. A CCDF curve depicts the probability of the peak signal amplitude exceeding the average power level. Most contemporary measurement instrumentation include the capability to produce CCDF curves for an input signal provided that the instrument's resolution bandwidth can be set wide enough to accommodate the entire input signal bandwidth. In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB.

### **3.5.2 Test Procedures**

1. The testing follows ANSI C63.26 Section 5.2.3.4 (CCDF).
2. The EUT was connected to spectrum and system simulator via a power divider.
3. Set the CCDF (Complementary Cumulative Distribution Function) option in spectrum analyzer.
4. The highest RF powers were measured and recorded the maximum PAPR level associated with a probability of 0.1 %.
5. Record the deviation as Peak to Average Ratio.



### 3.6 Occupied Bandwidth

#### 3.6.1 Description of Occupied Bandwidth Measurement

The occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The 26 dB emission bandwidth is defined as the frequency range between two points, one above and one below the carrier frequency, at which the spectral density of the emission is attenuated 26 dB below the maximum in-band spectral density of the modulated signal. Spectral density (power per unit bandwidth) is to be measured with a detector of resolution bandwidth equal to approximately 1.0% of the emission bandwidth.

#### 3.6.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.4
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The spectrum analyzer center frequency is set to the nominal EUT channel center frequency. The span range for the spectrum analyzer shall be between two and five times the anticipated OBW.
4. The nominal resolution bandwidth (RBW) shall be in the range of 1 to 5 % of the anticipated OBW, and the VBW shall be at least 3 times the RBW.
5. Set the detection mode to peak, and the trace mode to max hold.
6. Determine the reference value: Set the EUT to transmit a modulated signal. Allow the trace to stabilize. Set the spectrum analyzer marker to the highest level of the displayed trace. (this is the reference value)
7. Determine the “-26 dB down amplitude” as equal to (Reference Value – X).
8. Place two markers, one at the lowest and the other at the highest frequency of the envelope of the spectral display such that each marker is at or slightly below the “-X dB down amplitude” determined in step 6. If a marker is below this “-X dB down amplitude” value it shall be placed as close as possible to this value. The OBW is the positive frequency difference between the two markers.
9. Use the 99 % power bandwidth function of the spectrum analyzer and report the measured bandwidth.



### 3.7 Conducted Band Edge

#### 3.7.1 Description of Conducted Band Edge Measurement

27.53(l)(2)

For mobile operations in the 3700-3980 MHz band, the conducted power of any emission outside the licensee's authorized bandwidth shall not exceed -13 dBm/MHz. Compliance with this paragraph is based on the use of measurement instrumentation employing a resolution bandwidth of 1 megahertz or greater. However, in the 1 megahertz bands immediately outside and adjacent to the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be either one percent of the emission bandwidth of the fundamental emission of the transmitter or 350 kHz. In the bands between 1 and 5 MHz removed from the licensee's frequency block, the minimum resolution bandwidth for the measurement shall be 500 kHz.

#### 3.7.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The band edges of low and high channels for the highest RF powers were measured.
4. Set RBW  $\geq$  1% EBW in the 1MHz band immediately outside and adjacent to the band edge.
5. Beyond the 1 MHz band from the band edge, RBW=1MHz was used or a narrower RBW was used (generally limited to no less than 1% of the OBW) and the measured power was integrated over the full required measurement bandwidth.
6. Set spectrum analyzer with RMS detector.
7. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
8. Checked that all the results comply with the emission limit line.

Example:

$$\begin{aligned} & \text{The limit line is derived from } 43 + 10\log(P)\text{dB below the transmitter power } P(\text{Watts}) \\ & = P(\text{W}) - [43 + 10\log(P)] \text{ (dB)} \\ & = [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)} = -13\text{dBm.} \end{aligned}$$

9. When using the integration method, the starting frequency of the integration shall be centered at one-half of the RBW away from the band edge.



### 3.8 Conducted Spurious Emission

#### 3.8.1 Description of Conducted Spurious Emission Measurement

The power of any emission outside of the authorized operating frequency ranges must be lower than the transmitter power (P) by a factor of at least  $43 + 10 \log (P)$  dB.

It is measured by means of a calibrated spectrum analyzer and scanned from 30 MHz up to a frequency including its 10<sup>th</sup> harmonic.

#### 3.8.2 Test Procedures

1. The testing follows ANSI C63.26 section 5.7
2. The EUT was connected to spectrum analyzer and system simulator via a power divider.
3. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
4. The middle channel for the highest RF power within the transmitting frequency was measured.
5. The conducted spurious emission for the whole frequency range was taken.
6. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz.
7. Set spectrum analyzer with RMS detector.
8. Taking the record of maximum spurious emission.
9. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.
10. The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
=  $P(W) - [43 + 10\log(P)]$  (dB)  
=  $[30 + 10\log(P)]$  (dBm) -  $[43 + 10\log(P)]$  (dB)  
= -13dBm.



## **3.9 Frequency Stability**

### **3.9.1 Description of Frequency Stability Measurement**

The frequency stability shall be measured by variation of ambient temperature and variation of primary supply voltage to ensure that the fundamental emission stays within the authorized frequency block. The frequency stability of the transmitter shall be maintained within  $\pm 0.00025\%$  ( $\pm 2.5\text{ppm}$ ) of the center frequency.

### **3.9.2 Test Procedures for Temperature Variation**

1. The testing follows ANSI C63.26 section 5.6.4
2. The EUT was set up in the thermal chamber and connected with the system simulator.
3. With power OFF, the temperature was decreased to  $-30^{\circ}\text{C}$  and the EUT was stabilized before testing. Power was applied and the maximum change in frequency was recorded within one minute.
4. With power OFF, the temperature was raised in  $10^{\circ}\text{C}$  step up to  $50^{\circ}\text{C}$ . The EUT was stabilized at each step for at least half an hour. Power was applied and the maximum frequency change was recorded within one minute.

### **3.9.3 Test Procedures for Voltage Variation**

1. The testing follows ANSI C63.26 section 5.6.5
2. The EUT was placed in a temperature chamber at  $20\pm 5^{\circ}\text{C}$  and connected with the system simulator.
3. The power supply voltage to the EUT was varied from 85% to 115% of the nominal value for other than hand carried battery equipment.
4. For hand carried, battery powered equipment, reduce the primary ac or dc supply voltage to the battery operating end point, which shall be specified by the manufacturer.
5. The variation in frequency was measured for the worst case.


## 4 Radiated Test Items

### 4.1 Measuring Instruments


See list of measuring instruments of this test report.

### 4.2 Test Setup


#### 4.2.1 For radiated test below 30MHz

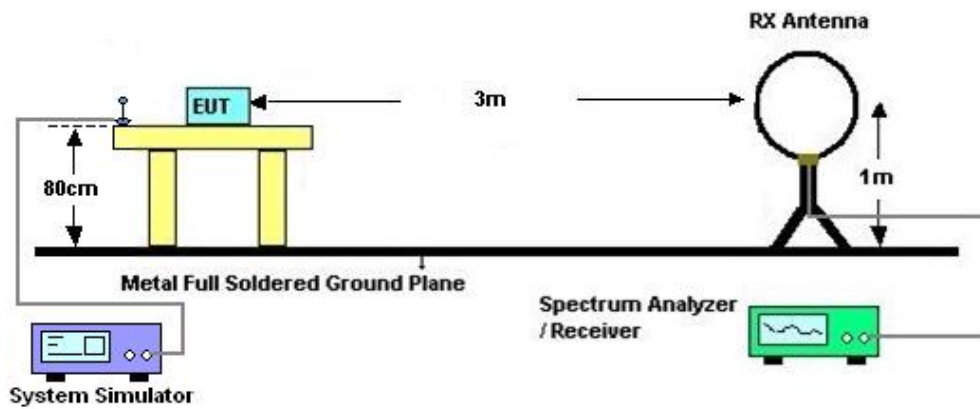

#### 4.2.2 For radiated test from 30MHz to 1GHz

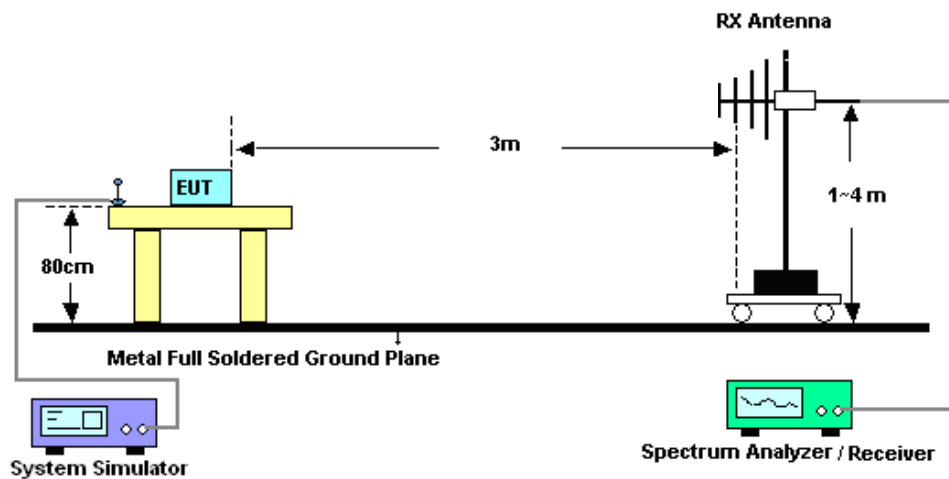

#### 4.2.3 For radiated test above 1GHz

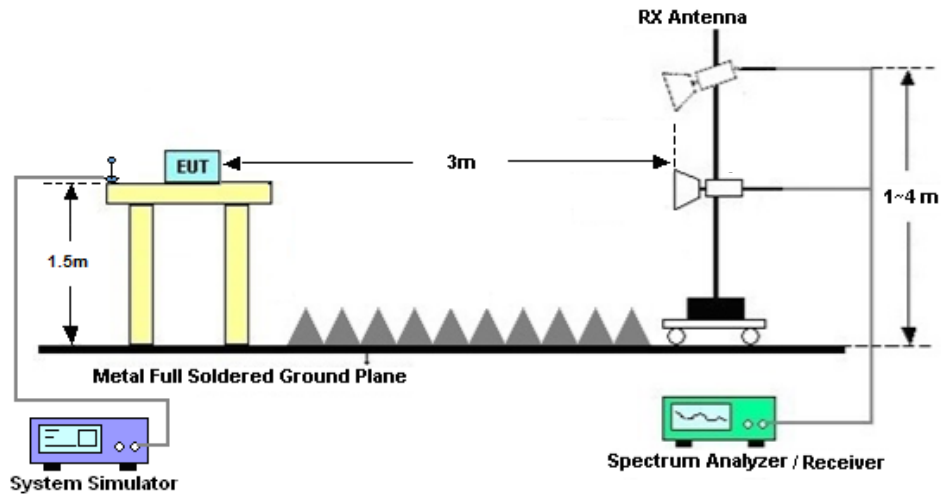

### 4.3 Test Result of Radiated Test

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

Please refer to Appendix B.



## 4.4 Radiated Spurious Emission

### 4.4.1 Description of Radiated Spurious Emission

The radiated spurious emission was measured by substitution method according to ANSI C63.26. The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitter power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

The spectrum is scanned from 30 MHz up to a frequency including its 10th harmonic.

### 4.4.2 Test Procedures

1. The testing follows ANSI C63.26 Section 5.5
2. The EUT was placed on a turntable with 0.8 meter height for frequency below 1GHz and 1.5 meter height for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the receiving antenna mounted on the antenna tower.
4. The table was rotated 360 degrees to determine the position of the highest spurious emission.
5. The height of the receiving antenna is varied between 1m to 4m to search the maximum spurious emission for both horizontal and vertical polarizations.
6. During the measurement, the system simulator parameters were set to force the EUT transmitting at maximum output power.
7. Make the measurement with the spectrum analyzer's RBW = 1MHz, VBW = 3MHz, taking the record of maximum spurious emission.
8. A horn antenna was substituted in place of the EUT and was driven by a signal generator.
9. Tune the output power of signal generator to the same emission level with EUT maximum spurious emission.
10.  $EIRP \text{ (dBm)} = S.G. \text{ Power} - Tx \text{ Cable Loss} + Tx \text{ Antenna Gain}$
11.  $ERP \text{ (dBm)} = EIRP - 2.15$
12. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

The limit line is derived from  $43 + 10\log(P)$ dB below the transmitter power P(Watts)  
 $= P(W) - [43 + 10\log(P)] \text{ (dB)}$   
 $= [30 + 10\log(P)] \text{ (dBm)} - [43 + 10\log(P)] \text{ (dB)}$   
 $= -13\text{dBm}.$



## 5 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 11, 2023	Mar. 15, 2024~ Mar. 26, 2024	Oct. 10, 2024	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Mar. 15, 2024~ Mar. 26, 2024	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 06, 2023	Mar. 15, 2024~ Mar. 26, 2024	Jul. 05, 2024	Conducted (TH01-KS)
EXA Spectrum Analyzer	Keysight	N9010B	MY57471079	10Hz-44G,MAX 30dB	Oct. 10, 2023	Mar. 28, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
Loop Antenna	R&S	HFH2-Z2	100354	9kHz~30MHz	Jun. 28, 2022	Mar. 28, 2024	Jun. 27, 2024	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	49922	30MHz-1GHz	Apr. 09, 2023	Mar. 28, 2024	Apr. 08, 2024	Radiation (03CH04-KS)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00251694	1GHz~18GHz	Jul. 12, 2023	Mar. 28, 2024	Jul. 11, 2024	Radiation (03CH04-KS)
SHF-EHF Horn	Com-power	AH-840	101070	18GHz~40GHz	Jan. 05, 2024	Mar. 28, 2024	Jan. 04, 2025	Radiation (03CH04-KS)
Amplifier	SONOMA	310N	380827	9KHz-1GHz	Jul. 06, 2023	Mar. 28, 2024	Jul. 05, 2024	Radiation (03CH04-KS)
Amplifier	MITEQ	EM18G40G GA	060728	18~40GHz	Jan. 05, 2024	Mar. 28, 2024	Jan. 04, 2025	Radiation (03CH04-KS)
high gain Amplifier	EM	EM01G18G A	060840	1Ghz-18Ghz	Oct. 10, 2023	Mar. 28, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
Amplifier	Agilent	8449B	3008A02370	1Ghz-18Ghz	Oct. 10, 2023	Mar. 28, 2024	Oct. 09, 2024	Radiation (03CH04-KS)
AC Power Source	Chroma	61601	F104090004	N/A	NCR	Mar. 28, 2024	NCR	Radiation (03CH04-KS)
Turn Table	ChamPro	EM 1000-T	060762-T	0~360 degree	NCR	Mar. 28, 2024	NCR	Radiation (03CH04-KS)
Antenna Mast	ChamPro	EM 1000-A	060762-A	1 m~4 m	NCR	Mar. 28, 2024	NCR	Radiation (03CH04-KS)

NCR: No Calibration Required



## 6 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.26 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.46 dB
Peak to Average Ratio	±0.46 dB
Frequency Stability	±0.4 Hz

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.82 dB
---	---------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.56 dB
---	---------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	3.54 dB
---	---------

----- THE END -----



## Appendix A. Test Results of Conducted Test

Test Engineer :	Smile Wang	Temperature :	22~23°C
		Relative Humidity :	40~42%

# FR1 N77-SCS 15K(SISO\_ANT4)

## Transmitter Conducted Output Power And EIRP,(G<sub>T</sub> - L<sub>C</sub>)=-1.89dB

NR Band	SCS	Band Width	Arfcn	Freq (MHz)	Modulation	RB	Conducted Power(dBm)	EIRP(dBm)	EIRP(W)
77	15	50	648334	3725.01	DFT-s-OFDM PI/2 BPSK	135@67	26.47	24.58	0.2871
77	15	50	648334	3725.01	DFT-s-OFDM PI/2 BPSK	1@1	26.24	24.35	0.2723
77	15	50	648334	3725.01	DFT-s-OFDM PI/2 BPSK	1@268	25.18	23.29	0.2133
77	15	50	648334	3725.01	DFT-s-OFDM QPSK	135@67	26.5	24.61	0.2891
77	15	50	648334	3725.01	DFT-s-OFDM QPSK	1@1	26.3	24.41	0.2761
77	15	50	648334	3725.01	DFT-s-OFDM QPSK	1@268	25.22	23.33	0.2153
77	15	50	648334	3725.01	DFT-s-OFDM 16 QAM	135@67	25.45	23.56	0.2270
77	15	50	648334	3725.01	DFT-s-OFDM 16 QAM	1@1	25.3	23.41	0.2193
77	15	50	648334	3725.01	DFT-s-OFDM 16 QAM	1@268	24.23	22.34	0.1714
77	15	50	648334	3725.01	DFT-s-OFDM 64 QAM	135@67	23.53	21.64	0.1459
77	15	50	648334	3725.01	DFT-s-OFDM 64 QAM	1@1	23.2	21.31	0.1352
77	15	50	648334	3725.01	DFT-s-OFDM 64 QAM	1@268	22.24	20.35	0.1084
77	15	50	648334	3725.01	DFT-s-OFDM 256 QAM	135@67	19.91	18.02	0.0634
77	15	50	648334	3725.01	DFT-s-OFDM 256 QAM	1@1	22.63	20.74	0.1186
77	15	50	648334	3725.01	DFT-s-OFDM 256 QAM	1@268	18.52	16.63	0.0460
77	15	50	648334	3725.01	CP-OFDM QPSK	135@67	24.46	22.57	0.1807
77	15	50	648334	3725.01	CP-OFDM QPSK	1@1	24.22	22.33	0.1710
77	15	50	648334	3725.01	CP-OFDM QPSK	1@268	23.24	21.35	0.1365
77	15	50	656000	3840	DFT-s-OFDM PI/2 BPSK	135@67	26.75	24.86	0.3062
77	15	50	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	26.5	24.61	0.2891
77	15	50	656000	3840	DFT-s-OFDM PI/2 BPSK	1@268	26.19	24.3	0.2692
77	15	50	656000	3840	DFT-s-OFDM QPSK	135@67	26.34	24.45	0.2786
77	15	50	656000	3840	DFT-s-OFDM QPSK	1@1	26.55	24.66	0.2924
77	15	50	656000	3840	DFT-s-OFDM QPSK	1@268	26.21	24.32	0.2704
77	15	50	656000	3840	DFT-s-OFDM 16 QAM	135@67	25.36	23.47	0.2223
77	15	50	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.53	23.64	0.2312
77	15	50	656000	3840	DFT-s-OFDM 16 QAM	1@268	25.23	23.34	0.2158
77	15	50	656000	3840	DFT-s-OFDM 64 QAM	135@67	23.39	21.5	0.1413
77	15	50	656000	3840	DFT-s-OFDM 64 QAM	1@1	23.5	21.61	0.1449
77	15	50	656000	3840	DFT-s-OFDM 64 QAM	1@268	23.31	21.42	0.1387
77	15	50	656000	3840	DFT-s-OFDM 256 QAM	135@67	20.16	18.27	0.0671
77	15	50	656000	3840	DFT-s-OFDM 256 QAM	1@1	22.86	20.97	0.1250
77	15	50	656000	3840	DFT-s-OFDM 256 QAM	1@268	19.92	18.03	0.0635
77	15	50	656000	3840	CP-OFDM QPSK	135@67	24.27	22.38	0.1730
77	15	50	656000	3840	CP-OFDM QPSK	1@1	24.52	22.63	0.1832
77	15	50	656000	3840	CP-OFDM QPSK	1@268	24.24	22.35	0.1718
77	15	50	663666	3954.99	DFT-s-OFDM PI/2 BPSK	135@67	26.16	24.27	0.2673
77	15	50	663666	3954.99	DFT-s-OFDM PI/2 BPSK	1@1	25.88	23.99	0.2506
77	15	50	663666	3954.99	DFT-s-OFDM PI/2 BPSK	1@268	26.24	24.35	0.2723
77	15	50	663666	3954.99	DFT-s-OFDM QPSK	135@67	26.19	24.3	0.2692
77	15	50	663666	3954.99	DFT-s-OFDM QPSK	1@1	25.96	24.07	0.2553
77	15	50	663666	3954.99	DFT-s-OFDM QPSK	1@268	26.28	24.39	0.2748
77	15	50	663666	3954.99	DFT-s-OFDM 16 QAM	135@67	25.22	23.33	0.2153
77	15	50	663666	3954.99	DFT-s-OFDM 16 QAM	1@1	24.92	23.03	0.2009
77	15	50	663666	3954.99	DFT-s-OFDM 16 QAM	1@268	25.2	23.31	0.2143

77	15	50	663666	3954.99	DFT-s-OFDM 64 QAM	135@67	23.23	21.34	0.1361
77	15	50	663666	3954.99	DFT-s-OFDM 64 QAM	1@1	22.99	21.1	0.1288
77	15	50	663666	3954.99	DFT-s-OFDM 64 QAM	1@268	23.29	21.4	0.1380
77	15	50	663666	3954.99	DFT-s-OFDM 256 QAM	135@67	20.2	18.31	0.0678
77	15	50	663666	3954.99	DFT-s-OFDM 256 QAM	1@1	19.78	17.89	0.0615
77	15	50	663666	3954.99	DFT-s-OFDM 256 QAM	1@268	20.1	18.21	0.0662
77	15	50	663666	3954.99	CP-OFDM QPSK	135@67	24.18	22.29	0.1694
77	15	50	663666	3954.99	CP-OFDM QPSK	1@1	23.88	21.99	0.1581
77	15	50	663666	3954.99	CP-OFDM QPSK	1@268	24.27	22.38	0.1730
77	15	10	647000	3705	DFT-s-OFDM PI/2 BPSK	1@1	26.24	24.35	0.2723
77	15	10	647000	3705	DFT-s-OFDM QPSK	1@1	26.33	24.44	0.2780
77	15	10	647000	3705	DFT-s-OFDM 16 QAM	1@1	25.15	23.26	0.2118
77	15	10	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	26.33	24.44	0.2780
77	15	10	656000	3840	DFT-s-OFDM QPSK	1@1	26.33	24.44	0.2780
77	15	10	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.35	23.46	0.2218
77	15	10	665000	3975	DFT-s-OFDM PI/2 BPSK	1@1	26.28	24.39	0.2748
77	15	10	665000	3975	DFT-s-OFDM QPSK	1@1	26.32	24.43	0.2773
77	15	10	665000	3975	DFT-s-OFDM 16 QAM	1@1	25.28	23.39	0.2183
77	15	15	647167	3707.505	DFT-s-OFDM PI/2 BPSK	1@1	26.23	24.34	0.2716
77	15	15	647167	3707.505	DFT-s-OFDM QPSK	1@1	26.24	24.35	0.2723
77	15	15	647167	3707.505	DFT-s-OFDM 16 QAM	1@1	25.26	23.37	0.2173
77	15	15	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	26.31	24.42	0.2767
77	15	15	656000	3840	DFT-s-OFDM QPSK	1@1	26.31	24.42	0.2767
77	15	15	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.28	23.39	0.2183
77	15	15	664833	3972.495	DFT-s-OFDM PI/2 BPSK	1@1	26.13	24.24	0.2655
77	15	15	664833	3972.495	DFT-s-OFDM QPSK	1@1	26.26	24.37	0.2735
77	15	15	664833	3972.495	DFT-s-OFDM 16 QAM	1@1	25.06	23.17	0.2075
77	15	20	647334	3710.01	DFT-s-OFDM PI/2 BPSK	1@1	26.26	24.37	0.2735
77	15	20	647334	3710.01	DFT-s-OFDM QPSK	1@1	26.29	24.4	0.2754
77	15	20	647334	3710.01	DFT-s-OFDM 16 QAM	1@1	25.16	23.27	0.2123
77	15	20	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	26.32	24.43	0.2773
77	15	20	656000	3840	DFT-s-OFDM QPSK	1@1	26.36	24.47	0.2799
77	15	20	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.28	23.39	0.2183
77	15	20	664666	3969.99	DFT-s-OFDM PI/2 BPSK	1@1	26.15	24.26	0.2667
77	15	20	664666	3969.99	DFT-s-OFDM QPSK	1@1	26.26	24.37	0.2735
77	15	20	664666	3969.99	DFT-s-OFDM 16 QAM	1@1	25.06	23.17	0.2075
77	15	25	647500	3712.5	DFT-s-OFDM PI/2 BPSK	1@1	26.22	24.33	0.2710
77	15	25	647500	3712.5	DFT-s-OFDM QPSK	1@1	26.28	24.39	0.2748
77	15	25	647500	3712.5	DFT-s-OFDM 16 QAM	1@1	25.15	23.26	0.2118
77	15	25	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	26.41	24.52	0.2831
77	15	25	656000	3840	DFT-s-OFDM QPSK	1@1	26.45	24.56	0.2858
77	15	25	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.37	23.48	0.2228
77	15	25	664500	3967.5	DFT-s-OFDM PI/2 BPSK	1@1	26.22	24.33	0.2710
77	15	25	664500	3967.5	DFT-s-OFDM QPSK	1@1	26.3	24.41	0.2761
77	15	25	664500	3967.5	DFT-s-OFDM 16 QAM	1@1	25.24	23.35	0.2163
77	15	30	647667	3715.005	DFT-s-OFDM PI/2 BPSK	1@1	26.26	24.37	0.2735
77	15	30	647667	3715.005	DFT-s-OFDM QPSK	1@1	26.31	24.42	0.2767
77	15	30	647667	3715.005	DFT-s-OFDM 16 QAM	1@1	25.31	23.42	0.2198
77	15	30	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	26.41	24.52	0.2831
77	15	30	656000	3840	DFT-s-OFDM QPSK	1@1	26.43	24.54	0.2844
77	15	30	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.43	23.54	0.2259
77	15	30	664332	3964.98	DFT-s-OFDM PI/2 BPSK	1@1	26.12	24.23	0.2649
77	15	30	664332	3964.98	DFT-s-OFDM QPSK	1@1	26.22	24.33	0.2710
77	15	30	664332	3964.98	DFT-s-OFDM 16 QAM	1@1	25.19	23.3	0.2138

77	15	40	648000	3720	DFT-s-OFDM PI/2 BPSK	1@1	26.24	24.35	0.2723
77	15	40	648000	3720	DFT-s-OFDM QPSK	1@1	26.24	24.35	0.2723
77	15	40	648000	3720	DFT-s-OFDM 16 QAM	1@1	25.27	23.38	0.2178
77	15	40	656000	3840	DFT-s-OFDM PI/2 BPSK	1@1	26.51	24.62	0.2897
77	15	40	656000	3840	DFT-s-OFDM QPSK	1@1	26.5	24.61	0.2891
77	15	40	656000	3840	DFT-s-OFDM 16 QAM	1@1	25.48	23.59	0.2286
77	15	40	664000	3960	DFT-s-OFDM PI/2 BPSK	1@1	26.05	24.16	0.2606
77	15	40	664000	3960	DFT-s-OFDM QPSK	1@1	26.16	24.27	0.2673
77	15	40	664000	3960	DFT-s-OFDM 16 QAM	1@1	25.16	23.27	0.2123

## Frequency Stability

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Deviation (ppm)	Verdict	Environment
77	15	20	656000	3840.0	DFT-s-OFDM QPSK	100@0	0.00432	PASS	NV
77	15	20	656000	3840.0	DFT-s-OFDM QPSK	100@0	-0.00361	PASS	LV
77	15	20	656000	3840.0	DFT-s-OFDM QPSK	100@0	0.00224	PASS	HV
77	15	20	656000	3840.0	DFT-s-OFDM QPSK	100@0	0.00364	PASS	-30°C
77	15	20	656000	3840.0	DFT-s-OFDM QPSK	100@0	0.00418	PASS	-20°C
77	15	20	656000	3840.0	DFT-s-OFDM QPSK	100@0	0.00342	PASS	-10°C
77	15	20	656000	3840.0	DFT-s-OFDM QPSK	100@0	0.00296	PASS	0°C
77	15	20	656000	3840.0	DFT-s-OFDM QPSK	100@0	0.00341	PASS	10°C
77	15	20	656000	3840.0	DFT-s-OFDM QPSK	100@0	-0.00286	PASS	20°C
77	15	20	656000	3840.0	DFT-s-OFDM QPSK	100@0	-0.00413	PASS	30°C
77	15	20	656000	3840.0	DFT-s-OFDM QPSK	100@0	0.00263	PASS	40°C
77	15	20	656000	3840.0	DFT-s-OFDM QPSK	100@0	0.00352	PASS	50°C

## Peak to Average Ratio

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
77	15	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	100@0	4.07	13	PASS
77	15	20	656000	3840.0	DFT-s-OFDM PI/2 BPSK	1@0	4.05	13	PASS
77	15	20	656000	3840.0	DFT-s-OFDM QPSK	100@0	5.16	13	PASS
77	15	20	656000	3840.0	DFT-s-OFDM QPSK	1@0	4.95	13	PASS

N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Outer\_Full\_Mid\_CH




N77(20M)\_DFT-s-OFDM\_PI\_2-BPSK\_Edge\_1RB\_Left\_Mid\_CH



N77(20M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Mid\_CH




N77(20M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

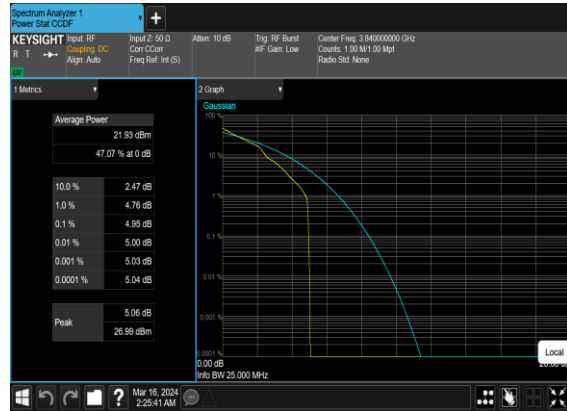


## Occupied Bandwidth

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
77	15	10	656000	3840.0	CP-OFDM QPSK	52@0	9.2408	9.678
77	15	10	656000	3840.0	CP-OFDM 16 QAM	52@0	9.248	9.707
77	15	10	656000	3840.0	CP-OFDM 64 QAM	52@0	9.265	9.588
77	15	10	656000	3840.0	CP-OFDM 256 QAM	52@0	9.2975	9.664
77	15	15	656000	3840.0	CP-OFDM QPSK	79@0	14.075	14.62
77	15	15	656000	3840.0	CP-OFDM 16 QAM	79@0	14.091	14.64
77	15	15	656000	3840.0	CP-OFDM 64 QAM	79@0	14.112	14.59
77	15	15	656000	3840.0	CP-OFDM 256 QAM	79@0	14.046	14.57
77	15	20	656000	3840.0	CP-OFDM QPSK	106@0	18.934	19.61
77	15	20	656000	3840.0	CP-OFDM 16 QAM	106@0	18.892	19.56
77	15	20	656000	3840.0	CP-OFDM 64 QAM	106@0	18.805	19.54
77	15	20	656000	3840.0	CP-OFDM 256 QAM	106@0	18.968	19.57
77	15	25	656000	3840.0	CP-OFDM QPSK	133@0	23.767	24.57
77	15	25	656000	3840.0	CP-OFDM 16 QAM	133@0	23.762	24.6
77	15	25	656000	3840.0	CP-OFDM 64 QAM	133@0	23.761	24.59
77	15	25	656000	3840.0	CP-OFDM 256 QAM	133@0	23.715	24.61
77	15	30	656000	3840.0	CP-OFDM QPSK	160@0	28.64	29.46
77	15	30	656000	3840.0	CP-OFDM 16 QAM	160@0	28.558	29.69
77	15	30	656000	3840.0	CP-OFDM 64 QAM	160@0	28.62	29.45
77	15	30	656000	3840.0	CP-OFDM 256 QAM	160@0	28.512	29.49
77	15	40	656000	3840.0	CP-OFDM QPSK	216@0	38.421	39.84
77	15	40	656000	3840.0	CP-OFDM 16 QAM	216@0	38.543	39.81
77	15	40	656000	3840.0	CP-OFDM 64 QAM	216@0	38.399	39.79
77	15	40	656000	3840.0	CP-OFDM 256 QAM	216@0	38.626	39.84
77	15	50	656000	3840.0	CP-OFDM QPSK	270@0	48.201	49.76
77	15	50	656000	3840.0	CP-OFDM 16 QAM	270@0	48.164	49.73
77	15	50	656000	3840.0	CP-OFDM 64 QAM	270@0	48.063	49.76
77	15	50	656000	3840.0	CP-OFDM 256 QAM	270@0	48.178	49.78

### N77(10M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

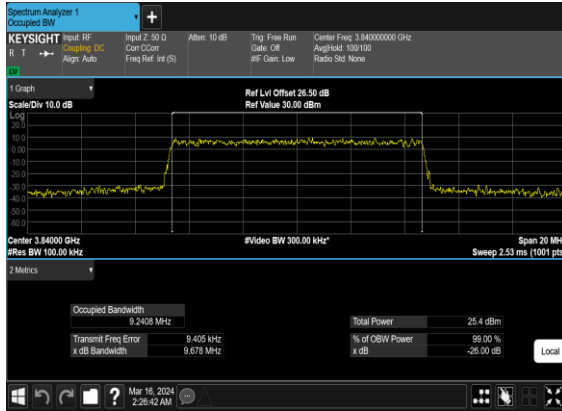


### N77(10M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

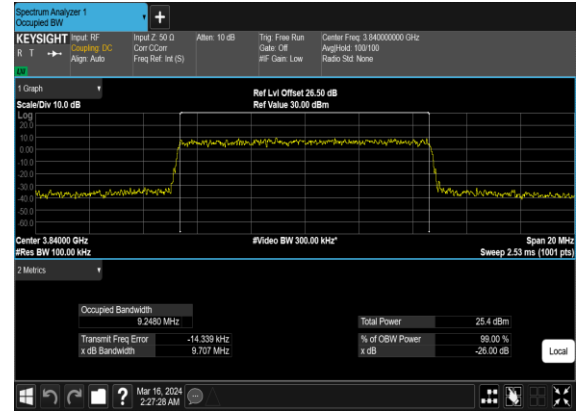


### N77(10M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH




### N77(10M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

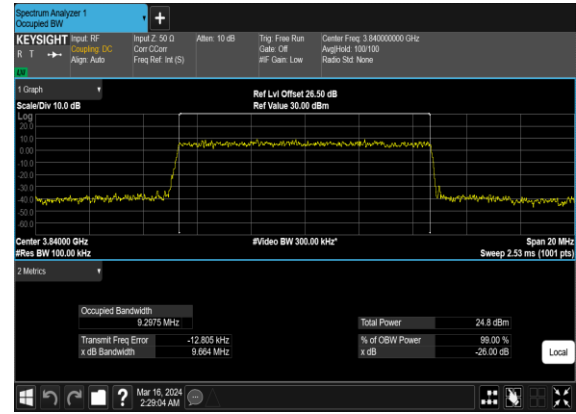

### N77(15M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

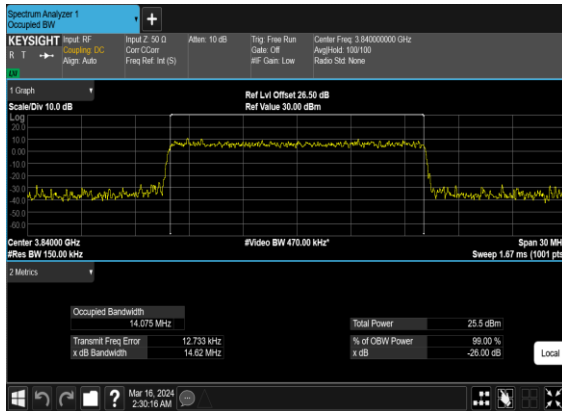


### N77(15M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

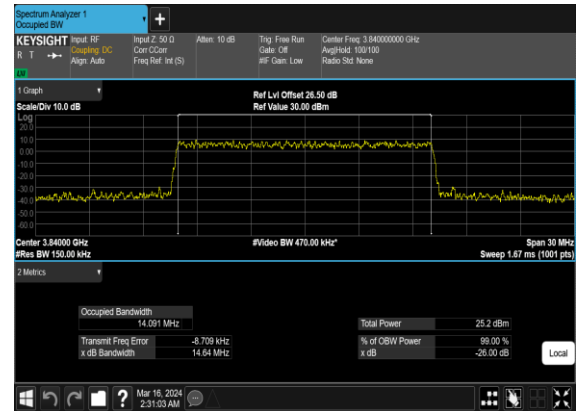


### N77(15M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH




### N77(15M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

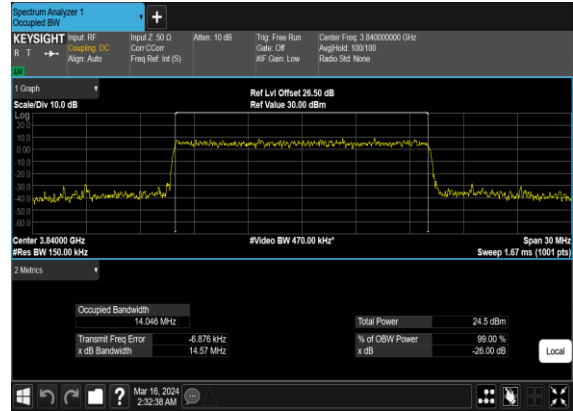


### N77(20M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

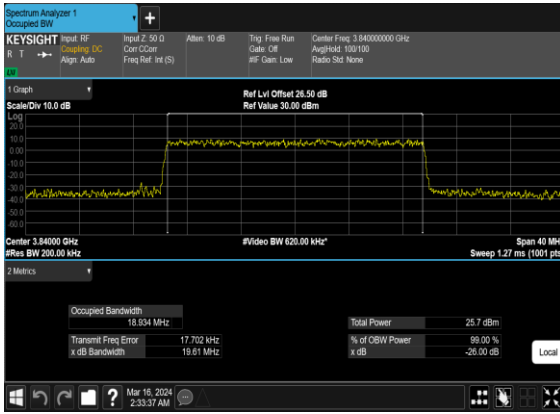


### N77(20M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

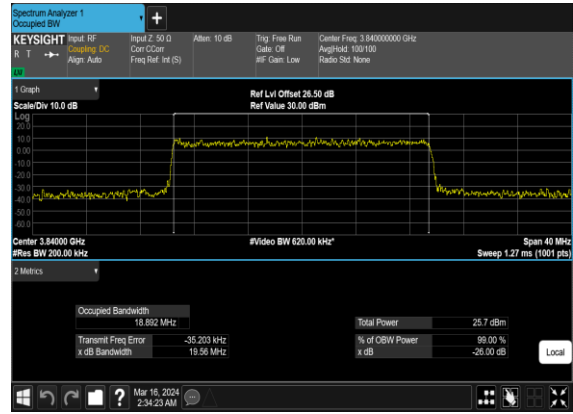


### N77(20M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

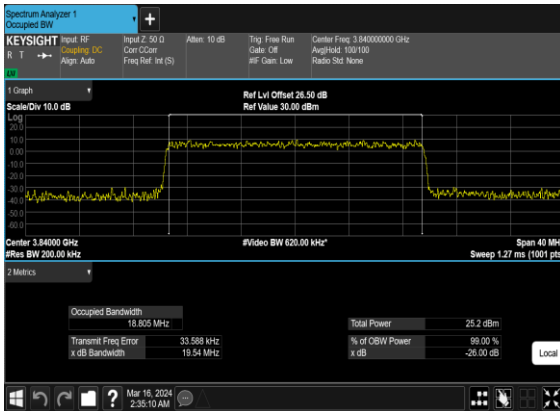


### N77(20M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

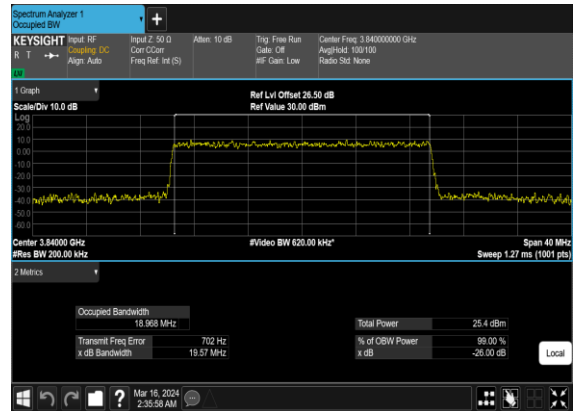


### N77(25M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

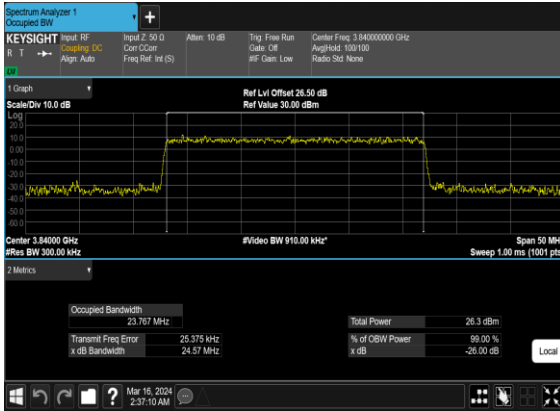


### N77(25M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

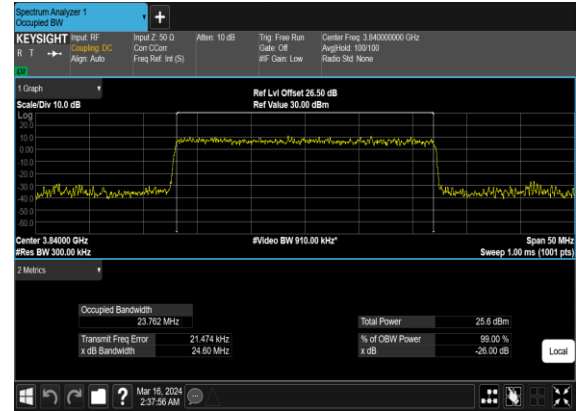


### N77(25M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

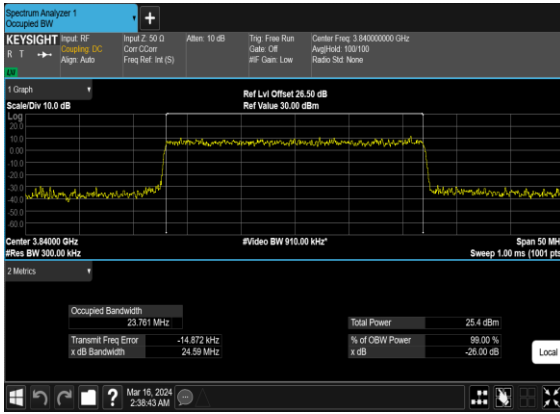


### N77(25M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

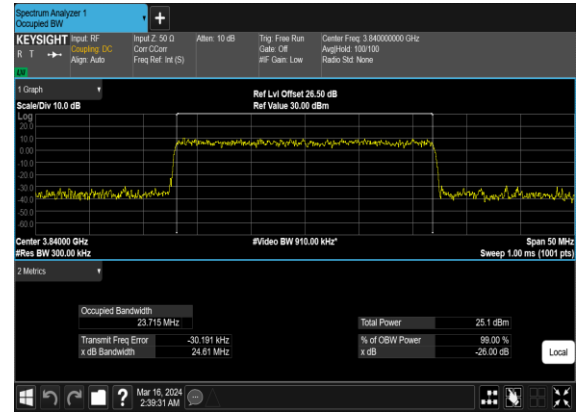


### N77(30M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

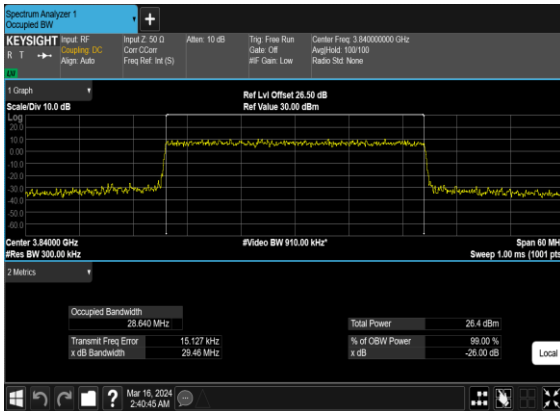


### N77(30M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

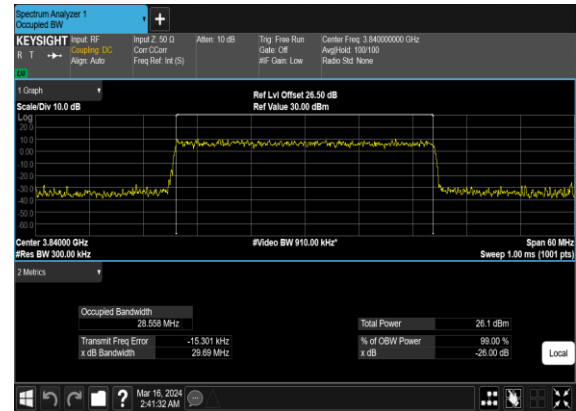


### N77(30M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

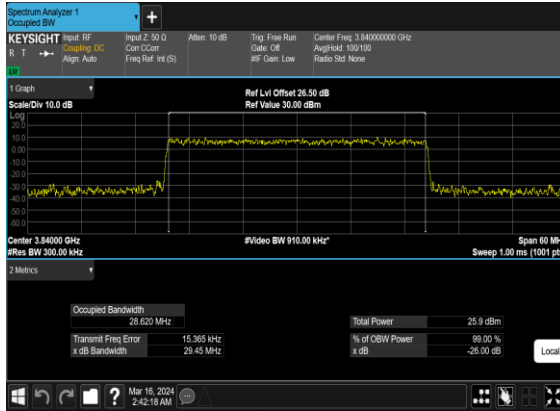


### N77(30M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

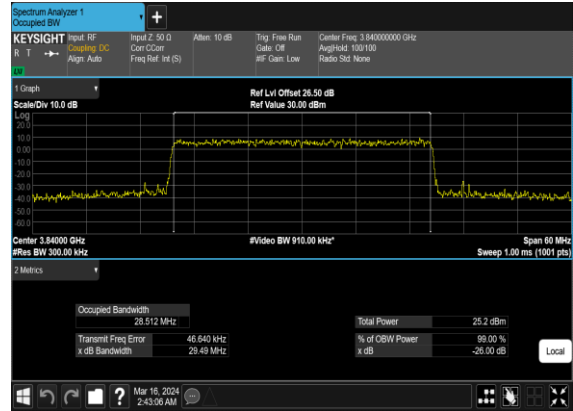


### N77(40M)\_CP- OFDM\_QPSK\_Outer\_Full\_Mid\_CH

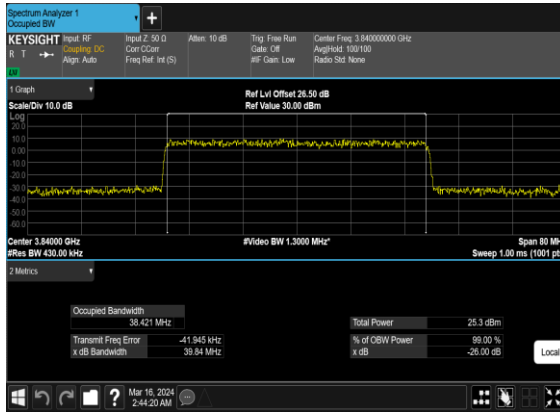


### N77(40M)\_CP-OFDM\_16 QAM\_Outer\_Full\_Mid\_CH

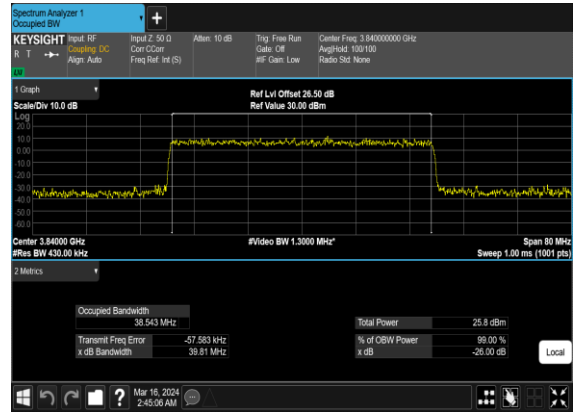


### N77(40M)\_CP-OFDM\_64 QAM\_Outer\_Full\_Mid\_CH

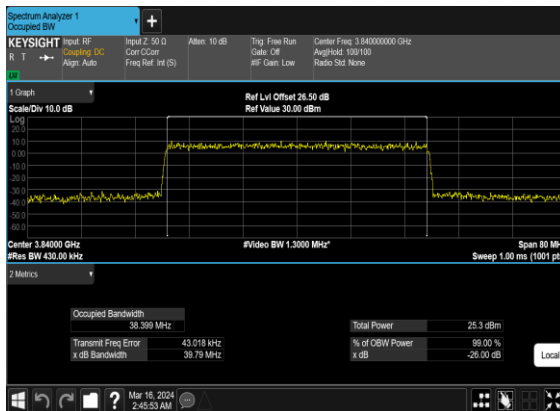


### N77(40M)\_CP-OFDM\_256 QAM\_Outer\_Full\_Mid\_CH

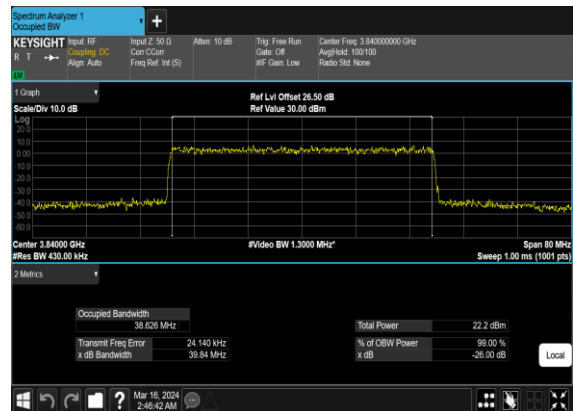


### N77(50M)\_CP-OFDM\_QPSK\_Outer\_Full\_Mid\_CH

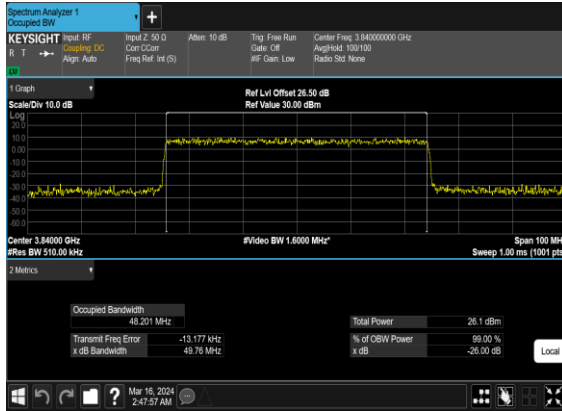


### N77(50M)\_CP-OFDM\_16QAM\_Outer\_Full\_Mid\_CH

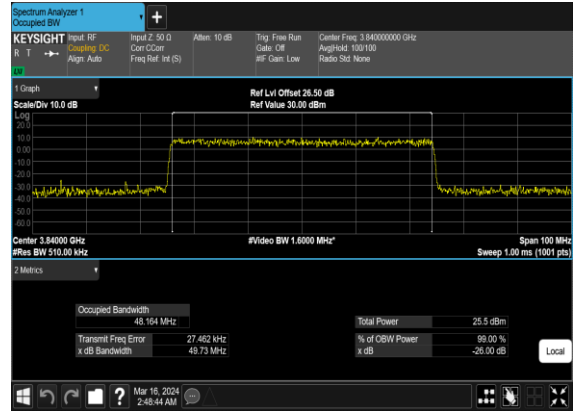

### N77(50M)\_CP-OFDM\_64QAM\_Outer\_Full\_Mid\_CH

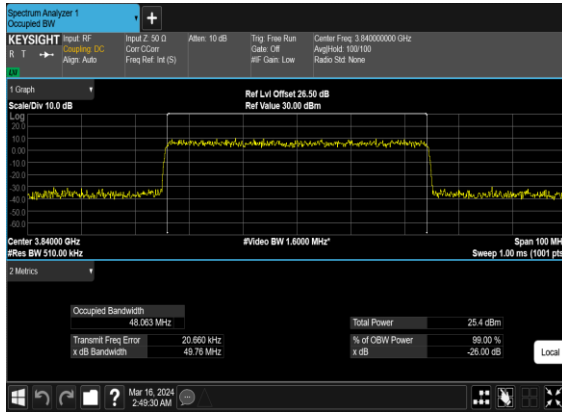

### N77(50M)\_CP-OFDM\_256QAM\_Outer\_Full\_Mid\_CH

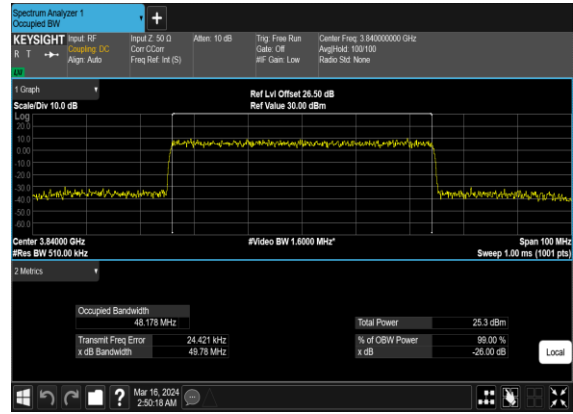

## Conducted Spurious Emissions


NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	15	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	10	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	10	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	10	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	10	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	10	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	10	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	10	665000	3975.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	10	665000	3975.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	10	665000	3975.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	10	665000	3975.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	10	665000	3975.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	10	665000	3975.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	25	647500	3712.5	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	25	647500	3712.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	25	647500	3712.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	25	647500	3712.5	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	25	647500	3712.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	25	647500	3712.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	25	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	25	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	25	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	25	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	25	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	25	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	PASS

77	15	25	664500	3967.5	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	25	664500	3967.5	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
77	15	25	664500	3967.5	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
77	15	25	664500	3967.5	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	25	664500	3967.5	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
77	15	25	664500	3967.5	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
77	15	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
77	15	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
77	15	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
77	15	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
77	15	50	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	50	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
77	15	50	656000	3840.0	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
77	15	50	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	50	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
77	15	50	656000	3840.0	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
77	15	50	663666	3954.99	DFT-s-OFDM BPSK	1@0	see graph	---
77	15	50	663666	3954.99	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
77	15	50	663666	3954.99	DFT-s-OFDM BPSK	1@0	see graph	<b>PASS</b>
77	15	50	663666	3954.99	DFT-s-OFDM QPSK	1@0	see graph	---
77	15	50	663666	3954.99	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>
77	15	50	663666	3954.99	DFT-s-OFDM QPSK	1@0	see graph	<b>PASS</b>


N77(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH




N77(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

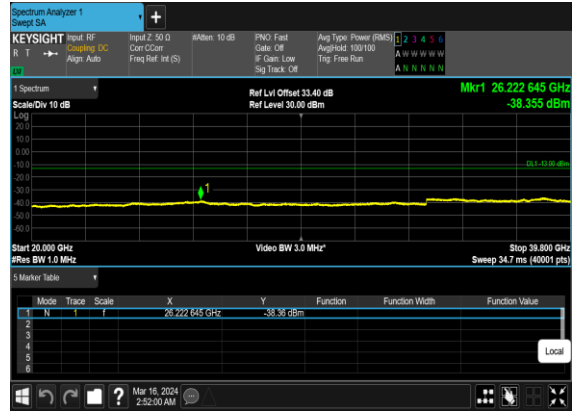


N77(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

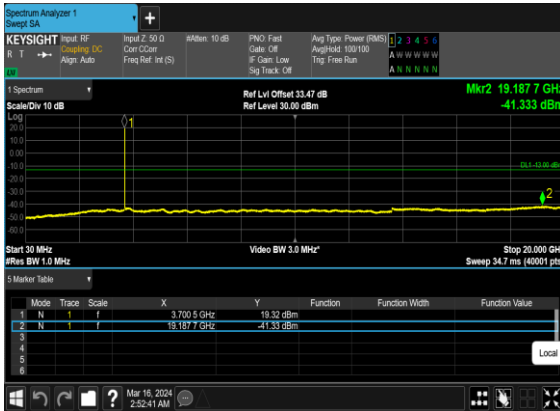


N77(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

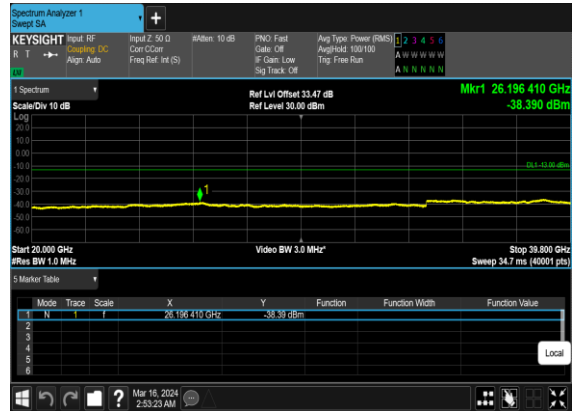


N77(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

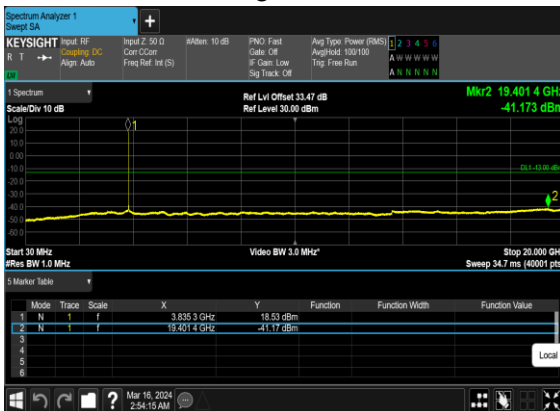


N77(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

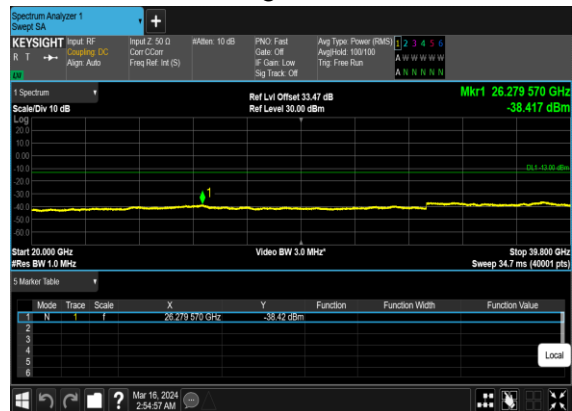


### N77(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

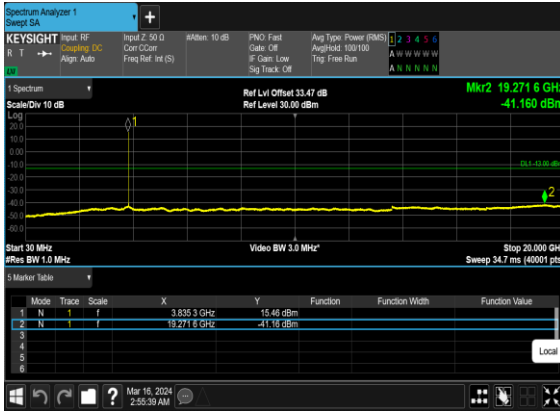


### N77(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

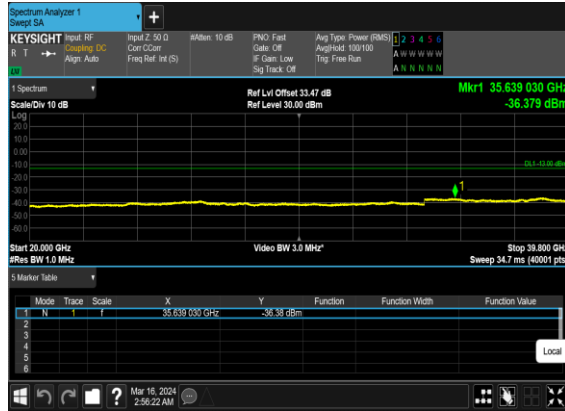

### N77(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

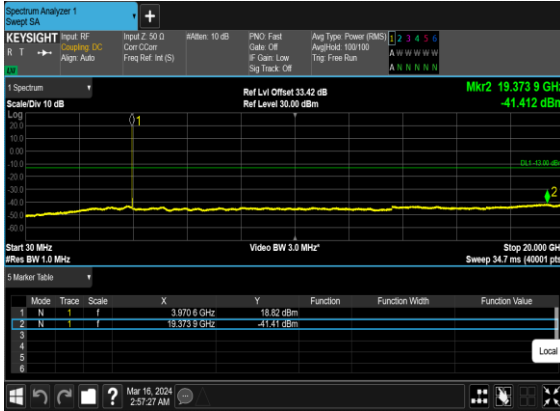


### N77(10M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

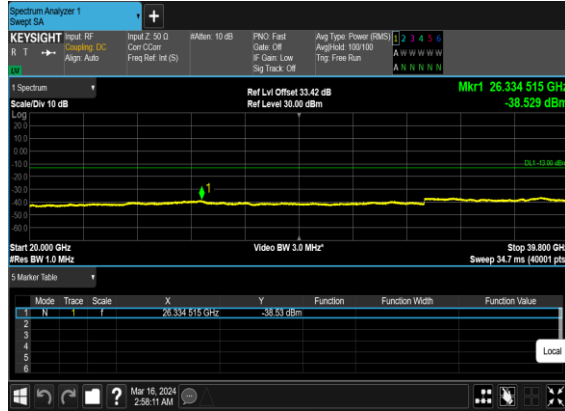

### N77(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH




### N77(10M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

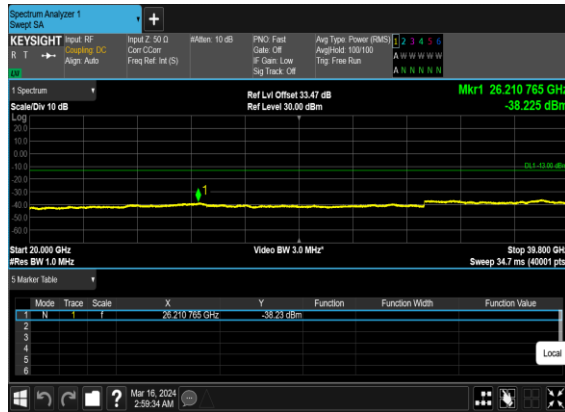

### N77(25M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH




### N77(25M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

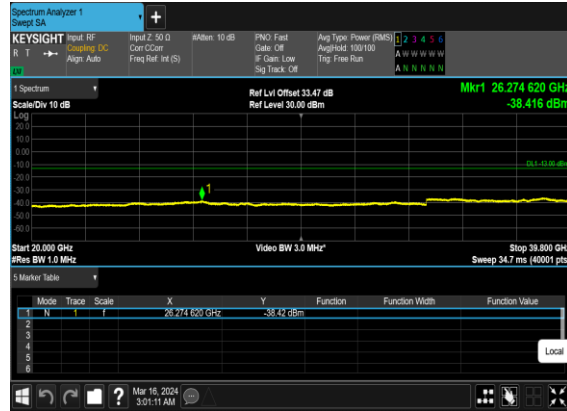


### N77(25M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH




### N77(25M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

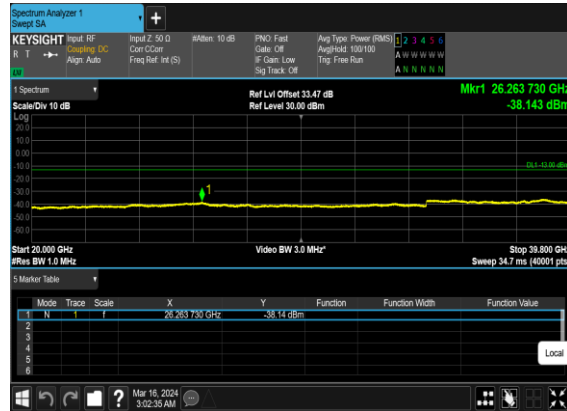


### N77(25M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

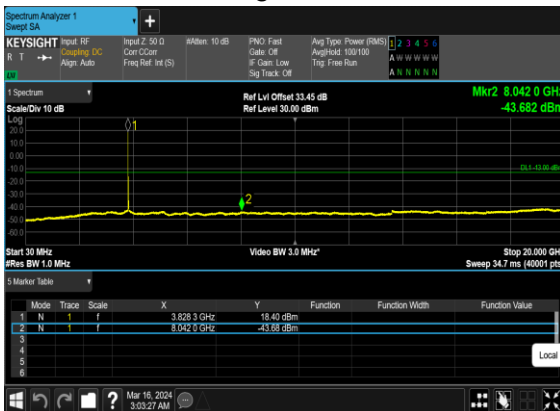


### N77(25M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

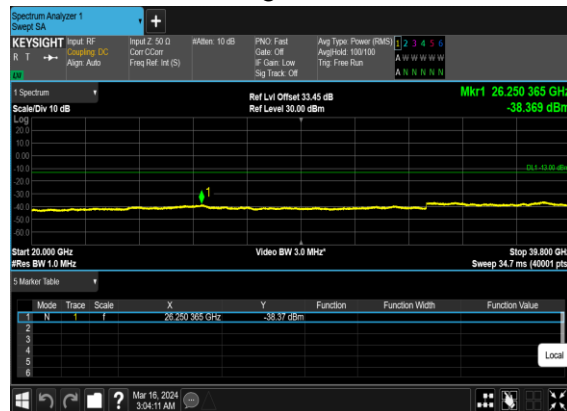


### N77(25M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

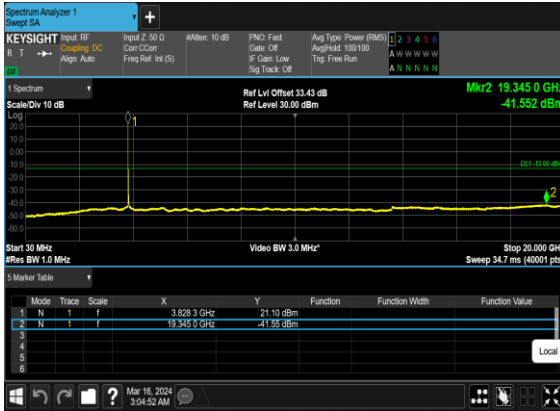


### N77(25M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

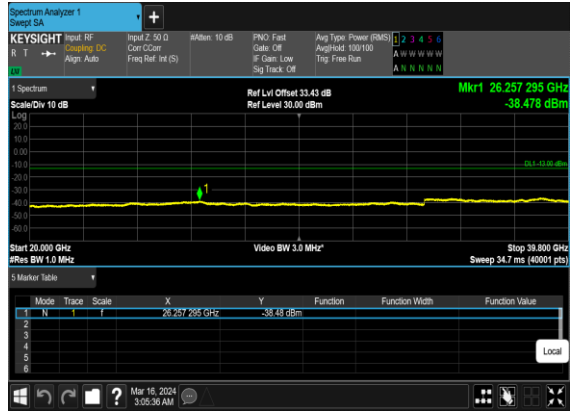


### N77(25M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

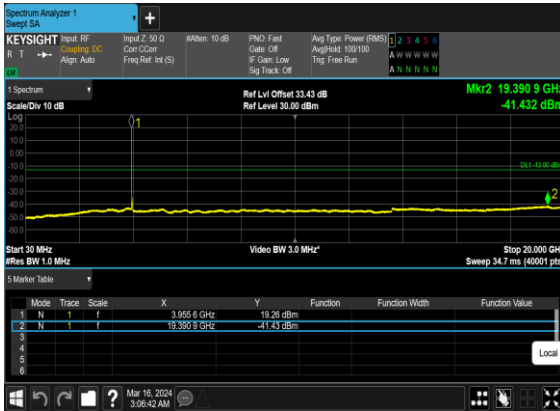


### N77(25M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

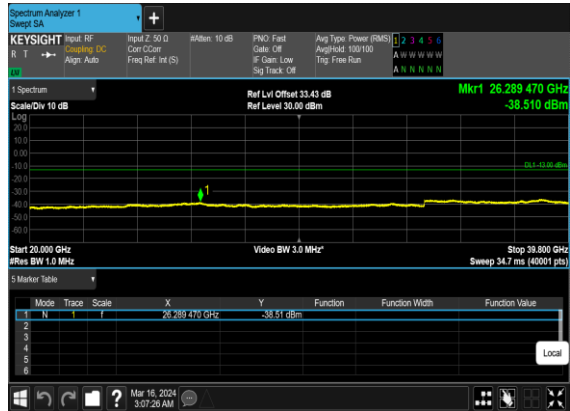

### N77(25M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

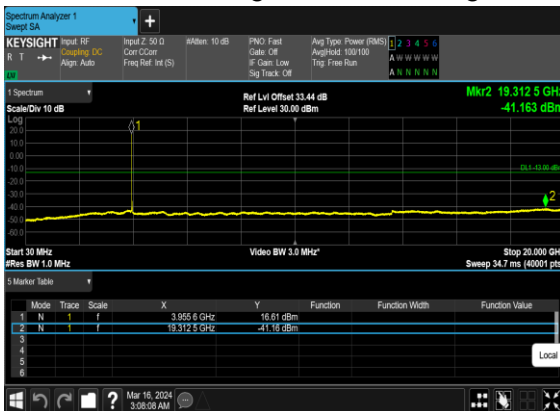


### N77(25M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

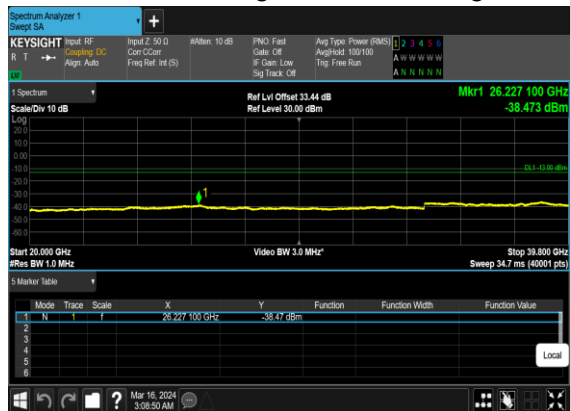


### N77(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH



### N77(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

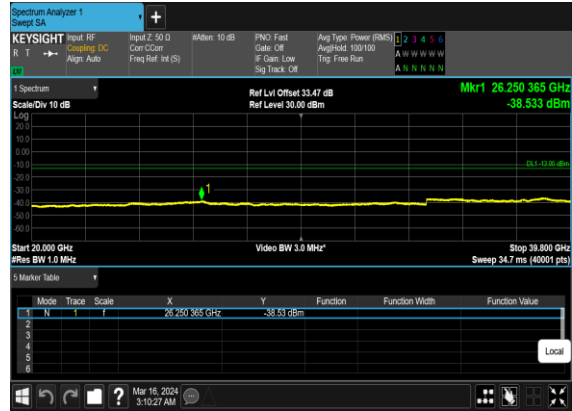


### N77(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

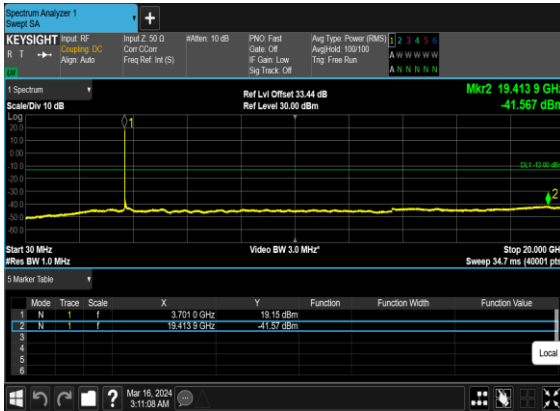


### N77(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH




### N77(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

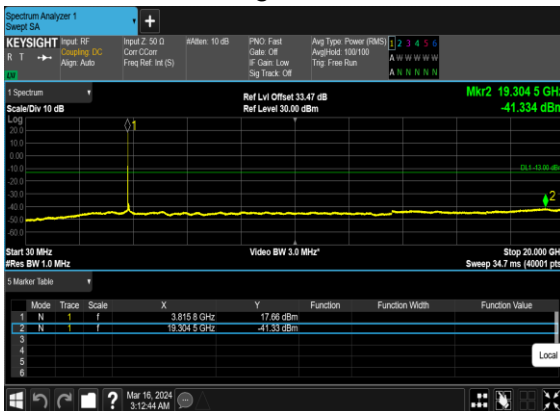


### N77(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Mid\_CH

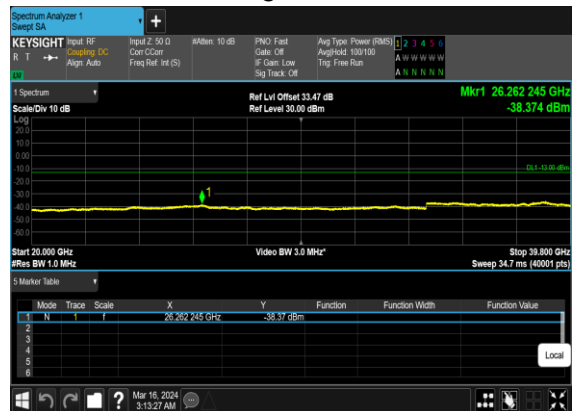


### N77(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

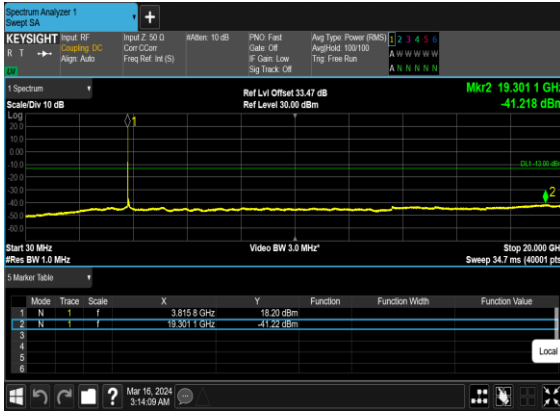


### N77(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Mid\_CH

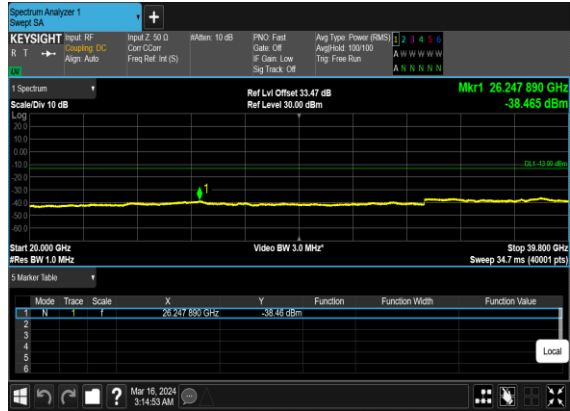

### N77(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

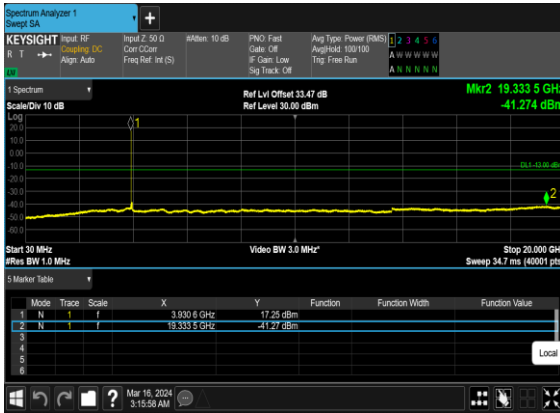


### N77(50M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_High\_CH

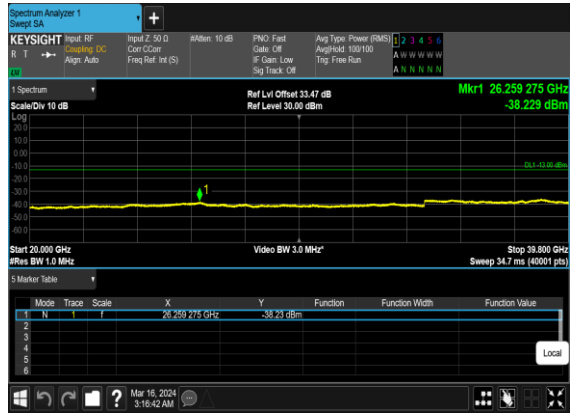

### N77(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH




### N77(50M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_High\_CH

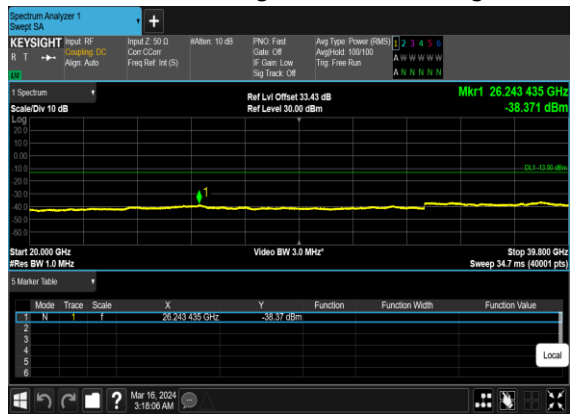


## Conducted Band Edge

NR Band	SCS (kHz)	Bandwidth (MHz)	Arfcn	Freq (MHz)	Modulation	RB	Result	Verdict
77	15	10	647000	3705.0	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	10	647000	3705.0	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	10	647000	3705.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
77	15	10	647000	3705.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
77	15	10	665000	3975.0	DFT-s-OFDM BPSK	1@51	see graph	PASS
77	15	10	665000	3975.0	DFT-s-OFDM QPSK	1@51	see graph	PASS
77	15	10	665000	3975.0	DFT-s-OFDM BPSK	50@0	see graph	PASS
77	15	10	665000	3975.0	DFT-s-OFDM QPSK	50@0	see graph	PASS
77	15	25	647500	3712.5	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	25	647500	3712.5	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	25	647500	3712.5	DFT-s-OFDM BPSK	128@0	see graph	PASS
77	15	25	647500	3712.5	DFT-s-OFDM QPSK	128@0	see graph	PASS
77	15	25	664500	3967.5	DFT-s-OFDM BPSK	1@132	see graph	PASS
77	15	25	664500	3967.5	DFT-s-OFDM QPSK	1@132	see graph	PASS
77	15	25	664500	3967.5	DFT-s-OFDM BPSK	128@0	see graph	PASS
77	15	25	664500	3967.5	DFT-s-OFDM QPSK	128@0	see graph	PASS
77	15	50	648334	3725.01	DFT-s-OFDM BPSK	1@0	see graph	PASS
77	15	50	648334	3725.01	DFT-s-OFDM QPSK	1@0	see graph	PASS
77	15	50	648334	3725.01	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	15	50	648334	3725.01	DFT-s-OFDM QPSK	270@0	see graph	PASS
77	15	50	663666	3954.99	DFT-s-OFDM BPSK	1@269	see graph	PASS
77	15	50	663666	3954.99	DFT-s-OFDM QPSK	1@269	see graph	PASS
77	15	50	663666	3954.99	DFT-s-OFDM BPSK	270@0	see graph	PASS
77	15	50	663666	3954.99	DFT-s-OFDM QPSK	270@0	see graph	PASS

N77(10M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

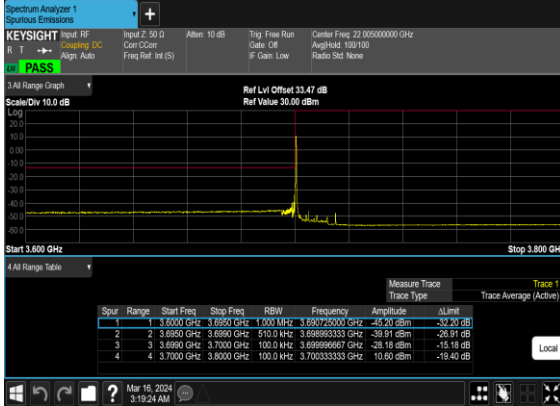


N77(10M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

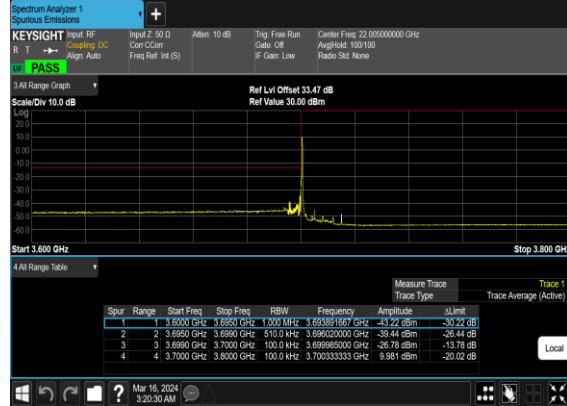


N77(10M)\_DFT-s-  
OFDM\_BPSK\_Outer\_Full\_Low\_CH




N77(10M)\_DFT-s-  
OFDM\_QPSK\_Outer\_Full\_Low\_CH

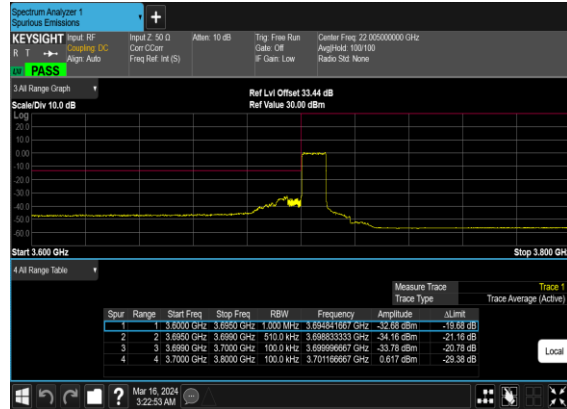


N77(10M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH

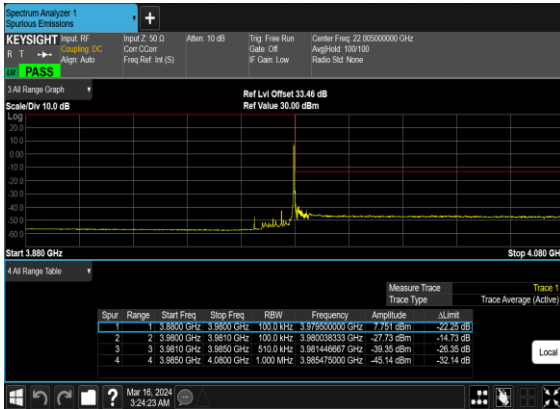


N77(10M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

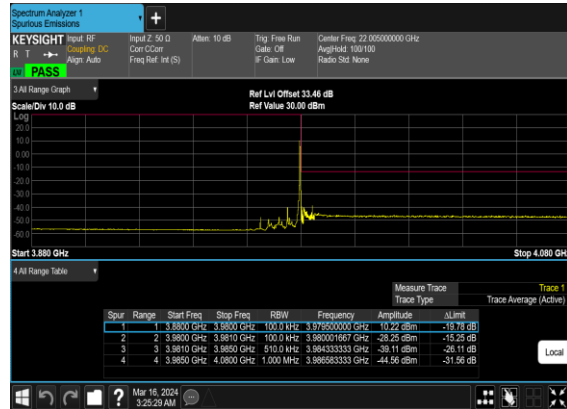


### N77(10M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_High\_CH

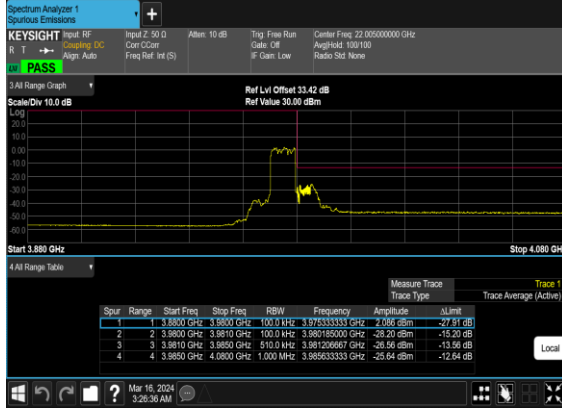


### N77(10M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_High\_CH

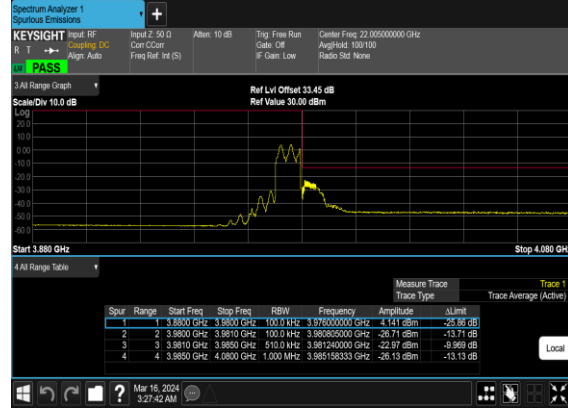


### N77(25M)\_DFT-s-OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

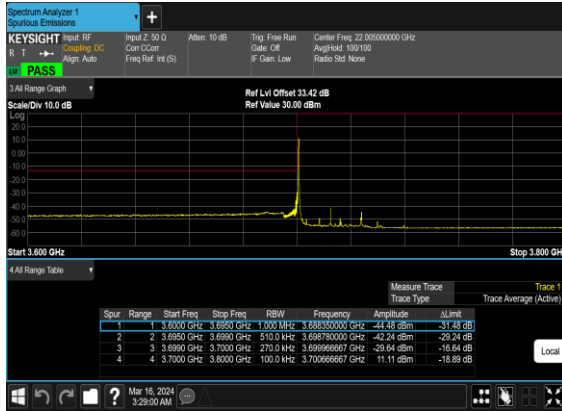


### N77(25M)\_DFT-s-OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

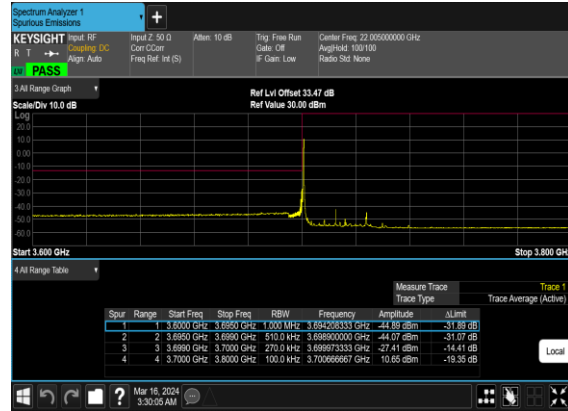


### N77(25M)\_DFT-s-OFDM\_BPSK\_Outer\_Full\_Low\_CH

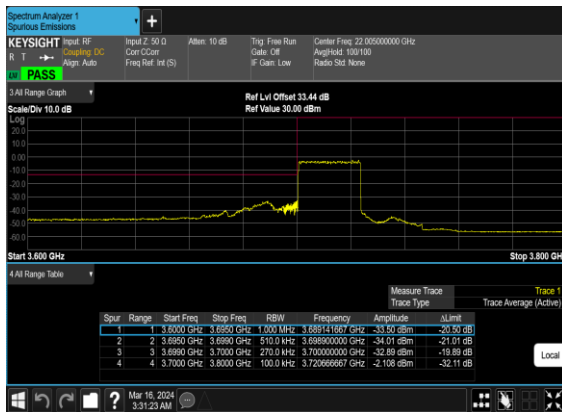


### N77(25M)\_DFT-s-OFDM\_QPSK\_Outer\_Full\_Low\_CH

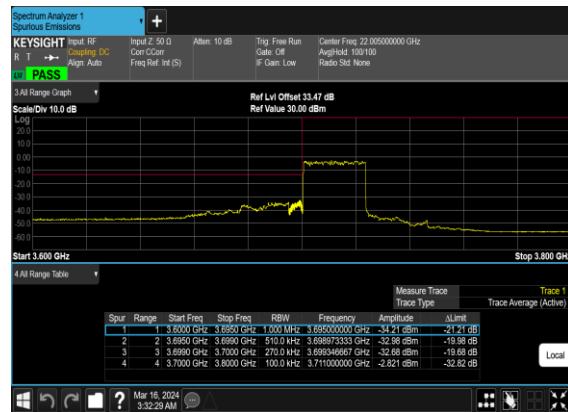


N77(25M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Right\_High\_CH

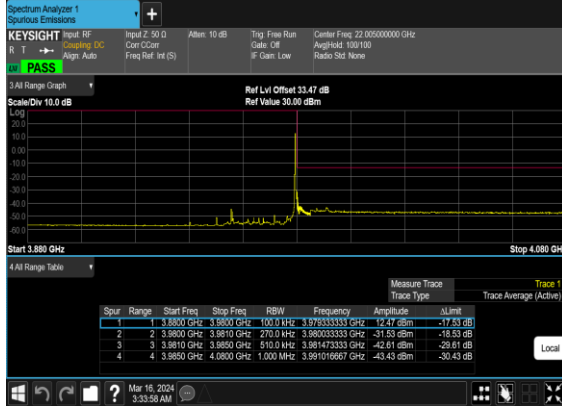

N77(25M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Right\_High\_CH

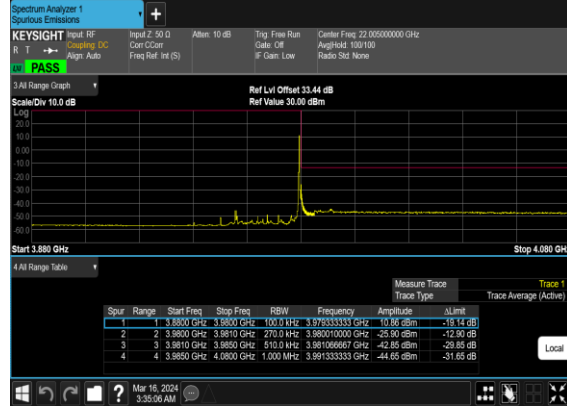


N77(25M)\_DFT-s-  
OFDM\_BPSK\_Outer\_Full\_High\_CH

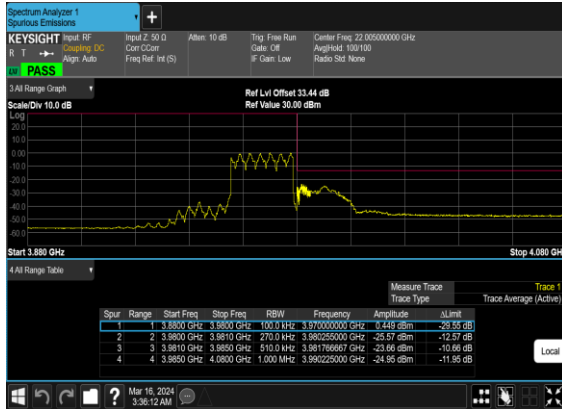

N77(25M)\_DFT-s-  
OFDM\_QPSK\_Outer\_Full\_High\_CH



N77(50M)\_DFT-s-  
OFDM\_BPSK\_Edge\_1RB\_Left\_Low\_CH

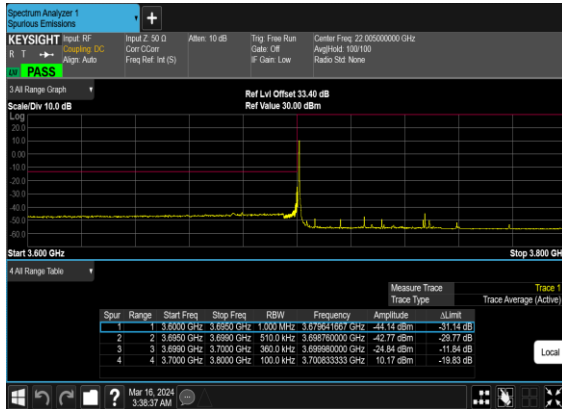

N77(50M)\_DFT-s-  
OFDM\_QPSK\_Edge\_1RB\_Left\_Low\_CH

