



# FCC RF Test Report

**APPLICANT** : Motorola Mobility LLC  
**EQUIPMENT** : Mobile Cellular Phone  
**BRAND NAME** : Motorola  
**MODEL NAME** : XT2523-11  
**FCC ID** : IHDT56AT5  
**STANDARD** : FCC Part 15 Subpart C §15.247  
**CLASSIFICATION** : (DTS) Digital Transmission System  
**TEST DATE(S)** : May 16, 2025~ May 27, 2025

We, Sporton International Inc. (Shenzhen), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Shenzhen), the test report shall not be reproduced except in full.

*Fly Liang*



Approved by: Fly Liang

**Sporton International Inc. (ShenZhen)**

**1/F, 2/F, Bldg 5, Shiling Industrial Zone, Xinwei Village, Xili, Nanshan, Shenzhen, 518055**

**People's Republic of China**



# TABLE OF CONTENTS

**REVISION HISTORY..... 3**

**SUMMARY OF TEST RESULT ..... 4**

**1 GENERAL DESCRIPTION..... 5**

    1.1 Applicant ..... 5

    1.2 Manufacturer ..... 5

    1.3 Product Feature of Equipment Under Test..... 5

    1.4 Product Specification of Equipment Under Test..... 6

    1.5 Modification of EUT ..... 6

    1.6 Testing Location ..... 6

    1.7 Test Software ..... 7

    1.8 Applicable Standards..... 7

    1.9 Specification of Accessory..... 8

**2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST..... 9**

    2.1 Carrier Frequency Channel ..... 9

    2.2 Test Mode ..... 10

    2.3 Connection Diagram of Test System ..... 11

    2.4 Support Unit used in test configuration and system ..... 12

    2.5 EUT Operation Test Setup ..... 12

    2.6 Measurement Results Explanation Example..... 12

**3 TEST RESULT ..... 13**

    3.1 6dB and 99% Bandwidth Measurement ..... 13

    3.2 Output Power Measurement..... 20

    3.3 Power Spectral Density Measurement ..... 21

    3.4 Conducted Band Edges and Spurious Emission Measurement ..... 28

    3.5 Radiated Band Edges and Spurious Emission Measurement ..... 37

    3.6 AC Conducted Emission Measurement..... 41

    3.7 Antenna Requirements ..... 43

**4 LIST OF MEASURING EQUIPMENT..... 44**

**5 MEASUREMENT UNCERTAINTY ..... 45**

**APPENDIX A. CONDUCTED TEST RESULTS**

**APPENDIX B. AC CONDUCTED EMISSION TEST RESULT**

**APPENDIX C. RADIATED SPURIOUS EMISSION**

**APPENDIX D. DUTY CYCLE PLOTS**

**APPENDIX E. SETUP PHOTOGRAPHS**





### SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	≥ 0.5MHz	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	≤ 30dBm	Pass	-
3.3	15.247(e)	Power Spectral Density	≤ 8dBm/3kHz	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	≤ 20dBc	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 11.06 dB at 209.45 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 8.15 dB at 0.15 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

<b>Conformity Assessment Condition:</b>
1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"
<b>Disclaimer:</b>
The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



# 1 General Description

## 1.1 Applicant

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.2 Manufacturer

Motorola Mobility LLC  
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

## 1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2523-11
FCC ID	IHDT56AT5
IMEI Code	Conducted: 350191670020497/350191670020505 Conduction: 350191670020091/350191670020109 for Sample 1 350191670020216/350191670020224 for Sample 2 350191670020299/350191670020307 for Sample 3 Radiation: 350191670020133/350191670020141 for Sample 1
HW Version	PVT
SW Version	VVTA35.51
EUT Stage	Identical Prototype

**Remark:**

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are four types of EUT, the differences between them could be referred to the XT2523-11\_Operational Description of Product Equality Declaration which is exhibit separately. After evaluation, Sample 1 was chose to perform full test and Sample 2/3 are verified the Conduction/Radiation worse cases of Sample 1 among the Part15C reports. The difference of Sample 4 does not affect the RF performance.



### 1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
<b>Tx/Rx Frequency Range</b>	2402 MHz ~ 2480 MHz
<b>Number of Channels</b>	40
<b>Carrier Frequency of Each Channel</b>	40 Channel(37 hopping + 3 advertising channel)
<b>Maximum Output Power to Antenna</b>	BLE 2Mbps: 3.30 dBm (0.0021 W) BLE 125Kbps: 3.37 dBm (0.0022 W) BLE 500Kbps: 3.36 dBm (0.0022 W) BLE 1Mbps: 3.35 dBm (0.0022 W)
<b>99% Occupied Bandwidth</b>	BLE 2Mbps:2.062MHz BLE 125Kbps: 1.055MHz
<b>Antenna Type / Gain</b>	PIFA Antenna type with gain -4.50 dBi
<b>Type of Modulation</b>	Bluetooth LE : GFSK

**Note :**

1. For BLE 1Mbps & 125Kbps & 500Kbps mode, the whole testing has assessed BLE 125Kps mode by referring to the higher conducted power.
2. BLE 2M supports the frequency range of 2404 MHz ~ 2478 MHz and does not support advertising channels (CH00, CH12 and CH39).

### 1.5 Modification of EUT

No modifications are made to the EUT during all test items.

### 1.6 Testing Location

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

<b>Test Firm</b>	Sporton International Inc. (ShenZhen)		
<b>Test Site Location</b>	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
<b>Test Site No.</b>	<b>Sporton Site No.</b>	<b>FCC Designation No.</b>	<b>FCC Test Firm Registration No.</b>
	TH01-SZ; CO02-SZ; 03CH04-SZ	CN1256	421272



### 1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	03CH04-SZ	AUDIX	E3	6.2009-8-24
2.	CO02-SZ	AUDIX	E3	6.120613b

### 1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

**Remark:**

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



### 1.9 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(AOHAI)	Model Name	MC-101
AC Adapter 1(EU)	Brand Name	Motorola(AOHAI)	Model Name	MC-102
AC Adapter 1(UK)	Brand Name	Motorola(AOHAI)	Model Name	MC-103
AC Adapter 1(IN)	Brand Name	Motorola(AOHAI)	Model Name	MC-104
AC Adapter 1(AU)	Brand Name	Motorola(AOHAI)	Model Name	MC-105
AC Adapter 1(AR)	Brand Name	Motorola(AOHAI)	Model Name	MC-106
AC Adapter 2(US)	Brand Name	Motorola(CHENYANG)	Model Name	MC-101
AC Adapter 2(EU)	Brand Name	Motorola(CHENYANG)	Model Name	MC-102
AC Adapter 2(UK)	Brand Name	Motorola(CHENYANG)	Model Name	MC-103
AC Adapter 2(AU)	Brand Name	Motorola(CHENYANG)	Model Name	MC-105
AC Adapter 2(AR)	Brand Name	Motorola(CHENYANG)	Model Name	MC-106
AC Adapter 2(BR)	Brand Name	Motorola(CHENYANG)	Model Name	MC-107
AC Adapter 2(PRC)	Brand Name	Motorola(CHENYANG)	Model Name	MC-108
AC Adapter 3(CHILE)	Brand Name	Motorola(SALCOMP)	Model Name	MC-109
Battery 1	Brand Name	Motorola(ATL)	Model Name	RL52
Battery 2	Brand Name	Motorola(Jiade)	Model Name	RL52
Battery 3	Brand Name	Motorola(Sunwoda)	Model Name	RL52
USB Cable 1	Brand Name	Motorola(Yihuaxing)	Model Name	T365-020 T365-020-01 T365-020-02
USB Cable 2	Brand Name	Motorola(WASHIN)	Model Name	HX-TL-01 HX-TL-08 HX-TL-07
USB Cable 3	Brand Name	Motorola(Juwei)	Model Name	JWUB1614-T03H JWUB1705-T03H JWUB1856-T03H
USB Cable 4	Brand Name	Motorola(I-SHENG)	Model Name	SC18D38574



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	



## 2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 125Kbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 125Kbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 125Kbps
	Mode 4: Bluetooth Tx CH01_2404 MHz_BLE 2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps
	Mode 6: Bluetooth Tx CH38_2478 MHz_BLE 2Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 125Kbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 125Kbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 125Kbps
	Mode 4: Bluetooth Tx CH01_2404 MHz_BLE 2Mbps
	Mode 5: Bluetooth Tx CH38_2478 MHz_BLE 2Mbps
	Co-location mode: BLE CH38 2Mbps Tx + LTE Band 7 link
AC Conducted Emission	Mode 1: GSM 850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Cable 1 (Charging from Adapter 1) + Battery 1 + Earphone for Sample 1
	Mode 2: GSM 850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Cable 1 (Charging from Adapter 1) + Battery 1 + Earphone for Sample 2
	Mode 3: GSM 850 Idle + Bluetooth Link + WLAN Link(2.4G) + USB Cable 1 (Charging from Adapter 1) + Battery 1 + Earphone for Sample 3
<b>Remark:</b>	
1. The worst case of conducted emission is mode 1; only the test data of it was reported.	
2. For Radiated Test Cases, The tests were performance with Adapter1, Earphone1 and USB Cable1.	

## 2.3 Connection Diagram of Test System

AC Conducted Emission:

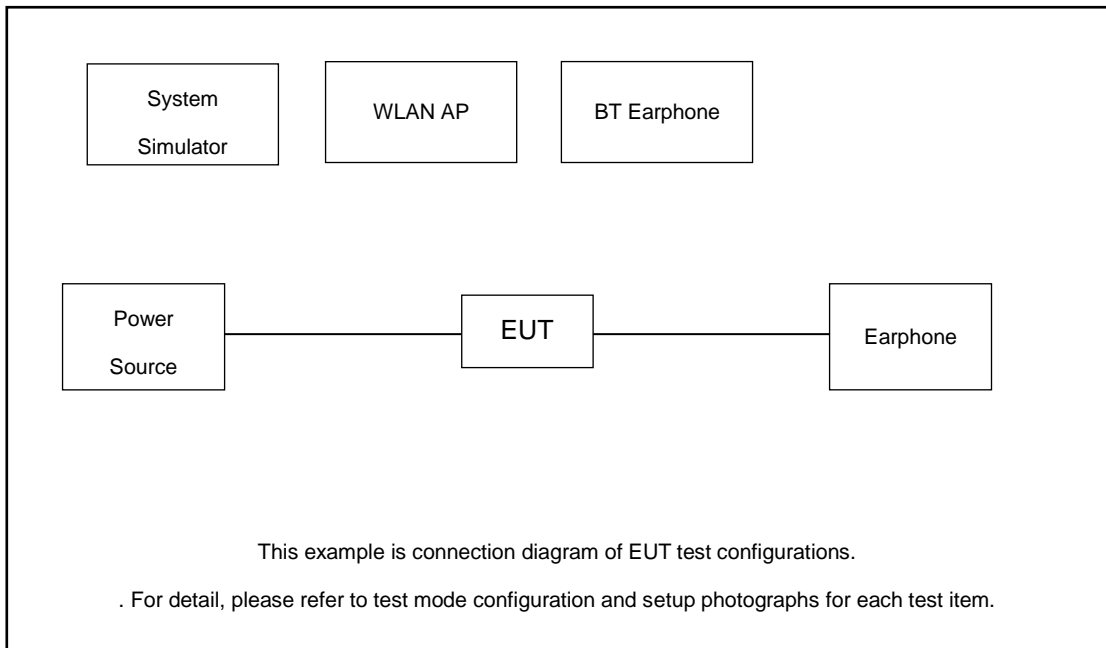

Radiated Emission:

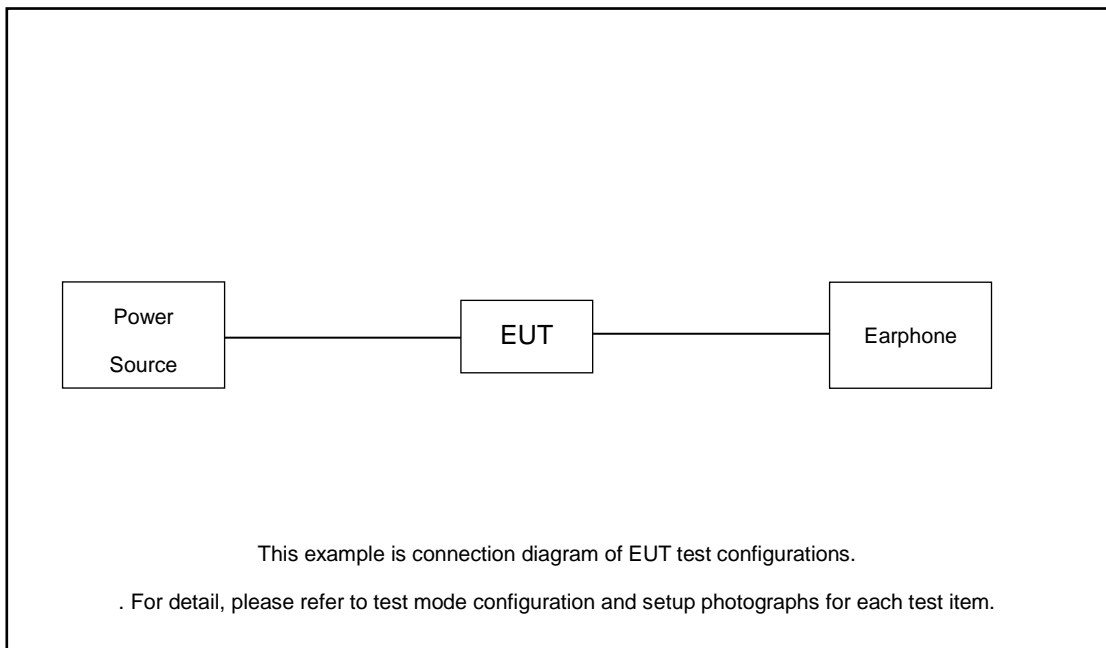

## 2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8m
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded, 1.8m
3.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
4.	Earphone 1	NA	MH202	NA	NA	NA

## 2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the BT earphone under large package sizes transmission.

## 2.6 Measurement Results Explanation Example

**For all conducted test items:**

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 1.30 dB and 10dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 1.30 + 10 = 11.30 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


##### 3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

##### 3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup

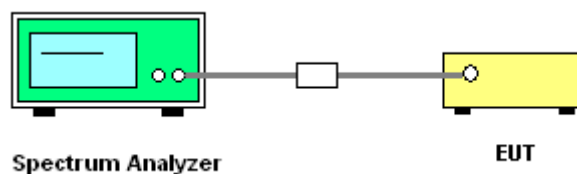




### 3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

#### BLE 125Kbps

#### 6 dB Bandwidth Plot on Channel 00

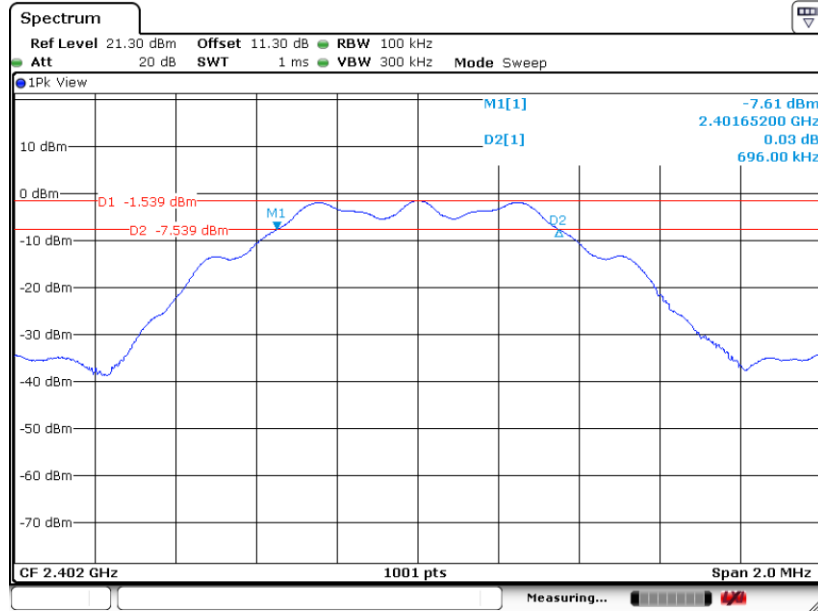


#### 6 dB Bandwidth Plot on Channel 19

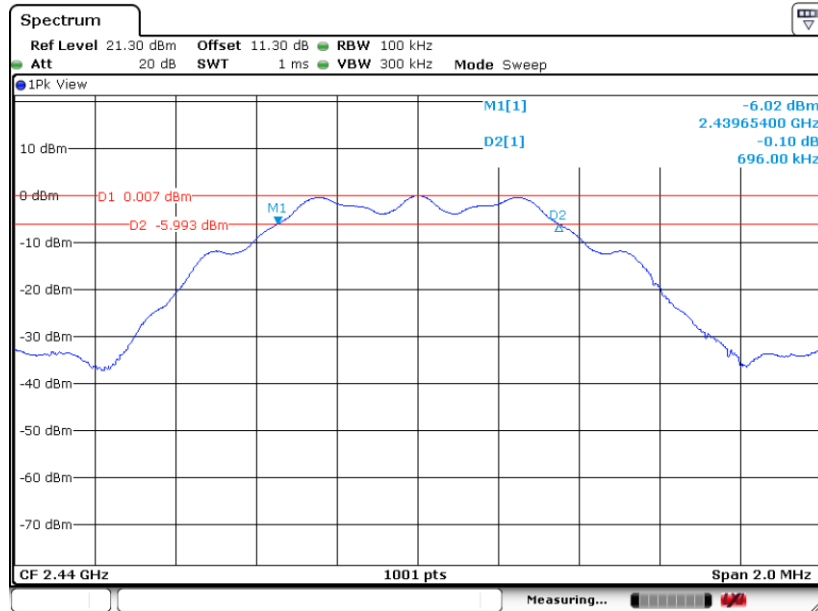




6 dB Bandwidth Plot on Channel 39

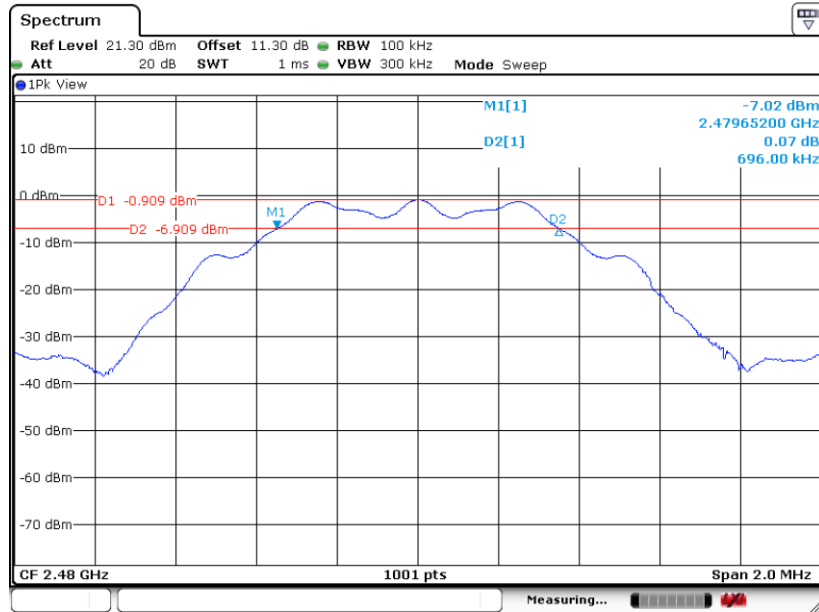

Date: 21.MAY.2025 22:33:46

BLE 2Mbps


6 dB Bandwidth Plot on Channel 01

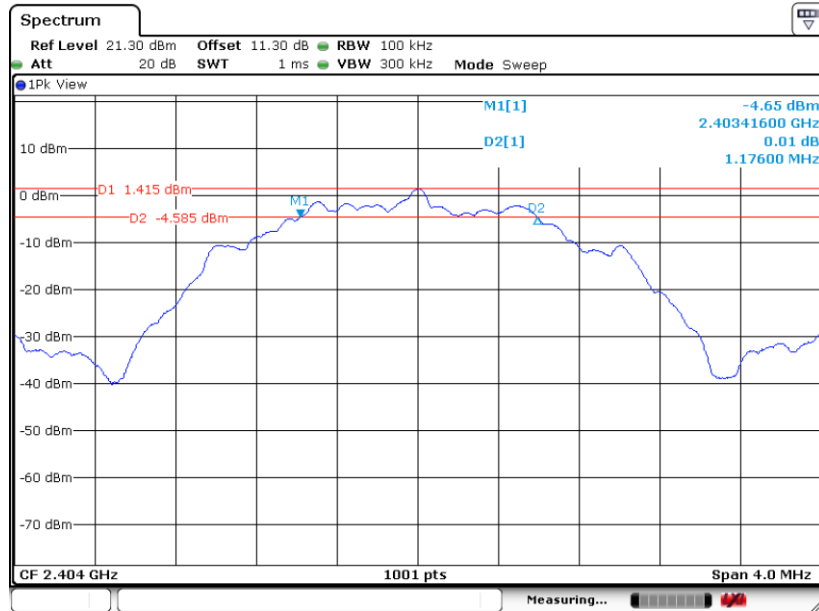

Date: 21.MAY.2025 22:36:17




6 dB Bandwidth Plot on Channel 19

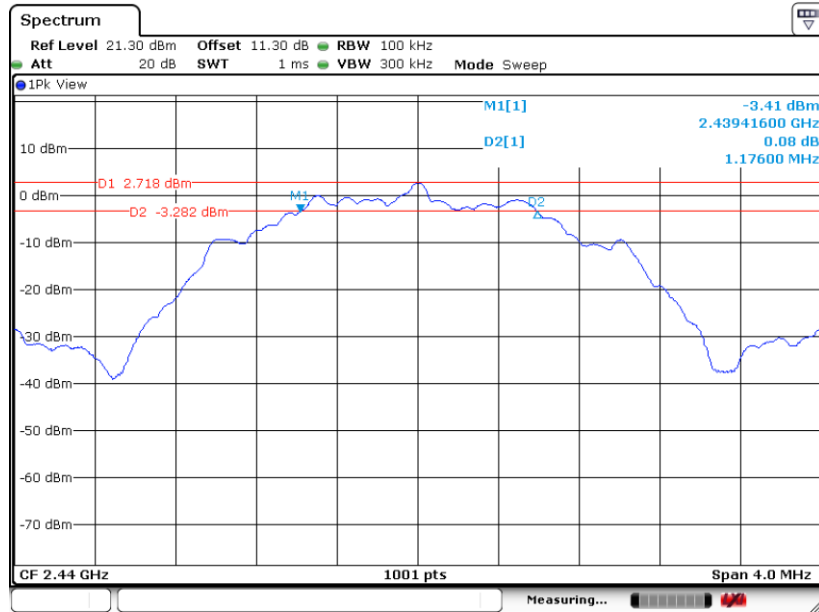

Date: 21.MAY.2025 22:47:15

6 dB Bandwidth Plot on Channel 38

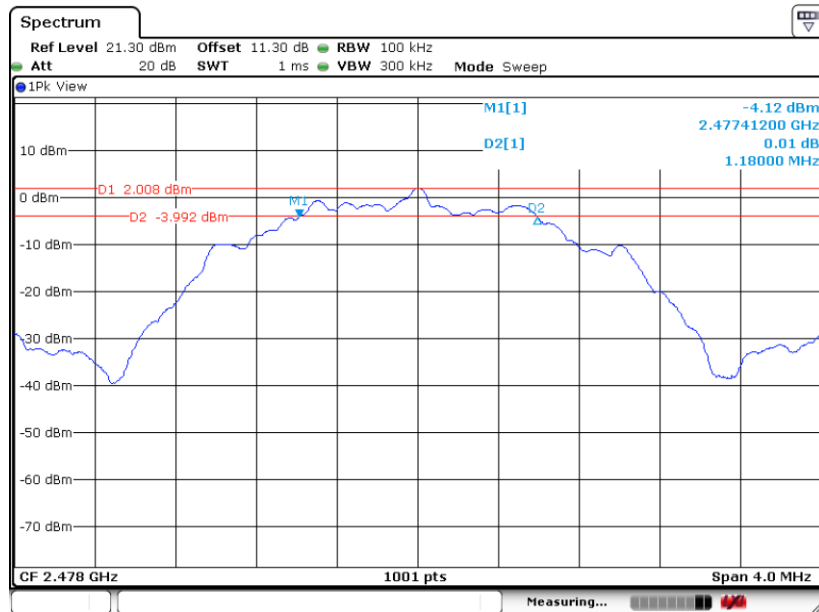

Date: 21.MAY.2025 22:50:02




### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.


#### BLE 125Kbps

#### 99% Occupied Bandwidth Plot on Channel 00

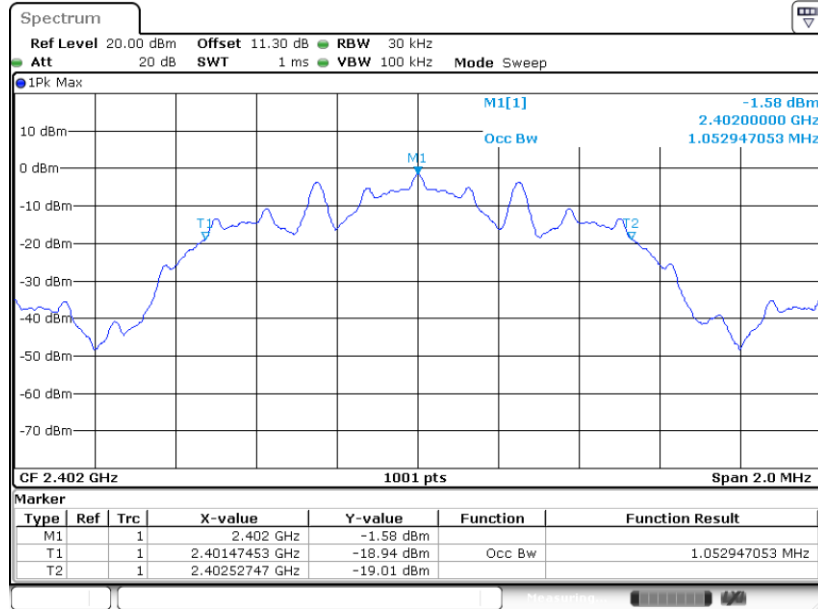

Date: 21.MAY.2025 22:28:00


#### 99% Occupied Bandwidth Plot on Channel 19

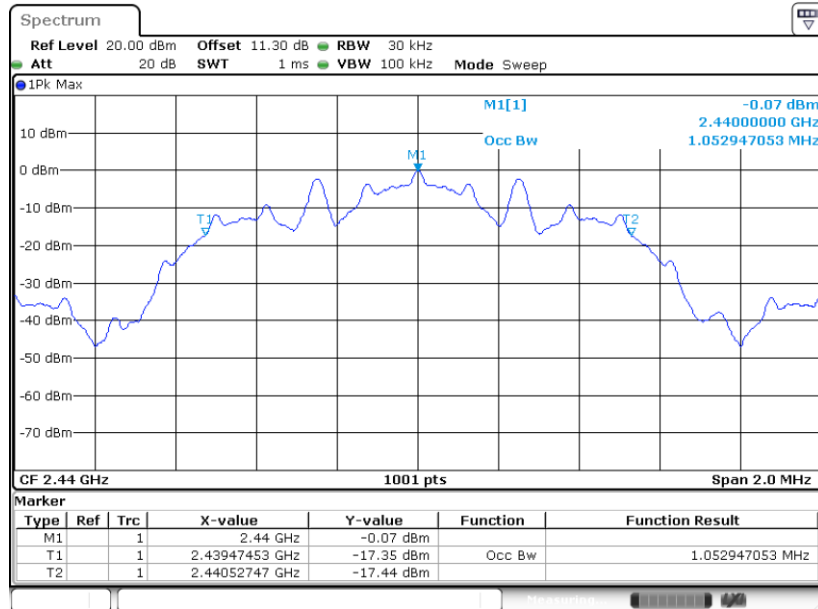

Date: 21.MAY.2025 22:31:33




99% Occupied Bandwidth Plot on Channel 39

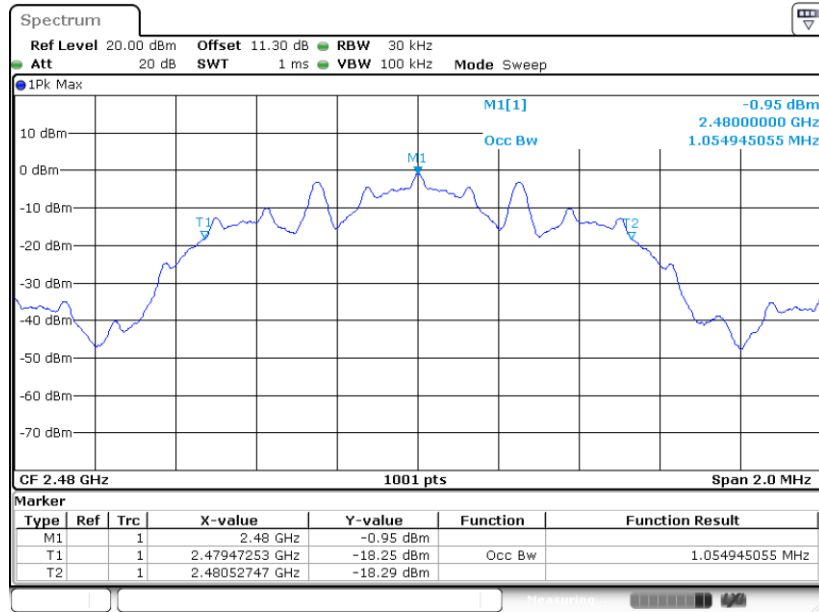

Date: 21.MAY.2025 22:33:19

BLE 2Mbps


99% Occupied Bandwidth Plot on Channel 01

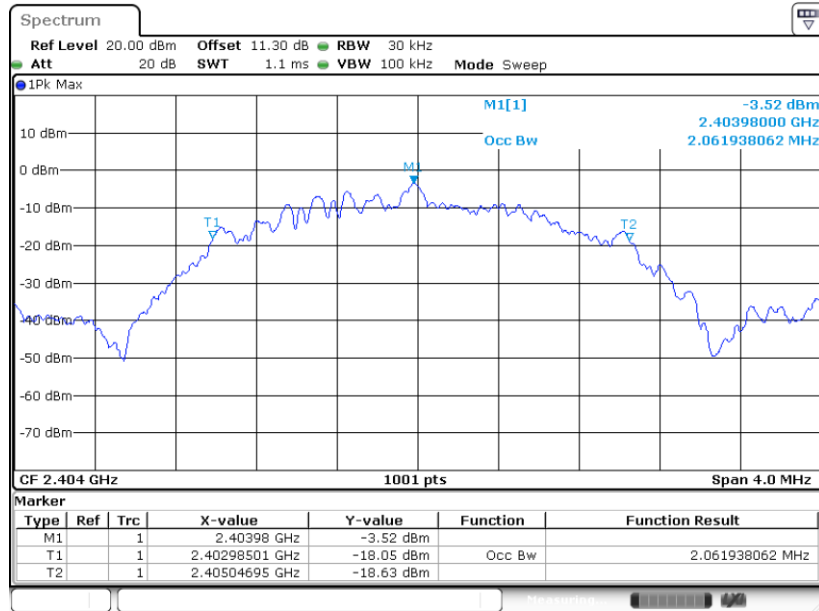

Date: 21.MAY.2025 22:36:05




99% Occupied Bandwidth Plot on Channel 19

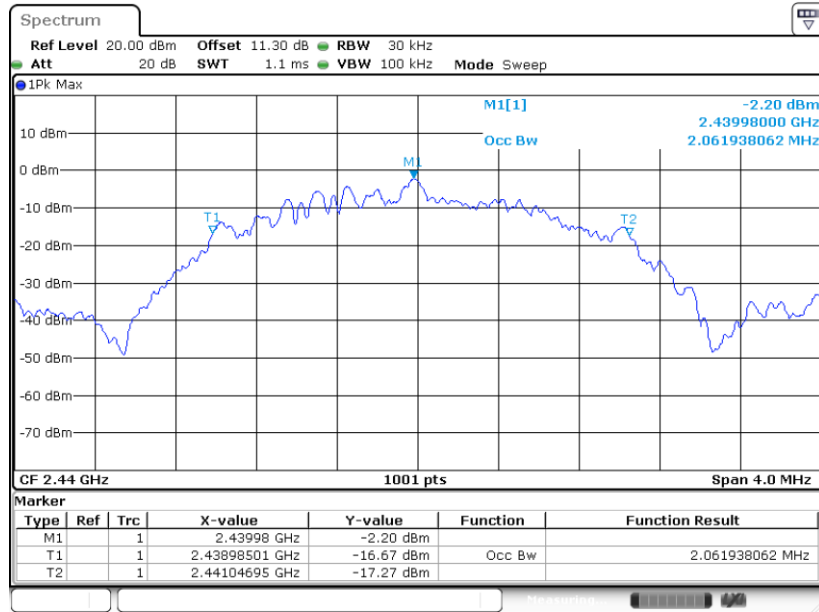

Date: 21.MAY.2025 22:47:01

99% Occupied Bandwidth Plot on Channel 38

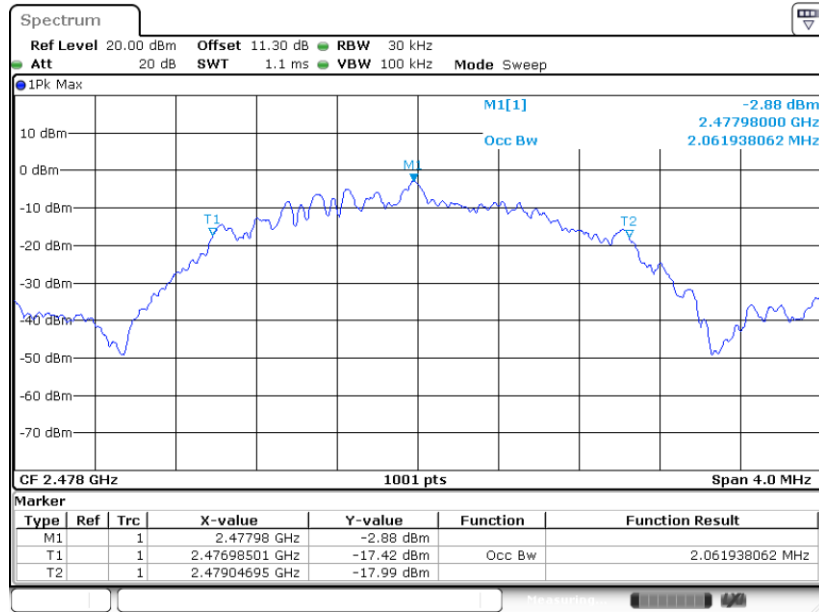

Date: 21.MAY.2025 22:49:49

Note : The occupied channel bandwidth is maintained within the band of operation for all of the modulations.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


### 3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup

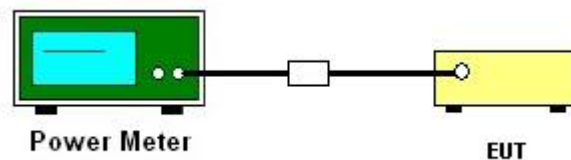

### 3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

### 3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


#### 3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup

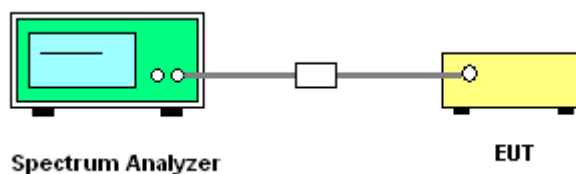

#### 3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.



### 3.3.6 Test Result of Power Spectral Density Plots (100kHz)


#### BLE 125Kbps

#### PSD 100kHz Plot on Channel 00

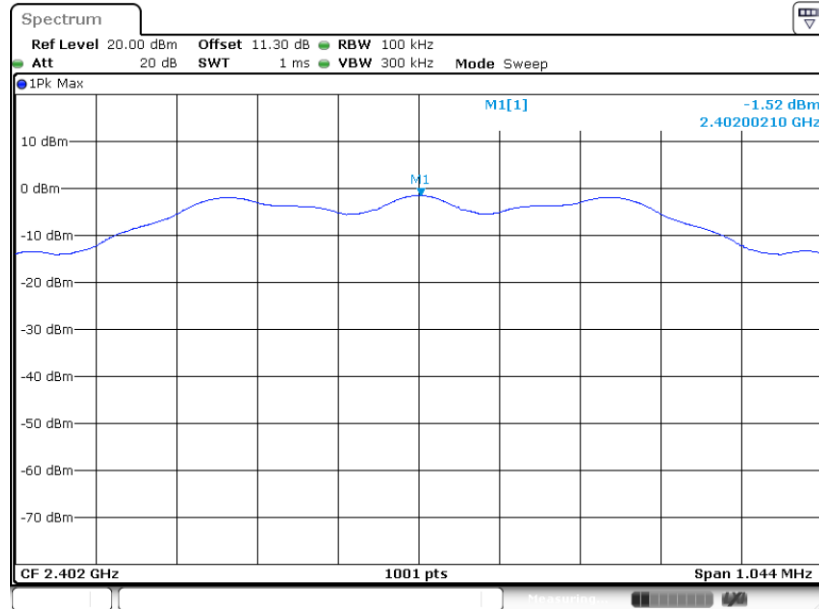

Date: 21.MAY.2025 22:29:57


#### PSD 100kHz Plot on Channel 19

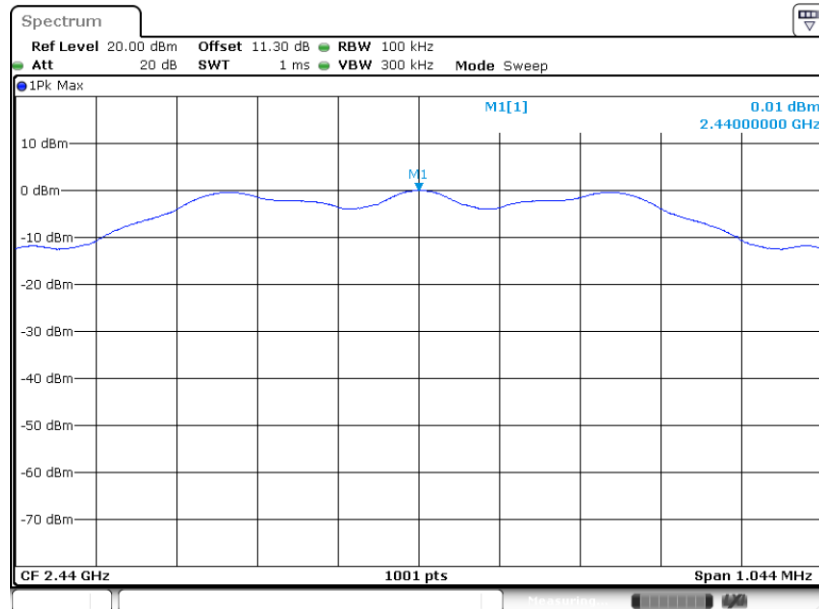

Date: 21.MAY.2025 22:32:14




### PSD 100kHz Plot on Channel 39

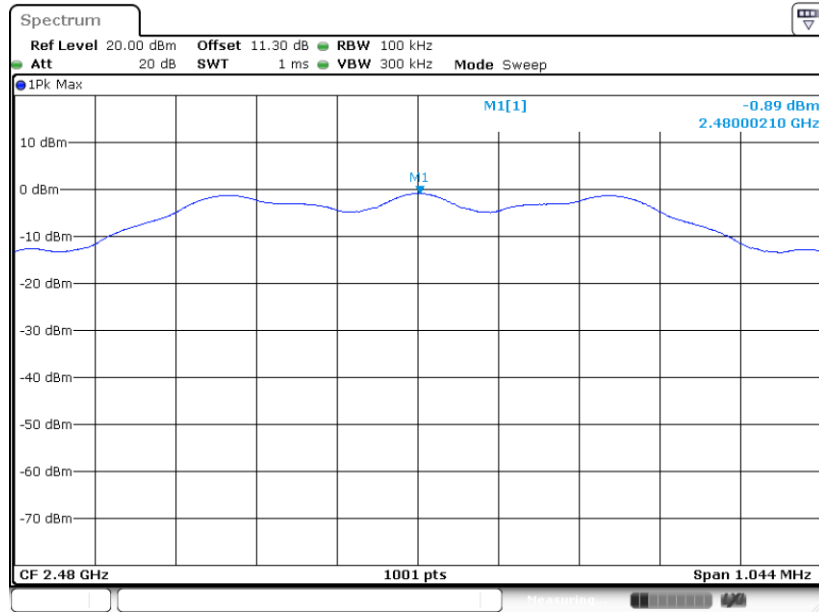

Date: 21.MAY.2025 22:34:18

### BLE 2Mbps


### PSD 100kHz Plot on Channel 01

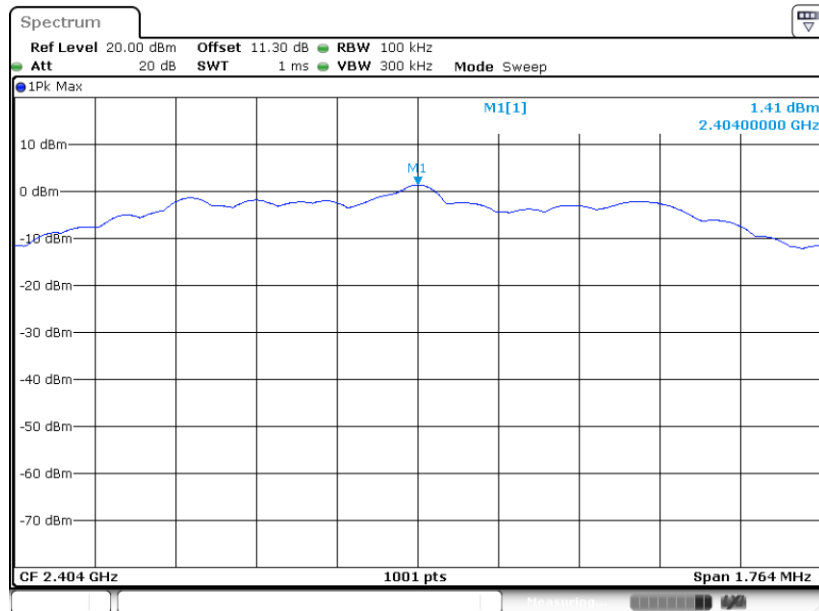

Date: 21.MAY.2025 22:37:06




PSD 100kHz Plot on Channel 19

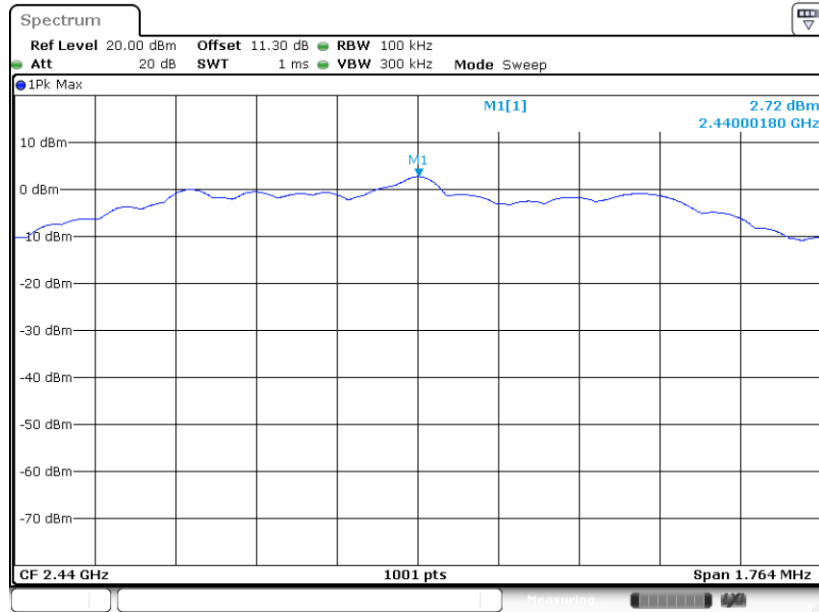

Date: 21.MAY.2025 22:47:51

PSD 100kHz Plot on Channel 38

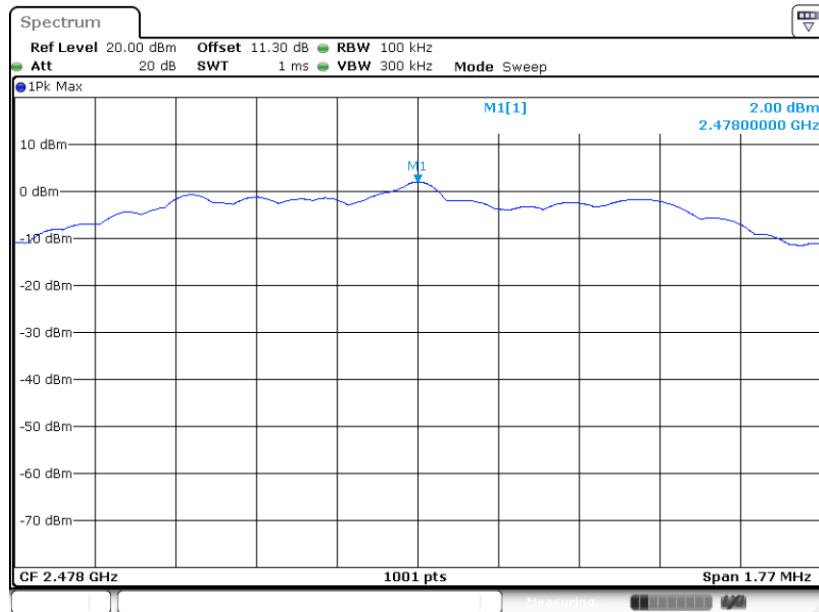


Date: 21.MAY.2025 22:50:31



### 3.3.7 Test Result of Power Spectral Density Plots (3kHz)


#### BLE 125Kbps

#### PSD 3kHz Plot on Channel 00

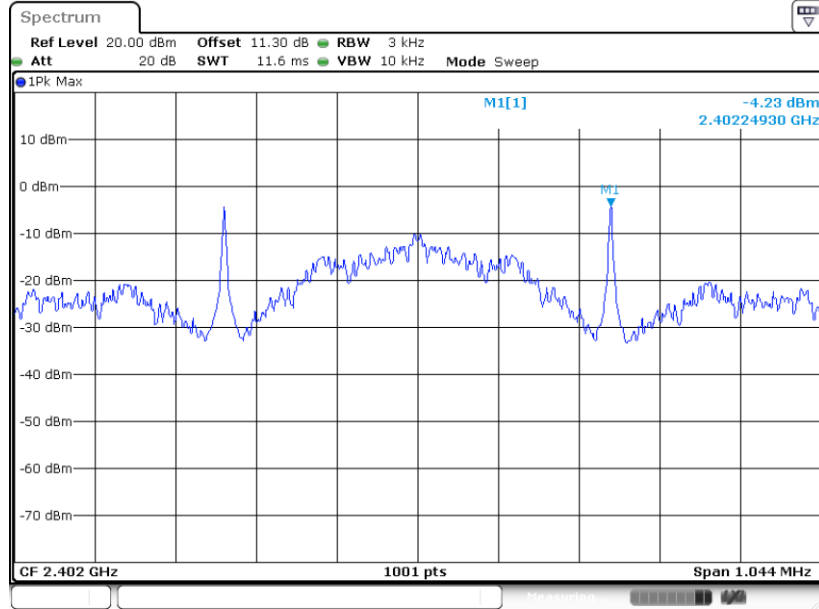

Date: 21.MAY.2025 22:29:35


#### PSD 3kHz Plot on Channel 19

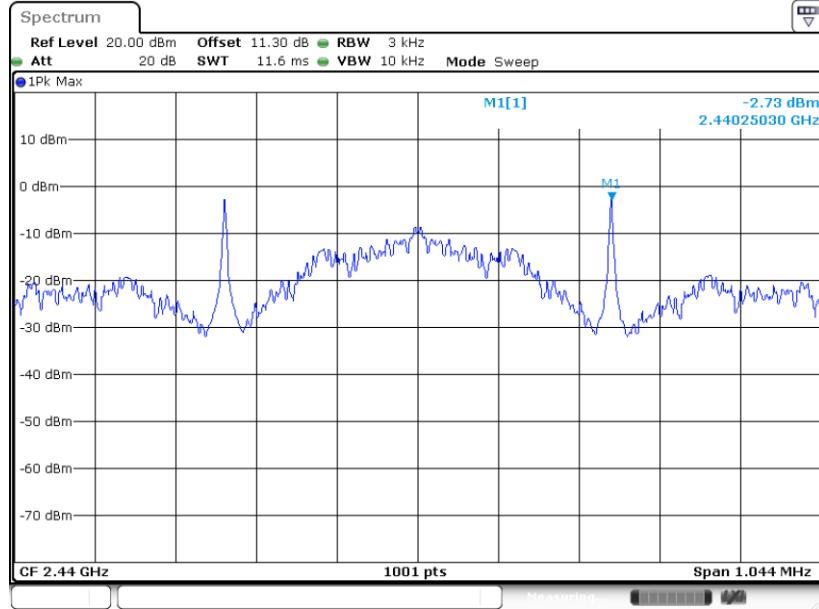

Date: 21.MAY.2025 22:31:56




### PSD 3kHz Plot on Channel 39

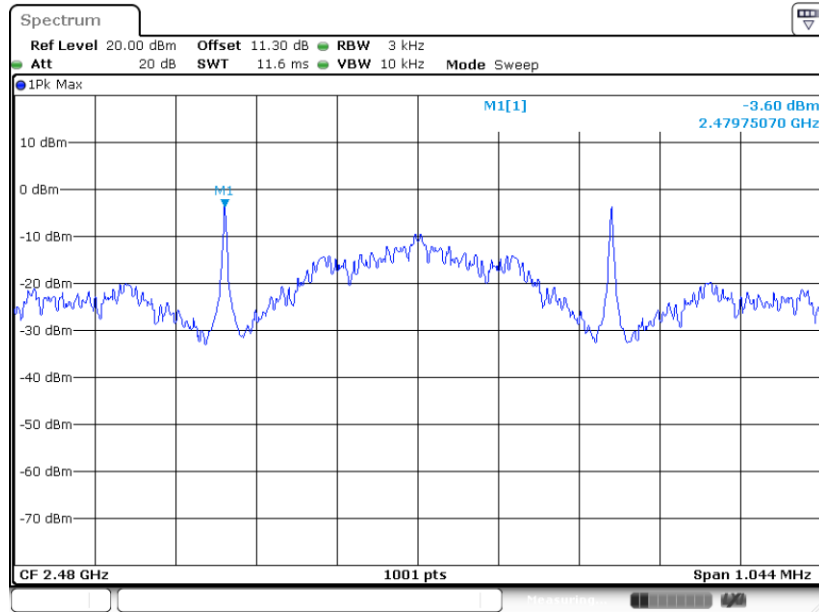

Date: 21.MAY.2025 22:34:01

### BLE 2Mbps


### PSD 3kHz Plot on Channel 01

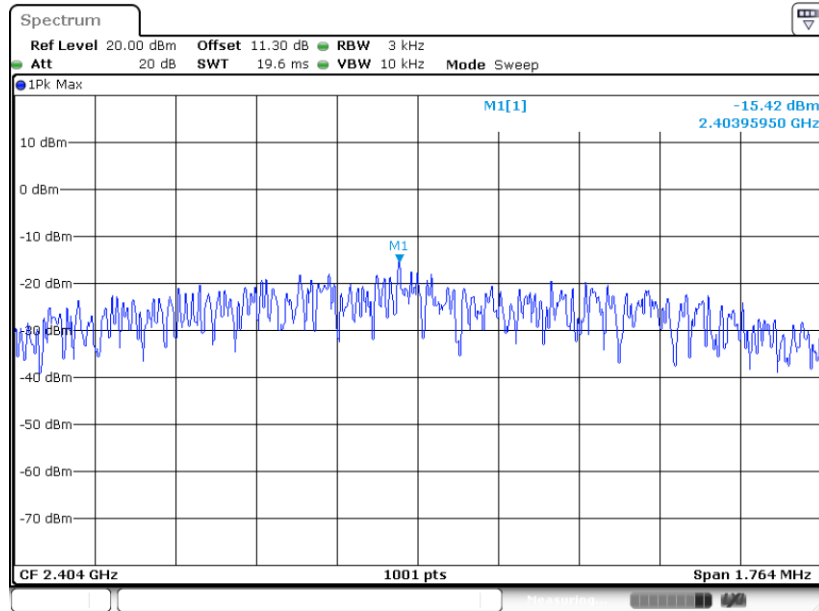

Date: 21.MAY.2025 22:36:26




PSD 3kHz Plot on Channel 19

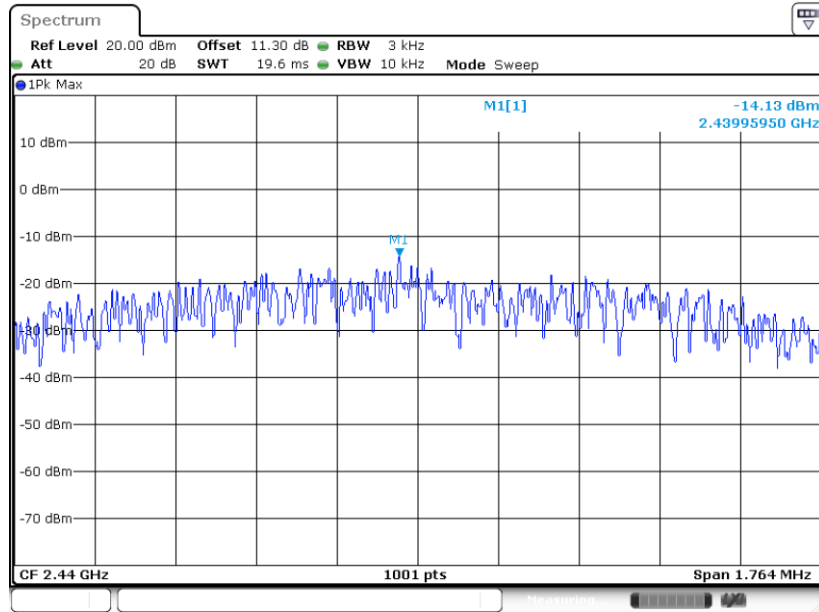

Date: 21.MAY.2025 22:47:27

PSD 3kHz Plot on Channel 38

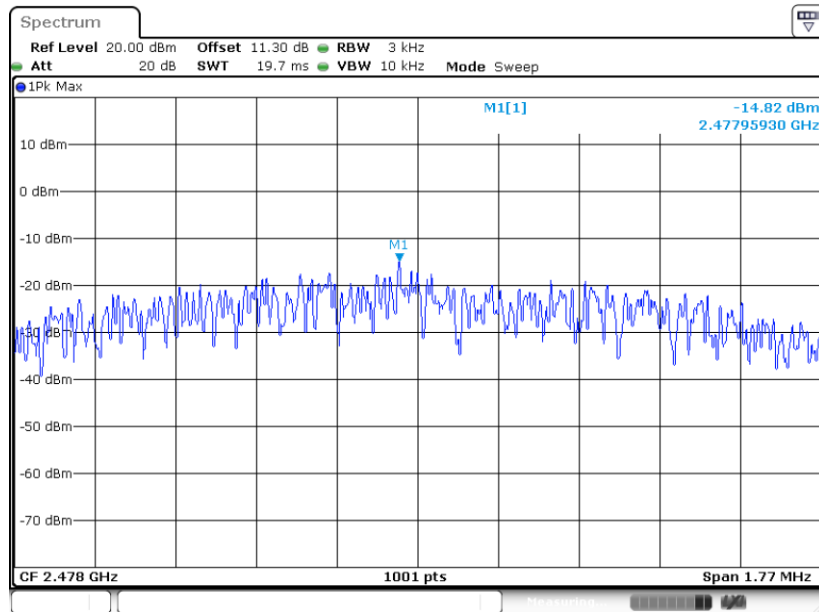

Date: 21.MAY.2025 22:50:13

## 3.4 Conducted Band Edges and Spurious Emission Measurement

### 3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


### 3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

### 3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### 3.4.4 Test Setup

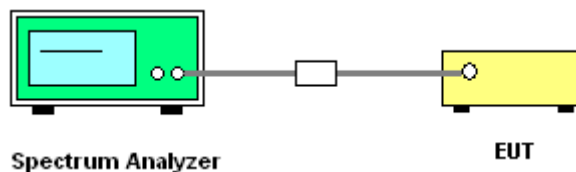




### 3.4.5 Test Result of Conducted Band Edges Plots


#### BLE 125Kbps

#### Low Band Edge Plot on Channel 00

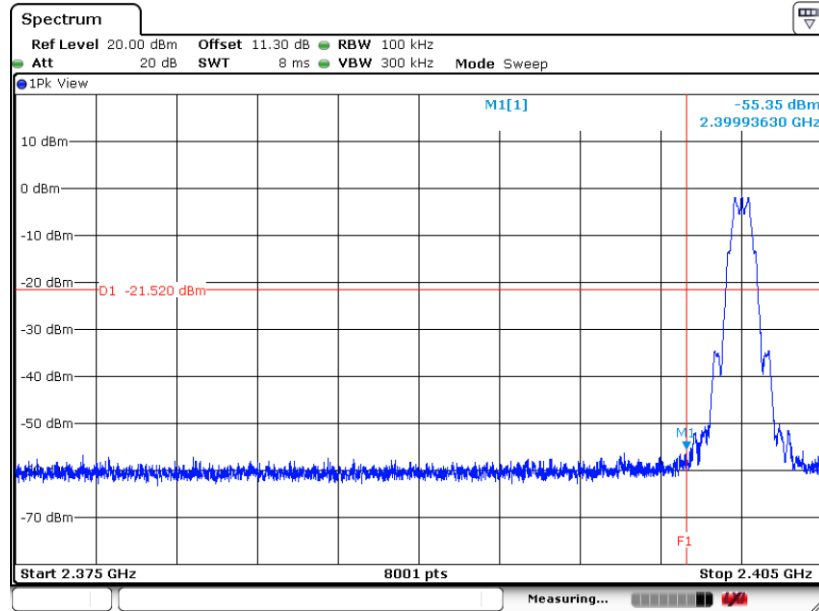

Date: 21.MAY.2025 22:30:53

#### High Band Edge Plot on Channel 39

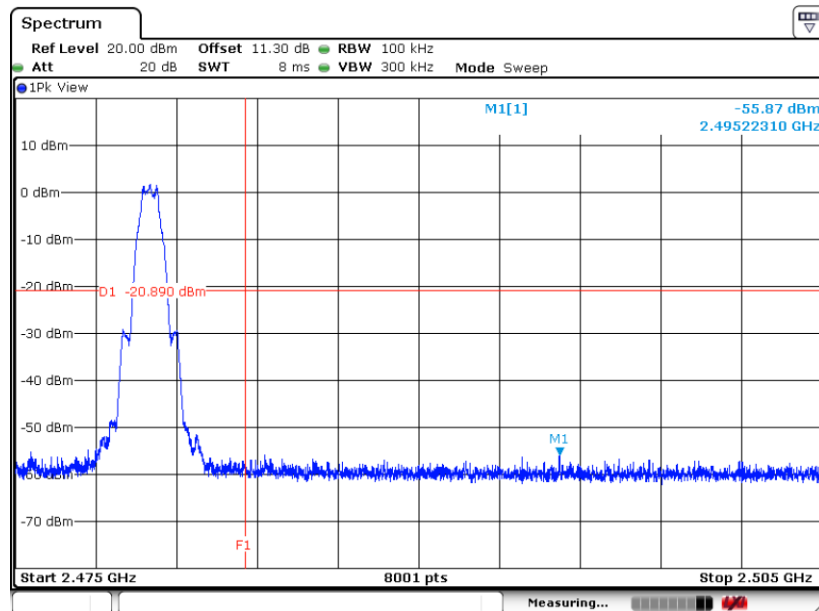


Date: 21.MAY.2025 23:05:23




### BLE 2Mbps

#### Low Band Edge Plot on Channel 01

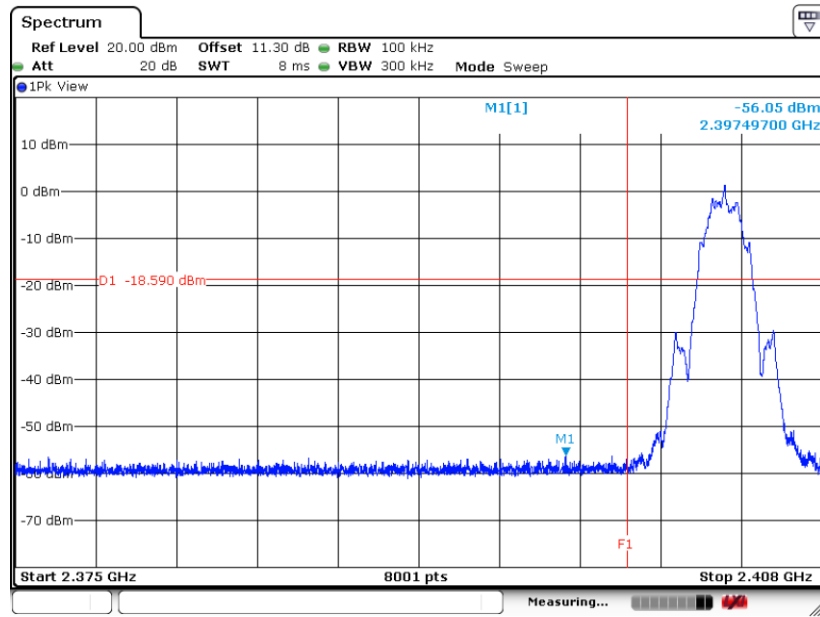

Date: 21.MAY.2025 23:02:49

#### High Band Edge Plot on Channel 38

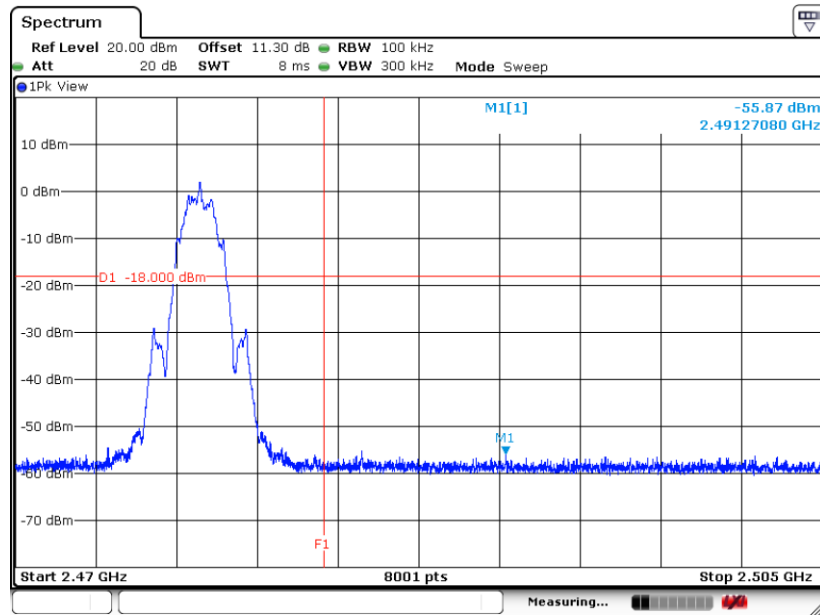


Date: 21.MAY.2025 22:58:33




### 3.4.6 Test Result of Conducted Spurious Emission Plots

#### Conducted Spurious Emission Plot on Bluetooth LE 125Kbps GFSK Channel 00

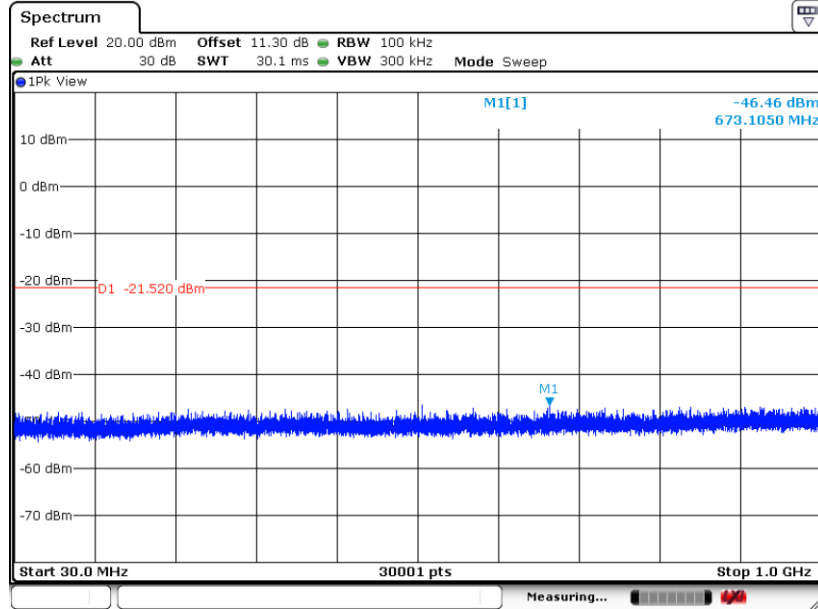

Date: 21.MAY.2025 22:30:18


#### Conducted Spurious Emission Plot on Bluetooth LE 125Kbps GFSK Channel 00

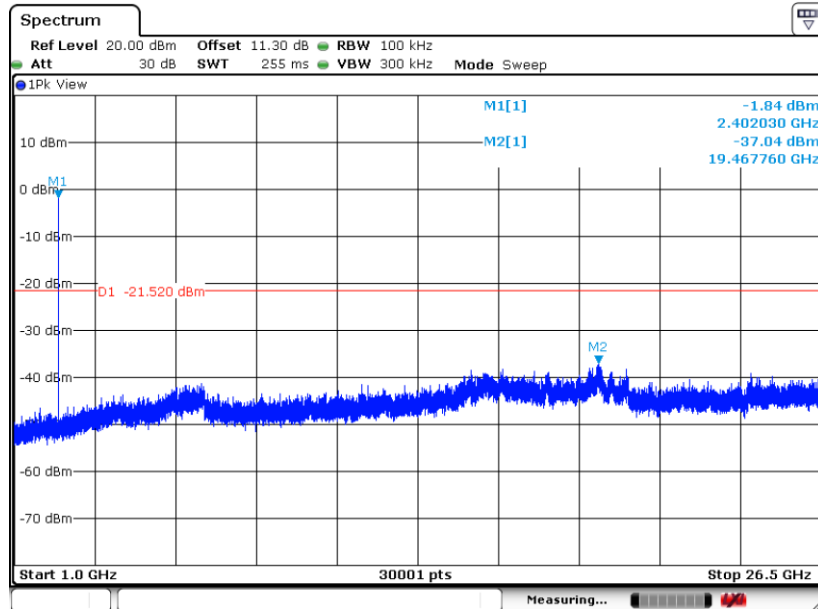

Date: 21.MAY.2025 22:30:38




Conducted Spurious Emission Plot on Bluetooth LE 125Kbps GFSK Channel 19

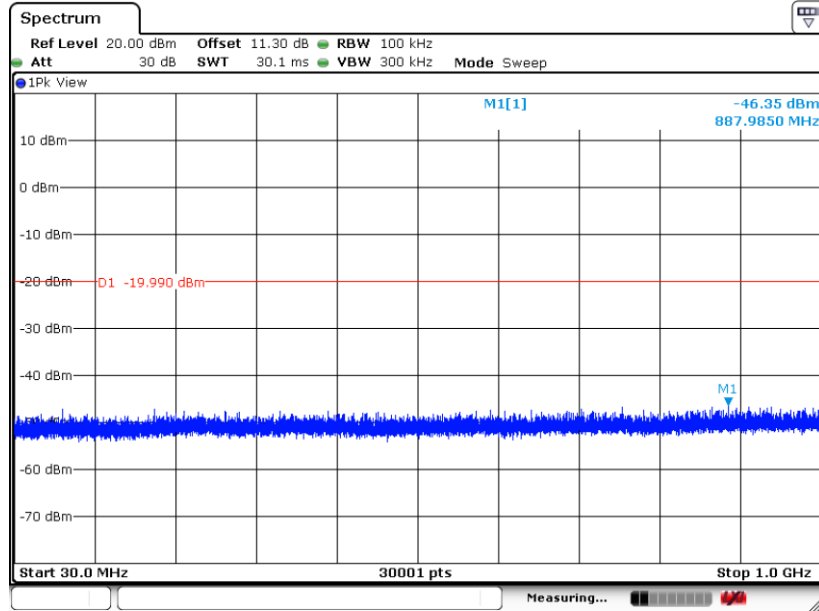

Date: 21.MAY.2025 22:32:33


Conducted Spurious Emission Plot on Bluetooth LE 125Kbps GFSK Channel 19

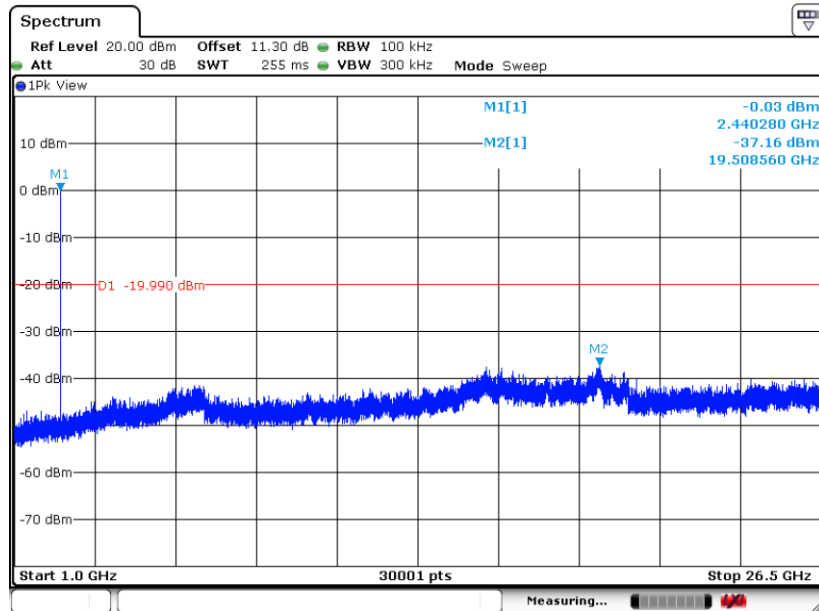

Date: 21.MAY.2025 22:32:49




Conducted Spurious Emission Plot on Bluetooth LE 125Kbps GFSK Channel 39

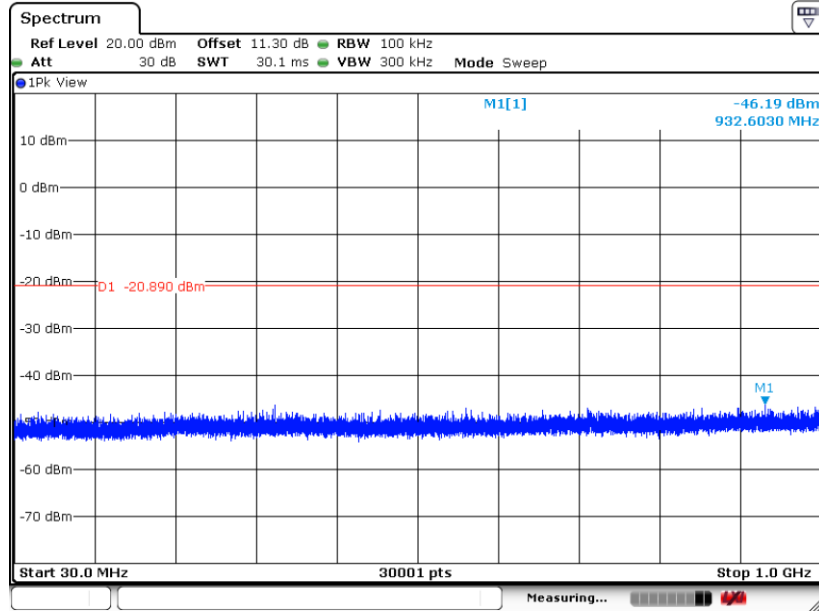

Date: 21.MAY.2025 22:34:37


Conducted Spurious Emission Plot on Bluetooth LE 125Kbps GFSK Channel 39

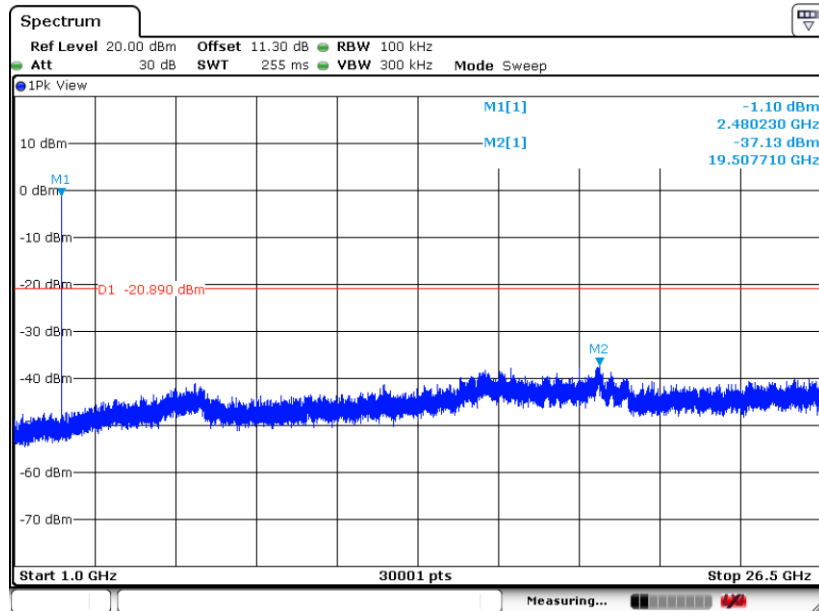

Date: 21.MAY.2025 22:34:55




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 01

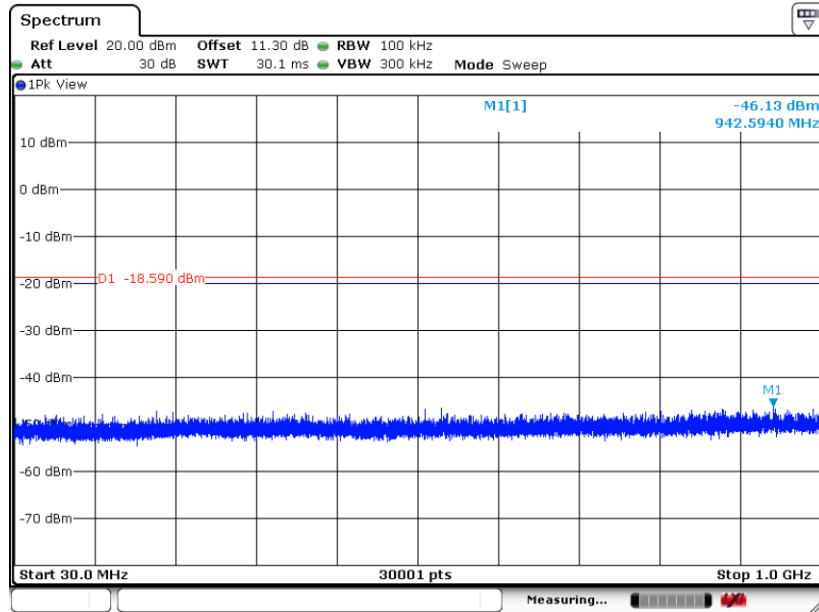

Date: 21.MAY.2025 22:37:56


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 01

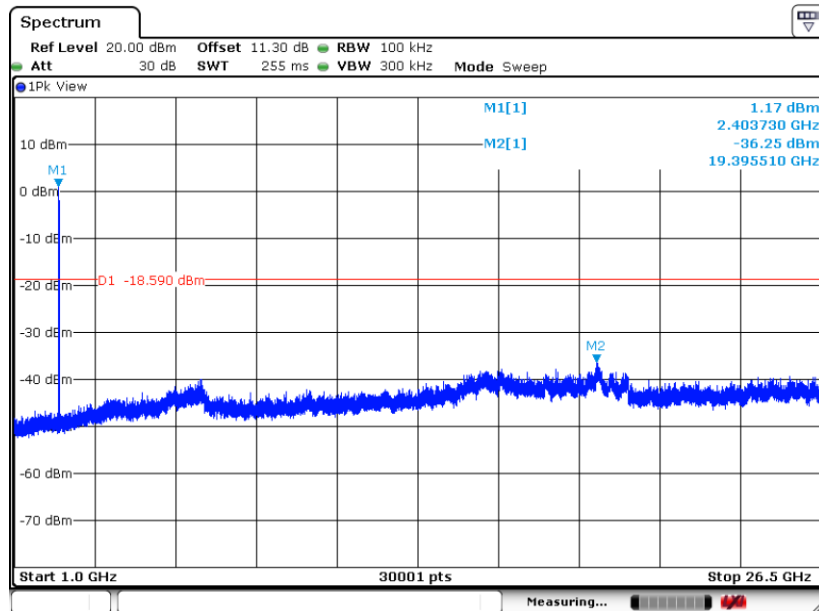

Date: 21.MAY.2025 22:40:10




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 19

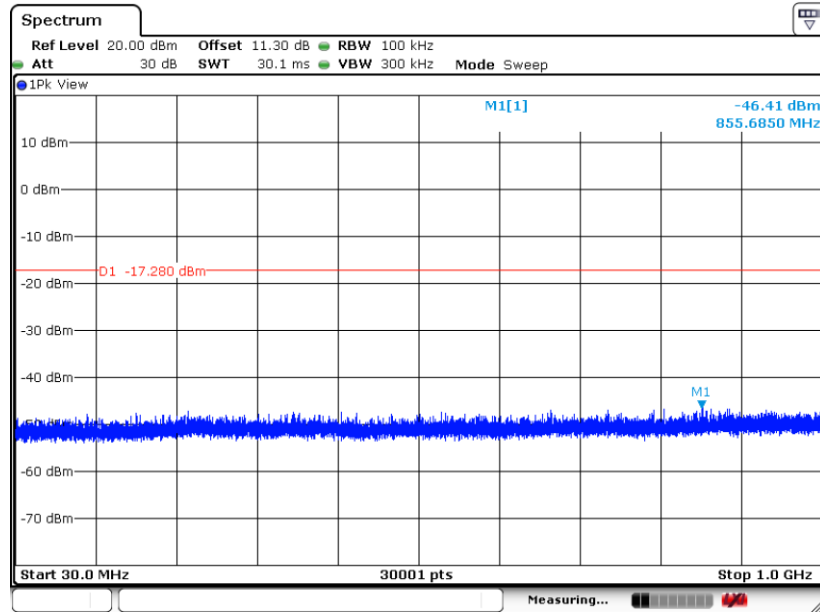

Date: 21.MAY.2025 22:48:07


Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 19

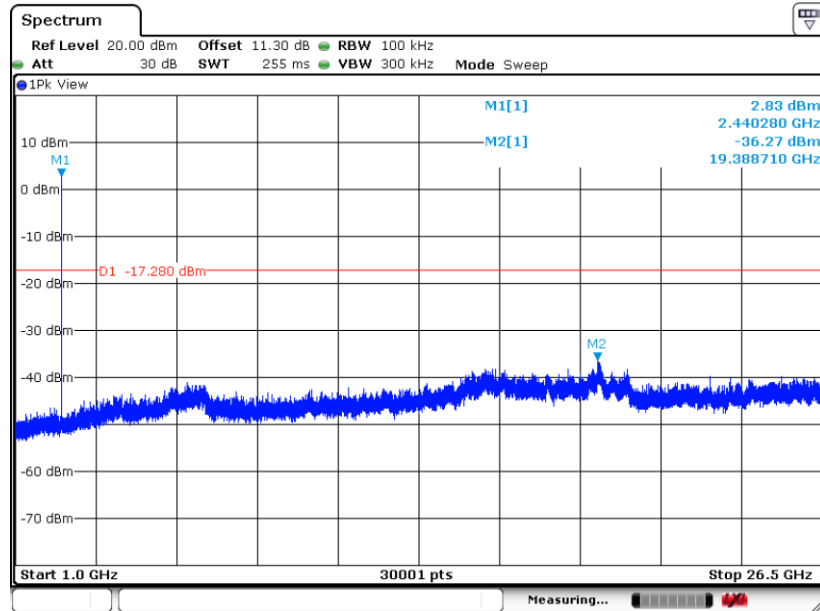

Date: 21.MAY.2025 22:49:12




Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 38

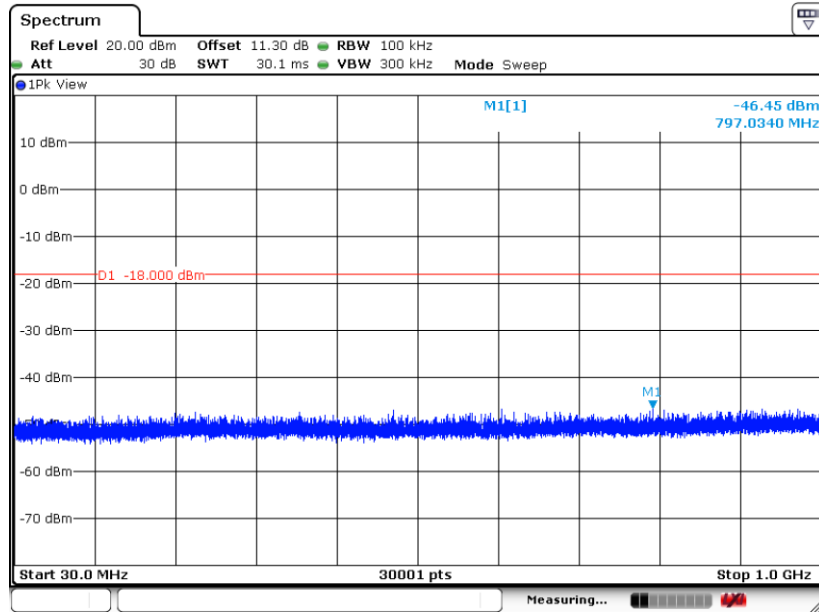

Date: 21.MAY.2025 22:50:48

Conducted Spurious Emission Plot on Bluetooth LE 2Mbps GFSK Channel 38

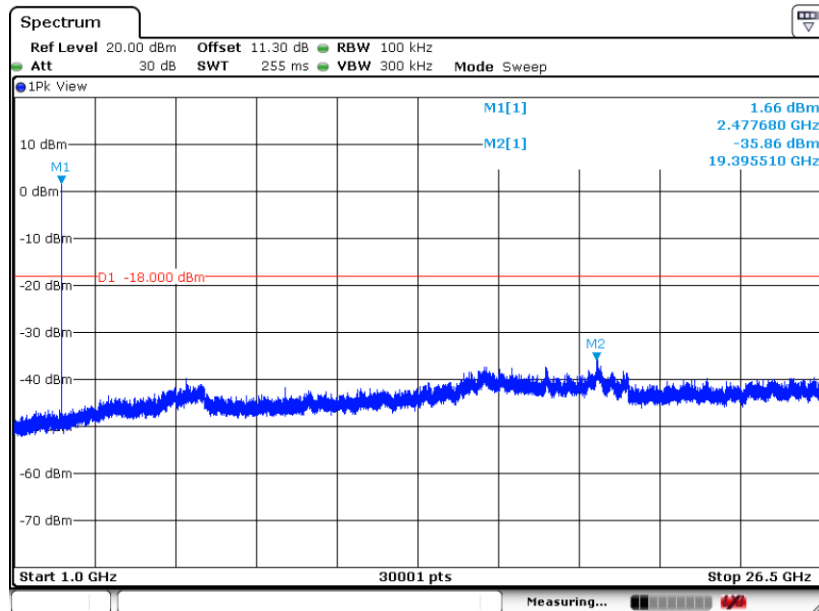

Date: 21.MAY.2025 22:52:52



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.




### 3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW=100 kHz for  $f < 1$  GHz;  $VBW \geq RBW$ ; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW= 3MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - $VBW = 10$  Hz, when duty cycle is no less than 98 percent.
    - $VBW \geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated emissions below 30MHz

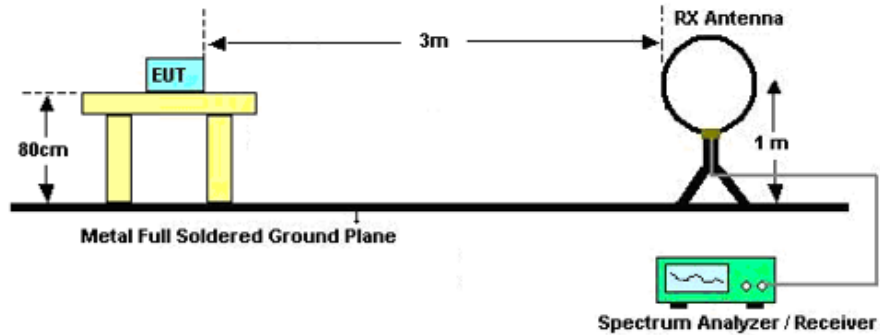

For radiated emissions from 30MHz to 1GHz

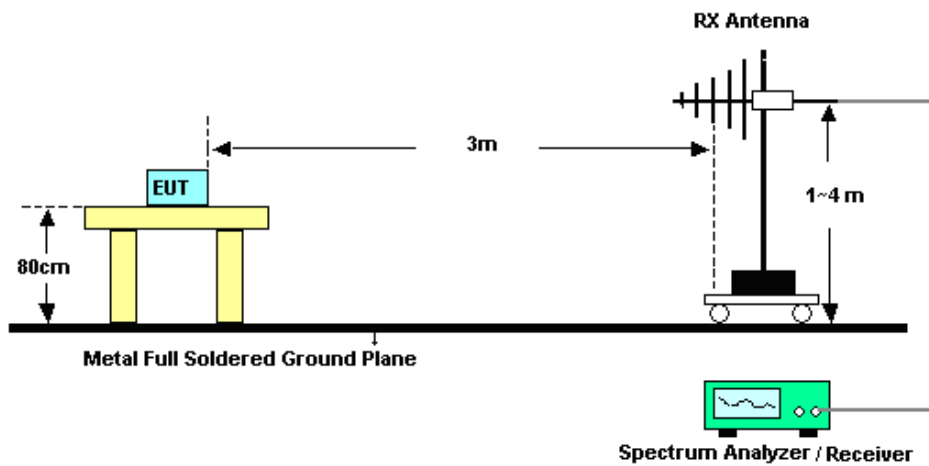

For radiated emissions above 1GHz

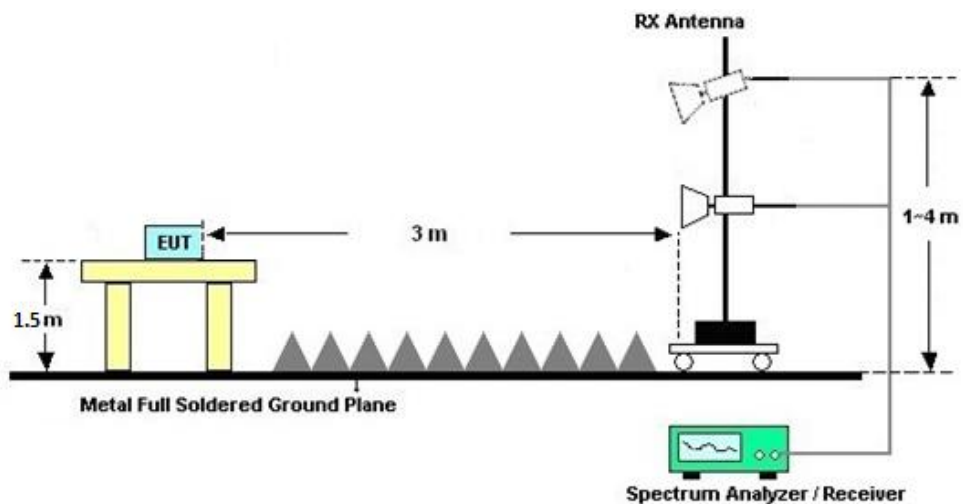



### **3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

### **3.5.6 Test Result of Radiated Spurious at Band Edges**

Please refer to Appendix C.

### **3.5.7 Duty Cycle**

Please refer to Appendix D.

### **3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)**

Please refer to Appendix C.



### 3.6 AC Conducted Emission Measurement

#### 3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBµV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

\*Decreases with the logarithm of the frequency.


#### 3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

#### 3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

### 3.6.4 Test Setup

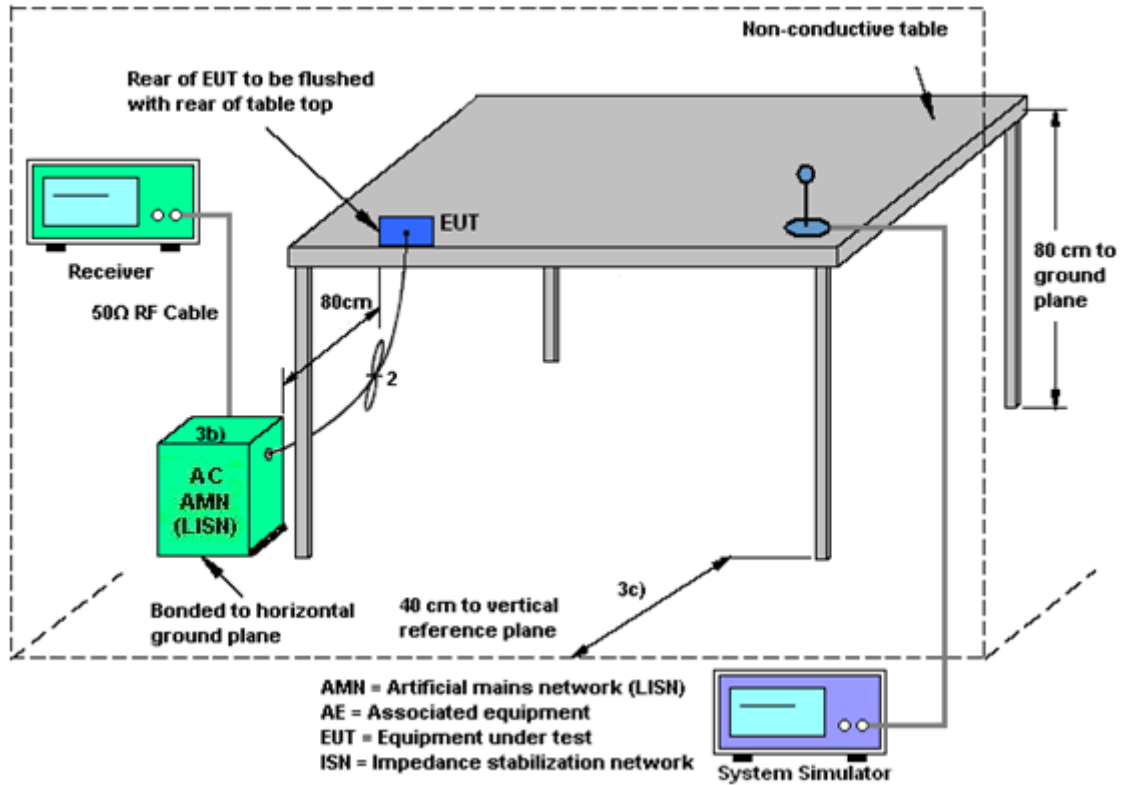

### 3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



## **3.7 Antenna Requirements**

### **3.7.1 Standard Applicable**

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.7.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.

### **3.7.3 Antenna Gain**

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



## 4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	101404	9kHz~7GHz	Oct. 14, 2024	May 22, 2025~ May 27, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY551502 13	10Hz~44GHz	Jul. 03, 2024	May 22, 2025~ May 27, 2025	Jul. 02, 2025	Radiation (03CH04-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	May 22, 2025~ May 27, 2025	Dec. 27, 2025	Radiation (03CH04-SZ)
Bilog Antenna	TeseQ	CBL6111D	41909	30MHz~1GHz	May 08, 2025	May 22, 2025~ May 27, 2025	May 07, 2026	Radiation (03CH04-SZ)
Double Ridge Guide Antenna	ETS-Lindgren	Burgeon-3117	00240057	1GHz~18GHz	Jul. 13, 2024	May 22, 2025~ May 27, 2025	Jul. 12, 2025	Radiation (03CH04-SZ)
Horn Antenna	SCHWARZBECK	BBHA9170	9170#679	15GHz~40GHz	Jul. 04, 2024	May 22, 2025~ May 27, 2025	Jul. 03, 2025	Radiation (03CH04-SZ)
LF Amplifier	EM Electronics	EM330	060773	20MHz-3GHz	Apr. 02, 2025	May 22, 2025~ May 27, 2025	Apr. 01, 2026	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	AMF-7D-0010 1800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	May 22, 2025~ May 27, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	May 22, 2025~ May 27, 2025	Jul. 02, 2025	Radiation (03CH04-SZ)
Amplifier	Agilent Technologies	83017A	MY572801 36	500MHz~26.5G Hz	Jul. 03, 2024	May 22, 2025~ May 27, 2025	Jul. 02, 2025	Radiation (03CH04-SZ)
AC Power Source	APC	AFV-S-600B	F11905001 9	N/A	Oct. 14, 2024	May 22, 2025~ May 27, 2025	Oct. 13, 2025	Radiation (03CH04-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	May 22, 2025~ May 27, 2025	NCR	Radiation (03CH04-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	May 22, 2025~ May 27, 2025	NCR	Radiation (03CH04-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	May 16, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	May 16, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002 470	100Vac~250Vac	Dec.25, 2024	May 16, 2025	Dec. 24, 2025	Conduction (CO02-SZ)
Spectrum Analyzer	R&S	FSV40	101078	10Hz~40GHz	Apr. 02, 2025	May 21, 2025	Apr. 01, 2026	Conducted (TH01-SZ)
Pulse Power Sensor	Anritsu	MA2411B	1339473	30MHz~40GHz	Dec. 25, 2024	May 21, 2025	Dec. 24, 2025	Conducted (TH01-SZ)
Power Meter	Anritsu	ML2495A	1218010	50MHz Bandwidth	Oct. 14,2024	May 21, 2025	Oct. 13, 2025	Conducted (TH01-SZ)

NCR: No Calibration Required



## 5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

### Uncertainty of Conducted Measurement

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	±1.34 dB
Occupied Channel Bandwidth	±0.012 MHz
Conducted Power	±1.34 dB
Conducted Power Spectral Density	±1.32 dB
Frequency	±1.3 Hz

### Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.1 dB
---	--------

----- THE END -----



## **Appendix A. Conducted Test Results**

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	He Qingsheng	Temperature:	21~25	°C
Test Date:	2025/5/21	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	125kbps	1	0	2402	1.053	0.696	0.50	Pass
BLE	125kbps	1	19	2440	1.053	0.696	0.50	Pass
BLE	125kbps	1	39	2480	1.055	0.696	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	125kbps	1	0	2402	2.35	Default	30.00	-4.50	-2.15	36.00	Pass
BLE	125kbps	1	19	2440	3.37	Default	30.00	-4.50	-1.13	36.00	Pass
BLE	125kbps	1	39	2480	2.41	Default	30.00	-4.50	-2.09	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	125kbps	1	0	2402	0.86	2.10	Default	30.00	-4.50	-2.40	36.00	Pass
BLE	125kbps	1	19	2440	0.86	3.20	Default	30.00	-4.50	-1.30	36.00	Pass
BLE	125kbps	1	39	2480	0.86	2.20	Default	30.00	-4.50	-2.30	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	125kbps	1	0	2402	-1.52	-4.23	-4.50	8.00	Pass
BLE	125kbps	1	19	2440	0.01	-2.73	-4.50	8.00	Pass
BLE	125kbps	1	39	2480	-0.89	-3.60	-4.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	1	2404	2.062	1.176	0.50	Pass
BLE	2Mbps	1	19	2440	2.062	1.176	0.50	Pass
BLE	2Mbps	1	38	2478	2.062	1.180	0.50	Pass

**TEST RESULTS DATA**  
**Peak Power Table**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE5.0	2Mbps	1	1	2404	2.18	Default	30.00	-4.50	-2.32	36.00	Pass
BLE5.0	2Mbps	1	19	2440	3.30	Default	30.00	-4.50	-1.20	36.00	Pass
BLE5.0	2Mbps	1	38	2478	2.30	Default	30.00	-4.50	-2.20	36.00	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	1	2404	4.98	2.00	Default	30.00	-4.50	-2.50	36.00	Pass
BLE	2Mbps	1	19	2440	4.98	3.00	Default	30.00	-4.50	-1.50	36.00	Pass
BLE	2Mbps	1	38	2478	4.98	2.00	Default	30.00	-4.50	-2.50	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	1	2404	1.41	-15.42	-4.50	8.00	Pass
BLE	2Mbps	1	19	2440	2.72	-14.13	-4.50	8.00	Pass
BLE	2Mbps	1	38	2478	2.00	-14.82	-4.50	8.00	Pass

Note: PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 20dBc limit.

**TEST RESULTS DATA****Peak Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	500kbps	1	0	2402	2.20	Default	30.00	-4.50	-2.30	36.00	Pass
BLE	500kbps	1	19	2440	3.36	Default	30.00	-4.50	-1.14	36.00	Pass
BLE	500kbps	1	39	2480	2.34	Default	30.00	-4.50	-2.16	36.00	Pass

**TEST RESULTS DATA****Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	500kbps	1	0	2402	2.49	2.00	Default	30.00	-4.50	-2.50	36.00	Pass
BLE	500kbps	1	19	2440	2.49	3.10	Default	30.00	-4.50	-1.40	36.00	Pass
BLE	500kbps	1	39	2480	2.49	2.10	Default	30.00	-4.50	-2.40	36.00	Pass

**TEST RESULTS DATA****Peak Power Table**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Peak Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	2.20	Default	30.00	-4.50	-2.30	36.00	Pass
BLE	1Mbps	1	19	2440	3.35	Default	30.00	-4.50	-1.15	36.00	Pass
BLE	1Mbps	1	39	2480	2.33	Default	30.00	-4.50	-2.17	36.00	Pass


**TEST RESULTS DATA****Average Power Table**

Mod.	Data Rate	N <sub>TX</sub>	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	Power Setting	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	2.19	2.00	Default	30.00	-4.50	-2.50	36.00	Pass
BLE	1Mbps	1	19	2440	2.19	3.10	Default	30.00	-4.50	-1.40	36.00	Pass
BLE	1Mbps	1	39	2480	2.19	2.10	Default	30.00	-4.50	-2.40	36.00	Pass



## Appendix B. AC Conducted Emission Test Results

Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

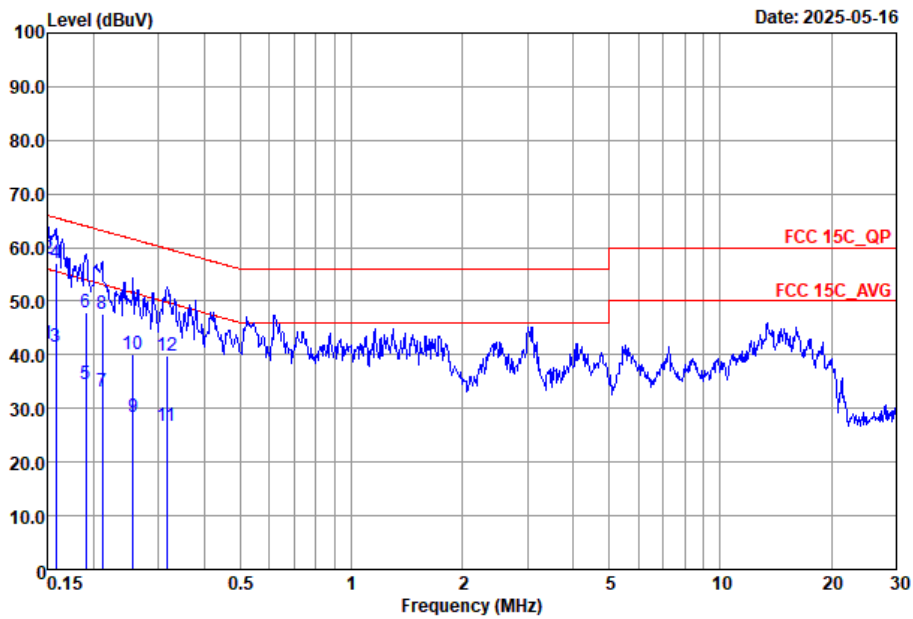


Site : C002-SZ  
 Condition : FCC 15C\_QP LISN\_2025-L LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15	42.05	-13.95	56.00	22.20	9.66	10.19	Average
2 *	0.15	57.85	-8.15	66.00	38.00	9.66	10.19	QP
3	0.16	41.55	-14.01	55.56	21.69	9.67	10.19	Average
4	0.16	57.15	-8.41	65.56	37.29	9.67	10.19	QP
5	0.19	34.58	-19.44	54.02	14.70	9.70	10.18	Average
6	0.19	47.78	-16.24	64.02	27.90	9.70	10.18	QP
7	0.21	33.10	-20.04	53.14	13.21	9.71	10.18	Average
8	0.21	47.70	-15.44	63.14	27.81	9.71	10.18	QP
9	0.26	28.42	-23.14	51.56	8.49	9.73	10.20	Average
10	0.26	40.22	-21.34	61.56	20.29	9.73	10.20	QP
11	0.32	26.66	-23.14	49.80	6.70	9.75	10.21	Average
12	0.32	39.96	-19.84	59.80	20.00	9.75	10.21	QP



Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

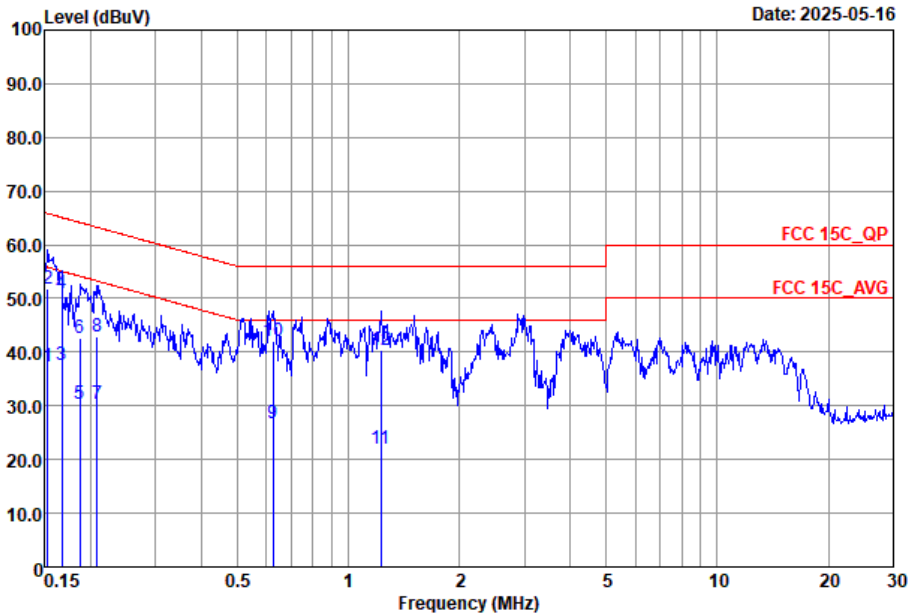

Site : CO02-SZ  
 Condition : FCC 15C\_QP LISN\_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15	37.36	-18.46	55.82	17.59	9.58	10.19	Average
2	0.15	51.86	-13.96	65.82	32.09	9.58	10.19	QP
3	0.17	37.52	-17.56	55.08	17.60	9.74	10.18	Average
4	0.17	50.92	-14.16	65.08	31.00	9.74	10.18	QP
5	0.19	30.40	-23.75	54.15	10.40	9.82	10.18	Average
6	0.19	42.70	-21.45	64.15	22.70	9.82	10.18	QP
7	0.21	30.38	-22.89	53.27	10.40	9.80	10.18	Average
8	0.21	42.88	-20.39	63.27	22.90	9.80	10.18	QP
9	0.62	26.70	-19.30	46.00	6.80	9.66	10.24	Average
10 *	0.62	42.10	-13.90	56.00	22.20	9.66	10.24	QP
11	1.22	22.13	-23.87	46.00	2.20	9.69	10.24	Average
12	1.22	40.33	-15.67	56.00	20.40	9.69	10.24	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



## Appendix C. Radiated Spurious Emission

Test Engineer :	ZhangXu	Relative Humidity :	48~49%
		Temperature :	24~25°C

## Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	5	Bluetooth-LE	00	2402	125kbps	-	-
Mode 2	2400-2483.5	5	Bluetooth-LE	19	2440	125kbps	-	-
Mode 3	2400-2483.5	5	Bluetooth-LE	39	2480	125kbps	-	-
Mode 4	2400-2483.5	5	Bluetooth-LE	01	2404	2Mbps	-	-
Mode 5	2400-2483.5	5	Bluetooth-LE	38	2478	2Mbps	-	-
Mode 6	2400-2483.5	5	Bluetooth-LE	38	2478	2Mbps	-	LF
Mode 7	2400-2483.5	5	Bluetooth-LE	38	2478	2Mbps	-	Co-TX
	WWAN	3	LTE B7 Link	-	-	-	-	Co-TX

## Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE	00	2362.61	33.43	54.00	-20.57	H	AVERAGE	Pass	Band Edge
1	Bluetooth-LE	00	4804.00	42.60	74.00	-31.40	V	Peak	Pass	Harmonic
2	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
2	Bluetooth-LE	19	7320.00	42.48	74.00	-31.52	H	Peak	Pass	Harmonic
3	Bluetooth-LE	39	2492.68	33.98	54.00	-20.02	V	AVERAGE	Pass	Band Edge
3	Bluetooth-LE	39	7440.00	42.96	74.00	-31.04	H	Peak	Pass	Harmonic
4	Bluetooth-LE	01	2358.09	35.93	54.00	-18.07	V	AVERAGE	Pass	Band Edge
4	Bluetooth-LE	01	-	-	-	-	-	-	-	Harmonic
5	Bluetooth-LE	38	2485.13	36.26	54.00	-17.74	H	AVERAGE	Pass	Band Edge
5	Bluetooth-LE	38	7434.00	42.96	74.00	-31.04	H	Peak	Pass	Harmonic
6	Bluetooth-LE	38	209.45	32.44	43.5	-11.06	H	Peak	Pass	LF
7	Bluetooth-LE	38	2490.32	39.27	54.00	-14.73	H	Average	Pass	Band Edge
7	Bluetooth-LE	38	7434.00	45.92	74.00	-28.08	V	Peak	Pass	Harmonic



Mode	1																																																																	
	Band Edge																																																																	
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																	
ANT	5																																																																	
Pol.	Horizontal	Fundamental																																																																
Peak	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2369.33 44.20 74.00 -29.80</td> <td>42.24</td> <td>30.77</td> <td>5.34</td> <td>34.15</td> <td>205</td> <td>3</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2369.33 44.20 74.00 -29.80	42.24	30.77	5.34	34.15	205	3	PEAK	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2402.00 91.81 -</td> <td>89.80</td> <td>30.78</td> <td>5.37</td> <td>34.14</td> <td>205</td> <td>3</td> <td>PEAK_74</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2402.00 91.81 -	89.80	30.78	5.37	34.14	205	3	PEAK_74
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2369.33 44.20 74.00 -29.80	42.24	30.77	5.34	34.15	205	3	PEAK																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2402.00 91.81 -	89.80	30.78	5.37	34.14	205	3	PEAK_74																																																											
Avg	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2362.61 33.43 54.00 -20.57</td> <td>31.47</td> <td>30.77</td> <td>5.34</td> <td>34.15</td> <td>205</td> <td>3</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2362.61 33.43 54.00 -20.57	31.47	30.77	5.34	34.15	205	3	AVERAGE	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq Level Line (dB)</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> <th></th> </tr> <tr> <th>MHz dBuV/m dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 2402.00 90.60 -</td> <td>88.59</td> <td>30.78</td> <td>5.37</td> <td>34.14</td> <td>205</td> <td>3</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg		MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg		1 2402.00 90.60 -	88.59	30.78	5.37	34.14	205	3	AVERAGE
	Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																										
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2362.61 33.43 54.00 -20.57	31.47	30.77	5.34	34.15	205	3	AVERAGE																																																											
Limit Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq Level Line (dB)	Level Factor	Loss Factor			cm	deg																																																												
MHz dBuV/m dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																												
1 2402.00 90.60 -	88.59	30.78	5.37	34.14	205	3	AVERAGE																																																											



	1																																																																													
Mode	Band Edge																																																																													
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																													
ANT	5																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2323.76</td> <td>44.24</td> <td>74.00</td> <td>-29.76</td> <td>42.35</td> <td>30.76</td> <td>5.30</td> <td>34.17</td> <td>100</td> <td>251 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2323.76	44.24	74.00	-29.76	42.35	30.76	5.30	34.17	100	251 PEAK	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>93.92</td> <td>-----</td> <td>-----</td> <td>91.91</td> <td>30.78</td> <td>5.37</td> <td>34.14</td> <td>100</td> <td>251 PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	93.92	-----	-----	91.91	30.78	5.37	34.14	100	251 PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	2323.76	44.24	74.00	-29.76	42.35	30.76	5.30	34.17	100	251 PEAK																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	2402.00	93.92	-----	-----	91.91	30.78	5.37	34.14	100	251 PEAK																																																																				
Avg	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2361.14</td> <td>33.37</td> <td>54.00</td> <td>-20.63</td> <td>31.43</td> <td>30.77</td> <td>5.33</td> <td>34.16</td> <td>100</td> <td>251 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2361.14	33.37	54.00	-20.63	31.43	30.77	5.33	34.16	100	251 AVERAGE	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2402.00</td> <td>92.53</td> <td>-----</td> <td>-----</td> <td>90.52</td> <td>30.78</td> <td>5.37</td> <td>34.14</td> <td>100</td> <td>251 AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	92.53	-----	-----	90.52	30.78	5.37	34.14	100	251 AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	2361.14	33.37	54.00	-20.63	31.43	30.77	5.33	34.16	100	251 AVERAGE																																																																				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	Level	Factor	Loss Factor	dB	cm	deg																																																																						
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																						
1	2402.00	92.53	-----	-----	90.52	30.78	5.37	34.14	100	251 AVERAGE																																																																				



Mode	1																																																																								
	Harmonic																																																																								
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																								
ANT	5																																																																								
Pol.	Horizontal	Vertical																																																																							
Peak Avg																																																																									
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>42.39</td> <td>74.00</td> <td>-31.61</td> <td>63.29</td> <td>35.00</td> <td>8.94</td> <td>64.84</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4804.00	42.39	74.00	-31.61	63.29	35.00	8.94	64.84	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4804.00</td> <td>42.60</td> <td>74.00</td> <td>-31.40</td> <td>63.50</td> <td>35.00</td> <td>8.94</td> <td>64.84</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4804.00	42.60	74.00	-31.40	63.50	35.00	8.94	64.84	---	---
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	4804.00	42.39	74.00	-31.61	63.29	35.00	8.94	64.84	---	---	Peak																																																														
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																		
1	4804.00	42.60	74.00	-31.40	63.50	35.00	8.94	64.84	---	---	Peak																																																														



Mode	2																																																																																																											
	Harmonic																																																																																																											
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																											
ANT	5																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>41.99</td> <td>74.00</td> <td>-32.01</td> <td>63.02</td> <td>35.08</td> <td>8.71</td> <td>64.82</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>42.48</td> <td>74.00</td> <td>-31.52</td> <td>61.20</td> <td>36.10</td> <td>10.18</td> <td>65.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	41.99	74.00	-32.01	63.02	35.08	8.71	64.82	---	---	Peak	2	7320.00	42.48	74.00	-31.52	61.20	36.10	10.18	65.00	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4880.00</td> <td>41.49</td> <td>74.00</td> <td>-32.51</td> <td>62.52</td> <td>35.08</td> <td>8.71</td> <td>64.82</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7320.00</td> <td>42.32</td> <td>74.00</td> <td>-31.68</td> <td>61.04</td> <td>36.10</td> <td>10.18</td> <td>65.00</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4880.00	41.49	74.00	-32.51	62.52	35.08	8.71	64.82	---	---	Peak	2	7320.00	42.32	74.00	-31.68	61.04	36.10	10.18	65.00	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	4880.00	41.99	74.00	-32.01	63.02	35.08	8.71	64.82	---	---	Peak																																																																																																	
2	7320.00	42.48	74.00	-31.52	61.20	36.10	10.18	65.00	---	---	Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	4880.00	41.49	74.00	-32.51	62.52	35.08	8.71	64.82	---	---	Peak																																																																																																	
2	7320.00	42.32	74.00	-31.68	61.04	36.10	10.18	65.00	---	---	Peak																																																																																																	



	3																																																																															
Mode	Band Edge																																																																															
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																															
ANT	5																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p style="text-align: right;">Date: 2025-05-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.62</td> <td>45.15</td> <td>74.00</td> <td>-28.85</td> <td>43.00</td> <td>30.80</td> <td>5.46</td> <td>34.11</td> <td>300</td> <td>320</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.62	45.15	74.00	-28.85	43.00	30.80	5.46	34.11	300	320	PEAK	<p style="text-align: right;">Date: 2025-05-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>93.01</td> <td>74.00</td> <td>-----</td> <td>90.86</td> <td>30.80</td> <td>5.46</td> <td>34.11</td> <td>300</td> <td>320</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	93.01	74.00	-----	90.86	30.80	5.46	34.11	300	320	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2484.62	45.15	74.00	-28.85	43.00	30.80	5.46	34.11	300	320	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2480.00	93.01	74.00	-----	90.86	30.80	5.46	34.11	300	320	PEAK																																																																					
Avg	<p style="text-align: right;">Date: 2025-05-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2488.66</td> <td>33.89</td> <td>54.00</td> <td>-20.11</td> <td>31.72</td> <td>30.80</td> <td>5.47</td> <td>34.10</td> <td>300</td> <td>320</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2488.66	33.89	54.00	-20.11	31.72	30.80	5.47	34.10	300	320	AVERAGE	<p style="text-align: right;">Date: 2025-05-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>91.81</td> <td>54.00</td> <td>-----</td> <td>89.66</td> <td>30.80</td> <td>5.46</td> <td>34.11</td> <td>300</td> <td>320</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	91.81	54.00	-----	89.66	30.80	5.46	34.11	300	320	AVERAGE
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2488.66	33.89	54.00	-20.11	31.72	30.80	5.47	34.10	300	320	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2480.00	91.81	54.00	-----	89.66	30.80	5.46	34.11	300	320	AVERAGE																																																																					



Mode	3																																																																															
	Band Edge																																																																															
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																															
ANT	5																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p>Date: 2025-05-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2484.36</td> <td>44.00</td> <td>74.00</td> <td>-30.00</td> <td>41.85</td> <td>30.80</td> <td>5.46</td> <td>34.11</td> <td>129</td> <td>345</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2484.36	44.00	74.00	-30.00	41.85	30.80	5.46	34.11	129	345	PEAK	<p>Date: 2025-05-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>88.55</td> <td>74.00</td> <td>-13.55</td> <td>86.40</td> <td>30.80</td> <td>5.46</td> <td>34.11</td> <td>129</td> <td>345</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	88.55	74.00	-13.55	86.40	30.80	5.46	34.11	129	345	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2484.36	44.00	74.00	-30.00	41.85	30.80	5.46	34.11	129	345	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2480.00	88.55	74.00	-13.55	86.40	30.80	5.46	34.11	129	345	PEAK																																																																					
Avg	<p>Date: 2025-05-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2492.68</td> <td>33.98</td> <td>54.00</td> <td>-20.02</td> <td>31.81</td> <td>30.80</td> <td>5.47</td> <td>34.10</td> <td>129</td> <td>345</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2492.68	33.98	54.00	-20.02	31.81	30.80	5.47	34.10	129	345	AVERAGE	<p>Date: 2025-05-22</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2480.00</td> <td>87.15</td> <td>54.00</td> <td>-33.15</td> <td>85.00</td> <td>30.80</td> <td>5.46</td> <td>34.11</td> <td>129</td> <td>345</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2480.00	87.15	54.00	-33.15	85.00	30.80	5.46	34.11	129	345	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2492.68	33.98	54.00	-20.02	31.81	30.80	5.47	34.10	129	345	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2480.00	87.15	54.00	-33.15	85.00	30.80	5.46	34.11	129	345	AVERAGE																																																																					



Mode	3																																																																																																	
	Harmonic																																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																	
ANT	5																																																																																																	
Pol.	Horizontal	Vertical																																																																																																
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>41.67</td> <td>74.00</td> <td>-32.33</td> <td>62.86</td> <td>35.16</td> <td>8.46</td> <td>64.81</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>42.96</td> <td>74.00</td> <td>-31.04</td> <td>61.66</td> <td>36.10</td> <td>10.17</td> <td>64.97</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4960.00	41.67	74.00	-32.33	62.86	35.16	8.46	64.81	---	---	Peak	2	7440.00	42.96	74.00	-31.04	61.66	36.10	10.17	64.97	---	---	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4960.00</td> <td>42.39</td> <td>74.00</td> <td>-31.61</td> <td>63.58</td> <td>35.16</td> <td>8.46</td> <td>64.81</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7440.00</td> <td>42.44</td> <td>74.00</td> <td>-31.56</td> <td>61.14</td> <td>36.10</td> <td>10.17</td> <td>64.97</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	4960.00	42.39	74.00	-31.61	63.58	35.16	8.46	64.81	---	---	Peak	2	7440.00	42.44	74.00	-31.56	61.14	36.10	10.17	64.97	---	---	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	4960.00	41.67	74.00	-32.33	62.86	35.16	8.46	64.81	---	---	Peak																																																																																							
2	7440.00	42.96	74.00	-31.04	61.66	36.10	10.17	64.97	---	---	Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																											
1	4960.00	42.39	74.00	-31.61	63.58	35.16	8.46	64.81	---	---	Peak																																																																																							
2	7440.00	42.44	74.00	-31.56	61.14	36.10	10.17	64.97	---	---	Peak																																																																																							



	4																																																																															
Mode	Band Edge																																																																															
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																															
ANT	5																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2365.76</td> <td>43.73</td> <td>74.00</td> <td>-30.27</td> <td>41.77</td> <td>30.77</td> <td>5.34</td> <td>34.15</td> <td>204</td> <td>1</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2365.76	43.73	74.00	-30.27	41.77	30.77	5.34	34.15	204	1	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2404.00</td> <td>91.38</td> <td>-----</td> <td>-----</td> <td>89.37</td> <td>30.78</td> <td>5.37</td> <td>34.14</td> <td>204</td> <td>1</td> <td>PEAK_74</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	91.38	-----	-----	89.37	30.78	5.37	34.14	204	1	PEAK_74
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2365.76	43.73	74.00	-30.27	41.77	30.77	5.34	34.15	204	1	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2404.00	91.38	-----	-----	89.37	30.78	5.37	34.14	204	1	PEAK_74																																																																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2352.11</td> <td>35.91</td> <td>54.00</td> <td>-18.09</td> <td>33.97</td> <td>30.77</td> <td>5.33</td> <td>34.16</td> <td>204</td> <td>1</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2352.11	35.91	54.00	-18.09	33.97	30.77	5.33	34.16	204	1	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2404.00</td> <td>89.48</td> <td>-----</td> <td>-----</td> <td>87.47</td> <td>30.78</td> <td>5.37</td> <td>34.14</td> <td>204</td> <td>1</td> <td>AVERAGE_54</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	89.48	-----	-----	87.47	30.78	5.37	34.14	204	1	AVERAGE_54
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2352.11	35.91	54.00	-18.09	33.97	30.77	5.33	34.16	204	1	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2404.00	89.48	-----	-----	87.47	30.78	5.37	34.14	204	1	AVERAGE_54																																																																					



Mode	4																																																																															
	Band Edge																																																																															
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																															
ANT	5																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2388.88</td> <td>44.00</td> <td>74.00</td> <td>-30.00</td> <td>42.02</td> <td>30.78</td> <td>5.35</td> <td>34.15</td> <td>100</td> <td>298</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2388.88	44.00	74.00	-30.00	42.02	30.78	5.35	34.15	100	298	PEAK	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2404.00</td> <td>93.90</td> <td>-----</td> <td>-----</td> <td>91.89</td> <td>30.78</td> <td>5.37</td> <td>34.14</td> <td>100</td> <td>298</td> <td>PEAK_74</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	93.90	-----	-----	91.89	30.78	5.37	34.14	100	298	PEAK_74
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2388.88	44.00	74.00	-30.00	42.02	30.78	5.35	34.15	100	298	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2404.00	93.90	-----	-----	91.89	30.78	5.37	34.14	100	298	PEAK_74																																																																					
Avg	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2358.09</td> <td>35.93</td> <td>54.00</td> <td>-18.07</td> <td>33.99</td> <td>30.77</td> <td>5.33</td> <td>34.16</td> <td>100</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2358.09	35.93	54.00	-18.07	33.99	30.77	5.33	34.16	100	298	AVERAGE	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2404.00</td> <td>91.98</td> <td>-----</td> <td>-----</td> <td>89.97</td> <td>30.78</td> <td>5.37</td> <td>34.14</td> <td>100</td> <td>298</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2404.00	91.98	-----	-----	89.97	30.78	5.37	34.14	100	298	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2358.09	35.93	54.00	-18.07	33.99	30.77	5.33	34.16	100	298	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																										
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2404.00	91.98	-----	-----	89.97	30.78	5.37	34.14	100	298	AVERAGE																																																																					



Mode	5																																																																															
	Band Edge																																																																															
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																															
ANT	5																																																																															
Pol.	Horizontal	Fundamental																																																																														
Peak	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2493.42</td> <td>87.74</td> <td>74.00</td> <td>-29.53</td> <td>42.30</td> <td>30.80</td> <td>5.47</td> <td>34.10</td> <td>385</td> <td>205</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2493.42	87.74	74.00	-29.53	42.30	30.80	5.47	34.10	385	205	PEAK	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>90.53</td> <td>74.00</td> <td>-16.47</td> <td>88.39</td> <td>30.80</td> <td>5.45</td> <td>34.11</td> <td>385</td> <td>205</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	90.53	74.00	-16.47	88.39	30.80	5.45	34.11	385	205	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2493.42	87.74	74.00	-29.53	42.30	30.80	5.47	34.10	385	205	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2478.00	90.53	74.00	-16.47	88.39	30.80	5.45	34.11	385	205	PEAK																																																																					
Avg	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2485.13</td> <td>36.26</td> <td>54.00</td> <td>-17.74</td> <td>34.11</td> <td>30.80</td> <td>5.46</td> <td>34.11</td> <td>385</td> <td>205</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2485.13	36.26	54.00	-17.74	34.11	30.80	5.46	34.11	385	205	AVERAGE	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>88.71</td> <td>54.00</td> <td>-34.71</td> <td>86.57</td> <td>30.80</td> <td>5.45</td> <td>34.11</td> <td>385</td> <td>205</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	88.71	54.00	-34.71	86.57	30.80	5.45	34.11	385	205	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2485.13	36.26	54.00	-17.74	34.11	30.80	5.46	34.11	385	205	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	Level	Factor	Loss Factor																																																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2478.00	88.71	54.00	-34.71	86.57	30.80	5.45	34.11	385	205	AVERAGE																																																																					



Mode	5																																																																															
	Band Edge																																																																															
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																															
ANT	5																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2498.59</td> <td>44.21</td> <td>74.00</td> <td>-29.79</td> <td>42.03</td> <td>30.80</td> <td>5.48</td> <td>34.10</td> <td>200</td> <td>255</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2498.59	44.21	74.00	-29.79	42.03	30.80	5.48	34.10	200	255	PEAK	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>90.26</td> <td>-----</td> <td>-----</td> <td>88.12</td> <td>30.80</td> <td>5.45</td> <td>34.11</td> <td>200</td> <td>255</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	90.26	-----	-----	88.12	30.80	5.45	34.11	200	255	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2498.59	44.21	74.00	-29.79	42.03	30.80	5.48	34.10	200	255	PEAK																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2478.00	90.26	-----	-----	88.12	30.80	5.45	34.11	200	255	PEAK																																																																					
Avg	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2491.60</td> <td>36.21</td> <td>54.00</td> <td>-17.79</td> <td>34.04</td> <td>30.80</td> <td>5.47</td> <td>34.10</td> <td>200</td> <td>255</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2491.60	36.21	54.00	-17.79	34.04	30.80	5.47	34.10	200	255	AVERAGE	<p style="text-align: right;">Date: 2025-05-27</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Margin</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>(dB)</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>88.49</td> <td>-----</td> <td>-----</td> <td>86.35</td> <td>30.80</td> <td>5.45</td> <td>34.11</td> <td>200</td> <td>255</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	2478.00	88.49	-----	-----	86.35	30.80	5.45	34.11	200	255	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2491.60	36.21	54.00	-17.79	34.04	30.80	5.47	34.10	200	255	AVERAGE																																																																					
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																									
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																								
1	2478.00	88.49	-----	-----	86.35	30.80	5.45	34.11	200	255	AVERAGE																																																																					







Mode	5																																																																																																			
	Harmonic																																																																																																			
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																																			
ANT	5																																																																																																			
Pol.	Horizontal	Vertical																																																																																																		
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4956.00</td> <td>41.67</td> <td>74.00</td> <td>-32.33</td> <td>62.84</td> <td>35.16</td> <td>8.48</td> <td>64.81</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7434.00</td> <td>42.96</td> <td>74.00</td> <td>-31.04</td> <td>61.66</td> <td>36.10</td> <td>10.17</td> <td>64.97</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4956.00	41.67	74.00	-32.33	62.84	35.16	8.48	64.81	---	---	Peak	2	7434.00	42.96	74.00	-31.04	61.66	36.10	10.17	64.97	---	---	Peak	<table border="1"> <thead> <tr> <th>Over</th> <th>Limit</th> <th>ReadAntenna</th> <th>Cable</th> <th>Preamp</th> <th>A/Pos</th> <th>T/Pos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Limit</th> <th>Line</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV/m</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4956.00</td> <td>42.39</td> <td>-31.61</td> <td>74.00</td> <td>63.51</td> <td>35.16</td> <td>8.53</td> <td>64.81</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2 *</td> <td>7434.00</td> <td>42.44</td> <td>-31.56</td> <td>74.00</td> <td>61.14</td> <td>36.10</td> <td>10.17</td> <td>64.97</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark	Freq	Level	Limit	Line	Level	Factor	Loss Factor		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg	1	4956.00	42.39	-31.61	74.00	63.51	35.16	8.53	64.81	---	---	Peak	2 *	7434.00	42.44	-31.56	74.00	61.14	36.10	10.17	64.97	---	---	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																												
1	4956.00	41.67	74.00	-32.33	62.84	35.16	8.48	64.81	---	---	Peak																																																																																									
2	7434.00	42.96	74.00	-31.04	61.66	36.10	10.17	64.97	---	---	Peak																																																																																									
Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos	Remark																																																																																													
Freq	Level	Limit	Line	Level	Factor	Loss Factor																																																																																														
MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																												
1	4956.00	42.39	-31.61	74.00	63.51	35.16	8.53	64.81	---	---	Peak																																																																																									
2 *	7434.00	42.44	-31.56	74.00	61.14	36.10	10.17	64.97	---	---	Peak																																																																																									







Mode	6																																																																																																																																																																			
	LF																																																																																																																																																																			
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																																																																																																			
ANT	5																																																																																																																																																																			
Pol.	Horizontal	Vertical																																																																																																																																																																		
Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th colspan="3"></th> </tr> <tr> <th>MHz</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>51.34</td> <td>18.58</td> <td>40.00</td> <td>-21.42</td> <td>35.64</td> <td>13.92</td> <td>0.72</td> <td>31.70</td> <td>Peak</td> </tr> <tr> <td>129.91</td> <td>22.15</td> <td>43.50</td> <td>-21.35</td> <td>34.83</td> <td>17.80</td> <td>1.16</td> <td>31.64</td> <td>Peak</td> </tr> <tr> <td>209.45</td> <td>32.44</td> <td>43.50</td> <td>-11.06</td> <td>47.41</td> <td>15.06</td> <td>1.47</td> <td>31.50</td> <td>Peak</td> </tr> <tr> <td>260.86</td> <td>32.28</td> <td>46.00</td> <td>-13.72</td> <td>42.43</td> <td>19.69</td> <td>1.68</td> <td>31.52</td> <td>Peak</td> </tr> <tr> <td>849.65</td> <td>31.34</td> <td>46.00</td> <td>-14.66</td> <td>30.39</td> <td>28.95</td> <td>3.05</td> <td>31.05</td> <td>Peak</td> </tr> <tr> <td>945.68</td> <td>31.93</td> <td>46.00</td> <td>-14.07</td> <td>28.38</td> <td>31.19</td> <td>3.22</td> <td>30.86</td> <td>Peak</td> </tr> </tbody> </table>	Peak	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	1	2	3	4	5	6				MHz	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	51.34	18.58	40.00	-21.42	35.64	13.92	0.72	31.70	Peak	129.91	22.15	43.50	-21.35	34.83	17.80	1.16	31.64	Peak	209.45	32.44	43.50	-11.06	47.41	15.06	1.47	31.50	Peak	260.86	32.28	46.00	-13.72	42.43	19.69	1.68	31.52	Peak	849.65	31.34	46.00	-14.66	30.39	28.95	3.05	31.05	Peak	945.68	31.93	46.00	-14.07	28.38	31.19	3.22	30.86	Peak	<table border="1"> <thead> <tr> <th>Peak</th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>1</th> <th>2</th> <th>3</th> <th>4</th> <th>5</th> <th>6</th> <th colspan="3"></th> </tr> <tr> <th>MHz</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>41.64</td> <td>24.46</td> <td>40.00</td> <td>-15.54</td> <td>36.49</td> <td>19.07</td> <td>0.63</td> <td>31.73</td> <td>Peak</td> </tr> <tr> <td>167.74</td> <td>28.06</td> <td>43.50</td> <td>-15.44</td> <td>42.38</td> <td>15.92</td> <td>1.32</td> <td>31.56</td> <td>Peak</td> </tr> <tr> <td>207.51</td> <td>31.41</td> <td>43.50</td> <td>-12.09</td> <td>46.38</td> <td>15.07</td> <td>1.46</td> <td>31.50</td> <td>Peak</td> </tr> <tr> <td>260.86</td> <td>25.21</td> <td>46.00</td> <td>-20.79</td> <td>35.36</td> <td>19.69</td> <td>1.68</td> <td>31.52</td> <td>Peak</td> </tr> <tr> <td>835.10</td> <td>31.01</td> <td>46.00</td> <td>-14.99</td> <td>30.28</td> <td>28.77</td> <td>3.02</td> <td>31.06</td> <td>Peak</td> </tr> <tr> <td>952.47</td> <td>32.03</td> <td>46.00</td> <td>-13.97</td> <td>28.10</td> <td>31.54</td> <td>3.23</td> <td>30.84</td> <td>Peak</td> </tr> </tbody> </table>	Peak	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	1	2	3	4	5	6				MHz	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg	41.64	24.46	40.00	-15.54	36.49	19.07	0.63	31.73	Peak	167.74	28.06	43.50	-15.44	42.38	15.92	1.32	31.56	Peak	207.51	31.41	43.50	-12.09	46.38	15.07	1.46	31.50	Peak	260.86	25.21	46.00	-20.79	35.36	19.69	1.68	31.52	Peak	835.10	31.01	46.00	-14.99	30.28	28.77	3.02	31.06	Peak	952.47	32.03	46.00	-13.97	28.10	31.54	3.23	30.84	Peak
	Peak	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																											
1	2	3	4	5	6																																																																																																																																																															
MHz	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																																																																																																																												
51.34	18.58	40.00	-21.42	35.64	13.92	0.72	31.70	Peak																																																																																																																																																												
129.91	22.15	43.50	-21.35	34.83	17.80	1.16	31.64	Peak																																																																																																																																																												
209.45	32.44	43.50	-11.06	47.41	15.06	1.47	31.50	Peak																																																																																																																																																												
260.86	32.28	46.00	-13.72	42.43	19.69	1.68	31.52	Peak																																																																																																																																																												
849.65	31.34	46.00	-14.66	30.39	28.95	3.05	31.05	Peak																																																																																																																																																												
945.68	31.93	46.00	-14.07	28.38	31.19	3.22	30.86	Peak																																																																																																																																																												
Peak	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																												
1	2	3	4	5	6																																																																																																																																																															
MHz	Level	Line	Margin	Level	Factor	Loss Factor	cm	deg																																																																																																																																																												
41.64	24.46	40.00	-15.54	36.49	19.07	0.63	31.73	Peak																																																																																																																																																												
167.74	28.06	43.50	-15.44	42.38	15.92	1.32	31.56	Peak																																																																																																																																																												
207.51	31.41	43.50	-12.09	46.38	15.07	1.46	31.50	Peak																																																																																																																																																												
260.86	25.21	46.00	-20.79	35.36	19.69	1.68	31.52	Peak																																																																																																																																																												
835.10	31.01	46.00	-14.99	30.28	28.77	3.02	31.06	Peak																																																																																																																																																												
952.47	32.03	46.00	-13.97	28.10	31.54	3.23	30.84	Peak																																																																																																																																																												

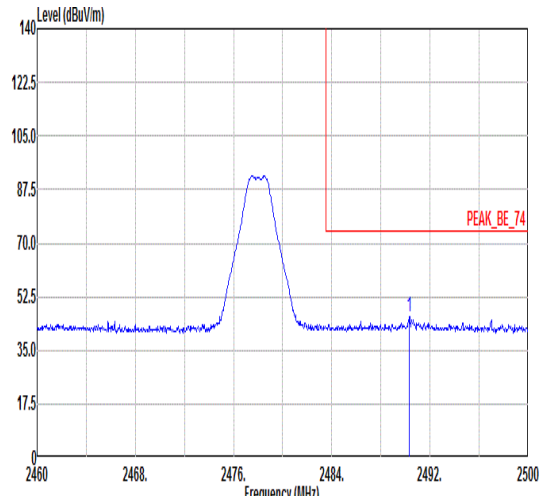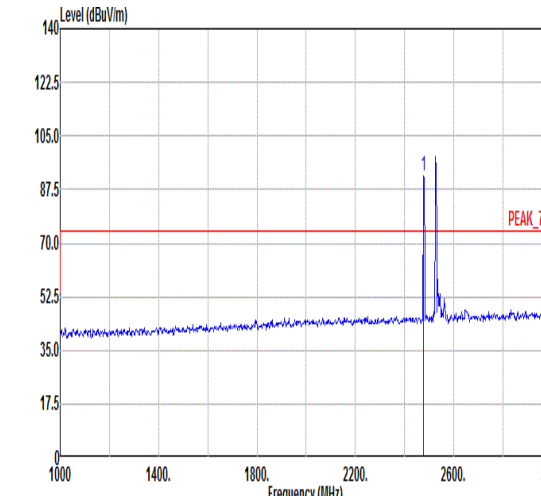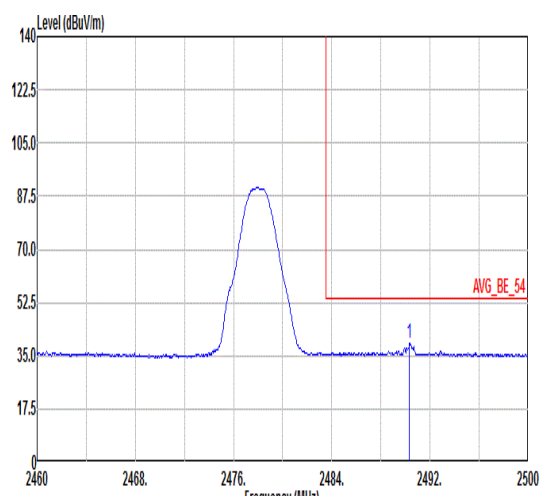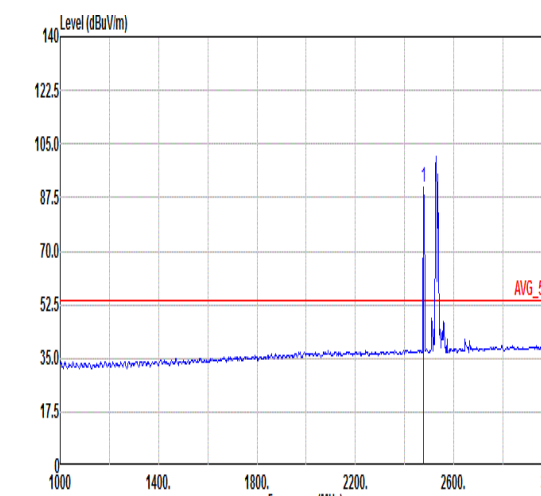

Mode	7																																																																									
	Band Edge																																																																									
	CO-TX 2400-2483.5_Bluetooth-LE_CH38_2478MHz+LTE B7 Link																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2490.28</td> <td>46.05</td> <td>74.00</td> <td>-27.95</td> <td>43.88</td> <td>30.80</td> <td>5.47</td> <td>34.10</td> <td>100</td> <td>297</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2490.28	46.05	74.00	-27.95	43.88	30.80	5.47	34.10	100	297	Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_74</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>92.16</td> <td>-----</td> <td>-----</td> <td>90.02</td> <td>30.80</td> <td>5.45</td> <td>34.11</td> <td>100</td> <td>297</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2478.00	92.16	-----	-----	90.02	30.80	5.45	34.11	100	297	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	2490.28	46.05	74.00	-27.95	43.88	30.80	5.47	34.10	100	297	Peak																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	2478.00	92.16	-----	-----	90.02	30.80	5.45	34.11	100	297	Peak																																																															
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2490.32</td> <td>39.27</td> <td>54.00</td> <td>-14.73</td> <td>37.10</td> <td>30.80</td> <td>5.47</td> <td>34.10</td> <td>100</td> <td>297</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2490.32	39.27	54.00	-14.73	37.10	30.80	5.47	34.10	100	297	Average	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_54</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>90.97</td> <td>-----</td> <td>-----</td> <td>88.83</td> <td>30.80</td> <td>5.45</td> <td>34.11</td> <td>100</td> <td>297</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2478.00	90.97	-----	-----	88.83	30.80	5.45	34.11	100	297	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	2490.32	39.27	54.00	-14.73	37.10	30.80	5.47	34.10	100	297	Average																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	2478.00	90.97	-----	-----	88.83	30.80	5.45	34.11	100	297	Peak																																																															

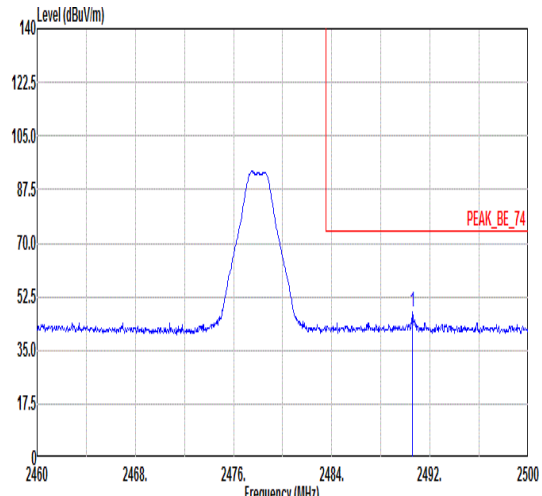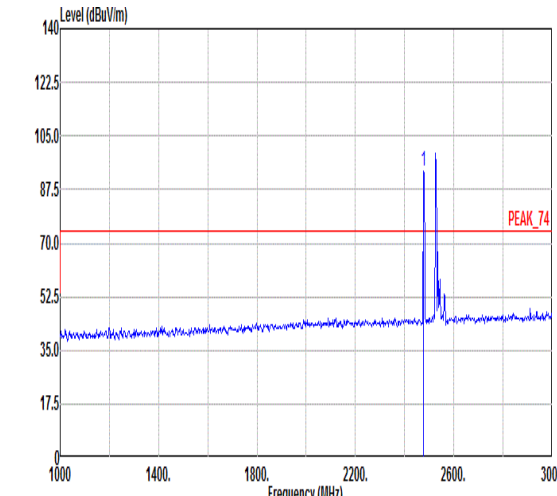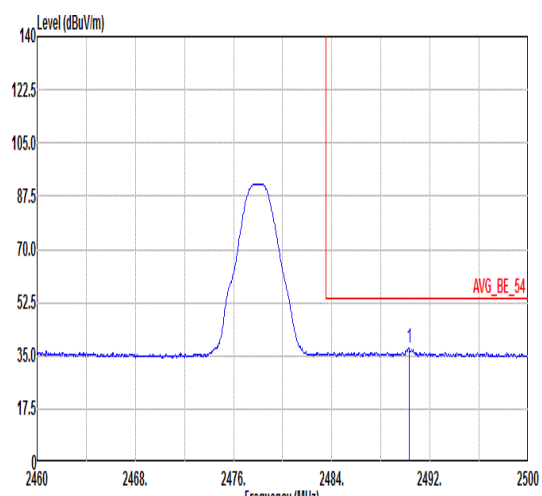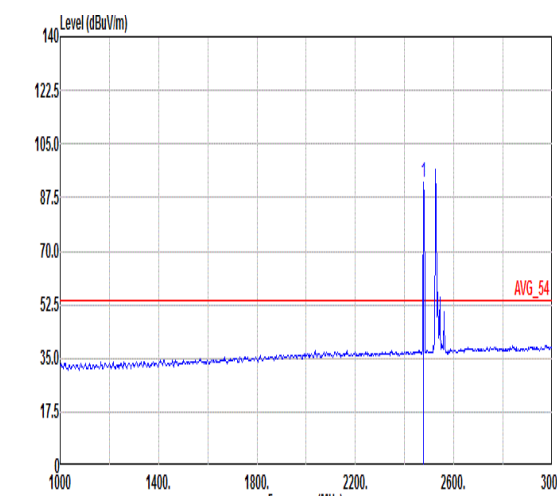

	7																																																																									
Mode	Band Edge																																																																									
	CO-TX 2400-2483.5_Bluetooth-LE_CH38_2478MHz+LTE B7 Link																																																																									
ANT	5																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_BE_74</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2490.56</td> <td>47.32</td> <td>74.00</td> <td>-26.68</td> <td>45.15</td> <td>30.80</td> <td>5.47</td> <td>34.10</td> <td>100</td> <td>236</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2490.56	47.32	74.00	-26.68	45.15	30.80	5.47	34.10	100	236	Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PEAK_74</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>93.60</td> <td>-----</td> <td>-----</td> <td>91.46</td> <td>30.80</td> <td>5.45</td> <td>34.11</td> <td>100</td> <td>236</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2478.00	93.60	-----	-----	91.46	30.80	5.45	34.11	100	236	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	2490.56	47.32	74.00	-26.68	45.15	30.80	5.47	34.10	100	236	Peak																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	2478.00	93.60	-----	-----	91.46	30.80	5.45	34.11	100	236	Peak																																																															
Avg	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_BE_54</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2490.28</td> <td>37.57</td> <td>54.00</td> <td>-16.43</td> <td>35.40</td> <td>30.80</td> <td>5.47</td> <td>34.10</td> <td>100</td> <td>236</td> <td>Average</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2490.28	37.57	54.00	-16.43	35.40	30.80	5.47	34.10	100	236	Average	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>AVG_54</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2478.00</td> <td>92.32</td> <td>-----</td> <td>-----</td> <td>90.18</td> <td>30.80</td> <td>5.45</td> <td>34.11</td> <td>100</td> <td>236</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	2478.00	92.32	-----	-----	90.18	30.80	5.45	34.11	100	236	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	2490.28	37.57	54.00	-16.43	35.40	30.80	5.47	34.10	100	236	Average																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	2478.00	92.32	-----	-----	90.18	30.80	5.45	34.11	100	236	Peak																																																															



Mode	7																																																																																																											
	Harmonic																																																																																																											
	CO-TX 2400-2483.5_Bluetooth-LE_CH38_2478MHz+LTE B7 Link																																																																																																											
ANT	5																																																																																																											
Pol.	Horizontal	Vertical																																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4956.00</td> <td>44.10</td> <td>74.00</td> <td>-29.90</td> <td>63.80</td> <td>36.63</td> <td>8.48</td> <td>64.81</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7434.00</td> <td>45.29</td> <td>74.00</td> <td>-28.71</td> <td>63.32</td> <td>36.77</td> <td>10.17</td> <td>64.97</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	44.10	74.00	-29.90	63.80	36.63	8.48	64.81	---	---	Peak	2	7434.00	45.29	74.00	-28.71	63.32	36.77	10.17	64.97	---	---	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>4956.00</td> <td>44.20</td> <td>74.00</td> <td>-29.80</td> <td>63.90</td> <td>36.63</td> <td>8.48</td> <td>64.81</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>7434.00</td> <td>45.92</td> <td>74.00</td> <td>-28.08</td> <td>63.95</td> <td>36.77</td> <td>10.17</td> <td>64.97</td> <td>---</td> <td>---</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	44.20	74.00	-29.80	63.90	36.63	8.48	64.81	---	---	Peak	2	7434.00	45.92	74.00	-28.08	63.95	36.77	10.17	64.97	---	---	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	4956.00	44.10	74.00	-29.90	63.80	36.63	8.48	64.81	---	---	Peak																																																																																																	
2	7434.00	45.29	74.00	-28.71	63.32	36.77	10.17	64.97	---	---	Peak																																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																		
1	4956.00	44.20	74.00	-29.80	63.90	36.63	8.48	64.81	---	---	Peak																																																																																																	
2	7434.00	45.92	74.00	-28.08	63.95	36.77	10.17	64.97	---	---	Peak																																																																																																	


Remark: In co-location mode, the signals exceeding the limit are all the fundamental frequency which can be ignored.



## Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 125Kbps	82.01	3.080	0.325	1KHz
Bluetooth LE 2Mbps	31.48	0.197	5.074	10KHZ

### Bluetooth LE 125Kbps

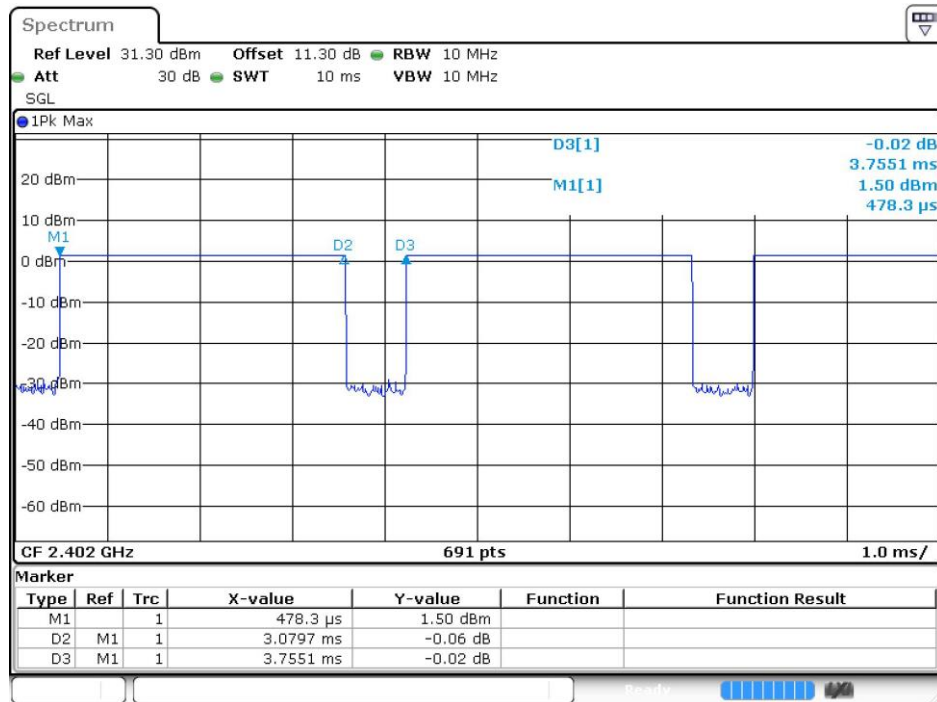



Bluetooth LE 2Mbps

