




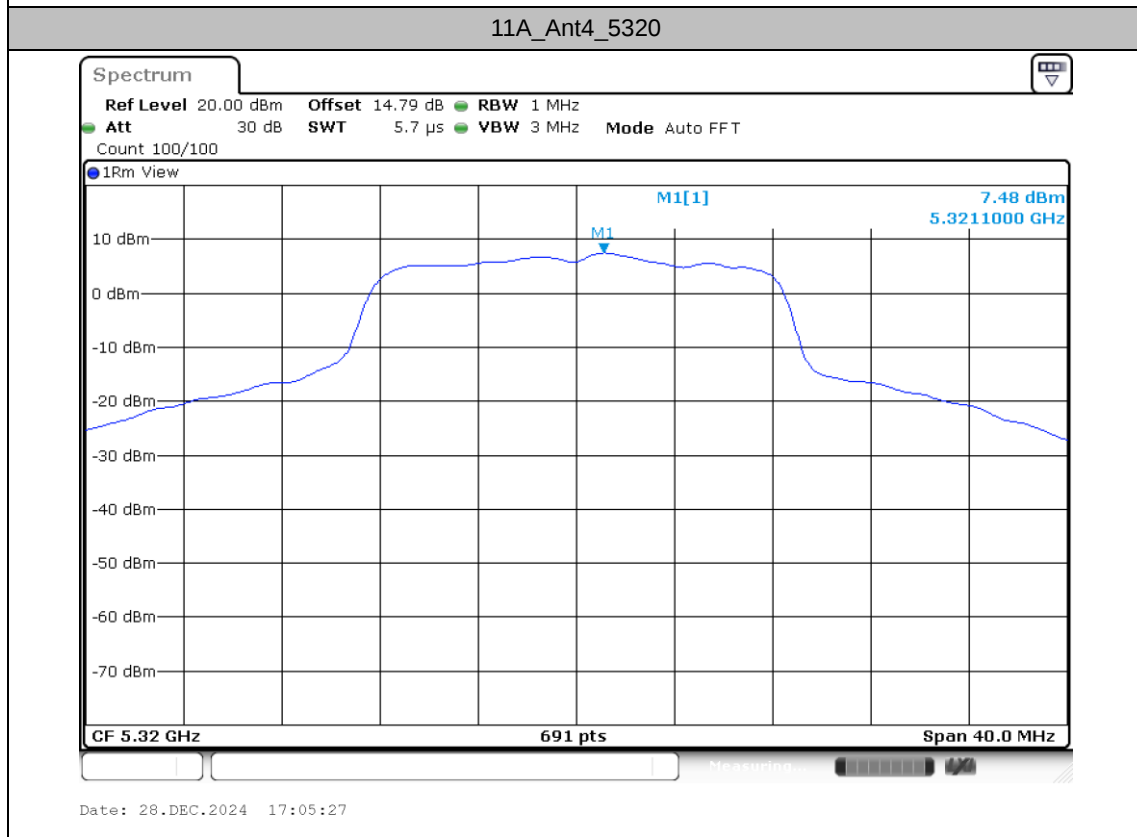
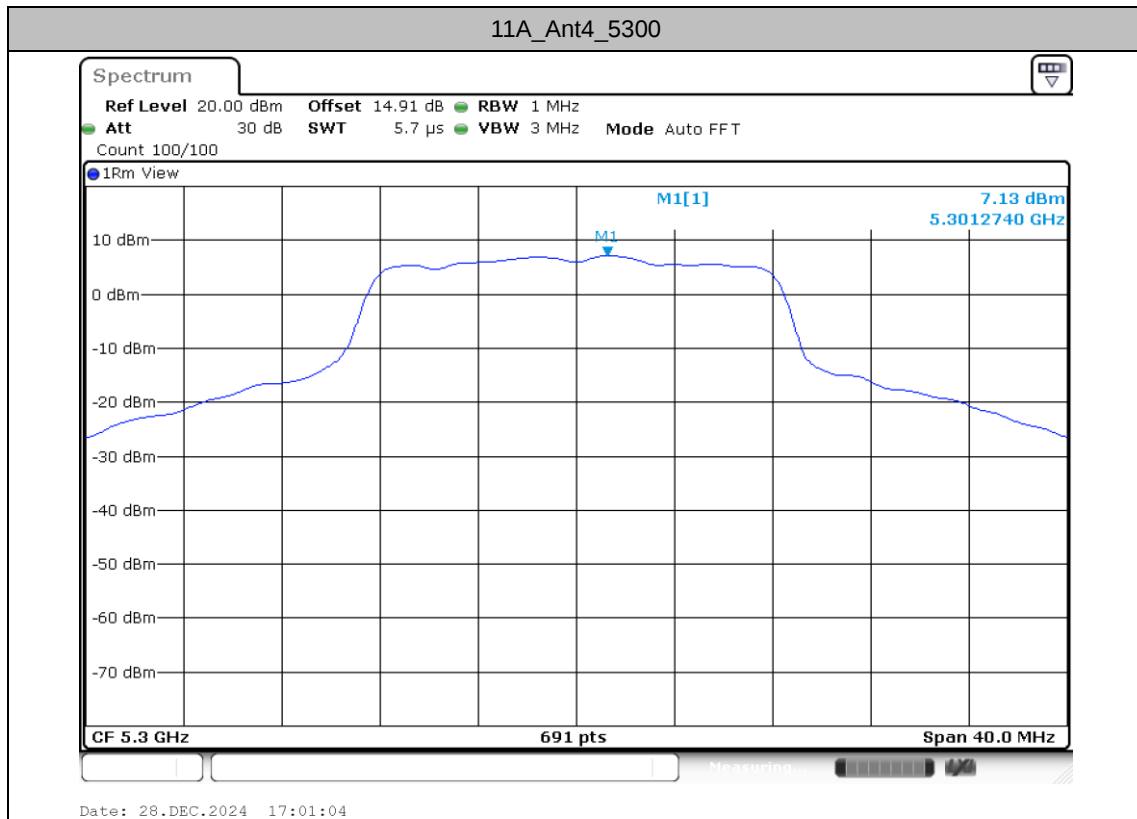
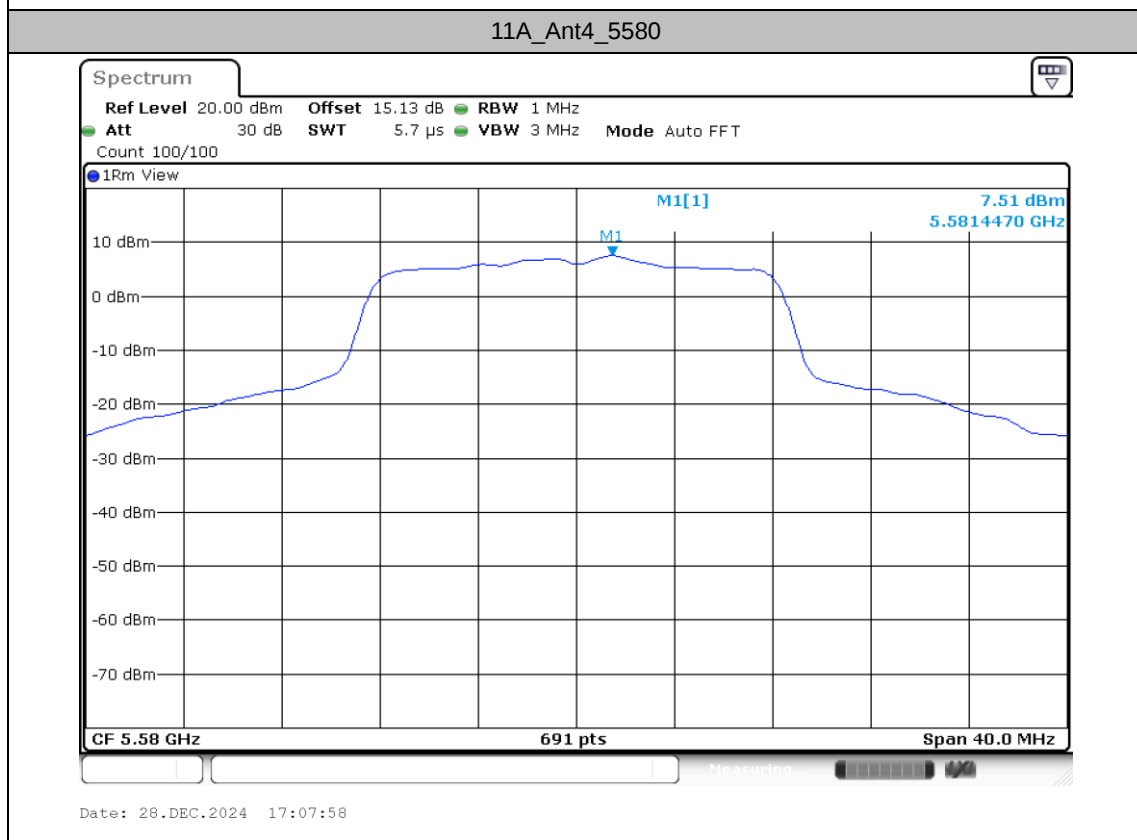
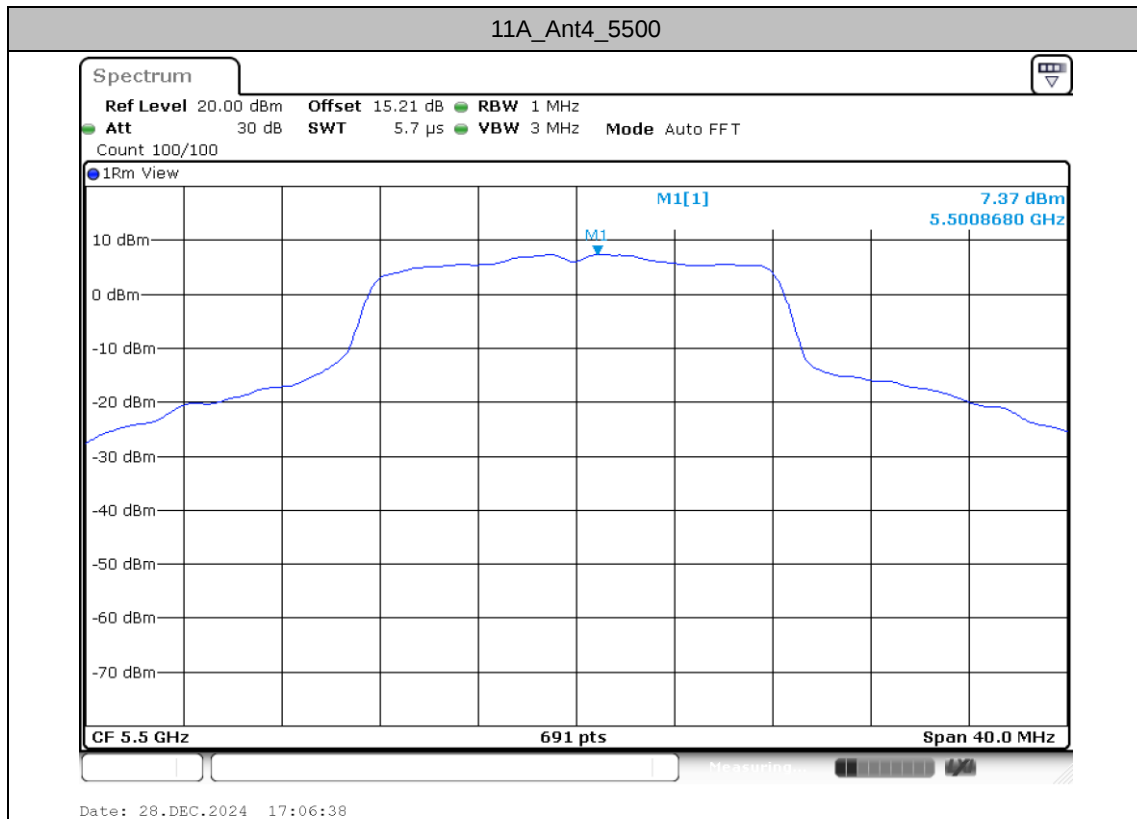
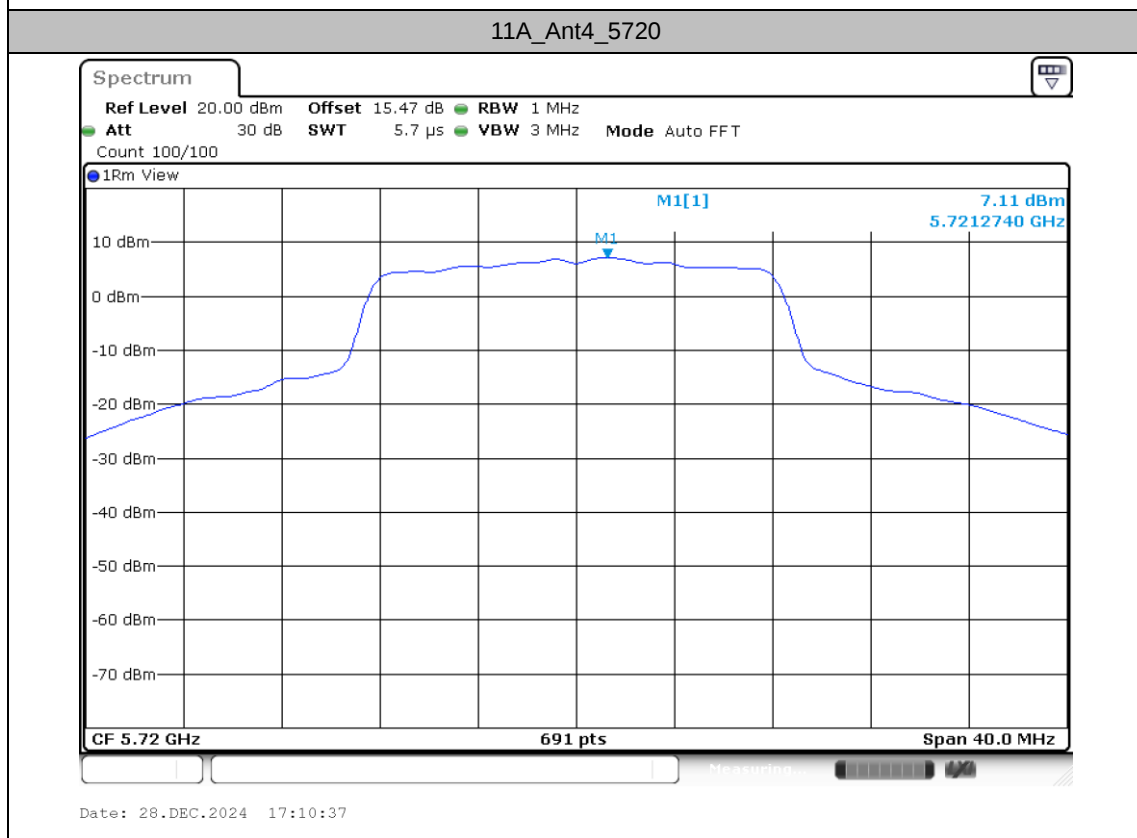



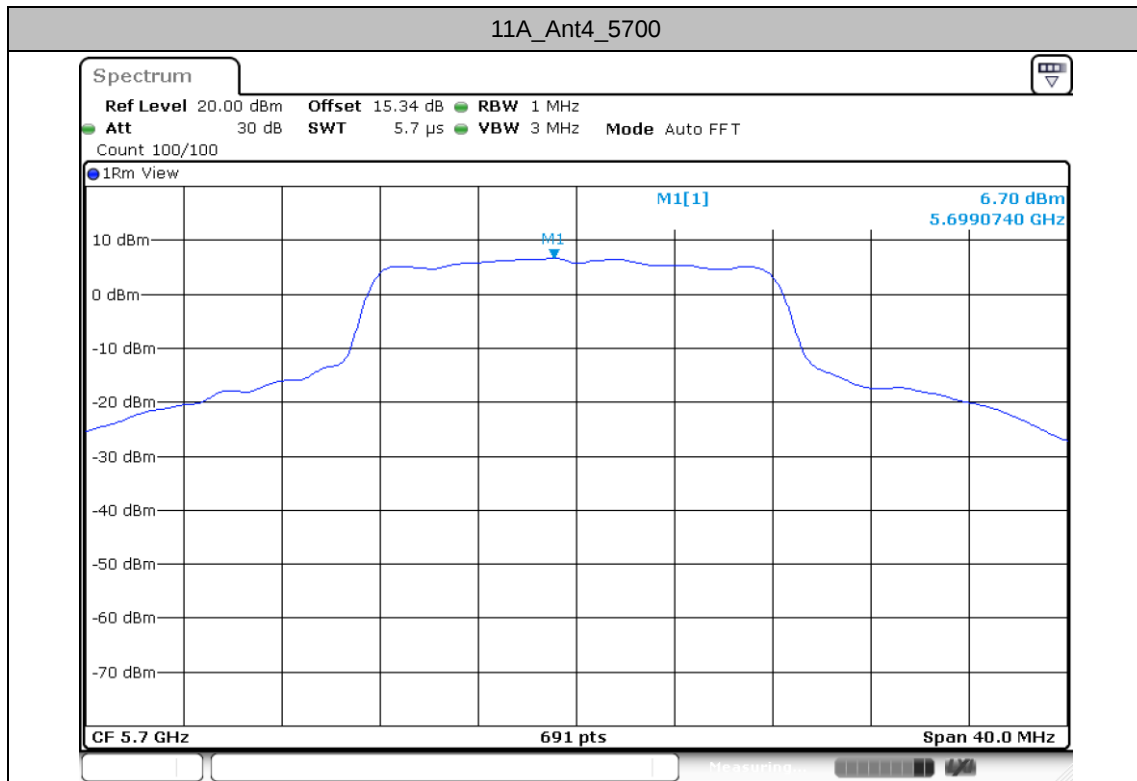


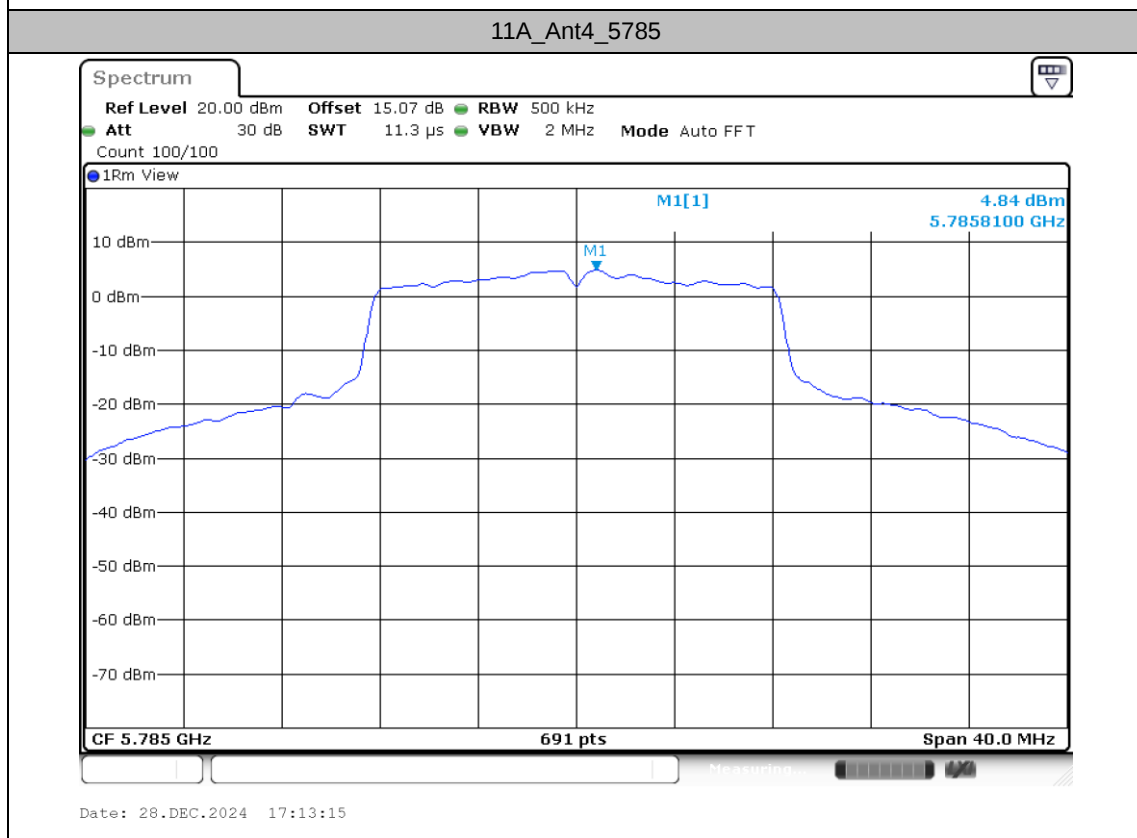


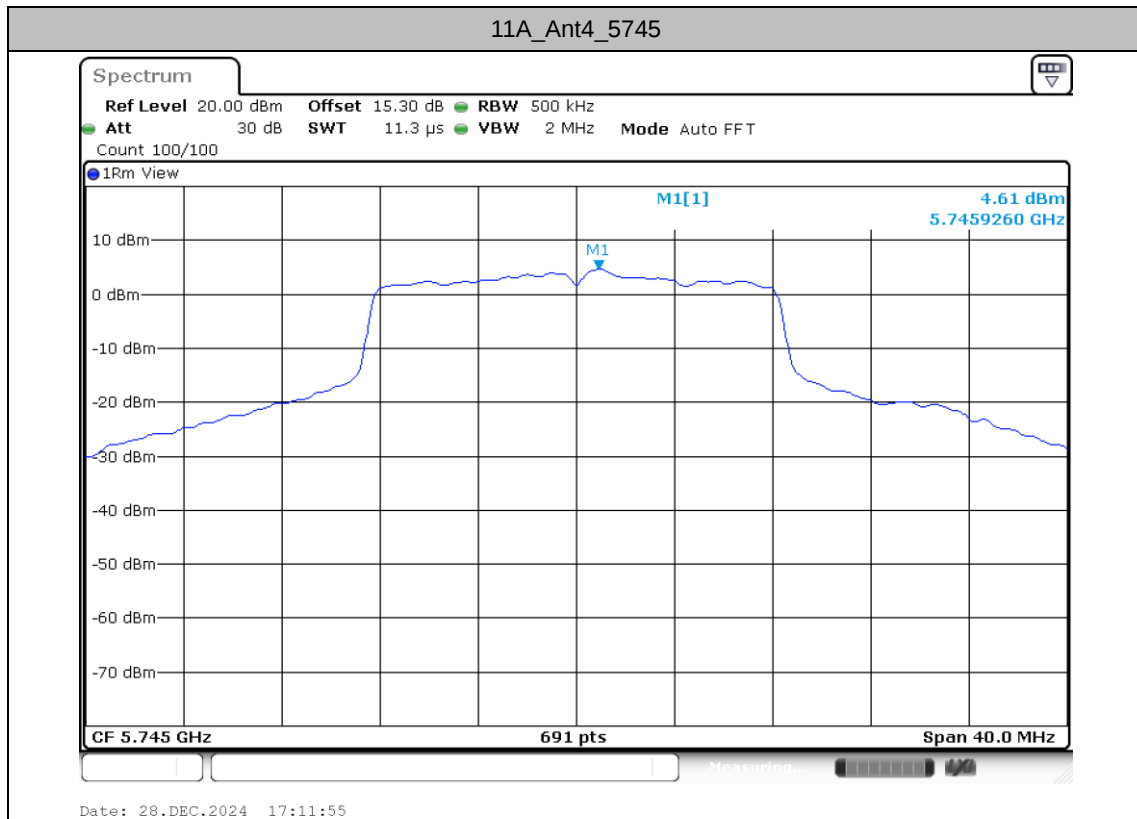


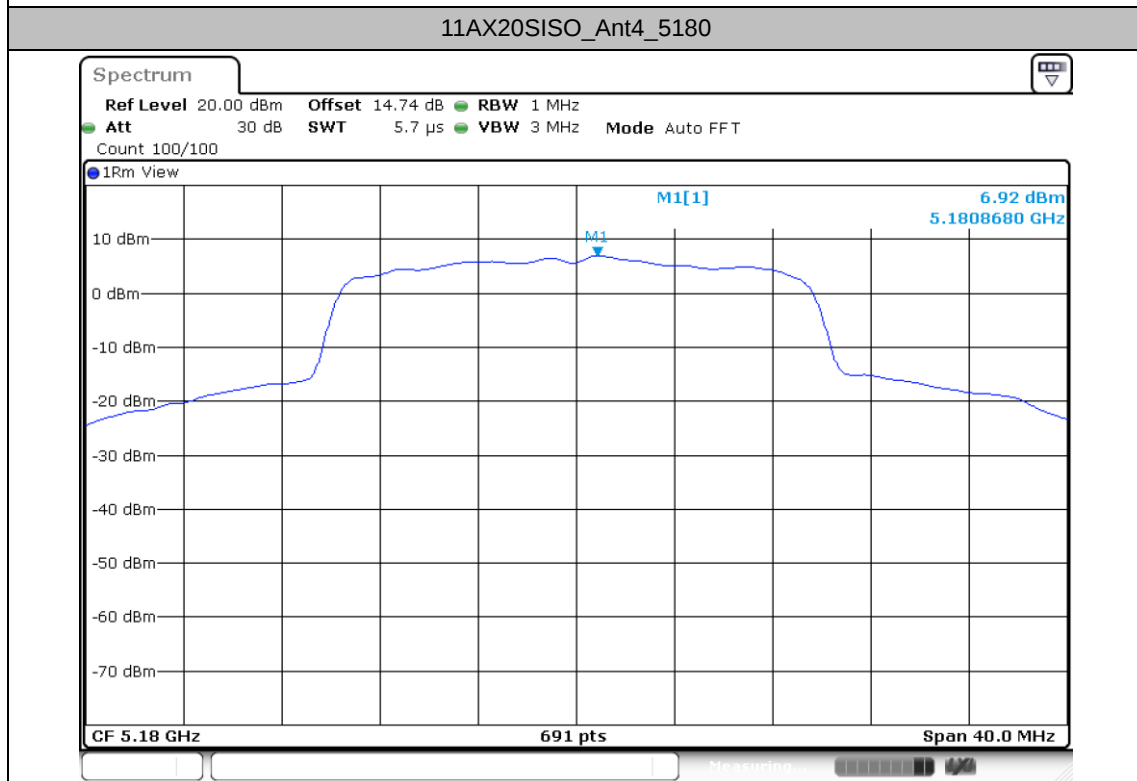


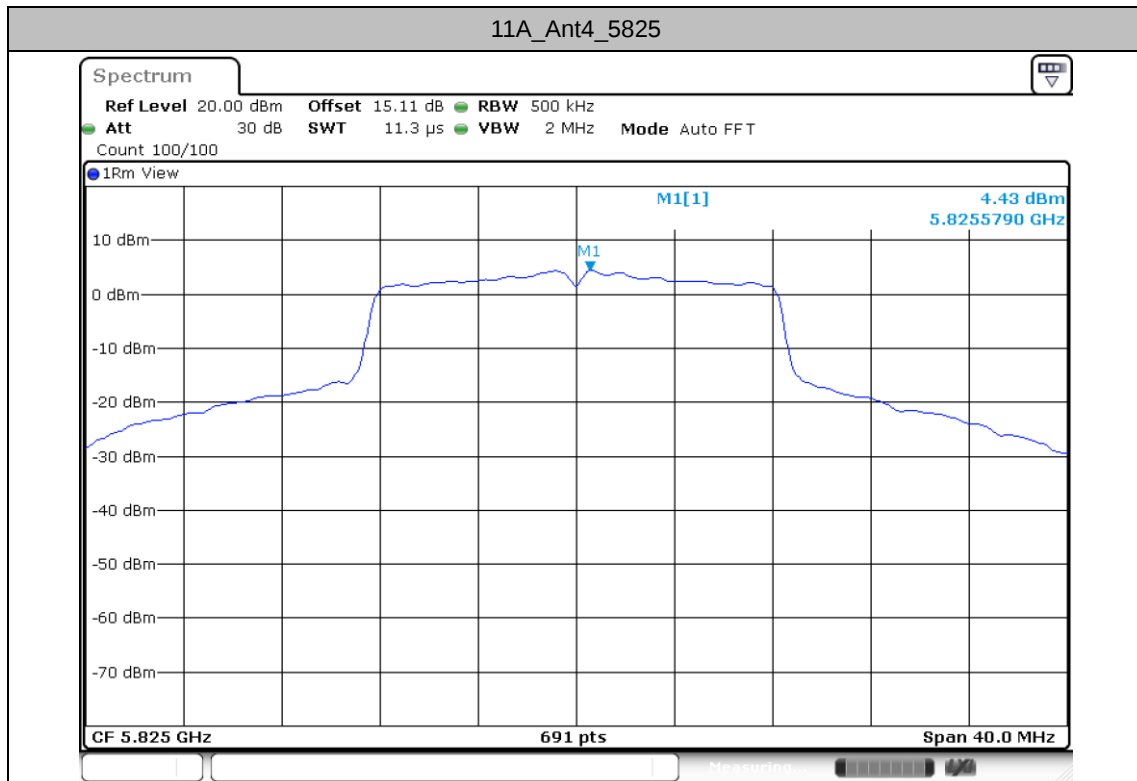


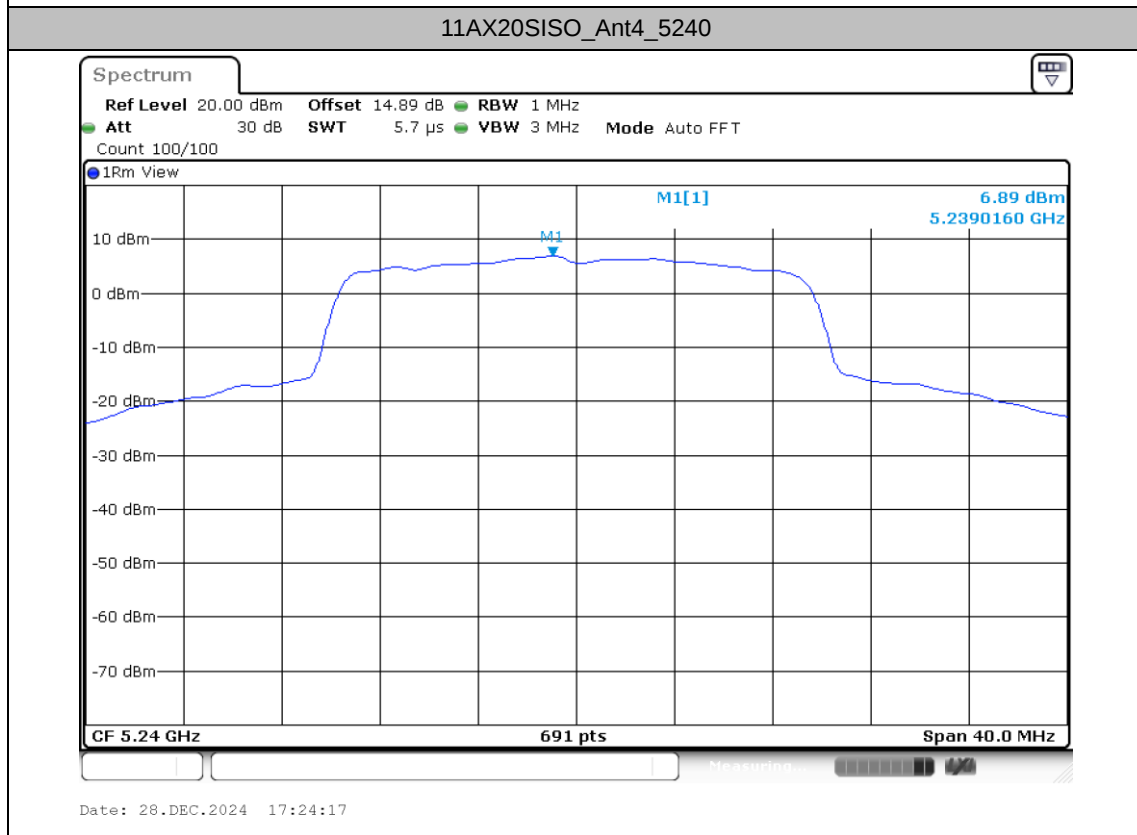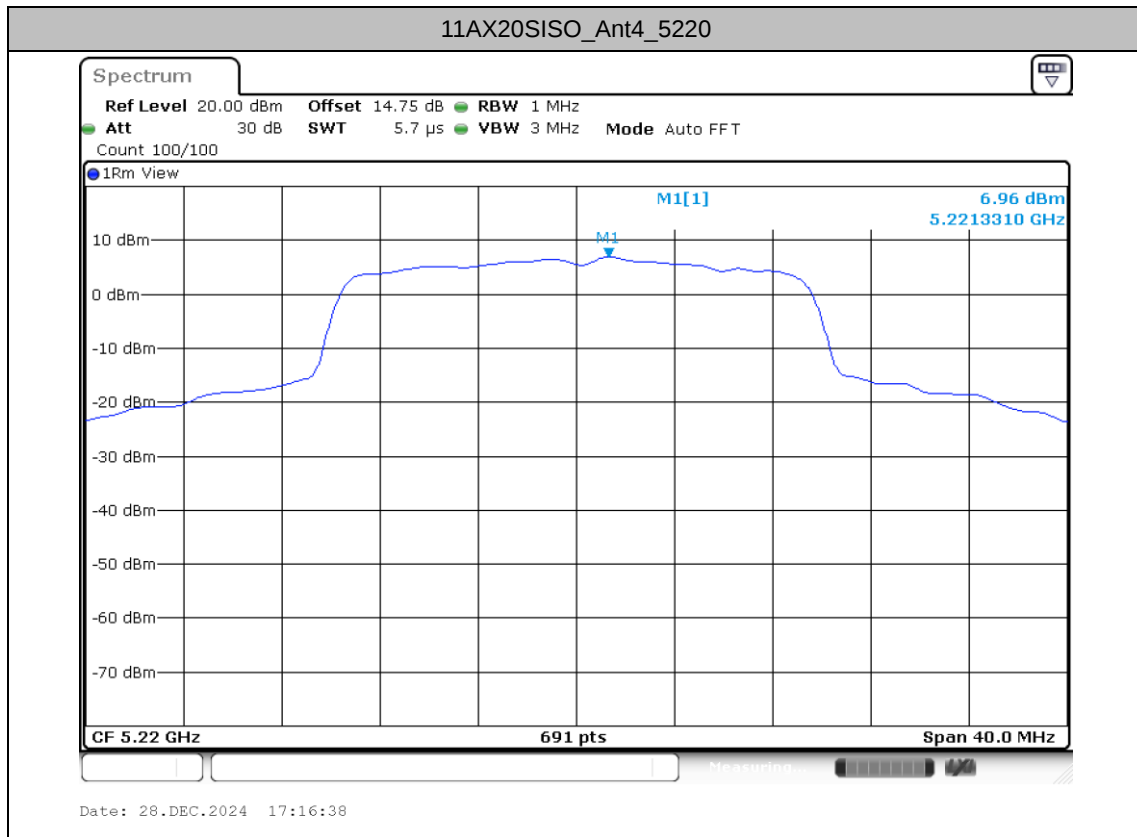



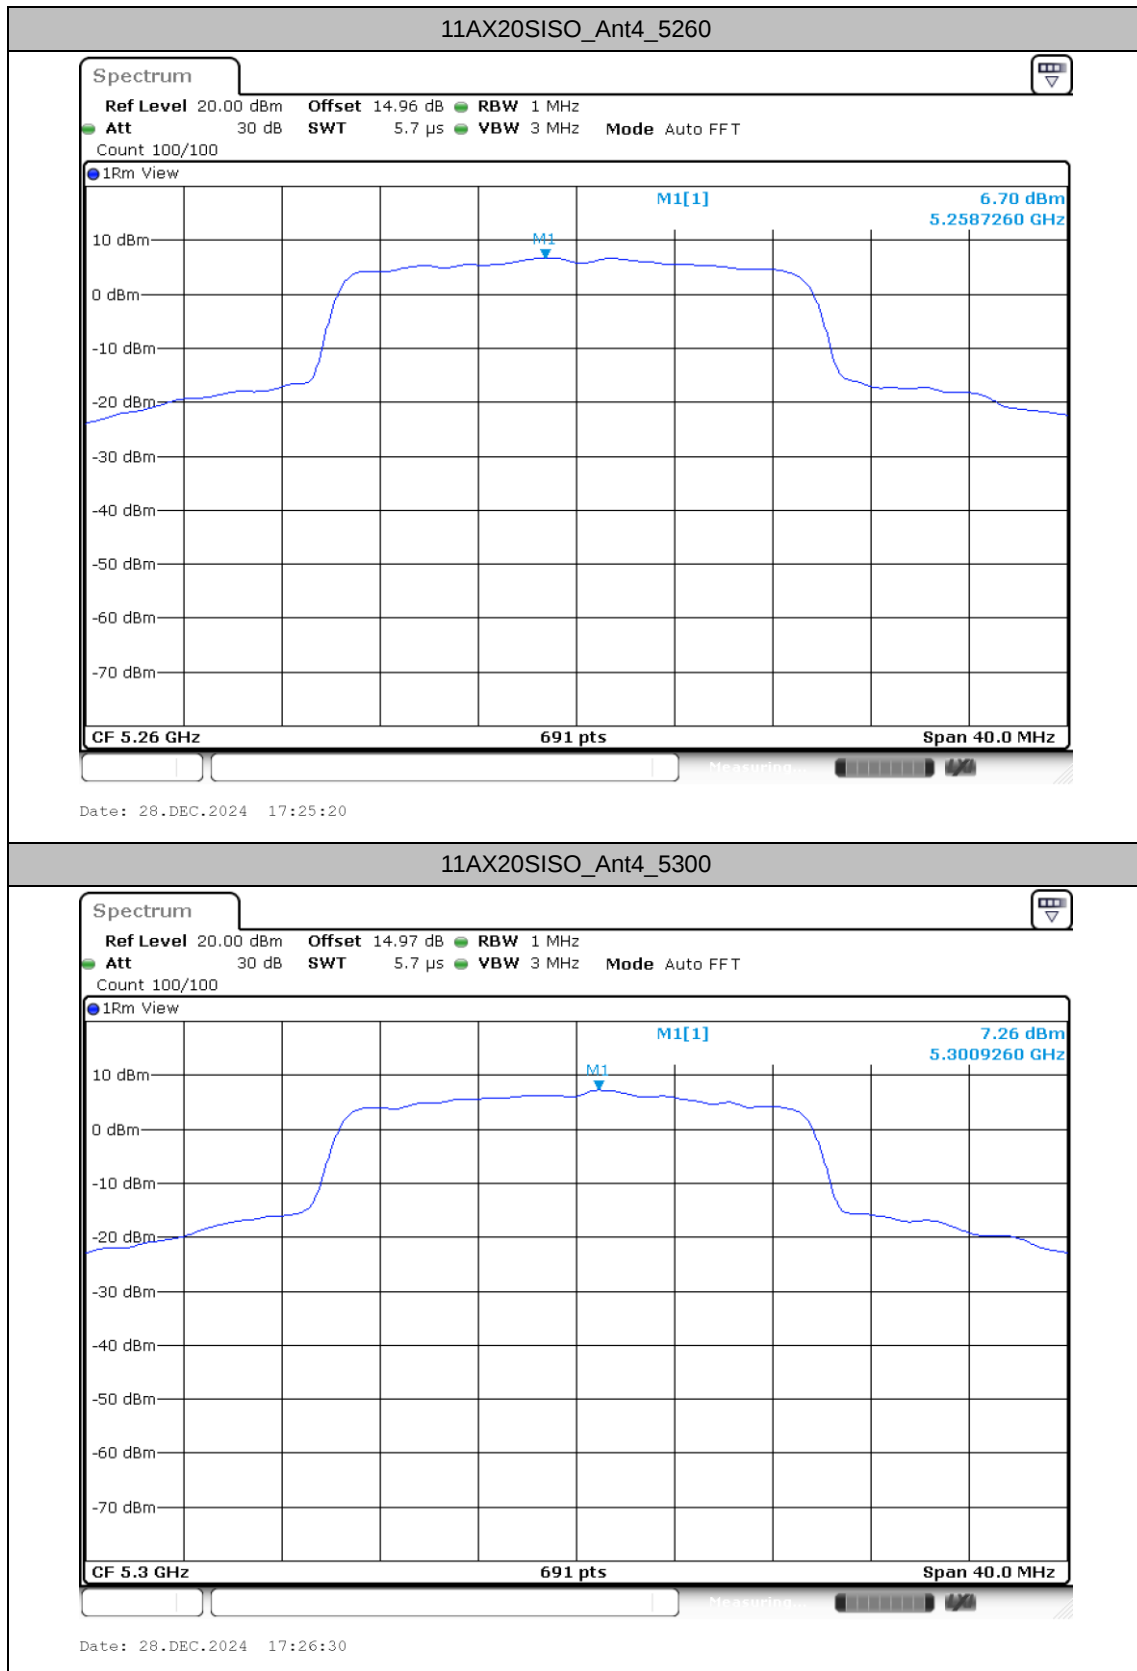


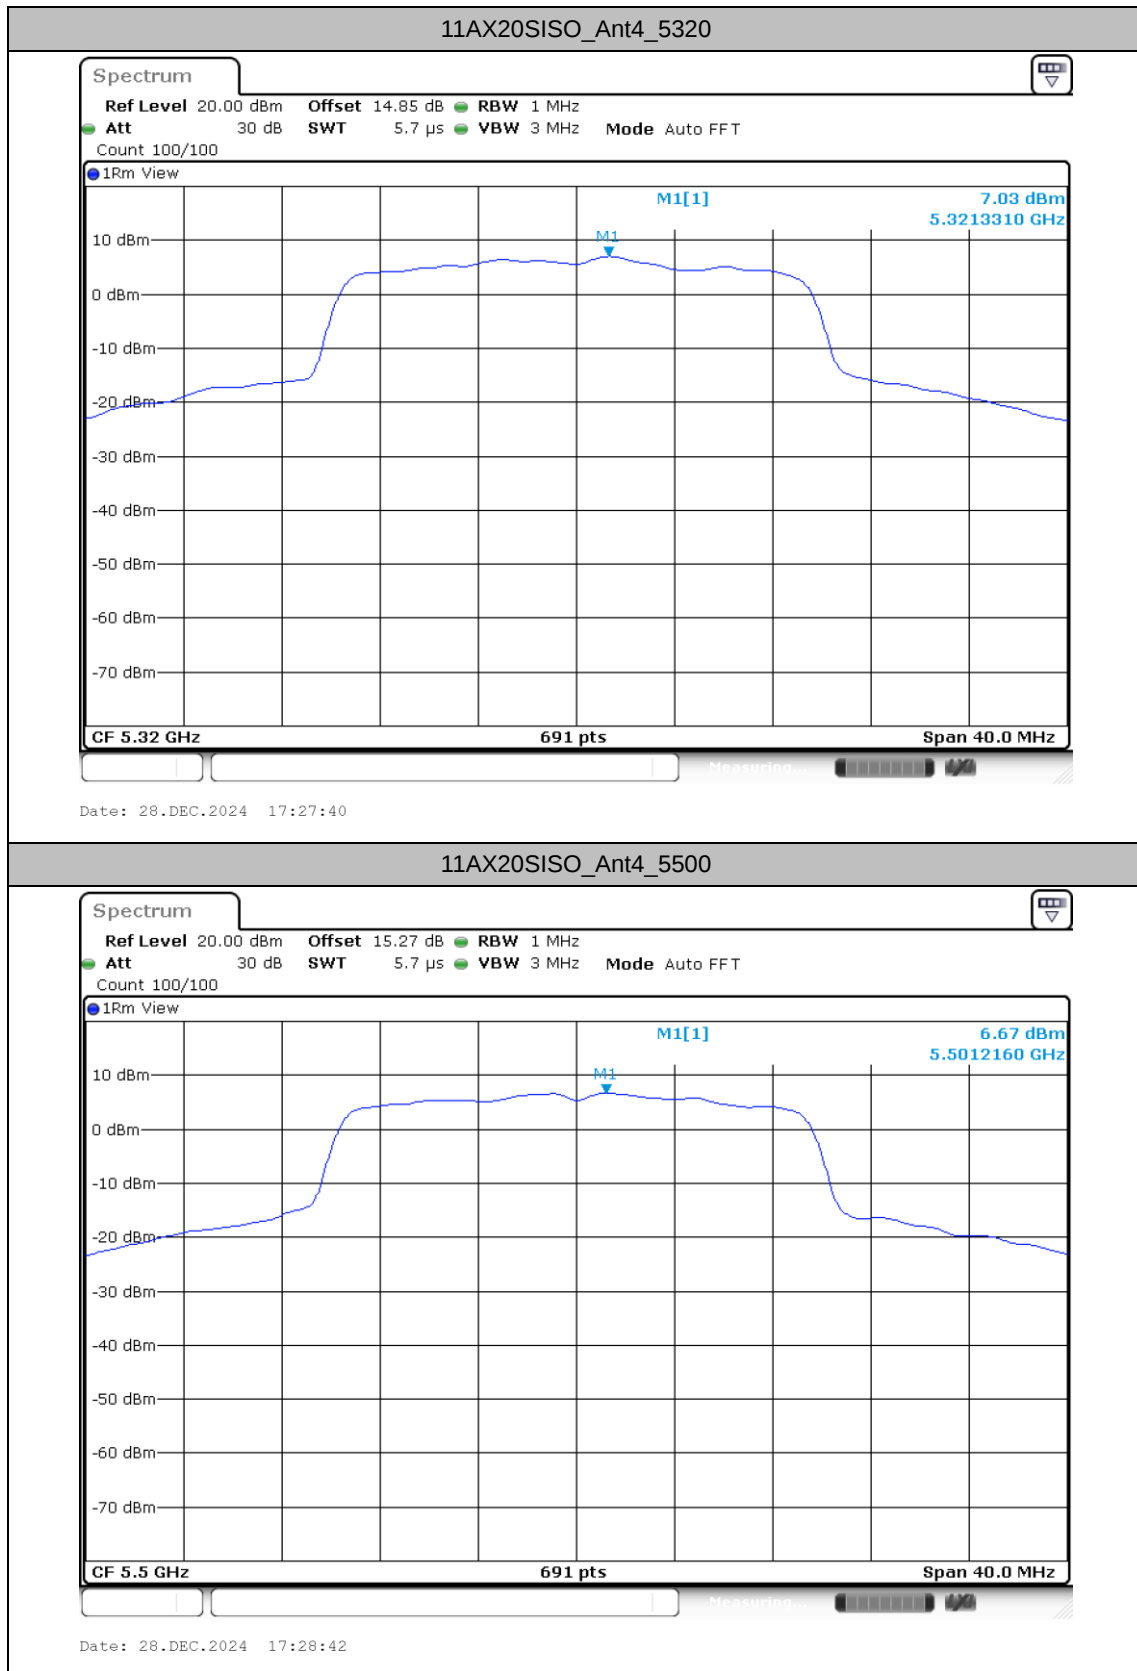


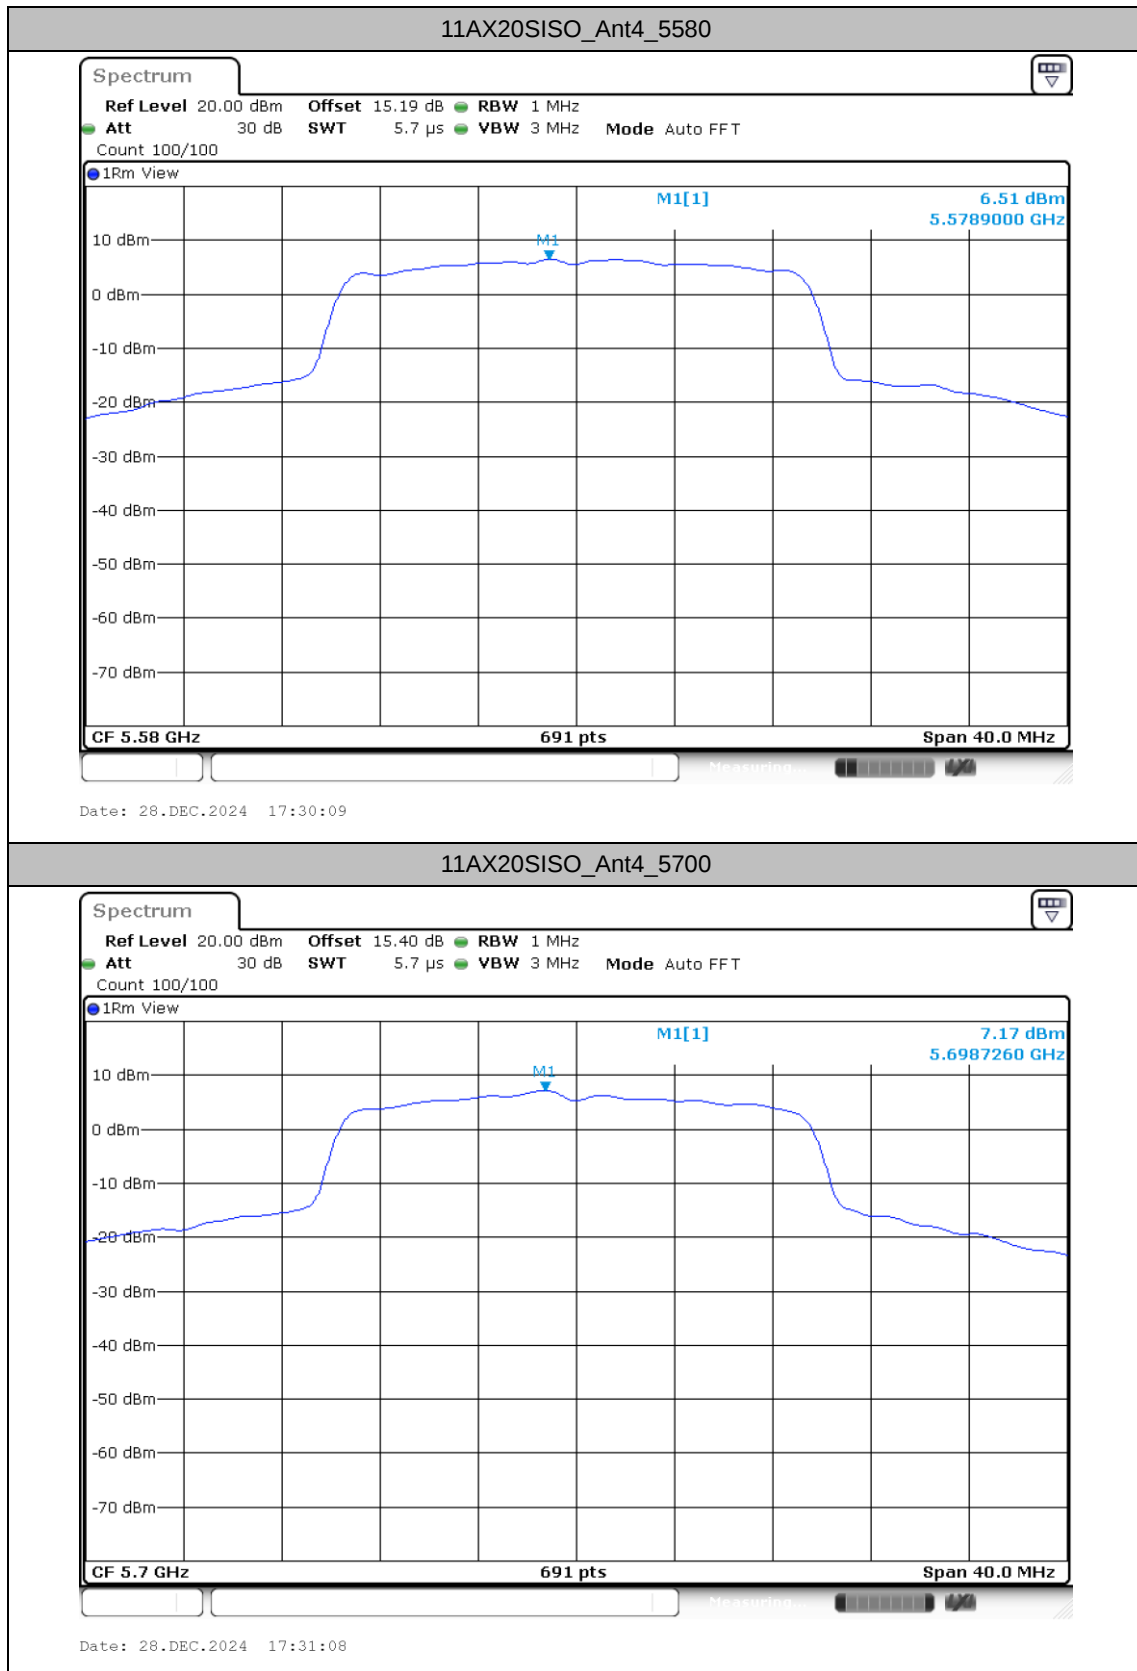


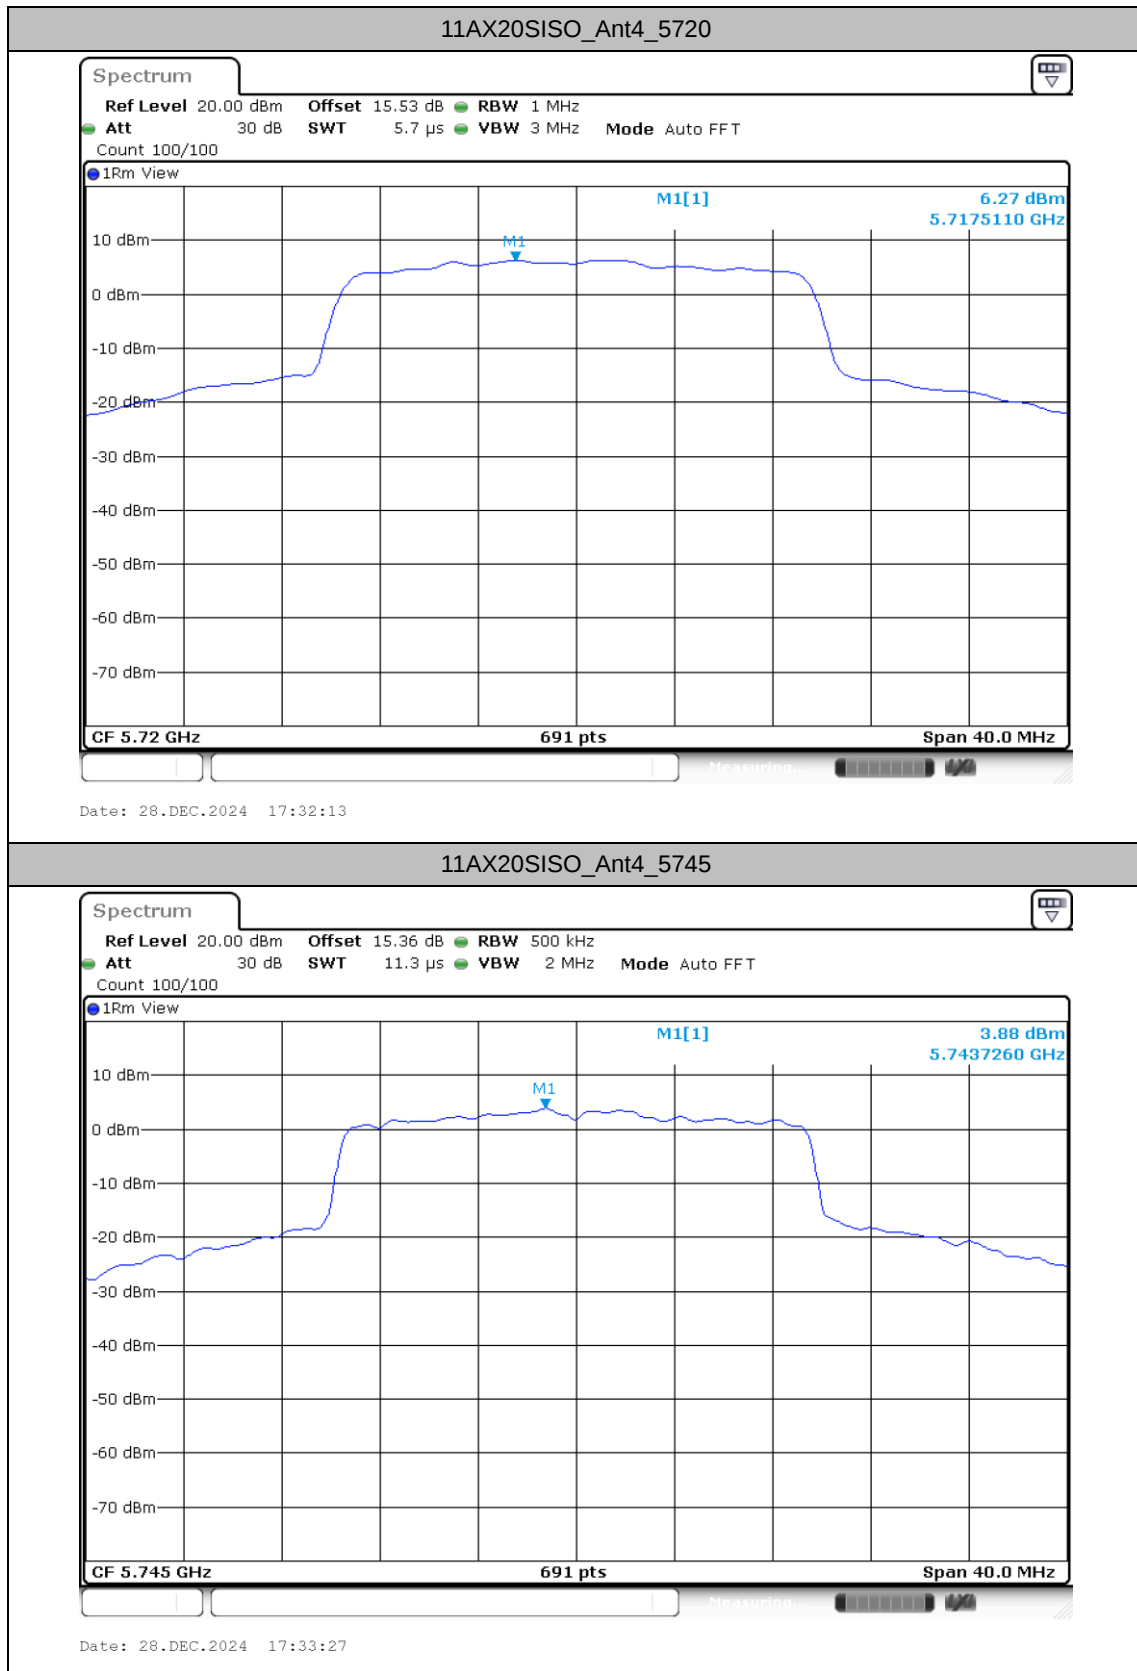



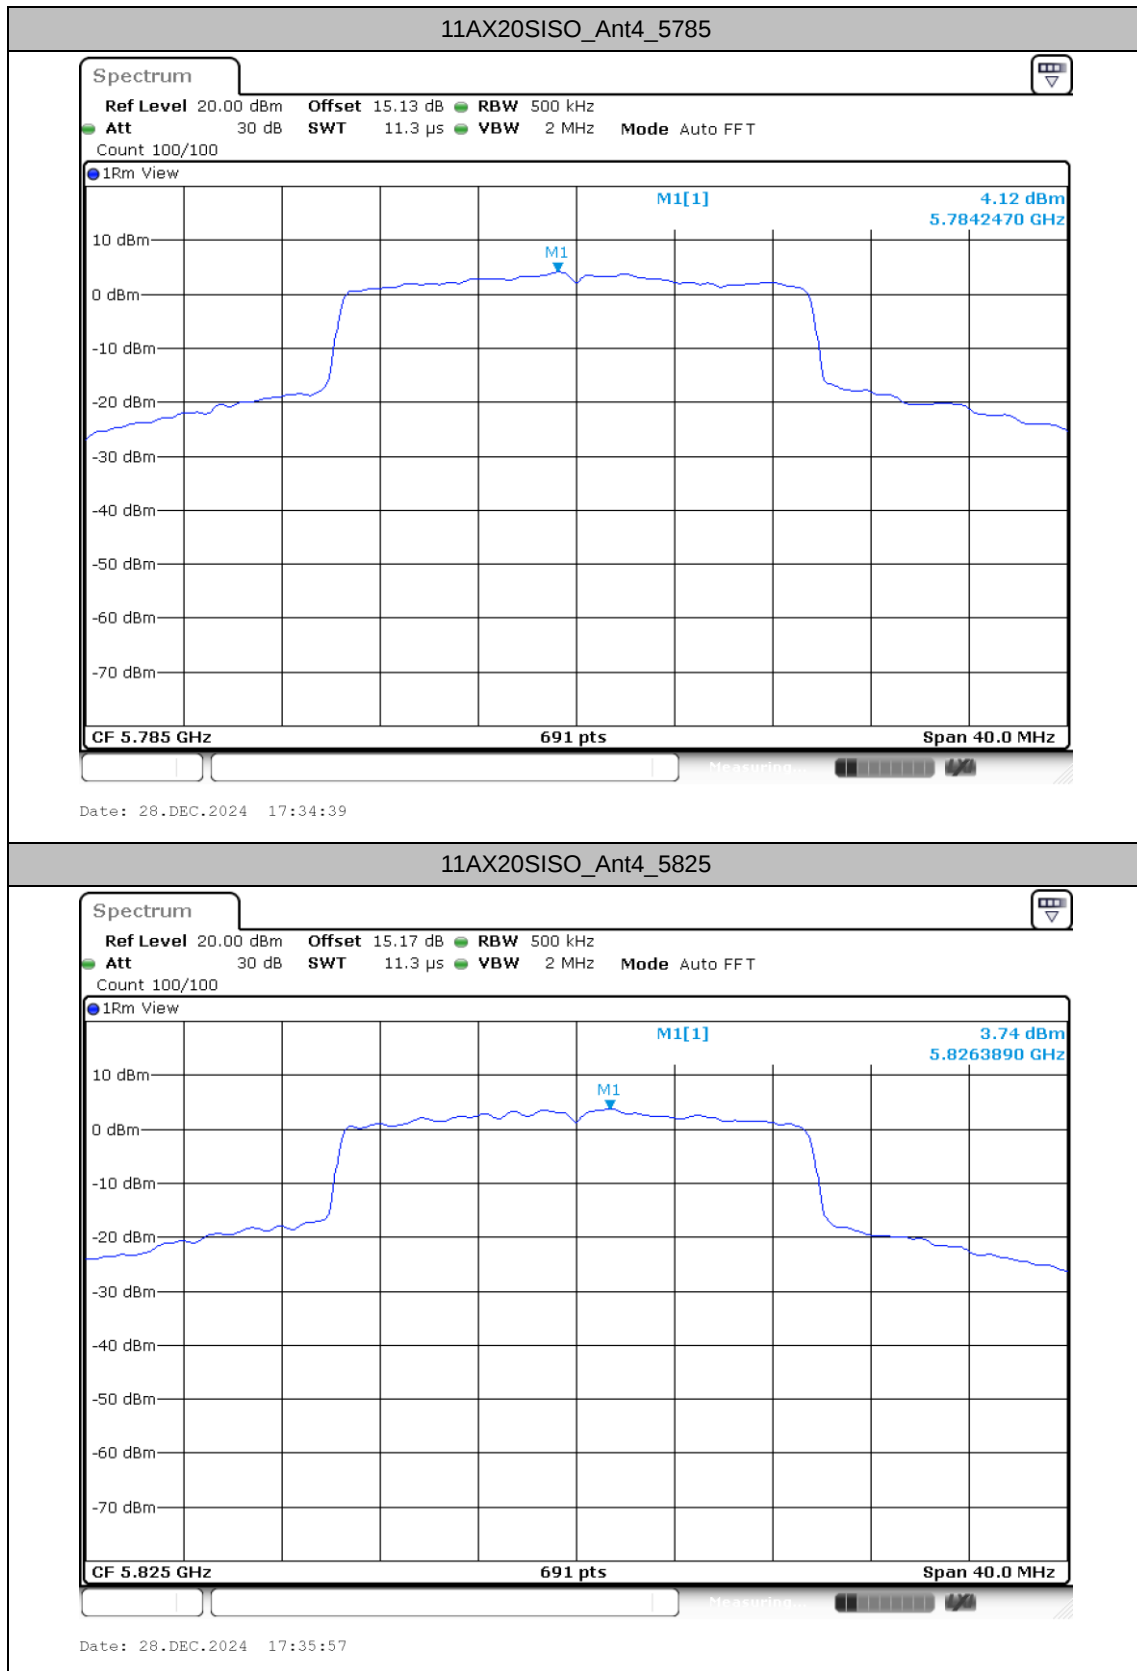


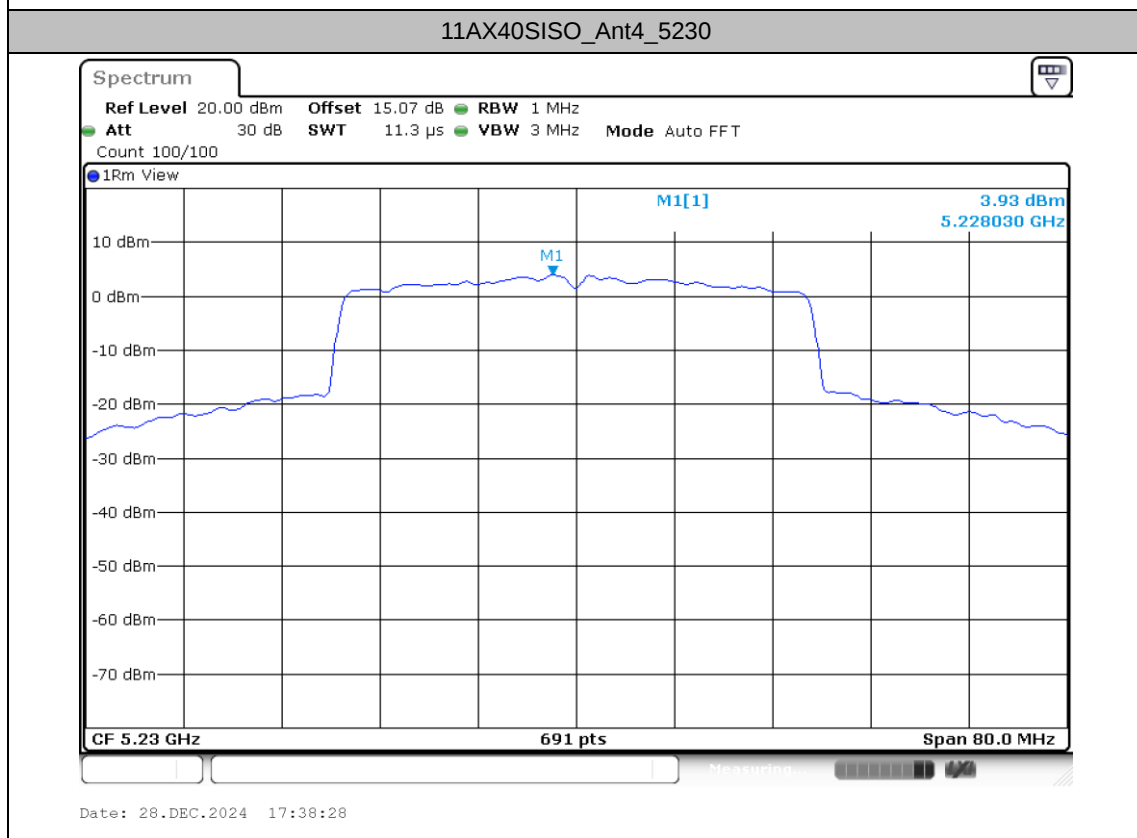
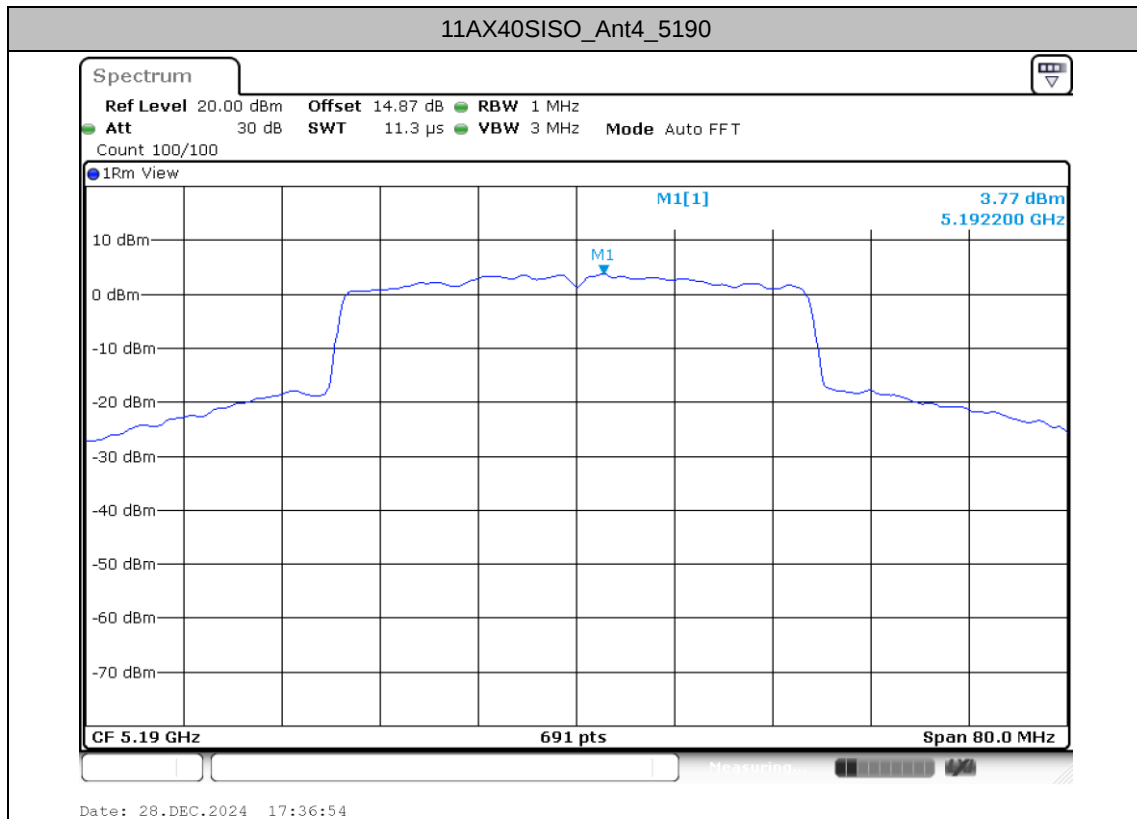



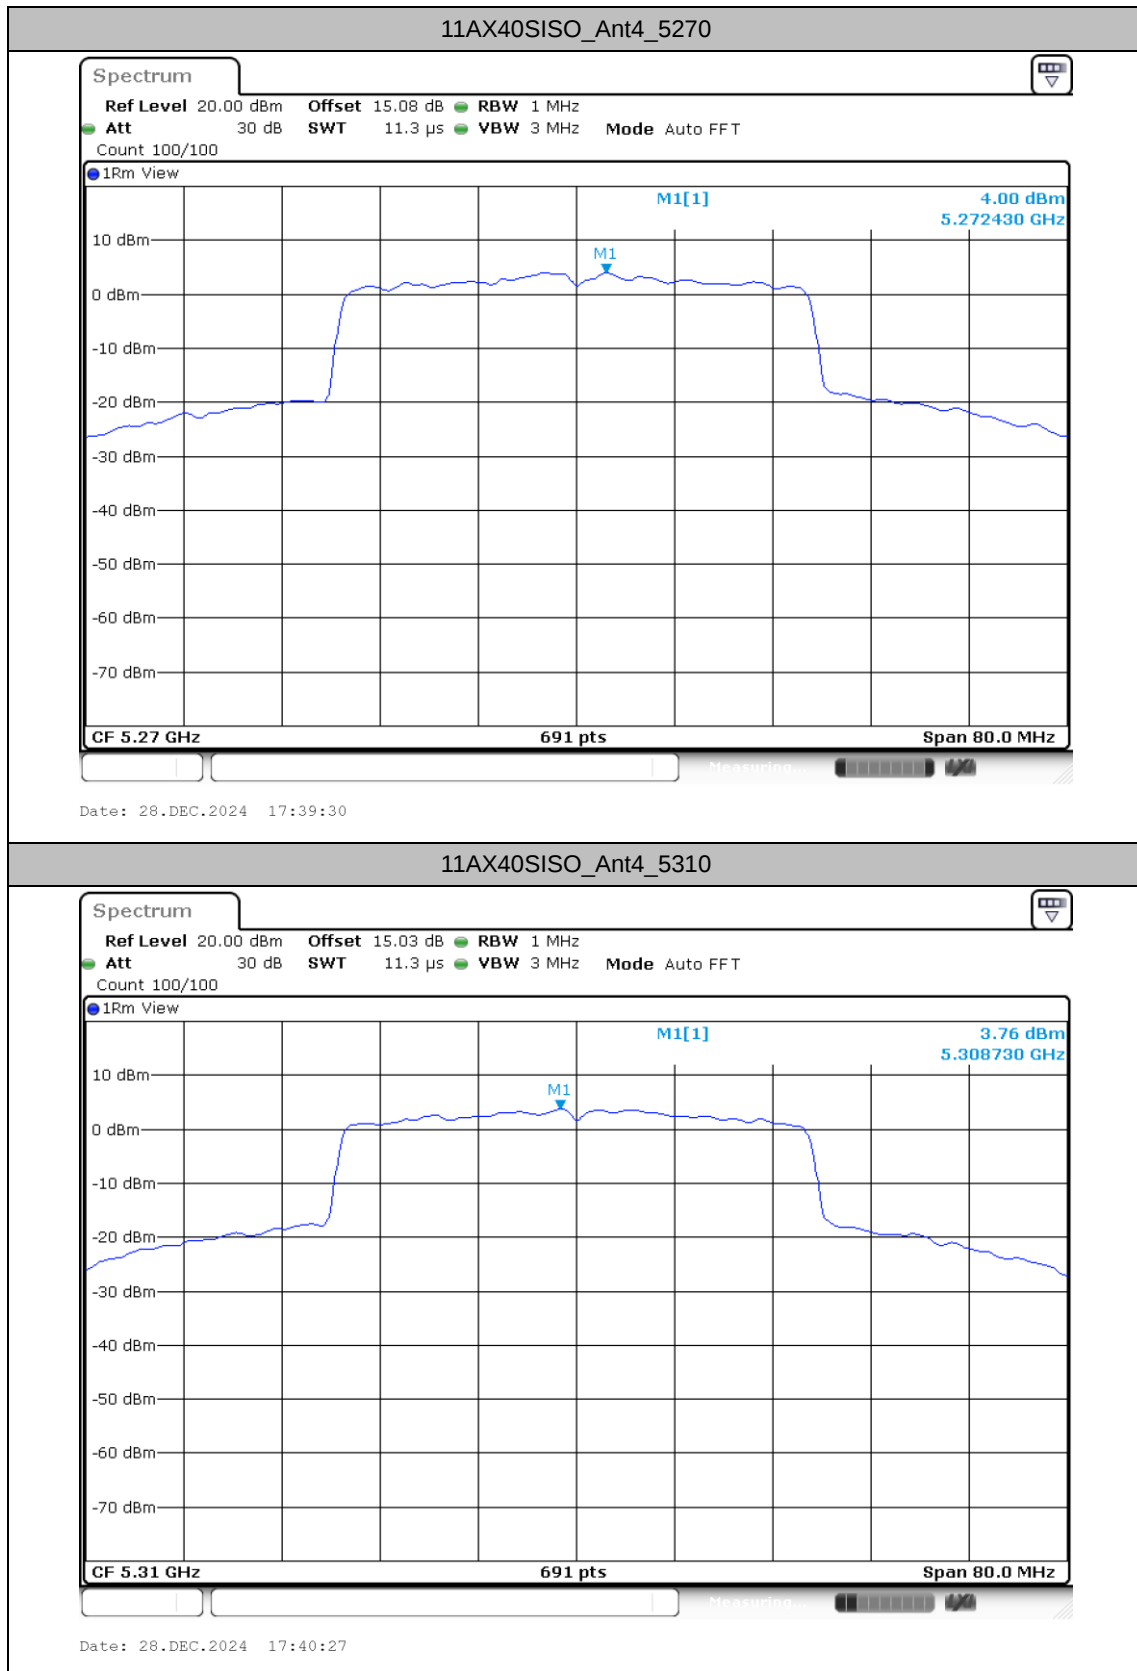



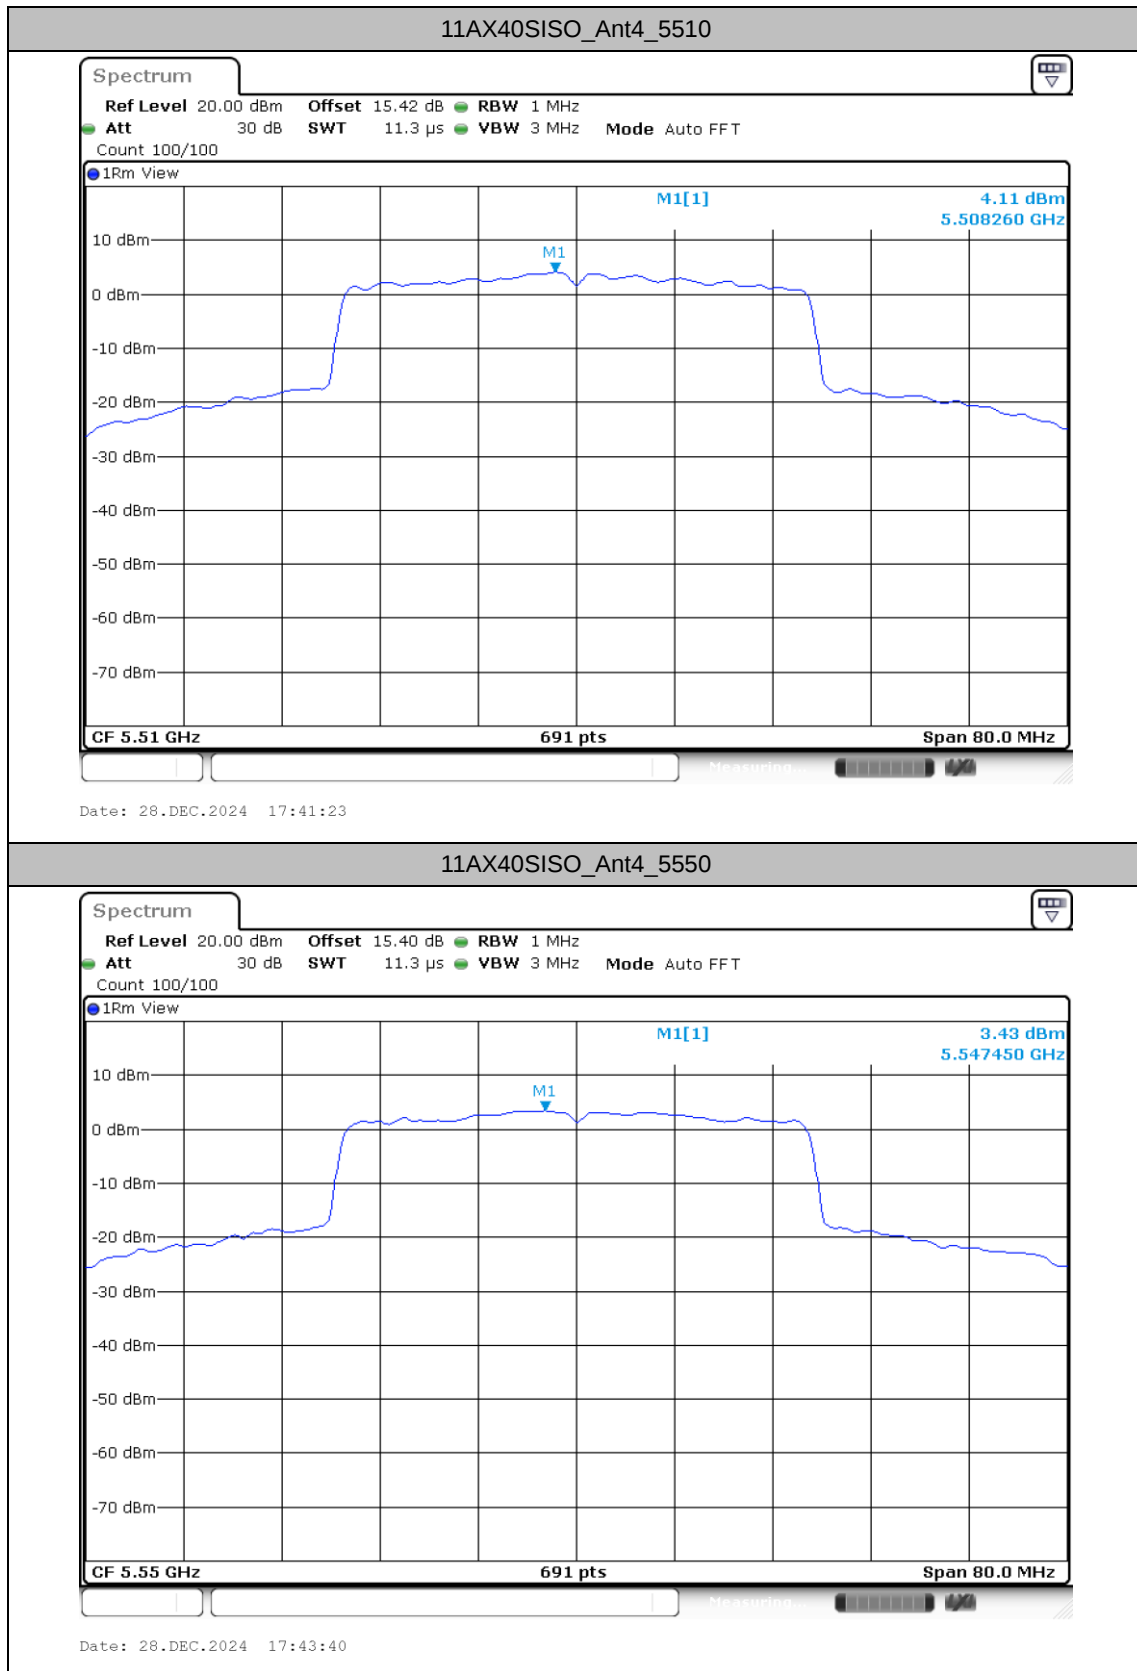


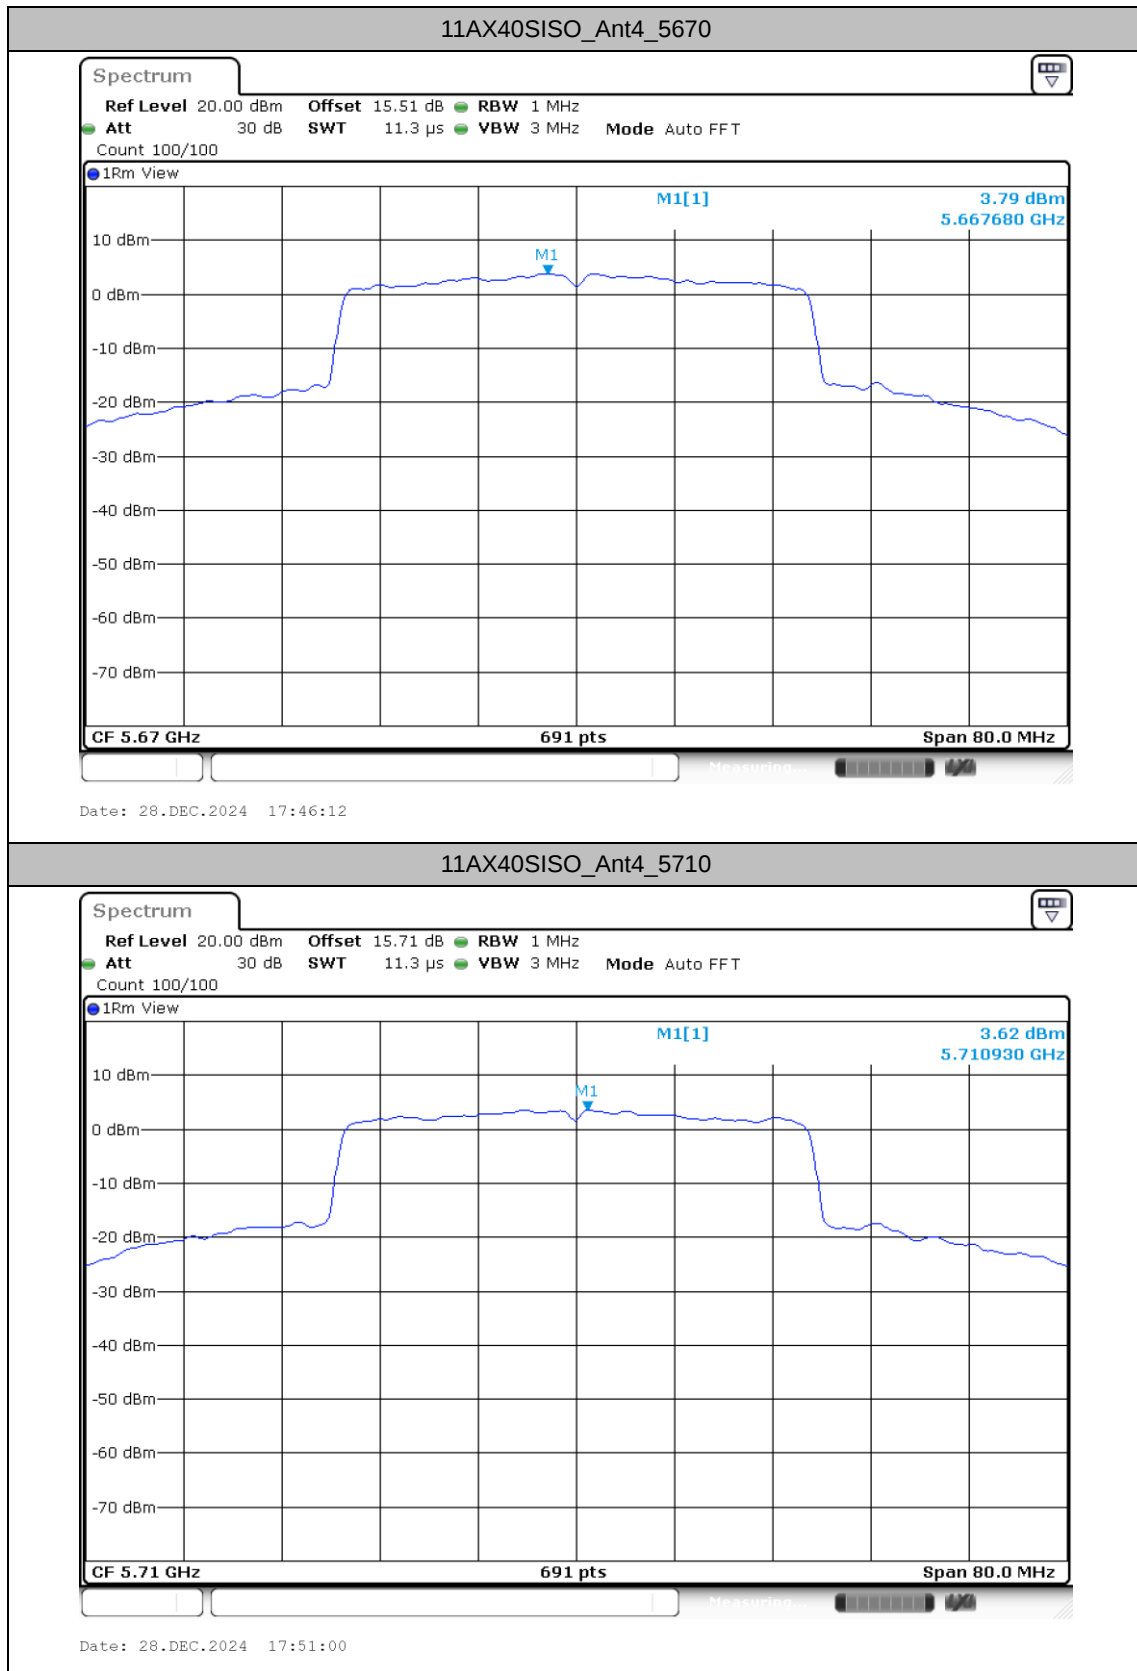

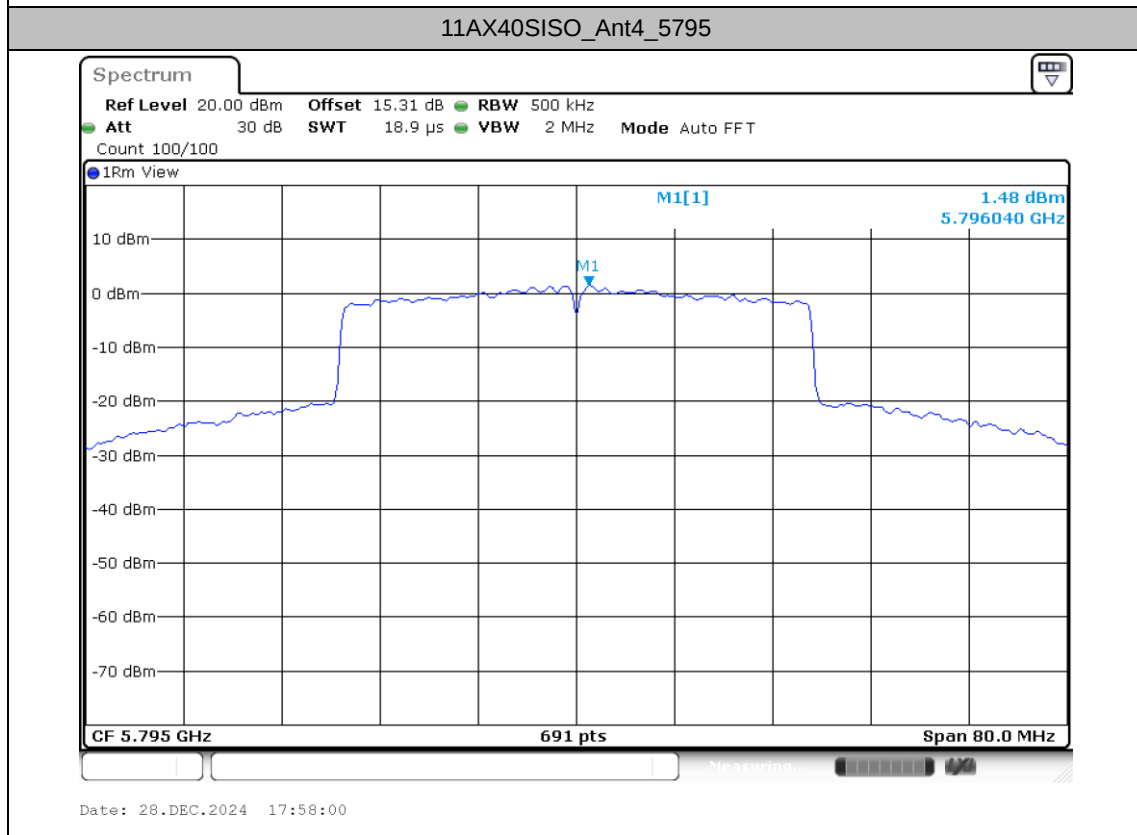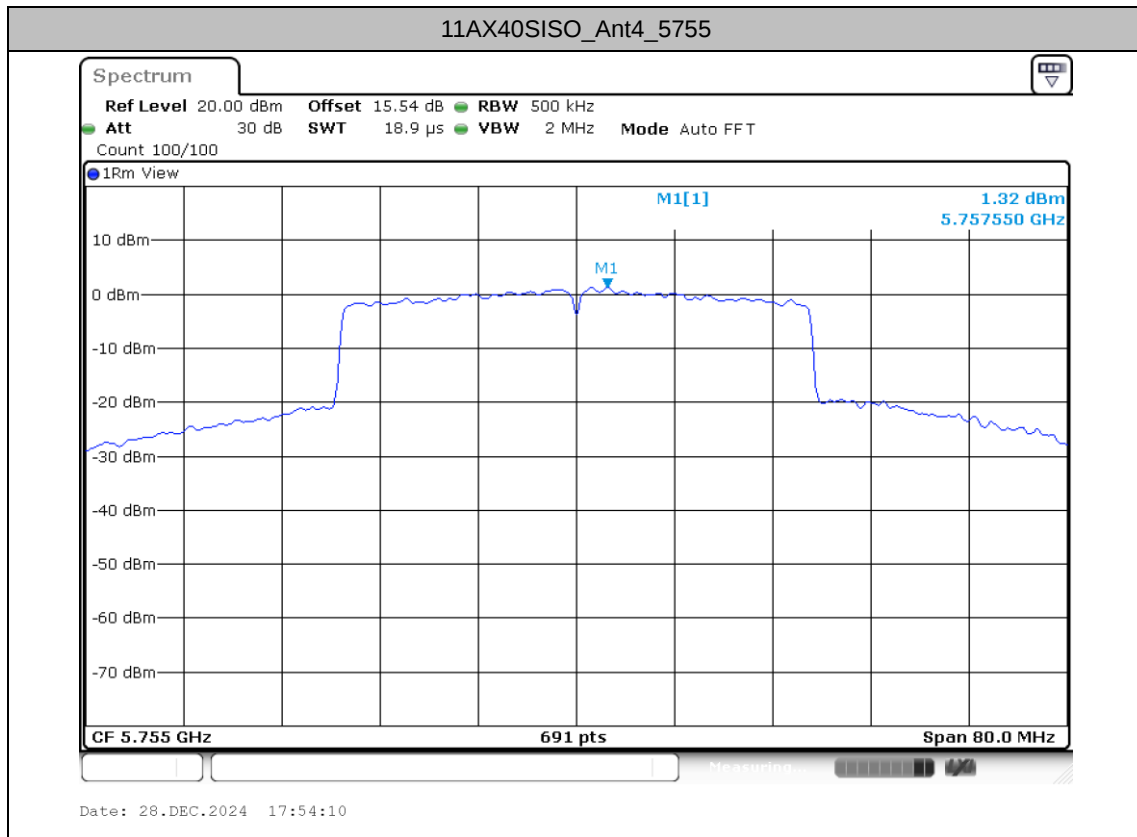

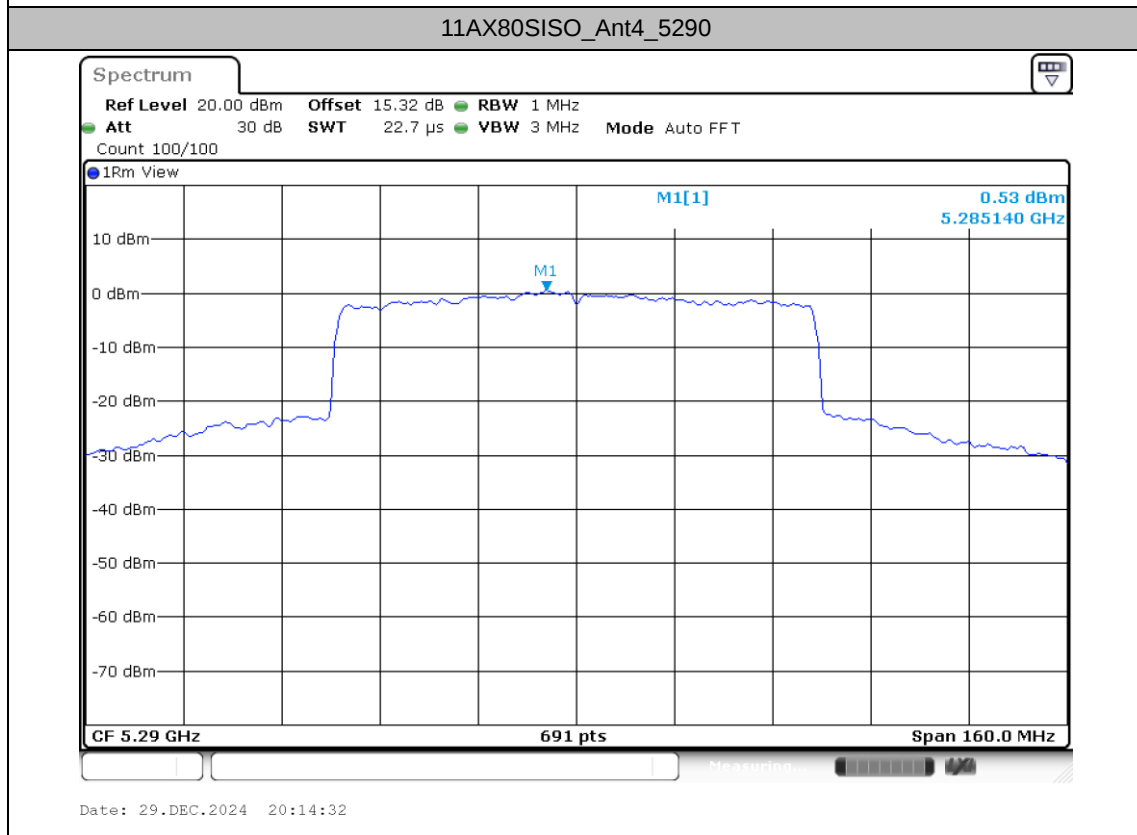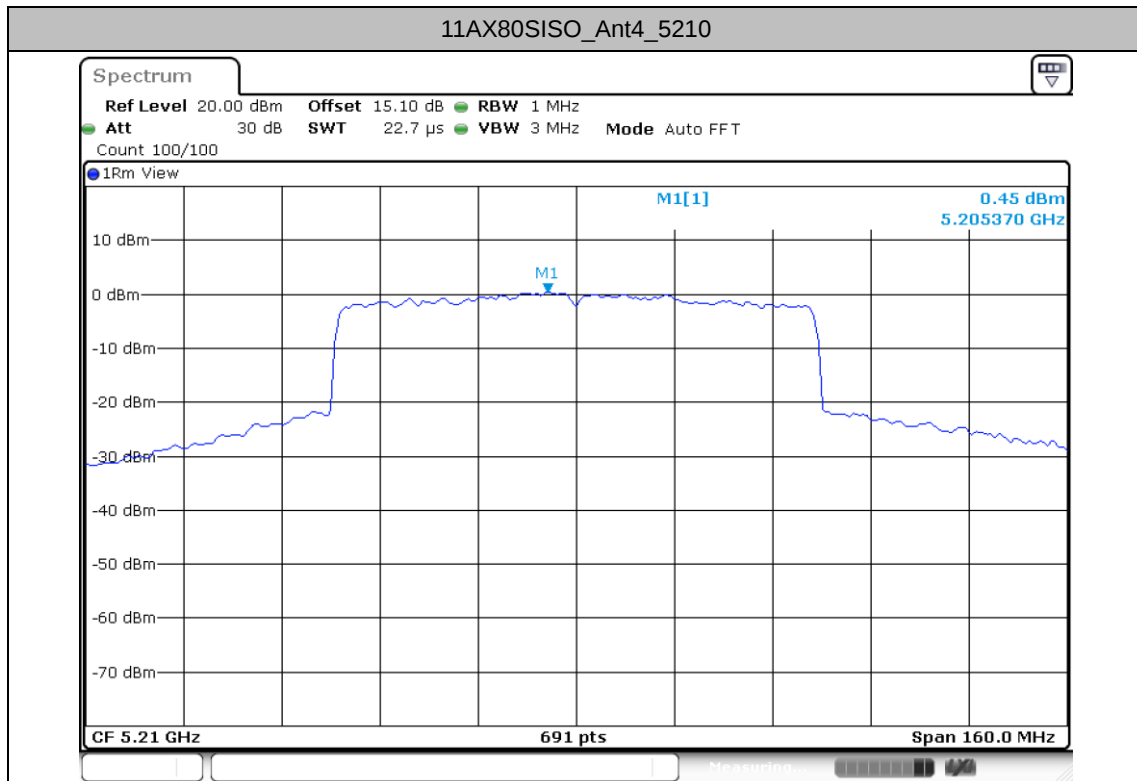

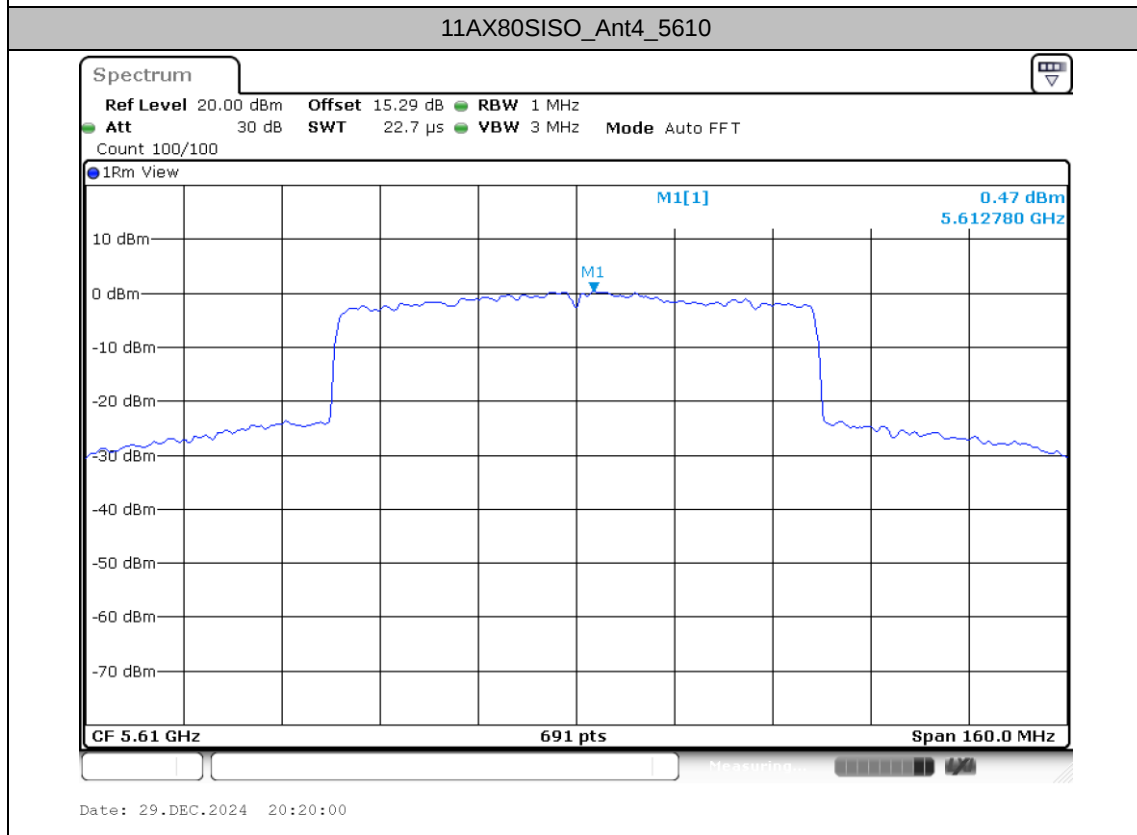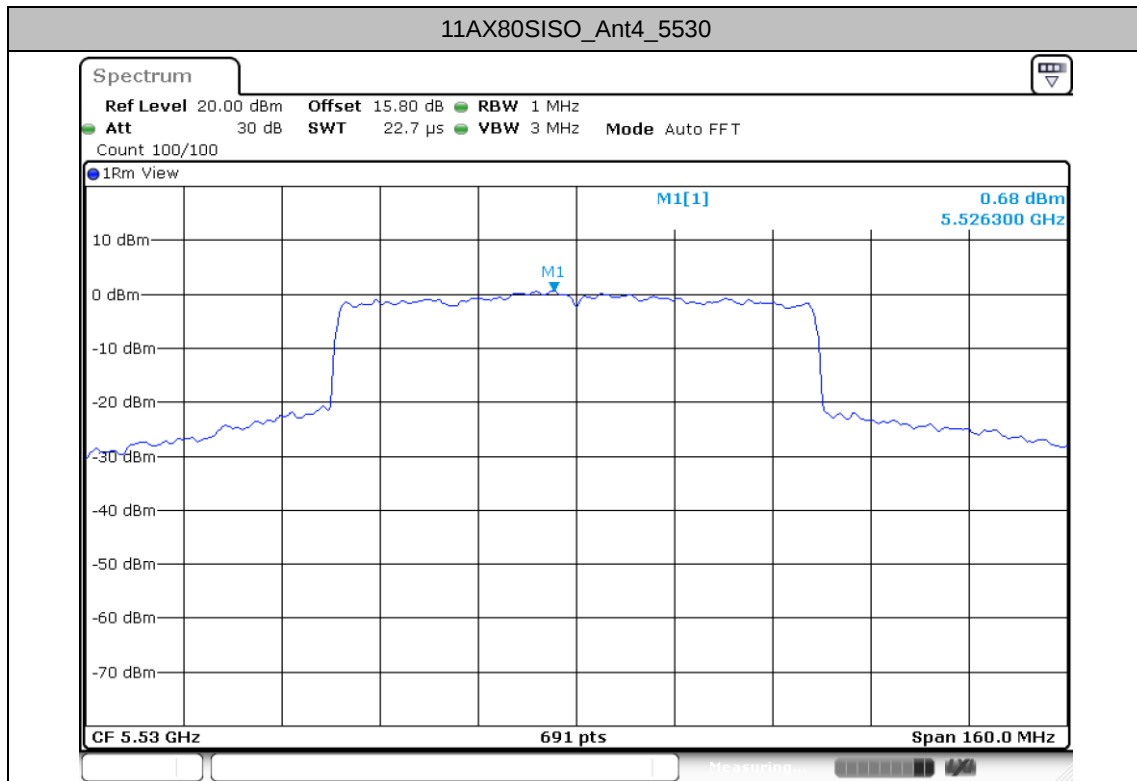

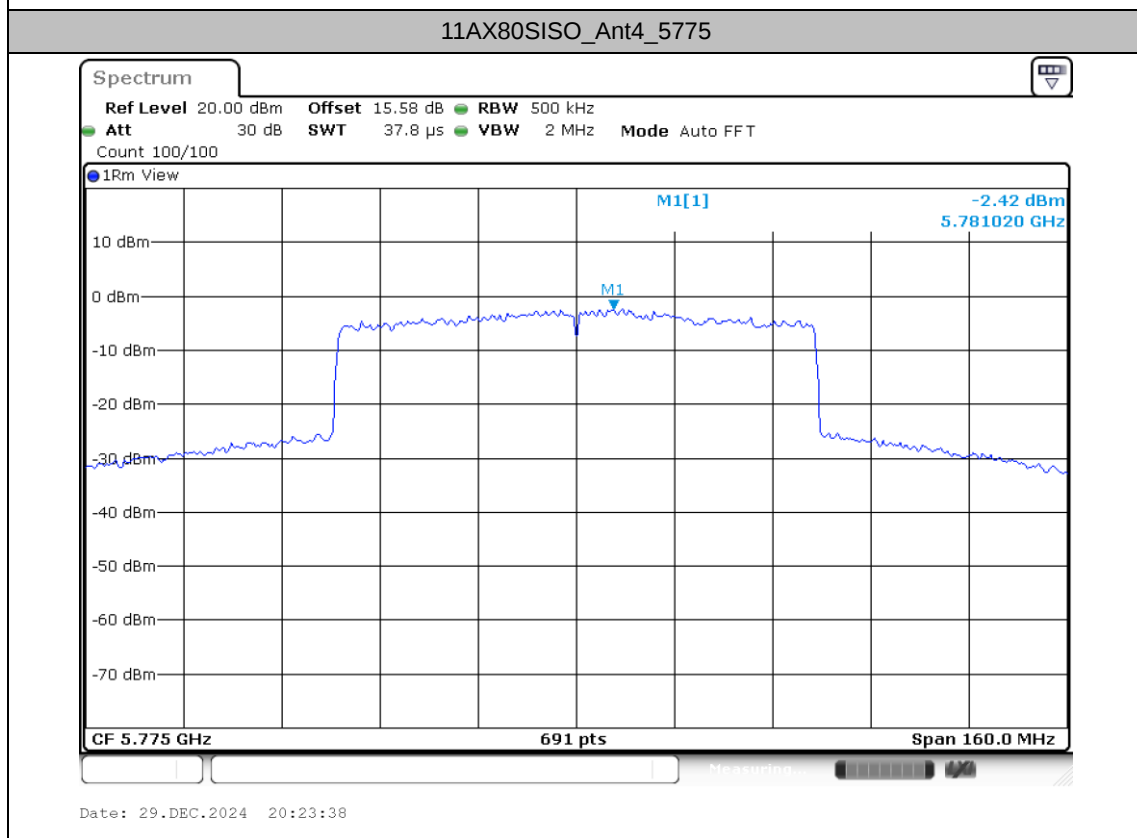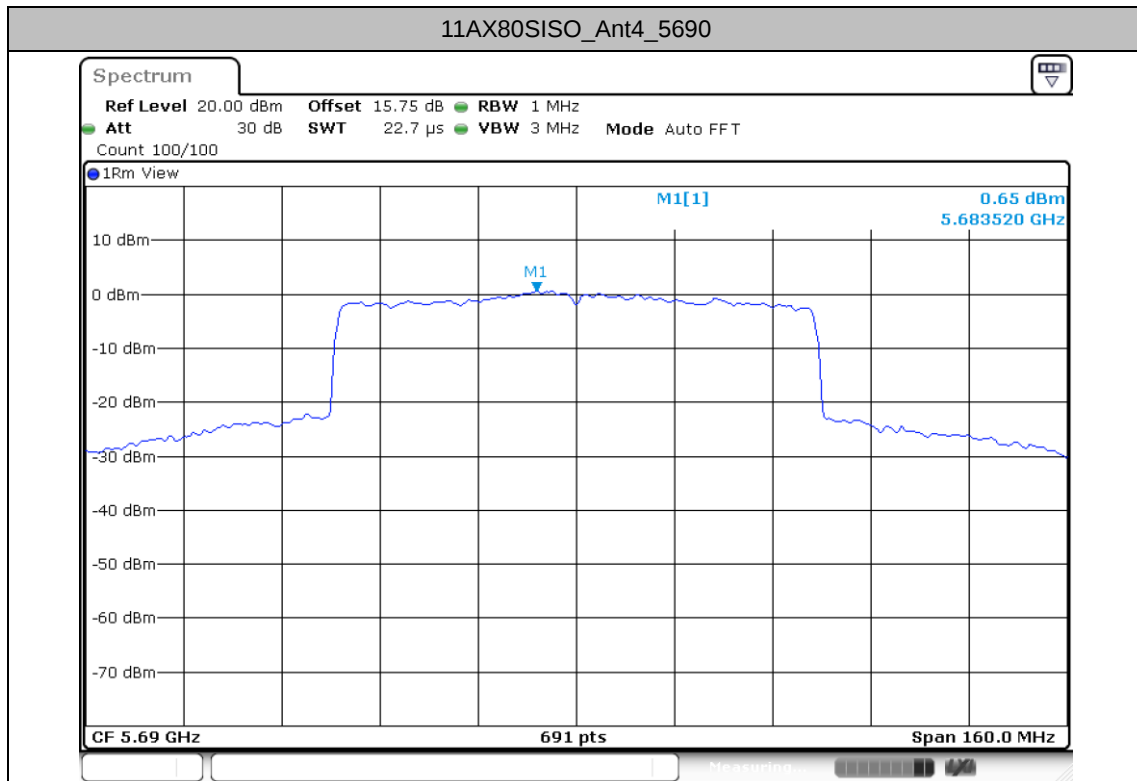



Single RU

Maximum conducted output power

Test Result

Test Mode	Antenna	Freq (MHz)	Ru Size	Ru Index	Set Power	Channel Power [dBm]	Duty Cycle [%]	DC Factor [dBm]	Result [dBm]	Conducted Limit [dBm]	Gain [dBi]	EIRP [dBm]	EIRP Limit [dBm]	Verdict
11AX20SISO	Ant4	5180	26Tone	RU0	9.5	8.17	95.28	0.21	8.38	≤24.00	-6.50	1.88	---	PASS
			52Tone	RU37	12.5	11.39	95.28	0.21	11.60	≤24.00	-6.50	5.10	---	PASS
			106Tone	RU53	15.5	14.48	95.28	0.21	14.69	≤24.00	-6.50	8.19	---	PASS
		5320	26Tone	RU8	9	8.23	95.28	0.21	8.44	≤23.98	-6.70	1.74	≤26.99	PASS
			52Tone	RU40	12	11.33	95.28	0.21	11.54	≤23.98	-6.70	4.84	≤26.99	PASS
			106Tone	RU54	15	14.41	95.28	0.21	14.62	≤23.98	-6.70	7.92	≤26.99	PASS
		5500	26Tone	RU0	9.5	8.98	95.28	0.21	9.19	≤23.98	-6.90	2.29	≤26.99	PASS
			52Tone	RU37	12.5	11.83	95.28	0.21	12.04	≤23.98	-6.90	5.14	≤26.99	PASS
			106Tone	RU53	15.5	15.01	95.28	0.21	15.22	≤23.98	-6.90	8.32	≤26.99	PASS
		5700	26Tone	RU8	10	9.32	95.28	0.21	9.53	≤23.98	-6.90	2.63	≤26.99	PASS
			52Tone	RU40	13	12.35	95.28	0.21	12.56	≤23.98	-6.90	5.66	≤26.99	PASS
			106Tone	RU54	16	15.33	95.28	0.21	15.54	≤23.98	-6.90	8.64	≤26.99	PASS
		5745	26Tone	RU0	9.5	8.75	95.28	0.21	8.96	≤30.00	-6.70	2.26	---	PASS
			52Tone	RU37	12.5	11.73	95.28	0.21	11.94	≤30.00	-6.70	5.24	---	PASS
			106Tone	RU53	15.5	14.90	95.28	0.21	15.11	≤30.00	-6.70	8.41	---	PASS
		5825	26Tone	RU8	9.5	8.90	95.28	0.21	9.11	≤30.00	-6.70	2.41	---	PASS
			52Tone	RU40	12.5	11.96	95.28	0.21	12.17	≤30.00	-6.70	5.47	---	PASS
			106Tone	RU54	15.5	14.97	95.28	0.21	15.18	≤30.00	-6.70	8.48	---	PASS

Maximum power spectral density


Test Result


Test Mode	Antenna	Freq(MHz)	Ru Size	Ru Index	Result [dBm/MHz]	Limit [dBm/MHz]	Verdict
11AX20SISO	Ant4	5180	26Tone	RU0	6.71	≤11.00	PASS
			52Tone	RU37	6.74	≤11.00	PASS
			106Tone	RU53	6.88	≤11.00	PASS
		5320	26Tone	RU8	6.78	≤11.00	PASS
			52Tone	RU40	7.00	≤11.00	PASS
			106Tone	RU54	6.60	≤11.00	PASS
		5500	26Tone	RU0	6.48	≤11.00	PASS
			52Tone	RU37	6.61	≤11.00	PASS
			106Tone	RU53	6.61	≤11.00	PASS
		5700	26Tone	RU8	7.11	≤11.00	PASS
			52Tone	RU40	7.02	≤11.00	PASS
			106Tone	RU54	6.91	≤11.00	PASS
		5745	26Tone	RU0	3.46	≤30.00	PASS
			52Tone	RU37	3.46	≤30.00	PASS
			106Tone	RU53	3.49	≤30.00	PASS
		5825	26Tone	RU8	3.39	≤30.00	PASS
			52Tone	RU40	3.72	≤30.00	PASS
			106Tone	RU54	3.53	≤30.00	PASS



Note: 1.The Result and Limit Unit is dBm/500 kHz in the band 5.725–5.85 GHz.
2.The Duty Cycle Factor and is compensated in the graph.






Test Graphs

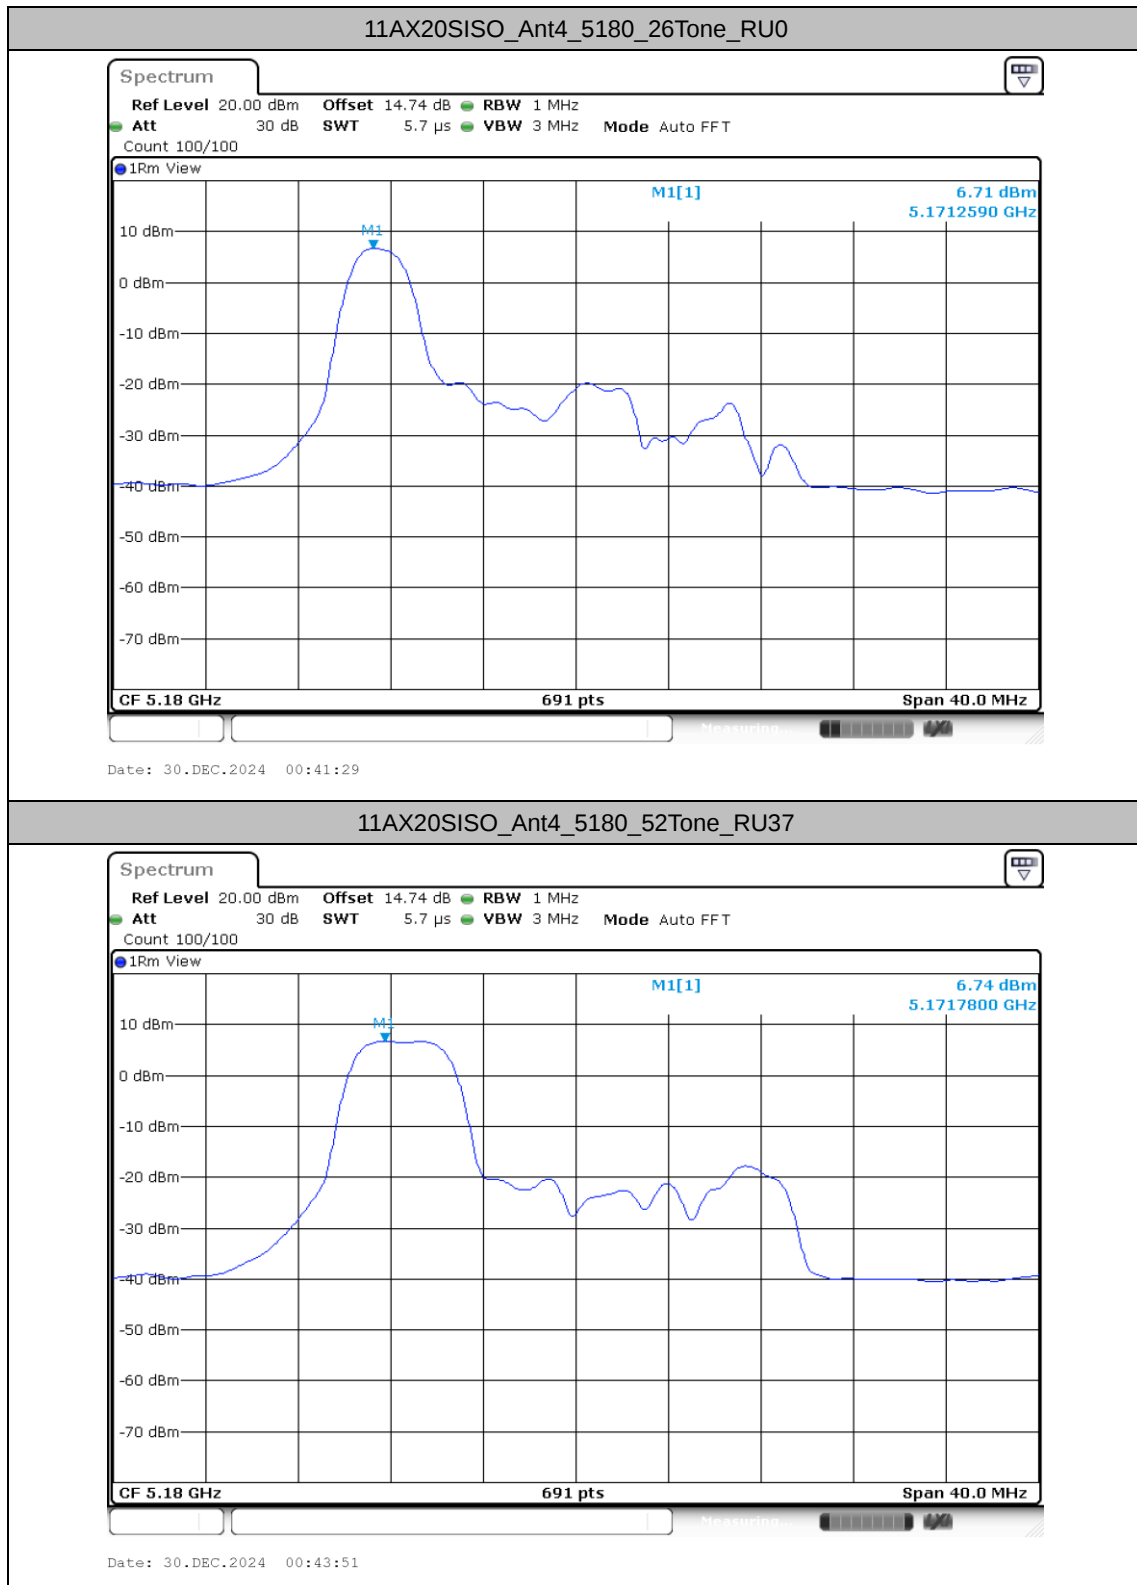



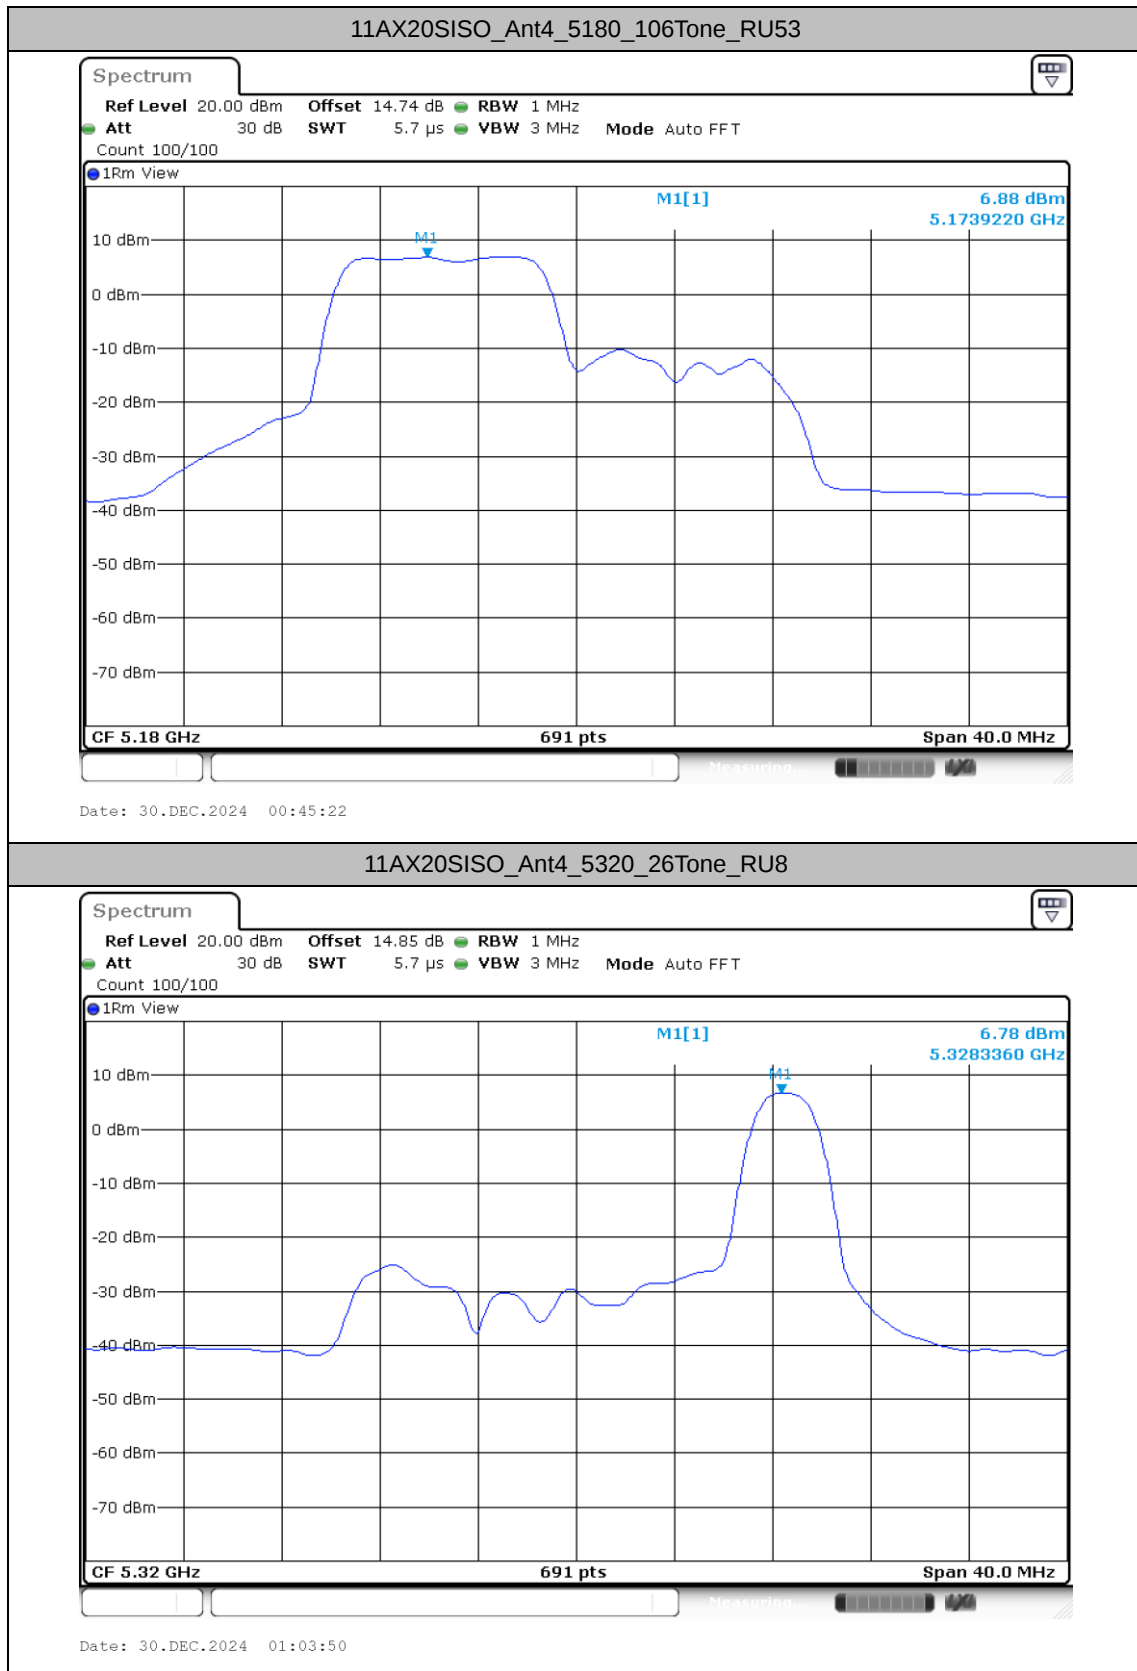


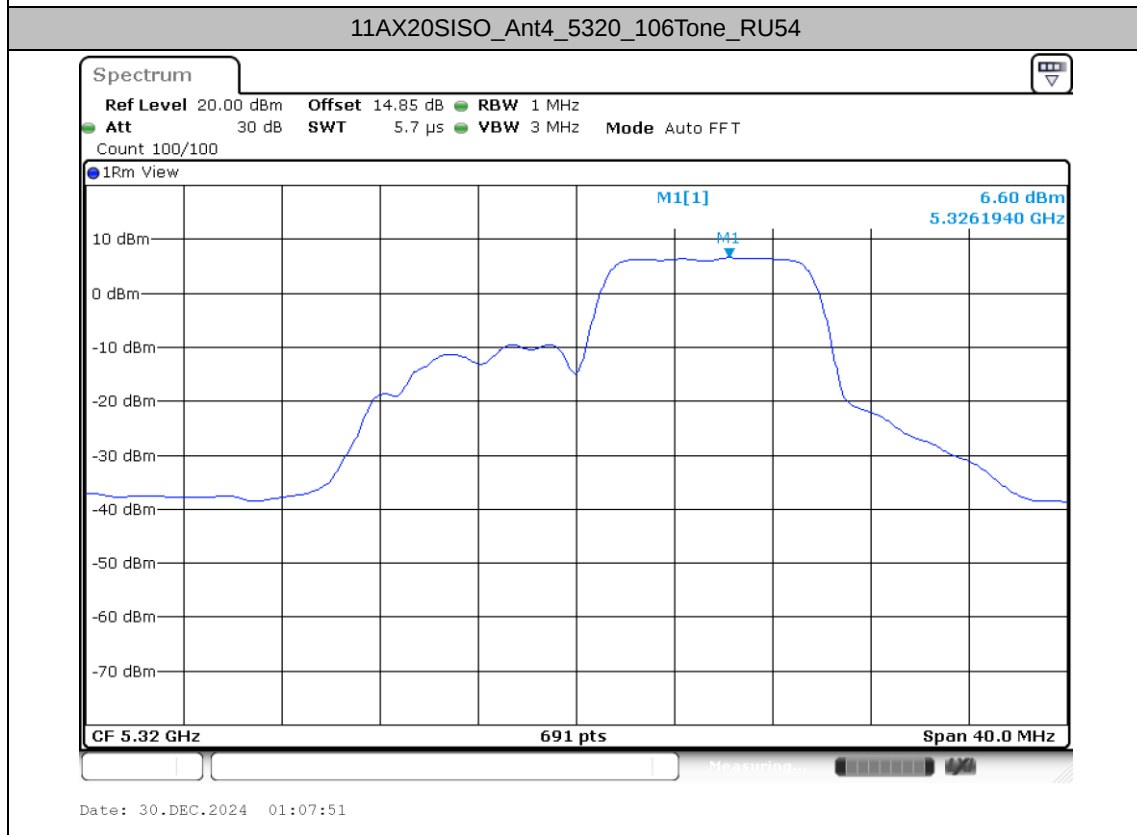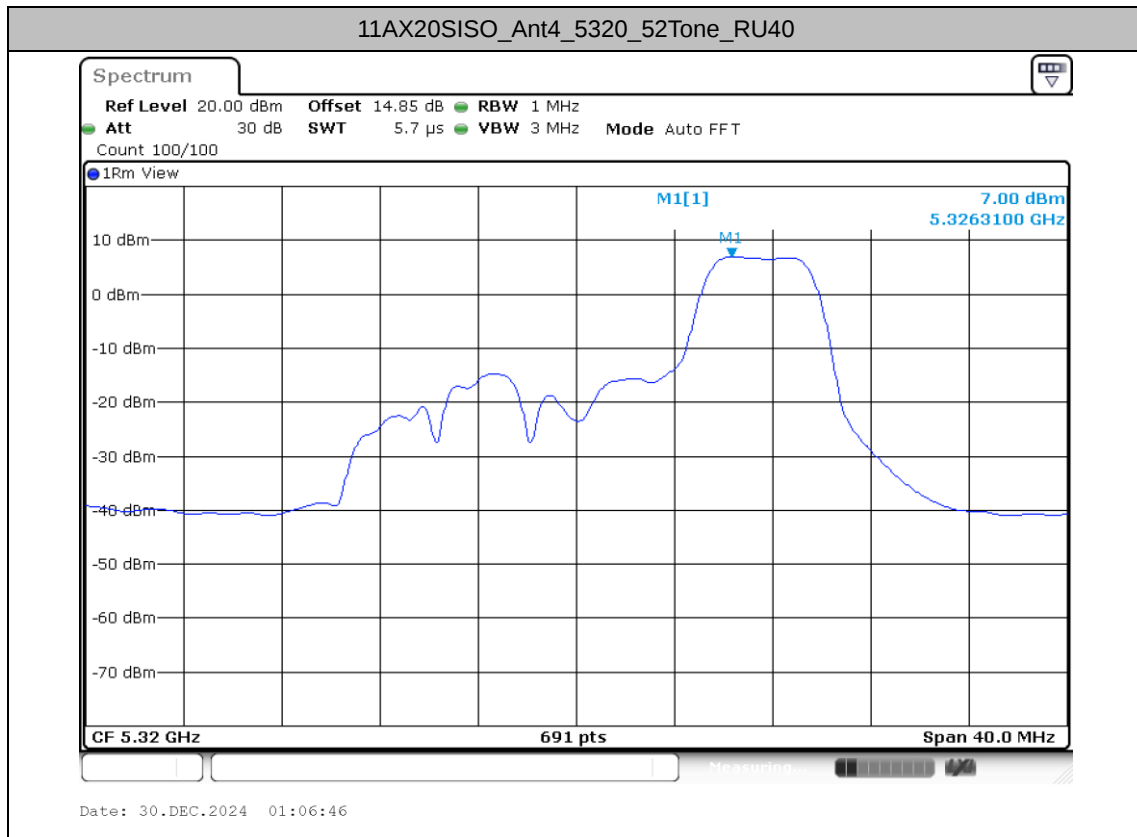


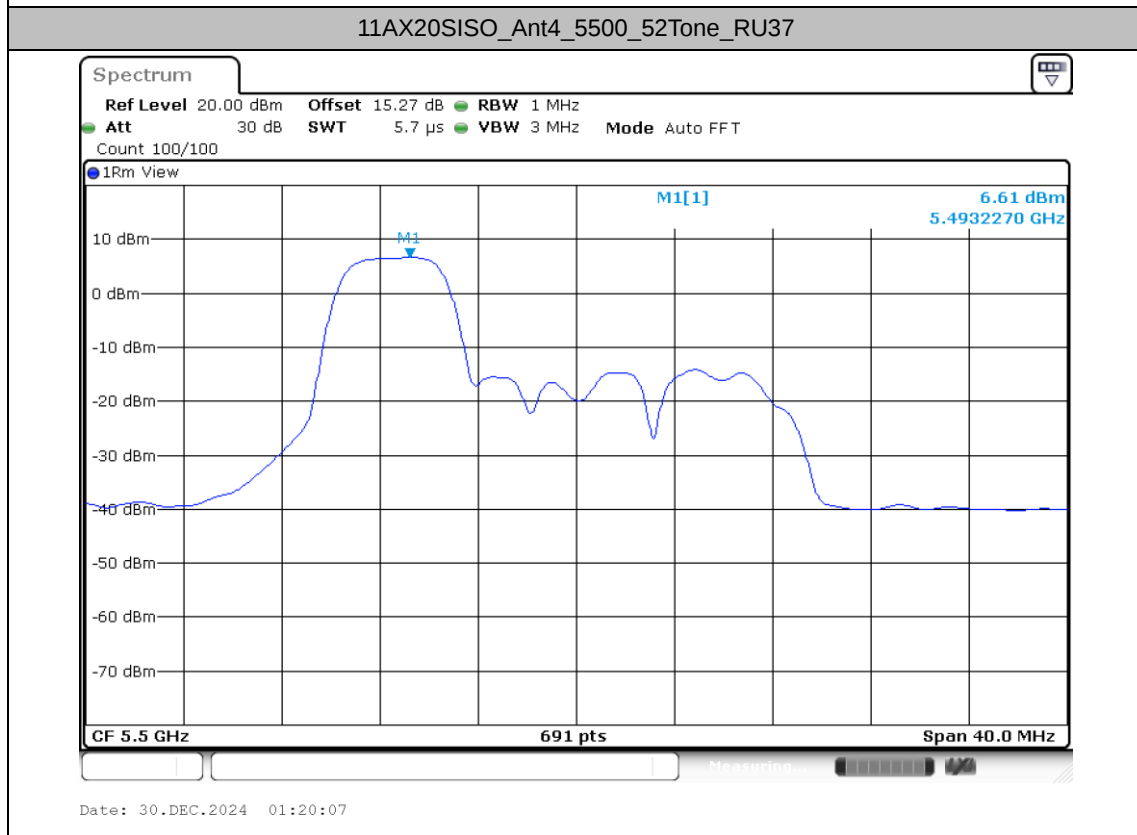
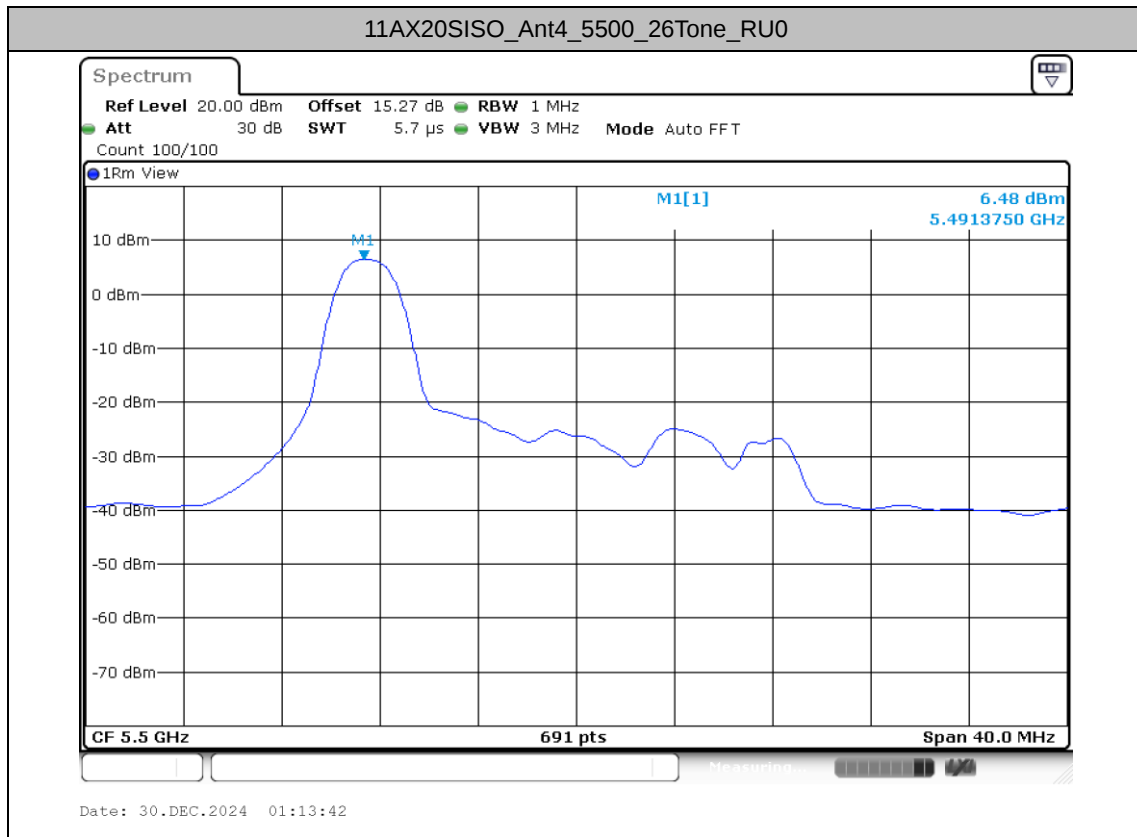


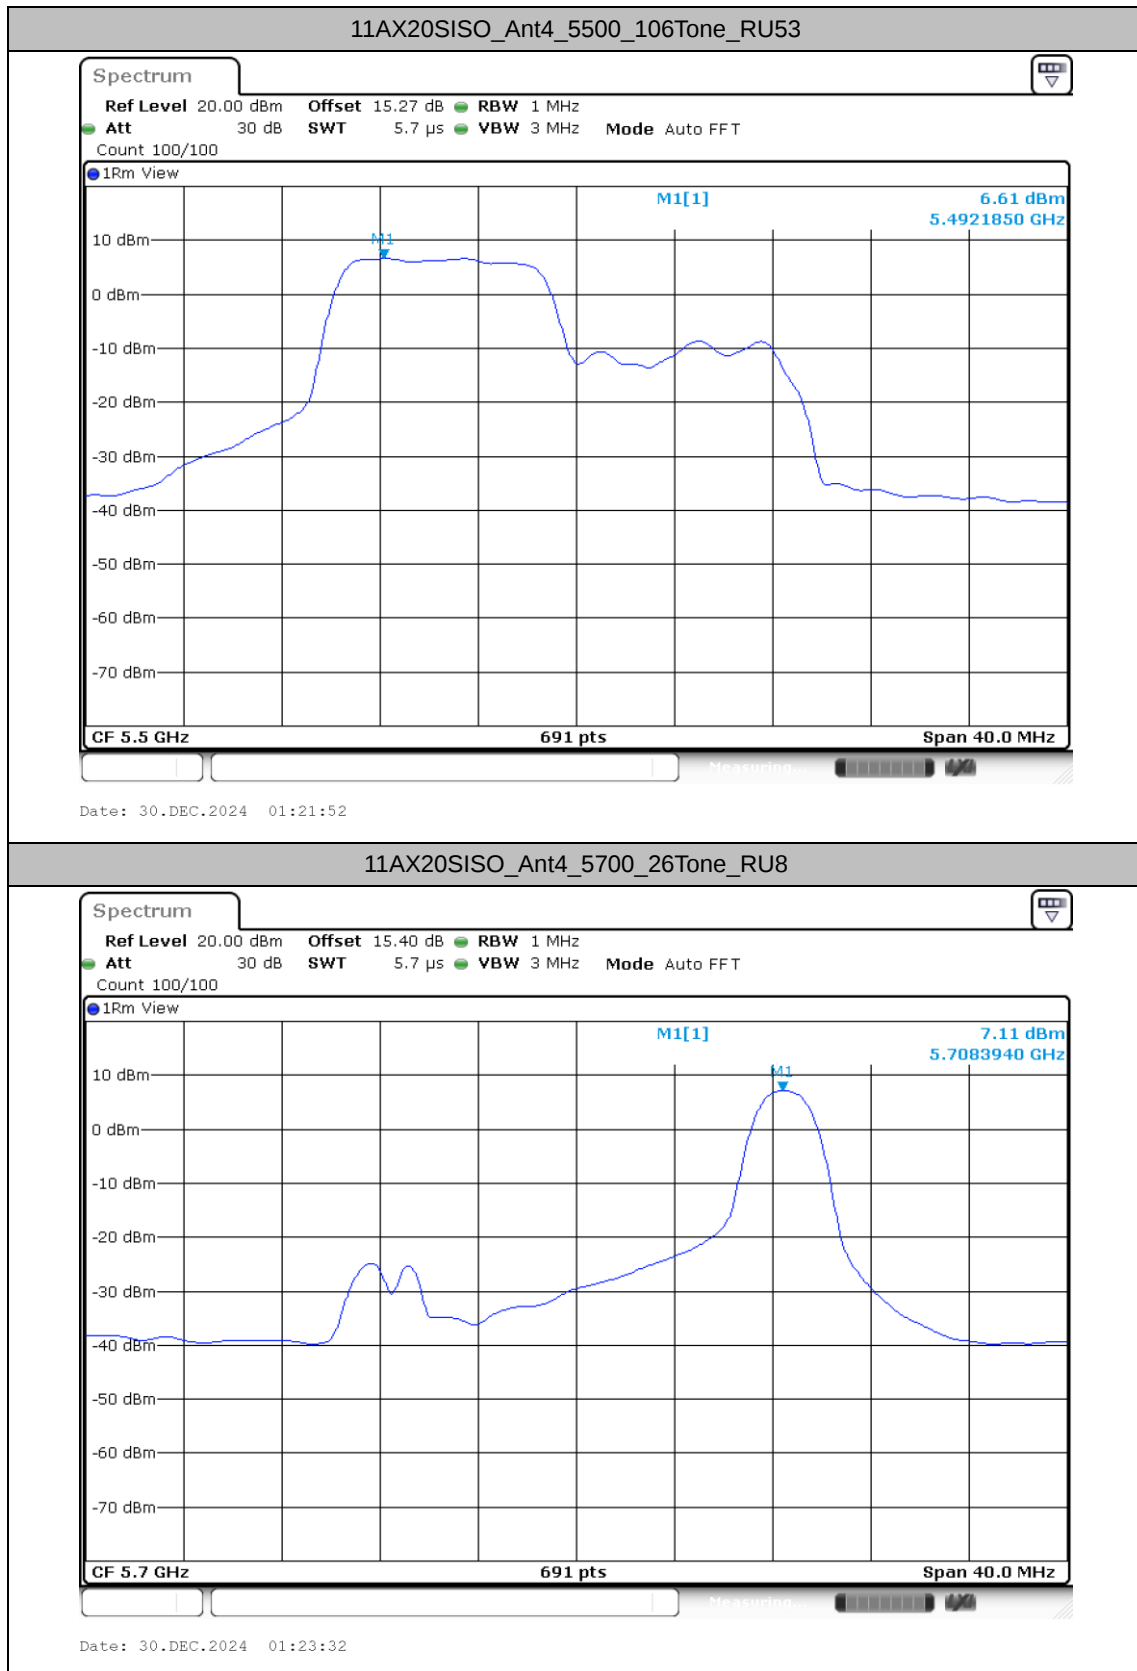

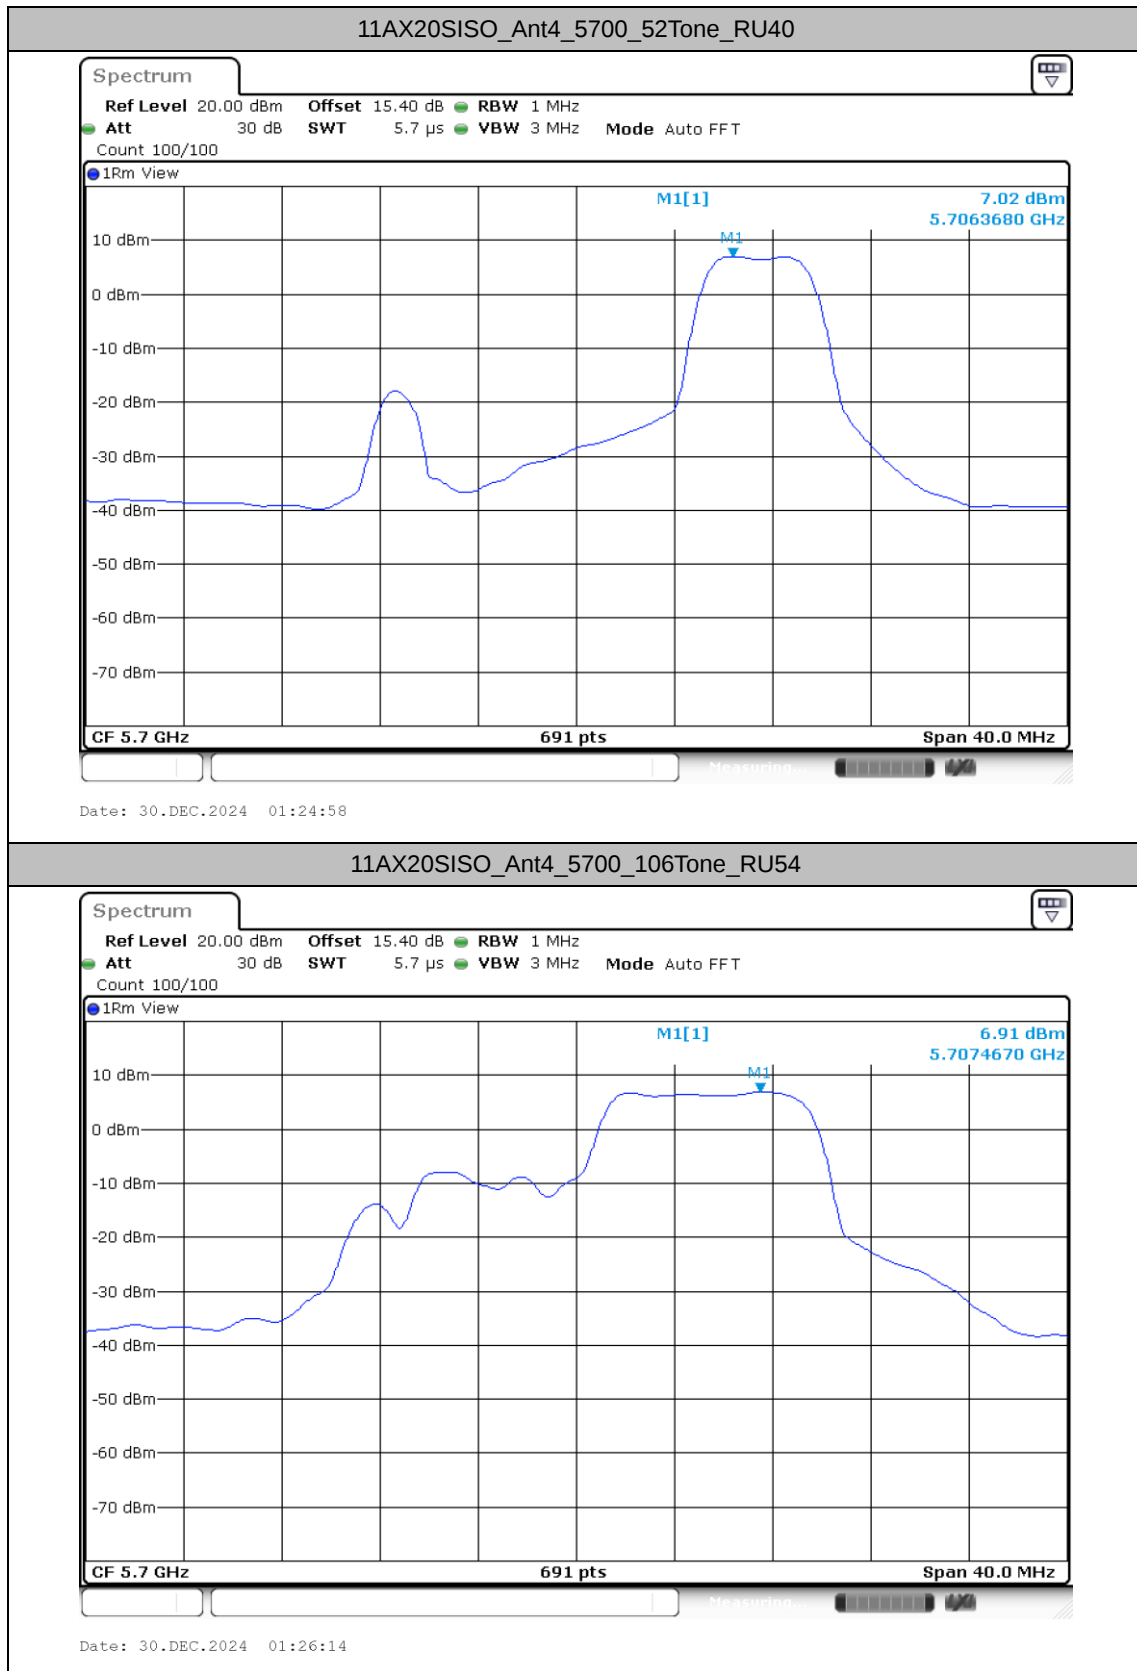

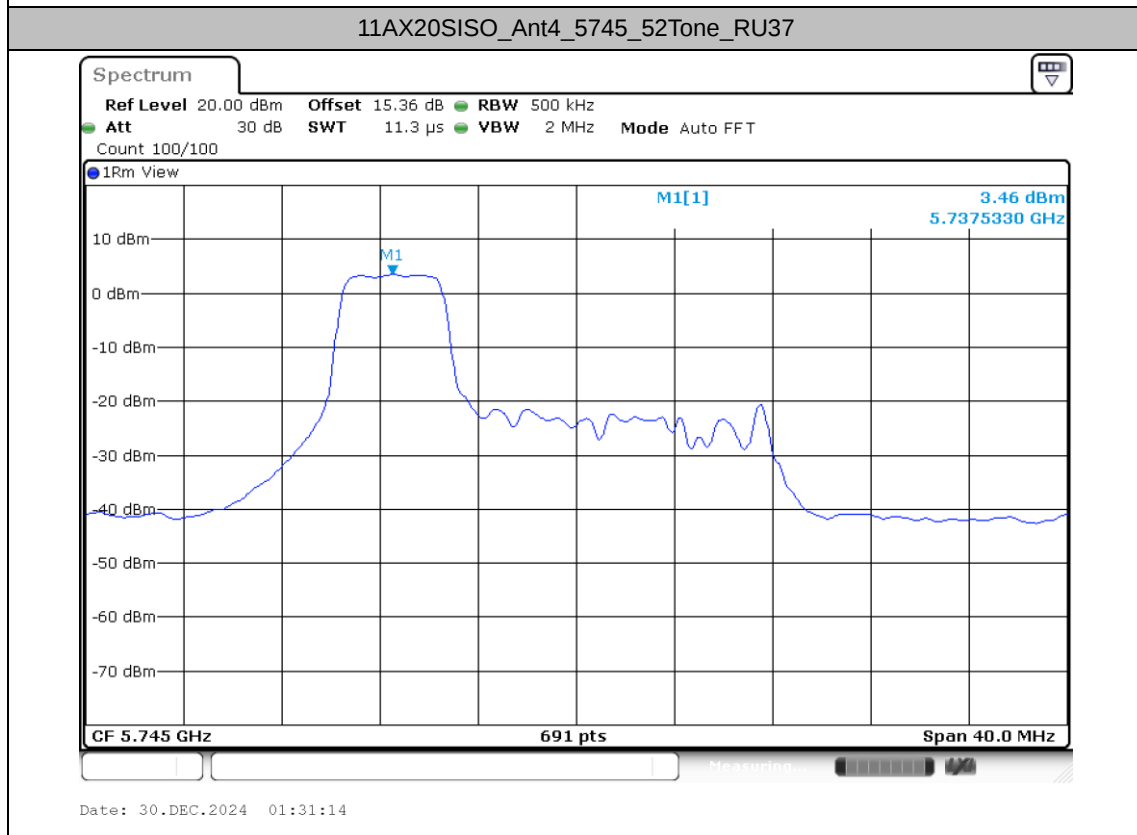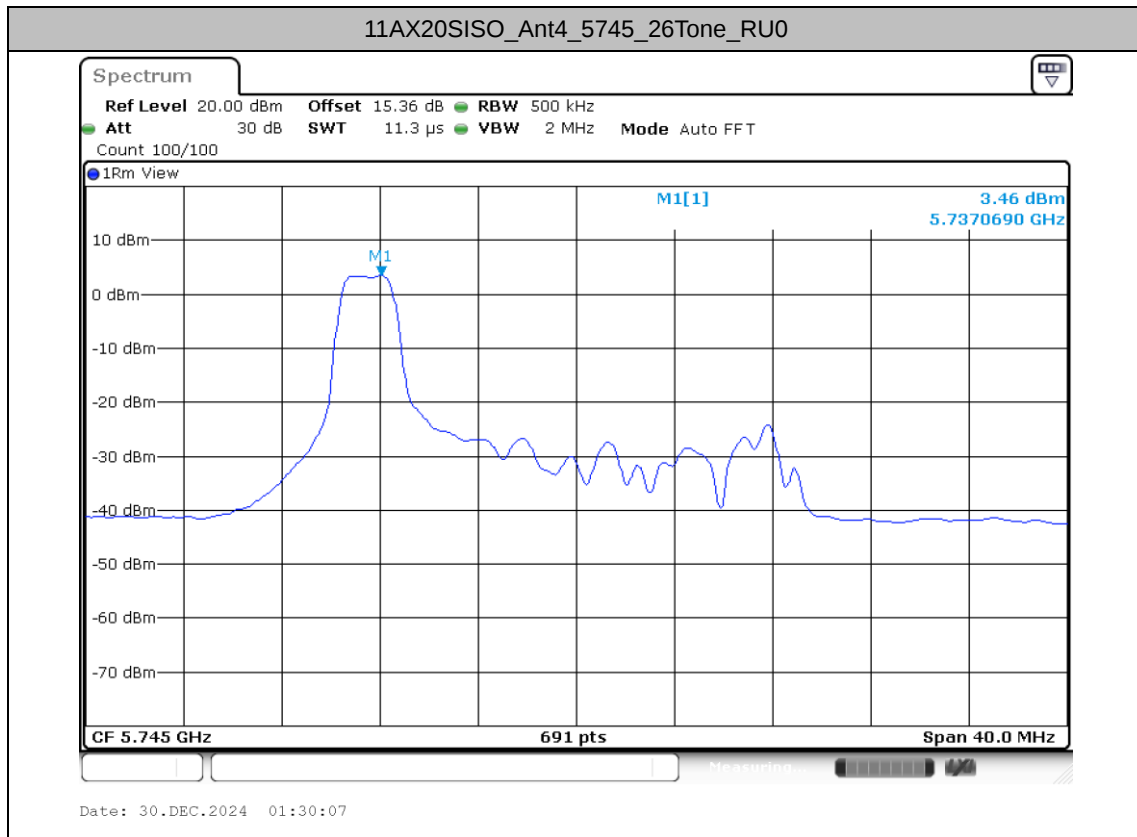

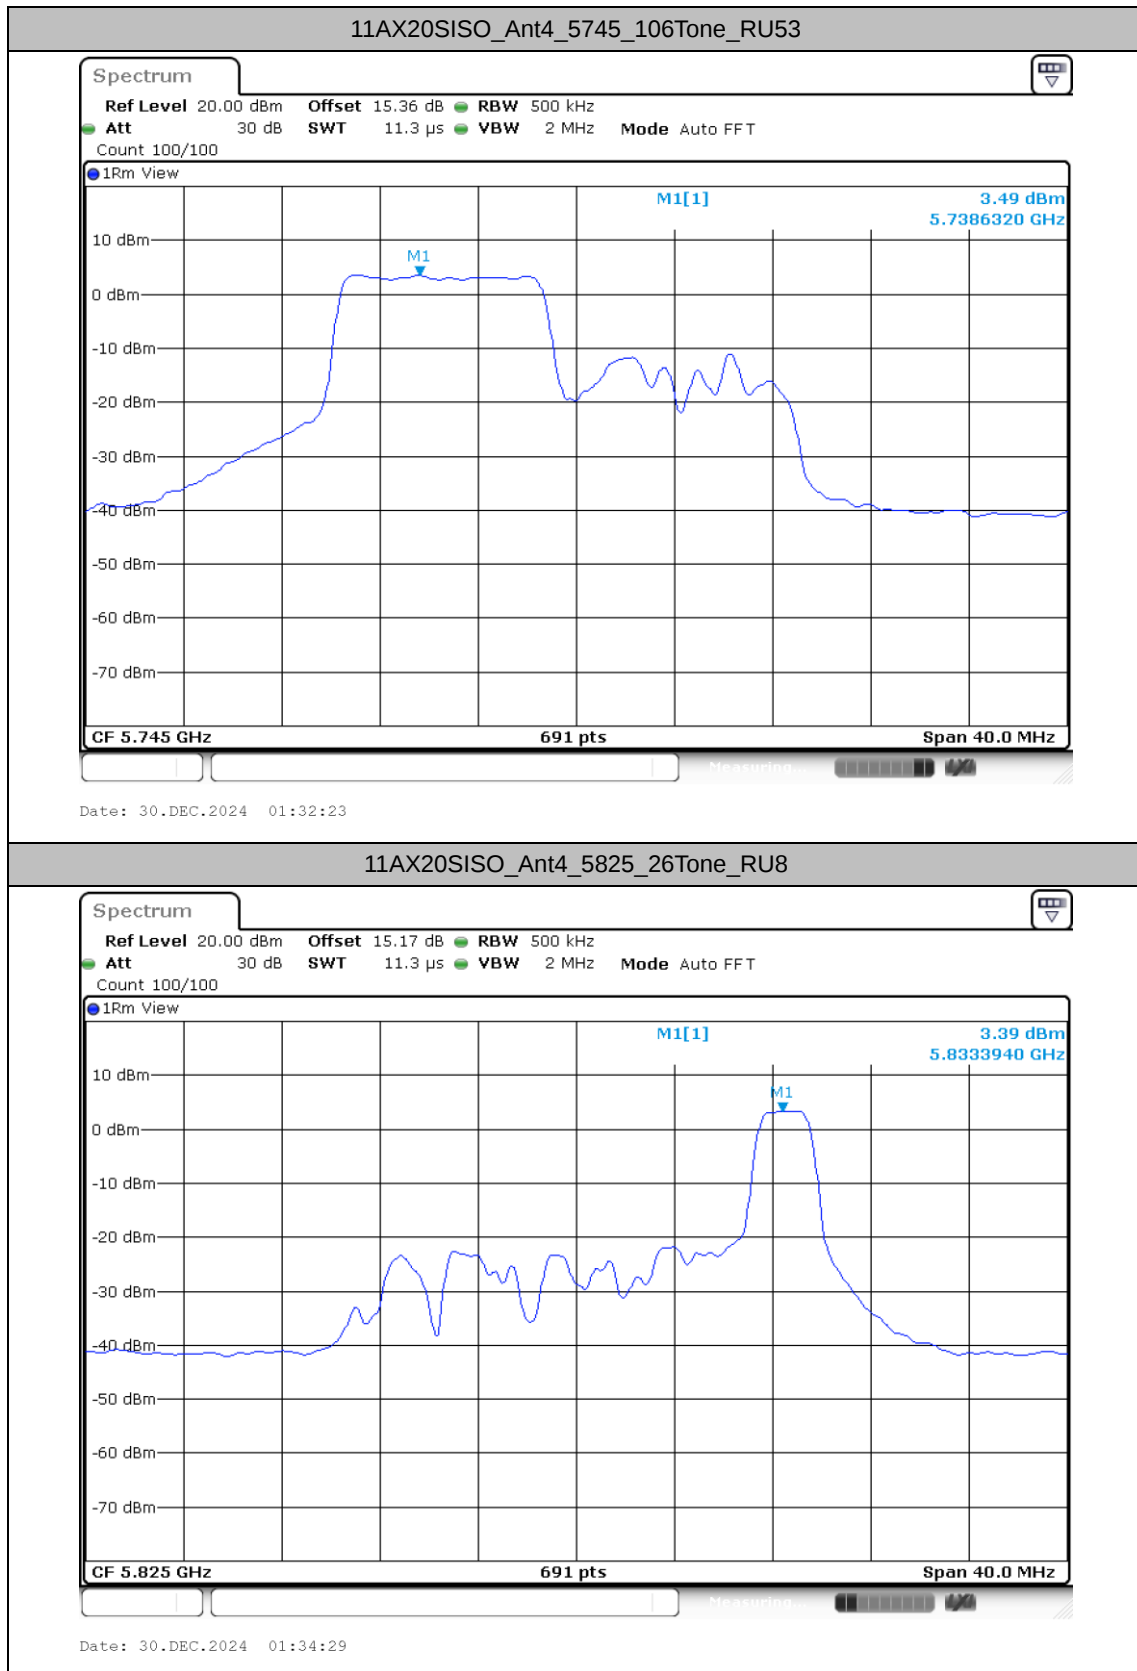


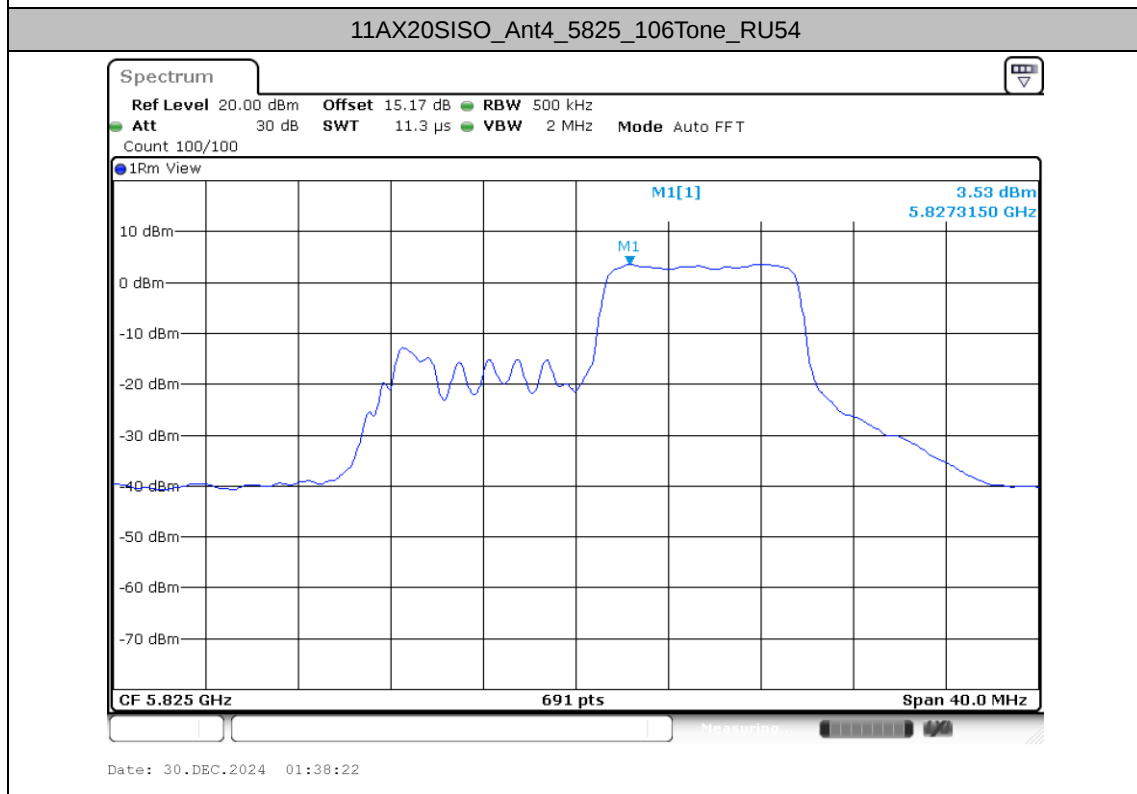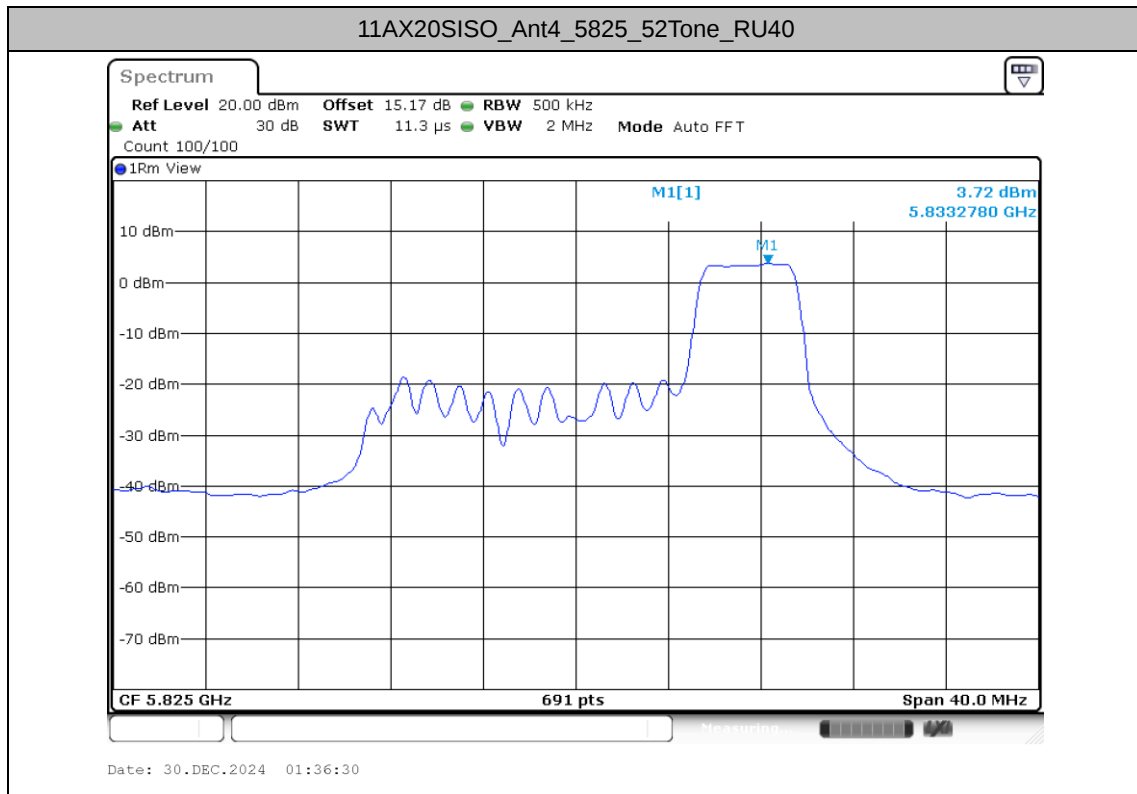



Appendix B. AC Conducted Emission Test Results

Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

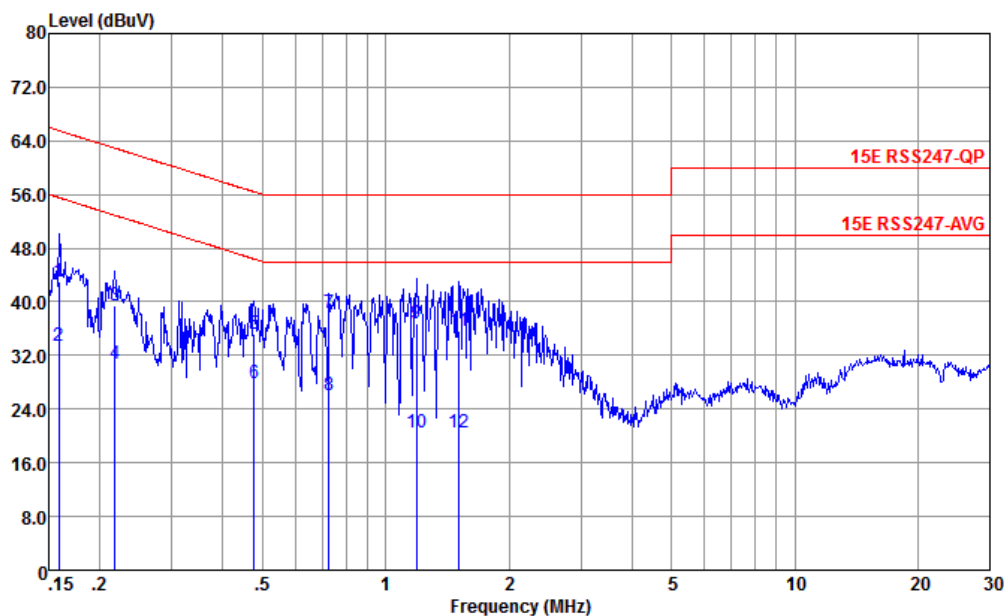


Site : CO01-KS
Condition : 15E RSS247-QP LISN-060105-L 2024 LINE

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.159	43.06	-22.46	65.52	32.50	0.11	10.45	QP
2	0.159	33.46	-22.06	55.52	22.90	0.11	10.45	Average
3	0.217	39.45	-23.47	62.92	28.91	0.08	10.46	QP
4	0.217	30.75	-22.17	52.92	20.21	0.08	10.46	Average
5	0.476	35.14	-21.27	56.41	24.80	-0.09	10.43	QP
6	0.476	27.84	-18.57	46.41	17.50	-0.09	10.43	Average
7 *	0.727	38.38	-17.62	56.00	28.20	-0.15	10.33	QP
8	0.727	26.08	-19.92	46.00	15.90	-0.15	10.33	Average
9	1.191	36.67	-19.33	56.00	26.60	-0.19	10.26	QP
10	1.191	20.57	-25.43	46.00	10.50	-0.19	10.26	Average
11	1.511	35.55	-20.45	56.00	25.50	-0.20	10.25	QP
12	1.511	20.55	-25.45	46.00	10.50	-0.20	10.25	Average



Test Engineer :	Amos Zhang	Temperature :	25.3~26.2°C
		Relative Humidity :	38~40%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

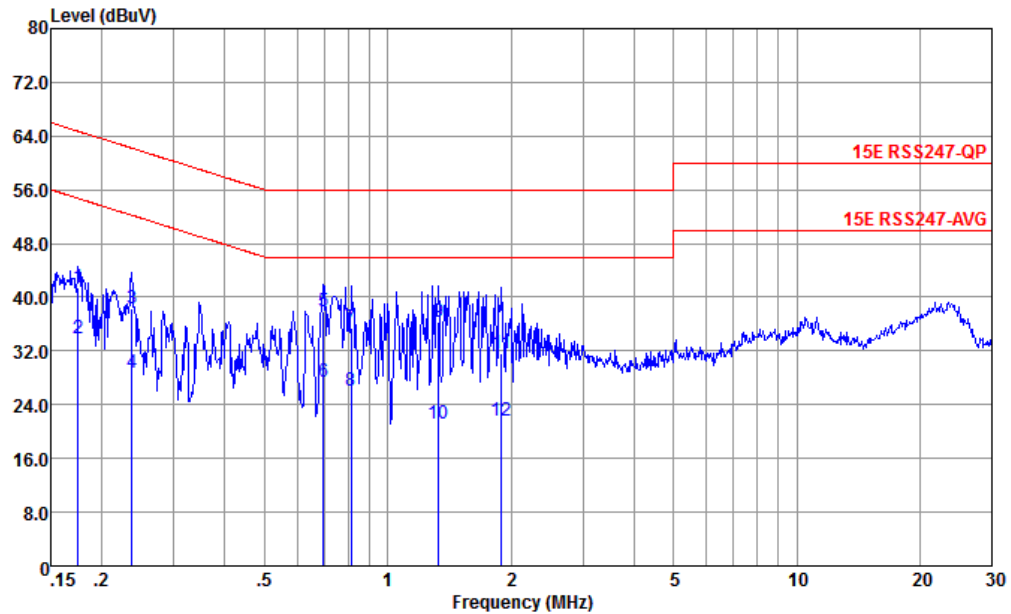

Site : CO01-KS
Condition : 15E RSS247-QP LISN-060105-N 2024 NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.175	41.38	-23.34	64.72	30.79	0.13	10.46	QP
2	0.175	33.78	-20.94	54.72	23.19	0.13	10.46	Average
3	0.237	38.29	-23.93	62.22	27.80	0.02	10.47	QP
4	0.237	28.69	-23.53	52.22	18.20	0.02	10.47	Average
5 *	0.697	37.97	-18.03	56.00	27.79	-0.16	10.34	QP
6	0.697	27.47	-18.53	46.00	17.29	-0.16	10.34	Average
7	0.813	35.34	-20.66	56.00	25.20	-0.17	10.31	QP
8	0.813	26.04	-19.96	46.00	15.90	-0.17	10.31	Average
9	1.331	36.27	-19.73	56.00	26.19	-0.18	10.26	QP
10	1.331	21.27	-24.73	46.00	11.19	-0.18	10.26	Average
11	1.898	31.55	-24.45	56.00	21.50	-0.19	10.24	QP
12	1.898	21.55	-24.45	46.00	11.50	-0.19	10.24	Average

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	Koi Ji	Relative Humidity :	51~53%
		Temperature :	21.2 ~22.5°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	4	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	4	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	4	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-1	5.15-5.25	4	802.11ax HE20	36	5180	MCS0	Full RU	-
Mode 5	U-NII-1	5.15-5.25	4	802.11ax HE20	44	5220	MCS0	Full RU	-
Mode 6	U-NII-1	5.15-5.25	4	802.11ax HE20	48	5240	MCS0	Full RU	-
Mode 7	U-NII-1	5.15-5.25	4	802.11ax HE40	38	5190	MCS0	Full RU	-
Mode 8	U-NII-1	5.15-5.25	4	802.11ax HE40	46	5230	MCS0	Full RU	-
Mode 9	U-NII-1	5.15-5.25	4	802.11ax HE80	42	5210	MCS0	Full RU	-
Mode 10	U-NII-1	5.15-5.25	4	802.11ax HE20	36	5180	MCS0	Partial_26/0RU	-
Mode 11	U-NII-1	5.15-5.25	4	802.11ax HE20	36	5180	MCS0	Partial_52/37RU	-
Mode 12	U-NII-1	5.15-5.25	4	802.11ax HE20	36	5180	MCS0	Partial_106/53RU	-
Mode 13	U-NII-2A	5.25-5.35	4	802.11a	52	5260	6Mbps	-	-
Mode 14	U-NII-2A	5.25-5.35	4	802.11a	60	5300	6Mbps	-	-
Mode 15	U-NII-2A	5.25-5.35	4	802.11a	64	5320	6Mbps	-	-
Mode 16	U-NII-2A	5.25-5.35	4	802.11ax HE20	52	5260	MCS0	Full RU	-
Mode 17	U-NII-2A	5.25-5.35	4	802.11ax HE20	60	5300	MCS0	Full RU	-
Mode 18	U-NII-2A	5.25-5.35	4	802.11ax HE20	64	5320	MCS0	Full RU	-
Mode 19	U-NII-2A	5.25-5.35	4	802.11ax HE40	54	5270	MCS0	Full RU	-
Mode 20	U-NII-2A	5.25-5.35	4	802.11ax HE40	62	5310	MCS0	Full RU	-
Mode 21	U-NII-2A	5.25-5.35	4	802.11ax HE80	58	5290	MCS0	Full RU	-
Mode 22	U-NII-2A	5.25-5.35	4	802.11ax HE20	64	5320	MCS0	Partial_26/8RU	-
Mode 23	U-NII-2A	5.25-5.35	4	802.11ax HE20	64	5320	MCS0	Partial_52/40RU	-
Mode 24	U-NII-2A	5.25-5.35	4	802.11ax HE20	64	5320	MCS0	Partial_106/54RU	-
Mode 25	U-NII-2C	5.47-5.725	4	802.11a	100	5500	6Mbps	-	-
Mode 26	U-NII-2C	5.47-5.725	4	802.11a	116	5580	6Mbps	-	-
Mode 27	U-NII-2C	5.47-5.725	4	802.11a	140	5700	6Mbps	-	-
Mode 28	U-NII-2C	5.47-5.725	4	802.11ax HE20	100	5500	MCS0	Full RU	-
Mode 29	U-NII-2C	5.47-5.725	4	802.11ax HE20	116	5580	MCS0	Full RU	-
Mode 30	U-NII-2C	5.47-5.725	4	802.11ax HE20	140	5700	MCS0	Full RU	-
Mode 31	U-NII-2C	5.47-5.725	4	802.11ax HE40	102	5510	MCS0	Full RU	-
Mode 32	U-NII-2C	5.47-5.725	4	802.11ax HE40	110	5550	MCS0	Full RU	-
Mode 33	U-NII-2C	5.47-5.725	4	802.11ax HE40	134	5670	MCS0	Full RU	-
Mode 34	U-NII-2C	5.47-5.725	4	802.11ax HE80	106	5530	MCS0	Full RU	-
Mode 35	U-NII-2C	5.47-5.725	4	802.11ax HE80	122	5610	MCS0	Full RU	-
Mode 36	U-NII-2C	5.47-5.725	4	802.11ax HE20	100	5500	MCS0	Partial_26/0RU	-



Mode 37	U-NII-2C	5.47-5.725	4	802.11ax HE20	140	5700	MCS0	Partial_26/8RU	-
Mode 38	U-NII-2C	5.47-5.725	4	802.11ax HE20	100	5500	MCS0	Partial_52/37RU	-
Mode 39	U-NII-2C	5.47-5.725	4	802.11ax HE20	140	5700	MCS0	Partial_52/40RU	-
Mode 40	U-NII-2C	5.47-5.725	4	802.11ax HE20	100	5500	MCS0	Partial_106/53RU	-
Mode 41	U-NII-2C	5.47-5.725	4	802.11ax HE20	140	5700	MCS0	Partial_106/54RU	-
Mode 42	U-NII-2C	5.47-5.725	4	802.11a	144	5720	6Mbps	-	-
Mode 43	U-NII-2C	5.47-5.725	4	802.11ax HE20	144	5720	MCS0	Full RU	-
Mode 44	U-NII-2C	5.47-5.725	4	802.11ax HE40	142	5710	MCS0	Full RU	-
Mode 45	U-NII-2C	5.47-5.725	4	802.11ax HE80	138	5690	MCS0	Full RU	-
Mode 47	U-NII-3	5.725-5.85	4	802.11a	149	5745	6Mbps	-	-
Mode 48	U-NII-3	5.725-5.85	4	802.11a	157	5785	6Mbps	-	-
Mode 49	U-NII-3	5.725-5.85	4	802.11a	165	5825	6Mbps	-	-
Mode 50	U-NII-3	5.725-5.85	4	802.11ax HE20	149	5745	MCS0	Full RU	-
Mode 51	U-NII-3	5.725-5.85	4	802.11ax HE20	157	5785	MCS0	Full RU	-
Mode 52	U-NII-3	5.725-5.85	4	802.11ax HE20	165	5825	MCS0	Full RU	-
Mode 53	U-NII-3	5.725-5.85	4	802.11ax HE40	151	5755	MCS0	Full RU	-
Mode 54	U-NII-3	5.725-5.85	4	802.11ax HE40	159	5795	MCS0	Full RU	-
Mode 55	U-NII-3	5.725-5.85	4	802.11ax HE80	155	5775	MCS0	Full RU	-
Mode 56	U-NII-3	5.725-5.85	4	802.11ax HE20	149	5745	MCS0	Partial_26/0RU	-
Mode 57	U-NII-3	5.725-5.85	4	802.11ax HE20	165	5825	MCS0	Partial_26/8RU	-
Mode 58	U-NII-3	5.725-5.85	4	802.11ax HE20	149	5745	MCS0	Partial_52/37RU	-
Mode 59	U-NII-3	5.725-5.85	4	802.11ax HE20	165	5825	MCS0	Partial_52/40RU	-
Mode 60	U-NII-3	5.725-5.85	4	802.11ax HE20	149	5745	MCS0	Partial_106/53RU	-
Mode 61	U-NII-3	5.725-5.85	4	802.11ax HE20	165	5825	MCS0	Partial_106/54RU	-



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.85	50.80	54.00	-3.20	H	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	45.47	68.20	-22.73	H	PEAK	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	45.42	68.20	-22.78	V	PEAK	Pass	Harmonic
3	802.11a	48	5455.28	45.24	54.00	-8.76	V	AVERAGE	Pass	Band Edge
3	802.11a	48	10480.00	45.47	68.20	-22.73	H	PEAK	Pass	Harmonic
4	802.11ax HE20	36	5149.85	50.93	54.00	-3.07	H	AVERAGE	Pass	Band Edge
4	802.11ax HE20	36	10360.00	46.13	68.20	-22.07	H	PEAK	Pass	Harmonic
5	802.11ax HE20	44	-	-	-	-	-	-	-	Band Edge
5	802.11ax HE20	44	10440.00	45.94	68.20	-22.26	V	PEAK	Pass	Harmonic
6	802.11ax HE20	48	5458.36	44.40	54.00	-9.60	H	AVERAGE	Pass	Band Edge
6	802.11ax HE20	48	10480.00	45.28	68.20	-22.92	V	PEAK	Pass	Harmonic
7	802.11ax HE40	38	5149.69	50.81	54.00	-3.19	H	AVERAGE	Pass	Band Edge
7	802.11ax HE40	38	10380.00	45.75	68.20	-22.45	V	PEAK	Pass	Harmonic
8	802.11ax HE40	46	5145.37	47.56	54.00	-6.44	H	AVERAGE	Pass	Band Edge
8	802.11ax HE40	46	10460.00	45.79	68.20	-22.41	V	PEAK	Pass	Harmonic
9	802.11ax HE80	42	5150.00	49.59	54.00	-4.41	H	AVERAGE	Pass	Band Edge
9	802.11ax HE80	42	10420.00	46.07	68.20	-22.13	H	PEAK	Pass	Harmonic
10	802.11ax HE20	36	5138.05	50.83	54.00	-3.17	H	AVERAGE	Pass	Band Edge
10	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
11	802.11ax HE20	36	5142.65	50.41	54.00	-3.59	H	AVERAGE	Pass	Band Edge
11	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
12	802.11ax HE20	36	5148.95	49.65	54.00	-4.35	H	AVERAGE	Pass	Band Edge
12	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
13	802.11a	52	-	-	-	-	-	-	-	Band Edge
13	802.11a	52	10520.00	45.70	68.20	-22.50	H	PEAK	Pass	Harmonic
14	802.11a	60	-	-	-	-	-	-	-	Band Edge
14	802.11a	60	10600.00	45.94	74.00	-28.06	V	PEAK	Pass	Harmonic
15	802.11a	64	5350.00	50.13	54.00	-3.87	H	AVERAGE	Pass	Band Edge
15	802.11a	64	10640.00	36.30	54.00	-17.70	H	AVERAGE	Pass	Harmonic
16	802.11ax HE20	52	-	-	-	-	-	-	-	Band Edge
16	802.11ax HE20	52	10520.00	45.88	68.20	-22.32	V	PEAK	Pass	Harmonic
17	802.11ax HE20	60	-	-	-	-	-	-	-	Band Edge
17	802.11ax HE20	60	10600.00	45.65	74.00	-28.35	V	PEAK	Pass	Harmonic
18	802.11ax HE20	64	5350.00	49.91	54.00	-4.09	H	AVERAGE	Pass	Band Edge
18	802.11ax HE20	64	10640.00	46.47	74.00	-27.53	H	PEAK	Pass	Harmonic
19	802.11ax HE40	54	5350.00	47.13	54.00	-6.87	H	AVERAGE	Pass	Band Edge
19	802.11ax HE40	54	10540.00	47.97	68.20	-20.23	V	PEAK	Pass	Harmonic
20	802.11ax HE40	62	5350.45	50.05	54.00	-3.95	H	AVERAGE	Pass	Band Edge
20	802.11ax HE40	62	10620.00	46.18	74.00	-27.82	V	PEAK	Pass	Harmonic
21	802.11ax HE80	58	5350.55	50.39	54.00	-3.61	H	AVERAGE	Pass	Band Edge
21	802.11ax HE80	58	10580.00	46.07	68.20	-22.13	H	PEAK	Pass	Harmonic
22	802.11ax HE20	64	5362.55	50.35	54.00	-3.65	H	AVERAGE	Pass	Band Edge
22	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic



23	802.11ax HE20	64	5358.35	50.91	54.00	-3.09	H	AVERAGE	Pass	Band Edge
23	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
24	802.11ax HE20	64	5350.00	49.92	54.00	-4.08	H	AVERAGE	Pass	Band Edge
24	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
25	802.11a	100	5459.85	47.27	54.00	-6.73	H	AVERAGE	Pass	Band Edge
25	802.11a	100	11000.00	46.36	74.00	-27.64	V	PEAK	Pass	Harmonic
26	802.11a	116	-	-	-	-	-	-	-	Band Edge
26	802.11a	116	11160.00	46.14	74.00	-27.86	H	PEAK	Pass	Harmonic
27	802.11a	140	5725.76	64.09	68.20	-4.11	H	PEAK	Pass	Band Edge
27	802.11a	140	11400.00	37.36	54.00	-16.64	H	AVERAGE	Pass	Harmonic
28	802.11ax HE20	100	5467.69	61.61	68.20	-6.59	V	PEAK	Pass	Band Edge
28	802.11ax HE20	100	11000.00	46.04	74.00	-27.96	H	PEAK	Pass	Harmonic
29	802.11ax HE20	116	-	-	-	-	-	-	-	Band Edge
29	802.11ax HE20	116	11160.00	46.48	74.00	-27.52	H	PEAK	Pass	Harmonic
30	802.11ax HE20	140	5725.00	65.08	68.20	-3.12	H	PEAK	Pass	Band Edge
30	802.11ax HE20	140	11400.00	37.41	54.00	-16.59	V	AVERAGE	Pass	Harmonic
31	802.11ax HE40	102	5467.05	64.65	68.20	-3.55	H	PEAK	Pass	Band Edge
31	802.11ax HE40	102	11020.00	45.38	74.00	-28.62	V	PEAK	Pass	Harmonic
32	802.11ax HE40	110	5458.51	47.48	54.00	-6.52	H	AVERAGE	Pass	Band Edge
32	802.11ax HE40	110	11100.00	46.40	74.00	-27.60	V	PEAK	Pass	Harmonic
33	802.11ax HE40	134	5729.84	64.87	68.20	-3.33	H	PEAK	Pass	Band Edge
33	802.11ax HE40	134	11340.00	37.23	54.00	-16.77	H	AVERAGE	Pass	Harmonic
34	802.11ax HE80	106	5458.57	50.63	54.00	-3.37	H	AVERAGE	Pass	Band Edge
34	802.11ax HE80	106	11060.00	46.12	74.00	-27.88	V	PEAK	Pass	Harmonic
35	802.11ax HE80	122	5728.56	63.05	68.20	-5.15	H	PEAK	Pass	Band Edge
35	802.11ax HE80	122	11220.00	37.24	54.00	-16.76	H	AVERAGE	Pass	Harmonic
36	802.11ax HE20	100	5457.61	50.64	54.00	-3.36	H	AVERAGE	Pass	Band Edge
36	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
37	802.11ax HE20	140	5726.32	64.70	68.20	-3.50	H	PEAK	Pass	Band Edge
37	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
38	802.11ax HE20	100	5460.01	63.06	68.20	-5.14	H	PEAK	Pass	Band Edge
38	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
39	802.11ax HE20	140	5725.04	65.07	68.20	-3.13	H	PEAK	Pass	Band Edge
39	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
40	802.11ax HE20	100	5469.93	61.20	68.20	-7.00	H	PEAK	Pass	Band Edge
40	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
41	802.11ax HE20	140	5725.84	65.04	68.20	-3.16	H	PEAK	Pass	Band Edge
41	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
42	802.11a	144	-	-	-	-	-	-	-	Band Edge
42	802.11a	144	11440.00	37.82	54.00	-16.18	V	AVERAGE	Pass	Harmonic
43	802.11ax HE20	144	-	-	-	-	-	-	-	Band Edge
43	802.11ax HE20	144	11440.00	37.62	54.00	-16.38	H	AVERAGE	Pass	Harmonic
44	802.11ax HE40	142	-	-	-	-	-	-	-	Band Edge
44	802.11ax HE40	142	11420.00	37.72	54.00	-16.28	V	AVERAGE	Pass	Harmonic
45	802.11ax HE80	138	-	-	-	-	-	-	-	Band Edge
45	802.11ax HE80	138	11380.00	37.72	54.00	-16.28	H	AVERAGE	Pass	Harmonic



47	802.11a	149	5605.41	57.68	68.20	-10.52	H	PEAK	Pass	Band Edge
47	802.11a	149	11490.00	38.12	54.00	-15.88	V	AVERAGE	Pass	Harmonic
48	802.11a	157	5925.01	57.20	68.20	-11.00	H	PEAK	Pass	Band Edge
48	802.11a	157	11570.00	37.95	54.00	-16.05	V	AVERAGE	Pass	Harmonic
49	802.11a	165	5937.01	56.93	68.20	-11.27	H	PEAK	Pass	Band Edge
49	802.11a	165	11650.00	37.38	54.00	-16.62	H	AVERAGE	Pass	Harmonic
50	802.11ax HE20	149	5627.20	57.53	68.20	-10.67	V	PEAK	Pass	Band Edge
50	802.11ax HE20	149	11490.00	38.18	54.00	-15.82	H	AVERAGE	Pass	Harmonic
51	802.11ax HE20	157	5934.00	57.40	68.20	-10.80	H	PEAK	Pass	Band Edge
51	802.11ax HE20	157	11570.00	37.98	54.00	-16.02	H	AVERAGE	Pass	Harmonic
52	802.11ax HE20	165	5925.60	57.40	68.20	-10.80	H	PEAK	Pass	Band Edge
52	802.11ax HE20	165	11650.00	46.80	74.00	-27.20	H	PEAK	Pass	Harmonic
53	802.11ax HE40	151	5611.01	57.86	68.20	-10.34	V	PEAK	Pass	Band Edge
53	802.11ax HE40	151	11510.00	38.13	54.00	-15.87	V	AVERAGE	Pass	Harmonic
54	802.11ax HE40	159	5972.00	57.85	68.20	-10.35	V	PEAK	Pass	Band Edge
54	802.11ax HE40	159	11590.00	38.08	54.00	-15.92	H	AVERAGE	Pass	Harmonic
55	802.11ax HE80	155	5630.40	60.06	68.20	-8.14	H	PEAK	Pass	Band Edge
55	802.11ax HE80	155	11550.00	38.08	54.00	-15.92	H	AVERAGE	Pass	Harmonic
56	802.11ax HE20	149	5631.20	56.49	68.20	-11.71	V	PEAK	Pass	Band Edge
56	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
57	802.11ax HE20	165	5979.20	58.06	68.20	-10.14	H	PEAK	Pass	Band Edge
57	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
58	802.11ax HE20	149	5618.00	56.81	68.20	-11.39	V	PEAK	Pass	Band Edge
58	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
59	802.11ax HE20	165	5935.20	58.53	68.20	-9.67	H	PEAK	Pass	Band Edge
59	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
60	802.11ax HE20	149	5614.00	57.27	68.20	-10.93	H	PEAK	Pass	Band Edge
60	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
61	802.11ax HE20	165	5926.80	58.30	68.20	-9.90	H	PEAK	Pass	Band Edge
61	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic





**Co-location****Radiated Spurious Emission Test Modes**

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 62	U-NII-1	5.15-5.25	4	802.11ax HE20	36	5180	MCS0	Full RU	-
Mode 62	2400-2483.5	2400-2483.5	3	Bluetooth-LE_GFSK	19	2440	1Mbps	-	-
Mode 62	LTE Band 13								





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
62	802.11ax HE20	36	5149.65	50.02	54.00	-3.98	H	AVERAGE	Pass	Band Edge
62	802.11ax HE20	36	10360.00	46.59	68.20	-21.61	V	PEAK	Pass	Harmonic
62	Bluetooth-LE_GFSK	19	2485.30	44.70	54.00	-9.30	H	AVERAGE	Pass	Band Edge
62	Bluetooth-LE_GFSK	19	4880.00	50.59	54.00	-3.41	H	AVERAGE	Pass	Harmonic

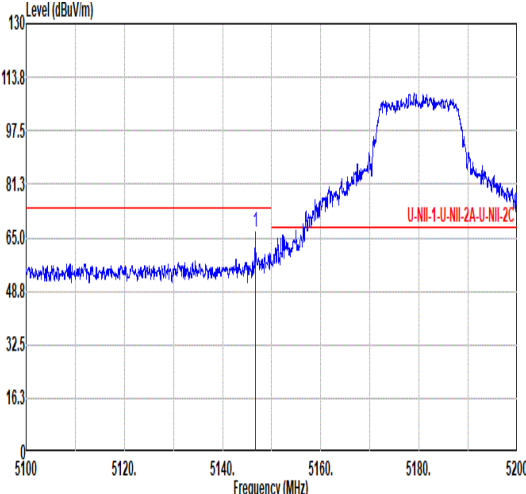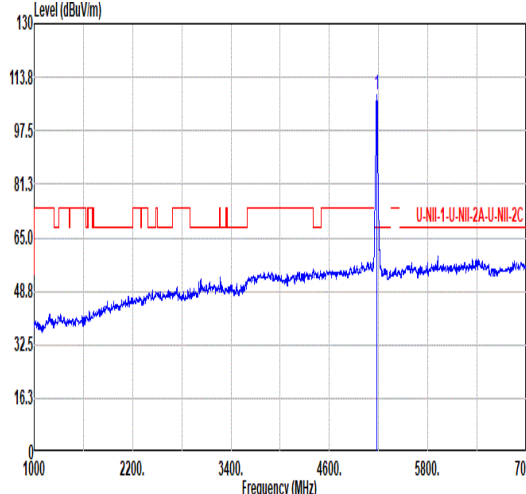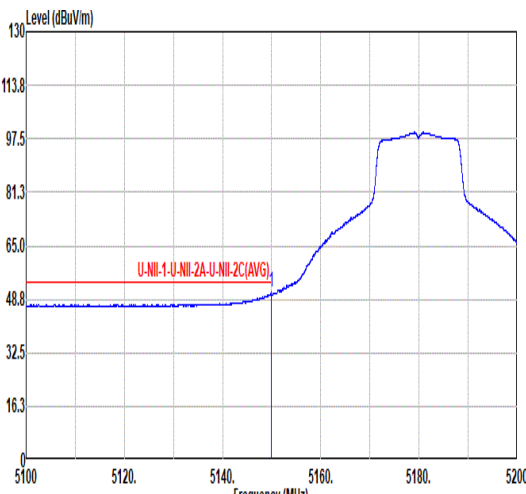
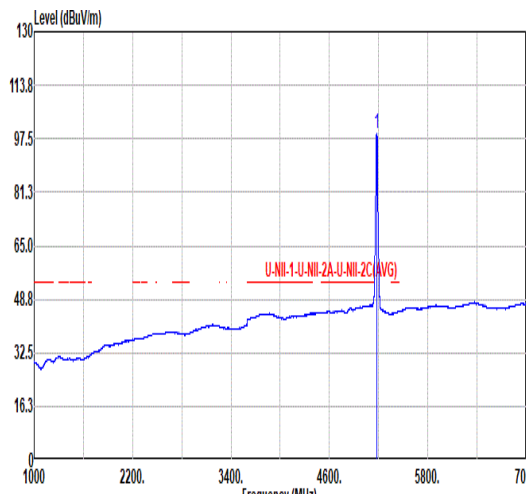


Mode	1																																																																																																																		
	Band Edge																																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																																		
ANT	4																																																																																																																		
Pol.	Horizontal						Fundamental																																																																																																												
Peak																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5146.65</td><td>66.59</td><td>74.00</td><td>-7.41</td><td>50.32</td><td>34.11</td><td>12.03</td><td>29.87</td><td>0.00</td><td>100</td><td>238</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5146.65	66.59	74.00	-7.41	50.32	34.11	12.03	29.87	0.00	100	238	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>108.27</td><td>-----</td><td>-----</td><td>91.87</td><td>34.22</td><td>12.06</td><td>29.88</td><td>0.00</td><td>100</td><td>238</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	108.27	-----	-----	91.87	34.22	12.06	29.88	0.00	100	238
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																								
1	5146.65	66.59	74.00	-7.41	50.32	34.11	12.03	29.87	0.00	100	238	PEAK																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																								
1	5180.00	108.27	-----	-----	91.87	34.22	12.06	29.88	0.00	100	238	PEAK																																																																																																							
Avg																																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.85</td><td>50.80</td><td>54.00</td><td>-3.20</td><td>34.54</td><td>34.10</td><td>12.03</td><td>29.87</td><td>0.00</td><td>100</td><td>238</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.85	50.80	54.00	-3.20	34.54	34.10	12.03	29.87	0.00	100	238	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>99.17</td><td>-----</td><td>-----</td><td>82.77</td><td>34.22</td><td>12.06</td><td>29.88</td><td>0.00</td><td>100</td><td>238</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	99.17	-----	-----	82.77	34.22	12.06	29.88	0.00	100	238
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																								
1	5149.85	50.80	54.00	-3.20	34.54	34.10	12.03	29.87	0.00	100	238	AVERAGE																																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																											
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																																								
1	5180.00	99.17	-----	-----	82.77	34.22	12.06	29.88	0.00	100	238	AVERAGE																																																																																																							

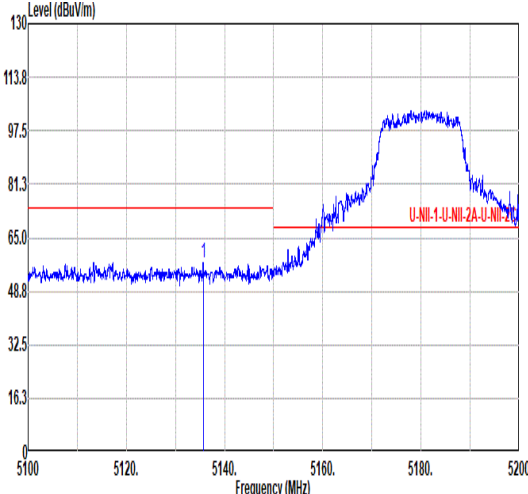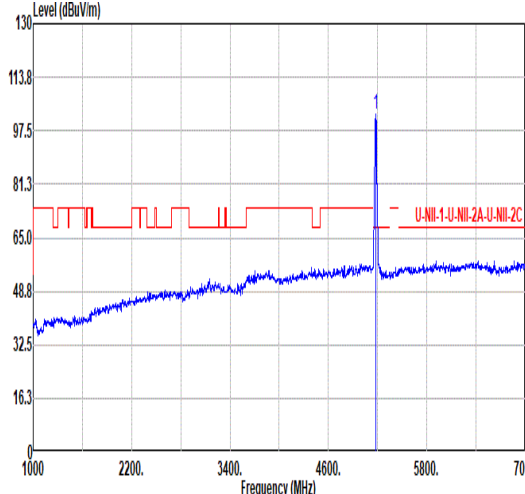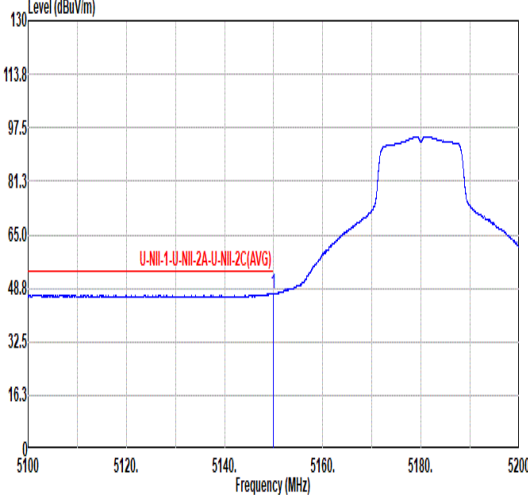
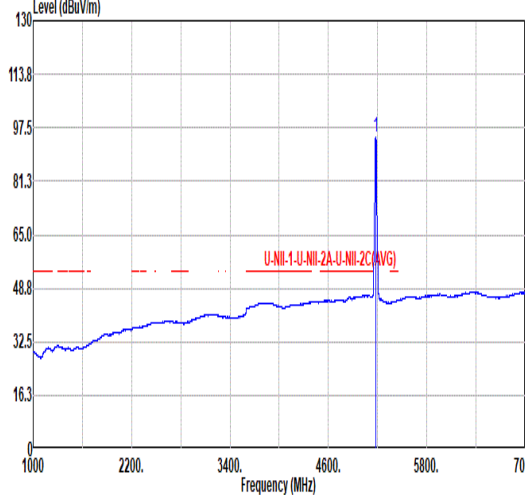


Mode	1																																																																																																						
	Band Edge																																																																																																						
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																						
ANT	4																																																																																																						
Pol.	Vertical						Fundamental																																																																																																
Peak																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5135.65</td><td>57.52</td><td>74.00</td><td>-16.48</td><td>41.20</td><td>34.16</td><td>12.02</td><td>29.86</td><td>0.00</td><td>320</td><td>46</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5135.65	57.52	74.00	-16.48	41.20	34.16	12.02	29.86	0.00	320	46	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>102.72</td><td>-----</td><td>-----</td><td>86.32</td><td>34.22</td><td>12.06</td><td>29.88</td><td>0.00</td><td>320</td><td>46</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	102.72	-----	-----	86.32	34.22	12.06	29.88	0.00	320	46
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	5135.65	57.52	74.00	-16.48	41.20	34.16	12.02	29.86	0.00	320	46	PEAK																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	5180.00	102.72	-----	-----	86.32	34.22	12.06	29.88	0.00	320	46	PEAK																																																																																											
Avg																																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.85</td><td>47.25</td><td>54.00</td><td>-6.75</td><td>30.99</td><td>34.10</td><td>12.03</td><td>29.87</td><td>0.00</td><td>320</td><td>46</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5149.85	47.25	54.00	-6.75	30.99	34.10	12.03	29.87	0.00	320	46	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>94.58</td><td>-----</td><td>-----</td><td>78.18</td><td>34.22</td><td>12.06</td><td>29.88</td><td>0.00</td><td>320</td><td>46</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	5180.00	94.58	-----	-----	78.18	34.22	12.06	29.88	0.00	320	46
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	5149.85	47.25	54.00	-6.75	30.99	34.10	12.03	29.87	0.00	320	46	AVERAGE																																																																																											
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos	Remark																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																												
1	5180.00	94.58	-----	-----	78.18	34.22	12.06	29.88	0.00	320	46	AVERAGE																																																																																											



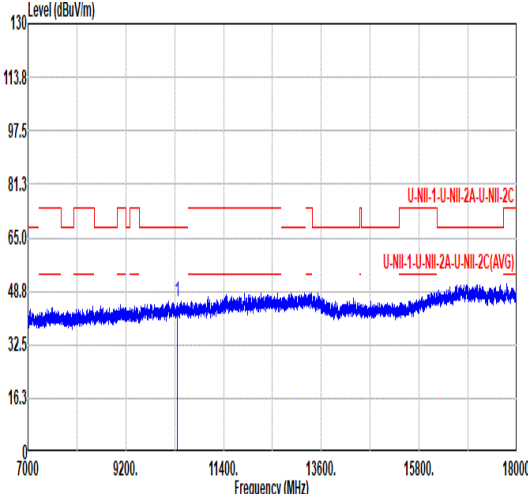
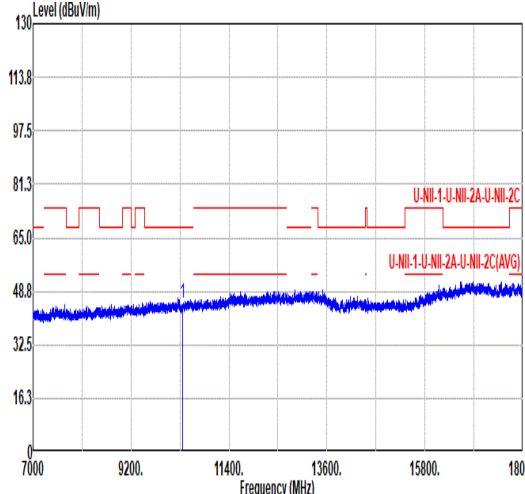


Mode	1																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																	
ANT	4																																																																																																	
Pol.	Horizontal						Vertical																																																																																											
Peak Avg																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>45.47</td><td>68.20</td><td>-22.73</td><td>57.02</td><td>37.46</td><td>17.53</td><td>66.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	45.47	68.20	-22.73	57.02	37.46	17.53	66.54	0.00	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>45.15</td><td>68.20</td><td>-23.05</td><td>56.69</td><td>37.46</td><td>17.54</td><td>66.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	45.15	68.20	-23.05	56.69	37.46	17.54	66.54	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	10360.00	45.47	68.20	-22.73	57.02	37.46	17.53	66.54	0.00	--	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	10360.00	45.15	68.20	-23.05	56.69	37.46	17.54	66.54	0.00	--	PEAK																																																																																							



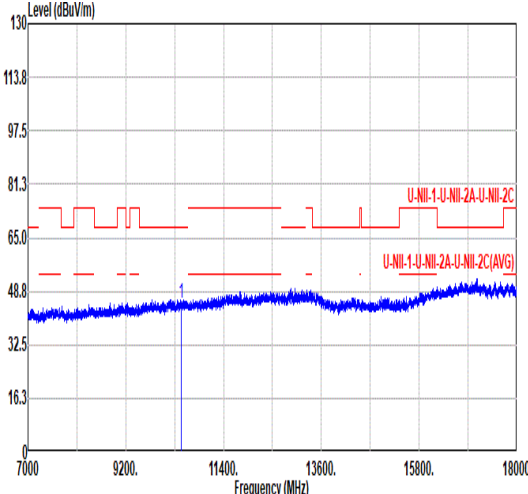
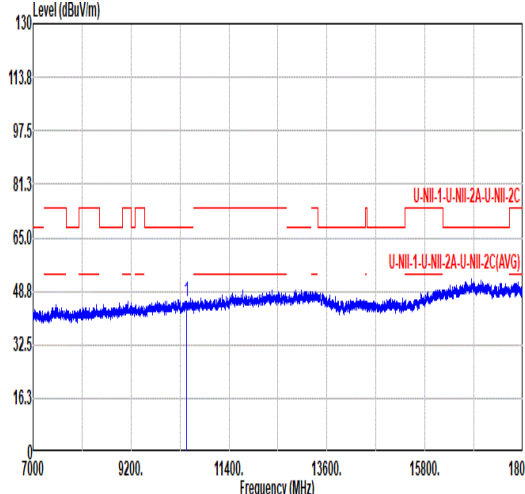


Mode	2																																																																																																		
	Harmonic																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																		
ANT	4																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>45.06</td><td>68.20</td><td>-23.14</td><td>56.44</td><td>37.55</td><td>17.62</td><td>66.55</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	45.06	68.20	-23.14	56.44	37.55	17.62	66.55	0.00	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>45.42</td><td>68.20</td><td>-22.78</td><td>56.82</td><td>37.54</td><td>17.61</td><td>66.55</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg	1	10440.00	45.42	68.20	-22.78	56.82	37.54	17.61	66.55	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	10440.00	45.06	68.20	-23.14	56.44	37.55	17.62	66.55	0.00	--	PEAK																																																																																								
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	dB	cm	deg																																																																																								
1	10440.00	45.42	68.20	-22.78	56.82	37.54	17.61	66.55	0.00	--	PEAK																																																																																								

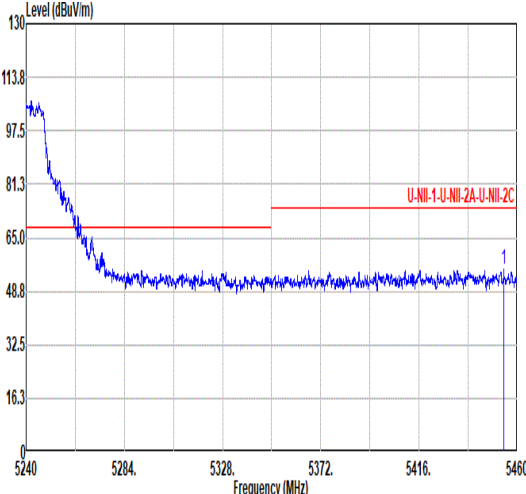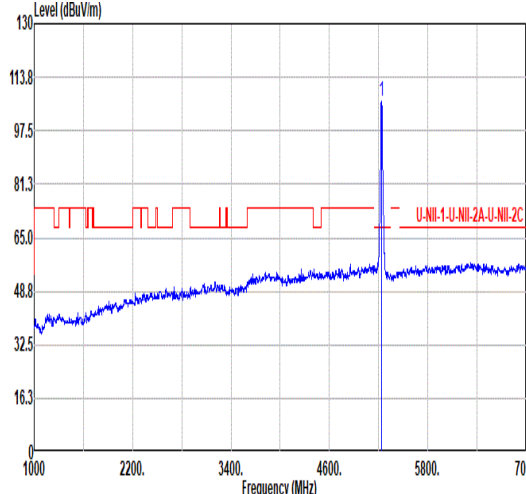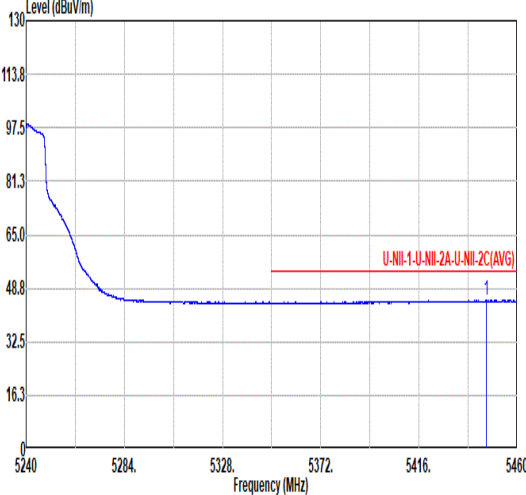
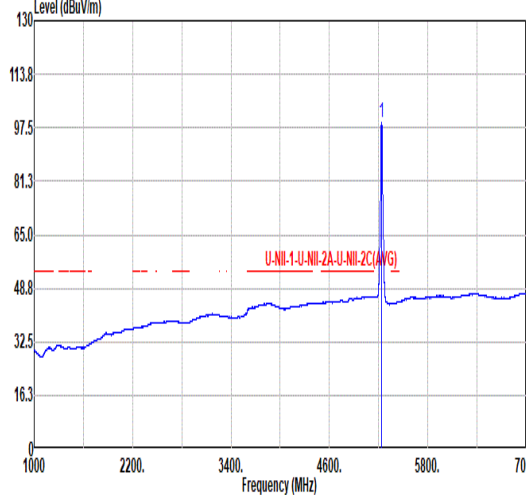


Mode	3																																																																																																		
	Band Edge																																																																																																		
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																		
ANT	4																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5453.96</td><td>55.23</td><td>74.00</td><td>-18.77</td><td>38.19</td><td>34.59</td><td>12.32</td><td>29.87</td><td>0.00</td><td>100</td><td>242</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5453.96	55.23	74.00	-18.77	38.19	34.59	12.32	29.87	0.00	100	242	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>106.38</td><td>-----</td><td>-----</td><td>89.81</td><td>34.37</td><td>12.10</td><td>29.90</td><td>0.00</td><td>100</td><td>242</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	106.38	-----	-----	89.81	34.37	12.10	29.90	0.00	100	242
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5453.96	55.23	74.00	-18.77	38.19	34.59	12.32	29.87	0.00	100	242	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5240.00	106.38	-----	-----	89.81	34.37	12.10	29.90	0.00	100	242	PEAK																																																																																							
Avg																																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5446.26</td><td>45.20</td><td>54.00</td><td>-8.80</td><td>28.14</td><td>34.60</td><td>12.31</td><td>29.85</td><td>0.00</td><td>100</td><td>242</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5446.26	45.20	54.00	-8.80	28.14	34.60	12.31	29.85	0.00	100	242	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5240.00</td><td>99.05</td><td>-----</td><td>-----</td><td>82.48</td><td>34.37</td><td>12.10</td><td>29.90</td><td>0.00</td><td>100</td><td>242</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	99.05	-----	-----	82.48	34.37	12.10	29.90	0.00	100	242
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5446.26	45.20	54.00	-8.80	28.14	34.60	12.31	29.85	0.00	100	242	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5240.00	99.05	-----	-----	82.48	34.37	12.10	29.90	0.00	100	242	AVERAGE																																																																																							

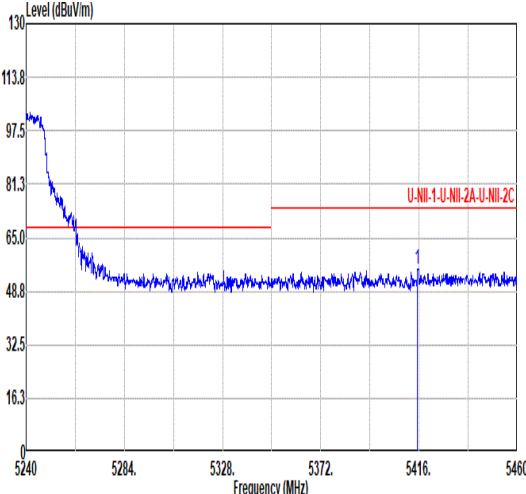
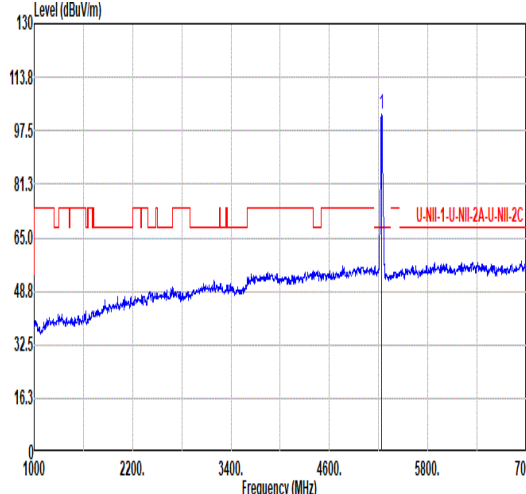
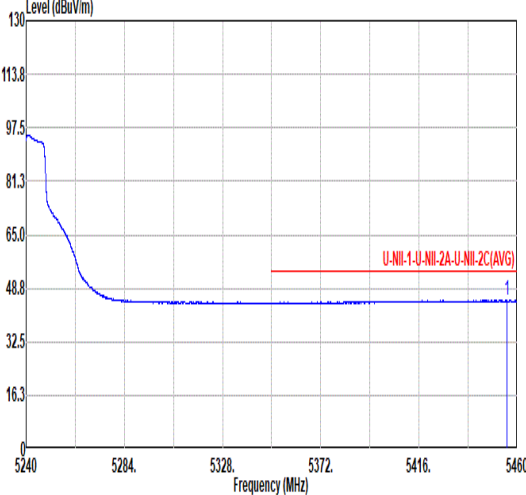
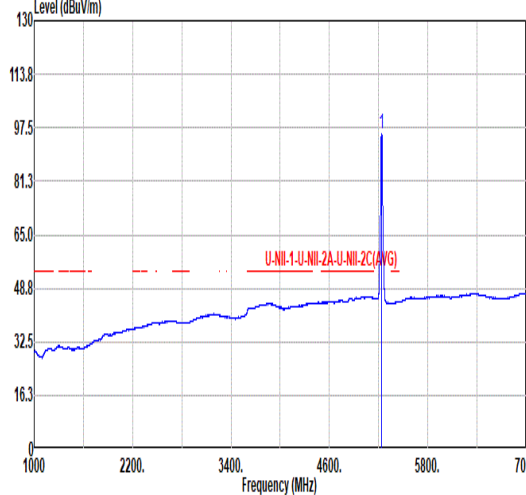


Mode	3																																																																																																														
	Band Edge																																																																																																														
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																														
ANT	4																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5415.24</td><td>55.59</td><td>74.00</td><td>-18.41</td><td>38.52</td><td>34.60</td><td>12.27</td><td>29.00</td><td>0.00</td><td>338</td><td>45</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5415.24	55.59	74.00	-18.41	38.52	34.60	12.27	29.00	0.00	338	45	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>102.77</td><td>-----</td><td>-----</td><td>86.18</td><td>34.38</td><td>12.11</td><td>29.90</td><td>0.00</td><td>338</td><td>45</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	102.77	-----	-----	86.18	34.38	12.11	29.90	0.00	338	45
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5415.24	55.59	74.00	-18.41	38.52	34.60	12.27	29.00	0.00	338	45	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5240.00	102.77	-----	-----	86.18	34.38	12.11	29.90	0.00	338	45	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5455.28</td><td>45.24</td><td>54.00</td><td>-8.76</td><td>28.20</td><td>34.59</td><td>12.32</td><td>29.87</td><td>0.00</td><td>338</td><td>45</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5455.28	45.24	54.00	-8.76	28.20	34.59	12.32	29.87	0.00	338	45	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>95.55</td><td>-----</td><td>-----</td><td>78.96</td><td>34.38</td><td>12.11</td><td>29.90</td><td>0.00</td><td>338</td><td>45</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	95.55	-----	-----	78.96	34.38	12.11	29.90	0.00	338	45
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5455.28	45.24	54.00	-8.76	28.20	34.59	12.32	29.87	0.00	338	45	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5240.00	95.55	-----	-----	78.96	34.38	12.11	29.90	0.00	338	45	AVERAGE																																																																																																			



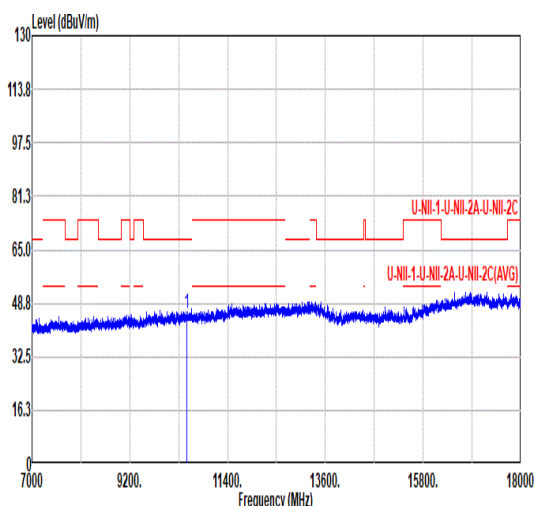
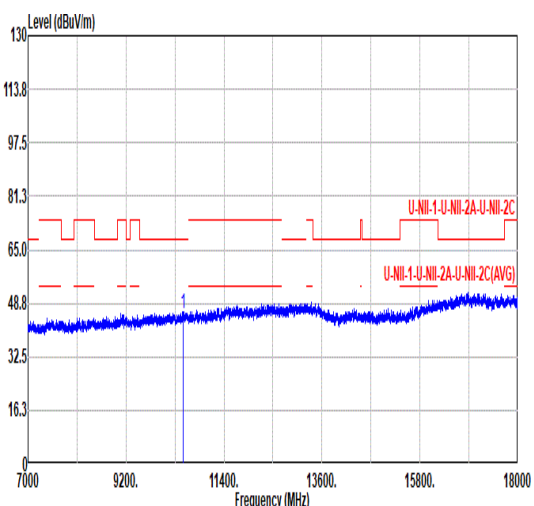


Mode	3																																																						
	Harmonic																																																						
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																						
ANT	4																																																						
Pol.	Horizontal						Vertical																																																
Peak Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10400.00</td><td>45.47</td><td>68.20</td><td>-22.73</td><td>56.82</td><td>37.57</td><td>17.64</td><td>66.56</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10400.00	45.47	68.20	-22.73	56.82	37.57	17.64	66.56	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	10400.00	45.47	68.20	-22.73	56.82	37.57	17.64	66.56	0.00	--	PEAK																																												
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10400.00</td><td>45.41</td><td>68.20</td><td>-22.79</td><td>56.76</td><td>37.57</td><td>17.64</td><td>66.56</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10400.00	45.41	68.20	-22.79	56.76	37.57	17.64	66.56	0.00	--	PEAK	
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	10400.00	45.41	68.20	-22.79	56.76	37.57	17.64	66.56	0.00	--	PEAK																																												

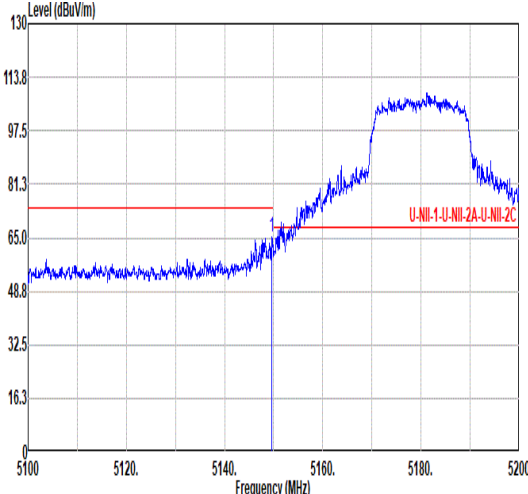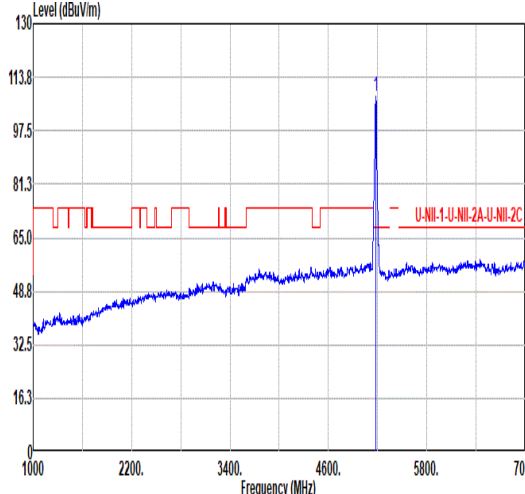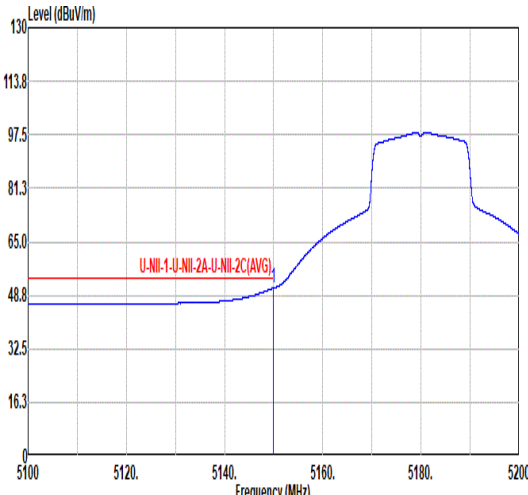
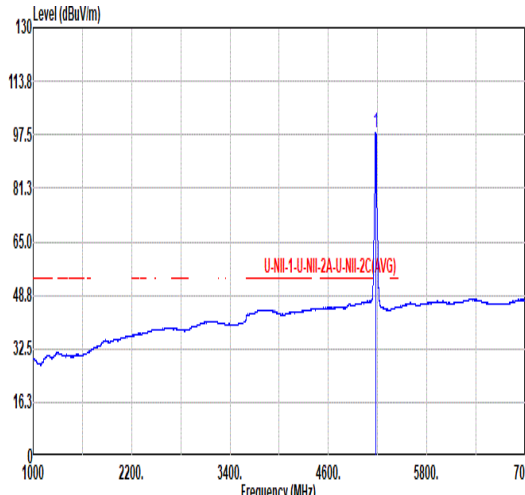



Mode	4																																																																																																														
	Band Edge - L																																																																																																														
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																														
ANT	4																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.65</td><td>65.49</td><td>74.00</td><td>-8.51</td><td>49.23</td><td>34.10</td><td>12.03</td><td>29.87</td><td>0.00</td><td>100</td><td>235</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.65	65.49	74.00	-8.51	49.23	34.10	12.03	29.87	0.00	100	235	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>107.07</td><td>-----</td><td>-----</td><td>91.30</td><td>34.22</td><td>12.06</td><td>29.88</td><td>0.00</td><td>100</td><td>235</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	107.07	-----	-----	91.30	34.22	12.06	29.88	0.00	100	235
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5149.65	65.49	74.00	-8.51	49.23	34.10	12.03	29.87	0.00	100	235	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5180.00	107.07	-----	-----	91.30	34.22	12.06	29.88	0.00	100	235	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.85</td><td>50.93</td><td>54.00</td><td>-3.07</td><td>34.67</td><td>34.10</td><td>12.03</td><td>29.87</td><td>0.00</td><td>100</td><td>235</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.85	50.93	54.00	-3.07	34.67	34.10	12.03	29.87	0.00	100	235	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>98.34</td><td>-----</td><td>-----</td><td>81.94</td><td>34.22</td><td>12.06</td><td>29.88</td><td>0.00</td><td>100</td><td>235</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	98.34	-----	-----	81.94	34.22	12.06	29.88	0.00	100	235
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5149.85	50.93	54.00	-3.07	34.67	34.10	12.03	29.87	0.00	100	235	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5180.00	98.34	-----	-----	81.94	34.22	12.06	29.88	0.00	100	235	AVERAGE																																																																																																			

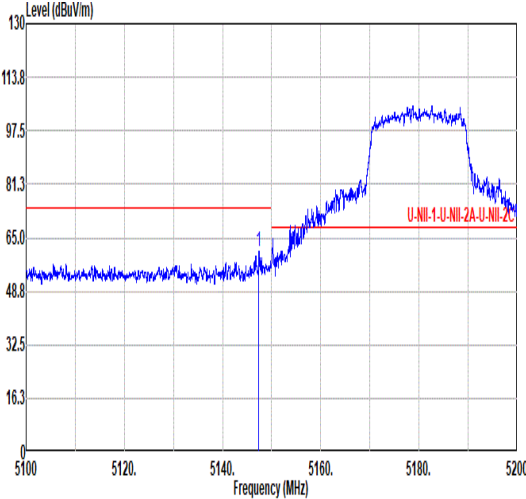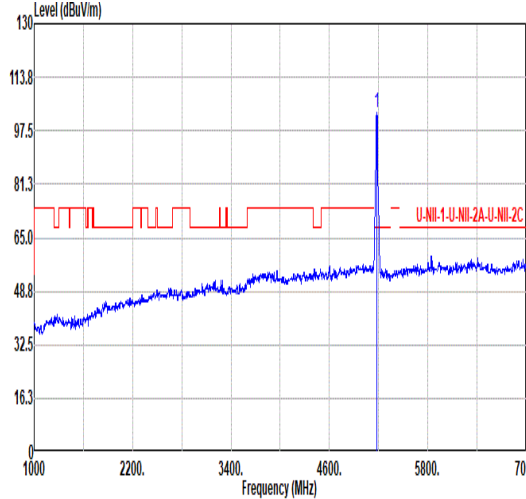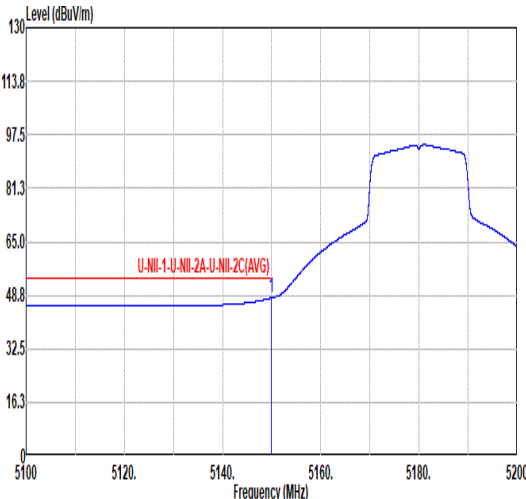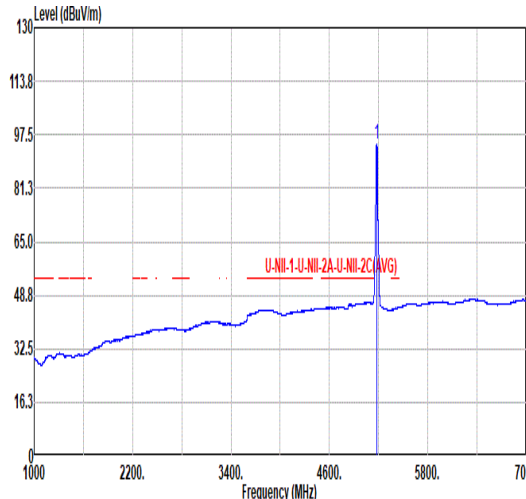

Mode	4																																																																																																														
	Band Edge - L																																																																																																														
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																														
ANT	4																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5147.35</td><td>60.93</td><td>74.00</td><td>-13.07</td><td>44.66</td><td>34.11</td><td>12.03</td><td>29.87</td><td>0.00</td><td>390</td><td>47</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5147.35	60.93	74.00	-13.07	44.66	34.11	12.03	29.87	0.00	390	47	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>102.79</td><td>-----</td><td>-----</td><td>86.39</td><td>34.22</td><td>12.06</td><td>29.88</td><td>0.00</td><td>390</td><td>47</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	102.79	-----	-----	86.39	34.22	12.06	29.88	0.00	390	47
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5147.35	60.93	74.00	-13.07	44.66	34.11	12.03	29.87	0.00	390	47	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5180.00	102.79	-----	-----	86.39	34.22	12.06	29.88	0.00	390	47	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>47.93</td><td>54.00</td><td>-6.07</td><td>31.67</td><td>34.10</td><td>12.03</td><td>29.87</td><td>0.00</td><td>390</td><td>47</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5150.00	47.93	54.00	-6.07	31.67	34.10	12.03	29.87	0.00	390	47	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>94.53</td><td>-----</td><td>-----</td><td>78.13</td><td>34.22</td><td>12.06</td><td>29.88</td><td>0.00</td><td>390</td><td>47</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	94.53	-----	-----	78.13	34.22	12.06	29.88	0.00	390	47
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5150.00	47.93	54.00	-6.07	31.67	34.10	12.03	29.87	0.00	390	47	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5180.00	94.53	-----	-----	78.13	34.22	12.06	29.88	0.00	390	47	AVERAGE																																																																																																			

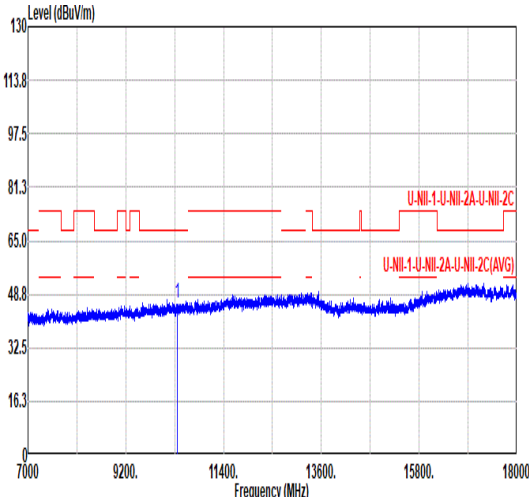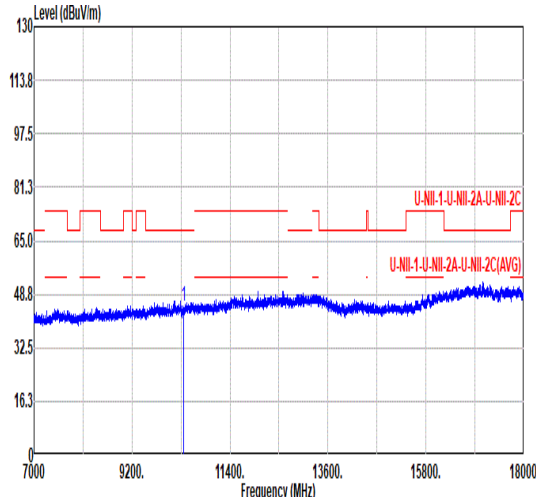





Mode	4																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full RU_5180MHz																																																																																																	
ANT	4																																																																																																	
Pol.	Horizontal						Vertical																																																																																											
Peak Avg																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.13</td><td>68.20</td><td>-22.07</td><td>57.68</td><td>37.46</td><td>17.53</td><td>66.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	46.13	68.20	-22.07	57.68	37.46	17.53	66.54	0.00	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>45.20</td><td>68.20</td><td>-23.00</td><td>56.73</td><td>37.47</td><td>17.54</td><td>66.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	45.20	68.20	-23.00	56.73	37.47	17.54	66.54	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	10360.00	46.13	68.20	-22.07	57.68	37.46	17.53	66.54	0.00	--	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	10360.00	45.20	68.20	-23.00	56.73	37.47	17.54	66.54	0.00	--	PEAK																																																																																							

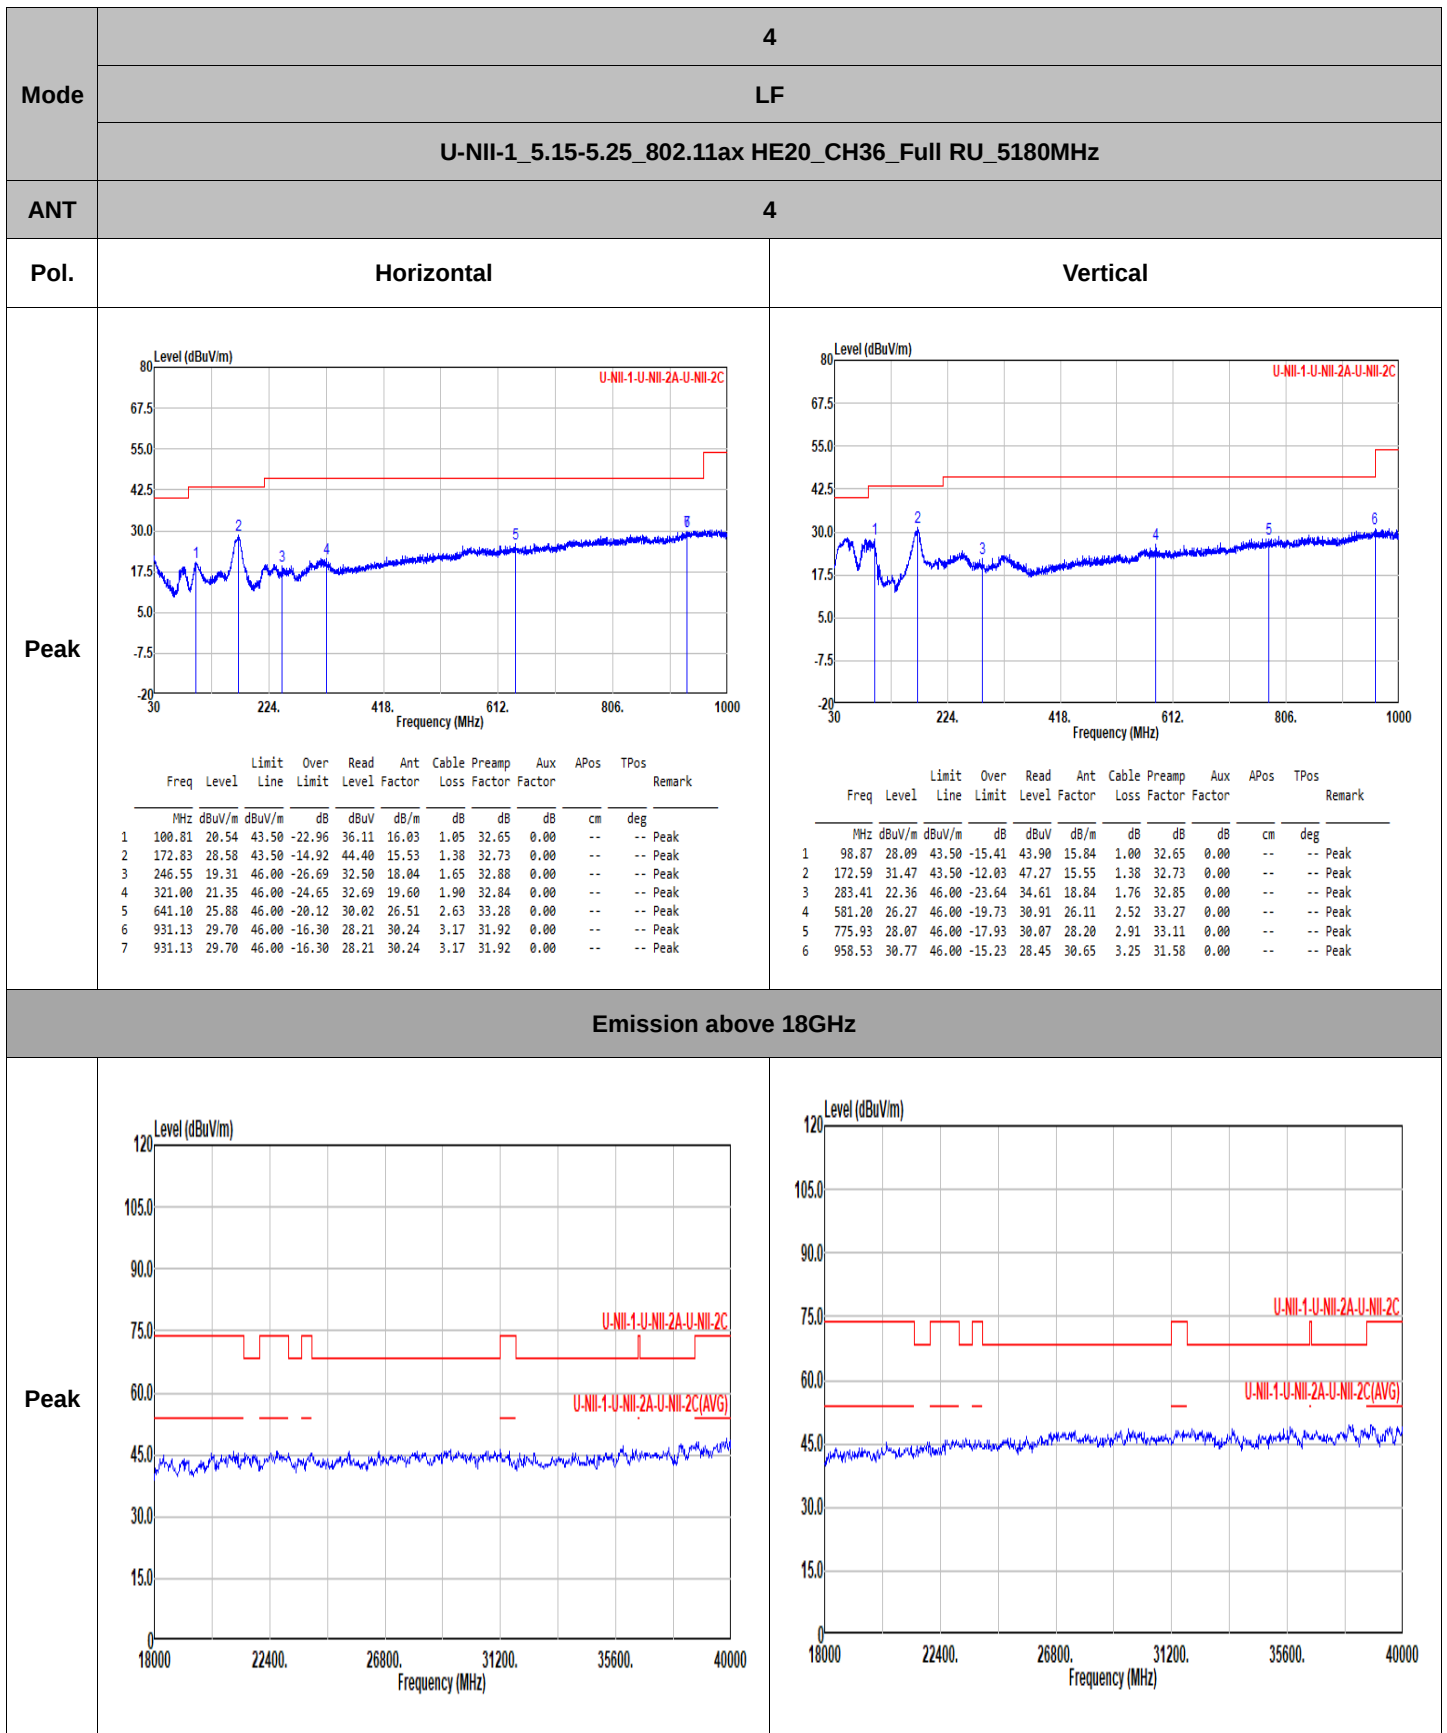







		5																																																				
Mode		Harmonic																																																				
		U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full RU_5220MHz																																																				
ANT		4																																																				
Pol.		Horizontal					Vertical																																															
Peak Avg																																																						
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>45.70</td><td>68.20</td><td>-22.50</td><td>57.10</td><td>37.54</td><td>17.61</td><td>66.55</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	45.70	68.20	-22.50	57.10	37.54	17.61	66.55	0.00	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	10440.00	45.70	68.20	-22.50	57.10	37.54	17.61	66.55	0.00	--	PEAK																																											
		<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>45.94</td><td>68.20</td><td>-22.26</td><td>57.35</td><td>37.53</td><td>17.61</td><td>66.55</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	45.94	68.20	-22.26	57.35	37.53	17.61	66.55	0.00	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	10440.00	45.94	68.20	-22.26	57.35	37.53	17.61	66.55	0.00	--	PEAK																																											

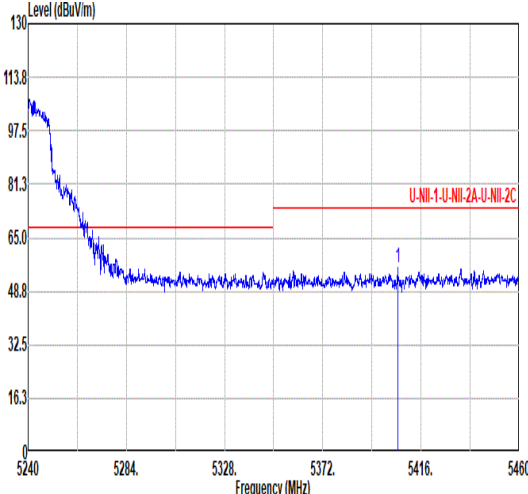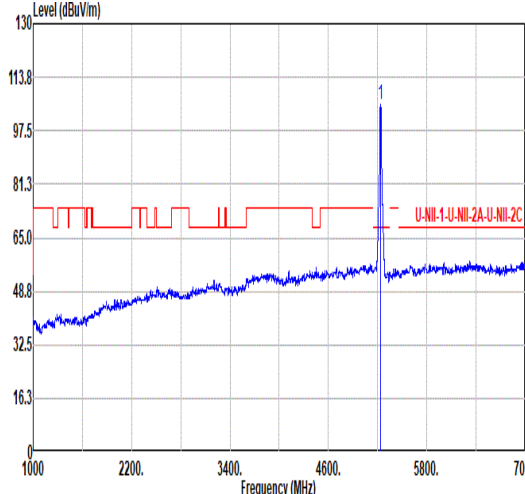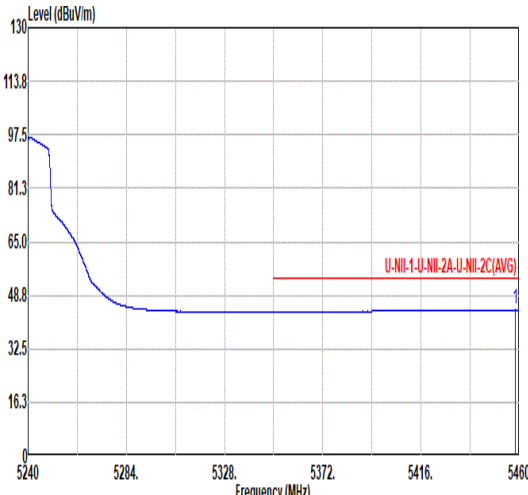
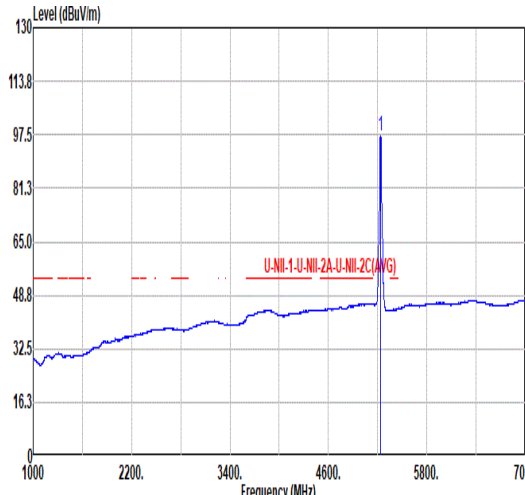


		6																																																																																									
Mode		Band Edge																																																																																									
		U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																																									
ANT		4																																																																																									
Pol.		Horizontal																																																																																									
Peak		 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5405.56</td><td>55.99</td><td>74.00</td><td>-18.01</td><td>38.92</td><td>34.60</td><td>12.26</td><td>29.79</td><td>0.00</td><td>113</td><td>234</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5405.56	55.99	74.00	-18.01	38.92	34.60	12.26	29.79	0.00	113	234	PEAK	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>105.29</td><td>-----</td><td>-----</td><td>88.72</td><td>34.37</td><td>12.10</td><td>29.90</td><td>0.00</td><td>113</td><td>234</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	105.29	-----	-----	88.72	34.37	12.10	29.90	0.00	113	234	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5405.56	55.99	74.00	-18.01	38.92	34.60	12.26	29.79	0.00	113	234	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5240.00	105.29	-----	-----	88.72	34.37	12.10	29.90	0.00	113	234	PEAK																																																																															
Avg		 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.36</td><td>44.40</td><td>54.00</td><td>-9.60</td><td>27.36</td><td>34.58</td><td>12.33</td><td>29.87</td><td>0.00</td><td>113</td><td>234</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.36	44.40	54.00	-9.60	27.36	34.58	12.33	29.87	0.00	113	234	AVERAGE	 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>97.29</td><td>-----</td><td>-----</td><td>88.72</td><td>34.37</td><td>12.10</td><td>29.90</td><td>0.00</td><td>113</td><td>234</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	97.29	-----	-----	88.72	34.37	12.10	29.90	0.00	113	234	AVERAGE
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5458.36	44.40	54.00	-9.60	27.36	34.58	12.33	29.87	0.00	113	234	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5240.00	97.29	-----	-----	88.72	34.37	12.10	29.90	0.00	113	234	AVERAGE																																																																															

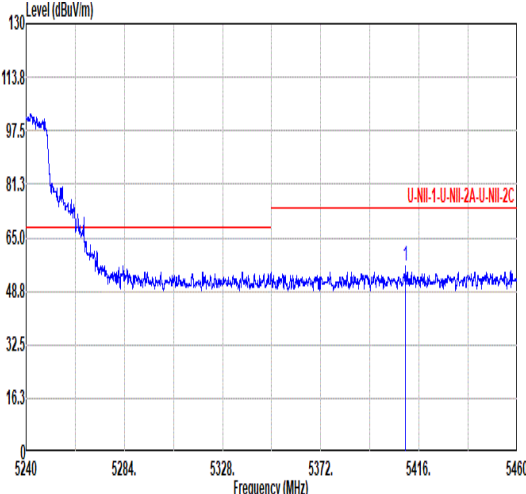
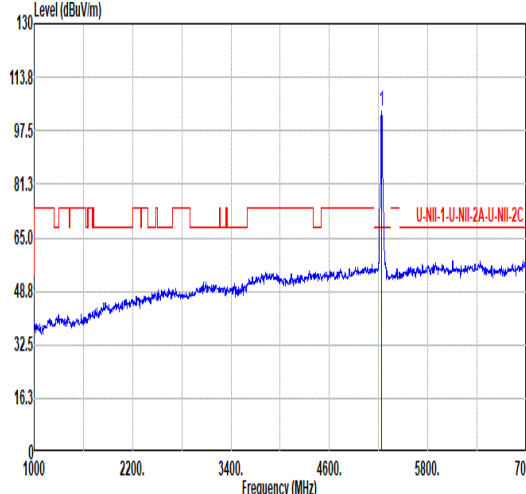
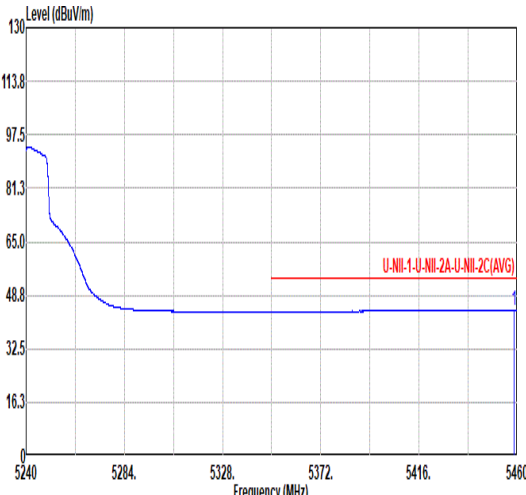
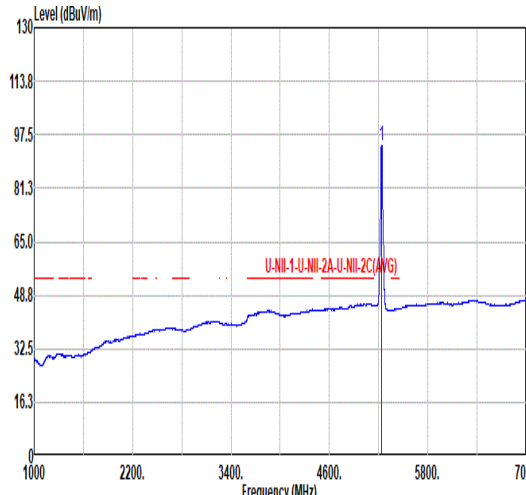


Mode	6																																																																																																														
	Band Edge																																																																																																														
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																																																														
ANT	4																																																																																																														
Pol.	Vertical						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5409.96</td><td>56.55</td><td>74.00</td><td>-17.45</td><td>39.49</td><td>34.60</td><td>12.26</td><td>29.00</td><td>0.00</td><td>305</td><td>42</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5409.96	56.55	74.00	-17.45	39.49	34.60	12.26	29.00	0.00	305	42	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>103.26</td><td>-----</td><td>-----</td><td>86.69</td><td>34.37</td><td>12.10</td><td>29.90</td><td>0.00</td><td>305</td><td>42</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	103.26	-----	-----	86.69	34.37	12.10	29.90	0.00	305	42
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5409.96	56.55	74.00	-17.45	39.49	34.60	12.26	29.00	0.00	305	42	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5240.00	103.26	-----	-----	86.69	34.37	12.10	29.90	0.00	305	42	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5458.53</td><td>44.39</td><td>54.00</td><td>-9.61</td><td>27.35</td><td>34.58</td><td>12.33</td><td>29.87</td><td>0.00</td><td>305</td><td>42</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5458.53	44.39	54.00	-9.61	27.35	34.58	12.33	29.87	0.00	305	42	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>94.38</td><td>-----</td><td>-----</td><td>77.80</td><td>34.38</td><td>12.10</td><td>29.90</td><td>0.00</td><td>305</td><td>42</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5240.00	94.38	-----	-----	77.80	34.38	12.10	29.90	0.00	305	42
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5458.53	44.39	54.00	-9.61	27.35	34.58	12.33	29.87	0.00	305	42	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5240.00	94.38	-----	-----	77.80	34.38	12.10	29.90	0.00	305	42	AVERAGE																																																																																																			

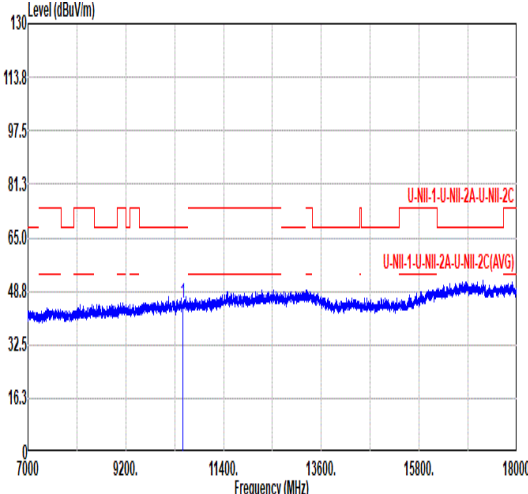
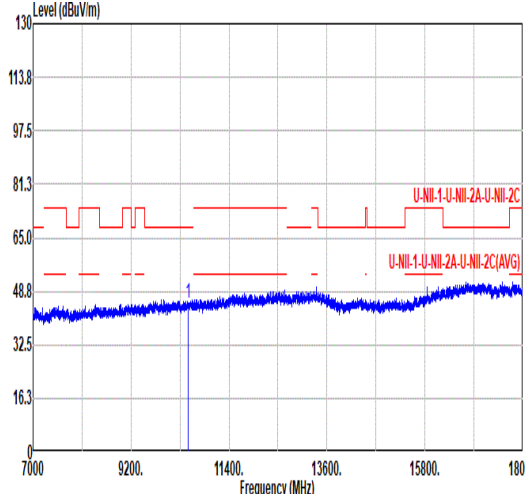


Mode	6																																																																																																	
	Harmonic																																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full RU_5240MHz																																																																																																	
ANT	4																																																																																																	
Pol.	Horizontal						Vertical																																																																																											
Peak Avg																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10400.00</td><td>45.07</td><td>68.20</td><td>-23.13</td><td>56.40</td><td>37.58</td><td>17.65</td><td>66.56</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10400.00	45.07	68.20	-23.13	56.40	37.58	17.65	66.56	0.00	--	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10400.00</td><td>45.28</td><td>68.20</td><td>-22.92</td><td>56.63</td><td>37.57</td><td>17.64</td><td>66.56</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10400.00	45.28	68.20	-22.92	56.63	37.57	17.64	66.56	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	10400.00	45.07	68.20	-23.13	56.40	37.58	17.65	66.56	0.00	--	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	10400.00	45.28	68.20	-22.92	56.63	37.57	17.64	66.56	0.00	--	PEAK																																																																																							

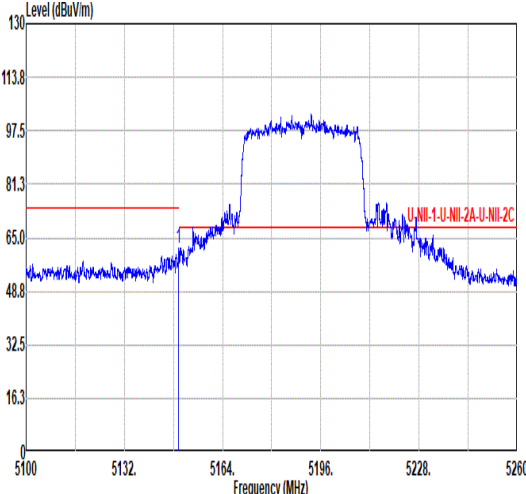
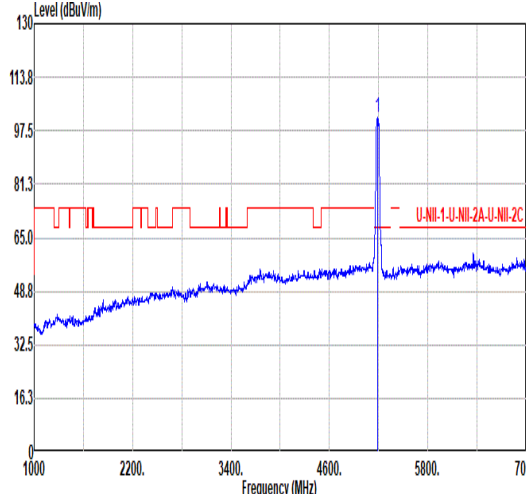
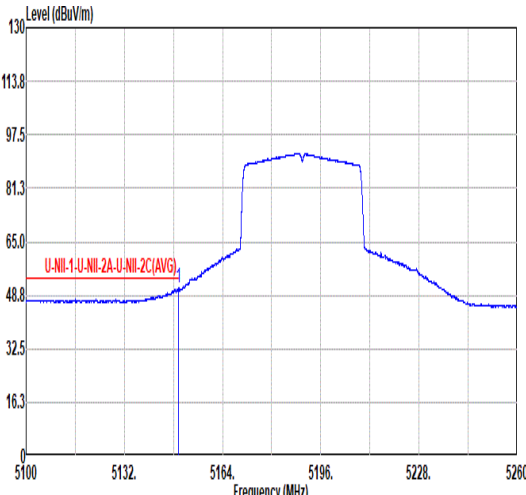
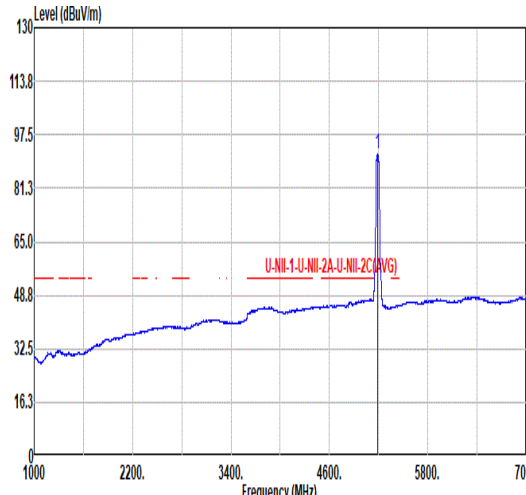


Mode	7																																																																																																														
	Band Edge - L																																																																																																														
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																																																																														
ANT	4																																																																																																														
Pol.	Horizontal						Fundamental																																																																																																								
Peak																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.69</td><td>61.92</td><td>74.00</td><td>-12.08</td><td>45.66</td><td>34.10</td><td>12.03</td><td>29.87</td><td>0.00</td><td>100</td><td>232</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.69	61.92	74.00	-12.08	45.66	34.10	12.03	29.87	0.00	100	232	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>101.67</td><td>-----</td><td>-----</td><td>85.25</td><td>34.24</td><td>12.06</td><td>29.88</td><td>0.00</td><td>100</td><td>232</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	101.67	-----	-----	85.25	34.24	12.06	29.88	0.00	100	232
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5149.69	61.92	74.00	-12.08	45.66	34.10	12.03	29.87	0.00	100	232	PEAK																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5190.00	101.67	-----	-----	85.25	34.24	12.06	29.88	0.00	100	232	PEAK																																																																																																			
Avg																																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.69</td><td>50.81</td><td>54.00</td><td>-3.19</td><td>34.55</td><td>34.10</td><td>12.03</td><td>29.87</td><td>0.00</td><td>100</td><td>232</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.69	50.81	54.00	-3.19	34.55	34.10	12.03	29.87	0.00	100	232	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>91.51</td><td>-----</td><td>-----</td><td>75.09</td><td>34.24</td><td>12.06</td><td>29.88</td><td>0.00</td><td>100</td><td>232</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	91.51	-----	-----	75.09	34.24	12.06	29.88	0.00	100	232
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5149.69	50.81	54.00	-3.19	34.55	34.10	12.03	29.87	0.00	100	232	AVERAGE																																																																																																			
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																					
1	5190.00	91.51	-----	-----	75.09	34.24	12.06	29.88	0.00	100	232	AVERAGE																																																																																																			

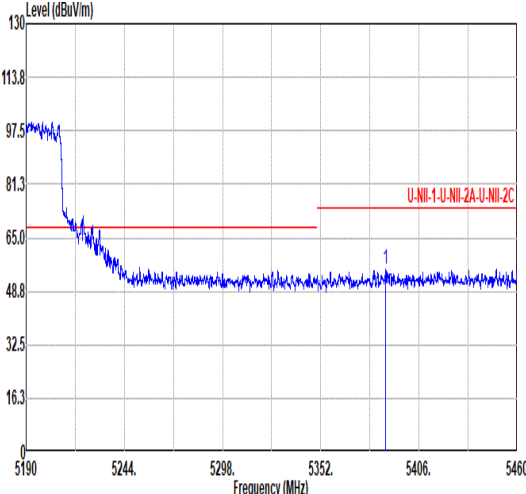
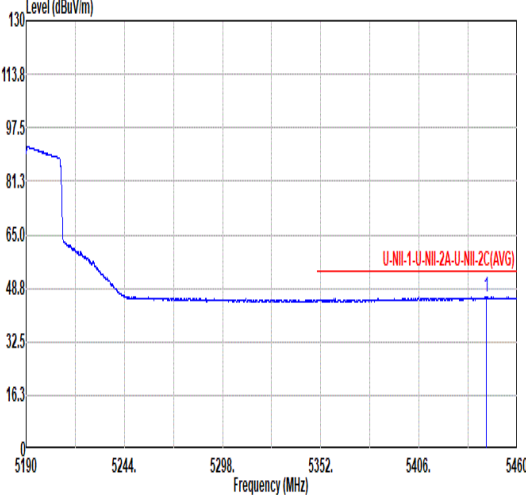


Mode	7																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																							
ANT	4																																																							
Pol.	Horizontal						Fundamental																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5387.78</td><td>55.62</td><td>74.00</td><td>-18.38</td><td>38.63</td><td>34.55</td><td>12.24</td><td>29.80</td><td>0.00</td><td>100</td><td>232</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5387.78	55.62	74.00	-18.38	38.63	34.55	12.24	29.80	0.00	100	232	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5387.78	55.62	74.00	-18.38	38.63	34.55	12.24	29.80	0.00	100	232	PEAK																																												
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5442.86</td><td>46.08</td><td>54.00</td><td>-7.92</td><td>29.02</td><td>34.60</td><td>12.31</td><td>29.85</td><td>0.00</td><td>100</td><td>232</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5442.86	46.08	54.00	-7.92	29.02	34.60	12.31	29.85	0.00	100	232	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5442.86	46.08	54.00	-7.92	29.02	34.60	12.31	29.85	0.00	100	232	AVERAGE																																												

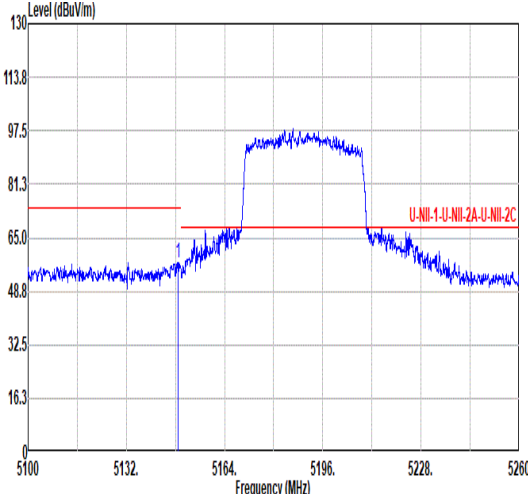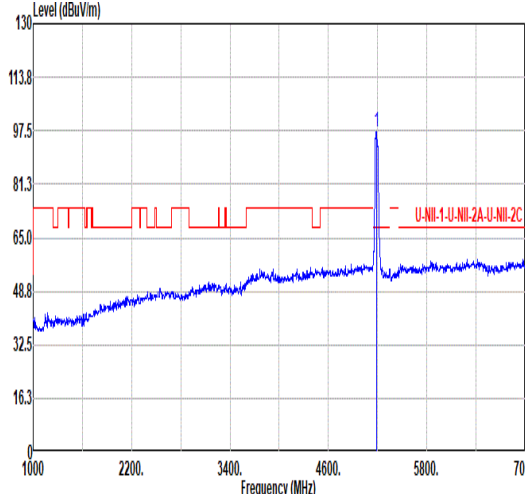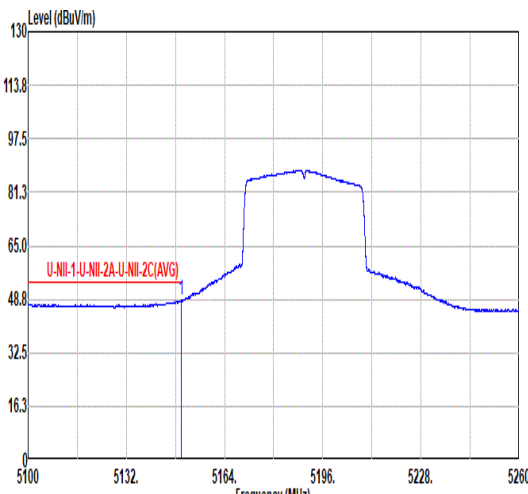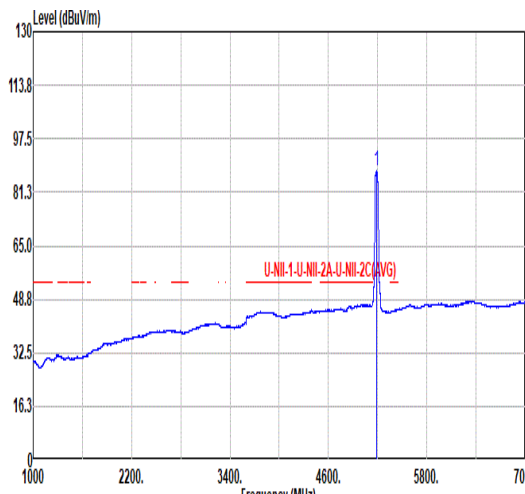

		7																																																					
Mode		Band Edge - L																																																					
		U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																					
ANT		4																																																					
Pol.		Vertical																																																					
Peak																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.89</td><td>57.43</td><td>74.00</td><td>-16.57</td><td>41.17</td><td>34.10</td><td>12.03</td><td>29.87</td><td>0.00</td><td>391</td><td>46</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.89	57.43	74.00	-16.57	41.17	34.10	12.03	29.87	0.00	391	46
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5148.89	57.43	74.00	-16.57	41.17	34.10	12.03	29.87	0.00	391	46	PEAK																																											
Fundamental																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>97.20</td><td>-----</td><td>-----</td><td>80.78</td><td>34.24</td><td>12.06</td><td>29.88</td><td>0.00</td><td>391</td><td>46</td><td>PEAK</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	97.20	-----	-----	80.78	34.24	12.06	29.88	0.00	391	46
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5190.00	97.20	-----	-----	80.78	34.24	12.06	29.88	0.00	391	46	PEAK																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5150.00</td><td>48.34</td><td>54.00</td><td>-5.66</td><td>32.08</td><td>34.10</td><td>12.03</td><td>29.87</td><td>0.00</td><td>391</td><td>46</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5150.00	48.34	54.00	-5.66	32.08	34.10	12.03	29.87	0.00	391	46
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5150.00	48.34	54.00	-5.66	32.08	34.10	12.03	29.87	0.00	391	46	AVERAGE																																											
Avg																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5190.00</td><td>87.68</td><td>-----</td><td>-----</td><td>71.26</td><td>34.24</td><td>12.06</td><td>29.88</td><td>0.00</td><td>391</td><td>46</td><td>AVERAGE</td></tr></table>													Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5190.00	87.68	-----	-----	71.26	34.24	12.06	29.88	0.00	391	46
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																													
1	5190.00	87.68	-----	-----	71.26	34.24	12.06	29.88	0.00	391	46	AVERAGE																																											



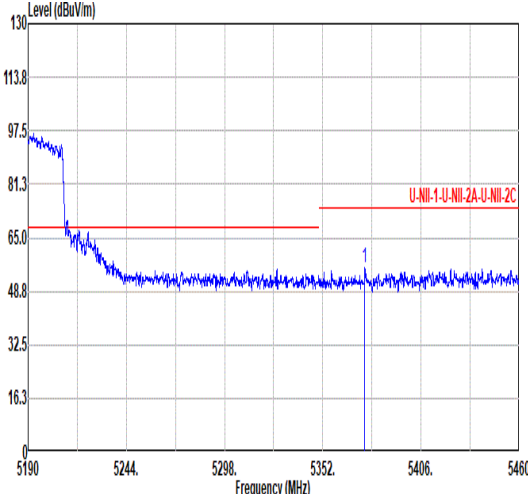
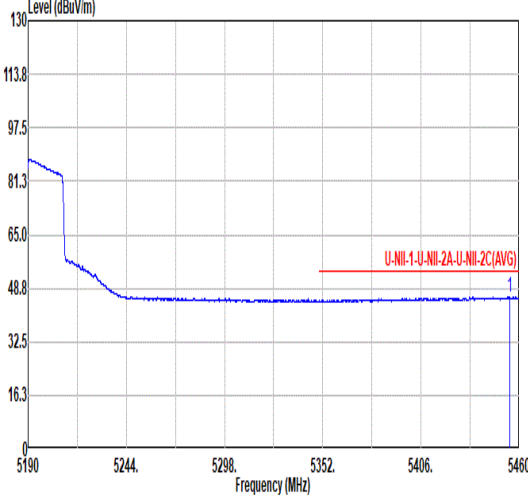


Mode	7																																																							
	Band Edge - R																																																							
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																							
ANT	4																																																							
Pol.	Vertical						Fundamental																																																	
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5375.09</td><td>56.02</td><td>74.00</td><td>-17.98</td><td>39.10</td><td>34.50</td><td>12.23</td><td>29.81</td><td>0.00</td><td>391</td><td>46</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5375.09	56.02	74.00	-17.98	39.10	34.50	12.23	29.81	0.00	391	46	PEAK	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5375.09	56.02	74.00	-17.98	39.10	34.50	12.23	29.81	0.00	391	46	PEAK																																												
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5454.73</td><td>46.17</td><td>54.00</td><td>-7.83</td><td>29.13</td><td>34.59</td><td>12.32</td><td>29.87</td><td>0.00</td><td>391</td><td>46</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5454.73	46.17	54.00	-7.83	29.13	34.59	12.32	29.87	0.00	391	46	AVERAGE	Blank					
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																															
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																														
1	5454.73	46.17	54.00	-7.83	29.13	34.59	12.32	29.87	0.00	391	46	AVERAGE																																												



Mode	7																																																					
	Harmonic																																																					
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full RU_5190MHz																																																					
ANT	4																																																					
Pol.	Horizontal																																																					
Peak Avg	Level (dBuV/m) Frequency (MHz) U-NII-1-U-NII-2A-U-NII-2C U-NII-1-U-NII-2A-U-NII-2C(AVG) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10300.00</td><td>45.63</td><td>68.20</td><td>-22.57</td><td>57.15</td><td>37.47</td><td>17.55</td><td>66.54</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10300.00	45.63	68.20	-22.57	57.15	37.47	17.55	66.54	0.00	--	PEAK
		Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																													
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																												
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	10300.00	45.63	68.20	-22.57	57.15	37.47	17.55	66.54	0.00	--	PEAK																																											
Vertical																																																						
	Level (dBuV/m) Frequency (MHz) U-NII-1-U-NII-2A-U-NII-2C U-NII-1-U-NII-2A-U-NII-2C(AVG) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10300.00</td><td>45.75</td><td>68.20</td><td>-22.45</td><td>57.27</td><td>37.48</td><td>17.55</td><td>66.55</td><td>0.00</td><td>--</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10300.00	45.75	68.20	-22.45	57.27	37.48	17.55	66.55	0.00	--	PEAK
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																												
1	10300.00	45.75	68.20	-22.45	57.27	37.48	17.55	66.55	0.00	--	PEAK																																											

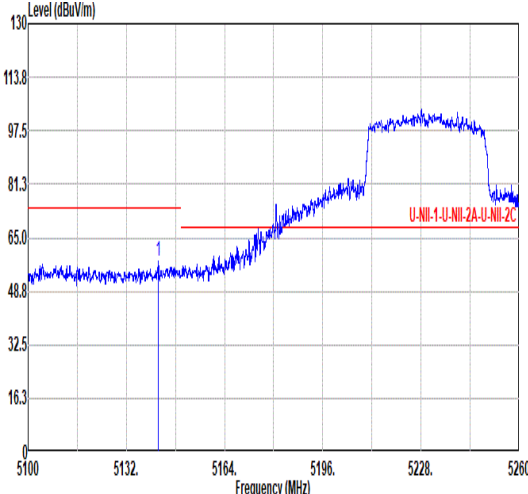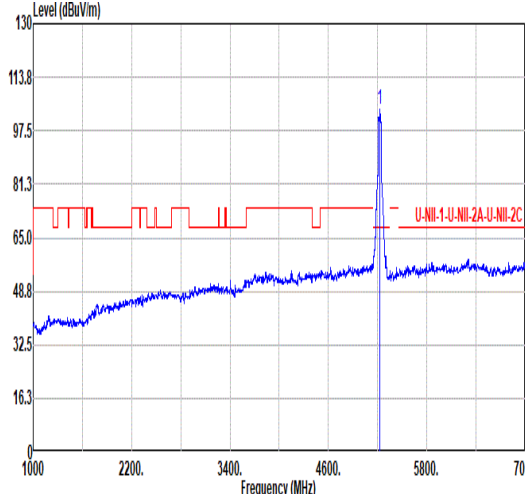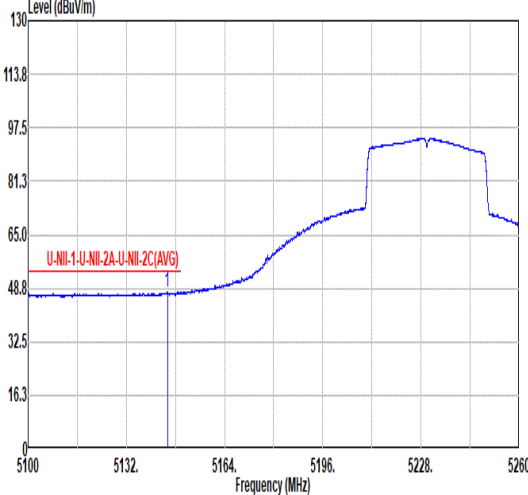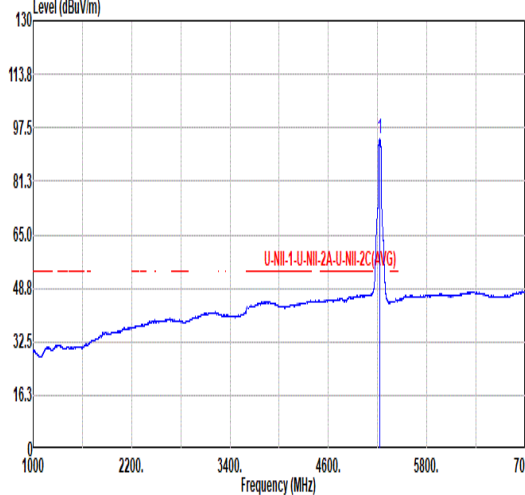

Mode	8																																																																																																		
	Band Edge - L																																																																																																		
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full RU_5230MHz																																																																																																		
ANT	4																																																																																																		
Pol.	Horizontal						Fundamental																																																																																												
Peak																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5142.49</td><td>57.65</td><td>74.00</td><td>-16.35</td><td>41.36</td><td>34.13</td><td>12.03</td><td>29.87</td><td>0.00</td><td>100</td><td>240</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5142.49	57.65	74.00	-16.35	41.36	34.13	12.03	29.87	0.00	100	240	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>103.79</td><td>-----</td><td>-----</td><td>87.25</td><td>34.35</td><td>12.09</td><td>29.90</td><td>0.00</td><td>100</td><td>240</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	103.79	-----	-----	87.25	34.35	12.09	29.90	0.00	100	240
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5142.49	57.65	74.00	-16.35	41.36	34.13	12.03	29.87	0.00	100	240	PEAK																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5230.00	103.79	-----	-----	87.25	34.35	12.09	29.90	0.00	100	240	PEAK																																																																																							
Avg																																																																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5145.37</td><td>47.56</td><td>54.00</td><td>-6.44</td><td>31.28</td><td>34.12</td><td>12.03</td><td>29.87</td><td>0.00</td><td>100</td><td>240</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5145.37	47.56	54.00	-6.44	31.28	34.12	12.03	29.87	0.00	100	240	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>Aux</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>94.25</td><td>-----</td><td>-----</td><td>77.71</td><td>34.35</td><td>12.09</td><td>29.90</td><td>0.00</td><td>100</td><td>240</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5230.00	94.25	-----	-----	77.71	34.35	12.09	29.90	0.00	100	240
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5145.37	47.56	54.00	-6.44	31.28	34.12	12.03	29.87	0.00	100	240	AVERAGE																																																																																							
	Limit	Read	Ant	Cable	Preamp	Aux	APos	TPos																																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Factor	Remark																																																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																									
1	5230.00	94.25	-----	-----	77.71	34.35	12.09	29.90	0.00	100	240	AVERAGE																																																																																							