



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2529-1
FCC ID : IHDT56AV1
STANDARD : FCC Part 15 Subpart E §15.407
CLASSIFICATION : (NII) Unlicensed National Information Infrastructure
TEST DATE(S) : Feb. 19, 2025 ~ Mar. 11, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan) , the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China



TABLE OF CONTENTS

REVISION HISTORY	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION	5
1.1 Applicant	5
1.2 Manufacturer	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	6
1.5 Modification of EUT	7
1.6 Testing Location	8
1.7 Test Software.....	8
1.8 Applicable Standards.....	9
1.9 Specification of Accessory.....	9
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST	10
2.1 Carrier Frequency and Channel	10
2.2 Test Mode.....	11
2.3 Connection Diagram of Test System.....	13
2.4 Support Unit used in test configuration and system	14
2.5 EUT Operation Test Setup	14
2.6 Measurement Results Explanation Example.....	14
3 TEST RESULT	15
3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement	15
3.2 Maximum Conducted Output Power Measurement	21
3.3 Power Spectral Density Measurement	23
3.4 Unwanted Emissions Measurement.....	27
3.5 AC Conducted Emission Measurement.....	32
3.6 Antenna Requirements.....	34
4 LIST OF MEASURING EQUIPMENT	35
5 MEASUREMENT UNCERTAINTY	36
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR520602E	Rev. 01	Initial issue of report	Mar. 20, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit for U-NII-1/2A/2C	Limit for U-NII-3	Result	Remark
3.1	2.1049 & 15.403(i)	6dB, 26dB & 99% Bandwidth	-	6dB Bandwidth > 500kHz	Pass	-
3.2	15.407(a)	Maximum Conducted Output Power	≤ 24 dBm	≤ 30 dBm	Pass	-
3.3	15.407(a)	Power Spectral Density	≤ 11 dBm/MHz	≤ 30 dBm/500kHz	Pass	-
3.4	15.407(b)	Unwanted Emissions	15.407(b) & 15.209(a)	15.407(b)(4)(i) & 15.209(a)	Pass	Under limit 3.13 dB at 5148.96 MHz
3.5	15.207	AC Conducted Emission	15.207(a)	15.207(a)	Pass	Under limit 9.11 dB at 0.54 MHz
3.6	15.203 & 15.407(a)	Antenna Requirement	15.203 & 15.407(a)	15.203 & 15.407(a)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2529-1
FCC ID	IHDT56AV1
IMEI Code	Conducted: 351291190028811/351291190028829 Conduction: 351291190028951/351291190028969 for Sample 1 351291190038158/351291190038166 for Sample 2 351291190048652/351291190048660 for Sample 3 Radiation: 351291190048611/351291190048629 for Sample 1 351291190042010/351291190042028 for Sample 2 351291190028910/351291190028928 for Sample 3
HW Version	DVT2
SW Version	V2VO35.57
EUT Stage	Identical Prototype

Remark:

1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.
2. There are three types of EUT, the differences could be referred to the XT2529-1_Operational Description of Product Equality Declaration which is exhibit separately. According to the difference, we choose sample 1 to full test and the sample 2/3 is verified for the difference.



1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	5180 MHz ~ 5240 MHz 5260 MHz ~ 5320 MHz 5500 MHz ~ 5720 MHz 5745 MHz ~ 5825 MHz
Maximum Output Power to Antenna	<5180 MHz ~ 5240 MHz> 802.11a : 18.84 dBm / 0.0766 W 802.11n HT20 : 18.73 dBm / 0.0746 W 802.11n HT40 : 17.14 dBm / 0.0518 W 802.11ac VHT20: 18.59 dBm / 0.0723 W 802.11ac VHT40: 17.10 dBm / 0.0513 W 802.11ac VHT80: 13.03 dBm / 0.0201 W <5260 MHz ~ 5320 MHz> 802.11a : 18.83 dBm / 0.0764 W 802.11n HT20 : 18.70 dBm / 0.0741 W 802.11n HT40 : 17.13 dBm / 0.0516 W 802.11ac VHT20: 18.58 dBm / 0.0721 W 802.11ac VHT40: 17.05 dBm / 0.0507 W 802.11ac VHT80: 14.02 dBm / 0.0252 W <5500 MHz ~ 5720 MHz > 802.11a : 18.90 dBm / 0.0776 W 802.11n HT20 : 18.74 dBm / 0.0748 W 802.11n HT40 : 17.39 dBm / 0.0548 W 802.11ac VHT20: 18.61 dBm / 0.0726 W 802.11ac VHT40: 17.30 dBm / 0.0537 W 802.11ac VHT80: 16.17 dBm / 0.0414 W <5745 MHz ~ 5825 MHz> 802.11a : 18.62 dBm / 0.0728 W 802.11n HT20 : 18.46 dBm / 0.0701 W 802.11n HT40 : 17.07 dBm / 0.0509 W 802.11ac VHT20: 18.38 dBm / 0.0689 W 802.11ac VHT40: 17.03 dBm / 0.0505 W 802.11ac VHT80: 16.05 dBm / 0.0403 W

99% Occupied Bandwidth	<5180 MHz ~ 5240 MHz> 802.11a : 17.19 MHz 802.11n HT20 : 18.47 MHz 802.11n HT40 : 36.52 MHz 802.11ac VHT80 : 75.28 MHz <5260 MHz ~ 5320 MHz> 802.11a : 17.28 MHz 802.11n HT20 : 18.21 MHz 802.11n HT40 : 36.64 MHz 802.11ac VHT80 : 75.28 MHz <5500 MHz ~ 5720 MHz> 802.11a : 17.57 MHz 802.11n HT20 : 18.35 MHz 802.11n HT40 : 36.74 MHz 802.11ac VHT80 : 75.44 MHz <5745 MHz ~ 5825 MHz> 802.11a : 17.52 MHz 802.11n HT20 : 18.20 MHz 802.11n HT40 : 36.63 MHz 802.11ac VHT80 : 75.39 MHz
Antenna Type / Gain	<Ant 5>: <5180 MHz ~ 5240 MHz> PIFA Antenna with gain -5.00 dBi <5260 MHz ~ 5320 MHz> PIFA Antenna with gain -4.60 dBi <5500 MHz ~ 5720 MHz> PIFA Antenna with gain -3.60 dBi <5745 MHz ~ 5825 MHz> PIFA Antenna with gain -6.30 dBi
Type of Modulation	802.11a/n : OFDM (BPSK / QPSK / 16QAM / 64QAM) 802.11ac : OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)

Note: For 802.11n HT20 / ac VHT20 and 802.11n HT40 / ac VHT40 mode, the whole testing has assessed only 802.11n HT20/ HT40 by referring to their higher conducted power.

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ ; 03CH03-SZ	CN1256	421272

Note: Test data subcontracted: RSE and conduction test case in section 3.4/3.5 of this report.

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	FCC 15C-15E Test Tools Ver10.0_210607	10.0
2.	03CH03-SZ	AUDIX	E3	6.2009-8-24
3.	CO02-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart E
- ♦ FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.9 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333L
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-335L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 1(CHILE)	Brand Name	Motorola(Salcomp)	Model Name	MC-339L
AC Adapter 1(KR)	Brand Name	Motorola(Salcomp)	Model Name	MC-330L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-333L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
AC Adapter 3(IN)	Brand Name	Motorola(AOHAI)	Model Name	MC-334L
AC Adapter 3(IN)	Brand Name	Motorola(XIHI)	Model Name	MC-334L
AC Adapter 4(IN)	Brand Name	Motorola(Salcomp)	Model Name	MC-334L
AC Adapter 4(IN)	Brand Name	Motorola(Salcomp)	Model Name	MC-334L
AC Adapter 5(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331
Battery 1	Brand Name	Motorola(Sunwoda)	Model Name	RB52
Battery 2	Brand Name	Motorola(NVT)	Model Name	RB52
Battery 3	Brand Name	Motorola(SCUD)	Model Name	RB52
USB Cable 1	Brand Name	Motorola(Yihuaxing)	Model Name	T365-020 T365-020-01 T365-020-02
USB Cable 2	Brand Name	Motorola(WASHIN)	Model Name	HX-TL-01 HX-TL-07 HX-TL-08
USB Cable 3	Brand Name	Motorola(Juwei)	Model Name	JWUB1614-T03H JWUB1705-T03H JWUB1856-T03H

2 Test Configuration of Equipment Under Test

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Y plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

2.1 Carrier Frequency and Channel

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5180-5240 MHz U-NII-1	36	5180	44	5220
	38*	5190	46*	5230
	40	5200	48	5240
	42 [#]	5210	-	-
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5260-5320 MHz U-NII-2A	52	5260	60	5300
	54*	5270	62*	5310
	56	5280	64	5320
	58 [#]	5290	-	-
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5500-5720MHz U-NII-2C	100	5500	112	5560
	102*	5510	116	5580
	104	5520	132	5660
	106 [#]	5530	134*	5670
	108	5540	136	5680
	110*	5550	140	5700
Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
5745-5825 MHz U-NII-3	149	5745	157	5785
	151*	5755	159*	5795
	153	5765	161	5805
	155 [#]	5775	165	5825

Frequency Band	Channel	Freq.(MHz)	Channel	Freq. (MHz)
TDWR Channel	118*	5590	124	5620
	120	5600	126*	5630
	122 [#]	5610	128	5640

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
Straddle Channel	138 [#]	5690	144	5720
	142*	5710	-	-

Note:

1. The above Frequency and Channel in "*" are 40MHz bandwidth.
2. The above Frequency and Channel in "[#]" are 80MHz bandwidth.

2.2 Test Mode

Final test modes are considering the modulation and worse data rates as below table.

Modulation	Data Rate
802.11a	6 Mbps
802.11n HT20	MCS0
802.11n HT40	MCS0
802.11ac VHT20 (Covered by HT20)	MCS0
802.11ac VHT40 (Covered by HT40)	MCS0
802.11ac VHT80	MCS0

AC Conducted Emission	Mode 1 : GSM850 Idle + BT Link + WLAN Link(5G) + Adaptor 1 + USB Cable 1 + Battery 1 for Sample 1
	Mode 2 : GSM850 Idle + BT Link + WLAN Link(5G) + Adaptor 1 + USB Cable 1 + Battery 2 for Sample 2
	Mode 3 : GSM850 Idle + BT Link + WLAN Link(5G) + Adaptor 1 + USB Cable 1 + Battery 3 for Sample 3
	Remark:
1. The worst case of conducted emission is mode 2; only the test data of it was reported. 2. For Radiated Test Cases, The tests were performance with Adapter1, Earphone and USB Cable 1.	

**RSE Co-location**

802.11n HT40 CH38 5190_TX + LTE Band 41 link
802.11n HT40 CH38 5190_TX + LTE Band 41 link + Bluetooth-LE 2Mbps CH38 2478


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		20M BW	20M BW	20M BW	20M BW
L	Low	36	52	100	149
M	Middle	44	60	116	157
H	High	48	64	140	165
Straddle		-	-	144	-

Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		40M BW	40M BW	40M BW	40M BW
L	Low	38	54	102	151
M	Middle	-	-	110	-
H	High	46	62	134	159
Straddle		-	-	142	-


Ch. #		U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
		80M BW	80M BW	80M BW	80M BW
L	Low	-	-	106	-
M	Middle	42	58	-	155
H	High	-	-	-	-
Straddle		-	-	138	-

2.3 Connection Diagram of Test System

AC Conducted Emission:

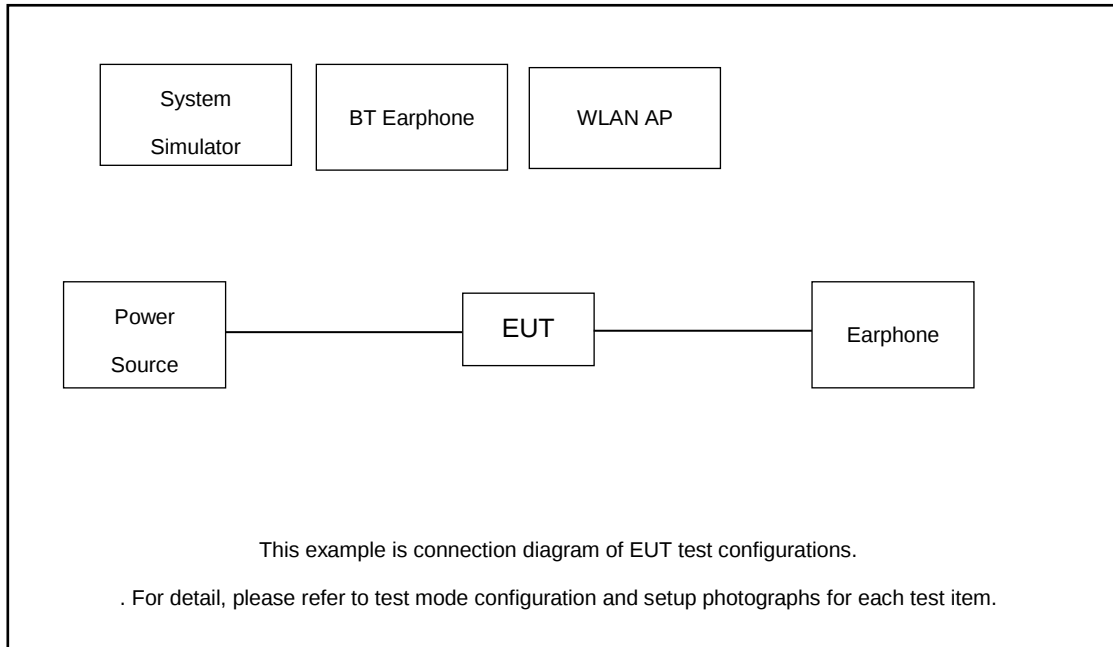

Radiated Emission:

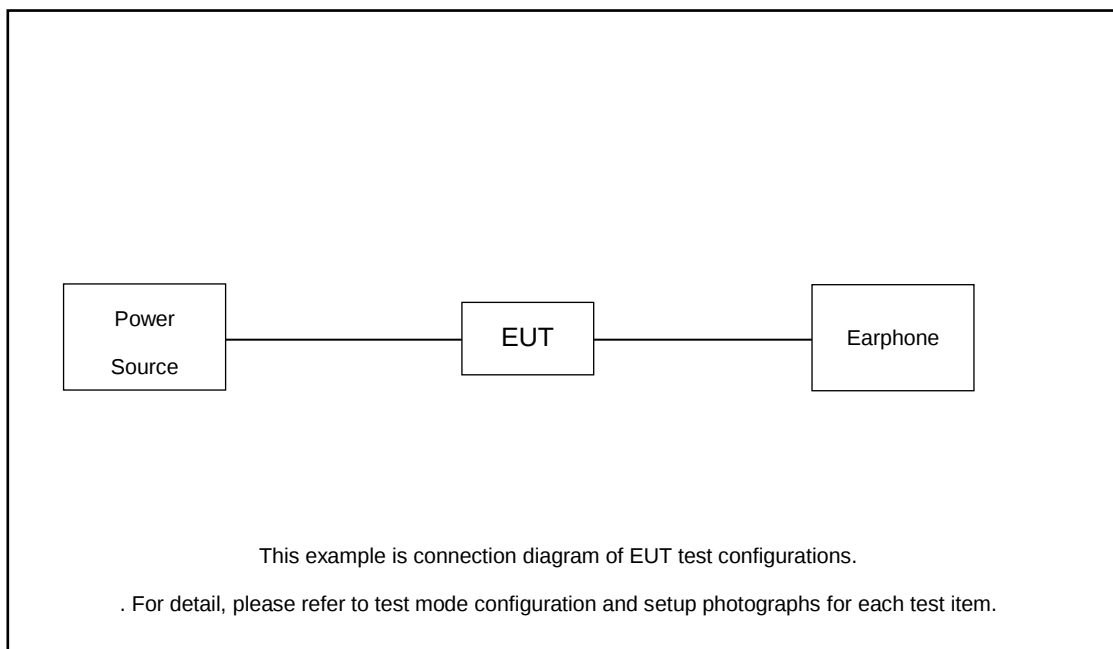

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station(LTE)	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	Bluetooth Earphone	Samsung	EO-MG900	PYAHS-107W	N/A	N/A
3.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m
4.	Earphone	N/A	N/A	N/A	N/A	N/A

2.5 EUT Operation Test Setup

For WLAN RF test items, an engineering test program was provided and enabled to make EUT continuously transmit.

For AC power line conducted emissions, the EUT was set to connect with the WLAN AP under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.80 dB and 10dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 2.80 + 10 = 12.80 \text{ (dB)}\end{aligned}$$



3 Test Result

3.1 6dB and 26dB and 99% Occupied Bandwidth Measurement

3.1.1 Description of 6dB and 26dB and 99% Occupied Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

26dB and 99% Occupied bandwidth are reporting only.

3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.


☒	Section C) Bandwidth Measurement 1. Emission Bandwidth (EBW) and 99% OBW
	1. Set RBW = approximately 1% of the emission bandwidth. 2. Set the VBW > RBW. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%. 6. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set to 1%~5% of the OBW and set the Video bandwidth (VBW) $\geq 3 * RBW$. 7. Measure and record the results in the test report.
☒	Section C) Bandwidth Measurement 2. Minimum Emission Bandwidth for the band 5.725 - 5.85 GHz
	1. Set RBW = 100kHz. 2. Set the VBW $\geq 3 \times RBW$. 3. Detector = Peak. 4. Trace mode = max hold 5. Measure the maximum width of the emission that is 6 dB down from the peak of the emission. 6. Measure and record the results in the test report.



3.1.4 Test Setup






3.1.5 Test Result of 6dB Bandwidth


Please refer to Appendix A.

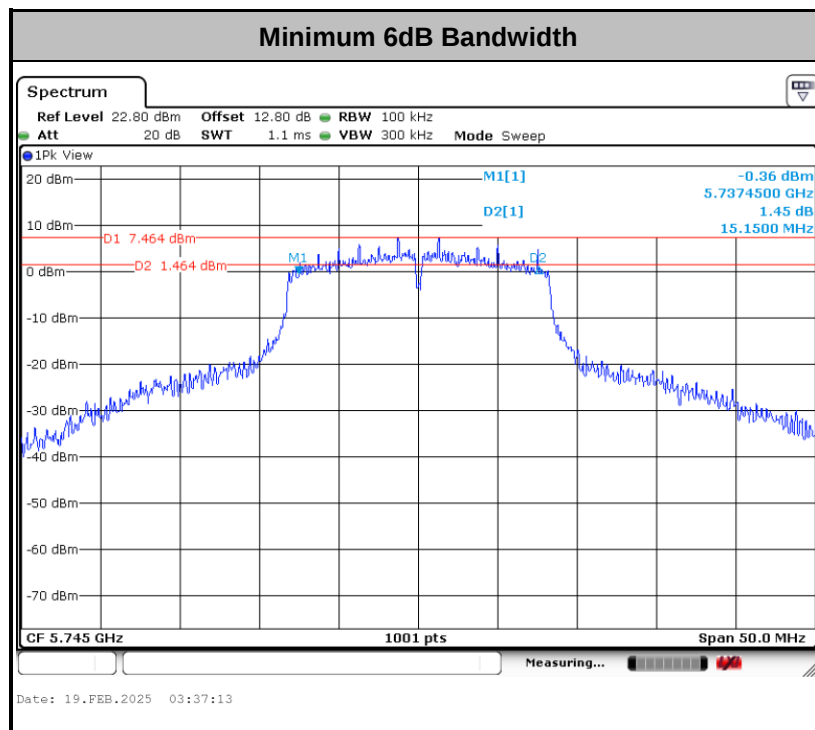

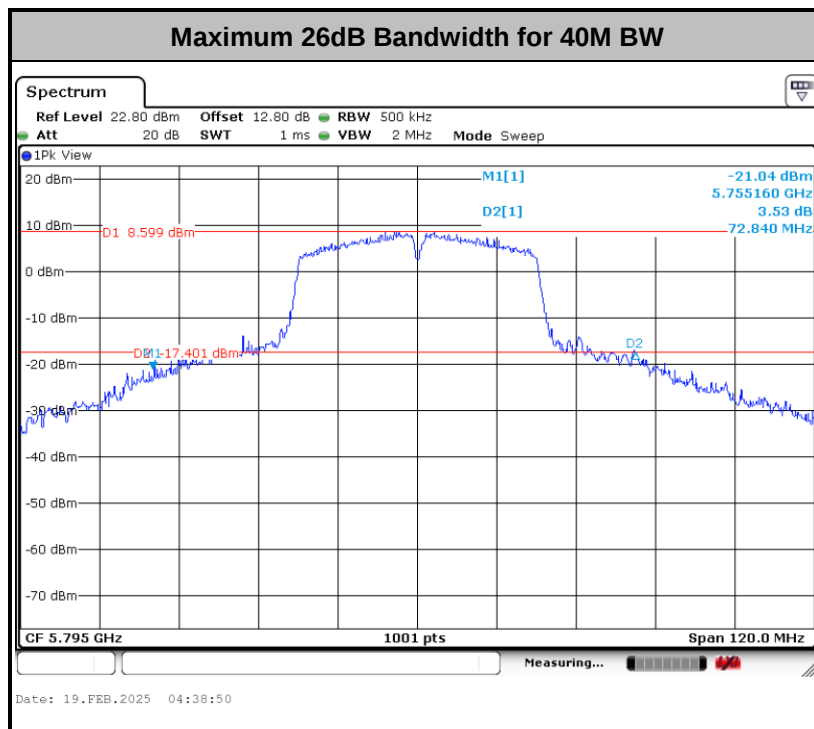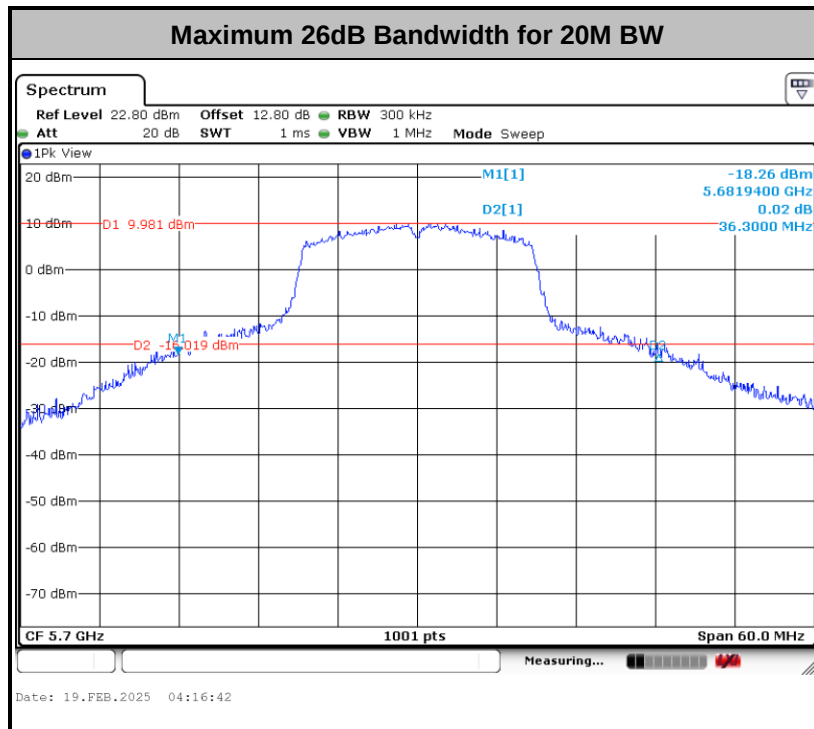

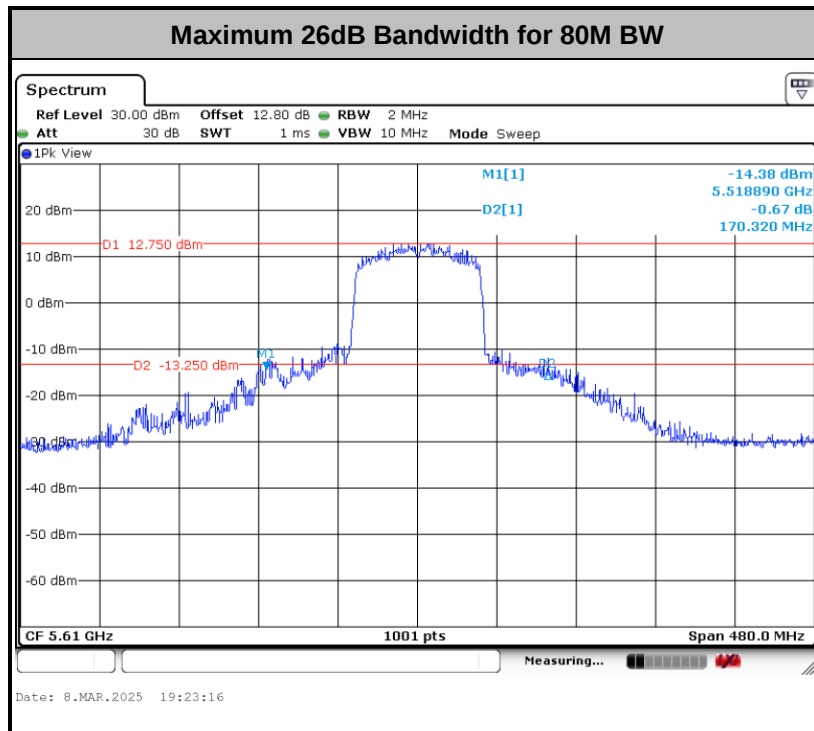

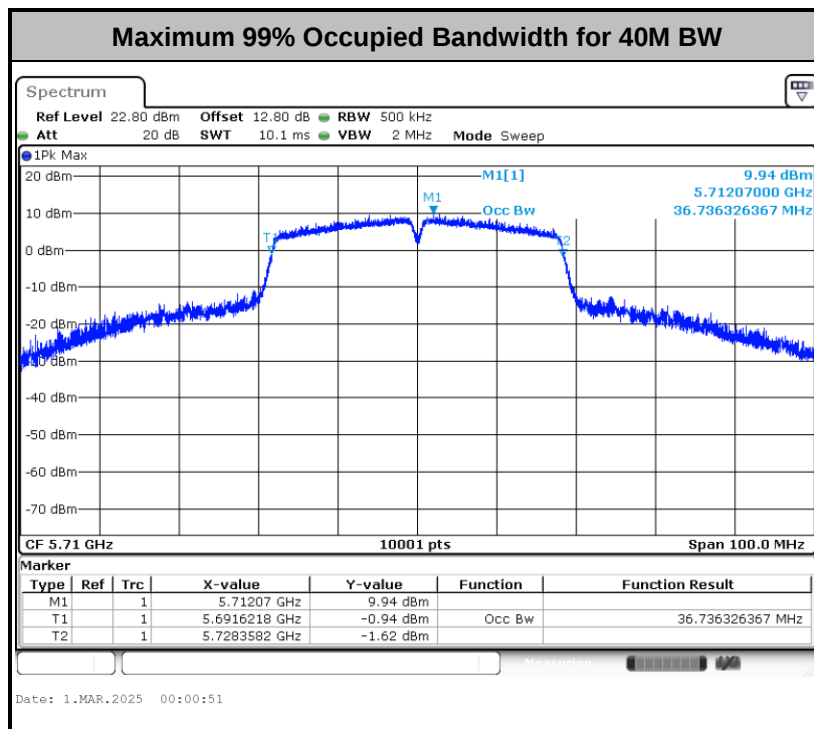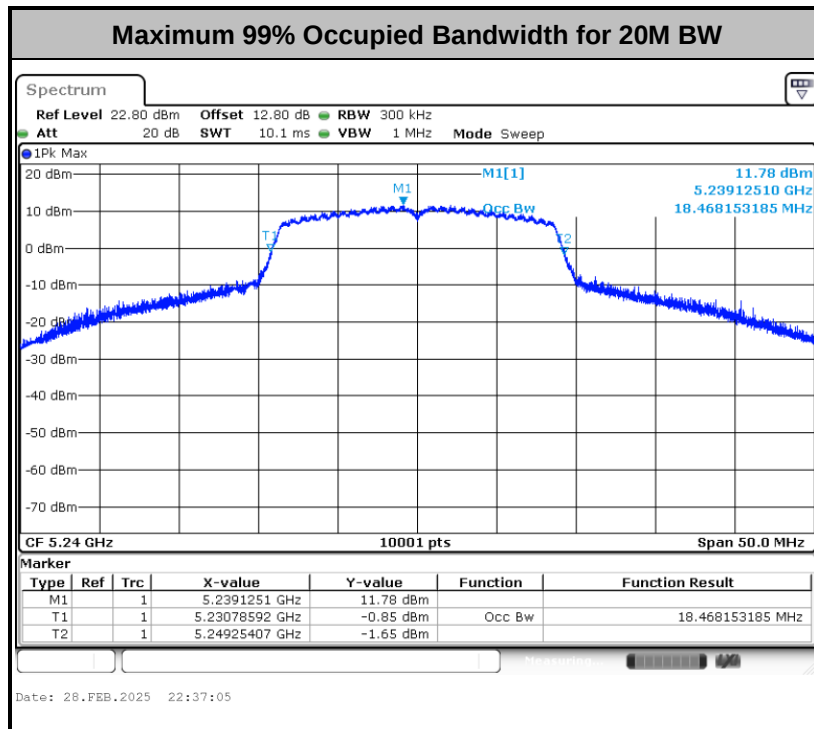

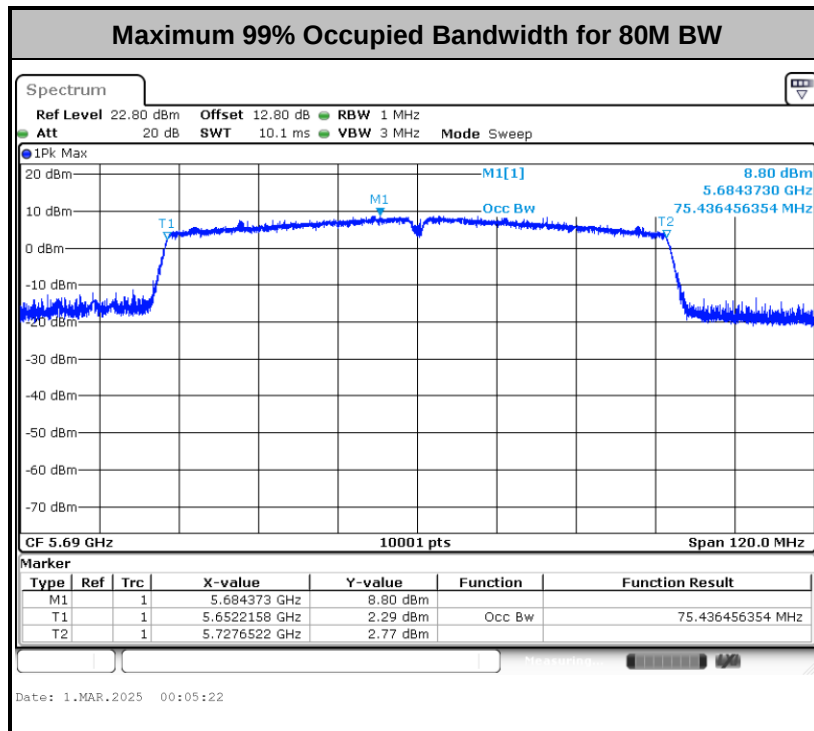

Note: The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



3.2 Maximum Conducted Output Power Measurement

3.2.1 Limit of Maximum Conducted Output Power

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW.

For the 5.25–5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm +10 log₁₀ B, where B is the 26 dB emission bandwidth in megahertz.

For the band 5.725–5.85 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Note that U-NII-2 band, devices with a maximum e.i.r.p. greater than 500 mW shall implement TPC in order to have the capability to operate at least 6 dB below the maximum permitted e.i.r.p. of 1 W.

.

3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures


The testing follows Method PM of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

Method PM (Measurement using an RF average power meter):

1. Measurement is performed using a wideband RF power meter.
2. The EUT is configured to transmit continuously with a consistent duty cycle at its maximum power control level.
3. Measure the average power of the transmitter, and the average power is corrected with duty factor, $10 \log(1/x)$, where x is the duty cycle.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

3.2.4 Test Setup

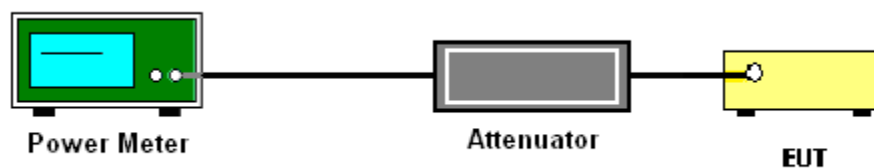

3.2.5 Test Result of Maximum Conducted Output Power

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

<FCC 14-30 CFR 15.407>

For mobile and portable client devices in the 5.15–5.25 GHz band, the maximum power spectral density shall not exceed 11dBm in any 1 megahertz band.

For the 5.25–5.725 GHz bands, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band.

For the band 5.725–5.85 GHz, the maximum power spectral density shall not exceed 30 dBm in any 500-kHz band.

For Straddle Channel, According to KDB 789033 D02 General UNII Test Procedures New Rules v02r01, If the power and PSD of the devices are uniform and comply with the lower limits specified for the U-NII-2 bands, a single measurement over the entire emission bandwidth can be performed to show compliance.

If transmitting antennas of directional gain greater than 6 dBi are used, the peak output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.

Section F) Maximum power spectral density.

For devices operating in the bands UNII-1/2A/2C

Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 1 MHz.
- Set VBW $\geq$ 3 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

For devices operating in the band UNII-3


Method SA-2

(trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- Measure the duty cycle.
- Set span to encompass the entire emission bandwidth (EBW) of the signal.
- Set RBW = 500KHz (or 300 kHz if the SA can't set RBW=500KHz).
- Set VBW $\geq$ 1 MHz.
- Number of points in sweep $\geq$ 2 Span / RBW.
- Sweep time = auto.
- Detector = RMS
- Trace average at least 100 traces in power averaging mode.
- If the SA can't set RBW=500KHz, then add $10 \log(500\text{kHz}/\text{RBW})$ to the test result.
- Add $10 \log(1/x)$, where x is the duty cycle, to the measured power in order to compute the average power during the actual transmission times. For example, add $10 \log(1/0.25) = 6$ dB if the duty cycle is 25 percent.

1. The RF output of EUT was connected to the spectrum analyzer by a low loss cable.
2. Each plot has already offset with cable loss, and attenuator loss. Measure the PPSD and record it.


3.3.4 Test Setup

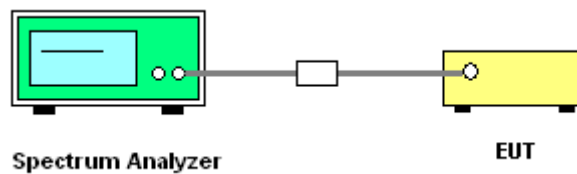

3.3.5 Test Result of Power Spectral Density


Please refer to Appendix A.

For devices operating in the bands UNII-1/2A/2C

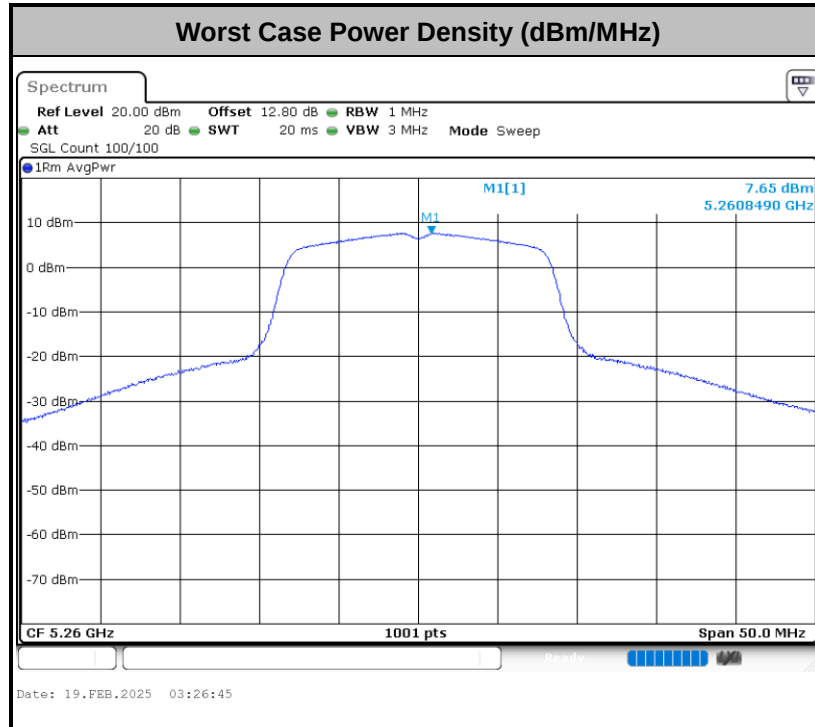

Note: Average Power Density (dB) = Measured value+ Duty Factor

For devices operating in the band UNII-3

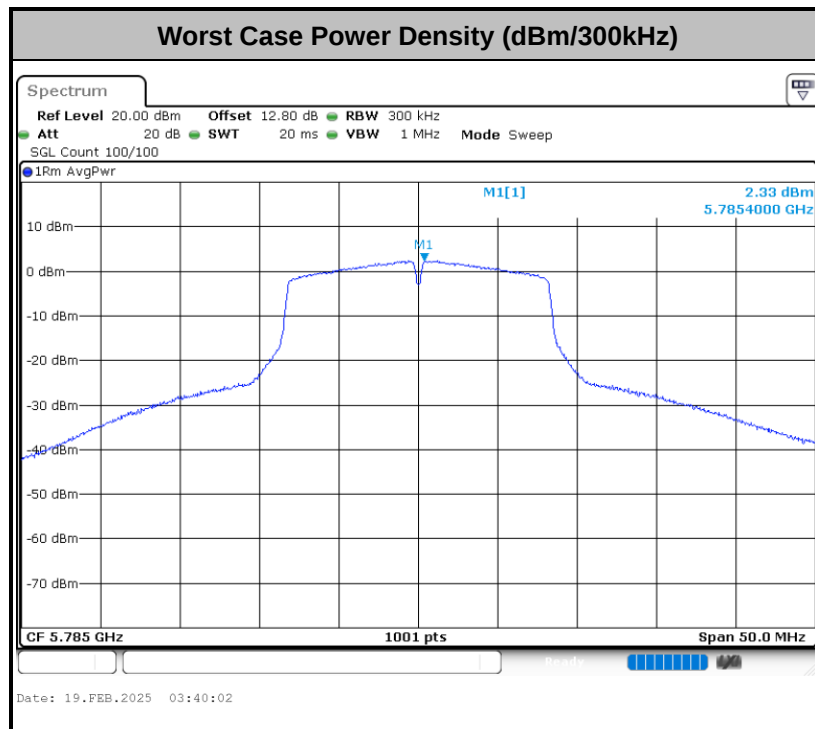

Note: Average Power Density (dB) = Measured value+ Duty Factor



3.4 Unwanted Emissions Measurement

This section as specified in FCC Part 15.407(b) is to measure unwanted emissions through radiated measurement for band edge spurious emissions and out of band emissions measurement. The unwanted emissions shall comply with 15.407(b)(1) to (6), and restricted bands per FCC Part 15.205.

3.4.1 Limit of Unwanted Emissions

- (1) For transmitters operating in the 5150-5250 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27dBm/MHz .

For transmitters operating in the 5250-5350 MHz band: all emissions outside of the 5150-5350 MHz band shall not exceed an EIRP of -27 dBm/MHz . Devices operating in the 5250-5350 MHz band that generate emissions in the 5150-5250 MHz band must meet all applicable technical requirements for operation in the 5150-5250 MHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of -27 dBm/MHz in the 5150-5250 MHz band.

For transmitters operating in the 5470-5600 MHz and 5650-5725MHz band: all emissions outside of the 5470-5600 MHz and 5650-5725MHz band shall not exceed an EIRP of -27 dBm/MHz .

- (2) For transmitters operating in the 5.725-5.85 GHz band:
- 15.407(b)(4)(i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

(3) Unwanted spurious emissions fallen in restricted bands shall comply with the general field strength limits as below table,

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

(4) EIRP (dBm)	Field Strength at 3m (dBμV/m)
- 27	68.2

Note: The following formula is used to convert the EIRP to field strength.

$$\text{EIRP} = E_{\text{Meas}} + 20\log (d_{\text{Meas}}) - 104.7$$

where

EIRP is the equivalent isotropically radiated power, in dBm

E_{Meas} is the field strength of the emission at the measurement distance, in dBμV/m

d_{Meas} is the measurement distance, in m

3.4.2 Measuring Instruments


The measuring equipment is listed in the section 4 of this test report.

3.4.3 Test Procedures


1. The testing follows FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04.
Section G) Unwanted emissions measurement.
(1) Procedure for Unwanted Emissions Measurements Below 1000MHz
 - RBW = 120 kHz
 - VBW = 300 kHz
 - Detector = Peak
 - Trace mode = max hold(2) Procedure for Peak Unwanted Emissions Measurements Above 1000 MHz
 - RBW = 1 MHz
 - VBW $\geq$ 3 MHz
 - Detector = Peak
 - Sweep time = auto
 - Trace mode = max hold(3) Procedures for Average Unwanted Emissions Measurements Above 1000MHz
 - RBW = 1 MHz
 - VBW = 10 Hz, when duty cycle is no less than 98 percent.
 - VBW $\geq$ 1/T, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on.
2. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
3. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
4. The antenna is a broadband antenna and its height is adjusted between one meter and four meters above ground to find the maximum value of the field strength for both horizontal polarization and vertical polarization of the antenna.
5. For each suspected emission, the EUT was arranged to its worst case and then adjust the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading.
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

3.4.4 Test Setup


For radiated emissions below 30MHz

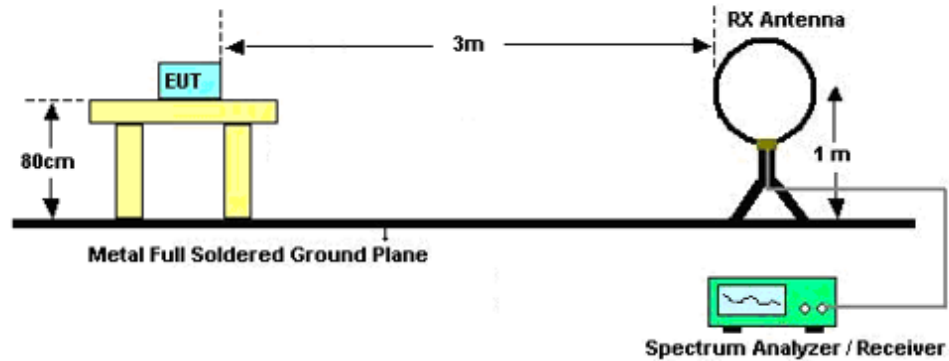

For radiated emissions from 30MHz to 1GHz

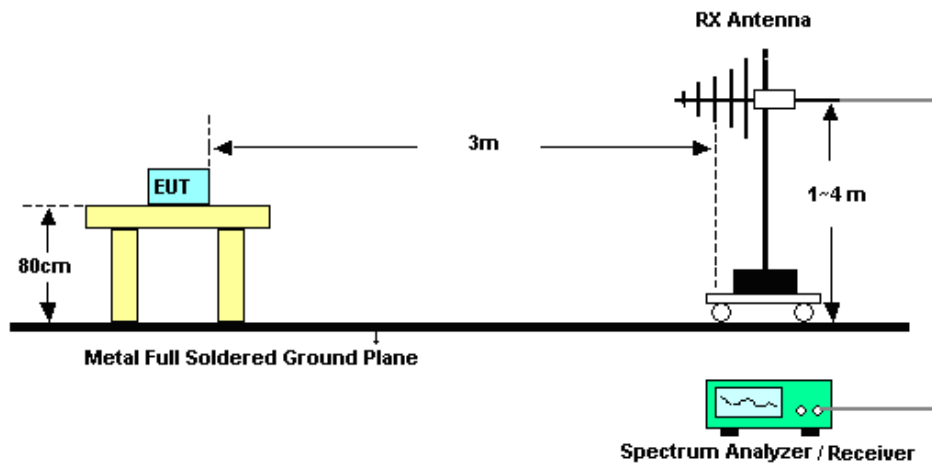

For radiated emissions above 1GHz

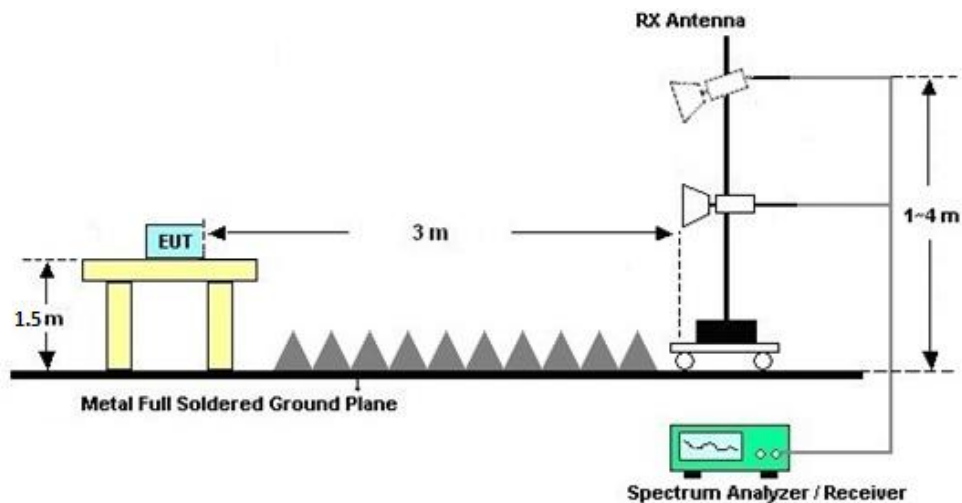

**3.4.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.4.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.4.7 Duty Cycle

Please refer to Appendix D.

3.4.8 Test Result of Radiated Spurious Emissions (30MHz ~ 10th Harmonic)

Please refer to Appendix C.

3.5 AC Conducted Emission Measurement

3.5.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.5.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.5.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth with Maximum Hold Mode.

3.5.4 Test Setup

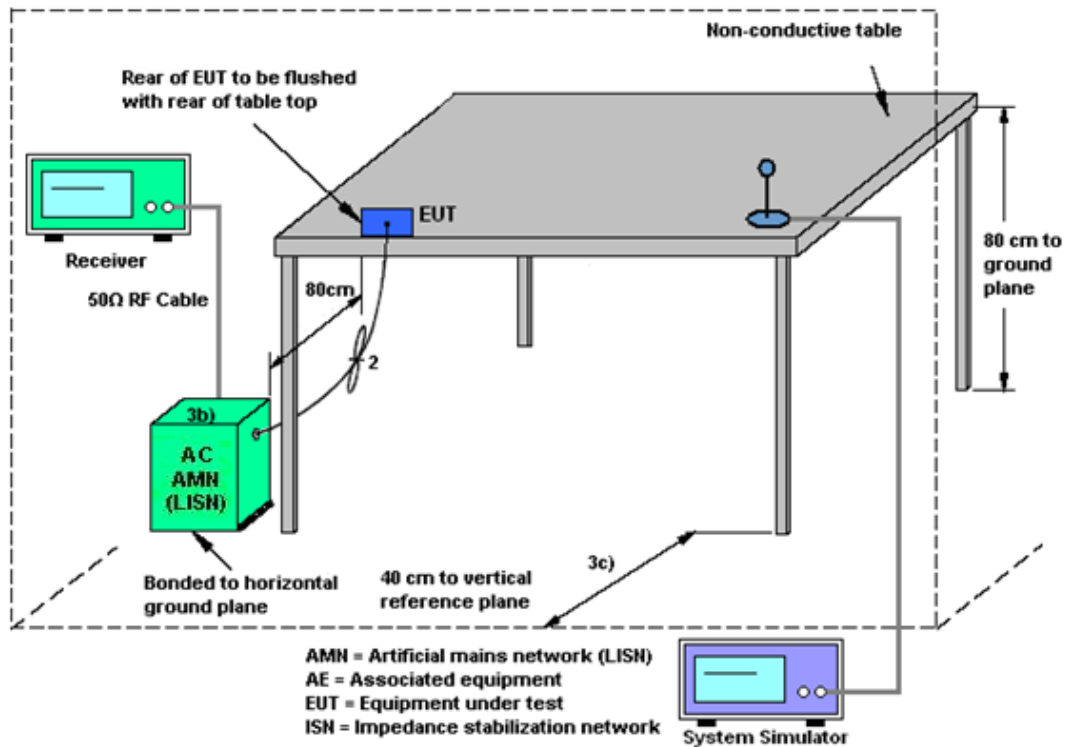

3.5.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.6 Antenna Requirements

3.6.1 Standard Applicable

According to FCC 47 CFR Section 15.407(a)(1)(2), if transmitting antenna directional gain is greater than 6 dBi, both the peak transmit power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

3.6.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.6.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 09, 2024	Feb. 24, 2025~Mar. 11, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 09, 2024	Feb. 24, 2025~Mar. 11, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Feb. 24, 2025~Mar. 11, 2025	Dec. 27, 2025	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Aug. 20, 2023	Feb. 24, 2025~Mar. 11, 2025	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 09, 2024	Feb. 24, 2025~Mar. 11, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Feb. 24, 2025~Mar. 11, 2025	Jul. 02, 2025	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18Ghz~40GHz	Apr. 09, 2024	Feb. 24, 2025~Mar. 11, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2024	Feb. 24, 2025~Mar. 11, 2025	Oct. 17, 2025	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Feb. 24, 2025~Mar. 11, 2025	Oct. 13, 2025	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 27, 2024	Feb. 24, 2025~Mar. 11, 2025	Dec. 26, 2025	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 18, 2024	Feb. 24, 2025~Mar. 11, 2025	Oct. 17, 2025	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Feb. 24, 2025~Mar. 11, 2025	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Feb. 24, 2025~Mar. 11, 2025	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Mar. 04, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Mar. 04, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.25, 2024	Mar. 04, 2025	Dec. 24, 2025	Conduction (CO02-SZ)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Feb. 19, 2025~Mar. 08, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Feb. 19, 2025~Mar. 08, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Feb. 19, 2025~Mar. 08, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Feb. 19, 2025~Mar. 08, 2025	Jul. 03, 2025	Conducted (TH01-KS)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.5 dB
---	--------

Uncertainty of Radiated Emission Measurement (9 KHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.9 dB
---	--------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.0 dB
---	--------

----- THE END -----



Appendix A. Conducted Test Results

Appendix A. Test Result of Conducted Test Items

Test Engineer:	Wang xiao	Temperature:	21~25	°C
Test Date:	2025/2/19~2025/3/8	Relative Humidity:	51~54	%

TEST RESULTS DATA
Average Power Table

<5180 MHz ~ 5240 MHz>											Power Setting
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail	
11a	6Mbps	1	36	5180	0.15	18.84	24.00	-5.00		Pass	18
11a	6Mbps	1	44	5220	0.15	18.83	24.00	-5.00		Pass	18
11a	6Mbps	1	48	5240	0.15	18.70	24.00	-5.00		Pass	18
HT20	MCS0	1	36	5180	0.17	18.73	24.00	-5.00		Pass	18
HT20	MCS0	1	44	5220	0.17	18.68	24.00	-5.00		Pass	18
HT20	MCS0	1	48	5240	0.17	18.69	24.00	-5.00		Pass	18
HT40	MCS0	1	38	5190	0.00	15.20	24.00	-5.00		Pass	15
HT40	MCS0	1	46	5230	0.00	17.14	24.00	-5.00		Pass	17
VHT20	MCS0	1	36	5180	0.10	18.59	24.00	-5.00		Pass	18
VHT20	MCS0	1	44	5220	0.10	18.56	24.00	-5.00		Pass	18
VHT20	MCS0	1	48	5240	0.10	18.55	24.00	-5.00		Pass	18
VHT40	MCS0	1	38	5190	0.00	15.08	24.00	-5.00		Pass	15
VHT40	MCS0	1	46	5230	0.00	17.10	24.00	-5.00		Pass	17
VHT80	MCS0	1	42	5210	0.00	13.03	24.00	-5.00		Pass	13

TEST RESULTS DATA
Average Power Table

<5260 MHz ~ 5320 MHz>											Power Setting
Mod.	Data Rate	N _{Tx}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	
11a	6M bps	1	52	5260	0.15	18.81	23.98	-4.60	26.99	Pass	18
11a	6M bps	1	60	5300	0.15	18.83	23.98	-4.60	26.99	Pass	18
11a	6M bps	1	64	5320	0.15	18.33	23.98	-4.60	26.99	Pass	17.5
HT20	MCS 0	1	52	5260	0.17	18.63	23.98	-4.60	26.99	Pass	18
HT20	MCS 0	1	60	5300	0.17	18.70	23.98	-4.60	26.99	Pass	18
HT20	MCS 0	1	64	5320	0.17	17.16	23.98	-4.60	26.99	Pass	16.5
HT40	MCS 0	1	54	5270	0.00	17.13	23.98	-4.60	26.99	Pass	17
HT40	MCS 0	1	62	5310	0.00	15.19	23.98	-4.60	26.99	Pass	15
VHT20	MCS 0	1	52	5260	0.10	18.53	23.98	-4.60	26.99	Pass	18
VHT20	MCS 0	1	60	5300	0.10	18.58	23.98	-4.60	26.99	Pass	18
VHT20	MCS 0	1	64	5320	0.10	16.99	23.98	-4.60	26.99	Pass	16.5
VHT40	MCS 0	1	54	5270	0.00	17.05	23.98	-4.60	26.99	Pass	17
VHT40	MCS 0	1	62	5310	0.00	15.09	23.98	-4.60	26.99	Pass	15
VHT80	MCS 0	1	58	5290	0.00	14.02	23.98	-4.60	26.99	Pass	14

TEST RESULTS DATA
Average Power Table

<5500 MHz ~ 5720 MHz >											Power Setting
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)	EIRP Power Limit (dBm)	Pass/Fail	
11a	6M bps	1	100	5500	0.15	18.90	23.98	-3.60	26.99	Pass	18
11a	6M bps	1	116	5580	0.15	18.74	23.98	-3.60	26.99	Pass	18
11a	6M bps	1	140	5700	0.15	16.32	23.98	-3.60	26.99	Pass	15.5
11a	6M bps	1	144	5720	0.15	18.89	23.98	-3.60	26.99	Pass	18
HT20	MCS 0	1	100	5500	0.17	18.74	23.98	-3.60	26.99	Pass	18
HT20	MCS 0	1	116	5580	0.17	18.64	23.98	-3.60	26.99	Pass	18
HT20	MCS 0	1	140	5700	0.17	17.26	23.98	-3.60	26.99	Pass	16.5
HT20	MCS 0	1	144	5720	0.17	18.67	23.98	-3.60	26.99	Pass	18
HT40	MCS 0	1	102	5510	0.00	17.25	23.98	-3.60	26.99	Pass	17
HT40	MCS 0	1	110	5550	0.00	17.16	23.98	-3.60	26.99	Pass	17
HT40	MCS 0	1	134	5670	0.00	17.27	23.98	-3.60	26.99	Pass	17
HT40	MCS 0	1	142	5710	0.00	17.39	23.98	-3.60	26.99	Pass	17
VHT20	MCS 0	1	100	5500	0.10	18.61	23.98	-3.60	26.99	Pass	18
VHT20	MCS 0	1	116	5580	0.10	18.51	23.98	-3.60	26.99	Pass	18
VHT20	MCS 0	1	140	5700	0.10	17.12	23.98	-3.60	26.99	Pass	16.5
VHT20	MCS 0	1	144	5720	0.10	18.55	23.98	-3.60	26.99	Pass	18
VHT40	MCS 0	1	102	5510	0.00	17.13	23.98	-3.60	26.99	Pass	17
VHT40	MCS 0	1	110	5550	0.00	17.09	23.98	-3.60	26.99	Pass	17
VHT40	MCS 0	1	134	5670	0.00	17.19	23.98	-3.60	26.99	Pass	17
VHT40	MCS 0	1	142	5710	0.00	17.30	23.98	-3.60	26.99	Pass	17
VHT80	MCS 0	1	106	5530	0.00	15.68	23.98	-3.60	26.99	Pass	15.5
VHT80	MCS 0	1	122	5610	0.00	16.06	23.98	-3.60	26.99	Pass	16
VHT80	MCS 0	1	138	5690	0.00	16.17	23.98	-3.60	26.99	Pass	16

TEST RESULTS DATA
Average Power Table

<5745 MHz ~ 5825 MHz>										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	Duty Factor (dB)	Average Conducted Power (dBm)	FCC Conducted Power Limit (dBm)	DG (dBi)		Pass/Fail
11a	6M bps	1	149	5745	0.15	18.55	30.00	-6.30		Pass
11a	6Mbps	1	157	5785	0.15	18.62	30.00	-6.30		Pass
11a	6Mbps	1	165	5825	0.15	18.59	30.00	-6.30		Pass
HT20	MCS 0	1	149	5745	0.17	18.45	30.00	-6.30		Pass
HT20	MCS 0	1	157	5785	0.17	18.46	30.00	-6.30		Pass
HT20	MCS 0	1	165	5825	0.17	18.45	30.00	-6.30		Pass
HT40	MCS 0	1	151	5755	0.00	17.07	30.00	-6.30		Pass
HT40	MCS 0	1	159	5795	0.00	17.03	30.00	-6.30		Pass
VHT20	MCS 0	1	149	5745	0.10	18.34	30.00	-6.30		Pass
VHT20	MCS 0	1	157	5785	0.10	18.38	30.00	-6.30		Pass
VHT20	MCS 0	1	165	5825	0.10	18.36	30.00	-6.30		Pass
VHT40	MCS 0	1	151	5755	0.00	17.03	30.00	-6.30		Pass
VHT40	MCS 0	1	159	5795	0.00	17.02	30.00	-6.30		Pass
VHT80	MCS 0	1	155	5775	0.00	16.05	30.00	-6.30		Pass

Setting
18
18
18
18
18
18
17
17
18
18
18
17
17
16

TEST RESULTS DATA
26dB and 99% OBW

<5180 MHz ~ 5240 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)		
11a	6Mbps	1	36	5180	17.19	31.74	-	22.35		
11a	6Mbps	1	44	5220	17.17	32.64	-	22.35		
11a	6Mbps	1	48	5240	17.19	34.38	-	22.35		
HT20	MCS0	1	36	5180	18.08	33.36	-	22.57		
HT20	MCS0	1	44	5220	18.15	32.64	-	22.59		
HT20	MCS0	1	48	5240	18.47	33.48	-	22.66		
HT40	MCS0	1	38	5190	36.52	65.64	-	23.01		
HT40	MCS0	1	46	5230	36.52	65.40	-	23.01		
VHT80	MCS0	1	42	5210	75.28	80.88	-	23.01		

TEST RESULTS DATA
26dB and 99% OBW

<5260 MHz ~ 5320 MHz>										
Mod.	Data Rate	N _{TX}	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	52	5260	17.19	32.70	23.35	29.35	23.98	
11a	6M bps	1	60	5300	17.26	32.64	23.37	29.37	23.98	
11a	6M bps	1	64	5320	17.28	31.38	23.37	29.37	23.98	
HT20	MCS 0	1	52	5260	18.13	32.40	23.58	29.58	23.98	
HT20	MCS 0	1	60	5300	18.17	35.10	23.59	29.59	23.98	
HT20	MCS 0	1	64	5320	18.21	32.16	23.60	29.60	23.98	
HT40	MCS 0	1	54	5270	36.64	62.28	23.98	30.00	23.98	
HT40	MCS 0	1	62	5310	36.59	65.40	23.98	30.00	23.98	
VHT80	MCS 0	1	58	5290	75.28	87.36	23.98	30.00	23.98	

TEST RESULTS DATA
26dB and 99% OBW

<5500 MHz ~ 5720 MHz >										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	IC 99% Bandwidth Power Limit (dBm)	IC 99% Bandwidth EIRP Limit (dBm)	FCC 26dB Bandwidth Power Limit (dBm)	Note
11a	6M bps	1	100	5500	17.40	32.58	23.41	29.41	23.98	
11a	6M bps	1	116	5580	17.36	34.44	23.39	29.39	23.98	
11a	6M bps	1	140	5700	17.42	36.06	23.41	29.41	23.98	
11a	6Mbps	1	144	5720	17.57	34.44	23.45	29.45	23.98	
HT20	MCS 0	1	100	5500	18.35	33.54	23.64	29.64	23.98	
HT20	MCS 0	1	116	5580	18.21	36.18	23.60	29.60	23.98	
HT20	MCS 0	1	140	5700	18.28	36.30	23.62	29.62	23.98	
HT20	MCS0	1	144	5720	18.25	32.82	23.61	29.61	23.98	
HT40	MCS 0	1	102	5510	36.54	65.76	23.98	30.00	23.98	
HT40	MCS 0	1	110	5550	36.64	65.28	23.98	30.00	23.98	
HT40	MCS 0	1	134	5670	36.69	66.12	23.98	30.00	23.98	
HT40	MCS0	1	142	5710	36.74	67.20	23.98	30.00	23.98	
VHT80	MCS 0	1	106	5530	75.35	167.69	23.98	30.00	23.98	
VHT80	MCS 0	1	122	5610	75.38	170.32	23.98	30.00	23.98	
VHT80	MCS0	1	138	5690	75.44	158.32	23.98	30.00	23.98	

TEST RESULTS DATA
6dB and 26dB EBW and 99% OBW

<5745 MHz ~ 5825 MHz>									
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Bandwidth (MHz)	26 dB Bandwidth (MHz)	6 dB Bandwidth (MHz)	6dB Bandwidth min. Limit (MHz)	Pass/Fail
11a	6M bps	1	149	5745	17.25	33.84	15.15	0.5	Pass
11a	6Mbps	1	157	5785	17.27	32.70	15.15	0.5	Pass
11a	6Mbps	1	165	5825	17.52	32.34	15.20	0.5	Pass
HT20	MCS 0	1	149	5745	18.11	33.36	15.25	0.5	Pass
HT20	MCS 0	1	157	5785	18.11	34.14	15.25	0.5	Pass
HT20	MCS 0	1	165	5825	18.20	30.60	15.20	0.5	Pass
HT40	MCS 0	1	151	5755	36.63	55.56	35.28	0.5	Pass
HT40	MCS 0	1	159	5795	36.59	72.84	35.19	0.5	Pass
VHT80	MCS 0	1	155	5775	75.39	144.41	75.52	0.5	Pass

TEST RESULTS DATA
Power Spectral Density

<5180 MHz ~ 5240 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)	-	Pass/Fail
11a	6Mbps	1	36	5180	0.15	7.76	11.00	-5.00		Pass
11a	6Mbps	1	44	5220	0.15	7.78	11.00	-5.00		Pass
11a	6Mbps	1	48	5240	0.15	7.78	11.00	-5.00		Pass
HT20	MCS0	1	36	5180	0.17	7.59	11.00	-5.00		Pass
HT20	MCS0	1	44	5220	0.17	7.56	11.00	-5.00		Pass
HT20	MCS0	1	48	5240	0.17	7.46	11.00	-5.00		Pass
HT40	MCS0	1	38	5190	0.00	3.42	11.00	-5.00		Pass
HT40	MCS0	1	46	5230	0.00	3.38	11.00	-5.00		Pass
VHT80	MCS0	1	42	5210	0.00	-0.54	11.00	-5.00		Pass

TEST RESULTS DATA
Power Spectral Density

<5260 MHz ~ 5320 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	52	5260	0.15	7.80	11.00	-4.60		Pass
11a	6M bps	1	60	5300	0.15	7.72	11.00	-4.60		Pass
11a	6M bps	1	64	5320	0.15	7.79	11.00	-4.60		Pass
HT20	MCS 0	1	52	5260	0.17	7.57	11.00	-4.60		Pass
HT20	MCS 0	1	60	5300	0.17	7.51	11.00	-4.60		Pass
HT20	MCS 0	1	64	5320	0.17	7.54	11.00	-4.60		Pass
HT40	MCS 0	1	54	5270	0.00	3.45	11.00	-4.60		Pass
HT40	MCS 0	1	62	5310	0.00	3.46	11.00	-4.60		Pass
VHT80	MCS 0	1	58	5290	0.00	-0.42	11.00	-4.60		Pass

TEST RESULTS DATA
Power Spectral Density


<5500 MHz ~ 5720 MHz >										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	Average Power Density (dBm/MHz)	Average PSD Limit (dBm/MHz)	DG (dBi)		Pass/Fail
11a	6M bps	1	100	5500	0.15	7.72	11.00	-3.60		Pass
11a	6M bps	1	116	5580	0.15	7.71	11.00	-3.60		Pass
11a	6M bps	1	140	5700	0.15	7.58	11.00	-3.60		Pass
11a	6Mbps	1	144	5720	0.15	7.64	11.00	-3.60		Pass
HT20	MCS 0	1	100	5500	0.17	7.54	11.00	-3.60		Pass
HT20	MCS 0	1	116	5580	0.17	7.36	11.00	-3.60		Pass
HT20	MCS 0	1	140	5700	0.17	7.32	11.00	-3.60		Pass
HT20	MCS0	1	144	5720	0.17	7.47	11.00	-3.60		Pass
HT40	MCS 0	1	102	5510	0.00	3.43	11.00	-3.60		Pass
HT40	MCS 0	1	110	5550	0.00	3.40	11.00	-3.60		Pass
HT40	MCS 0	1	134	5670	0.00	3.40	11.00	-3.60		Pass
HT40	MCS0	1	142	5710	0.00	3.51	11.00	-3.60		Pass
VHT80	MCS 0	1	106	5530	0.00	-0.31	11.00	-3.60		Pass
VHT80	MCS 0	1	122	5610	0.00	-0.83	11.00	-3.60		Pass
VHT80	MCS0	1	138	5690	0.00	-0.93	11.00	-3.60		Pass

TEST RESULTS DATA
Power Spectral Density

<5745 MHz ~ 5825 MHz>										
Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Duty Factor (dB)	10log (500kHz /RBW) Factor (dB)	Average Power Density (dBm/500kHz)	Average PSD Limit (dBm/500kHz)	DG (dBi)	Pass/Fail
11a	6M bps	1	149	5745	0.15	2.22	4.64	30.00	-6.30	Pass
11a	6Mbps	1	157	5785	0.15	2.22	4.70	30.00	-6.30	Pass
11a	6Mbps	1	165	5825	0.15	2.22	4.63	30.00	-6.30	Pass
HT20	MCS 0	1	149	5745	0.17	2.22	4.37	30.00	-6.30	Pass
HT20	MCS 0	1	157	5785	0.17	2.22	4.42	30.00	-6.30	Pass
HT20	MCS 0	1	165	5825	0.17	2.22	4.31	30.00	-6.30	Pass
HT40	MCS 0	1	151	5755	0.00	2.22	0.25	30.00	-6.30	Pass
HT40	MCS 0	1	159	5795	0.00	2.22	0.26	30.00	-6.30	Pass
VHT80	MCS 0	1	155	5775	0.00	2.22	-3.68	30.00	-6.30	Pass




Appendix B. AC Conducted Emission Test Results

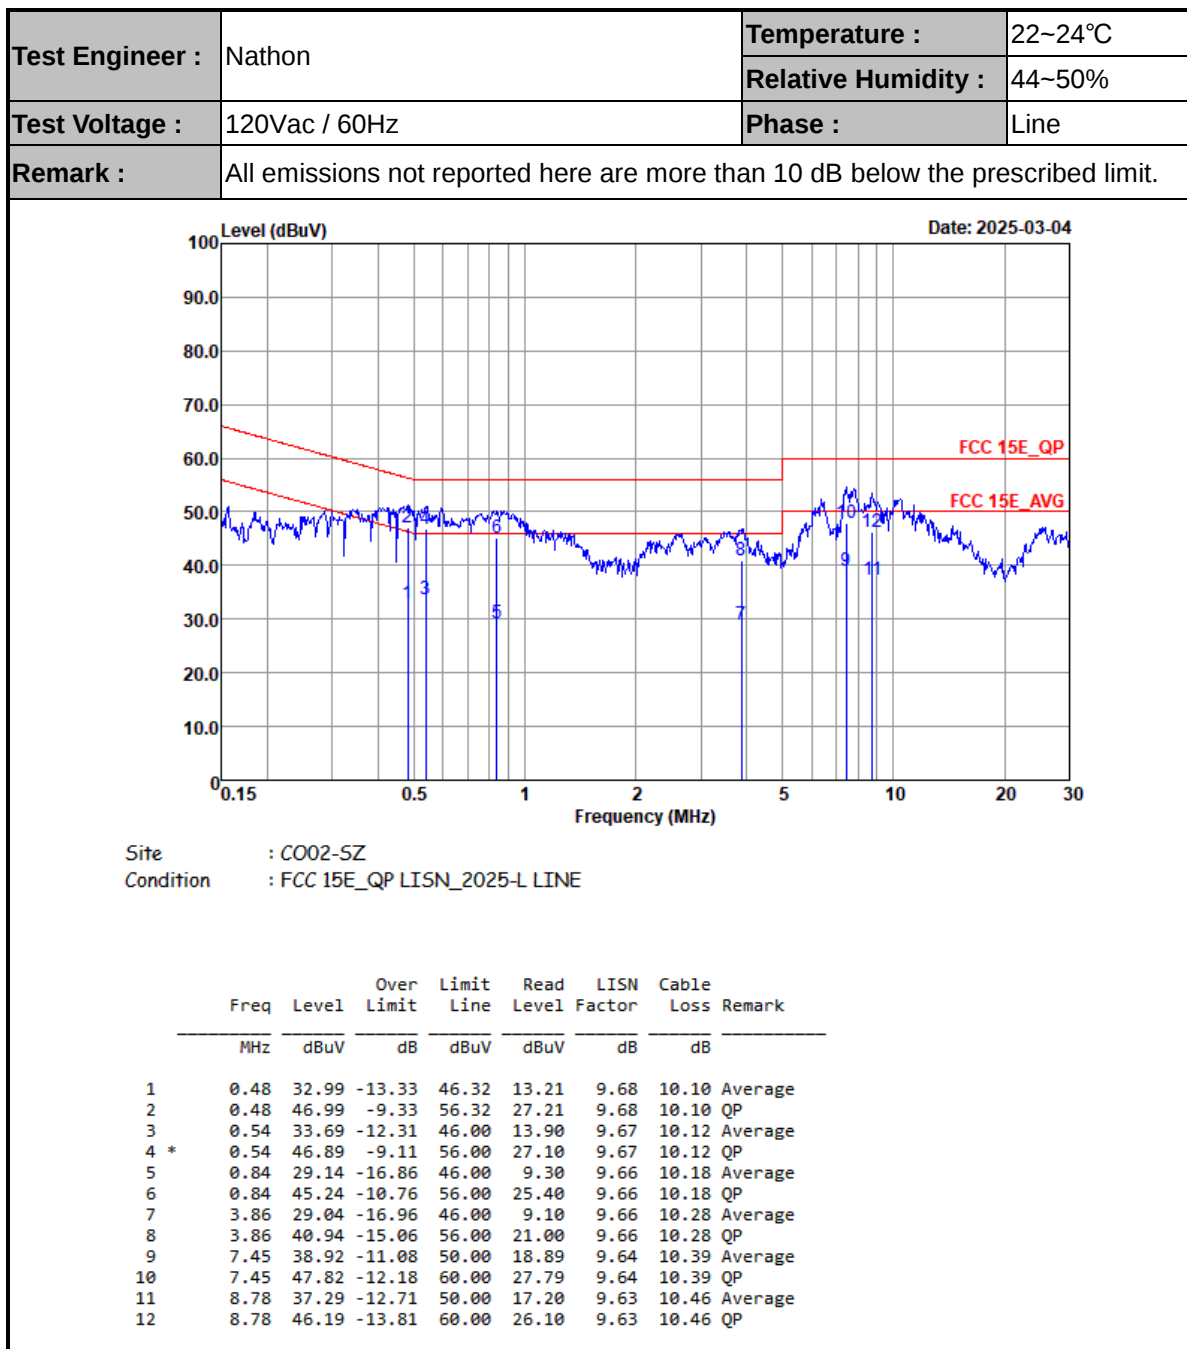



Test Engineer :	Nathon	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

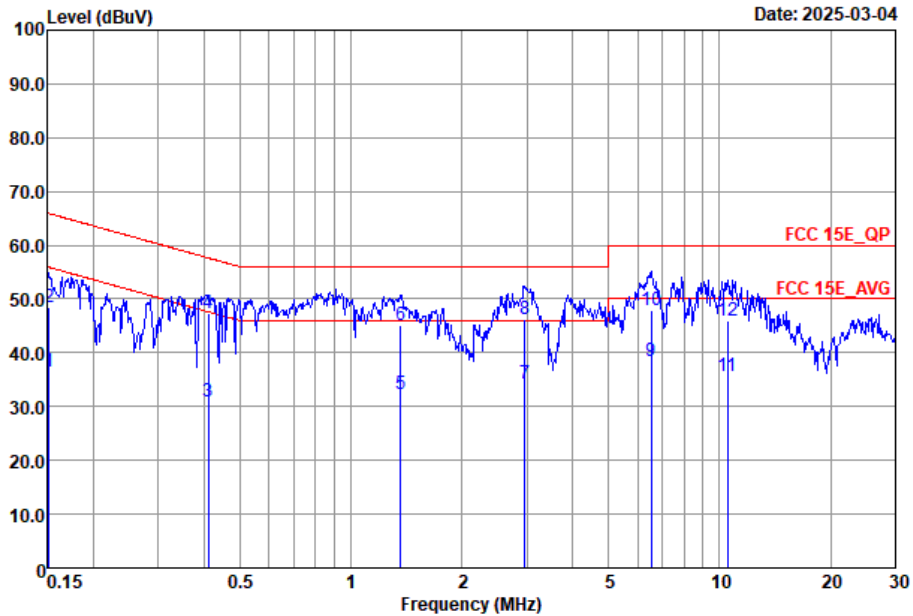

Site : C002-SZ
Condition : FCC 15E_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.15	36.37	-19.54	55.91	16.80	9.56	10.01	Average
2	0.15	48.57	-17.34	65.91	29.00	9.56	10.01	QP
3	0.41	30.85	-16.79	47.64	10.90	9.87	10.08	Average
4	0.41	47.45	-10.19	57.64	27.50	9.87	10.08	QP
5	1.37	32.25	-13.75	46.00	12.31	9.69	10.25	Average
6	1.37	45.25	-10.75	56.00	25.31	9.69	10.25	QP
7	2.96	34.19	-11.81	46.00	14.21	9.68	10.30	Average
8 *	2.96	46.19	-9.81	56.00	26.21	9.68	10.30	QP
9	6.52	38.39	-11.61	50.00	18.29	9.76	10.34	Average
10	6.52	47.89	-12.11	60.00	27.79	9.76	10.34	QP
11	10.51	35.59	-14.41	50.00	15.40	9.63	10.56	Average
12	10.51	45.89	-14.11	60.00	25.70	9.63	10.56	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C Radiated Spurious Emission Test Data

Test Engineer :	ZhangXu	Relative Humidity :	48~49%
		Temperature :	24°C-25°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Sample
Mode 1	U-NII-1	5.15-5.25	5	802.11a	36	5180	6Mbps	-	1
Mode 2	U-NII-1	5.15-5.25	5	802.11a	44	5220	6Mbps	-	1
Mode 3	U-NII-1	5.15-5.25	5	802.11a	48	5240	6Mbps	-	1
Mode 4	U-NII-2A	5.25-5.35	5	802.11a	52	5260	6Mbps	-	1
Mode 5	U-NII-2A	5.25-5.35	5	802.11a	60	5300	6Mbps	-	1
Mode 6	U-NII-2A	5.25-5.35	5	802.11a	64	5320	6Mbps	-	1
Mode 7	U-NII-2C	5.47-5.725	5	802.11a	100	5500	6Mbps	-	1
Mode 8	U-NII-2C	5.47-5.725	5	802.11a	116	5580	6Mbps	-	1
Mode 9	U-NII-2C	5.47-5.725	5	802.11a	140	5700	6Mbps	-	1
Mode 10	U-NII-1	5.15-5.25	5	802.11n HT20	36	5180	MCS0	-	1
Mode 11	U-NII-1	5.15-5.25	5	802.11n HT20	44	5220	MCS0	-	1
Mode 12	U-NII-1	5.15-5.25	5	802.11n HT20	48	5240	MCS0	-	1
Mode 13	U-NII-2A	5.25-5.35	5	802.11n HT20	52	5260	MCS0	-	1
Mode 14	U-NII-2A	5.25-5.35	5	802.11n HT20	60	5300	MCS0	-	1
Mode 15	U-NII-2A	5.25-5.35	5	802.11n HT20	64	5320	MCS0	-	1
Mode 16	U-NII-2C	5.47-5.725	5	802.11n HT20	100	5500	MCS0	-	1
Mode 17	U-NII-2C	5.47-5.725	5	802.11n HT20	116	5580	MCS0	-	1
Mode 18	U-NII-2C	5.47-5.725	5	802.11n HT20	140	5700	MCS0	-	1
Mode 19	U-NII-1	5.15-5.25	5	802.11n HT40	38	5190	MCS0	-	1
Mode 20	U-NII-1	5.15-5.25	5	802.11n HT40	46	5230	MCS0	-	1
Mode 21	U-NII-2A	5.25-5.35	5	802.11n HT40	54	5270	MCS0	-	1
Mode 22	U-NII-2A	5.25-5.35	5	802.11n HT40	62	5310	MCS0	-	1
Mode 23	U-NII-2C	5.47-5.725	5	802.11n HT40	102	5510	MCS0	-	1
Mode 24	U-NII-2C	5.47-5.725	5	802.11n HT40	134	5670	MCS0	-	1
Mode 25	U-NII-1	5.15-5.25	5	802.11ac VHT80	42	5210	MCS0	-	1
Mode 26	U-NII-2A	5.25-5.35	5	802.11ac VHT80	58	5290	MCS0	-	1
Mode 27	U-NII-2C	5.47-5.725	5	802.11ac VHT80	106	5530	MCS0	-	1
Mode 28	U-NII-2C	5.47-5.725	5	802.11ac VHT80	122	5610	MCS0	-	1
Mode 29	U-NII-3	5.725-5.85	5	802.11a	149	5745	6Mbps	-	1
Mode 30	U-NII-3	5.725-5.85	5	802.11a	157	5785	6Mbps	-	1
Mode 31	U-NII-3	5.725-5.85	5	802.11a	165	5825	6Mbps	-	1



Mode 32	U-NII-3	5.725-5.85	5	802.11n HT20	149	5745	MCS0	-	1
Mode 33	U-NII-3	5.725-5.85	5	802.11n HT20	157	5785	MCS0	-	1
Mode 34	U-NII-3	5.725-5.85	5	802.11n HT20	165	5825	MCS0	-	1
Mode 35	U-NII-3	5.725-5.85	5	802.11n HT40	151	5755	MCS0	-	1
Mode 36	U-NII-3	5.725-5.85	5	802.11n HT40	159	5795	MCS0	-	1
Mode 37	U-NII-3	5.725-5.85	5	802.11ac VHT80	155	5775	MCS0	-	1
Mode 38	U-NII-2C	5.47-5.725	5	802.11a	144	5720	6Mbps	-	1
Mode 39	U-NII-2C	5.47-5.725	5	802.11n HT20	144	5720	MCS0	-	1
Mode 40	U-NII-2C	5.47-5.725	5	802.11n HT40	142	5710	MCS0	-	1
Mode 41	U-NII-2C	5.47-5.725	5	802.11ac VHT80	138	5690	MCS0	-	1
Mode 42	U-NII-1	5.15-5.25	5	802.11n HT40	38	5190	MCS0	-	1-LF
Mode 43	U-NII-3	5.725-5.85	5	802.11ac VHT80	155	5775	MCS0	-	1-LF
Mode 44	U-NII-1	5.15-5.25	5	802.11n HT40	38	5190	MCS0	-	1
Mode 44	LTE		1	B41 LINK					1
Mode 45	U-NII-1	5.15-5.25	5	802.11n HT40	38	5190	MCS0	-	1
Mode 45	LTE		1	B41 LINK					1
Mode 45		2400-2483.5	6	Bluetooth-LE	38	2478	2Mbps		1
Mode 46	U-NII-1	5.15-5.25	5	802.11n HT40	38	5190	MCS0	-	2
Mode 47	U-NII-1	5.15-5.25	5	802.11n HT40	38	5190	MCS0	-	3



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	-	-	-	-	-	-	-	Band Edge
1	802.11a	36	10360.00	46.14	68.30	-22.16	H	Peak	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	45.84	68.30	-22.46	V	Peak	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10480.00	46.36	68.30	-21.94	H	Peak	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	10520.00	46.44	68.30	-21.86	H	Peak	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	15900.00	48.15	74.00	-25.85	V	Peak	Pass	Harmonic
6	802.11a	64	5350.38	50.09	54.00	-3.91	V	AVERAGE	Pass	Band Edge
6	802.11a	64	10640.00	46.92	74.00	-27.08	H	Peak	Pass	Harmonic
7	802.11a	100	-	-	-	-	-	-	-	Band Edge
7	802.11a	100	17100.00	46.45	68.30	-21.85	H	Peak	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	16740.00	47.52	68.30	-20.78	V	Peak	Pass	Harmonic
9	802.11a	140	5725.74	64.37	68.30	-3.93	V	PEAK	Pass	Band Edge
9	802.11a	140	17100.00	47.80	68.30	-20.50	H	Peak	Pass	Harmonic
10	802.11n HT20	36	5149.58	48.34	54.00	-5.66	H	AVERAGE	Pass	Band Edge
10	802.11n HT20	36	10360.00	46.15	68.30	-22.15	V	Peak	Pass	Harmonic
11	802.11n HT20	44	-	-	-	-	-	-	-	Band Edge
11	802.11n HT20	44	10440.00	45.76	68.30	-22.54	V	Peak	Pass	Harmonic
12	802.11n HT20	48	5145.20	39.79	54.00	-14.21	H	AVERAGE	Pass	Band Edge
12	802.11n HT20	48	10480.00	46.13	68.30	-22.17	V	Peak	Pass	Harmonic
13	802.11n HT20	52	5139.36	39.50	54.00	-14.50	H	AVERAGE	Pass	Band Edge
13	802.11n HT20	52	10520.00	45.26	68.30	-23.04	V	Peak	Pass	Harmonic
14	802.11n HT20	60	-	-	-	-	-	-	-	Band Edge
14	802.11n HT20	60	15900.00	46.97	74.00	-27.03	H	Peak	Pass	Harmonic
15	802.11n HT20	64	5350.80	48.99	54.00	-5.01	H	AVERAGE	Pass	Band Edge
15	802.11n HT20	64	15960.00	47.16	74.00	-26.84	H	Peak	Pass	Harmonic
16	802.11n HT20	100	5470.00	60.85	68.30	-7.45	H	PEAK	Pass	Band Edge
16	802.11n HT20	100	16500.00	48.77	68.30	-19.53	V	Peak	Pass	Harmonic
17	802.11n HT20	116	-	-	-	-	-	-	-	Band Edge
17	802.11n HT20	116	16740.00	47.51	68.30	-20.79	V	Peak	Pass	Harmonic
18	802.11n HT20	140	5727.76	63.99	68.30	-4.31	V	PEAK	Pass	Band Edge
18	802.11n HT20	140	17100.00	50.23	68.30	-18.07	H	Peak	Pass	Harmonic





19	802.11n HT40	38	5148.96	50.87	54.00	-3.13	H	AVERAGE	Pass	Band Edge
19	802.11n HT40	38	10380.00	44.65	68.30	-23.65	H	Peak	Pass	Harmonic
20	802.11n HT40	46	5146.05	42.56	54.00	-11.44	H	AVERAGE	Pass	Band Edge
20	802.11n HT40	46	-	-	-	-	-	-	-	Harmonic
21	802.11n HT40	54	5350.75	43.06	54.00	-10.94	H	AVERAGE	Pass	Band Edge
21	802.11n HT40	54	-	-	-	-	-	-	-	Harmonic
22	802.11n HT40	62	5351.40	49.40	54.00	-4.60	H	AVERAGE	Pass	Band Edge
22	802.11n HT40	62	-	-	-	-	-	-	-	Harmonic
23	802.11n HT40	102	5466.96	64.00	68.30	-4.30	V	PEAK	Pass	Band Edge
23	802.11n HT40	102	-	-	-	-	-	-	-	Harmonic
24	802.11n HT40	134	5725.86	62.08	68.30	-6.22	V	PEAK	Pass	Band Edge
24	802.11n HT40	134	-	-	-	-	-	-	-	Harmonic
25	802.11ac VHT80	42	5149.73	46.38	54.00	-7.62	H	AVERAGE	Pass	Band Edge
25	802.11ac VHT80	42	-	-	-	-	-	-	-	Harmonic
26	802.11ac VHT80	58	5350.18	48.71	54.00	-5.29	H	AVERAGE	Pass	Band Edge
26	802.11ac VHT80	58	-	-	-	-	-	-	-	Harmonic
27	802.11ac VHT80	106	5459.26	48.35	54.00	-5.65	V	AVERAGE	Pass	Band Edge
27	802.11ac VHT80	106	-	-	-	-	-	-	-	Harmonic
28	802.11ac VHT80	122	5728.89	60.73	68.30	-7.57	V	PEAK	Pass	Band Edge
28	802.11ac VHT80	122	-	-	-	-	-	-	-	Harmonic
29	802.11a	149	-	-	-	-	-	-	-	Band Edge
29	802.11a	149	17235.00	47.66	68.30	-20.64	H	Peak	Pass	Harmonic
30	802.11a	157	-	-	-	-	-	-	-	Band Edge
30	802.11a	157	17355.00	48.57	68.30	-19.73	V	Peak	Pass	Harmonic
31	802.11a	165	-	-	-	-	-	-	-	Band Edge
31	802.11a	165	17475.00	49.45	68.30	-18.85	H	Peak	Pass	Harmonic
32	802.11n HT20	149	5641.47	50.18	68.30	-18.12	H	PEAK	Pass	Band Edge
32	802.11n HT20	149	17235.00	49.71	68.30	-18.59	V	Peak	Pass	Harmonic
33	802.11n HT20	157	5928.39	50.09	68.30	-18.21	V	PEAK	Pass	Band Edge
33	802.11n HT20	157	17355.00	51.04	68.30	-17.26	H	Peak	Pass	Harmonic
34	802.11n HT20	165	5939.00	49.86	68.30	-18.44	H	PEAK	Pass	Band Edge
34	802.11n HT20	165	17475.00	47.71	68.30	-20.59	H	Peak	Pass	Harmonic
35	802.11n HT40	151	5642.94	53.95	68.30	-14.35	H	PEAK	Pass	Band Edge
35	802.11n HT40	151	-	-	-	-	-	-	-	Harmonic
36	802.11n HT40	159	5931.25	49.71	68.30	-18.59	V	PEAK	Pass	Band Edge
36	802.11n HT40	159	-	-	-	-	-	-	-	Harmonic
37	802.11ac VHT80	155	5642.18	61.43	68.30	-6.87	H	PEAK	Pass	Band Edge
37	802.11ac VHT80	155	17325.00	48.31	68.30	-19.99	V	Peak	Pass	Harmonic



38	802.11a	144	-	-	-	-	-	-	-	Band Edge
38	802.11a	144	17160.00	50.00	68.30	-18.30	H	Peak	Pass	Harmonic
39	802.11n HT20	144	5431.40	38.80	54.00	-15.20	H	Peak	Pass	Band Edge
39	802.11n HT20	144	17160.00	50.44	68.30	-17.86	H	Peak	Pass	Harmonic
40	802.11n HT40	142	5388.50	39.14	54.00	-14.86	H	Peak	Pass	Band Edge
40	802.11n HT40	142	17130.00	49.39	68.30	-18.91	V	Peak	Pass	Harmonic
41	802.11ac VHT80	138	5457.25	41.08	54.00	-12.92	H	Peak	Pass	Band Edge
41	802.11ac VHT80	138	-	-	-	-	-	-	-	Harmonic
42	802.11n HT40	38	46.99	33.26	40.00	-6.74	V	Peak	Pass	LF
43	802.11ac VHT80	155	46.49	32.69	40.00	-7.31	V	Peak	Pass	LF
44	Co-TX		5149.72	49.71	54.00	-4.29	H	AVERAGE	Pass	Band Edge
44			10380.00	46.01	68.30	-22.29	V	Peak	Pass	Harmonic
45	Co-TX		5149.15	50.15	54.00	-3.85	H	AVERAGE	Pass	Band Edge
45			10380.00	46.58	68.30	-21.72	H	Peak	Pass	Harmonic
46	802.11n HT40	38	5149.72	49.46	54.00	-4.54	H	AVERAGE	Pass	Band Edge
46	802.11n HT40	38	-	-	-	-	-	-	-	Harmonic
47	802.11n HT40	38	5144.21	47.62	54.00	-6.38	H	AVERAGE	Pass	Band Edge
47	802.11n HT40	38	-	-	-	-	-	-	-	Harmonic

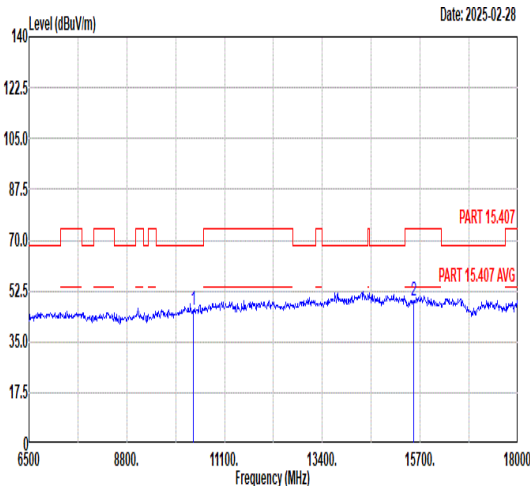
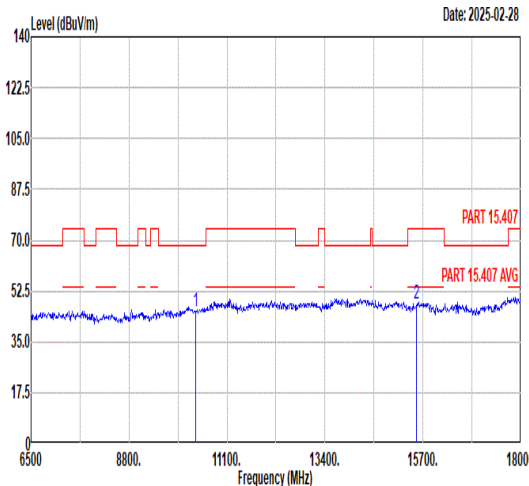


Mode	1																																																																																																					
	Harmonic																																																																																																					
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																																					
ANT	5																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10360.00</td><td>46.14</td><td>68.30</td><td>-22.16</td><td>57.25</td><td>37.16</td><td>10.73</td><td>59.00 -- -- Peak</td></tr><tr><td>2</td><td>15540.00</td><td>49.15</td><td>74.00</td><td>-24.85</td><td>55.95</td><td>39.42</td><td>12.72</td><td>58.94 -- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10360.00	46.14	68.30	-22.16	57.25	37.16	10.73	59.00 -- -- Peak	2	15540.00	49.15	74.00	-24.85	55.95	39.42	12.72	58.94 -- -- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10360.00</td><td>45.70</td><td>68.30</td><td>-22.60</td><td>56.81</td><td>37.16</td><td>10.73</td><td>59.00 -- -- Peak</td></tr><tr><td>2</td><td>15540.00</td><td>48.18</td><td>74.00</td><td>-25.82</td><td>54.98</td><td>39.42</td><td>12.72</td><td>58.94 -- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10360.00	45.70	68.30	-22.60	56.81	37.16	10.73	59.00 -- -- Peak	2	15540.00	48.18	74.00	-25.82	54.98	39.42	12.72	58.94 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	10360.00	46.14	68.30	-22.16	57.25	37.16	10.73	59.00 -- -- Peak																																																																																														
2	15540.00	49.15	74.00	-24.85	55.95	39.42	12.72	58.94 -- -- Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	10360.00	45.70	68.30	-22.60	56.81	37.16	10.73	59.00 -- -- Peak																																																																																														
2	15540.00	48.18	74.00	-25.82	54.98	39.42	12.72	58.94 -- -- Peak																																																																																														





Mode	2																																																																																																																
	Harmonic																																																																																																																
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																																																
ANT	5																																																																																																																
Pol.	Horizontal						Vertical																																																																																																										
Peak Avg	Level (dBuV/m) Date: 2025-02-28 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>45.31</td><td>68.30</td><td>-22.99</td><td>56.08</td><td>37.35</td><td>10.79</td><td>58.91</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.05</td><td>74.00</td><td>-26.95</td><td>53.93</td><td>39.46</td><td>12.72</td><td>59.06</td><td>--</td><td>-- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	45.31	68.30	-22.99	56.08	37.35	10.79	58.91	--	-- Peak	2	15660.00	47.05	74.00	-26.95	53.93	39.46	12.72	59.06	--	-- Peak	Level (dBuV/m) Date: 2025-02-28 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10440.00</td><td>45.84</td><td>68.30</td><td>-22.46</td><td>56.61</td><td>37.35</td><td>10.79</td><td>58.91</td><td>--</td><td>-- Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.83</td><td>74.00</td><td>-26.17</td><td>54.71</td><td>39.46</td><td>12.72</td><td>59.06</td><td>--</td><td>-- Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10440.00	45.84	68.30	-22.46	56.61	37.35	10.79	58.91	--	-- Peak	2	15660.00	47.83	74.00	-26.17	54.71	39.46	12.72	59.06	--	-- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																								
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	10440.00	45.31	68.30	-22.99	56.08	37.35	10.79	58.91	--	-- Peak																																																																																																							
2	15660.00	47.05	74.00	-26.95	53.93	39.46	12.72	59.06	--	-- Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																							
1	10440.00	45.84	68.30	-22.46	56.61	37.35	10.79	58.91	--	-- Peak																																																																																																							
2	15660.00	47.83	74.00	-26.17	54.71	39.46	12.72	59.06	--	-- Peak																																																																																																							

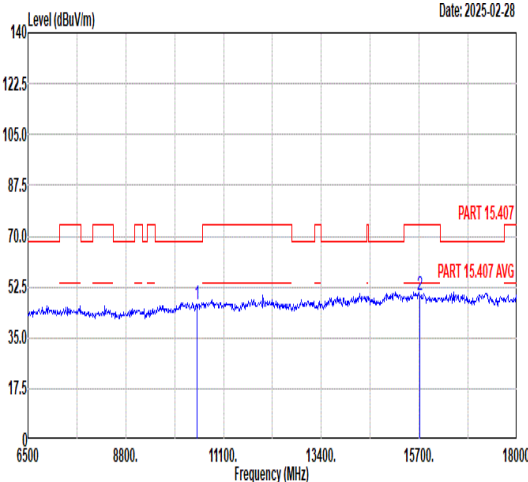
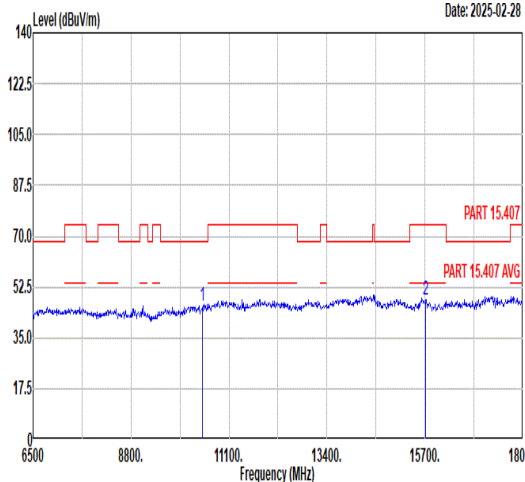


Mode	3																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																																																	
ANT	5																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10480.00</td><td>46.36</td><td>68.30</td><td>-21.94</td><td>56.96</td><td>37.45</td><td>10.82</td><td>58.87</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>49.74</td><td>74.00</td><td>-24.26</td><td>56.66</td><td>39.49</td><td>12.71</td><td>59.12</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10480.00	46.36	68.30	-21.94	56.96	37.45	10.82	58.87	--	--	Peak	2	15720.00	49.74	74.00	-24.26	56.66	39.49	12.71	59.12	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10480.00</td><td>45.79</td><td>68.30</td><td>-22.51</td><td>56.39</td><td>37.45</td><td>10.82</td><td>58.87</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>47.92</td><td>74.00</td><td>-26.08</td><td>54.84</td><td>39.49</td><td>12.71</td><td>59.12</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10480.00	45.79	68.30	-22.51	56.39	37.45	10.82	58.87	--	--	Peak	2	15720.00	47.92	74.00	-26.08	54.84	39.49	12.71	59.12	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10480.00	46.36	68.30	-21.94	56.96	37.45	10.82	58.87	--	--	Peak																																																																																																																							
2	15720.00	49.74	74.00	-24.26	56.66	39.49	12.71	59.12	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10480.00	45.79	68.30	-22.51	56.39	37.45	10.82	58.87	--	--	Peak																																																																																																																							
2	15720.00	47.92	74.00	-26.08	54.84	39.49	12.71	59.12	--	--	Peak																																																																																																																							

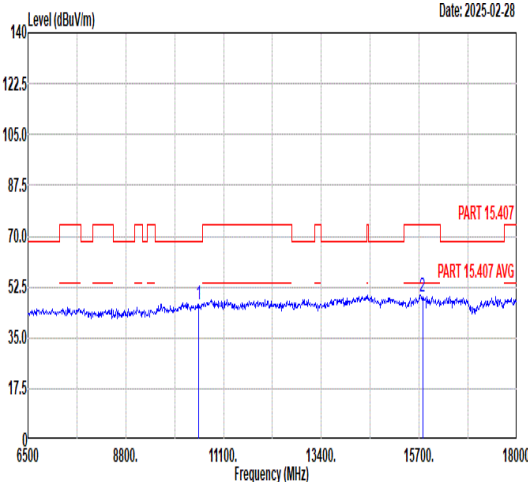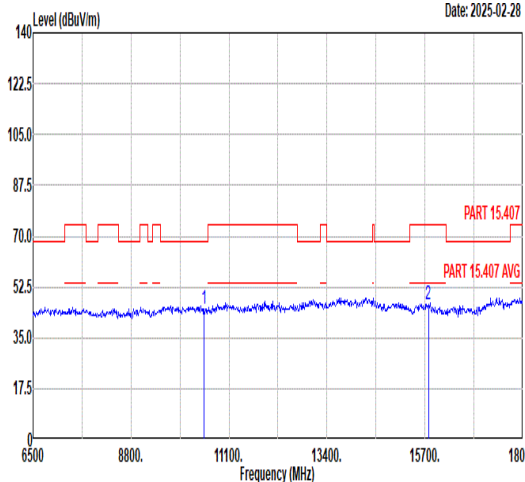

Mode	4																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																																																	
ANT	5																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10520.00</td><td>46.44</td><td>68.30</td><td>-21.86</td><td>56.88</td><td>37.53</td><td>10.85</td><td>58.82</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>49.16</td><td>74.00</td><td>-24.84</td><td>56.12</td><td>39.51</td><td>12.71</td><td>59.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10520.00	46.44	68.30	-21.86	56.88	37.53	10.85	58.82	--	--	Peak	2	15780.00	49.16	74.00	-24.84	56.12	39.51	12.71	59.18	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10520.00</td><td>44.86</td><td>68.30</td><td>-23.44</td><td>55.30</td><td>37.53</td><td>10.85</td><td>58.82</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>46.31</td><td>74.00</td><td>-27.69</td><td>53.27</td><td>39.51</td><td>12.71</td><td>59.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10520.00	44.86	68.30	-23.44	55.30	37.53	10.85	58.82	--	--	Peak	2	15780.00	46.31	74.00	-27.69	53.27	39.51	12.71	59.18	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10520.00	46.44	68.30	-21.86	56.88	37.53	10.85	58.82	--	--	Peak																																																																																																																							
2	15780.00	49.16	74.00	-24.84	56.12	39.51	12.71	59.18	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10520.00	44.86	68.30	-23.44	55.30	37.53	10.85	58.82	--	--	Peak																																																																																																																							
2	15780.00	46.31	74.00	-27.69	53.27	39.51	12.71	59.18	--	--	Peak																																																																																																																							



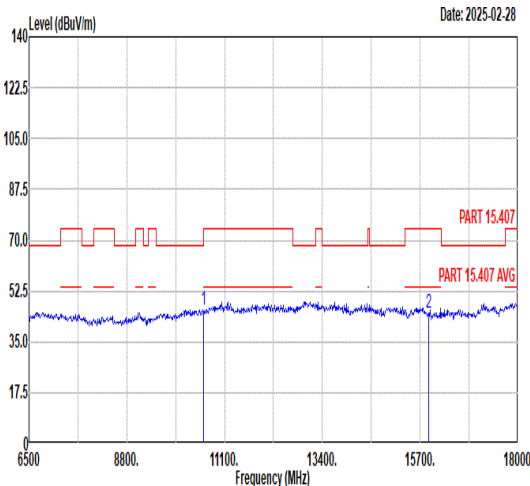
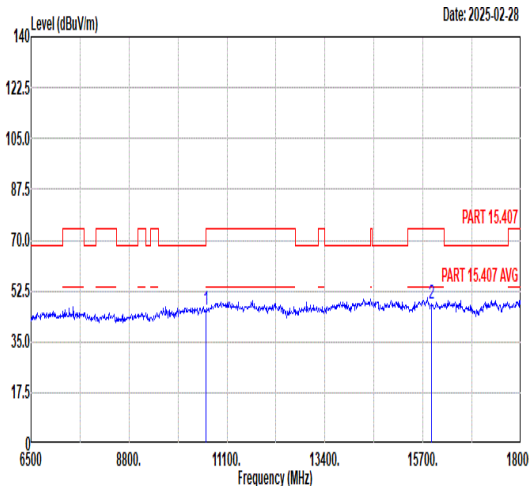


Mode	5																																																																																																					
	Harmonic																																																																																																					
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																					
ANT	5																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10600.00</td><td>46.07</td><td>74.00</td><td>-27.93</td><td>56.19</td><td>37.70</td><td>10.91</td><td>58.73</td></tr><tr><td>2</td><td>15900.00</td><td>44.91</td><td>74.00</td><td>-29.09</td><td>51.94</td><td>39.56</td><td>12.71</td><td>59.30</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10600.00	46.07	74.00	-27.93	56.19	37.70	10.91	58.73	2	15900.00	44.91	74.00	-29.09	51.94	39.56	12.71	59.30	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10600.00</td><td>46.04</td><td>74.00</td><td>-27.96</td><td>56.16</td><td>37.70</td><td>10.91</td><td>58.73</td></tr><tr><td>2</td><td>15900.00</td><td>48.15</td><td>74.00</td><td>-25.85</td><td>55.18</td><td>39.56</td><td>12.71</td><td>59.30</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10600.00	46.04	74.00	-27.96	56.16	37.70	10.91	58.73	2	15900.00	48.15	74.00	-25.85	55.18	39.56	12.71	59.30
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	10600.00	46.07	74.00	-27.93	56.19	37.70	10.91	58.73																																																																																														
2	15900.00	44.91	74.00	-29.09	51.94	39.56	12.71	59.30																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	10600.00	46.04	74.00	-27.96	56.16	37.70	10.91	58.73																																																																																														
2	15900.00	48.15	74.00	-25.85	55.18	39.56	12.71	59.30																																																																																														
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10600.00</td><td>46.07</td><td>74.00</td><td>-27.93</td><td>56.19</td><td>37.70</td><td>10.91</td><td>58.73</td></tr><tr><td>2</td><td>15900.00</td><td>44.91</td><td>74.00</td><td>-29.09</td><td>51.94</td><td>39.56</td><td>12.71</td><td>59.30</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10600.00	46.07	74.00	-27.93	56.19	37.70	10.91	58.73	2	15900.00	44.91	74.00	-29.09	51.94	39.56	12.71	59.30	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>10600.00</td><td>46.04</td><td>74.00</td><td>-27.96</td><td>56.16</td><td>37.70</td><td>10.91</td><td>58.73</td></tr><tr><td>2</td><td>15900.00</td><td>48.15</td><td>74.00</td><td>-25.85</td><td>55.18</td><td>39.56</td><td>12.71</td><td>59.30</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	10600.00	46.04	74.00	-27.96	56.16	37.70	10.91	58.73	2	15900.00	48.15	74.00	-25.85	55.18	39.56	12.71	59.30
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	10600.00	46.07	74.00	-27.93	56.19	37.70	10.91	58.73																																																																																														
2	15900.00	44.91	74.00	-29.09	51.94	39.56	12.71	59.30																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	10600.00	46.04	74.00	-27.96	56.16	37.70	10.91	58.73																																																																																														
2	15900.00	48.15	74.00	-25.85	55.18	39.56	12.71	59.30																																																																																														





Mode	6																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																									
ANT	5																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2025-02-28 Frequency (MHz)						Level (dBuV/m) Date: 2025-03-07 Frequency (MHz)																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5351.36</td><td>63.41</td><td>74.00</td><td>-10.59</td><td>53.63</td><td>34.11</td><td>8.33</td><td>32.66</td><td>160 42 PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5351.36	63.41	74.00	-10.59	53.63	34.11	8.33	32.66	160 42 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>100.55</td><td>-----</td><td>-----</td><td>90.88</td><td>34.09</td><td>8.25</td><td>32.67</td><td>160 42 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	100.55	-----	-----	90.88	34.09	8.25	32.67
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5351.36	63.41	74.00	-10.59	53.63	34.11	8.33	32.66	160 42 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5320.00	100.55	-----	-----	90.88	34.09	8.25	32.67	160 42 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-03-07 Frequency (MHz)						Level (dBuV/m) Date: 2025-03-07 Frequency (MHz)																																																																																			
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.10</td><td>49.71</td><td>54.00</td><td>-4.29</td><td>39.93</td><td>34.11</td><td>8.33</td><td>32.66</td><td>160 42 AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5350.10	49.71	54.00	-4.29	39.93	34.11	8.33	32.66	160 42 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>94.08</td><td>-----</td><td>-----</td><td>84.41</td><td>34.09</td><td>8.25</td><td>32.67</td><td>160 42 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	94.08	-----	-----	84.41	34.09	8.25	32.67
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5350.10	49.71	54.00	-4.29	39.93	34.11	8.33	32.66	160 42 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5320.00	94.08	-----	-----	84.41	34.09	8.25	32.67	160 42 AVERAGE																																																																																	

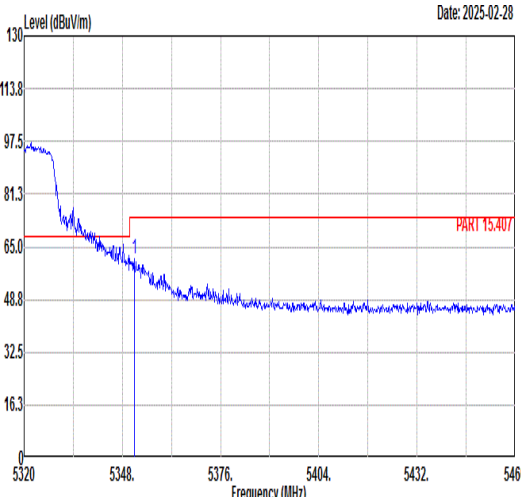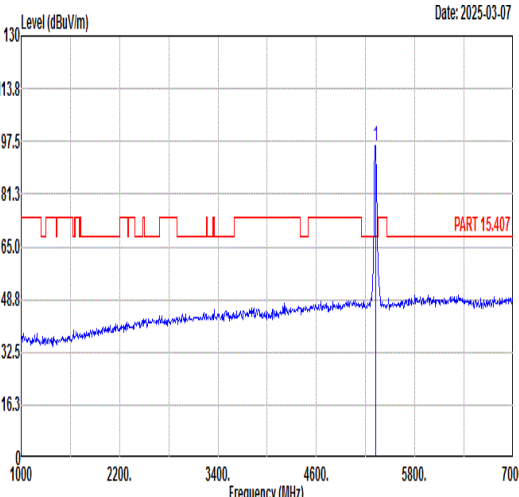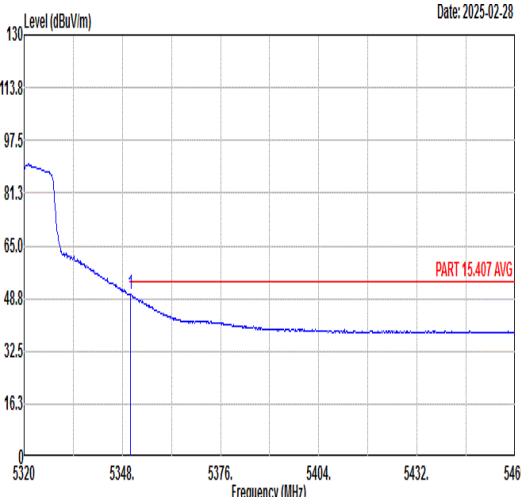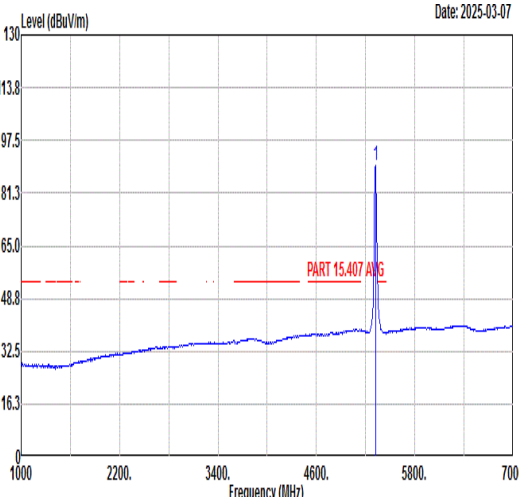

Mode	6																																																																																														
	Band Edge																																																																																														
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																														
ANT	5																																																																																														
Pol.	Vertical						Fundamental																																																																																								
Peak	 Date: 2025-02-28						 Date: 2025-03-07																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5351.36</td><td>61.26</td><td>74.00</td><td>-12.74</td><td>51.48</td><td>34.11</td><td>8.33</td><td>32.66</td><td>307</td><td>117</td><td>PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5351.36	61.26	74.00	-12.74	51.48	34.11	8.33	32.66	307	117	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>96.40</td><td>-----</td><td>-----</td><td>86.73</td><td>34.09</td><td>8.25</td><td>32.67</td><td>307</td><td>117</td><td>PEAK</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	96.40	-----	-----	86.73	34.09	8.25	32.67	307	117
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5351.36	61.26	74.00	-12.74	51.48	34.11	8.33	32.66	307	117	PEAK																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5320.00	96.40	-----	-----	86.73	34.09	8.25	32.67	307	117	PEAK																																																																																				
Avg	 Date: 2025-02-28						 Date: 2025-03-07																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.38</td><td>50.09</td><td>54.00</td><td>-3.91</td><td>40.31</td><td>34.11</td><td>8.33</td><td>32.66</td><td>307</td><td>117</td><td>AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.38	50.09	54.00	-3.91	40.31	34.11	8.33	32.66	307	117	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>89.93</td><td>-----</td><td>-----</td><td>80.26</td><td>34.09</td><td>8.25</td><td>32.67</td><td>307</td><td>117</td><td>AVERAGE</td></tr></tbody></table>							Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	89.93	-----	-----	80.26	34.09	8.25	32.67	307	117
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5350.38	50.09	54.00	-3.91	40.31	34.11	8.33	32.66	307	117	AVERAGE																																																																																				
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																						
1	5320.00	89.93	-----	-----	80.26	34.09	8.25	32.67	307	117	AVERAGE																																																																																				

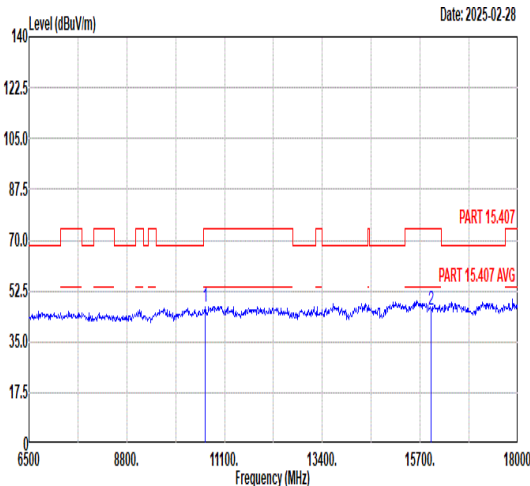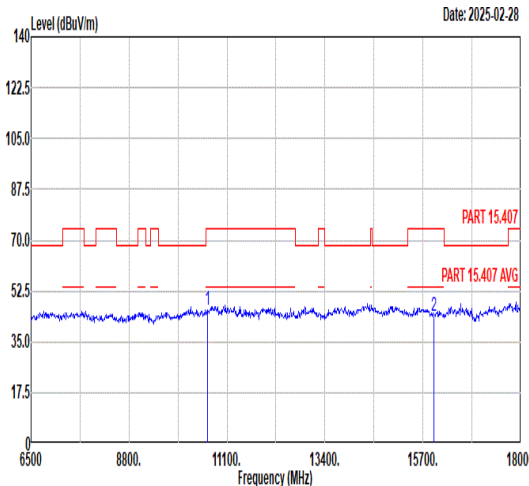

Mode	6																																																																																																					
	Harmonic																																																																																																					
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																																					
ANT	5																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg																																																																																																						
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1 10640.00</td><td>46.92</td><td>74.00</td><td>-27.08</td><td>56.89</td><td>37.78</td><td>10.94</td><td>58.69</td><td>-- -- Peak</td></tr><tr><td>2 15960.00</td><td>46.02</td><td>74.00</td><td>-27.98</td><td>53.10</td><td>39.59</td><td>12.70</td><td>59.37</td><td>-- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 10640.00	46.92	74.00	-27.08	56.89	37.78	10.94	58.69	-- -- Peak	2 15960.00	46.02	74.00	-27.98	53.10	39.59	12.70	59.37	-- -- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1 10640.00</td><td>45.78</td><td>74.00</td><td>-28.22</td><td>55.75</td><td>37.78</td><td>10.94</td><td>58.69</td><td>-- -- Peak</td></tr><tr><td>2 15960.00</td><td>44.11</td><td>74.00</td><td>-29.89</td><td>51.19</td><td>39.59</td><td>12.70</td><td>59.37</td><td>-- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1 10640.00	45.78	74.00	-28.22	55.75	37.78	10.94	58.69	-- -- Peak	2 15960.00	44.11	74.00	-29.89	51.19	39.59	12.70	59.37	-- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1 10640.00	46.92	74.00	-27.08	56.89	37.78	10.94	58.69	-- -- Peak																																																																																														
2 15960.00	46.02	74.00	-27.98	53.10	39.59	12.70	59.37	-- -- Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1 10640.00	45.78	74.00	-28.22	55.75	37.78	10.94	58.69	-- -- Peak																																																																																														
2 15960.00	44.11	74.00	-29.89	51.19	39.59	12.70	59.37	-- -- Peak																																																																																														



Mode	7																																																																																																		
	Harmonic																																																																																																		
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																		
ANT	5																																																																																																		
Pol.	Horizontal						Vertical																																																																																												
Peak Avg	Data: 1 Date: 2025-03-08 <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Cable Factor</th><th>Preamplifier Loss</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11000.00</td><td>45.70</td><td>-28.30</td><td>74.00</td><td>58.09</td><td>38.60</td><td>12.51</td><td>63.50</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>* 16500.00</td><td>45.06</td><td>-23.24</td><td>68.30</td><td>52.71</td><td>41.95</td><td>15.15</td><td>64.75</td><td>---</td><td>Peak</td></tr></table>							Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	11000.00	45.70	-28.30	74.00	58.09	38.60	12.51	63.50	---	Peak	2	* 16500.00	45.06	-23.24	68.30	52.71	41.95	15.15	64.75	---	Peak	Data: 2 Date: 2025-03-08 <table><tr><th></th><th>Freq</th><th>Level</th><th>Over Limit</th><th>Limit Line</th><th>ReadAntenna Level</th><th>Cable Factor</th><th>Preamplifier Loss</th><th>A/Pos</th><th>T/Pos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>11000.00</td><td>45.69</td><td>-28.31</td><td>74.00</td><td>58.08</td><td>38.60</td><td>12.51</td><td>63.50</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>* 16500.00</td><td>46.29</td><td>-22.01</td><td>68.30</td><td>53.94</td><td>41.95</td><td>15.15</td><td>64.75</td><td>---</td><td>Peak</td></tr></table>						Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	A/Pos	T/Pos	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg		1	11000.00	45.69	-28.31	74.00	58.08	38.60	12.51	63.50	---	Peak	2	* 16500.00	46.29	-22.01	68.30	53.94	41.95	15.15	64.75	---	Peak
		Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	A/Pos	T/Pos	Remark																																																																																								
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																										
1	11000.00	45.70	-28.30	74.00	58.09	38.60	12.51	63.50	---	Peak																																																																																									
2	* 16500.00	45.06	-23.24	68.30	52.71	41.95	15.15	64.75	---	Peak																																																																																									
	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Cable Factor	Preamplifier Loss	A/Pos	T/Pos	Remark																																																																																									
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	cm	deg																																																																																										
1	11000.00	45.69	-28.31	74.00	58.08	38.60	12.51	63.50	---	Peak																																																																																									
2	* 16500.00	46.29	-22.01	68.30	53.94	41.95	15.15	64.75	---	Peak																																																																																									



Mode	8																																																																																																																		
	Harmonic																																																																																																																		
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																																																		
ANT	5																																																																																																																		
Pol.	Horizontal						Vertical																																																																																																												
Peak Avg	Data: 1 Level (dBuV/m) Date: 2025-03-07 Frequency (MHz) <table><thead><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>11160.00</td><td>46.69</td><td>-27.31</td><td>74.00</td><td>58.86</td><td>38.79</td><td>12.65</td><td>63.61</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>* 16740.00</td><td>46.49</td><td>-21.81</td><td>68.30</td><td>53.78</td><td>42.12</td><td>15.36</td><td>64.77</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>							Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos		Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11160.00	46.69	-27.31	74.00	58.86	38.79	12.65	63.61	---	---	Peak	2	* 16740.00	46.49	-21.81	68.30	53.78	42.12	15.36	64.77	---	---	Peak	Data: 2 Level (dBuV/m) Date: 2025-03-07 Frequency (MHz) <table><thead><tr><th></th><th>Over</th><th>Limit</th><th>ReadAntenna</th><th>Cable</th><th>Preamp</th><th>A/Pos</th><th>T/Pos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dB</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>11160.00</td><td>48.50</td><td>-25.50</td><td>74.00</td><td>60.67</td><td>38.79</td><td>12.65</td><td>63.61</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2</td><td>* 16740.00</td><td>47.52</td><td>-20.78</td><td>68.30</td><td>54.81</td><td>42.12</td><td>15.36</td><td>64.77</td><td>---</td><td>---</td><td>Peak</td></tr></tbody></table>						Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos		Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	11160.00	48.50	-25.50	74.00	60.67	38.79	12.65	63.61	---	---	Peak	2	* 16740.00	47.52	-20.78	68.30	54.81	42.12	15.36	64.77	---	---	Peak
		Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos																																																																																																											
	Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark																																																																																																										
	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																												
1	11160.00	46.69	-27.31	74.00	58.86	38.79	12.65	63.61	---	---	Peak																																																																																																								
2	* 16740.00	46.49	-21.81	68.30	53.78	42.12	15.36	64.77	---	---	Peak																																																																																																								
	Over	Limit	ReadAntenna	Cable	Preamp	A/Pos	T/Pos																																																																																																												
Freq	Level	Limit	Line	Level	Factor	Loss	Factor	Remark																																																																																																											
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	11160.00	48.50	-25.50	74.00	60.67	38.79	12.65	63.61	---	---	Peak																																																																																																								
2	* 16740.00	47.52	-20.78	68.30	54.81	42.12	15.36	64.77	---	---	Peak																																																																																																								





Mode	9																																																																																											
	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																											
ANT	5																																																																																											
Pol.	Horizontal						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2025-03-07 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5726.39</td><td>63.84</td><td>68.30</td><td>-4.46</td><td>53.34</td><td>34.60</td><td>8.68</td><td>32.78</td><td>199</td><td>340</td><td>Peak</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5726.39	63.84	68.30	-4.46	53.34	34.60	8.68	32.78	199	340	Peak	Level (dBuV/m) Date: 2025-03-07 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>99.79</td><td>-----</td><td>-----</td><td>89.43</td><td>34.55</td><td>8.57</td><td>32.76</td><td>199</td><td>340</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	99.79	-----	-----	89.43	34.55	8.57	32.76	199	340	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5726.39	63.84	68.30	-4.46	53.34	34.60	8.68	32.78	199	340	Peak																																																																																	
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5700.00	99.79	-----	-----	89.43	34.55	8.57	32.76	199	340	PEAK																																																																																	
Avg	Blank						Level (dBuV/m) Date: 2025-03-07 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>93.39</td><td>-----</td><td>-----</td><td>83.03</td><td>34.55</td><td>8.57</td><td>32.76</td><td>199</td><td>340</td><td>AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	93.39	-----	-----	83.03	34.55	8.57	32.76	199	340	AVERAGE																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss Factor																																																																																						
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5700.00	93.39	-----	-----	83.03	34.55	8.57	32.76	199	340	AVERAGE																																																																																	



Mode	9																																																					
	Band Edge																																																					
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																					
ANT	5																																																					
Pol.	Vertical						Fundamental																																															
Peak	Level (dBuV/m) Date: 2025-02-28 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5725.74</td><td>64.37</td><td>68.30</td><td>-3.93</td><td>53.87</td><td>34.60</td><td>8.68</td><td>32.78</td><td>200</td><td>318</td><td>PEAK</td></tr></table>						MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark	1	5725.74	64.37	68.30	-3.93	53.87	34.60	8.68	32.78	200	318	PEAK	Level (dBuV/m) Date: 2025-03-07 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5700.00</td><td>99.14</td><td>-----</td><td>-----</td><td>88.74</td><td>34.56</td><td>8.60</td><td>32.76</td><td>200</td><td>318</td><td>PEAK</td></tr></table>						MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark	1	5700.00	99.14	-----	-----	88.74	34.56	8.60	32.76	200	318	PEAK
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark																																													
1	5725.74	64.37	68.30	-3.93	53.87	34.60	8.68	32.78	200	318	PEAK																																											
MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark																																														
1	5700.00	99.14	-----	-----	88.74	34.56	8.60	32.76	200	318	PEAK																																											
Avg	Blank						Level (dBuV/m) Date: 2025-03-07 Limit Margin Read Ant Cable Preamp APos TPos Freq Level Line (dB) Level Factor Loss Factor Remark <table><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><td>1</td><td>5700.00</td><td>93.05</td><td>-----</td><td>-----</td><td>82.65</td><td>34.56</td><td>8.60</td><td>32.76</td><td>200</td><td>318</td><td>AVERAGE</td></tr></table>						MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark	1	5700.00	93.05	-----	-----	82.65	34.56	8.60	32.76	200	318	AVERAGE																					
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	cm	deg	Remark																																													
1	5700.00	93.05	-----	-----	82.65	34.56	8.60	32.76	200	318	AVERAGE																																											

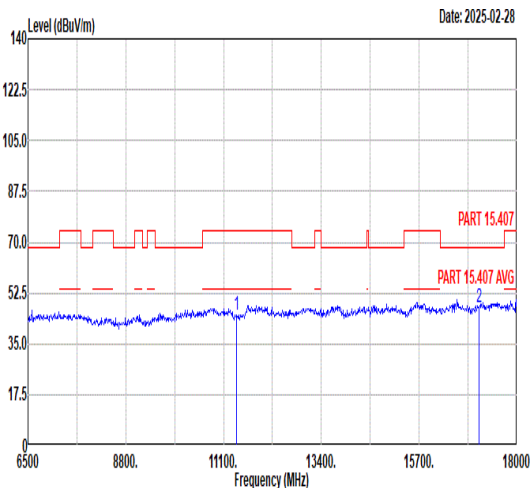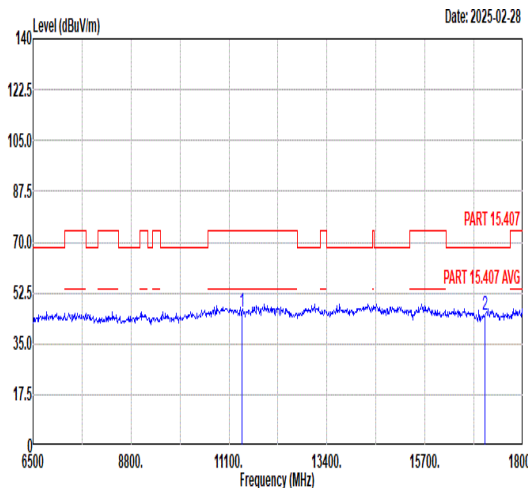

Mode	9																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																																																																	
ANT	5																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11400.00</td><td>44.89</td><td>74.00</td><td>-29.11</td><td>53.95</td><td>37.39</td><td>11.41</td><td>57.86</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>47.80</td><td>68.30</td><td>-20.50</td><td>51.82</td><td>41.00</td><td>13.14</td><td>58.16</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11400.00	44.89	74.00	-29.11	53.95	37.39	11.41	57.86	--	--	Peak	2	17100.00	47.80	68.30	-20.50	51.82	41.00	13.14	58.16	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>11400.00</td><td>45.78</td><td>74.00</td><td>-28.22</td><td>54.84</td><td>37.39</td><td>11.41</td><td>57.86</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>17100.00</td><td>45.09</td><td>68.30</td><td>-23.21</td><td>49.11</td><td>41.00</td><td>13.14</td><td>58.16</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	11400.00	45.78	74.00	-28.22	54.84	37.39	11.41	57.86	--	--	Peak	2	17100.00	45.09	68.30	-23.21	49.11	41.00	13.14	58.16	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11400.00	44.89	74.00	-29.11	53.95	37.39	11.41	57.86	--	--	Peak																																																																																																																							
2	17100.00	47.80	68.30	-20.50	51.82	41.00	13.14	58.16	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	11400.00	45.78	74.00	-28.22	54.84	37.39	11.41	57.86	--	--	Peak																																																																																																																							
2	17100.00	45.09	68.30	-23.21	49.11	41.00	13.14	58.16	--	--	Peak																																																																																																																							



Mode	10																																																																																								
	Band Edge																																																																																								
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																								
ANT	5																																																																																								
Pol.	Horizontal					Fundamental																																																																																			
Peak	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz)					Level (dBuV/m) Date: 2025-03-07 Frequency (MHz)																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.76</td><td>63.10</td><td>74.00</td><td>-10.90</td><td>53.93</td><td>33.99</td><td>7.92</td><td>32.74</td><td>235 34 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.76	63.10	74.00	-10.90	53.93	33.99	7.92	32.74	235 34 PEAK	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>102.62</td><td>-----</td><td>-----</td><td>93.40</td><td>34.01</td><td>7.94</td><td>32.73</td><td>235 34 PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	102.62	-----	-----	93.40	34.01	7.94	32.73
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5149.76	63.10	74.00	-10.90	53.93	33.99	7.92	32.74	235 34 PEAK																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5180.00	102.62	-----	-----	93.40	34.01	7.94	32.73	235 34 PEAK																																																																																
Avg	Level (dBuV/m) Date: 2025-03-07 Frequency (MHz)					Level (dBuV/m) Date: 2025-03-07 Frequency (MHz)																																																																																			
	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.58</td><td>48.34</td><td>54.00</td><td>-5.66</td><td>39.17</td><td>33.99</td><td>7.92</td><td>32.74</td><td>235 34 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5149.58	48.34	54.00	-5.66	39.17	33.99	7.92	32.74	235 34 AVERAGE	<table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>96.48</td><td>-----</td><td>-----</td><td>87.26</td><td>34.01</td><td>7.94</td><td>32.73</td><td>235 34 AVERAGE</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	96.48	-----	-----	87.26	34.01	7.94	32.73
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5149.58	48.34	54.00	-5.66	39.17	33.99	7.92	32.74	235 34 AVERAGE																																																																																
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																
1	5180.00	96.48	-----	-----	87.26	34.01	7.94	32.73	235 34 AVERAGE																																																																																



Mode	10																																																																																	
	Band Edge																																																																																	
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																	
ANT	5																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5148.32</td><td>59.87</td><td>74.00</td><td>-14.13</td><td>50.70</td><td>33.99</td><td>7.92</td><td>32.74</td><td>400</td><td>90</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5148.32	59.87	74.00	-14.13	50.70	33.99	7.92	32.74	400	90	PEAK	Level (dBuV/m) Date: 2025-03-07 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>97.41</td><td>-----</td><td>-----</td><td>88.19</td><td>34.01</td><td>7.94</td><td>32.73</td><td>400</td><td>90</td><td>PEAK</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5180.00	97.41	-----	-----	88.19	34.01	7.94	32.73	400	90	PEAK
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5148.32	59.87	74.00	-14.13	50.70	33.99	7.92	32.74	400	90	PEAK																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5180.00	97.41	-----	-----	88.19	34.01	7.94	32.73	400	90	PEAK																																																																							
Avg	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5149.58</td><td>47.46</td><td>54.00</td><td>-6.54</td><td>38.29</td><td>33.99</td><td>7.92</td><td>32.74</td><td>400</td><td>90</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5149.58	47.46	54.00	-6.54	38.29	33.99	7.92	32.74	400	90	AVERAGE	Level (dBuV/m) Date: 2025-03-07 Frequency (MHz) <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5180.00</td><td>91.47</td><td>-----</td><td>-----</td><td>82.25</td><td>34.01</td><td>7.94</td><td>32.73</td><td>400</td><td>90</td><td>AVERAGE</td></tr></table>	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5180.00	91.47	-----	-----	82.25	34.01	7.94	32.73	400	90	AVERAGE
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5149.58	47.46	54.00	-6.54	38.29	33.99	7.92	32.74	400	90	AVERAGE																																																																							
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5180.00	91.47	-----	-----	82.25	34.01	7.94	32.73	400	90	AVERAGE																																																																							







Mode	10																																																																																																																			
	Harmonic																																																																																																																			
	U-NII-1_5.15-5.25_802.11n HT20_CH36_5180MHz																																																																																																																			
ANT	5																																																																																																																			
Pol.	Horizontal						Vertical																																																																																																													
Peak Avg	Level (dBuV/m) Date: 2025-02-28 Frequency (MHz)						Level (dBuV/m) Date: 2025-02-28 Frequency (MHz)																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>45.69</td><td>68.30</td><td>-22.61</td><td>56.80</td><td>37.16</td><td>10.73</td><td>59.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>47.24</td><td>74.00</td><td>-26.76</td><td>54.04</td><td>39.42</td><td>12.72</td><td>58.94</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	45.69	68.30	-22.61	56.80	37.16	10.73	59.00	--	--	Peak	2	15540.00	47.24	74.00	-26.76	54.04	39.42	12.72	58.94	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10360.00</td><td>46.15</td><td>68.30</td><td>-22.15</td><td>57.26</td><td>37.16</td><td>10.73</td><td>59.00</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15540.00</td><td>48.04</td><td>74.00</td><td>-25.96</td><td>54.84</td><td>39.42</td><td>12.72</td><td>58.94</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10360.00	46.15	68.30	-22.15	57.26	37.16	10.73	59.00	--	--	Peak	2	15540.00	48.04	74.00	-25.96	54.84	39.42	12.72	58.94	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10360.00	45.69	68.30	-22.61	56.80	37.16	10.73	59.00	--	--	Peak																																																																																																									
2	15540.00	47.24	74.00	-26.76	54.04	39.42	12.72	58.94	--	--	Peak																																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10360.00	46.15	68.30	-22.15	57.26	37.16	10.73	59.00	--	--	Peak																																																																																																									
2	15540.00	48.04	74.00	-25.96	54.84	39.42	12.72	58.94	--	--	Peak																																																																																																									







Mode	11																																																																					
	Harmonic																																																																					
	U-NII-1_5.15-5.25_802.11n HT20_CH44_5220MHz																																																																					
ANT	5																																																																					
Pol.	Horizontal																																																																					
Peak Avg	Level (dBuV/m) Date: 2025-02-28 Frequency (MHz)																																																																					
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10440.00</td><td>43.84</td><td>68.30</td><td>-24.46</td><td>54.61</td><td>37.35</td><td>10.79</td><td>58.91</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>47.64</td><td>74.00</td><td>-26.36</td><td>54.52</td><td>39.46</td><td>12.72</td><td>59.06</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10440.00	43.84	68.30	-24.46	54.61	37.35	10.79	58.91	--	--	Peak	2	15660.00	47.64	74.00	-26.36	54.52	39.46	12.72	59.06	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																													
1	10440.00	43.84	68.30	-24.46	54.61	37.35	10.79	58.91	--	--	Peak																																																											
2	15660.00	47.64	74.00	-26.36	54.52	39.46	12.72	59.06	--	--	Peak																																																											
Level (dBuV/m) Date: 2025-02-28 Frequency (MHz)																																																																						
<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10440.00</td><td>45.76</td><td>68.30</td><td>-22.54</td><td>56.53</td><td>37.35</td><td>10.79</td><td>58.91</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15660.00</td><td>48.50</td><td>74.00</td><td>-25.50</td><td>55.38</td><td>39.46</td><td>12.72</td><td>59.06</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10440.00	45.76	68.30	-22.54	56.53	37.35	10.79	58.91	--	--	Peak	2	15660.00	48.50	74.00	-25.50	55.38	39.46	12.72	59.06	--	--	Peak	
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																													
1	10440.00	45.76	68.30	-22.54	56.53	37.35	10.79	58.91	--	--	Peak																																																											
2	15660.00	48.50	74.00	-25.50	55.38	39.46	12.72	59.06	--	--	Peak																																																											

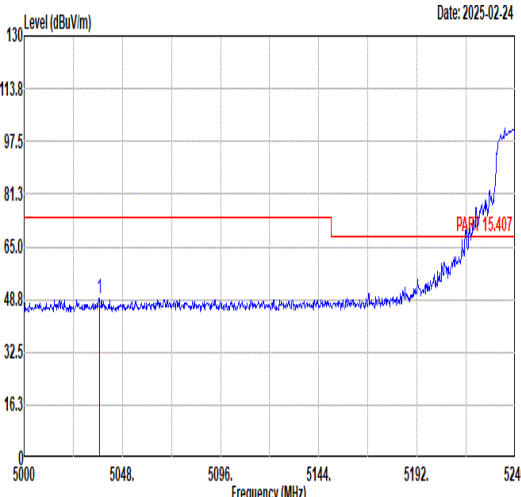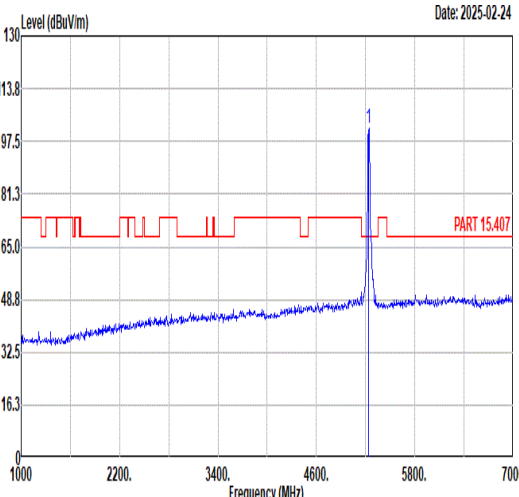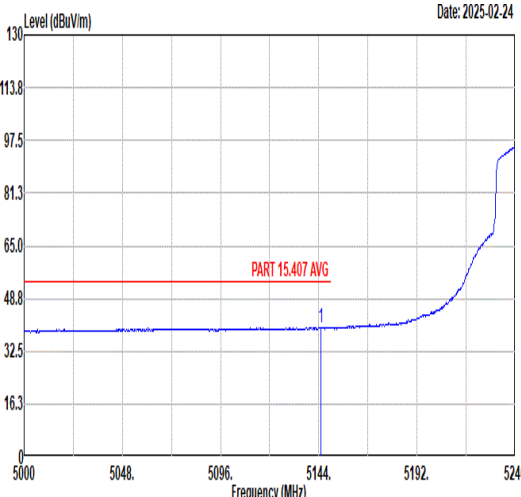
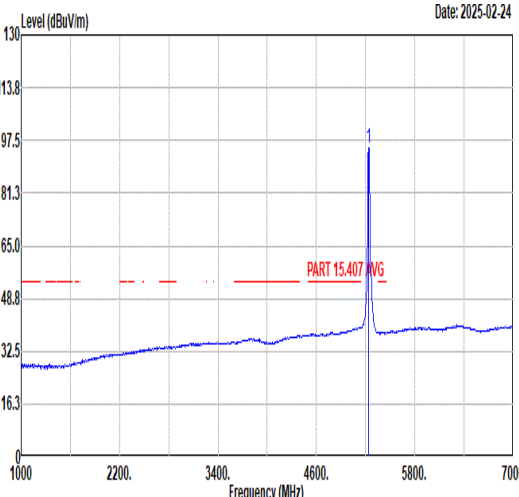


Mode	12																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz																																																																																										
ANT	5																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak	 Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 5000 5048. 5096. 5144. 5192. 5240 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5036.72</td><td>49.21</td><td>74.00</td><td>-24.79</td><td>40.23</td><td>33.92</td><td>7.84</td><td>32.78</td><td>100</td><td>35</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5036.72	49.21	74.00	-24.79	40.23	33.92	7.84	32.78	100	35	PEAK	 Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1000 2200. 3400. 4600. 5800. 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>101.71</td><td>-----</td><td>-----</td><td>92.32</td><td>34.05</td><td>8.04</td><td>32.70</td><td>100</td><td>35</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	101.71	-----	-----	92.32	34.05	8.04	32.70	100	35	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5036.72	49.21	74.00	-24.79	40.23	33.92	7.84	32.78	100	35	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5240.00	101.71	-----	-----	92.32	34.05	8.04	32.70	100	35	PEAK																																																																																
Avg	 Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 5000 5048. 5096. 5144. 5192. 5240 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5145.20</td><td>39.79</td><td>54.00</td><td>-14.21</td><td>30.62</td><td>33.99</td><td>7.92</td><td>32.74</td><td>100</td><td>35</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5145.20	39.79	54.00	-14.21	30.62	33.99	7.92	32.74	100	35	AVERAGE	 Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1000 2200. 3400. 4600. 5800. 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>95.31</td><td>-----</td><td>-----</td><td>85.92</td><td>34.05</td><td>8.04</td><td>32.70</td><td>100</td><td>35</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	95.31	-----	-----	85.92	34.05	8.04	32.70	100	35	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5145.20	39.79	54.00	-14.21	30.62	33.99	7.92	32.74	100	35	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5240.00	95.31	-----	-----	85.92	34.05	8.04	32.70	100	35	AVERAGE																																																																																

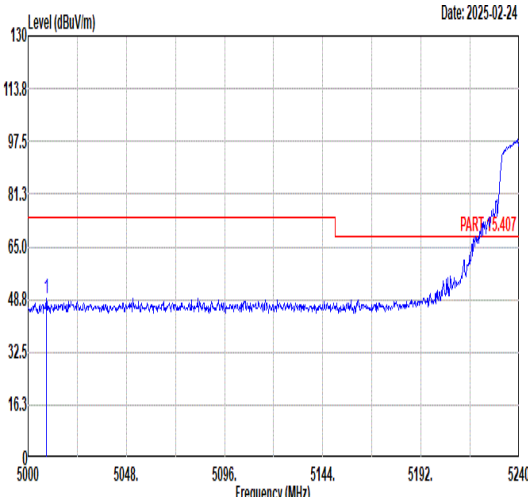
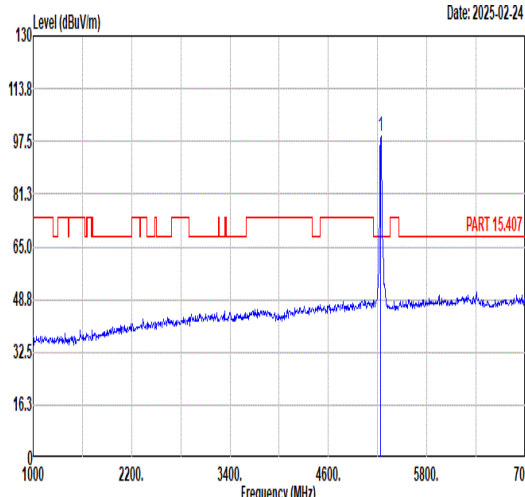
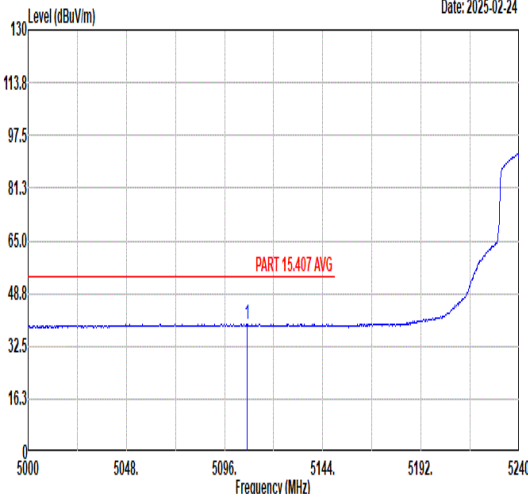
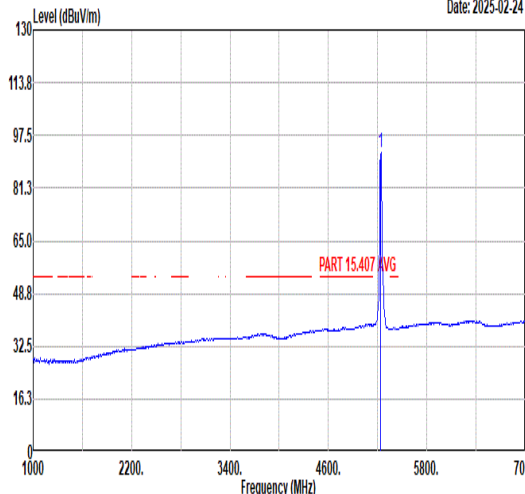


Mode	12																																																																																										
	Band Edge - L																																																																																										
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz																																																																																										
ANT	5																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5008.88</td><td>49.00</td><td>74.00</td><td>-25.00</td><td>40.06</td><td>33.91</td><td>7.83</td><td>32.80</td><td>400</td><td>77</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5008.88	49.00	74.00	-25.00	40.06	33.91	7.83	32.80	400	77	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>98.86</td><td>-----</td><td>-----</td><td>89.47</td><td>34.05</td><td>8.04</td><td>32.70</td><td>400</td><td>77</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	98.86	-----	-----	89.47	34.05	8.04	32.70	400	77
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5008.88	49.00	74.00	-25.00	40.06	33.91	7.83	32.80	400	77	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5240.00	98.86	-----	-----	89.47	34.05	8.04	32.70	400	77	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5107.04</td><td>39.45</td><td>54.00</td><td>-14.55</td><td>30.35</td><td>33.97</td><td>7.89</td><td>32.76</td><td>400</td><td>77</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5107.04	39.45	54.00	-14.55	30.35	33.97	7.89	32.76	400	77	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5240.00</td><td>92.05</td><td>-----</td><td>-----</td><td>82.66</td><td>34.05</td><td>8.04</td><td>32.70</td><td>400</td><td>77</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5240.00	92.05	-----	-----	82.66	34.05	8.04	32.70	400	77
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5107.04	39.45	54.00	-14.55	30.35	33.97	7.89	32.76	400	77	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5240.00	92.05	-----	-----	82.66	34.05	8.04	32.70	400	77	AVERAGE																																																																																

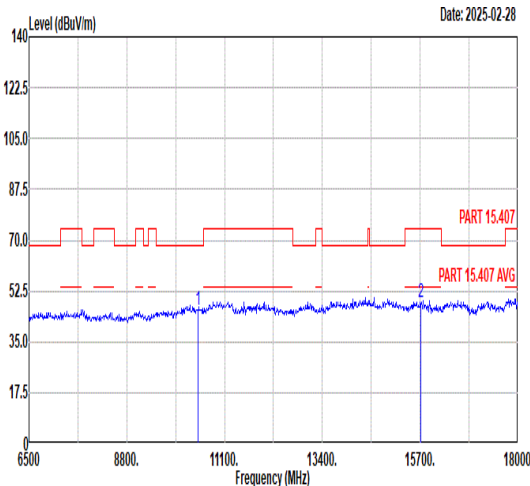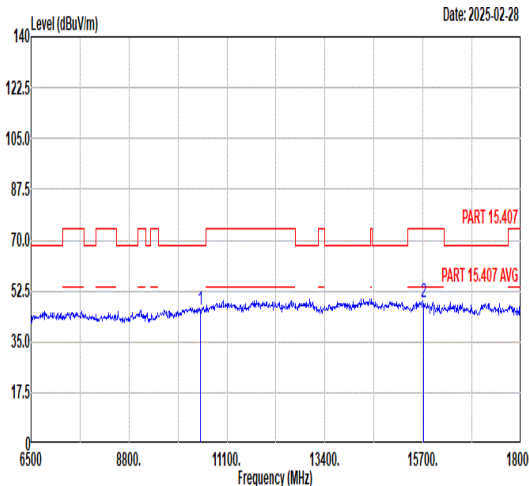

Mode	12																																																																																																																				
	Harmonic																																																																																																																				
	U-NII-1_5.15-5.25_802.11n HT20_CH48_5240MHz																																																																																																																				
ANT	5																																																																																																																				
Pol.	Horizontal						Vertical																																																																																																														
Peak Avg																																																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>45.97</td><td>68.30</td><td>-22.33</td><td>56.57</td><td>37.45</td><td>10.82</td><td>58.87</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>48.47</td><td>74.00</td><td>-25.53</td><td>55.39</td><td>39.49</td><td>12.71</td><td>59.12</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	45.97	68.30	-22.33	56.57	37.45	10.82	58.87	--	--	Peak	2	15720.00	48.47	74.00	-25.53	55.39	39.49	12.71	59.12	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10480.00</td><td>46.13</td><td>68.30</td><td>-22.17</td><td>56.73</td><td>37.45</td><td>10.82</td><td>58.87</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15720.00</td><td>48.62</td><td>74.00</td><td>-25.38</td><td>55.54</td><td>39.49</td><td>12.71</td><td>59.12</td><td>--</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	46.13	68.30	-22.17	56.73	37.45	10.82	58.87	--	--	Peak	2	15720.00	48.62	74.00	-25.38	55.54	39.49	12.71	59.12	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																													
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10480.00	45.97	68.30	-22.33	56.57	37.45	10.82	58.87	--	--	Peak																																																																																																										
2	15720.00	48.47	74.00	-25.53	55.39	39.49	12.71	59.12	--	--	Peak																																																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																											
1	10480.00	46.13	68.30	-22.17	56.73	37.45	10.82	58.87	--	--	Peak																																																																																																										
2	15720.00	48.62	74.00	-25.38	55.54	39.49	12.71	59.12	--	--	Peak																																																																																																										

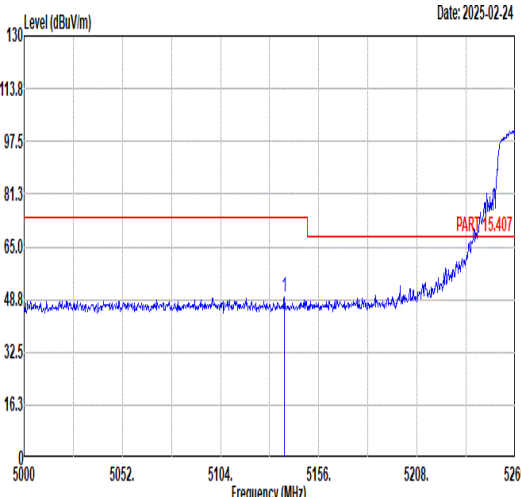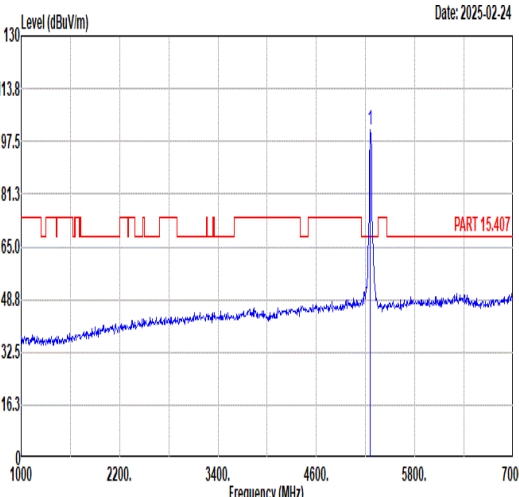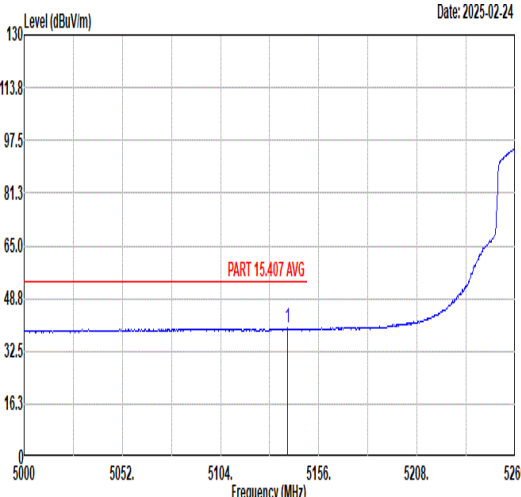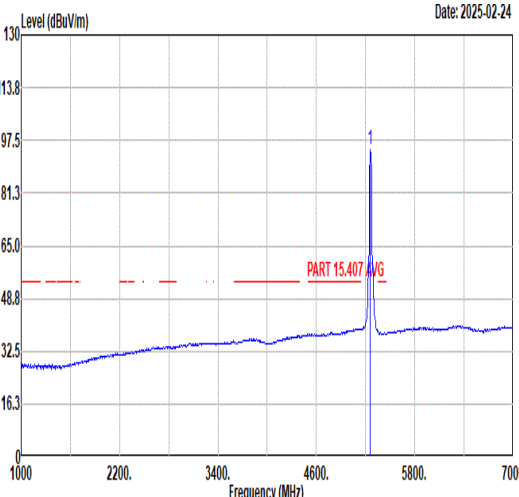

Mode	13																																																																																					
	Band Edge - L																																																																																					
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz																																																																																					
ANT	5																																																																																					
Pol.	Horizontal					Fundamental																																																																																
Peak	 Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 5000 5052. 5104. 5156. 5208. 5260 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5137.80</td><td>49.55</td><td>74.00</td><td>-24.45</td><td>40.40</td><td>33.98</td><td>7.91</td><td>32.74</td><td>172 33 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5137.80	49.55	74.00	-24.45	40.40	33.98	7.91	32.74	172 33 PEAK	 Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1000 2200. 3400. 4600. 5800. 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5260.00</td><td>100.85</td><td>-----</td><td>-----</td><td>91.39</td><td>34.06</td><td>8.09</td><td>32.69</td><td>172 33 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5260.00	100.85	-----	-----	91.39	34.06	8.09	32.69	172 33 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	5137.80	49.55	74.00	-24.45	40.40	33.98	7.91	32.74	172 33 PEAK																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	5260.00	100.85	-----	-----	91.39	34.06	8.09	32.69	172 33 PEAK																																																																													
Avg	 Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 5000 5052. 5104. 5156. 5208. 5260 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5139.36</td><td>39.50</td><td>54.00</td><td>-14.50</td><td>30.35</td><td>33.98</td><td>7.91</td><td>32.74</td><td>172 33 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5139.36	39.50	54.00	-14.50	30.35	33.98	7.91	32.74	172 33 AVERAGE	 Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1000 2200. 3400. 4600. 5800. 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5260.00</td><td>94.46</td><td>-----</td><td>-----</td><td>85.00</td><td>34.06</td><td>8.09</td><td>32.69</td><td>172 33 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5260.00	94.46	-----	-----	85.00	34.06	8.09	32.69	172 33 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	5139.36	39.50	54.00	-14.50	30.35	33.98	7.91	32.74	172 33 AVERAGE																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																													
1	5260.00	94.46	-----	-----	85.00	34.06	8.09	32.69	172 33 AVERAGE																																																																													





Mode	13																																																																													
	Band Edge - L																																																																													
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz																																																																													
ANT	5																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 5000 5052 5104 5156 5208 5260 Frequency (MHz) PART 15.407 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5096.72</td><td>48.66</td><td>74.00</td><td>-25.34</td><td>39.58</td><td>33.96</td><td>7.88</td><td>32.76</td><td>158 360 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5096.72	48.66	74.00	-25.34	39.58	33.96	7.88	32.76	158 360 PEAK	Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) PART 15.407 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5260.00</td><td>92.16</td><td>-----</td><td>-----</td><td>82.74</td><td>34.05</td><td>8.07</td><td>32.70</td><td>158 360 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5260.00	92.16	-----	-----	82.74	34.05	8.07	32.70	158 360 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																					
1	5096.72	48.66	74.00	-25.34	39.58	33.96	7.88	32.76	158 360 PEAK																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																					
1	5260.00	92.16	-----	-----	82.74	34.05	8.07	32.70	158 360 PEAK																																																																					
Avg	Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 5000 5052 5104 5156 5208 5260 Frequency (MHz) PART 15.407 AVG <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5096.20</td><td>39.20</td><td>54.00</td><td>-14.80</td><td>30.12</td><td>33.96</td><td>7.88</td><td>32.76</td><td>158 360 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5096.20	39.20	54.00	-14.80	30.12	33.96	7.88	32.76	158 360 AVERAGE	Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) PART 15.407 AVG <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5260.00</td><td>85.64</td><td>-----</td><td>-----</td><td>76.18</td><td>34.06</td><td>8.09</td><td>32.69</td><td>158 360 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5260.00	85.64	-----	-----	76.18	34.06	8.09	32.69	158 360 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																					
1	5096.20	39.20	54.00	-14.80	30.12	33.96	7.88	32.76	158 360 AVERAGE																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																					
1	5260.00	85.64	-----	-----	76.18	34.06	8.09	32.69	158 360 AVERAGE																																																																					



Mode	13																																																		
	Band Edge - R																																																		
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz																																																		
ANT	5																																																		
Pol.	Vertical										Fundamental																																								
Peak	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5374.40</td><td>48.03</td><td>74.00</td><td>-25.97</td><td>38.17</td><td>34.12</td><td>8.39</td><td>32.65</td><td>158</td><td>360</td><td>PEAK</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5374.40	48.03	74.00	-25.97	38.17	34.12	8.39	32.65	158	360	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5374.40	48.03	74.00	-25.97	38.17	34.12	8.39	32.65	158	360	PEAK																																								
Avg	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5401.20</td><td>38.40</td><td>54.00</td><td>-15.60</td><td>28.44</td><td>34.14</td><td>8.46</td><td>32.64</td><td>158</td><td>360</td><td>AVERAGE</td></tr></table>											Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5401.20	38.40	54.00	-15.60	28.44	34.14	8.46	32.64	158	360	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5401.20	38.40	54.00	-15.60	28.44	34.14	8.46	32.64	158	360	AVERAGE																																								



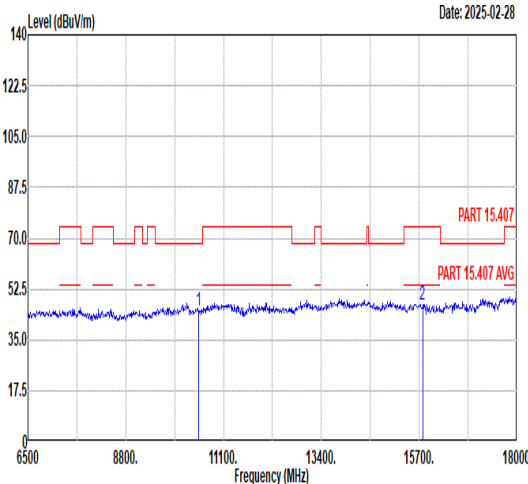
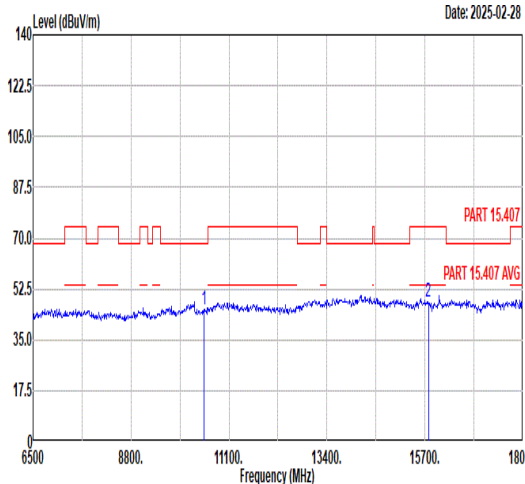


Mode	13																																																																																																																															
	Harmonic																																																																																																																															
	U-NII-2A_5.25-5.35_802.11n HT20_CH52_5260MHz																																																																																																																															
ANT	5																																																																																																																															
Pol.	Horizontal						Vertical																																																																																																																									
Peak Avg																																																																																																																																
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10520.00</td><td>45.14</td><td>68.30</td><td>-23.16</td><td>55.58</td><td>37.53</td><td>10.85</td><td>58.82</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>46.87</td><td>74.00</td><td>-27.13</td><td>53.83</td><td>39.51</td><td>12.71</td><td>59.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10520.00	45.14	68.30	-23.16	55.58	37.53	10.85	58.82	--	--	Peak	2	15780.00	46.87	74.00	-27.13	53.83	39.51	12.71	59.18	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>10520.00</td><td>45.26</td><td>68.30</td><td>-23.04</td><td>55.70</td><td>37.53</td><td>10.85</td><td>58.82</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15780.00</td><td>47.85</td><td>74.00</td><td>-26.15</td><td>54.81</td><td>39.51</td><td>12.71</td><td>59.18</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	10520.00	45.26	68.30	-23.04	55.70	37.53	10.85	58.82	--	--	Peak	2	15780.00	47.85	74.00	-26.15	54.81	39.51	12.71	59.18	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	10520.00	45.14	68.30	-23.16	55.58	37.53	10.85	58.82	--	--	Peak																																																																																																																					
2	15780.00	46.87	74.00	-27.13	53.83	39.51	12.71	59.18	--	--	Peak																																																																																																																					
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																							
1	10520.00	45.26	68.30	-23.04	55.70	37.53	10.85	58.82	--	--	Peak																																																																																																																					
2	15780.00	47.85	74.00	-26.15	54.81	39.51	12.71	59.18	--	--	Peak																																																																																																																					



Mode	14																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-2A_5.25-5.35_802.11n HT20_CH60_5300MHz																																																																																																																																	
ANT	5																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2025-02-28 Frequency (MHz)						Level (dBuV/m) Date: 2025-02-28 Frequency (MHz)																																																																																																																											
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10600.00</td><td>44.56</td><td>74.00</td><td>-29.44</td><td>54.68</td><td>37.70</td><td>10.91</td><td>58.73</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>46.97</td><td>74.00</td><td>-27.03</td><td>54.00</td><td>39.56</td><td>12.71</td><td>59.30</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10600.00	44.56	74.00	-29.44	54.68	37.70	10.91	58.73	--	--	Peak	2	15900.00	46.97	74.00	-27.03	54.00	39.56	12.71	59.30	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>10600.00</td><td>44.68</td><td>74.00</td><td>-29.32</td><td>54.80</td><td>37.70</td><td>10.91</td><td>58.73</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15900.00</td><td>46.43</td><td>74.00</td><td>-27.57</td><td>53.46</td><td>39.56</td><td>12.71</td><td>59.30</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	10600.00	44.68	74.00	-29.32	54.80	37.70	10.91	58.73	--	--	Peak	2	15900.00	46.43	74.00	-27.57	53.46	39.56	12.71	59.30	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10600.00	44.56	74.00	-29.44	54.68	37.70	10.91	58.73	--	--	Peak																																																																																																																							
2	15900.00	46.97	74.00	-27.03	54.00	39.56	12.71	59.30	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	10600.00	44.68	74.00	-29.32	54.80	37.70	10.91	58.73	--	--	Peak																																																																																																																							
2	15900.00	46.43	74.00	-27.57	53.46	39.56	12.71	59.30	--	--	Peak																																																																																																																							

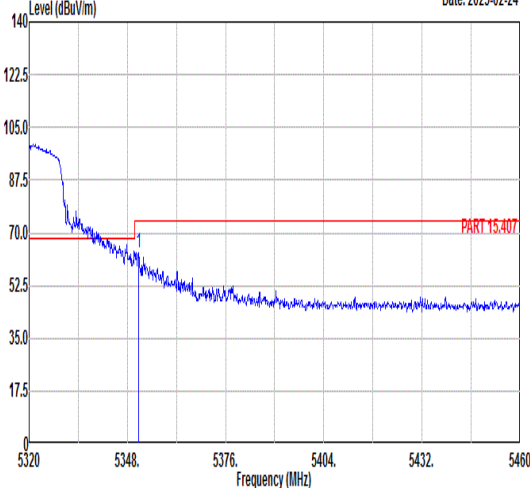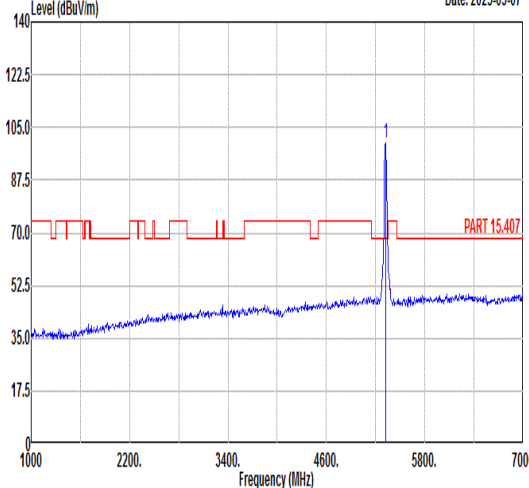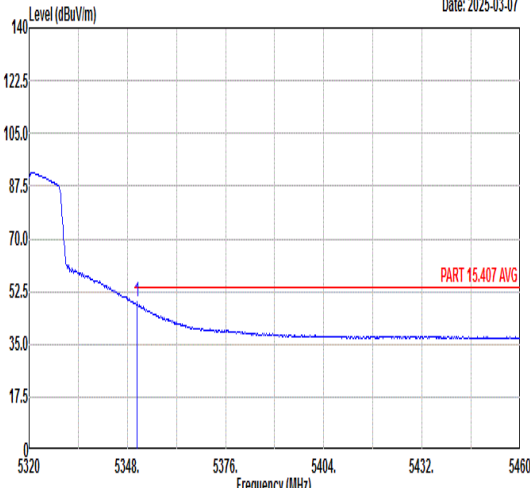
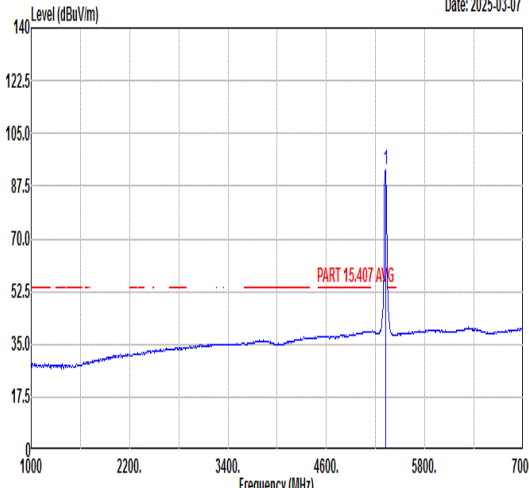


Mode	15																																																																																									
	Band Edge																																																																																									
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																									
ANT	5																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	Level (dBuV/m) Date: 2025-02-24  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5351.22</td><td>63.55</td><td>74.00</td><td>-10.45</td><td>53.77</td><td>34.11</td><td>8.33</td><td>32.66</td><td>136 41 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5351.22	63.55	74.00	-10.45	53.77	34.11	8.33	32.66	136 41 PEAK	Level (dBuV/m) Date: 2025-03-07  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>99.69</td><td>-----</td><td>-----</td><td>90.02</td><td>34.09</td><td>8.25</td><td>32.67</td><td>136 41 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	99.69	-----	-----	90.02	34.09	8.25	32.67	136 41 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5351.22	63.55	74.00	-10.45	53.77	34.11	8.33	32.66	136 41 PEAK																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5320.00	99.69	-----	-----	90.02	34.09	8.25	32.67	136 41 PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-03-07  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.80</td><td>48.99</td><td>54.00</td><td>-5.01</td><td>39.21</td><td>34.11</td><td>8.33</td><td>32.66</td><td>136 41 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5350.80	48.99	54.00	-5.01	39.21	34.11	8.33	32.66	136 41 AVERAGE	Level (dBuV/m) Date: 2025-03-07  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>92.88</td><td>-----</td><td>-----</td><td>83.21</td><td>34.09</td><td>8.25</td><td>32.67</td><td>136 41 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5320.00	92.88	-----	-----	83.21	34.09	8.25	32.67	136 41 AVERAGE
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																	
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5350.80	48.99	54.00	-5.01	39.21	34.11	8.33	32.66	136 41 AVERAGE																																																																																	
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																																	
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	5320.00	92.88	-----	-----	83.21	34.09	8.25	32.67	136 41 AVERAGE																																																																																	







Mode	15	
	Band Edge	
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz	
ANT	5	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m) Date: 2025-02-24 1 5353.60 61.92 74.00 -12.08 52.13 34.11 8.34 32.66 400 104 PEAK	Level (dBuV/m) Date: 2025-03-07 1 5320.00 95.76 ----- 86.09 34.09 8.25 32.67 400 104 PEAK
	Level (dBuV/m) Date: 2025-02-24 1 5350.38 48.65 54.00 -5.35 38.87 34.11 8.33 32.66 400 104 AVERAGE	Level (dBuV/m) Date: 2025-03-07 1 5320.00 88.79 ----- 79.12 34.09 8.25 32.67 400 104 AVERAGE



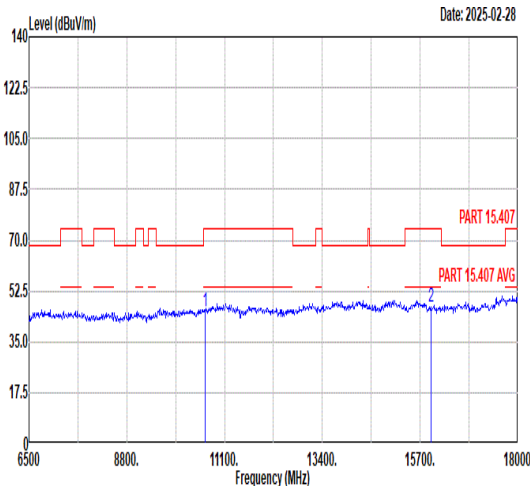
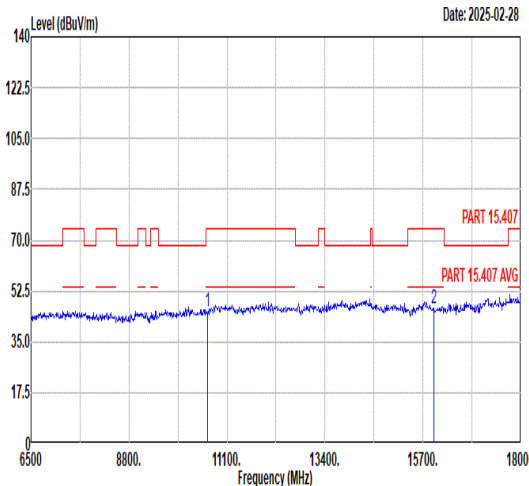


Mode	15																																																																																																												
	Harmonic																																																																																																												
	U-NII-2A_5.25-5.35_802.11n HT20_CH64_5320MHz																																																																																																												
ANT	5																																																																																																												
Pol.	Horizontal						Vertical																																																																																																						
Peak Avg																																																																																																													
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10640.00</td><td>45.56</td><td>74.00</td><td>-28.44</td><td>55.53</td><td>37.78</td><td>10.94</td><td>58.69</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 15960.00</td><td>47.16</td><td>74.00</td><td>-26.84</td><td>54.24</td><td>39.59</td><td>12.70</td><td>59.37</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	45.56	74.00	-28.44	55.53	37.78	10.94	58.69	--	--	Peak	2 15960.00	47.16	74.00	-26.84	54.24	39.59	12.70	59.37	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1 10640.00</td><td>45.28</td><td>74.00</td><td>-28.72</td><td>55.25</td><td>37.78</td><td>10.94</td><td>58.69</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2 15960.00</td><td>46.45</td><td>74.00</td><td>-27.55</td><td>53.53</td><td>39.59</td><td>12.70</td><td>59.37</td><td>--</td><td>--</td><td>Peak</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 10640.00	45.28	74.00	-28.72	55.25	37.78	10.94	58.69	--	--	Peak	2 15960.00	46.45	74.00	-27.55	53.53	39.59	12.70	59.37	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1 10640.00	45.56	74.00	-28.44	55.53	37.78	10.94	58.69	--	--	Peak																																																																																																			
2 15960.00	47.16	74.00	-26.84	54.24	39.59	12.70	59.37	--	--	Peak																																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																				
1 10640.00	45.28	74.00	-28.72	55.25	37.78	10.94	58.69	--	--	Peak																																																																																																			
2 15960.00	46.45	74.00	-27.55	53.53	39.59	12.70	59.37	--	--	Peak																																																																																																			

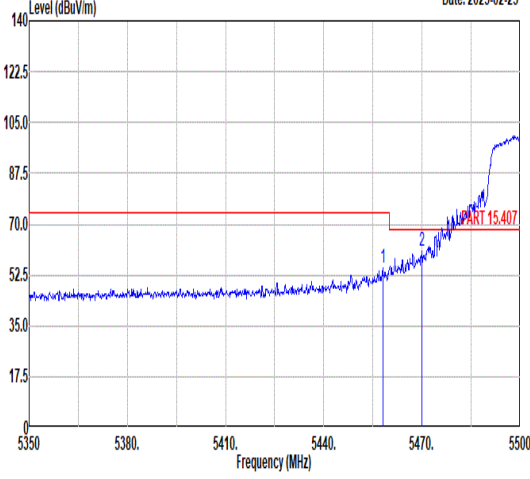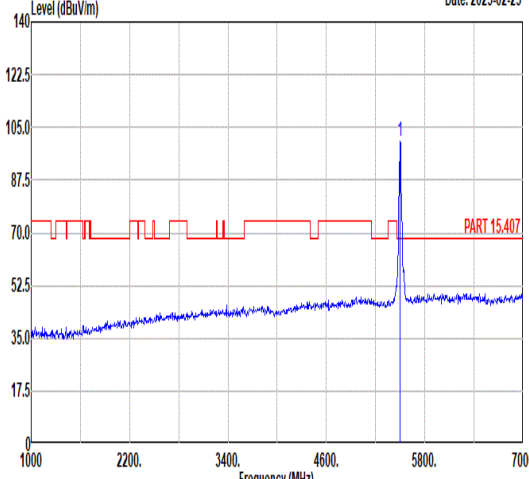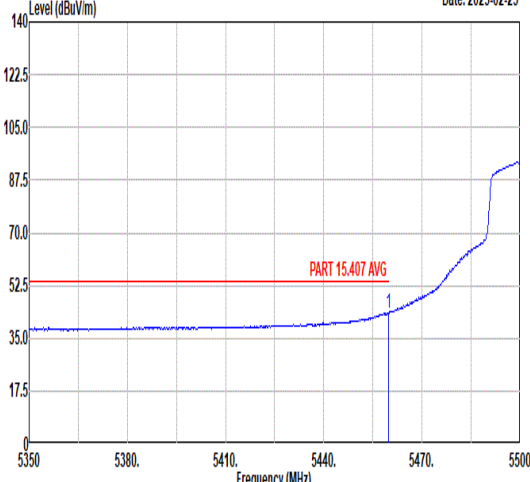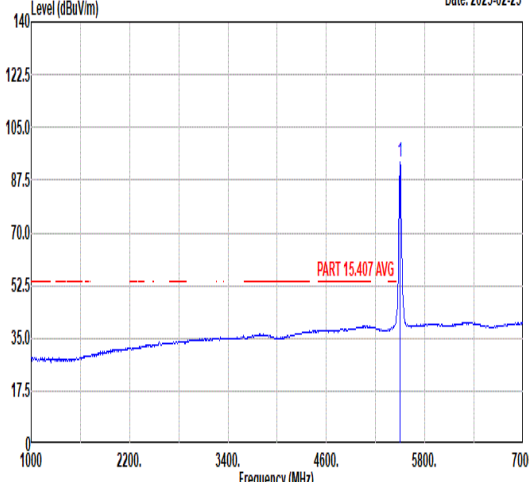

		16																																																																																													
Mode		Band Edge																																																																																													
		U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																													
ANT		5																																																																																													
Pol.		Horizontal					Fundamental																																																																																								
Peak	 Level (dBuV/m) vs Frequency (MHz). Date: 2025-02-25. The plot shows a rising signal starting around 5450 MHz, with a red limit line at 70.0 dBuV/m. Two peaks are identified: Peak 1 at 5458.00 MHz and Peak 2 at 5470.00 MHz. The label 'PART 15.407' is present.					 Level (dBuV/m) vs Frequency (MHz). Date: 2025-02-25. The plot shows a sharp peak at 5500.00 MHz. A red limit line is at 70.0 dBuV/m. The label 'PART 15.407' is present.																																																																																									
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5458.00</td><td>55.09</td><td>74.00</td><td>-18.91</td><td>45.12</td><td>34.17</td><td>8.41</td><td>32.61</td><td>233</td><td>345</td><td>PEAK</td></tr><tr><td>2</td><td>5470.00</td><td>60.85</td><td>68.30</td><td>-7.45</td><td>50.88</td><td>34.18</td><td>8.40</td><td>32.61</td><td>233</td><td>345</td><td>PEAK</td></tr></tbody></table>											Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5458.00	55.09	74.00	-18.91	45.12	34.17	8.41	32.61	233	345	PEAK	2	5470.00	60.85	68.30	-7.45	50.88	34.18	8.40	32.61	233	345	PEAK	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>100.19</td><td>-----</td><td>-----</td><td>90.24</td><td>34.20</td><td>8.36</td><td>32.61</td><td>233</td><td>345</td><td>PEAK</td></tr></tbody></table>			Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	100.19	-----	-----	90.24	34.20	8.36	32.61	233	345
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5458.00	55.09	74.00	-18.91	45.12	34.17	8.41	32.61	233	345	PEAK																																																																																				
2	5470.00	60.85	68.30	-7.45	50.88	34.18	8.40	32.61	233	345	PEAK																																																																																				
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5500.00	100.19	-----	-----	90.24	34.20	8.36	32.61	233	345	PEAK																																																																																				
Avg	 Level (dBuV/m) vs Frequency (MHz). Date: 2025-02-25. The plot shows a rising signal starting around 5450 MHz, with a red limit line at 52.5 dBuV/m. A peak is identified at 5459.80 MHz. The label 'PART 15.407 AVG' is present.					 Level (dBuV/m) vs Frequency (MHz). Date: 2025-02-25. The plot shows a sharp peak at 5500.00 MHz. A red limit line is at 52.5 dBuV/m. The label 'PART 15.407 AVG' is present.																																																																																									
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5459.80</td><td>43.52</td><td>54.00</td><td>-10.48</td><td>33.55</td><td>34.17</td><td>8.41</td><td>32.61</td><td>233</td><td>345</td><td>AVERAGE</td></tr></tbody></table>											Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5459.80	43.52	54.00	-10.48	33.55	34.17	8.41	32.61	233	345	AVERAGE	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>93.37</td><td>-----</td><td>-----</td><td>83.42</td><td>34.20</td><td>8.36</td><td>32.61</td><td>233</td><td>345</td><td>AVERAGE</td></tr></tbody></table>			Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5500.00	93.37	-----	-----	83.42	34.20	8.36	32.61	233	345	AVERAGE											
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5459.80	43.52	54.00	-10.48	33.55	34.17	8.41	32.61	233	345	AVERAGE																																																																																				
	Freq	Level	Limit	Line Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5500.00	93.37	-----	-----	83.42	34.20	8.36	32.61	233	345	AVERAGE																																																																																				

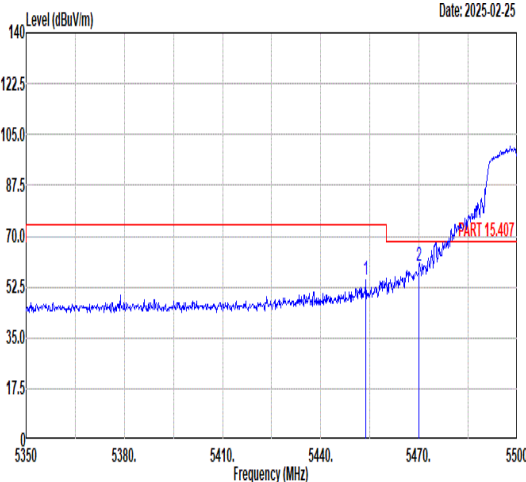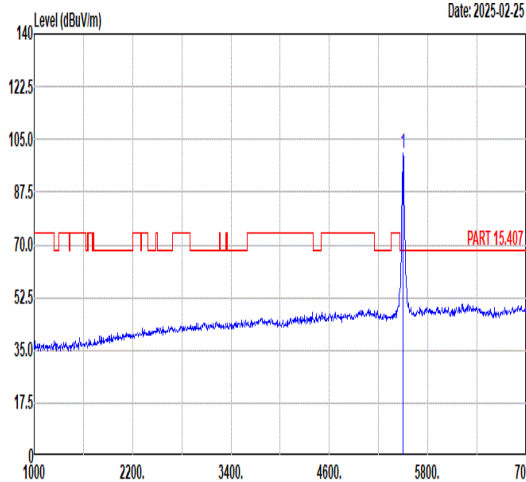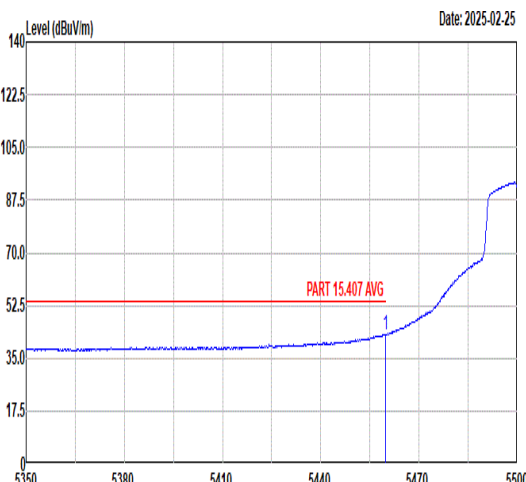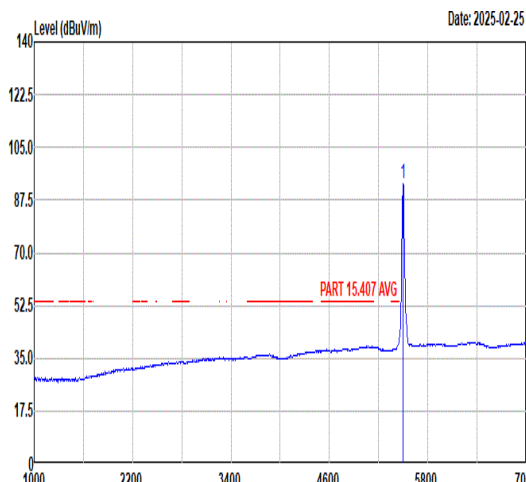

Mode	16																																																																																																							
	Band Edge																																																																																																							
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																																							
ANT	5																																																																																																							
Pol.	Vertical								Fundamental																																																																																															
Peak																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5453.65</td><td>54.69</td><td>74.00</td><td>-19.31</td><td>44.72</td><td>34.17</td><td>8.42</td><td>32.62</td><td>200</td><td>332</td><td>PEAK</td></tr><tr><td>2</td><td>5470.00</td><td>59.82</td><td>68.30</td><td>-8.48</td><td>49.85</td><td>34.18</td><td>8.40</td><td>32.61</td><td>200</td><td>332</td><td>PEAK</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5453.65	54.69	74.00	-19.31	44.72	34.17	8.42	32.62	200	332	PEAK	2	5470.00	59.82	68.30	-8.48	49.85	34.18	8.40	32.61	200	332	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>100.24</td><td>-----</td><td>90.29</td><td>34.20</td><td>8.36</td><td>32.61</td><td>200</td><td>332</td><td>PEAK</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5500.00	100.24	-----	90.29	34.20	8.36	32.61	200	332
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																	
1	5453.65	54.69	74.00	-19.31	44.72	34.17	8.42	32.62	200	332	PEAK																																																																																													
2	5470.00	59.82	68.30	-8.48	49.85	34.18	8.40	32.61	200	332	PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																	
1	5500.00	100.24	-----	90.29	34.20	8.36	32.61	200	332	PEAK																																																																																														
Avg																																																																																																								
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5459.80</td><td>43.03</td><td>54.00</td><td>-10.97</td><td>33.06</td><td>34.17</td><td>8.41</td><td>32.61</td><td>200</td><td>332</td><td>AVERAGE</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5459.80	43.03	54.00	-10.97	33.06	34.17	8.41	32.61	200	332	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1</td><td>5500.00</td><td>93.12</td><td>-----</td><td>83.17</td><td>34.20</td><td>8.36</td><td>32.61</td><td>200</td><td>332</td><td>AVERAGE</td></tr></tbody></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	5500.00	93.12	-----	83.17	34.20	8.36	32.61	200	332	AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																	
1	5459.80	43.03	54.00	-10.97	33.06	34.17	8.41	32.61	200	332	AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																																	
1	5500.00	93.12	-----	83.17	34.20	8.36	32.61	200	332	AVERAGE																																																																																														



Mode	16																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11n HT20_CH100_5500MHz																																																																																															
ANT	5																																																																																															
Pol.	Horizontal								Vertical																																																																																							
Peak Avg	Level (dBuV/m) Date: 2025-02-28 Frequency (MHz)								Level (dBuV/m) Date: 2025-02-28 Frequency (MHz)																																																																																							
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11000.00</td><td>47.74</td><td>74.00</td><td>-26.26</td><td>56.34</td><td>38.49</td><td>11.21</td></tr><tr><td>2</td><td>16500.00</td><td>48.59</td><td>68.30</td><td>-19.71</td><td>54.14</td><td>40.39</td><td>12.91</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11000.00	47.74	74.00	-26.26	56.34	38.49	11.21	2	16500.00	48.59	68.30	-19.71	54.14	40.39	12.91	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11000.00</td><td>47.93</td><td>74.00</td><td>-26.07</td><td>56.53</td><td>38.49</td><td>11.21</td></tr><tr><td>2</td><td>16500.00</td><td>48.77</td><td>68.30</td><td>-19.53</td><td>54.32</td><td>40.39</td><td>12.91</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11000.00	47.93	74.00	-26.07	56.53	38.49	11.21	2	16500.00	48.77	68.30	-19.53	54.32	40.39	12.91
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11000.00	47.74	74.00	-26.26	56.34	38.49	11.21																																																																																									
2	16500.00	48.59	68.30	-19.71	54.14	40.39	12.91																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11000.00	47.93	74.00	-26.07	56.53	38.49	11.21																																																																																									
2	16500.00	48.77	68.30	-19.53	54.32	40.39	12.91																																																																																									
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11000.00</td><td>47.74</td><td>74.00</td><td>-26.26</td><td>56.34</td><td>38.49</td><td>11.21</td></tr><tr><td>2</td><td>16500.00</td><td>48.59</td><td>68.30</td><td>-19.71</td><td>54.14</td><td>40.39</td><td>12.91</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11000.00	47.74	74.00	-26.26	56.34	38.49	11.21	2	16500.00	48.59	68.30	-19.71	54.14	40.39	12.91	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>11000.00</td><td>47.93</td><td>74.00</td><td>-26.07</td><td>56.53</td><td>38.49</td><td>11.21</td></tr><tr><td>2</td><td>16500.00</td><td>48.77</td><td>68.30</td><td>-19.53</td><td>54.32</td><td>40.39</td><td>12.91</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	11000.00	47.93	74.00	-26.07	56.53	38.49	11.21	2	16500.00	48.77	68.30	-19.53	54.32	40.39	12.91	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11000.00	47.74	74.00	-26.26	56.34	38.49	11.21																																																																																									
2	16500.00	48.59	68.30	-19.71	54.14	40.39	12.91																																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																									
1	11000.00	47.93	74.00	-26.07	56.53	38.49	11.21																																																																																									
2	16500.00	48.77	68.30	-19.53	54.32	40.39	12.91																																																																																									



Mode	17																																																																																																																																
	Harmonic																																																																																																																																
	U-NII-2C_5.47-5.725_802.11n HT20_CH116_5580MHz																																																																																																																																
ANT	5																																																																																																																																
Pol.	Horizontal						Vertical																																																																																																																										
Peak Avg	Level (dBuV/m) Date: 2025-02-28 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 11160.00</td><td>47.01</td><td>74.00</td><td>-26.99</td><td>55.79</td><td>38.05</td><td>11.29</td><td>58.12</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>2 16740.00</td><td>47.47</td><td>68.30</td><td>-20.83</td><td>52.45</td><td>40.59</td><td>13.01</td><td>58.58</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 11160.00	47.01	74.00	-26.99	55.79	38.05	11.29	58.12	--	--	Peak		2 16740.00	47.47	68.30	-20.83	52.45	40.59	13.01	58.58	--	--	Peak		Level (dBuV/m) Date: 2025-02-28 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 11160.00</td><td>47.13</td><td>74.00</td><td>-26.87</td><td>55.91</td><td>38.05</td><td>11.29</td><td>58.12</td><td>--</td><td>--</td><td>Peak</td><td></td></tr><tr><td>2 16740.00</td><td>47.51</td><td>68.30</td><td>-20.79</td><td>52.49</td><td>40.59</td><td>13.01</td><td>58.58</td><td>--</td><td>--</td><td>Peak</td><td></td></tr></table>							Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 11160.00	47.13	74.00	-26.87	55.91	38.05	11.29	58.12	--	--	Peak		2 16740.00	47.51	68.30	-20.79	52.49	40.59	13.01	58.58	--	--	Peak	
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1 11160.00	47.01	74.00	-26.99	55.79	38.05	11.29	58.12	--	--	Peak																																																																																																																							
2 16740.00	47.47	68.30	-20.83	52.45	40.59	13.01	58.58	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																								
1 11160.00	47.13	74.00	-26.87	55.91	38.05	11.29	58.12	--	--	Peak																																																																																																																							
2 16740.00	47.51	68.30	-20.79	52.49	40.59	13.01	58.58	--	--	Peak																																																																																																																							







Mode	18																																																																																	
	Band Edge																																																																																	
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																	
ANT	5																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	Level (dBuV/m) Date: 2025-03-07 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 5700 5713 5726 5739 5752 5765 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5727.76</td><td>63.99</td><td>68.30</td><td>-4.31</td><td>53.48</td><td>34.61</td><td>8.68</td><td>32.78</td><td>218 328 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5727.76	63.99	68.30	-4.31	53.48	34.61	8.68	32.78	218 328 PEAK	Level (dBuV/m) Date: 2025-03-07 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>100.63</td><td>-----</td><td>90.27</td><td>34.55</td><td>8.57</td><td>32.76</td><td>218 328</td><td>PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	100.63	-----	90.27	34.55	8.57	32.76	218 328	PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5727.76	63.99	68.30	-4.31	53.48	34.61	8.68	32.78	218 328 PEAK																																																																									
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5700.00	100.63	-----	90.27	34.55	8.57	32.76	218 328	PEAK																																																																									
Avg	Blank	Level (dBuV/m) Date: 2025-03-07 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5700.00</td><td>94.34</td><td>-----</td><td>83.98</td><td>34.55</td><td>8.57</td><td>32.76</td><td>218 328</td><td>AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg	1	5700.00	94.34	-----	83.98	34.55	8.57	32.76	218 328	AVERAGE																																								
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line	(dB)	Level	Factor	Loss Factor			Remark																																																																									
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5700.00	94.34	-----	83.98	34.55	8.57	32.76	218 328	AVERAGE																																																																									







Mode	18																																																																																																					
	Harmonic																																																																																																					
	U-NII-2C_5.47-5.725_802.11n HT20_CH140_5700MHz																																																																																																					
ANT	5																																																																																																					
Pol.	Horizontal						Vertical																																																																																															
Peak Avg	Date: 2025-02-28						Date: 2025-02-28																																																																																															
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11400.00</td><td>47.97</td><td>74.00</td><td>-26.03</td><td>57.03</td><td>37.39</td><td>11.41</td><td>57.86 -- -- Peak</td></tr><tr><td>2</td><td>17100.00</td><td>50.23</td><td>68.30</td><td>-18.07</td><td>54.25</td><td>41.00</td><td>13.14</td><td>58.16 -- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11400.00	47.97	74.00	-26.03	57.03	37.39	11.41	57.86 -- -- Peak	2	17100.00	50.23	68.30	-18.07	54.25	41.00	13.14	58.16 -- -- Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th></th></tr><tr><td>1</td><td>11400.00</td><td>48.30</td><td>74.00</td><td>-25.70</td><td>57.36</td><td>37.39</td><td>11.41</td><td>57.86 -- -- Peak</td></tr><tr><td>2</td><td>17100.00</td><td>47.97</td><td>68.30</td><td>-20.33</td><td>51.99</td><td>41.00</td><td>13.14</td><td>58.16 -- -- Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB		1	11400.00	48.30	74.00	-25.70	57.36	37.39	11.41	57.86 -- -- Peak	2	17100.00	47.97	68.30	-20.33	51.99	41.00	13.14	58.16 -- -- Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	11400.00	47.97	74.00	-26.03	57.03	37.39	11.41	57.86 -- -- Peak																																																																																														
2	17100.00	50.23	68.30	-18.07	54.25	41.00	13.14	58.16 -- -- Peak																																																																																														
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																																															
1	11400.00	48.30	74.00	-25.70	57.36	37.39	11.41	57.86 -- -- Peak																																																																																														
2	17100.00	47.97	68.30	-20.33	51.99	41.00	13.14	58.16 -- -- Peak																																																																																														

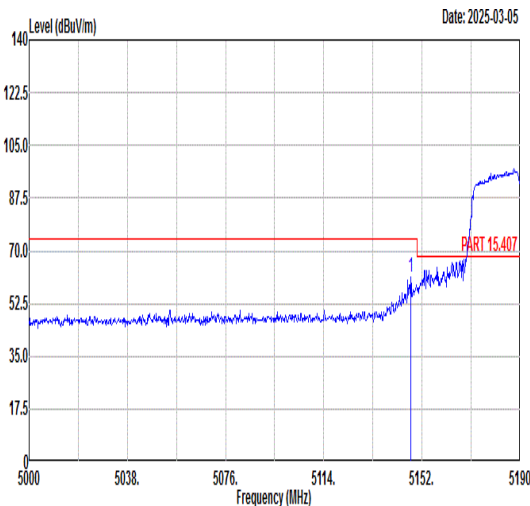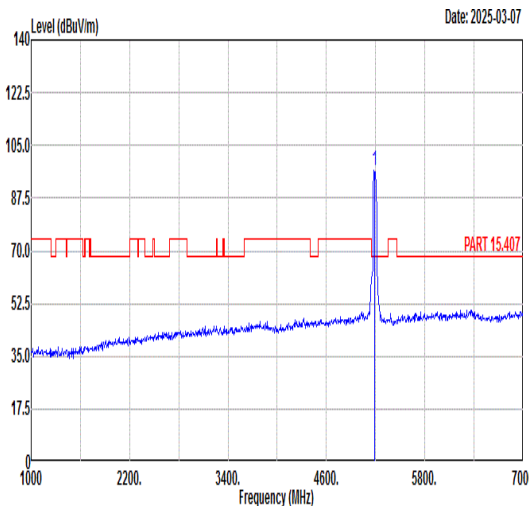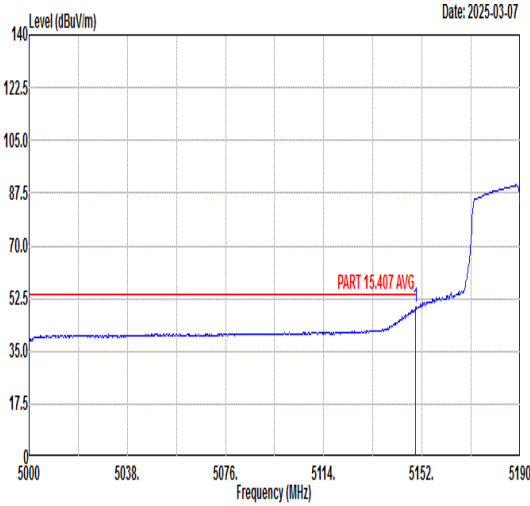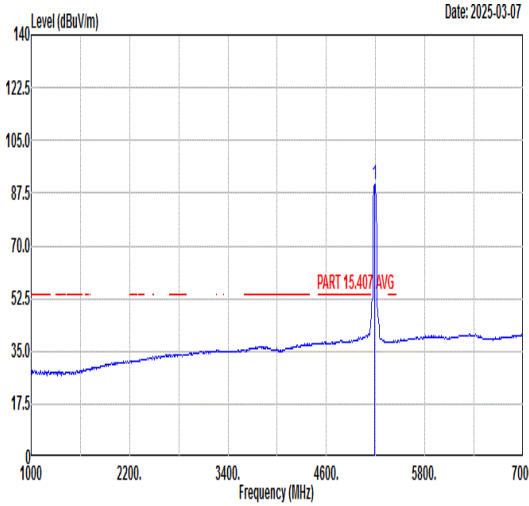

		19																																																																									
Mode		Band Edge - L																																																																									
		U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																									
ANT		5																																																																									
Pol.		Horizontal					Fundamental																																																																				
Peak	 Date: 2025-03-05					 Date: 2025-03-07																																																																					
	<table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5147.63</td><td>61.39</td><td>74.00</td><td>-12.61</td><td>52.22</td><td>33.99</td><td>7.92</td><td>32.74</td><td>130</td><td>36 PEAK</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5147.63	61.39	74.00	-12.61	52.22	33.99	7.92	32.74	130	36 PEAK	<table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>96.67</td><td>-----</td><td>-----</td><td>87.45</td><td>34.01</td><td>7.94</td><td>32.73</td><td>130</td><td>36 PEAK</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5190.00	96.67	-----	-----	87.45	34.01	7.94	32.73	130
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5147.63	61.39	74.00	-12.61	52.22	33.99	7.92	32.74	130	36 PEAK																																																																	
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5190.00	96.67	-----	-----	87.45	34.01	7.94	32.73	130	36 PEAK																																																																	
Avg	 Date: 2025-03-07					 Date: 2025-03-07																																																																					
	<table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5149.53</td><td>49.79</td><td>54.00</td><td>-4.21</td><td>40.62</td><td>33.99</td><td>7.92</td><td>32.74</td><td>130</td><td>36 AVERAGE</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5149.53	49.79	54.00	-4.21	40.62	33.99	7.92	32.74	130	36 AVERAGE	<table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5190.00</td><td>90.15</td><td>-----</td><td>-----</td><td>80.92</td><td>34.01</td><td>7.94</td><td>32.72</td><td>130</td><td>36 AVERAGE</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1	5190.00	90.15	-----	-----	80.92	34.01	7.94	32.72	130
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5149.53	49.79	54.00	-4.21	40.62	33.99	7.92	32.74	130	36 AVERAGE																																																																	
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																		
1	5190.00	90.15	-----	-----	80.92	34.01	7.94	32.72	130	36 AVERAGE																																																																	

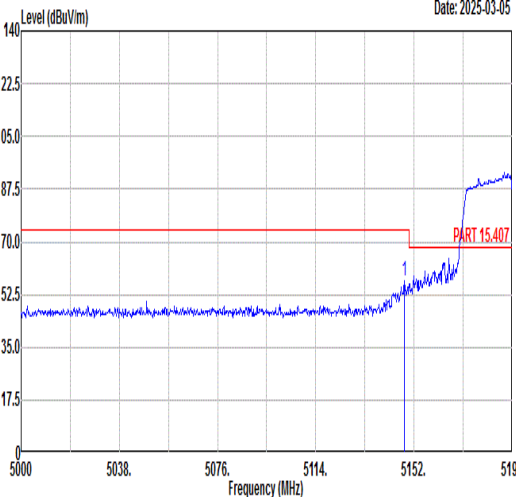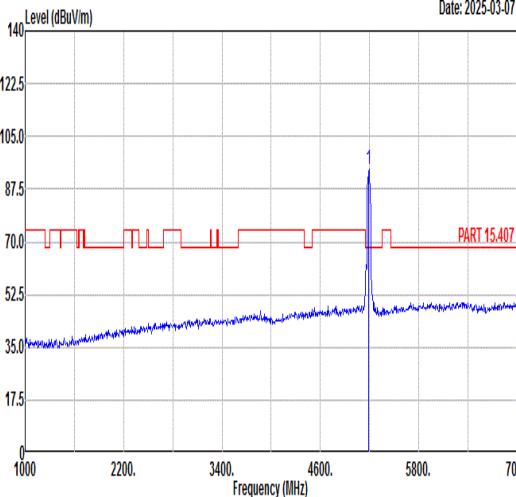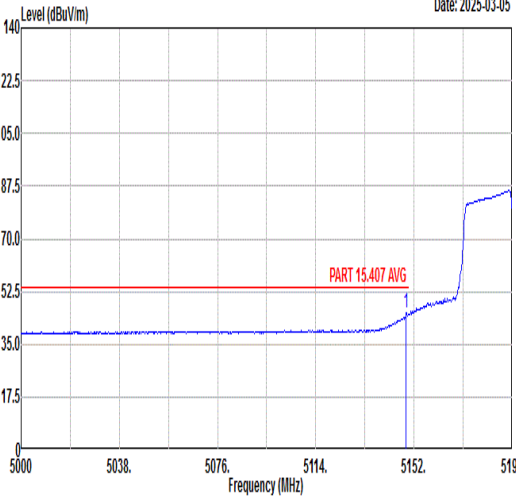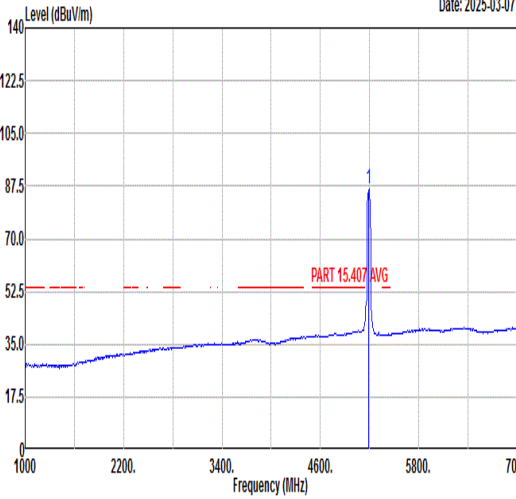

		19																																																																										
Mode		Band Edge - L																																																																										
		U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																										
ANT		5																																																																										
Pol.		Vertical					Fundamental																																																																					
Peak	Level (dBuV/m) Date: 2025-03-05  <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 5148.20</td><td>57.07</td><td>74.00</td><td>-16.93</td><td>47.90</td><td>33.99</td><td>7.92</td><td>32.74</td><td>300</td><td>98</td><td>PEAK</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 5148.20	57.07	74.00	-16.93	47.90	33.99	7.92	32.74	300	98	PEAK	Level (dBuV/m) Date: 2025-03-07  <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 5190.00</td><td>94.15</td><td>-----</td><td>-----</td><td>84.90</td><td>34.02</td><td>7.95</td><td>32.72</td><td>300</td><td>98</td><td>PEAK</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 5190.00	94.15	-----	-----	84.90	34.02	7.95	32.72	300	98	PEAK
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 5148.20	57.07	74.00	-16.93	47.90	33.99	7.92	32.74	300	98	PEAK																																																																		
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 5190.00	94.15	-----	-----	84.90	34.02	7.95	32.72	300	98	PEAK																																																																		
Avg	Level (dBuV/m) Date: 2025-03-05  <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 5148.96</td><td>45.43</td><td>54.00</td><td>-8.57</td><td>36.26</td><td>33.99</td><td>7.92</td><td>32.74</td><td>300</td><td>98</td><td>AVERAGE</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 5148.96	45.43	54.00	-8.57	36.26	33.99	7.92	32.74	300	98	AVERAGE	Level (dBuV/m) Date: 2025-03-07  <table><thead><tr><th>Freq</th><th>Level</th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>(dB)</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1 5190.00</td><td>86.41</td><td>-----</td><td>-----</td><td>77.16</td><td>34.02</td><td>7.95</td><td>32.72</td><td>300</td><td>98</td><td>AVERAGE</td></tr></tbody></table>					Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg		1 5190.00	86.41	-----	-----	77.16	34.02	7.95	32.72	300	98	AVERAGE
	Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 5148.96	45.43	54.00	-8.57	36.26	33.99	7.92	32.74	300	98	AVERAGE																																																																		
Freq	Level	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
MHz	dBuV/m	dBuV/m	(dB)	dBuV	dB/m	dB	dB	cm	deg																																																																			
1 5190.00	86.41	-----	-----	77.16	34.02	7.95	32.72	300	98	AVERAGE																																																																		







Mode	19																																										
	Band Edge - R																																										
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																										
ANT	5																																										
Pol.	Vertical	Fundamental																																									
Peak	Date: 2025-03-05 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5437.05</td><td>48.56</td><td>74.00</td><td>-25.44</td><td>38.58</td><td>34.16</td><td>8.44</td><td>32.62</td><td>300</td><td>98 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5437.05	48.56	74.00	-25.44	38.58	34.16	8.44	32.62	300	98 PEAK	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5437.05	48.56	74.00	-25.44	38.58	34.16	8.44	32.62	300	98 PEAK																																	
Avg	Date: 2025-03-05 <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5402.22</td><td>38.73</td><td>54.00</td><td>-15.27</td><td>28.76</td><td>34.14</td><td>8.47</td><td>32.64</td><td>300</td><td>98 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5402.22	38.73	54.00	-15.27	28.76	34.14	8.47	32.64	300	98 AVERAGE	Blank
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																		
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																		
1	5402.22	38.73	54.00	-15.27	28.76	34.14	8.47	32.64	300	98 AVERAGE																																	







Mode	19																																																																																																																																	
	Harmonic																																																																																																																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH38_5190MHz																																																																																																																																	
ANT	5																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg	Level (dBuV/m) Date: 2025-03-07 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10380.00</td><td>44.65</td><td>68.30</td><td>-23.65</td><td>60.68</td><td>38.48</td><td>9.24</td><td>63.75</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 15570.00</td><td>47.54</td><td>74.00</td><td>-26.46</td><td>58.64</td><td>41.34</td><td>11.96</td><td>64.40</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10380.00	44.65	68.30	-23.65	60.68	38.48	9.24	63.75	---	---	---	Peak	2 15570.00	47.54	74.00	-26.46	58.64	41.34	11.96	64.40	---	---	---	Peak	Level (dBuV/m) Date: 2025-03-07 Frequency (MHz) <table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1 10380.00</td><td>44.11</td><td>68.30</td><td>-24.19</td><td>60.14</td><td>38.48</td><td>9.24</td><td>63.75</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr><tr><td>2 15570.00</td><td>47.31</td><td>74.00</td><td>-26.69</td><td>58.41</td><td>41.34</td><td>11.96</td><td>64.40</td><td>---</td><td>---</td><td>---</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1 10380.00	44.11	68.30	-24.19	60.14	38.48	9.24	63.75	---	---	---	Peak	2 15570.00	47.31	74.00	-26.69	58.41	41.34	11.96	64.40	---	---	---	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 10380.00	44.65	68.30	-23.65	60.68	38.48	9.24	63.75	---	---	---	Peak																																																																																																																							
2 15570.00	47.54	74.00	-26.46	58.64	41.34	11.96	64.40	---	---	---	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1 10380.00	44.11	68.30	-24.19	60.14	38.48	9.24	63.75	---	---	---	Peak																																																																																																																							
2 15570.00	47.31	74.00	-26.69	58.41	41.34	11.96	64.40	---	---	---	Peak																																																																																																																							

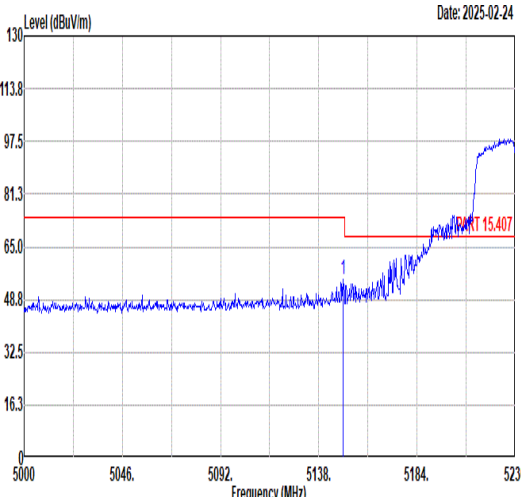
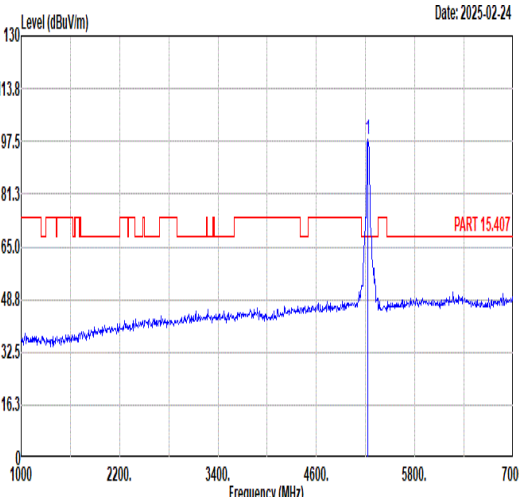
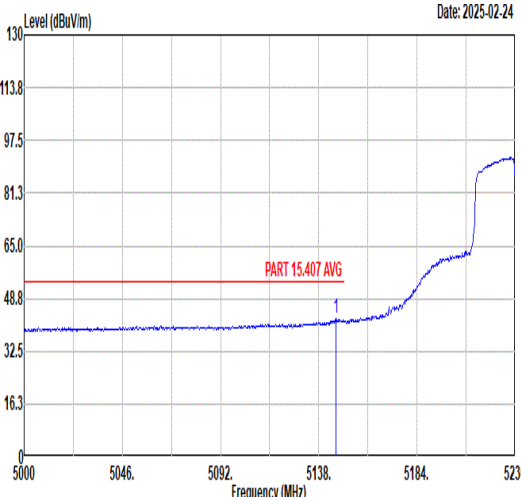
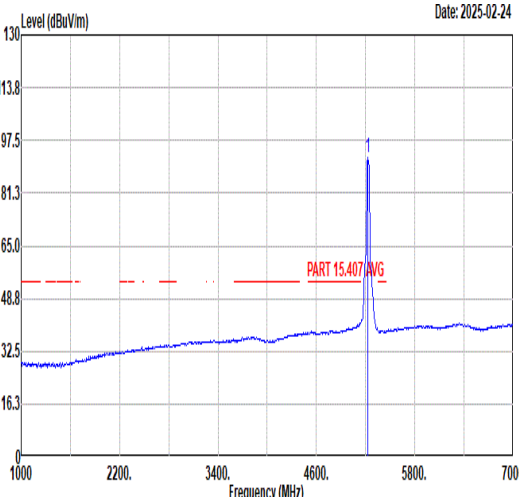


Mode	20																																																																																	
	Band Edge - L																																																																																	
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																																	
ANT	5																																																																																	
Pol.	Horizontal					Fundamental																																																																												
Peak	 Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5149.27</td><td>54.75</td><td>74.00 -19.25</td><td>45.58</td><td>33.99</td><td>7.92</td><td>32.74</td><td>100</td><td>30 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5149.27	54.75	74.00 -19.25	45.58	33.99	7.92	32.74	100	30 PEAK	 Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5230.00</td><td>98.00</td><td>-----</td><td>88.69</td><td>34.03</td><td>7.99</td><td>32.71</td><td>100</td><td>30 PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5230.00	98.00	-----	88.69	34.03	7.99	32.71	100	30 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																										
1 5149.27	54.75	74.00 -19.25	45.58	33.99	7.92	32.74	100	30 PEAK																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																										
1 5230.00	98.00	-----	88.69	34.03	7.99	32.71	100	30 PEAK																																																																										
Avg	 Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5146.05</td><td>42.56</td><td>54.00 -11.44</td><td>33.39</td><td>33.99</td><td>7.92</td><td>32.74</td><td>100</td><td>30 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5146.05	42.56	54.00 -11.44	33.39	33.99	7.92	32.74	100	30 AVERAGE	 Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5230.00</td><td>92.01</td><td>-----</td><td>82.67</td><td>34.04</td><td>8.01</td><td>32.71</td><td>100</td><td>30 AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5230.00	92.01	-----	82.67	34.04	8.01	32.71	100	30 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																										
1 5146.05	42.56	54.00 -11.44	33.39	33.99	7.92	32.74	100	30 AVERAGE																																																																										
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																										
1 5230.00	92.01	-----	82.67	34.04	8.01	32.71	100	30 AVERAGE																																																																										

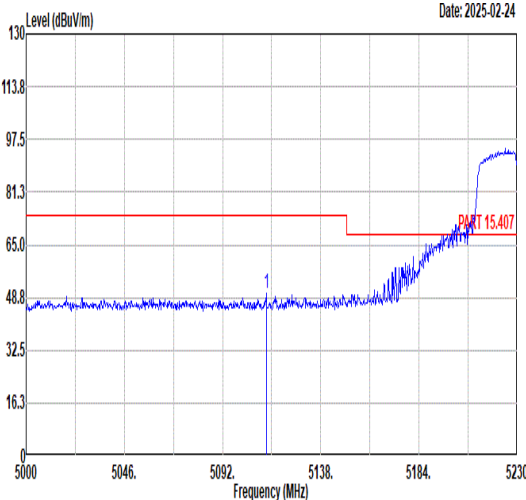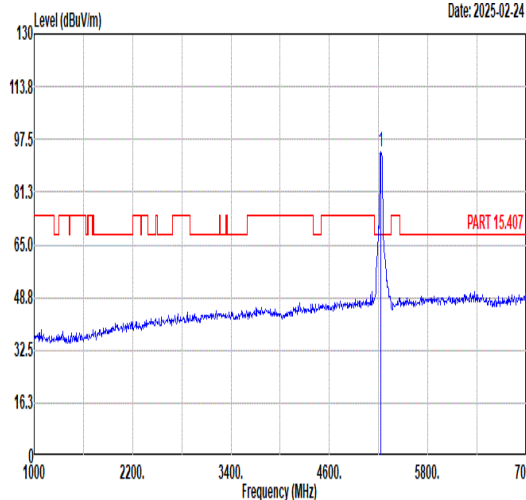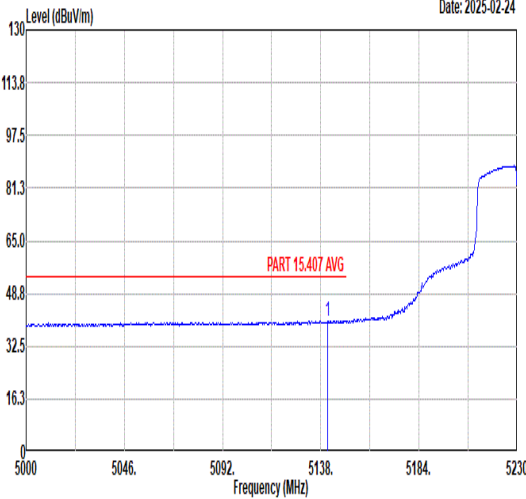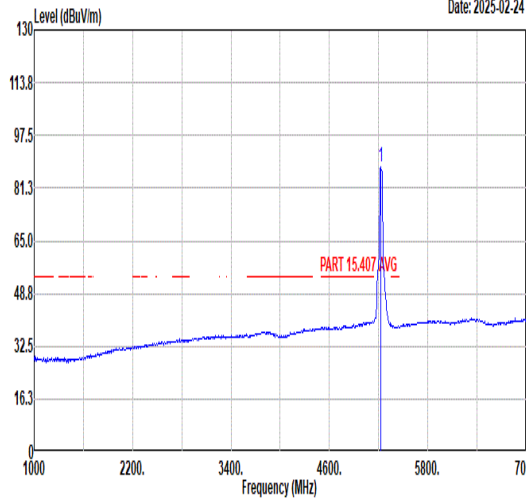

Mode	20																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11n HT40_CH46_5230MHz																																																																																									
ANT	5																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5112.47</td><td>50.13</td><td>74.00</td><td>-23.87</td><td>41.02</td><td>33.97</td><td>7.89</td><td>32.75</td><td>349</td><td>83</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5112.47	50.13	74.00	-23.87	41.02	33.97	7.89	32.75	349	83	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>93.83</td><td>-----</td><td>-----</td><td>84.49</td><td>34.04</td><td>8.01</td><td>32.71</td><td>349</td><td>83</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	93.83	-----	-----	84.49	34.04	8.01	32.71	349	83
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5112.47	50.13	74.00	-23.87	41.02	33.97	7.89	32.75	349	83	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5230.00	93.83	-----	-----	84.49	34.04	8.01	32.71	349	83	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5141.22</td><td>40.38</td><td>54.00</td><td>-13.62</td><td>31.22</td><td>33.99</td><td>7.91</td><td>32.74</td><td>349</td><td>83</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5141.22	40.38	54.00	-13.62	31.22	33.99	7.91	32.74	349	83	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5230.00</td><td>88.03</td><td>-----</td><td>-----</td><td>78.69</td><td>34.04</td><td>8.01</td><td>32.71</td><td>349</td><td>83</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5230.00	88.03	-----	-----	78.69	34.04	8.01	32.71	349	83
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5141.22	40.38	54.00	-13.62	31.22	33.99	7.91	32.74	349	83	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5230.00	88.03	-----	-----	78.69	34.04	8.01	32.71	349	83	AVERAGE																																																																															

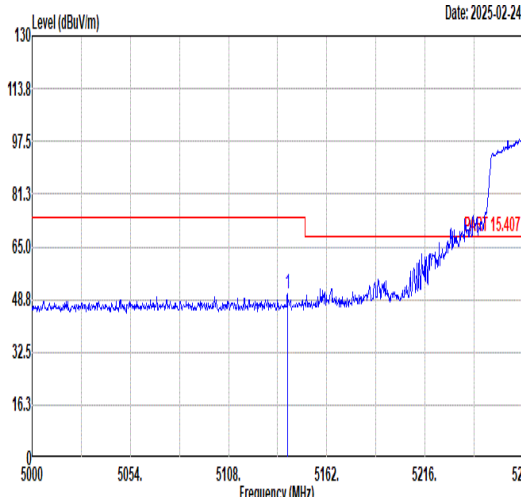
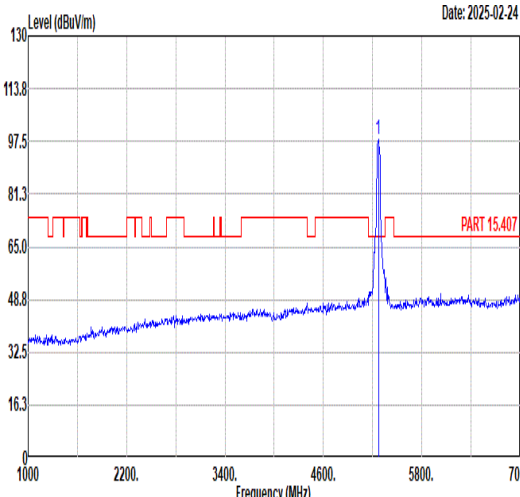
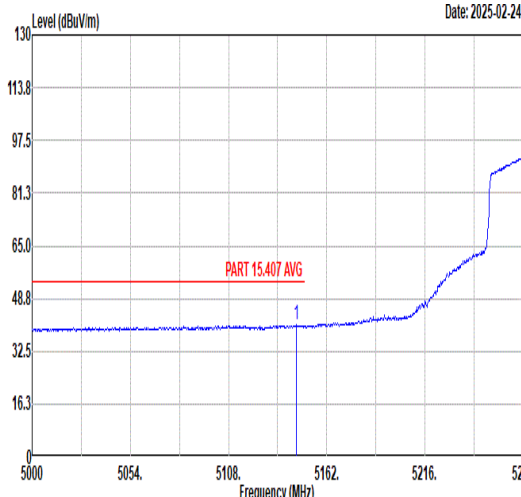
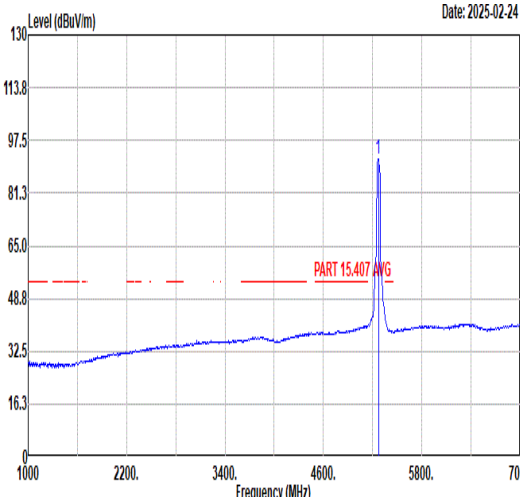


Mode	21																																																																																										
	Band Edge - L																																																																																										
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																																										
ANT	5																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak	 Date: 2025-02-24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5140.40</td><td>50.45</td><td>74.00</td><td>-23.55</td><td>41.29</td><td>33.99</td><td>7.91</td><td>32.74</td><td>100</td><td>30</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5140.40	50.45	74.00	-23.55	41.29	33.99	7.91	32.74	100	30	PEAK	 Date: 2025-02-24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5270.00</td><td>97.88</td><td>-----</td><td>-----</td><td>88.39</td><td>34.06</td><td>8.12</td><td>32.69</td><td>100</td><td>30</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	97.88	-----	-----	88.39	34.06	8.12	32.69	100	30	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5140.40	50.45	74.00	-23.55	41.29	33.99	7.91	32.74	100	30	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5270.00	97.88	-----	-----	88.39	34.06	8.12	32.69	100	30	PEAK																																																																																
Avg	 Date: 2025-02-24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5145.26</td><td>40.53</td><td>54.00</td><td>-13.47</td><td>31.36</td><td>33.99</td><td>7.92</td><td>32.74</td><td>100</td><td>30</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5145.26	40.53	54.00	-13.47	31.36	33.99	7.92	32.74	100	30	AVERAGE	 Date: 2025-02-24 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5270.00</td><td>91.77</td><td>-----</td><td>-----</td><td>82.28</td><td>34.06</td><td>8.12</td><td>32.69</td><td>100</td><td>30</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	91.77	-----	-----	82.28	34.06	8.12	32.69	100	30	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5145.26	40.53	54.00	-13.47	31.36	33.99	7.92	32.74	100	30	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5270.00	91.77	-----	-----	82.28	34.06	8.12	32.69	100	30	AVERAGE																																																																																



Mode	21																																																		
	Band Edge - R																																																		
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																		
ANT	5																																																		
Pol.	Horizontal							Fundamental																																											
Peak	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5361.01</td><td>55.21</td><td>74.00</td><td>-18.79</td><td>45.38</td><td>34.12</td><td>8.36</td><td>32.65</td><td>100</td><td>30</td><td>PEAK</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5361.01	55.21	74.00	-18.79	45.38	34.12	8.36	32.65	100	30	PEAK	Blank			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5361.01	55.21	74.00	-18.79	45.38	34.12	8.36	32.65	100	30	PEAK																																								
Avg	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.75</td><td>43.06</td><td>54.00</td><td>-10.94</td><td>33.28</td><td>34.11</td><td>8.33</td><td>32.66</td><td>100</td><td>30</td><td>AVERAGE</td></tr></table>								Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.75	43.06	54.00	-10.94	33.28	34.11	8.33	32.66	100	30	AVERAGE	Blank			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																										
1	5350.75	43.06	54.00	-10.94	33.28	34.11	8.33	32.66	100	30	AVERAGE																																								

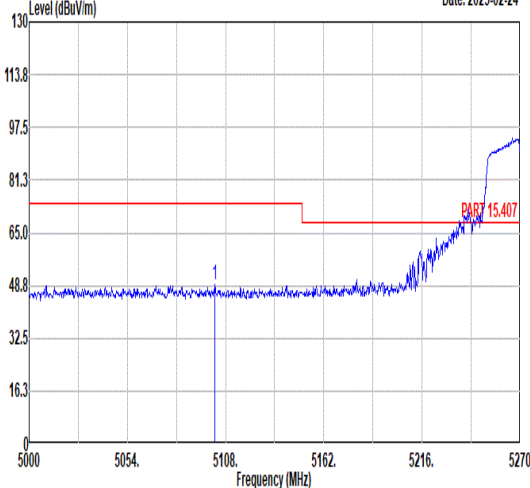
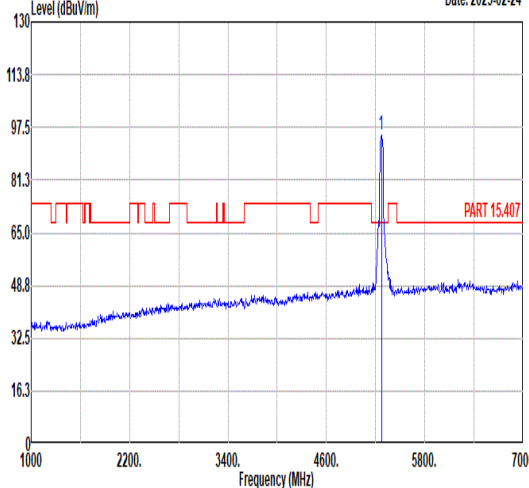
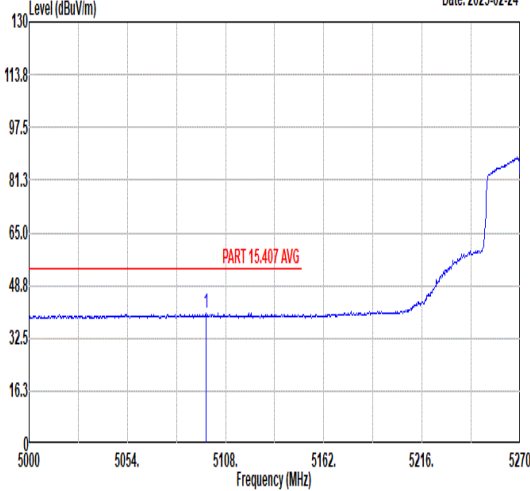
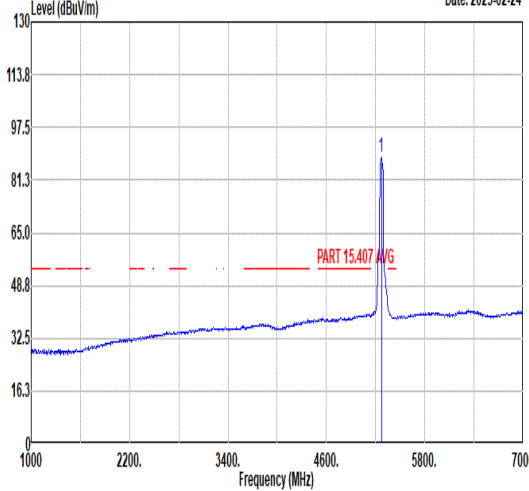


Mode	21																																																																																										
	Band Edge - L																																																																																										
	U-NII-2A_5.25-5.35_802.11n HT40_CH54_5270MHz																																																																																										
ANT	5																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak	 Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 5000 5054 5108 5162 5216 5270 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5102.06</td><td>49.15</td><td>74.00</td><td>-24.85</td><td>40.06</td><td>33.96</td><td>7.89</td><td>32.76</td><td>281</td><td>106</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5102.06	49.15	74.00	-24.85	40.06	33.96	7.89	32.76	281	106	PEAK	 Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5270.00</td><td>95.18</td><td>-----</td><td>-----</td><td>85.69</td><td>34.06</td><td>8.12</td><td>32.69</td><td>281</td><td>106</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	95.18	-----	-----	85.69	34.06	8.12	32.69	281	106	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5102.06	49.15	74.00	-24.85	40.06	33.96	7.89	32.76	281	106	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5270.00	95.18	-----	-----	85.69	34.06	8.12	32.69	281	106	PEAK																																																																																
Avg	 Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 5000 5054 5108 5162 5216 5270 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5097.20</td><td>40.29</td><td>54.00</td><td>-13.71</td><td>31.21</td><td>33.96</td><td>7.88</td><td>32.76</td><td>281</td><td>106</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5097.20	40.29	54.00	-13.71	31.21	33.96	7.88	32.76	281	106	AVERAGE	 Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5270.00</td><td>88.42</td><td>-----</td><td>-----</td><td>78.93</td><td>34.06</td><td>8.12</td><td>32.69</td><td>281</td><td>106</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5270.00	88.42	-----	-----	78.93	34.06	8.12	32.69	281	106	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5097.20	40.29	54.00	-13.71	31.21	33.96	7.88	32.76	281	106	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5270.00	88.42	-----	-----	78.93	34.06	8.12	32.69	281	106	AVERAGE																																																																																



Mode	22																																																																													
	Band Edge - L																																																																													
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																													
ANT	5																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	Level (dBuV/m) Date: 2025-03-05 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5054.87</td><td>49.30</td><td>74.00</td><td>-24.70</td><td>40.28</td><td>33.94</td><td>7.86</td><td>32.78</td><td>156</td><td>38 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5054.87	49.30	74.00	-24.70	40.28	33.94	7.86	32.78	156	38 PEAK	Level (dBuV/m) Date: 2025-03-05 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5310.00</td><td>96.95</td><td>-----</td><td>-----</td><td>87.35</td><td>34.08</td><td>8.20</td><td>32.68</td><td>156</td><td>38 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	96.95	-----	-----	87.35	34.08	8.20	32.68	156	38 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5054.87	49.30	74.00	-24.70	40.28	33.94	7.86	32.78	156	38 PEAK																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5310.00	96.95	-----	-----	87.35	34.08	8.20	32.68	156	38 PEAK																																																																					
Avg	Level (dBuV/m) Date: 2025-03-05 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5129.89</td><td>39.56</td><td>54.00</td><td>-14.44</td><td>30.42</td><td>33.98</td><td>7.91</td><td>32.75</td><td>156</td><td>38 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5129.89	39.56	54.00	-14.44	30.42	33.98	7.91	32.75	156	38 AVERAGE	Level (dBuV/m) Date: 2025-03-05 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5310.00</td><td>89.60</td><td>-----</td><td>-----</td><td>79.97</td><td>34.08</td><td>8.22</td><td>32.67</td><td>156</td><td>38 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	89.60	-----	-----	79.97	34.08	8.22	32.67	156	38 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5129.89	39.56	54.00	-14.44	30.42	33.98	7.91	32.75	156	38 AVERAGE																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5310.00	89.60	-----	-----	79.97	34.08	8.22	32.67	156	38 AVERAGE																																																																					

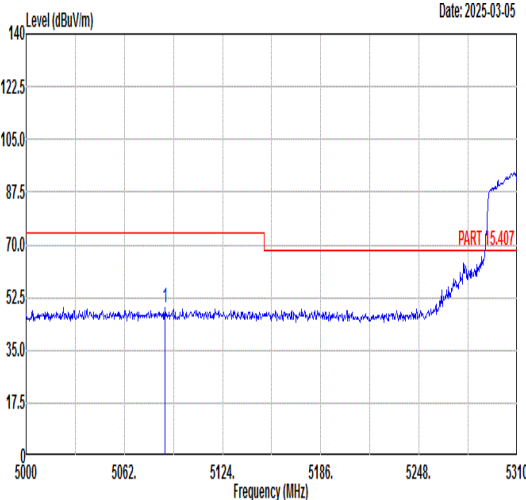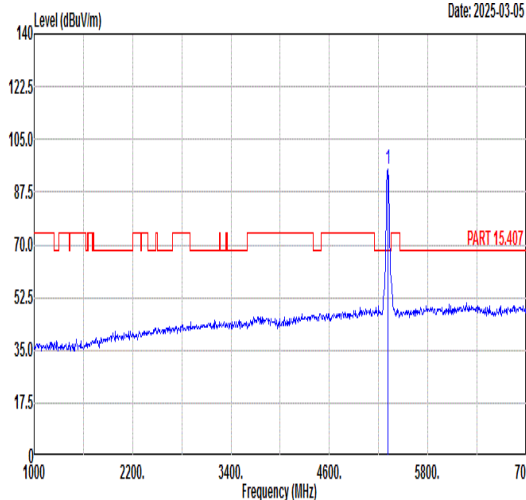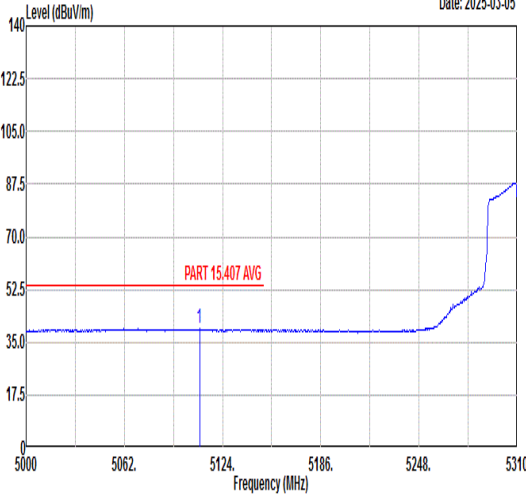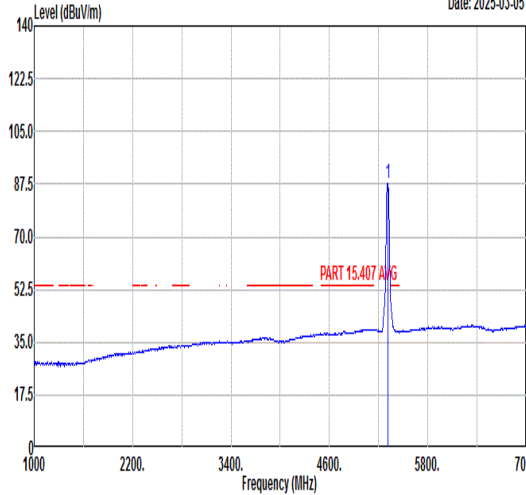

Mode	22																																																																																																																																																										
	Band Edge - L																																																																																																																																																										
	U-NII-2A_5.25-5.35_802.11n HT40_CH62_5310MHz																																																																																																																																																										
ANT	5																																																																																																																																																										
Pol.	Vertical	Fundamental																																																																																																																																																									
Peak	Level (dBuV/m) Date: 2025-03-05 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5087.73</td><td>49.04</td><td>74.00</td><td>-24.96</td><td>39.97</td><td>33.95</td><td>7.88</td><td>32.76</td><td>345</td><td>96 PEAK</td></tr></tbody></table> Level (dBuV/m) Date: 2025-03-05 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5310.00</td><td>94.91</td><td>-----</td><td>-----</td><td>85.26</td><td>34.09</td><td>8.23</td><td>32.67</td><td>345</td><td>96 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5087.73	49.04	74.00	-24.96	39.97	33.95	7.88	32.76	345	96 PEAK		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	94.91	-----	-----	85.26	34.09	8.23	32.67	345	96 PEAK	Avg	Level (dBuV/m) Date: 2025-03-05 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5109.43</td><td>39.42</td><td>54.00</td><td>-14.58</td><td>30.31</td><td>33.97</td><td>7.89</td><td>32.75</td><td>345</td><td>96 AVERAGE</td></tr></tbody></table> Level (dBuV/m) Date: 2025-03-05 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1 5310.00</td><td>87.89</td><td>-----</td><td>-----</td><td>78.24</td><td>34.09</td><td>8.23</td><td>32.67</td><td>345</td><td>96 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5109.43	39.42	54.00	-14.58	30.31	33.97	7.89	32.75	345	96 AVERAGE		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5310.00	87.89	-----	-----	78.24	34.09	8.23	32.67	345	96 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																		
1 5087.73	49.04	74.00	-24.96	39.97	33.95	7.88	32.76	345	96 PEAK																																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																		
1 5310.00	94.91	-----	-----	85.26	34.09	8.23	32.67	345	96 PEAK																																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																		
1 5109.43	39.42	54.00	-14.58	30.31	33.97	7.89	32.75	345	96 AVERAGE																																																																																																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																																		
1 5310.00	87.89	-----	-----	78.24	34.09	8.23	32.67	345	96 AVERAGE																																																																																																																																																		



		23																																																																																																			
Mode		Band Edge - L																																																																																																			
		U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																																			
ANT		5																																																																																																			
Pol.		Horizontal					Fundamental																																																																																														
Peak																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5455.76</td><td>61.44</td><td>74.00</td><td>-12.56</td><td>51.47</td><td>34.17</td><td>8.41</td><td>32.61</td><td>244</td><td>341 PEAK</td></tr><tr><td>2</td><td>5465.04</td><td>63.92</td><td>68.30</td><td>-4.38</td><td>53.95</td><td>34.18</td><td>8.40</td><td>32.61</td><td>244</td><td>341 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5455.76	61.44	74.00	-12.56	51.47	34.17	8.41	32.61	244	341 PEAK	2	5465.04	63.92	68.30	-4.38	53.95	34.18	8.40	32.61	244	341 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>97.27</td><td>-----</td><td>87.33</td><td>34.20</td><td>8.35</td><td>32.61</td><td>244</td><td>341 PEAK</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	97.27	-----	87.33	34.20	8.35	32.61	244
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5455.76	61.44	74.00	-12.56	51.47	34.17	8.41	32.61	244	341 PEAK																																																																																											
2	5465.04	63.92	68.30	-4.38	53.95	34.18	8.40	32.61	244	341 PEAK																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5510.00	97.27	-----	87.33	34.20	8.35	32.61	244	341 PEAK																																																																																												
Avg																																																																																																					
	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.76</td><td>48.53</td><td>54.00</td><td>-5.47</td><td>38.56</td><td>34.17</td><td>8.41</td><td>32.61</td><td>244</td><td>341 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.76	48.53	54.00	-5.47	38.56	34.17	8.41	32.61	244	341 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5510.00</td><td>90.72</td><td>-----</td><td>80.78</td><td>34.20</td><td>8.35</td><td>32.61</td><td>244</td><td>341 AVERAGE</td></tr></tbody></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	90.72	-----	80.78	34.20	8.35	32.61	244	341 AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5459.76	48.53	54.00	-5.47	38.56	34.17	8.41	32.61	244	341 AVERAGE																																																																																											
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																													
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																												
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	5510.00	90.72	-----	80.78	34.20	8.35	32.61	244	341 AVERAGE																																																																																												



Mode	23																																																																																											
	Band Edge - L																																																																																											
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																																																																											
ANT	5																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	Level (dBuV/m) Date: 2025-03-07 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 5350 5382 5414 5446 5478 5510 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.76</td><td>58.20</td><td>74.00</td><td>-15.80</td><td>48.23</td><td>34.17</td><td>8.41</td><td>32.61</td><td>229 121 PEAK</td></tr><tr><td>2</td><td>5466.96</td><td>64.00</td><td>68.30</td><td>-4.30</td><td>54.03</td><td>34.18</td><td>8.40</td><td>32.61</td><td>229 121 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.76	58.20	74.00	-15.80	48.23	34.17	8.41	32.61	229 121 PEAK	2	5466.96	64.00	68.30	-4.30	54.03	34.18	8.40	32.61	229 121 PEAK	Level (dBuV/m) Date: 2025-03-07 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>95.97</td><td>-----</td><td>86.04</td><td>34.21</td><td>8.34</td><td>32.62</td><td>229</td><td>121 PEAK</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	95.97	-----	86.04	34.21	8.34	32.62	229	121 PEAK
		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5459.76	58.20	74.00	-15.80	48.23	34.17	8.41	32.61	229 121 PEAK																																																																																			
2	5466.96	64.00	68.30	-4.30	54.03	34.18	8.40	32.61	229 121 PEAK																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5510.00	95.97	-----	86.04	34.21	8.34	32.62	229	121 PEAK																																																																																			
Avg	Level (dBuV/m) Date: 2025-02-24 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 5350 5382 5414 5446 5478 5510 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5459.76</td><td>46.35</td><td>54.00</td><td>-7.65</td><td>36.38</td><td>34.17</td><td>8.41</td><td>32.61</td><td>229 121 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5459.76	46.35	54.00	-7.65	36.38	34.17	8.41	32.61	229 121 AVERAGE	Level (dBuV/m) Date: 2025-03-07 130 113.8 97.5 81.3 65.0 48.8 32.5 16.3 0 1000 2200 3400 4600 5800 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5510.00</td><td>89.53</td><td>-----</td><td>79.60</td><td>34.21</td><td>8.34</td><td>32.62</td><td>229</td><td>121 AVERAGE</td></tr></table>		Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark		MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg	1	5510.00	89.53	-----	79.60	34.21	8.34	32.62	229	121 AVERAGE										
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5459.76	46.35	54.00	-7.65	36.38	34.17	8.41	32.61	229 121 AVERAGE																																																																																			
	Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dBuV	dB/m	dB	dB	cm	deg																																																																																			
1	5510.00	89.53	-----	79.60	34.21	8.34	32.62	229	121 AVERAGE																																																																																			



Mode	23																																														
	Band Edge - R																																														
	U-NII-2C_5.47-5.725_802.11n HT40_CH102_5510MHz																																														
ANT	5																																														
Pol.	Vertical						Fundamental																																								
Peak	Date: 2025-02-24 <table><tr><th>Limit</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>(dB)</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th></tr><tr><td>1</td><td>5756.08</td><td>48.97</td><td>68.30</td><td>-19.33</td><td>38.32</td><td>34.66</td><td>8.79</td><td>32.80</td><td>229</td><td>121</td><td>PEAK</td></tr></table>						Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	(dB)	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB	1	5756.08	48.97	68.30	-19.33	38.32	34.66	8.79	32.80	229	121	PEAK	Blank				
Limit	Margin	Read	Ant	Cable	Preamp	APos	TPos																																								
Freq	Level	Line	(dB)	Level	Factor	Loss	Factor																																								
MHz	dBuV/m	dBuV/m		dBuV	dB/m	dB	dB																																								
1	5756.08	48.97	68.30	-19.33	38.32	34.66	8.79	32.80	229	121	PEAK																																				







Mode	24																																																																																																										
	Band Edge - L																																																																																																										
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																																										
ANT	5																																																																																																										
Pol.	Horizontal						Fundamental																																																																																																				
Peak	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5435.12</td><td>47.88</td><td>74.00</td><td>-26.12</td><td>37.90</td><td>34.16</td><td>8.44</td><td>32.62</td><td>188</td><td>55</td><td>PEAK</td></tr><tr><td>2</td><td>5460.72</td><td>48.08</td><td>68.30</td><td>-20.22</td><td>38.11</td><td>34.17</td><td>8.41</td><td>32.61</td><td>188</td><td>55</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5435.12	47.88	74.00	-26.12	37.90	34.16	8.44	32.62	188	55	PEAK	2	5460.72	48.08	68.30	-20.22	38.11	34.17	8.41	32.61	188	55	PEAK	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>96.59</td><td>-----</td><td>-----</td><td>86.37</td><td>34.50</td><td>8.46</td><td>32.74</td><td>188</td><td>55</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5670.00	96.59	-----	-----	86.37	34.50	8.46	32.74	188	55	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5435.12	47.88	74.00	-26.12	37.90	34.16	8.44	32.62	188	55	PEAK																																																																																																
2	5460.72	48.08	68.30	-20.22	38.11	34.17	8.41	32.61	188	55	PEAK																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5670.00	96.59	-----	-----	86.37	34.50	8.46	32.74	188	55	PEAK																																																																																																
Avg	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5429.36</td><td>39.25</td><td>54.00</td><td>-14.75</td><td>29.27</td><td>34.16</td><td>8.45</td><td>32.63</td><td>188</td><td>55</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5429.36	39.25	54.00	-14.75	29.27	34.16	8.45	32.63	188	55	AVERAGE	Level (dBuV/m) Date: 2025-02-24 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>90.71</td><td>-----</td><td>-----</td><td>80.45</td><td>34.51</td><td>8.49</td><td>32.74</td><td>188</td><td>55</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5670.00	90.71	-----	-----	80.45	34.51	8.49	32.74	188	55	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5429.36	39.25	54.00	-14.75	29.27	34.16	8.45	32.63	188	55	AVERAGE																																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																	
1	5670.00	90.71	-----	-----	80.45	34.51	8.49	32.74	188	55	AVERAGE																																																																																																







Mode	24																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																									
ANT	5																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2025-02-24 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5725.29</td><td>60.57</td><td>68.30</td><td>-7.73</td><td>50.07</td><td>34.60</td><td>8.68</td><td>32.78</td><td>188</td><td>55 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5725.29	60.57	68.30	-7.73	50.07	34.60	8.68	32.78	188	55 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																
1	5725.29	60.57	68.30	-7.73	50.07	34.60	8.68	32.78	188	55 PEAK																																

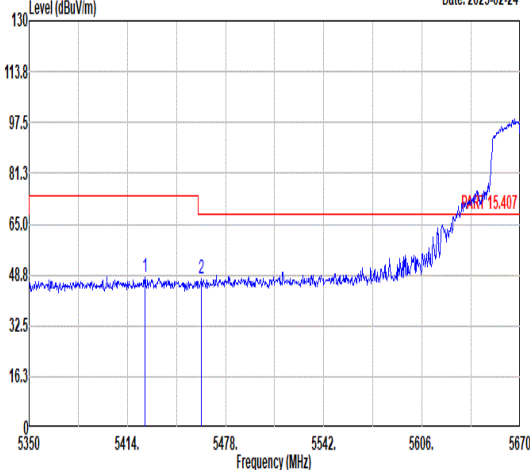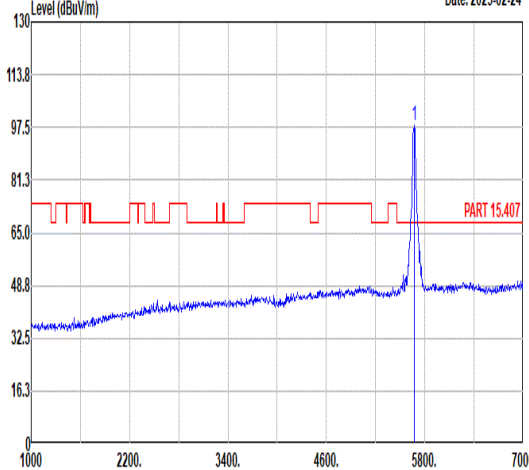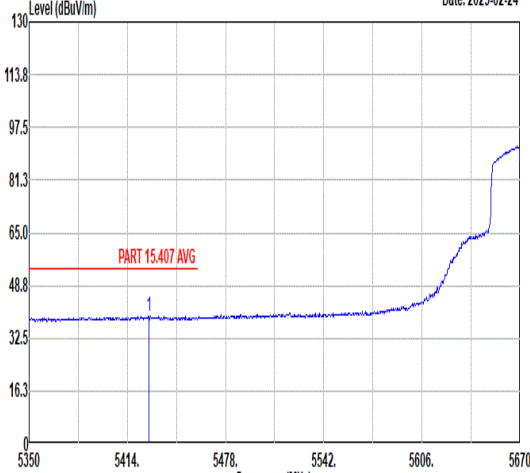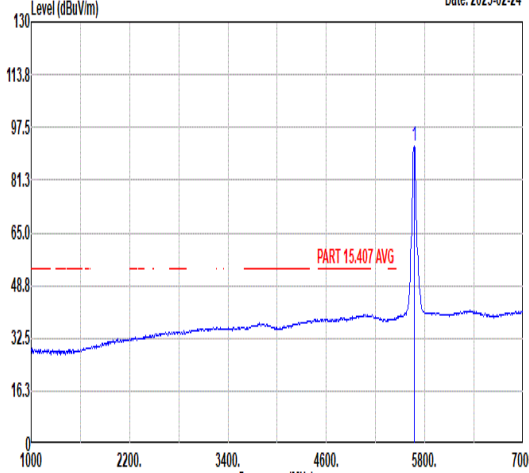

Mode	24																																																																																																							
	Band Edge - L																																																																																																							
	U-NII-2C_5.47-5.725_802.11n HT40_CH134_5670MHz																																																																																																							
ANT	5																																																																																																							
Pol.	Vertical						Fundamental																																																																																																	
Peak	Level (dBuV/m) Date: 2025-02-24  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5425.52</td><td>48.13</td><td>74.00</td><td>-25.87</td><td>38.15</td><td>34.15</td><td>8.46</td><td>32.63</td><td>318</td><td>297</td><td>PEAK</td></tr><tr><td>2</td><td>5462.00</td><td>47.45</td><td>68.30</td><td>-20.85</td><td>37.48</td><td>34.17</td><td>8.41</td><td>32.61</td><td>318</td><td>297</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5425.52	48.13	74.00	-25.87	38.15	34.15	8.46	32.63	318	297	PEAK	2	5462.00	47.45	68.30	-20.85	37.48	34.17	8.41	32.61	318	297	PEAK	Level (dBuV/m) Date: 2025-02-24  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>97.94</td><td>-----</td><td>-----</td><td>87.68</td><td>34.51</td><td>8.49</td><td>32.74</td><td>318</td><td>297</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5670.00	97.94	-----	-----	87.68	34.51	8.49	32.74	318	297	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																															
1	5425.52	48.13	74.00	-25.87	38.15	34.15	8.46	32.63	318	297	PEAK																																																																																													
2	5462.00	47.45	68.30	-20.85	37.48	34.17	8.41	32.61	318	297	PEAK																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																															
1	5670.00	97.94	-----	-----	87.68	34.51	8.49	32.74	318	297	PEAK																																																																																													
Avg	Level (dBuV/m) Date: 2025-02-24  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5428.08</td><td>39.22</td><td>54.00</td><td>-14.78</td><td>29.25</td><td>34.15</td><td>8.45</td><td>32.63</td><td>318</td><td>297</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5428.08	39.22	54.00	-14.78	29.25	34.15	8.45	32.63	318	297	AVERAGE	Level (dBuV/m) Date: 2025-02-24  Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5670.00</td><td>91.72</td><td>-----</td><td>-----</td><td>81.46</td><td>34.51</td><td>8.49</td><td>32.74</td><td>318</td><td>297</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5670.00	91.72	-----	-----	81.46	34.51	8.49	32.74	318	297	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																															
1	5428.08	39.22	54.00	-14.78	29.25	34.15	8.45	32.63	318	297	AVERAGE																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																															
1	5670.00	91.72	-----	-----	81.46	34.51	8.49	32.74	318	297	AVERAGE																																																																																													

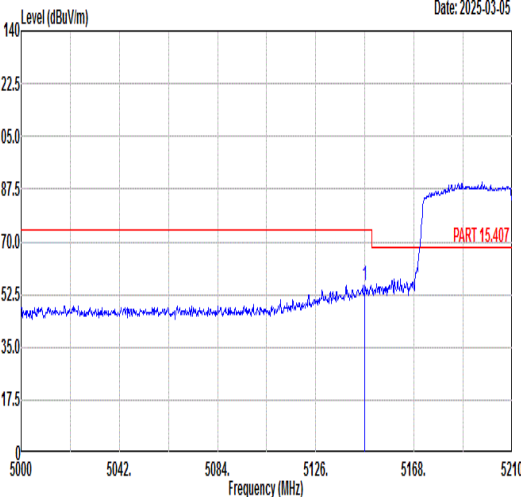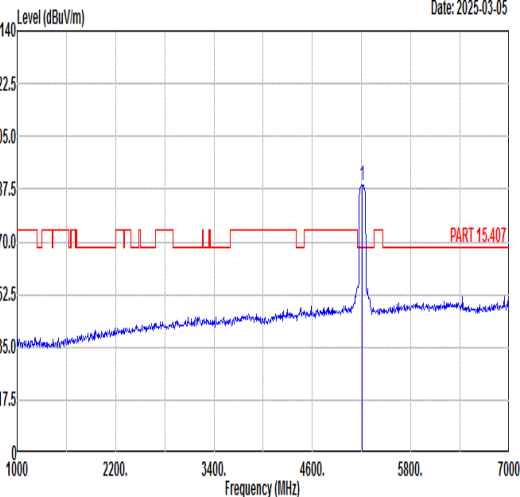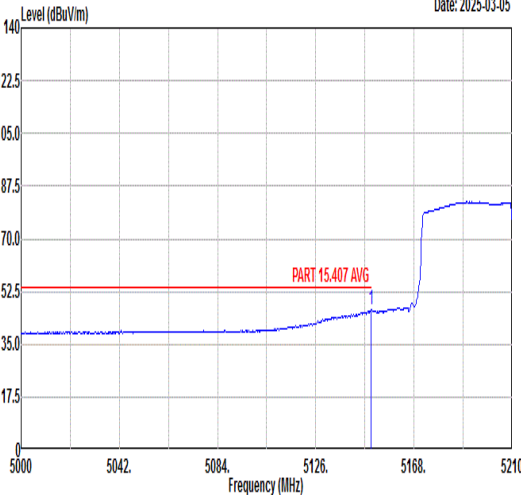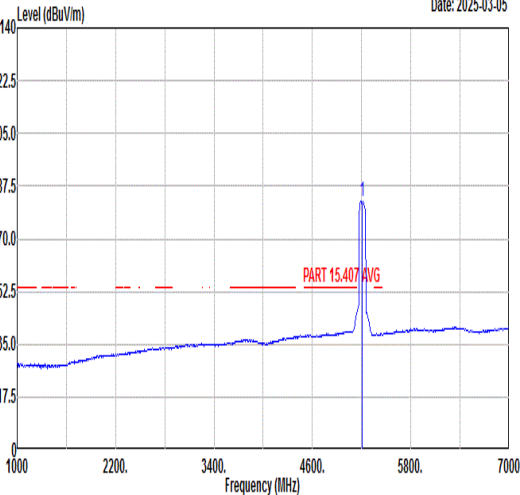

Mode	25																																																																																									
	Band Edge - L																																																																																									
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																																																																									
ANT	5																																																																																									
Pol.	Horizontal					Fundamental																																																																																				
Peak	 Level (dBuV/m) Date: 2025-03-05 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5147.00</td><td>55.51</td><td>74.00</td><td>-18.49</td><td>46.34</td><td>33.99</td><td>7.92</td><td>32.74</td><td>100</td><td>26</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.00	55.51	74.00	-18.49	46.34	33.99	7.92	32.74	100	26	PEAK	 Level (dBuV/m) Date: 2025-03-05 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>88.79</td><td>-----</td><td>-----</td><td>79.51</td><td>34.03</td><td>7.96</td><td>32.71</td><td>100</td><td>26</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	88.79	-----	-----	79.51	34.03	7.96	32.71	100	26	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5147.00	55.51	74.00	-18.49	46.34	33.99	7.92	32.74	100	26	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5210.00	88.79	-----	-----	79.51	34.03	7.96	32.71	100	26	PEAK																																																																															
Avg	 Level (dBuV/m) Date: 2025-03-05 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5149.73</td><td>46.38</td><td>54.00</td><td>-7.62</td><td>37.21</td><td>33.99</td><td>7.92</td><td>32.74</td><td>100</td><td>26</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.73	46.38	54.00	-7.62	37.21	33.99	7.92	32.74	100	26	AVERAGE	 Level (dBuV/m) Date: 2025-03-05 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5210.00</td><td>82.41</td><td>-----</td><td>-----</td><td>73.13</td><td>34.03</td><td>7.96</td><td>32.71</td><td>100</td><td>26</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	82.41	-----	-----	73.13	34.03	7.96	32.71	100	26	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5149.73	46.38	54.00	-7.62	37.21	33.99	7.92	32.74	100	26	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss Factor																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5210.00	82.41	-----	-----	73.13	34.03	7.96	32.71	100	26	AVERAGE																																																																															



Mode	25																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																									
ANT	5																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2025-03-05 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5443.50</td><td>48.75</td><td>74.00</td><td>-25.25</td><td>38.78</td><td>34.16</td><td>8.43</td><td>32.62</td><td>100</td><td>26</td><td>PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5443.50	48.75	74.00	-25.25	38.78	34.16	8.43	32.62	100	26	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5443.50	48.75	74.00	-25.25	38.78	34.16	8.43	32.62	100	26	PEAK																															
Avg	Date: 2025-03-05 <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5427.00</td><td>38.77</td><td>54.00</td><td>-15.23</td><td>28.80</td><td>34.15</td><td>8.45</td><td>32.63</td><td>100</td><td>26</td><td>AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5427.00	38.77	54.00	-15.23	28.80	34.15	8.45	32.63	100	26	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5427.00	38.77	54.00	-15.23	28.80	34.15	8.45	32.63	100	26	AVERAGE																															



Mode	25	
	Band Edge - L	
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz	
ANT	5	
Pol.	Vertical	Fundamental
Peak	Level (dBuV/m)	



Mode	25																																									
	Band Edge - R																																									
	U-NII-1_5.15-5.25_802.11ac VHT80_CH42_5210MHz																																									
ANT	5																																									
Pol.	Vertical	Fundamental																																								
Peak	Date: 2025-03-05 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5436.25</td><td>48.77</td><td>74.00</td><td>-25.23</td><td>38.79</td><td>34.16</td><td>8.44</td><td>32.62</td><td>300</td><td>81</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5436.25	48.77	74.00	-25.23	38.79	34.16	8.44	32.62	300	81	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5436.25	48.77	74.00	-25.23	38.79	34.16	8.44	32.62	300	81	PEAK																															
Avg	Date: 2025-03-05 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5210.00</td><td>78.74</td><td>-----</td><td>-----</td><td>69.46</td><td>34.03</td><td>7.96</td><td>32.71</td><td>300</td><td>81</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5210.00	78.74	-----	-----	69.46	34.03	7.96	32.71	300	81	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5210.00	78.74	-----	-----	69.46	34.03	7.96	32.71	300	81	AVERAGE																															



Mode	26																																																																																										
	Band Edge - L																																																																																										
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																																																																										
ANT	5																																																																																										
Pol.	Horizontal						Fundamental																																																																																				
Peak	Date: 2025-03-05						Date: 2025-03-05																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5099.76</td><td>49.87</td><td>74.00</td><td>-24.13</td><td>40.78</td><td>33.96</td><td>7.89</td><td>32.76</td><td>116</td><td>40</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5099.76	49.87	74.00	-24.13	40.78	33.96	7.89	32.76	116	40	PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>91.80</td><td>-----</td><td>-----</td><td>82.28</td><td>34.07</td><td>8.14</td><td>32.69</td><td>116</td><td>40</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	91.80	-----	-----	82.28	34.07	8.14	32.69	116	40
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5099.76	49.87	74.00	-24.13	40.78	33.96	7.89	32.76	116	40	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5290.00	91.80	-----	-----	82.28	34.07	8.14	32.69	116	40	PEAK																																																																																
Avg	Date: 2025-03-05						Date: 2025-03-05																																																																																				
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5091.35</td><td>39.59</td><td>54.00</td><td>-14.41</td><td>30.51</td><td>33.96</td><td>7.88</td><td>32.76</td><td>116</td><td>40</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5091.35	39.59	54.00	-14.41	30.51	33.96	7.88	32.76	116	40	AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th></th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5290.00</td><td>84.29</td><td>-----</td><td>-----</td><td>74.71</td><td>34.08</td><td>8.18</td><td>32.68</td><td>116</td><td>40</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5290.00	84.29	-----	-----	74.71	34.08	8.18	32.68	116	40
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5091.35	39.59	54.00	-14.41	30.51	33.96	7.88	32.76	116	40	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss Factor		Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	5290.00	84.29	-----	-----	74.71	34.08	8.18	32.68	116	40	AVERAGE																																																																																





Mode	26																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																									
ANT	5																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2025-03-05 Level (dBuV/m) Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5352.90</td><td>59.71</td><td>74.00</td><td>-14.29</td><td>49.92</td><td>34.11</td><td>8.34</td><td>32.66</td><td>116</td><td>40 PEAK</td></tr></table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5352.90	59.71	74.00	-14.29	49.92	34.11	8.34	32.66	116	40 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5352.90	59.71	74.00	-14.29	49.92	34.11	8.34	32.66	116	40 PEAK																																
Avg	Date: 2025-03-05 Level (dBuV/m) Frequency (MHz) <table><tr><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>cm</th><th>deg</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>5350.18</td><td>48.71</td><td>54.00</td><td>-5.29</td><td>38.93</td><td>34.11</td><td>8.33</td><td>32.66</td><td>116</td><td>40 AVERAGE</td></tr></table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	5350.18	48.71	54.00	-5.29	38.93	34.11	8.33	32.66	116	40 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5350.18	48.71	54.00	-5.29	38.93	34.11	8.33	32.66	116	40 AVERAGE																																







Mode	26																																																																									
	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																																																									
ANT	5																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	Level (dBuV/m) Date: 2025-03-05 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5000 5058. 5116. 5174. 5232. 5290 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5072.50</td><td>49.81</td><td>74.00</td><td>-24.19</td><td>40.76</td><td>33.95</td><td>7.87</td><td>32.77</td><td>400 281 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5072.50	49.81	74.00	-24.19	40.76	33.95	7.87	32.77	400 281 PEAK	Level (dBuV/m) Date: 2025-03-05 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200. 3400. 4600. 5800. 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5290.00</td><td>86.97</td><td>-----</td><td>-----</td><td>77.37</td><td>34.08</td><td>8.20</td><td>32.68</td><td>400 281 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5290.00	86.97	-----	-----	77.37	34.08	8.20	32.68	400 281 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																		
1 5072.50	49.81	74.00	-24.19	40.76	33.95	7.87	32.77	400 281 PEAK																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																		
1 5290.00	86.97	-----	-----	77.37	34.08	8.20	32.68	400 281 PEAK																																																																		
Avg	Level (dBuV/m) Date: 2025-03-05 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 5000 5058. 5116. 5174. 5232. 5290 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5056.26</td><td>39.30</td><td>54.00</td><td>-14.70</td><td>30.28</td><td>33.94</td><td>7.86</td><td>32.78</td><td>400 281 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5056.26	39.30	54.00	-14.70	30.28	33.94	7.86	32.78	400 281 AVERAGE	Level (dBuV/m) Date: 2025-03-05 140 122.5 105.0 87.5 70.0 52.5 35.0 17.5 0 1000 2200. 3400. 4600. 5800. 7000 Frequency (MHz) <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th></tr><tr><td>1 5290.00</td><td>80.48</td><td>-----</td><td>-----</td><td>70.90</td><td>34.08</td><td>8.18</td><td>32.68</td><td>400 281 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	1 5290.00	80.48	-----	-----	70.90	34.08	8.18	32.68	400 281 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																		
1 5056.26	39.30	54.00	-14.70	30.28	33.94	7.86	32.78	400 281 AVERAGE																																																																		
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm																																																																		
1 5290.00	80.48	-----	-----	70.90	34.08	8.18	32.68	400 281 AVERAGE																																																																		

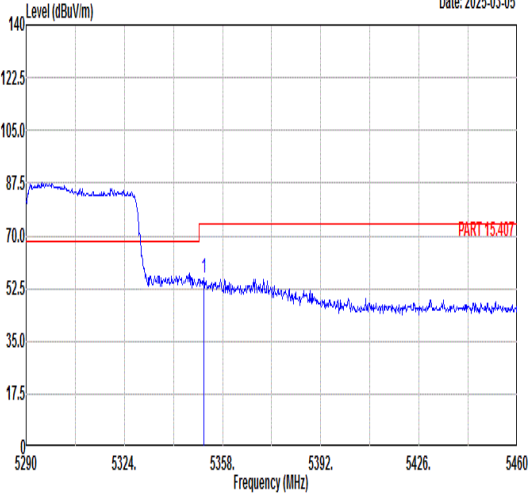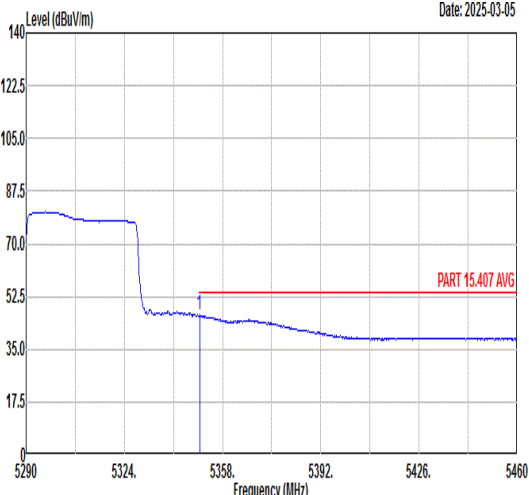

Mode	26																																									
	Band Edge - R																																									
	U-NII-2A_5.25-5.35_802.11ac VHT80_CH58_5290MHz																																									
ANT	5																																									
Pol.	Vertical	Fundamental																																								
Peak	Level (dBuV/m) Date: 2025-03-05 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5351.54</td><td>55.86</td><td>74.00</td><td>-18.14</td><td>46.08</td><td>34.11</td><td>8.33</td><td>32.66</td><td>400</td><td>281</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5351.54	55.86	74.00	-18.14	46.08	34.11	8.33	32.66	400	281	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5351.54	55.86	74.00	-18.14	46.08	34.11	8.33	32.66	400	281	PEAK																															
Avg	Level (dBuV/m) Date: 2025-03-05 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.01</td><td>46.26</td><td>54.00</td><td>-7.74</td><td>36.48</td><td>34.11</td><td>8.33</td><td>32.66</td><td>400</td><td>281</td><td>AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.01	46.26	54.00	-7.74	36.48	34.11	8.33	32.66	400	281	AVERAGE	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																	
1	5350.01	46.26	54.00	-7.74	36.48	34.11	8.33	32.66	400	281	AVERAGE																															

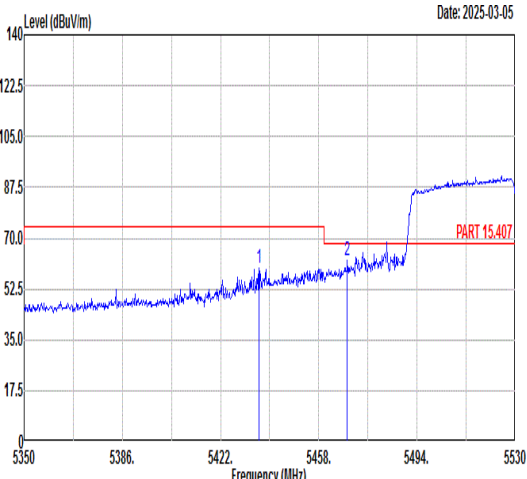
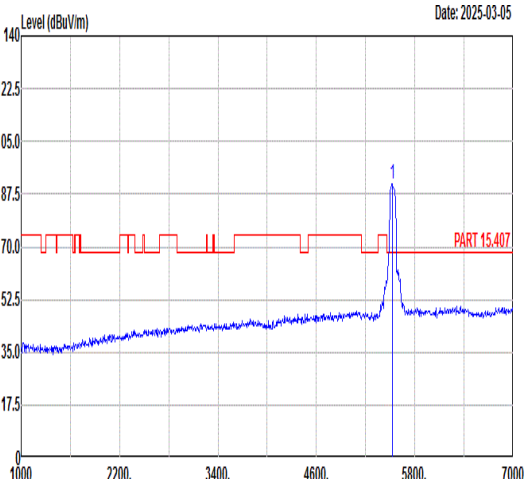
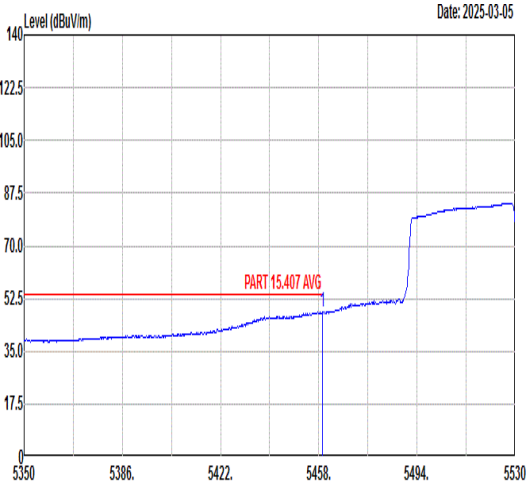
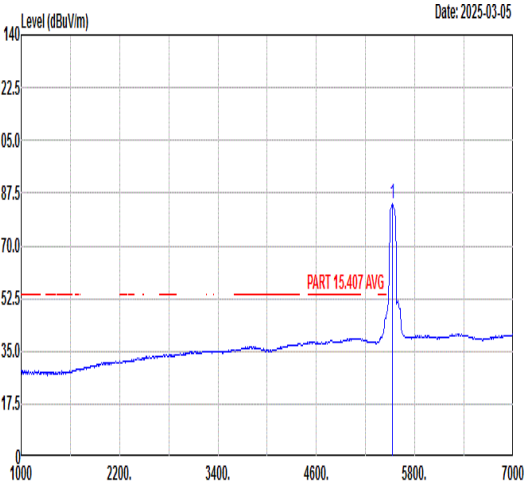


Mode	27																																																																																																						
	Band Edge - L																																																																																																						
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																																																						
ANT	5																																																																																																						
Pol.	Horizontal						Fundamental																																																																																																
Peak	 Level (dBuV/m) Date: 2025-03-05 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5436.04</td><td>59.53</td><td>74.00</td><td>-14.47</td><td>49.55</td><td>34.16</td><td>8.44</td><td>32.62</td><td>300</td><td>339</td><td>PEAK</td></tr><tr><td>2</td><td>5468.44</td><td>62.10</td><td>68.30</td><td>-6.20</td><td>52.13</td><td>34.18</td><td>8.40</td><td>32.61</td><td>300</td><td>339</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5436.04	59.53	74.00	-14.47	49.55	34.16	8.44	32.62	300	339	PEAK	2	5468.44	62.10	68.30	-6.20	52.13	34.18	8.40	32.61	300	339	PEAK	 Level (dBuV/m) Date: 2025-03-05 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>90.99</td><td>-----</td><td>-----</td><td>81.06</td><td>34.23</td><td>8.32</td><td>32.62</td><td>300</td><td>339</td><td>PEAK</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	90.99	-----	-----	81.06	34.23	8.32	32.62	300	339	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5436.04	59.53	74.00	-14.47	49.55	34.16	8.44	32.62	300	339	PEAK																																																																																												
2	5468.44	62.10	68.30	-6.20	52.13	34.18	8.40	32.61	300	339	PEAK																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5530.00	90.99	-----	-----	81.06	34.23	8.32	32.62	300	339	PEAK																																																																																												
Avg	 Level (dBuV/m) Date: 2025-03-05 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5459.44</td><td>47.99</td><td>54.00</td><td>-6.01</td><td>38.02</td><td>34.17</td><td>8.41</td><td>32.61</td><td>300</td><td>339</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.44	47.99	54.00	-6.01	38.02	34.17	8.41	32.61	300	339	AVERAGE	 Level (dBuV/m) Date: 2025-03-05 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>83.88</td><td>-----</td><td>-----</td><td>73.94</td><td>34.25</td><td>8.32</td><td>32.63</td><td>300</td><td>339</td><td>AVERAGE</td></tr></tbody></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5530.00	83.88	-----	-----	73.94	34.25	8.32	32.63	300	339	AVERAGE												
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5459.44	47.99	54.00	-6.01	38.02	34.17	8.41	32.61	300	339	AVERAGE																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																														
1	5530.00	83.88	-----	-----	73.94	34.25	8.32	32.63	300	339	AVERAGE																																																																																												



Mode	27																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																									
ANT	5																																									
Pol.	Horizontal	Fundamental																																								
Peak	Date: 2025-03-05 <table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5743.85</td><td>49.36</td><td>68.30</td><td>-18.94</td><td>38.77</td><td>34.64</td><td>8.74</td><td>32.79</td><td>300</td><td>339</td><td>PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5743.85	49.36	68.30	-18.94	38.77	34.64	8.74	32.79	300	339	PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1	5743.85	49.36	68.30	-18.94	38.77	34.64	8.74	32.79	300	339	PEAK																															

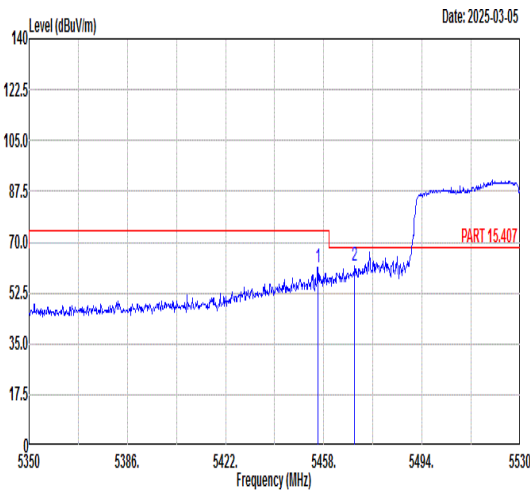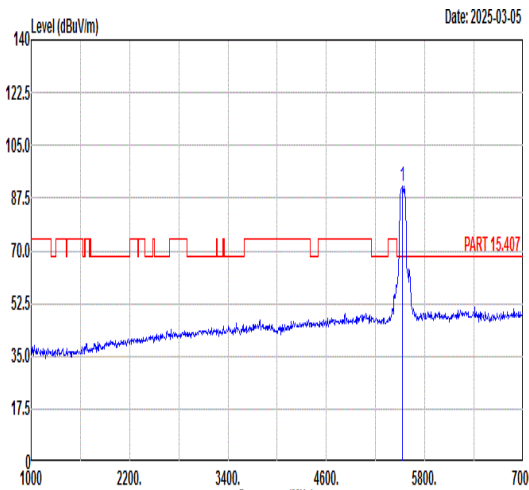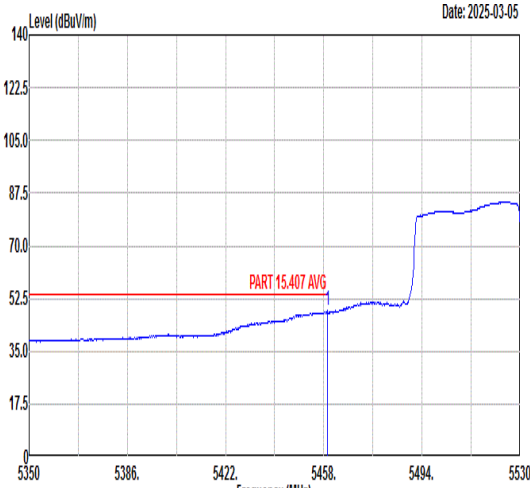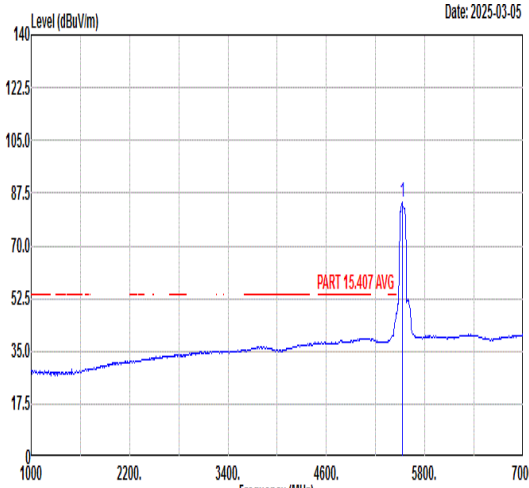

		27																																																																																																			
Mode	Band Edge - L																																																																																																				
	U-NII-2C_5.47-5.725_802.11ac VHT80_CH106_5530MHz																																																																																																				
ANT	5																																																																																																				
Pol.	Vertical					Fundamental																																																																																															
Peak																																																																																																					
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5455.84</td><td>61.12</td><td>74.00</td><td>-12.88</td><td></td><td>51.15</td><td>34.17</td><td>8.41</td><td>32.61</td><td>393</td><td>310</td><td>PEAK</td></tr><tr><td>2</td><td>5469.34</td><td>61.90</td><td>68.30</td><td>-6.40</td><td></td><td>51.93</td><td>34.18</td><td>8.40</td><td>32.61</td><td>393</td><td>310</td><td>PEAK</td></tr></tbody></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg		1	5455.84	61.12	74.00	-12.88		51.15	34.17	8.41	32.61	393	310	PEAK	2	5469.34	61.90	68.30	-6.40		51.93	34.18	8.40	32.61	393	310	PEAK	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>91.47</td><td>-----</td><td>-----</td><td></td><td>81.54</td><td>34.23</td><td>8.32</td><td>32.62</td><td>393</td><td>310</td><td>PEAK</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg		1	5530.00	91.47	-----	-----		81.54	34.23	8.32	32.62	393	310
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5455.84	61.12	74.00	-12.88		51.15	34.17	8.41	32.61	393	310	PEAK																																																																																									
2	5469.34	61.90	68.30	-6.40		51.93	34.18	8.40	32.61	393	310	PEAK																																																																																									
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5530.00	91.47	-----	-----		81.54	34.23	8.32	32.62	393	310	PEAK																																																																																									
Avg																																																																																																					
	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5459.26</td><td>48.35</td><td>54.00</td><td>-5.65</td><td></td><td>38.38</td><td>34.17</td><td>8.41</td><td>32.61</td><td>393</td><td>310</td><td>AVERAGE</td></tr></tbody></table>						Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg		1	5459.26	48.35	54.00	-5.65		38.38	34.17	8.41	32.61	393	310	AVERAGE	<table><thead><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th></th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr></thead><tbody><tr><td>1</td><td>5530.00</td><td>84.28</td><td>-----</td><td>-----</td><td></td><td>74.35</td><td>34.23</td><td>8.32</td><td>32.62</td><td>393</td><td>310</td><td>AVERAGE</td></tr></tbody></table>							Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg		1	5530.00	84.28	-----	-----		74.35	34.23	8.32	32.62	393	310	AVERAGE												
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5459.26	48.35	54.00	-5.65		38.38	34.17	8.41	32.61	393	310	AVERAGE																																																																																									
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																									
	MHz	dBuV/m	dBuV/m	dB		dBuV	dB/m	dB	dB	cm	deg																																																																																										
1	5530.00	84.28	-----	-----		74.35	34.23	8.32	32.62	393	310	AVERAGE																																																																																									

