




Test Engineer :	XuRuibin	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

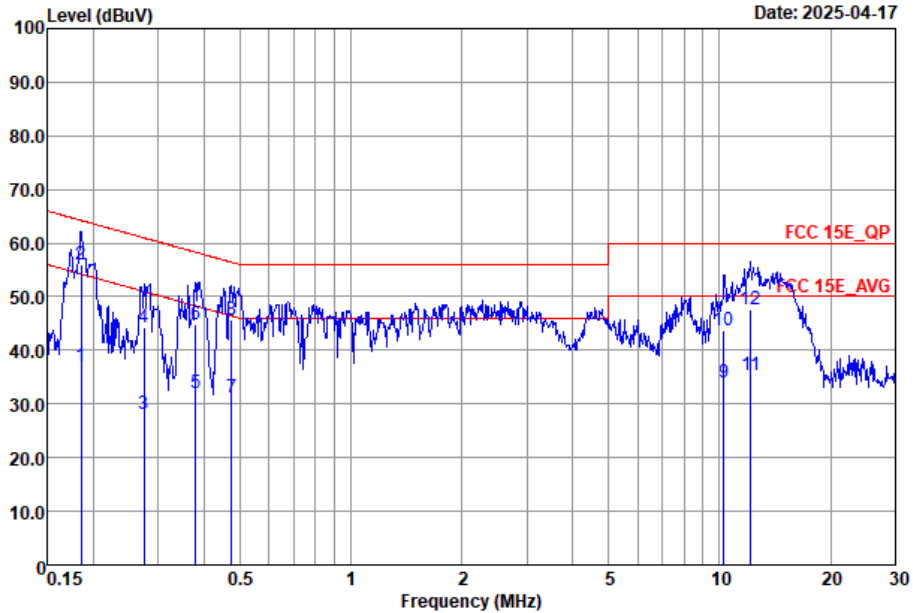

Site : CO02-SZ
 Condition : FCC 15E_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.19	37.09	-17.15	54.24	17.10	9.81	10.18	Average
2 *	0.19	55.99	-8.25	64.24	36.00	9.81	10.18	QP
3	0.27	28.21	-22.77	50.98	8.30	9.71	10.20	Average
4	0.27	44.31	-16.67	60.98	24.40	9.71	10.20	QP
5	0.38	32.15	-16.15	48.30	12.20	9.73	10.22	Average
6	0.38	44.85	-13.45	58.30	24.90	9.73	10.22	QP
7	0.47	31.16	-15.29	46.45	10.89	10.03	10.24	Average
8	0.47	45.76	-10.69	56.45	25.49	10.03	10.24	QP
9	10.29	33.91	-16.09	50.00	14.09	9.63	10.19	Average
10	10.29	43.71	-16.29	60.00	23.89	9.63	10.19	QP
11	12.12	35.28	-14.72	50.00	15.40	9.66	10.22	Average
12	12.12	47.68	-12.32	60.00	27.80	9.66	10.22	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Reid Huang	Relative Humidity :	50%
		Temperature :	20-24°C

Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	U-NII-1	5.15-5.25	5	802.11a	36	5180	6Mbps	-	-
Mode 2	U-NII-1	5.15-5.25	5	802.11a	44	5220	6Mbps	-	-
Mode 3	U-NII-1	5.15-5.25	5	802.11a	48	5240	6Mbps	-	-
Mode 4	U-NII-2A	5.25-5.35	5	802.11a	52	5260	6Mbps	-	-
Mode 5	U-NII-2A	5.25-5.35	5	802.11a	60	5300	6Mbps	-	-
Mode 6	U-NII-2A	5.25-5.35	5	802.11a	64	5320	6Mbps	-	-
Mode 7	U-NII-2C	5.47-5.725	5	802.11a	100	5500	6Mbps	-	-
Mode 8	U-NII-2C	5.47-5.725	5	802.11a	116	5580	6Mbps	-	-
Mode 9	U-NII-2C	5.47-5.725	5	802.11a	140	5700	6Mbps	-	-
Mode 10	U-NII-1	5.15-5.25	5	802.11ax HE20	36	5180	MCS0	Full	-
Mode 11	U-NII-1	5.15-5.25	5	802.11ax HE20	44	5220	MCS0	Full	-
Mode 12	U-NII-1	5.15-5.25	5	802.11ax HE20	48	5240	MCS0	Full	-
Mode 13	U-NII-2A	5.25-5.35	5	802.11ax HE20	52	5260	MCS0	Full	-
Mode 14	U-NII-2A	5.25-5.35	5	802.11ax HE20	60	5300	MCS0	Full	-
Mode 15	U-NII-2A	5.25-5.35	5	802.11ax HE20	64	5320	MCS0	Full	-
Mode 16	U-NII-2C	5.47-5.725	5	802.11ax HE20	100	5500	MCS0	Full	-
Mode 17	U-NII-2C	5.47-5.725	5	802.11ax HE20	116	5580	MCS0	Full	-
Mode 18	U-NII-2C	5.47-5.725	5	802.11ax HE20	140	5700	MCS0	Full	-
Mode 19	U-NII-1	5.15-5.25	5	802.11ax HE20	36	5180	MCS0	Partial RU26/0	-
Mode 20	U-NII-2A	5.15-5.25	5	802.11ax HE20	64	5320	MCS0	Partial RU26/8	-
Mode 21	U-NII-2C	5.15-5.25	5	802.11ax HE20	100	5500	MCS0	Partial RU26/0	-
Mode 22	U-NII-2C	5.25-5.35	5	802.11ax HE20	140	5700	MCS0	Partial RU26/8	-
Mode 23	U-NII-1	5.25-5.35	5	802.11ax HE20	36	5180	MCS0	Partial RU52/37	-
Mode 24	U-NII-2A	5.25-5.35	5	802.11ax HE20	64	5320	MCS0	Partial RU52/40	-
Mode 25	U-NII-2C	5.47-5.725	5	802.11ax HE20	100	5500	MCS0	Partial RU52/37	-
Mode 26	U-NII-2C	5.47-5.725	5	802.11ax HE20	140	5700	MCS0	Partial RU52/40	-
Mode 27	U-NII-1	5.47-5.725	5	802.11ax HE20	36	5180	MCS0	Partial RU106/53	-
Mode 28	U-NII-2A	5.47-5.725	5	802.11ax HE20	64	5320	MCS0	Partial RU106/54	-
Mode 29	U-NII-2C	5.47-5.725	5	802.11ax HE20	100	5500	MCS0	Partial RU106/53	-
Mode 30	U-NII-2C	5.47-5.725	5	802.11ax HE20	140	5700	MCS0	Partial RU106/54	-
Mode 31	U-NII-1	5.15-5.25	5	802.11ax HE40	38	5190	MCS0	Full	-
Mode 32	U-NII-1	5.15-5.25	5	802.11ax HE40	46	5230	MCS0	Full	-
Mode 33	U-NII-2A	5.25-5.35	5	802.11ax HE40	54	5270	MCS0	Full	-
Mode 34	U-NII-2A	5.25-5.35	5	802.11ax HE40	62	5310	MCS0	Full	-
Mode 35	U-NII-2C	5.47-5.725	5	802.11ax HE40	102	5510	MCS0	Full	-
Mode 36	U-NII-2C	5.47-5.725	5	802.11ax HE40	110	5550	MCS0	Full	-



Mode 37	U-NII-2C	5.47-5.725	5	802.11ax HE40	134	5670	MCS0	Full	-
Mode 38	U-NII-1	5.15-5.25	5	802.11ax HE80	42	5210	MCS0	Full	-
Mode 39	U-NII-2A	5.25-5.35	5	802.11ax HE80	58	5290	MCS0	Full	-
Mode 40	U-NII-2C	5.47-5.725	5	802.11ax HE80	106	5530	MCS0	Full	-
Mode 41	U-NII-2C	5.47-5.725	5	802.11ax HE80	122	5610	MCS0	Full	-
Mode 42	U-NII-3	5.725-5.85	5	802.11a	149	5745	6Mbps	-	-
Mode 43	U-NII-3	5.725-5.85	5	802.11a	157	5785	6Mbps	-	-
Mode 44	U-NII-3	5.725-5.85	5	802.11a	165	5825	6Mbps	-	-
Mode 45	U-NII-3	5.725-5.85	5	802.11ax HE20	149	5745	MCS0	Full	-
Mode 46	U-NII-3	5.725-5.85	5	802.11ax HE20	157	5785	MCS0	Full	-
Mode 47	U-NII-3	5.725-5.85	5	802.11ax HE20	165	5825	MCS0	Full	-
Mode 48	U-NII-3	5.725-5.85	5	802.11ax HE40	151	5755	MCS0	Full	-
Mode 49	U-NII-3	5.725-5.85	5	802.11ax HE40	159	5795	MCS0	Full	-
Mode 50	U-NII-3	5.725-5.85	5	802.11ax HE80	155	5775	MCS0	Full	-
Mode 51	U-NII-3	5.725-5.85	5	802.11ax HE20	149	5745	MCS0	Partial RU26/0	-
Mode 52	U-NII-3	5.725-5.85	5	802.11ax HE20	165	5825	MCS0	Partial RU26/8	-
Mode 53	U-NII-3	5.725-5.85	5	802.11ax HE20	149	5745	MCS0	Partial RU52/37	-
Mode 54	U-NII-3	5.725-5.85	5	802.11ax HE20	165	5825	MCS0	Partial RU52/40	-
Mode 55	U-NII-3	5.725-5.85	5	802.11ax HE20	149	5745	MCS0	Partial RU106/53	-
Mode 56	U-NII-3	5.725-5.85	5	802.11ax HE20	165	5825	MCS0	Partial RU106/54	-
Mode 57	U-NII-2C-3	5.47-5.725	5	802.11a	144	5720	6Mbps	-	-
Mode 58	U-NII-2C-3	5.47-5.725	5	802.11ax HE20	144	5720	MCS0	Full	-
Mode 59	U-NII-2C-3	5.47-5.725	5	802.11ax HE40	142	5710	MCS0	Full	-
Mode 60	U-NII-2C-3	5.47-5.725	5	802.11ax HE80	138	5690	MCS0	Full	-
Mode 61	U-NII-2A	5.25-5.35	5	802.11ax HE20_LF	64	5320	MCS0	Full	LF
Mode 62	U-NII-3	5.725-5.85	5	802.11ax HE80_LF	155	5775	MCS0	Full	LF



Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11a	36	5149.58	47.11	54.00	-6.89	H	AVERAGE	Pass	Band Edge
1	802.11a	36	10360.00	46.07	68.30	-22.23	H	Peak	Pass	Harmonic
2	802.11a	44	-	-	-	-	-	-	-	Band Edge
2	802.11a	44	10440.00	46.36	68.30	-21.94	V	Peak	Pass	Harmonic
3	802.11a	48	-	-	-	-	-	-	-	Band Edge
3	802.11a	48	10480.00	45.71	68.30	-22.59	V	Peak	Pass	Harmonic
4	802.11a	52	-	-	-	-	-	-	-	Band Edge
4	802.11a	52	10520.00	46.87	68.30	-21.43	V	Peak	Pass	Harmonic
5	802.11a	60	-	-	-	-	-	-	-	Band Edge
5	802.11a	60	15900.00	48.73	74.00	-25.27	H	Peak	Pass	Harmonic
6	802.11a	64	5350.10	50.15	54.00	-3.85	H	AVERAGE	Pass	Band Edge
6	802.11a	64	15960.00	47.92	74.00	-26.08	V	Peak	Pass	Harmonic
7	802.11a	100	5469.70	63.23	68.30	-5.07	H	PEAK	Pass	Band Edge
7	802.11a	100	16500.00	48.91	68.30	-19.39	V	Peak	Pass	Harmonic
8	802.11a	116	-	-	-	-	-	-	-	Band Edge
8	802.11a	116	16740.00	47.93	68.30	-20.37	V	Peak	Pass	Harmonic
9	802.11a	140	5725.35	64.71	68.30	-3.59	H	PEAK	Pass	Band Edge
9	802.11a	140	17100.00	48.33	68.30	-19.97	V	Peak	Pass	Harmonic
10	802.11ax HE20	36	5149.76	49.75	54.00	-4.25	H	AVERAGE	Pass	Band Edge
10	802.11ax HE20	36	10360.00	45.93	68.30	-22.37	H	Peak	Pass	Harmonic
11	802.11ax HE20	44	-	-	-	-	-	-	-	Band Edge
11	802.11ax HE20	44	10440.00	45.24	68.30	-23.06	H	Peak	Pass	Harmonic
12	802.11ax HE20	48	-	-	-	-	-	-	-	Band Edge
12	802.11ax HE20	48	10480.00	46.77	68.30	-21.53	H	Peak	Pass	Harmonic
13	802.11ax HE20	52	-	-	-	-	-	-	-	Band Edge
13	802.11ax HE20	52	10520.00	45.74	68.30	-22.56	V	Peak	Pass	Harmonic
14	802.11ax HE20	60	-	-	-	-	-	-	-	Band Edge
14	802.11ax HE20	60	15900.00	47.95	74.00	-26.05	V	Peak	Pass	Harmonic
15	802.11ax HE20	64	5350.24	50.77	54.00	-3.23	H	AVERAGE	Pass	Band Edge
15	802.11ax HE20	64	10640.00	48.38	74.00	-25.62	V	Peak	Pass	Harmonic
16	802.11ax HE20	100	5467.60	64.37	68.30	-3.93	H	PEAK	Pass	Band Edge
16	802.11ax HE20	100	16500.00	45.66	68.30	-22.64	H	Peak	Pass	Harmonic
17	802.11ax HE20	116	-	-	-	-	-	-	-	Band Edge
17	802.11ax HE20	116	16740.00	49.11	68.30	-19.19	V	Peak	Pass	Harmonic
18	802.11ax HE20	140	5727.89	64.59	68.30	-3.71	H	PEAK	Pass	Band Edge
18	802.11ax HE20	140	17100.00	47.99	68.30	-20.31	V	Peak	Pass	Harmonic
19	802.11ax HE20	36	5137.88	39.42	54.00	-14.58	H	AVERAGE	Pass	Band Edge
19	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
20	802.11ax HE20	64	5362.14	39.26	54.00	-14.74	H	AVERAGE	Pass	Band Edge
20	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
21	802.11ax HE20	100	5456.95	39.49	54.00	-14.51	H	AVERAGE	Pass	Band Edge
21	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic



22	802.11ax HE20	140	5754.08	50.86	68.30	-17.44	V	PEAK	Pass	Band Edge
22	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
23	802.11ax HE20	36	5141.12	39.73	54.00	-14.27	H	AVERAGE	Pass	Band Edge
23	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
24	802.11ax HE20	64	5356.40	40.24	54.00	-13.76	H	AVERAGE	Pass	Band Edge
24	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
25	802.11ax HE20	100	5459.65	39.86	54.00	-14.14	H	AVERAGE	Pass	Band Edge
25	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
26	802.11ax HE20	140	5739.91	50.38	68.30	-17.92	H	PEAK	Pass	Band Edge
26	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
27	802.11ax HE20	36	5149.22	42.91	54.00	-11.09	H	AVERAGE	Pass	Band Edge
27	802.11ax HE20	36	-	-	-	-	-	-	-	Harmonic
28	802.11ax HE20	64	5350.10	43.98	54.00	-10.02	H	AVERAGE	Pass	Band Edge
28	802.11ax HE20	64	-	-	-	-	-	-	-	Harmonic
29	802.11ax HE20	100	5456.95	40.69	54.00	-13.31	H	AVERAGE	Pass	Band Edge
29	802.11ax HE20	100	-	-	-	-	-	-	-	Harmonic
30	802.11ax HE20	140	5725.09	53.30	68.30	-15.00	V	PEAK	Pass	Band Edge
30	802.11ax HE20	140	-	-	-	-	-	-	-	Harmonic
31	802.11ax HE40	38	5149.53	50.47	54.00	-3.53	H	AVERAGE	Pass	Band Edge
31	802.11ax HE40	38	10380.00	47.35	68.30	-20.95	V	Peak	Pass	Harmonic
32	802.11ax HE40	46	5148.81	41.04	54.00	-12.96	H	AVERAGE	Pass	Band Edge
32	802.11ax HE40	46	10460.00	46.63	68.30	-21.67	H	Peak	Pass	Harmonic
33	802.11ax HE40	54	5350.94	43.75	54.00	-10.25	H	AVERAGE	Pass	Band Edge
33	802.11ax HE40	54	10540.00	46.26	68.30	-22.04	H	Peak	Pass	Harmonic
34	802.11ax HE40	62	5350.80	48.77	54.00	-5.23	H	AVERAGE	Pass	Band Edge
34	802.11ax HE40	62	15930.00	49.33	74.00	-24.67	H	Peak	Pass	Harmonic
35	802.11ax HE40	102	5469.04	63.05	68.30	-5.25	H	PEAK	Pass	Band Edge
35	802.11ax HE40	102	16530.00	49.40	68.30	-18.90	V	Peak	Pass	Harmonic
36	802.11ax HE40	110	5458.60	41.34	54.00	-12.66	H	AVERAGE	Pass	Band Edge
36	802.11ax HE40	110	16650.00	49.01	68.30	-19.29	V	Peak	Pass	Harmonic
37	802.11ax HE40	134	5728.81	61.80	68.30	-6.50	H	PEAK	Pass	Band Edge
37	802.11ax HE40	134	17010.00	47.86	68.30	-20.44	V	Peak	Pass	Harmonic
38	802.11ax HE80	42	5137.55	50.75	54.00	-3.25	H	AVERAGE	Pass	Band Edge
38	802.11ax HE80	42	10420.00	46.57	68.30	-21.73	H	Peak	Pass	Harmonic
39	802.11ax HE80	58	5350.86	49.72	54.00	-4.28	H	AVERAGE	Pass	Band Edge
39	802.11ax HE80	58	10580.00	46.28	68.30	-22.02	H	Peak	Pass	Harmonic
40	802.11ax HE80	106	5459.44	50.05	54.00	-3.95	H	AVERAGE	Pass	Band Edge
40	802.11ax HE80	106	16590.00	49.99	68.30	-18.31	H	Peak	Pass	Harmonic
41	802.11ax HE80	122	5459.72	42.26	54.00	-11.74	H	AVERAGE	Pass	Band Edge
41	802.11ax HE80	122	16830.00	48.49	68.30	-19.81	H	Peak	Pass	Harmonic
42	802.11a	149	5630.02	50.49	68.30	-17.81	H	PEAK	Pass	Band Edge
42	802.11a	149	17235.00	48.97	68.30	-19.33	V	Peak	Pass	Harmonic
43	802.11a	157	-	-	-	-	-	-	-	Band Edge
43	802.11a	157	17355.00	48.79	68.30	-19.51	V	Peak	Pass	Harmonic
44	802.11a	165	5941.13	50.63	68.30	-17.67	H	PEAK	Pass	Band Edge
44	802.11a	165	17475.00	48.99	68.30	-19.31	V	Peak	Pass	Harmonic
45	802.11ax HE20	149	5622.48	50.99	68.30	-17.31	H	PEAK	Pass	Band Edge



45	802.11ax HE20	149	17235.00	48.74	68.30	-19.56	H	Peak	Pass	Harmonic
46	802.11ax HE20	157	-	-	-	-	-	-	-	Band Edge
46	802.11ax HE20	157	17355.00	49.31	68.30	-18.99	H	Peak	Pass	Harmonic
47	802.11ax HE20	165	5927.25	49.61	68.30	-18.69	H	PEAK	Pass	Band Edge
47	802.11ax HE20	165	17475.00	49.04	68.30	-19.26	V	Peak	Pass	Harmonic
48	802.11ax HE40	151	5606.05	50.26	68.30	-18.04	H	PEAK	Pass	Band Edge
48	802.11ax HE40	151	17265.00	49.63	68.30	-18.67	H	Peak	Pass	Harmonic
49	802.11ax HE40	159	5946.90	50.31	68.30	-17.99	V	PEAK	Pass	Band Edge
49	802.11ax HE40	159	17385.00	48.71	68.30	-19.59	V	Peak	Pass	Harmonic
50	802.11ax HE80	155	5640.95	55.48	68.30	-12.82	H	PEAK	Pass	Band Edge
50	802.11ax HE80	155	17325.00	49.64	68.30	-18.66	H	Peak	Pass	Harmonic
51	802.11ax HE20	149	5615.08	49.57	68.30	-18.73	H	PEAK	Pass	Band Edge
51	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
52	802.11ax HE20	165	5935.00	49.48	68.30	-18.82	V	PEAK	Pass	Band Edge
52	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
53	802.11ax HE20	149	5619.72	49.46	68.30	-18.84	H	PEAK	Pass	Band Edge
53	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
54	802.11ax HE20	165	5937.88	49.93	68.30	-18.37	H	PEAK	Pass	Band Edge
54	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
55	802.11ax HE20	149	5629.58	50.05	68.30	-18.25	H	PEAK	Pass	Band Edge
55	802.11ax HE20	149	-	-	-	-	-	-	-	Harmonic
56	802.11ax HE20	165	5938.88	50.44	68.30	-17.86	H	PEAK	Pass	Band Edge
56	802.11ax HE20	165	-	-	-	-	-	-	-	Harmonic
57	802.11a	144	-	-	-	-	-	-	-	Band Edge
57	802.11a	144	17160.00	49.47	68.30	-18.83	V	Peak	Pass	Harmonic
58	802.11ax HE20	144	-	-	-	-	-	-	-	Band Edge
58	802.11ax HE20	144	17160.00	49.03	68.30	-19.27	H	Peak	Pass	Harmonic
59	802.11ax HE40	142	-	-	-	-	-	-	-	Band Edge
59	802.11ax HE40	142	17130.00	49.30	68.30	-19.00	H	Peak	Pass	Harmonic
60	802.11ax HE80	138	-	-	-	-	-	-	-	Band Edge
60	802.11ax HE80	138	17070.00	49.50	68.30	-18.80	V	Peak	Pass	Harmonic
61	802.11ax HE20_LF	64	34.85	25.73	40.00	-14.27	V	Peak	Pass	LF
62	802.11ax HE80_LF	155	49.40	26.18	40.00	-13.82	V	Peak	Pass	LF



Mode	1																																																																									
	Band Edge																																																																									
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>60.38</td> <td>74.00</td> <td>-13.62</td> <td>51.21</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>100</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.76	60.38	74.00	-13.62	51.21	33.99	7.92	32.74	100	66	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>100.48</td> <td>-----</td> <td>-----</td> <td>91.26</td> <td>34.01</td> <td>7.94</td> <td>32.73</td> <td>100</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	100.48	-----	-----	91.26	34.01	7.94	32.73	100	66	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5149.76	60.38	74.00	-13.62	51.21	33.99	7.92	32.74	100	66	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5180.00	100.48	-----	-----	91.26	34.01	7.94	32.73	100	66	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.58</td> <td>47.11</td> <td>54.00</td> <td>-6.89</td> <td>37.94</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>100</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.58	47.11	54.00	-6.89	37.94	33.99	7.92	32.74	100	66	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>93.01</td> <td>-----</td> <td>-----</td> <td>83.79</td> <td>34.01</td> <td>7.94</td> <td>32.73</td> <td>100</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	93.01	-----	-----	83.79	34.01	7.94	32.73	100	66	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5149.58	47.11	54.00	-6.89	37.94	33.99	7.92	32.74	100	66	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5180.00	93.01	-----	-----	83.79	34.01	7.94	32.73	100	66	AVERAGE																																																															



Mode	1																																																																							
	Band Edge																																																																							
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																							
ANT	5																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5149.40</td> <td>52.99</td> <td>74.00</td> <td>-21.01</td> <td>43.82</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>100</td> <td>268 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5149.40	52.99	74.00	-21.01	43.82	33.99	7.92	32.74	100	268 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>93.16</td> <td>-----</td> <td>-----</td> <td>83.94</td> <td>34.01</td> <td>7.94</td> <td>32.73</td> <td>100</td> <td>268 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5180.00	93.16	-----	-----	83.94	34.01	7.94	32.73	100	268 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5149.40	52.99	74.00	-21.01	43.82	33.99	7.92	32.74	100	268 PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5180.00	93.16	-----	-----	83.94	34.01	7.94	32.73	100	268 PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5149.40</td> <td>42.35</td> <td>54.00</td> <td>-11.65</td> <td>33.18</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>100</td> <td>268 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5149.40	42.35	54.00	-11.65	33.18	33.99	7.92	32.74	100	268 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>86.30</td> <td>-----</td> <td>-----</td> <td>77.08</td> <td>34.01</td> <td>7.94</td> <td>32.73</td> <td>100</td> <td>268 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5180.00	86.30	-----	-----	77.08	34.01	7.94	32.73	100	268 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5149.40	42.35	54.00	-11.65	33.18	33.99	7.92	32.74	100	268 AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5180.00	86.30	-----	-----	77.08	34.01	7.94	32.73	100	268 AVERAGE																																																															



Mode	1																																																																																															
	Harmonic																																																																																															
	U-NII-1_5.15-5.25_802.11a_CH36_5180MHz																																																																																															
ANT	5																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>46.07</td> <td>68.30</td> <td>-22.23</td> <td>57.18</td> <td>37.16</td> <td>10.73</td> <td>59.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>49.20</td> <td>74.00</td> <td>-24.80</td> <td>56.00</td> <td>39.42</td> <td>12.72</td> <td>58.94</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	46.07	68.30	-22.23	57.18	37.16	10.73	59.00	--	--	Peak	2	15540.00	49.20	74.00	-24.80	56.00	39.42	12.72	58.94	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.12</td> <td>68.30</td> <td>-23.18</td> <td>56.23</td> <td>37.16</td> <td>10.73</td> <td>59.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>47.78</td> <td>74.00</td> <td>-26.22</td> <td>54.58</td> <td>39.42</td> <td>12.72</td> <td>58.94</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	45.12	68.30	-23.18	56.23	37.16	10.73	59.00	--	--	Peak	2	15540.00	47.78	74.00	-26.22	54.58	39.42	12.72	58.94	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10360.00	46.07	68.30	-22.23	57.18	37.16	10.73	59.00	--	--	Peak																																																																																					
2	15540.00	49.20	74.00	-24.80	56.00	39.42	12.72	58.94	--	--	Peak																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10360.00	45.12	68.30	-23.18	56.23	37.16	10.73	59.00	--	--	Peak																																																																																					
2	15540.00	47.78	74.00	-26.22	54.58	39.42	12.72	58.94	--	--	Peak																																																																																					



Mode	2																																																																																															
	Harmonic																																																																																															
	U-NII-1_5.15-5.25_802.11a_CH44_5220MHz																																																																																															
ANT	5																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>45.18</td> <td>68.30</td> <td>-23.12</td> <td>55.95</td> <td>37.35</td> <td>10.79</td> <td>58.91</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>48.53</td> <td>74.00</td> <td>-25.47</td> <td>55.41</td> <td>39.46</td> <td>12.72</td> <td>59.06</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10440.00	45.18	68.30	-23.12	55.95	37.35	10.79	58.91	--	--	Peak	2	15660.00	48.53	74.00	-25.47	55.41	39.46	12.72	59.06	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>46.36</td> <td>68.30</td> <td>-21.94</td> <td>57.13</td> <td>37.35</td> <td>10.79</td> <td>58.91</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>49.06</td> <td>74.00</td> <td>-24.94</td> <td>55.94</td> <td>39.46</td> <td>12.72</td> <td>59.06</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10440.00	46.36	68.30	-21.94	57.13	37.35	10.79	58.91	--	--	Peak	2	15660.00	49.06	74.00	-24.94	55.94	39.46	12.72	59.06	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10440.00	45.18	68.30	-23.12	55.95	37.35	10.79	58.91	--	--	Peak																																																																																					
2	15660.00	48.53	74.00	-25.47	55.41	39.46	12.72	59.06	--	--	Peak																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10440.00	46.36	68.30	-21.94	57.13	37.35	10.79	58.91	--	--	Peak																																																																																					
2	15660.00	49.06	74.00	-24.94	55.94	39.46	12.72	59.06	--	--	Peak																																																																																					



Mode	3																																																																																																					
	Harmonic																																																																																																					
	U-NII-1_5.15-5.25_802.11a_CH48_5240MHz																																																																																																					
ANT	5																																																																																																					
Pol.	Horizontal	Vertical																																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>45.10</td> <td>68.30</td> <td>-23.20</td> <td>55.70</td> <td>37.45</td> <td>10.82</td> <td>58.87</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>49.67</td> <td>74.00</td> <td>-24.33</td> <td>56.59</td> <td>39.49</td> <td>12.71</td> <td>59.12</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	45.10	68.30	-23.20	55.70	37.45	10.82	58.87	--	Peak	2	15720.00	49.67	74.00	-24.33	56.59	39.49	12.71	59.12	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>45.71</td> <td>68.30</td> <td>-22.59</td> <td>56.31</td> <td>37.45</td> <td>10.82</td> <td>58.87</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>49.42</td> <td>74.00</td> <td>-24.58</td> <td>56.34</td> <td>39.49</td> <td>12.71</td> <td>59.12</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10480.00	45.71	68.30	-22.59	56.31	37.45	10.82	58.87	--	Peak	2	15720.00	49.42	74.00	-24.58	56.34	39.49	12.71	59.12	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																													
1	10480.00	45.10	68.30	-23.20	55.70	37.45	10.82	58.87	--	Peak																																																																																												
2	15720.00	49.67	74.00	-24.33	56.59	39.49	12.71	59.12	--	Peak																																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																													
1	10480.00	45.71	68.30	-22.59	56.31	37.45	10.82	58.87	--	Peak																																																																																												
2	15720.00	49.42	74.00	-24.58	56.34	39.49	12.71	59.12	--	Peak																																																																																												







Mode	4																																																																																																							
	Harmonic																																																																																																							
	U-NII-2A_5.25-5.35_802.11a_CH52_5260MHz																																																																																																							
ANT	5																																																																																																							
Pol.	Horizontal	Vertical																																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>46.08</td> <td>68.30</td> <td>-22.22</td> <td>56.52</td> <td>37.53</td> <td>10.85</td> <td>58.82</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>49.41</td> <td>74.00</td> <td>-24.59</td> <td>56.37</td> <td>39.51</td> <td>12.71</td> <td>59.18</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB			1	10520.00	46.08	68.30	-22.22	56.52	37.53	10.85	58.82	--	--	Peak	2	15780.00	49.41	74.00	-24.59	56.37	39.51	12.71	59.18	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10520.00</td> <td>46.87</td> <td>68.30</td> <td>-21.43</td> <td>57.31</td> <td>37.53</td> <td>10.85</td> <td>58.82</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15780.00</td> <td>48.54</td> <td>74.00</td> <td>-25.46</td> <td>55.50</td> <td>39.51</td> <td>12.71</td> <td>59.18</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB			1	10520.00	46.87	68.30	-21.43	57.31	37.53	10.85	58.82	--	--	Peak	2	15780.00	48.54	74.00	-25.46	55.50	39.51	12.71	59.18	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																		
1	10520.00	46.08	68.30	-22.22	56.52	37.53	10.85	58.82	--	--	Peak																																																																																													
2	15780.00	49.41	74.00	-24.59	56.37	39.51	12.71	59.18	--	--	Peak																																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																		
1	10520.00	46.87	68.30	-21.43	57.31	37.53	10.85	58.82	--	--	Peak																																																																																													
2	15780.00	48.54	74.00	-25.46	55.50	39.51	12.71	59.18	--	--	Peak																																																																																													



Mode	5																																																																																																							
	Harmonic																																																																																																							
	U-NII-2A_5.25-5.35_802.11a_CH60_5300MHz																																																																																																							
ANT	5																																																																																																							
Pol.	Horizontal	Vertical																																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>46.33</td> <td>74.00</td> <td>-27.67</td> <td>56.45</td> <td>37.70</td> <td>10.91</td> <td>58.73</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>48.73</td> <td>74.00</td> <td>-25.27</td> <td>55.76</td> <td>39.56</td> <td>12.71</td> <td>59.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB			1	10600.00	46.33	74.00	-27.67	56.45	37.70	10.91	58.73	--	--	Peak	2	15900.00	48.73	74.00	-25.27	55.76	39.56	12.71	59.30	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10600.00</td> <td>45.51</td> <td>74.00</td> <td>-28.49</td> <td>55.63</td> <td>37.70</td> <td>10.91</td> <td>58.73</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15900.00</td> <td>48.69</td> <td>74.00</td> <td>-25.31</td> <td>55.72</td> <td>39.56</td> <td>12.71</td> <td>59.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB			1	10600.00	45.51	74.00	-28.49	55.63	37.70	10.91	58.73	--	--	Peak	2	15900.00	48.69	74.00	-25.31	55.72	39.56	12.71	59.30	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																		
1	10600.00	46.33	74.00	-27.67	56.45	37.70	10.91	58.73	--	--	Peak																																																																																													
2	15900.00	48.73	74.00	-25.27	55.76	39.56	12.71	59.30	--	--	Peak																																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																		
1	10600.00	45.51	74.00	-28.49	55.63	37.70	10.91	58.73	--	--	Peak																																																																																													
2	15900.00	48.69	74.00	-25.31	55.72	39.56	12.71	59.30	--	--	Peak																																																																																													

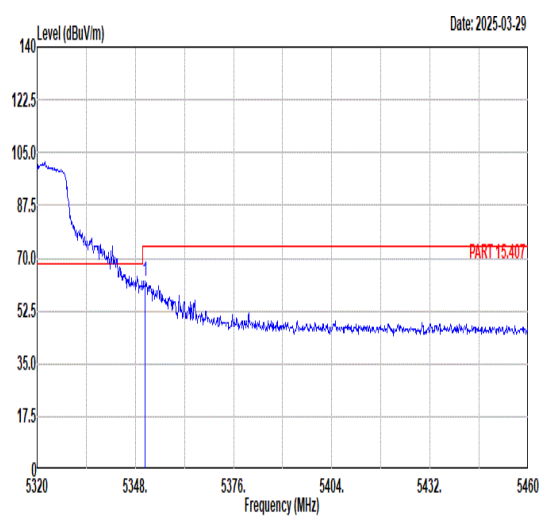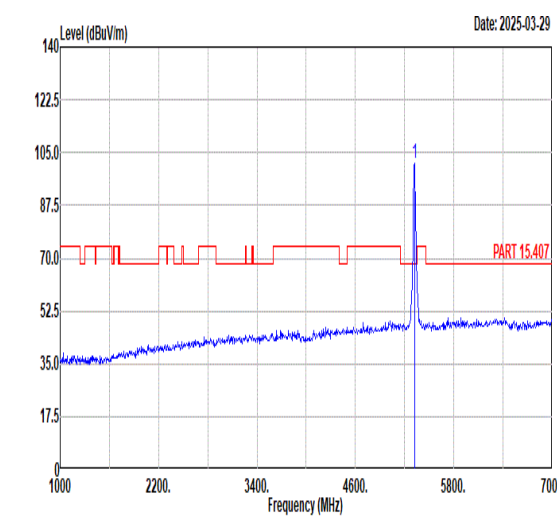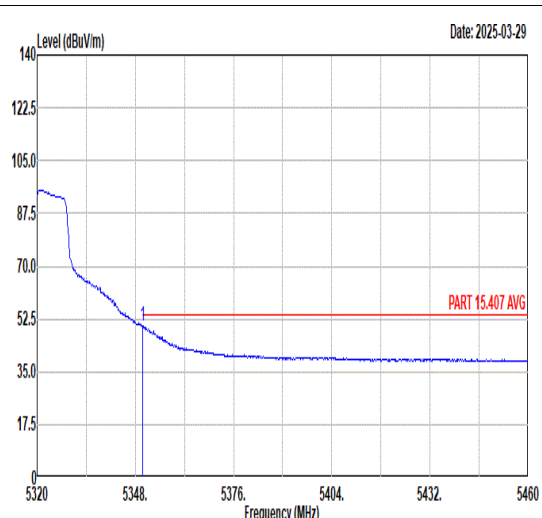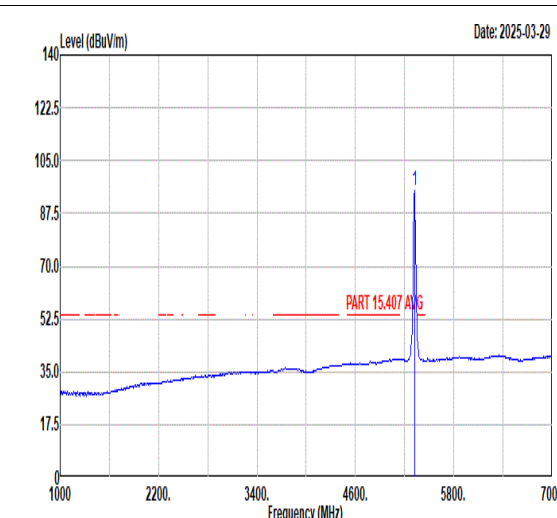

		6																																																												
Mode	Band Edge																																																													
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																													
ANT	5																																																													
Pol.	Horizontal	Fundamental																																																												
Peak	 <p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5350.80</td> <td>62.40</td> <td>74.00</td> <td>-11.60</td> <td>52.62</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>102</td> <td>65 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 5350.80	62.40	74.00	-11.60	52.62	34.11	8.33	32.66	102	65 PEAK	 <p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>101.53</td> <td>91.86</td> <td>-----</td> <td>34.09</td> <td>8.25</td> <td>32.67</td> <td>102</td> <td>65</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 5320.00	101.53	91.86	-----	34.09	8.25	32.67	102	65	PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																						
1 5350.80	62.40	74.00	-11.60	52.62	34.11	8.33	32.66	102	65 PEAK																																																					
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																						
1 5320.00	101.53	91.86	-----	34.09	8.25	32.67	102	65	PEAK																																																					
Avg	 <p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5350.10</td> <td>50.15</td> <td>54.00</td> <td>-3.85</td> <td>40.37</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>102</td> <td>65 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 5350.10	50.15	54.00	-3.85	40.37	34.11	8.33	32.66	102	65 AVERAGE	 <p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>95.02</td> <td>85.35</td> <td>-----</td> <td>34.09</td> <td>8.25</td> <td>32.67</td> <td>102</td> <td>65</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg		1 5320.00	95.02	85.35	-----	34.09	8.25	32.67	102	65	AVERAGE
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																						
1 5350.10	50.15	54.00	-3.85	40.37	34.11	8.33	32.66	102	65 AVERAGE																																																					
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																						
1 5320.00	95.02	85.35	-----	34.09	8.25	32.67	102	65	AVERAGE																																																					







		6																																																																														
Mode	Band Edge																																																																															
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																															
ANT	5																																																																															
Pol.	Vertical	Fundamental																																																																														
Peak	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.94</td> <td>53.20</td> <td>74.00</td> <td>-20.80</td> <td>43.42</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>111</td> <td>280</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.94	53.20	74.00	-20.80	43.42	34.11	8.33	32.66	111	280	PEAK	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>91.68</td> <td>-----</td> <td>-----</td> <td>82.01</td> <td>34.09</td> <td>8.25</td> <td>32.67</td> <td>111</td> <td>280</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	91.68	-----	-----	82.01	34.09	8.25	32.67	111	280	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																								
Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5350.94	53.20	74.00	-20.80	43.42	34.11	8.33	32.66	111	280	PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5320.00	91.68	-----	-----	82.01	34.09	8.25	32.67	111	280	PEAK																																																																					
Avg	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.38</td> <td>41.78</td> <td>54.00</td> <td>-12.22</td> <td>32.00</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>111</td> <td>280</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.38	41.78	54.00	-12.22	32.00	34.11	8.33	32.66	111	280	AVERAGE	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>84.79</td> <td>-----</td> <td>-----</td> <td>75.12</td> <td>34.09</td> <td>8.25</td> <td>32.67</td> <td>111</td> <td>280</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark		Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	84.79	-----	-----	75.12	34.09	8.25	32.67	111	280	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5350.38	41.78	54.00	-12.22	32.00	34.11	8.33	32.66	111	280	AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor			cm	deg																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																								
1	5320.00	84.79	-----	-----	75.12	34.09	8.25	32.67	111	280	AVERAGE																																																																					



Mode	6																																																																																															
	Harmonic																																																																																															
	U-NII-2A_5.25-5.35_802.11a_CH64_5320MHz																																																																																															
ANT	5																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>46.25</td> <td>74.00</td> <td>-27.75</td> <td>56.22</td> <td>37.78</td> <td>10.94</td> <td>58.69</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>46.66</td> <td>74.00</td> <td>-27.34</td> <td>53.74</td> <td>39.59</td> <td>12.70</td> <td>59.37</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	46.25	74.00	-27.75	56.22	37.78	10.94	58.69	--	--	Peak	2	15960.00	46.66	74.00	-27.34	53.74	39.59	12.70	59.37	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>46.44</td> <td>74.00</td> <td>-27.56</td> <td>56.41</td> <td>37.78</td> <td>10.94</td> <td>58.69</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>47.92</td> <td>74.00</td> <td>-26.08</td> <td>55.00</td> <td>39.59</td> <td>12.70</td> <td>59.37</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level Factor	Loss Factor		Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	46.44	74.00	-27.56	56.41	37.78	10.94	58.69	--	--	Peak	2	15960.00	47.92	74.00	-26.08	55.00	39.59	12.70	59.37	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line Margin	Level Factor	Loss Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10640.00	46.25	74.00	-27.75	56.22	37.78	10.94	58.69	--	--	Peak																																																																																					
2	15960.00	46.66	74.00	-27.34	53.74	39.59	12.70	59.37	--	--	Peak																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level Factor	Loss Factor		Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10640.00	46.44	74.00	-27.56	56.41	37.78	10.94	58.69	--	--	Peak																																																																																					
2	15960.00	47.92	74.00	-26.08	55.00	39.59	12.70	59.37	--	--	Peak																																																																																					

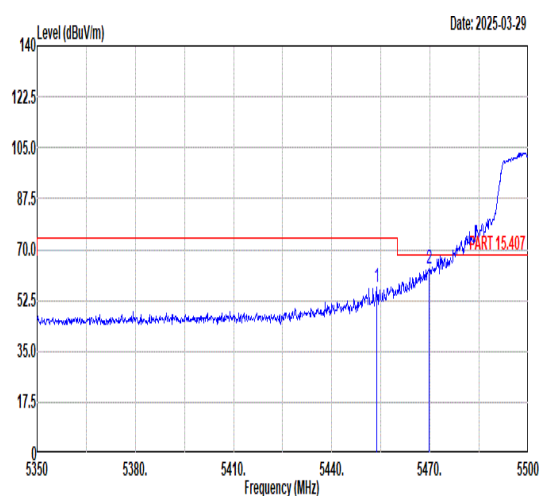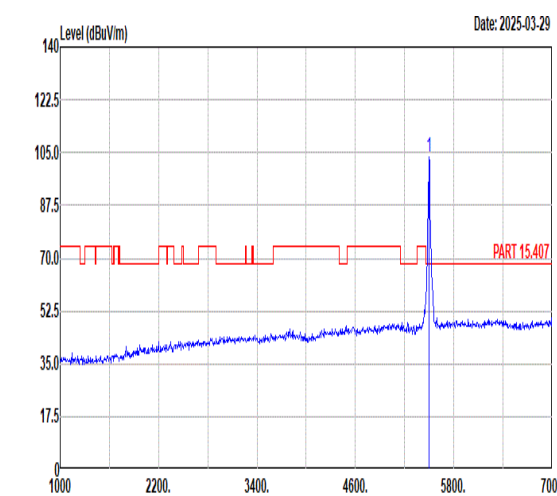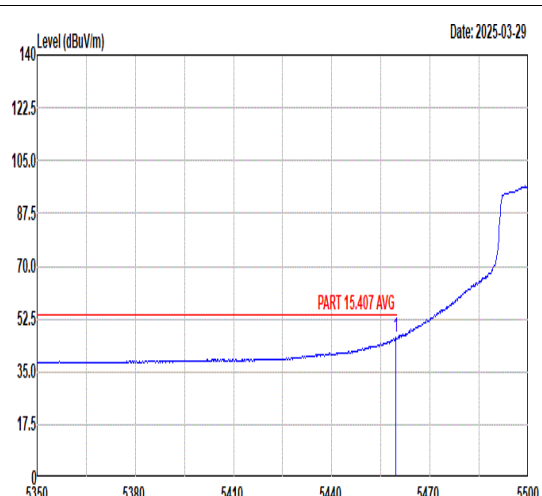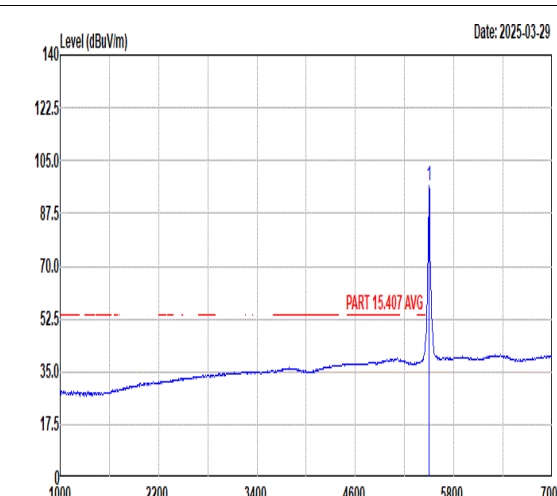

	7																																																																							
Mode	Band Edge																																																																							
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																							
ANT	5																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5453.65</td> <td>57.02</td> <td>74.00</td> <td>-16.98</td> <td>47.05</td> <td>34.17</td> <td>8.42</td> <td>32.62</td> <td>100</td> <td>35 PEAK</td> </tr> <tr> <td>2 5469.70</td> <td>63.23</td> <td>68.30</td> <td>-5.07</td> <td>53.26</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>100</td> <td>35 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5453.65	57.02	74.00	-16.98	47.05	34.17	8.42	32.62	100	35 PEAK	2 5469.70	63.23	68.30	-5.07	53.26	34.18	8.40	32.61	100	35 PEAK	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>103.72</td> <td>93.77</td> <td>9.95</td> <td>34.20</td> <td>8.36</td> <td>32.61</td> <td>100</td> <td>35</td> <td>PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5500.00	103.72	93.77	9.95	34.20	8.36	32.61	100	35	PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1 5453.65	57.02	74.00	-16.98	47.05	34.17	8.42	32.62	100	35 PEAK																																																															
2 5469.70	63.23	68.30	-5.07	53.26	34.18	8.40	32.61	100	35 PEAK																																																															
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1 5500.00	103.72	93.77	9.95	34.20	8.36	32.61	100	35	PEAK																																																															
Avg	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5459.65</td> <td>46.31</td> <td>54.00</td> <td>-7.69</td> <td>36.34</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>100</td> <td>35 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5459.65	46.31	54.00	-7.69	36.34	34.17	8.41	32.61	100	35 AVERAGE	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>96.42</td> <td>86.47</td> <td>9.95</td> <td>34.20</td> <td>8.36</td> <td>32.61</td> <td>100</td> <td>35</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5500.00	96.42	86.47	9.95	34.20	8.36	32.61	100	35	AVERAGE										
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1 5459.65	46.31	54.00	-7.69	36.34	34.17	8.41	32.61	100	35 AVERAGE																																																															
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1 5500.00	96.42	86.47	9.95	34.20	8.36	32.61	100	35	AVERAGE																																																															



		7																																																																																										
Mode	Band Edge																																																																																											
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																											
ANT	5																																																																																											
Pol.	Vertical	Fundamental																																																																																										
Peak	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5457.25</td> <td>49.96</td> <td>74.00</td> <td>-24.04</td> <td>39.99</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>103</td> <td>108</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5470.00</td> <td>56.85</td> <td>68.30</td> <td>-11.45</td> <td>46.88</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>103</td> <td>108</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5457.25	49.96	74.00	-24.04	39.99	34.17	8.41	32.61	103	108	PEAK	2	5470.00	56.85	68.30	-11.45	46.88	34.18	8.40	32.61	103	108	PEAK	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>96.25</td> <td>-----</td> <td>-----</td> <td>86.31</td> <td>34.20</td> <td>8.35</td> <td>32.61</td> <td>103</td> <td>108</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	96.25	-----	-----	86.31	34.20	8.35	32.61	103	108	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1	5457.25	49.96	74.00	-24.04	39.99	34.17	8.41	32.61	103	108	PEAK																																																																																	
2	5470.00	56.85	68.30	-11.45	46.88	34.18	8.40	32.61	103	108	PEAK																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1	5500.00	96.25	-----	-----	86.31	34.20	8.35	32.61	103	108	PEAK																																																																																	
Avg	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.95</td> <td>40.60</td> <td>54.00</td> <td>-13.40</td> <td>30.63</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>103</td> <td>108</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.95	40.60	54.00	-13.40	30.63	34.17	8.41	32.61	103	108	AVERAGE	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>88.94</td> <td>-----</td> <td>-----</td> <td>78.99</td> <td>34.20</td> <td>8.36</td> <td>32.61</td> <td>103</td> <td>108</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	88.94	-----	-----	78.99	34.20	8.36	32.61	103	108	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1	5459.95	40.60	54.00	-13.40	30.63	34.17	8.41	32.61	103	108	AVERAGE																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1	5500.00	88.94	-----	-----	78.99	34.20	8.36	32.61	103	108	AVERAGE																																																																																	



Mode	7																																																																																																
	Harmonic																																																																																																
	U-NII-2C_5.47-5.725_802.11a_CH100_5500MHz																																																																																																
ANT	5																																																																																																
Pol.	Horizontal	Vertical																																																																																															
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.82</td> <td>74.00</td> <td>-27.18</td> <td>55.42</td> <td>38.49</td> <td>11.21</td> <td>58.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>45.83</td> <td>68.30</td> <td>-22.47</td> <td>51.38</td> <td>40.39</td> <td>12.91</td> <td>58.85</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11000.00	46.82	74.00	-27.18	55.42	38.49	11.21	58.30	--	--	Peak	2	16500.00	45.83	68.30	-22.47	51.38	40.39	12.91	58.85	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>47.06</td> <td>74.00</td> <td>-26.94</td> <td>55.66</td> <td>38.49</td> <td>11.21</td> <td>58.30</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>48.91</td> <td>68.30</td> <td>-19.39</td> <td>54.46</td> <td>40.39</td> <td>12.91</td> <td>58.85</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	11000.00	47.06	74.00	-26.94	55.66	38.49	11.21	58.30	--	--	Peak	2	16500.00	48.91	68.30	-19.39	54.46	40.39	12.91	58.85	--	--	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																									
1	11000.00	46.82	74.00	-27.18	55.42	38.49	11.21	58.30	--	--	Peak																																																																																						
2	16500.00	45.83	68.30	-22.47	51.38	40.39	12.91	58.85	--	--	Peak																																																																																						
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																								
1	11000.00	47.06	74.00	-26.94	55.66	38.49	11.21	58.30	--	--	Peak																																																																																						
2	16500.00	48.91	68.30	-19.39	54.46	40.39	12.91	58.85	--	--	Peak																																																																																						



Mode	8																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH116_5580MHz																																																																																															
ANT	5																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>47.72</td> <td>74.00</td> <td>-26.28</td> <td>56.50</td> <td>38.05</td> <td>11.29</td> <td>58.12</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>47.65</td> <td>68.30</td> <td>-20.65</td> <td>52.63</td> <td>40.59</td> <td>13.01</td> <td>58.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11160.00	47.72	74.00	-26.28	56.50	38.05	11.29	58.12	--	--	Peak	2	16740.00	47.65	68.30	-20.65	52.63	40.59	13.01	58.58	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11160.00</td> <td>47.94</td> <td>74.00</td> <td>-26.06</td> <td>56.72</td> <td>38.05</td> <td>11.29</td> <td>58.12</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16740.00</td> <td>47.93</td> <td>68.30</td> <td>-20.37</td> <td>52.91</td> <td>40.59</td> <td>13.01</td> <td>58.58</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11160.00	47.94	74.00	-26.06	56.72	38.05	11.29	58.12	--	--	Peak	2	16740.00	47.93	68.30	-20.37	52.91	40.59	13.01	58.58	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11160.00	47.72	74.00	-26.28	56.50	38.05	11.29	58.12	--	--	Peak																																																																																					
2	16740.00	47.65	68.30	-20.65	52.63	40.59	13.01	58.58	--	--	Peak																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11160.00	47.94	74.00	-26.06	56.72	38.05	11.29	58.12	--	--	Peak																																																																																					
2	16740.00	47.93	68.30	-20.37	52.91	40.59	13.01	58.58	--	--	Peak																																																																																					



Mode	9																																																																									
	Band Edge																																																																									
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5725.35</td> <td>64.71</td> <td>68.30</td> <td>-3.59</td> <td>54.21</td> <td>34.60</td> <td>8.68</td> <td>32.78</td> <td>106</td> <td>126</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5725.35	64.71	68.30	-3.59	54.21	34.60	8.68	32.78	106	126	PEAK	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>101.17</td> <td>-----</td> <td>-----</td> <td>90.77</td> <td>34.56</td> <td>8.60</td> <td>32.76</td> <td>106</td> <td>126</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	101.17	-----	-----	90.77	34.56	8.60	32.76	106	126	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5725.35	64.71	68.30	-3.59	54.21	34.60	8.68	32.78	106	126	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	101.17	-----	-----	90.77	34.56	8.60	32.76	106	126	PEAK																																																															
Avg	Blank	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>95.36</td> <td>-----</td> <td>-----</td> <td>85.00</td> <td>34.55</td> <td>8.57</td> <td>32.76</td> <td>106</td> <td>126</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5700.00	95.36	-----	-----	85.00	34.55	8.57	32.76	106	126	AVERAGE																																				
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5700.00	95.36	-----	-----	85.00	34.55	8.57	32.76	106	126	AVERAGE																																																															



Mode	9																																																																					
	Band Edge																																																																					
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																					
ANT	5																																																																					
Pol.	Vertical	Fundamental																																																																				
Peak	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5726.85</td> <td>59.79</td> <td>68.30</td> <td>-8.51</td> <td>49.29</td> <td>34.60</td> <td>8.68</td> <td>32.78</td> <td>110</td> <td>288 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5726.85	59.79	68.30	-8.51	49.29	34.60	8.68	32.78	110	288 PEAK	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>94.63</td> <td>-----</td> <td>-----</td> <td>84.27</td> <td>34.55</td> <td>8.57</td> <td>32.76</td> <td>110</td> <td>288 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	94.63	-----	-----	84.27	34.55	8.57	32.76	110	288 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5726.85	59.79	68.30	-8.51	49.29	34.60	8.68	32.78	110	288 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5700.00	94.63	-----	-----	84.27	34.55	8.57	32.76	110	288 PEAK																																																													
Avg	Blank	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>88.64</td> <td>-----</td> <td>-----</td> <td>78.28</td> <td>34.55</td> <td>8.57</td> <td>32.76</td> <td>110</td> <td>288 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	88.64	-----	-----	78.28	34.55	8.57	32.76	110	288 AVERAGE																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5700.00	88.64	-----	-----	78.28	34.55	8.57	32.76	110	288 AVERAGE																																																													



Mode	9																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11a_CH140_5700MHz																																																																																															
ANT	5																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>45.03</td> <td>74.00</td> <td>-28.97</td> <td>54.09</td> <td>37.39</td> <td>11.41</td> <td>57.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>47.38</td> <td>68.30</td> <td>-20.92</td> <td>51.40</td> <td>41.00</td> <td>13.14</td> <td>58.16</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	45.03	74.00	-28.97	54.09	37.39	11.41	57.86	--	--	Peak	2	17100.00	47.38	68.30	-20.92	51.40	41.00	13.14	58.16	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>46.25</td> <td>74.00</td> <td>-27.75</td> <td>55.31</td> <td>37.39</td> <td>11.41</td> <td>57.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>48.33</td> <td>68.30</td> <td>-19.97</td> <td>52.35</td> <td>41.00</td> <td>13.14</td> <td>58.16</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	46.25	74.00	-27.75	55.31	37.39	11.41	57.86	--	--	Peak	2	17100.00	48.33	68.30	-19.97	52.35	41.00	13.14	58.16	--	--	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11400.00	45.03	74.00	-28.97	54.09	37.39	11.41	57.86	--	--	Peak																																																																																					
2	17100.00	47.38	68.30	-20.92	51.40	41.00	13.14	58.16	--	--	Peak																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11400.00	46.25	74.00	-27.75	55.31	37.39	11.41	57.86	--	--	Peak																																																																																					
2	17100.00	48.33	68.30	-19.97	52.35	41.00	13.14	58.16	--	--	Peak																																																																																					



Mode	10																																																																									
	Band Edge																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full_5180MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.22</td> <td>61.70</td> <td>74.00</td> <td>-12.30</td> <td>52.53</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>103</td> <td>126</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.22	61.70	74.00	-12.30	52.53	33.99	7.92	32.74	103	126	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>100.07</td> <td>-----</td> <td>-----</td> <td>90.85</td> <td>34.01</td> <td>7.94</td> <td>32.73</td> <td>103</td> <td>126</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	100.07	-----	-----	90.85	34.01	7.94	32.73	103	126	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5149.22	61.70	74.00	-12.30	52.53	33.99	7.92	32.74	103	126	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5180.00	100.07	-----	-----	90.85	34.01	7.94	32.73	103	126	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.76</td> <td>49.75</td> <td>54.00</td> <td>-4.25</td> <td>40.58</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>103</td> <td>126</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.76	49.75	54.00	-4.25	40.58	33.99	7.92	32.74	103	126	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>91.58</td> <td>-----</td> <td>-----</td> <td>82.36</td> <td>34.01</td> <td>7.94</td> <td>32.73</td> <td>103</td> <td>126</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	91.58	-----	-----	82.36	34.01	7.94	32.73	103	126	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5149.76	49.75	54.00	-4.25	40.58	33.99	7.92	32.74	103	126	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5180.00	91.58	-----	-----	82.36	34.01	7.94	32.73	103	126	AVERAGE																																																															



Mode	10																																																																									
	Band Edge																																																																									
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full_5180MHz																																																																									
ANT	5																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.24</td> <td>51.83</td> <td>74.00</td> <td>-22.17</td> <td>42.66</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>102</td> <td>269</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5147.24	51.83	74.00	-22.17	42.66	33.99	7.92	32.74	102	269	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>92.99</td> <td>-----</td> <td>-----</td> <td>83.77</td> <td>34.01</td> <td>7.94</td> <td>32.73</td> <td>102</td> <td>269</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	92.99	-----	-----	83.77	34.01	7.94	32.73	102	269	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5147.24	51.83	74.00	-22.17	42.66	33.99	7.92	32.74	102	269	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5180.00	92.99	-----	-----	83.77	34.01	7.94	32.73	102	269	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.94</td> <td>42.58</td> <td>54.00</td> <td>-11.42</td> <td>33.41</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>102</td> <td>269</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5149.94	42.58	54.00	-11.42	33.41	33.99	7.92	32.74	102	269	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>84.88</td> <td>-----</td> <td>-----</td> <td>75.66</td> <td>34.01</td> <td>7.94</td> <td>32.73</td> <td>102</td> <td>269</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5180.00	84.88	-----	-----	75.66	34.01	7.94	32.73	102	269	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5149.94	42.58	54.00	-11.42	33.41	33.99	7.92	32.74	102	269	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5180.00	84.88	-----	-----	75.66	34.01	7.94	32.73	102	269	AVERAGE																																																															



Mode	10																																																																																															
	Harmonic																																																																																															
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Full_5180MHz																																																																																															
ANT	5																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.93</td> <td>68.30</td> <td>-22.37</td> <td>57.04</td> <td>37.16</td> <td>10.73</td> <td>59.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>46.88</td> <td>74.00</td> <td>-27.12</td> <td>53.68</td> <td>39.42</td> <td>12.72</td> <td>58.94</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	45.93	68.30	-22.37	57.04	37.16	10.73	59.00	--	--	Peak	2	15540.00	46.88	74.00	-27.12	53.68	39.42	12.72	58.94	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10360.00</td> <td>45.61</td> <td>68.30</td> <td>-22.69</td> <td>56.72</td> <td>37.16</td> <td>10.73</td> <td>59.00</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15540.00</td> <td>46.16</td> <td>74.00</td> <td>-27.84</td> <td>52.96</td> <td>39.42</td> <td>12.72</td> <td>58.94</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10360.00	45.61	68.30	-22.69	56.72	37.16	10.73	59.00	--	--	Peak	2	15540.00	46.16	74.00	-27.84	52.96	39.42	12.72	58.94	--	--	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10360.00	45.93	68.30	-22.37	57.04	37.16	10.73	59.00	--	--	Peak																																																																																					
2	15540.00	46.88	74.00	-27.12	53.68	39.42	12.72	58.94	--	--	Peak																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10360.00	45.61	68.30	-22.69	56.72	37.16	10.73	59.00	--	--	Peak																																																																																					
2	15540.00	46.16	74.00	-27.84	52.96	39.42	12.72	58.94	--	--	Peak																																																																																					



Mode	11																																																																																															
	Harmonic																																																																																															
	U-NII-1_5.15-5.25_802.11ax HE20_CH44_Full_5220MHz																																																																																															
ANT	5																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>45.24</td> <td>68.30</td> <td>-23.06</td> <td>56.01</td> <td>37.35</td> <td>10.79</td> <td>58.91</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>48.18</td> <td>74.00</td> <td>-25.82</td> <td>55.06</td> <td>39.46</td> <td>12.72</td> <td>59.06</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg	1	10440.00	45.24	68.30	-23.06	56.01	37.35	10.79	58.91	-- -- Peak	2	15660.00	48.18	74.00	-25.82	55.06	39.46	12.72	59.06	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10440.00</td> <td>45.23</td> <td>68.30</td> <td>-23.07</td> <td>56.00</td> <td>37.35</td> <td>10.79</td> <td>58.91</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15660.00</td> <td>48.04</td> <td>74.00</td> <td>-25.96</td> <td>54.92</td> <td>39.46</td> <td>12.72</td> <td>59.06</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg	1	10440.00	45.23	68.30	-23.07	56.00	37.35	10.79	58.91	-- -- Peak	2	15660.00	48.04	74.00	-25.96	54.92	39.46	12.72	59.06	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg																																																																																								
1	10440.00	45.24	68.30	-23.06	56.01	37.35	10.79	58.91	-- -- Peak																																																																																							
2	15660.00	48.18	74.00	-25.82	55.06	39.46	12.72	59.06	-- -- Peak																																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	deg																																																																																								
1	10440.00	45.23	68.30	-23.07	56.00	37.35	10.79	58.91	-- -- Peak																																																																																							
2	15660.00	48.04	74.00	-25.96	54.92	39.46	12.72	59.06	-- -- Peak																																																																																							



Mode	12																																																																																																							
	Harmonic																																																																																																							
	U-NII-1_5.15-5.25_802.11ax HE20_CH48_Full_5240MHz																																																																																																							
ANT	5																																																																																																							
Pol.	Horizontal	Vertical																																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.77</td> <td>68.30</td> <td>-21.53</td> <td>57.37</td> <td>37.45</td> <td>10.82</td> <td>58.87</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>49.91</td> <td>74.00</td> <td>-24.09</td> <td>56.83</td> <td>39.49</td> <td>12.71</td> <td>59.12</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	46.77	68.30	-21.53	57.37	37.45	10.82	58.87	--	Peak	2	15720.00	49.91	74.00	-24.09	56.83	39.49	12.71	59.12	--	Peak	<table border="1"> <thead> <tr> <th colspan="2">Limit</th> <th colspan="2">Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th rowspan="2">Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10480.00</td> <td>46.44</td> <td>68.30</td> <td>-21.86</td> <td>57.04</td> <td>37.45</td> <td>10.82</td> <td>58.87</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15720.00</td> <td>49.23</td> <td>74.00</td> <td>-24.77</td> <td>56.15</td> <td>39.49</td> <td>12.71</td> <td>59.12</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10480.00	46.44	68.30	-21.86	57.04	37.45	10.82	58.87	--	Peak	2	15720.00	49.23	74.00	-24.77	56.15	39.49	12.71	59.12	--	Peak
	Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	10480.00	46.77	68.30	-21.53	57.37	37.45	10.82	58.87	--	Peak																																																																																														
2	15720.00	49.91	74.00	-24.09	56.83	39.49	12.71	59.12	--	Peak																																																																																														
Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																															
1	10480.00	46.44	68.30	-21.86	57.04	37.45	10.82	58.87	--	Peak																																																																																														
2	15720.00	49.23	74.00	-24.77	56.15	39.49	12.71	59.12	--	Peak																																																																																														







Mode	13																																																																																											
	Harmonic																																																																																											
	U-NII-2A_5.25-5.35_802.11ax HE20_CH52_Full_5260MHz																																																																																											
ANT	5																																																																																											
Pol.	Horizontal	Vertical																																																																																										
Peak Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>44.56</td> <td>68.30</td> <td>-23.74</td> <td>55.00</td> <td>37.53</td> <td>10.85</td> <td>58.82</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15780.00</td> <td>48.04</td> <td>74.00</td> <td>-25.96</td> <td>55.00</td> <td>39.51</td> <td>12.71</td> <td>59.18</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 10520.00	44.56	68.30	-23.74	55.00	37.53	10.85	58.82	-- -- Peak	2 15780.00	48.04	74.00	-25.96	55.00	39.51	12.71	59.18	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10520.00</td> <td>45.74</td> <td>68.30</td> <td>-22.56</td> <td>56.18</td> <td>37.53</td> <td>10.85</td> <td>58.82</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15780.00</td> <td>48.19</td> <td>74.00</td> <td>-25.81</td> <td>55.15</td> <td>39.51</td> <td>12.71</td> <td>59.18</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 10520.00	45.74	68.30	-22.56	56.18	37.53	10.85	58.82	-- -- Peak	2 15780.00	48.19	74.00	-25.81	55.15	39.51	12.71	59.18	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1 10520.00	44.56	68.30	-23.74	55.00	37.53	10.85	58.82	-- -- Peak																																																																																				
2 15780.00	48.04	74.00	-25.96	55.00	39.51	12.71	59.18	-- -- Peak																																																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																				
1 10520.00	45.74	68.30	-22.56	56.18	37.53	10.85	58.82	-- -- Peak																																																																																				
2 15780.00	48.19	74.00	-25.81	55.15	39.51	12.71	59.18	-- -- Peak																																																																																				



Mode	14																																																																									
	Harmonic																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE20_CH60_Full_5300MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Vertical																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10600.00</td> <td>45.38</td> <td>74.00</td> <td>-28.62</td> <td>55.50</td> <td>37.70</td> <td>10.91</td> <td>58.73</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15900.00</td> <td>47.82</td> <td>74.00</td> <td>-26.18</td> <td>54.85</td> <td>39.56</td> <td>12.71</td> <td>59.30</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	1 10600.00	45.38	74.00	-28.62	55.50	37.70	10.91	58.73	-- -- Peak	2 15900.00	47.82	74.00	-26.18	54.85	39.56	12.71	59.30	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10600.00</td> <td>45.58</td> <td>74.00</td> <td>-28.42</td> <td>55.70</td> <td>37.70</td> <td>10.91</td> <td>58.73</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15900.00</td> <td>47.95</td> <td>74.00</td> <td>-26.05</td> <td>54.98</td> <td>39.56</td> <td>12.71</td> <td>59.30</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	1 10600.00	45.58	74.00	-28.42	55.70	37.70	10.91	58.73	-- -- Peak	2 15900.00	47.95	74.00	-26.05	54.98	39.56	12.71	59.30	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																		
1 10600.00	45.38	74.00	-28.62	55.50	37.70	10.91	58.73	-- -- Peak																																																																		
2 15900.00	47.82	74.00	-26.18	54.85	39.56	12.71	59.30	-- -- Peak																																																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																		
1 10600.00	45.58	74.00	-28.42	55.70	37.70	10.91	58.73	-- -- Peak																																																																		
2 15900.00	47.95	74.00	-26.05	54.98	39.56	12.71	59.30	-- -- Peak																																																																		

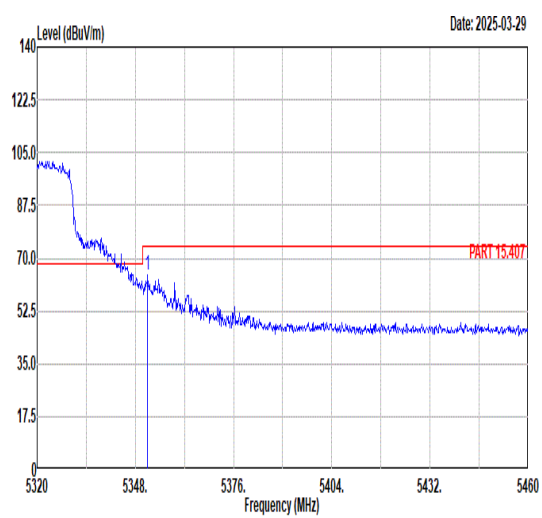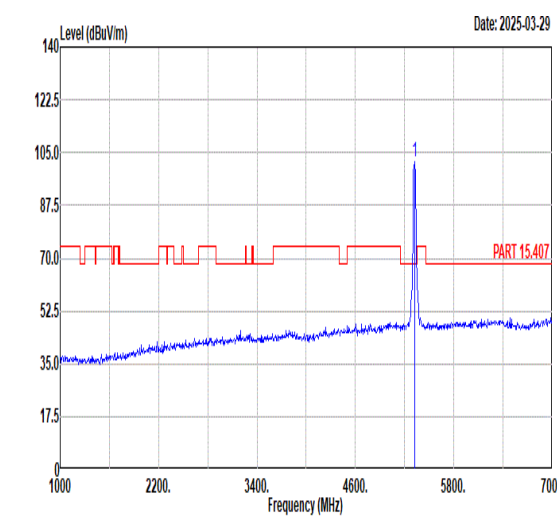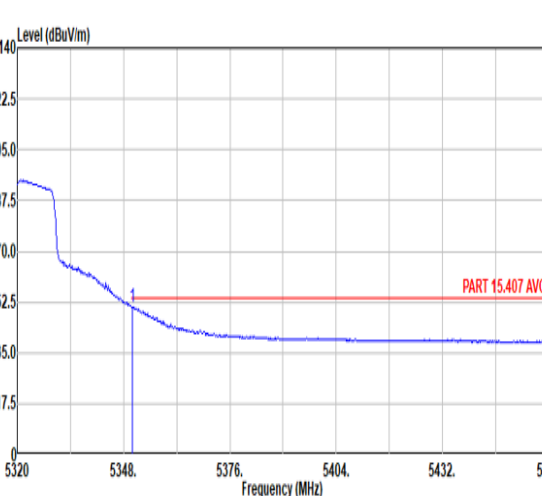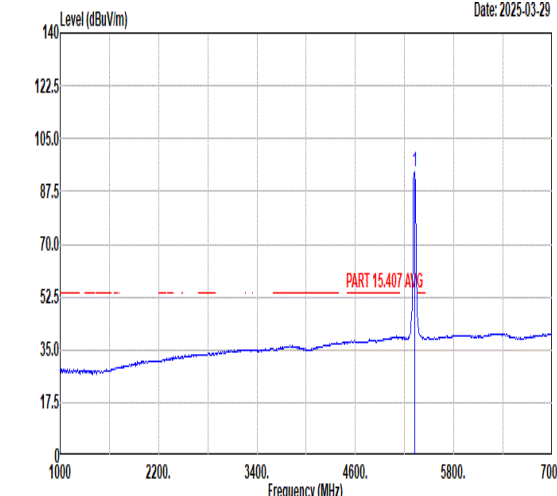

Mode	15																																																																									
	Band Edge																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full_5320MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.50</td> <td>64.41</td> <td>74.00</td> <td>-9.59</td> <td>54.63</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>102</td> <td>64</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5351.50	64.41	74.00	-9.59	54.63	34.11	8.33	32.66	102	64	PEAK	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>101.96</td> <td>-----</td> <td>-----</td> <td>92.29</td> <td>34.09</td> <td>8.25</td> <td>32.67</td> <td>102</td> <td>64</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	101.96	-----	-----	92.29	34.09	8.25	32.67	102	64	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5351.50	64.41	74.00	-9.59	54.63	34.11	8.33	32.66	102	64	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5320.00	101.96	-----	-----	92.29	34.09	8.25	32.67	102	64	PEAK																																																															
Avg	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.24</td> <td>50.77</td> <td>54.00</td> <td>-3.23</td> <td>40.99</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>102</td> <td>64</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5350.24	50.77	54.00	-3.23	40.99	34.11	8.33	32.66	102	64	AVERAGE	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>93.90</td> <td>-----</td> <td>-----</td> <td>84.23</td> <td>34.09</td> <td>8.25</td> <td>32.67</td> <td>102</td> <td>64</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5320.00	93.90	-----	-----	84.23	34.09	8.25	32.67	102	64	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5350.24	50.77	54.00	-3.23	40.99	34.11	8.33	32.66	102	64	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5320.00	93.90	-----	-----	84.23	34.09	8.25	32.67	102	64	AVERAGE																																																															







		15																																																																												
Mode	Band Edge																																																																													
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full_5320MHz																																																																													
ANT	5																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5353.74</td> <td>53.57</td> <td>74.00</td> <td>-20.43</td> <td>43.78</td> <td>34.11</td> <td>8.34</td> <td>32.66</td> <td>112</td> <td>277 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5353.74	53.57	74.00	-20.43	43.78	34.11	8.34	32.66	112	277 PEAK	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>93.17</td> <td>-----</td> <td>-----</td> <td>83.52</td> <td>34.09</td> <td>8.23</td> <td>32.67</td> <td>112</td> <td>277 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5320.00	93.17	-----	-----	83.52	34.09	8.23	32.67	112	277 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5353.74	53.57	74.00	-20.43	43.78	34.11	8.34	32.66	112	277 PEAK																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5320.00	93.17	-----	-----	83.52	34.09	8.23	32.67	112	277 PEAK																																																																					
Avg	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5350.24</td> <td>42.90</td> <td>54.00</td> <td>-11.10</td> <td>33.12</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>112</td> <td>277 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5350.24	42.90	54.00	-11.10	33.12	34.11	8.33	32.66	112	277 AVERAGE	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>84.92</td> <td>-----</td> <td>-----</td> <td>75.25</td> <td>34.09</td> <td>8.25</td> <td>32.67</td> <td>112</td> <td>277 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5320.00	84.92	-----	-----	75.25	34.09	8.25	32.67	112	277 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5350.24	42.90	54.00	-11.10	33.12	34.11	8.33	32.66	112	277 AVERAGE																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																					
1 5320.00	84.92	-----	-----	75.25	34.09	8.25	32.67	112	277 AVERAGE																																																																					



Mode	15																																																																																																				
	Harmonic																																																																																																				
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Full_5320MHz																																																																																																				
ANT	5																																																																																																				
Pol.	Horizontal	Vertical																																																																																																			
Peak Avg																																																																																																					
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>46.44</td> <td>74.00</td> <td>-27.56</td> <td>56.41</td> <td>37.78</td> <td>10.94</td> <td>58.69</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>45.41</td> <td>74.00</td> <td>-28.59</td> <td>52.49</td> <td>39.59</td> <td>12.70</td> <td>59.37</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	46.44	74.00	-27.56	56.41	37.78	10.94	58.69	--	Peak	2	15960.00	45.41	74.00	-28.59	52.49	39.59	12.70	59.37	--	Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10640.00</td> <td>48.38</td> <td>74.00</td> <td>-25.62</td> <td>58.35</td> <td>37.78</td> <td>10.94</td> <td>58.69</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15960.00</td> <td>46.38</td> <td>74.00</td> <td>-27.62</td> <td>53.46</td> <td>39.59</td> <td>12.70</td> <td>59.37</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	48.38	74.00	-25.62	58.35	37.78	10.94	58.69	--	Peak	2	15960.00	46.38	74.00	-27.62	53.46	39.59	12.70	59.37	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	10640.00	46.44	74.00	-27.56	56.41	37.78	10.94	58.69	--	Peak																																																																																											
2	15960.00	45.41	74.00	-28.59	52.49	39.59	12.70	59.37	--	Peak																																																																																											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																												
1	10640.00	48.38	74.00	-25.62	58.35	37.78	10.94	58.69	--	Peak																																																																																											
2	15960.00	46.38	74.00	-27.62	53.46	39.59	12.70	59.37	--	Peak																																																																																											

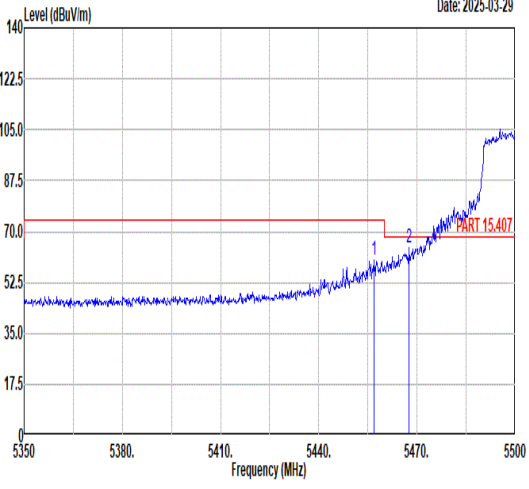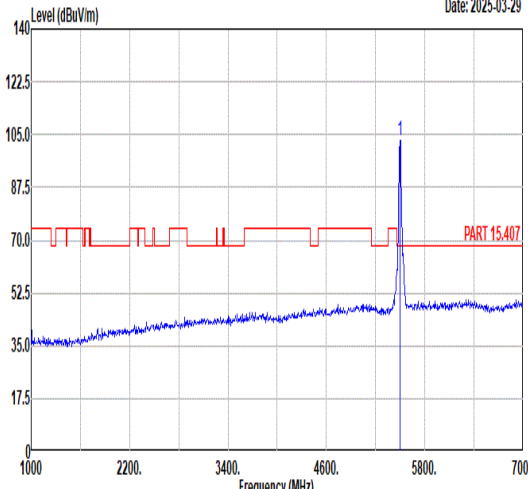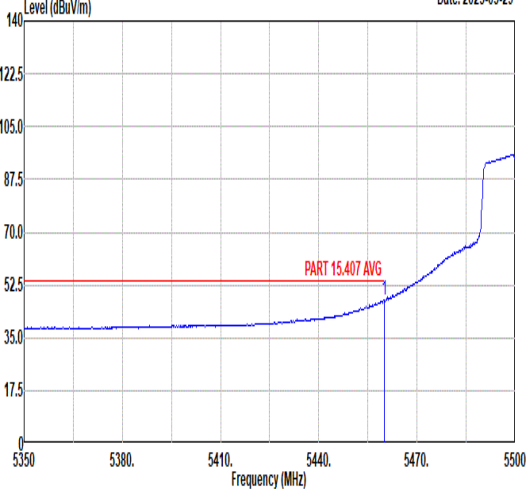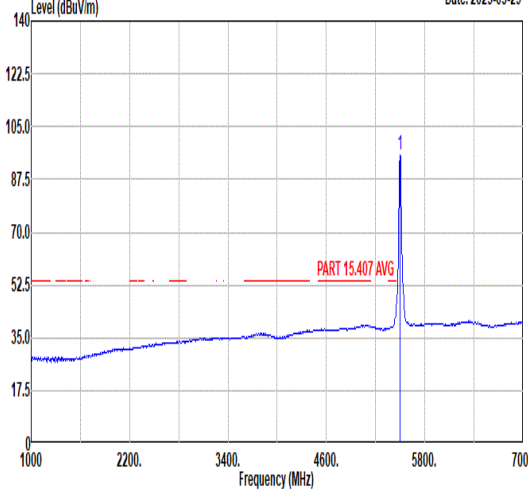

Mode	16																																																																							
	Band Edge																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full_5500MHz																																																																							
ANT	5																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5456.80</td> <td>60.00</td> <td>74.00</td> <td>-14.00</td> <td>50.03</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>100</td> <td>59 PEAK</td> </tr> <tr> <td>2 5467.60</td> <td>64.37</td> <td>68.30</td> <td>-3.93</td> <td>54.40</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>100</td> <td>59 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5456.80	60.00	74.00	-14.00	50.03	34.17	8.41	32.61	100	59 PEAK	2 5467.60	64.37	68.30	-3.93	54.40	34.18	8.40	32.61	100	59 PEAK	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>102.87</td> <td>-----</td> <td>-----</td> <td>92.92</td> <td>34.20</td> <td>8.36</td> <td>32.61</td> <td>100</td> <td>59 PEAK</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5500.00	102.87	-----	-----	92.92	34.20	8.36	32.61	100	59 PEAK
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1 5456.80	60.00	74.00	-14.00	50.03	34.17	8.41	32.61	100	59 PEAK																																																															
2 5467.60	64.37	68.30	-3.93	54.40	34.18	8.40	32.61	100	59 PEAK																																																															
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1 5500.00	102.87	-----	-----	92.92	34.20	8.36	32.61	100	59 PEAK																																																															
Avg	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5459.95</td> <td>47.54</td> <td>54.00</td> <td>-6.46</td> <td>37.57</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>100</td> <td>59 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5459.95	47.54	54.00	-6.46	37.57	34.17	8.41	32.61	100	59 AVERAGE	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5500.00</td> <td>95.45</td> <td>-----</td> <td>-----</td> <td>85.50</td> <td>34.20</td> <td>8.36</td> <td>32.61</td> <td>100</td> <td>59 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1 5500.00	95.45	-----	-----	85.50	34.20	8.36	32.61	100	59 AVERAGE										
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1 5459.95	47.54	54.00	-6.46	37.57	34.17	8.41	32.61	100	59 AVERAGE																																																															
Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																															
1 5500.00	95.45	-----	-----	85.50	34.20	8.36	32.61	100	59 AVERAGE																																																															



Mode	16																																																																																							
	Band Edge																																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full_5500MHz																																																																																							
ANT	5																																																																																							
Pol.	Vertical	Fundamental																																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.90</td> <td>54.69</td> <td>74.00</td> <td>-19.31</td> <td>44.72</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>100</td> <td>278</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.85</td> <td>58.38</td> <td>68.30</td> <td>-9.92</td> <td>48.41</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>100</td> <td>278</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5455.90	54.69	74.00	-19.31	44.72	34.17	8.41	32.61	100	278	PEAK	2	5469.85	58.38	68.30	-9.92	48.41	34.18	8.40	32.61	100	278	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>96.49</td> <td>-----</td> <td>-----</td> <td>86.55</td> <td>34.20</td> <td>8.35</td> <td>32.61</td> <td>100</td> <td>278</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	96.49	-----	-----	86.55	34.20	8.35	32.61	100	278	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5455.90	54.69	74.00	-19.31	44.72	34.17	8.41	32.61	100	278	PEAK																																																																													
2	5469.85	58.38	68.30	-9.92	48.41	34.18	8.40	32.61	100	278	PEAK																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5500.00	96.49	-----	-----	86.55	34.20	8.35	32.61	100	278	PEAK																																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.80</td> <td>41.01</td> <td>54.00</td> <td>-12.99</td> <td>31.04</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>100</td> <td>278</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.80	41.01	54.00	-12.99	31.04	34.17	8.41	32.61	100	278	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>86.64</td> <td>-----</td> <td>-----</td> <td>76.69</td> <td>34.20</td> <td>8.36</td> <td>32.61</td> <td>100</td> <td>278</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	86.64	-----	-----	76.69	34.20	8.36	32.61	100	278	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5459.80	41.01	54.00	-12.99	31.04	34.17	8.41	32.61	100	278	AVERAGE																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																
1	5500.00	86.64	-----	-----	76.69	34.20	8.36	32.61	100	278	AVERAGE																																																																													



Mode	16																																																																																														
	Harmonic																																																																																														
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Full_5500MHz																																																																																														
ANT	5																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.05</td> <td>74.00</td> <td>-27.95</td> <td>54.65</td> <td>38.49</td> <td>11.21</td> <td>58.30</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>45.66</td> <td>68.30</td> <td>-22.64</td> <td>51.21</td> <td>40.39</td> <td>12.91</td> <td>58.85</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11000.00	46.05	74.00	-27.95	54.65	38.49	11.21	58.30	-- Peak	2	16500.00	45.66	68.30	-22.64	51.21	40.39	12.91	58.85	-- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>Apos</th> <th>Tpos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11000.00</td> <td>46.68</td> <td>74.00</td> <td>-27.32</td> <td>55.28</td> <td>38.49</td> <td>11.21</td> <td>58.30</td> <td>-- Peak</td> </tr> <tr> <td>2</td> <td>16500.00</td> <td>45.57</td> <td>68.30</td> <td>-22.73</td> <td>51.12</td> <td>40.39</td> <td>12.91</td> <td>58.85</td> <td>-- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	Apos	Tpos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11000.00	46.68	74.00	-27.32	55.28	38.49	11.21	58.30	-- Peak	2	16500.00	45.57	68.30	-22.73	51.12	40.39	12.91	58.85
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	11000.00	46.05	74.00	-27.95	54.65	38.49	11.21	58.30	-- Peak																																																																																						
2	16500.00	45.66	68.30	-22.64	51.21	40.39	12.91	58.85	-- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	Apos	Tpos																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	11000.00	46.68	74.00	-27.32	55.28	38.49	11.21	58.30	-- Peak																																																																																						
2	16500.00	45.57	68.30	-22.73	51.12	40.39	12.91	58.85	-- Peak																																																																																						



Mode	17																																																																									
	Harmonic																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE20_CH116_Full_5580MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Vertical																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>47.45</td> <td>74.00</td> <td>-26.55</td> <td>56.23</td> <td>38.05</td> <td>11.29</td> <td>58.12</td> <td>-- -- Peak</td> </tr> <tr> <td>2 16740.00</td> <td>48.17</td> <td>68.30</td> <td>-20.13</td> <td>53.15</td> <td>40.59</td> <td>13.01</td> <td>58.58</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	1 11160.00	47.45	74.00	-26.55	56.23	38.05	11.29	58.12	-- -- Peak	2 16740.00	48.17	68.30	-20.13	53.15	40.59	13.01	58.58	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11160.00</td> <td>47.23</td> <td>74.00</td> <td>-26.77</td> <td>56.01</td> <td>38.05</td> <td>11.29</td> <td>58.12</td> <td>-- -- Peak</td> </tr> <tr> <td>2 16740.00</td> <td>49.11</td> <td>68.30</td> <td>-19.19</td> <td>54.09</td> <td>40.59</td> <td>13.01</td> <td>58.58</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	1 11160.00	47.23	74.00	-26.77	56.01	38.05	11.29	58.12	-- -- Peak	2 16740.00	49.11	68.30	-19.19	54.09	40.59	13.01	58.58	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																		
1 11160.00	47.45	74.00	-26.55	56.23	38.05	11.29	58.12	-- -- Peak																																																																		
2 16740.00	48.17	68.30	-20.13	53.15	40.59	13.01	58.58	-- -- Peak																																																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																		
1 11160.00	47.23	74.00	-26.77	56.01	38.05	11.29	58.12	-- -- Peak																																																																		
2 16740.00	49.11	68.30	-19.19	54.09	40.59	13.01	58.58	-- -- Peak																																																																		



Mode	18																																																																					
	Band Edge																																																																					
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full_5700MHz																																																																					
ANT	5																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5727.89</td> <td>64.59</td> <td>68.30</td> <td>-3.71</td> <td>54.08</td> <td>34.61</td> <td>8.68</td> <td>32.78</td> <td>101</td> <td>124 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5727.89	64.59	68.30	-3.71	54.08	34.61	8.68	32.78	101	124 PEAK	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>101.09</td> <td>-----</td> <td>-----</td> <td>90.73</td> <td>34.55</td> <td>8.57</td> <td>32.76</td> <td>101</td> <td>124 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	101.09	-----	-----	90.73	34.55	8.57	32.76	101	124 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5727.89	64.59	68.30	-3.71	54.08	34.61	8.68	32.78	101	124 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5700.00	101.09	-----	-----	90.73	34.55	8.57	32.76	101	124 PEAK																																																													
Avg	Blank	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>93.77</td> <td>-----</td> <td>-----</td> <td>83.41</td> <td>34.55</td> <td>8.57</td> <td>32.76</td> <td>101</td> <td>124 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	93.77	-----	-----	83.41	34.55	8.57	32.76	101	124 AVERAGE																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5700.00	93.77	-----	-----	83.41	34.55	8.57	32.76	101	124 AVERAGE																																																													



Mode	18																																																																							
	Band Edge																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full_5700MHz																																																																							
ANT	5																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	<p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5726.07</td> <td>60.65</td> <td>68.30</td> <td>-7.65</td> <td>50.15</td> <td>34.60</td> <td>8.68</td> <td>32.78</td> <td>100</td> <td>288 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5726.07	60.65	68.30	-7.65	50.15	34.60	8.68	32.78	100	288 PEAK	<p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>96.34</td> <td>-----</td> <td>-----</td> <td>85.98</td> <td>34.55</td> <td>8.57</td> <td>32.76</td> <td>100</td> <td>288 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	96.34	-----	-----	85.98	34.55	8.57	32.76	100	288 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5726.07	60.65	68.30	-7.65	50.15	34.60	8.68	32.78	100	288 PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5700.00	96.34	-----	-----	85.98	34.55	8.57	32.76	100	288 PEAK																																																															
Avg	Blank	<p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>88.72</td> <td>-----</td> <td>-----</td> <td>78.32</td> <td>34.56</td> <td>8.60</td> <td>32.76</td> <td>100</td> <td>288 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	88.72	-----	-----	78.32	34.56	8.60	32.76	100	288 AVERAGE																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5700.00	88.72	-----	-----	78.32	34.56	8.60	32.76	100	288 AVERAGE																																																															



Mode	18																																																																																															
	Harmonic																																																																																															
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Full_5700MHz																																																																																															
ANT	5																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>46.89</td> <td>74.00</td> <td>-27.11</td> <td>55.95</td> <td>37.39</td> <td>11.41</td> <td>57.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>47.15</td> <td>68.30</td> <td>-21.15</td> <td>51.17</td> <td>41.00</td> <td>13.14</td> <td>58.16</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	46.89	74.00	-27.11	55.95	37.39	11.41	57.86	--	--	Peak	2	17100.00	47.15	68.30	-21.15	51.17	41.00	13.14	58.16	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11400.00</td> <td>46.93</td> <td>74.00</td> <td>-27.07</td> <td>55.99</td> <td>37.39</td> <td>11.41</td> <td>57.86</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17100.00</td> <td>47.99</td> <td>68.30</td> <td>-20.31</td> <td>52.01</td> <td>41.00</td> <td>13.14</td> <td>58.16</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	11400.00	46.93	74.00	-27.07	55.99	37.39	11.41	57.86	--	--	Peak	2	17100.00	47.99	68.30	-20.31	52.01	41.00	13.14	58.16	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																									
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11400.00	46.89	74.00	-27.11	55.95	37.39	11.41	57.86	--	--	Peak																																																																																					
2	17100.00	47.15	68.30	-21.15	51.17	41.00	13.14	58.16	--	--	Peak																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	11400.00	46.93	74.00	-27.07	55.99	37.39	11.41	57.86	--	--	Peak																																																																																					
2	17100.00	47.99	68.30	-20.31	52.01	41.00	13.14	58.16	--	--	Peak																																																																																					



Mode	19																																																																																	
	Band Edge																																																																																	
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial RU26/0_5180MHz																																																																																	
ANT	5																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5000.72</td> <td>49.35</td> <td>74.00</td> <td>-24.65</td> <td>40.43</td> <td>33.90</td> <td>7.82</td> <td>32.80</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>116</td> <td>71 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5000.72	49.35	74.00	-24.65	40.43	33.90	7.82	32.80							116	71 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>100.01</td> <td>-----</td> <td>-----</td> <td>90.81</td> <td>34.00</td> <td>7.93</td> <td>32.73</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>116</td> <td>71 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5180.00	100.01	-----	-----	90.81	34.00	7.93	32.73							116	71 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 5000.72	49.35	74.00	-24.65	40.43	33.90	7.82	32.80																																																																											
						116	71 PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 5180.00	100.01	-----	-----	90.81	34.00	7.93	32.73																																																																											
						116	71 PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5137.88</td> <td>39.42</td> <td>54.00</td> <td>-14.58</td> <td>30.27</td> <td>33.98</td> <td>7.91</td> <td>32.74</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>116</td> <td>71 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5137.88	39.42	54.00	-14.58	30.27	33.98	7.91	32.74							116	71 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5180.00</td> <td>92.57</td> <td>-----</td> <td>-----</td> <td>83.37</td> <td>34.00</td> <td>7.93</td> <td>32.73</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>116</td> <td>71 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5180.00	92.57	-----	-----	83.37	34.00	7.93	32.73							116	71 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 5137.88	39.42	54.00	-14.58	30.27	33.98	7.91	32.74																																																																											
						116	71 AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 5180.00	92.57	-----	-----	83.37	34.00	7.93	32.73																																																																											
						116	71 AVERAGE																																																																											



	19																																																																											
Mode	Band Edge																																																																											
	U-NII-1_5.15-5.25_802.11ax HE20_CH36_Partial RU26/0_5180MHz																																																																											
ANT	5																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5062.64</td> <td>49.70</td> <td>74.00</td> <td>-24.30</td> <td>40.67</td> <td>33.94</td> <td>7.86</td> <td>32.77</td> <td>100</td> <td>270</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5062.64	49.70	74.00	-24.30	40.67	33.94	7.86	32.77	100	270	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>96.06</td> <td>-----</td> <td>-----</td> <td>86.86</td> <td>34.00</td> <td>7.93</td> <td>32.73</td> <td>100</td> <td>270</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	96.06	-----	-----	86.86	34.00	7.93	32.73	100	270	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5062.64	49.70	74.00	-24.30	40.67	33.94	7.86	32.77	100	270	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5180.00	96.06	-----	-----	86.86	34.00	7.93	32.73	100	270	PEAK																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5082.62</td> <td>39.24</td> <td>54.00</td> <td>-14.76</td> <td>30.19</td> <td>33.95</td> <td>7.87</td> <td>32.77</td> <td>100</td> <td>270</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5082.62	39.24	54.00	-14.76	30.19	33.95	7.87	32.77	100	270	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>86.24</td> <td>-----</td> <td>-----</td> <td>77.04</td> <td>34.00</td> <td>7.93</td> <td>32.73</td> <td>100</td> <td>270</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	86.24	-----	-----	77.04	34.00	7.93	32.73	100	270	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5082.62	39.24	54.00	-14.76	30.19	33.95	7.87	32.77	100	270	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5180.00	86.24	-----	-----	77.04	34.00	7.93	32.73	100	270	AVERAGE																																																																	



Mode	20																																																																									
	Band Edge																																																																									
	U-NII-2A_5.15-5.25_802.11ax HE20_CH64_Partial RU26/8_5320MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5390.70</td> <td>48.73</td> <td>74.00</td> <td>-25.27</td> <td>38.80</td> <td>34.13</td> <td>8.44</td> <td>32.64</td> <td>114</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5390.70	48.73	74.00	-25.27	38.80	34.13	8.44	32.64	114	76	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>101.02</td> <td>-----</td> <td>-----</td> <td>91.34</td> <td>34.09</td> <td>8.26</td> <td>32.67</td> <td>114</td> <td>76</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5320.00	101.02	-----	-----	91.34	34.09	8.26	32.67	114	76	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5390.70	48.73	74.00	-25.27	38.80	34.13	8.44	32.64	114	76	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5320.00	101.02	-----	-----	91.34	34.09	8.26	32.67	114	76	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5362.14</td> <td>39.26</td> <td>54.00</td> <td>-14.74</td> <td>29.43</td> <td>34.12</td> <td>8.36</td> <td>32.65</td> <td>114</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5362.14	39.26	54.00	-14.74	29.43	34.12	8.36	32.65	114	76	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>93.80</td> <td>-----</td> <td>-----</td> <td>84.12</td> <td>34.09</td> <td>8.26</td> <td>32.67</td> <td>114</td> <td>76</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5320.00	93.80	-----	-----	84.12	34.09	8.26	32.67	114	76	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5362.14	39.26	54.00	-14.74	29.43	34.12	8.36	32.65	114	76	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5320.00	93.80	-----	-----	84.12	34.09	8.26	32.67	114	76	AVERAGE																																																															



		20																																																																																
Mode	Band Edge																																																																																	
	U-NII-2A_5.15-5.25_802.11ax HE20_CH64_Partial RU26/8_5320MHz																																																																																	
ANT	5																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5409.32</td> <td>48.68</td> <td>74.00</td> <td>-25.32</td> <td>38.69</td> <td>34.14</td> <td>8.48</td> <td>32.63</td> <td>127</td> <td>288</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5409.32	48.68	74.00	-25.32	38.69	34.14	8.48	32.63	127	288	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>93.13</td> <td>-----</td> <td>-----</td> <td>83.45</td> <td>34.09</td> <td>8.26</td> <td>32.67</td> <td>127</td> <td>288</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	93.13	-----	-----	83.45	34.09	8.26	32.67	127	288	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5409.32	48.68	74.00	-25.32	38.69	34.14	8.48	32.63	127	288	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5320.00	93.13	-----	-----	83.45	34.09	8.26	32.67	127	288	PEAK																																																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5431.16</td> <td>38.55</td> <td>54.00</td> <td>-15.45</td> <td>28.56</td> <td>34.16</td> <td>8.45</td> <td>32.62</td> <td>127</td> <td>288</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5431.16	38.55	54.00	-15.45	28.56	34.16	8.45	32.62	127	288	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5320.00</td> <td>85.76</td> <td>-----</td> <td>-----</td> <td>76.08</td> <td>34.09</td> <td>8.26</td> <td>32.67</td> <td>127</td> <td>288</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	85.76	-----	-----	76.08	34.09	8.26	32.67	127	288	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5431.16	38.55	54.00	-15.45	28.56	34.16	8.45	32.62	127	288	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5320.00	85.76	-----	-----	76.08	34.09	8.26	32.67	127	288	AVERAGE																																																																							



	21																																																																																								
Mode	Band Edge																																																																																								
	U-NII-2C_5.15-5.25_802.11ax HE20_CH100_Partial RU26/0_5500MHz																																																																																								
ANT	5																																																																																								
Pol.	Horizontal	Fundamental																																																																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.45</td> <td>48.36</td> <td>74.00</td> <td>-25.64</td> <td>38.39</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>105</td> <td>61 PEAK</td> </tr> <tr> <td>2</td> <td>5467.60</td> <td>48.28</td> <td>68.30</td> <td>-20.02</td> <td>38.31</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>105</td> <td>61 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5458.45	48.36	74.00	-25.64	38.39	34.17	8.41	32.61	105	61 PEAK	2	5467.60	48.28	68.30	-20.02	38.31	34.18	8.40	32.61	105	61 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>103.51</td> <td>-----</td> <td>-----</td> <td>93.56</td> <td>34.19</td> <td>8.36</td> <td>32.60</td> <td>105</td> <td>61 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	103.51	-----	-----	93.56	34.19	8.36	32.60	105	61 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5458.45	48.36	74.00	-25.64	38.39	34.17	8.41	32.61	105	61 PEAK																																																																															
2	5467.60	48.28	68.30	-20.02	38.31	34.18	8.40	32.61	105	61 PEAK																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5500.00	103.51	-----	-----	93.56	34.19	8.36	32.60	105	61 PEAK																																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.95</td> <td>39.49</td> <td>54.00</td> <td>-14.51</td> <td>29.52</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>105</td> <td>61 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5456.95	39.49	54.00	-14.51	29.52	34.17	8.41	32.61	105	61 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>95.25</td> <td>-----</td> <td>-----</td> <td>85.30</td> <td>34.19</td> <td>8.36</td> <td>32.60</td> <td>105</td> <td>61 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	95.25	-----	-----	85.30	34.19	8.36	32.60	105	61 AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5456.95	39.49	54.00	-14.51	29.52	34.17	8.41	32.61	105	61 AVERAGE																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5500.00	95.25	-----	-----	85.30	34.19	8.36	32.60	105	61 AVERAGE																																																																															



		21																																																																																												
Mode	Band Edge																																																																																													
	U-NII-2C_5.15-5.25_802.11ax HE20_CH100_Partial RU26/0_5500MHz																																																																																													
ANT	5																																																																																													
Pol.	Vertical	Fundamental																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5384.80</td> <td>48.61</td> <td>74.00</td> <td>-25.39</td> <td>38.70</td> <td>34.13</td> <td>8.42</td> <td>32.64</td> <td>112</td> <td>273</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5461.30</td> <td>47.79</td> <td>68.30</td> <td>-20.51</td> <td>37.82</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>112</td> <td>273</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5384.80	48.61	74.00	-25.39	38.70	34.13	8.42	32.64	112	273	PEAK	2	5461.30	47.79	68.30	-20.51	37.82	34.17	8.41	32.61	112	273	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>95.12</td> <td>-----</td> <td>-----</td> <td>85.17</td> <td>34.19</td> <td>8.36</td> <td>32.60</td> <td>112</td> <td>273</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	95.12	-----	-----	85.17	34.19	8.36	32.60	112	273	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5384.80	48.61	74.00	-25.39	38.70	34.13	8.42	32.64	112	273	PEAK																																																																																			
2	5461.30	47.79	68.30	-20.51	37.82	34.17	8.41	32.61	112	273	PEAK																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5500.00	95.12	-----	-----	85.17	34.19	8.36	32.60	112	273	PEAK																																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.05</td> <td>38.54</td> <td>54.00</td> <td>-15.46</td> <td>28.57</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>112</td> <td>273</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5456.05	38.54	54.00	-15.46	28.57	34.17	8.41	32.61	112	273	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>86.87</td> <td>-----</td> <td>-----</td> <td>76.92</td> <td>34.19</td> <td>8.36</td> <td>32.60</td> <td>112</td> <td>273</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	86.87	-----	-----	76.92	34.19	8.36	32.60	112	273	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5456.05	38.54	54.00	-15.46	28.57	34.17	8.41	32.61	112	273	AVERAGE																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5500.00	86.87	-----	-----	76.92	34.19	8.36	32.60	112	273	AVERAGE																																																																																			



	22																																																																					
Mode	Band Edge																																																																					
	U-NII-2C_5.25-5.35_802.11ax HE20_CH140_Partial RU26/8_5700MHz																																																																					
ANT	5																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5743.55</td> <td>50.53</td> <td>68.30</td> <td>-17.77</td> <td>39.94</td> <td>34.64</td> <td>8.74</td> <td>32.79</td> <td>116</td> <td>61 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5743.55	50.53	68.30	-17.77	39.94	34.64	8.74	32.79	116	61 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>100.63</td> <td>-----</td> <td>-----</td> <td>90.21</td> <td>34.57</td> <td>8.62</td> <td>32.77</td> <td>116</td> <td>61 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	100.63	-----	-----	90.21	34.57	8.62	32.77	116	61 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5743.55	50.53	68.30	-17.77	39.94	34.64	8.74	32.79	116	61 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5700.00	100.63	-----	-----	90.21	34.57	8.62	32.77	116	61 PEAK																																																													
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>92.58</td> <td>-----</td> <td>-----</td> <td>82.16</td> <td>34.57</td> <td>8.62</td> <td>32.77</td> <td>116</td> <td>61 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5700.00	92.58	-----	-----	82.16	34.57	8.62	32.77	116	61 AVERAGE																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5700.00	92.58	-----	-----	82.16	34.57	8.62	32.77	116	61 AVERAGE																																																													



	22																																																																											
Mode	Band Edge																																																																											
	U-NII-2C_5.25-5.35_802.11ax HE20_CH140_Partial RU26/8_5700MHz																																																																											
ANT	5																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5754.08</td> <td>50.86</td> <td>68.30</td> <td>-17.44</td> <td>40.23</td> <td>34.65</td> <td>8.78</td> <td>32.80</td> <td>100</td> <td>288</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5754.08	50.86	68.30	-17.44	40.23	34.65	8.78	32.80	100	288	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>98.41</td> <td>-----</td> <td>-----</td> <td>87.99</td> <td>34.57</td> <td>8.62</td> <td>32.77</td> <td>100</td> <td>288</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	98.41	-----	-----	87.99	34.57	8.62	32.77	100	288	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5754.08	50.86	68.30	-17.44	40.23	34.65	8.78	32.80	100	288	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5700.00	98.41	-----	-----	87.99	34.57	8.62	32.77	100	288	PEAK																																																																	
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>90.19</td> <td>-----</td> <td>-----</td> <td>79.77</td> <td>34.57</td> <td>8.62</td> <td>32.77</td> <td>100</td> <td>288</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	90.19	-----	-----	79.77	34.57	8.62	32.77	100	288	AVERAGE																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5700.00	90.19	-----	-----	79.77	34.57	8.62	32.77	100	288	AVERAGE																																																																	



Mode	23																																																																									
	Band Edge																																																																									
	U-NII-1_5.25-5.35_802.11ax HE20_CH36_Partial RU52/37_5180MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5145.26</td> <td>53.04</td> <td>74.00</td> <td>-20.96</td> <td>43.87</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>112</td> <td>61</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5145.26	53.04	74.00	-20.96	43.87	33.99	7.92	32.74	112	61	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>100.13</td> <td>-----</td> <td>-----</td> <td>90.91</td> <td>34.01</td> <td>7.94</td> <td>32.73</td> <td>112</td> <td>61</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	100.13	-----	-----	90.91	34.01	7.94	32.73	112	61	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5145.26	53.04	74.00	-20.96	43.87	33.99	7.92	32.74	112	61	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5180.00	100.13	-----	-----	90.91	34.01	7.94	32.73	112	61	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5141.12</td> <td>39.73</td> <td>54.00</td> <td>-14.27</td> <td>30.57</td> <td>33.99</td> <td>7.91</td> <td>32.74</td> <td>112</td> <td>61</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5141.12	39.73	54.00	-14.27	30.57	33.99	7.91	32.74	112	61	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>91.62</td> <td>-----</td> <td>-----</td> <td>82.40</td> <td>34.01</td> <td>7.94</td> <td>32.73</td> <td>112</td> <td>61</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	91.62	-----	-----	82.40	34.01	7.94	32.73	112	61	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5141.12	39.73	54.00	-14.27	30.57	33.99	7.91	32.74	112	61	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5180.00	91.62	-----	-----	82.40	34.01	7.94	32.73	112	61	AVERAGE																																																															



		23																																																																																
Mode	Band Edge																																																																																	
	U-NII-1_5.25-5.35_802.11ax HE20_CH36_Partial RU52/37_5180MHz																																																																																	
ANT	5																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5066.96</td> <td>49.25</td> <td>74.00</td> <td>-24.75</td> <td>40.22</td> <td>33.94</td> <td>7.86</td> <td>32.77</td> <td>100</td> <td>260</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5066.96	49.25	74.00	-24.75	40.22	33.94	7.86	32.77	100	260	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>93.57</td> <td>-----</td> <td>-----</td> <td>84.37</td> <td>34.00</td> <td>7.93</td> <td>32.73</td> <td>100</td> <td>260</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	93.57	-----	-----	84.37	34.00	7.93	32.73	100	260	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5066.96	49.25	74.00	-24.75	40.22	33.94	7.86	32.77	100	260	PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5180.00	93.57	-----	-----	84.37	34.00	7.93	32.73	100	260	PEAK																																																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5073.26</td> <td>39.20</td> <td>54.00</td> <td>-14.80</td> <td>30.15</td> <td>33.95</td> <td>7.87</td> <td>32.77</td> <td>100</td> <td>260</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5073.26	39.20	54.00	-14.80	30.15	33.95	7.87	32.77	100	260	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>86.15</td> <td>-----</td> <td>-----</td> <td>76.93</td> <td>34.01</td> <td>7.94</td> <td>32.73</td> <td>100</td> <td>260</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5180.00	86.15	-----	-----	76.93	34.01	7.94	32.73	100	260	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5073.26	39.20	54.00	-14.80	30.15	33.95	7.87	32.77	100	260	AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																									
1	5180.00	86.15	-----	-----	76.93	34.01	7.94	32.73	100	260	AVERAGE																																																																							



Mode	24																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Partial RU52/40_5320MHz																																																																																	
ANT	5																																																																																	
Pol.	Horizontal	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5354.16</td> <td>49.73</td> <td>74.00</td> <td>-24.27</td> <td>39.94</td> <td>34.11</td> <td>8.34</td> <td>32.66</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>112</td> <td>66 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5354.16	49.73	74.00	-24.27	39.94	34.11	8.34	32.66							112	66 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>101.18</td> <td>-----</td> <td>-----</td> <td>91.50</td> <td>34.09</td> <td>8.26</td> <td>32.67</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>112</td> <td>66 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	101.18	-----	-----	91.50	34.09	8.26	32.67							112	66 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 5354.16	49.73	74.00	-24.27	39.94	34.11	8.34	32.66																																																																											
						112	66 PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 5320.00	101.18	-----	-----	91.50	34.09	8.26	32.67																																																																											
						112	66 PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5356.40</td> <td>40.24</td> <td>54.00</td> <td>-13.76</td> <td>30.43</td> <td>34.11</td> <td>8.35</td> <td>32.65</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>112</td> <td>66 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5356.40	40.24	54.00	-13.76	30.43	34.11	8.35	32.65							112	66 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>93.30</td> <td>-----</td> <td>-----</td> <td>83.62</td> <td>34.09</td> <td>8.26</td> <td>32.67</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>112</td> <td>66 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	93.30	-----	-----	83.62	34.09	8.26	32.67							112	66 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 5356.40	40.24	54.00	-13.76	30.43	34.11	8.35	32.65																																																																											
						112	66 AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 5320.00	93.30	-----	-----	83.62	34.09	8.26	32.67																																																																											
						112	66 AVERAGE																																																																											



Mode	24																																																																																	
	Band Edge																																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE20_CH64_Partial RU52/40_5320MHz																																																																																	
ANT	5																																																																																	
Pol.	Vertical	Fundamental																																																																																
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5380.06</td> <td>84.10</td> <td>74.00</td> <td>-25.90</td> <td>38.21</td> <td>34.13</td> <td>8.41</td> <td>32.65</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>110</td> <td>288 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5380.06	84.10	74.00	-25.90	38.21	34.13	8.41	32.65							110	288 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>93.55</td> <td>-----</td> <td>-----</td> <td>83.87</td> <td>34.09</td> <td>8.26</td> <td>32.67</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>110</td> <td>288 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	93.55	-----	-----	83.87	34.09	8.26	32.67							110	288 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 5380.06	84.10	74.00	-25.90	38.21	34.13	8.41	32.65																																																																											
						110	288 PEAK																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 5320.00	93.55	-----	-----	83.87	34.09	8.26	32.67																																																																											
						110	288 PEAK																																																																											
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5424.44</td> <td>38.65</td> <td>54.00</td> <td>-15.35</td> <td>28.67</td> <td>34.15</td> <td>8.46</td> <td>32.63</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>110</td> <td>288 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5424.44	38.65	54.00	-15.35	28.67	34.15	8.46	32.63							110	288 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>85.89</td> <td>-----</td> <td>-----</td> <td>76.21</td> <td>34.09</td> <td>8.26</td> <td>32.67</td> </tr> <tr> <td></td> <td></td> <td></td> <td></td> <td></td> <td></td> <td>110</td> <td>288 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	85.89	-----	-----	76.21	34.09	8.26	32.67							110	288 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 5424.44	38.65	54.00	-15.35	28.67	34.15	8.46	32.63																																																																											
						110	288 AVERAGE																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																											
1 5320.00	85.89	-----	-----	76.21	34.09	8.26	32.67																																																																											
						110	288 AVERAGE																																																																											






		25																																																																																									
Mode	Band Edge																																																																																										
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Partial RU52/37_5500MHz																																																																																										
ANT	5																																																																																										
Pol.	Horizontal	Fundamental																																																																																									
Peak	<p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a blue signal line and a red limit line. A peak is labeled 'PART 15.407' at approximately 5467.60 MHz. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 5350 to 5500 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.05</td> <td>48.66</td> <td>74.00</td> <td>-25.34</td> <td>38.69</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>109</td> <td>64 PEAK</td> </tr> <tr> <td>2</td> <td>5467.60</td> <td>49.31</td> <td>68.30</td> <td>-18.99</td> <td>39.34</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>109</td> <td>64 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.05	48.66	74.00	-25.34	38.69	34.17	8.41	32.61	109	64 PEAK	2	5467.60	49.31	68.30	-18.99	39.34	34.18	8.40	32.61	109	64 PEAK	<p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a blue signal line and a red limit line. A peak is labeled 'PART 15.407' at 5500.00 MHz. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>104.13</td> <td>-----</td> <td>-----</td> <td>94.18</td> <td>34.19</td> <td>8.36</td> <td>32.60</td> <td>109</td> <td>64 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	104.13	-----	-----	94.18	34.19	8.36	32.60	109	64 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5459.05	48.66	74.00	-25.34	38.69	34.17	8.41	32.61	109	64 PEAK																																																																																	
2	5467.60	49.31	68.30	-18.99	39.34	34.18	8.40	32.61	109	64 PEAK																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5500.00	104.13	-----	-----	94.18	34.19	8.36	32.60	109	64 PEAK																																																																																	
Avg	<p>Level (dBuV/m) vs Frequency (MHz) plot for Average Horizontal polarization. The plot shows a blue signal line and a red limit line. A peak is labeled 'PART 15.407 AVG' at 5459.65 MHz. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 5350 to 5500 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.65</td> <td>39.86</td> <td>54.00</td> <td>-14.14</td> <td>29.89</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>109</td> <td>64 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5459.65	39.86	54.00	-14.14	29.89	34.17	8.41	32.61	109	64 AVERAGE	<p>Level (dBuV/m) vs Frequency (MHz) plot for Average Fundamental polarization. The plot shows a blue signal line and a red limit line. A peak is labeled 'PART 15.407 AVG' at 5500.00 MHz. The y-axis ranges from 0 to 140 dBuV/m, and the x-axis ranges from 1000 to 7000 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>95.89</td> <td>-----</td> <td>-----</td> <td>85.94</td> <td>34.19</td> <td>8.36</td> <td>32.60</td> <td>109</td> <td>64 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5500.00	95.89	-----	-----	85.94	34.19	8.36	32.60	109	64 AVERAGE											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5459.65	39.86	54.00	-14.14	29.89	34.17	8.41	32.61	109	64 AVERAGE																																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																		
1	5500.00	95.89	-----	-----	85.94	34.19	8.36	32.60	109	64 AVERAGE																																																																																	



Mode	25																																																																																
	Band Edge																																																																																
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Partial RU52/37_5500MHz																																																																																
ANT	5																																																																																
Pol.	Vertical	Fundamental																																																																															
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5421.40</td> <td>48.45</td> <td>74.00</td> <td>-25.55</td> <td>38.47</td> <td>34.15</td> <td>8.46</td> <td>32.63</td> <td>110</td> <td>287 PEAK</td> </tr> <tr> <td>2</td> <td>5463.85</td> <td>48.09</td> <td>68.30</td> <td>-20.21</td> <td>38.12</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>110</td> <td>287 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5421.40	48.45	74.00	-25.55	38.47	34.15	8.46	32.63	110	287 PEAK	2	5463.85	48.09	68.30	-20.21	38.12	34.18	8.40	32.61	110	287 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>96.23</td> <td>-----</td> <td>-----</td> <td>86.28</td> <td>34.19</td> <td>8.36</td> <td>32.60</td> <td>110</td> <td>287 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	96.23	-----	-----	86.28	34.19	8.36	32.60	110	287 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	5421.40	48.45	74.00	-25.55	38.47	34.15	8.46	32.63	110	287 PEAK																																																																							
2	5463.85	48.09	68.30	-20.21	38.12	34.18	8.40	32.61	110	287 PEAK																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	5500.00	96.23	-----	-----	86.28	34.19	8.36	32.60	110	287 PEAK																																																																							
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.65</td> <td>38.75</td> <td>54.00</td> <td>-15.25</td> <td>28.78</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>110</td> <td>287 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5456.65	38.75	54.00	-15.25	28.78	34.17	8.41	32.61	110	287 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>86.82</td> <td>-----</td> <td>-----</td> <td>76.87</td> <td>34.19</td> <td>8.36</td> <td>32.60</td> <td>110</td> <td>287 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	86.82	-----	-----	76.87	34.19	8.36	32.60	110	287 AVERAGE											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	5456.65	38.75	54.00	-15.25	28.78	34.17	8.41	32.61	110	287 AVERAGE																																																																							
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																									
1	5500.00	86.82	-----	-----	76.87	34.19	8.36	32.60	110	287 AVERAGE																																																																							

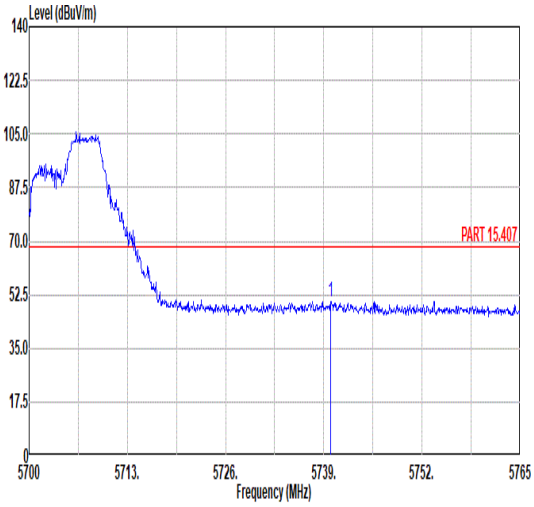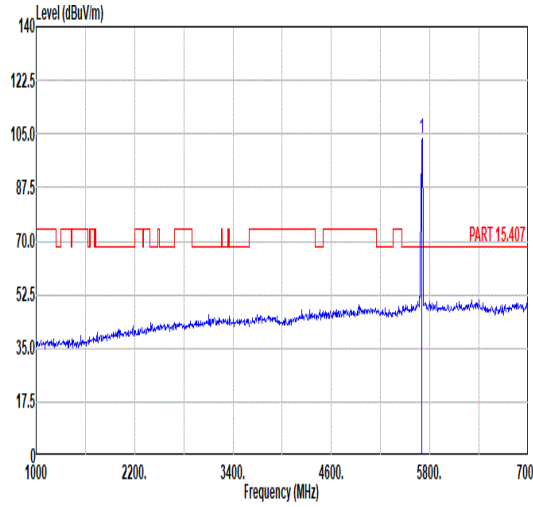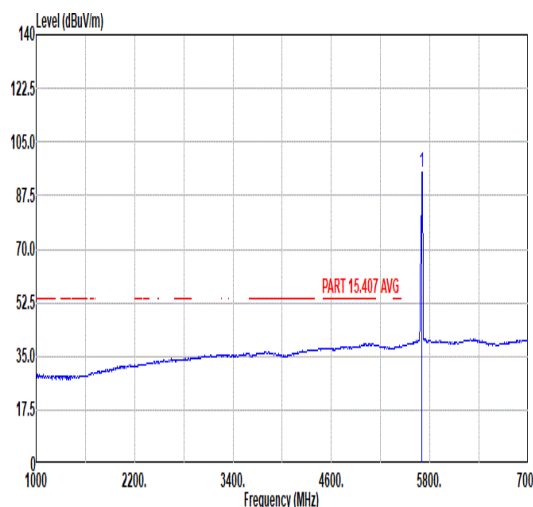

	26																																																																											
Mode	Band Edge																																																																											
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Partial RU52/40_5700MHz																																																																											
ANT	5																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PART 15.407</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5739.91</td> <td>50.38</td> <td>68.30</td> <td>-17.92</td> <td>39.81</td> <td>34.63</td> <td>8.73</td> <td>32.79</td> <td>116</td> <td>14</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5739.91	50.38	68.30	-17.92	39.81	34.63	8.73	32.79	116	14	PEAK	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PART 15.407</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>103.71</td> <td>-----</td> <td>-----</td> <td>93.29</td> <td>34.57</td> <td>8.62</td> <td>32.77</td> <td>116</td> <td>14</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	103.71	-----	-----	93.29	34.57	8.62	32.77	116	14	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5739.91	50.38	68.30	-17.92	39.81	34.63	8.73	32.79	116	14	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5700.00	103.71	-----	-----	93.29	34.57	8.62	32.77	116	14	PEAK																																																																	
Avg	Blank	 <p>Level (dBuV/m)</p> <p>Frequency (MHz)</p> <p>PART 15.407 AVG</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5700.00</td> <td>95.26</td> <td>-----</td> <td>-----</td> <td>84.84</td> <td>34.57</td> <td>8.62</td> <td>32.77</td> <td>116</td> <td>14</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5700.00	95.26	-----	-----	84.84	34.57	8.62	32.77	116	14	AVERAGE																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5700.00	95.26	-----	-----	84.84	34.57	8.62	32.77	116	14	AVERAGE																																																																	



	26																																																																							
Mode	Band Edge																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Partial RU52/40_5700MHz																																																																							
ANT	5																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5736.92</td> <td>49.74</td> <td>68.30</td> <td>-18.56</td> <td>39.19</td> <td>34.62</td> <td>8.72</td> <td>32.79</td> <td>110</td> <td>285 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5736.92	49.74	68.30	-18.56	39.19	34.62	8.72	32.79	110	285 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>98.67</td> <td>-----</td> <td>-----</td> <td>88.27</td> <td>34.56</td> <td>8.60</td> <td>32.76</td> <td>110</td> <td>285 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	98.67	-----	-----	88.27	34.56	8.60	32.76	110	285 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5736.92	49.74	68.30	-18.56	39.19	34.62	8.72	32.79	110	285 PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5700.00	98.67	-----	-----	88.27	34.56	8.60	32.76	110	285 PEAK																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>89.57</td> <td>-----</td> <td>-----</td> <td>79.15</td> <td>34.57</td> <td>8.62</td> <td>32.77</td> <td>110</td> <td>285 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	89.57	-----	-----	79.15	34.57	8.62	32.77	110	285 AVERAGE																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5700.00	89.57	-----	-----	79.15	34.57	8.62	32.77	110	285 AVERAGE																																																															







		27																																																																								
Mode	Band Edge																																																																									
	U-NII-1_5.47-5.725_802.11ax HE20_CH36_Partial RU106/53_5180MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.04</td> <td>55.77</td> <td>74.00</td> <td>-18.23</td> <td>46.60</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>100</td> <td>64</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.04	55.77	74.00	-18.23	46.60	33.99	7.92	32.74	100	64	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>100.80</td> <td>-----</td> <td>-----</td> <td>91.60</td> <td>34.00</td> <td>7.93</td> <td>32.73</td> <td>100</td> <td>64</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	100.80	-----	-----	91.60	34.00	7.93	32.73	100	64	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5149.04	55.77	74.00	-18.23	46.60	33.99	7.92	32.74	100	64	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5180.00	100.80	-----	-----	91.60	34.00	7.93	32.73	100	64	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.22</td> <td>42.91</td> <td>54.00</td> <td>-11.09</td> <td>33.74</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>100</td> <td>64</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5149.22	42.91	54.00	-11.09	33.74	33.99	7.92	32.74	100	64	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>92.73</td> <td>-----</td> <td>-----</td> <td>83.51</td> <td>34.01</td> <td>7.94</td> <td>32.73</td> <td>100</td> <td>64</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5180.00	92.73	-----	-----	83.51	34.01	7.94	32.73	100	64	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5149.22	42.91	54.00	-11.09	33.74	33.99	7.92	32.74	100	64	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																			
1	5180.00	92.73	-----	-----	83.51	34.01	7.94	32.73	100	64	AVERAGE																																																															



Mode	27																																																																											
	Band Edge																																																																											
	U-NII-1_5.47-5.725_802.11ax HE20_CH36_Partial RU106/53_5180MHz																																																																											
ANT	5																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.86</td> <td>50.64</td> <td>74.00</td> <td>-23.36</td> <td>41.47</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>109</td> <td>252</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5148.86	50.64	74.00	-23.36	41.47	33.99	7.92	32.74	109	252	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>92.87</td> <td>-----</td> <td>-----</td> <td>83.67</td> <td>34.00</td> <td>7.93</td> <td>32.73</td> <td>109</td> <td>252</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	92.87	-----	-----	83.67	34.00	7.93	32.73	109	252	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5148.86	50.64	74.00	-23.36	41.47	33.99	7.92	32.74	109	252	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5180.00	92.87	-----	-----	83.67	34.00	7.93	32.73	109	252	PEAK																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.58</td> <td>39.35</td> <td>54.00</td> <td>-14.65</td> <td>30.18</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>109</td> <td>252</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.58	39.35	54.00	-14.65	30.18	33.99	7.92	32.74	109	252	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5180.00</td> <td>85.05</td> <td>-----</td> <td>-----</td> <td>75.85</td> <td>34.00</td> <td>7.93</td> <td>32.73</td> <td>109</td> <td>252</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5180.00	85.05	-----	-----	75.85	34.00	7.93	32.73	109	252	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5149.58	39.35	54.00	-14.65	30.18	33.99	7.92	32.74	109	252	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5180.00	85.05	-----	-----	75.85	34.00	7.93	32.73	109	252	AVERAGE																																																																	

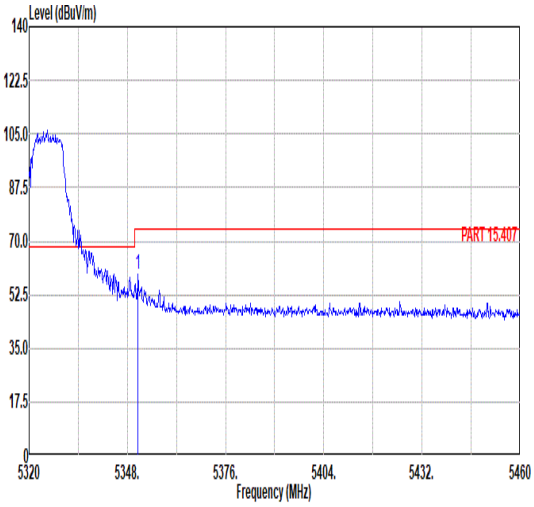
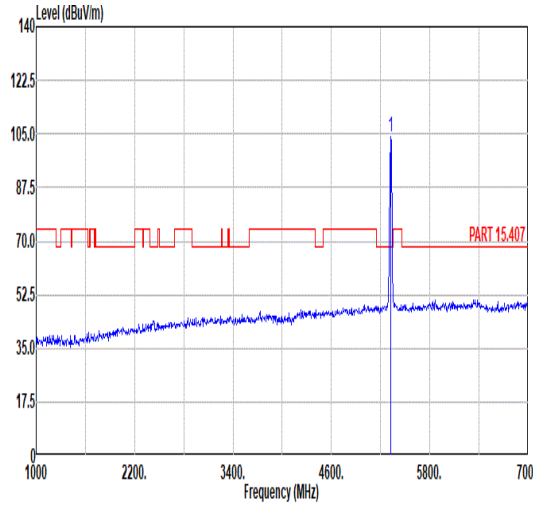
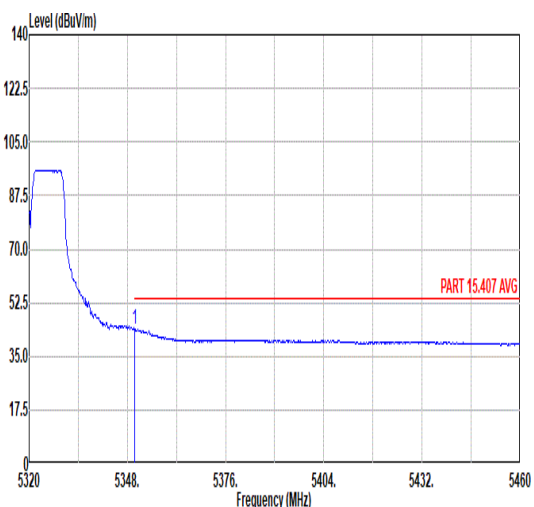
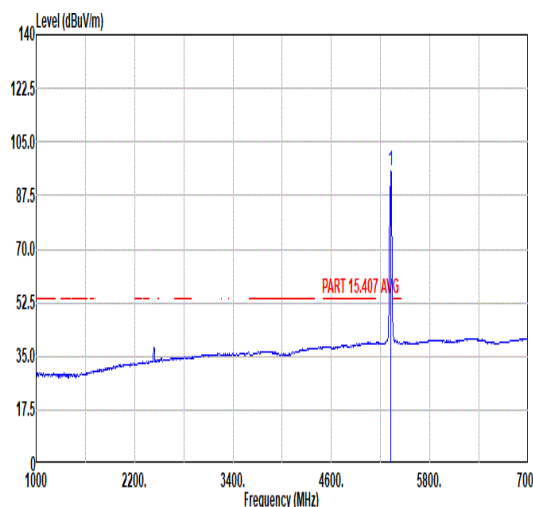


		28																																																																				
Mode	Band Edge																																																																					
	U-NII-2A_5.47-5.725_802.11ax HE20_CH64_Partial RU106/54_5320MHz																																																																					
ANT	5																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization. The plot shows a signal level starting at approximately 105 dBuV/m at 5320 MHz and decreasing to about 50 dBuV/m by 5460 MHz. A red limit line is shown at 70.0 dBuV/m. A blue peak is marked at 5351.08 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5351.08</td> <td>59.22</td> <td>74.00</td> <td>-14.78</td> <td>49.44</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>100</td> <td>64 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5351.08	59.22	74.00	-14.78	49.44	34.11	8.33	32.66	100	64 PEAK	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization. The plot shows a signal level starting at approximately 40 dBuV/m at 1000 MHz and increasing to about 105 dBuV/m at 5320 MHz. A red limit line is shown at 70.0 dBuV/m. A blue peak is marked at 5320.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>104.13</td> <td>-----</td> <td>-----</td> <td>94.45</td> <td>34.09</td> <td>8.26</td> <td>32.67</td> <td>100</td> <td>64 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	104.13	-----	-----	94.45	34.09	8.26	32.67	100	64 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5351.08	59.22	74.00	-14.78	49.44	34.11	8.33	32.66	100	64 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5320.00	104.13	-----	-----	94.45	34.09	8.26	32.67	100	64 PEAK																																																													
Avg	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Horizontal polarization (Average). The plot shows a signal level starting at approximately 105 dBuV/m at 5320 MHz and decreasing to about 40 dBuV/m by 5460 MHz. A red limit line is shown at 54.00 dBuV/m. A blue peak is marked at 5350.10 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5350.10</td> <td>43.98</td> <td>54.00</td> <td>-10.02</td> <td>34.20</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>100</td> <td>64 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5350.10	43.98	54.00	-10.02	34.20	34.11	8.33	32.66	100	64 AVERAGE	 <p>Level (dBuV/m) vs Frequency (MHz) plot for Fundamental polarization (Average). The plot shows a signal level starting at approximately 40 dBuV/m at 1000 MHz and increasing to about 105 dBuV/m at 5320 MHz. A red limit line is shown at 54.00 dBuV/m. A blue peak is marked at 5320.00 MHz.</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>95.73</td> <td>-----</td> <td>-----</td> <td>86.05</td> <td>34.09</td> <td>8.26</td> <td>32.67</td> <td>100</td> <td>64 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	95.73	-----	-----	86.05	34.09	8.26	32.67	100	64 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5350.10	43.98	54.00	-10.02	34.20	34.11	8.33	32.66	100	64 AVERAGE																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5320.00	95.73	-----	-----	86.05	34.09	8.26	32.67	100	64 AVERAGE																																																													



		28																																																																				
Mode	Band Edge																																																																					
	U-NII-2A_5.47-5.725_802.11ax HE20_CH64_Partial RU106/54_5320MHz																																																																					
ANT	5																																																																					
Pol.	Vertical	Fundamental																																																																				
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5351.08</td> <td>50.38</td> <td>74.00</td> <td>-23.62</td> <td>40.60</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>100</td> <td>269 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5351.08	50.38	74.00	-23.62	40.60	34.11	8.33	32.66	100	269 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>96.37</td> <td>-----</td> <td>-----</td> <td>86.69</td> <td>34.09</td> <td>8.26</td> <td>32.67</td> <td>100</td> <td>269 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	96.37	-----	-----	86.69	34.09	8.26	32.67	100	269 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5351.08	50.38	74.00	-23.62	40.60	34.11	8.33	32.66	100	269 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5320.00	96.37	-----	-----	86.69	34.09	8.26	32.67	100	269 PEAK																																																													
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5351.64</td> <td>39.10</td> <td>54.00</td> <td>-14.90</td> <td>29.32</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>100</td> <td>269 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5351.64	39.10	54.00	-14.90	29.32	34.11	8.33	32.66	100	269 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1 5320.00</td> <td>88.24</td> <td>-----</td> <td>-----</td> <td>78.57</td> <td>34.09</td> <td>8.25</td> <td>32.67</td> <td>100</td> <td>269 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1 5320.00	88.24	-----	-----	78.57	34.09	8.25	32.67	100	269 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5351.64	39.10	54.00	-14.90	29.32	34.11	8.33	32.66	100	269 AVERAGE																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																															
1 5320.00	88.24	-----	-----	78.57	34.09	8.25	32.67	100	269 AVERAGE																																																													

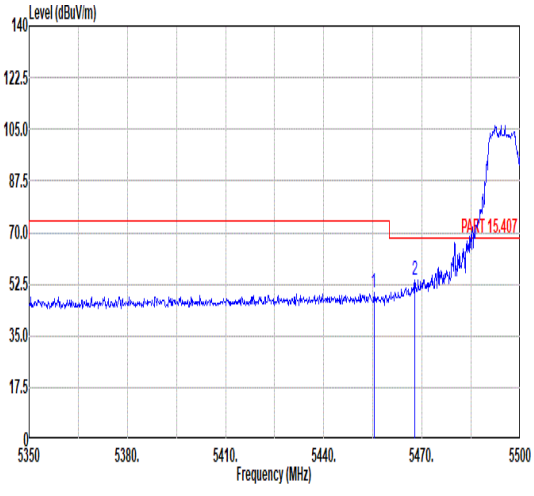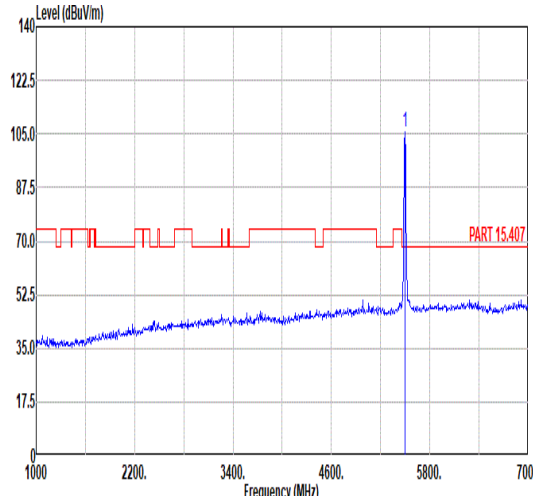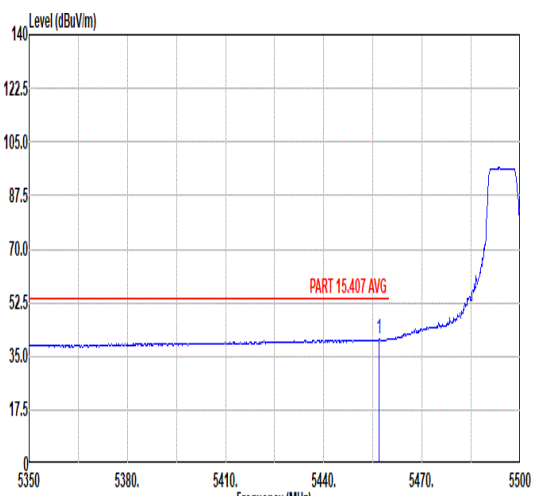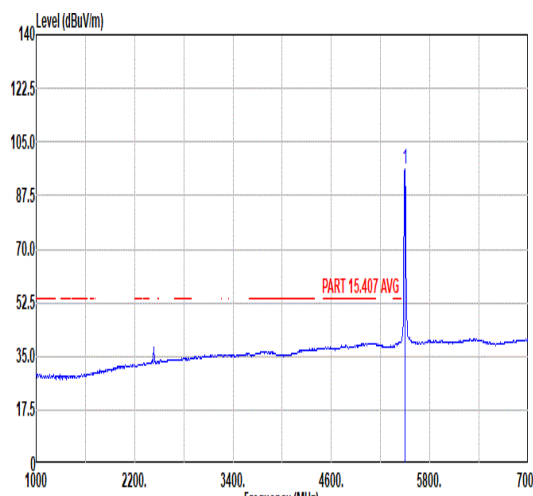

		29																																																							
Mode	Band Edge																																																								
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Partial RU106/53_5500MHz																																																								
ANT	5																																																								
Pol.	Horizontal	Fundamental																																																							
Peak	 <table border="1" data-bbox="263 1097 734 1243"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Level dBuV/m</th> <th>Line Margin dB</th> <th>Read Level dBuV</th> <th>Ant Factor dB/m</th> <th>Cable Loss Factor dB</th> <th>Preamp Loss Factor dB</th> <th>APos cm</th> <th>TPos deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5455.30</td> <td>49.79</td> <td>74.00</td> <td>-24.21</td> <td>39.81</td> <td>34.17</td> <td>8.42</td> <td>32.61</td> <td>104</td> <td>63 PEAK</td> </tr> <tr> <td>2</td> <td>5467.75</td> <td>53.94</td> <td>68.30</td> <td>-14.36</td> <td>43.97</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>104</td> <td>63 PEAK</td> </tr> </tbody> </table>		Limit Freq	Level dBuV/m	Line Margin dB	Read Level dBuV	Ant Factor dB/m	Cable Loss Factor dB	Preamp Loss Factor dB	APos cm	TPos deg	Remark	1	5455.30	49.79	74.00	-24.21	39.81	34.17	8.42	32.61	104	63 PEAK	2	5467.75	53.94	68.30	-14.36	43.97	34.18	8.40	32.61	104	63 PEAK	 <table border="1" data-bbox="901 1097 1372 1243"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Level dBuV/m</th> <th>Line Margin dB</th> <th>Read Level dBuV</th> <th>Ant Factor dB/m</th> <th>Cable Loss Factor dB</th> <th>Preamp Loss Factor dB</th> <th>APos cm</th> <th>TPos deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>105.76</td> <td>-----</td> <td>95.81</td> <td>34.20</td> <td>8.36</td> <td>32.61</td> <td>104</td> <td>63</td> <td>PEAK</td> </tr> </tbody> </table>		Limit Freq	Level dBuV/m	Line Margin dB	Read Level dBuV	Ant Factor dB/m	Cable Loss Factor dB	Preamp Loss Factor dB	APos cm	TPos deg	Remark	1	5500.00	105.76	-----	95.81	34.20	8.36	32.61	104	63	PEAK
		Limit Freq	Level dBuV/m	Line Margin dB	Read Level dBuV	Ant Factor dB/m	Cable Loss Factor dB	Preamp Loss Factor dB	APos cm	TPos deg	Remark																																														
1	5455.30	49.79	74.00	-24.21	39.81	34.17	8.42	32.61	104	63 PEAK																																															
2	5467.75	53.94	68.30	-14.36	43.97	34.18	8.40	32.61	104	63 PEAK																																															
	Limit Freq	Level dBuV/m	Line Margin dB	Read Level dBuV	Ant Factor dB/m	Cable Loss Factor dB	Preamp Loss Factor dB	APos cm	TPos deg	Remark																																															
1	5500.00	105.76	-----	95.81	34.20	8.36	32.61	104	63	PEAK																																															
Avg	 <table border="1" data-bbox="263 1769 734 1915"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Level dBuV/m</th> <th>Line Margin dB</th> <th>Read Level dBuV</th> <th>Ant Factor dB/m</th> <th>Cable Loss Factor dB</th> <th>Preamp Loss Factor dB</th> <th>APos cm</th> <th>TPos deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5456.95</td> <td>40.69</td> <td>54.00</td> <td>-13.31</td> <td>30.72</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>104</td> <td>63 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Level dBuV/m	Line Margin dB	Read Level dBuV	Ant Factor dB/m	Cable Loss Factor dB	Preamp Loss Factor dB	APos cm	TPos deg	Remark	1	5456.95	40.69	54.00	-13.31	30.72	34.17	8.41	32.61	104	63 AVERAGE	 <table border="1" data-bbox="901 1769 1372 1915"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Level dBuV/m</th> <th>Line Margin dB</th> <th>Read Level dBuV</th> <th>Ant Factor dB/m</th> <th>Cable Loss Factor dB</th> <th>Preamp Loss Factor dB</th> <th>APos cm</th> <th>TPos deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>96.06</td> <td>-----</td> <td>86.11</td> <td>34.19</td> <td>8.36</td> <td>32.60</td> <td>104</td> <td>63</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Level dBuV/m	Line Margin dB	Read Level dBuV	Ant Factor dB/m	Cable Loss Factor dB	Preamp Loss Factor dB	APos cm	TPos deg	Remark	1	5500.00	96.06	-----	86.11	34.19	8.36	32.60	104	63	AVERAGE											
		Limit Freq	Level dBuV/m	Line Margin dB	Read Level dBuV	Ant Factor dB/m	Cable Loss Factor dB	Preamp Loss Factor dB	APos cm	TPos deg	Remark																																														
1	5456.95	40.69	54.00	-13.31	30.72	34.17	8.41	32.61	104	63 AVERAGE																																															
	Limit Freq	Level dBuV/m	Line Margin dB	Read Level dBuV	Ant Factor dB/m	Cable Loss Factor dB	Preamp Loss Factor dB	APos cm	TPos deg	Remark																																															
1	5500.00	96.06	-----	86.11	34.19	8.36	32.60	104	63	AVERAGE																																															



		29																																																																																							
Mode	Band Edge																																																																																								
	U-NII-2C_5.47-5.725_802.11ax HE20_CH100_Partial RU106/53_5500MHz																																																																																								
ANT	5																																																																																								
Pol.	Vertical	Fundamental																																																																																							
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5394.70</td> <td>48.76</td> <td>74.00</td> <td>-25.24</td> <td>38.81</td> <td>34.14</td> <td>8.45</td> <td>32.64</td> <td>100</td> <td>276 PEAK</td> </tr> <tr> <td>2</td> <td>5467.45</td> <td>48.66</td> <td>68.30</td> <td>-19.64</td> <td>38.69</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>100</td> <td>276 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5394.70	48.76	74.00	-25.24	38.81	34.14	8.45	32.64	100	276 PEAK	2	5467.45	48.66	68.30	-19.64	38.69	34.18	8.40	32.61	100	276 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>96.15</td> <td>-----</td> <td>-----</td> <td>86.20</td> <td>34.19</td> <td>8.36</td> <td>32.60</td> <td>100</td> <td>276 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	96.15	-----	-----	86.20	34.19	8.36	32.60	100	276 PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5394.70	48.76	74.00	-25.24	38.81	34.14	8.45	32.64	100	276 PEAK																																																																															
2	5467.45	48.66	68.30	-19.64	38.69	34.18	8.40	32.61	100	276 PEAK																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5500.00	96.15	-----	-----	86.20	34.19	8.36	32.60	100	276 PEAK																																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5454.10</td> <td>39.03</td> <td>54.00</td> <td>-14.97</td> <td>29.06</td> <td>34.17</td> <td>8.42</td> <td>32.62</td> <td>100</td> <td>276 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5454.10	39.03	54.00	-14.97	29.06	34.17	8.42	32.62	100	276 AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5500.00</td> <td>87.04</td> <td>-----</td> <td>-----</td> <td>77.09</td> <td>34.19</td> <td>8.36</td> <td>32.60</td> <td>100</td> <td>276 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5500.00	87.04	-----	-----	77.09	34.19	8.36	32.60	100	276 AVERAGE											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5454.10	39.03	54.00	-14.97	29.06	34.17	8.42	32.62	100	276 AVERAGE																																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																	
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	5500.00	87.04	-----	-----	77.09	34.19	8.36	32.60	100	276 AVERAGE																																																																															







Mode	30																																																																							
	Band Edge																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Partial RU106/54_5700MHz																																																																							
ANT	5																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5725.09</td> <td>53.02</td> <td>68.30</td> <td>-15.28</td> <td>42.53</td> <td>34.60</td> <td>8.67</td> <td>32.78</td> <td>104</td> <td>55 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5725.09	53.02	68.30	-15.28	42.53	34.60	8.67	32.78	104	55 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>104.29</td> <td>-----</td> <td>-----</td> <td>93.89</td> <td>34.56</td> <td>8.60</td> <td>32.76</td> <td>104</td> <td>55 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	104.29	-----	-----	93.89	34.56	8.60	32.76	104	55 PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5725.09	53.02	68.30	-15.28	42.53	34.60	8.67	32.78	104	55 PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5700.00	104.29	-----	-----	93.89	34.56	8.60	32.76	104	55 PEAK																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>93.89</td> <td>-----</td> <td>-----</td> <td>83.49</td> <td>34.56</td> <td>8.60</td> <td>32.76</td> <td>104</td> <td>55 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	93.89	-----	-----	83.49	34.56	8.60	32.76	104	55 AVERAGE																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5700.00	93.89	-----	-----	83.49	34.56	8.60	32.76	104	55 AVERAGE																																																															



Mode	30																																																																							
	Band Edge																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE20_CH140_Partial RU106/54_5700MHz																																																																							
ANT	5																																																																							
Pol.	Vertical	Fundamental																																																																						
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5725.09</td> <td>53.30</td> <td>68.30</td> <td>-15.00</td> <td>42.81</td> <td>34.60</td> <td>8.67</td> <td>32.78</td> <td>100</td> <td>293 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5725.09	53.30	68.30	-15.00	42.81	34.60	8.67	32.78	100	293 PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>102.06</td> <td>-----</td> <td>-----</td> <td>91.66</td> <td>34.56</td> <td>8.60</td> <td>32.76</td> <td>100</td> <td>293 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	102.06	-----	-----	91.66	34.56	8.60	32.76	100	293 PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5725.09	53.30	68.30	-15.00	42.81	34.60	8.67	32.78	100	293 PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5700.00	102.06	-----	-----	91.66	34.56	8.60	32.76	100	293 PEAK																																																															
Avg	Blank	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5700.00</td> <td>90.63</td> <td>-----</td> <td>-----</td> <td>80.23</td> <td>34.56</td> <td>8.60</td> <td>32.76</td> <td>100</td> <td>293 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5700.00	90.63	-----	-----	80.23	34.56	8.60	32.76	100	293 AVERAGE																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5700.00	90.63	-----	-----	80.23	34.56	8.60	32.76	100	293 AVERAGE																																																															

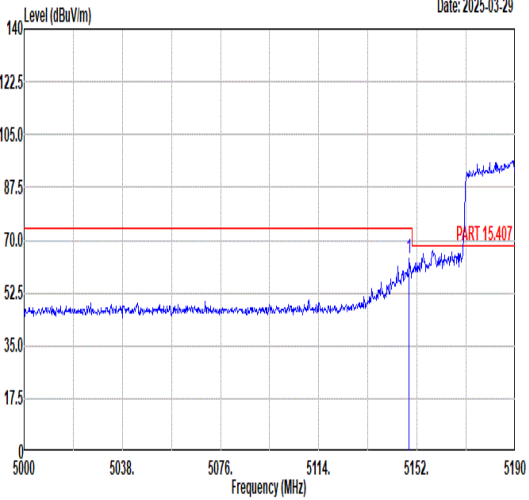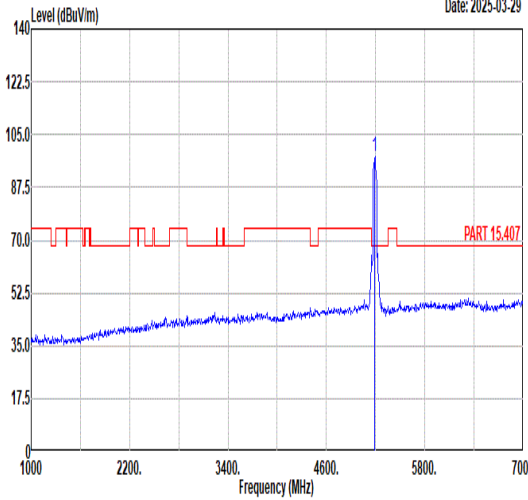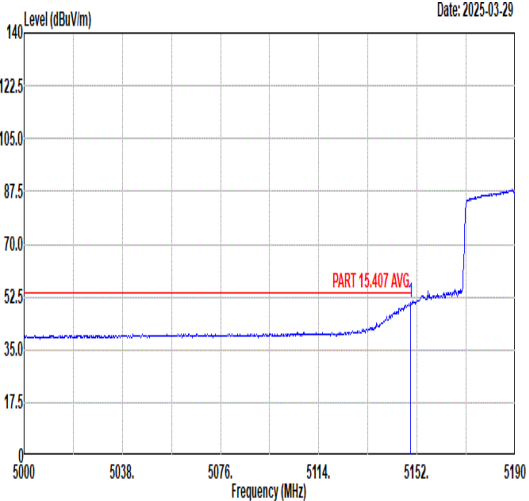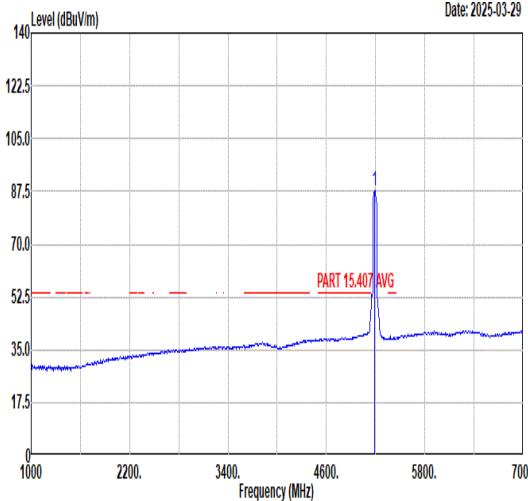

	31																																																																									
Mode	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full_5190MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.96</td> <td>64.17</td> <td>74.00</td> <td>-9.83</td> <td>55.00</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>102</td> <td>127</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5148.96	64.17	74.00	-9.83	55.00	33.99	7.92	32.74	102	127	PEAK	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>97.90</td> <td>-----</td> <td>-----</td> <td>88.65</td> <td>34.02</td> <td>7.95</td> <td>32.72</td> <td>102</td> <td>127</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5190.00	97.90	-----	-----	88.65	34.02	7.95	32.72	102	127	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5148.96	64.17	74.00	-9.83	55.00	33.99	7.92	32.74	102	127	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5190.00	97.90	-----	-----	88.65	34.02	7.95	32.72	102	127	PEAK																																																															
Avg	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.53</td> <td>50.47</td> <td>54.00</td> <td>-3.53</td> <td>41.30</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>102</td> <td>127</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5149.53	50.47	54.00	-3.53	41.30	33.99	7.92	32.74	102	127	AVERAGE	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>87.91</td> <td>-----</td> <td>-----</td> <td>78.68</td> <td>34.01</td> <td>7.94</td> <td>32.72</td> <td>102</td> <td>127</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5190.00	87.91	-----	-----	78.68	34.01	7.94	32.72	102	127	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5149.53	50.47	54.00	-3.53	41.30	33.99	7.92	32.74	102	127	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5190.00	87.91	-----	-----	78.68	34.01	7.94	32.72	102	127	AVERAGE																																																															



Mode	31																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full_5190MHz																																					
ANT	5																																					
Pol.	Horizontal	Fundamental																																				
Peak	<p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5386.02</td> <td>48.29</td> <td>74.00</td> <td>-25.71</td> <td>38.38</td> <td>34.13</td> <td>8.42</td> <td>32.64</td> <td>102</td> <td>127</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5386.02	48.29	74.00	-25.71	38.38	34.13	8.42	32.64	102	127	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5386.02	48.29	74.00	-25.71	38.38	34.13	8.42	32.64	102	127	PEAK																											
Blank																																						
Avg	<p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5420.85</td> <td>39.39</td> <td>54.00</td> <td>-14.61</td> <td>29.41</td> <td>34.15</td> <td>8.46</td> <td>32.63</td> <td>102</td> <td>127</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5420.85	39.39	54.00	-14.61	29.41	34.15	8.46	32.63	102	127	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5420.85	39.39	54.00	-14.61	29.41	34.15	8.46	32.63	102	127	AVERAGE																											
Blank																																						



	31																																																																											
Mode	Band Edge - L																																																																											
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full_5190MHz																																																																											
ANT	5																																																																											
Pol.	Vertical	Fundamental																																																																										
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5147.44</td> <td>50.54</td> <td>74.00</td> <td>-23.46</td> <td>41.37</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>103</td> <td>271</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5147.44	50.54	74.00	-23.46	41.37	33.99	7.92	32.74	103	271	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>86.68</td> <td>-----</td> <td>-----</td> <td>77.43</td> <td>34.02</td> <td>7.95</td> <td>32.72</td> <td>103</td> <td>271</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	86.68	-----	-----	77.43	34.02	7.95	32.72	103	271	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5147.44	50.54	74.00	-23.46	41.37	33.99	7.92	32.74	103	271	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5190.00	86.68	-----	-----	77.43	34.02	7.95	32.72	103	271	PEAK																																																																	
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.15</td> <td>42.03</td> <td>54.00</td> <td>-11.97</td> <td>32.86</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>103</td> <td>271</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5149.15	42.03	54.00	-11.97	32.86	33.99	7.92	32.74	103	271	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5190.00</td> <td>79.40</td> <td>-----</td> <td>-----</td> <td>70.17</td> <td>34.01</td> <td>7.94</td> <td>32.72</td> <td>103</td> <td>271</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5190.00	79.40	-----	-----	70.17	34.01	7.94	32.72	103	271	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5149.15	42.03	54.00	-11.97	32.86	33.99	7.92	32.74	103	271	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5190.00	79.40	-----	-----	70.17	34.01	7.94	32.72	103	271	AVERAGE																																																																	



Mode	31																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full_5190MHz																																					
ANT	5																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5442.72</td> <td>48.78</td> <td>74.00</td> <td>-25.22</td> <td>38.81</td> <td>34.16</td> <td>8.43</td> <td>32.62</td> <td>103</td> <td>271</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5442.72	48.78	74.00	-25.22	38.81	34.16	8.43	32.62	103	271	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5442.72	48.78	74.00	-25.22	38.81	34.16	8.43	32.62	103	271	PEAK																											
Blank																																						
Avg	<p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5440.56</td> <td>39.28</td> <td>54.00</td> <td>-14.72</td> <td>29.30</td> <td>34.16</td> <td>8.44</td> <td>32.62</td> <td>103</td> <td>271</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5440.56	39.28	54.00	-14.72	29.30	34.16	8.44	32.62	103	271	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5440.56	39.28	54.00	-14.72	29.30	34.16	8.44	32.62	103	271	AVERAGE																											
Blank																																						



Mode	31																																																																																																							
	Harmonic																																																																																																							
	U-NII-1_5.15-5.25_802.11ax HE40_CH38_Full_5190MHz																																																																																																							
ANT	5																																																																																																							
Pol.	Horizontal	Vertical																																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>46.69</td> <td>68.30</td> <td>-21.61</td> <td>57.72</td> <td>37.21</td> <td>10.74</td> <td>58.98</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>49.60</td> <td>74.00</td> <td>-24.40</td> <td>56.42</td> <td>39.43</td> <td>12.72</td> <td>58.97</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10380.00	46.69	68.30	-21.61	57.72	37.21	10.74	58.98	--	--	Peak	2	15570.00	49.60	74.00	-24.40	56.42	39.43	12.72	58.97	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10380.00</td> <td>47.35</td> <td>68.30</td> <td>-20.95</td> <td>58.38</td> <td>37.21</td> <td>10.74</td> <td>58.98</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15570.00</td> <td>50.01</td> <td>74.00</td> <td>-23.99</td> <td>56.83</td> <td>39.43</td> <td>12.72</td> <td>58.97</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10380.00	47.35	68.30	-20.95	58.38	37.21	10.74	58.98	--	--	Peak	2	15570.00	50.01	74.00	-23.99	56.83	39.43	12.72	58.97	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																
1	10380.00	46.69	68.30	-21.61	57.72	37.21	10.74	58.98	--	--	Peak																																																																																													
2	15570.00	49.60	74.00	-24.40	56.42	39.43	12.72	58.97	--	--	Peak																																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																
1	10380.00	47.35	68.30	-20.95	58.38	37.21	10.74	58.98	--	--	Peak																																																																																													
2	15570.00	50.01	74.00	-23.99	56.83	39.43	12.72	58.97	--	--	Peak																																																																																													



	32																																																																							
Mode	Band Edge - L																																																																							
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full_5230MHz																																																																							
ANT	5																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5144.90</td> <td>49.95</td> <td>74.00</td> <td>-24.05</td> <td>40.78</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>100</td> <td>62 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5144.90	49.95	74.00	-24.05	40.78	33.99	7.92	32.74	100	62 PEAK	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5230.00</td> <td>98.27</td> <td>-----</td> <td>-----</td> <td>88.96</td> <td>34.03</td> <td>7.99</td> <td>32.71</td> <td>100</td> <td>62 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5230.00	98.27	-----	-----	88.96	34.03	7.99	32.71	100	62 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5144.90	49.95	74.00	-24.05	40.78	33.99	7.92	32.74	100	62 PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5230.00	98.27	-----	-----	88.96	34.03	7.99	32.71	100	62 PEAK																																																															
Avg	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5148.81</td> <td>41.04</td> <td>54.00</td> <td>-12.96</td> <td>31.87</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>100</td> <td>62 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5148.81	41.04	54.00	-12.96	31.87	33.99	7.92	32.74	100	62 AVERAGE	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 5230.00</td> <td>89.91</td> <td>-----</td> <td>-----</td> <td>80.57</td> <td>34.04</td> <td>8.01</td> <td>32.71</td> <td>100</td> <td>62 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1 5230.00	89.91	-----	-----	80.57	34.04	8.01	32.71	100	62 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5148.81	41.04	54.00	-12.96	31.87	33.99	7.92	32.74	100	62 AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																	
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1 5230.00	89.91	-----	-----	80.57	34.04	8.01	32.71	100	62 AVERAGE																																																															



Mode	32																																						
	Band Edge - R																																						
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full_5230MHz																																						
ANT	5																																						
Pol.	Horizontal	Fundamental																																					
Peak	<p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5420.67</td> <td>48.29</td> <td>74.00</td> <td>-25.71</td> <td>38.31</td> <td>34.15</td> <td>8.46</td> <td>32.63</td> <td>100</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5420.67	48.29	74.00	-25.71	38.31	34.15	8.46	32.63	100	62	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5420.67	48.29	74.00	-25.71	38.31	34.15	8.46	32.63	100	62	PEAK																												
Blank																																							
Avg	<p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.29</td> <td>39.88</td> <td>54.00</td> <td>-14.12</td> <td>30.10</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>100</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.29	39.88	54.00	-14.12	30.10	34.11	8.33	32.66	100	62	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																															
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																															
1	5350.29	39.88	54.00	-14.12	30.10	34.11	8.33	32.66	100	62	AVERAGE																												
Blank																																							



	32																																																																									
Mode	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full_5230MHz																																																																									
ANT	5																																																																									
Pol.	Vertical	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5068.54</td> <td>49.40</td> <td>74.00</td> <td>-24.60</td> <td>40.37</td> <td>33.94</td> <td>7.86</td> <td>32.77</td> <td>100</td> <td>267</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5068.54	49.40	74.00	-24.60	40.37	33.94	7.86	32.77	100	267	PEAK	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>90.06</td> <td>-----</td> <td>-----</td> <td>80.70</td> <td>34.04</td> <td>8.02</td> <td>32.70</td> <td>100</td> <td>267</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5230.00	90.06	-----	-----	80.70	34.04	8.02	32.70	100	267	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5068.54	49.40	74.00	-24.60	40.37	33.94	7.86	32.77	100	267	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5230.00	90.06	-----	-----	80.70	34.04	8.02	32.70	100	267	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5097.98</td> <td>40.16</td> <td>54.00</td> <td>-13.84</td> <td>31.08</td> <td>33.96</td> <td>7.88</td> <td>32.76</td> <td>100</td> <td>267</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5097.98	40.16	54.00	-13.84	31.08	33.96	7.88	32.76	100	267	AVERAGE	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5230.00</td> <td>81.59</td> <td>-----</td> <td>-----</td> <td>72.25</td> <td>34.04</td> <td>8.01</td> <td>32.71</td> <td>100</td> <td>267</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5230.00	81.59	-----	-----	72.25	34.04	8.01	32.71	100	267	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5097.98	40.16	54.00	-13.84	31.08	33.96	7.88	32.76	100	267	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																			
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5230.00	81.59	-----	-----	72.25	34.04	8.01	32.71	100	267	AVERAGE																																																															







Mode	32																																					
	Band Edge - R																																					
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full_5230MHz																																					
ANT	5																																					
Pol.	Vertical	Fundamental																																				
Peak	<p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5413.54</td> <td>48.19</td> <td>74.00</td> <td>-25.81</td> <td>38.20</td> <td>34.15</td> <td>8.47</td> <td>32.63</td> <td>100</td> <td>267</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5413.54	48.19	74.00	-25.81	38.20	34.15	8.47	32.63	100	267	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5413.54	48.19	74.00	-25.81	38.20	34.15	8.47	32.63	100	267	PEAK																											
Blank																																						
Avg	<p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5435.39</td> <td>39.32</td> <td>54.00</td> <td>-14.68</td> <td>29.34</td> <td>34.16</td> <td>8.44</td> <td>32.62</td> <td>100</td> <td>267</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5435.39	39.32	54.00	-14.68	29.34	34.16	8.44	32.62	100	267	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																															
1	5435.39	39.32	54.00	-14.68	29.34	34.16	8.44	32.62	100	267	AVERAGE																											
Blank																																						



Mode	32																																																																																															
	Harmonic																																																																																															
	U-NII-1_5.15-5.25_802.11ax HE40_CH46_Full_5230MHz																																																																																															
ANT	5																																																																																															
Pol.	Horizontal	Vertical																																																																																														
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.00</td> <td>46.63</td> <td>68.30</td> <td>-21.67</td> <td>57.32</td> <td>37.40</td> <td>10.80</td> <td>58.89</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15690.00</td> <td>49.13</td> <td>74.00</td> <td>-24.87</td> <td>56.02</td> <td>39.48</td> <td>12.72</td> <td>59.09</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10460.00	46.63	68.30	-21.67	57.32	37.40	10.80	58.89	--	--	Peak	2	15690.00	49.13	74.00	-24.87	56.02	39.48	12.72	59.09	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10460.00</td> <td>45.79</td> <td>68.30</td> <td>-22.51</td> <td>56.48</td> <td>37.40</td> <td>10.80</td> <td>58.89</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15690.00</td> <td>48.06</td> <td>74.00</td> <td>-25.94</td> <td>54.95</td> <td>39.48</td> <td>12.72</td> <td>59.09</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10460.00	45.79	68.30	-22.51	56.48	37.40	10.80	58.89	--	--	Peak	2	15690.00	48.06	74.00	-25.94	54.95	39.48	12.72	59.09	--	--	Peak
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10460.00	46.63	68.30	-21.67	57.32	37.40	10.80	58.89	--	--	Peak																																																																																					
2	15690.00	49.13	74.00	-24.87	56.02	39.48	12.72	59.09	--	--	Peak																																																																																					
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																										
Freq	Level	Line Margin	Level	Factor	Loss Factor	Remark																																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																								
1	10460.00	45.79	68.30	-22.51	56.48	37.40	10.80	58.89	--	--	Peak																																																																																					
2	15690.00	48.06	74.00	-25.94	54.95	39.48	12.72	59.09	--	--	Peak																																																																																					

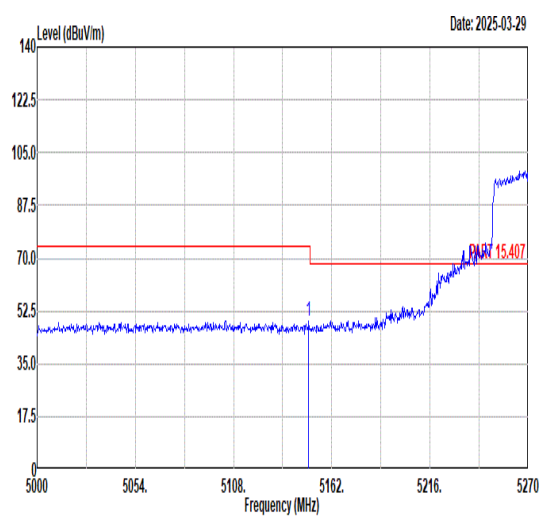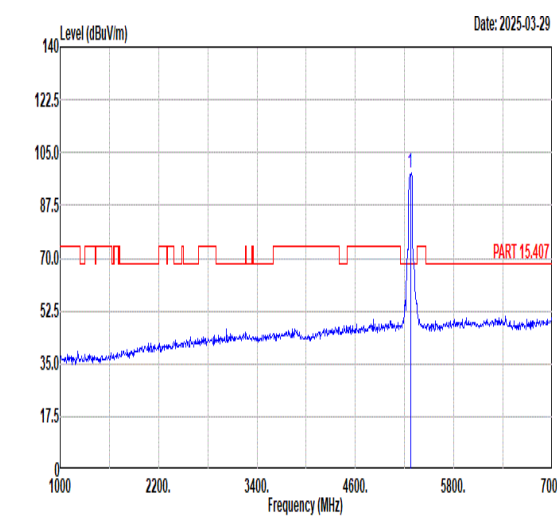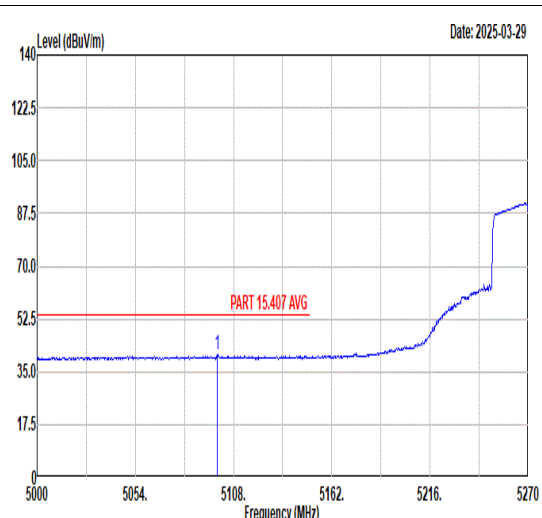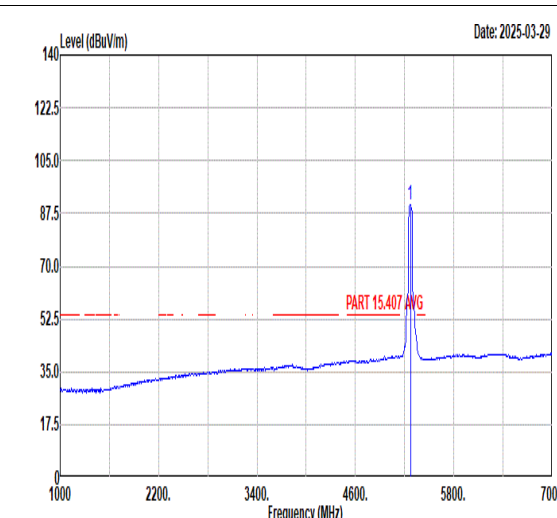

	33																																																																									
Mode	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full_5270MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5149.31</td> <td>49.34</td> <td>74.00</td> <td>-24.66</td> <td>40.17</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>100</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5149.31	49.34	74.00	-24.66	40.17	33.99	7.92	32.74	100	66	PEAK	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>98.47</td> <td>-----</td> <td>-----</td> <td>88.93</td> <td>34.07</td> <td>8.15</td> <td>32.68</td> <td>100</td> <td>66</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5270.00	98.47	-----	-----	88.93	34.07	8.15	32.68	100	66	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5149.31	49.34	74.00	-24.66	40.17	33.99	7.92	32.74	100	66	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5270.00	98.47	-----	-----	88.93	34.07	8.15	32.68	100	66	PEAK																																																															
Avg	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5099.09</td> <td>40.80</td> <td>54.00</td> <td>-13.20</td> <td>31.72</td> <td>33.96</td> <td>7.88</td> <td>32.76</td> <td>100</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5099.09	40.80	54.00	-13.20	31.72	33.96	7.88	32.76	100	66	AVERAGE	 <p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5270.00</td> <td>90.47</td> <td>-----</td> <td>-----</td> <td>81.00</td> <td>34.06</td> <td>8.10</td> <td>32.69</td> <td>100</td> <td>66</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5270.00	90.47	-----	-----	81.00	34.06	8.10	32.69	100	66	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5099.09	40.80	54.00	-13.20	31.72	33.96	7.88	32.76	100	66	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5270.00	90.47	-----	-----	81.00	34.06	8.10	32.69	100	66	AVERAGE																																																															



Mode	33																														
	Band Edge - R																														
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full_5270MHz																														
ANT	5																														
Pol.	Horizontal	Fundamental																													
Peak	<p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.41</td> <td>55.65</td> <td>74.00</td> <td>-18.35</td> <td>45.86</td> <td>34.11</td> <td>8.34</td> <td>32.66</td> <td>100</td> <td>66 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	5353.41	55.65	74.00	-18.35	45.86	34.11	8.34	32.66	100	66 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																					
1	5353.41	55.65	74.00	-18.35	45.86	34.11	8.34	32.66	100	66 PEAK																					
Avg	<p>Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.94</td> <td>43.75</td> <td>54.00</td> <td>-10.25</td> <td>33.97</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>100</td> <td>66 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	5350.94	43.75	54.00	-10.25	33.97	34.11	8.33	32.66	100	66 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																					
1	5350.94	43.75	54.00	-10.25	33.97	34.11	8.33	32.66	100	66 AVERAGE																					



	33																																																																	
Mode	Band Edge - L																																																																	
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full_5270MHz																																																																	
ANT	5																																																																	
Pol.	Vertical	Fundamental																																																																
Peak	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 5143.91</td> <td>49.06</td> <td>74.00</td> <td>-24.94</td> <td>39.90</td> <td>33.99</td> <td>7.91</td> <td>32.74 100 278 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1 5143.91	49.06	74.00	-24.94	39.90	33.99	7.91	32.74 100 278 PEAK	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 5270.00</td> <td>92.38</td> <td>-----</td> <td>-----</td> <td>82.82</td> <td>34.07</td> <td>8.17</td> <td>32.68 100 278 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1 5270.00	92.38	-----	-----	82.82	34.07	8.17	32.68 100 278 PEAK
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																											
1 5143.91	49.06	74.00	-24.94	39.90	33.99	7.91	32.74 100 278 PEAK																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																											
1 5270.00	92.38	-----	-----	82.82	34.07	8.17	32.68 100 278 PEAK																																																											
Avg	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 5101.79</td> <td>40.10</td> <td>54.00</td> <td>-13.90</td> <td>31.01</td> <td>33.96</td> <td>7.89</td> <td>32.76 100 278 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1 5101.79	40.10	54.00	-13.90	31.01	33.96	7.89	32.76 100 278 AVERAGE	<p style="text-align: right;">Date: 2025-03-29</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm deg</th> </tr> </thead> <tbody> <tr> <td>1 5270.00</td> <td>82.71</td> <td>-----</td> <td>-----</td> <td>73.24</td> <td>34.06</td> <td>8.10</td> <td>32.69 100 278 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg	1 5270.00	82.71	-----	-----	73.24	34.06	8.10	32.69 100 278 AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																											
1 5101.79	40.10	54.00	-13.90	31.01	33.96	7.89	32.76 100 278 AVERAGE																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																											
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																													
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm deg																																																											
1 5270.00	82.71	-----	-----	73.24	34.06	8.10	32.69 100 278 AVERAGE																																																											



Mode	33																																				
	Band Edge - R																																				
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full_5270MHz																																				
ANT	5																																				
Pol.	Vertical	Fundamental																																			
Peak																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5425.80</td> <td>48.26</td> <td>74.00</td> <td>-25.74</td> <td>38.29</td> <td>34.15</td> <td>8.45</td> <td>32.63</td> <td>100</td> <td>278</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5425.80	48.26	74.00	-25.74	38.29	34.15	8.45	32.63	100	278
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5425.80	48.26	74.00	-25.74	38.29	34.15	8.45	32.63	100	278	PEAK																										
Avg																																					
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.56</td> <td>39.60</td> <td>54.00</td> <td>-14.40</td> <td>29.82</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>100</td> <td>278</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5350.56	39.60	54.00	-14.40	29.82	34.11	8.33	32.66	100	278
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																														
1	5350.56	39.60	54.00	-14.40	29.82	34.11	8.33	32.66	100	278	AVERAGE																										



Mode	33																																																																																					
	Harmonic																																																																																					
	U-NII-2A_5.25-5.35_802.11ax HE40_CH54_Full_5270MHz																																																																																					
ANT	5																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.00</td> <td>46.26</td> <td>68.30</td> <td>-22.04</td> <td>56.62</td> <td>37.58</td> <td>10.86</td> <td>58.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15810.00</td> <td>49.47</td> <td>74.00</td> <td>-24.53</td> <td>56.44</td> <td>39.53</td> <td>12.71</td> <td>59.21</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	1	10540.00	46.26	68.30	-22.04	56.62	37.58	10.86	58.80	--	--	Peak	2	15810.00	49.47	74.00	-24.53	56.44	39.53	12.71	59.21	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10540.00</td> <td>45.57</td> <td>68.30</td> <td>-22.73</td> <td>55.93</td> <td>37.58</td> <td>10.86</td> <td>58.80</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>15810.00</td> <td>49.17</td> <td>74.00</td> <td>-24.83</td> <td>56.14</td> <td>39.53</td> <td>12.71</td> <td>59.21</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	1	10540.00	45.57	68.30	-22.73	55.93	37.58	10.86	58.80	--	--	Peak	2	15810.00	49.17	74.00	-24.83	56.14	39.53	12.71	59.21	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																														
1	10540.00	46.26	68.30	-22.04	56.62	37.58	10.86	58.80	--	--	Peak																																																																											
2	15810.00	49.47	74.00	-24.53	56.44	39.53	12.71	59.21	--	--	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																														
1	10540.00	45.57	68.30	-22.73	55.93	37.58	10.86	58.80	--	--	Peak																																																																											
2	15810.00	49.17	74.00	-24.83	56.14	39.53	12.71	59.21	--	--	Peak																																																																											



	34																																																																											
Mode	Band Edge - L																																																																											
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz																																																																											
ANT	5																																																																											
Pol.	Horizontal	Fundamental																																																																										
Peak	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5094.52</td> <td>49.55</td> <td>74.00</td> <td>-24.45</td> <td>40.53</td> <td>33.94</td> <td>7.86</td> <td>32.78</td> <td>100</td> <td>61</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5094.52	49.55	74.00	-24.45	40.53	33.94	7.86	32.78	100	61	PEAK	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>96.26</td> <td>-----</td> <td>-----</td> <td>86.61</td> <td>34.09</td> <td>8.23</td> <td>32.67</td> <td>100</td> <td>61</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5310.00	96.26	-----	-----	86.61	34.09	8.23	32.67	100	61	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5094.52	49.55	74.00	-24.45	40.53	33.94	7.86	32.78	100	61	PEAK																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5310.00	96.26	-----	-----	86.61	34.09	8.23	32.67	100	61	PEAK																																																																	
Avg	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5094.24</td> <td>40.63</td> <td>54.00</td> <td>-13.37</td> <td>31.55</td> <td>33.96</td> <td>7.88</td> <td>32.76</td> <td>100</td> <td>61</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5094.24	40.63	54.00	-13.37	31.55	33.96	7.88	32.76	100	61	AVERAGE	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>88.73</td> <td>-----</td> <td>-----</td> <td>79.10</td> <td>34.08</td> <td>8.22</td> <td>32.67</td> <td>100</td> <td>61</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level Factor	Loss Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5310.00	88.73	-----	-----	79.10	34.08	8.22	32.67	100	61	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5094.24	40.63	54.00	-13.37	31.55	33.96	7.88	32.76	100	61	AVERAGE																																																																	
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																					
Freq	Level	Line Margin	Level Factor	Loss Factor																																																																								
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																				
1	5310.00	88.73	-----	-----	79.10	34.08	8.22	32.67	100	61	AVERAGE																																																																	



Mode	34																														
	Band Edge - R																														
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz																														
ANT	5																														
Pol.	Horizontal	Fundamental																													
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5351.85</td> <td>60.11</td> <td>74.00</td> <td>-13.89</td> <td>50.33</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>100</td> <td>61 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	5351.85	60.11	74.00	-13.89	50.33	34.11	8.33	32.66	100	61 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																					
1	5351.85	60.11	74.00	-13.89	50.33	34.11	8.33	32.66	100	61 PEAK																					
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.80</td> <td>48.77</td> <td>54.00</td> <td>-5.23</td> <td>38.99</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>100</td> <td>61 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	5350.80	48.77	54.00	-5.23	38.99	34.11	8.33	32.66	100	61 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																					
1	5350.80	48.77	54.00	-5.23	38.99	34.11	8.33	32.66	100	61 AVERAGE																					



		34																																																																									
Mode	Band Edge - L																																																																										
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz																																																																										
ANT	5																																																																										
Pol.	Vertical	Fundamental																																																																									
Peak	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5110.67</td> <td>49.04</td> <td>74.00</td> <td>-24.96</td> <td>39.93</td> <td>33.97</td> <td>7.89</td> <td>32.75</td> <td>100</td> <td>279</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5110.67	49.04	74.00	-24.96	39.93	33.97	7.89	32.75	100	279	PEAK	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>88.95</td> <td>-----</td> <td>-----</td> <td>79.32</td> <td>34.08</td> <td>8.22</td> <td>32.67</td> <td>100</td> <td>279</td> <td>PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5310.00	88.95	-----	-----	79.32	34.08	8.22	32.67	100	279	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																				
1	5110.67	49.04	74.00	-24.96	39.93	33.97	7.89	32.75	100	279	PEAK																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																				
1	5310.00	88.95	-----	-----	79.32	34.08	8.22	32.67	100	279	PEAK																																																																
Avg	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5095.79</td> <td>40.75</td> <td>54.00</td> <td>-13.25</td> <td>31.67</td> <td>33.96</td> <td>7.88</td> <td>32.76</td> <td>100</td> <td>279</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5095.79	40.75	54.00	-13.25	31.67	33.96	7.88	32.76	100	279	AVERAGE	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5310.00</td> <td>80.81</td> <td>-----</td> <td>-----</td> <td>71.18</td> <td>34.08</td> <td>8.22</td> <td>32.67</td> <td>100</td> <td>279</td> <td>AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	1	5310.00	80.81	-----	-----	71.18	34.08	8.22	32.67	100	279	AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																				
1	5095.79	40.75	54.00	-13.25	31.67	33.96	7.88	32.76	100	279	AVERAGE																																																																
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB																																																																				
1	5310.00	80.81	-----	-----	71.18	34.08	8.22	32.67	100	279	AVERAGE																																																																







Mode	34																															
	Band Edge - R																															
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz																															
ANT	5																															
Pol.	Vertical	Fundamental																														
Peak	<p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5353.95</td> <td>52.75</td> <td>74.00</td> <td>-21.25</td> <td>42.96</td> <td>34.11</td> <td>8.34</td> <td>32.66</td> <td>100</td> <td>279 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	5353.95	52.75	74.00	-21.25	42.96	34.11	8.34	32.66	100	279 PEAK	Blank
	Limit	Read	Ant	Cable	Preamp	APos	TPos																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																						
1	5353.95	52.75	74.00	-21.25	42.96	34.11	8.34	32.66	100	279 PEAK																						
Avg	<p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5350.50</td> <td>41.77</td> <td>54.00</td> <td>-12.23</td> <td>31.99</td> <td>34.11</td> <td>8.33</td> <td>32.66</td> <td>100</td> <td>279 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	5350.50	41.77	54.00	-12.23	31.99	34.11	8.33	32.66	100	279 AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																						
1	5350.50	41.77	54.00	-12.23	31.99	34.11	8.33	32.66	100	279 AVERAGE																						



Mode	34																																																																																														
	Harmonic																																																																																														
	U-NII-2A_5.25-5.35_802.11ax HE40_CH62_Full_5310MHz																																																																																														
ANT	5																																																																																														
Pol.	Horizontal	Vertical																																																																																													
Peak Avg																																																																																															
	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>46.33</td> <td>74.00</td> <td>-27.67</td> <td>56.38</td> <td>37.74</td> <td>10.92</td> <td>58.71</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15930.00</td> <td>49.33</td> <td>74.00</td> <td>-24.67</td> <td>56.40</td> <td>39.57</td> <td>12.70</td> <td>59.34</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10620.00	46.33	74.00	-27.67	56.38	37.74	10.92	58.71	-- -- Peak	2	15930.00	49.33	74.00	-24.67	56.40	39.57	12.70	59.34	-- -- Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>10620.00</td> <td>47.03</td> <td>74.00</td> <td>-26.97</td> <td>57.08</td> <td>37.74</td> <td>10.92</td> <td>58.71</td> <td>-- -- Peak</td> </tr> <tr> <td>2</td> <td>15930.00</td> <td>49.21</td> <td>74.00</td> <td>-24.79</td> <td>56.28</td> <td>39.57</td> <td>12.70</td> <td>59.34</td> <td>-- -- Peak</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10620.00	47.03	74.00	-26.97	57.08	37.74	10.92	58.71	-- -- Peak	2	15930.00	49.21	74.00	-24.79	56.28	39.57	12.70	59.34
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	10620.00	46.33	74.00	-27.67	56.38	37.74	10.92	58.71	-- -- Peak																																																																																						
2	15930.00	49.33	74.00	-24.67	56.40	39.57	12.70	59.34	-- -- Peak																																																																																						
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line Margin	Level	Factor	Loss Factor			Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																							
1	10620.00	47.03	74.00	-26.97	57.08	37.74	10.92	58.71	-- -- Peak																																																																																						
2	15930.00	49.21	74.00	-24.79	56.28	39.57	12.70	59.34	-- -- Peak																																																																																						

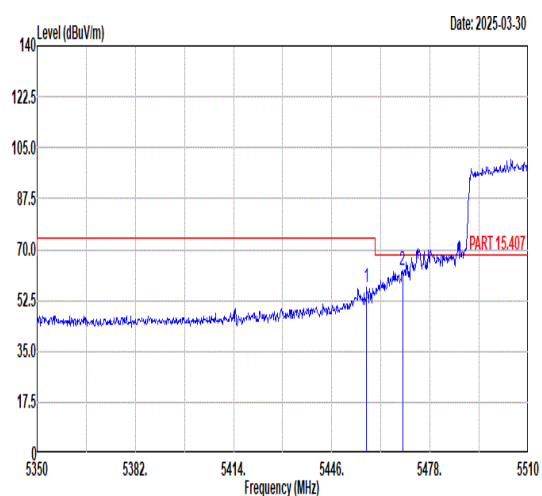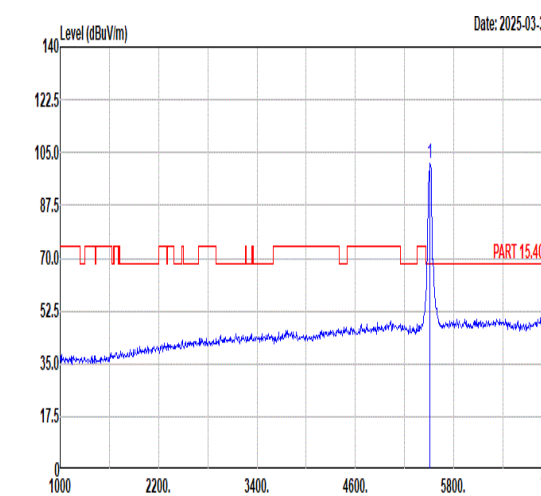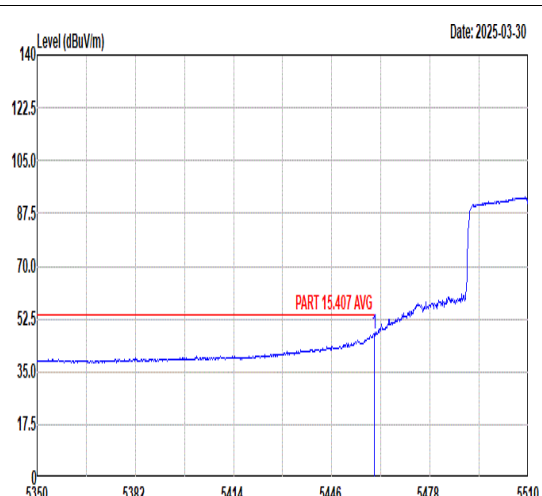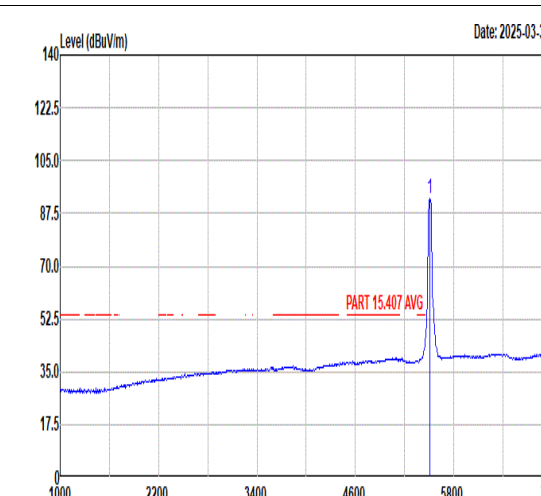

	35																																																																					
Mode	Band Edge - L																																																																					
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz																																																																					
ANT	5																																																																					
Pol.	Horizontal	Fundamental																																																																				
Peak	 <p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5457.36</td> <td>56.81</td> <td>74.00</td> <td>-17.19</td> <td>46.84</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>100</td> <td>39 PEAK</td> </tr> <tr> <td>2 5469.04</td> <td>63.05</td> <td>-5.25</td> <td>53.08</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>100</td> <td>39 PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5457.36	56.81	74.00	-17.19	46.84	34.17	8.41	32.61	100	39 PEAK	2 5469.04	63.05	-5.25	53.08	34.18	8.40	32.61	100	39 PEAK	 <p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5510.00</td> <td>101.58</td> <td>-----</td> <td>91.65</td> <td>34.21</td> <td>8.34</td> <td>32.62</td> <td>100</td> <td>39 PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5510.00	101.58	-----	91.65	34.21	8.34	32.62	100	39 PEAK
	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	APos	TPos	Remark																																																												
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1 5457.36	56.81	74.00	-17.19	46.84	34.17	8.41	32.61	100	39 PEAK																																																													
2 5469.04	63.05	-5.25	53.08	34.18	8.40	32.61	100	39 PEAK																																																														
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	APos	TPos	Remark																																																													
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1 5510.00	101.58	-----	91.65	34.21	8.34	32.62	100	39 PEAK																																																														
Avg	 <p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5459.92</td> <td>47.45</td> <td>54.00</td> <td>-6.55</td> <td>37.48</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>100</td> <td>39 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5459.92	47.45	54.00	-6.55	37.48	34.17	8.41	32.61	100	39 AVERAGE	 <p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5510.00</td> <td>92.63</td> <td>-----</td> <td>82.70</td> <td>34.21</td> <td>8.34</td> <td>32.62</td> <td>100</td> <td>39 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	APos	TPos	Remark	MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5510.00	92.63	-----	82.70	34.21	8.34	32.62	100	39 AVERAGE									
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	APos	TPos	Remark																																																													
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1 5459.92	47.45	54.00	-6.55	37.48	34.17	8.41	32.61	100	39 AVERAGE																																																													
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss	Preamp Loss	APos	TPos	Remark																																																													
MHz	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																														
1 5510.00	92.63	-----	82.70	34.21	8.34	32.62	100	39 AVERAGE																																																														



Mode	35																														
	Band Edge - R																														
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz																														
ANT	5																														
Pol.	Horizontal	Fundamental																													
Peak	<p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5733.64</td> <td>49.23</td> <td>68.30</td> <td>-19.07</td> <td>38.69</td> <td>34.62</td> <td>8.71</td> <td>32.79</td> <td>100</td> <td>39 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	5733.64	49.23	68.30	-19.07	38.69	34.62	8.71	32.79	100	39 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																					
1	5733.64	49.23	68.30	-19.07	38.69	34.62	8.71	32.79	100	39 PEAK																					



	35																																																																				
Mode	Band Edge - L																																																																				
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz																																																																				
ANT	5																																																																				
Pol.	Vertical	Fundamental																																																																			
Peak	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.48</td> <td>48.99</td> <td>74.00</td> <td>-25.01</td> <td>39.02</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>100</td> <td>278 PEAK</td> </tr> <tr> <td>2</td> <td>5469.52</td> <td>56.34</td> <td>68.30</td> <td>-11.96</td> <td>46.37</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>100</td> <td>278 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1	5458.48	48.99	74.00	-25.01	39.02	34.17	8.41	32.61	100	278 PEAK	2	5469.52	56.34	68.30	-11.96	46.37	34.18	8.40	32.61	100	278 PEAK	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>92.94</td> <td>-----</td> <td>-----</td> <td>83.01</td> <td>34.22</td> <td>8.33</td> <td>32.62</td> <td>100</td> <td>278 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1	5510.00	92.94	-----	-----	83.01	34.22	8.33	32.62	100	278 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																													
1	5458.48	48.99	74.00	-25.01	39.02	34.17	8.41	32.61	100	278 PEAK																																																											
2	5469.52	56.34	68.30	-11.96	46.37	34.18	8.40	32.61	100	278 PEAK																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																													
1	5510.00	92.94	-----	-----	83.01	34.22	8.33	32.62	100	278 PEAK																																																											
Avg	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.76</td> <td>40.65</td> <td>54.00</td> <td>-13.35</td> <td>30.68</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>100</td> <td>278 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1	5459.76	40.65	54.00	-13.35	30.68	34.17	8.41	32.61	100	278 AVERAGE	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5510.00</td> <td>83.92</td> <td>-----</td> <td>-----</td> <td>73.99</td> <td>34.21</td> <td>8.34</td> <td>32.62</td> <td>100</td> <td>278 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1	5510.00	83.92	-----	-----	73.99	34.21	8.34	32.62	100	278 AVERAGE											
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																													
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																													
1	5459.76	40.65	54.00	-13.35	30.68	34.17	8.41	32.61	100	278 AVERAGE																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																														
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																													
1	5510.00	83.92	-----	-----	73.99	34.21	8.34	32.62	100	278 AVERAGE																																																											



Mode	35																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz																																									
ANT	5																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5747.41</td> <td>48.54</td> <td>68.30</td> <td>-19.76</td> <td>37.94</td> <td>34.64</td> <td>8.76</td> <td>32.80</td> <td>100</td> <td>278</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5747.41	48.54	68.30	-19.76	37.94	34.64	8.76	32.80	100	278	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5747.41	48.54	68.30	-19.76	37.94	34.64	8.76	32.80	100	278	PEAK																																



Mode	35																																																																																					
	Harmonic																																																																																					
	U-NII-2C_5.47-5.725_802.11ax HE40_CH102_Full_5510MHz																																																																																					
ANT	5																																																																																					
Pol.	Horizontal	Vertical																																																																																				
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.00</td> <td>48.28</td> <td>74.00</td> <td>-25.72</td> <td>56.90</td> <td>38.43</td> <td>11.22</td> <td>58.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16530.00</td> <td>49.23</td> <td>68.30</td> <td>-19.07</td> <td>54.70</td> <td>40.42</td> <td>12.92</td> <td>58.81</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	1	11020.00	48.28	74.00	-25.72	56.90	38.43	11.22	58.27	--	--	Peak	2	16530.00	49.23	68.30	-19.07	54.70	40.42	12.92	58.81	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11020.00</td> <td>48.48</td> <td>74.00</td> <td>-25.52</td> <td>57.10</td> <td>38.43</td> <td>11.22</td> <td>58.27</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>16530.00</td> <td>49.40</td> <td>68.30</td> <td>-18.90</td> <td>54.87</td> <td>40.42</td> <td>12.92</td> <td>58.81</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	1	11020.00	48.48	74.00	-25.52	57.10	38.43	11.22	58.27	--	--	Peak	2	16530.00	49.40	68.30	-18.90	54.87	40.42	12.92	58.81	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																															
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																														
1	11020.00	48.28	74.00	-25.72	56.90	38.43	11.22	58.27	--	--	Peak																																																																											
2	16530.00	49.23	68.30	-19.07	54.70	40.42	12.92	58.81	--	--	Peak																																																																											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																														
1	11020.00	48.48	74.00	-25.52	57.10	38.43	11.22	58.27	--	--	Peak																																																																											
2	16530.00	49.40	68.30	-18.90	54.87	40.42	12.92	58.81	--	--	Peak																																																																											



	36																																																																									
Mode	Band Edge - L																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5450.20</td> <td>49.52</td> <td>74.00</td> <td>-24.48</td> <td>39.55</td> <td>34.17</td> <td>8.42</td> <td>32.62</td> <td>100</td> <td>37</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5463.20</td> <td>52.77</td> <td>68.30</td> <td>-15.53</td> <td>42.79</td> <td>34.18</td> <td>8.41</td> <td>32.61</td> <td>100</td> <td>37</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1	5450.20	49.52	74.00	-24.48	39.55	34.17	8.42	32.62	100	37	PEAK	2	5463.20	52.77	68.30	-15.53	42.79	34.18	8.41	32.61	100	37	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>101.34</td> <td>-----</td> <td>-----</td> <td>91.42</td> <td>34.29</td> <td>8.28</td> <td>32.65</td> <td>100</td> <td>37</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1	5550.00	101.34	-----	-----	91.42	34.29	8.28	32.65	100	37	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																		
1	5450.20	49.52	74.00	-24.48	39.55	34.17	8.42	32.62	100	37	PEAK																																																															
2	5463.20	52.77	68.30	-15.53	42.79	34.18	8.41	32.61	100	37	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																		
1	5550.00	101.34	-----	-----	91.42	34.29	8.28	32.65	100	37	PEAK																																																															
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5458.60</td> <td>41.34</td> <td>54.00</td> <td>-12.66</td> <td>31.37</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>100</td> <td>37</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1	5458.60	41.34	54.00	-12.66	31.37	34.17	8.41	32.61	100	37	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>93.34</td> <td>-----</td> <td>-----</td> <td>83.41</td> <td>34.28</td> <td>8.29</td> <td>32.64</td> <td>100</td> <td>37</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg	1	5550.00	93.34	-----	-----	83.41	34.28	8.29	32.64	100	37	AVERAGE												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																		
1	5458.60	41.34	54.00	-12.66	31.37	34.17	8.41	32.61	100	37	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor	dB	cm	deg																																																																		
1	5550.00	93.34	-----	-----	83.41	34.28	8.29	32.64	100	37	AVERAGE																																																															



Mode	36																																															
	Band Edge - R																																															
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz																																															
ANT	5																																															
Pol.	Horizontal	Fundamental																																														
Peak	<p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5760.70</td> <td>48.79</td> <td>68.30</td> <td>-19.51</td> <td>38.12</td> <td>34.67</td> <td>8.81</td> <td>32.81</td> <td>100</td> <td>37</td> <td></td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg				1	5760.70	48.79	68.30	-19.51	38.12	34.67	8.81	32.81	100	37		PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	dB	cm	deg	Remark																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																							
1	5760.70	48.79	68.30	-19.51	38.12	34.67	8.81	32.81	100	37		PEAK																																				



		36																																																																					
Mode	Band Edge - L																																																																						
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz																																																																						
ANT	5																																																																						
Pol.	Vertical	Fundamental																																																																					
Peak	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.80</td> <td>48.03</td> <td>74.00</td> <td>-25.97</td> <td>38.06</td> <td>34.17</td> <td>8.42</td> <td>32.62</td> <td>100</td> <td>278 PEAK</td> </tr> <tr> <td>2</td> <td>5463.80</td> <td>47.04</td> <td>68.30</td> <td>-21.26</td> <td>37.07</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>100</td> <td>278 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg	Remark	1	5453.80	48.03	74.00	-25.97	38.06	34.17	8.42	32.62	100	278 PEAK	2	5463.80	47.04	68.30	-21.26	37.07	34.18	8.40	32.61	100	278 PEAK	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>93.85</td> <td>-----</td> <td>-----</td> <td>83.93</td> <td>34.29</td> <td>8.28</td> <td>32.65</td> <td>100</td> <td>278 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg	Remark	1	5550.00	93.85	-----	-----	83.93	34.29	8.28	32.65	100	278 PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																
Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg	Remark																																																															
1	5453.80	48.03	74.00	-25.97	38.06	34.17	8.42	32.62	100	278 PEAK																																																													
2	5463.80	47.04	68.30	-21.26	37.07	34.18	8.40	32.61	100	278 PEAK																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg	Remark																																																															
1	5550.00	93.85	-----	-----	83.93	34.29	8.28	32.65	100	278 PEAK																																																													
Avg	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.80</td> <td>39.37</td> <td>54.00</td> <td>-14.63</td> <td>29.40</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>100</td> <td>278 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg	Remark	1	5453.80	39.37	54.00	-14.63	29.40	34.17	8.41	32.61	100	278 AVERAGE	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5550.00</td> <td>85.73</td> <td>-----</td> <td>-----</td> <td>75.80</td> <td>34.28</td> <td>8.29</td> <td>32.64</td> <td>100</td> <td>278 AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg	Remark	1	5550.00	85.73	-----	-----	75.80	34.28	8.29	32.64	100	278 AVERAGE											
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg	Remark																																																															
1	5453.80	39.37	54.00	-14.63	29.40	34.17	8.41	32.61	100	278 AVERAGE																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor	cm	deg	Remark																																																															
1	5550.00	85.73	-----	-----	75.80	34.28	8.29	32.64	100	278 AVERAGE																																																													



Mode	36																														
	Band Edge - R																														
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz																														
ANT	5																														
Pol.	Vertical	Fundamental																													
Peak	<p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5758.34</td> <td>48.76</td> <td>68.30</td> <td>-19.54</td> <td>38.10</td> <td>34.66</td> <td>8.80</td> <td>32.80</td> <td>100</td> <td>278 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark	1	5758.34	48.76	68.30	-19.54	38.10	34.66	8.80	32.80	100	278 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	cm	deg	Remark																					
1	5758.34	48.76	68.30	-19.54	38.10	34.66	8.80	32.80	100	278 PEAK																					



Mode	36																																																																									
	Harmonic																																																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH110_Full_5550MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Vertical																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11100.00</td> <td>47.25</td> <td>74.00</td> <td>-26.75</td> <td>55.97</td> <td>38.21</td> <td>11.26</td> <td>58.19</td> <td>-- -- Peak</td> </tr> <tr> <td>2 16650.00</td> <td>48.92</td> <td>68.30</td> <td>-19.38</td> <td>54.11</td> <td>40.52</td> <td>12.97</td> <td>58.68</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	1 11100.00	47.25	74.00	-26.75	55.97	38.21	11.26	58.19	-- -- Peak	2 16650.00	48.92	68.30	-19.38	54.11	40.52	12.97	58.68	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 11100.00</td> <td>47.41</td> <td>74.00</td> <td>-26.59</td> <td>56.13</td> <td>38.21</td> <td>11.26</td> <td>58.19</td> <td>-- -- Peak</td> </tr> <tr> <td>2 16650.00</td> <td>49.01</td> <td>68.30</td> <td>-19.29</td> <td>54.20</td> <td>40.52</td> <td>12.97</td> <td>58.68</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	1 11100.00	47.41	74.00	-26.59	56.13	38.21	11.26	58.19	-- -- Peak	2 16650.00	49.01	68.30	-19.29	54.20	40.52	12.97	58.68	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																		
1 11100.00	47.25	74.00	-26.75	55.97	38.21	11.26	58.19	-- -- Peak																																																																		
2 16650.00	48.92	68.30	-19.38	54.11	40.52	12.97	58.68	-- -- Peak																																																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																		
1 11100.00	47.41	74.00	-26.59	56.13	38.21	11.26	58.19	-- -- Peak																																																																		
2 16650.00	49.01	68.30	-19.29	54.20	40.52	12.97	58.68	-- -- Peak																																																																		



		37																																																																						
Mode	Band Edge - L																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz																																																																							
ANT	5																																																																							
Pol.	Horizontal	Fundamental																																																																						
Peak	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5459.76</td> <td>47.38</td> <td>74.00</td> <td>-26.62</td> <td>37.41</td> <td>34.17</td> <td>8.41</td> <td>32.61</td> <td>100</td> <td>32 PEAK</td> </tr> <tr> <td>2</td> <td>5465.20</td> <td>46.49</td> <td>68.30</td> <td>-21.81</td> <td>36.52</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>100</td> <td>32 PEAK</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5459.76	47.38	74.00	-26.62	37.41	34.17	8.41	32.61	100	32 PEAK	2	5465.20	46.49	68.30	-21.81	36.52	34.18	8.40	32.61	100	32 PEAK	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>102.66</td> <td>-----</td> <td>-----</td> <td>92.44</td> <td>34.50</td> <td>8.46</td> <td>32.74</td> <td>100</td> <td>32 PEAK</td> </tr> </tbody> </table>		Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5670.00	102.66	-----	-----	92.44	34.50	8.46	32.74	100	32 PEAK
	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss Factor	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1	5459.76	47.38	74.00	-26.62	37.41	34.17	8.41	32.61	100	32 PEAK																																																														
2	5465.20	46.49	68.30	-21.81	36.52	34.18	8.40	32.61	100	32 PEAK																																																														
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss Factor	APos	TPos	Remark																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1	5670.00	102.66	-----	-----	92.44	34.50	8.46	32.74	100	32 PEAK																																																														
Avg	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5435.12</td> <td>39.42</td> <td>54.00</td> <td>-14.58</td> <td>29.44</td> <td>34.16</td> <td>8.44</td> <td>32.62</td> <td>100</td> <td>32 AVERAGE</td> </tr> </tbody> </table>	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5435.12	39.42	54.00	-14.58	29.44	34.16	8.44	32.62	100	32 AVERAGE	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit Freq</th> <th>Level</th> <th>Line Margin</th> <th>Read Level</th> <th>Ant Factor</th> <th>Cable Loss Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>92.46</td> <td>-----</td> <td>-----</td> <td>82.20</td> <td>34.51</td> <td>8.49</td> <td>32.74</td> <td>100</td> <td>32 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5670.00	92.46	-----	-----	82.20	34.51	8.49	32.74	100	32 AVERAGE											
	Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss Factor	APos	TPos	Remark																																																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1	5435.12	39.42	54.00	-14.58	29.44	34.16	8.44	32.62	100	32 AVERAGE																																																														
Limit Freq	Level	Line Margin	Read Level	Ant Factor	Cable Loss Factor	APos	TPos	Remark																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																
1	5670.00	92.46	-----	-----	82.20	34.51	8.49	32.74	100	32 AVERAGE																																																														



Mode	37																																						
	Band Edge - R																																						
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz																																						
ANT	5																																						
Pol.	Horizontal	Fundamental																																					
Peak	<p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5728.81</td> <td>61.80</td> <td>68.30</td> <td>-6.50</td> <td>51.28</td> <td>34.61</td> <td>8.69</td> <td>32.78</td> <td>100</td> <td>32 PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5728.81	61.80	68.30	-6.50	51.28	34.61	8.69	32.78	100	32 PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																															
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																														
1	5728.81	61.80	68.30	-6.50	51.28	34.61	8.69	32.78	100	32 PEAK																													



	37																																																																																													
Mode	Band Edge - L																																																																																													
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz																																																																																													
ANT	5																																																																																													
Pol.	Vertical	Fundamental																																																																																												
Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5436.40</td> <td>48.08</td> <td>74.00</td> <td>-25.92</td> <td>38.10</td> <td>34.16</td> <td>8.44</td> <td>32.62</td> <td>100</td> <td>281</td> <td>PEAK</td> </tr> <tr> <td>2</td> <td>5469.04</td> <td>46.50</td> <td>68.30</td> <td>-21.80</td> <td>36.53</td> <td>34.18</td> <td>8.40</td> <td>32.61</td> <td>100</td> <td>281</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5436.40	48.08	74.00	-25.92	38.10	34.16	8.44	32.62	100	281	PEAK	2	5469.04	46.50	68.30	-21.80	36.53	34.18	8.40	32.61	100	281	PEAK	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>96.25</td> <td>-----</td> <td>-----</td> <td>86.05</td> <td>34.49</td> <td>8.44</td> <td>32.73</td> <td>100</td> <td>281</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	96.25	-----	-----	86.05	34.49	8.44	32.73	100	281	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5436.40	48.08	74.00	-25.92	38.10	34.16	8.44	32.62	100	281	PEAK																																																																																			
2	5469.04	46.50	68.30	-21.80	36.53	34.18	8.40	32.61	100	281	PEAK																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5670.00	96.25	-----	-----	86.05	34.49	8.44	32.73	100	281	PEAK																																																																																			
Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5453.36</td> <td>39.12</td> <td>54.00</td> <td>-14.88</td> <td>29.15</td> <td>34.17</td> <td>8.42</td> <td>32.62</td> <td>100</td> <td>281</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5453.36	39.12	54.00	-14.88	29.15	34.17	8.42	32.62	100	281	AVERAGE	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5670.00</td> <td>86.41</td> <td>-----</td> <td>-----</td> <td>76.15</td> <td>34.51</td> <td>8.49</td> <td>32.74</td> <td>100</td> <td>281</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5670.00	86.41	-----	-----	76.15	34.51	8.49	32.74	100	281	AVERAGE												
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5453.36	39.12	54.00	-14.88	29.15	34.17	8.42	32.62	100	281	AVERAGE																																																																																			
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5670.00	86.41	-----	-----	76.15	34.51	8.49	32.74	100	281	AVERAGE																																																																																			







Mode	37																																									
	Band Edge - R																																									
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz																																									
ANT	5																																									
Pol.	Vertical	Fundamental																																								
Peak	<p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> <th></th> </tr> </thead> <tbody> <tr> <td>1 5728.90</td> <td>54.47</td> <td>68.30</td> <td>-13.83</td> <td>43.95</td> <td>34.61</td> <td>8.69</td> <td>32.78</td> <td>100</td> <td>281</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1 5728.90	54.47	68.30	-13.83	43.95	34.61	8.69	32.78	100	281	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	APos	TPos	Remark																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																	
1 5728.90	54.47	68.30	-13.83	43.95	34.61	8.69	32.78	100	281	PEAK																																



Mode	37																																																																																																							
	Harmonic																																																																																																							
	U-NII-2C_5.47-5.725_802.11ax HE40_CH134_Full_5670MHz																																																																																																							
ANT	5																																																																																																							
Pol.	Horizontal	Vertical																																																																																																						
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.00</td> <td>46.81</td> <td>74.00</td> <td>-27.19</td> <td>55.79</td> <td>37.56</td> <td>11.38</td> <td>57.92</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17010.00</td> <td>47.85</td> <td>68.30</td> <td>-20.45</td> <td>52.18</td> <td>40.83</td> <td>13.12</td> <td>58.28</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB			1	11340.00	46.81	74.00	-27.19	55.79	37.56	11.38	57.92	--	--	Peak	2	17010.00	47.85	68.30	-20.45	52.18	40.83	13.12	58.28	--	--	Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th></th> <th></th> </tr> </thead> <tbody> <tr> <td>1</td> <td>11340.00</td> <td>46.59</td> <td>74.00</td> <td>-27.41</td> <td>55.57</td> <td>37.56</td> <td>11.38</td> <td>57.92</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> <tr> <td>2</td> <td>17010.00</td> <td>47.86</td> <td>68.30</td> <td>-20.44</td> <td>52.19</td> <td>40.83</td> <td>13.12</td> <td>58.28</td> <td>--</td> <td>--</td> <td>Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB			1	11340.00	46.59	74.00	-27.41	55.57	37.56	11.38	57.92	--	--	Peak	2	17010.00	47.86	68.30	-20.44	52.19	40.83	13.12	58.28	--	--	Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																	
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																		
1	11340.00	46.81	74.00	-27.19	55.79	37.56	11.38	57.92	--	--	Peak																																																																																													
2	17010.00	47.85	68.30	-20.45	52.18	40.83	13.12	58.28	--	--	Peak																																																																																													
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																																																		
1	11340.00	46.59	74.00	-27.41	55.57	37.56	11.38	57.92	--	--	Peak																																																																																													
2	17010.00	47.86	68.30	-20.44	52.19	40.83	13.12	58.28	--	--	Peak																																																																																													

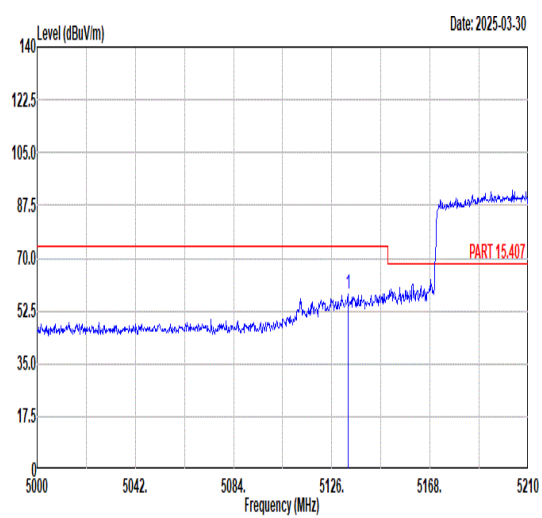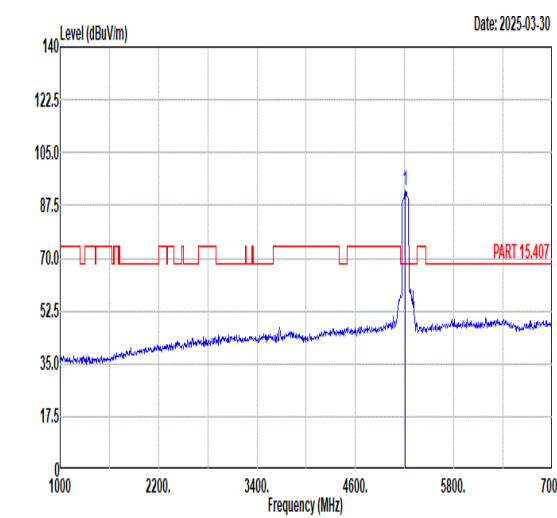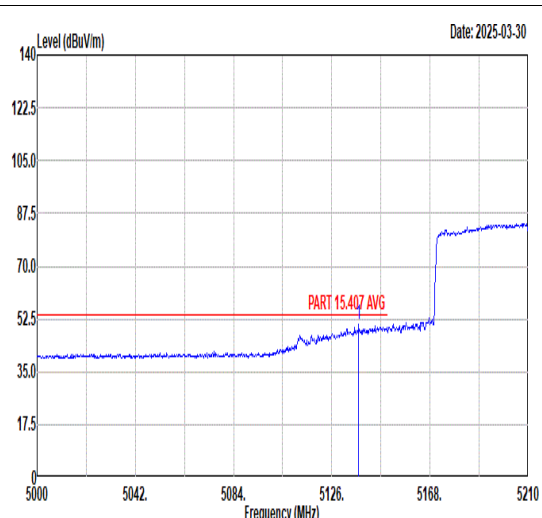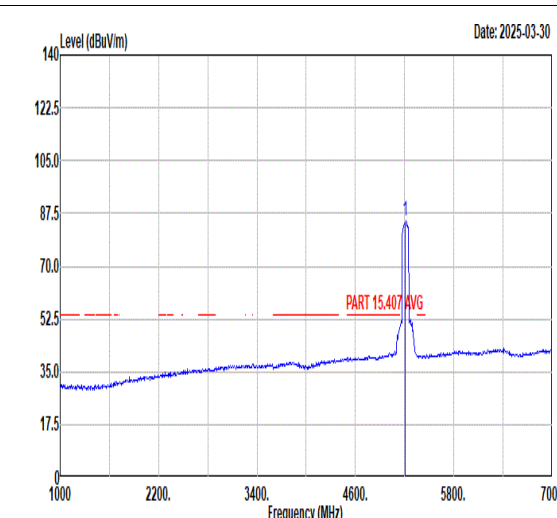

	38																																																																									
Mode	Band Edge - L																																																																									
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	 <p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5132.93</td> <td>58.09</td> <td>74.00</td> <td>-15.91</td> <td>48.95</td> <td>33.98</td> <td>7.91</td> <td>32.75</td> <td>100</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5132.93	58.09	74.00	-15.91	48.95	33.98	7.91	32.75	100	62	PEAK	 <p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>92.21</td> <td>-----</td> <td>-----</td> <td>82.95</td> <td>34.02</td> <td>7.96</td> <td>32.72</td> <td>100</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5210.00	92.21	-----	-----	82.95	34.02	7.96	32.72	100	62	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5132.93	58.09	74.00	-15.91	48.95	33.98	7.91	32.75	100	62	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5210.00	92.21	-----	-----	82.95	34.02	7.96	32.72	100	62	PEAK																																																															
Avg	 <p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5137.55</td> <td>50.75</td> <td>54.00</td> <td>-3.25</td> <td>41.60</td> <td>33.98</td> <td>7.91</td> <td>32.74</td> <td>100</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5137.55	50.75	54.00	-3.25	41.60	33.98	7.91	32.74	100	62	AVERAGE	 <p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>85.09</td> <td>-----</td> <td>-----</td> <td>75.79</td> <td>34.03</td> <td>7.98</td> <td>32.71</td> <td>100</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5210.00	85.09	-----	-----	75.79	34.03	7.98	32.71	100	62	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5137.55	50.75	54.00	-3.25	41.60	33.98	7.91	32.74	100	62	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5210.00	85.09	-----	-----	75.79	34.03	7.98	32.71	100	62	AVERAGE																																																															



Mode	38																																
	Band Edge - R																																
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																
ANT	5																																
Pol.	Horizontal	Fundamental																															
Peak	<p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5358.50</td> <td>48.15</td> <td>74.00</td> <td>-25.85</td> <td>38.34</td> <td>34.11</td> <td>8.35</td> <td>32.65</td> <td>100</td> <td>62</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark	1	5358.50	48.15	74.00	-25.85	38.34	34.11	8.35	32.65	100	62	PEAK	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark																						
1	5358.50	48.15	74.00	-25.85	38.34	34.11	8.35	32.65	100	62	PEAK																						
Avg	<p>Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> <th>dB</th> <th>cm</th> <th>deg</th> <th>Remark</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5362.25</td> <td>40.79</td> <td>54.00</td> <td>-13.21</td> <td>30.96</td> <td>34.12</td> <td>8.36</td> <td>32.65</td> <td>100</td> <td>62</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark	1	5362.25	40.79	54.00	-13.21	30.96	34.12	8.36	32.65	100	62	AVERAGE	Blank
Limit	Read	Ant	Cable	Preamp	APos	TPos																											
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	dB	cm	deg	Remark																						
1	5362.25	40.79	54.00	-13.21	30.96	34.12	8.36	32.65	100	62	AVERAGE																						



	38																																																																			
Mode	Band Edge - L																																																																			
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																																			
ANT	5																																																																			
Pol.	Vertical	Fundamental																																																																		
Peak	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5144.90</td> <td>51.65</td> <td>74.00</td> <td>-22.35</td> <td>42.48</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>100</td> <td>264 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5144.90	51.65	74.00	-22.35	42.48	33.99	7.92	32.74	100	264 PEAK	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>83.98</td> <td>-----</td> <td>-----</td> <td>74.68</td> <td>34.03</td> <td>7.98</td> <td>32.71</td> <td>100</td> <td>264 PEAK</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	83.98	-----	-----	74.68	34.03	7.98	32.71	100	264 PEAK
		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5144.90	51.65	74.00	-22.35	42.48	33.99	7.92	32.74	100	264 PEAK																																																										
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5210.00	83.98	-----	-----	74.68	34.03	7.98	32.71	100	264 PEAK																																																										
Avg	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5148.68</td> <td>44.57</td> <td>54.00</td> <td>-9.43</td> <td>35.40</td> <td>33.99</td> <td>7.92</td> <td>32.74</td> <td>100</td> <td>264 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5148.68	44.57	54.00	-9.43	35.40	33.99	7.92	32.74	100	264 AVERAGE	<table border="1"> <thead> <tr> <th></th> <th>Limit Freq</th> <th>Limit Level</th> <th>Read Level</th> <th>Line Margin</th> <th>Ant Level</th> <th>Cable Loss</th> <th>Preamp Loss</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th></th> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>dB</th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5210.00</td> <td>76.67</td> <td>-----</td> <td>-----</td> <td>67.37</td> <td>34.03</td> <td>7.98</td> <td>32.71</td> <td>100</td> <td>264 AVERAGE</td> </tr> </tbody> </table>		Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5210.00	76.67	-----	-----	67.37	34.03	7.98	32.71	100	264 AVERAGE
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5148.68	44.57	54.00	-9.43	35.40	33.99	7.92	32.74	100	264 AVERAGE																																																										
	Limit Freq	Limit Level	Read Level	Line Margin	Ant Level	Cable Loss	Preamp Loss	APos	TPos	Remark																																																										
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																										
1	5210.00	76.67	-----	-----	67.37	34.03	7.98	32.71	100	264 AVERAGE																																																										



Mode	38																																		
	Band Edge - R																																		
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																		
ANT	5																																		
Pol.	Vertical	Fundamental																																	
Peak																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5429.00</td> <td>47.33</td> <td>74.00</td> <td>-26.67</td> <td>37.35</td> <td>34.16</td> <td>8.45</td> <td>32.63</td> <td>100</td> <td>264 PEAK</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5429.00	47.33	74.00	-26.67	37.35	34.16	8.45	32.63	100
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																												
1 5429.00	47.33	74.00	-26.67	37.35	34.16	8.45	32.63	100	264 PEAK																										
Avg																																			
	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line</th> <th>Margin</th> <th>Level</th> <th>Factor</th> <th>Loss</th> <th>Factor</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1 5429.00</td> <td>40.50</td> <td>54.00</td> <td>-13.50</td> <td>30.52</td> <td>34.16</td> <td>8.45</td> <td>32.63</td> <td>100</td> <td>264 AVERAGE</td> </tr> </tbody> </table>		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1 5429.00	40.50	54.00	-13.50	30.52	34.16	8.45	32.63	100
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																												
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																												
1 5429.00	40.50	54.00	-13.50	30.52	34.16	8.45	32.63	100	264 AVERAGE																										



Mode	38																																																																									
	Harmonic																																																																									
	U-NII-1_5.15-5.25_802.11ax HE80_CH42_Full_5210MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Vertical																																																																								
Peak Avg	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10420.00</td> <td>46.57</td> <td>68.30</td> <td>-21.73</td> <td>57.43</td> <td>37.30</td> <td>10.77</td> <td>58.93</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15630.00</td> <td>51.35</td> <td>74.00</td> <td>-22.65</td> <td>58.21</td> <td>39.45</td> <td>12.72</td> <td>59.03</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	1 10420.00	46.57	68.30	-21.73	57.43	37.30	10.77	58.93	-- -- Peak	2 15630.00	51.35	74.00	-22.65	58.21	39.45	12.72	59.03	-- -- Peak	<table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th colspan="2"></th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1 10420.00</td> <td>46.29</td> <td>68.30</td> <td>-22.01</td> <td>57.15</td> <td>37.30</td> <td>10.77</td> <td>58.93</td> <td>-- -- Peak</td> </tr> <tr> <td>2 15630.00</td> <td>49.61</td> <td>74.00</td> <td>-24.39</td> <td>56.47</td> <td>39.45</td> <td>12.72</td> <td>59.03</td> <td>-- -- Peak</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos			Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg	1 10420.00	46.29	68.30	-22.01	57.15	37.30	10.77	58.93	-- -- Peak	2 15630.00	49.61	74.00	-24.39	56.47	39.45	12.72	59.03	-- -- Peak
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																		
1 10420.00	46.57	68.30	-21.73	57.43	37.30	10.77	58.93	-- -- Peak																																																																		
2 15630.00	51.35	74.00	-22.65	58.21	39.45	12.72	59.03	-- -- Peak																																																																		
Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																				
Freq	Level	Line Margin	Level	Factor	Loss Factor		cm	deg																																																																		
1 10420.00	46.29	68.30	-22.01	57.15	37.30	10.77	58.93	-- -- Peak																																																																		
2 15630.00	49.61	74.00	-24.39	56.47	39.45	12.72	59.03	-- -- Peak																																																																		



		39																																																																								
Mode	Band Edge - L																																																																									
	U-NII-2A_5.25-5.35_802.11ax HE80_CH58_Full_5290MHz																																																																									
ANT	5																																																																									
Pol.	Horizontal	Fundamental																																																																								
Peak	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5057.42</td> <td>49.03</td> <td>74.00</td> <td>-24.97</td> <td>40.01</td> <td>33.94</td> <td>7.86</td> <td>32.78</td> <td>100</td> <td>58</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5057.42	49.03	74.00	-24.97	40.01	33.94	7.86	32.78	100	58	PEAK	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>91.63</td> <td>-----</td> <td>-----</td> <td>81.98</td> <td>34.09</td> <td>8.23</td> <td>32.67</td> <td>100</td> <td>58</td> <td>PEAK</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5290.00	91.63	-----	-----	81.98	34.09	8.23	32.67	100	58	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																		
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5057.42	49.03	74.00	-24.97	40.01	33.94	7.86	32.78	100	58	PEAK																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5290.00	91.63	-----	-----	81.98	34.09	8.23	32.67	100	58	PEAK																																																															
Avg	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5085.26</td> <td>41.27</td> <td>54.00</td> <td>-12.73</td> <td>32.20</td> <td>33.95</td> <td>7.88</td> <td>32.76</td> <td>100</td> <td>58</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5085.26	41.27	54.00	-12.73	32.20	33.95	7.88	32.76	100	58	AVERAGE	<p style="text-align: right;">Date: 2025-03-30</p> <table border="1"> <thead> <tr> <th>Limit</th> <th>Read</th> <th>Ant</th> <th>Cable</th> <th>Preamp</th> <th>APos</th> <th>TPos</th> <th>Remark</th> </tr> <tr> <th>Freq</th> <th>Level</th> <th>Line Margin</th> <th>Level</th> <th>Factor</th> <th>Loss Factor</th> <th></th> <th></th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB/m</th> <th>dB</th> <th>cm</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5290.00</td> <td>84.61</td> <td>-----</td> <td>-----</td> <td>75.05</td> <td>34.07</td> <td>8.17</td> <td>32.68</td> <td>100</td> <td>58</td> <td>AVERAGE</td> </tr> </tbody> </table>	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line Margin	Level	Factor	Loss Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	1	5290.00	84.61	-----	-----	75.05	34.07	8.17	32.68	100	58	AVERAGE
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5085.26	41.27	54.00	-12.73	32.20	33.95	7.88	32.76	100	58	AVERAGE																																																															
Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																			
Freq	Level	Line Margin	Level	Factor	Loss Factor																																																																					
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm																																																																			
1	5290.00	84.61	-----	-----	75.05	34.07	8.17	32.68	100	58	AVERAGE																																																															