



Spot Check Evaluation

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2527-2
FCC ID : IHDT56AV4
STANDARD : 47 CFR Part 22(H), 24(E), 27(M), 27(Q), 90(S)
47 CFR Part 15 Subpart C §15.225
47 CFR Part 15 Subpart C §15.247
47 CFR Part 15 Subpart E §15.407
TEST DATE(S) : Apr. 05, 2025 ~ Apr. 27, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (ShenZhen)

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
1 GENERAL DESCRIPTION.....	4
1.1 Applicant.....	4
1.2 Manufacturer.....	4
1.3 Product Feature of Equipment Under Test.....	4
1.4 Modification of EUT	4
1.5 Testing Site.....	5
1.6 Test Software.....	5
1.7 Applicable Standards.....	6
1.8 Specification of Accessory.....	6
2 RE-USE OF MEASURED DATA.....	7
2.1 Introduction Section.....	7
2.2 Model Difference Information	7
2.3 Reference detail Section:	8
2.4 Spot Check Verification Data Section.....	9
3 LIST OF MEASURING EQUIPMENT.....	13
4 MEASUREMENT UNCERTAINTY	16
APPENDIX A. RADIATED SPURIOUS EMISSION	
APPENDIX B. SETUP PHOTOGRAPHS	
APPENDIX C. REFERENCE REPORT	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR530724-01B	Rev. 01	Initial issue of report	Apr. 30, 2025

Conformity Assessment Condition:

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC
222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2527-2
FCC ID	IHDT56AV4
IMEI Code	Conducted/DFS: 258674600017032/258674600017040 Radiation: 358674600016810/358674600016828 Conduction: 358674600016612/358674600016620
HW Version	DVT2
SW Version	V2VN35.50
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Modification of EUT

No modifications are made to the EUT during all test items.

1.5 Testing Site

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS DFS01-KS	CN1257	314309

Sporton International Inc. (Shenzhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (Shenzhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ 03CH02-SZ 03CH03-SZ 03CH05-SZ	CN1256	421272

1.6 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	SPORTON	FCC 15C-15E Test Tools Ver10.0_210607	10.0
2.	DFS01-KS	Sporton	Test Tools	1.0
3.	03CH02-SZ	AUDIX	E3	6.2009-8-24a
4.	03CH03-SZ	AUDIX	E3	6.2009-8-24
5.	03CH05-SZ	AUDIX	E3	6.2009-8-24a1
6.	CO02-SZ	AUDIX	E3	6.120613b

1.7 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC KDB 484596 D01 Referencing Test Data v02r03
- 47 CFR Part 22(H), 24(E), 27(M), 27(Q), 90(S)
- 47 CFR Part 15 Subpart C §15.225
- 47 CFR Part 15 Subpart C §15.247
- 47 CFR Part 15 Subpart E §15.407
- ANSI C63.10-2013
- ANSI C63.26-2015

1.8 Specification of Accessory

Specification of Accessory				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333L
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-335L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-333L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
Battery 1	Brand Name	Motorola(NVT)	Model Name	RA52
Battery 2	Brand Name	Motorola(SUNWODA)	Model Name	RA52
USB Cable 1	Brand Name	Motorola(Washin)	Model Name	HX-ZN-34
USB Cable 2	Brand Name	Motorola(Juwei)	Model Name	JWUB1928-ZN01H
Earphone	Brand Name	Motorola (Juwei)	Model Name	ZN80400118H001



2 Re-use of Measured Data

2.1 Introduction Section

This application re-uses data collected on a similar device. The subject device of this application (Model: XT2527-2, FCC ID: IHDT56AV4) is electrically identical to the reference device (Model: XT2527-1, FCC ID: IHDT56AV5) for the portions of the circuitry corresponding to the data being re-used, following the FCC KDB 484596 D01 Referencing Test Data v02r03.

ECR Data Referencing Inquiry has been approved by FCC, and the data referencing and spot check test plan includes RF/EMC, the details are presented in section 2.3 of this report, and for SAR Reference detail, please refer to FCC SAR report FA530724-01.

The criteria set in section 3 of KDB 484596 D01 v02r03 is followed to determine whether the data referencing is justified. For SAR, the higher between the referenced value and the spot check value is used to determine compliance in both standalone and simultaneous transmission conditions

The applicant takes full responsibility that the test data as referenced in this report represent compliance for this FCC ID: IHDT56AV4 .

2.2 Model Difference Information

The **main** difference between FCC ID: IHDT56AV5 and FCC ID: IHDT56AV4 is as below:

- Remove WCDMA B4, LTE B4/12/13/17/25/66 and 5G NR n2/n66.
- Add LTE B20/32/71/38C/41C and 5G NR n8/n20/n71.
- B41/B41C/n77/n78 Enable PC2 by software.
- Add NSA mode for 5G NR n5/n77.

Other differences and all the details of similarity and difference can be found in the confidential documents (IHDT56AV4 Operational Description of Product Equality Declaration).



2.3 Reference detail Section:

Rule Part	Equipment Class	Frequency Band (MHz)	Reference FCC ID (Parent)	Reference on test	Reference Title	FCC ID Filling (Variant)	Test on the variant	Data Referencing (Y/N)
15C	DSS (BR/EDR)	2400~2483.5	IHDT56AV5	Full test	FR530724A	IHDT56AV4	Spot check	Y, All test items
	DTS (BLE)	2400~2483.5	IHDT56AV5	Full test	FR530724B	IHDT56AV4	Spot check	Y, All test items
	DTS (WLAN)	2400~2483.5	IHDT56AV5	Full test	FR530724C	IHDT56AV4	Spot check	Y, All test items
	DXX (NFC)	13.56	IHDT56AV5	Full test	FR530724D	IHDT56AV4	Spot check	Y, All test items
15E	U-NII	5180~5240	IHDT56AV5	Full test	FR530724E	IHDT56AV4	Spot check	Y, All test items
		5260~5320	IHDT56AV5	Full test	FR530724E	IHDT56AV4	Spot check	Y, All test items
		5500~5720	IHDT56AV5	Full test	FR530724E	IHDT56AV4	Spot check	Y, All test items
		5745~5825	IHDT56AV5	Full test	FR530724E	IHDT56AV4	Spot check	Y, All test items
		5260~5320 5500~5720	IHDT56AV5	Full test	FZ530724	IHDT56AV4	Spot check	Y, All test items
22, 24, 27, 90,	PCE (GSM)	GSM 850/1900	IHDT56AV5	Full test	FG530724A	IHDT56AV4	Spot check	Y, All test items
	PCE (WCDMA)	Band II, V	IHDT56AV5	Full test	FG530724A	IHDT56AV4	Spot check	Y, All test items
	PCE (LTE)	B5/26/7/7C/42	IHDT56AV5	Full test	FG530724B FG530724C FG530724E FG530724F	IHDT56AV4	Spot check	Y, All test items
	PCE (LTE)	B26 (90S)	IHDT56AV5	Full test	FG530724D	IHDT56AV4	Spot check	Y, All test items
	PCE (LTE)	B2/38/38C/41/41C/71	-	-	-	-	-	N

Y: Pointer to spot-check exhibit; N: Pointer to full test exhibit

Remark: All 5G NR spot check or full test bands are not included in this report and will be issued separately.

2.4 Spot Check Verification Data Section

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

All test procedures follow the related section of parent report.

Spot-check measurements, while being always compliant with the applicable rule part(s) for the test under consideration, show a deviation d_{dB} from the reference data no larger than 3 dB:

$$d_{dB} = |V_{dB} - R_{dB}| \leq 3 \text{ dB} \quad (1)$$

V_{dB} , the variant spot-check level

R_{dB} , the corresponding measurement level for the reference model

An alternative to the limit of eq. (1) is available, and is based on considering how far the reference data R_{dB} is from the compliance threshold C_{dB} (also expressed in dB), for the particular test under consideration. In this case, if $M_{dB} = |C_{dB} - R_{dB}|$ is the margin in dB from the compliance limit, a spot check may be considered acceptable when the deviation d_{dB} from the reference data satisfies the following condition:

$$d_{dB} = |V_{dB} - R_{dB}| \leq (3 + M_{dB} / 20) \text{ dB} , \text{ for } 0 \leq M_{dB} \leq 60 \text{ dB} \quad (2)$$

$$d_{dB} = |V_{dB} - R_{dB}| = 6 \text{ dB} , \text{ for } M_{dB} > 60 \text{ dB}$$

where “| |” is the absolute value of the measured quantity.

When using the option in eq. (2), d_{dB} increases linearly from 3 dB to 6 dB.

Summary for spot check for each rule entry and technology is listed as below:

Mode	Test Item	IHDT56AV5 Parent Worst mode Test Result	IHDT56AV4 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
BT 1Mbps (CH78)	Number of Channels	79	79	0	3
	Hopping Channel Separation	0.991	0.998	0.007	3
	Dwell Time of Each Channel	0.31	0.31	0	3
	20dB Bandwidth	0.86	0.86	0	3
	99% Bandwidth	0.758	0.758	0	3
	Conducted Band Edges	-46.95	-46.67	0.28	3
	Conducted Spurious Emission	-36.21	-36.45	0.24	3
BT 1Mbps (CH78)	Radiated Band Edges and Radiated Spurious Emission	46.35	46.95	0.6	3
BT	AC Conducted Emission	7.98	8.08	0.1	3
BLE 2Mbps (CH38)	6dB Bandwidth	1.18	1.17	0.01	3
	99% Bandwidth	2.054	2.054	0	3
	Power Spectral Density	-5	-5.08	0.08	3
	Conducted Band Edges	-46.83	-47.02	0.19	3
	Conducted Spurious Emission	-35.82	-35.51	0.31	3
BLE 2Mbps (CH39)	Radiated Band Edges and Spurious Emission	41.54	41.29	0.25	3
BLE	AC Conducted Emission	7.98	8.08	0.1	3
WIFI 2.4G	6dB Bandwidth	17.24	17.96	0.72	3



(802.11ax20 CH01)	99% Bandwidth	19.341	19.5	0.159	3
	Power Spectral Density	-7.83	-8.05	0.22	3
	Conducted Band Edges	-18.38	-18.82	0.44	3
	Conducted Spurious Emission	-36.09	-35.22	0.87	3
WIFI 2.4G (802.11g CH11)	Radiated Band Edges and Spurious Emission	50.75	49.21	1.54	3
WIFI 2.4G	AC Conducted Emission	7.98	8.08	0.1	3
FCC-WIFI 5G (802.11ax20 CH149)	26dB Bandwidth	29	28.06	0.94	3
FCC-WIFI 5G (802.11ax20 CH149)	99% Bandwidth	19.341	19.295	0.046	3
FCC-WIFI 5G (802.11ax20 CH149)	Power Spectral Density	3.98	3.93	0.05	3
FCC-WIFI 5G (802.11ax20 CH149)	Unwanted Emissions	17.52	18.14	0.62	3
WIFI 5G (802.11ax HE80 CH106)	DFS	0.91522	0.830828	0.084392	3
5G WIFI 11ax HE20_CH64	Radiated Band Edges and Spurious Emission	50.65	50.01	0.64	3
WIFI 5G	AC Conducted Emission	8.68	9.38	0.7	3
NFC	20dB Emission Bandwidth (MHz)	2.48	2.48	0	3
	99% Occupied Bandwidth (MHz)	2.10	2.11	0.01	3
	Frequency Stability	-0.5531	-0.5045	0.0486	3
	Field Strength of Fundamental (dBuV/m)	55.24	55.48	0.24	3
	Radiated Spurious Emissions (dBuV/m)	36.16	33.85	2.31	3
	AC Power Line Conducted Emissions(dBuV)	9.75	8.40	1.35	3
Part 22/24/27/90 (LTE Band 7C)	Equivalent Isotropic Radiated Power	20.47	20.15	0.32	3
	Peak-to-Average Ratio	6.41	6.22	0.19	3
	Occupied Bandwidth	28.77	28.89	0.12	3
	Conducted Band Edge	-26.22	-27.35	1.13	3
	Conducted Spurious Emission	-51.75	-53.16	1.41	3
Part 22/24/27/90 (GSM 850)	Frequency Stability	0.0012	0.0027	0.0015	3
	Radiated Spurious Emission	-34.48	-32.78	1.7	3



Test Item	Mode	IHDT56AV5 Parent Worst mode Test Result	IHDT56AV4 Variant Check Test Result	Deviation (dB)	Deviation Limit (dB)
Conducted Power (dBm)	BT BR/EDR	16.74	15.87	0.87	3
	BLE 1Mbps	11.92	11.67	0.25	3
	BLE 2Mbps	11.96	11.64	0.32	3
	11b, 2.4GHz	18.51	18.18	0.33	3
	11g, 2.4GHz	18.57	18.47	0.10	3
	11n HT20, 2.4GHz	18.59	18.25	0.34	3
	11n HT40, 2.4GHz	16.86	16.59	0.33	3
	11ax HE20, 2.4GHz	18.69	18.50	0.19	3
	11ax HE40, 2.4GHz	17.05	17.59	0.54	3
	11a, 5.2GHz	18.24	18.21	0.03	3
	11a, 5.3GHz	18.30	18.26	0.04	3
	11a, 5.5GHz	18.01	17.96	0.05	3
	11a, 5.8GHz	17.92	17.86	0.06	3
	11n HT20, 5.2GHz	18.07	17.92	0.15	3
	11n HT20, 5.3GHz	18.27	18.11	0.16	3
	11n HT20, 5.5GHz	18.08	17.97	0.11	3
	11n HT20, 5.8GHz	17.81	17.61	0.20	3
	11ac VHT20, 5.2GHz	18.12	18.04	0.08	3
	11ac VHT20, 5.3GHz	18.34	18.21	0.13	3
	11ac VHT20, 5.5GHz	18.12	18.03	0.09	3
	11ac VHT20, 5.8GHz	17.88	17.81	0.07	3
	11ax HE20, 5.2GHz	18.23	18.18	0.05	3
	11ax HE20, 5.3GHz	18.41	18.36	0.05	3
	11ax HE20, 5.5GHz	18.21	18.18	0.03	3
	11ax HE20, 5.8GHz	17.97	17.93	0.04	3
	11n HT40, 5.2GHz	17.29	17.21	0.08	3
	11n HT40, 5.3GHz	17.70	17.62	0.08	3
	11n HT40, 5.5GHz	17.19	17.07	0.12	3
	11n HT40, 5.8GHz	17.18	17.12	0.06	3
	11ac VHT40, 5.2GHz	17.36	17.35	0.01	3
	11ac VHT40, 5.3GHz	17.73	17.71	0.02	3
	11ac VHT40, 5.5GHz	17.25	17.21	0.04	3
	11ac VHT40, 5.8GHz	17.24	17.22	0.02	3
	11ax HE40, 5.2GHz	17.47	17.41	0.06	3
	11ax HE40, 5.3GHz	17.82	17.77	0.05	3
	11ax HE40, 5.5GHz	17.37	17.34	0.03	3
	11ax HE40, 5.8GHz	17.34	17.30	0.04	3
	11ac VHT80, 5.2GHz	16.33	16.26	0.07	3
	11ac VHT80, 5.3GHz	16.46	16.30	0.16	3
	11ac VHT80, 5.5GHz	16.27	16.23	0.04	3
	11ac VHT80, 5.8GHz	16.20	16.19	0.01	3
	11ax HE80, 5.2GHz	16.43	16.38	0.05	3
	11ax HE80, 5.3GHz	16.58	16.55	0.03	3
	11ax HE80, 5.5GHz	16.38	16.34	0.04	3
	11ax HE80, 5.8GHz	16.33	16.30	0.03	3
	GSM 850	31.76	31.65	0.11	3
	GSM 1900	28.52	28.24	0.28	3
	WCDMA 850	22.58	22.53	0.05	3
	WCDMA 1900	22.70	22.65	0.05	3
	LTE B5	22.59	22.49	0.1	3
	LTE B26	22.65	22.54	0.11	3



	LTE B26-90S	22.81	22.48	0.33	3
	LTE B7	22.84	22.72	0.12	3
	LTE B42	23.04	22.92	0.12	3
	LTE B7C	22.77	22.45	0.32	3

Conclusion:

All test items test against the variant model based on the worst-case condition from the original model was performed in this filing to demonstrate the test data from original model remains representative for the variant model.

Based on the spot check test result, the test data from the original model is representative for the variant model. All spot check test data are shown within expected level compliant to limit line.

We are using power and ERP/EIRP measurements from the original parent model reports to list on the grant.

We confirm that the test data referencing policy of FCC KDB 484596 D01 Referencing Test Data v02r03 has been followed and the test data as referenced from the parent model report represents compliance with new FCC ID.



3 List of Measuring Equipment

For BT/WIFI:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Apr. 23, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Apr. 23, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Apr. 23, 2025	Jan. 01, 2026	Conducted (TH01-KS)
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 08, 2025	Apr. 16, 2025	Apr. 07, 2026	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 08, 2025	Apr. 16, 2025	Apr. 07, 2026	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Apr. 16, 2025	Dec. 27, 2025	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Aug. 20, 2023	Apr. 16, 2025	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 08, 2025	Apr. 16, 2025	Apr. 07, 2026	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Apr. 16, 2025	Jul. 02, 2025	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 08, 2025	Apr. 16, 2025	Apr. 07, 2026	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2024	Apr. 16, 2025	Oct. 17, 2025	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Apr. 16, 2025	Oct. 13, 2025	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 27, 2023	Apr. 16, 2025	Dec. 26, 2024	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 18, 2024	Apr. 16, 2025	Oct. 17, 2025	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Apr. 16, 2025	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Apr. 16, 2025	NCR	Radiation (03CH03-SZ)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec. 25, 2024	Apr. 17, 2025	Dec. 24, 2025	Conduction (CO02-SZ)
Spectrum Analyzer	R&S	FSV7	101632	10Hz~7GHz	Jan. 03, 2025	Apr. 16, 2025	Jan. 02, 2026	Conducted (DFS01-KS)
Signal Generator	KEYSIGHT	N5182B	MY53050604	9KHz~6GHz	Apr. 17, 2024	Apr. 16, 2025	Apr. 16, 2025	Conducted (DFS01-KS)
Combiner	MTJ Cooperation	MTJ7112	N/A	0.4-6GHz	NCR	Apr. 16, 2025	NCR	Conducted (DFS01-KS)

NCR: No Calibration Required.

**For NFC:**

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	R&S	ESR7	102261	9kHz~7GHz	Apr. 08, 2025	Apr. 23, 2025	Apr. 07, 2026	Radiation (03CH05-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010B	MY59071191	10Hz~44GHz	Apr. 08, 2025	Apr. 23, 2025	Apr. 07, 2026	Radiation (03CH05-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Apr. 23, 2025	Dec. 27, 2025	Radiation (03CH05-SZ)
Log-periodic Antenna	SCHWARZBECK	VULB 9168	01001	20MHz~1.5GHz	Jul. 08, 2024	Apr. 23, 2025	Jul. 07, 2025	Radiation (03CH05-SZ)
Amplifier	EM Electronics	EM330	060756	0.01Hz~3000MHz	Apr. 08, 2025	Apr. 23, 2025	Apr. 07, 2026	Radiation (03CH05-SZ)
AC Power Source	APC	AFV-S-600	F119050013	N/A	Oct. 14, 2024	Apr. 23, 2025	Oct. 13, 2025	Radiation (03CH05-SZ)
Turn Table	EMEC	T-200-S-1	060925-T	0~360 degree	NCR	Apr. 23, 2025	NCR	Radiation (03CH05-SZ)
Antenna Mast	EMEC	MBS-400-1	060927	1 m~4 m	NCR	Apr. 23, 2025	NCR	Radiation (03CH05-SZ)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Apr. 23, 2025	Oct. 09, 2025	Conducted (TH01-KS)
DC Power Supply	GW INSTEK	PLR36-10	GET220683	Max 20A, 36V	Jan. 02, 2025	Apr. 23, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Apr. 23, 2025	Jul. 03, 2025	Conducted (TH01-KS)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec.25, 2024	Apr. 17, 2025	Dec. 24, 2025	Conduction (CO02-SZ)

NCR: No Calibration Required.



For WWAN Bands:

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Apr. 22, 2025~ Apr. 23, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Power divider	STI	STI08-0055	-	0.5~40GHz	NCR	Apr. 22, 2025~ Apr. 23, 2025	NCR	Conducted (TH01-KS)
Temperature & humidity chamber	Hongzhan	LP-150U	H2014011440	-40~+150°C 20%~95%RH	Jul. 04, 2024	Apr. 22, 2025~ Apr. 23, 2025	Jul. 03, 2025	Conducted (TH01-KS)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150213	10Hz~44GHz	Jul. 03, 2024	Apr. 16, 2025~ Apr. 27, 2025	Jul. 02, 2025	Radiation (03CH02-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Apr. 16, 2025~ Apr. 27, 2025	Dec. 27, 2025	Radiation (03CH02-SZ)
Bilog Antenna	TeseQ	CBL6112D	35407	30MHz-2GHz	Oct. 24, 2023	Apr. 16, 2025~ Apr. 27, 2025	Oct. 23, 2025	Radiation (03CH02-SZ)
Double Ridge Horn Antenna	ETS-Lindgren	3117	00119436	1GHz~18GHz	Jul. 04, 2024	Apr. 16, 2025~ Apr. 27, 2025	Jul. 04, 2025	Radiation (03CH02-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Apr. 16, 2025~ Apr. 27, 2025	Jul. 03, 2025	Radiation (03CH02-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz-40GHz	Apr. 08, 2025	Apr. 16, 2025~ Apr. 27, 2025	Apr. 07, 2026	Radiation (03CH02-SZ)
LF Amplifier	Burgeon	BPA-530	102211	0.01~3000Mhz	Oct. 18, 2024	Apr. 16, 2025~ Apr. 27, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
HF Amplifier	KEYSIGHT	83017A	MY53270105	0.5GHz~26.5GHz	Oct. 14, 2024	Apr. 16, 2025~ Apr. 27, 2025	Oct. 13, 2025	Radiation (03CH02-SZ)
AC Power Source	Chroma	61601	616010003043	N/A	Oct. 18, 2024	Apr. 16, 2025~ Apr. 27, 2025	Oct. 17, 2025	Radiation (03CH02-SZ)
Turn Table	Chaintek	T-200	N/A	0~360 degree	NCR	Apr. 16, 2025~ Apr. 27, 2025	NCR	Radiation (03CH02-SZ)
Antenna Mast	Chaintek	MBS-400	N/A	1 m~4 m	NCR	Apr. 16, 2025~ Apr. 27, 2025	NCR	Radiation (03CH02-SZ)

NCR: No Calibration Required.

4 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.26-2015. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement (BT/WIFI2.4G/5G)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 2.22 dB
Occupied Channel Bandwidth	$\pm 0.1\%$
Conducted Power	± 0.50 dB
Conducted Power Spectral Density	± 0.90 dB
Frequency	± 0.04 Hz

Uncertainty of Conducted Measurement (DFS)

Conducted Generated signal Levels	± 0.56 dB
Conducted Time	0.38%

Uncertainty of Conducted Measurement (NFC)

Test Item	Uncertainty
Occupied Channel Bandwidth	$\pm 0.1\%$
Frequency	± 0.04 Hz

Uncertainty of Conducted Measurement (WWAN)

Test Item	Uncertainty
Conducted Spurious Emission & Bandedge	± 2.22 dB
Occupied Channel Bandwidth	$\pm 0.1\%$
Conducted Power	± 0.50 dB
Peak to Average Ratio	± 0.90 dB
Frequency Stability	± 0.04 ppm

**Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)**

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.5 dB
---	--------

03CH03-SZ(BT/WIF):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.00 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.90 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	5.00 dB
---	---------

03CH05-SZ(NFC):

Uncertainty of Radiated Emission Measurement (9 kHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	4.20 dB
---	---------

03CH02-SZ(WWAN):

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	2.47 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.31 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% ($U = 2Uc(y)$)	3.72 dB
---	---------

-THE END-



Appendix A. Radiated Spurious Emission

Test Engineer :	Shunping You	Relative Humidity :	50%
		Temperature :	20-24℃




Radiated Spurious Emission Test Modes

Mode	Band	Band (GHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	CO-TX	5.25-5.35	5	802.11ax HE20	64	5320	MCS0	Full	-
		-	-	BT on	-	-	-	-	-
		-	-	NFC on	-	-	-	-	-
		-	-	LTE Band 71	LINK	-	-	-	-
Mode 2	CO-TX	5.25-5.35	5	802.11ax HE20	64	5320	MCS0	Full	-
		-	-	BT on	-	-	-	-	-
		-	-	NFC on	-	-	-	-	-
		-	-	LTE Band 41	LINK	-	-	-	-
Mode 3	CO-TX			LF					

Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	802.11ax HE20	64	5350.24	49.99	54.00	-4.01	H	Average	Pass	Band Edge
	802.11ax HE20	64	15960.00	46.33	74.00	-27.67	H	Peak	Pass	Harmonic
2	802.11ax HE20	64	5350.10	49.71	54.00	-4.29	H	AVERAGE	Pass	Band Edge
	802.11ax HE20	64	10640.00	47.57	74.00	-26.43	H	Peak	Pass	Harmonic
3	802.11ax HE20_LF	64	34.85	26.73	40.00	-13.27	V	Peak	Pass	LF

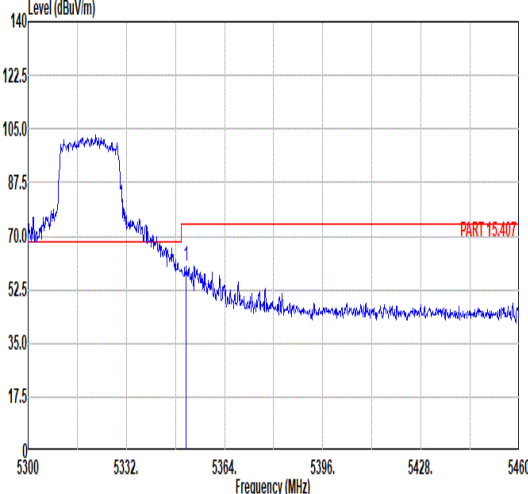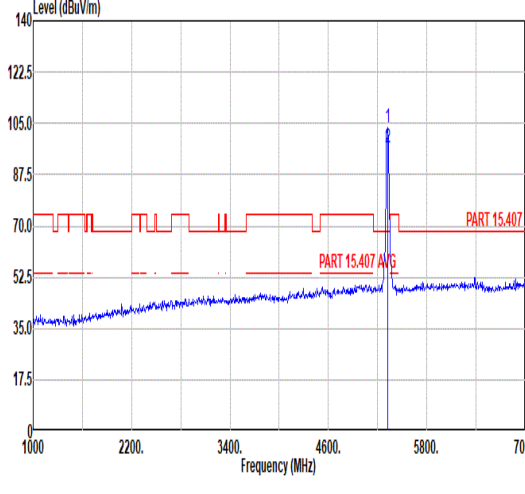
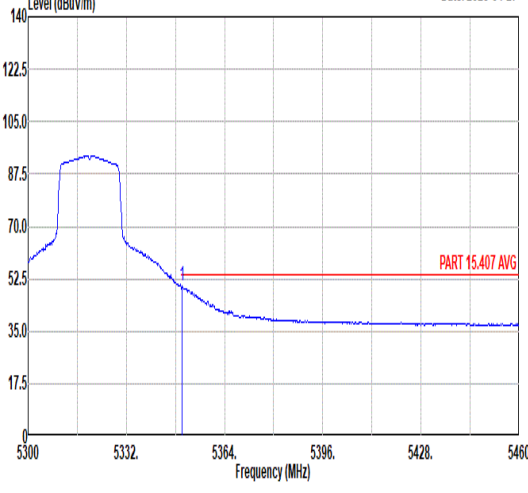


Mode	1																																																																																
	Band Edge																																																																																
	LTE Band 71 + 802.11ax HE20 + BT on + NFC on.																																																																																
ANT	5																																																																																
Pol.	Horizontal					Fundamental																																																																											
Peak																																																																																	
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 5351.52</td><td>60.07</td><td>74.00</td><td>-13.93</td><td>50.29</td><td>34.11</td><td>8.33</td><td>32.66 161 40 Peak</td></tr></tbody></table>						Limit	Read	Ant	Cable Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1 5351.52	60.07	74.00	-13.93	50.29	34.11	8.33	32.66 161 40 Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 5320.00</td><td>103.66</td><td>-----</td><td>-----</td><td>93.99</td><td>34.09</td><td>8.25</td><td>32.67 161 40 Peak</td></tr><tr><td>2 5320.00</td><td>96.65</td><td>-----</td><td>-----</td><td>86.98</td><td>34.09</td><td>8.25</td><td>32.67 161 40 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1 5320.00	103.66	-----	-----	93.99	34.09	8.25	32.67 161 40 Peak	2 5320.00	96.65	-----	-----	86.98	34.09	8.25
	Limit	Read	Ant	Cable Preamp	APos	TPos																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																											
1 5351.52	60.07	74.00	-13.93	50.29	34.11	8.33	32.66 161 40 Peak																																																																										
	Limit	Read	Ant	Cable Preamp	APos	TPos																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																											
1 5320.00	103.66	-----	-----	93.99	34.09	8.25	32.67 161 40 Peak																																																																										
2 5320.00	96.65	-----	-----	86.98	34.09	8.25	32.67 161 40 Average																																																																										
Avg						Blank																																																																											
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line Margin</th><th>Level Factor</th><th>Loss Factor</th><th></th><th></th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th></th></tr></thead><tbody><tr><td>1 5350.24</td><td>49.99</td><td>54.00</td><td>-4.01</td><td>40.21</td><td>34.11</td><td>8.33</td><td>32.66 161 40 Average</td></tr></tbody></table>						Limit	Read	Ant	Cable Preamp	APos	TPos		Freq	Level	Line Margin	Level Factor	Loss Factor			Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB		1 5350.24	49.99	54.00	-4.01	40.21	34.11	8.33	32.66 161 40 Average																																												
	Limit	Read	Ant	Cable Preamp	APos	TPos																																																																											
Freq	Level	Line Margin	Level Factor	Loss Factor			Remark																																																																										
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																											
1 5350.24	49.99	54.00	-4.01	40.21	34.11	8.33	32.66 161 40 Average																																																																										







Mode	1																																																																																													
	Band Edge																																																																																													
	LTE Band 71 + 802.11ax HE20 + BT on + NFC on.																																																																																													
ANT	5																																																																																													
Pol.	Vertical	Fundamental																																																																																												
Peak	Vertical Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a signal peak around 5350 MHz. A red line indicates the limit at 70.0 dBuV/m. A blue line indicates the measured peak at 98.84 dBuV/m. A red label 'PART 15.407' is present. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5354.72</td><td>56.23</td><td>74.00</td><td>-17.77</td><td>46.44</td><td>34.11</td><td>8.34</td><td>32.66</td><td>115</td><td>266</td><td>Peak</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5354.72	56.23	74.00	-17.77	46.44	34.11	8.34	32.66	115	266	Peak	Fundamental Peak Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a signal peak around 5350 MHz. A red line indicates the limit at 70.0 dBuV/m. A blue line indicates the measured peak at 92.32 dBuV/m. A red label 'PART 15.407' is present. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>98.84</td><td>-----</td><td>-----</td><td>89.17</td><td>34.09</td><td>8.25</td><td>32.67</td><td>115</td><td>266</td><td>Peak</td></tr><tr><td>2</td><td>5320.00</td><td>92.32</td><td>-----</td><td>-----</td><td>82.65</td><td>34.09</td><td>8.25</td><td>32.67</td><td>115</td><td>266</td><td>Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	98.84	-----	-----	89.17	34.09	8.25	32.67	115	266	Peak	2	5320.00	92.32	-----	-----	82.65	34.09	8.25	32.67	115	266	Average
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5354.72	56.23	74.00	-17.77	46.44	34.11	8.34	32.66	115	266	Peak																																																																																			
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5320.00	98.84	-----	-----	89.17	34.09	8.25	32.67	115	266	Peak																																																																																			
2	5320.00	92.32	-----	-----	82.65	34.09	8.25	32.67	115	266	Average																																																																																			
Avg	Vertical Average Spectrum Plot showing Level (dBuV/m) vs Frequency (MHz). The plot shows a signal peak around 5350 MHz. A red line indicates the limit at 54.00 dBuV/m. A blue line indicates the measured average at 45.73 dBuV/m. A red label 'PART 15.407 AVG' is present. <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.08</td><td>45.73</td><td>54.00</td><td>-8.27</td><td>35.95</td><td>34.11</td><td>8.33</td><td>32.66</td><td>115</td><td>266</td><td>Average</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.08	45.73	54.00	-8.27	35.95	34.11	8.33	32.66	115	266	Average	Blank																																																				
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																						
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																					
1	5350.08	45.73	54.00	-8.27	35.95	34.11	8.33	32.66	115	266	Average																																																																																			

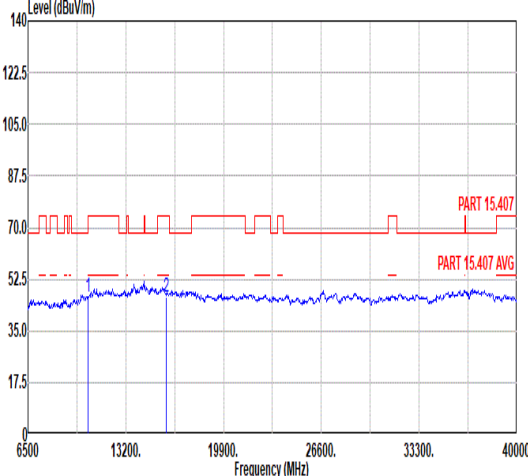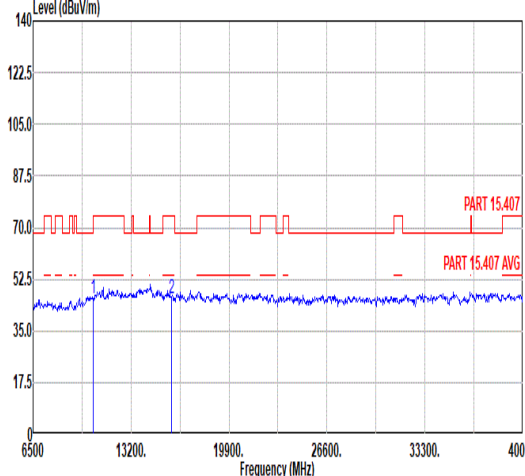

Mode	1																																																																																																																							
	Harmonic																																																																																																																							
	LTE Band 71 + 802.11ax HE20 + BT on + NFC on.																																																																																																																							
ANT	5																																																																																																																							
Pol.	Horizontal								Vertical																																																																																																															
Peak Avg																																																																																																																								
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>46.26</td><td>74.00</td><td>-27.74</td><td>56.23</td><td>37.78</td><td>10.94</td><td>58.69</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>46.33</td><td>74.00</td><td>-27.67</td><td>53.41</td><td>39.59</td><td>12.70</td><td>59.37</td><td>--</td><td>--</td><td>Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	46.26	74.00	-27.74	56.23	37.78	10.94	58.69	--	--	Peak	2	15960.00	46.33	74.00	-27.67	53.41	39.59	12.70	59.37	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>10640.00</td><td>46.15</td><td>74.00</td><td>-27.85</td><td>56.12</td><td>37.78</td><td>10.94</td><td>58.69</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>46.03</td><td>74.00</td><td>-27.97</td><td>53.11</td><td>39.59</td><td>12.70</td><td>59.37</td><td>--</td><td>--</td><td>Peak</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	10640.00	46.15	74.00	-27.85	56.12	37.78	10.94	58.69	--	--	Peak	2	15960.00	46.03	74.00	-27.97	53.11	39.59	12.70	59.37	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	10640.00	46.26	74.00	-27.74	56.23	37.78	10.94	58.69	--	--	Peak																																																																																																													
2	15960.00	46.33	74.00	-27.67	53.41	39.59	12.70	59.37	--	--	Peak																																																																																																													
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																																	
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																																																
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																															
1	10640.00	46.15	74.00	-27.85	56.12	37.78	10.94	58.69	--	--	Peak																																																																																																													
2	15960.00	46.03	74.00	-27.97	53.11	39.59	12.70	59.37	--	--	Peak																																																																																																													

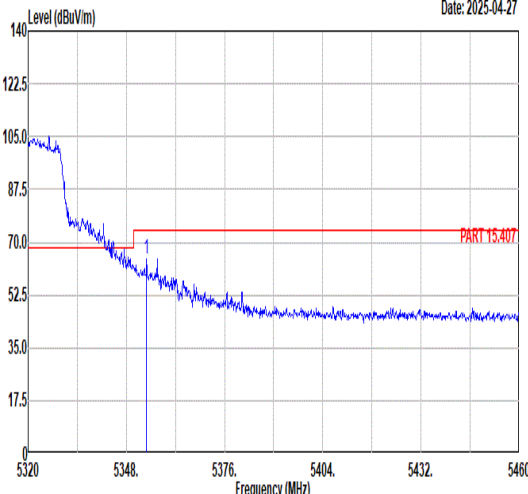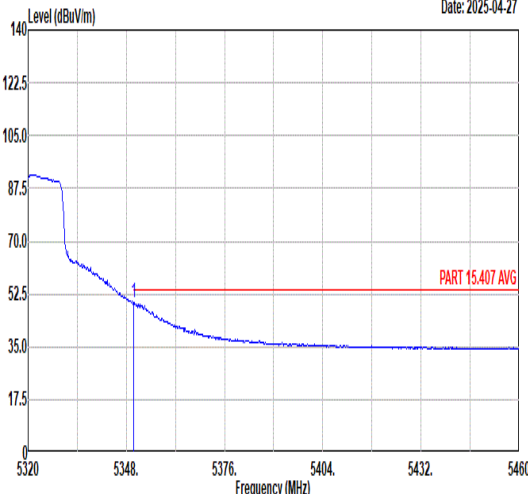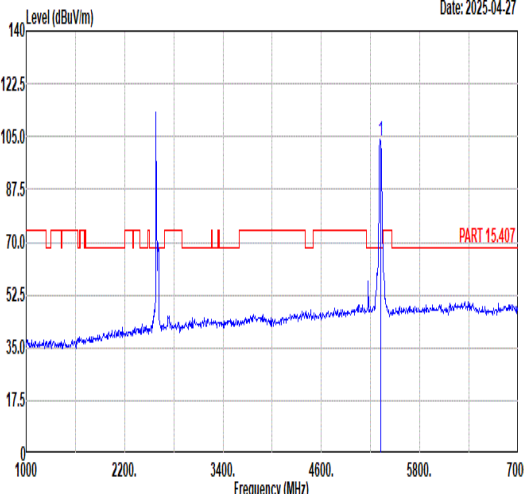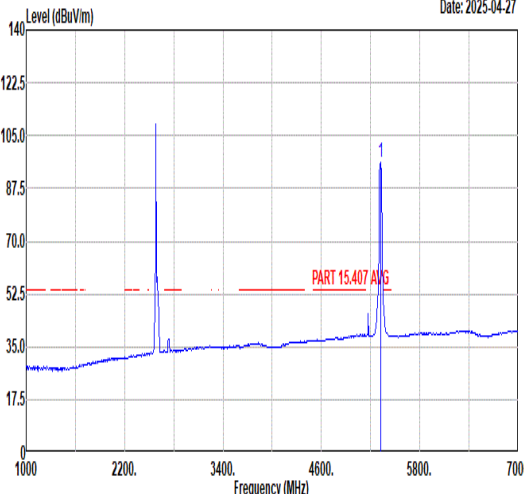

Mode	2																																																		
	Band Edge																																																		
	LTE Band 41 + 802.11ax HE20 + BT on + NFC on.																																																		
ANT	5																																																		
Pol.	Horizontal																																																		
Peak	Fundamental																																																		
	Date: 2025-04-27																																																		
																																																			
<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5353.74</td><td>64.56</td><td>74.00</td><td>-9.44</td><td>54.77</td><td>34.11</td><td>8.34</td><td>32.66</td><td>106</td><td>58</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5353.74	64.56	74.00	-9.44	54.77	34.11	8.34	32.66	106	58	PEAK
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5353.74	64.56	74.00	-9.44	54.77	34.11	8.34	32.66	106	58	PEAK																																								
Avg	Date: 2025-04-27																																																		
																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5350.10</td><td>49.71</td><td>54.00</td><td>-4.29</td><td>39.93</td><td>34.11</td><td>8.33</td><td>32.66</td><td>106</td><td>58</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5350.10	49.71	54.00	-4.29	39.93	34.11	8.33	32.66	106	58
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5350.10	49.71	54.00	-4.29	39.93	34.11	8.33	32.66	106	58	AVERAGE																																								
Peak	Date: 2025-04-27																																																		
																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>103.80</td><td>-----</td><td>-----</td><td>101.53</td><td>30.64</td><td>5.06</td><td>33.43</td><td>106</td><td>58</td><td>PEAK</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	103.80	-----	-----	101.53	30.64	5.06	33.43	106	58
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5320.00	103.80	-----	-----	101.53	30.64	5.06	33.43	106	58	PEAK																																								
Avg	Date: 2025-04-27																																																		
																																																			
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>5320.00</td><td>95.90</td><td>-----</td><td>-----</td><td>93.63</td><td>30.64</td><td>5.06</td><td>33.43</td><td>106</td><td>58</td><td>AVERAGE</td></tr></table>												Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	5320.00	95.90	-----	-----	93.63	30.64	5.06	33.43	106	58
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																												
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																											
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																									
1	5320.00	95.90	-----	-----	93.63	30.64	5.06	33.43	106	58	AVERAGE																																								

Remark: All signals exceeding the limit are fundamental frequency signals and can be ignored.





Mode	2																																																																																											
	Band Edge																																																																																											
	LTE Band 41 + 802.11ax HE20 + BT on + NFC on.																																																																																											
ANT	5																																																																																											
Pol.	Vertical						Fundamental																																																																																					
Peak	Level (dBuV/m) Date: 2025-04-27 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.10</td><td>55.49</td><td>74.00</td><td>-18.51</td><td>45.71</td><td>34.11</td><td>8.33</td><td>32.66</td><td>103</td><td>257</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.10	55.49	74.00	-18.51	45.71	34.11	8.33	32.66	103	257	PEAK	Level (dBuV/m) Date: 2025-04-27 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>97.58</td><td>-----</td><td>-----</td><td>95.31</td><td>30.64</td><td>5.06</td><td>33.43</td><td>103</td><td>257</td><td>PEAK</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	97.58	-----	-----	95.31	30.64	5.06	33.43	103	257	PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5350.10	55.49	74.00	-18.51	45.71	34.11	8.33	32.66	103	257	PEAK																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5320.00	97.58	-----	-----	95.31	30.64	5.06	33.43	103	257	PEAK																																																																																	
Avg	Level (dBuV/m) Date: 2025-04-27 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5350.10</td><td>46.21</td><td>54.00</td><td>-7.79</td><td>36.43</td><td>34.11</td><td>8.33</td><td>32.66</td><td>103</td><td>257</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5350.10	46.21	54.00	-7.79	36.43	34.11	8.33	32.66	103	257	AVERAGE	Level (dBuV/m) Date: 2025-04-27 Frequency (MHz) <table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>5320.00</td><td>89.80</td><td>-----</td><td>-----</td><td>87.53</td><td>30.64</td><td>5.06</td><td>33.43</td><td>103</td><td>257</td><td>AVERAGE</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	5320.00	89.80	-----	-----	87.53	30.64	5.06	33.43	103	257	AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5350.10	46.21	54.00	-7.79	36.43	34.11	8.33	32.66	103	257	AVERAGE																																																																																	
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																					
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																			
1	5320.00	89.80	-----	-----	87.53	30.64	5.06	33.43	103	257	AVERAGE																																																																																	



Mode	2																																																																																																															
	Harmonic																																																																																																															
	LTE Band 41 + 802.11ax HE20 + BT on + NFC on.																																																																																																															
ANT	5																																																																																																															
Pol.	Horizontal						Vertical																																																																																																									
Peak Avg	Date: 2025-04-27						Date: 2025-04-27																																																																																																									
	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10640.00</td><td>47.57</td><td>74.00</td><td>-26.43</td><td>57.54</td><td>37.78</td><td>10.94</td><td>58.69</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>45.19</td><td>74.00</td><td>-28.81</td><td>52.27</td><td>39.59</td><td>12.70</td><td>59.37</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	47.57	74.00	-26.43	57.54	37.78	10.94	58.69	--	--	Peak	2	15960.00	45.19	74.00	-28.81	52.27	39.59	12.70	59.37	--	--	Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss Factor</th><th>Remark</th></tr></thead><tbody><tr><td></td><td>MHz</td><td>dBuV/m</td><td>dBuV/m</td><td>dB</td><td>dBuV</td><td>dB/m</td><td>dB</td><td>cm</td><td>deg</td></tr><tr><td>1</td><td>10640.00</td><td>46.77</td><td>74.00</td><td>-27.23</td><td>56.74</td><td>37.78</td><td>10.94</td><td>58.69</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>15960.00</td><td>45.21</td><td>74.00</td><td>-28.79</td><td>52.29</td><td>39.59</td><td>12.70</td><td>59.37</td><td>--</td><td>--</td><td>Peak</td></tr></tbody></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	10640.00	46.77	74.00	-27.23	56.74	37.78	10.94	58.69	--	--	Peak	2	15960.00	45.21	74.00	-28.79	52.29	39.59	12.70	59.37	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	10640.00	47.57	74.00	-26.43	57.54	37.78	10.94	58.69	--	--	Peak																																																																																																					
2	15960.00	45.19	74.00	-28.81	52.27	39.59	12.70	59.37	--	--	Peak																																																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss Factor	Remark																																																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																																							
1	10640.00	46.77	74.00	-27.23	56.74	37.78	10.94	58.69	--	--	Peak																																																																																																					
2	15960.00	45.21	74.00	-28.79	52.29	39.59	12.70	59.37	--	--	Peak																																																																																																					

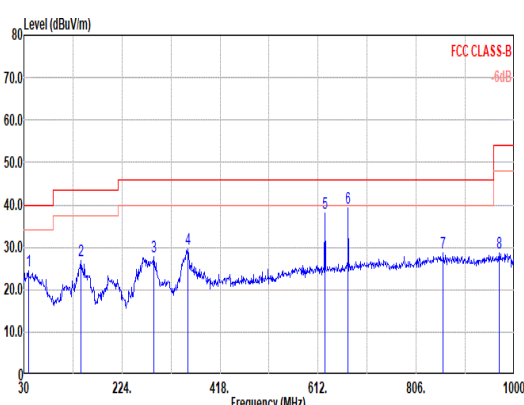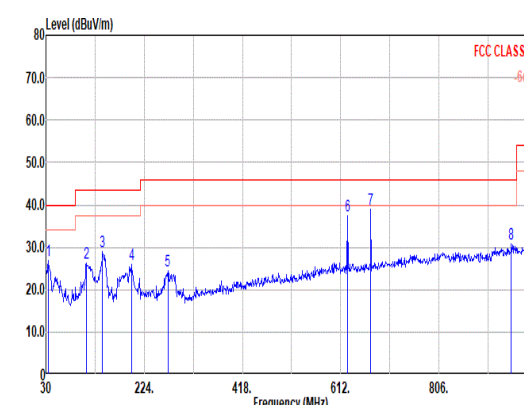

Mode	3																																																																																																																																													
	LF																																																																																																																																													
	LTE Band 71 + 802.11ax HE20 + BT on + NFC on.																																																																																																																																													
ANT	5																																																																																																																																													
Pol.	Horizontal						Vertical																																																																																																																																							
Peak Avg																																																																																																																																														
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>38.73</td><td>24.31</td><td>40.00</td><td>-15.69</td><td>39.43</td><td>19.16</td><td>0.62</td><td>34.90</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>142.52</td><td>26.81</td><td>43.50</td><td>-16.69</td><td>41.93</td><td>18.35</td><td>1.25</td><td>34.72</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>287.05</td><td>27.91</td><td>46.00</td><td>-18.09</td><td>42.06</td><td>18.72</td><td>1.76</td><td>34.63</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>353.98</td><td>29.69</td><td>46.00</td><td>-16.31</td><td>42.02</td><td>20.31</td><td>1.95</td><td>34.59</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>625.50</td><td>38.03</td><td></td><td></td><td>43.75</td><td>26.17</td><td>2.66</td><td>34.55</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>671.50</td><td>39.23</td><td></td><td></td><td>44.32</td><td>26.62</td><td>2.75</td><td>34.46</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>7</td><td>859.35</td><td>28.78</td><td>46.00</td><td>-17.22</td><td>31.20</td><td>28.77</td><td>3.11</td><td>34.30</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>8</td><td>970.90</td><td>28.79</td><td>54.00</td><td>-25.21</td><td>29.87</td><td>29.88</td><td>3.30</td><td>34.26</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	38.73	24.31	40.00	-15.69	39.43	19.16	0.62	34.90	--	--	--	Peak	2	142.52	26.81	43.50	-16.69	41.93	18.35	1.25	34.72	--	--	--	Peak	3	287.05	27.91	46.00	-18.09	42.06	18.72	1.76	34.63	--	--	--	Peak	4	353.98	29.69	46.00	-16.31	42.02	20.31	1.95	34.59	--	--	--	Peak	5	625.50	38.03			43.75	26.17	2.66	34.55	--	--	--	Peak	6	671.50	39.23			44.32	26.62	2.75	34.46	--	--	--	Peak	7	859.35	28.78	46.00	-17.22	31.20	28.77	3.11	34.30	--	--	--	Peak	8	970.90	28.79	54.00	-25.21	29.87	29.88	3.30	34.26	--	--	--	Peak
		Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	38.73	24.31	40.00	-15.69	39.43	19.16	0.62	34.90	--	--	--	Peak																																																																																																																																		
2	142.52	26.81	43.50	-16.69	41.93	18.35	1.25	34.72	--	--	--	Peak																																																																																																																																		
3	287.05	27.91	46.00	-18.09	42.06	18.72	1.76	34.63	--	--	--	Peak																																																																																																																																		
4	353.98	29.69	46.00	-16.31	42.02	20.31	1.95	34.59	--	--	--	Peak																																																																																																																																		
5	625.50	38.03			43.75	26.17	2.66	34.55	--	--	--	Peak																																																																																																																																		
6	671.50	39.23			44.32	26.62	2.75	34.46	--	--	--	Peak																																																																																																																																		
7	859.35	28.78	46.00	-17.22	31.20	28.77	3.11	34.30	--	--	--	Peak																																																																																																																																		
8	970.90	28.79	54.00	-25.21	29.87	29.88	3.30	34.26	--	--	--	Peak																																																																																																																																		
																																																																																																																																														
	<table><tr><th></th><th>Freq</th><th>Level</th><th>Limit</th><th>Line</th><th>Margin</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>34.85</td><td>26.73</td><td>40.00</td><td>-13.27</td><td>42.37</td><td>18.68</td><td>0.58</td><td>34.90</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>109.54</td><td>26.35</td><td>43.50</td><td>-17.15</td><td>44.34</td><td>15.68</td><td>1.11</td><td>34.78</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>141.55</td><td>29.03</td><td>43.50</td><td>-14.47</td><td>44.23</td><td>18.27</td><td>1.25</td><td>34.72</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>198.78</td><td>25.84</td><td>43.50</td><td>-17.66</td><td>43.01</td><td>16.05</td><td>1.48</td><td>34.70</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>270.56</td><td>24.31</td><td>46.00</td><td>-21.69</td><td>39.05</td><td>18.21</td><td>1.71</td><td>34.66</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>625.50</td><td>37.44</td><td></td><td></td><td>43.16</td><td>26.17</td><td>2.66</td><td>34.55</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>7</td><td>671.50</td><td>38.82</td><td></td><td></td><td>43.91</td><td>26.62</td><td>2.75</td><td>34.46</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>8</td><td>948.59</td><td>30.69</td><td>46.00</td><td>-15.31</td><td>31.99</td><td>29.74</td><td>3.26</td><td>34.30</td><td>--</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	34.85	26.73	40.00	-13.27	42.37	18.68	0.58	34.90	--	--	--	Peak	2	109.54	26.35	43.50	-17.15	44.34	15.68	1.11	34.78	--	--	--	Peak	3	141.55	29.03	43.50	-14.47	44.23	18.27	1.25	34.72	--	--	--	Peak	4	198.78	25.84	43.50	-17.66	43.01	16.05	1.48	34.70	--	--	--	Peak	5	270.56	24.31	46.00	-21.69	39.05	18.21	1.71	34.66	--	--	--	Peak	6	625.50	37.44			43.16	26.17	2.66	34.55	--	--	--	Peak	7	671.50	38.82			43.91	26.62	2.75	34.46	--	--	--	Peak	8	948.59	30.69	46.00	-15.31	31.99	29.74	3.26	34.30	--	--	--	Peak
	Freq	Level	Limit	Line	Margin	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																																				
1	34.85	26.73	40.00	-13.27	42.37	18.68	0.58	34.90	--	--	--	Peak																																																																																																																																		
2	109.54	26.35	43.50	-17.15	44.34	15.68	1.11	34.78	--	--	--	Peak																																																																																																																																		
3	141.55	29.03	43.50	-14.47	44.23	18.27	1.25	34.72	--	--	--	Peak																																																																																																																																		
4	198.78	25.84	43.50	-17.66	43.01	16.05	1.48	34.70	--	--	--	Peak																																																																																																																																		
5	270.56	24.31	46.00	-21.69	39.05	18.21	1.71	34.66	--	--	--	Peak																																																																																																																																		
6	625.50	37.44			43.16	26.17	2.66	34.55	--	--	--	Peak																																																																																																																																		
7	671.50	38.82			43.91	26.62	2.75	34.46	--	--	--	Peak																																																																																																																																		
8	948.59	30.69	46.00	-15.31	31.99	29.74	3.26	34.30	--	--	--	Peak																																																																																																																																		

Remark: 625.5MHz & 671.5MHz are WWAN fundamental frequency signals and can be ignored



Appendix C. Reference Report



FCC RF Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : XT2527-1
FCC ID : IHDT56AV5
STANDARD : FCC Part 15 Subpart C §15.247
CLASSIFICATION : (DTS) Digital Transmission System
TEST DATE(S) : Mar. 20, 2025 ~ Apr. 17, 2025

We, Sporton International Inc. (Kunshan), would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

This report contains data that were produced under subcontract by Sporton International Inc. (Shenzhen).

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International Inc. (Kunshan), the test report shall not be reproduced except in full.

Jason Jia

Approved by: Jason Jia



Sporton International Inc. (Kunshan)

**No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300
People's Republic of China**



TABLE OF CONTENTS

REVISION HISTORY.....	3
SUMMARY OF TEST RESULT	4
1 GENERAL DESCRIPTION.....	5
1.1 Applicant.....	5
1.2 Manufacturer.....	5
1.3 Product Feature of Equipment Under Test.....	5
1.4 Product Specification of Equipment Under Test.....	5
1.5 Modification of EUT	6
1.6 Testing Location	6
1.7 Test Software.....	6
1.8 Applicable Standards.....	7
1.9 Specification of Accessory.....	7
2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST.....	8
2.1 Carrier Frequency Channel	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	10
2.4 Support Unit used in test configuration and system	11
2.5 EUT Operation Test Setup	11
2.6 Measurement Results Explanation Example.....	11
3 TEST RESULT	12
3.1 6dB and 99% Bandwidth Measurement	12
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement	14
3.4 Conducted Band Edges and Spurious Emission Measurement	15
3.5 Radiated Band Edges and Spurious Emission Measurement	16
3.6 AC Conducted Emission Measurement.....	20
3.7 Antenna Requirements.....	22
4 LIST OF MEASURING EQUIPMENT.....	23
5 MEASUREMENT UNCERTAINTY	24
APPENDIX A. CONDUCTED TEST RESULTS	
APPENDIX B. AC CONDUCTED EMISSION TEST RESULT	
APPENDIX C. RADIATED SPURIOUS EMISSION	
APPENDIX D. DUTY CYCLE PLOTS	
APPENDIX E. SETUP PHOTOGRAPHS	



REVISION HISTORY

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR530724B	Rev. 01	Initial issue of report	Apr. 21, 2025
FR530724B	Rev. 02	Update the equipment calibration date in section4. This report is an update version, replacing the report issued on Apr. 21, 2025.	Apr. 23, 2025

SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	15.247(a)(2)	6dB Bandwidth	$\geq 0.5\text{MHz}$	Pass	-
3.1	-	99% Bandwidth	-	Report only	-
3.2	15.247(b)(3)	Peak Output Power	$\leq 30\text{dBm}$	Pass	-
3.3	15.247(e)	Power Spectral Density	$\leq 8\text{dBm}/3\text{kHz}$	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	$\leq 20\text{dBc}$	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	15.209(a) & 15.247(d)	Pass	Under limit 12.46 dB at 2483.54 MHz
3.6	15.207	AC Conducted Emission	15.207(a)	Pass	Under limit 6.75 dB at 0.18 MHz
3.7	15.203 & 15.247(b)	Antenna Requirement	15.203 & 15.247(b)	Pass	-

Conformity Assessment Condition:

- The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacture who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
- The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty"

Disclaimer:

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.



1 General Description

1.1 Applicant

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility LLC

222 W,Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Product Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola
Model Name	XT2527-1
FCC ID	IHDT56AV5
IMEI/SN Code	Conducted: NN0R250102 Conduction: 358887330039734/358887330039742 Radiation: 358887330040591/358887330040609
HW Version	DVT2
SW Version	V2VN35.50
EUT Stage	Identical Prototype

Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

1.4 Product Specification of Equipment Under Test

Standards-related Product Specification	
Tx/Rx Frequency Range	2402 MHz ~ 2480 MHz
Number of Channels	40
Carrier Frequency of Each Channel	40 Channel(37 hopping + 3 advertising channel)
Maximum Output Power to Antenna	BLE 1Mbps: 12.19 dBm (0.0166 W) BLE 2Mbps: 12.22 dBm (0.0167 W)
99% Occupied Bandwidth	BLE 1Mbps:1.039MHz BLE 2Mbps:2.058MHz
Antenna Type / Gain	IFA Antenna type with gain -2.50 dBi
Type of Modulation	Bluetooth LE : GFSK

Note: The device supports frequency range of Bluetooth LE data rate 2Mbps is 2404MHz ~ 2478MHz.



1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Testing Location

Sporton International Inc. (Kunshan) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.02.

Test Firm	Sporton International Inc. (Kunshan)		
Test Site Location	No. 1098, Pengxi North Road, Kunshan Economic Development Zone Jiangsu Province 215300 People's Republic of China TEL : +86-512-57900158		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	TH01-KS	CN1257	314309

Sporton International Inc. (ShenZhen) is accredited to ISO/IEC 17025:2017 by American Association for Laboratory Accreditation with Certificate Number 5145.01.

Test Firm	Sporton International Inc. (ShenZhen)		
Test Site Location	101, 1st Floor, Block B, Building 1, No. 2, Tengfeng 4th Road, Fenghuang Community, Fuyong Street, Baoan District, Shenzhen City, Guangdong Province 518103 People's Republic of China TEL: +86-755-86066985		
Test Site No.	Sporton Site No.	FCC Designation No.	FCC Test Firm Registration No.
	CO02-SZ 03CH03-SZ	CN1256	421272

Note: Test data subcontracted: test cases in section 3.5&3.6 of this report.

1.7 Test Software

Item	Site	Manufacturer	Name	Version
1.	TH01-KS	Tonscend	JS1120-3 test system China_210602	3.3.10
2.	03CH03-SZ	AUDIX	E3	6.2009-8-24
3.	CO02-SZ	AUDIX	E3	6.120613b



1.8 Applicable Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ 47 CFR Part 15 Subpart C §15.247
- ♦ FCC KDB 558074 D01 15.247 Meas Guidance v05r02
- ♦ ANSI C63.10-2013

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.

1.9 Specification of Accessory

Accessories Information				
AC Adapter 1(US)	Brand Name	Motorola(Salcomp)	Model Name	MC-331L
AC Adapter 1(EU)	Brand Name	Motorola(Salcomp)	Model Name	MC-332L
AC Adapter 1(UK)	Brand Name	Motorola(Salcomp)	Model Name	MC-333L
AC Adapter 1(AU)	Brand Name	Motorola(Salcomp)	Model Name	MC-335L
AC Adapter 1(AR)	Brand Name	Motorola(Salcomp)	Model Name	MC-336L
AC Adapter 1(BR)	Brand Name	Motorola(Salcomp)	Model Name	MC-337L
AC Adapter 2(US)	Brand Name	Motorola(Chenyang)	Model Name	MC-331L
AC Adapter 2(EU)	Brand Name	Motorola(Chenyang)	Model Name	MC-332L
AC Adapter 2(UK)	Brand Name	Motorola(Chenyang)	Model Name	MC-333L
AC Adapter 2(AR)	Brand Name	Motorola(Chenyang)	Model Name	MC-336L
AC Adapter 2(BR)	Brand Name	Motorola(Chenyang)	Model Name	MC-337L
Battery 1	Brand Name	Motorola(NVT)	Model Name	RA52
Battery 2	Brand Name	Motorola(SUNWODA)	Model Name	RA52
USB Cable 1	Brand Name	Motorola(Washin)	Model Name	HX-ZN-34
USB Cable 2	Brand Name	Motorola(Juwei)	Model Name	JWUB1928-ZN01H
Wireless Earphones	Brand Name	Motorola	Model Name	XT2443-1



2 Test Configuration of Equipment Under Test

2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
	20	2442	-	-

2.2 Test Mode


- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: conduction emission (150 kHz to 30 MHz), radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, pre-scanned in three orthogonal panels, X, Y, Z. The worst cases (Z plane) were recorded in this report.
- b. AC power line Conducted Emission was tested under maximum output power.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
	Bluetooth – LE / GFSK
Conducted TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps
	Mode 4: Bluetooth Tx CH01_2404 MHz_BLE 2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps
	Mode 6: Bluetooth Tx CH38_2478 MHz_BLE 2Mbps
Radiated TCs	Mode 1: Bluetooth Tx CH00_2402 MHz_BLE 1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_BLE 1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_BLE 1Mbps
	Mode 4: Bluetooth Tx CH01_2404 MHz_BLE 2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_BLE 2Mbps
	Mode 6: Bluetooth Tx CH38_2478 MHz_BLE 2Mbps
AC Conducted Emission	Mode 1 : GSM 850 Idle + Bluetooth Link with Wireless Earphones + WLAN Link (2.4G) + USB Cable2 (Charging from Adapter2)
Remark: - For Radiated Test Cases, The tests were performance with Adapter 2 and USB Cable 2. - Accessories from 15B worse mode.	

2.3 Connection Diagram of Test System

AC Conducted Emission:

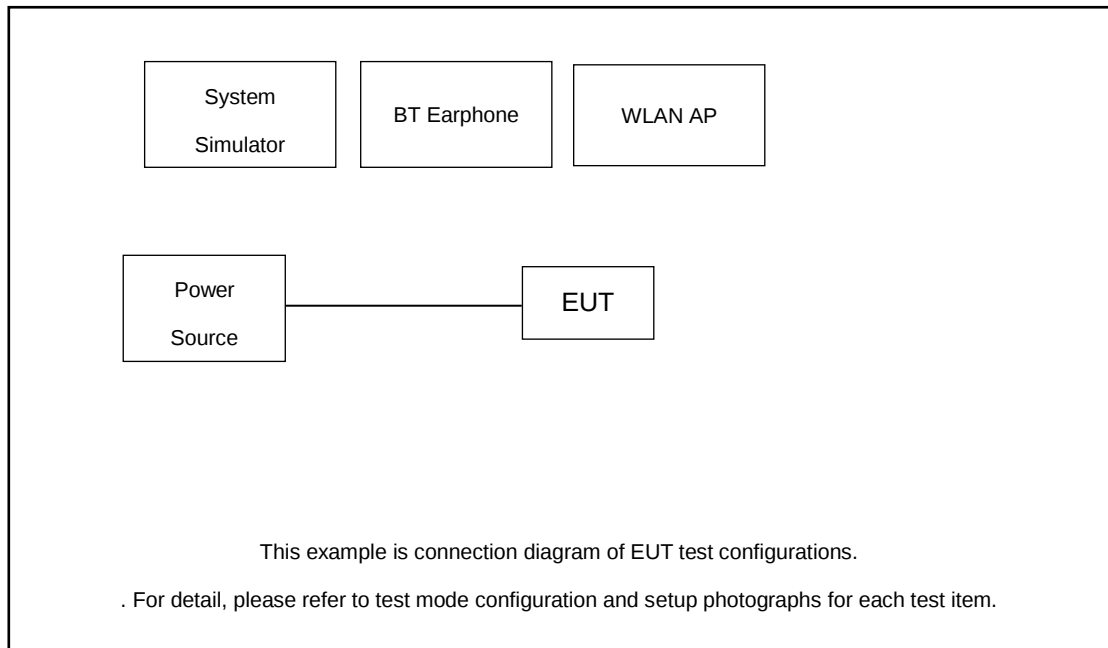

Radiated Emission:

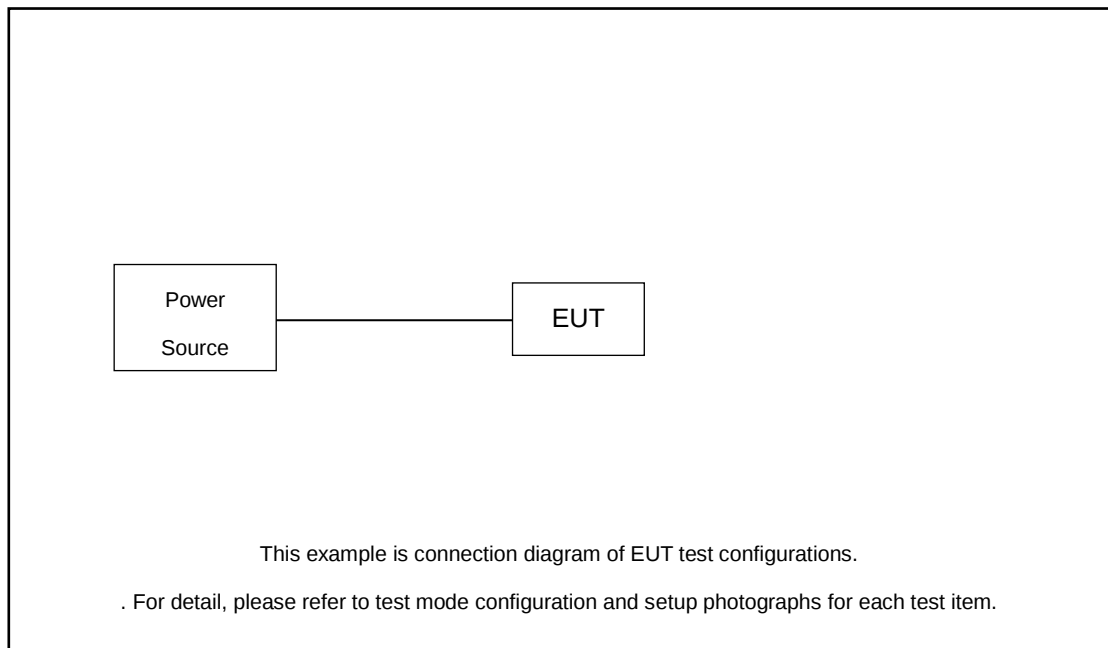

2.4 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model Name	FCC ID	Data Cable	Power Cord
1.	Base Station	Anritsu	MT8820C	N/A	N/A	Unshielded,1.8m
2.	WLAN AP	Dlink	DIR-820L	KA2IR820LA1	N/A	Unshielded,1.8m

2.5 EUT Operation Test Setup

For BLE function, the engineering test program was provided and enabled to make EUT continuous transmit.

For AC power line conducted emissions, the EUT was set to connect with the BT Earphone under large package sizes transmission.

2.6 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

Following shows an offset computation example with cable loss 2.19 dB and 20dB attenuator.

$$\begin{aligned}\text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)} \\ &= 2.19 + 20 = 22.19 \text{ (dB)}\end{aligned}$$

3 Test Result

3.1 6dB and 99% Bandwidth Measurement

3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.


3.1.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.1.3 Test Procedures

1. The testing follows ANSI C63.10-2013 clause 11.8
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6 dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1% to 5% of the 99% OBW and the VBW is set to 3 times of the RBW.
6. Measure and record the results in the test report.

3.1.4 Test Setup

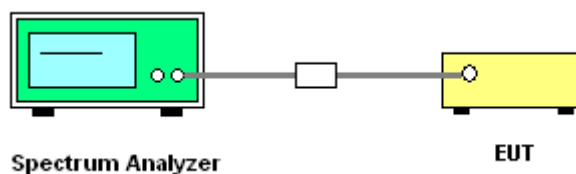

3.1.5 Test Result of 6dB Bandwidth and 99% Occupied Bandwidth

Please refer to Appendix A.

3.2 Output Power Measurement

3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. If transmitting antenna of directional gain greater than 6dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi.


3.2.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.2.3 Test Procedures

1. The testing follows the Measurement Procedure of ANSI C63.10-2013 clause 11.9.1.3 PKPM1 Peak power meter or ANSI C63.10-2013 clause 11.9.2.3.1 Method AVGPM method.
2. The RF output of EUT was connected to the power meter by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Measure the conducted output power and record the results in the test report.

3.2.4 Test Setup

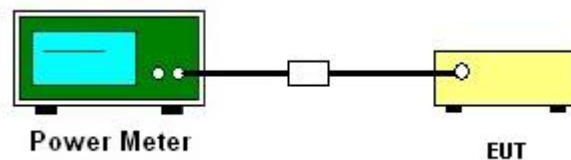

3.2.5 Test Result of Peak Output Power

Please refer to Appendix A.

3.2.6 Test Result of Average Output Power (Reporting Only)

Please refer to Appendix A.

3.3 Power Spectral Density Measurement

3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8dBm in any 3kHz band at any time interval of continuous transmission.


3.3.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.3.3 Test Procedures

1. The testing follows Measurement Procedure of ANSI C63.10-2013 clause 11.10.2 Method PKPSD.
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth VBW = 10 kHz In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100kHz is a reference level and used as 20dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

3.3.4 Test Setup

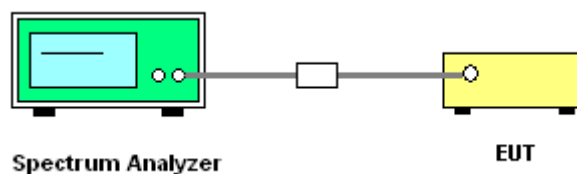

3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

3.4 Conducted Band Edges and Spurious Emission Measurement

3.4.1 Limit of Conducted Band Edges and Spurious Emission

All harmonics/spurious must be at least 20 dB down from the highest emission level within the authorized band.


3.4.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.4.3 Test Procedure

1. The testing follows ANSI C63.10-2013 clause 11.13
2. The RF output of EUT was connected to the spectrum analyzer by RF cable and attenuator. The path loss was compensated to the results for each measurement.
3. Set to the maximum power setting and enable the EUT transmit continuously.
4. Set RBW = 100 kHz, VBW=300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

3.4.4 Test Setup

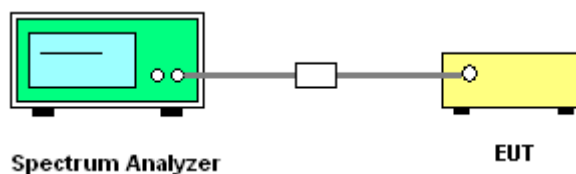

3.4.5 Test Result of Conducted Band Edges Plots

Please refer to Appendix A.

3.4.6 Test Result of Conducted Spurious Emission Plots

Please refer to Appendix A.

3.5 Radiated Band Edges and Spurious Emission Measurement

3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device was measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

3.5.2 Measuring Instruments


The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.5.3 Test Procedures


1. The testing follows ANSI C63.10-2013 clause 11.11 & 11.12
2. The EUT was arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT was placed on a turntable with 0.8 meter for frequency below 1GHz and 1.5 meter for frequency above 1GHz respectively above ground.
4. The EUT was set 3 meters from the interference receiving antenna, which was mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. For testing below 1GHz, if the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then peak values of EUT will be reported, otherwise, the emissions will be repeated one by one using the CISPR quasi-peak method and reported.
7. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than peak limit (that means the emission level in average mode also complies with the limit in average mode), then peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
8. Use the following spectrum analyzer settings:
 - (1) Span shall wide enough to fully capture the emission being measured;
 - (2) Set RBW=100 kHz for $f < 1$ GHz; $VBW \geq RBW$; Sweep = auto; Detector function = peak; Trace = max hold;
 - (3) Set RBW = 1 MHz, VBW= 3MHz for $f \geq 1$ GHz for peak measurement.
For average measurement:
 - $VBW = 10$ Hz, when duty cycle is no less than 98 percent.
 - $VBW \geq 1/T$, when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

3.5.4 Test Setup


For radiated emissions below 30MHz

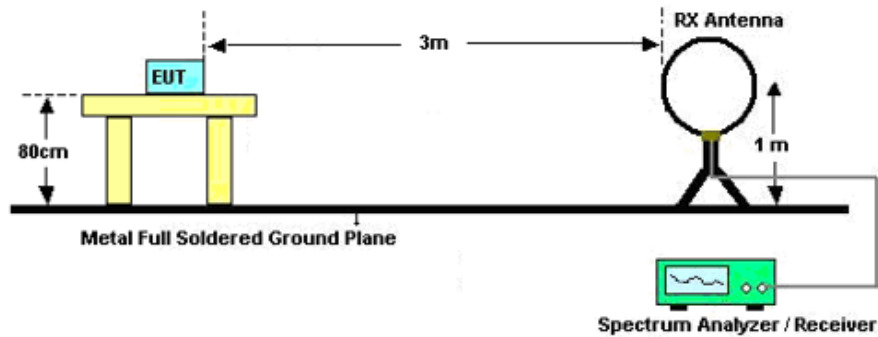

For radiated emissions from 30MHz to 1GHz

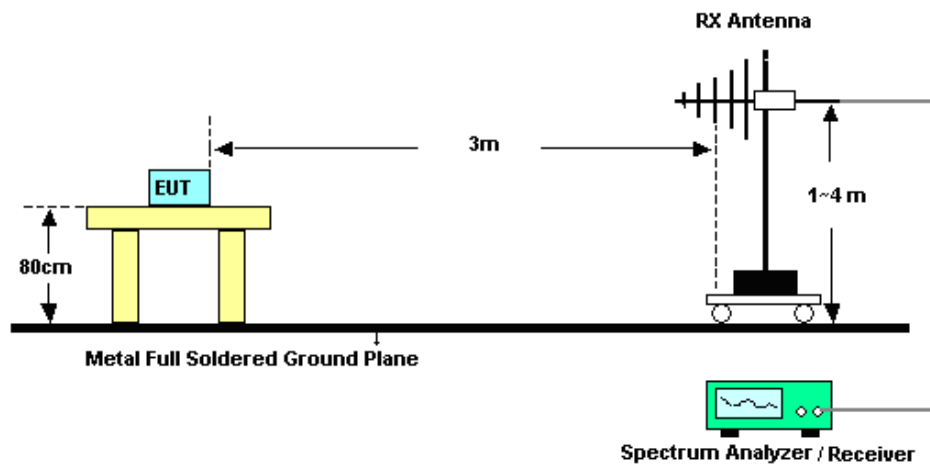

For radiated emissions above 1GHz

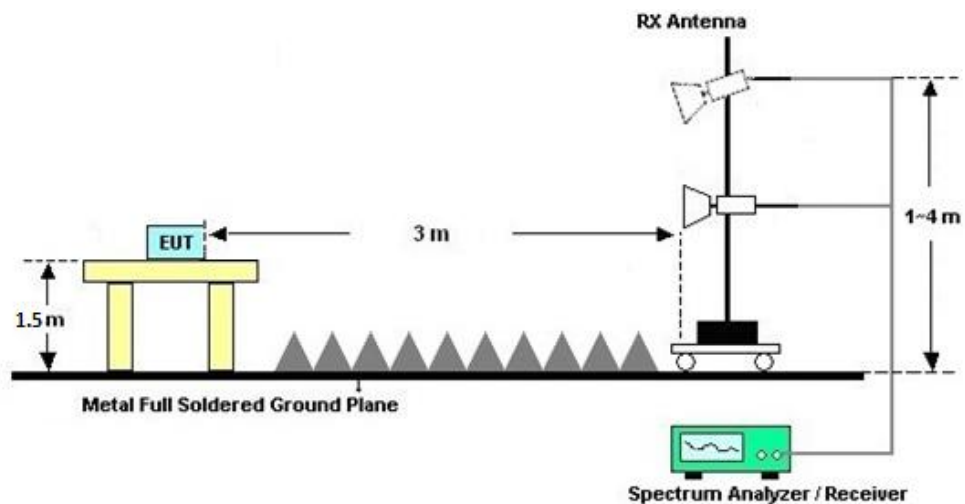

**3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)**

The low frequency, which started from 9 kHz to 30MHz, was pre-scanned and the result which was 20dB lower than the limit line was not reported.

There is a comparison data of both open-field test site and semi-Anechoic chamber, and the result came out very similar.

3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix C.

3.5.7 Duty Cycle

Please refer to Appendix D.

3.5.8 Test Result of Radiated Spurious Emission (30MHz ~ 10th Harmonic or 40GHz, whichever is lower)

Please refer to Appendix C.

3.6 AC Conducted Emission Measurement

3.6.1 Limit of AC Conducted Emission

For equipment that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table.

Frequency of emission (MHz)	Conducted limit (dBμV)	
	Quasi-peak	Average
0.15-0.5	66 to 56*	56 to 46*
0.5-5	56	46
5-30	60	50

*Decreases with the logarithm of the frequency.


3.6.2 Measuring Instruments

The section 4.0 of List of Measuring Equipment of this test report is used for test.

3.6.3 Test Procedures

1. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connecting to the other LISN.
4. The LISN provides 50 ohm coupling impedance for the measuring instrument.
5. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
6. Both sides of AC line were checked for maximum conducted interference.
7. The frequency range from 150 kHz to 30 MHz was searched.
8. Set the test-receiver system to Peak Detect Function and specified bandwidth (IF Bandwidth = 9kHz) with Maximum Hold Mode. Then measurement is also conducted by Average Detector and Quasi-Peak Detector Function respectively.

3.6.4 Test Setup

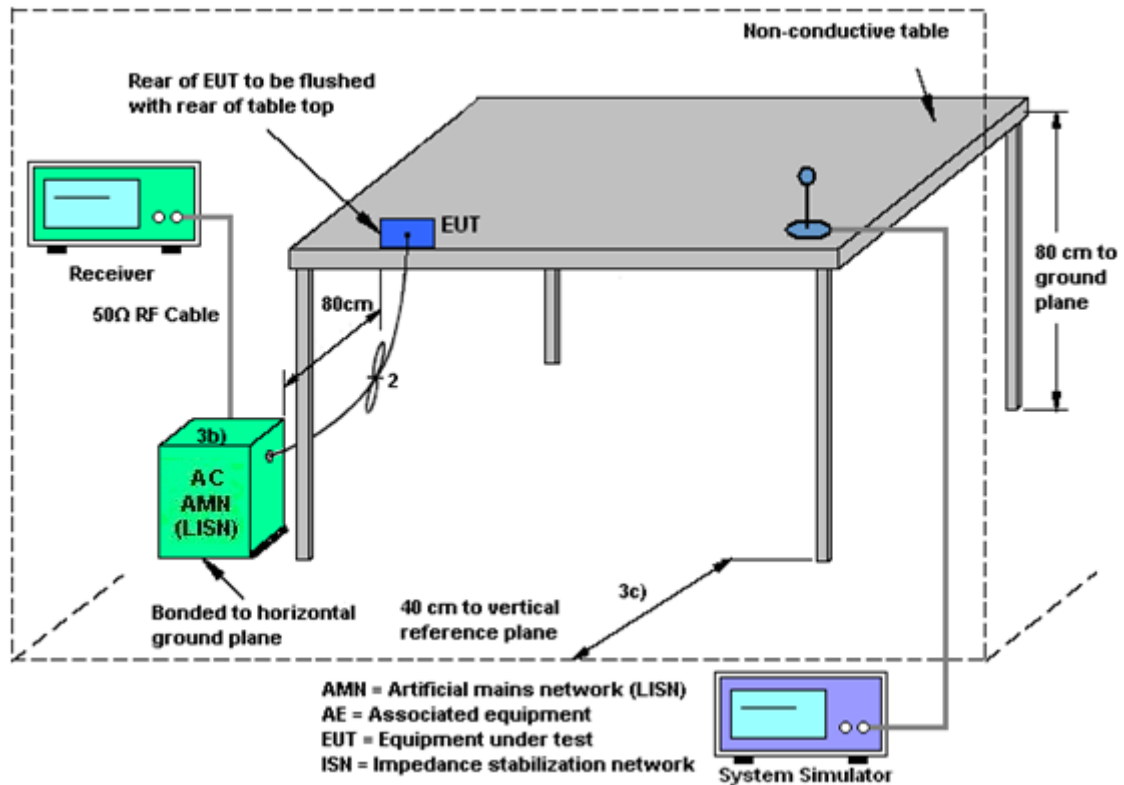

3.6.5 Test Result of AC Conducted Emission

Please refer to Appendix B.



3.7 Antenna Requirements

3.7.1 Standard Applicable

If directional gain of transmitting antennas is greater than 6dBi, the power shall be reduced by the same level in dB comparing to gain minus 6dBi. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

3.7.2 Antenna Anti-Replacement Construction

An embedded-in antenna design is used.

3.7.3 Antenna Gain

The antenna peak gain of EUT is less than 6 dBi. Therefore, it is not necessary to reduce maximum peak output power limit.



4 List of Measuring Equipment

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver&SA	KEYSIGHT	N9038A	MY54450083	20Hz~8.4GHz	Apr. 09, 2024	Mar. 20, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY55150246	10Hz~44GHz;	Apr. 09, 2024	Mar. 20, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
Loop Antenna	R&S	HFH2-Z2E	101141	9kHz~30MHz	Dec. 28, 2024	Mar. 20, 2025	Dec. 27, 2025	Radiation (03CH03-SZ)
Bilog Antenna	TeseQ	CBL6112D	35408	30MHz~2GHz	Aug. 20, 2023	Mar. 20, 2025	Aug. 19, 2025	Radiation (03CH03-SZ)
Double Ridge Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-1355	1GHz~18GHz	Apr. 09, 2024	Mar. 20, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	TTA1840-35-HG	1871923	18GHz~40GHz	Jul. 03, 2024	Mar. 20, 2025	Jul. 02, 2025	Radiation (03CH03-SZ)
SHF-EHF Horn	com-power	AH-840	101071	18GHz~40GHz	Apr. 09, 2024	Mar. 20, 2025	Apr. 08, 2025	Radiation (03CH03-SZ)
Amplifier	Burgeon	BPA-530	102211	0.01Hz~3000MHz	Oct. 18, 2024	Mar. 20, 2025	Oct. 17, 2025	Radiation (03CH03-SZ)
HF Amplifier	MITEQ	AMF-7D-00101800-30-10P-R	1943528	1GHz~18GHz	Oct. 14, 2024	Mar. 20, 2025	Oct. 13, 2025	Radiation (03CH03-SZ)
Amplifier	Agilent Technologies	83017A	MY39501302	500MHz~26.5GHz	Dec. 26, 2024	Mar. 20, 2025	Dec. 25, 2025	Radiation (03CH03-SZ)
AC Power Source	Chroma	61601	616010002729	N/A	Oct. 18, 2024	Mar. 20, 2025	Oct. 17, 2025	Radiation (03CH03-SZ)
Turn Table	EM	EM1000	N/A	0~360 degree	NCR	Mar. 20, 2025	NCR	Radiation (03CH03-SZ)
Antenna Mast	EM	EM1000	N/A	1 m~4 m	NCR	Mar. 20, 2025	NCR	Radiation (03CH03-SZ)
Spectrum Analyzer	R&S	FSV40	101040	10Hz~40GHz	Oct. 10, 2024	Apr. 06, 2025~Apr. 17, 2025	Oct. 09, 2025	Conducted (TH01-KS)
Pulse Power Sensor	Anritsu	MA2411B	0917070	300MHz~40GHz	Jan. 02, 2025	Apr. 06, 2025~Apr. 17, 2025	Jan. 01, 2026	Conducted (TH01-KS)
Power Meter	Anritsu	ML2495A	1005002	50MHz Bandwidth	Jan. 02, 2025	Apr. 06, 2025~Apr. 17, 2025	Jan. 01, 2026	Conducted (TH01-KS)
EMI Receiver	R&S	ESR7	102297	9kHz~7GHz;	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC LISN	R&S	ENV216	101499	9kHz~30MHz	Jul. 03, 2024	Apr. 17, 2025	Jul. 02, 2025	Conduction (CO02-SZ)
AC Power Source	CHROMA	61601	616010002470	100Vac~250Vac	Dec. 25, 2024	Apr. 17, 2025	Dec. 24, 2025	Conduction (CO02-SZ)

NCR: No Calibration Required

5 Measurement Uncertainty

The measurement uncertainties shown below were calculated in accordance with the requirements of ANSI 63.10-2013. All the measurement uncertainty value were shown with a coverage K=2 to indicate 95% level of confidence. The measurement data show herein meets or exceeds the CISPR measurement uncertainty values specified in CISPR 16-4-2 and can be compared directly to specified limit to determine compliance.

Uncertainty of Conducted Measurement

Conducted Spurious Emission & Bandedge	±2.22 dB
Occupied Channel Bandwidth	±0.1%
Conducted Power	±0.50 dB
Conducted Power Spectral Density	±0.90 dB
Frequency	±0.04 Hz

Uncertainty of AC Conducted Emission Measurement (0.15 MHz ~ 30 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	2.50 dB
---	---------

Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.00 dB
---	---------

Uncertainty of Radiated Emission Measurement (1 GHz ~ 18 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	4.90 dB
---	---------

Uncertainty of Radiated Emission Measurement (18 GHz ~ 40 GHz)

Measuring Uncertainty for a Level of Confidence of 95% (U = 2Uc(y))	5.00 dB
---	---------

----- THE END -----



Appendix A. Conducted Test Results

**Ambient Condition:** 25 °C, 45 %RH**Test Date:** 2025.4.6~2025.4.17**Test Engineer:** Gene Wang


DTS Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	DTS BW [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant6	2402	0.69	2401.65	2402.34	0.5	PASS
		2440	0.69	2439.66	2440.34	0.5	PASS
		2480	0.69	2479.66	2480.34	0.5	PASS
BLE_2M	Ant6	2404	1.18	2403.41	2404.59	0.5	PASS
		2440	1.18	2439.41	2440.60	0.5	PASS
		2478	1.18	2477.42	2478.59	0.5	PASS



Test Graphs

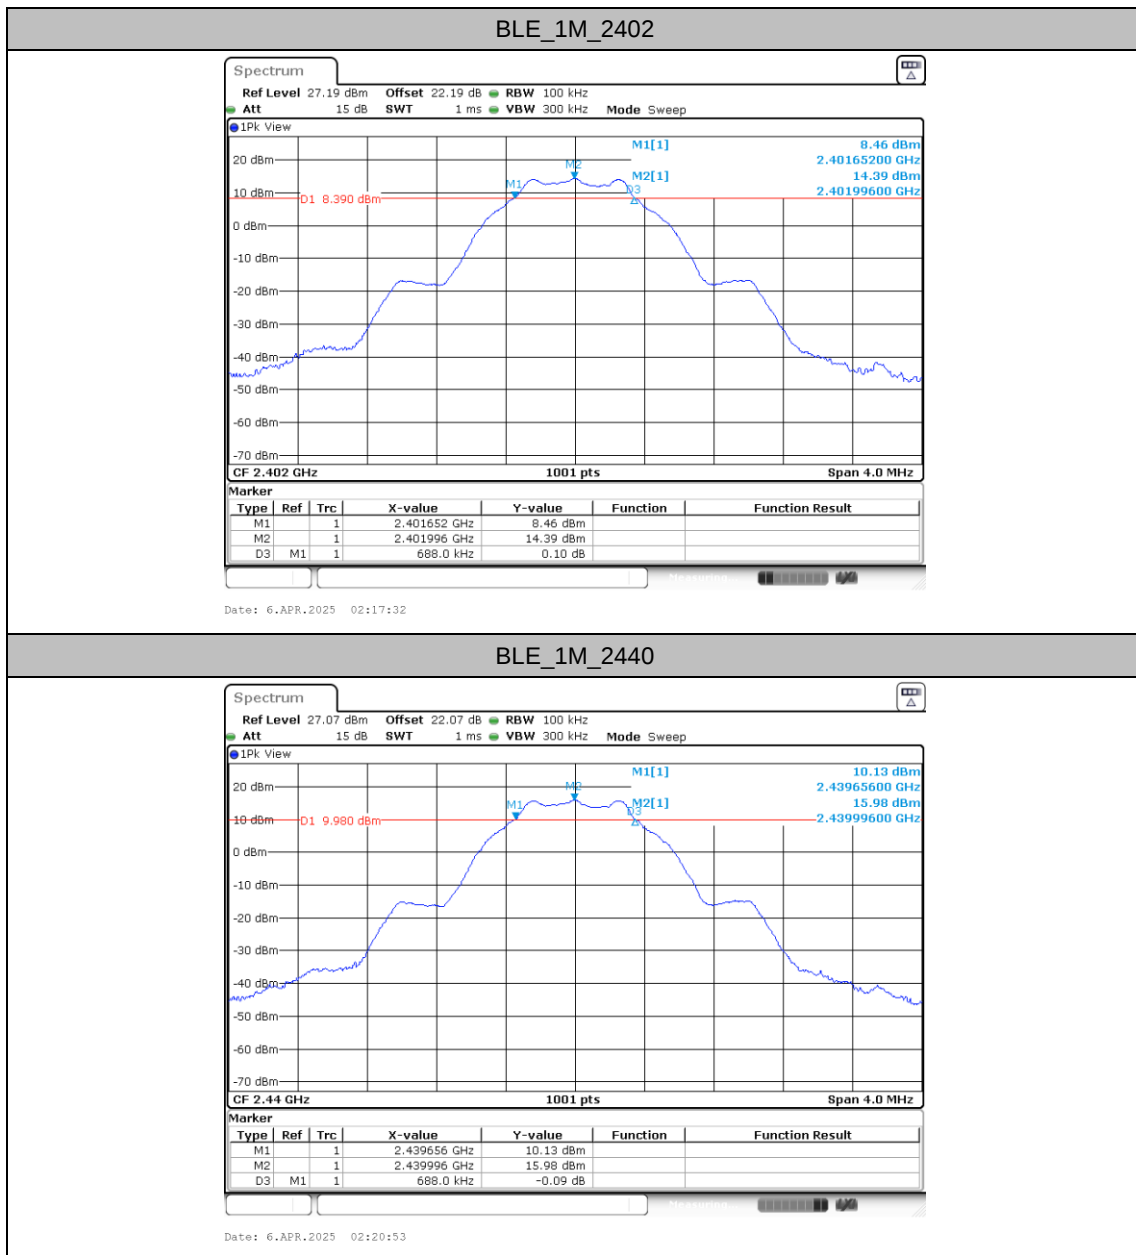

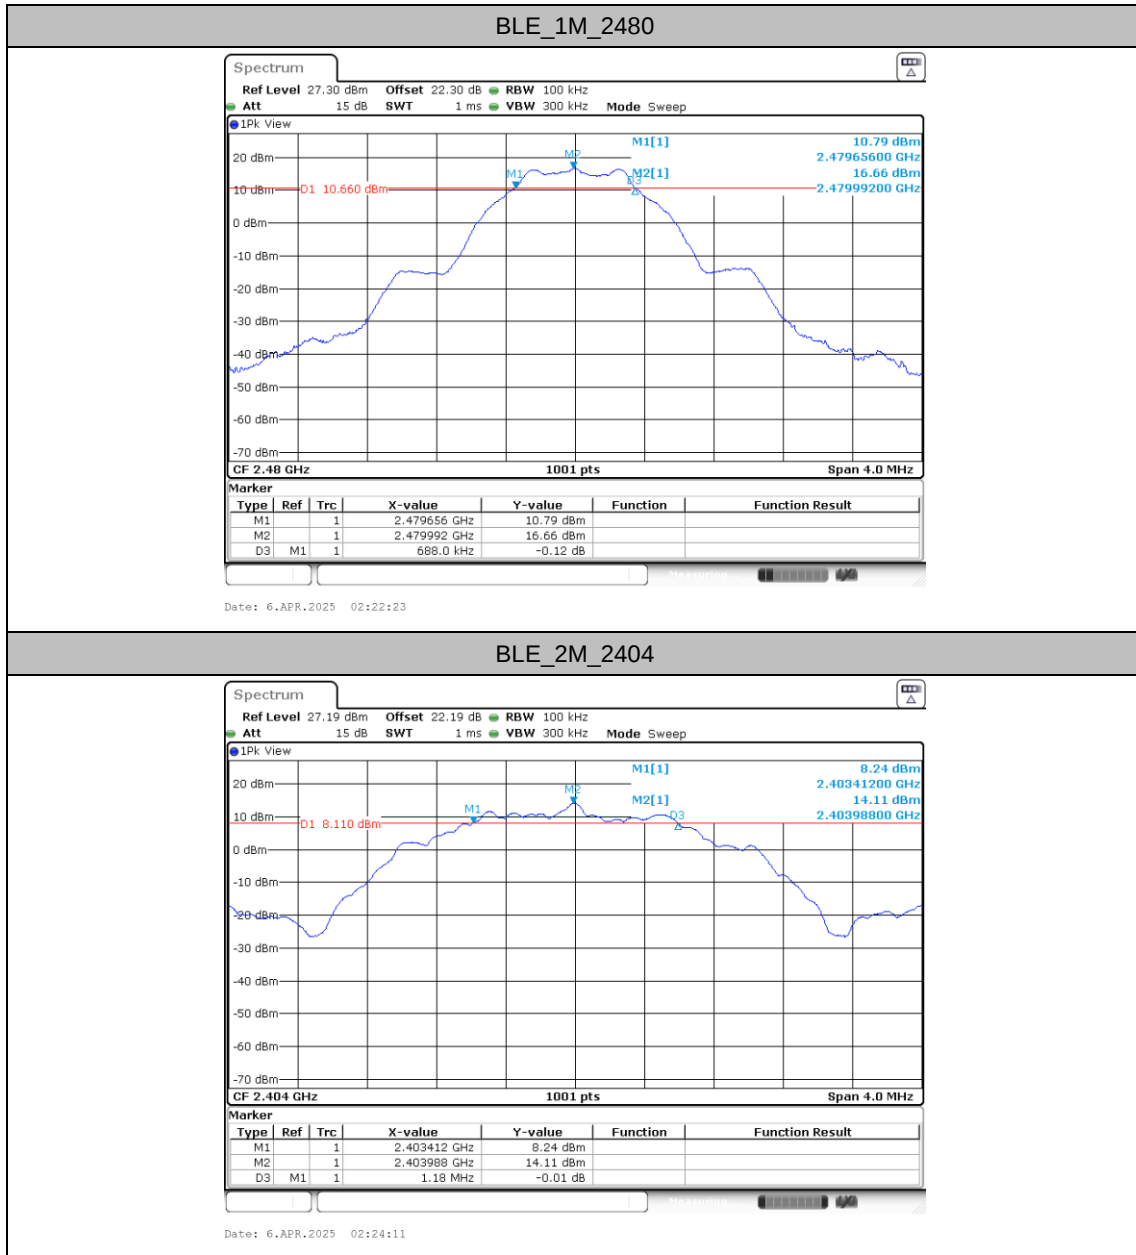

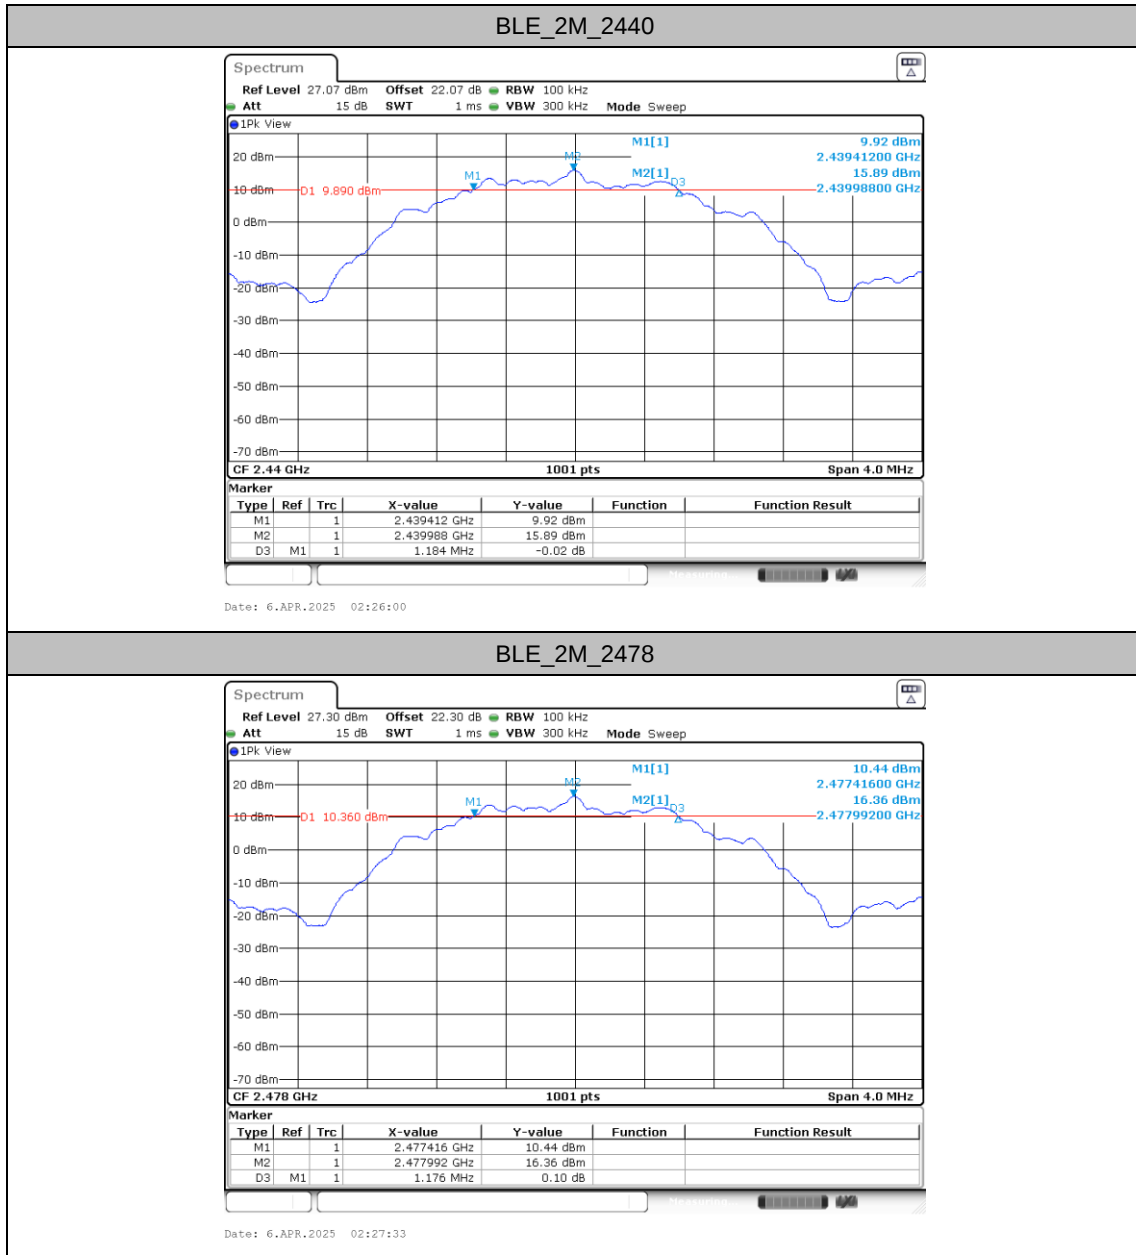




Occupied Channel Bandwidth


Test Result


TestMode	Antenna	Freq(MHz)	OCB [MHz]	FL[MHz]	FH[MHz]	Limit[MHz]	Verdict
BLE_1M	Ant6	2402	1.039	2401.4885	2402.5275	---	---
		2440	1.035	2439.4925	2440.5275	---	---
		2480	1.035	2479.4925	2480.5275	---	---
BLE_2M	Ant6	2404	2.058	2402.9890	2405.0470	---	---
		2440	2.058	2438.9890	2441.0470	---	---
		2478	2.054	2476.9930	2479.0470	---	---



Test Graphs

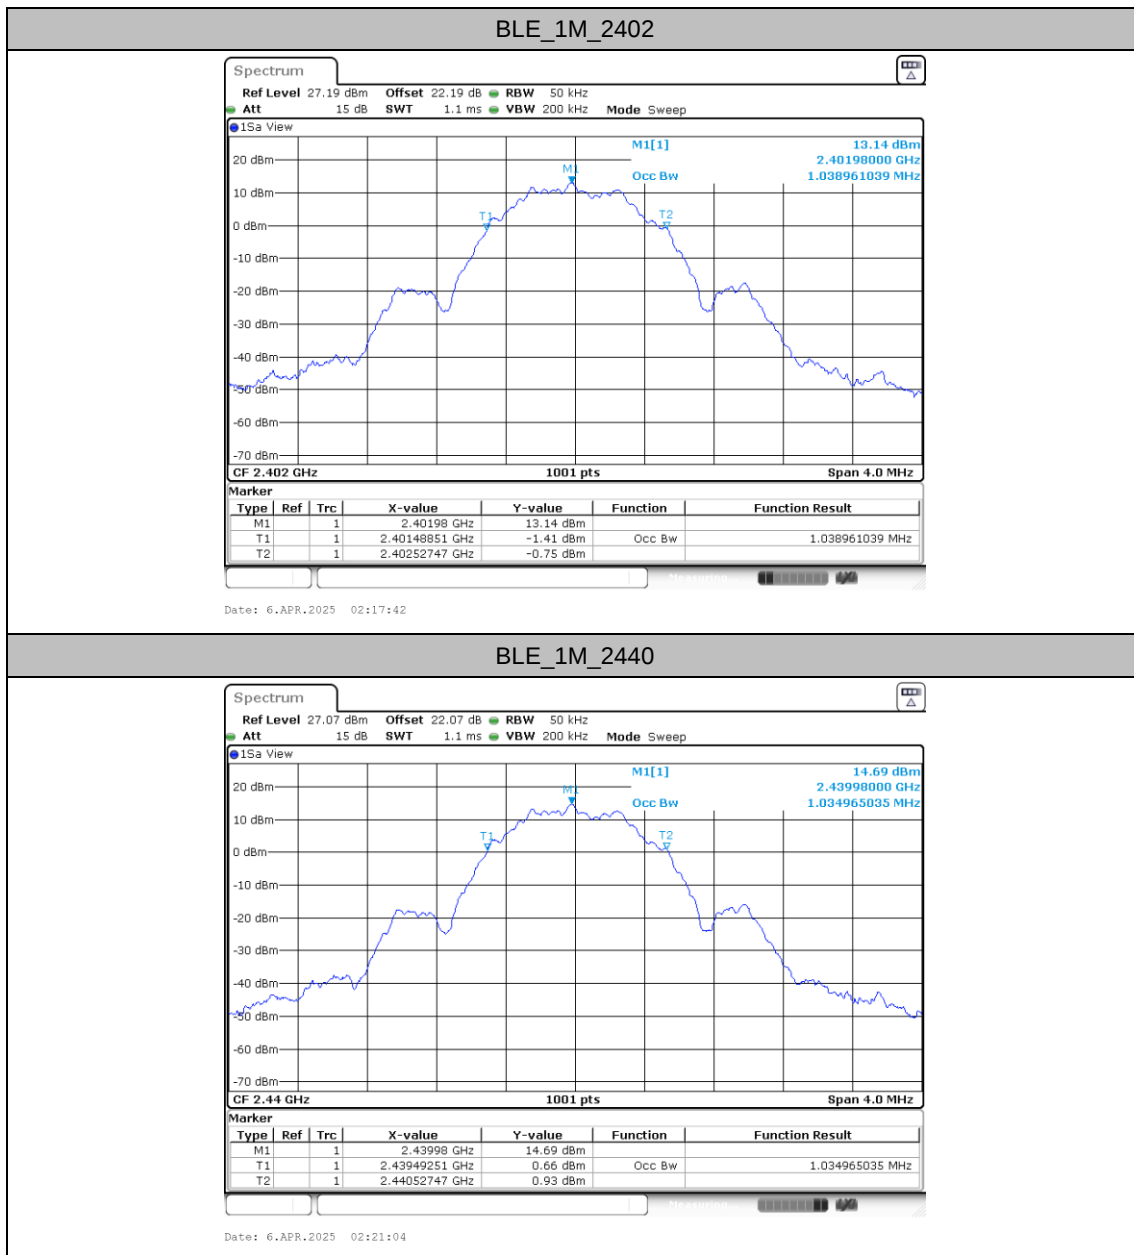

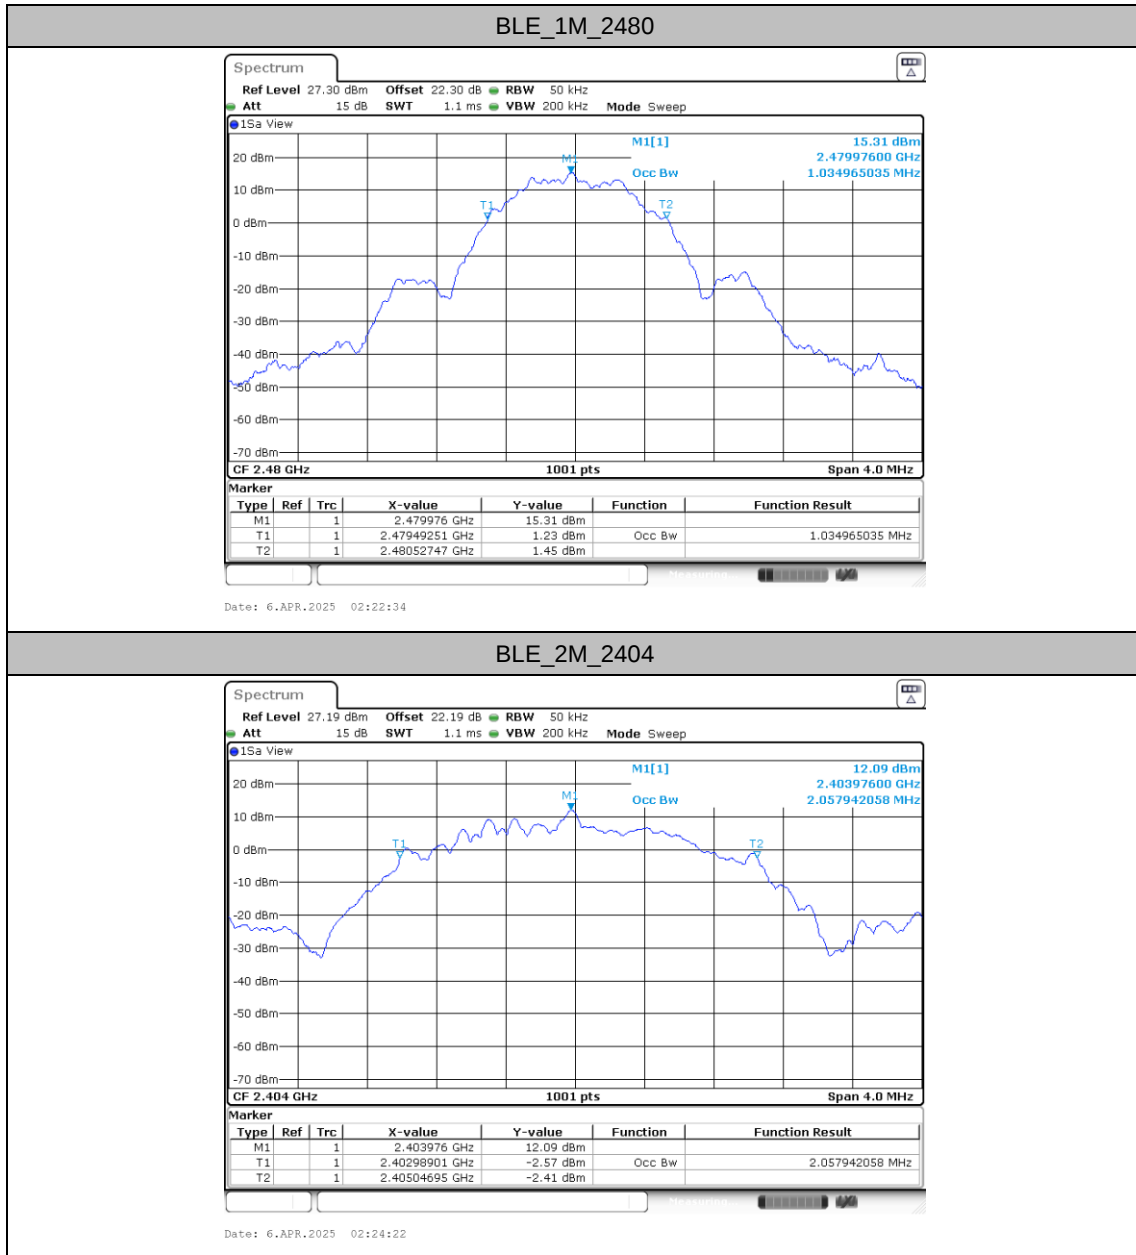

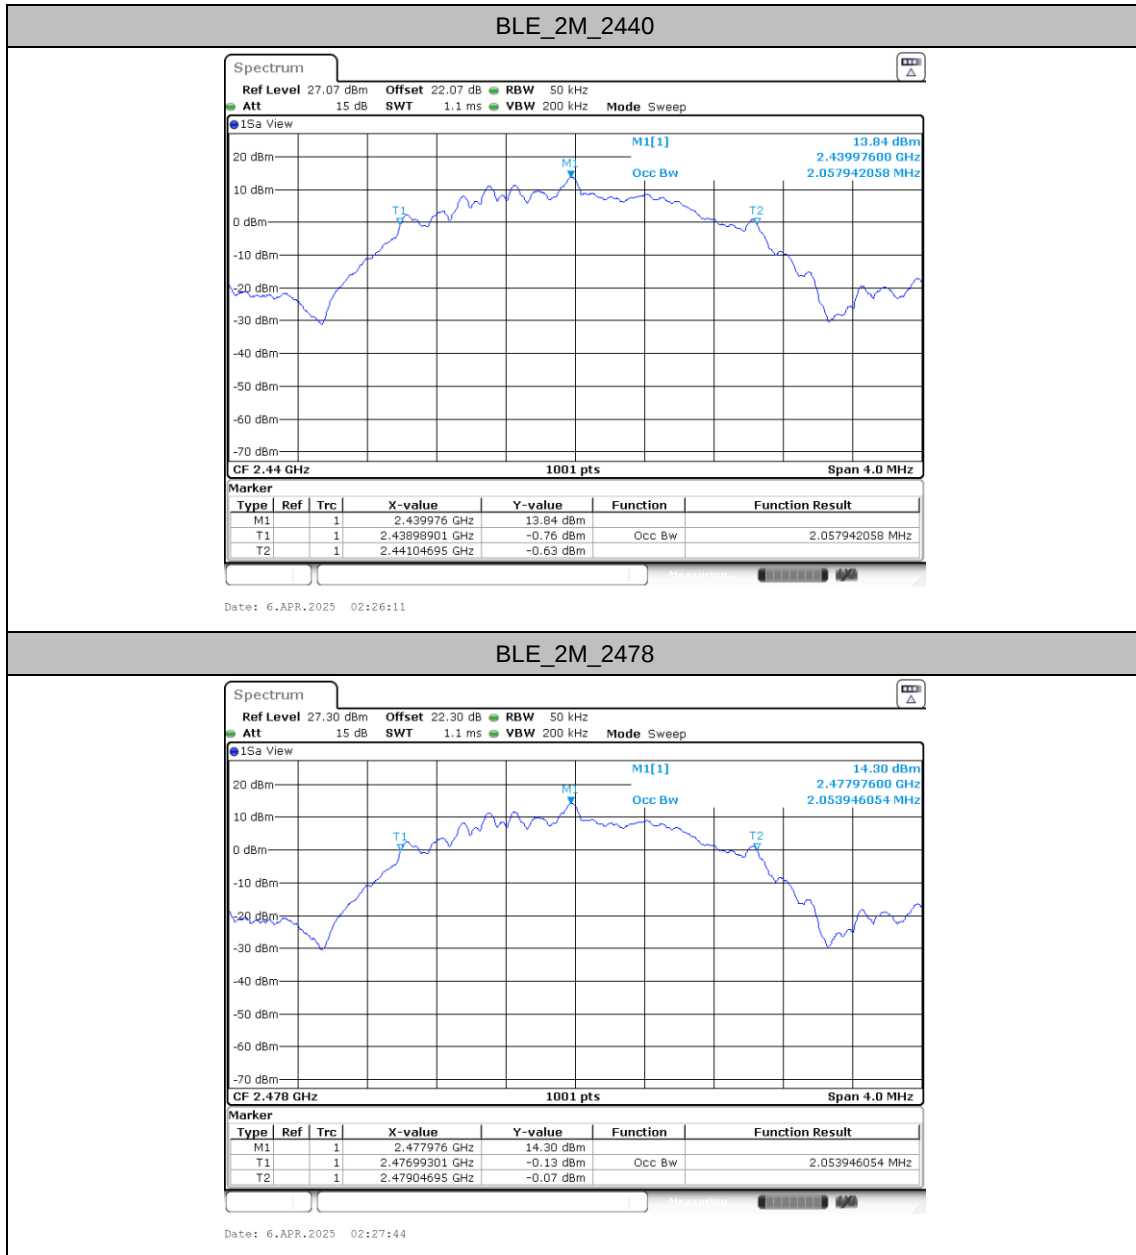



Maximum conducted output power

Test Result

TestMode	Antenna	CH.	Peak Conducted Power (dBm)	Conducted Power Limit	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit	Pass/Fail
BLE1M	Ant6	0	12.04	30.00	-2.5	9.54	36.00	Pass
		19	11.83	30.00	-2.5	9.33	36.00	Pass
		39	12.19	30.00	-2.5	9.69	36.00	Pass
BLE2M	Ant6	01	12.22	30.00	-2.5	9.72	36.00	Pass
		19	11.85	30.00	-2.5	9.35	36.00	Pass
		38	12.15	30.00	-2.5	9.65	36.00	Pass

Test Result

TestMode	Antenna	CH.	Duty Factor (dB)	Average Conducted Power (dBm)
BLE1M	Ant6	0	2.16	11.92
		19	2.16	11.74
		39	2.16	11.87
BLE2M	Ant6	01	5.04	11.87
		19	5.04	11.73
		38	5.04	11.96

Note: Power setting is default.




Maximum power spectral density

Test Result

TestMode	Antenna	Freq(MHz)	Result[dBm/3kHz]	Limit[dBm/3kHz]	Verdict
BLE_1M	Ant6	2402	-2.61	≤8.00	PASS
		2440	-3.30	≤8.00	PASS
		2480	-2.47	≤8.00	PASS
BLE_2M	Ant6	2404	-5.14	≤8.00	PASS
		2440	-5.56	≤8.00	PASS
		2478	-5.00	≤8.00	PASS




Test Graphs

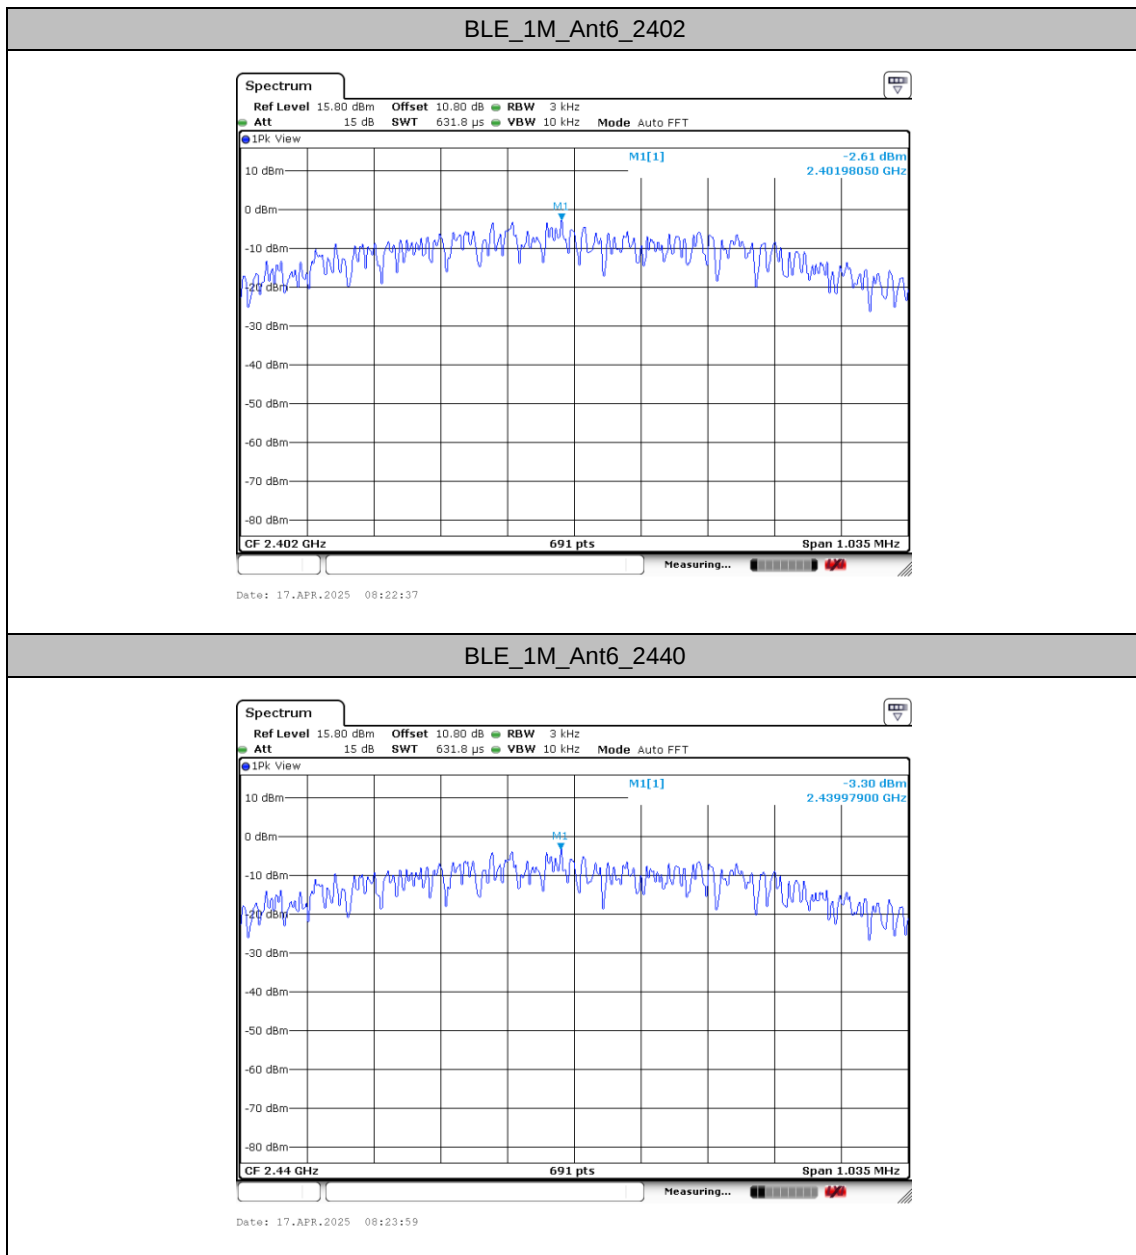




BLE_1M_Ant6_2480

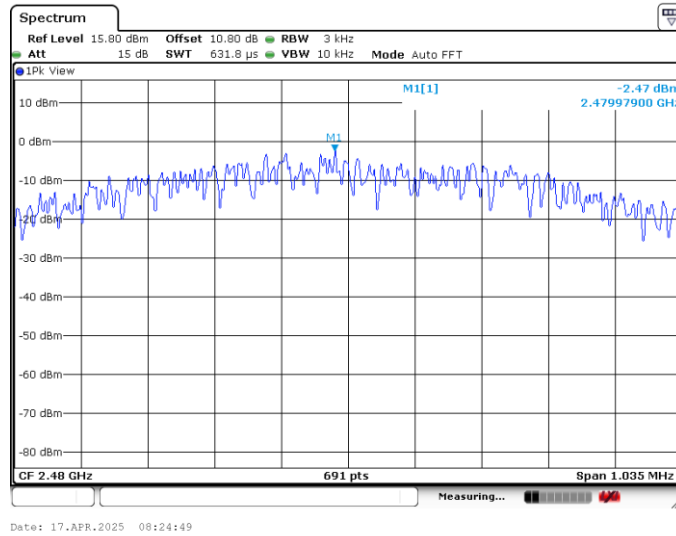


BLE_2M_Ant6_2404

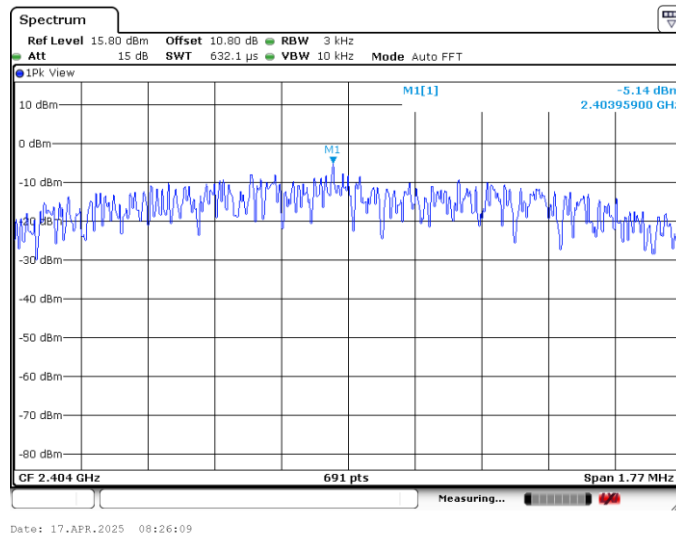




BLE_2M_Ant6_2440

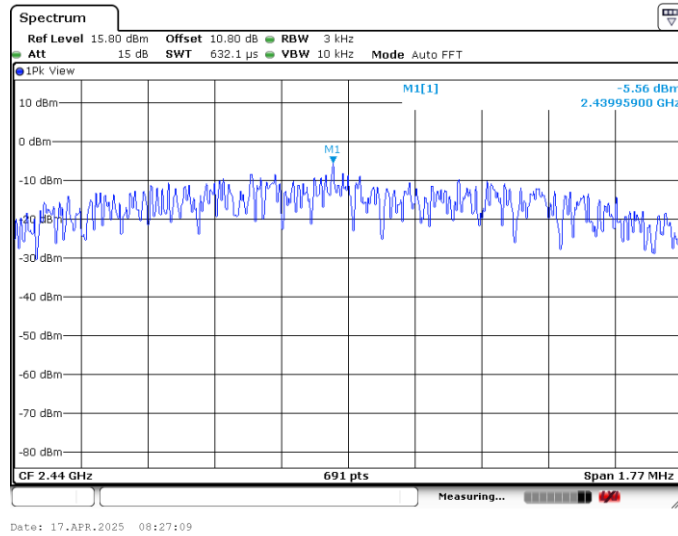

BLE_2M_Ant6_2478

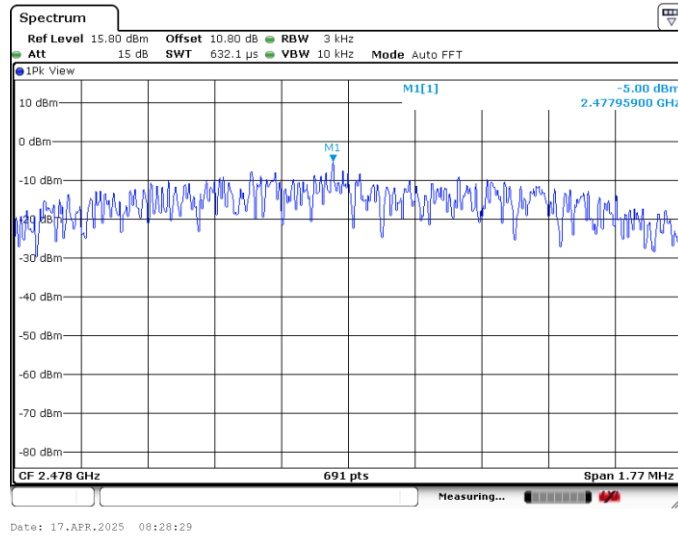




Reference level measurement


Test Result


TestMode	Antenna	Freq(MHz)	Max.Point[MHz]	Result[dBm/100KHz]
BLE_1M	Ant6	2402	2401.99	14.64
		2440	2440.00	15.90
		2480	2479.99	16.59
BLE_2M	Ant6	2404	2403.99	14.09
		2440	2439.99	15.86
		2478	2477.99	16.32



Test Graphs

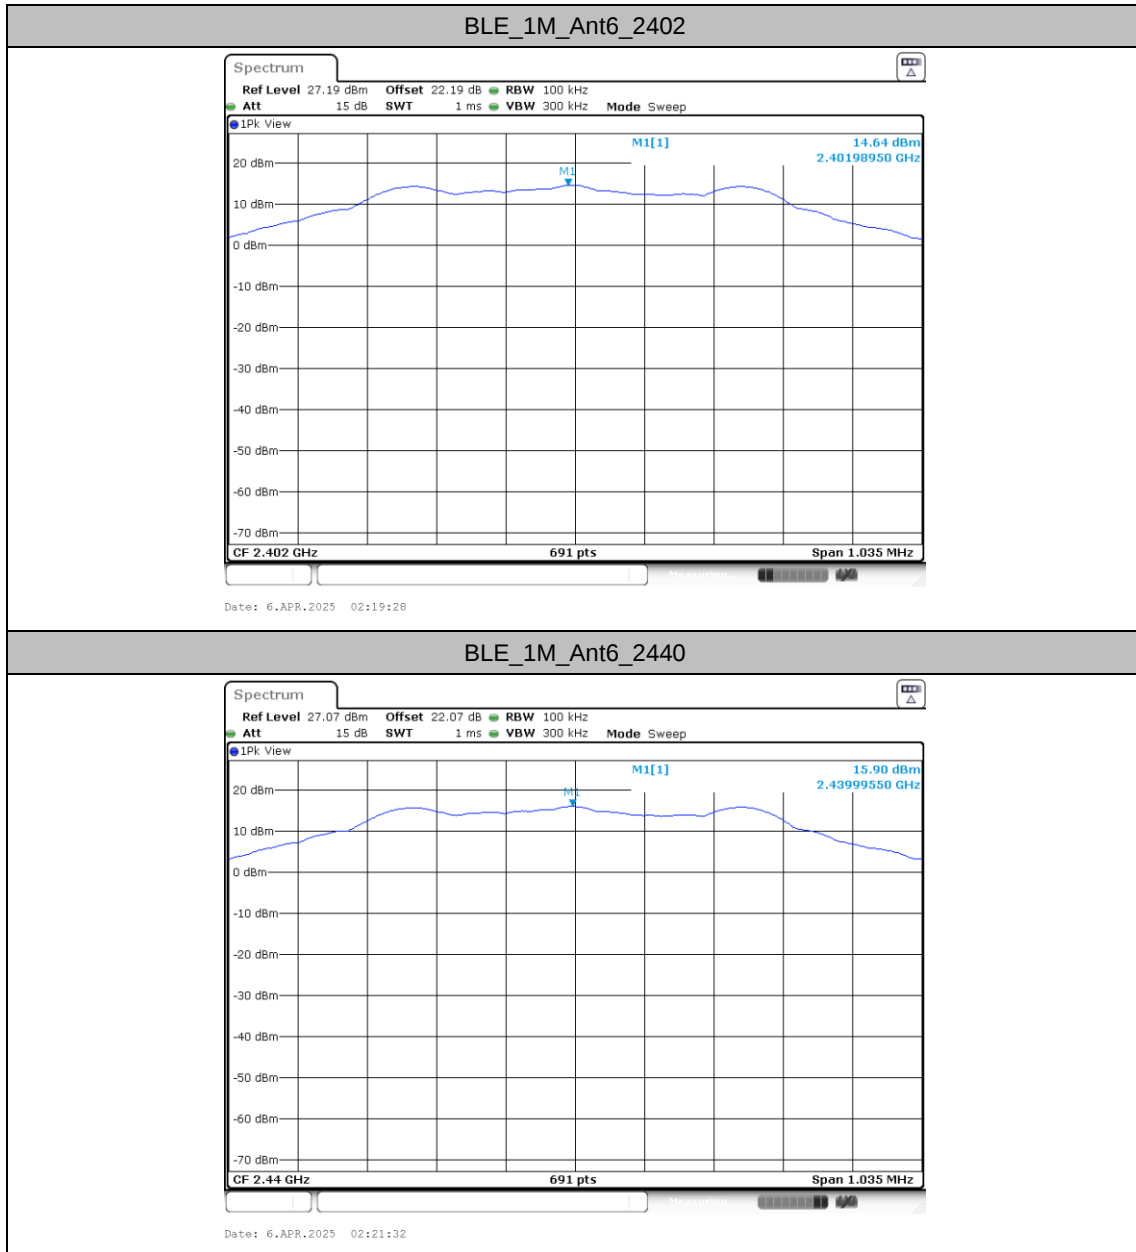

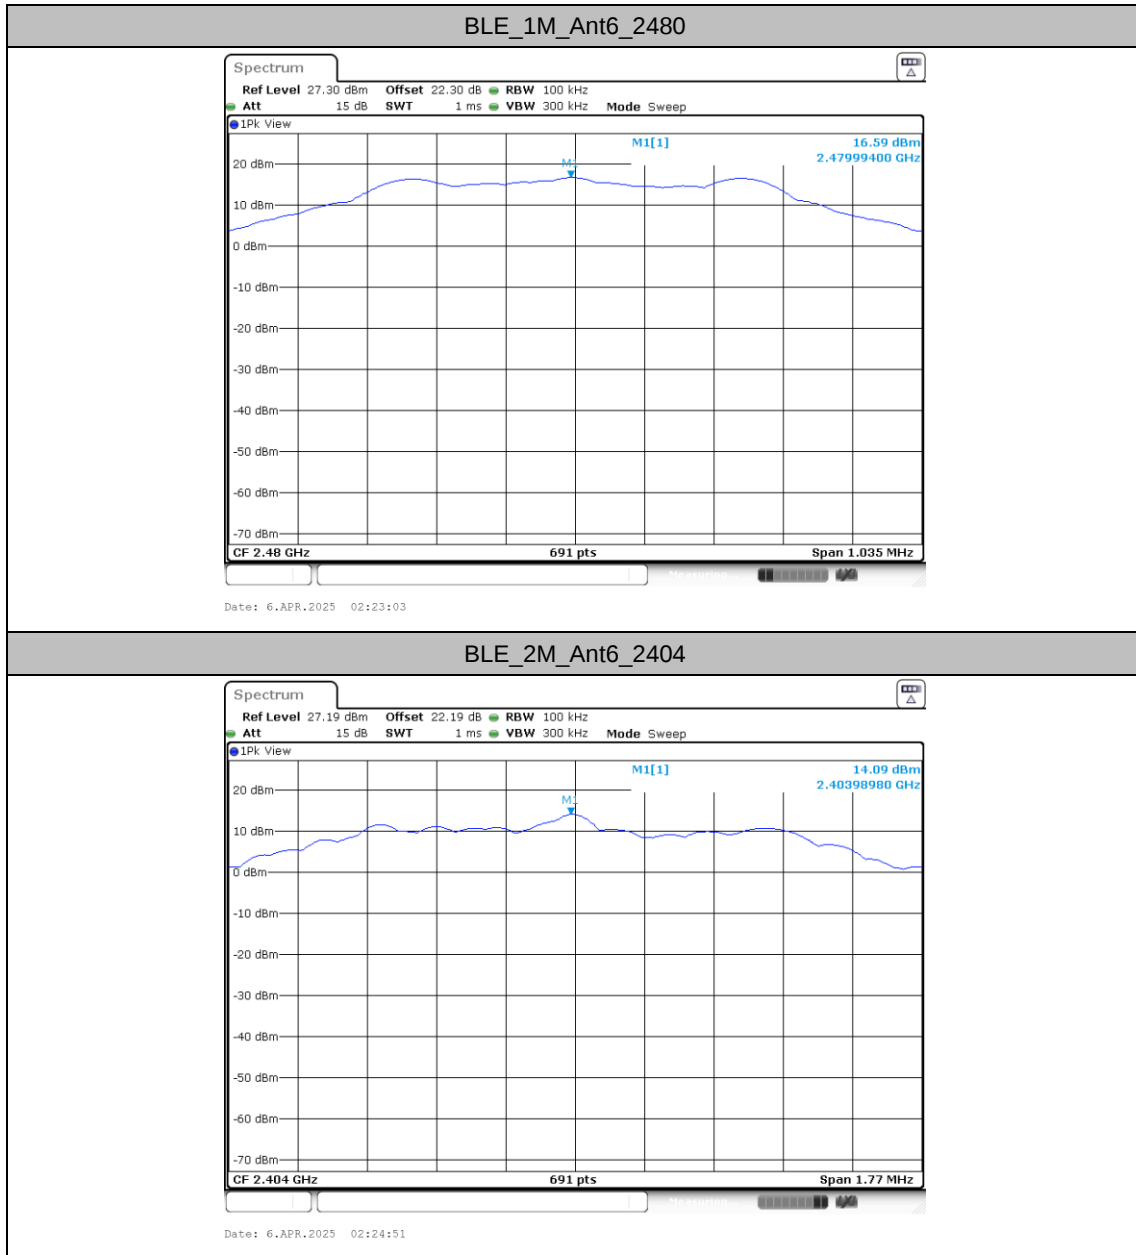

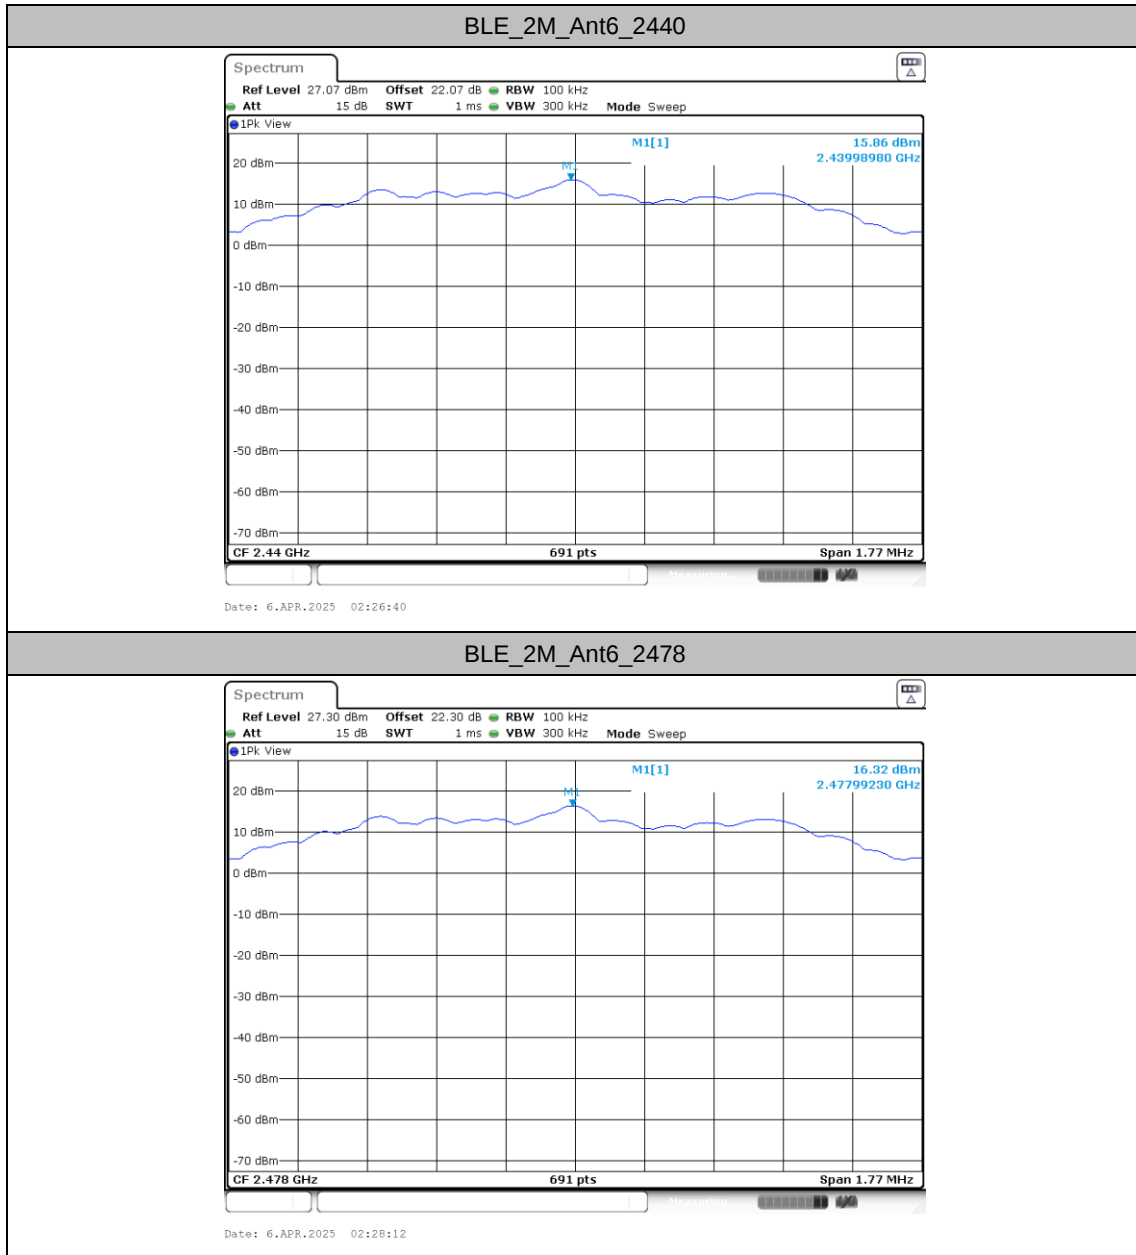




Band edge measurements


Test Result

TestMode	Antenna	ChName	Freq(MHz)	RefLevel[dBm /100KHz]	Result[dBm /100KHz]	Limit[dBm /100KHz]	Verdict
BLE_1M	Ant6	Low	2402	14.64	-44.11	≤-5.36	PASS
		High	2480	16.59	-46.76	≤-3.41	PASS
BLE_2M	Ant6	Low	2404	14.09	-47.89	≤-5.91	PASS
		High	2478	16.32	-46.83	≤-3.68	PASS



Test Graphs

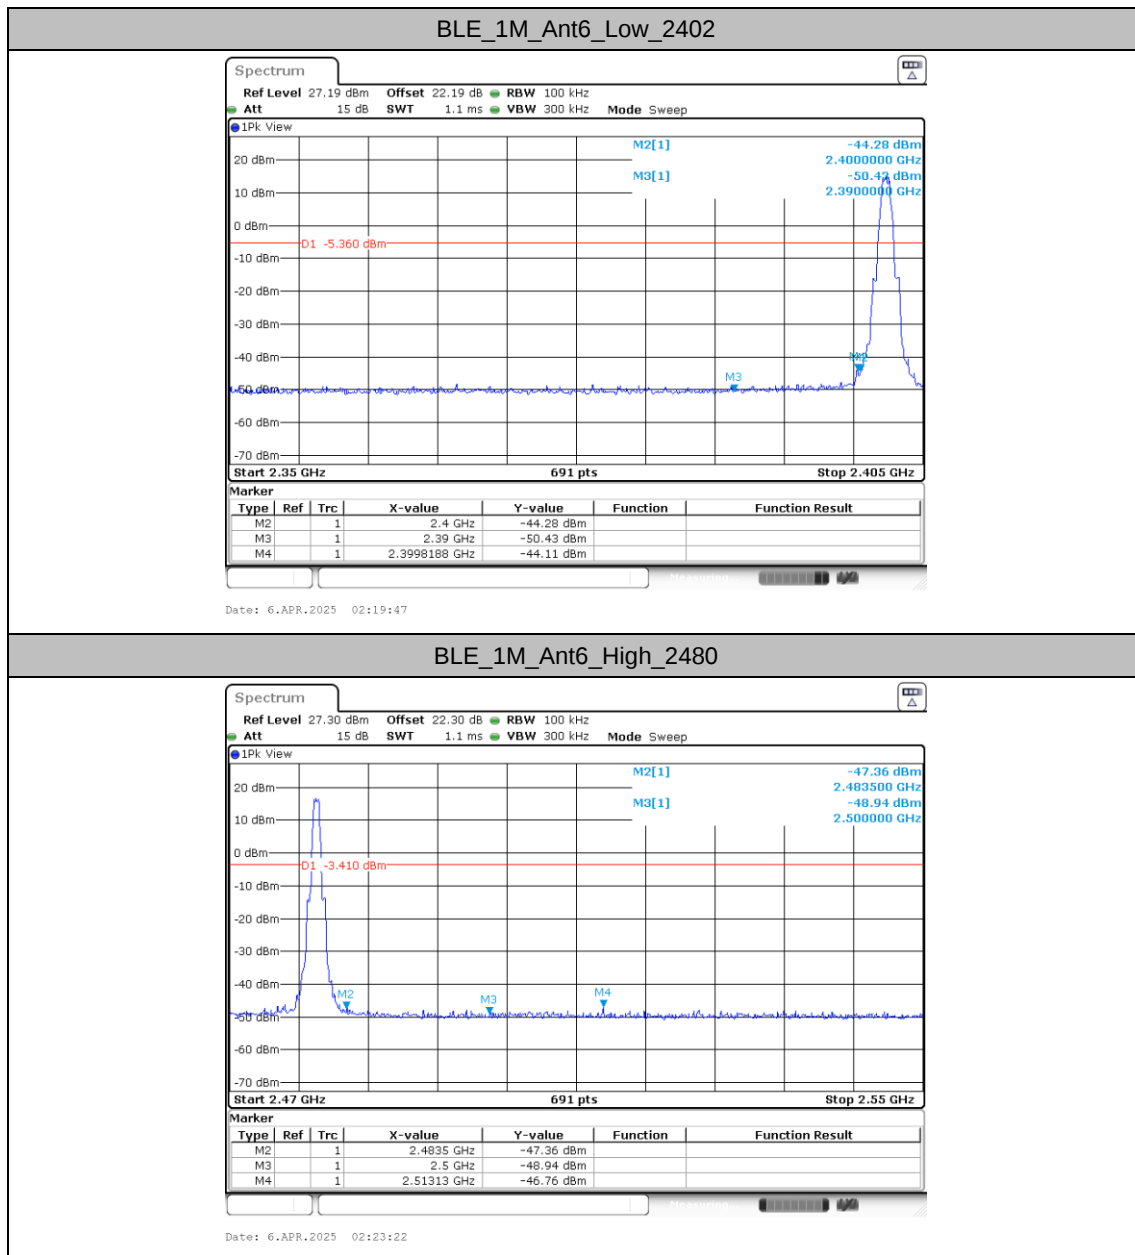

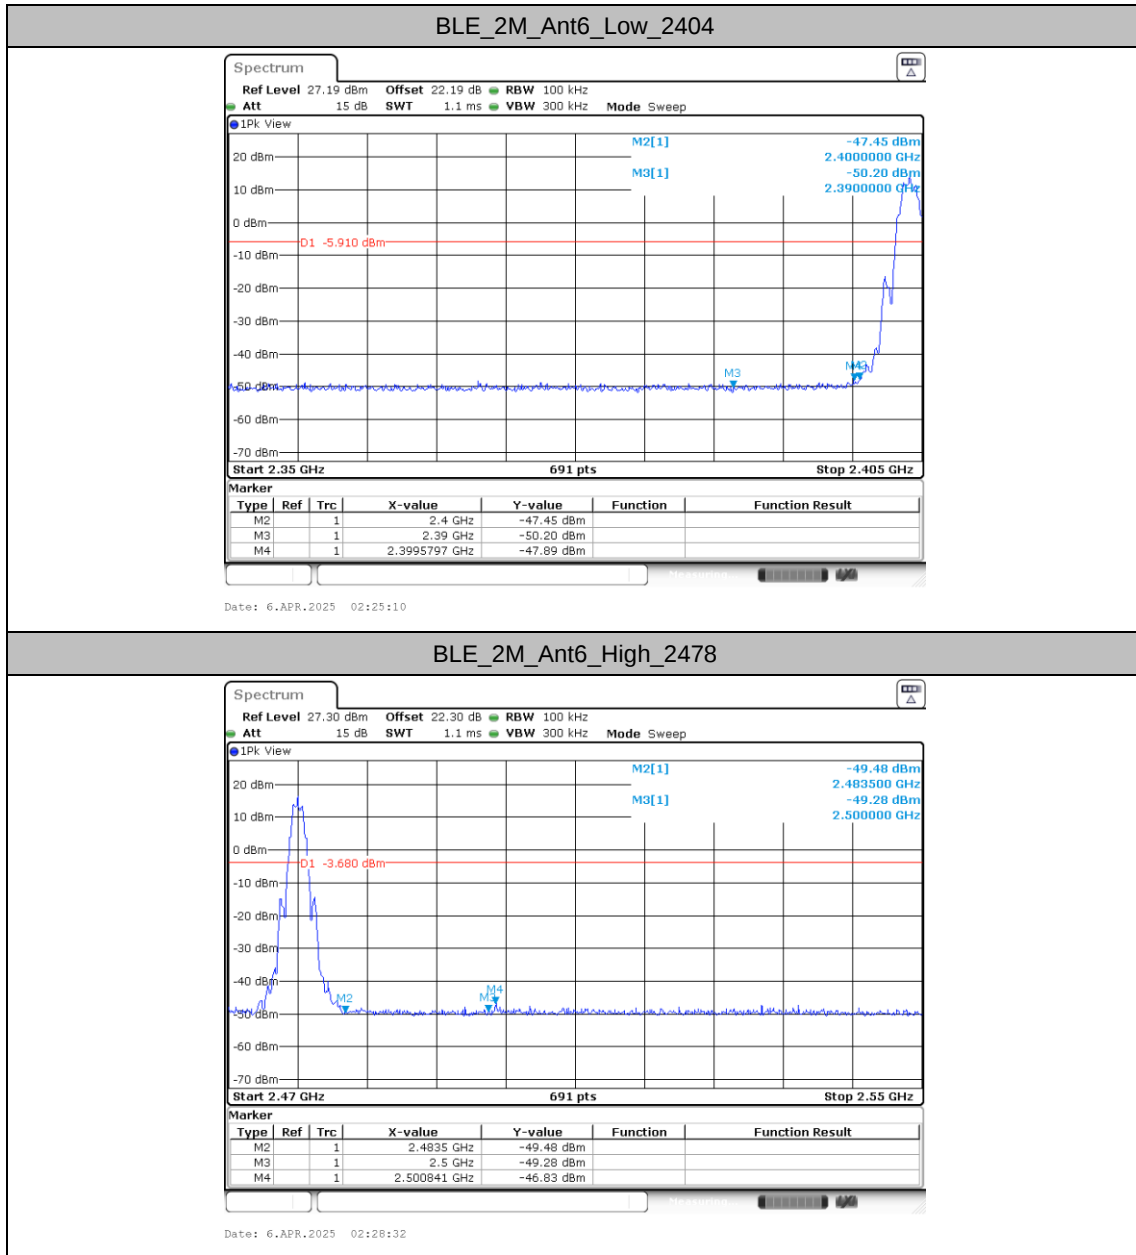




Conducted Spurious Emission


Test Result


TestMode	Antenna	Freq(MHz)	FreqRange [MHz]	RefLevel [dBm/100KHz]	Result [dBm/100KHz]	Limit [dBm/100KHz]	Verdict
BLE_1M	Ant6	2402	30~1000	14.64	-44.28	≤ -5.36	PASS
			1000~26500	14.64	-35.85	≤ -5.36	PASS
		2440	30~1000	15.90	-45.24	≤ -4.1	PASS
			1000~26500	15.90	-36.02	≤ -4.1	PASS
		2480	30~1000	16.59	-44.59	≤ -3.41	PASS
			1000~26500	16.59	-35.82	≤ -3.41	PASS
BLE_2M	Ant6	2404	30~1000	14.09	-44.69	≤ -5.91	PASS
			1000~26500	14.09	-35.78	≤ -5.91	PASS
		2440	30~1000	15.86	-43.91	≤ -4.14	PASS
			1000~26500	15.86	-36.39	≤ -4.14	PASS
		2478	30~1000	16.32	-44.6	≤ -3.68	PASS
			1000~26500	16.32	-35.94	≤ -3.68	PASS





Test Graphs

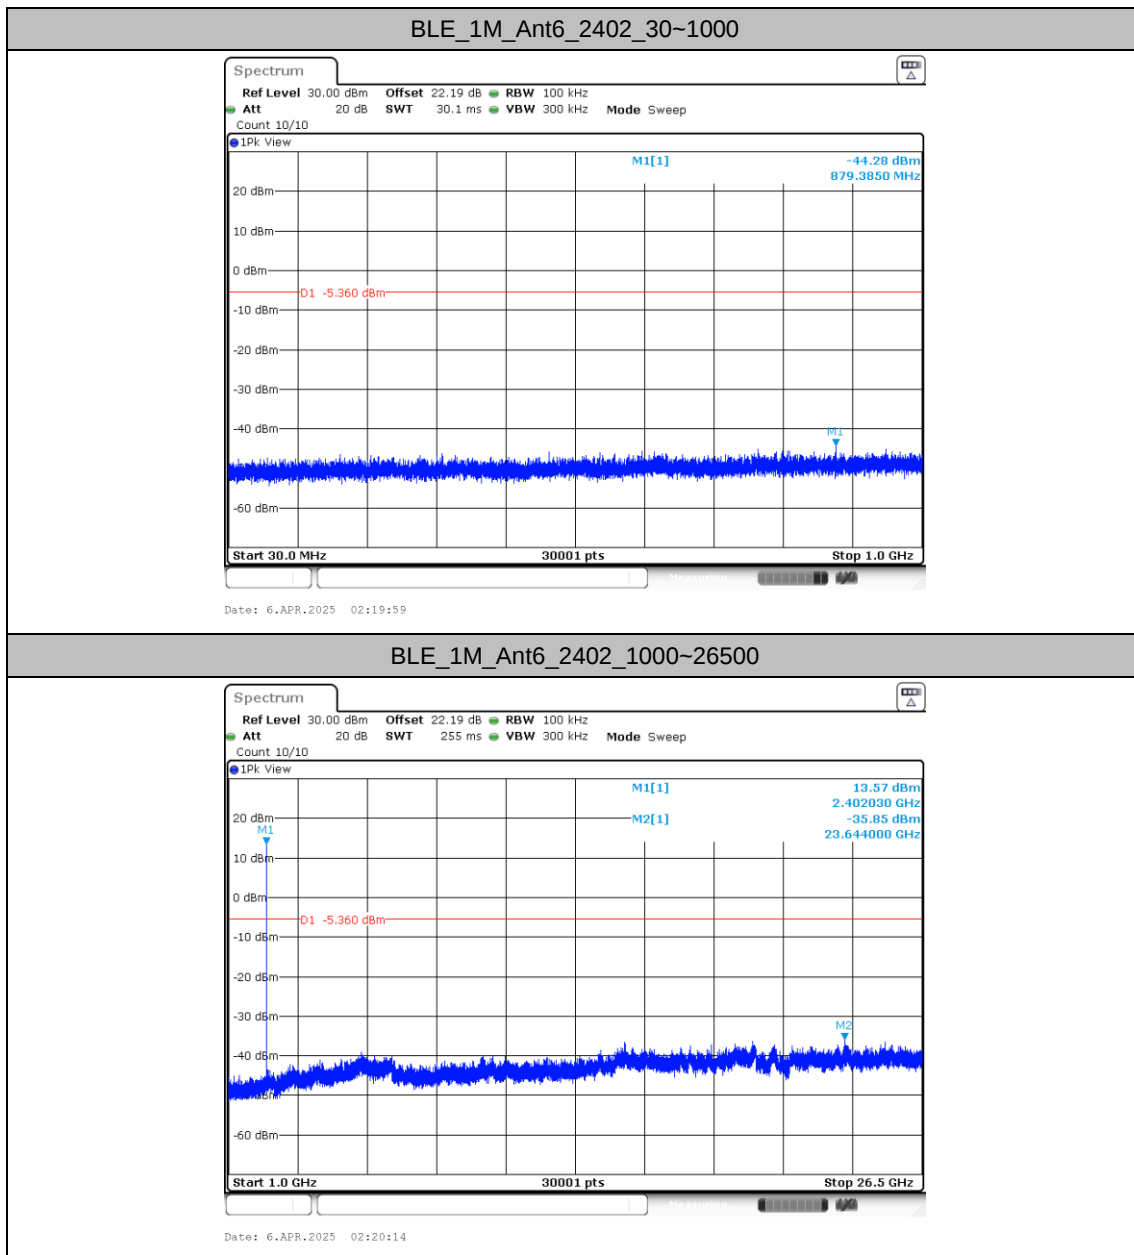


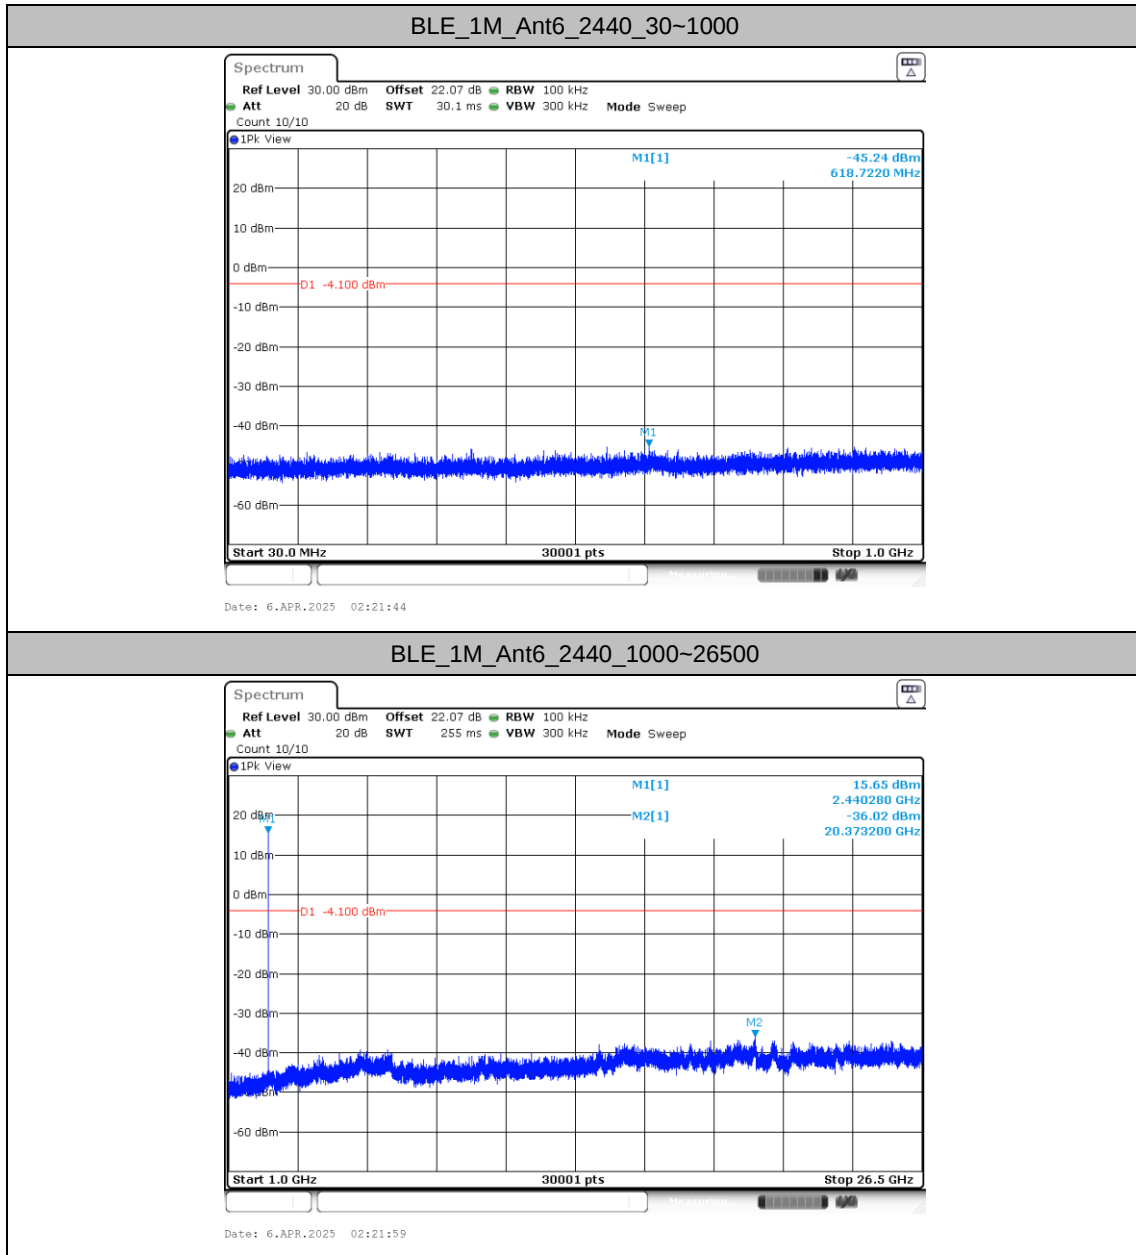

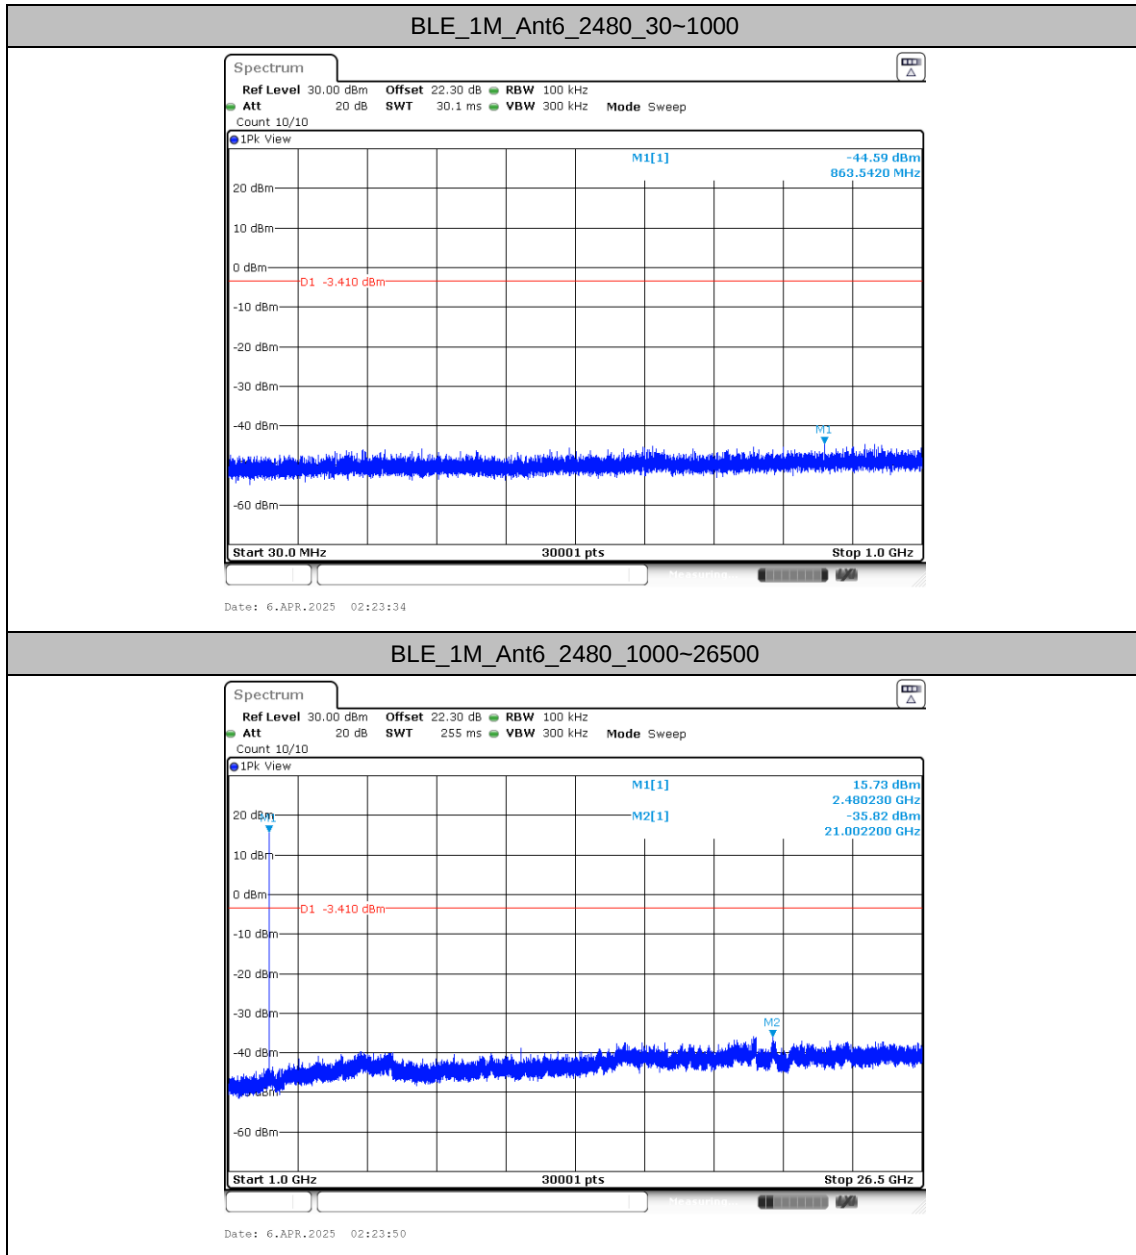

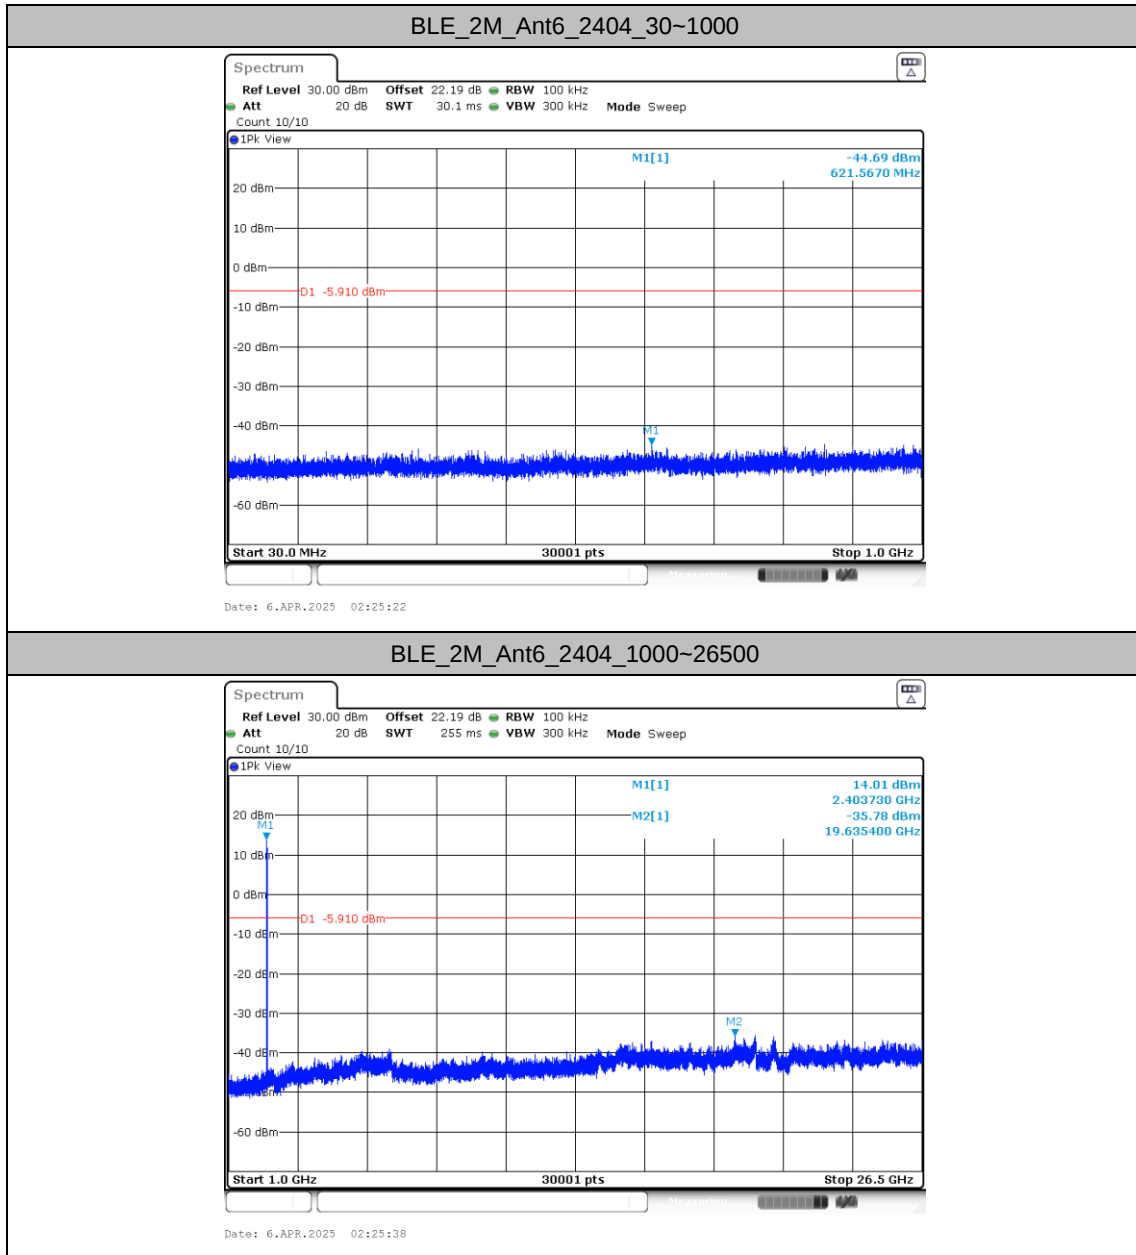

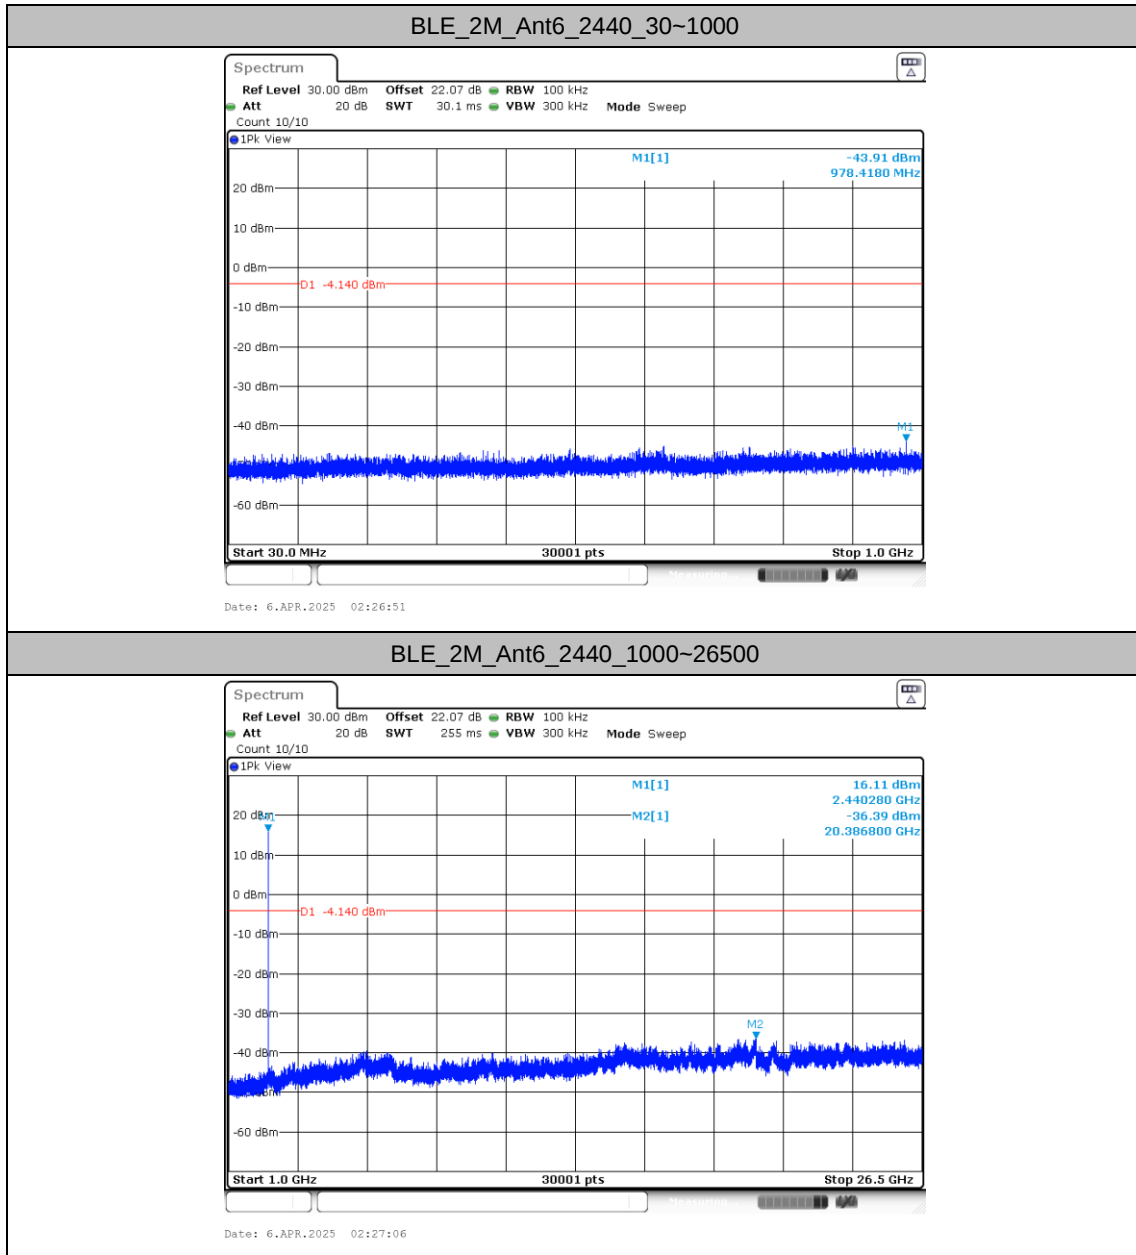


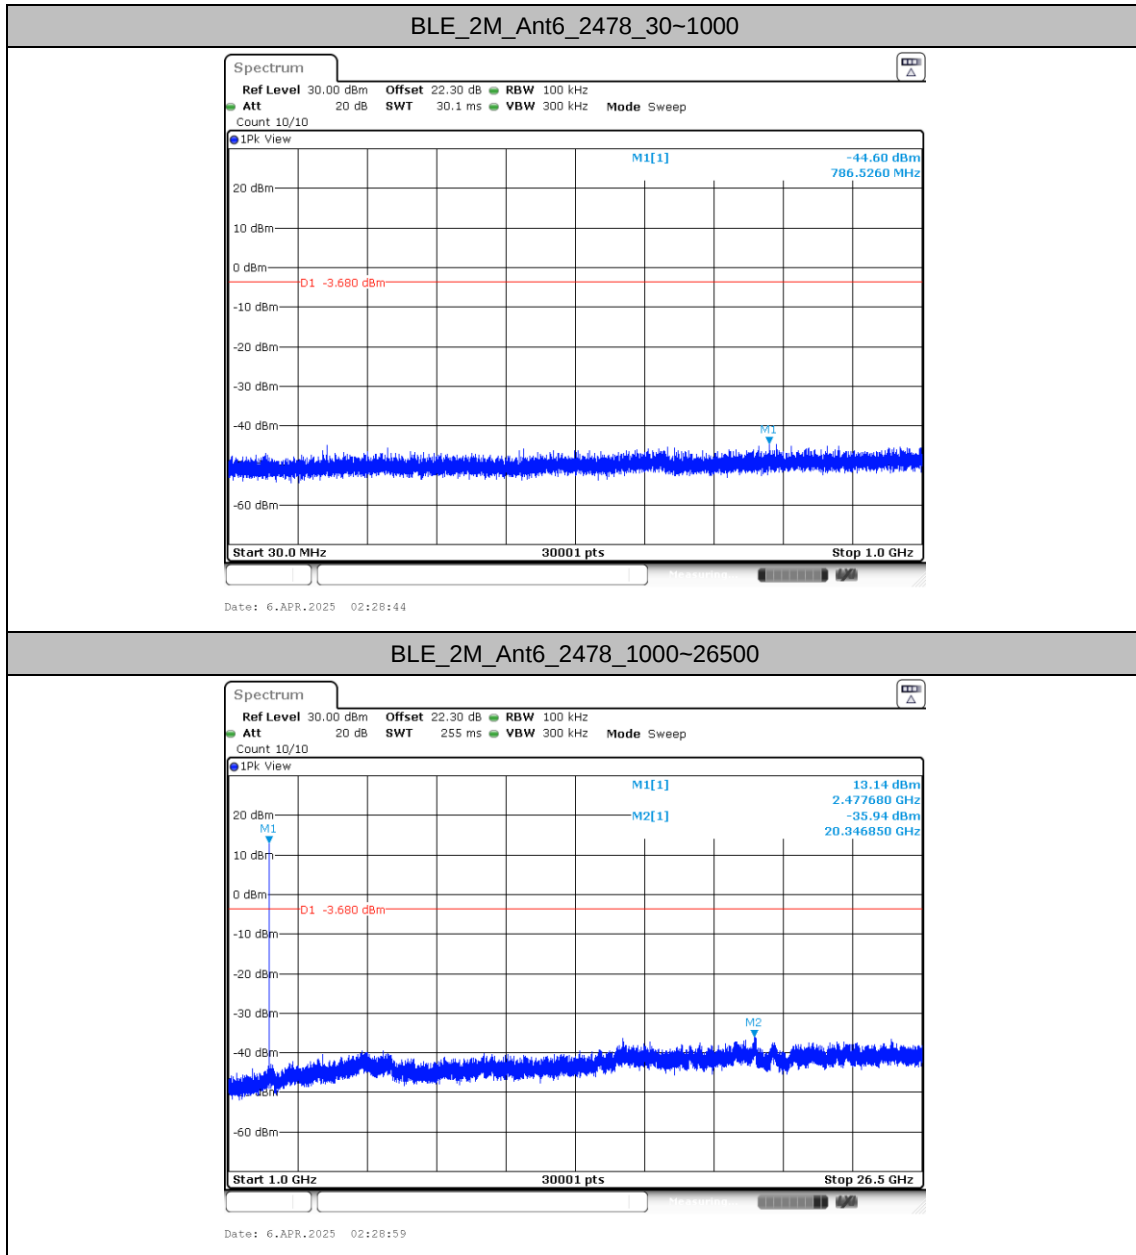



Appendix B. AC Conducted Emission Test Results

Test Engineer :	XuRuibin	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Line
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

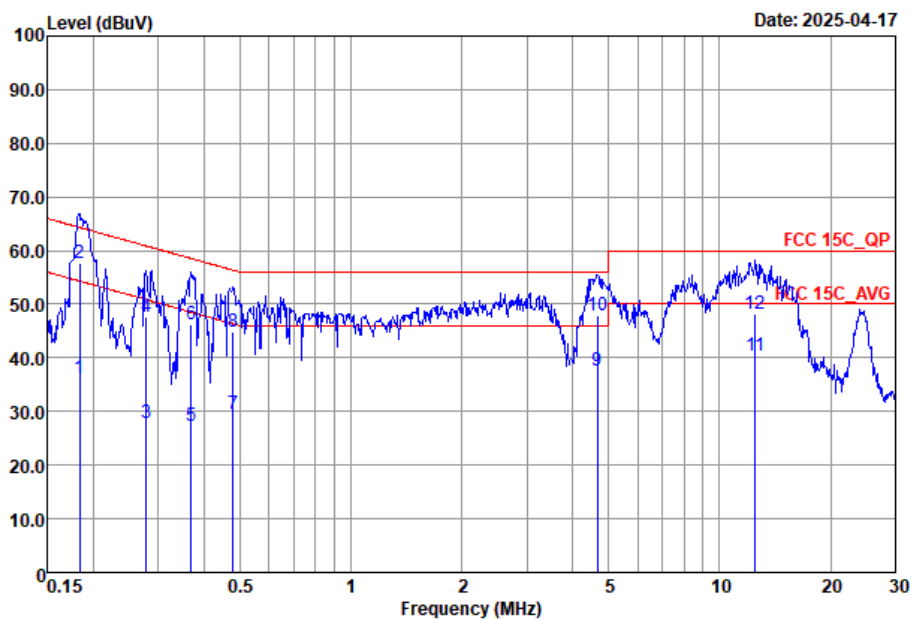


Site : CO02-SZ
Condition : FCC 15C_QP LISN_2025-L LINE

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.18	36.28	-18.05	54.33	16.41	9.69	10.18	Average
2 *	0.18	57.58	-6.75	64.33	37.71	9.69	10.18	QP
3	0.28	27.95	-22.90	50.85	8.01	9.74	10.20	Average
4	0.28	47.55	-13.30	60.85	27.61	9.74	10.20	QP
5	0.37	27.24	-21.28	48.52	7.30	9.72	10.22	Average
6	0.37	46.24	-12.28	58.52	26.30	9.72	10.22	QP
7	0.48	29.42	-16.94	46.36	9.49	9.69	10.24	Average
8	0.48	44.92	-11.44	56.36	24.99	9.69	10.24	QP
9	4.67	37.72	-8.28	46.00	17.80	9.65	10.27	Average
10	4.67	48.02	-7.98	56.00	28.10	9.65	10.27	QP
11	12.52	40.37	-9.63	50.00	20.50	9.64	10.23	Average
12	12.52	48.27	-11.73	60.00	28.40	9.64	10.23	QP



Test Engineer :	XuRuibin	Temperature :	22~24°C
		Relative Humidity :	44~50%
Test Voltage :	120Vac / 60Hz	Phase :	Neutral
Remark :	All emissions not reported here are more than 10 dB below the prescribed limit.		

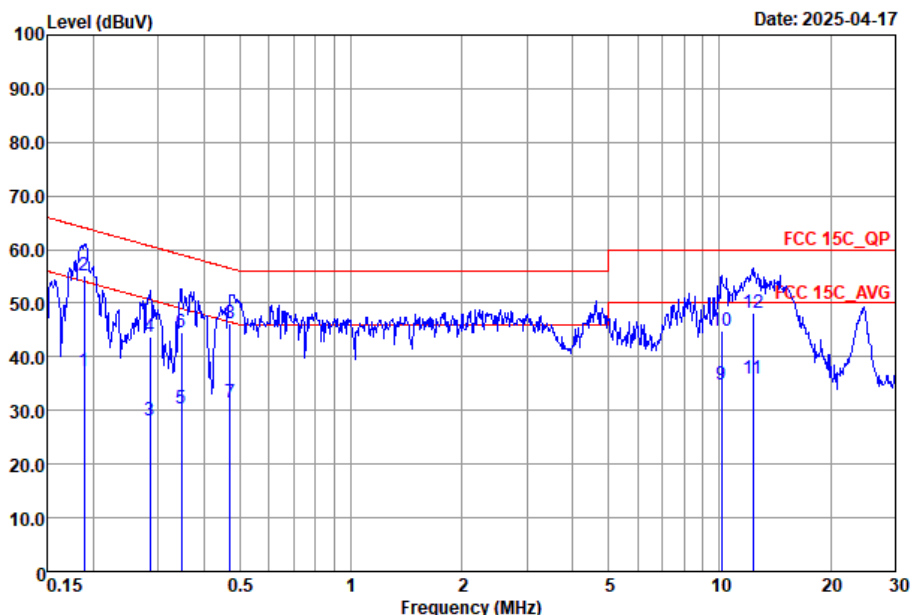

Site : CO02-SZ
Condition : FCC 15C_QP LISN_2025-N NEUTRAL

	Freq	Level	Over	Limit	Read	LISN	Cable	
	MHz	dBuV	Limit	Line	Level	Factor	Loss	Remark
			dB	dBuV	dBuV	dB	dB	
1	0.19	37.21	-16.85	54.06	17.20	9.83	10.18	Average
2 *	0.19	55.11	-8.95	64.06	35.10	9.83	10.18	QP
3	0.28	28.10	-22.58	50.68	8.10	9.80	10.20	Average
4	0.28	43.80	-16.88	60.68	23.80	9.80	10.20	QP
5	0.35	30.30	-18.75	49.05	10.49	9.59	10.22	Average
6	0.35	44.60	-14.45	59.05	24.79	9.59	10.22	QP
7	0.47	31.35	-15.14	46.49	11.09	10.02	10.24	Average
8	0.47	46.25	-10.24	56.49	25.99	10.02	10.24	QP
9	10.13	34.80	-15.20	50.00	15.00	9.62	10.18	Average
10	10.13	44.80	-15.20	60.00	25.00	9.62	10.18	QP
11	12.32	35.99	-14.01	50.00	16.09	9.67	10.23	Average
12	12.32	48.29	-11.71	60.00	28.39	9.67	10.23	QP

Note:

- Level(dBμV) = Read Level(dBμV) + LISN Factor(dB) + Cable Loss(dB)
- Over Limit(dB) = Level(dBμV) – Limit Line(dBμV)



Appendix C. Radiated Spurious Emission

Test Engineer :	Reid Huang	Relative Humidity :	50%
		Temperature :	20-24°C





Radiated Spurious Emission Test Modes

Mode	Band (MHz)	Antenna	Modulation	Channel	Frequency	Data Rate	RU	Remark
Mode 1	2400-2483.5	6	Bluetooth-LE	00	2402	1Mbps	-	-
Mode 2	2400-2483.5	6	Bluetooth-LE	19	2440	1Mbps	-	-
Mode 3	2400-2483.5	6	Bluetooth-LE	39	2480	1Mbps	-	-
Mode 4	2400-2483.5	6	Bluetooth-LE	01	2404	2Mbps	-	-
Mode 5	2400-2483.5	6	Bluetooth-LE	19	2440	2Mbps	-	-
Mode 6	2400-2483.5	6	Bluetooth-LE	38	2478	2Mbps	-	-
Mode 7	2400-2483.5	6	Bluetooth-LE_LF	38	2478	2Mbps	-	-





Summary of each worse mode

Mode	Modulation	Ch.	Freq. (MHz)	Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pol.	Peak Avg.	Result	Remark
1	Bluetooth-LE	00	2386.91	39.22	54.00	-14.78	H	AVERAGE	Pass	Band Edge
	Bluetooth-LE	00	4804.00	43.20	74.00	-30.80	H	Peak	Pass	Harmonic
2	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	45.54	74.00	-28.46	V	Peak	Pass	Harmonic
3	Bluetooth-LE	39	2483.92	40.87	54.00	-13.13	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	39	7440.00	44.99	74.00	-29.01	H	Peak	Pass	Harmonic
4	Bluetooth-LE	01	2382.47	41.24	54.00	-12.76	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	01	4804.00	44.1	74.00	-29.9	H	Peak	Pass	Harmonic
5	Bluetooth-LE	19	-	-	-	-	-	-	-	Band Edge
	Bluetooth-LE	19	7320.00	45.02	74.00	-28.98	H	Peak	Pass	Harmonic
6	Bluetooth-LE	38	2483.54	41.54	54.00	-12.46	V	AVERAGE	Pass	Band Edge
	Bluetooth-LE	38	7434.00	45.04	74.00	-28.96	V	Peak	Pass	Harmonic
7	Bluetooth-LE_LF	38	34.85	25.73	40.00	-14.27	V	Peak	Pass	LF

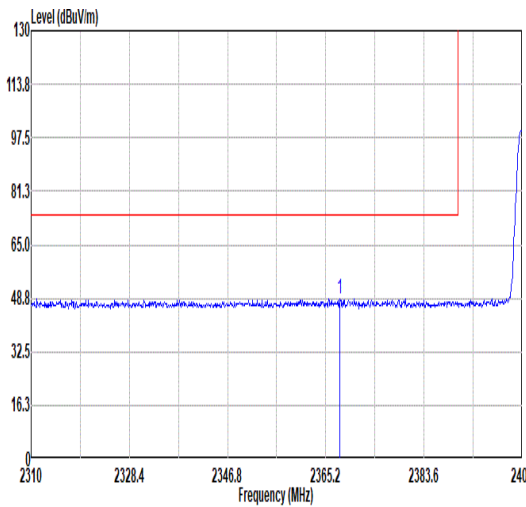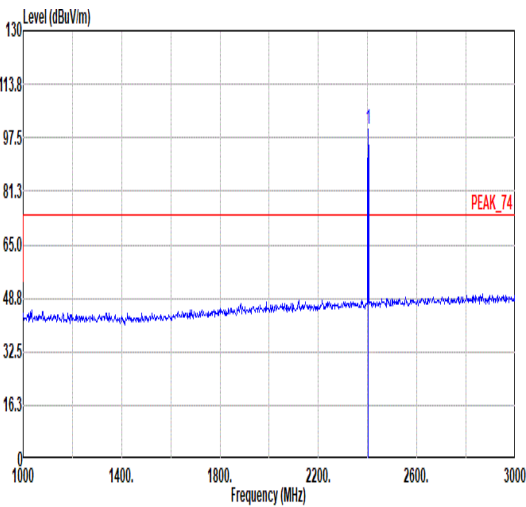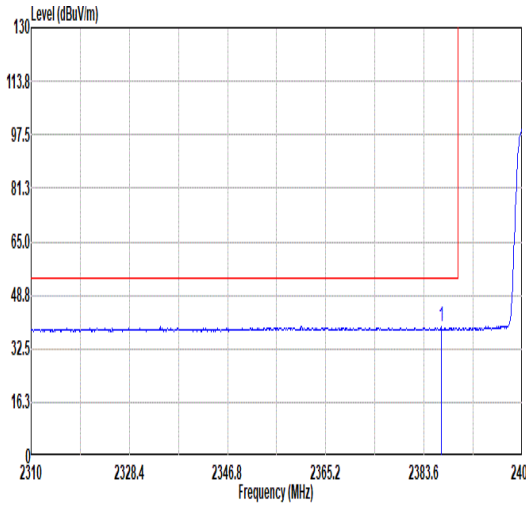
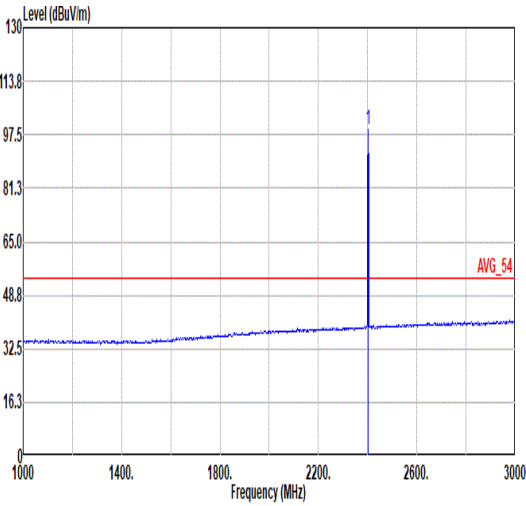


Mode	1																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																									
ANT	6																																																																																									
Pol.	Horizontal						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2367.78</td><td>48.57</td><td>74.00</td><td>-25.43</td><td>47.12</td><td>30.42</td><td>4.77</td><td>33.74</td><td>253</td><td>317</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2367.78	48.57	74.00	-25.43	47.12	30.42	4.77	33.74	253	317	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>100.01</td><td>-----</td><td>-----</td><td>98.44</td><td>30.44</td><td>4.81</td><td>33.68</td><td>253</td><td>317</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	100.01	-----	-----	98.44	30.44	4.81	33.68	253	317
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2367.78	48.57	74.00	-25.43	47.12	30.42	4.77	33.74	253	317	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2402.00	100.01	-----	-----	98.44	30.44	4.81	33.68	253	317	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2386.91</td><td>39.22</td><td>54.00</td><td>-14.78</td><td>37.71</td><td>30.43</td><td>4.79</td><td>33.71</td><td>253</td><td>317</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2386.91	39.22	54.00	-14.78	37.71	30.43	4.79	33.71	253	317	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>99.00</td><td>-----</td><td>-----</td><td>97.43</td><td>30.44</td><td>4.81</td><td>33.68</td><td>253</td><td>317</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	2402.00	99.00	-----	-----	97.43	30.44	4.81	33.68	253	317
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2386.91	39.22	54.00	-14.78	37.71	30.43	4.79	33.71	253	317	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																	
1	2402.00	99.00	-----	-----	97.43	30.44	4.81	33.68	253	317	AVERAGE																																																																															

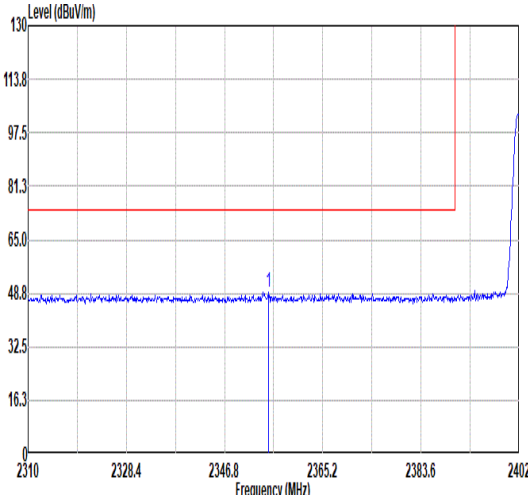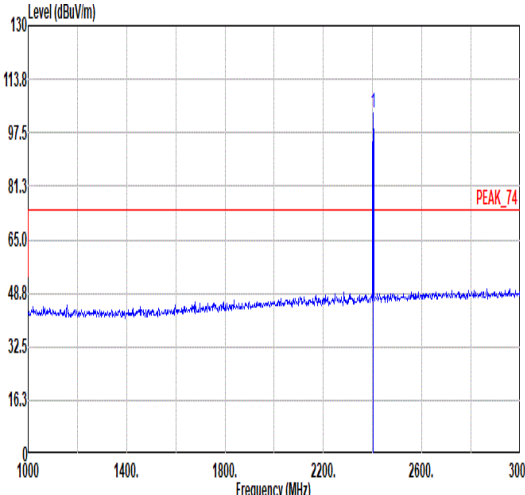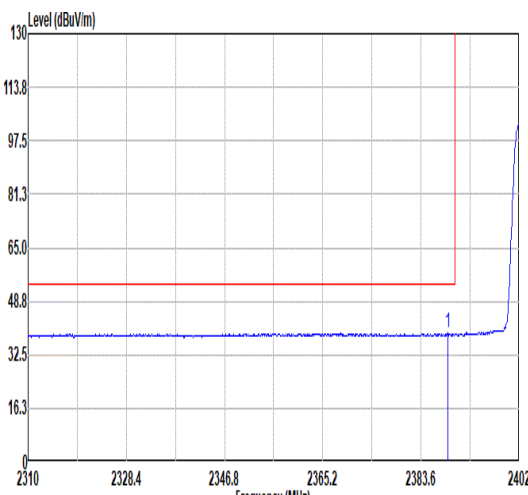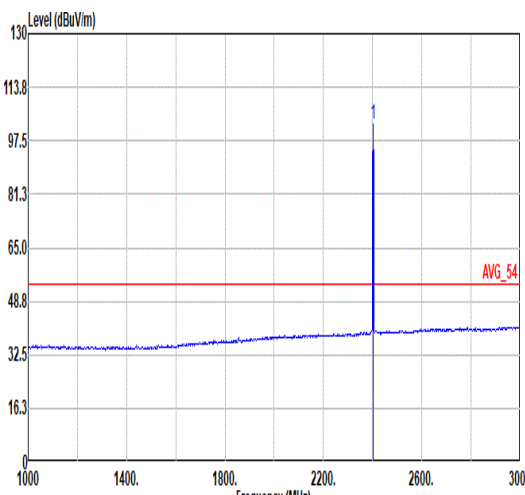

Mode	1																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																									
ANT	6																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2355.08</td><td>48.88</td><td>74.00</td><td>-25.12</td><td>47.48</td><td>30.41</td><td>4.76</td><td>33.77</td><td>122</td><td>352</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2355.08	48.88	74.00	-25.12	47.48	30.41	4.76	33.77	122	352	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>103.58</td><td>-----</td><td>-----</td><td>102.01</td><td>30.44</td><td>4.81</td><td>33.68</td><td>122</td><td>352</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	103.58	-----	-----	102.01	30.44	4.81	33.68	122	352
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2355.08	48.88	74.00	-25.12	47.48	30.41	4.76	33.77	122	352	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2402.00	103.58	-----	-----	102.01	30.44	4.81	33.68	122	352	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2388.57</td><td>39.08</td><td>54.00</td><td>-14.92</td><td>37.57</td><td>30.43</td><td>4.79</td><td>33.71</td><td>122</td><td>352</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2388.57	39.08	54.00	-14.92	37.57	30.43	4.79	33.71	122	352	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th>Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2402.00</td><td>102.45</td><td>-----</td><td>-----</td><td>100.88</td><td>30.44</td><td>4.81</td><td>33.68</td><td>122</td><td>352</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2402.00	102.45	-----	-----	100.88	30.44	4.81	33.68	122	352
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2388.57	39.08	54.00	-14.92	37.57	30.43	4.79	33.71	122	352	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																		
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2402.00	102.45	-----	-----	100.88	30.44	4.81	33.68	122	352	AVERAGE																																																																															



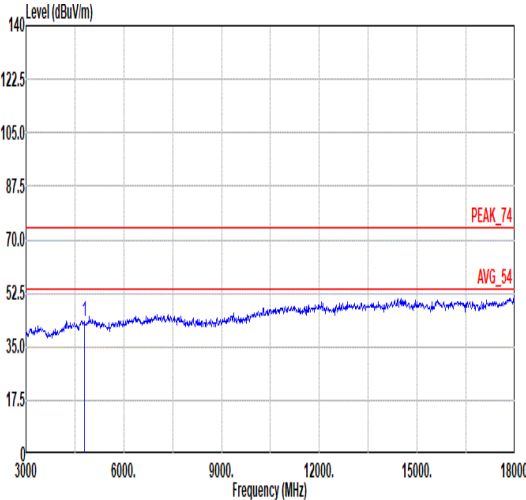
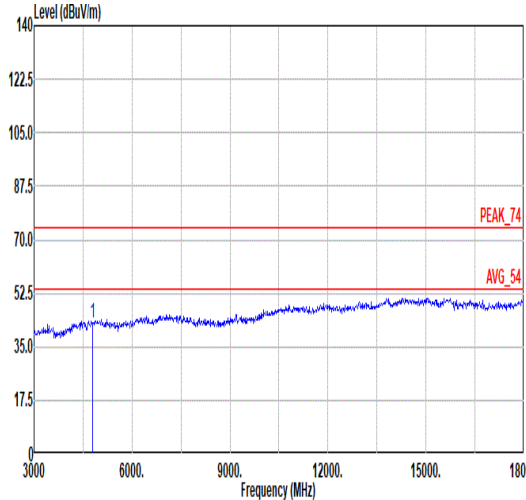


Mode	1																																																																																										
	Harmonic																																																																																										
	2400-2483.5_Bluetooth-LE_CH00_2402MHz																																																																																										
ANT	6																																																																																										
Pol.	Horizontal						Vertical																																																																																				
Peak Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>43.20</td><td>74.00</td><td>-30.80</td><td>59.11</td><td>33.82</td><td>7.74</td><td>57.47</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	43.20	74.00	-30.80	59.11	33.82	7.74	57.47	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>43.05</td><td>74.00</td><td>-30.95</td><td>58.96</td><td>33.82</td><td>7.74</td><td>57.47</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	43.05	74.00	-30.95	58.96	33.82	7.74	57.47	--	--
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	4804.00	43.20	74.00	-30.80	59.11	33.82	7.74	57.47	--	--	Peak																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	4804.00	43.05	74.00	-30.95	58.96	33.82	7.74	57.47	--	--	Peak																																																																																







Mode	2																																																																																																																																	
	Harmonic																																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																																																																																	
ANT	6																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4880.00</td><td>44.54</td><td>74.00</td><td>-29.46</td><td>60.44</td><td>33.85</td><td>7.77</td><td>57.52</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>44.23</td><td>74.00</td><td>-29.77</td><td>57.90</td><td>36.30</td><td>8.96</td><td>58.93</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4880.00	44.54	74.00	-29.46	60.44	33.85	7.77	57.52	--	--	Peak	2	7320.00	44.23	74.00	-29.77	57.90	36.30	8.96	58.93	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4880.00</td><td>43.23</td><td>74.00</td><td>-30.77</td><td>59.13</td><td>33.85</td><td>7.77</td><td>57.52</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>45.54</td><td>74.00</td><td>-28.46</td><td>59.21</td><td>36.30</td><td>8.96</td><td>58.93</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4880.00	43.23	74.00	-30.77	59.13	33.85	7.77	57.52	--	--	Peak	2	7320.00	45.54	74.00	-28.46	59.21	36.30	8.96	58.93	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	4880.00	44.54	74.00	-29.46	60.44	33.85	7.77	57.52	--	--	Peak																																																																																																																							
2	7320.00	44.23	74.00	-29.77	57.90	36.30	8.96	58.93	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	4880.00	43.23	74.00	-30.77	59.13	33.85	7.77	57.52	--	--	Peak																																																																																																																							
2	7320.00	45.54	74.00	-28.46	59.21	36.30	8.96	58.93	--	--	Peak																																																																																																																							

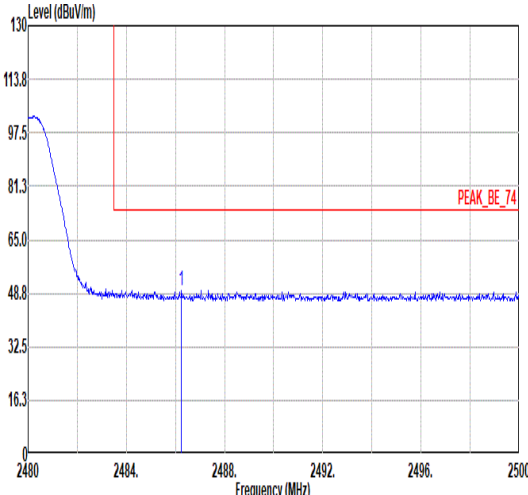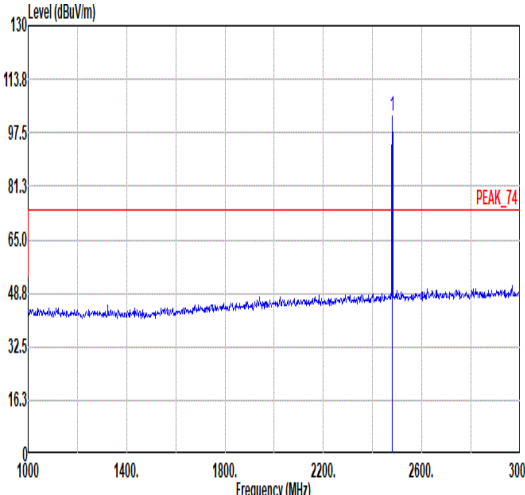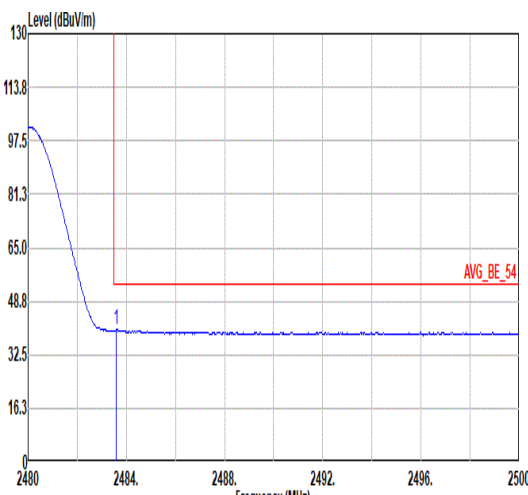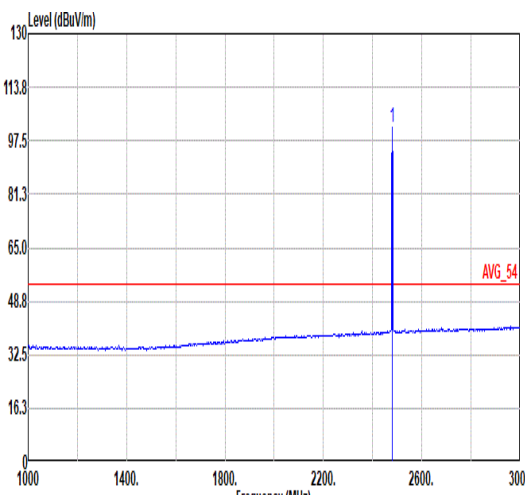

Mode	2																																																																													
	Band Edge																																																																													
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																													
ANT	6																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2486.24</td><td>49.66</td><td>74.00</td><td>-24.34</td><td>47.78</td><td>30.49</td><td>4.92</td><td>33.53</td><td>349 322 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2486.24	49.66	74.00	-24.34	47.78	30.49	4.92	33.53	349 322 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>102.71</td><td>-----</td><td>-----</td><td>100.84</td><td>30.49</td><td>4.92</td><td>33.54</td><td>349 322 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	102.71	-----	-----	100.84	30.49	4.92	33.54	349 322 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																					
1	2486.24	49.66	74.00	-24.34	47.78	30.49	4.92	33.53	349 322 PEAK																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																					
1	2480.00	102.71	-----	-----	100.84	30.49	4.92	33.54	349 322 PEAK																																																																					
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.60</td><td>40.44</td><td>54.00</td><td>-13.56</td><td>38.56</td><td>30.49</td><td>4.92</td><td>33.53</td><td>349 322 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.60	40.44	54.00	-13.56	38.56	30.49	4.92	33.53	349 322 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2480.00</td><td>101.69</td><td>-----</td><td>-----</td><td>99.82</td><td>30.49</td><td>4.92</td><td>33.54</td><td>349 322 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	101.69	-----	-----	99.82	30.49	4.92	33.54	349 322 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																					
1	2483.60	40.44	54.00	-13.56	38.56	30.49	4.92	33.53	349 322 AVERAGE																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																					
1	2480.00	101.69	-----	-----	99.82	30.49	4.92	33.54	349 322 AVERAGE																																																																					

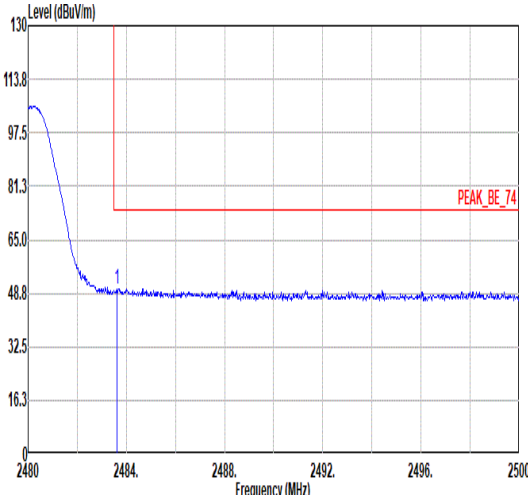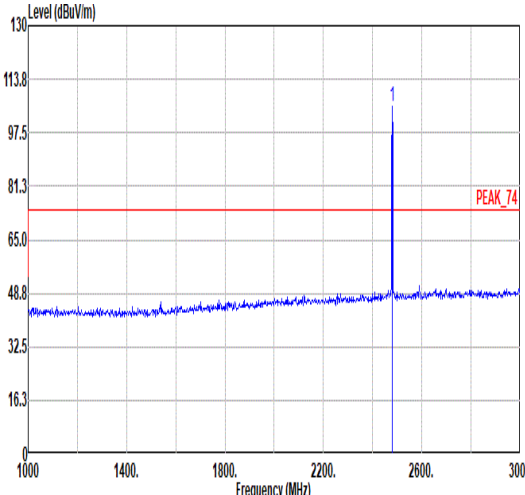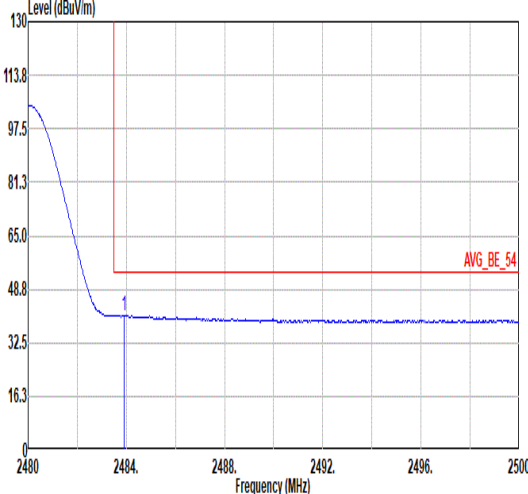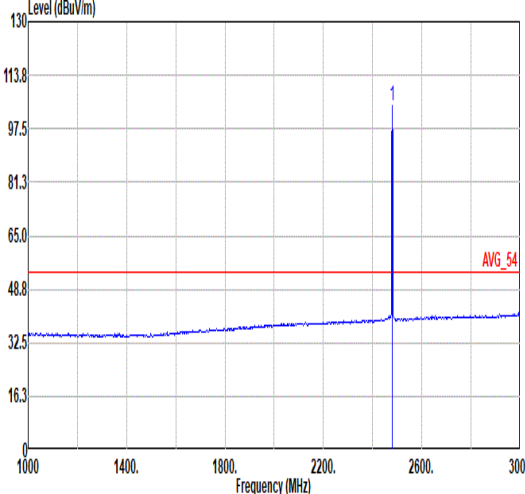

Mode	2																																																																													
	Band Edge																																																																													
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																													
ANT	6																																																																													
Pol.	Vertical	Fundamental																																																																												
Peak	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.62</td><td>50.12</td><td>74.00</td><td>-23.88</td><td>48.24</td><td>30.49</td><td>4.92</td><td>33.53</td><td>122 347 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.62	50.12	74.00	-23.88	48.24	30.49	4.92	33.53	122 347 PEAK	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>105.59</td><td>-----</td><td>-----</td><td>103.72</td><td>30.49</td><td>4.92</td><td>33.54</td><td>122 347 PEAK</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	105.59	-----	-----	103.72	30.49	4.92	33.54	122 347 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																					
1	2483.62	50.12	74.00	-23.88	48.24	30.49	4.92	33.53	122 347 PEAK																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																					
1	2480.00	105.59	-----	-----	103.72	30.49	4.92	33.54	122 347 PEAK																																																																					
Avg	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2483.92</td><td>40.87</td><td>54.00</td><td>-13.13</td><td>38.99</td><td>30.49</td><td>4.92</td><td>33.53</td><td>122 347 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.92	40.87	54.00	-13.13	38.99	30.49	4.92	33.53	122 347 AVERAGE	<table><thead><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr></thead><tbody><tr><td>1</td><td>2480.00</td><td>104.62</td><td>-----</td><td>-----</td><td>102.75</td><td>30.49</td><td>4.92</td><td>33.54</td><td>122 347 AVERAGE</td></tr></tbody></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2480.00	104.62	-----	-----	102.75	30.49	4.92	33.54	122 347 AVERAGE
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																					
1	2483.92	40.87	54.00	-13.13	38.99	30.49	4.92	33.53	122 347 AVERAGE																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																					
1	2480.00	104.62	-----	-----	102.75	30.49	4.92	33.54	122 347 AVERAGE																																																																					







Mode	2																																																																																																																																	
	Harmonic																																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH39_2480MHz																																																																																																																																	
ANT	6																																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																																											
Peak Avg																																																																																																																																		
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4960.00</td><td>43.71</td><td>74.00</td><td>-30.29</td><td>59.59</td><td>33.89</td><td>7.81</td><td>57.58</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>44.99</td><td>74.00</td><td>-29.01</td><td>58.48</td><td>36.30</td><td>9.19</td><td>58.98</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4960.00	43.71	74.00	-30.29	59.59	33.89	7.81	57.58	--	--	Peak	2	7440.00	44.99	74.00	-29.01	58.48	36.30	9.19	58.98	--	--	Peak	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>4960.00</td><td>43.13</td><td>74.00</td><td>-30.87</td><td>59.01</td><td>33.89</td><td>7.81</td><td>57.58</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7440.00</td><td>44.67</td><td>74.00</td><td>-29.33</td><td>58.16</td><td>36.30</td><td>9.19</td><td>58.98</td><td>--</td><td>--</td><td>Peak</td></tr></table>								Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	4960.00	43.13	74.00	-30.87	59.01	33.89	7.81	57.58	--	--	Peak	2	7440.00	44.67	74.00	-29.33	58.16	36.30	9.19	58.98	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	4960.00	43.71	74.00	-30.29	59.59	33.89	7.81	57.58	--	--	Peak																																																																																																																							
2	7440.00	44.99	74.00	-29.01	58.48	36.30	9.19	58.98	--	--	Peak																																																																																																																							
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																																									
1	4960.00	43.13	74.00	-30.87	59.01	33.89	7.81	57.58	--	--	Peak																																																																																																																							
2	7440.00	44.67	74.00	-29.33	58.16	36.30	9.19	58.98	--	--	Peak																																																																																																																							





Mode	3																																																																													
	Band Edge																																																																													
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																													
ANT	6																																																																													
Pol.	Horizontal	Fundamental																																																																												
Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2375.80</td><td>48.64</td><td>74.00</td><td>-25.36</td><td>47.16</td><td>30.43</td><td>4.78</td><td>33.73</td><td>364 320 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2375.80	48.64	74.00	-25.36	47.16	30.43	4.78	33.73	364 320 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>100.98</td><td>-----</td><td>-----</td><td>99.41</td><td>30.44</td><td>4.81</td><td>33.68</td><td>364 320 PEAK</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2404.00	100.98	-----	-----	99.41	30.44	4.81	33.68	364 320 PEAK
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																					
1	2375.80	48.64	74.00	-25.36	47.16	30.43	4.78	33.73	364 320 PEAK																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																					
1	2404.00	100.98	-----	-----	99.41	30.44	4.81	33.68	364 320 PEAK																																																																					
Avg	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2376.08</td><td>40.87</td><td>54.00</td><td>-13.13</td><td>39.39</td><td>30.43</td><td>4.78</td><td>33.73</td><td>364 320 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2376.08	40.87	54.00	-13.13	39.39	30.43	4.78	33.73	364 320 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>98.99</td><td>-----</td><td>-----</td><td>97.42</td><td>30.44</td><td>4.81</td><td>33.68</td><td>364 320 AVERAGE</td></tr></table>		Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2404.00	98.99	-----	-----	97.42	30.44	4.81	33.68	364 320 AVERAGE
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																						
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																					
1	2376.08	40.87	54.00	-13.13	39.39	30.43	4.78	33.73	364 320 AVERAGE																																																																					
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																							
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																						
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																					
1	2404.00	98.99	-----	-----	97.42	30.44	4.81	33.68	364 320 AVERAGE																																																																					

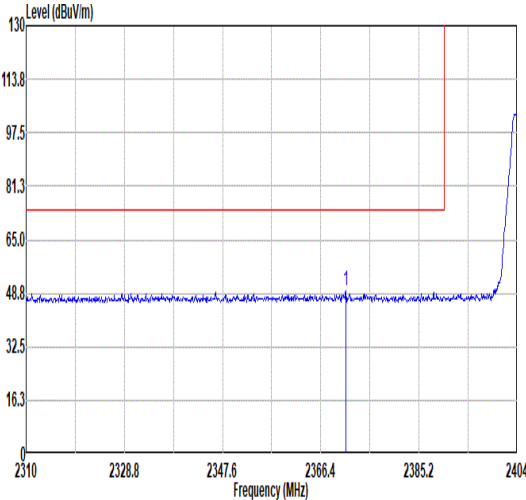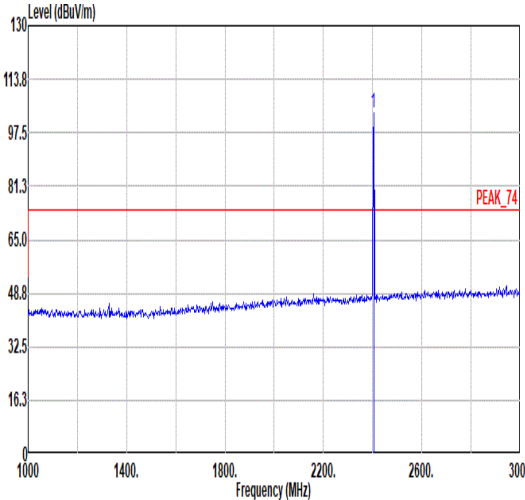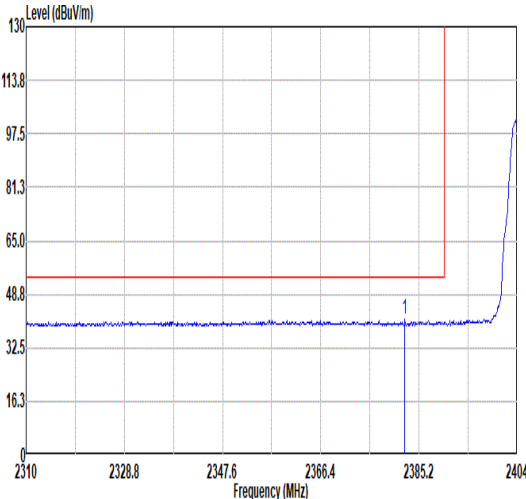
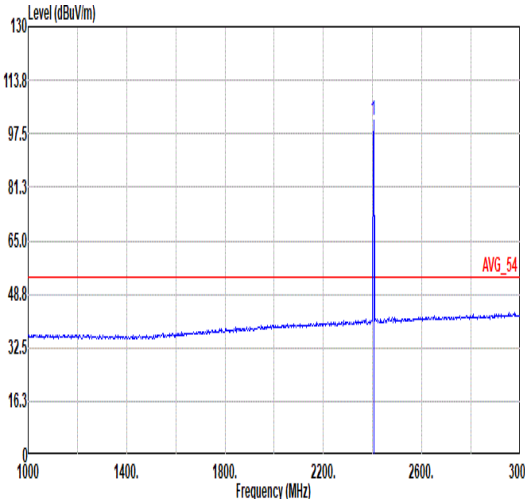


Mode	3																																																																																									
	Band Edge																																																																																									
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																																									
ANT	6																																																																																									
Pol.	Vertical						Fundamental																																																																																			
Peak																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2371.19</td><td>49.37</td><td>74.00</td><td>-24.63</td><td>47.91</td><td>30.42</td><td>4.78</td><td>33.74</td><td>129</td><td>351</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2371.19	49.37	74.00	-24.63	47.91	30.42	4.78	33.74	129	351	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>103.38</td><td>-----</td><td>-----</td><td>101.81</td><td>30.44</td><td>4.81</td><td>33.68</td><td>129</td><td>351</td><td>PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2404.00	103.38	-----	-----	101.81	30.44	4.81	33.68	129	351
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2371.19	49.37	74.00	-24.63	47.91	30.42	4.78	33.74	129	351	PEAK																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2404.00	103.38	-----	-----	101.81	30.44	4.81	33.68	129	351	PEAK																																																																															
Avg																																																																																										
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2382.47</td><td>41.24</td><td>54.00</td><td>-12.76</td><td>39.74</td><td>30.43</td><td>4.79</td><td>33.72</td><td>129</td><td>351</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2382.47	41.24	54.00	-12.76	39.74	30.43	4.79	33.72	129	351	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2404.00</td><td>101.50</td><td>-----</td><td>-----</td><td>99.93</td><td>30.44</td><td>4.81</td><td>33.68</td><td>129</td><td>351</td><td>AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2404.00	101.50	-----	-----	99.93	30.44	4.81	33.68	129	351
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2382.47	41.24	54.00	-12.76	39.74	30.43	4.79	33.72	129	351	AVERAGE																																																																															
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																			
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																		
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																	
1	2404.00	101.50	-----	-----	99.93	30.44	4.81	33.68	129	351	AVERAGE																																																																															



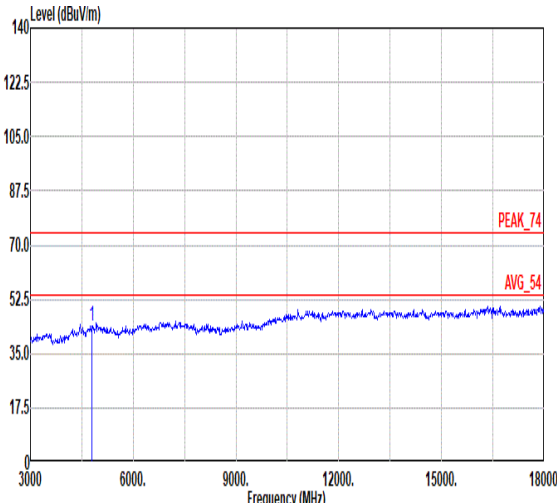
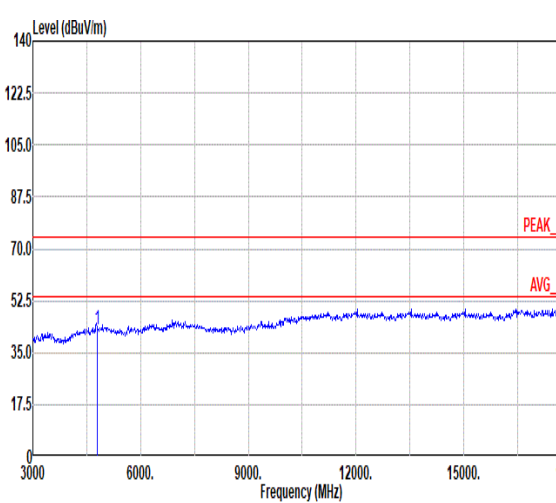


Mode	3																																																																															
	Harmonic																																																																															
	2400-2483.5_Bluetooth-LE_CH01_2404MHz																																																																															
ANT	6																																																																															
Pol.	Horizontal								Vertical																																																																							
Peak Avg																																																																																
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4804.00</td><td>44.10</td><td>74.00</td><td>-29.90</td><td>60.01</td><td>33.82</td><td>7.74</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4804.00	44.10	74.00	-29.90	60.01	33.82	7.74	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th></tr><tr><td>1</td><td>4804.00</td><td>42.59</td><td>74.00</td><td>-31.41</td><td>58.50</td><td>33.82</td><td>7.74</td></tr></table>									Limit	Read	Ant	Cable	Preamp	APos	TPos	Freq	Level	Line	Margin	Level	Factor	Loss	Factor		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	1	4804.00	42.59	74.00	-31.41	58.50	33.82	7.74
		Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																								
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																									
1	4804.00	44.10	74.00	-29.90	60.01	33.82	7.74																																																																									
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																									
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB																																																																									
1	4804.00	42.59	74.00	-31.41	58.50	33.82	7.74																																																																									
	<table><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>44.10</td><td>74.00</td><td>-29.90</td><td>60.01</td><td>33.82</td><td>7.74</td><td>57.47</td><td>-- Peak</td></tr></table>																			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	44.10	74.00	-29.90	60.01	33.82	7.74	57.47	-- Peak	<table><tr><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4804.00</td><td>42.59</td><td>74.00</td><td>-31.41</td><td>58.50</td><td>33.82</td><td>7.74</td><td>57.47</td><td>-- Peak</td></tr></table>																			MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	4804.00	42.59	74.00	-31.41	58.50	33.82	7.74	57.47	-- Peak				
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	4804.00	44.10	74.00	-29.90	60.01	33.82	7.74	57.47	-- Peak																																																																							
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																							
1	4804.00	42.59	74.00	-31.41	58.50	33.82	7.74	57.47	-- Peak																																																																							



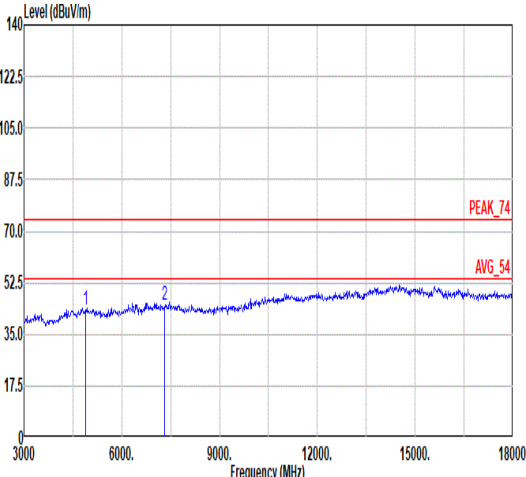
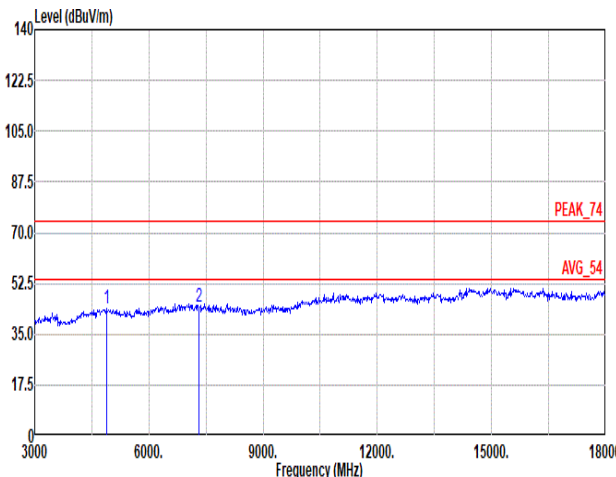


Mode	4																																																																					
	Harmonic																																																																					
	2400-2483.5_Bluetooth-LE_CH19_2440MHz																																																																					
ANT	6																																																																					
Pol.	Horizontal																																																																					
Peak Avg																																																																						
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>43.22</td><td>74.00</td><td>-30.78</td><td>59.12</td><td>33.85</td><td>7.77</td><td>57.52</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>45.02</td><td>74.00</td><td>-28.98</td><td>58.69</td><td>36.30</td><td>8.96</td><td>58.93</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4880.00	43.22	74.00	-30.78	59.12	33.85	7.77	57.52	--	--	Peak	2	7320.00	45.02	74.00	-28.98	58.69	36.30	8.96	58.93	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																												
1	4880.00	43.22	74.00	-30.78	59.12	33.85	7.77	57.52	--	--	Peak																																																											
2	7320.00	45.02	74.00	-28.98	58.69	36.30	8.96	58.93	--	--	Peak																																																											
Peak Avg																																																																						
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th></tr><tr><td>1</td><td>4880.00</td><td>43.86</td><td>74.00</td><td>-30.14</td><td>59.76</td><td>33.85</td><td>7.77</td><td>57.52</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7320.00</td><td>44.59</td><td>74.00</td><td>-29.41</td><td>58.26</td><td>36.30</td><td>8.96</td><td>58.93</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor					MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg		1	4880.00	43.86	74.00	-30.14	59.76	33.85	7.77	57.52	--	--	Peak	2	7320.00	44.59	74.00	-29.41	58.26	36.30	8.96	58.93	--	--	Peak
			Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																										
	Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																														
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																												
1	4880.00	43.86	74.00	-30.14	59.76	33.85	7.77	57.52	--	--	Peak																																																											
2	7320.00	44.59	74.00	-29.41	58.26	36.30	8.96	58.93	--	--	Peak																																																											

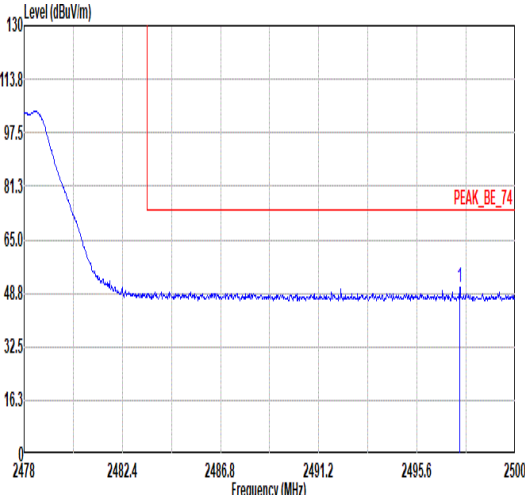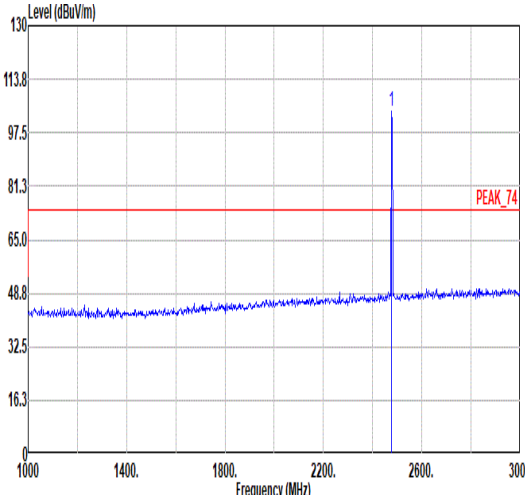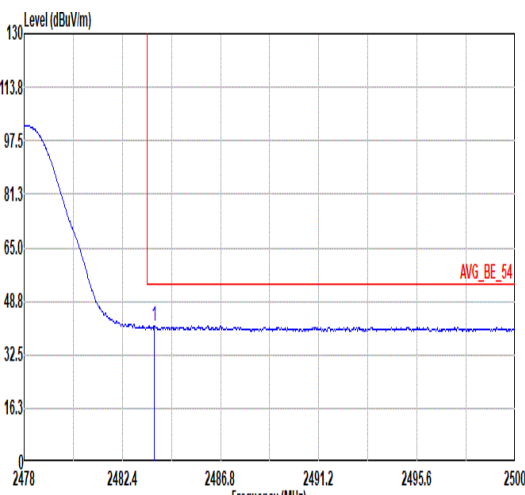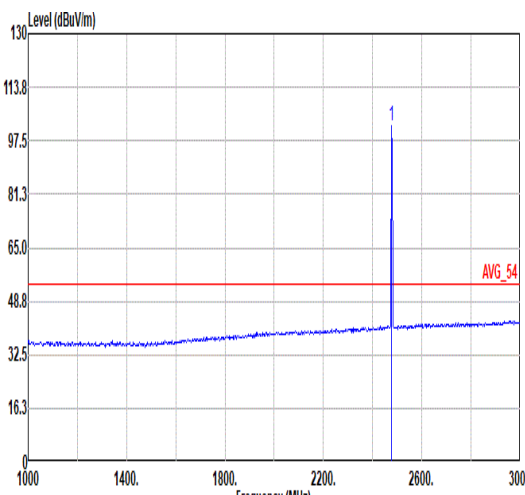

Mode	5																																																																																				
	Band Edge																																																																																				
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																				
ANT	6																																																																																				
Pol.	Horizontal					Fundamental																																																																															
Peak																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2497.51</td><td>50.33</td><td>74.00</td><td>-23.67</td><td>48.40</td><td>30.50</td><td>4.94</td><td>33.51</td><td>131 317 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2497.51	50.33	74.00	-23.67	48.40	30.50	4.94	33.51	131 317 PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>103.95</td><td>-----</td><td>-----</td><td>102.09</td><td>30.49</td><td>4.91</td><td>33.54</td><td>131 317 PEAK</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2478.00	103.95	-----	-----	102.09	30.49	4.91	33.54
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	2497.51	50.33	74.00	-23.67	48.40	30.50	4.94	33.51	131 317 PEAK																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	2478.00	103.95	-----	-----	102.09	30.49	4.91	33.54	131 317 PEAK																																																																												
Avg																																																																																					
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.83</td><td>41.40</td><td>54.00</td><td>-12.60</td><td>39.52</td><td>30.49</td><td>4.92</td><td>33.53</td><td>131 317 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.83	41.40	54.00	-12.60	39.52	30.49	4.92	33.53	131 317 AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>102.00</td><td>-----</td><td>-----</td><td>100.14</td><td>30.49</td><td>4.91</td><td>33.54</td><td>131 317 AVERAGE</td></tr></table>						Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2478.00	102.00	-----	-----	100.14	30.49	4.91	33.54
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	2483.83	41.40	54.00	-12.60	39.52	30.49	4.92	33.53	131 317 AVERAGE																																																																												
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																														
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																													
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																												
1	2478.00	102.00	-----	-----	100.14	30.49	4.91	33.54	131 317 AVERAGE																																																																												

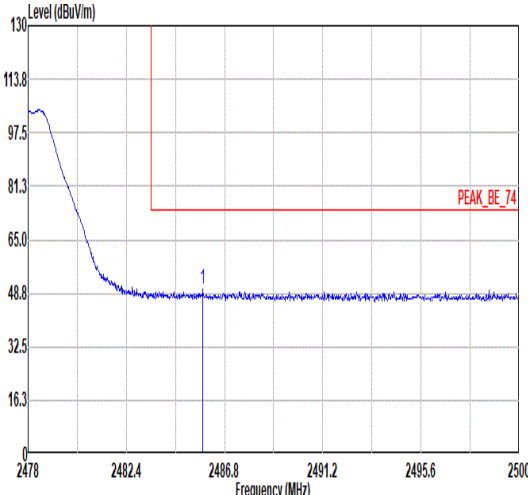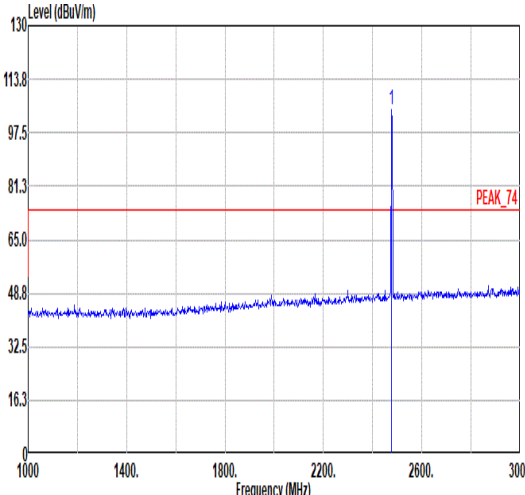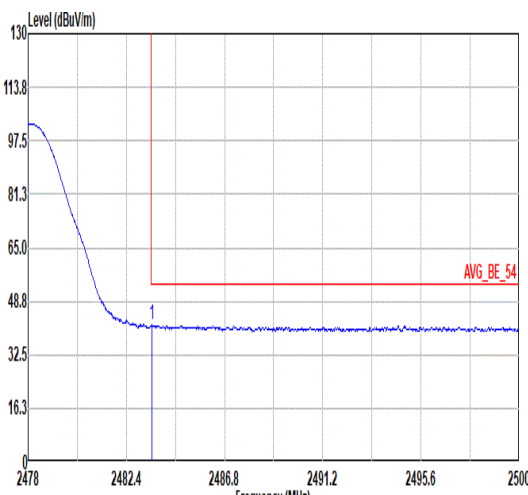
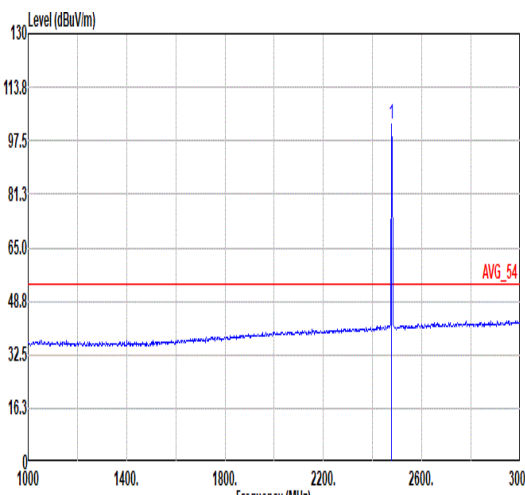


Mode	5																																																																																										
	Band Edge																																																																																										
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																										
ANT	6																																																																																										
Pol.	Vertical						Fundamental																																																																																				
Peak																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2485.83</td><td>49.88</td><td>74.00</td><td>-24.12</td><td>48.00</td><td>30.49</td><td>4.92</td><td>33.53</td><td>124</td><td>348</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2485.83	49.88	74.00	-24.12	48.00	30.49	4.92	33.53	124	348	PEAK	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>104.53</td><td>-----</td><td>-----</td><td>102.67</td><td>30.49</td><td>4.91</td><td>33.54</td><td>124</td><td>348</td><td>PEAK</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2478.00	104.53	-----	-----	102.67	30.49	4.91	33.54	124	348
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2485.83	49.88	74.00	-24.12	48.00	30.49	4.92	33.53	124	348	PEAK																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2478.00	104.53	-----	-----	102.67	30.49	4.91	33.54	124	348	PEAK																																																																																
Avg																																																																																											
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2483.54</td><td>41.54</td><td>54.00</td><td>-12.46</td><td>39.66</td><td>30.49</td><td>4.92</td><td>33.53</td><td>124</td><td>348</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2483.54	41.54	54.00	-12.46	39.66	30.49	4.92	33.53	124	348	AVERAGE	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th></th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th>Remark</th></tr><tr><th></th><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>2478.00</td><td>102.65</td><td>-----</td><td>-----</td><td>100.79</td><td>30.49</td><td>4.91</td><td>33.54</td><td>124</td><td>348</td><td>AVERAGE</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos		Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg	1	2478.00	102.65	-----	-----	100.79	30.49	4.91	33.54	124	348
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2483.54	41.54	54.00	-12.46	39.66	30.49	4.92	33.53	124	348	AVERAGE																																																																																
	Limit	Read	Ant	Cable	Preamp	APos	TPos																																																																																				
Freq	Level	Line	Margin	Level	Factor	Loss	Factor	Remark																																																																																			
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	cm	deg																																																																																		
1	2478.00	102.65	-----	-----	100.79	30.49	4.91	33.54	124	348	AVERAGE																																																																																



Mode	5																																																																																																																	
	Harmonic																																																																																																																	
	2400-2483.5_Bluetooth-LE_CH38_2478MHz																																																																																																																	
ANT	6																																																																																																																	
Pol.	Horizontal						Vertical																																																																																																											
Peak Avg																																																																																																																		
	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>44.88</td><td>74.00</td><td>-29.12</td><td>60.77</td><td>33.88</td><td>7.80</td><td>57.57</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>44.47</td><td>74.00</td><td>-29.53</td><td>57.95</td><td>36.30</td><td>9.19</td><td>58.97</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	44.88	74.00	-29.12	60.77	33.88	7.80	57.57	--	--	Peak	2	7434.00	44.47	74.00	-29.53	57.95	36.30	9.19	58.97	--	--	Peak	<table><tr><th></th><th>Limit</th><th>Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th></tr><tr><td>1</td><td>4956.00</td><td>44.58</td><td>74.00</td><td>-29.42</td><td>60.47</td><td>33.88</td><td>7.80</td><td>57.57</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>7434.00</td><td>45.04</td><td>74.00</td><td>-28.96</td><td>58.52</td><td>36.30</td><td>9.19</td><td>58.97</td><td>--</td><td>--</td><td>Peak</td></tr></table>							Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg	1	4956.00	44.58	74.00	-29.42	60.47	33.88	7.80	57.57	--	--	Peak	2	7434.00	45.04	74.00	-28.96	58.52	36.30	9.19	58.97	--	--	Peak
		Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																									
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	4956.00	44.88	74.00	-29.12	60.77	33.88	7.80	57.57	--	--	Peak																																																																																																							
2	7434.00	44.47	74.00	-29.53	57.95	36.30	9.19	58.97	--	--	Peak																																																																																																							
	Limit	Read	Ant	Cable	Preamp	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																											
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																									
1	4956.00	44.58	74.00	-29.42	60.47	33.88	7.80	57.57	--	--	Peak																																																																																																							
2	7434.00	45.04	74.00	-28.96	58.52	36.30	9.19	58.97	--	--	Peak																																																																																																							

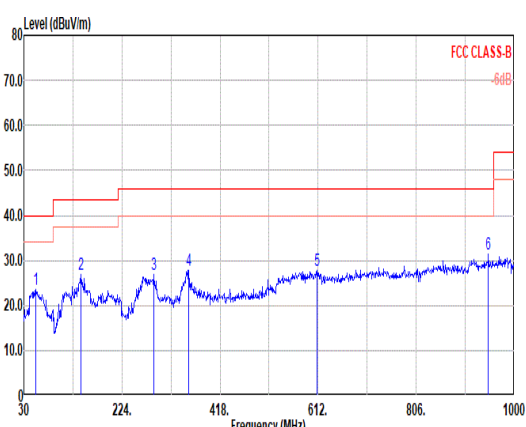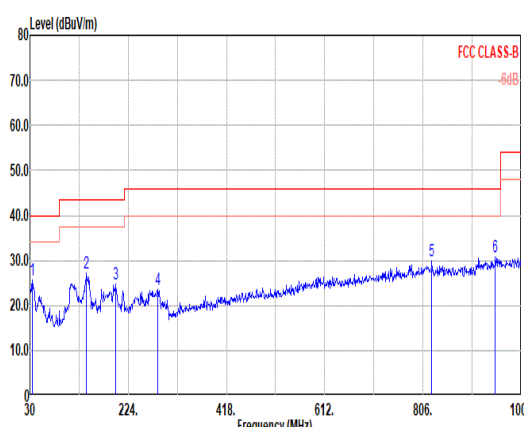


Mode	6																																																																																																																				
	Harmonic																																																																																																																				
	2400-2483.5_Bluetooth-LE_LF_CH38_2478MHz																																																																																																																				
ANT	6																																																																																																																				
Pol.	Horizontal																																																																																																																				
Peak Avg																																																																																																																					
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>54.25</td><td>23.40</td><td>40.00</td><td>-16.60</td><td>38.16</td><td>19.42</td><td>0.75</td><td>34.93</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>142.52</td><td>26.81</td><td>43.50</td><td>-16.69</td><td>41.93</td><td>18.35</td><td>1.25</td><td>34.72</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>287.05</td><td>26.91</td><td>46.00</td><td>-19.09</td><td>41.06</td><td>18.72</td><td>1.76</td><td>34.63</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>355.92</td><td>27.80</td><td>46.00</td><td>-18.20</td><td>40.07</td><td>20.36</td><td>1.96</td><td>34.59</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>610.06</td><td>27.79</td><td>46.00</td><td>-18.21</td><td>33.62</td><td>26.12</td><td>2.63</td><td>34.58</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>948.59</td><td>31.41</td><td>46.00</td><td>-14.59</td><td>32.71</td><td>29.74</td><td>3.26</td><td>34.30</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	54.25	23.40	40.00	-16.60	38.16	19.42	0.75	34.93	--	--	Peak	2	142.52	26.81	43.50	-16.69	41.93	18.35	1.25	34.72	--	--	Peak	3	287.05	26.91	46.00	-19.09	41.06	18.72	1.76	34.63	--	--	Peak	4	355.92	27.80	46.00	-18.20	40.07	20.36	1.96	34.59	--	--	Peak	5	610.06	27.79	46.00	-18.21	33.62	26.12	2.63	34.58	--	--	Peak	6	948.59	31.41	46.00	-14.59	32.71	29.74	3.26	34.30	--	--
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	54.25	23.40	40.00	-16.60	38.16	19.42	0.75	34.93	--	--	Peak																																																																																																										
2	142.52	26.81	43.50	-16.69	41.93	18.35	1.25	34.72	--	--	Peak																																																																																																										
3	287.05	26.91	46.00	-19.09	41.06	18.72	1.76	34.63	--	--	Peak																																																																																																										
4	355.92	27.80	46.00	-18.20	40.07	20.36	1.96	34.59	--	--	Peak																																																																																																										
5	610.06	27.79	46.00	-18.21	33.62	26.12	2.63	34.58	--	--	Peak																																																																																																										
6	948.59	31.41	46.00	-14.59	32.71	29.74	3.26	34.30	--	--	Peak																																																																																																										
Peak Avg																																																																																																																					
	<table><tr><th colspan="2"></th><th colspan="2">Limit</th><th colspan="2">Read</th><th>Ant</th><th>Cable</th><th>Preamp</th><th>APos</th><th>TPos</th><th rowspan="2">Remark</th></tr><tr><th>Freq</th><th>Level</th><th>Line</th><th>Margin</th><th>Level</th><th>Factor</th><th>Loss</th><th>Factor</th><th></th><th></th><th></th></tr><tr><th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th>dB</th><th>dB</th><th>cm</th><th>deg</th><th></th><th></th></tr><tr><td>1</td><td>34.85</td><td>25.73</td><td>40.00</td><td>-14.27</td><td>41.37</td><td>18.68</td><td>0.58</td><td>34.90</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>2</td><td>141.55</td><td>27.03</td><td>43.50</td><td>-16.47</td><td>42.23</td><td>18.27</td><td>1.25</td><td>34.72</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>3</td><td>198.78</td><td>24.84</td><td>43.50</td><td>-18.66</td><td>42.01</td><td>16.05</td><td>1.48</td><td>34.70</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>4</td><td>282.20</td><td>23.45</td><td>46.00</td><td>-22.55</td><td>37.78</td><td>18.57</td><td>1.74</td><td>34.64</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>5</td><td>823.46</td><td>29.78</td><td>46.00</td><td>-16.22</td><td>32.73</td><td>28.29</td><td>3.06</td><td>34.30</td><td>--</td><td>--</td><td>Peak</td></tr><tr><td>6</td><td>948.59</td><td>30.69</td><td>46.00</td><td>-15.31</td><td>31.99</td><td>29.74</td><td>3.26</td><td>34.30</td><td>--</td><td>--</td><td>Peak</td></tr></table>													Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark	Freq	Level	Line	Margin	Level	Factor	Loss	Factor				MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg			1	34.85	25.73	40.00	-14.27	41.37	18.68	0.58	34.90	--	--	Peak	2	141.55	27.03	43.50	-16.47	42.23	18.27	1.25	34.72	--	--	Peak	3	198.78	24.84	43.50	-18.66	42.01	16.05	1.48	34.70	--	--	Peak	4	282.20	23.45	46.00	-22.55	37.78	18.57	1.74	34.64	--	--	Peak	5	823.46	29.78	46.00	-16.22	32.73	28.29	3.06	34.30	--	--	Peak	6	948.59	30.69	46.00	-15.31	31.99	29.74	3.26	34.30	--	--
		Limit		Read		Ant	Cable	Preamp	APos	TPos	Remark																																																																																																										
Freq	Level	Line	Margin	Level	Factor	Loss	Factor																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m	dB	dB	cm	deg																																																																																																												
1	34.85	25.73	40.00	-14.27	41.37	18.68	0.58	34.90	--	--	Peak																																																																																																										
2	141.55	27.03	43.50	-16.47	42.23	18.27	1.25	34.72	--	--	Peak																																																																																																										
3	198.78	24.84	43.50	-18.66	42.01	16.05	1.48	34.70	--	--	Peak																																																																																																										
4	282.20	23.45	46.00	-22.55	37.78	18.57	1.74	34.64	--	--	Peak																																																																																																										
5	823.46	29.78	46.00	-16.22	32.73	28.29	3.06	34.30	--	--	Peak																																																																																																										
6	948.59	30.69	46.00	-15.31	31.99	29.74	3.26	34.30	--	--	Peak																																																																																																										



Appendix D. Duty Cycle Plots

Band	Duty Cycle(%)	T(ms)	1/T(kHz)	VBW Setting
Bluetooth LE 1Mbps	60.83	0.382	2.618	3KHz
Bluetooth LE 2Mbps	31.37	0.197	5.076	10KHZ

Bluetooth LE 1Mbps

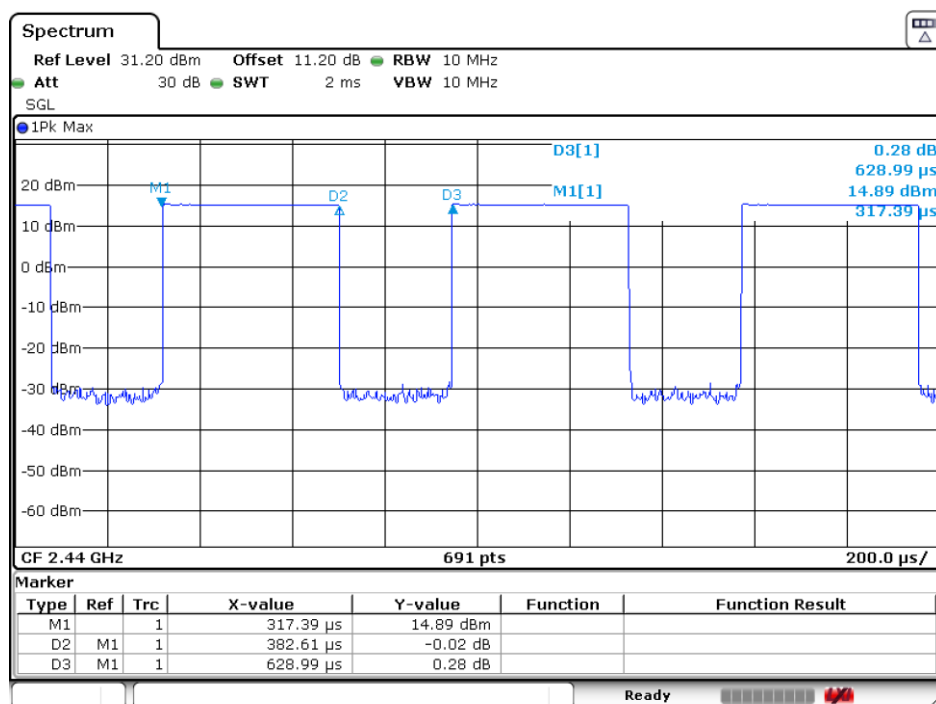



Bluetooth LE 2Mbps

