



MOBILE DEVICES BUSINESS

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT

Test Report Number – 18921-1

Report Date – September 5, 2006

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature: 

Name: Thanigaiselvan Palaniswami

Title: EMC Engineer

Date: September 5, 2006

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 1651-01

Table of Contents

<u>Description</u>	<u>Page</u>
Test Report Details	3
Applicable Standards	3
Summary of Testing	4
General and Special Conditions	4
Equipment and Cable Configuration	5
Measurement Procedures and Data	6
RF Power Output	7
Measurement results	7
Radiated Power	8
Measurement results	8
Occupied Bandwidth	9
Measurement results	10
Spurious Emissions at Antenna Terminals	19
Measurement results	20
Field Strength of Spurious Emissions	23
Measurement results	24
Frequency Stability	30
Measurement results	31
Field Strength of Spurious Emissions -Unintentional Radiators	34
Measurement results	35
AC Line Conducted Emissions	36
Measurement results	37
Appendix A - Radiated Emissions Test Setup Photos	46
Figure A.1 – Radiated Emissions Measurement	46
Figure A.2 – Substitution Measurement	46

Test Report Details

Tests Performed By: Motorola Mobile Devices business (MDb)
 Product Safety and Compliance Group
 600 North US Hwy 45
 Libertyville, IL 60048
 PH (847) 523-6167 Fax (847) 523-4538
 Motorola MDb FRN: 0004321311
 FCC Registration Number: 316588
 Industry Canada Number: IC3908-1

Tests Requested By: Motorola Inc.
 Mobile Devices Business
 600 North US Hwy 45
 Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: AMPS 800, CDMA 850, 1900 Bluetooth

FCC ID : IHDT56GS1

Serial Numbers: 1B172459, 1B172495, 1B17249C

Testing Complete Date: September 5, 2006

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- X Part 15 Subpart B – Unintentional Radiators
- X Part 22 Subpart H - Public Mobile Services
- X Part 24 Subpart E – Personal Communications Services

Applicable Standards: TIA EIA 137-A, TIA EIA 98-C, ANSI 63.4 2003, RSS-129 (CDMA).

Summary of Testing

Test #	Test Name	Pass/Fail
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	Pass
3	EIRP (Effective Isotropic Radiated Power)	Pass
4	Occupied Bandwidth	Pass
5	Spurious Emissions at Antenna Terminal	Pass
6	Field Strength of Spurious Emissions	Pass
7	Frequency Stability	Pass
8	Field Strength of Spurious Emissions from Unintentional Radiators	Pass
9	AC Line Conducted Emissions	Pass

Test #	Test Name	Margin with respect to the Limit
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	See results
3	EIRP (Effective Isotropic Radiated Power)	See results
3	Occupied Bandwidth	See Plots
4	Spurious Emissions at Antenna Terminal	6.5 dB
5	Field Strength of Spurious Emissions	17.5 dB
6	Frequency Stability	186 Hz
7	Field Strength of Spurious Emissions from Unintentional Radiators	Below noise floor
8	AC Line Conducted Emissions	See Plots

The margin with respect to the limit is the minimum margin for all modes and bands.

General and Special Conditions

The EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Manufacturer	Equipment Type	Model No.	Serial Number	Calibration Due Date
Rohde Schwarz	Receiver	ESI26	100001	3/08/07
Rohde Schwarz	Receiver	ESI40	100226	6/05/07
Hewlett Packard	EMC Analyzer	E7405	US39440191	1/05/07
Hewlett Packard	Signal Generator	83712A	3429A00286	6/6/07
A.H. Systems	DRG Horn Antenna	SAS 200/571	365	5/12/07
ETS.	Horn Antenna	3115	6222	3/03/07
ETS	Log-Periodic Antenna	3148	1188	6/05/07
ETS	Biconical Antenna	3110B	3370	3/03/07
Attenuator	Weinschel	2	AS-6 6675	6/6/07
Attenuator	Weinschel	2	AS-6 6677	11/10/06
Attenuator	Weinschel	2	AS-6 7075	1/31/07
Attenuator	Weinschel	2	AS-6 6675	6/06/07
Thermotron	Environmental Chamber	S-4	31580	1/31/07
Agilent	Power Meter	E4416A	GB41293246	02/03/07
Agilent	Power Sensor	E4412B	US38486321	02/03/07
ETS	LISN	3810/2NM	00062907	5/10/07
ETS	LISN	3810/2NM	00062912	5/10/07

All equipment is on a one-year calibration cycle.

Measurement Procedures and Data

As Per the “Preliminary Guidance for Reviewing Applications for Certifications of 3G Devices” released on May 9, 2006, RC1, RC3 and RC3 (FCH + SCH) CDMA modes were considered. The conducted power measurements (per steps 3, 4 & 10 of section 4.4.5.2 of 3GPP2 C.5.011 / TIA -98-E) show that the portable cellular phone FCC ID IHDT56GS1 has the same output conducted power for both CDMA modes.

		V323i			
		RC1		RC3	
Channel		SO2	SO55	SO2	SO55
800CDMA	1013	25.13	25.10	25.02	25.07
	384	25.13	25.20	25.11	25.14
	777	25.00	24.98	24.94	24.93
1900CDMA	25	24.82	24.89	24.90	24.92
	600	24.85	24.94	25.00	25.04
	1175	24.90	24.94	24.91	24.95

Per Motorola designs ;the maximum power, when in a mode that allows supplemental Channels will always be less that the RC3 / RC1 maximum conducted power limit.

RF POWER OUTPUT

Measurement Procedure

The RF output port of the equipment under test is directly coupled to the input of a Agilent power meter through a 20dB passive attenuator, adaptor (if needed), and specialized RF connector. The peak power output is measured for all channels.

CFR47 Part 2.1046

Measurement Results

AMPS 800

Frequency (MHz)	Power (dBm)
824.04	27.89
836.52	27.83
848.97	27.88

CDMA 800

Frequency (MHz)	Power (dBm)
824.70	25.05
836.52	25.06
848.31	25.09

CDMA 1900

Frequency (MHz)	Power (dBm)
1851.25	25.02
1880.00	25.06
1908.75	25.08

RADIATED POWER (EIRP AND ERP)

Measurement Procedure

The phone was tested in a 16’ anechoic chamber with a 2-axis position system that permits taking complete spherical scans of the EUT’s radiation patterns. For all tests, the phone was supported in a free space type environment, vertically oriented in the chamber. Tests were done for AMPS 800, CDMA 800 and CDMA 1900.

CDMA and Analog measurements were made with the phone placed in a call using the CMU 200 mobile station test set. The phone was weakly coupled to the test set and configured to transmit in full data rate mode. Radiated power was measured at each 15 degree step. The radiated power was measured using a Gigatronics 8542C power meter in “Mod Avg” mode for CDMA and “CW Mode” for Analog modulation. . From these measurements, the software calculates the angle at which maximum radiated power occurs for each case, and the radiated power at this angle was extracted from the data. To get ERP (effective radiated power referenced to a half-wave dipole), subtract 2.1 dB from these numbers.

Measurement Results

CDMA 800:

<u>Frequency</u>	<u>ERP</u>
824.70 MHz:	23.54 dBm
836.52 MHz:	24.45 dBm
848.31 MHz:	22.71 dBm

CDMA 1900:

<u>Frequency</u>	<u>EIRP</u>
1851.25 MHz:	26.97 dBm
1880.00 MHz:	26.26 dBm
1908.75 MHz:	26.53 dBm

800 Analog:

<u>Frequency</u>	<u>ERP</u>
824.04 MHz:	23.51 dBm
836.52 MHz:	24.92 dBm
848.97 MHz:	23.95 dBm

For all measurement, calibration was performed via gain substitution with a half-wave dipole.

BAND/TECHNOLOGY	MAXIMUM EIRP(dBm)	MAXIMUM ERP (dBm)
800 CDMA	26.55	24.45
800 Analog	27.02	24.92
1900 CDMA	26.97	24.87

OCCUPIED BANDWIDTH

Measurement Procedure

The RF output port of the equipment under test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. The analyzer is set for Peak Detector and each trace is set for Max Hold. A fully charged battery was used for the supply voltage.


The middle channel within the designated frequency block was measured. For digital modulation, the lower and upper band edge plots are displayed.

Measurement Results


Attached

Measurement Results – AMPS


AMPS - Unmodulated Carrier – Channel 384 (836.52 MHz)

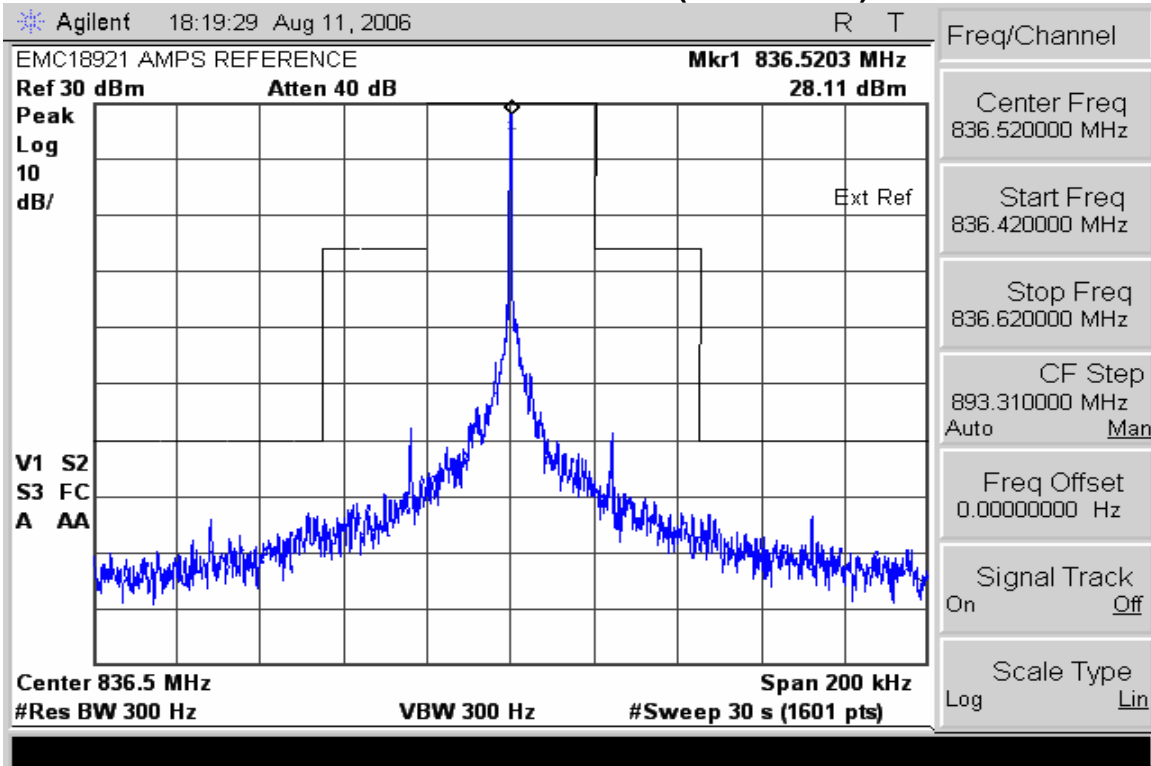


AMPS - Supervisory Audio Tone – Channel 384 (836.52 MHz)

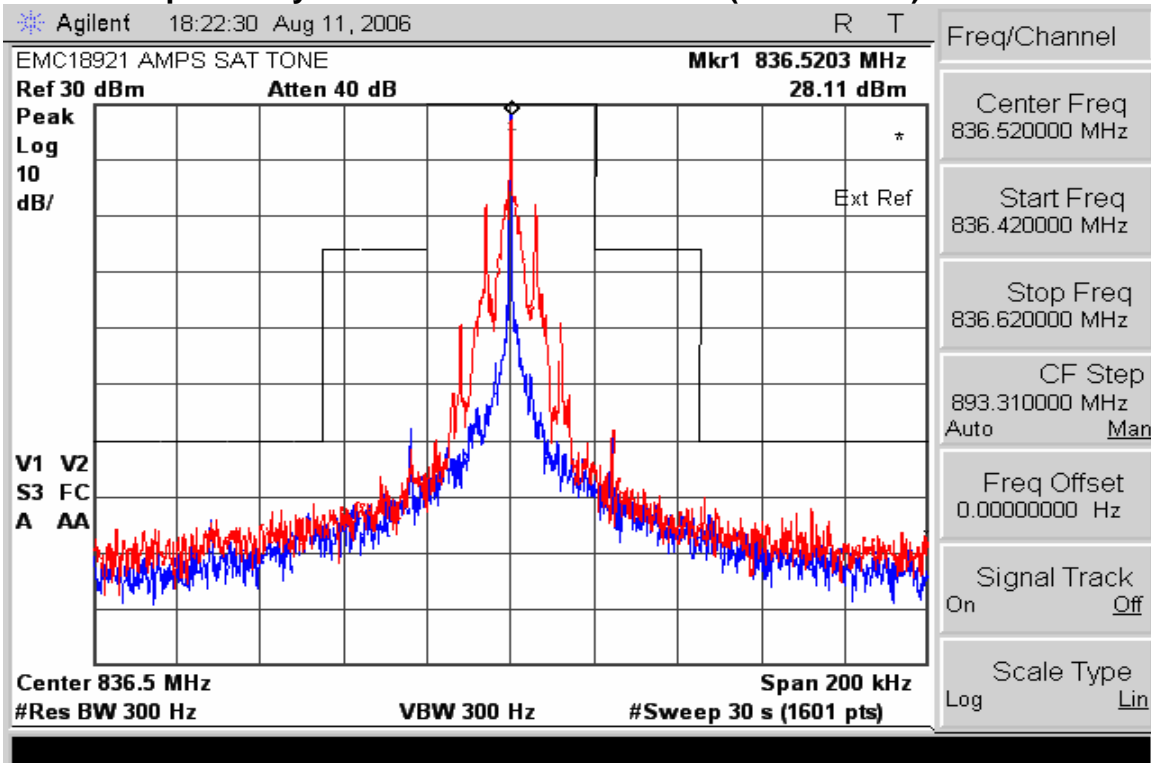


AMPS - Voice – Channel 384 (836.52 MHz)

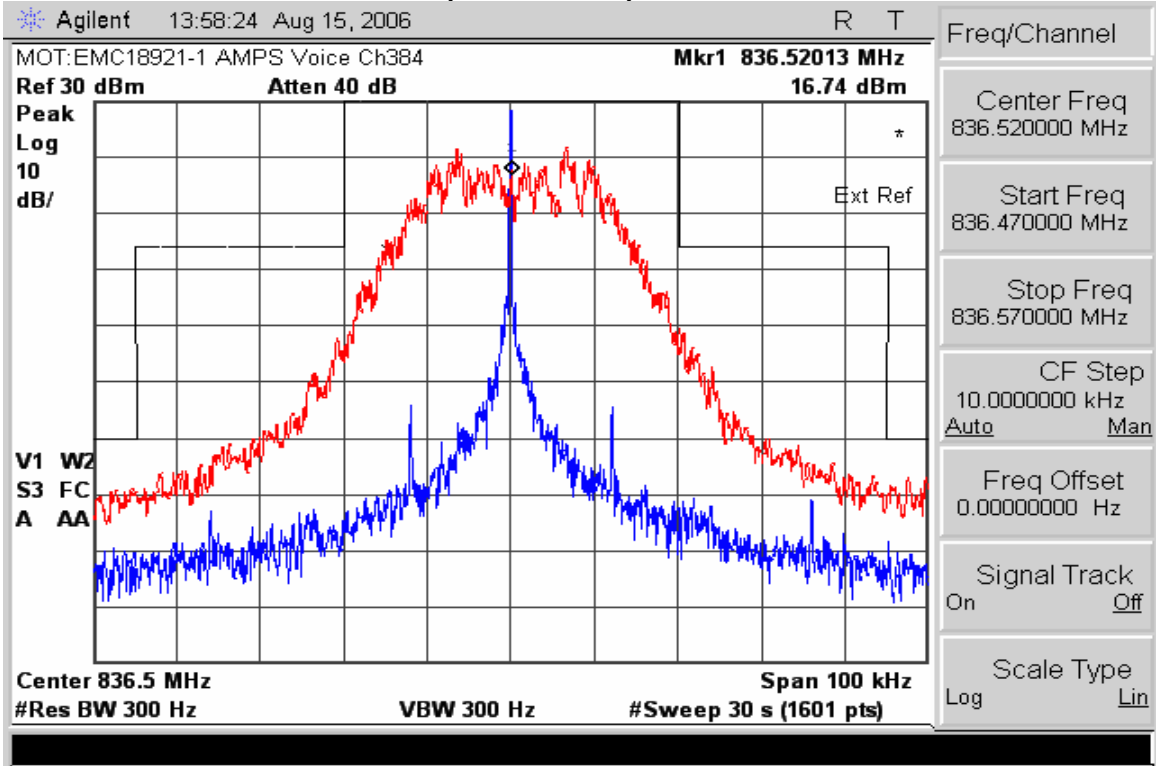


AMPS – Signaling Tone – Channel 384 (836.52 MHz)

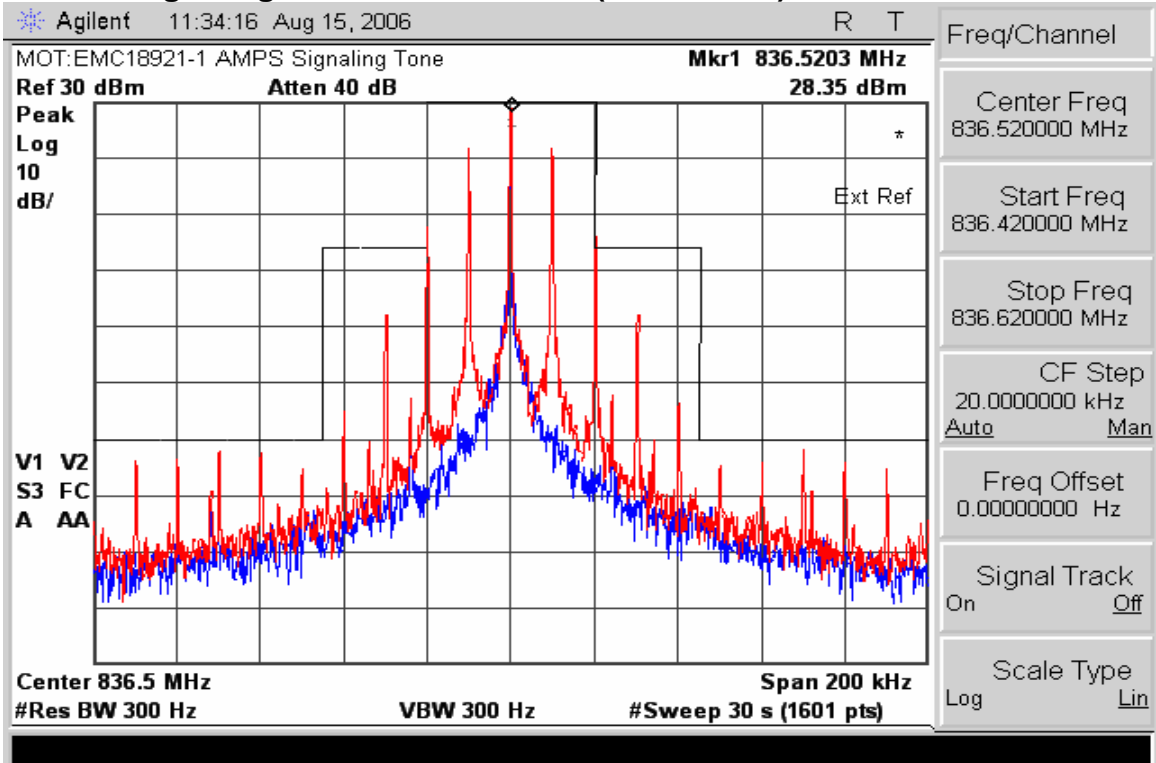


AMPS – 10kb/s Wideband Data – Channel 384 (836.52 MHz)

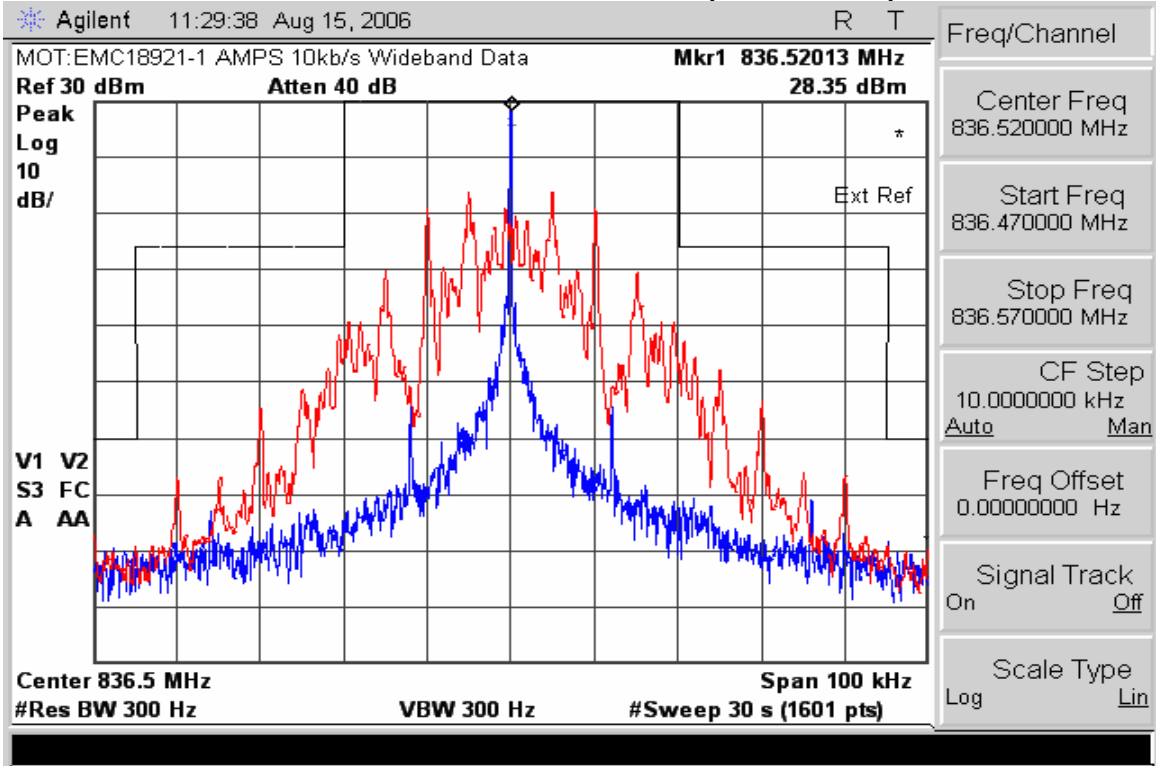

AMPS – Lower Band Edge – Channel 991 (824.04 MHz)

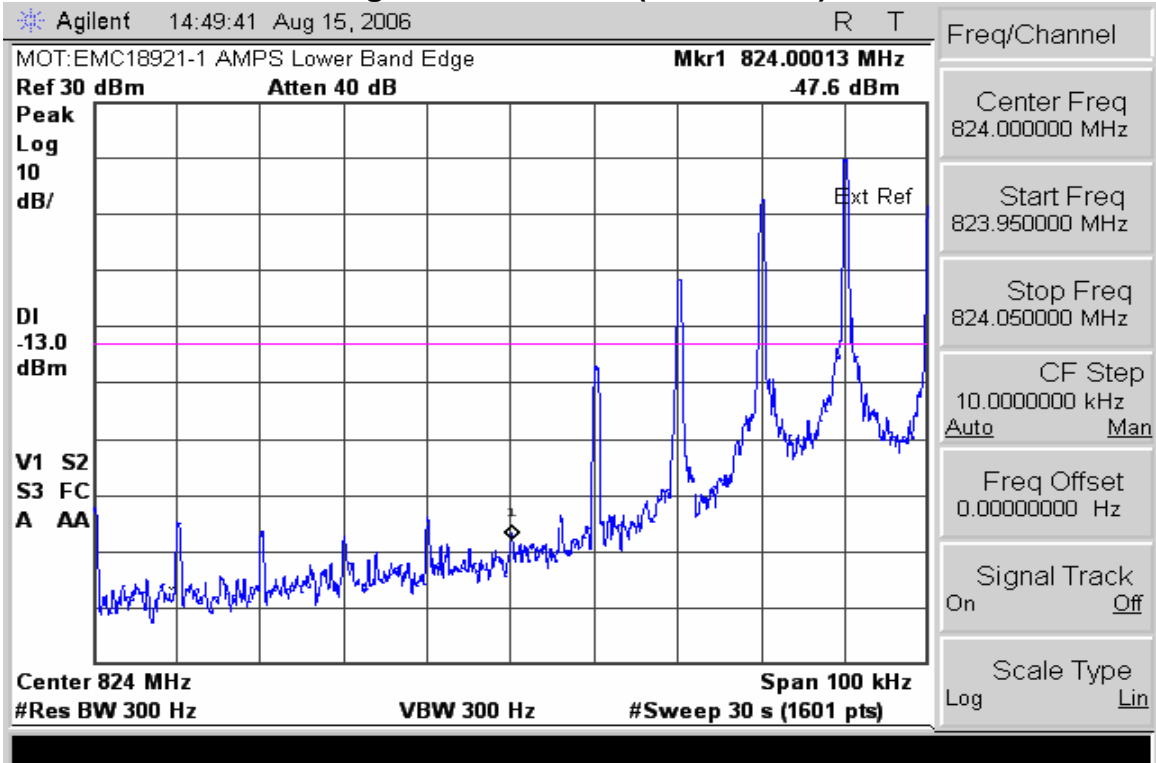

AMPS – Upper Band Edge – Channel 799 (848.97 MHz)

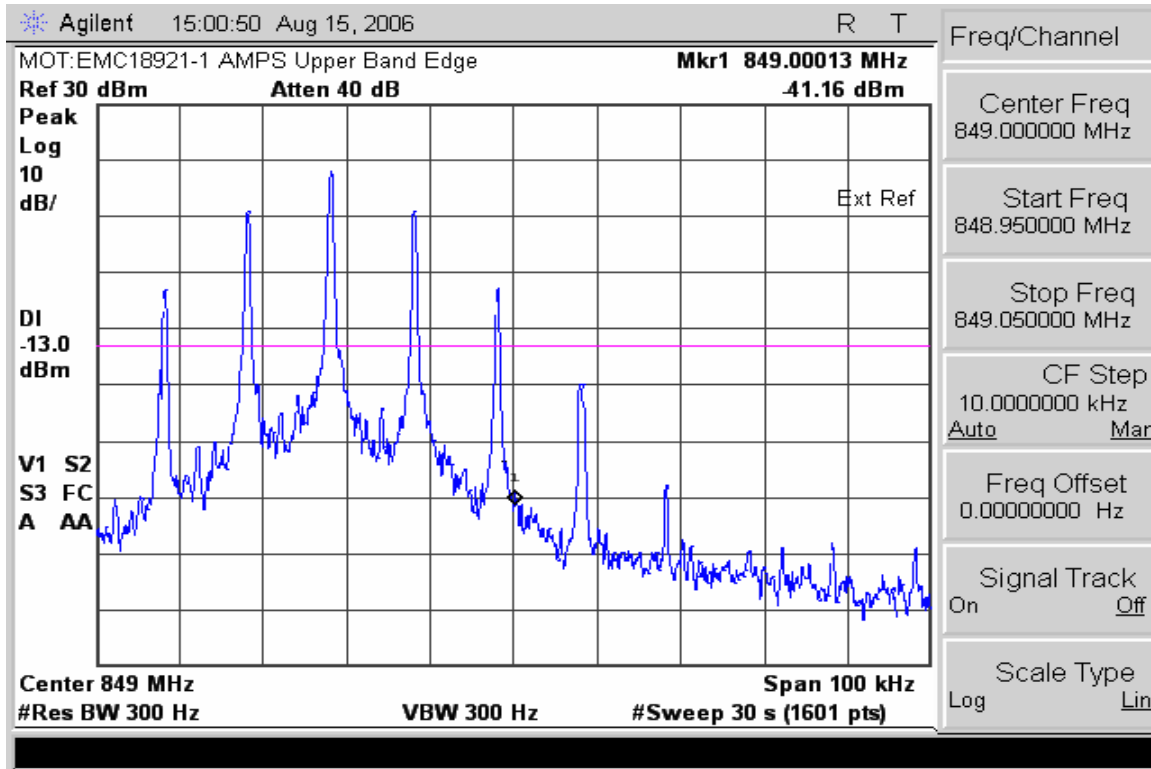


Measurement Results – CDMA 800


Plot	Equipment Settings					
	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Sweep Points (#)	Trace Mode	Detector	Samples (≥ #)
Reference Plot - CDMA 800	3000	Auto	2001	Max Hold	Peak	100
OCBW - CDMA 800	30	Auto	1601	Max Hold	Peak	100
Lower Band Edge - CDMA 800	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - CDMA 800	1	Auto	2004	Max Hold	Peak	30
Reference Plot - CDMA 1900	300	Auto	1001	Max Hold	Peak	30
OCBW - CDMA 1900	3	Auto	1001	Max Hold	Peak	30
Lower Band Edge - CDMA 1900	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - CDMA 1900	1	Auto	2004	Max Hold	Peak	30

- Notes: 1) When the video bandwidth is set to Auto the video bandwidth self adjusts for ³ the resolution bandwidth.
- 2) The plotted data shown for the band edge measurements is representative of data taken with a true 13 kHz resolution bandwidth filter. The raw data was taken using a 1 kHz resolution bandwidth and was integrated to produce a response representative of data taken using a true 13 kHz resolution bandwidth filter.


CDMA 800 – Reference Level Plot – Channel 384 (836.52 MHz)

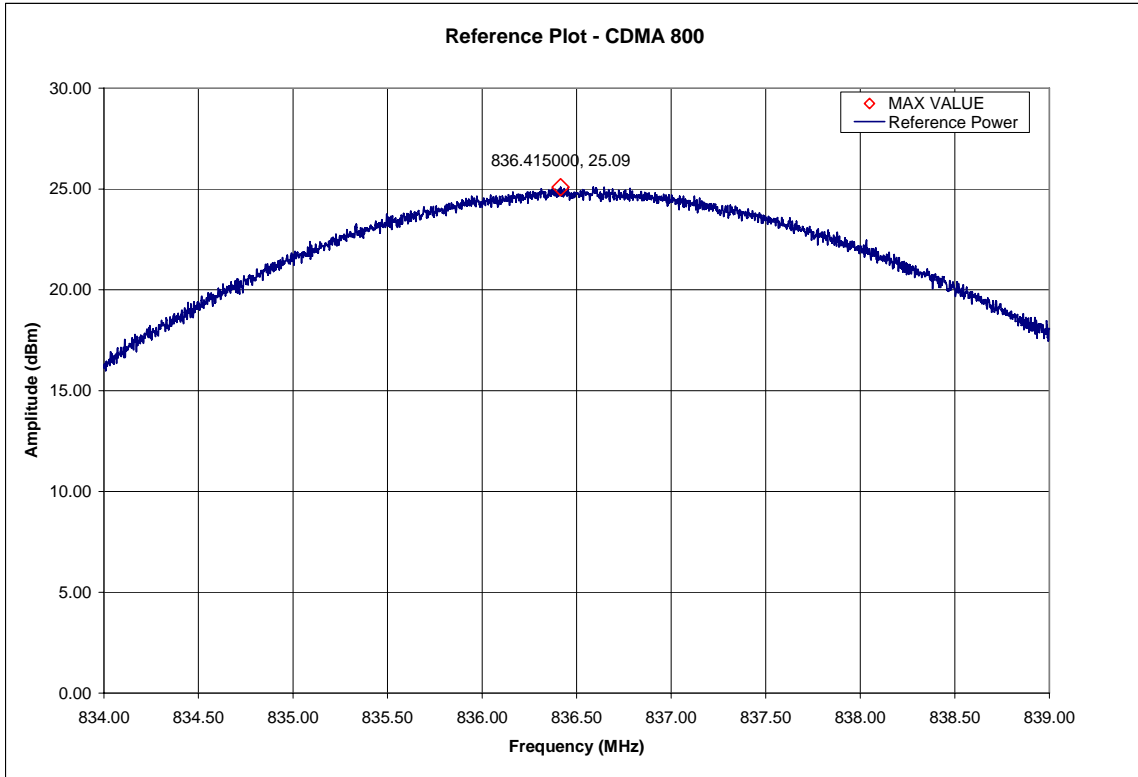


CDMA 800 – Channel 384 (836.52 MHz) – Occupied Bandwidth

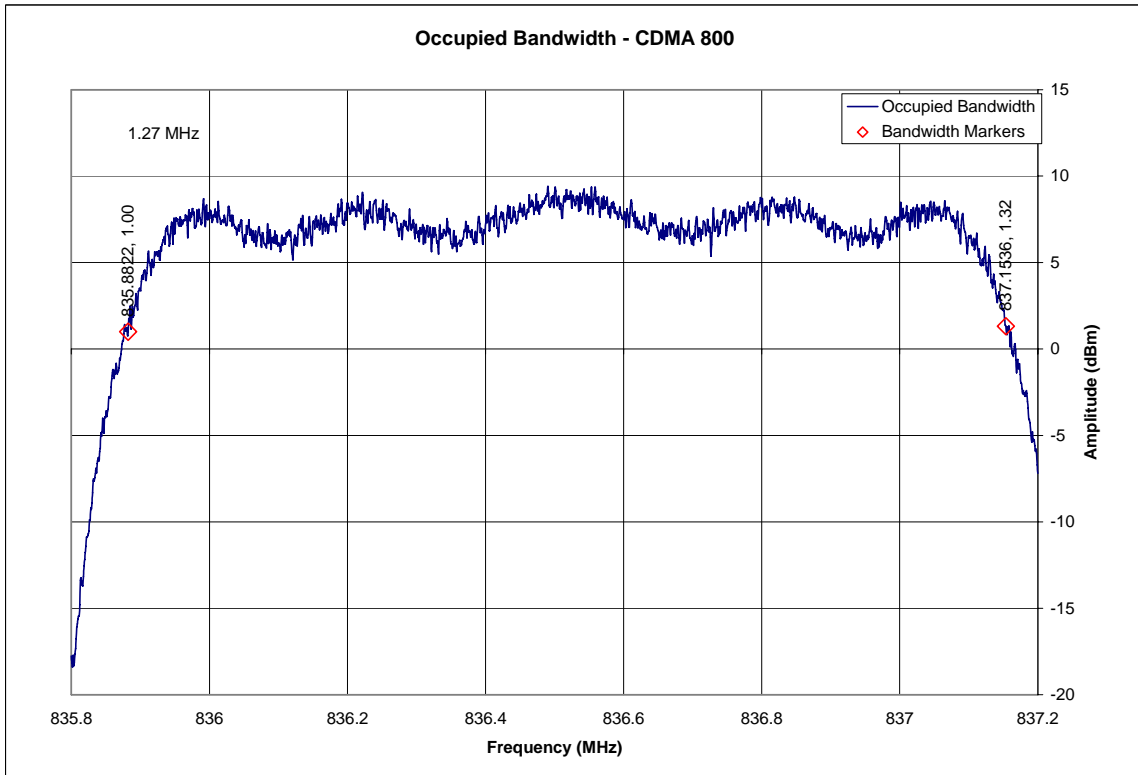

CDMA 800 – Lower Band Edge – Channel 1013 (824.7 MHz)

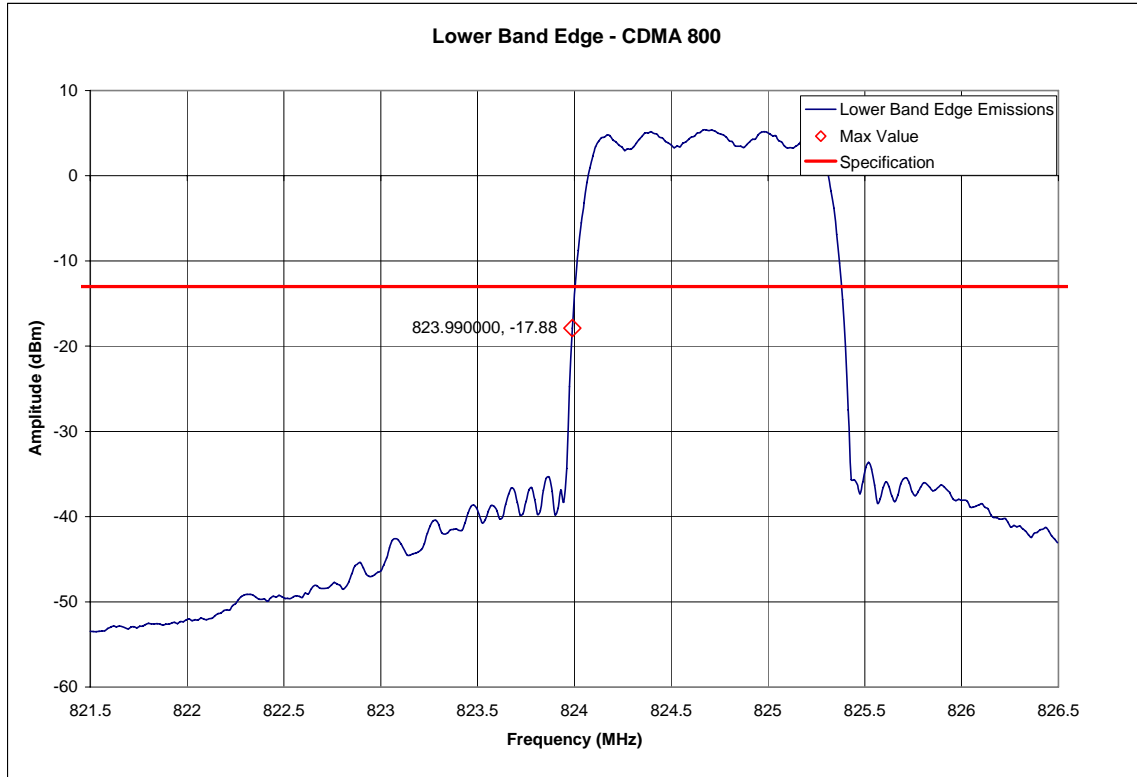


CDMA 800 – Upper Band Edge – Channel 777 (848.31 MHz)

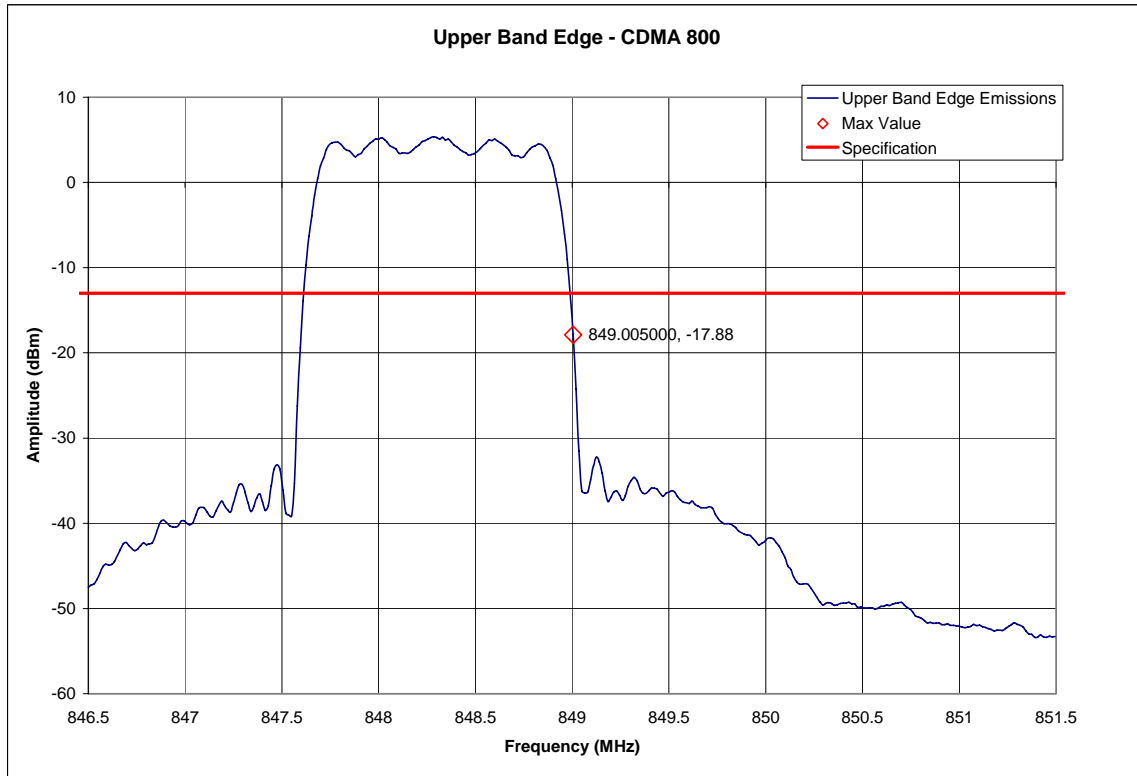


Measurement Results – CDMA 1900


CDMA 1900 – Channel 600 (1880.00 MHz) – Occupied Bandwidth

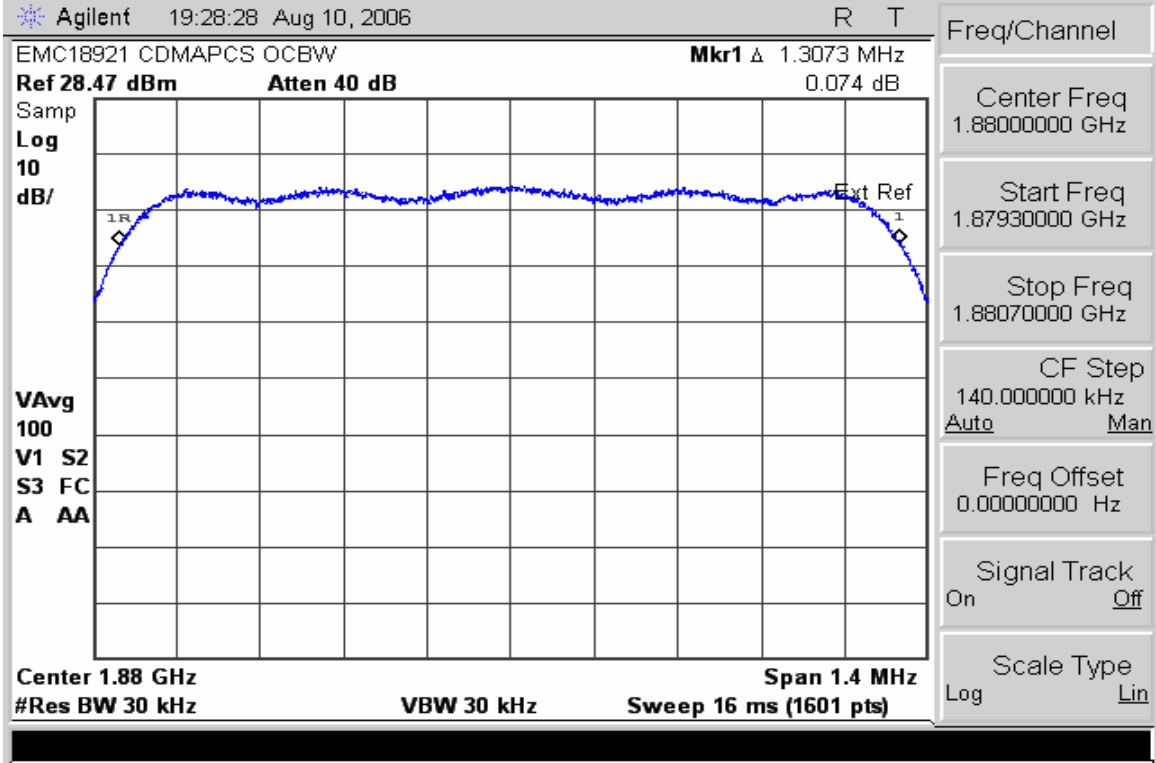

CDMA 1900 – Lower Band Edge – Channel 25 (1851.25 MHz)

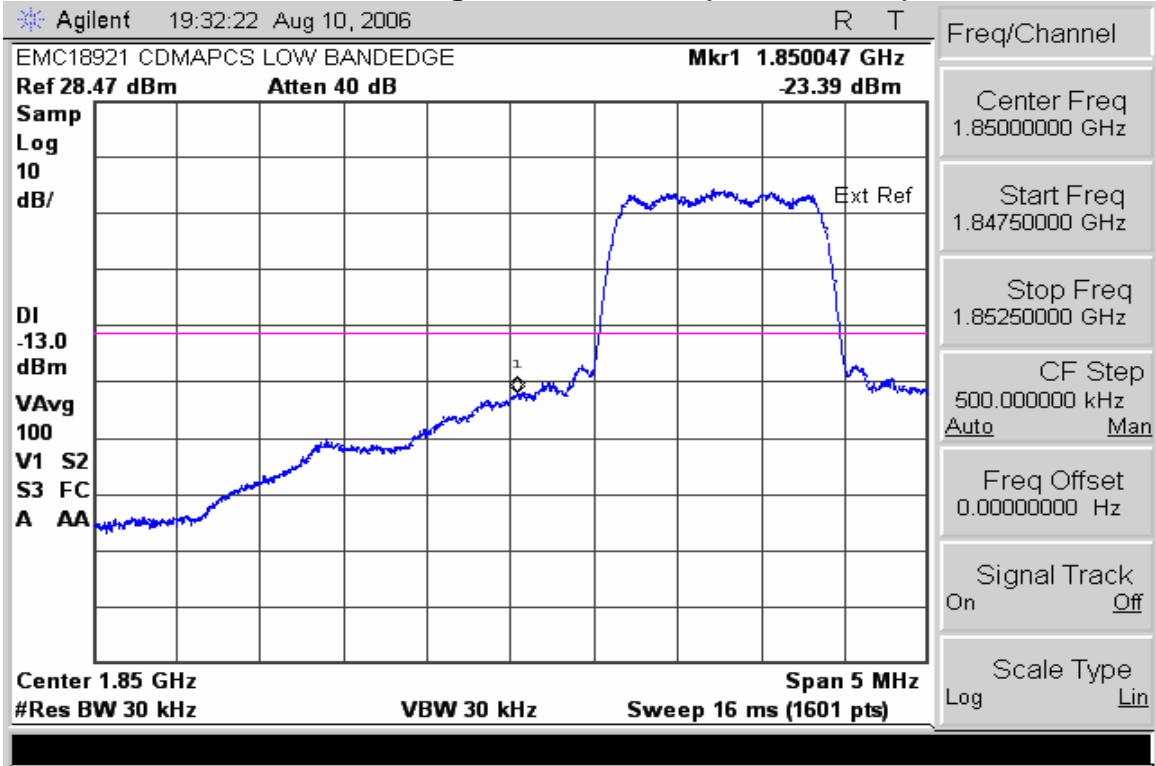

CDMA 1900 – Upper Band Edge – Channel 1175 (1908.75 MHz)

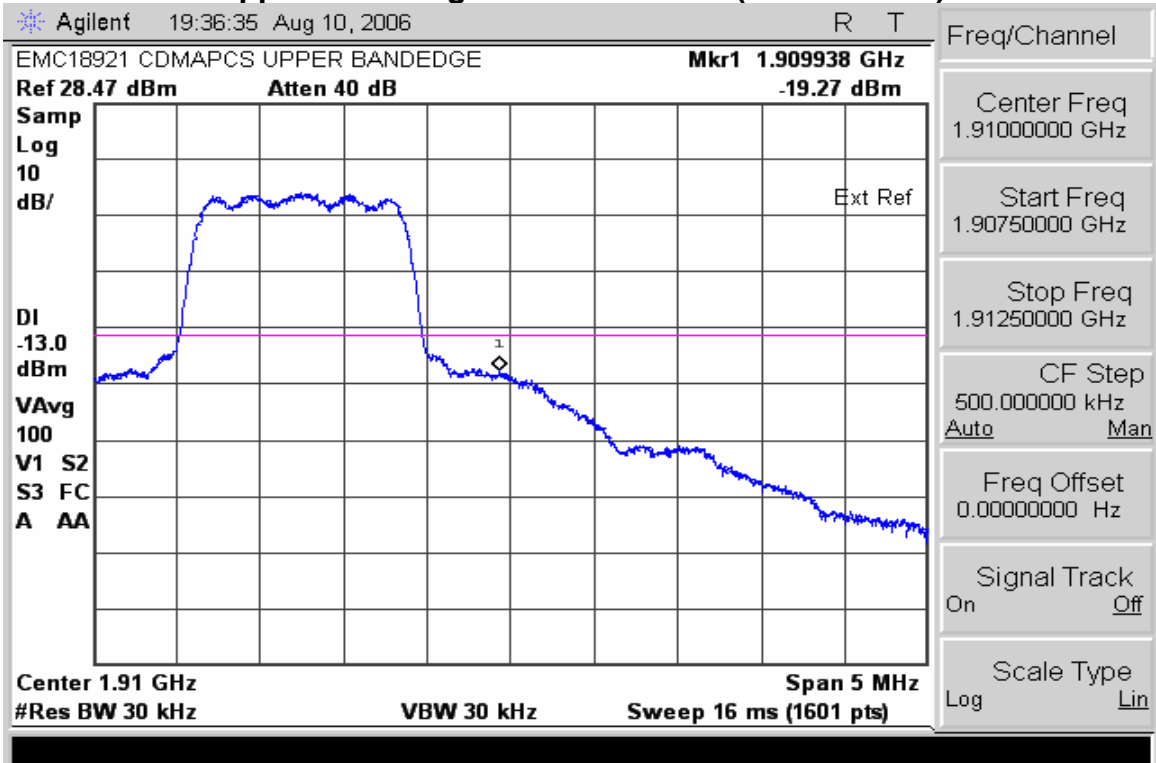

SPURIOUS EMISSIONS AT ANTENNA TERMINALS**Measurement Procedure**

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.

The spectrum analyzer settings were as follows:

Units	dBm
Divisions	10 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto


Measurement Results

Attached

Measurement Results
Modulation: AMPS 800

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-35.4
3rd harmonic	-13	-36.0
4th harmonic	-13	-43.0
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

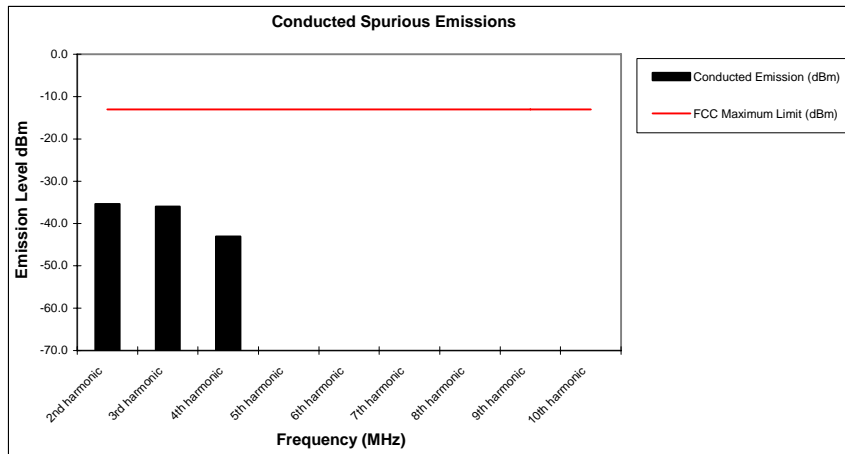

Notes:


1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results
Modulation: CDMA 800

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-36.4
3rd harmonic	-13	-37.3
4th harmonic	-13	-44.9
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

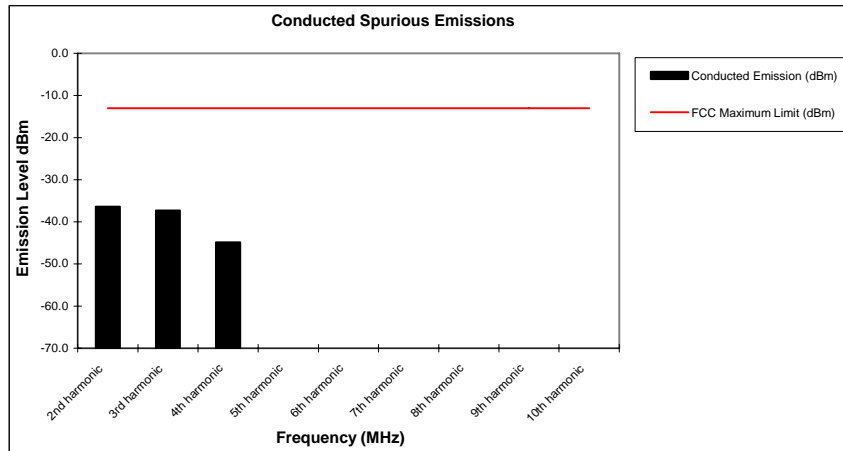

Notes:


1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results
Modulation: CDMA 1900

Conducted Spurious and Harmonic Emissions

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-19.5
3rd harmonic	-13	-47.4
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

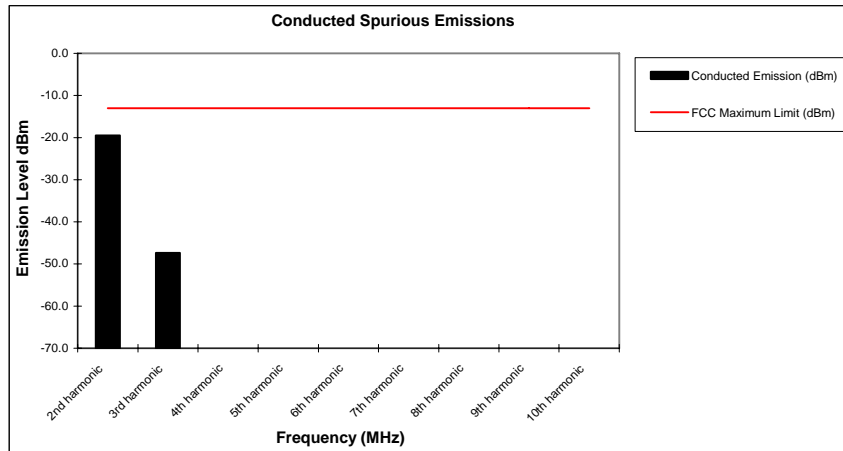

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

FIELD STRENGTH OF SPURIOUS EMISSIONS

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

The settings of the receiver were as follows:

Units	dBm
Divisions	5 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto

Measurement Results


Attached

Measurement Results
Modulation: AMPS 800

Test Mode - Antenna Extended

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-49.2	-41.2
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

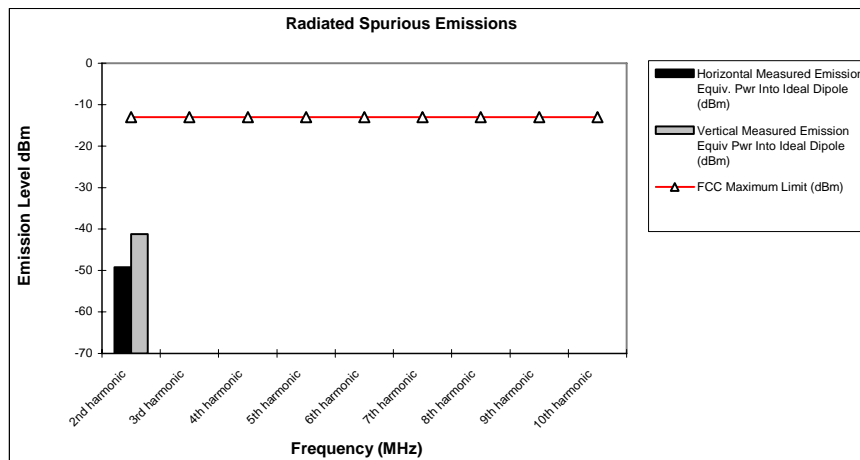

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results
Modulation: AMPS 800

Test Mode - Antenna Retracted

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	-50.5
3rd harmonic	-13	-49.5	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

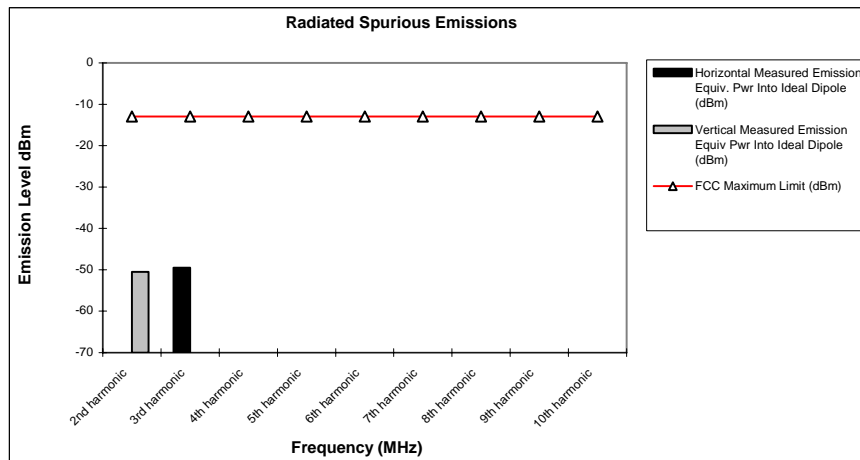

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results
Modulation: CDMA 800

Test Mode - Antenna Extended

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	-38.2
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

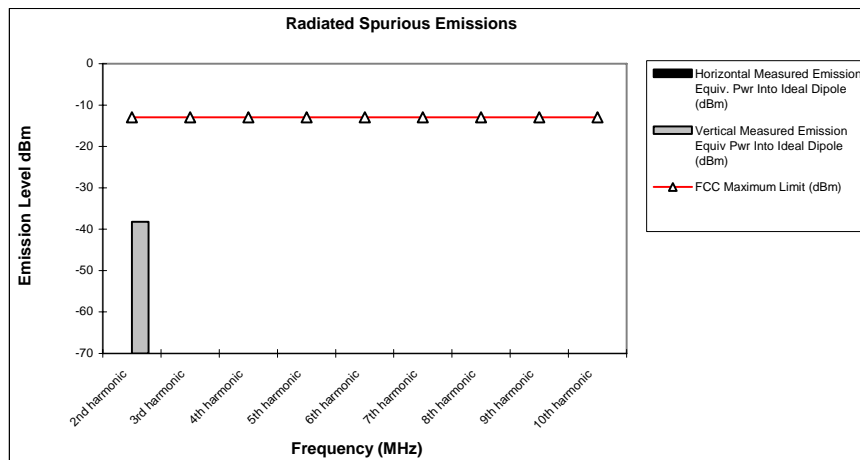

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results
Modulation: CDMA 800

Test Mode - Antenna Retracted

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	-46.9
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

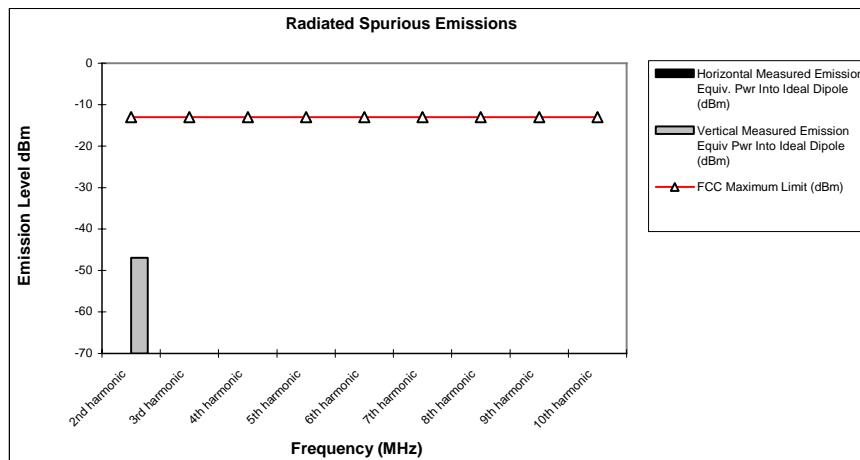

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results
Modulation: CDMA 1900

Test Mode - Antenna Extended

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

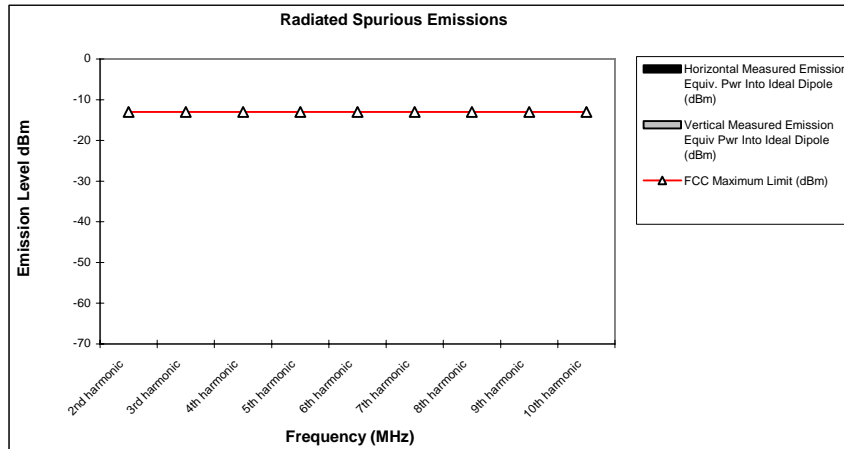

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.


The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results
Modulation: CDMA 1900

Test Mode - Antenna Retracted

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-28.3	-30.5
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

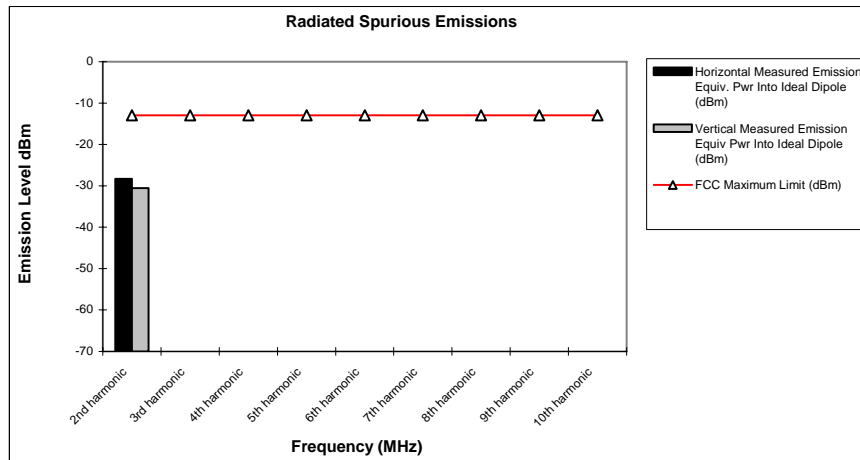

Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

FREQUENCY STABILITY**Measurement Procedure**

The equipment under test is placed in an environmental chamber. The antenna port of the Equipment Under Test is directly coupled to the input of the measurement equipment through a specialized RF connector. A power supply is attached as the primary voltage supply.

Frequency measurements are made at the extremes of the temperature range -30°C to $+60^{\circ}\text{C}$ and at intervals of 10°C with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured.

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured. A battery eliminator was used for the input supply voltage.

Measurement Results


Attached

Measurement Results
Modulation: AMPS 800

Frequency Stability

Mode: Analog **Operating Frequency:** 836.52 MHz
Channel: 384 **Deviation Limit (PPM):** 2.5ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	186.00	0.222	100%	3.60
-20 C	105.00	0.126	100%	3.60
-10 C	92.00	0.110	100%	3.60
0 C	63.00	0.075	100%	3.60
10 C	64.00	0.077	100%	3.60
20 C	81.00	0.097	100%	3.60
30 C	79.00	0.094	100%	3.60
40 C	102.00	0.122	100%	3.60
50 C	114.00	0.136	100%	3.60
60 C	69.00	0.082	100%	3.60
20 C	98.00	0.117	Battery Endpoint	3.50

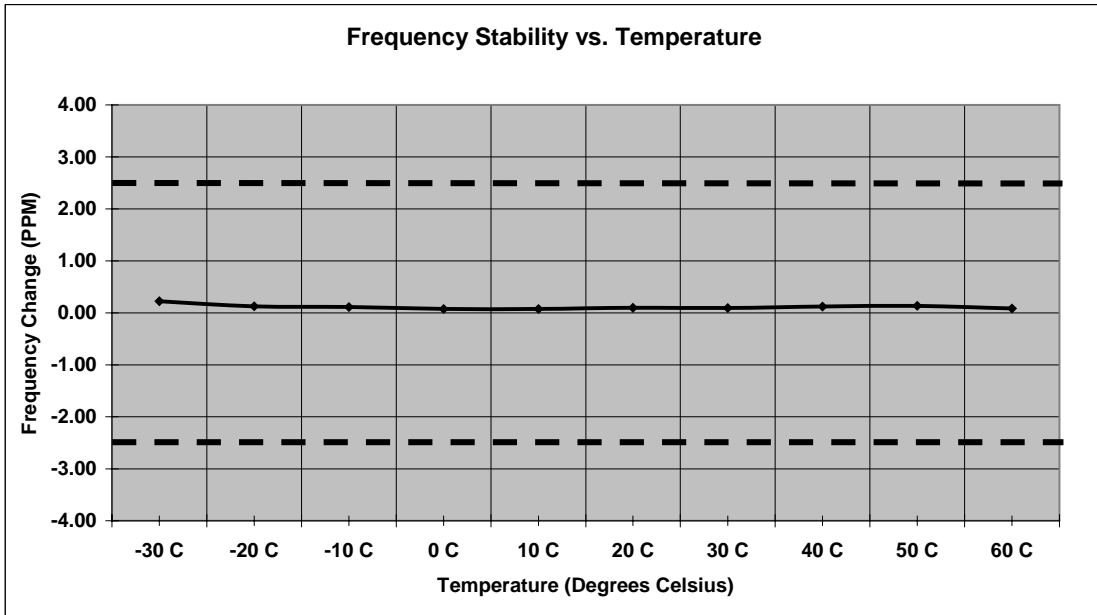


Measurement Results
Modulation: CDMA 800

Frequency Stability

Mode: CDMA 800 **Operating Frequency:** 836.52 MHz
Channel: 384 **Deviation Limit (PPM):** 0.359ppm (+/-300 Hz)

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	6.20	0.007	100%	3.60
-20 C	6.80	0.008	100%	3.60
-10 C	5.80	0.007	100%	3.60
0 C	-6.70	-0.008	100%	3.60
10 C	-4.90	-0.006	100%	3.60
20 C	-5.40	-0.006	100%	3.60
30 C	5.10	0.006	100%	3.60
40 C	6.60	0.008	100%	3.60
50 C	-5.80	-0.007	100%	3.60
60 C	8.10	0.010	100%	3.60
20 C	6.20	0.007	Battery Endpoint	3.35

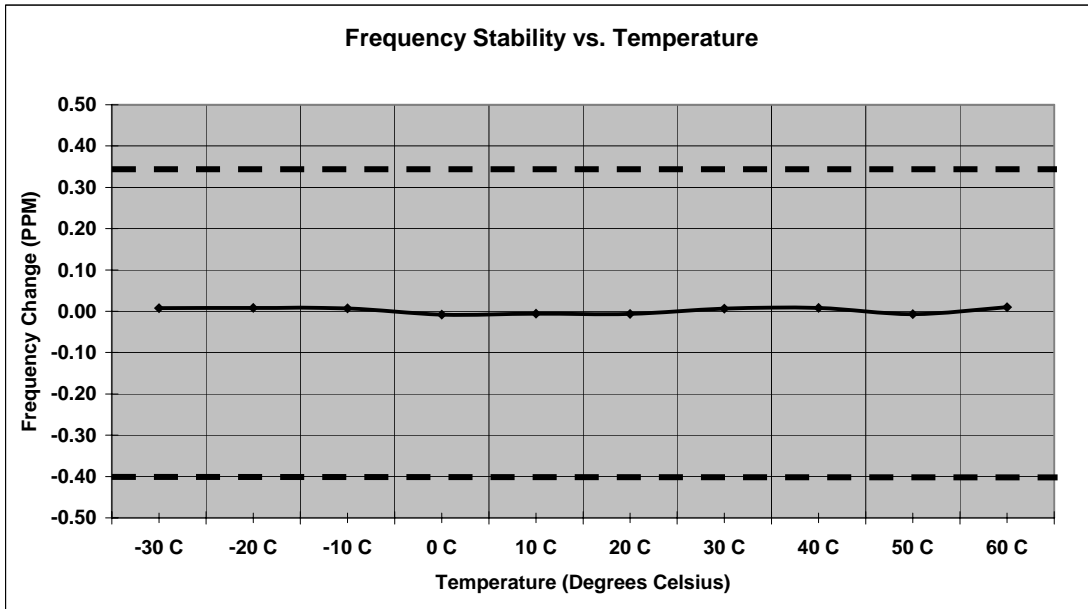


Measurement Results
Modulation: CDMA 1900

Frequency Stability

Mode: CDMA 1900 **Operating Frequency:** 1880.0 MHz
Channel: 600 **Deviation Limit (PPM):** 0.08ppm (+/-150Hz)

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	13.20	0.007	100%	3.60
-20 C	17.80	0.009	100%	3.60
-10 C	13.90	0.007	100%	3.60
0 C	13.80	0.007	100%	3.60
10 C	14.30	0.008	100%	3.60
20 C	11.10	0.006	100%	3.60
30 C	12.30	0.007	100%	3.60
40 C	13.20	0.007	100%	3.60
50 C	14.40	0.008	100%	3.60
60 C	14.30	0.008	100%	3.60
20 C	4.80	0.003	Battery Endpoint	3.35

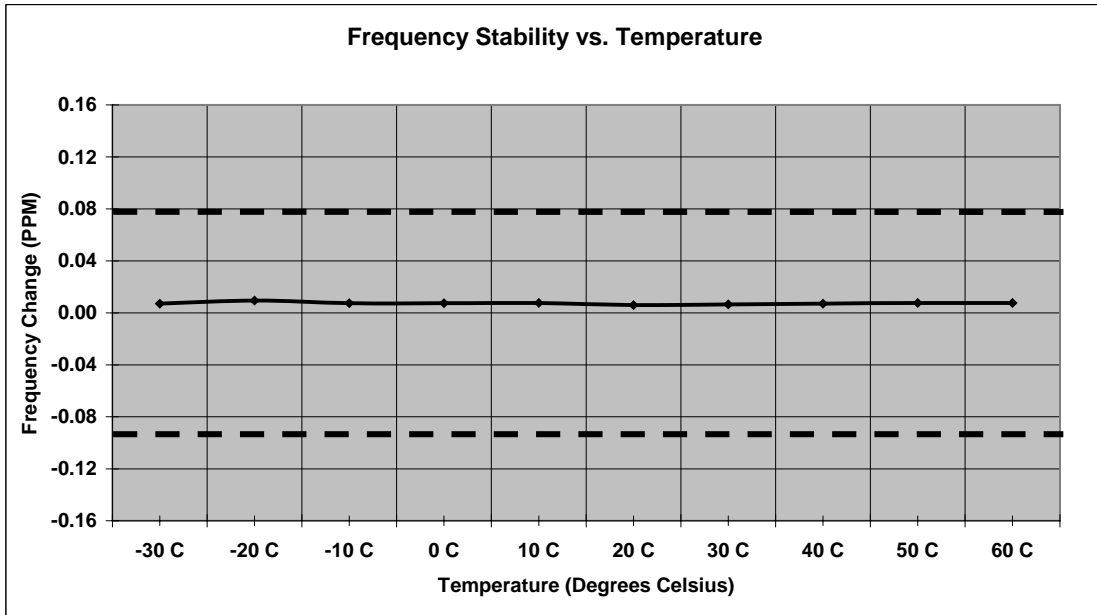

FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS**Measurement Procedure**

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna. A fully charged battery was used for the supply voltage.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.


$$\text{Field Strength (dBuV/m)} = \text{EMI Receiver Level (dBuV)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Antenna Correction Factor (1/m)}$$
Measurement Results

Attached

Measurement Results
All Modulation Schemes

Receiver Radiated Spurious Emissions

Frequency (MHz)	FCC Maximum Limit (dBuV/m)	Horizontal Measured Field Strength (dBuV/m)	Vertical Measured Field Strength (dBuV/m)
Local Oscillator	54	*	*
2nd harmonic	54	*	*
3rd harmonic	54	*	*
4th harmonic	54	*	*
5th harmonic	54	*	*
6th harmonic	40	*	*
7th harmonic	40	*	*
8th harmonic	40	*	*
9th harmonic	40	*	*
10th harmonic	40	*	*

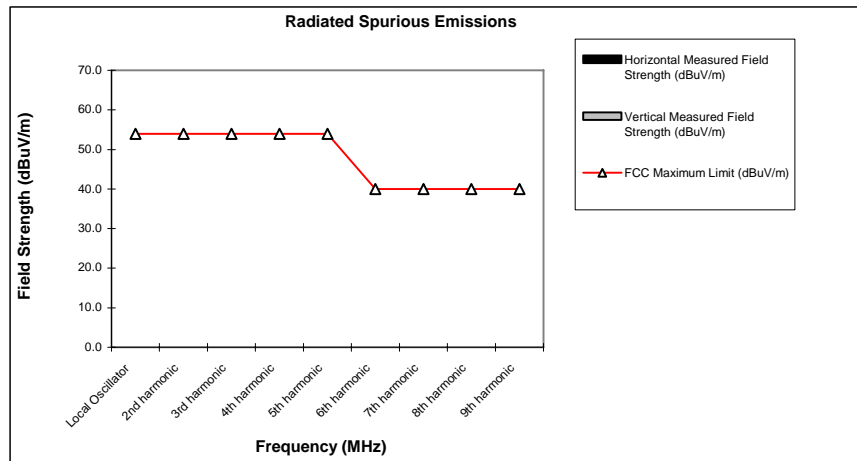

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific frequency for the low, mid, and high channels.

AC LINE CONDUCTED EMISSIONS

Measurement Procedure

Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50 Ω LISN port, where permitted, terminated into a 50 Ω noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.


All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50 Ω measuring port is terminated by a 50 Ω radio-noise meter or a 50 Ω resistive load. All other ports are terminated in 50 Ω .

Detectors – Quasi Peak and Average


Measurement Results

See attached:


AMPS Channel 991 - Tx Mode - Line Coupling

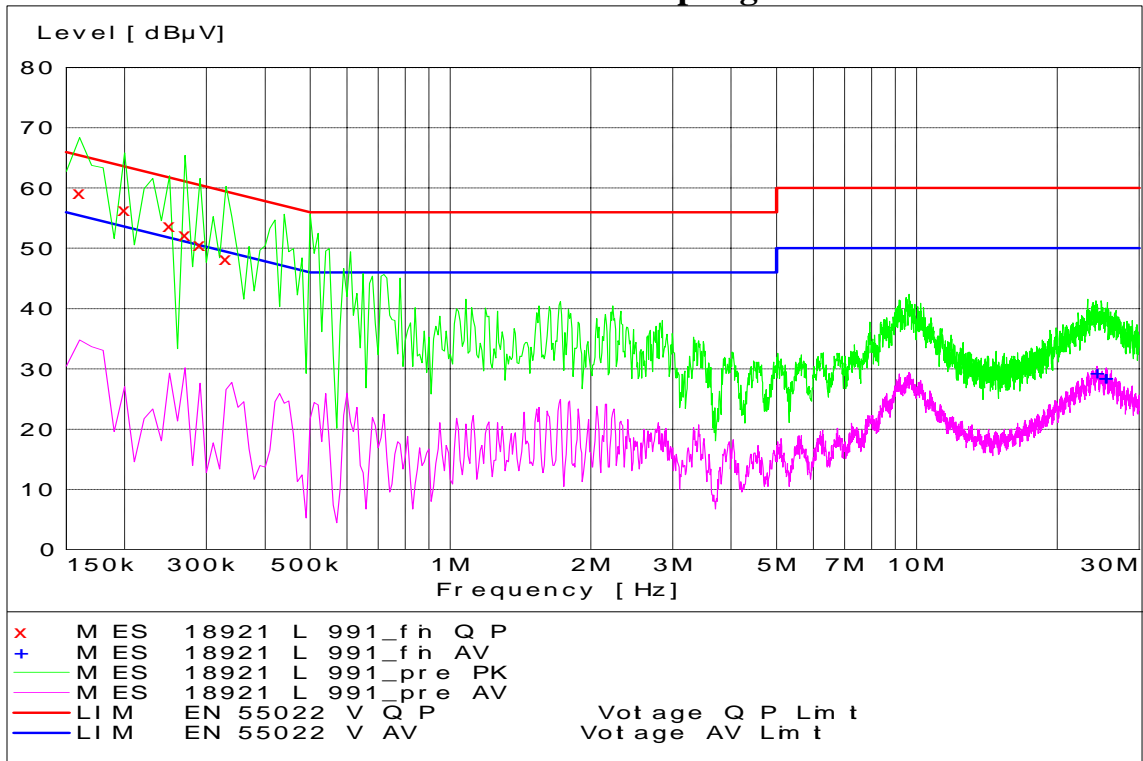


AMPS Channel 991 - Tx Mode - Neutral Coupling

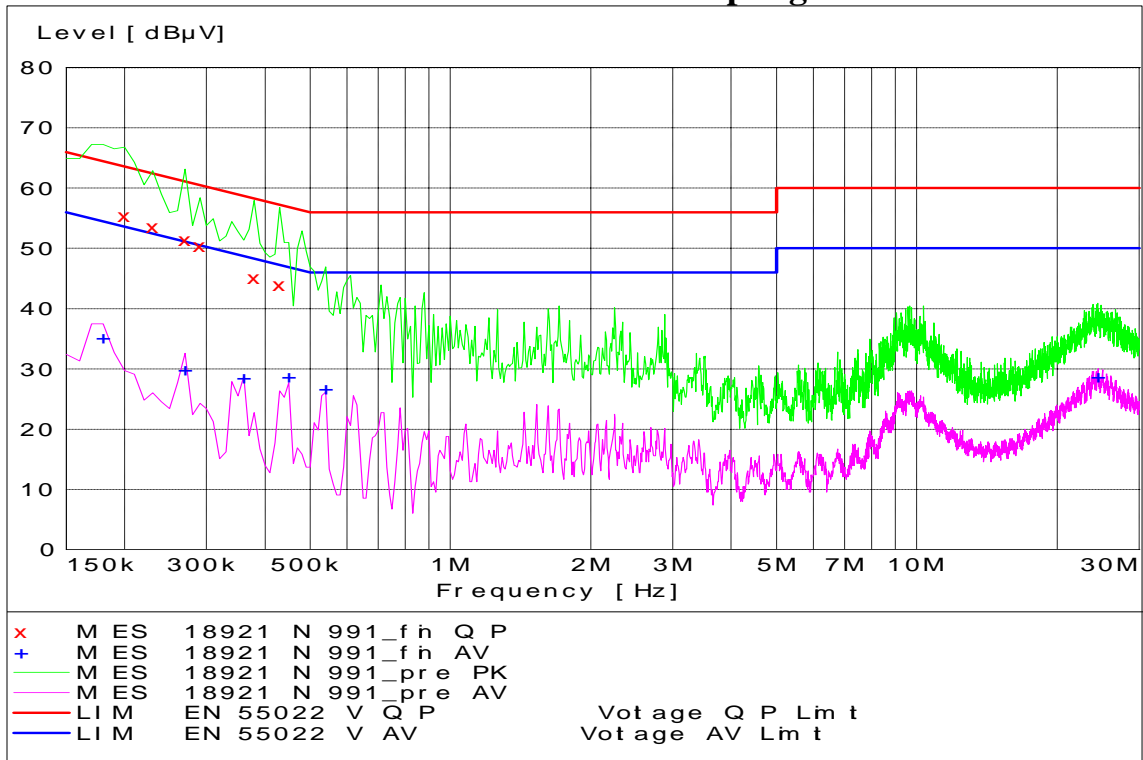


AMPS Channel 384 - Tx Mode - Line Coupling

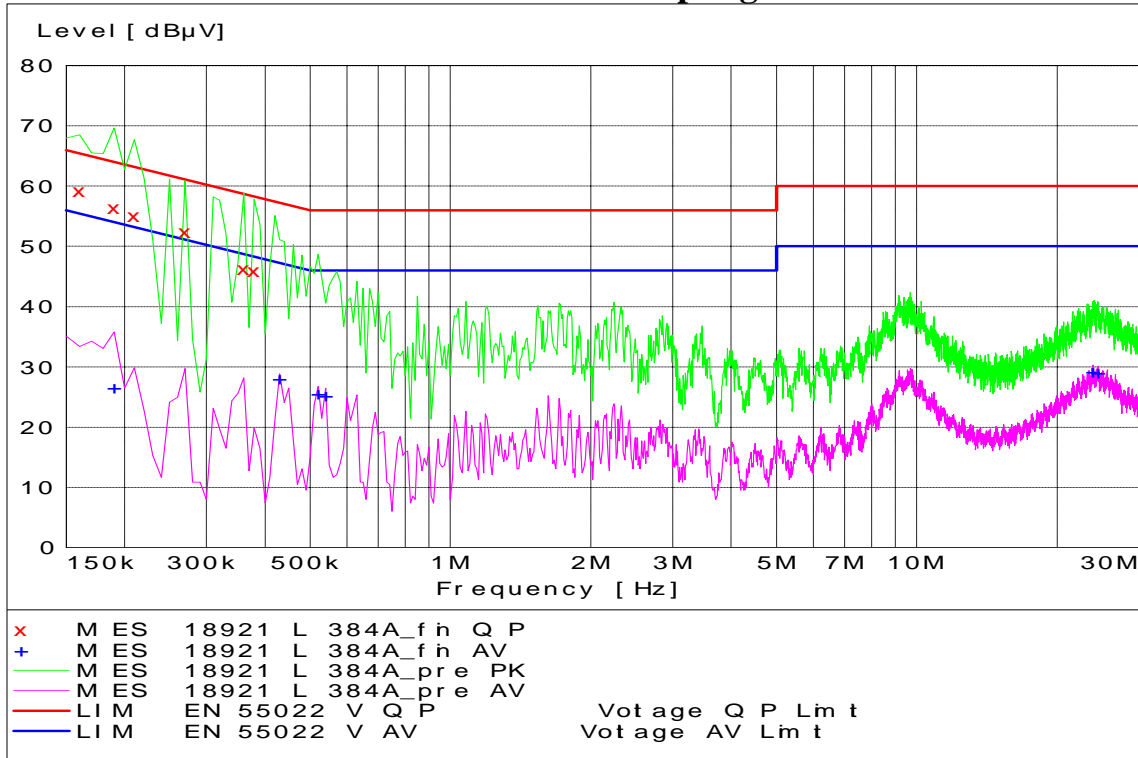


AMPS Channel 384 - Tx Mode - Neutral Coupling

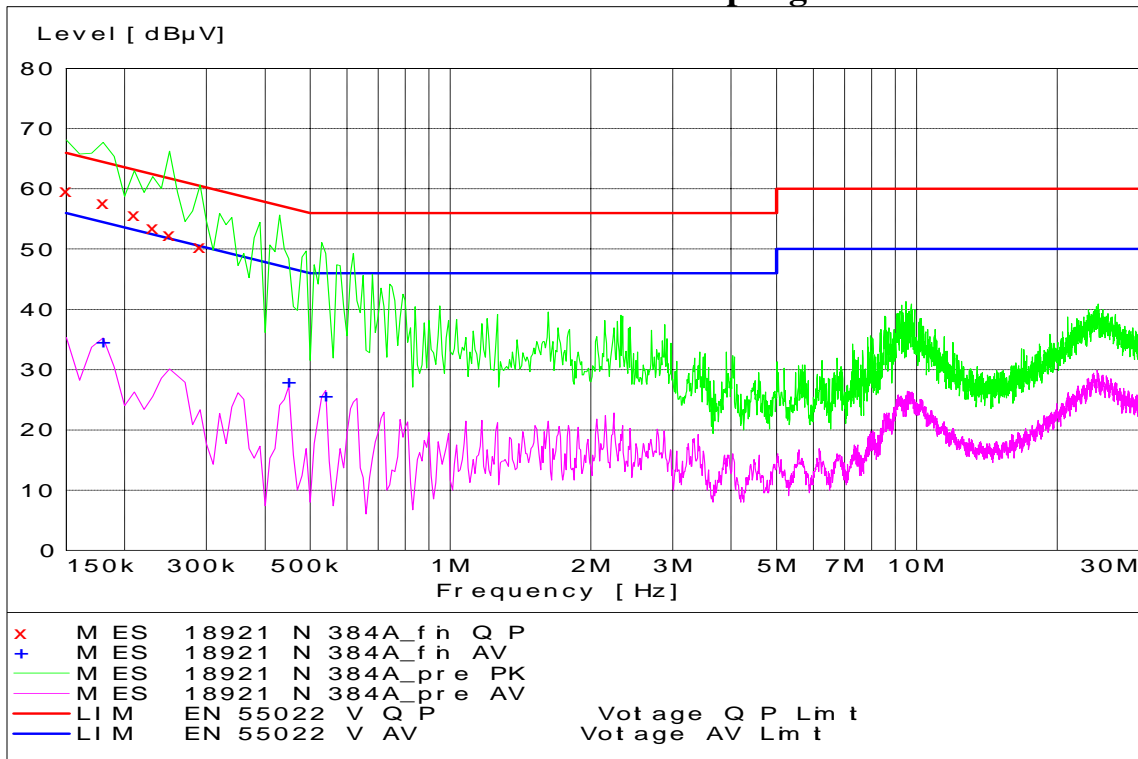


AMPS Channel 799 - Tx Mode - Line Coupling

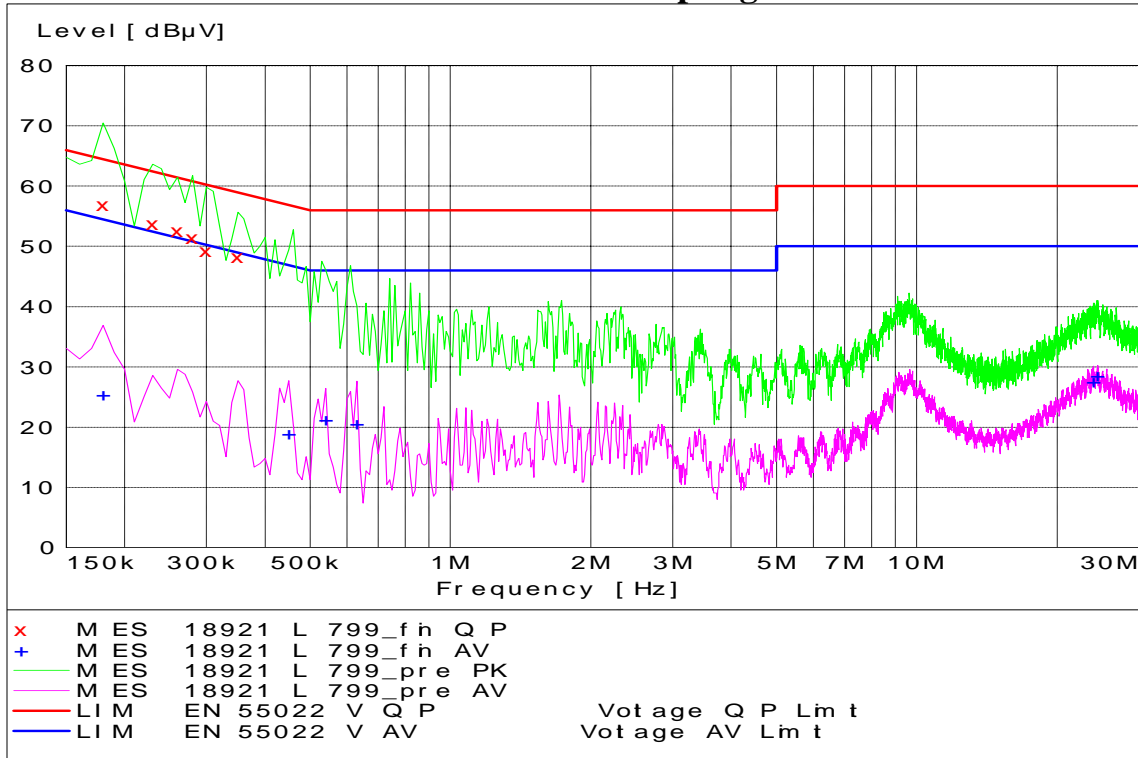


AMPS Channel 799 - Tx Mode - Neutral Coupling

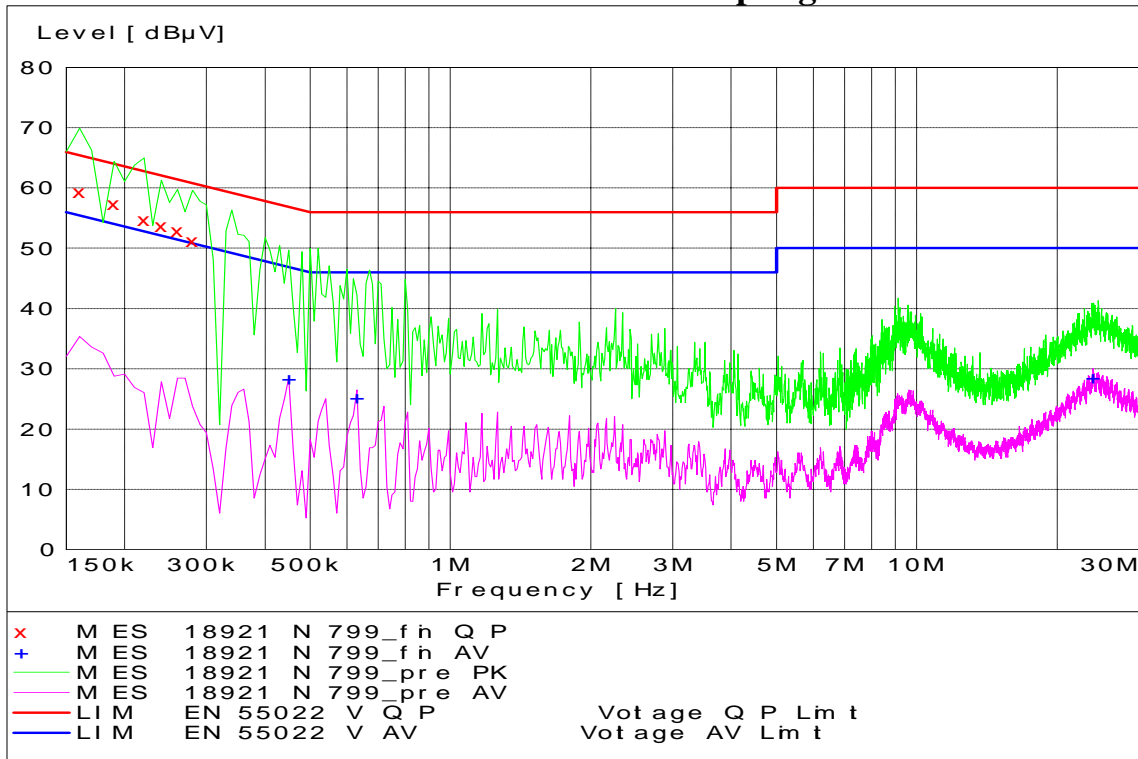


800CDMA Channel 1013 - Tx Mode - Line Coupling

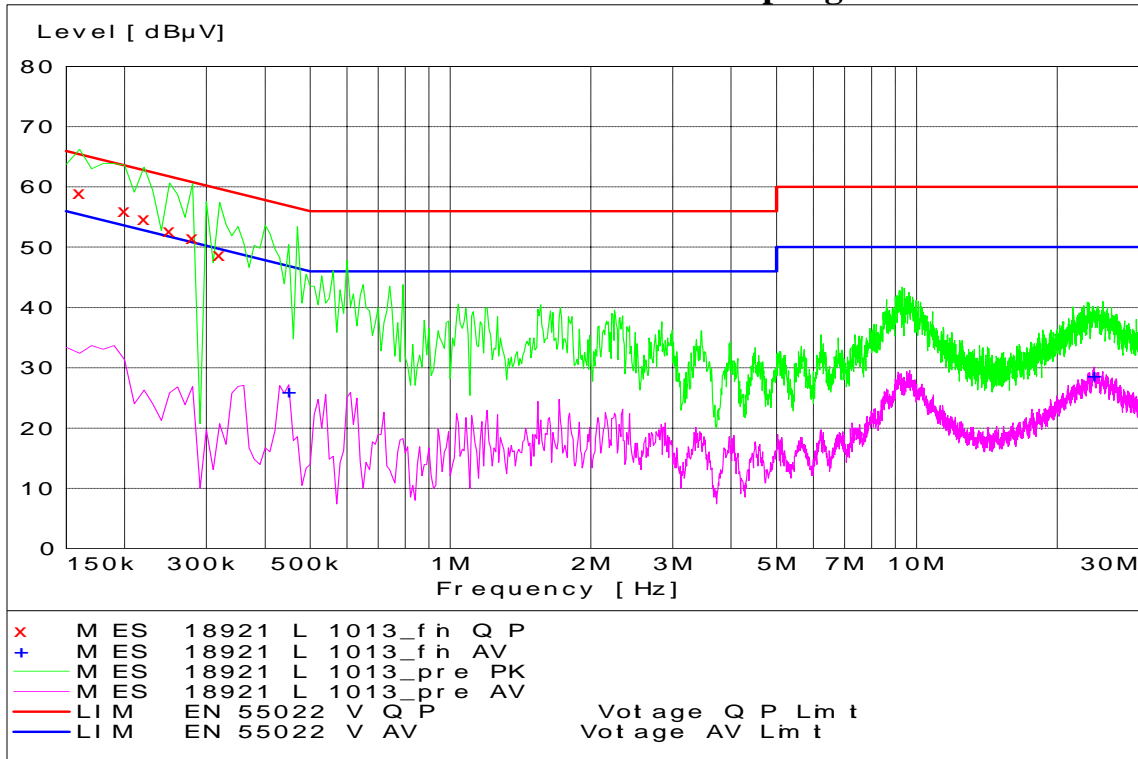


800CDMA Channel 1013 - Tx Mode - Neutral Coupling

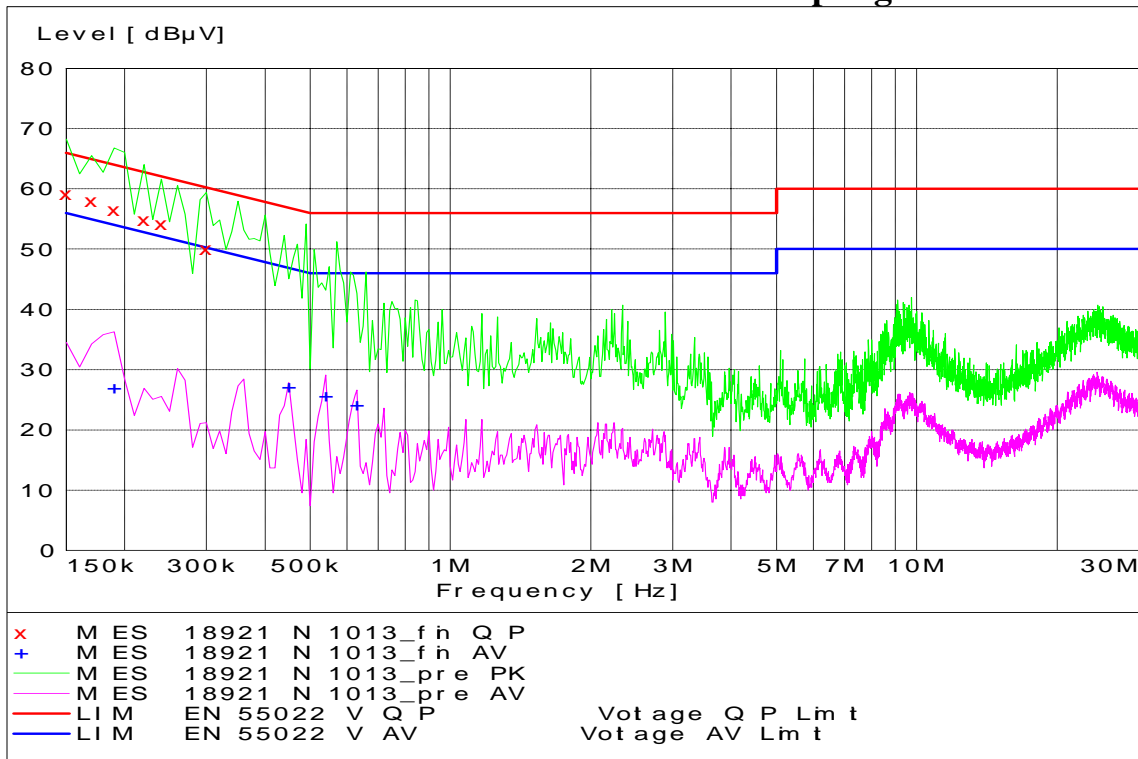


800CDMA Channel 384 - Tx Mode - Line Coupling

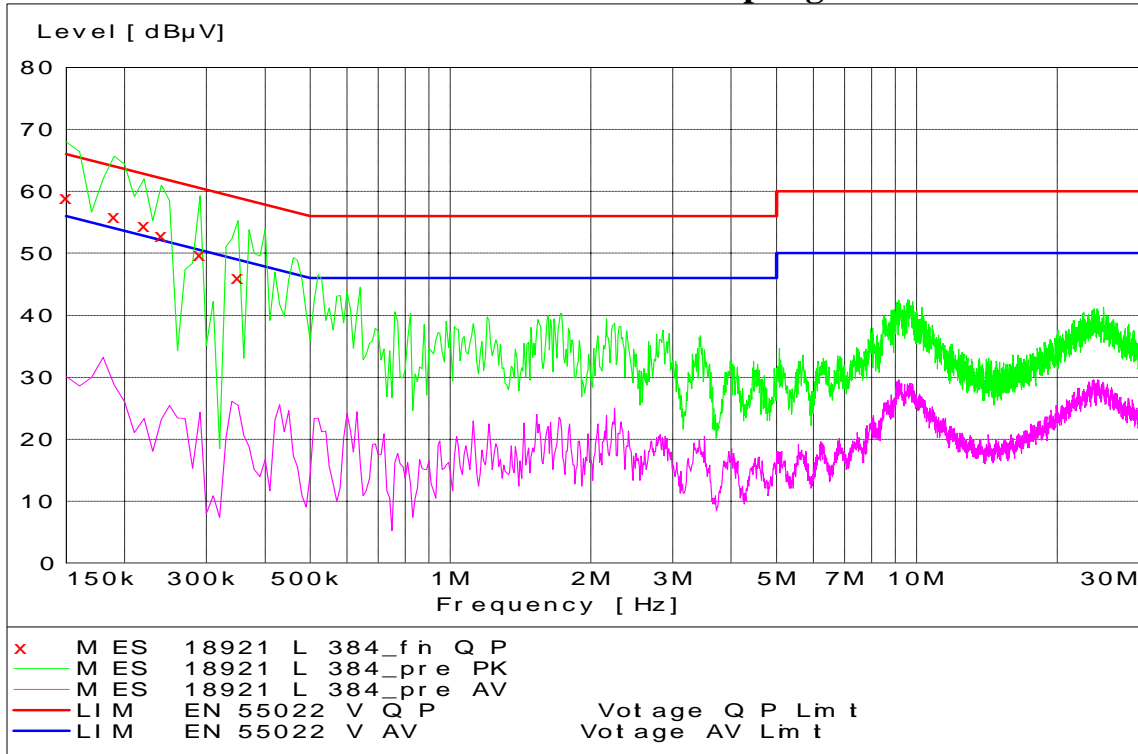


800CDMA Channel 384 - Tx Mode - Neutral Coupling

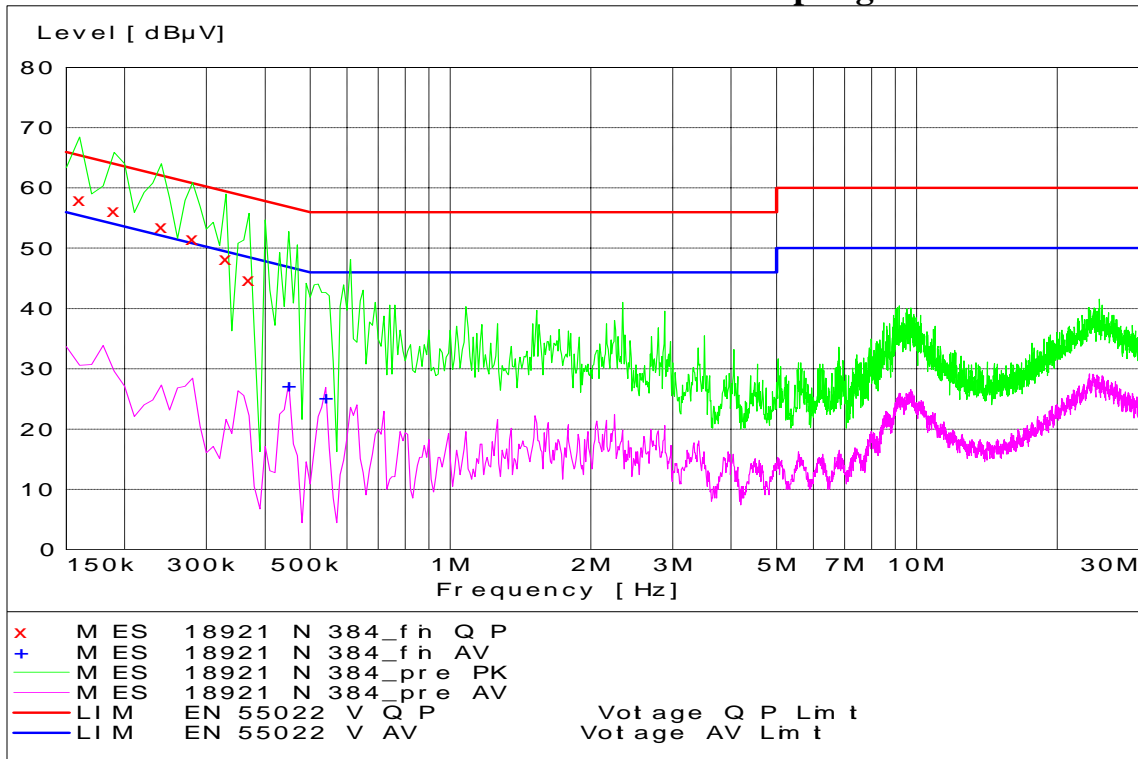


800CDMA Channel 777 - Tx Mode - Line Coupling

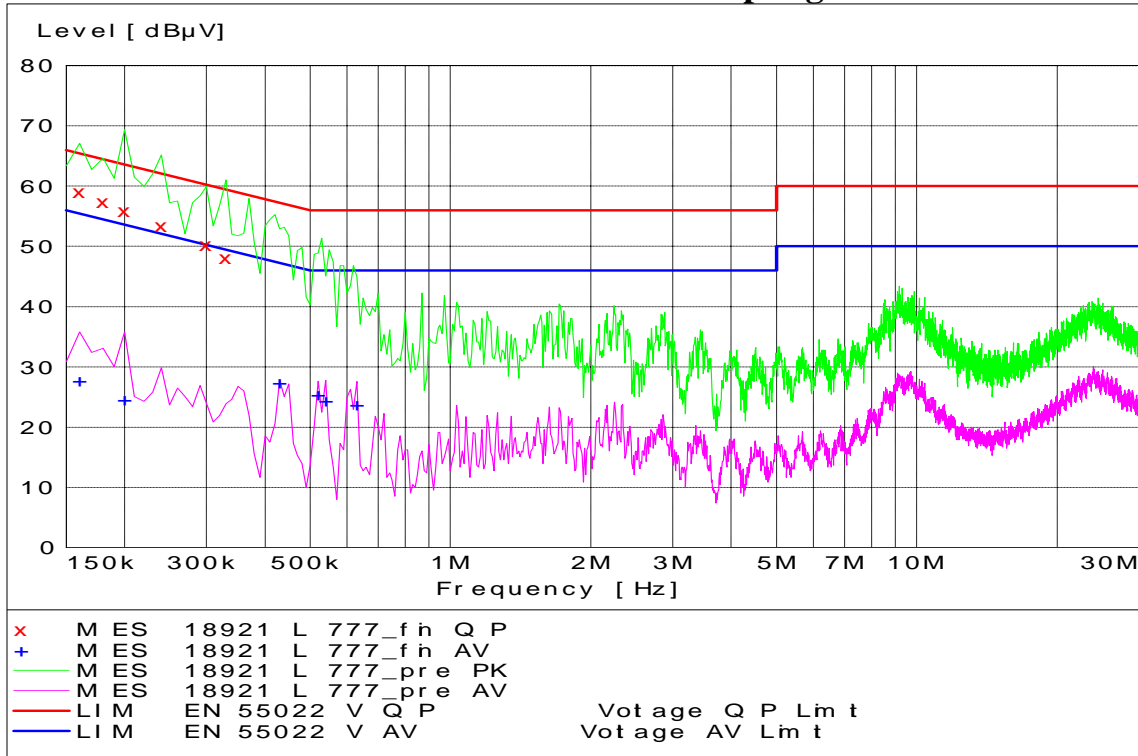


800CDMA Channel 777 - Tx Mode - Neutral Coupling

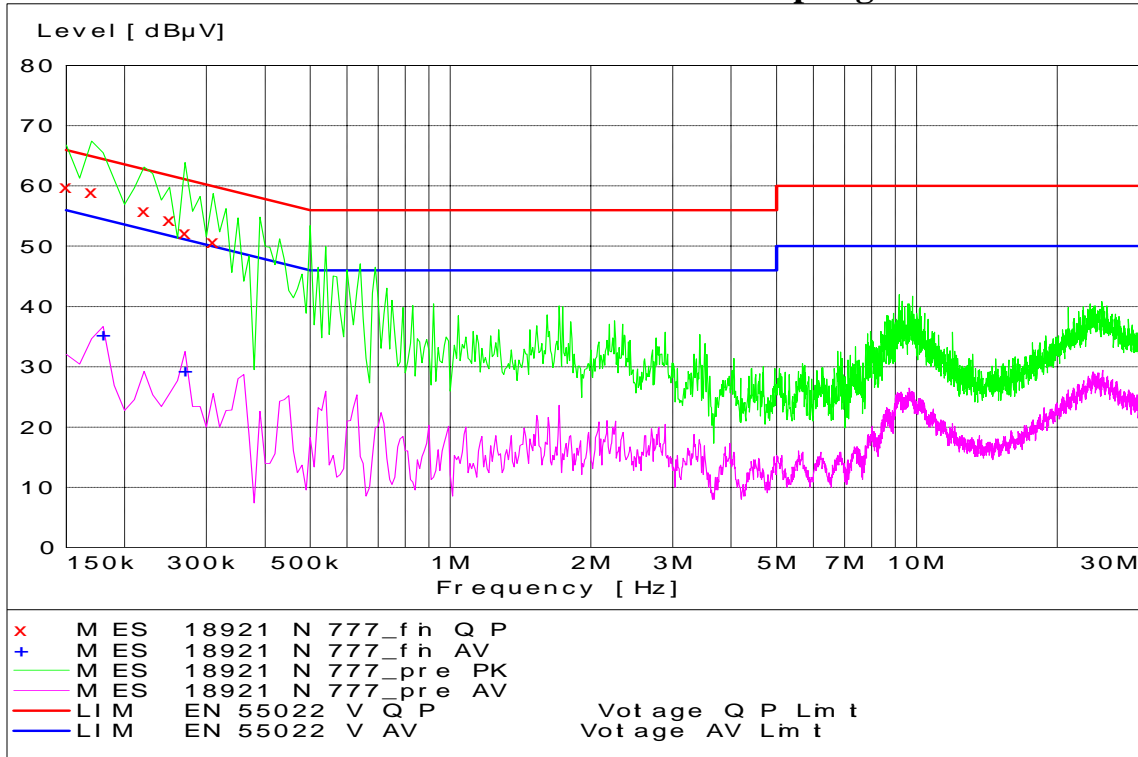


PCS Channel 25 - Tx Mode - Line Coupling

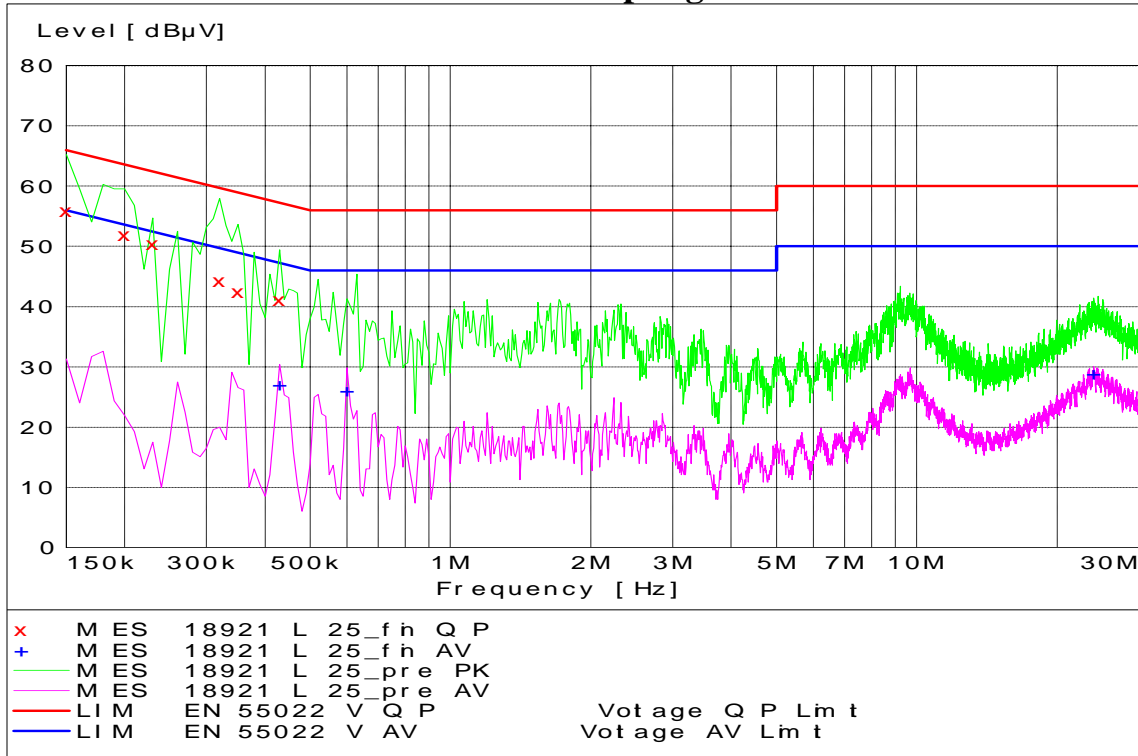


PCS Channel 25 - Tx Mode - Neutral Coupling

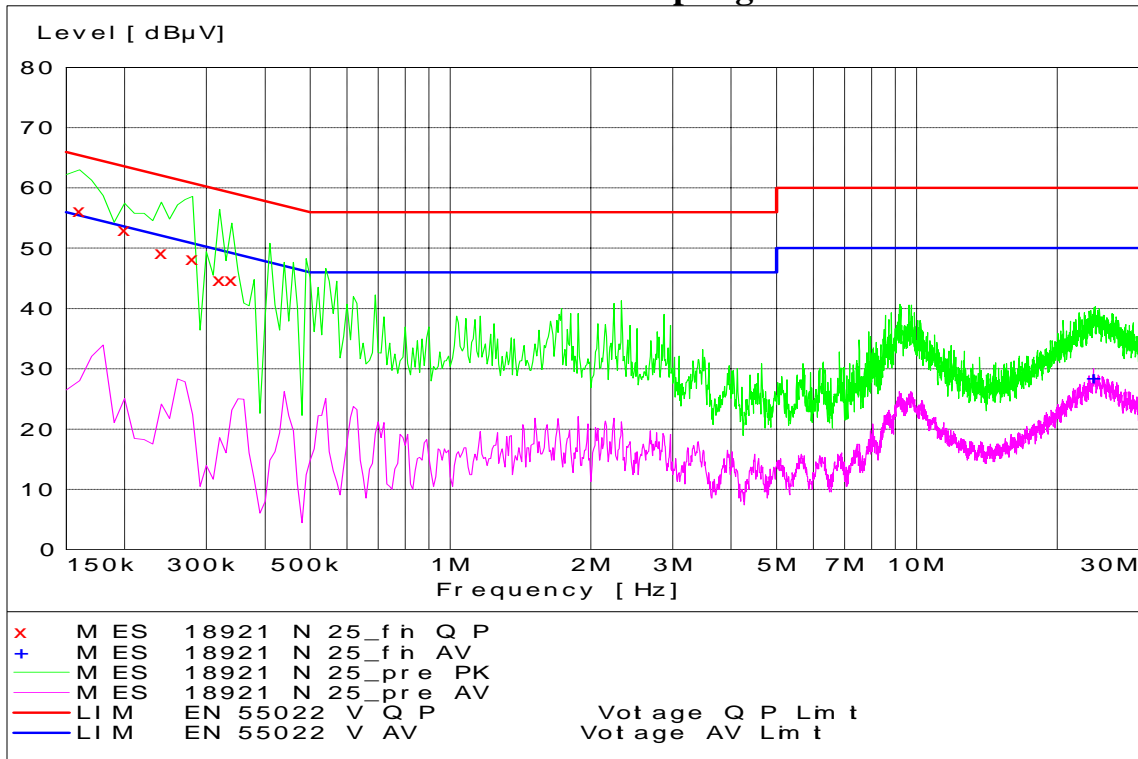


PCS Channel 600 - Tx Mode - Line Coupling

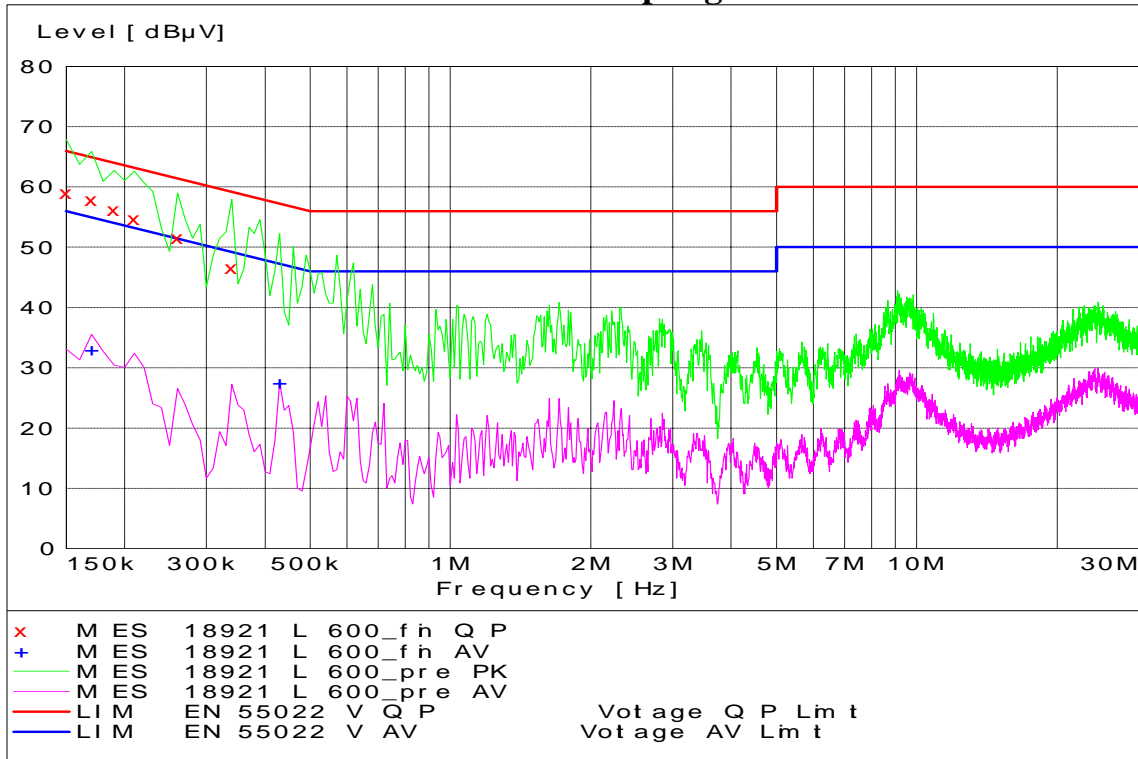


PCS Channel 600 - Tx Mode - Neutral Coupling

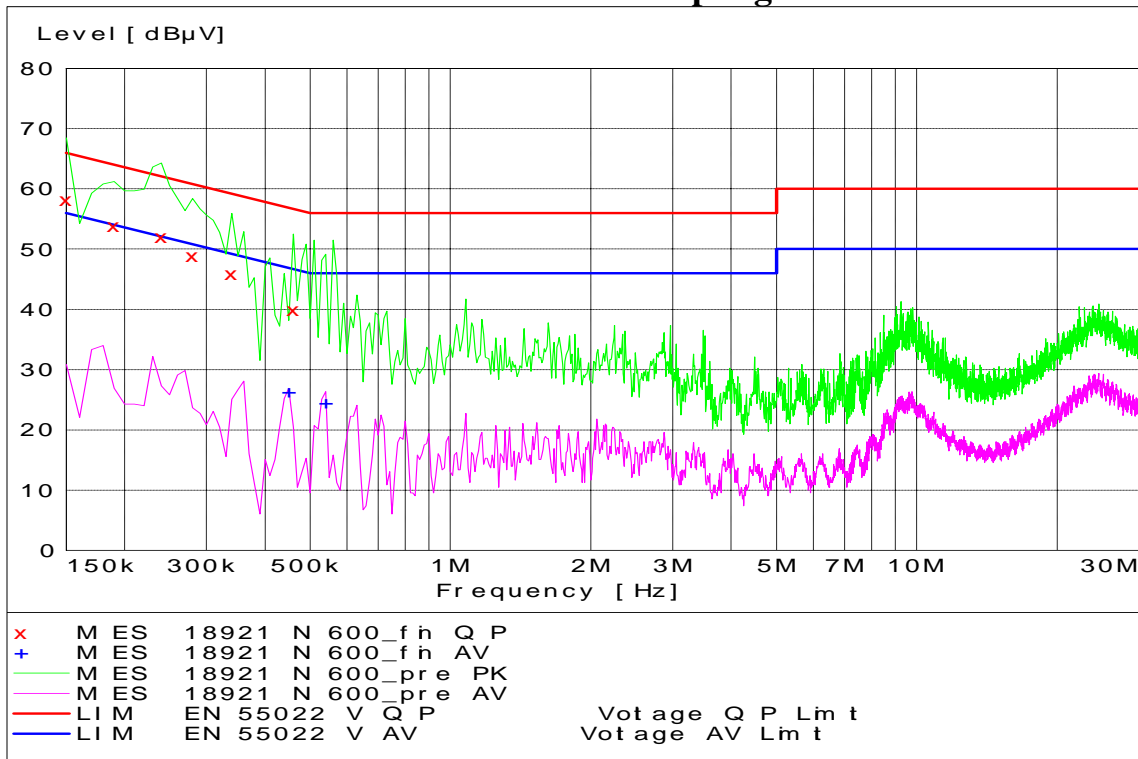


PCS Channel 1175 - Tx Mode - Line Coupling

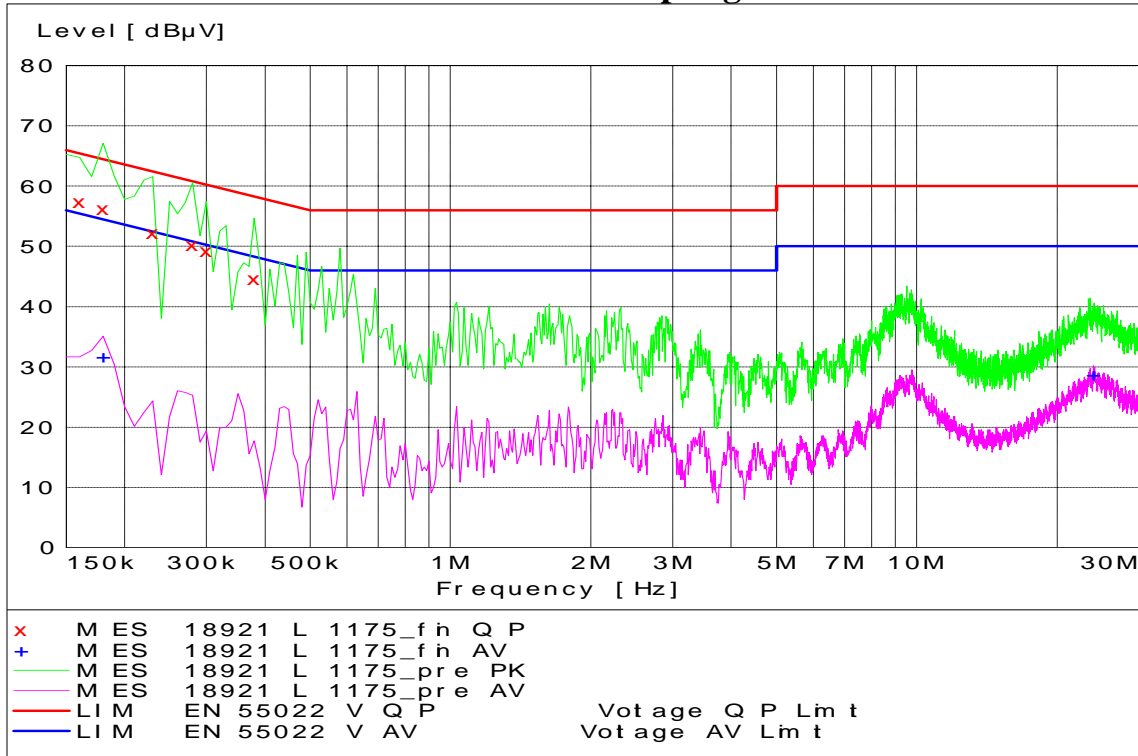


PCS Channel 1175 - Tx Mode - Neutral Coupling

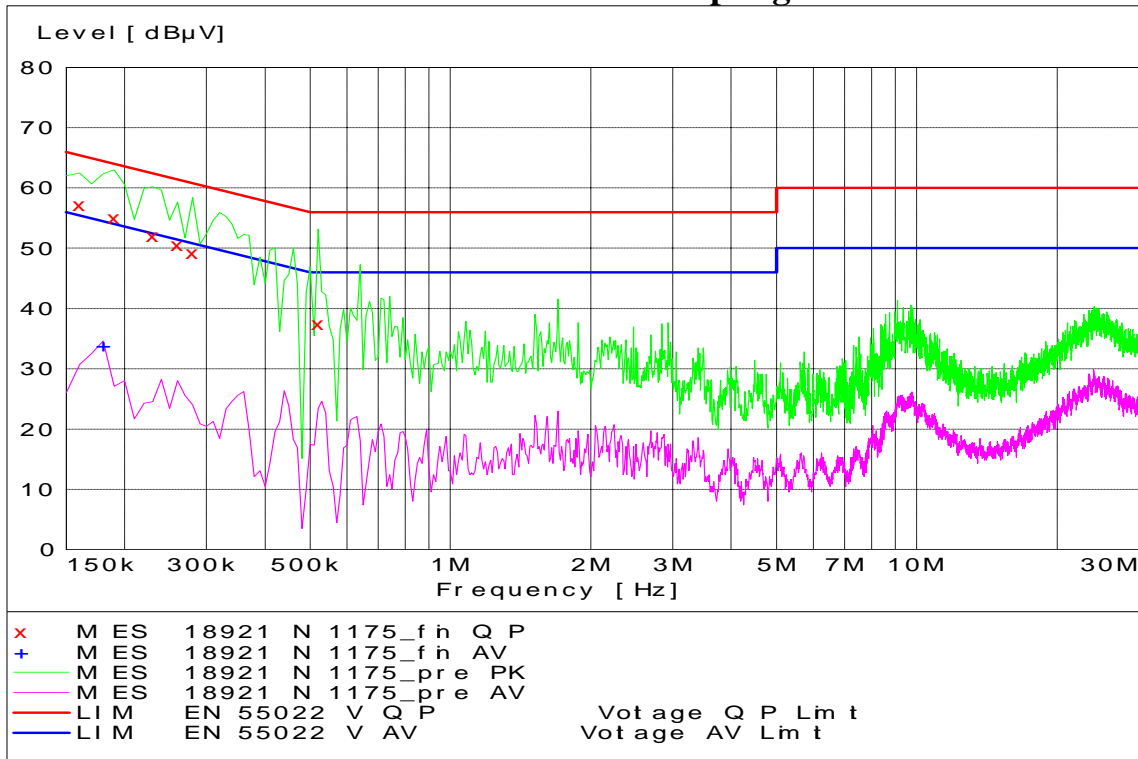

Appendix A – Radiated Emissions Test Setup Photos

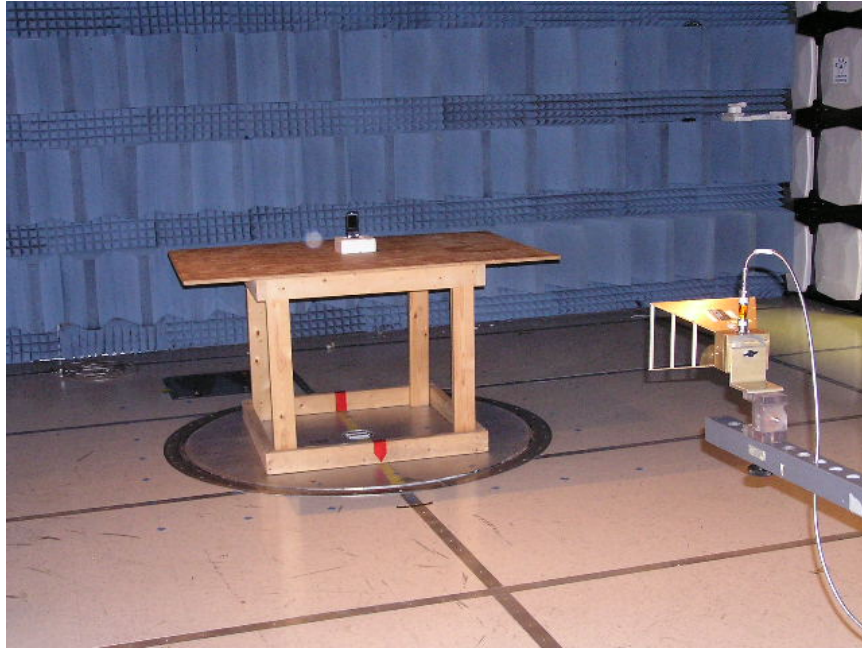

A.1 Radiated Emissions Measurement
(Representative Photo- Not actual Phone tested)

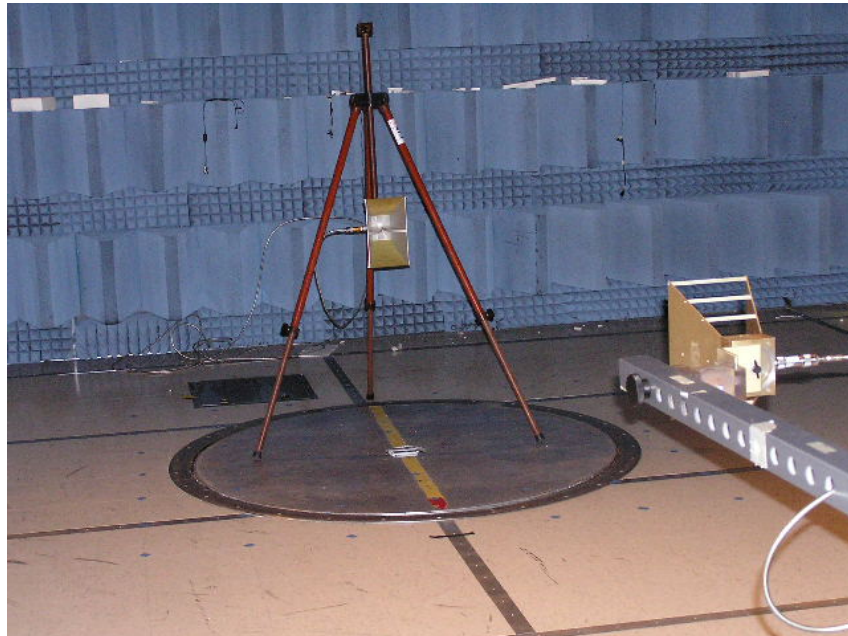

A.2 Substitution Measurement

End of Test Report