

6a.4 Power Line Conducted Spurious Voltage -- Pursuant 47 CFR 15.207Conducted voltage limits:

-Per 47 CFR 15.207

This radio product can transmit in 800-900 MHz Band while resting in a battery charger that is connected to the AC power line. Each figure contains two measurement traces in addition to the two applicable limit lines (pink and red traces), the higher being applicable to measurements utilizing a quasi-peak detector and the lower being applicable to measurements utilizing an average detector. The upper data trace (light blue) portrays the amplitude of the voltage measured during sweeping with a peak detector while the lower trace (light green) represents the amplitude of the voltage measured using an average detector. These detectors facilitated the measurement process. Measurements with a quasi-peak detector lie between these bounds.

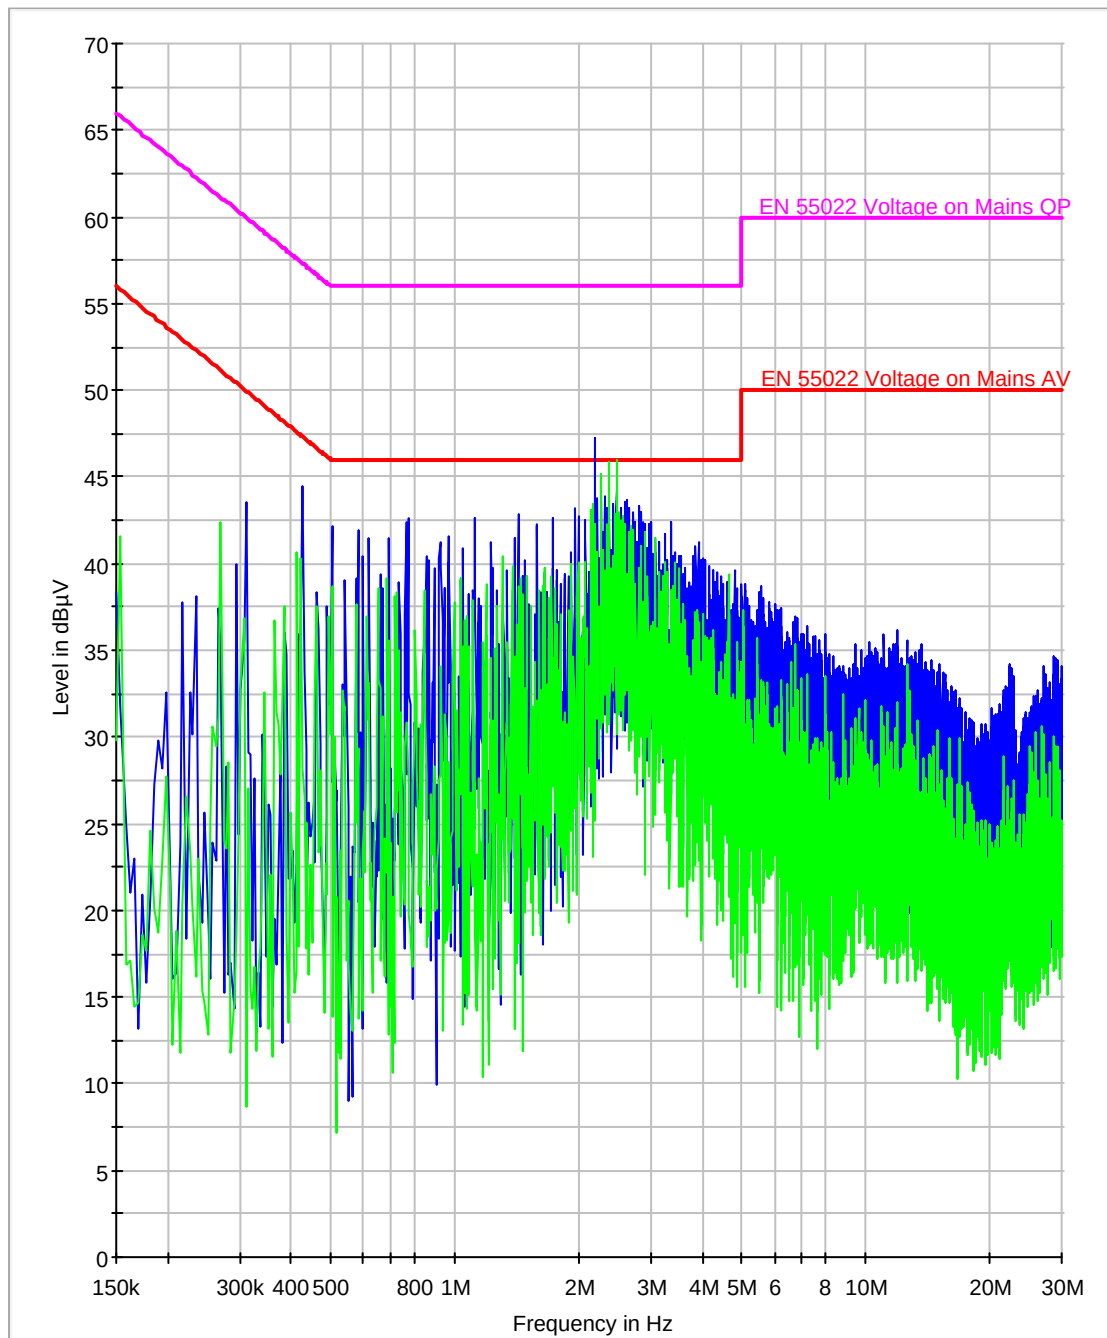


Figure 6a-4.1: iDEN Phase Line and Neutral Line Voltage with a Peak and Average Detector N (Green) L1 (Blue)

TX 806.0625MHz Limits

Frequency							
<= 500kHz	QP value	QP Limit	QP Margin	Avr Value	Avr Limit	Avr Margin	Ph
154000	37.90	65.89	27.99	26.40	55.89	29.49	L1
310000	43.40	61.40	18.00	39.90	51.40	11.50	L1
426000	44.80	58.07	13.27	38.60	48.07	9.47	L1
154000	38.20	65.89	27.69	27.00	55.89	28.89	N
310000	42.90	61.40	18.50	36.90	51.40	14.50	N
426000	40.20	58.07	17.87	33.60	48.07	14.47	N
500kHz - 5MHz							
2198000	41.10	56.00	14.90	32.60	46.00	13.40	L1
2378000	40.70	56.00	15.30	27.90	46.00	18.10	L1
2490000	38.50	56.00	17.50	28.00	46.00	18.00	L1
2198000	38.00	56.00	18.00	30.40	46.00	15.60	N
2378000	38.80	56.00	17.20	28.50	46.00	17.50	N
2490000	36.80	56.00	19.20	26.30	46.00	19.70	N

Table 6a-4.2: Line Voltage Data- Quasi-Peak and Average