



MOBILE DEVICES BUSINESS

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**


EMC TEST REPORT

Test Report Number – 21467-1 BT

Report Date – January 15, 2008

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature: 

Name: Thanigaiselvan Palaniswami

Title: EMC Engineer

Date: January 15, 2008

This report must not be reproduced, except in full, without written approval from this laboratory.

**THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY
A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.**

A2LA Certificate Number: 2518-02

Table of Contents

Test Report Details	3
Applicable Standards	3
Summary of Testing.....	4
General and Special Conditions.....	4
Equipment and Cable Configurations	5
Measuring Equipment and Calibration Information	5
Description of Bluetooth Transmitter	5
Measurement Procedures and Data.....	6
CARRIER FREQUENCY SEPARATION	6
Measurement Procedure.....	6
Measurement Results	6
NUMBER OF HOPPING FREQUENCIES	8
Measurement Procedure.....	8
Measurement Results	8
TIME OF OCCUPANCY (DWELL TIME).....	10
Measurement Procedure.....	10
Measurement Results	10
20dB BANDWIDTH	12
Measurement Procedure.....	12
Measurement Results	12
PEAK OUTPUT POWER	14
Measurement Procedure.....	14
Measurement Results	14
BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS	15
Measurement Procedure.....	15
Measurement Results	15
SPURIOUS RF CONDUCTED EMISSIONS	20
Measurement Procedure.....	20
Measurement Results	20
AC LINE CONDUCTED EMISSIONS	27
Measurement Procedure.....	27
Measurement Results	27

Test Report Details

Tests Performed By: Motorola Mobile Devices Business (MDb)
Product Safety and Compliance Group
600 North US Hwy 45
Libertyville, IL 60048
PH (847) 523-6167 Fax (847) 523-4538
Motorola MDb FRN: 0004321311
FCC Registration Number: 316588
Industry Canada Number: IC3908-1

Tests Requested By: Motorola Inc.
Mobile Devices Business
600 North US Hwy 45
Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: CDMA 800, CDMA 1900, Bluetooth

FCC ID: IHDT56JA1

Serial Numbers: 805BA2DA, 80898934, 807AD365, 808E4C7B,
80A6B066, 8078553E

Testing Complete Date: January 10, 2008

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

 X Part 15 Subpart C – Intentional Radiators

Applicable Standards: ANSI 63.4 2003

DA 00-705, “Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems” published by the Federal Communications Commission was also used in the testing of this product.

Summary of Testing

Test	Test Name	Pass/Fail
1	Carrier Frequency Separation	Pass
2	Number of Hopping Frequencies	Pass
3	Time of Occupancy (Dwell Time)	Pass
4	20 dB Bandwidth	Pass
5	Spurious RF Conducted Emissions	Pass
6	Max Power	N/A
7	Band Edges	Pass
8	Conducted Spurious Emissions	Pass

Test	Test Name	Results
1	Carrier Frequency Separation	998 kHz
2	Number of Hopping	79
3	Time of Occupancy (Dwell Time)	2.925 ms
4	20 dB Bandwidth	See plots
5	Spurious RF Conducted Emissions	See plots
6	Max Power	6.556 dBm
7	Band Edges	See plots
8	Conducted Spurious Emissions	See plots

General and Special Conditions

The Cellular Phone hereinafter referred to as the Equipment under Test or EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Measuring Equipment and Calibration Information

Manufacturer	Equipment Type	Model No.	Serial Number	Calibration Due Date
Rohde Schwarz	Receiver	ESI26	100001	5/02/2008
Hewlett Packard	EMC Analyzer	E7405	US39440191	1/24/2008
Attenuator	Weinschel	AS-6	6675	1/31/2008
Attenuator	Weinschel	AS-6	6677	6/21/2008
ETS	LISN	3810/2NM	62907	5/02/2008
ETS	LISN	3810/2NM	62912	5/02/2008

All equipment is on a one-year calibration cycle.

Description of Bluetooth Transmitter

The EUT offers Bluetooth as a feature. The Bluetooth spread-spectrum, frequency hopping transceiver is designed to operate between 2400 and 2483.5 MHz. The Bluetooth antenna is mounted inside of the EUT. The antenna installation is permanent. For a more thorough description of the functionality please refer to Exhibit 12 of this package.

As a Bluetooth transmitter, it is designed operate with other Bluetooth devices as defined by the industrial standard. In this application, the device is battery operated. The Bluetooth transmitter supports Bluetooth version 2.0+EDR.

The Bluetooth Antenna gain is 0 dBi.

Measurement Procedures and Data

CARRIER FREQUENCY SEPARATION

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth transmitter of the EUT had its hopping function enabled. The following spectrum analyzer settings were used:

1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW) $\geq 1\%$ of the span
3. Video (or Average) Bandwidth (VBW) $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

Measurement Results

See attached.

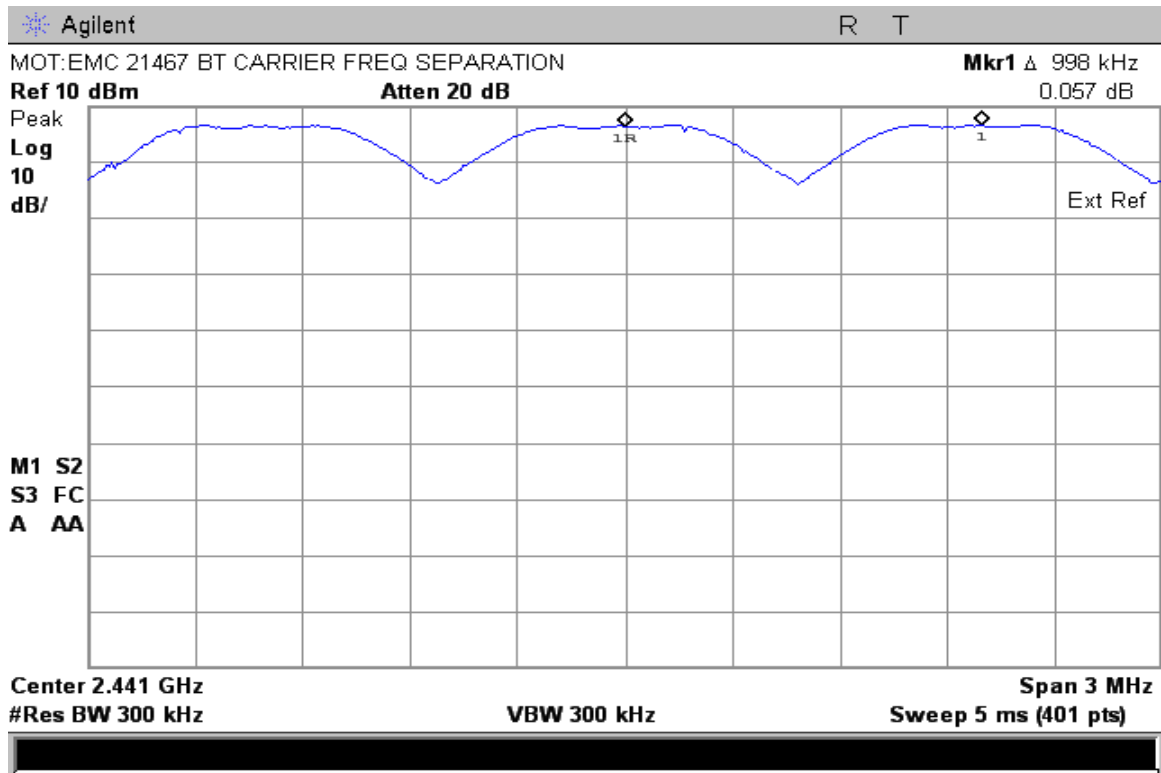

Carrier Frequency Separation

NUMBER OF HOPPING FREQUENCIES

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = the frequency band of operation
2. RBW $\geq$ 1% of the span
3. VBW $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize.

Measurement Results

See attached.

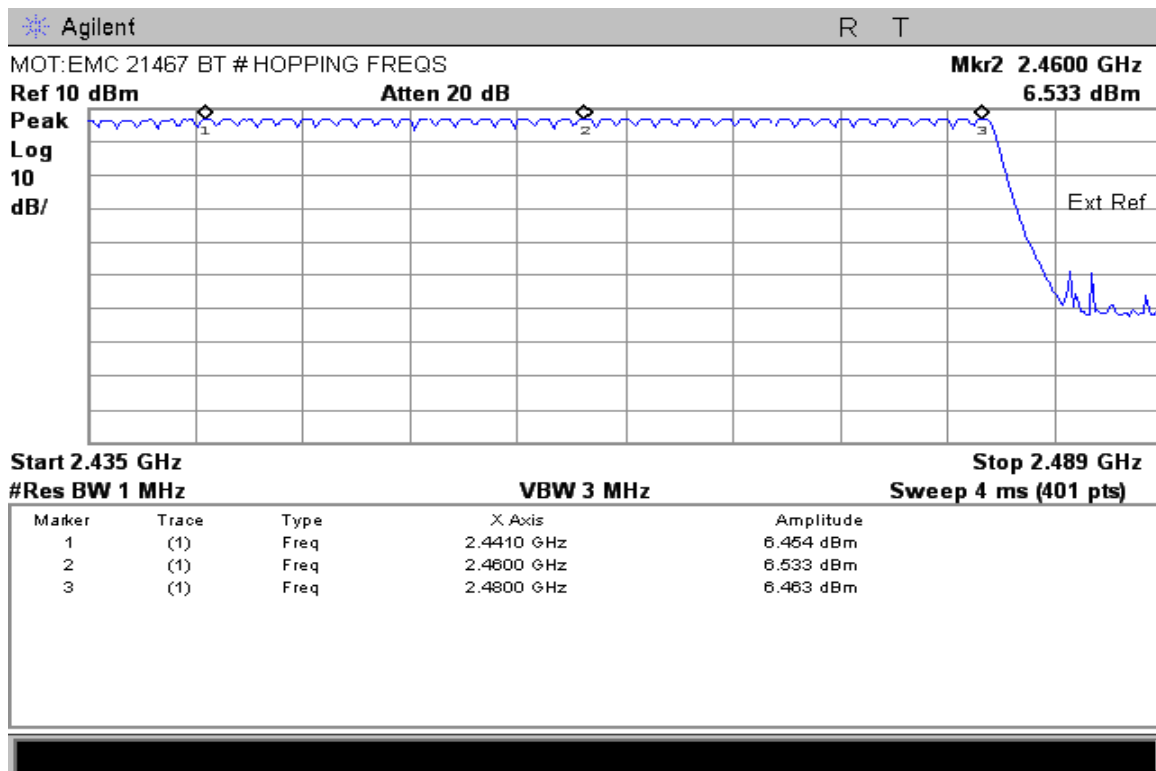

Number of Hopping Frequencies (Channels 0 – 39)

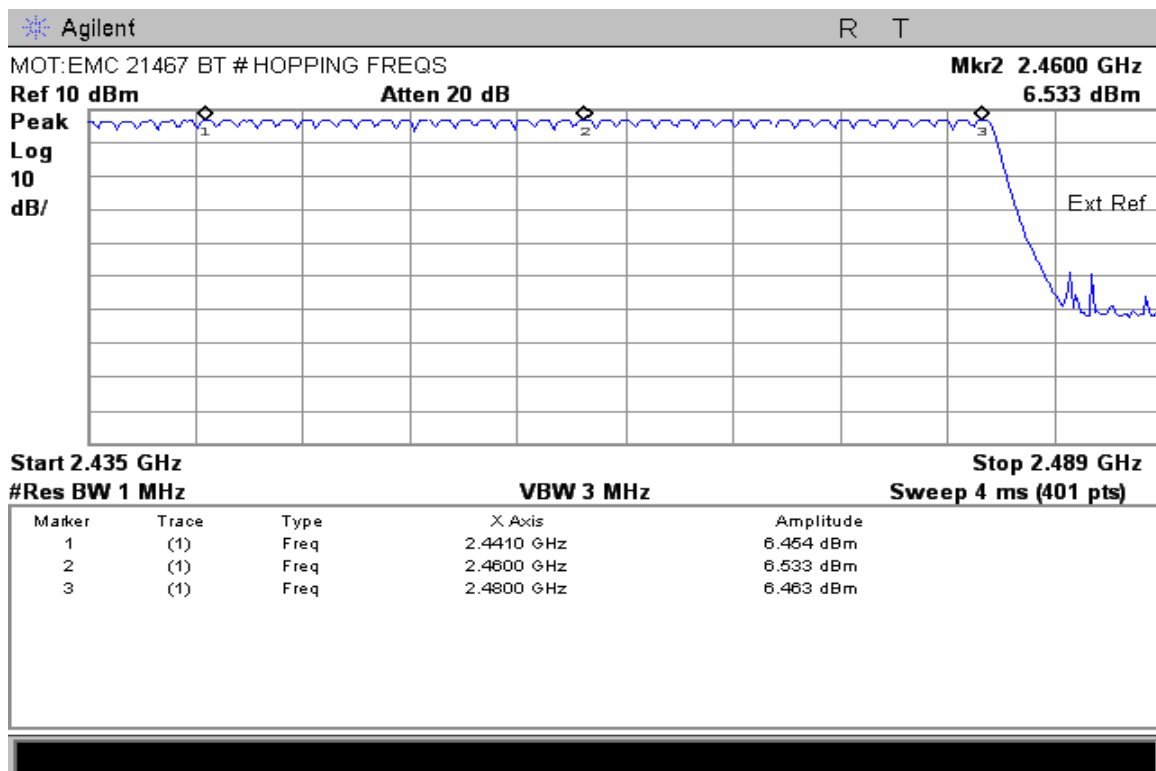

Number of Hopping Frequencies (Channels 39 – 78)

TIME OF OCCUPANCY (DWELL TIME)

CFR47 Part 15.247

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW $\geq$ RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold

The marker-delta function was used to determine the dwell time.

Measurement Results

See attached

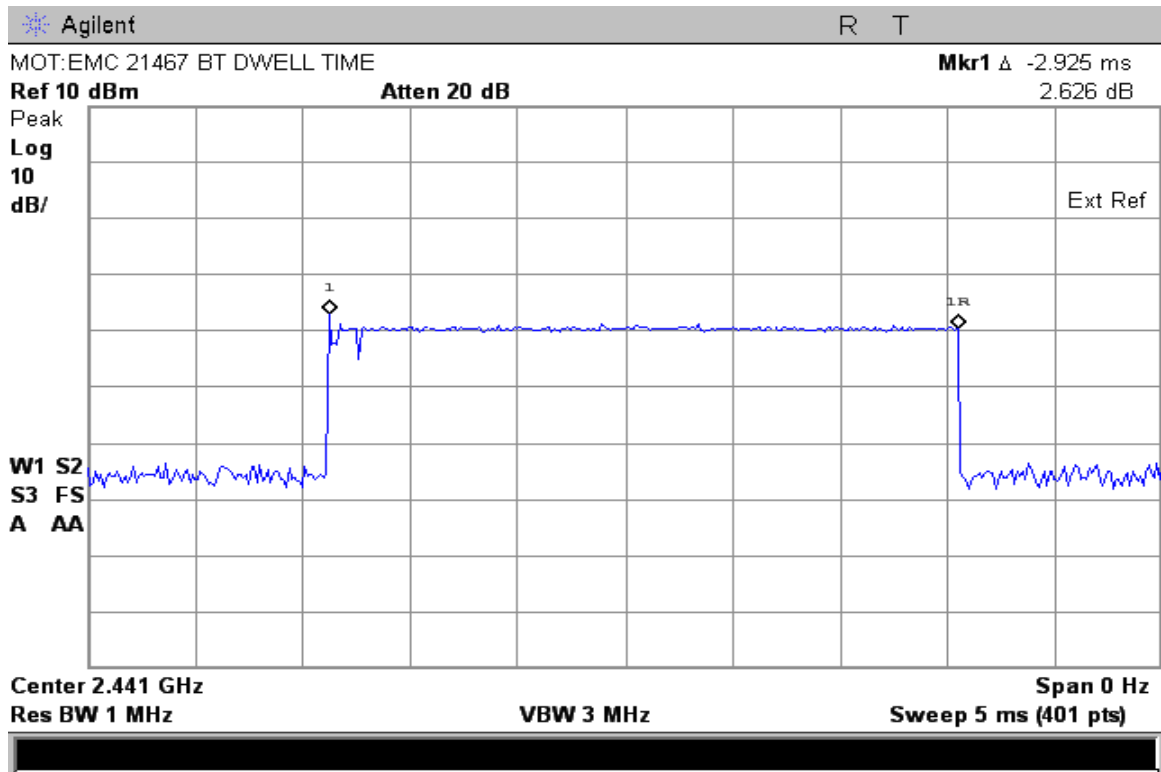

20dB Bandwidth

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.



The Bluetooth frequency hopping function of the EUT was disabled. The spectrum analyzer used the following settings:

1. Span = 2MHz, centered on the center channel frequency
2. RBW $\geq$ 1% of the 20dB span
3. VBW $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.

Measurement Results

See attached

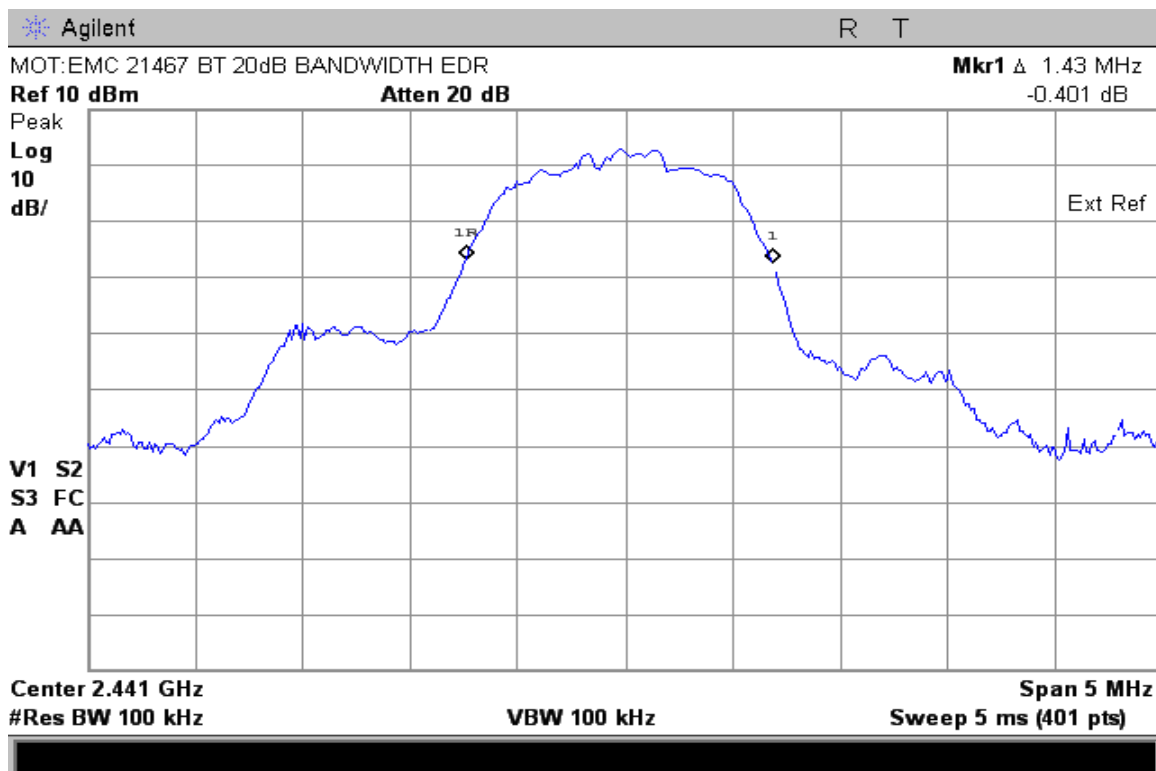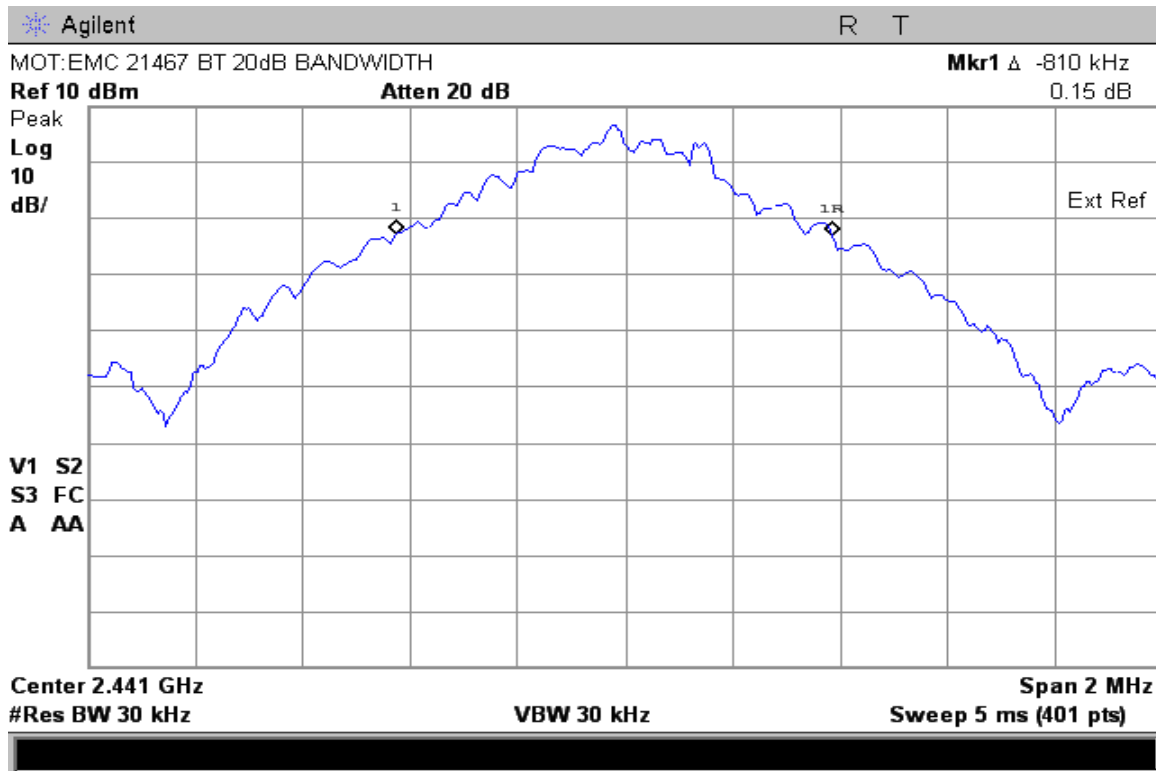

PEAK OUTPUT POWER


CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results

See Attached

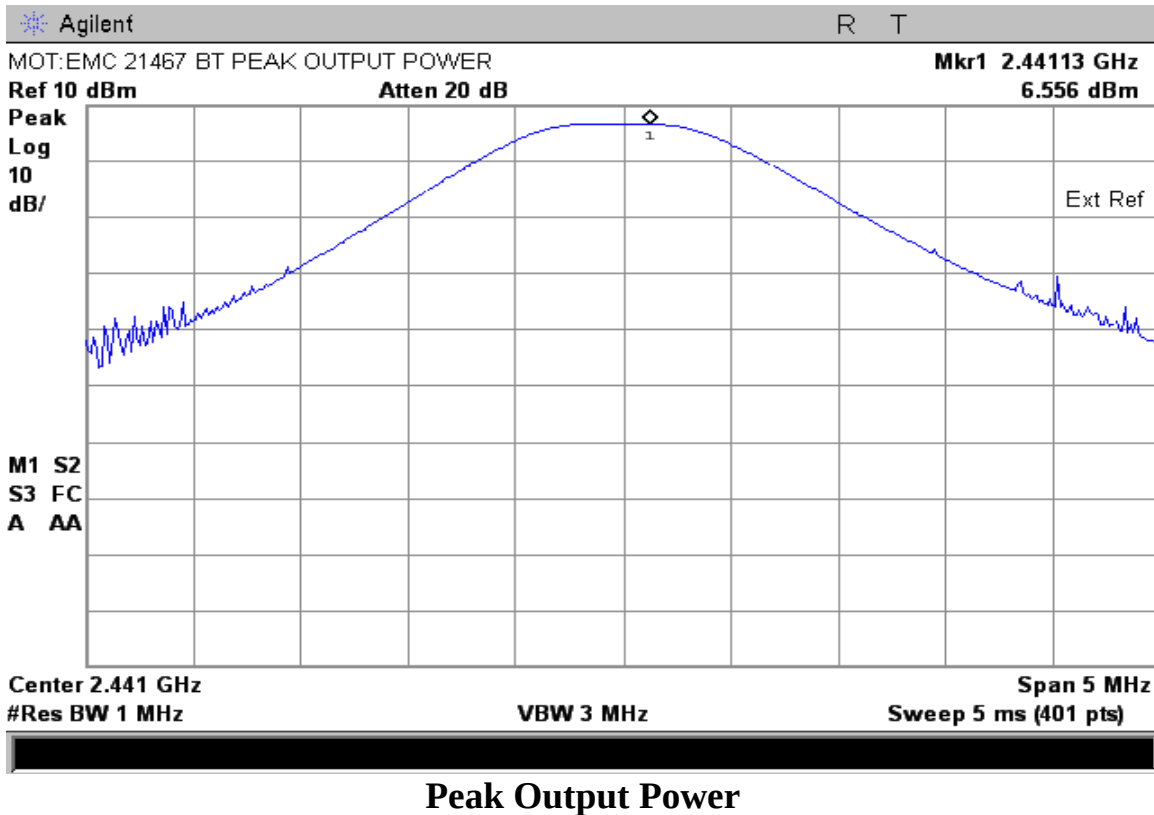

BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS


CFR 47 Part 15.247

Measurement Procedure


The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results


See Attached:

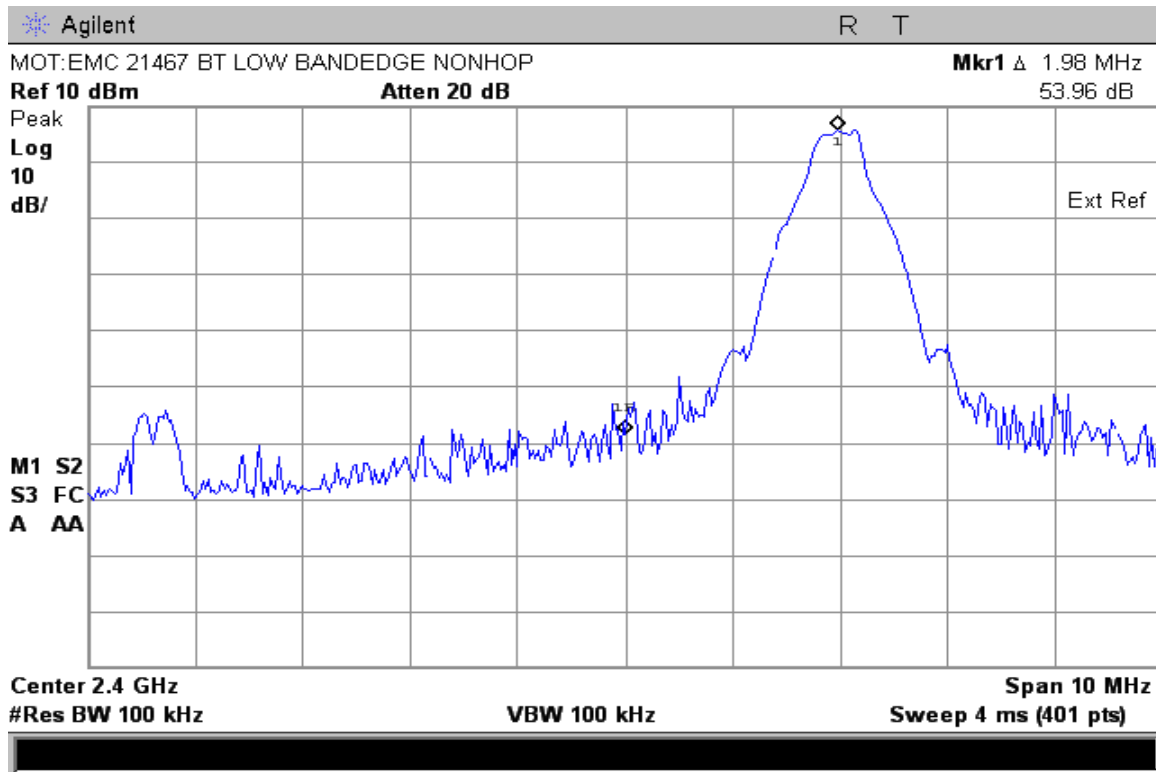


Low Band edge with Hopping Disabled

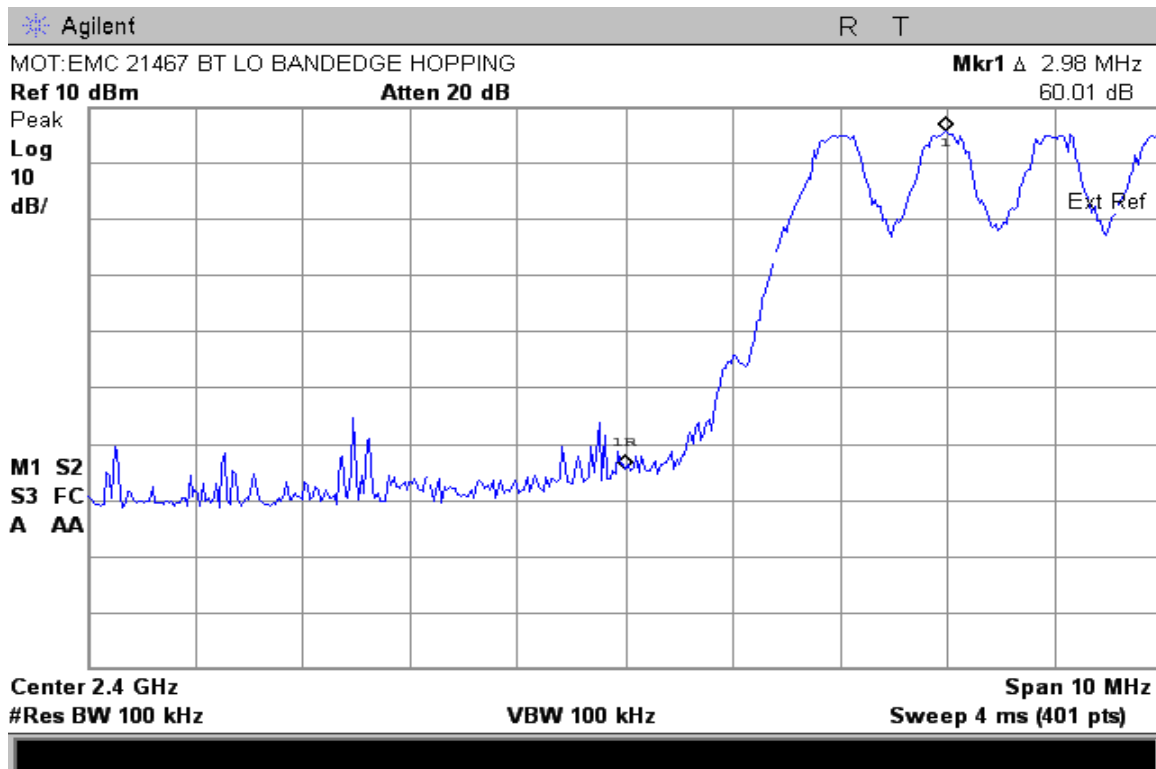


Low Band edge with Hopping Enabled

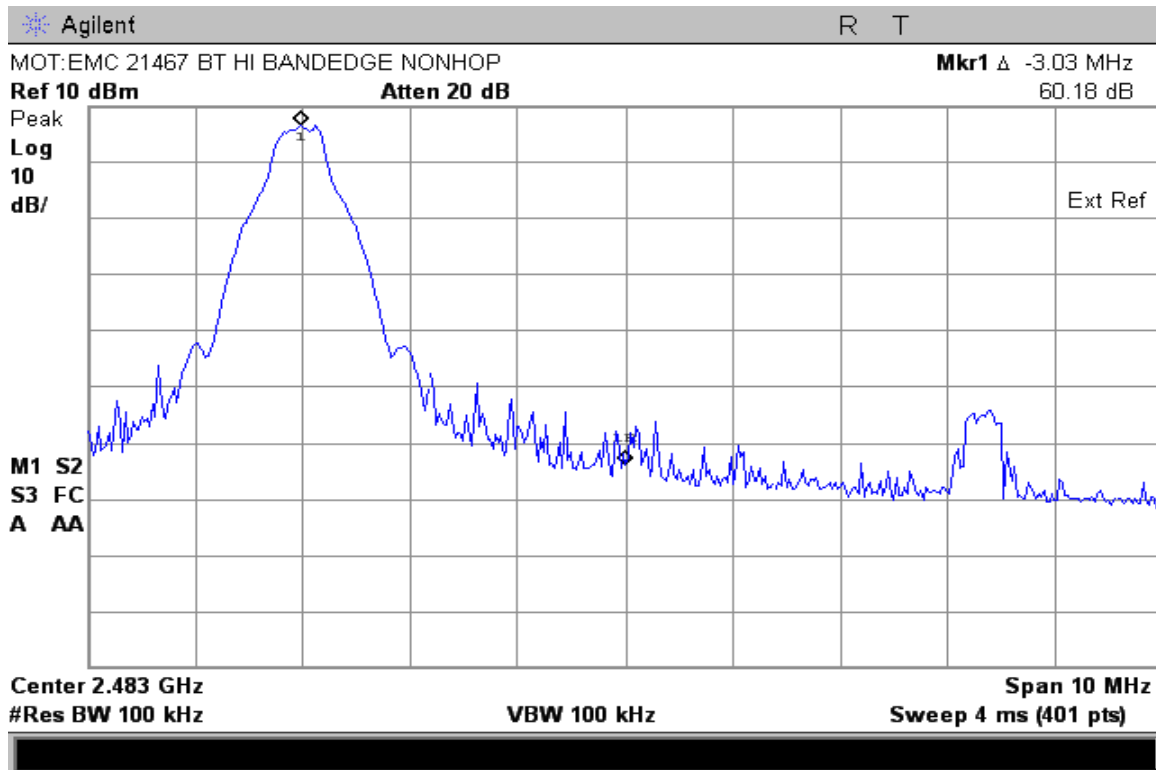


High Band edge with Hopping Disabled

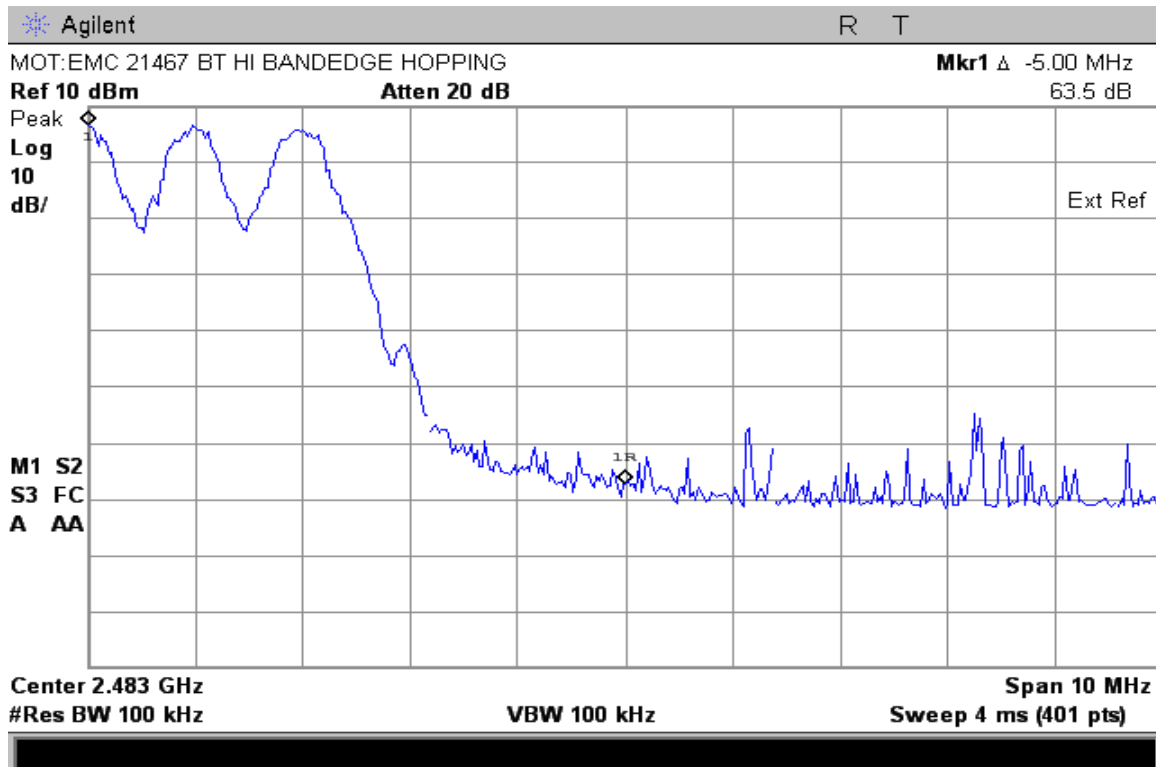


High Band edge with Hopping Enabled

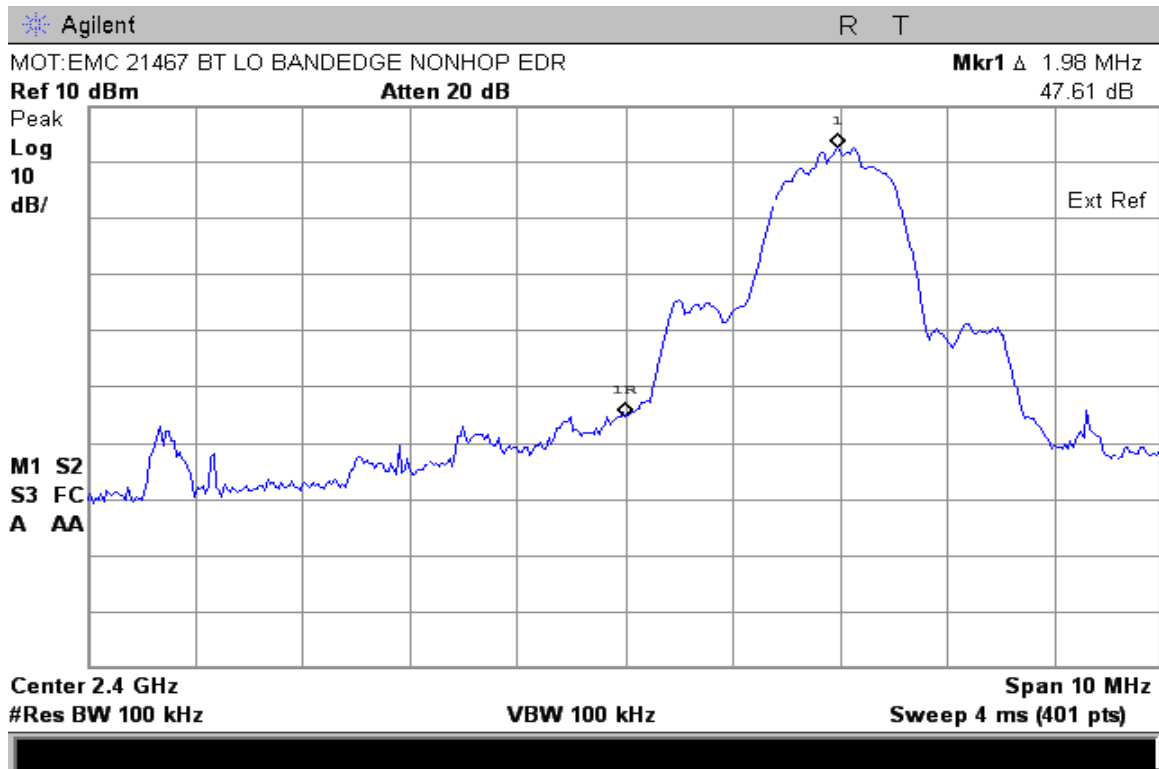


Low Band edge with Hopping Disabled – EDR Mode

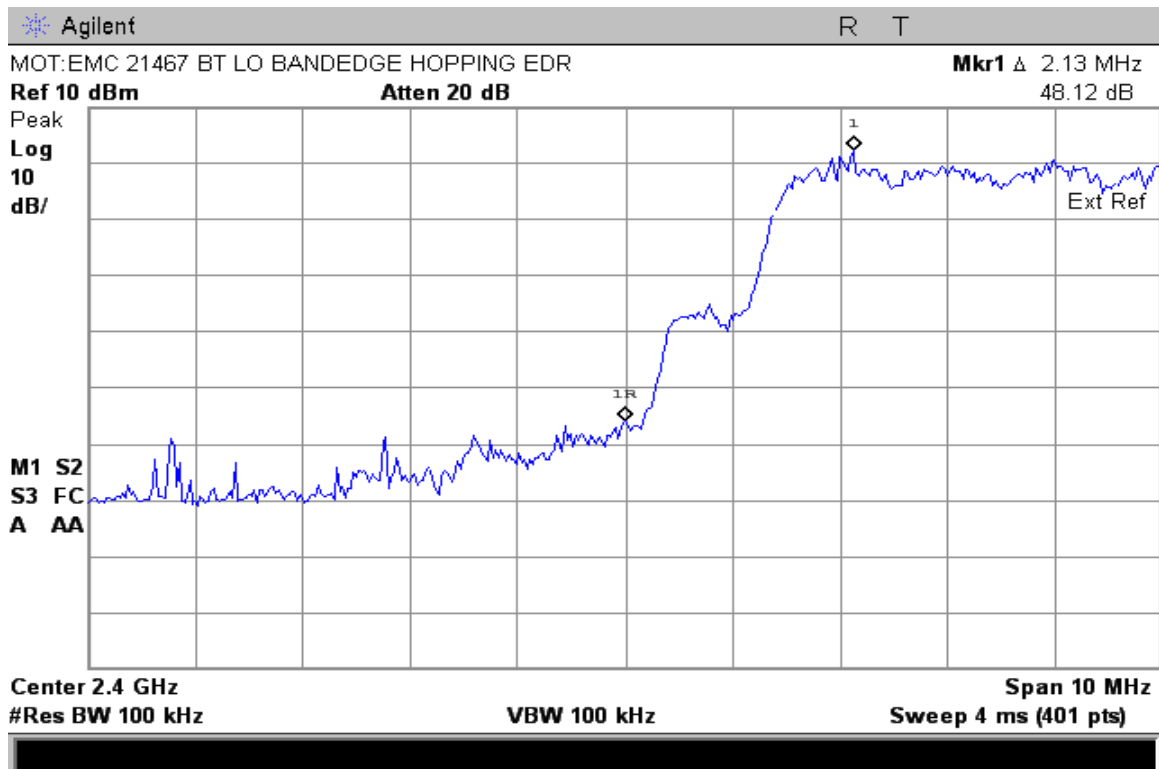

Low Band edge with Hopping Enabled – EDR Mode

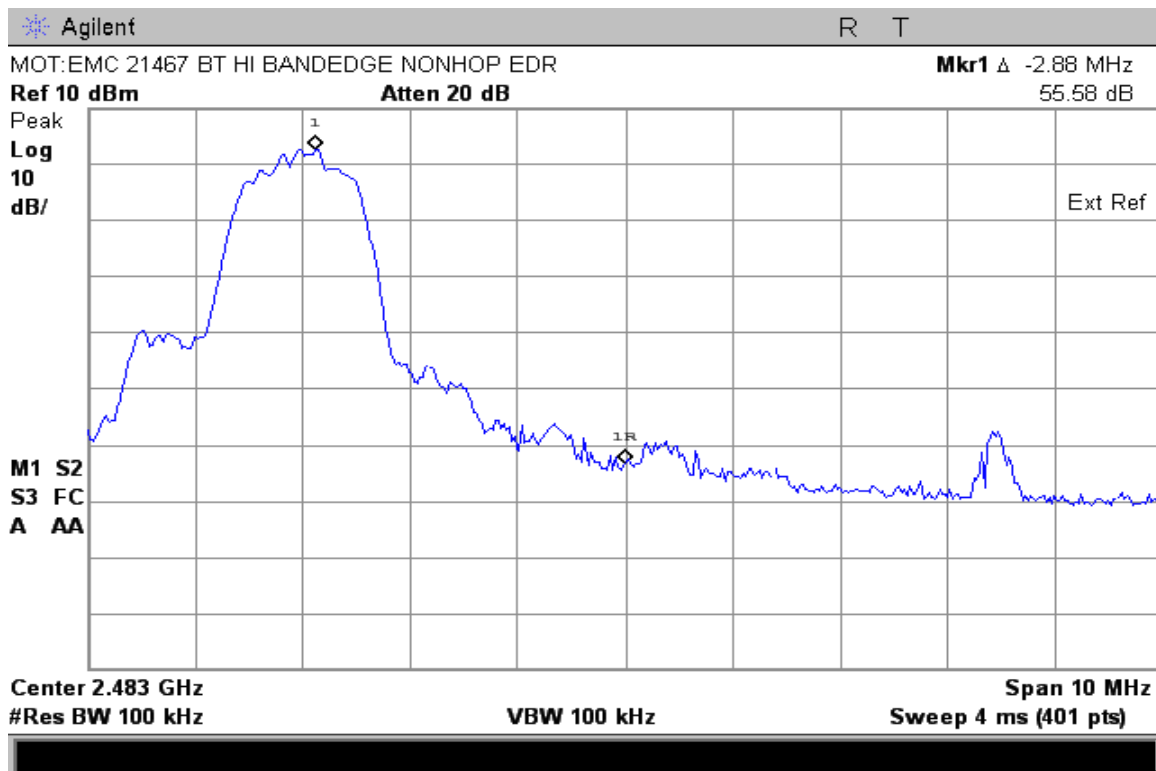

High Band edge with Hopping Disabled – EDR Mode

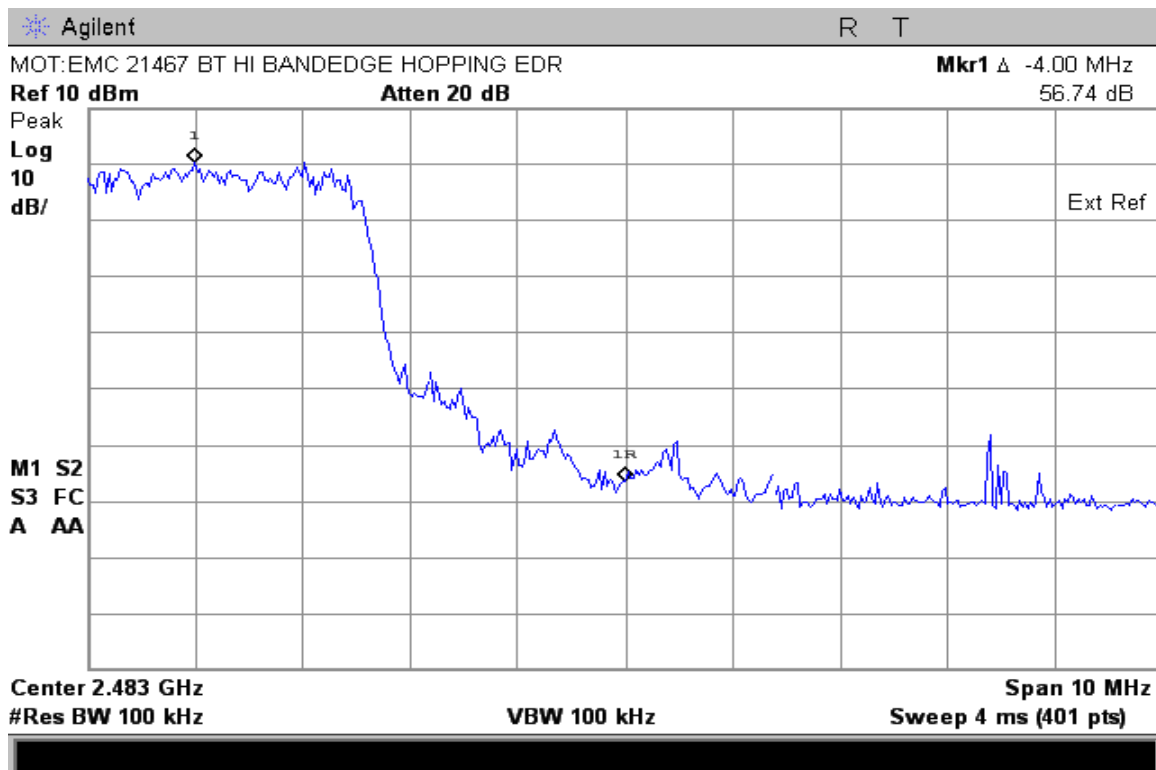

High Band edge with Hopping Enabled – EDR Mode

SPURIOUS RF CONDUCTED EMISSIONS


CFR 47 Part 15.247

Measurement Procedure


The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results


See attached:

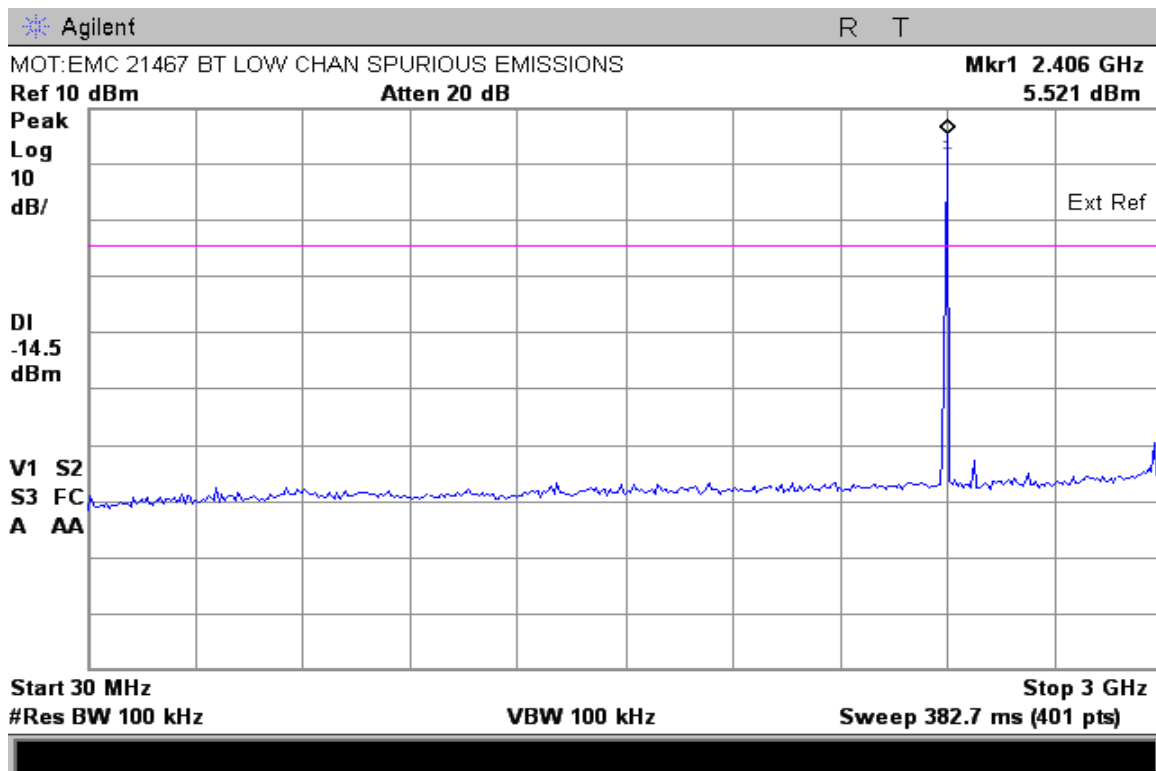


Conducted Spurious Emissions 30-3000MHz (Low Channel Enabled)

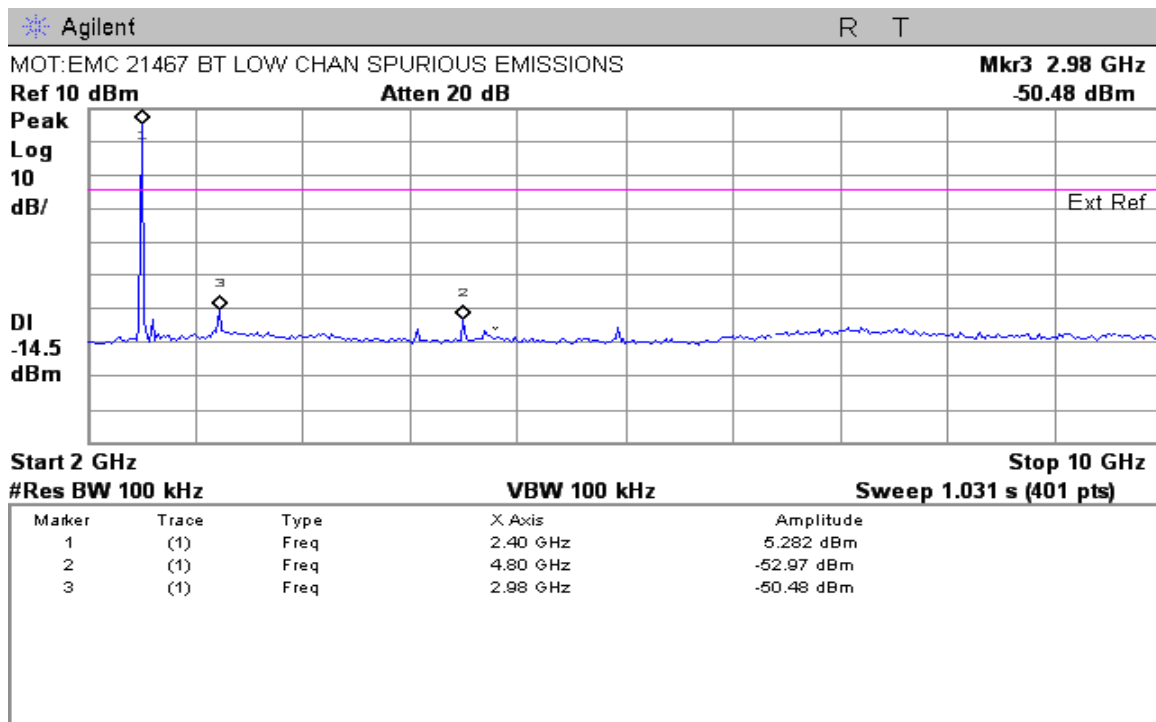


Conducted Spurious Emissions 2-10GHz (Low Channel Enabled)

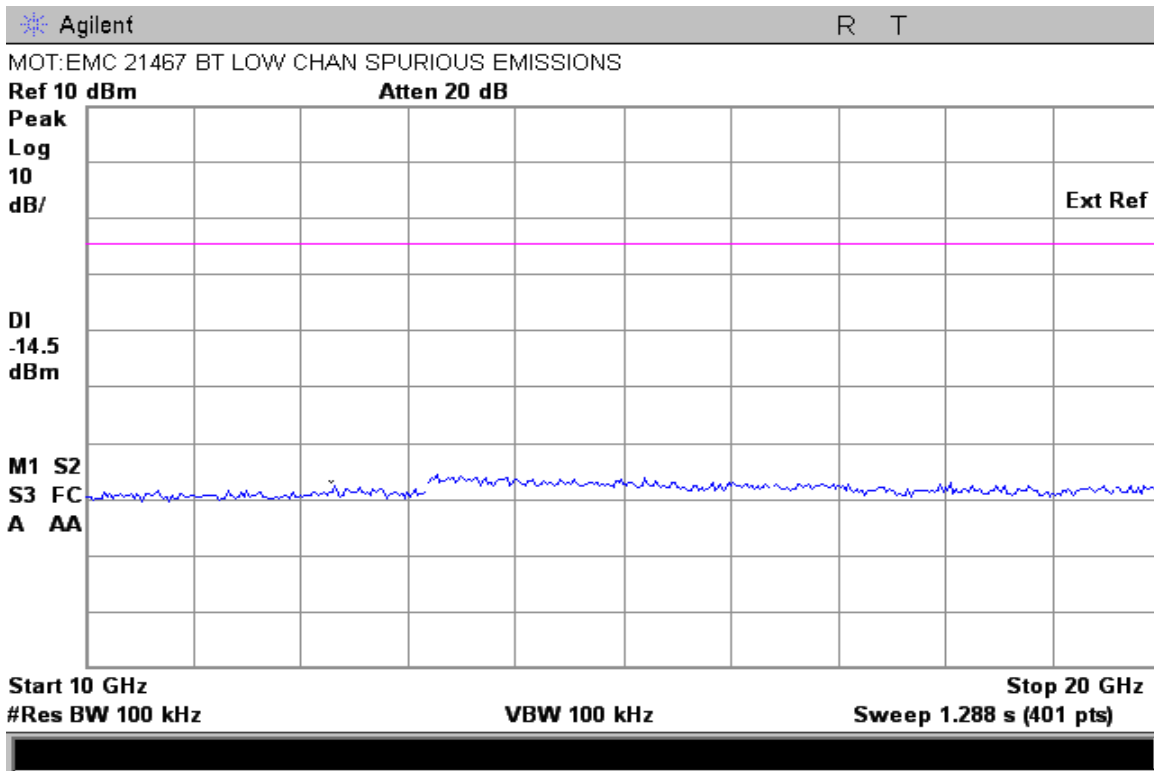


Conducted Spurious Emissions 10-20GHz (Low Channel Enabled)

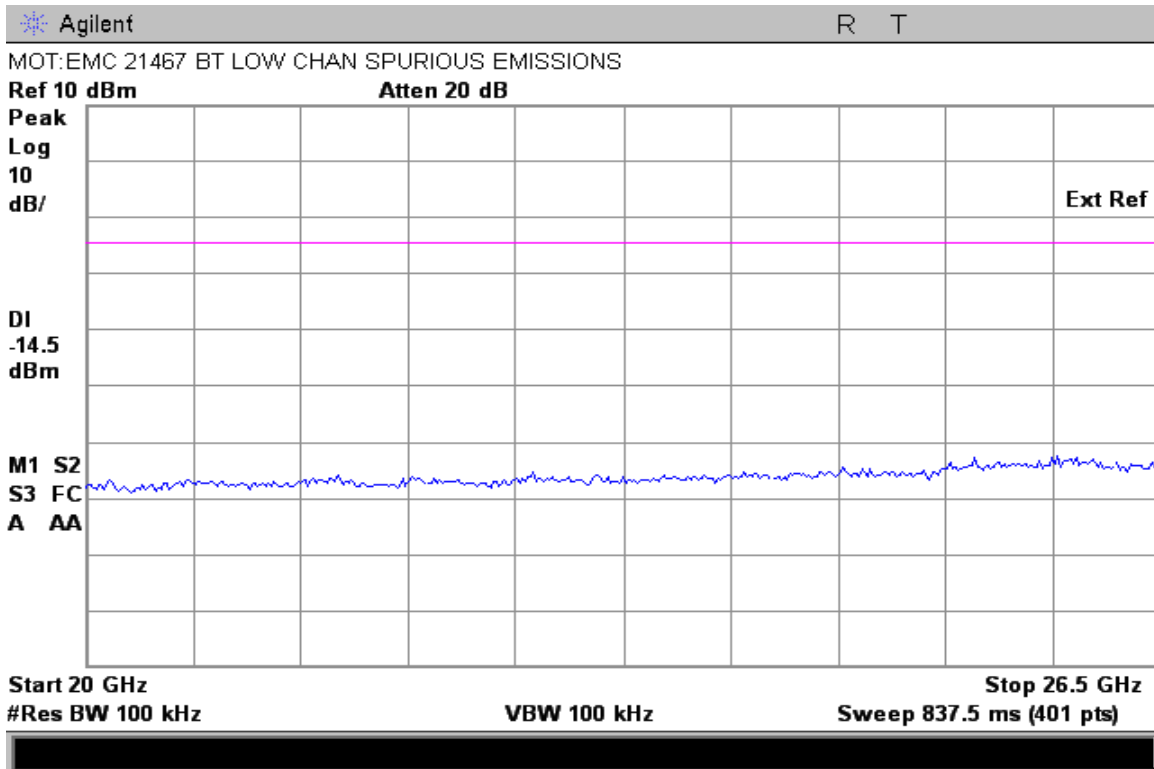


Conducted Spurious Emissions 20-26.5GHz (Low Channel Enabled)

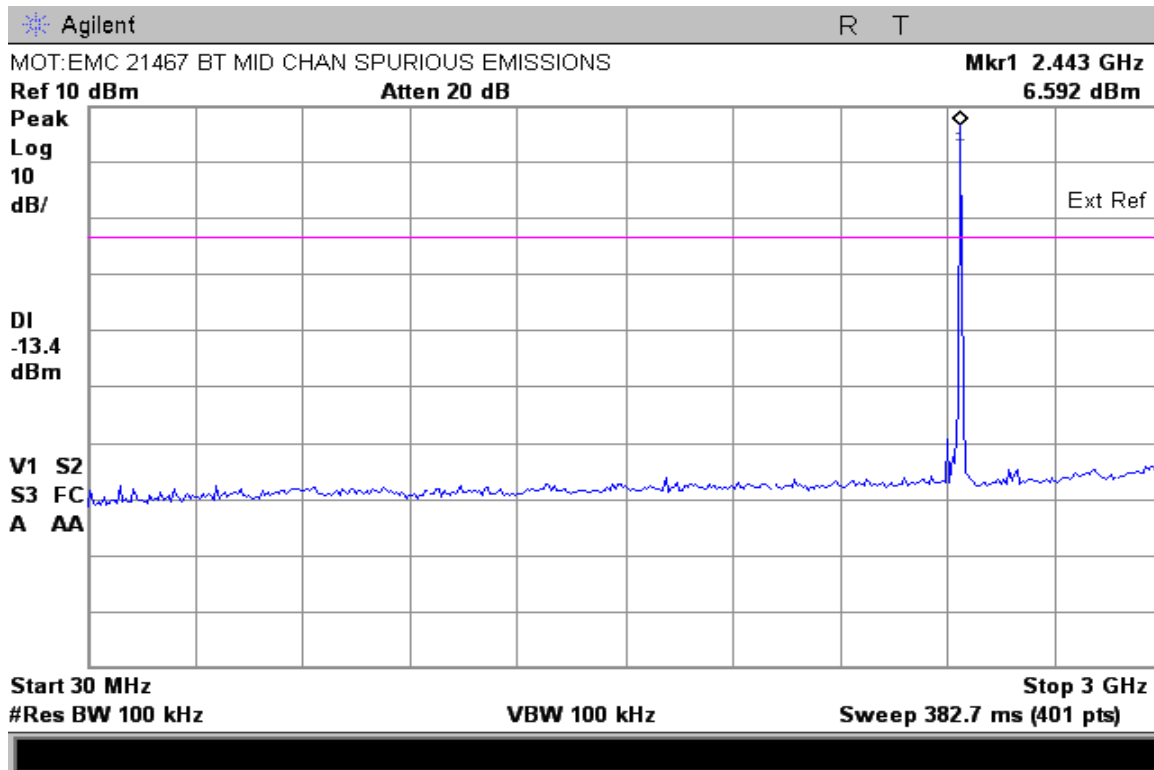


Conducted Spurious Emissions 30-3000MHz (Mid Channel Enabled)

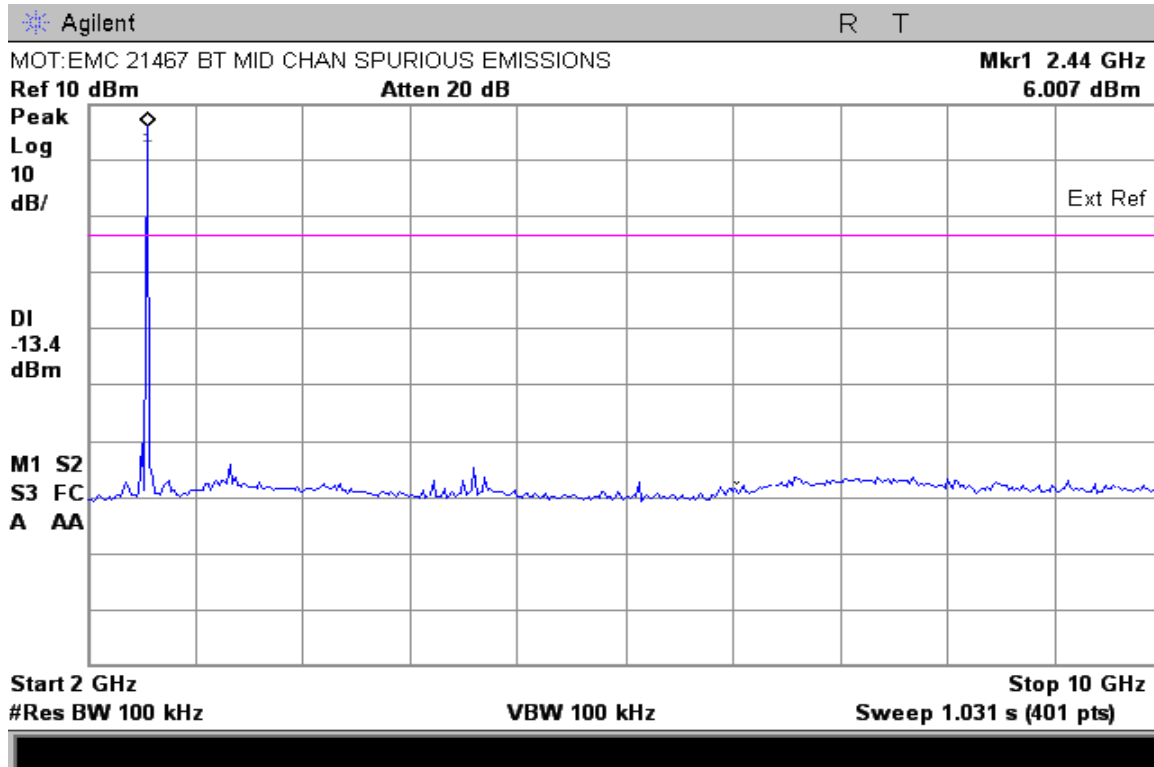


Conducted Spurious Emissions 2-10GHz (Mid Channel Enabled)

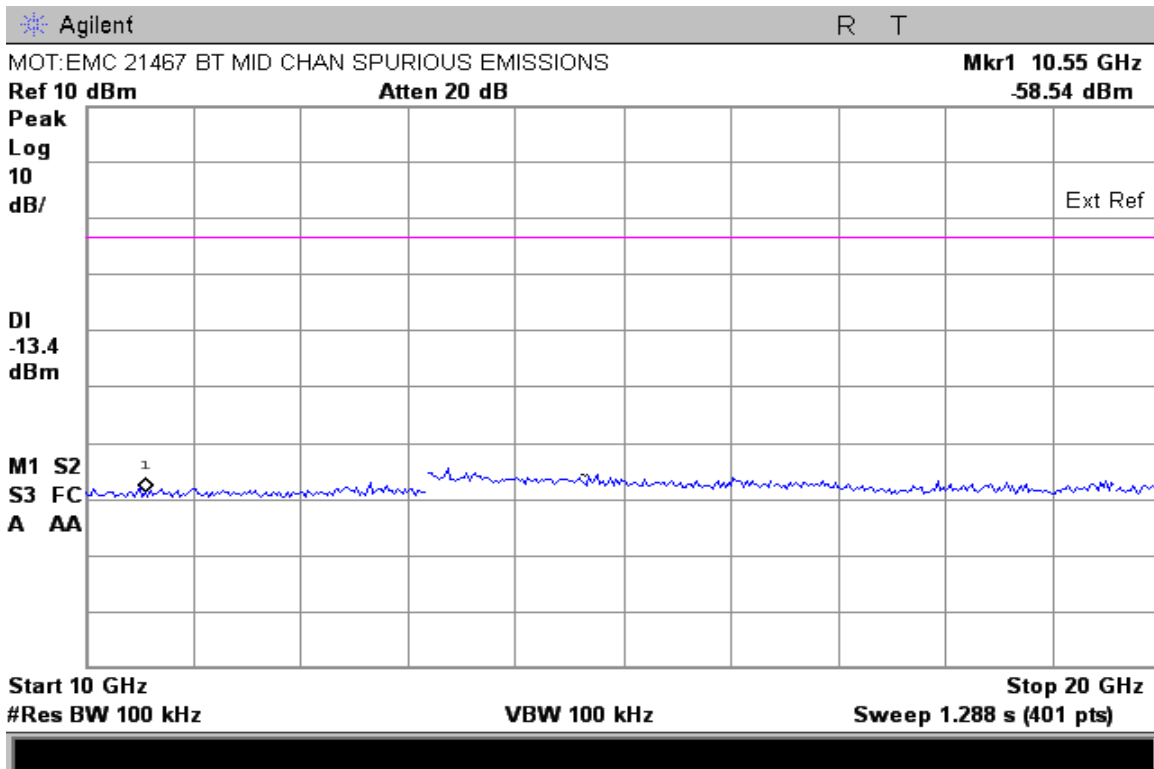


Conducted Spurious Emissions 10-20GHz (Mid Channel Enabled)

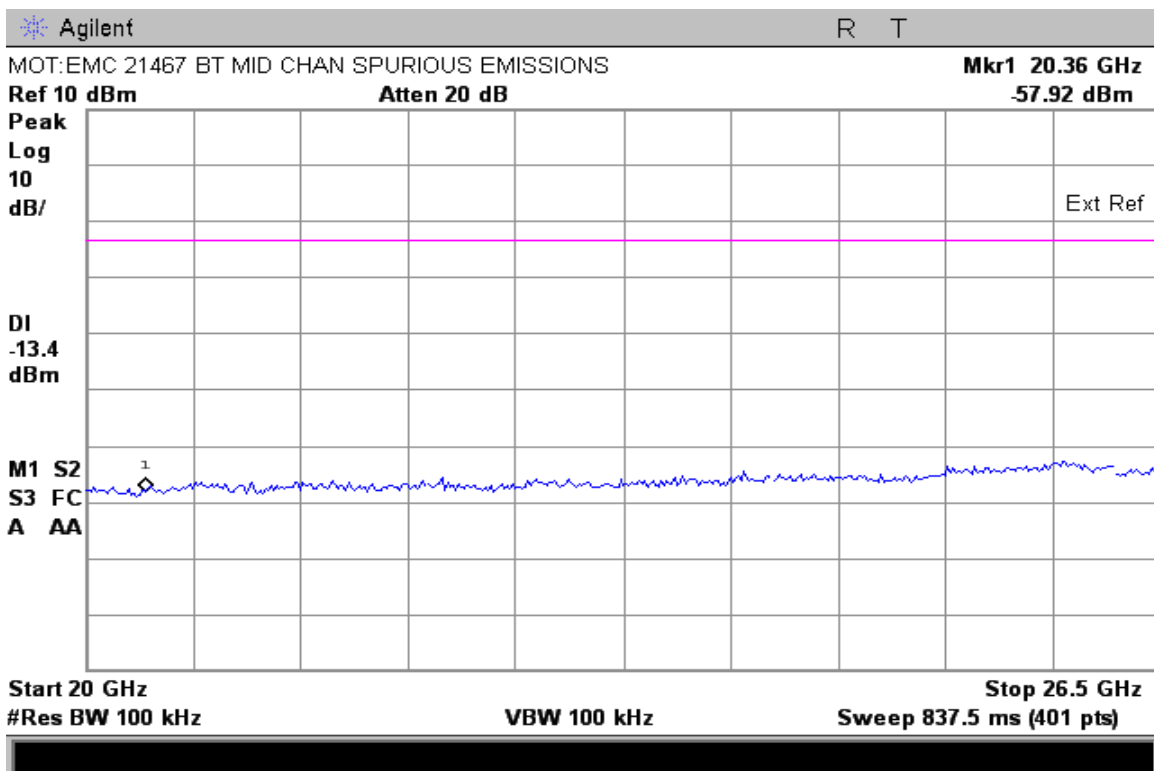


Conducted Spurious Emissions 20-26.5GHz (Mid Chan Enabled)

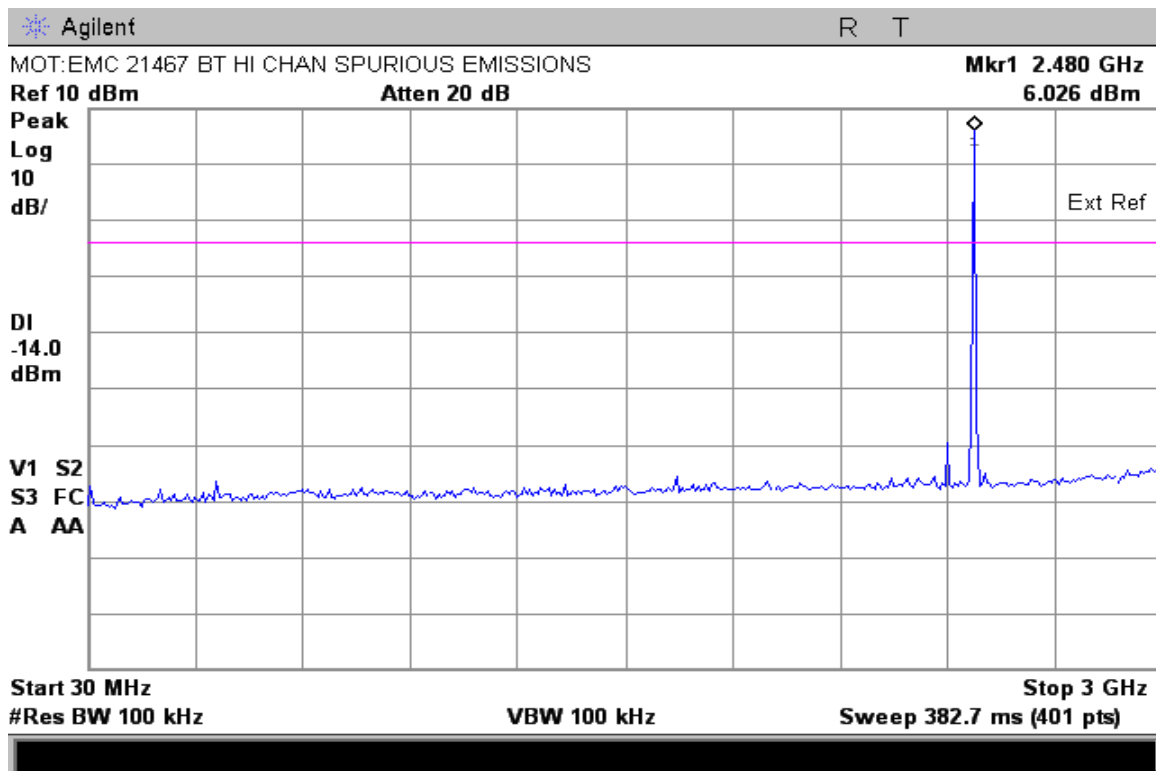


Conducted Spurious Emissions 30-3000MHz (High Channel Enabled)

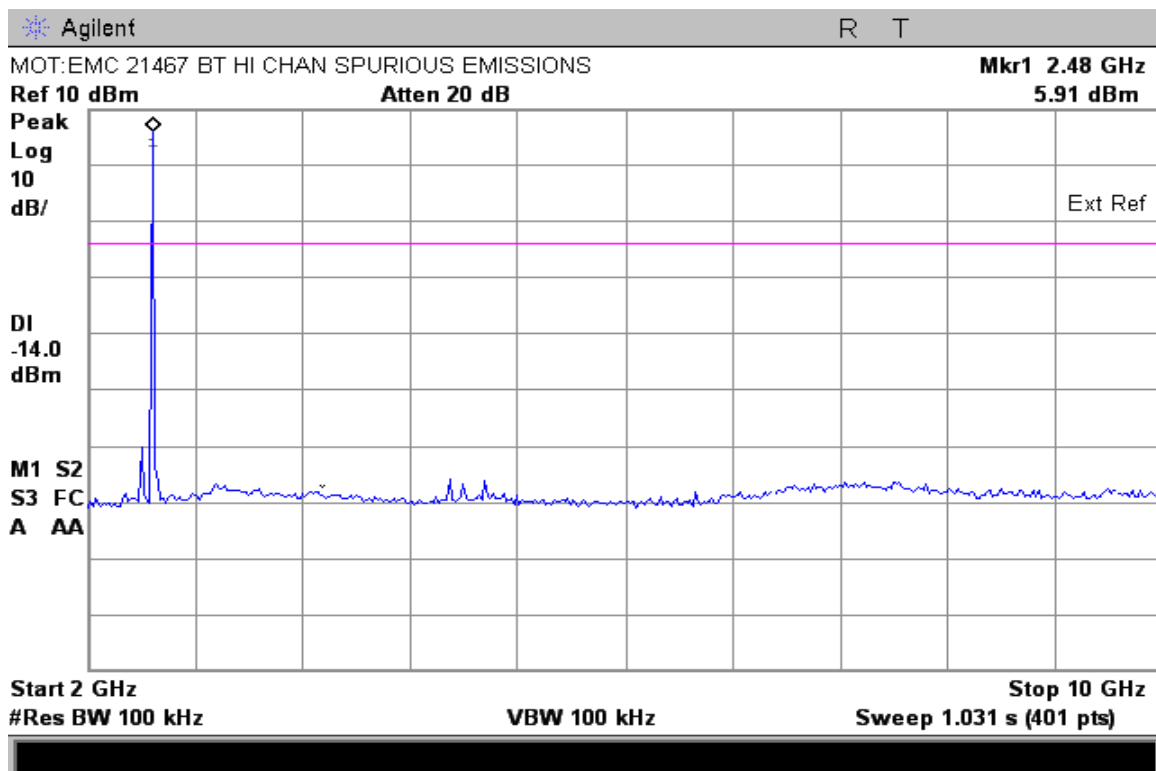

Conducted Spurious Emissions 2-10GHz (High Channel Enabled)

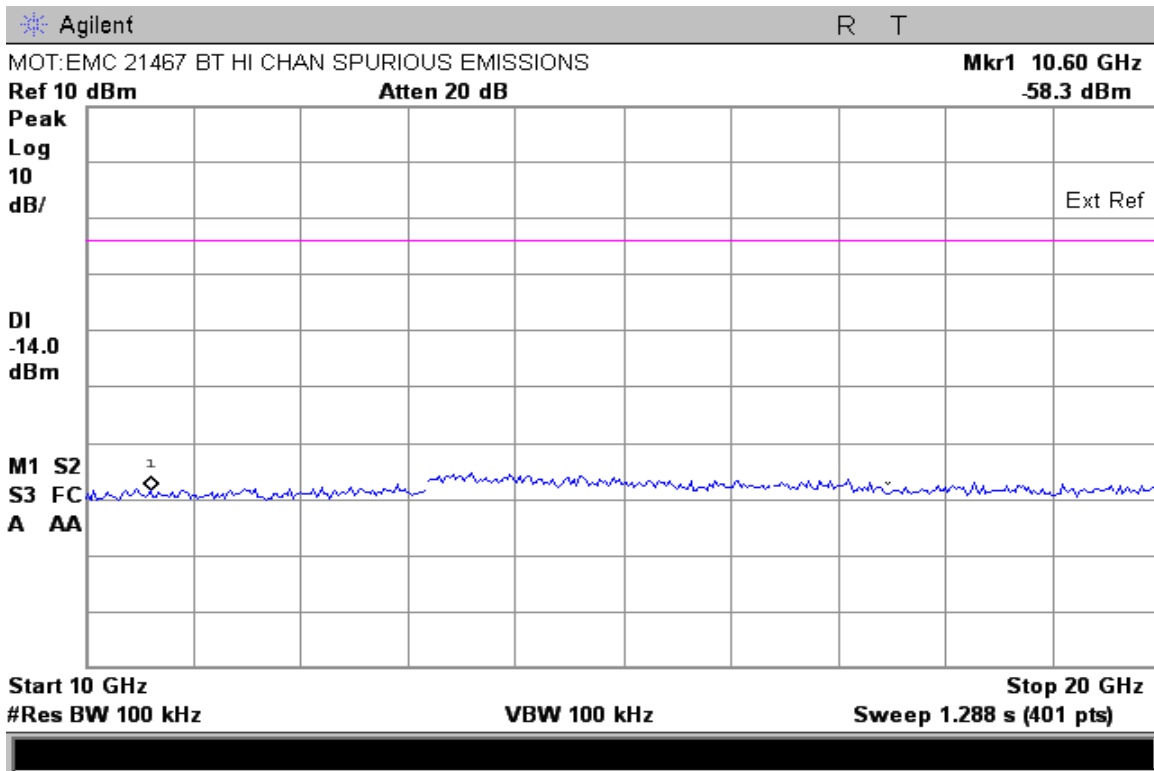

Conducted Spurious Emissions 10-20GHz (High Channel Enabled)

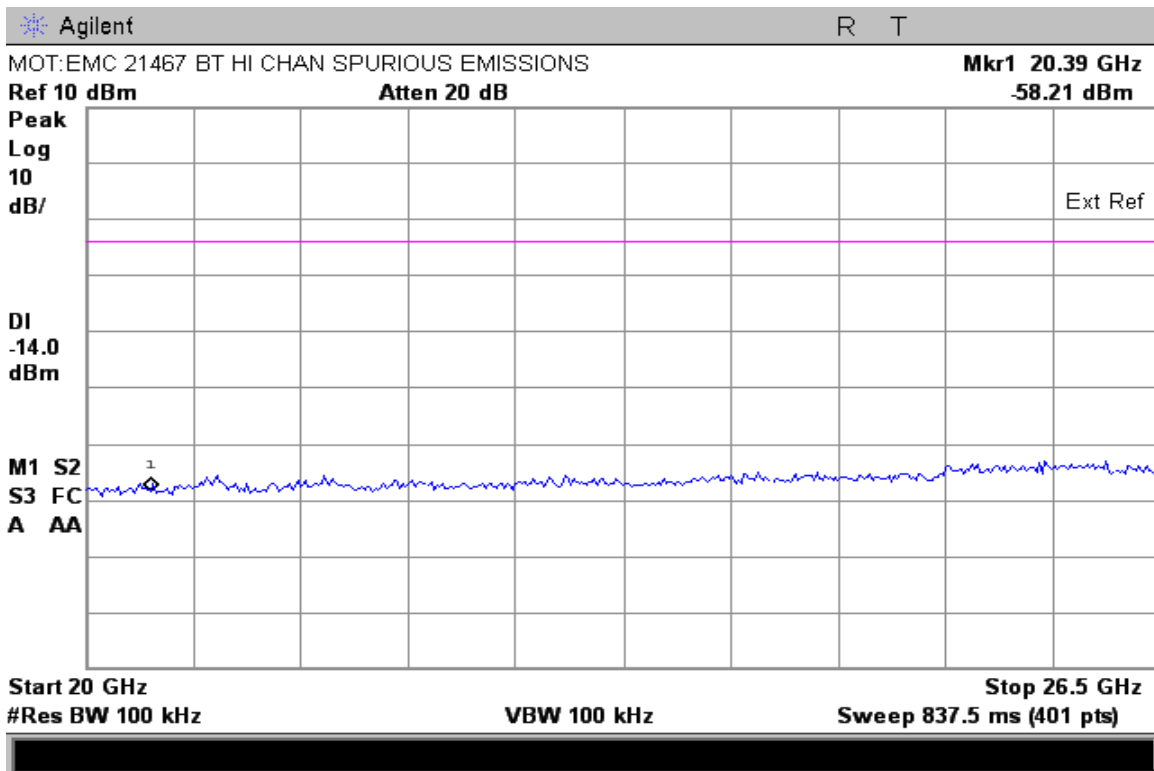

Conducted Spurious Emissions 20-26.5GHz (High Chan Enabled)

AC LINE CONDUCTED

CFR 47 Part 15.207

Measurement Procedure


Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50 Ω LISN port, where permitted, terminated into a 50 Ω noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.

All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50 Ω measuring port is terminated by a 50 Ω radio-noise meter or a 50 Ω resistive load. All other ports are terminated in 50 Ω .


Detectors – Quasi Peak and Average Detector.

Measurement Results

See attached:

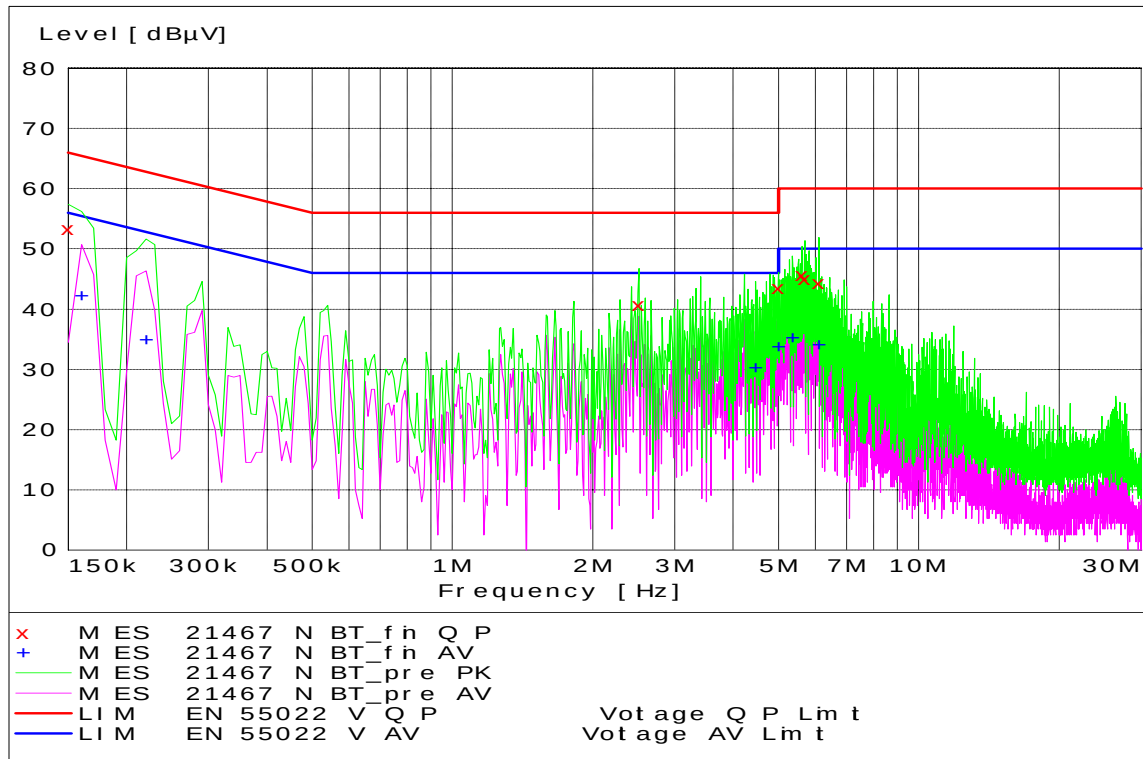

Bluetooth - Tx Mode - Neutral Coupling Hopping

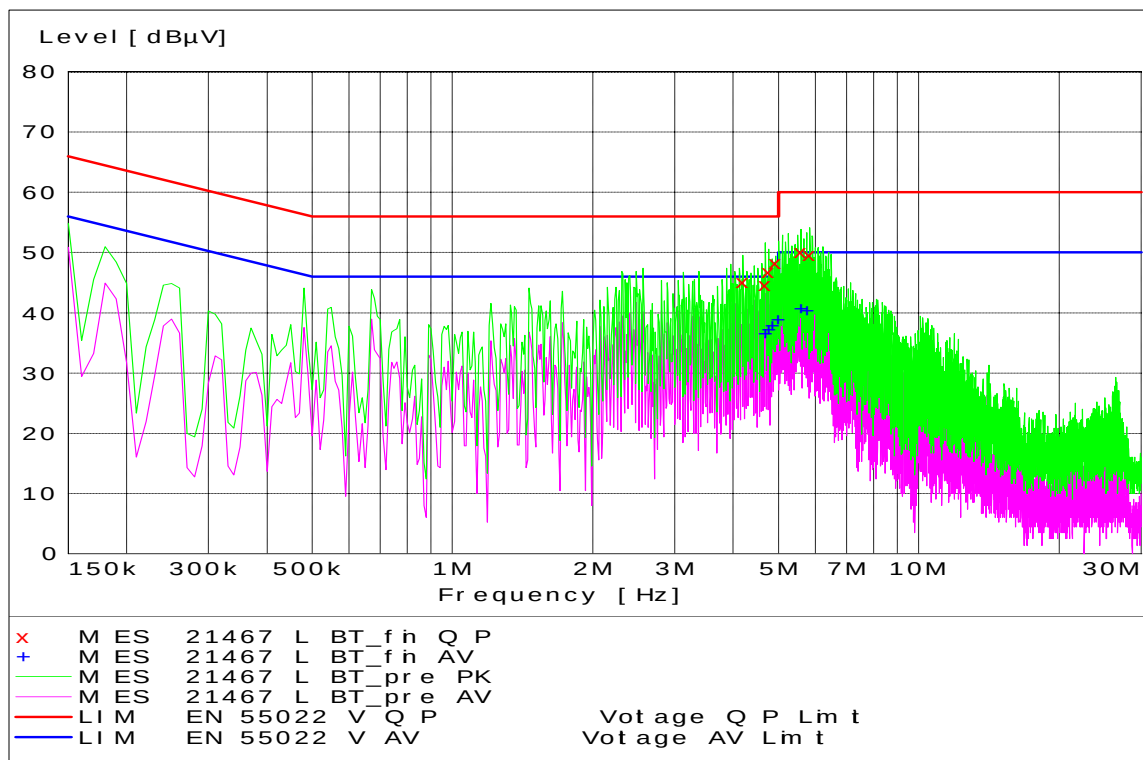

Bluetooth - Tx Mode – Line Coupling Hopping

End of Test Report