



MOBILE DEVICES BUSINESS

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT

Test Report Number – 22708-1

Report Date – February 5, 2009

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

Signature: 

Name: Albert J. Patapack

Title: EMC Engineer

Date: February 5, 2009

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 2518-02

Table of Contents

<u>Description</u>	<u>Page</u>
Test Report Details	3
Applicable Standards	3
Summary of Testing	4
General and Special Conditions	4
Equipment and Cable Configuration	5
Measurement Procedures and Data	6
RF Power Output	6
Measurement results	6
Radiated Power	8
Measurement results	9
Occupied Bandwidth	10
Measurement results	11
Spurious Emissions at Antenna Terminals	23
Measurement results	24
Field Strength of Spurious Emissions	30
Measurement results	31
Frequency Stability	38
Measurement results	39
Field Strength of Spurious Emissions -Unintentional Radiators	45
Measurement results	46
AC Line Conducted Emissions	47
Measurement results	48

Test Report Details

Tests Performed By: Motorola Mobile Devices business (Mdb)
 Product Safety and Compliance Group
 600 North US Hwy 45
 Libertyville, IL 60048
 PH (847) 523-6167 Fax (847) 523-4538
 Motorola MDb FRN: 0004321311
 FCC Registration Number: 316588
 Industry Canada Number: 1090-1

Tests Requested By: Motorola Inc.
 Mobile Devices Business
 600 North US Hwy 45
 Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: WCDMA 850/1900, GSM 850/900/1800/1900,
 HSDPA 3.6 Mbps (Category 5/6),
 EDGE Class 12, GPRS Class 12, aGPS,
 Bluetooth Class 1 Version 2.0+EDR

FCC ID : IHDT56KE1

Serial Numbers: LSSA2E0002, LSSA2E0007

Testing Complete Date: February 5, 2009

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- X Part 15 Subpart B – Unintentional Radiators
- X Part 22 Subpart H - Public Mobile Services
- X Part 24 Subpart E – Personal Communications Services

Applicable Standards: TIA EIA 137-A, TIA EIA 98-C, ANSI 63.4 2001, RSS-118 (AMPS), RSS-128 (TDMA), RSS-129 (CDMA), RSS-133 (PCS)

Summary of Testing

Test #	Test Name	Pass/Fail
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	Pass
3	EIRP (Effective Isotropic Radiated Power)	Pass
4	Occupied Bandwidth	Pass
5	Spurious Emissions at Antenna Terminal	Pass
6	Field Strength of Spurious Emissions	Pass
7	Frequency Stability	Pass
8	Field Strength of Spurious Emissions from Unintentional Radiators	Pass
9	AC Line Conducted Emissions	Pass

Test #	Test Name	Margin with respect to the Limit
1	RF Power Output	NA
2	ERP (Effective Radiated Power)	See results
3	EIRP (Effective Isotropic Radiated Power)	See results
3	Occupied Bandwidth	See Plots
4	Spurious Emissions at Antenna Terminal	See results
5	Field Strength of Spurious Emissions	See results
6	Frequency Stability	See results
7	Field Strength of Spurious Emissions from Unintentional Radiators	Below noise floor
8	AC Line Conducted Emissions	See Plots

The margin with respect to the limit is the minimum margin for all modes and bands.

General and Special Conditions

The EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Manufacturer	Equipment Type	Model No.	Serial Number	Calibration Due Date
Rohde & Schwarz	Receiver	ESI26	838786/010	2/28/2009
Rohde & Schwarz	Receiver	ESI26	100001	6/03/2009
Rohde & Schwarz	Spectrum Analyzer	FSU	200432	1/10/2009
Hewlett Packard	EMC Analyzer	E7405	US39440191	5/08/2009
Agilent	Spectrum Analyzer	N9020A	US46470586	12/10/2009
Hewlett Packard	Signal Generator	83712A	3429A00286	6/19/2009
ETS	DRG Horn Antenna	3115	6222	5/02/2009
A.H. Systems	DRG Horn Antenna	SAS 200/571	265	1/18/2009
ETS	Log-Periodic Antenna	3148	1188	7/30/2009
ETS	Biconical Antenna	3110B	3370	7/29/2009
Attenuator	Weinschel	AS-6	6675	6/13/2009
Attenuator	Weinschel	AS-6	6677	6/17/2009
Thermotron	Environmental Chamber	S-4	31580	2/11/2009
Agilent	Power Meter	E4416A	GB41293262	11/01/2009
Agilent	Power Sensor	E9323A	MY44420845	12/13/2009
Agilent	Microwave Preamplifier	8449B	3008A01442	2/25/2009
ETS	LISN	3810/2NM	2179	1/23/2009
ETS	LISN	3810/2NM	00023630	1/23/2009

Note that the Agilent power meter and microwave preamplifier are on a two-year calibration cycle. All other equipment is on a one-year calibration cycle. All testing was performed using equipment that was within calibration at the time that the test was performed. No equipment listed in the table above was used after the specified calibration due date. If, during the course of product testing, a piece of equipment went out of calibration and that piece of equipment was needed to complete product testing, a similar piece of calibrated equipment was substituted. If a substitution was made, that new piece of equipment would be listed in the above table along with the piece that was removed from service.

Measurement Procedures and Data

RF POWER OUTPUT

Measurement Procedure

The RF output port of the equipment under test is directly coupled to the input of an Agilent power meter through a 20dB passive attenuator, adaptor (if needed), and specialized RF connector. The average power output is measured for all channels.

CFR47 Part 2.1046

Measurement Results

GSM 850

Frequency (MHz)	Power (dBm)
824.2	32.56
836.6	32.54
848.8	32.47

GSM 1900

Frequency (MHz)	Power (dBm)
1850.2	29.99
1880.0	29.47
1909.8	28.93

EDGE 850

Frequency (MHz)	Power (dBm)
824.2	27.58
836.6	27.55
848.8	27.48

EDGE 1900

Frequency (MHz)	Power (dBm)
1850.2	26.52
1880.0	26.50
1909.8	26.45

WCDMA Modes

Band	Channel	Conducted power (dBm) for WCDMA modes		Conducted Power (dBm) for WCDMA – HSDPA (Rel 5) Modes			
		RMC	AMR	Subtest 1	Subtest 2	Subtest 3	Subtest 4
WCDMA 850	4132	23.95	23.90	23.88	23.90	23.90	23.90
	4180	24.15	24.20	24.19	24.18	24.18	24.18
	4233	24.01	24.00	23.95	23.96	23.96	23.96
WCDMA 1900	9262	23.93	23.91	23.90	23.90	23.90	23.90
	9400	24.02	24.01	24.00	24.01	24.01	24.01
	9538	24.03	24.06	24.05	24.05	24.05	24.04

All WCDMA testing was done in RMC mode.

RADIATED POWER (EIRP AND ERP)

Measurement Procedure

The phone was tested in a 16' anechoic chamber with a 2-axis position system that permits taking complete spherical scans of the EUT's radiation patterns. For all tests, the phone was supported in a free space type environment, vertically oriented in the chamber.

All measurements were made with the phone placed in a call using a mobile station test set. The phone was weakly coupled to the test set and configured to transmit in full data rate mode. Radiated power was measured at each 15 degree step. The radiated power was measured using a peak detector. From these measurements, the software calculates the angle at which maximum radiated power occurs for each case, and the radiated power at this angle was extracted from the data. To get ERP (effective radiated power referenced to a half-wave dipole), subtract 2.1 dB from these numbers.

Measurement Results

By channel

Frequency (MHz)	EIRP (dBm) Slider up	ERP (dBm) Slider up	EIRP (dBm) Slider down	ERP (dBm) Slider down
GSM 850				
128	32.59	30.49	28.95	26.85
190	32.91	30.81	29.10	27.00
251	32.67	30.57	28.57	26.47
EDGE 850				
128	30.25	28.15	26.36	24.26
190	30.78	28.68	26.91	24.81
251	30.45	28.35	26.41	24.31
WCDMA 850				
4132	24.62	22.52	20.68	18.58
4183	25.70	23.60	21.71	19.61
4233	25.36	23.26	21.40	19.30
GSM 1900				
512	31.05	28.95	29.91	27.81
661	31.16	29.06	30.23	28.13
810	31.83	29.73	30.25	28.15
EDGE 1900				
512	31.04	28.94	29.92	27.82
661	31.39	29.29	30.16	28.06
810	31.90	29.80	29.88	27.78
WCDMA 1900				
9262	27.64	25.54	26.76	24.66
9400	27.46	25.36	26.68	24.58
9538	28.03	25.93	26.75	24.65

Maximum

Band	EIRP dBm	ERP dBm
Slider Up		
GSM 850	32.91	30.81
EDGE 850	30.78	28.68
WCDMA 850	25.70	23.60
GSM 1900	31.83	29.73
EDGE 1900	31.90	29.80
WCDMA1900	28.03	25.93
Slider Down		
GSM 850	29.10	27.00
EDGE 850	26.91	24.81
WCDMA 850	21.71	19.61
GSM 1900	30.25	28.15
EDGE 1900	30.16	28.06
WCDMA1900	26.76	24.66

OCCUPIED BANDWIDTH

Measurement Procedure

The RF output port of the equipment under test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. The amplitude of the spectrum analyzer is corrected for the attenuator and any other applicable losses. The analyzer is set for Peak Detector and each trace is set for Max Hold. A fully charged battery was used for the supply voltage.


The middle channel within the designated frequency block was measured. For digital modulation, the lower and upper band edge plots are displayed.

Measurement Results
Attached


Plot	Equipment Settings					
	Resolution Bandwidth (kHz)	Video Bandwidth (kHz)	Sweep Points (#)	Trace Mode	Detector	Samples (≥ #)
Reference Plot - GSM 850	300	Auto	1001	Max Hold	Peak	30
OCBW - GSM 850	3	Auto	1001	Max Hold	Peak	30
Lower Band Edge - GSM 850	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - GSM 850	1	Auto	2004	Max Hold	Peak	30
Reference Plot - GSM 1900	300	Auto	1001	Max Hold	Peak	30
OCBW - GSM 1900	3	Auto	1001	Max Hold	Peak	30
Lower Band Edge - GSM 1900	1	Auto	2004	Max Hold	Peak	30
Upper Band Edge - GSM 1900	1	Auto	2004	Max Hold	Peak	30

- Notes:
- 1) When the video bandwidth is set to Auto the video bandwidth self adjusts for ³ the resolution bandwidth.
 - 2) The plotted data shown for the band edge measurements is representative of data taken with a true 3 kHz resolution bandwidth filter. The raw data was taken using a 1 kHz resolution bandwidth and was integrated to produce a response representative of data taken using a true 3 kHz resolution bandwidth filter.


Measurement Results – GSM 850

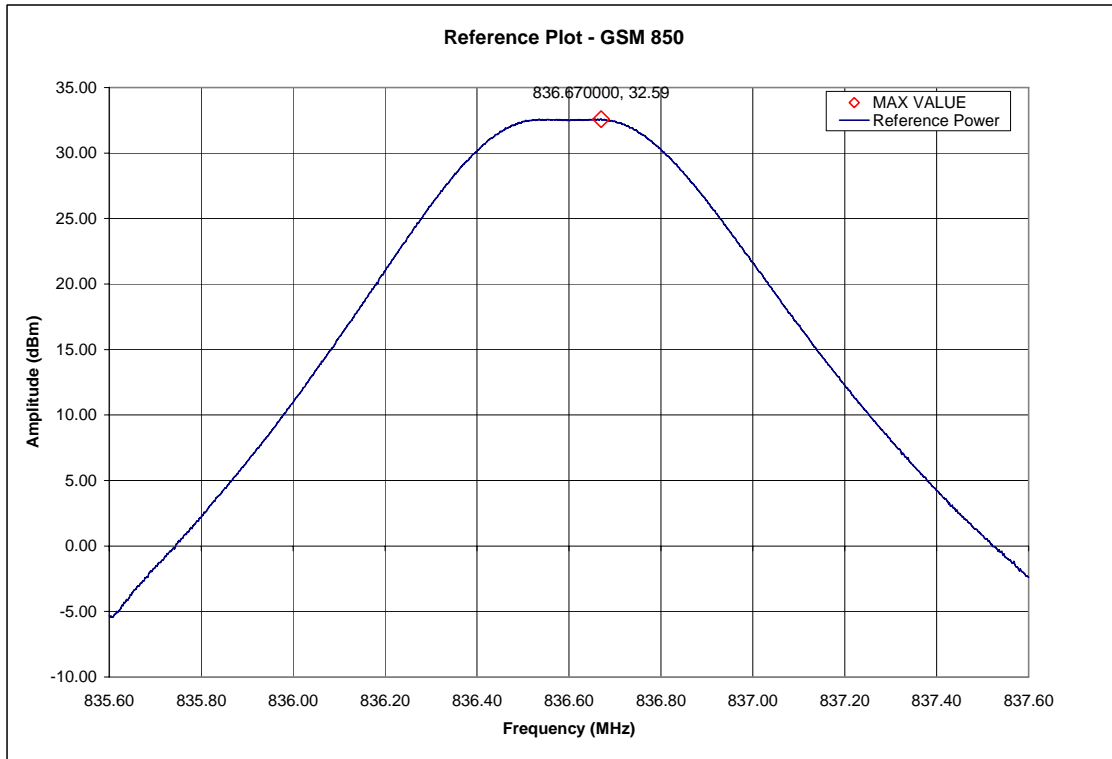


GSM 850 – Reference Level Plot – Channel 190 (836.60 MHz)

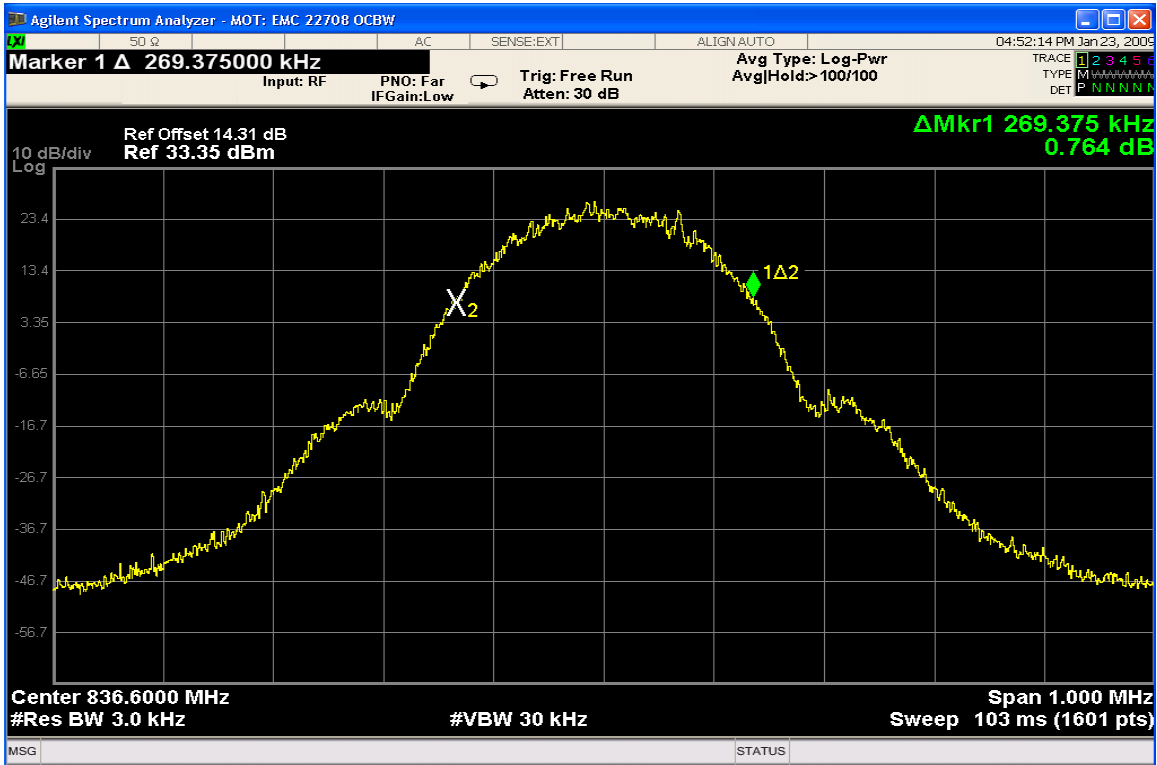

GSM 850 – Channel 190 (836.60 MHz) – Occupied Bandwidth

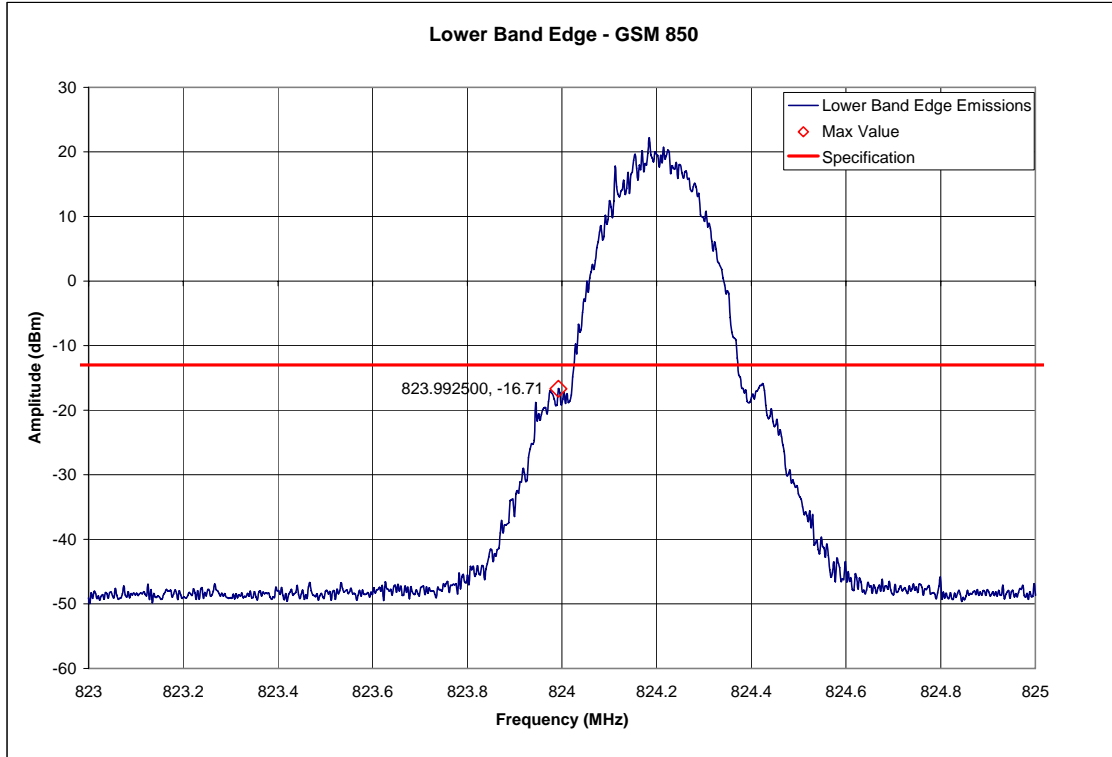


GSM 850 – Lower Band Edge – Channel 128 (824.2 MHz)

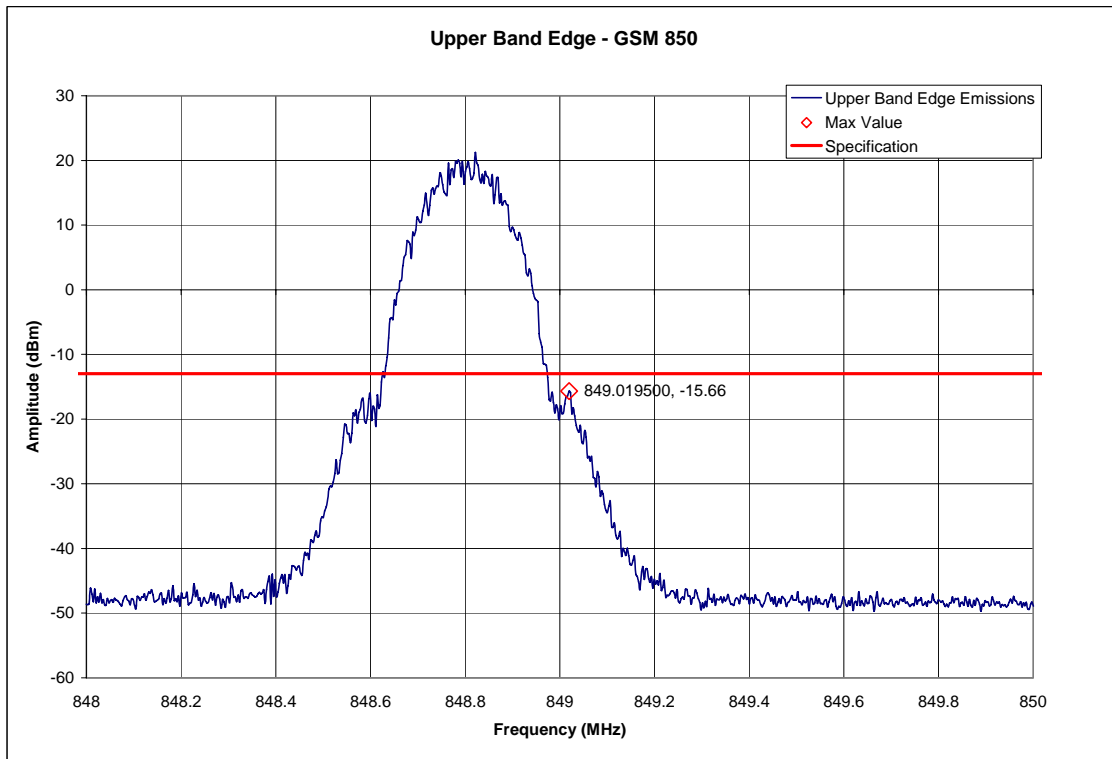


GSM 850 – Upper Band Edge – Channel 251 (848.8 MHz)


Measurement Results – GSM 1900

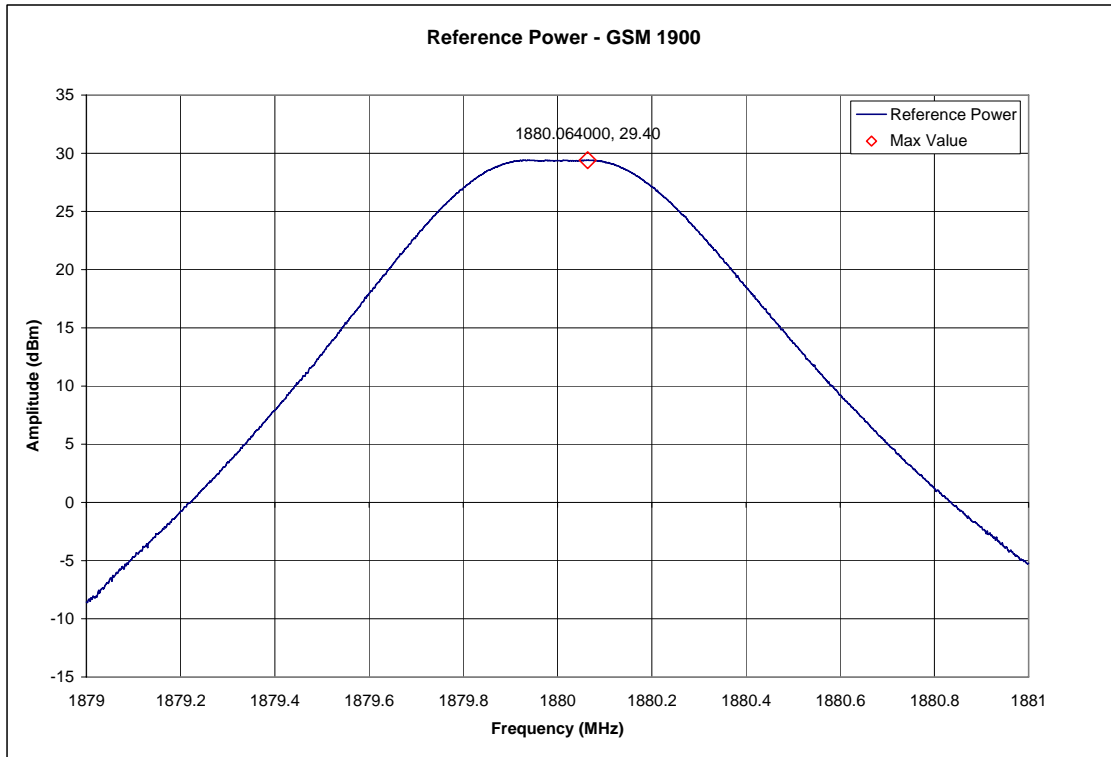


GSM 1900 – Reference Level Plot – Channel 661 (1880.00MHz)

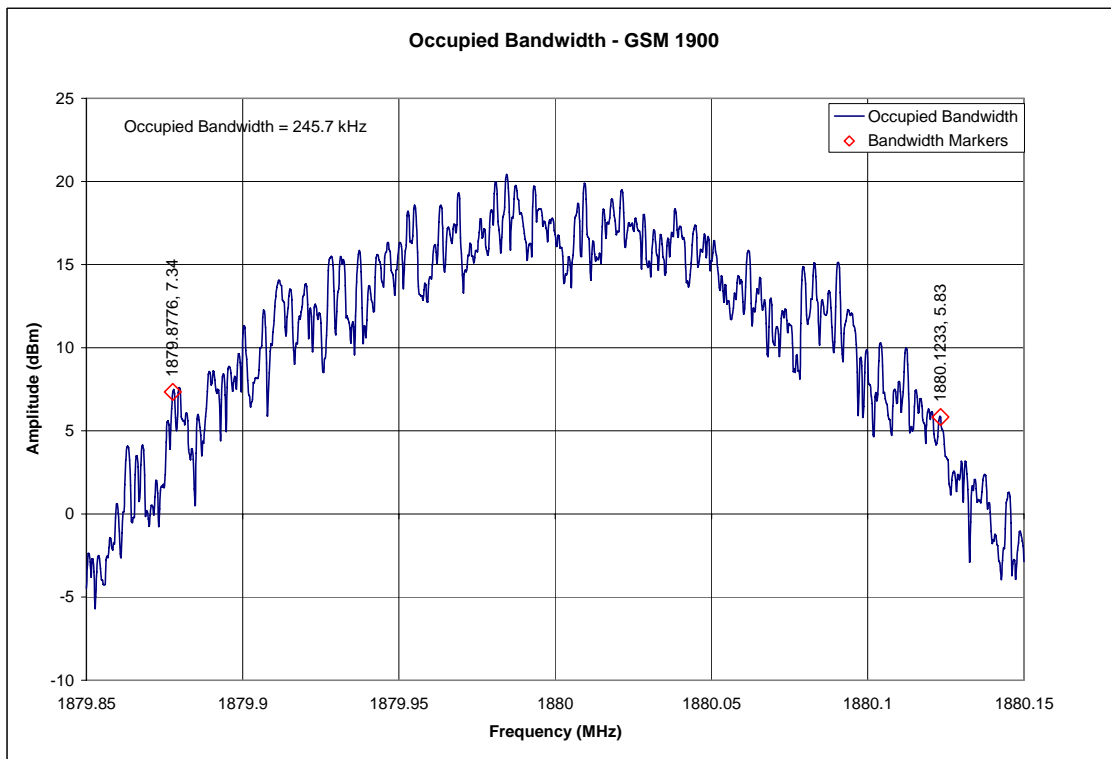

GSM 1900 – Occupied Bandwidth – Channel 661 (1880.00MHz)

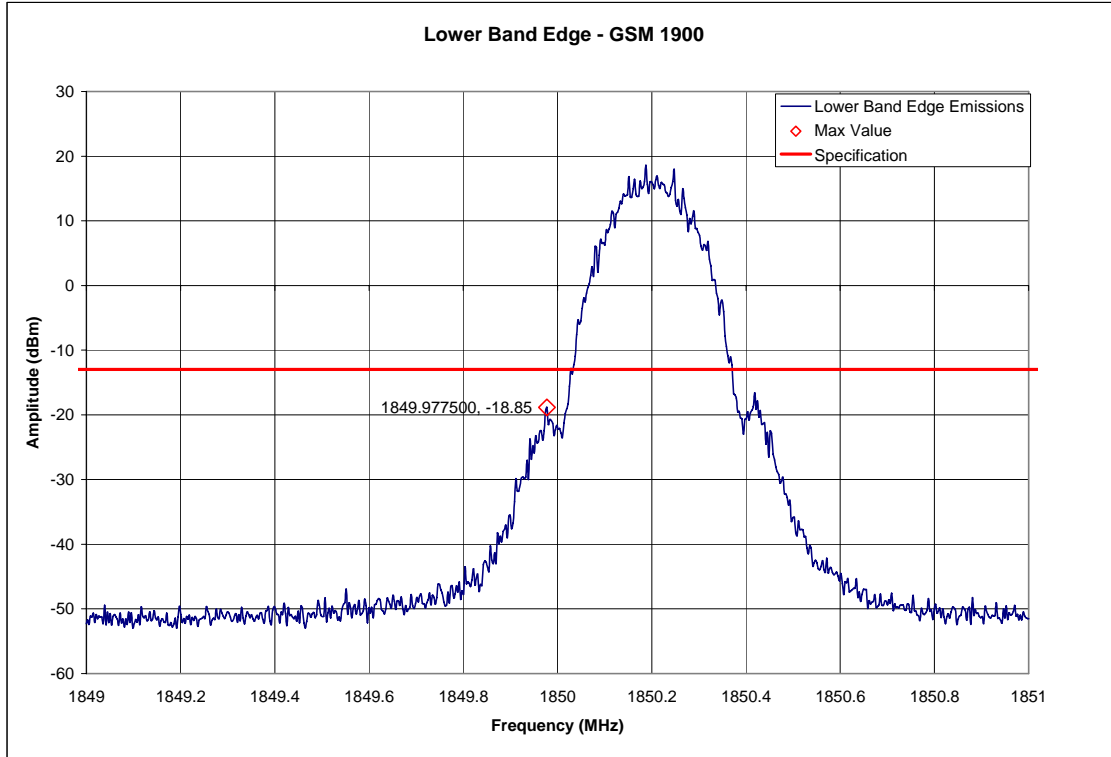


GSM 1900 – Lower Band Edge – Channel 512 (1850.2MHz)

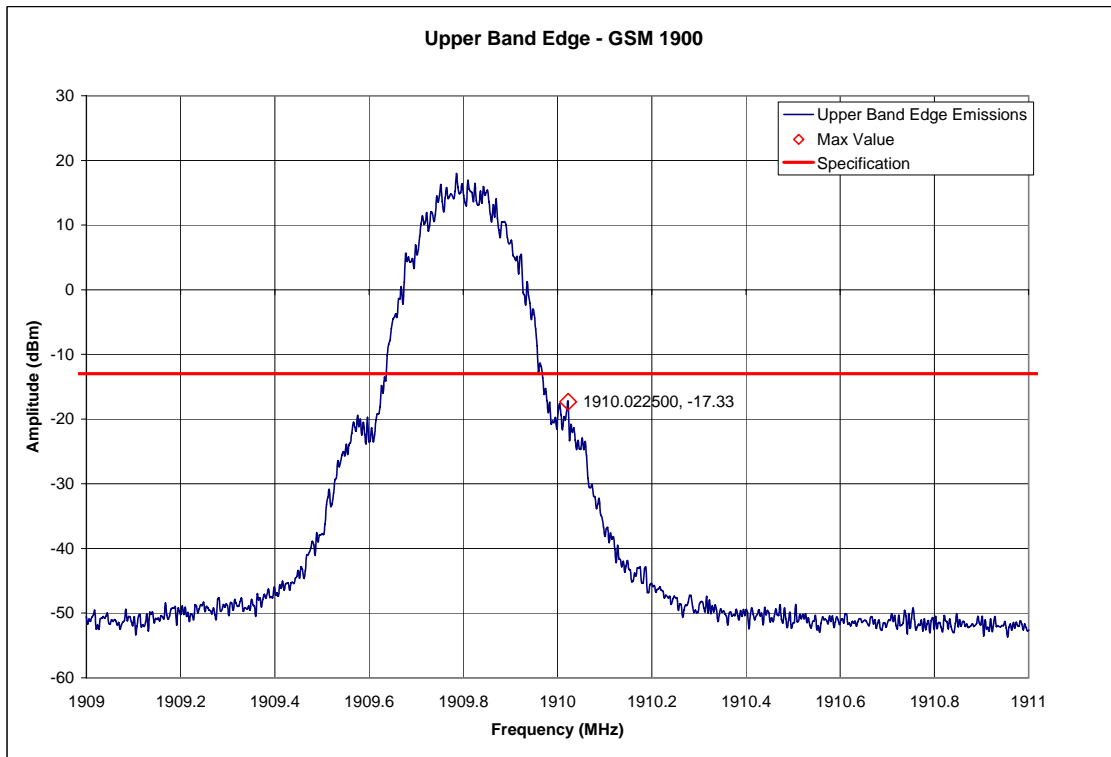


GSM 1900 – Upper Band Edge – Channel 810 (1909.8MHz)


Measurement Results – EDGE 850

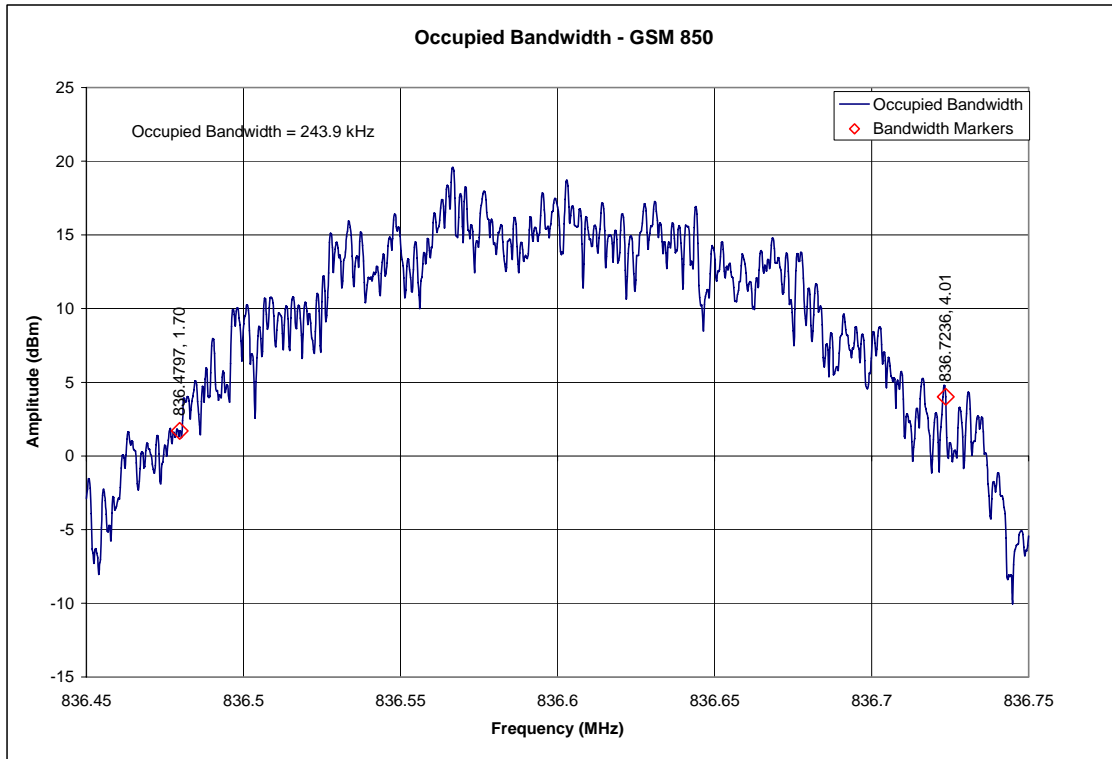

EDGE 850 – Channel 190 (836.60 MHz) – Occupied Bandwidth

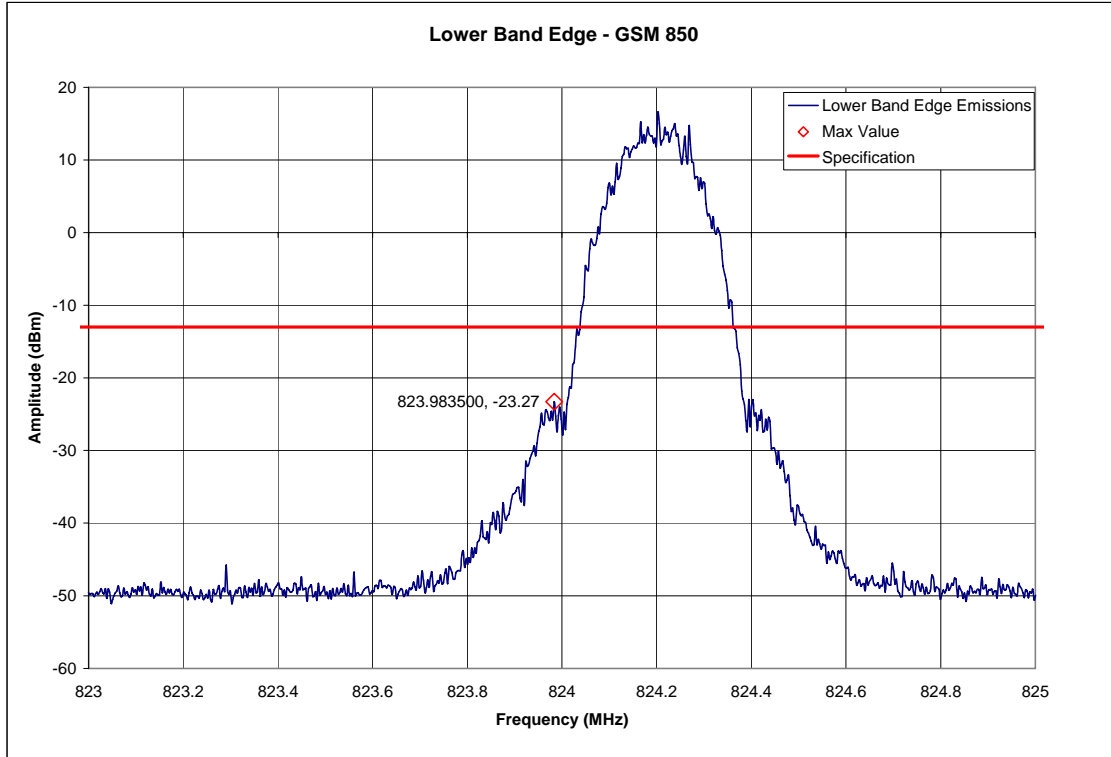


EDGE 850 – Lower Band Edge – Channel 128 (824.2 MHz)

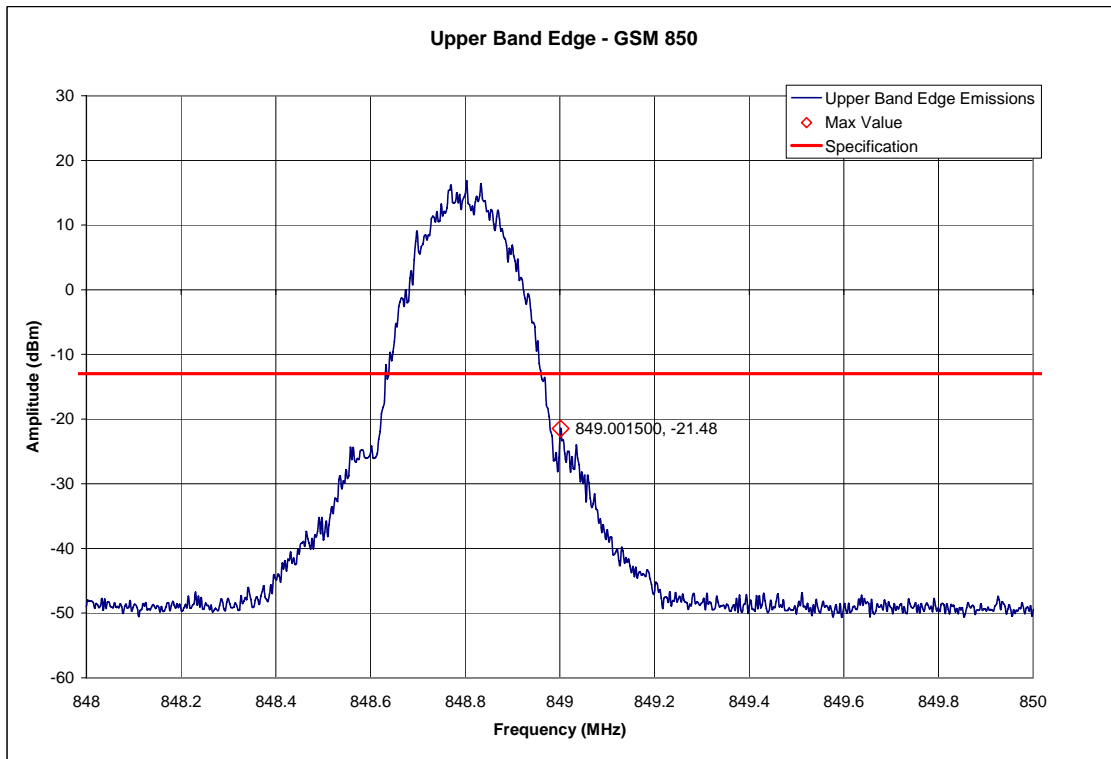


EDGE 850 – Upper Band Edge – Channel 251 (848.8 MHz)


Measurement Results – EDGE 1900

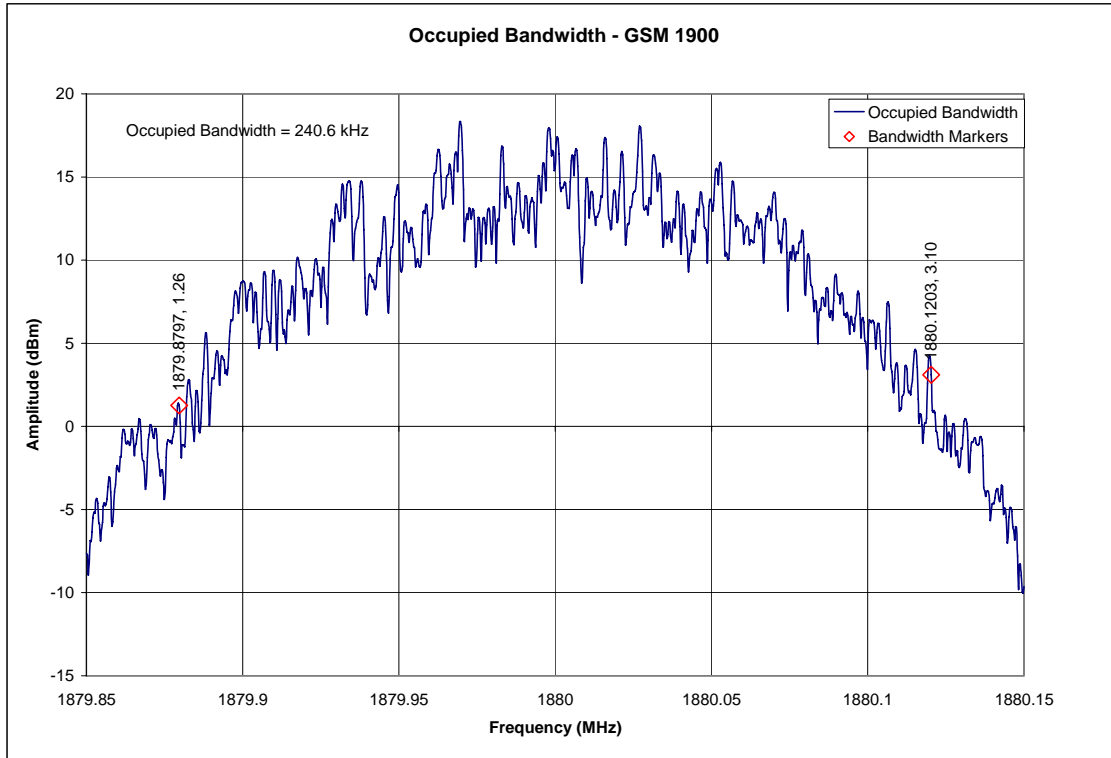

GSM 1900 EDGE – Occupied Bandwidth – Channel 661 (1880.00MHz)

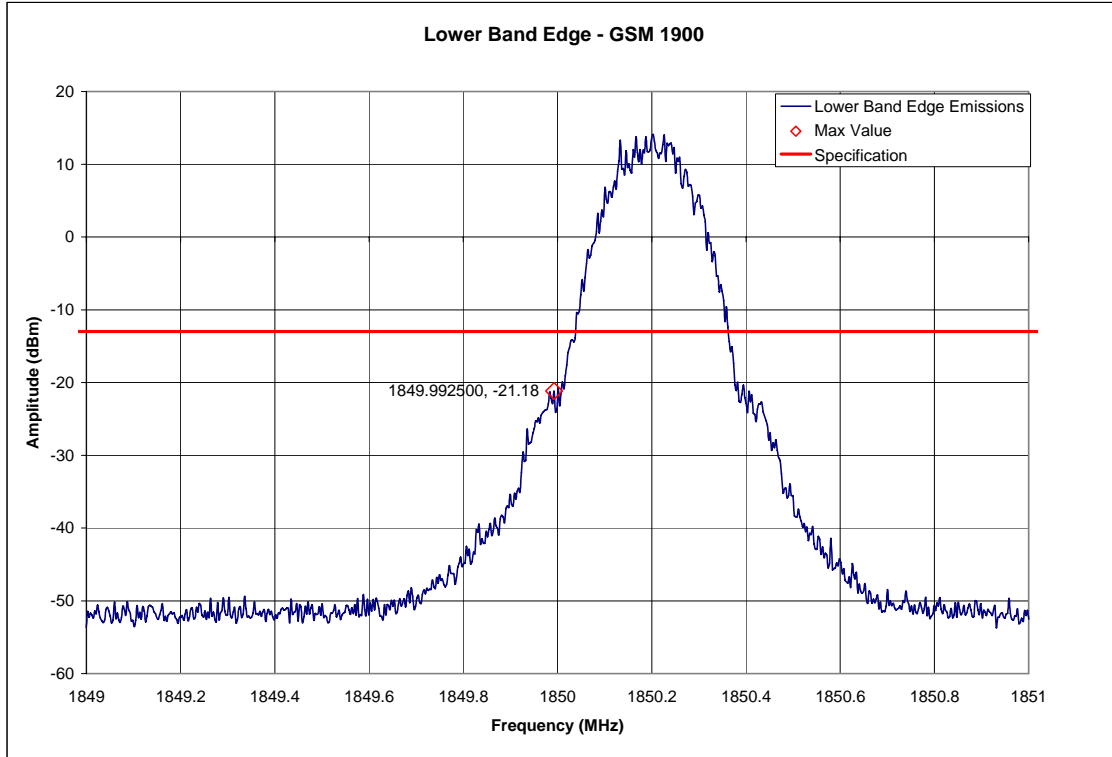


GSM 1900 EDGE – Lower Band Edge – Channel 512 (1850.2MHz)

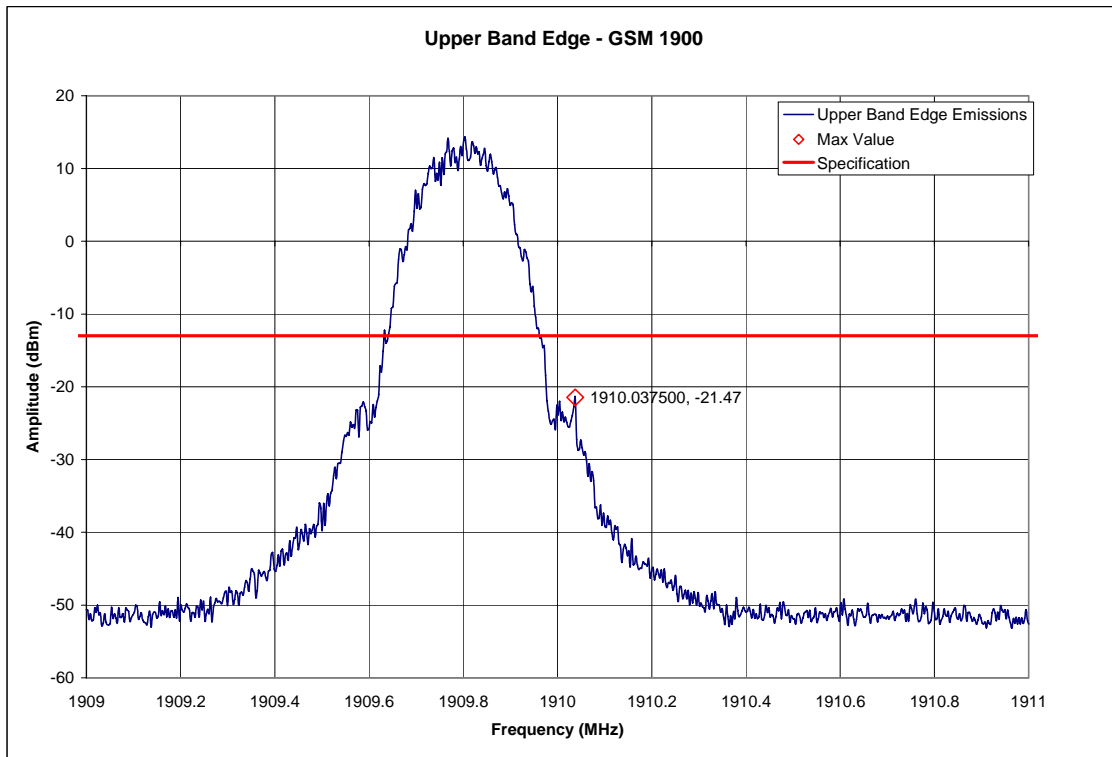


GSM 1900 EDGE – Upper Band Edge – Channel 810 (1909.8MHz)

Measurement Results – WCDMA 850

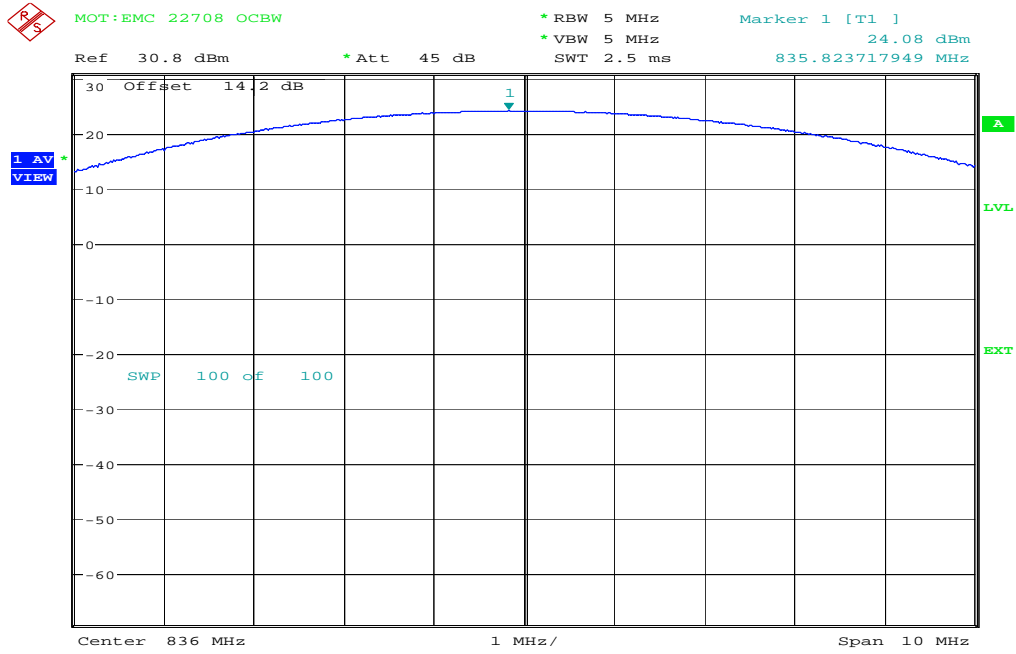


Date: 7.JAN.2009 01:15:40

WCDMA 850 – Reference Level Plot – Channel 4180 (836.00 MHz)

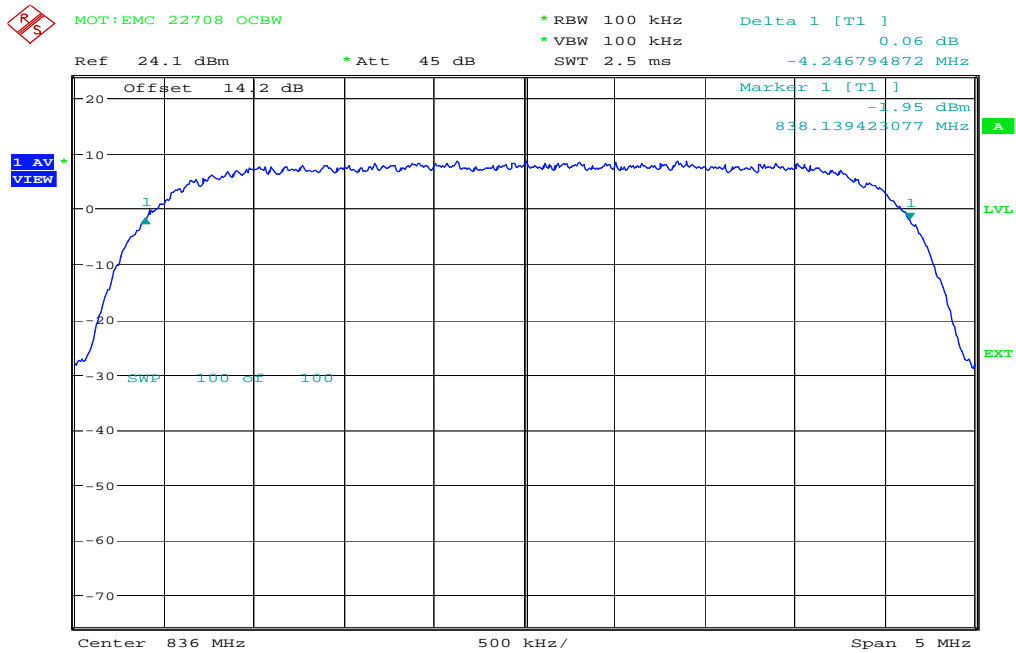


Date: 7.JAN.2009 01:25:29

WCDMA 850 – Occupied Bandwidth – Channel 4180 (836.00 MHz)

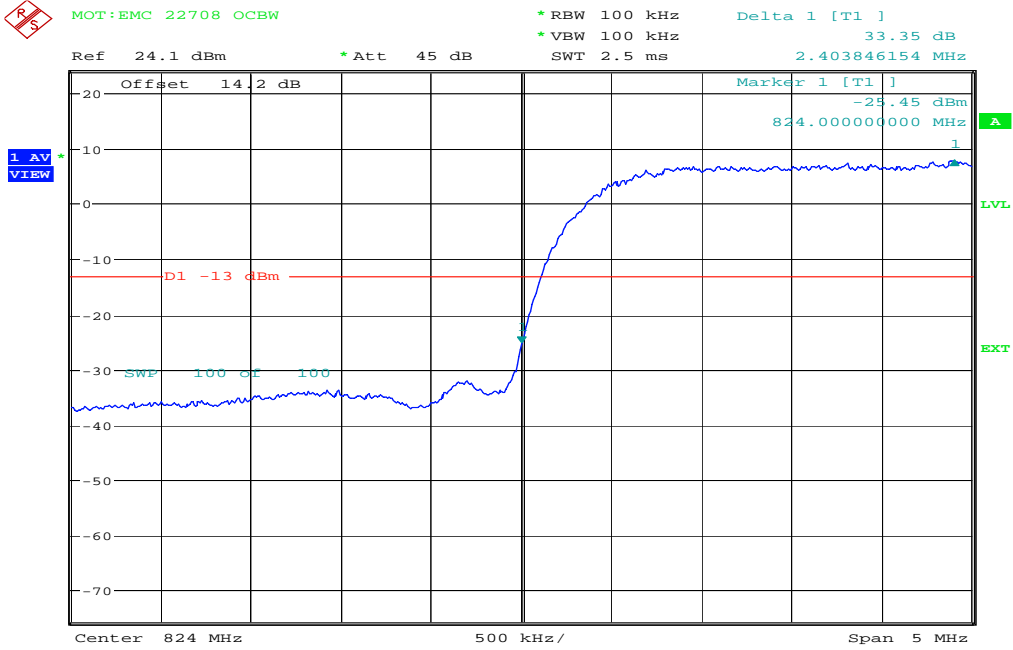

Date: 7.JAN.2009 01:28:22


WCDMA 850 – Lower Band Edge – Channel 4132 (826.40 MHz)

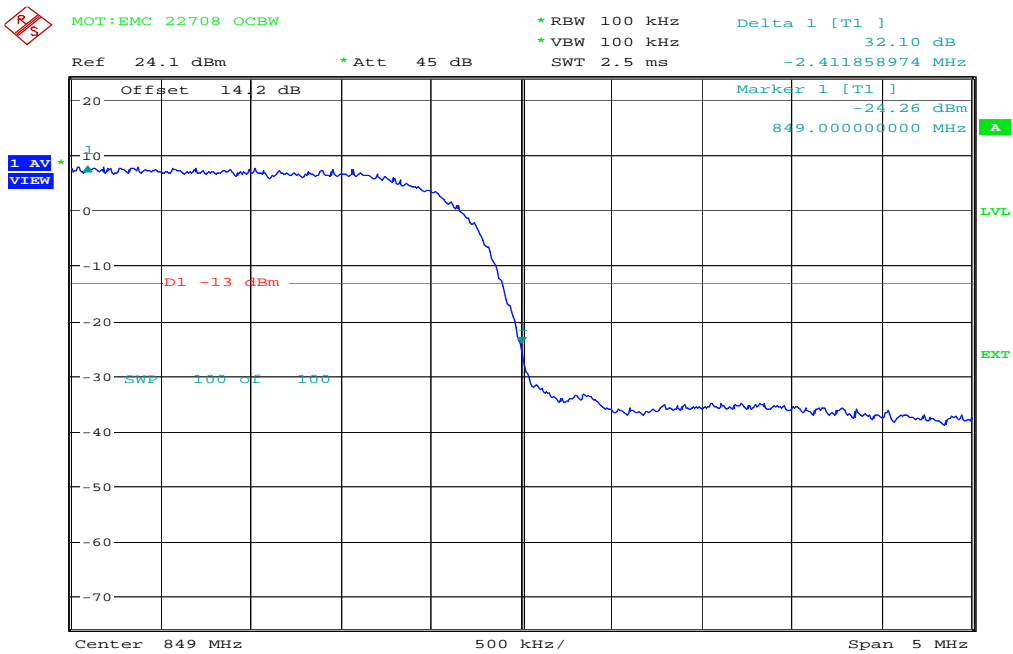

Date: 7.JAN.2009 01:30:44


WCDMA 850 – Upper Band Edge – Channel 4233 (846.60 MHz)

Measurement Results – WCDMA 1900

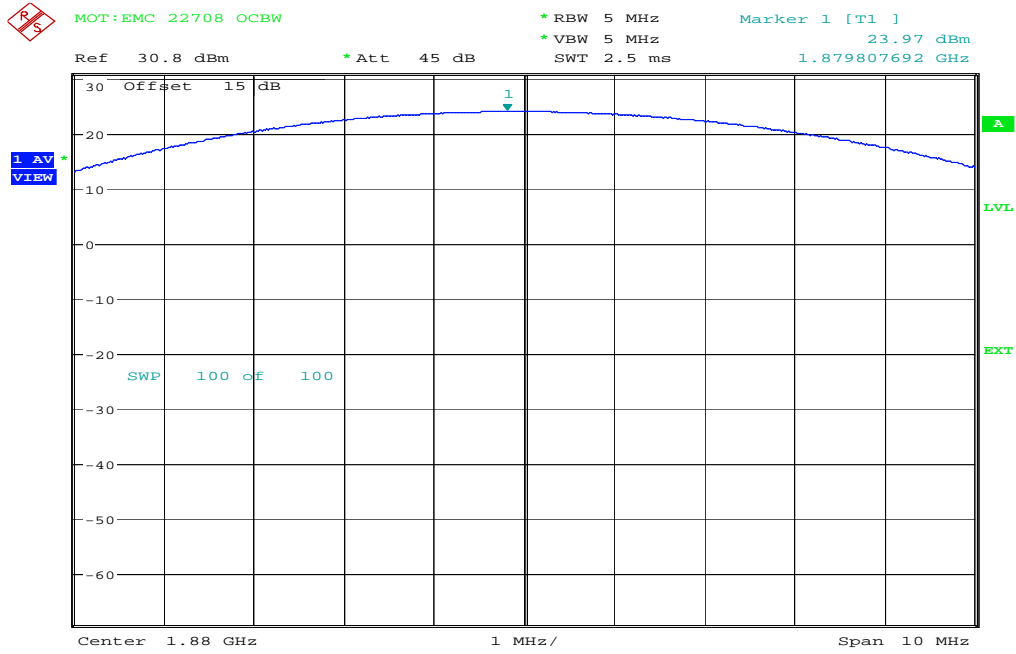


Date: 7.JAN.2009 01:33:29

WCDMA 1900 – Reference Level Plot – Channel 9400 (1880.00 MHz)

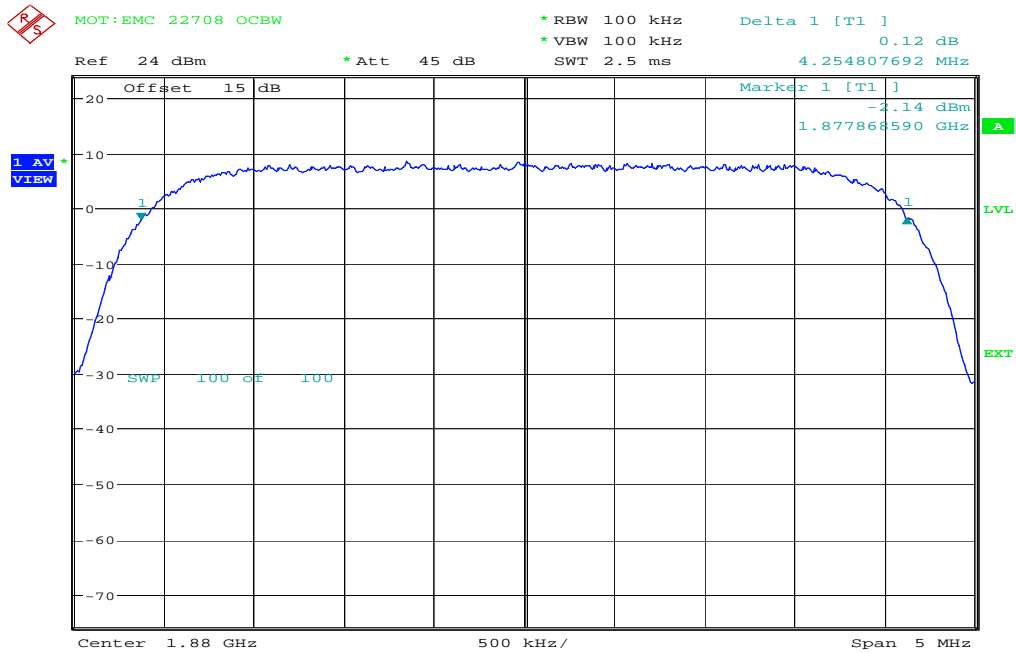


Date: 7.JAN.2009 01:35:16

WCDMA 1900 – Occupied Bandwidth – Channel 9400 (1880.00 MHz)

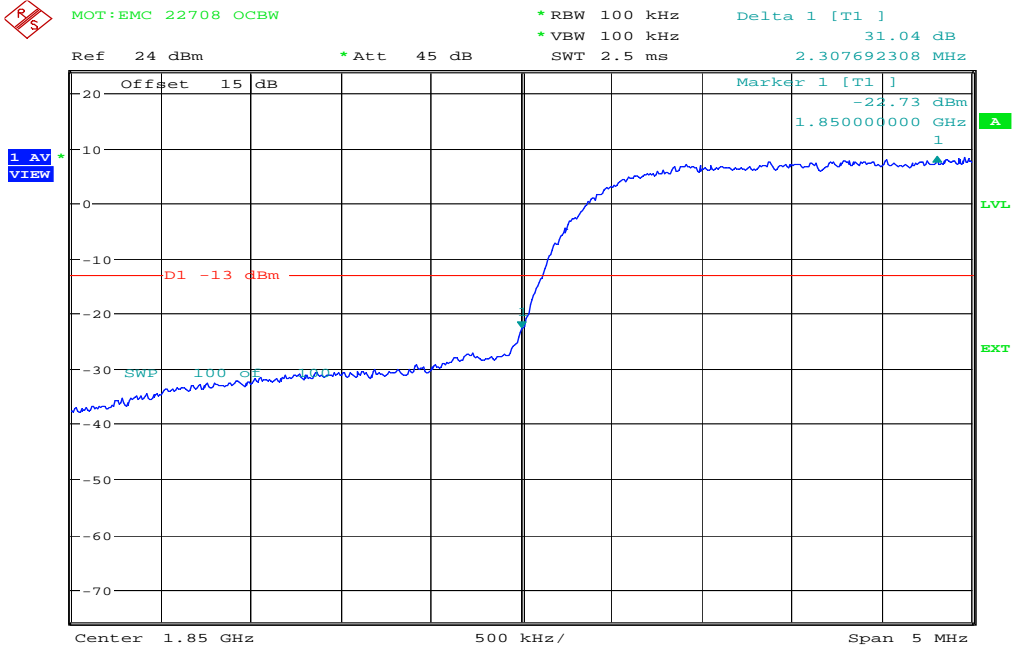

Date: 7.JAN.2009 01:37:09

WCDMA 1900 – Lower Band Edge – Channel 9262 (1852.40 MHz)

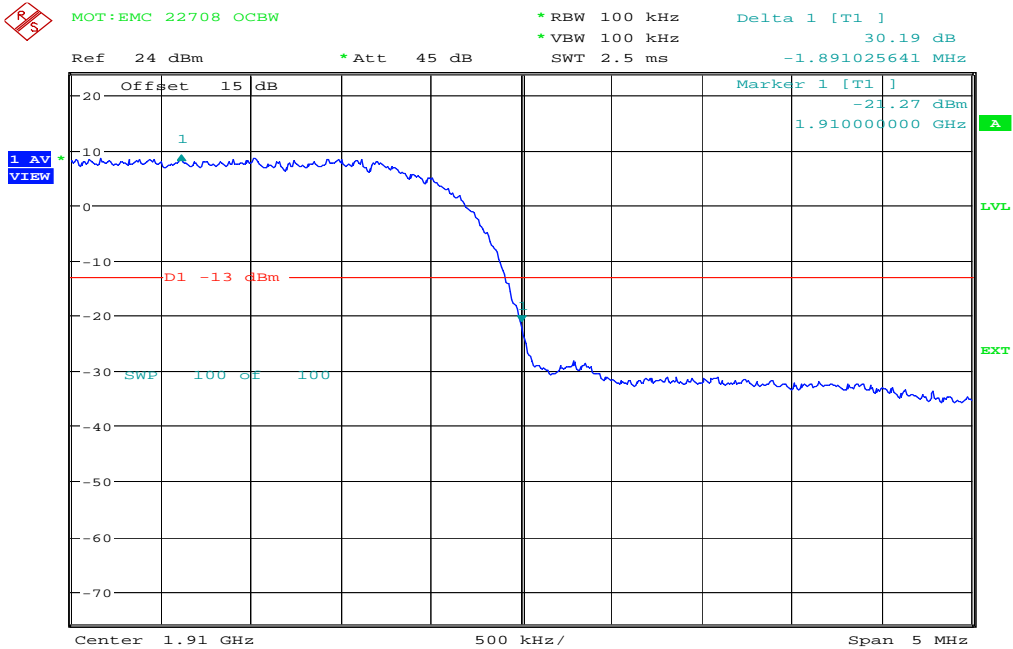

Date: 7.JAN.2009 01:38:32

WCDMA 1900 – Upper Band Edge – Channel 9538 (1907.60 MHz)

SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Measurement Procedure

The RF output port of the Equipment Under Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The spectrum was investigated from the lowest frequency signal generated, without going below 9 kHz, up to at least the tenth harmonic of the fundamental or 40 GHz, whichever is lower.

The spectrum analyzer settings were as follows:


Units	dBm
Divisions	10 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto

Measurement Results

Attached

Measurement Results
Modulation: GSM 850

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-57.46
3rd harmonic	-13	-53.97
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

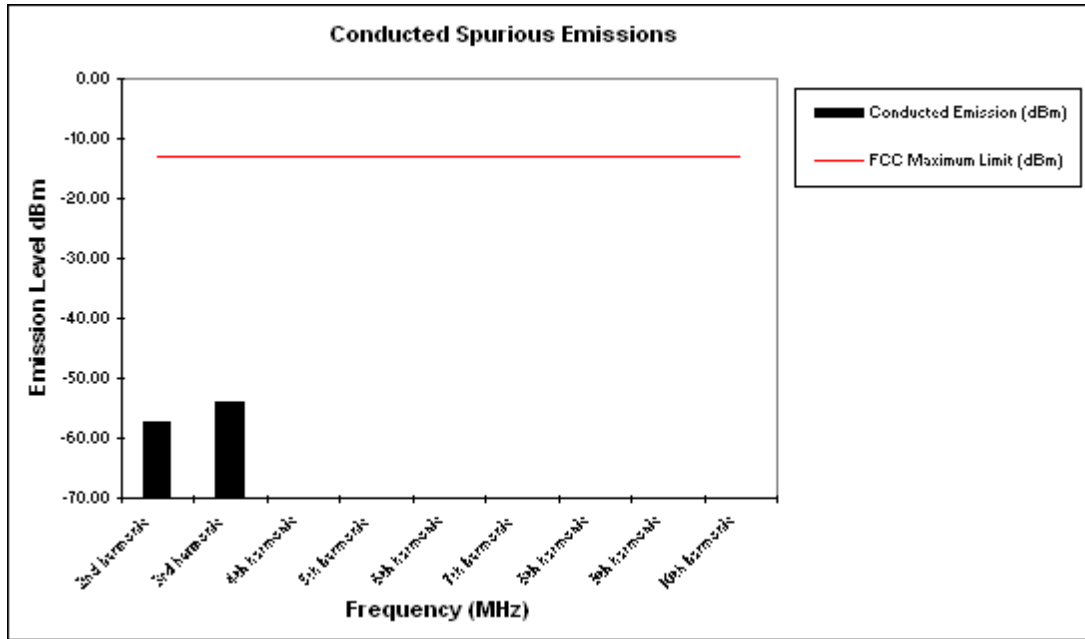


Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results
Modulation: EDGE 850

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	*
3rd harmonic	-13	-60.41
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

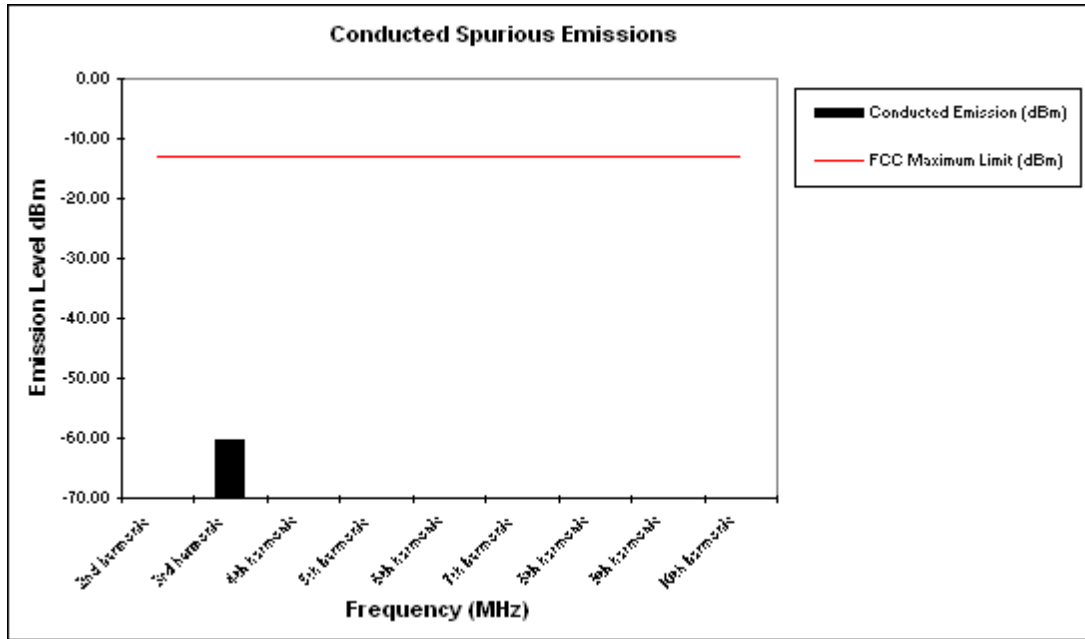


Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results
Modulation: WCDMA 850

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	-56.06
3rd harmonic	-13	*
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

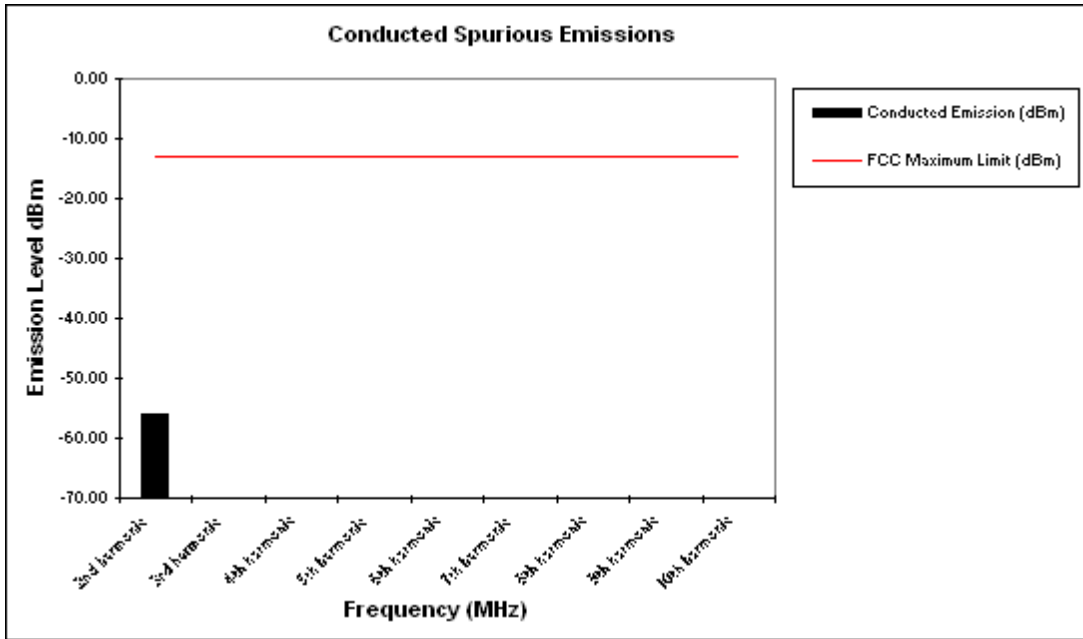


Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results
Modulation: GSM 1900 and EDGE 1900

Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	*
3rd harmonic	-13	*
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

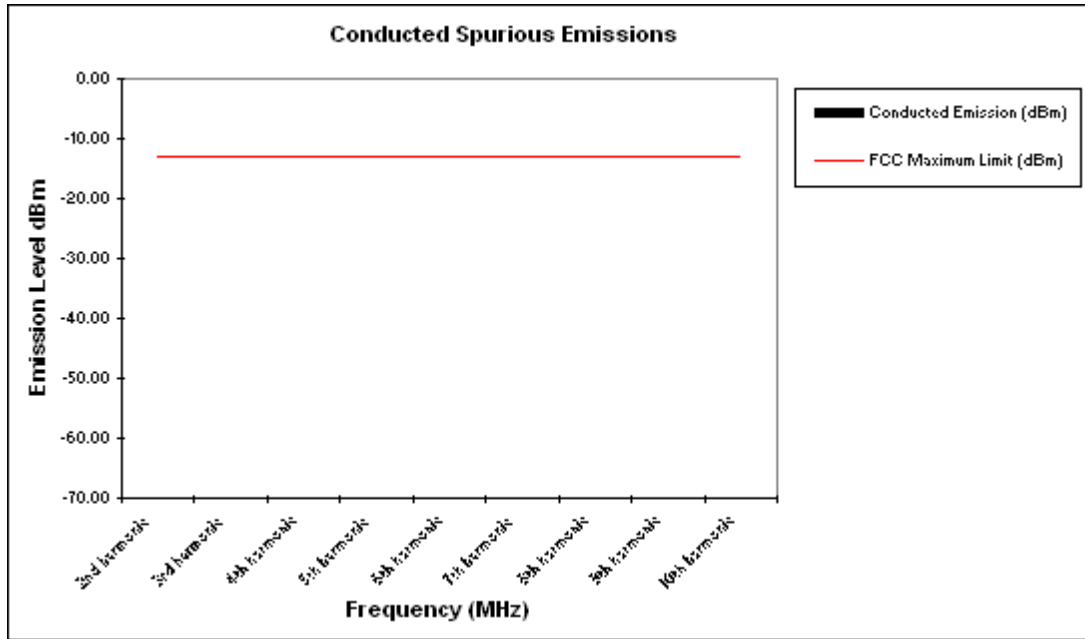


Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results
Modulation: WCDMA 1900


Harmonic of Fundamental	FCC Maximum Limit (dBm)	Conducted Emission (dBm)
2nd harmonic	-13	*
3rd harmonic	-13	-45.94
4th harmonic	-13	*
5th harmonic	-13	*
6th harmonic	-13	*
7th harmonic	-13	*
8th harmonic	-13	*
9th harmonic	-13	*
10th harmonic	-13	*

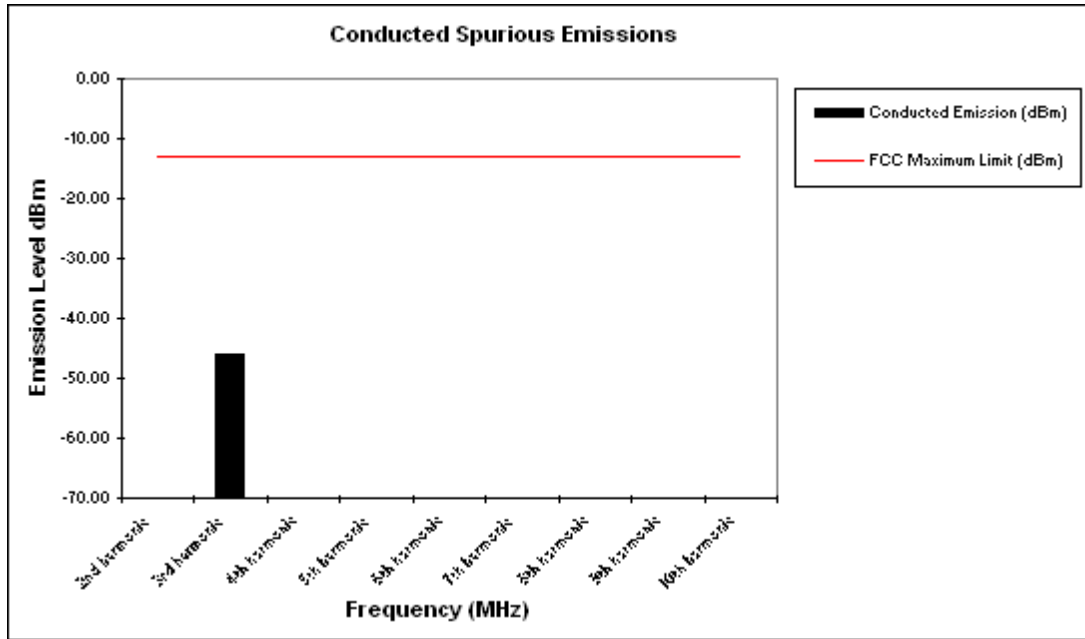


Notes:

- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 9 kHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

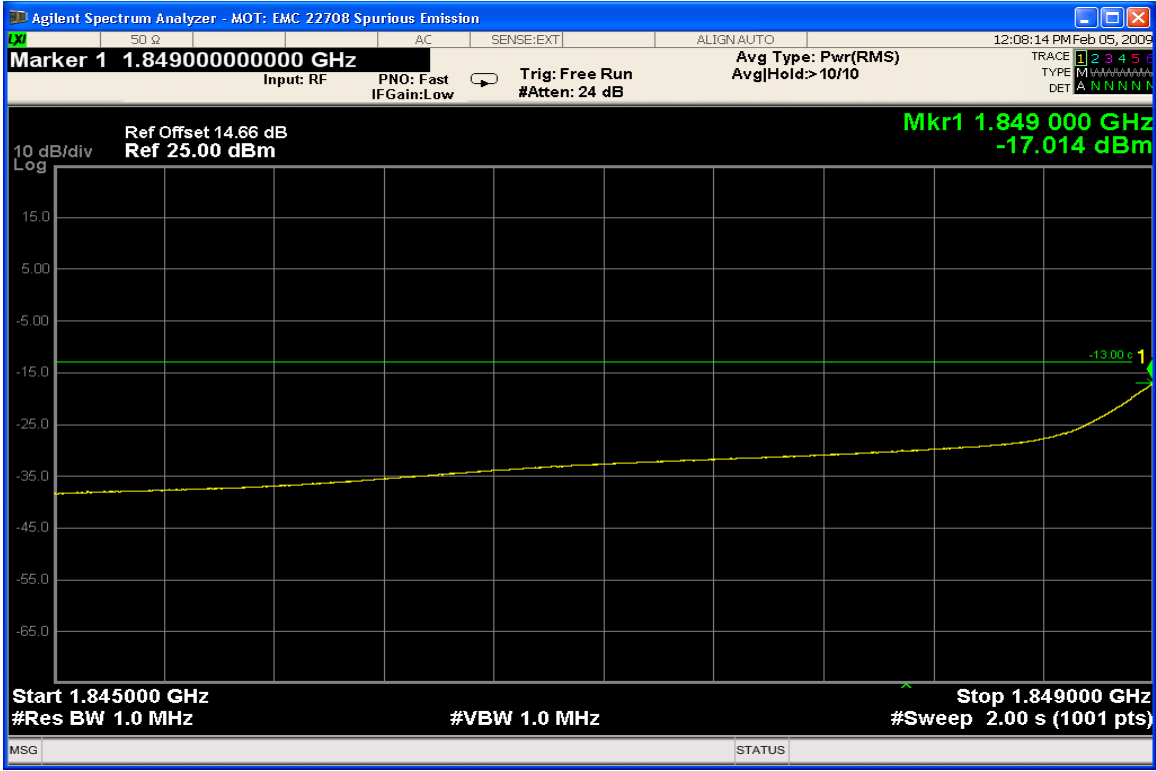

PCS WCDMA Conducted Spurious Emissions (Lower adjacent 1 MHz band)

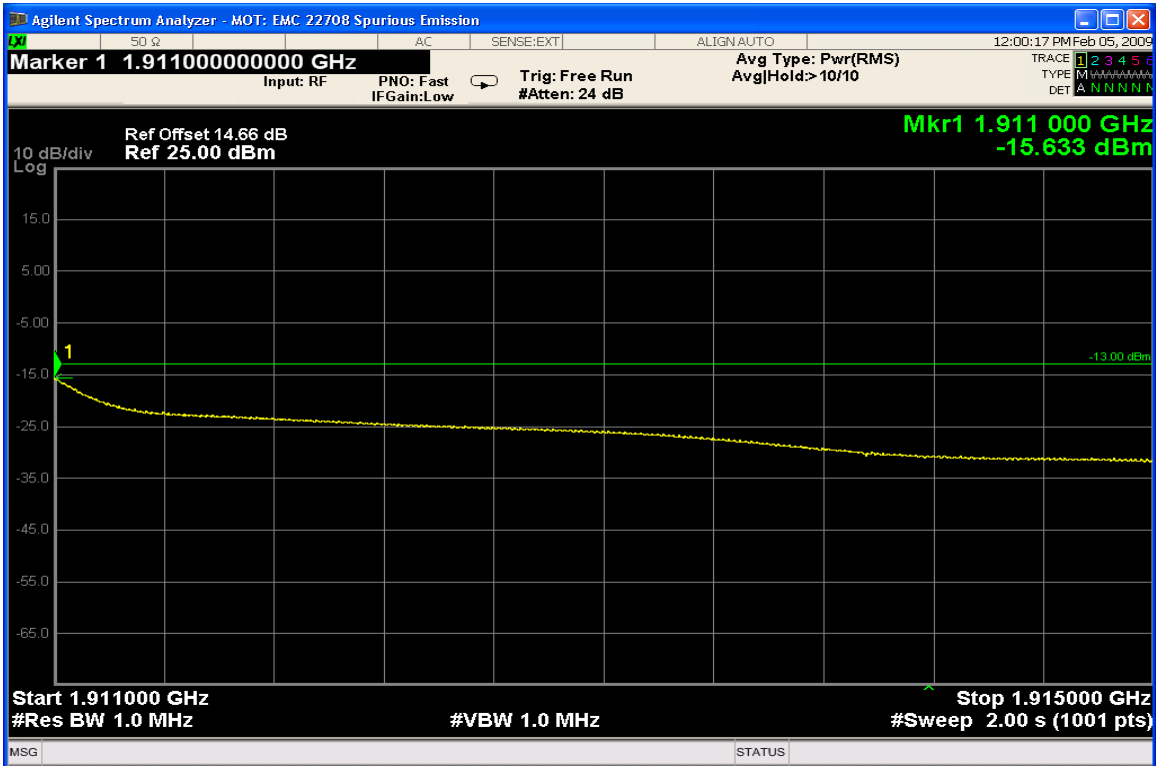

PCS WCDMA Conducted Spurious Emissions (Upper adjacent 1 MHz band)

FIELD STRENGTH OF SPURIOUS EMISSIONS

Measurement Procedure

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The equipment under test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole. A fully charged battery was used for the supply voltage.

The settings of the receiver were as follows:

Units	dBm
Divisions	5 dB
Detector	Peak Detector
Resolution Bandwidth	1 MHz
Video Bandwidth (AVG)	Auto
Sweep Time	Auto


Measurement Results

Attached

Measurement Results – GSM 850, slide up

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-53.4	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

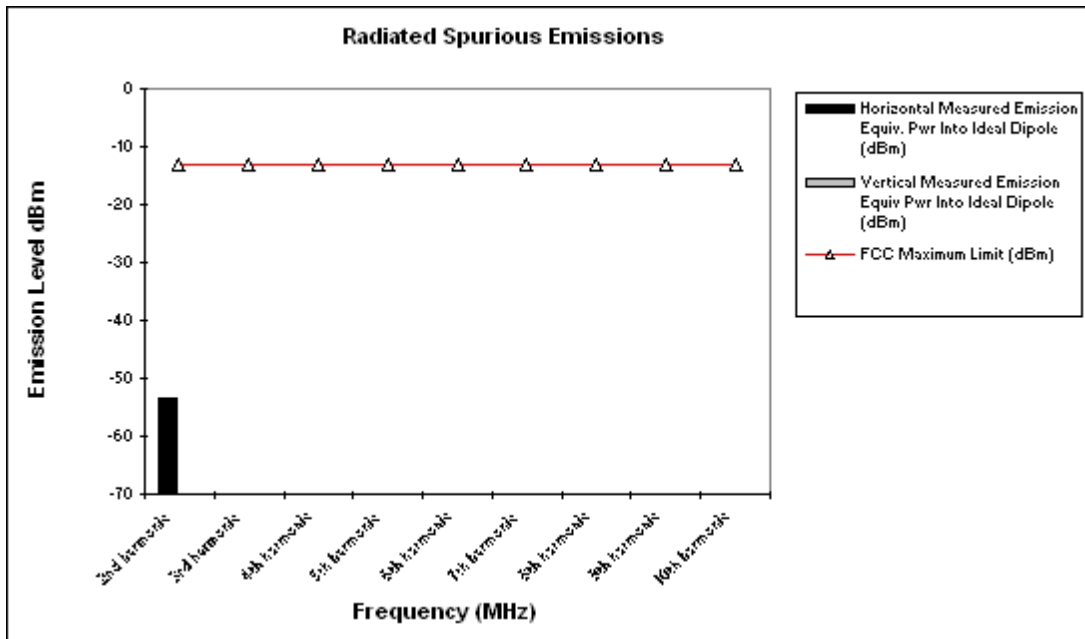

Notes:


1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – GSM 1900, slide up

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-44.4	-40.4
3rd harmonic	-13	-28.3	-42.3
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

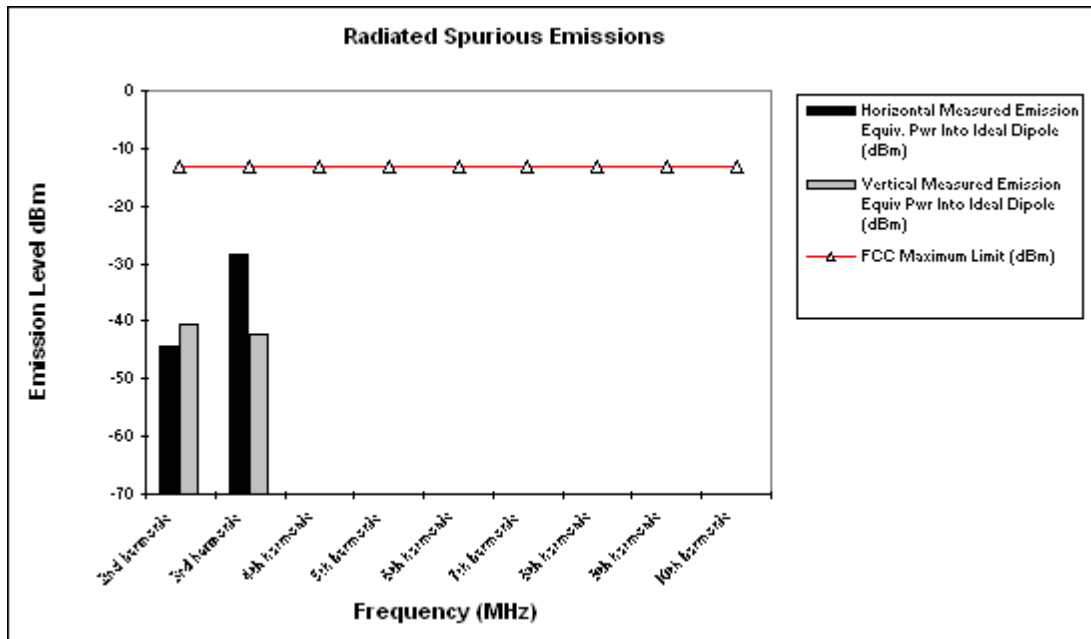

Notes:


- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – GSM 850 and 1900, slide down

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

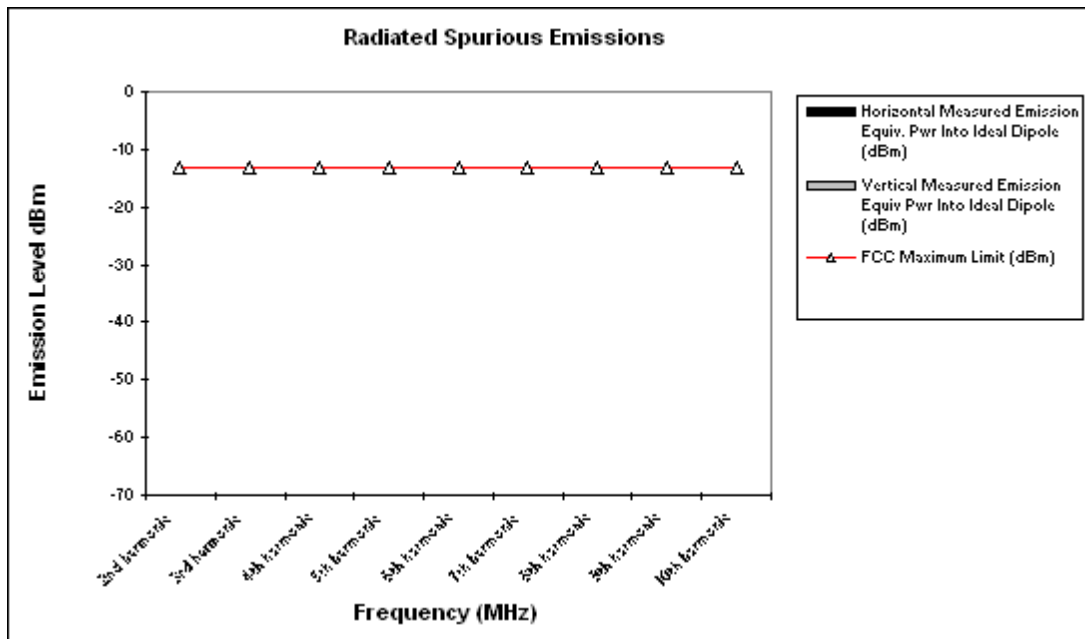

Notes:


1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – EDGE 850 and 1900, slide up and slide down

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

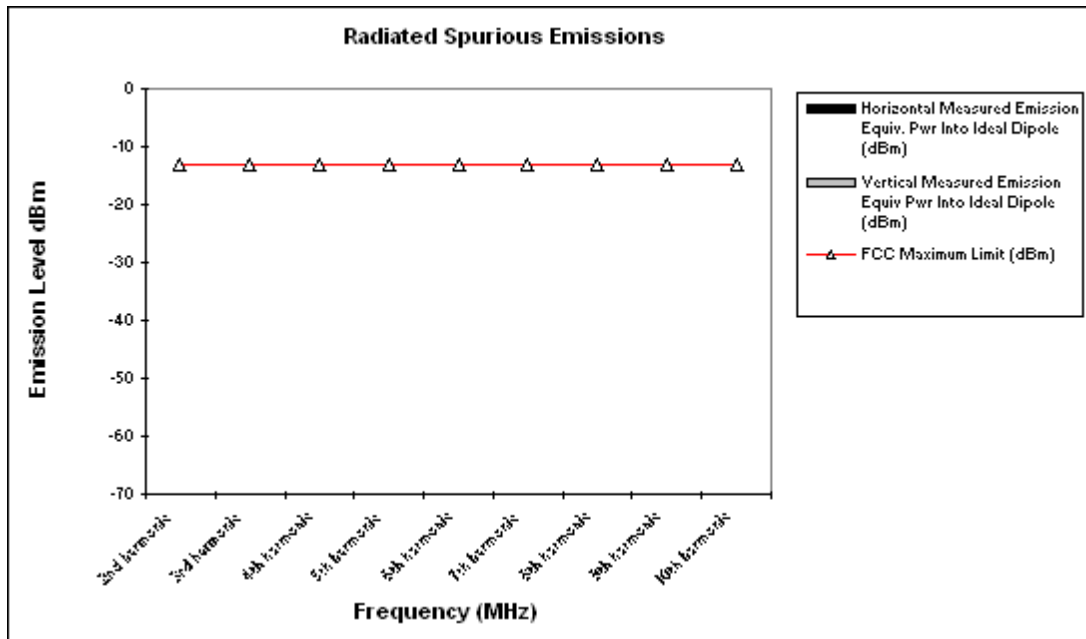

Notes:


1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – WCDMA 850 slide up

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-46.8	-51.4
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

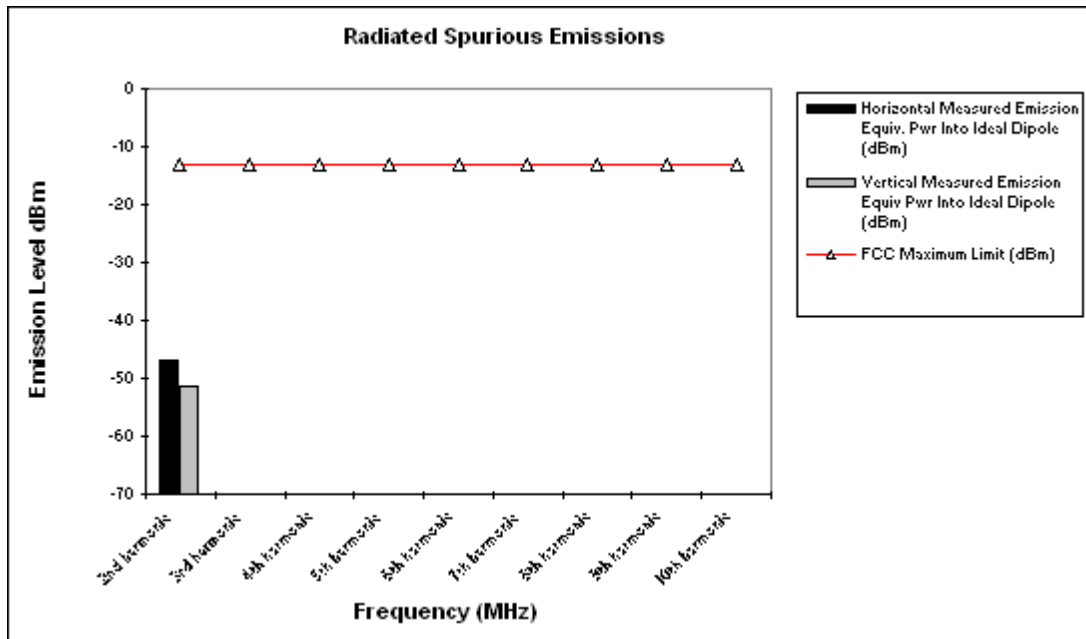

Notes:


1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – WCDMA 850 slide down

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	-45.0	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

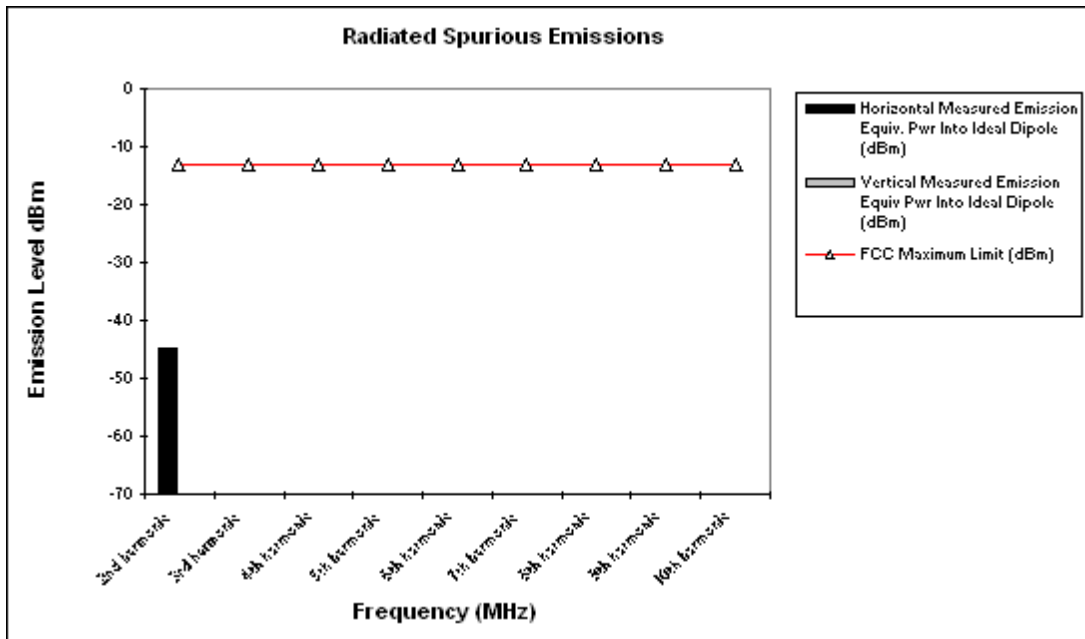

Notes:


- * Indicates the spurious emission could not be detected due to noise limitations or ambients.
- Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
- The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

Measurement Results – WCDMA 1900 slide up and slide down

Radiated Spurious and Harmonic Emissions

Frequency (MHz)	FCC Maximum Limit (dBm)	Horizontal Measured Emission Equiv. Pwr Into Ideal Dipole (dBm)	Vertical Measured Emission Equiv Pwr Into Ideal Dipole (dBm)
2nd harmonic	-13	*	*
3rd harmonic	-13	*	*
4th harmonic	-13	*	*
5th harmonic	-13	*	*
6th harmonic	-13	*	*
7th harmonic	-13	*	*
8th harmonic	-13	*	*
9th harmonic	-13	*	*
10th harmonic	-13	*	*

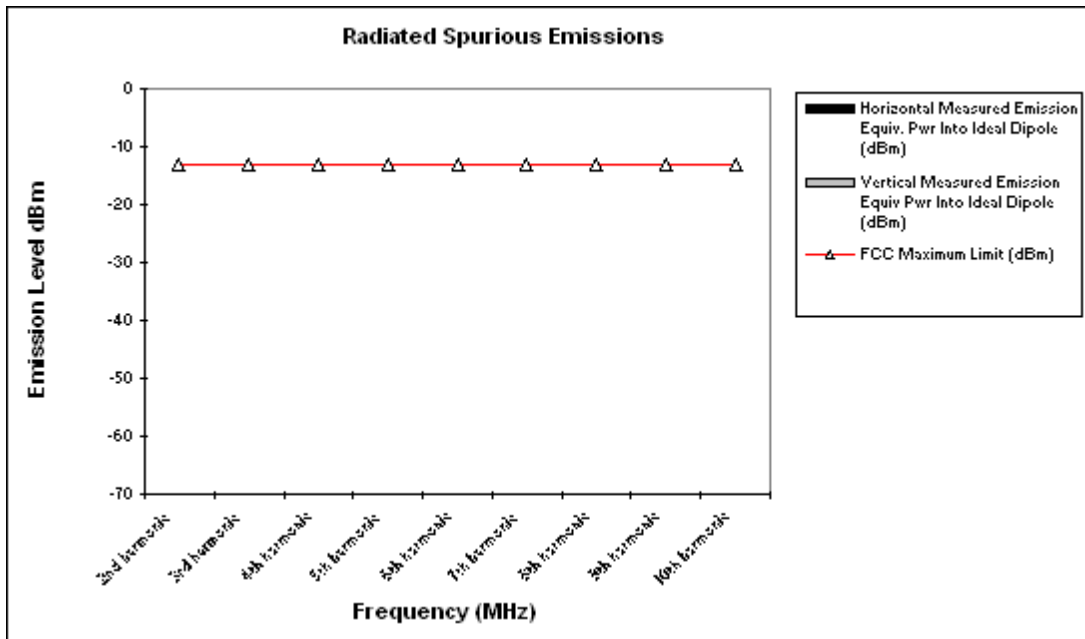

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific harmonic for the low, mid, and high channels at maximum power.
3. The Spectrum was investigated from 30 MHz to the tenth harmonic of the fundamental.

The margin with respect to the limit is the minimum margin for all modes and bands.

FREQUENCY STABILITY

Measurement Procedure

The equipment under test is placed in an environmental chamber. The antenna port of the Equipment Under Test is directly coupled to the input of the measurement equipment through a specialized RF connector. A power supply is attached as the primary voltage supply.

Frequency measurements are made at the extremes of the temperature range -30°C to $+60^{\circ}\text{C}$ and at intervals of 10°C with the primary supply voltage set to the nominal battery operating voltage. A period of time sufficient to stabilize all components of the equipment is allowed at each frequency measurement. The maximum variation of frequency is measured.

At room temperature, the primary supply voltage is reduced to the battery operating endpoint of the equipment under test. The maximum variation of frequency is measured. A battery eliminator was used for the input supply voltage.

Measurement Results


Attached

Measurement Results
Modulation: GSM 850

Frequency Stability

Mode: GSM 850 **Operating Frequency:** 836.6 MHz
Channel: 190 **Deviation Limit (PPM):** 0.1 ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-20.66	-0.025	100%	3.80
-20 C	-29.29	-0.035	100%	3.80
-10 C	-20.42	-0.024	100%	3.80
0 C	-22.31	-0.027	100%	3.80
10 C	-22.02	-0.026	100%	3.80
20 C	-22.79	-0.027	100%	3.80
30 C	-20.67	-0.025	100%	3.80
40 C	-22.95	-0.027	100%	3.80
50 C	-23.05	-0.028	100%	3.80
60 C	-22.70	-0.027	100%	3.80
20 C	-22.00	-0.026	Battery Endpoint	3.20

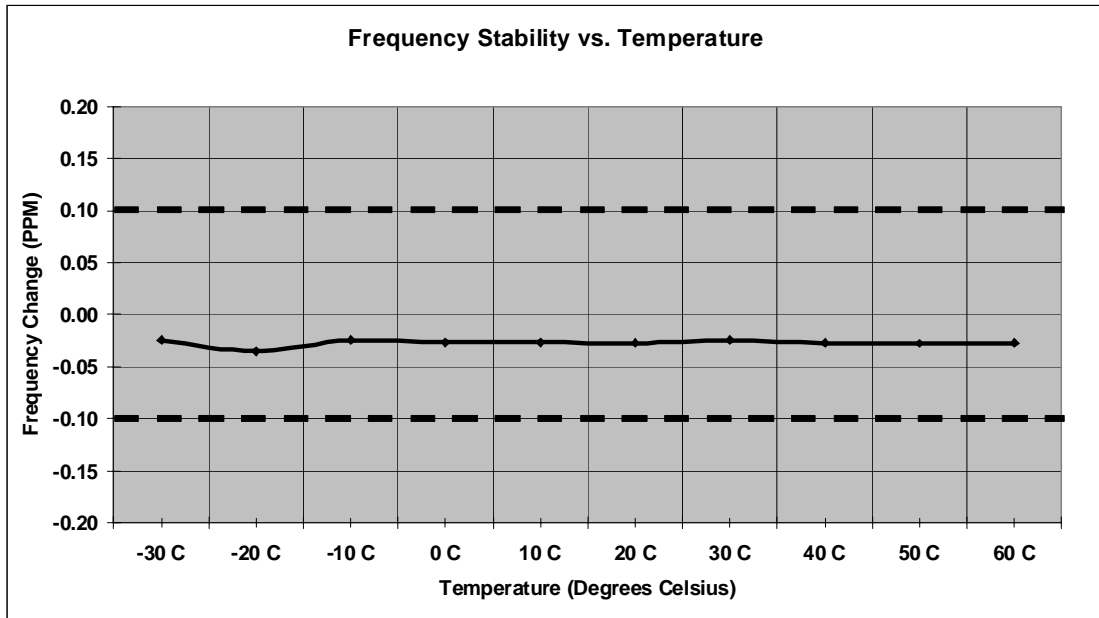


Measurement Results
Modulation: GSM 1900

Frequency Stability

Mode: GSM 1900 **Operating Frequency:** 1880.0 MHz
Channel: 661 **Deviation Limit (PPM):** 0.1ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-54.04	-0.029	100%	3.80
-20 C	-56.05	-0.030	100%	3.80
-10 C	-51.89	-0.028	100%	3.80
0 C	-52.40	-0.028	100%	3.80
10 C	-58.01	-0.031	100%	3.80
20 C	-53.93	-0.029	100%	3.80
30 C	-57.15	-0.030	100%	3.80
40 C	-54.06	-0.029	100%	3.80
50 C	-54.37	-0.029	100%	3.80
60 C	-56.60	-0.030	100%	3.80
20 C	-55.23	-0.029	Battery Endpoint	3.20

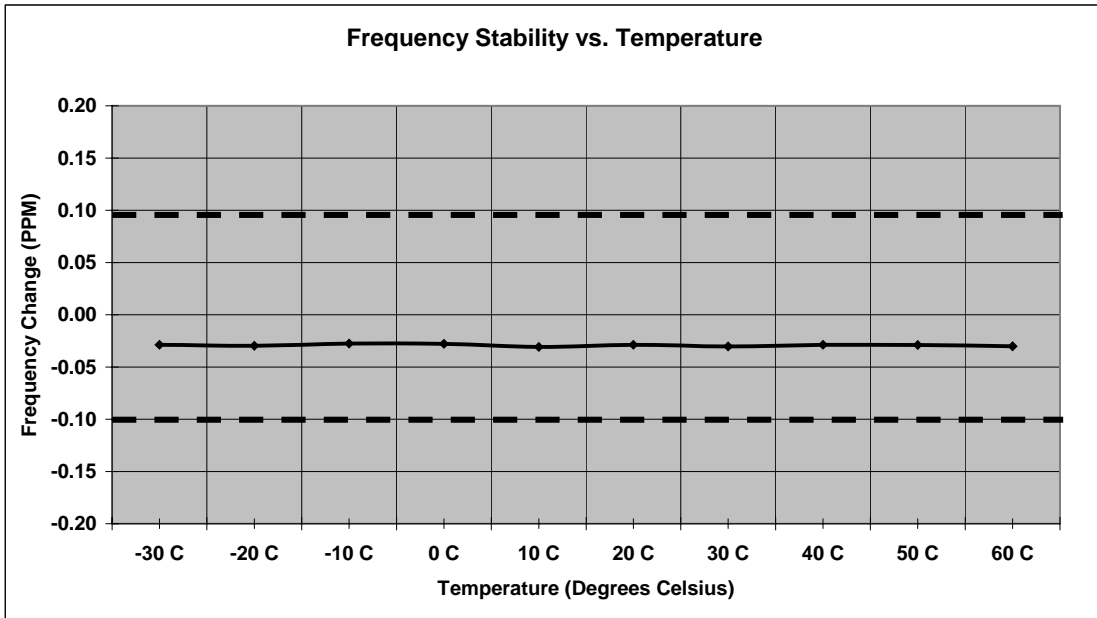


Measurement Results
Modulation: EDGE 850

Frequency Stability

Mode: Edge 850 **Operating Frequency:** 836.6 MHz
Channel: 190 **Deviation Limit (PPM):** 0.359ppm (+/-300 Hz)

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-23.25	-0.028	100%	3.80
-20 C	-24.91	-0.030	100%	3.80
-10 C	-23.57	-0.028	100%	3.80
0 C	-21.68	-0.026	100%	3.80
10 C	-21.71	-0.026	100%	3.80
20 C	-25.72	-0.031	100%	3.80
30 C	-22.14	-0.026	100%	3.80
40 C	-24.82	-0.030	100%	3.80
50 C	-25.13	-0.030	100%	3.80
60 C	-25.79	-0.031	100%	3.80
20 C	-20.78	-0.025	Battery Endpoint	3.20

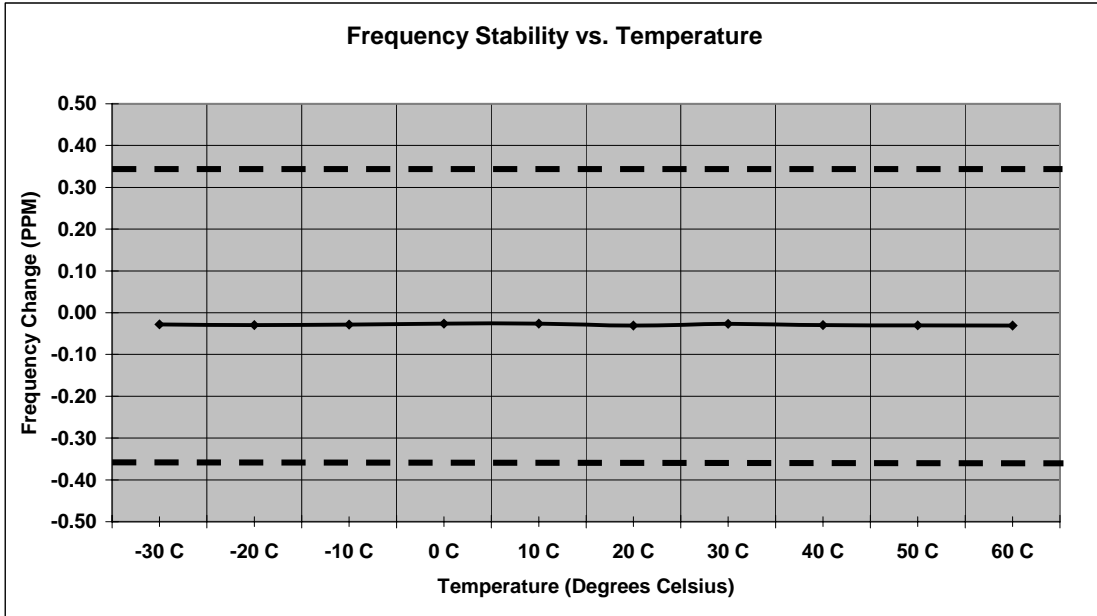


Measurement Results
Modulation: EDGE 1900

Frequency Stability

Mode: Edge 1900 **Operating Frequency:** 1880.0 MHz
Channel: 661 **Deviation Limit (PPM):** 0.08ppm (+/-150Hz)

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	-56.16	-0.030	100%	3.80
-20 C	-48.46	-0.026	100%	3.80
-10 C	-49.90	-0.027	100%	3.80
0 C	-49.32	-0.026	100%	3.80
10 C	-45.36	-0.024	100%	3.80
20 C	-59.01	-0.031	100%	3.80
30 C	-60.18	-0.032	100%	3.80
40 C	-54.17	-0.029	100%	3.80
50 C	-50.93	-0.027	100%	3.80
60 C	-48.85	-0.026	100%	3.80
20 C	-53.93	-0.029	Battery Endpoint	3.20

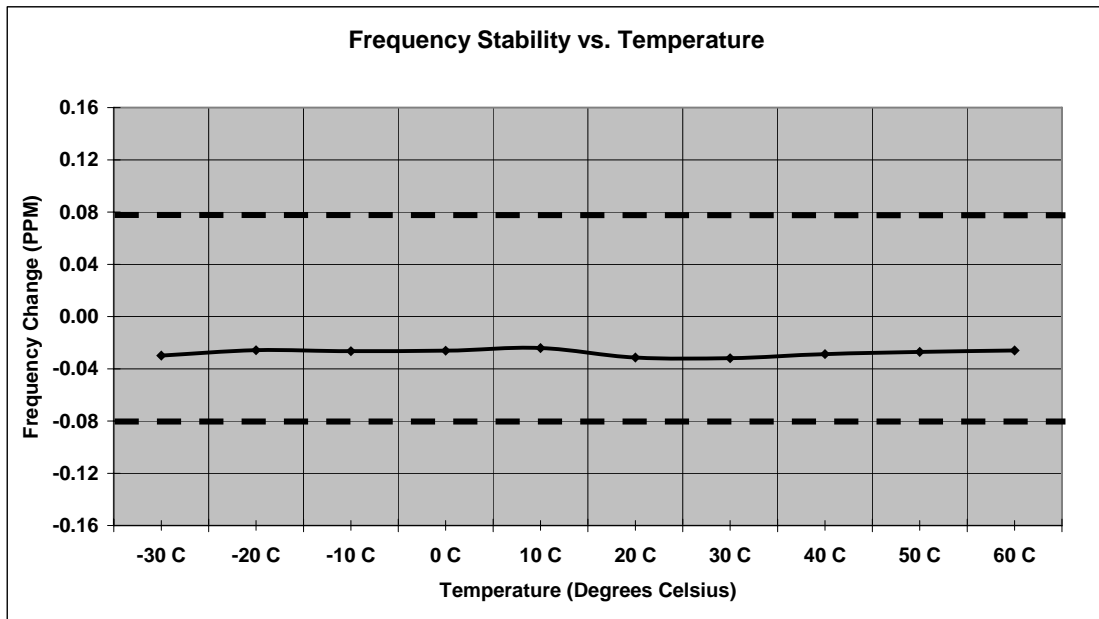


Measurement Results
Modulation: WCDMA 850

Frequency Stability

Mode: WCDMA 850 **Operating Frequency:** 836.00 MHz
Channel: 4180 **Deviation Limit (PPM):** 0.359ppm (+/-300 Hz)

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	22.34	0.027	100%	3.80
-20 C	23.43	0.028	100%	3.80
-10 C	-5.98	-0.007	100%	3.80
0 C	11.24	0.013	100%	3.80
10 C	20.46	0.024	100%	3.80
20 C	19.37	0.023	100%	3.80
30 C	-5.48	-0.007	100%	3.80
40 C	-5.74	-0.007	100%	3.80
50 C	25.29	0.030	100%	3.80
60 C	26.96	0.032	100%	3.80
20 C	16.21	0.019	Battery Endpoint	3.20

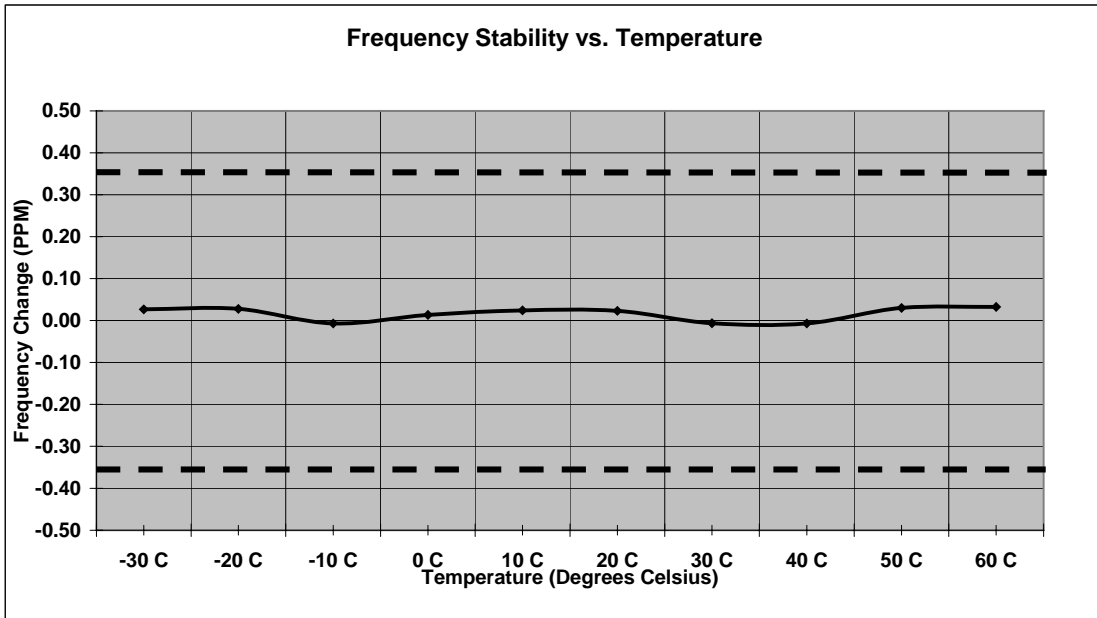


Measurement Results
Modulation: WCDMA 1900

Frequency Stability

Mode: WCDMA 1900 **Operating Frequency:** 1880.0 MHz
Channel: 9400 **Deviation Limit (PPM):** 0.1ppm

Temperature C	Frequency Error HZ	Frequency Error (PPM)	Voltage (%)	Voltage (VDC)
-30 C	104.42	0.056	100%	3.80
-20 C	80.85	0.043	100%	3.80
-10 C	87.54	0.047	100%	3.80
0 C	125.76	0.067	100%	3.80
10 C	118.72	0.063	100%	3.80
20 C	105.69	0.056	100%	3.80
30 C	88.13	0.047	100%	3.80
40 C	93.28	0.050	100%	3.80
50 C	85.22	0.045	100%	3.80
60 C	109.82	0.058	100%	3.80
20 C	98.55	0.052	Battery Endpoint	3.20

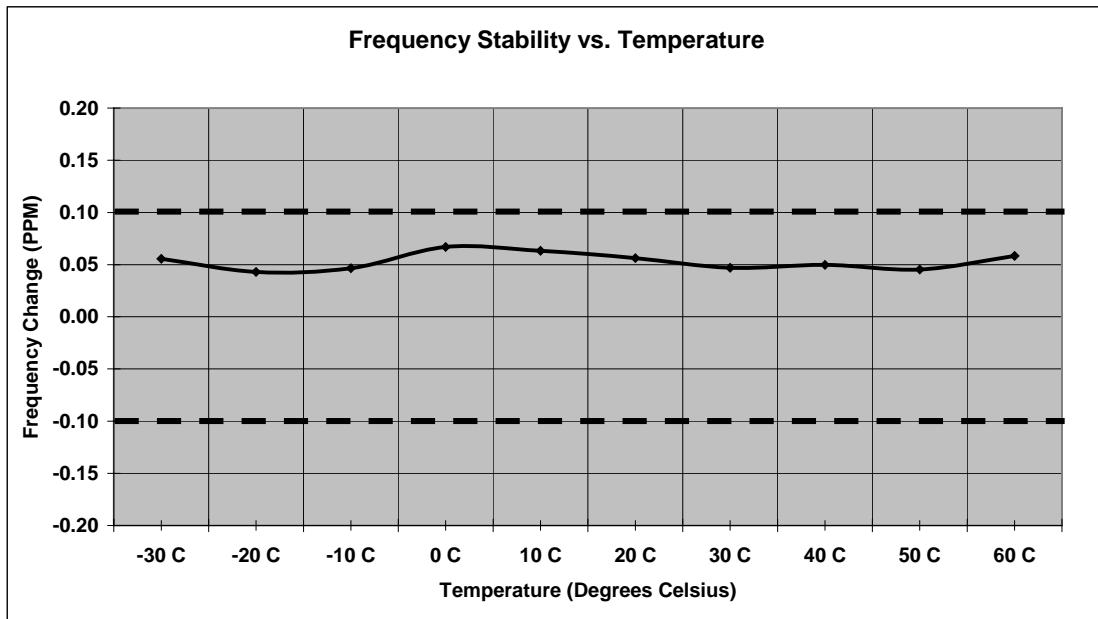

FIELD STRENGTH OF EMISSIONS FROM UNINTENTIONAL RADIATORS**Measurement Procedure**

The equipment under test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each radiated emission, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum peak reading on the spectrum analyzer. The radiated emissions are then measured using an EMI receiver employing a CISPR quasi-peak detector function below 1000 MHz and an average detector function above 1000 MHz. This is repeated for both horizontal and vertical polarizations of the receive antenna. A fully charged battery was used for the supply voltage.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.

$$\text{Field Strength (dBuV/m)} = \text{EMI Receiver Level (dBuV)} + \text{Cable Loss (dB)} - \text{Amplifier Gain (dB)} + \text{Antenna Correction Factor (1/m)}$$
Measurement Results


Attached

Measurement Results

Modulation: All Operating Modes

Receiver Radiated Spurious Emissions

Frequency (MHz)	FCC Maximum Limit (dBuV/m)	Horizontal Measured Field Strength (dBuV/m)	Vertical Measured Field Strength (dBuV/m)
Local Oscillator	54	*	*
2nd harmonic	54	*	*
3rd harmonic	54	*	*
4th harmonic	54	*	*
5th harmonic	54	*	*
6th harmonic	40	*	*
7th harmonic	40	*	*
8th harmonic	40	*	*
9th harmonic	40	*	*
10th harmonic	40	*	*

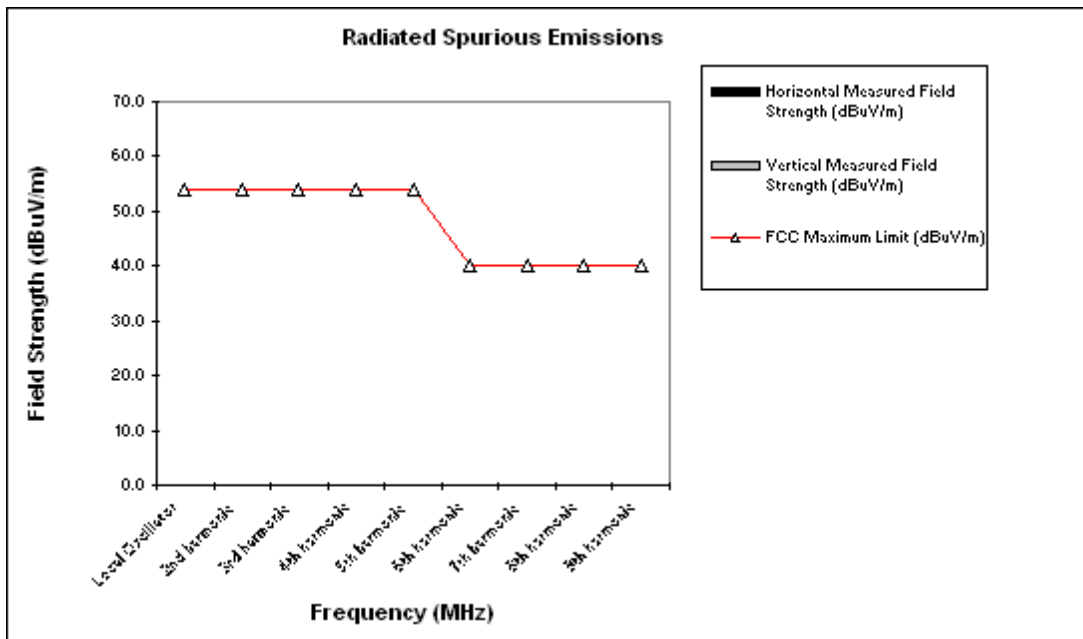

Notes:

1. * Indicates the spurious emission could not be detected due to noise limitations or ambients.
2. Each emission reported reflects the highest absolute level at the specific frequency for the low, mid, and high channels.

AC LINE CONDUCTED EMISSIONS

Measurement Procedure


Measured levels of ac power line conducted emission shall be the radio-noise voltage from the line probe or across the 50 Ω LISN port, where permitted, terminated into a 50 Ω noise meter, or where permitted or required, the radio-noise current on the power line sensed by a current probe.

All radio-noise voltage and current measurements shall be made on each current-carrying conductor at the plug end of the EUT power cord or calibrated extension cord by the use of mating plugs and receptacles on the EUT and LISN. Equipment shall be tested with power cords that are normally supplied using an LISN, the 50 Ω measuring port is terminated by a 50 Ω radio-noise meter or a 50 Ω resistive load. All other ports are terminated in 50 Ω .


Detectors – Quasi Peak and Average

Measurement Results


See attached:

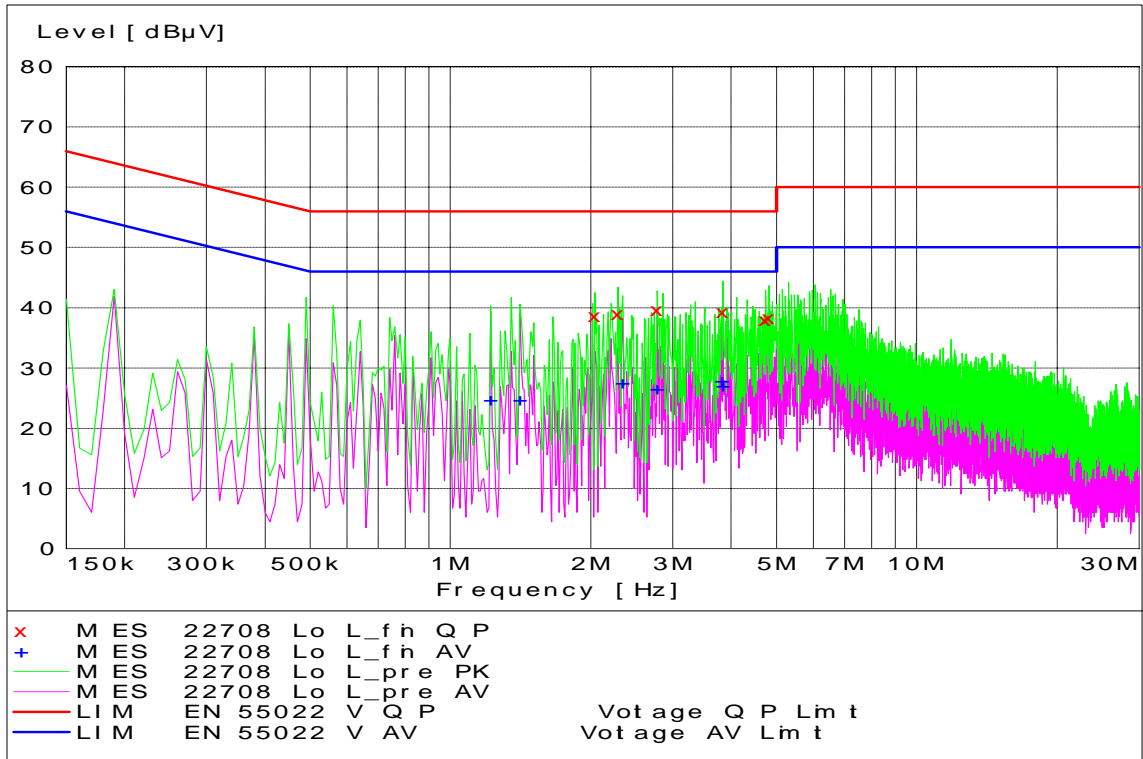


GSM 850 Channel 128 - Tx Mode - Line Coupling

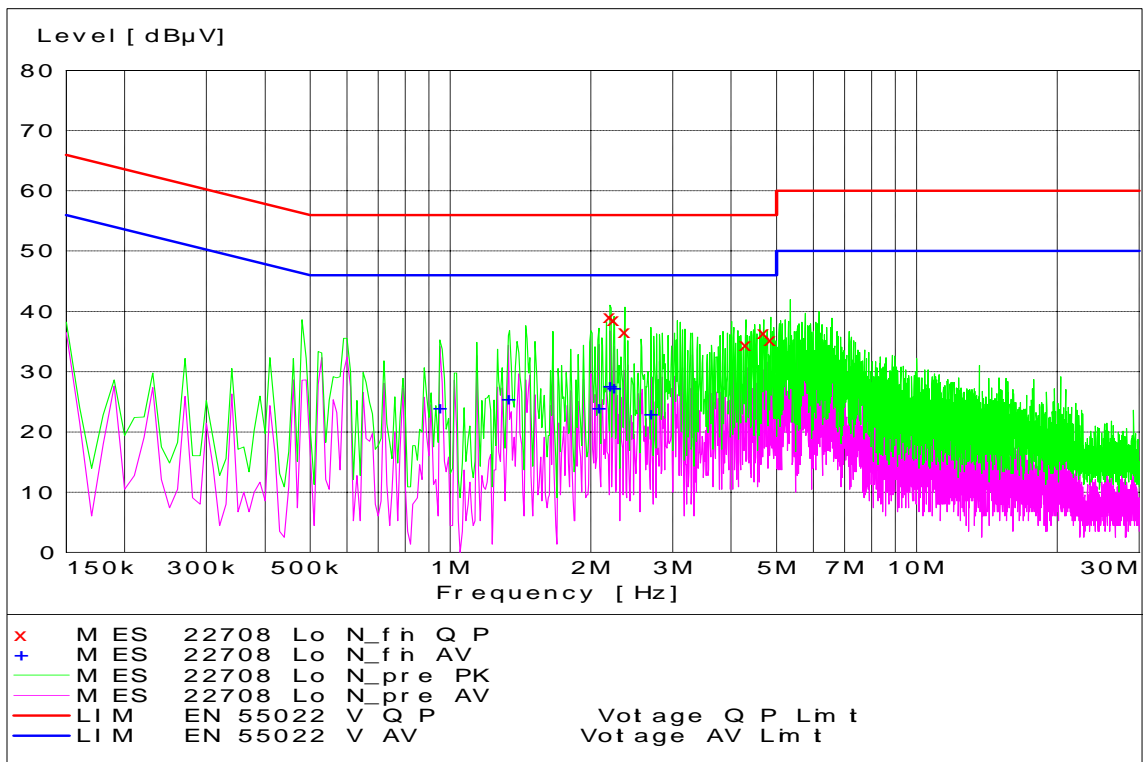


GSM 850 Channel 128 - Tx Mode - Neutral Coupling

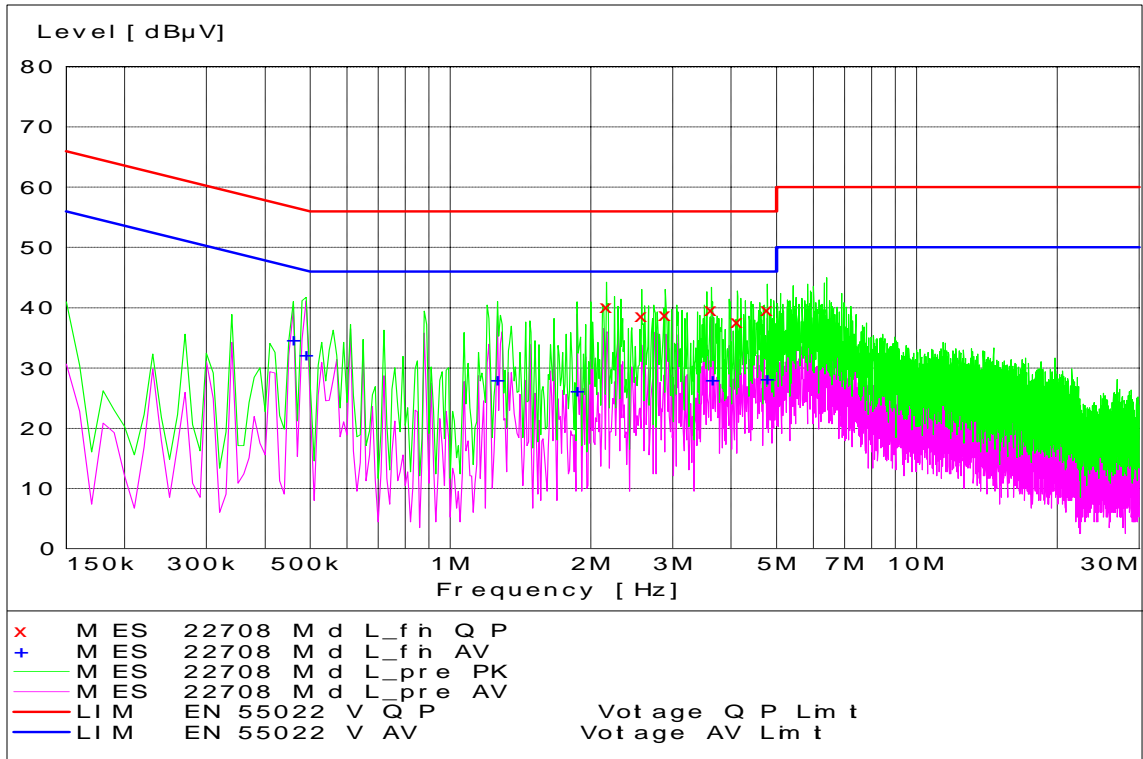


GSM 850 Channel 190 - Tx Mode - Line Coupling

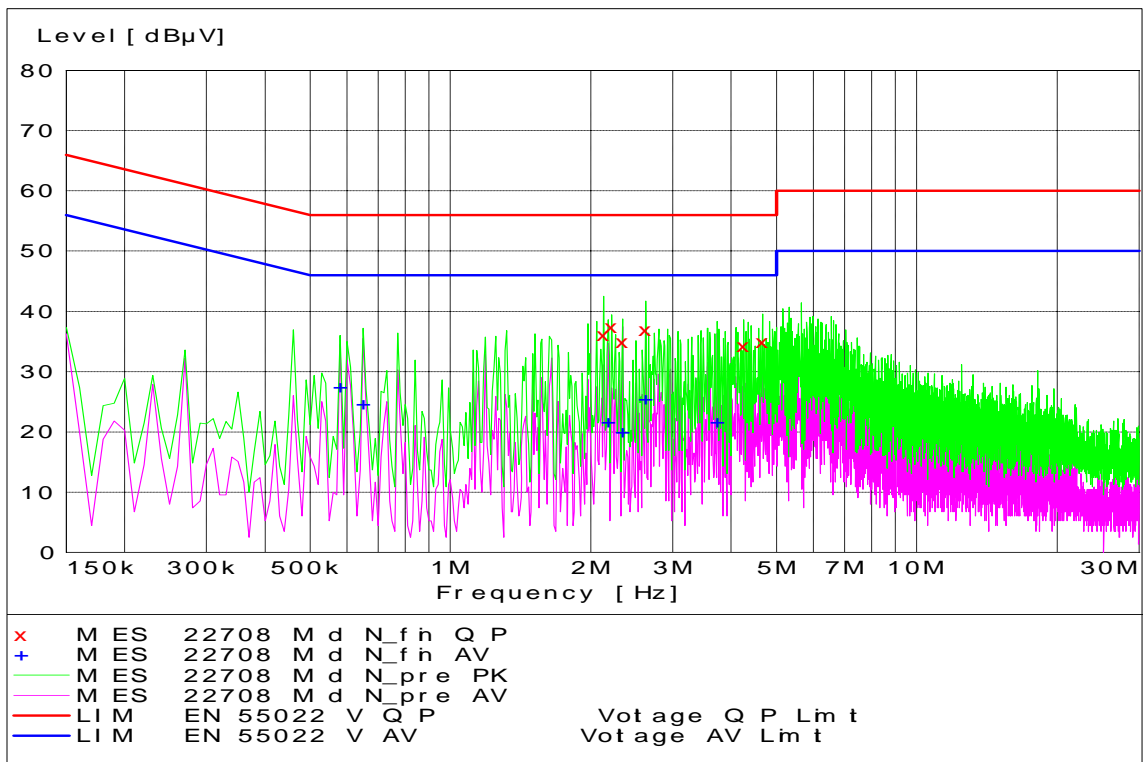


GSM 850 Channel 190 - Tx Mode - Neutral Coupling

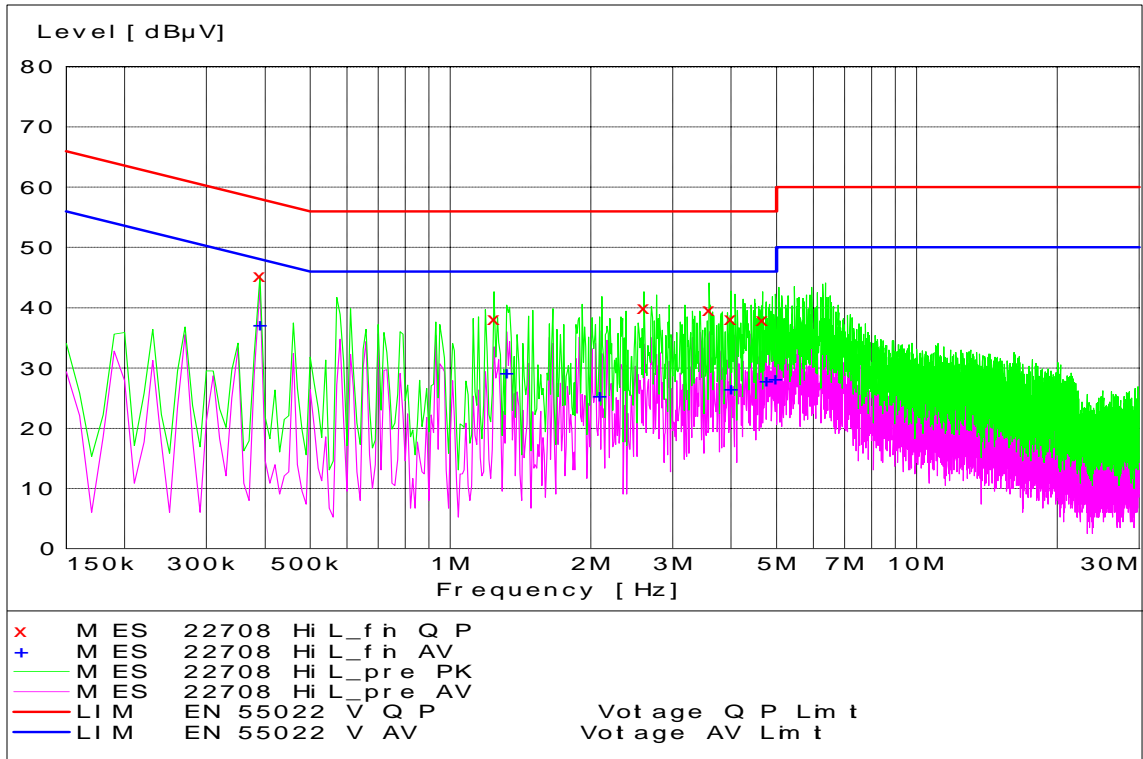


GSM 850 Channel 251 - Tx Mode - Line Coupling

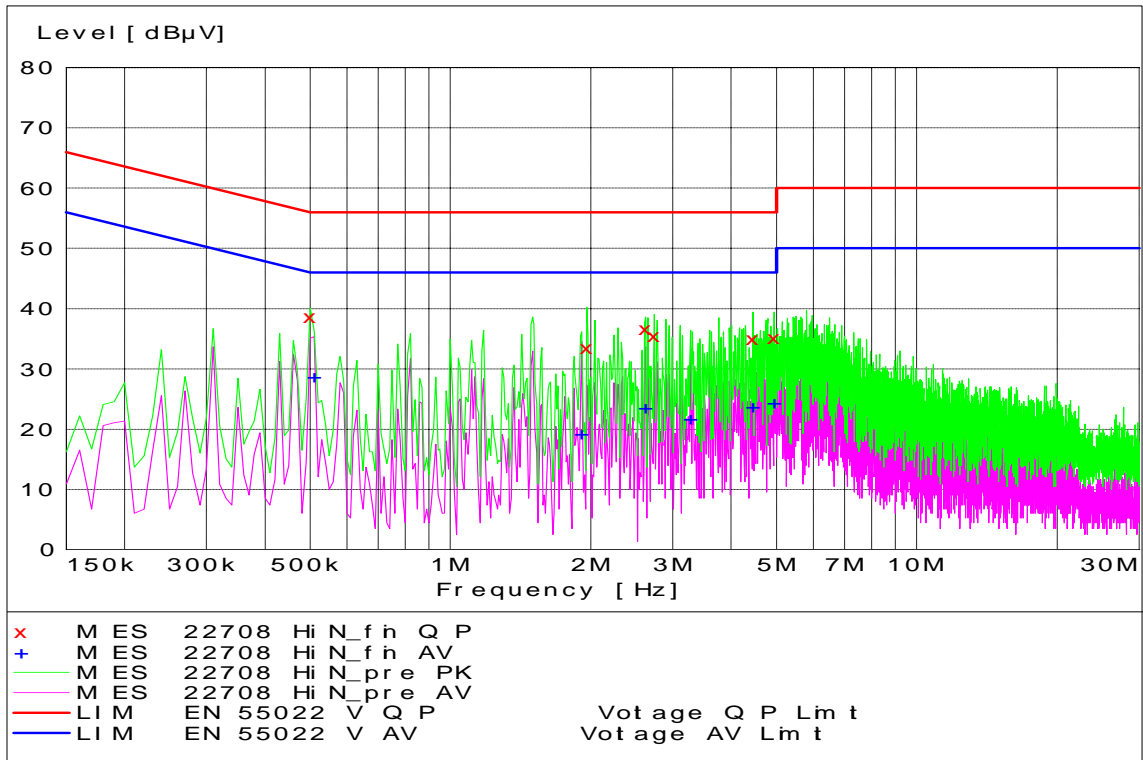


GSM 850 Channel 251 - Tx Mode - Neutral Coupling

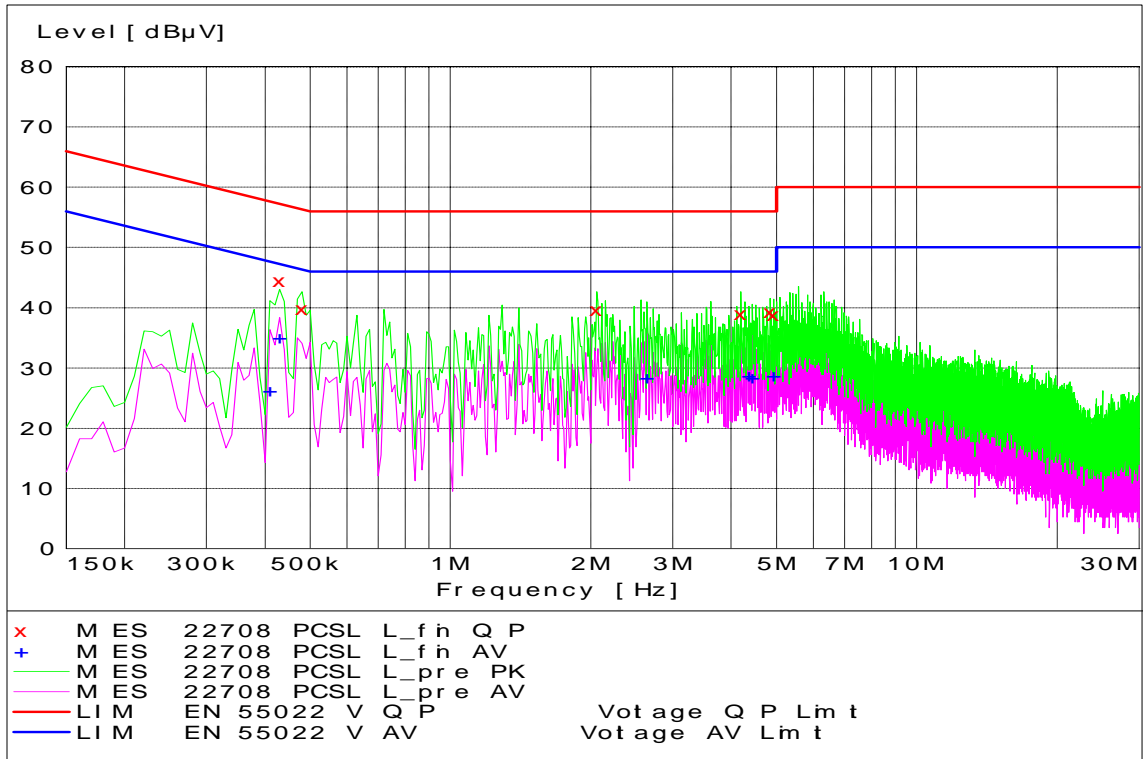


PCS Channel 512 - Tx Mode - Line Coupling

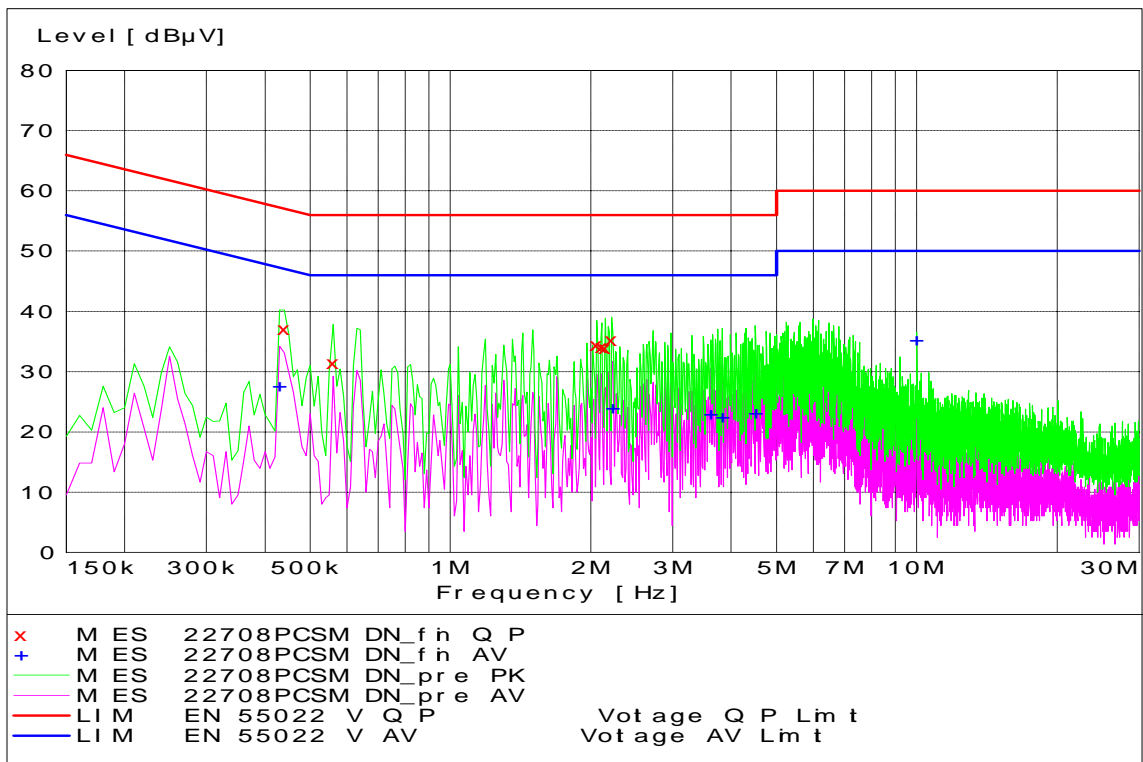


PCS Channel 512 - Tx Mode - Neutral Coupling

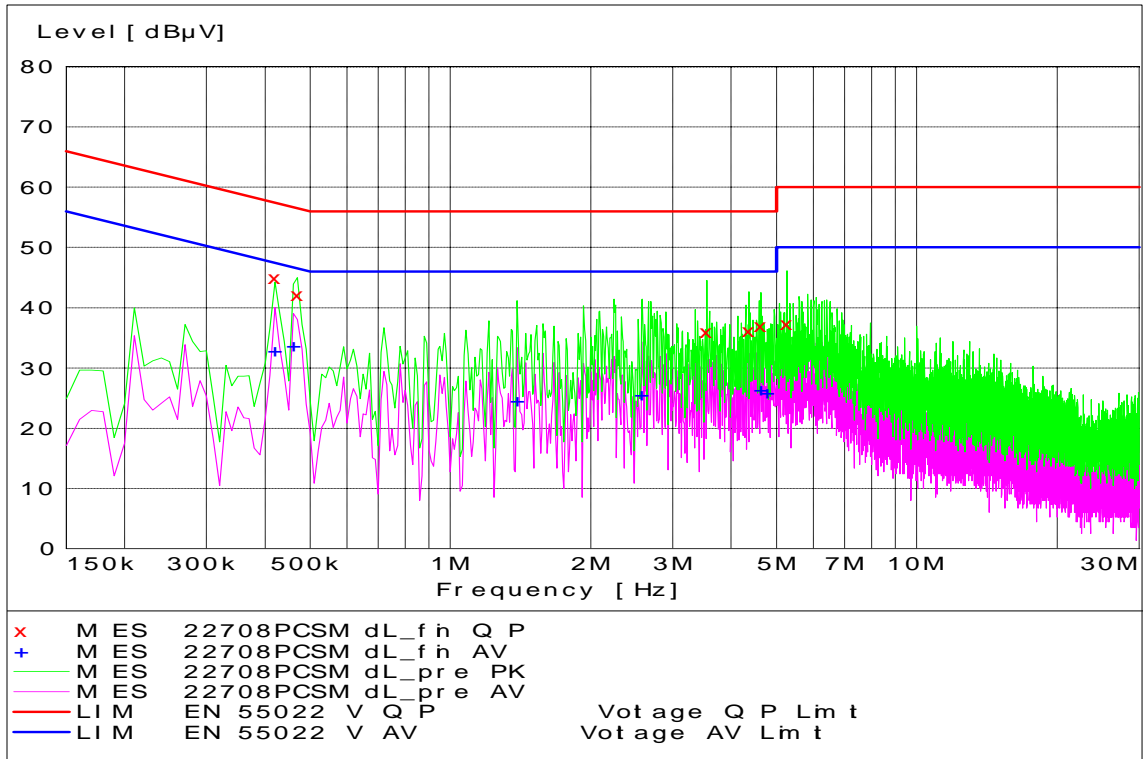


PCS Channel 661 - Tx Mode - Line Coupling

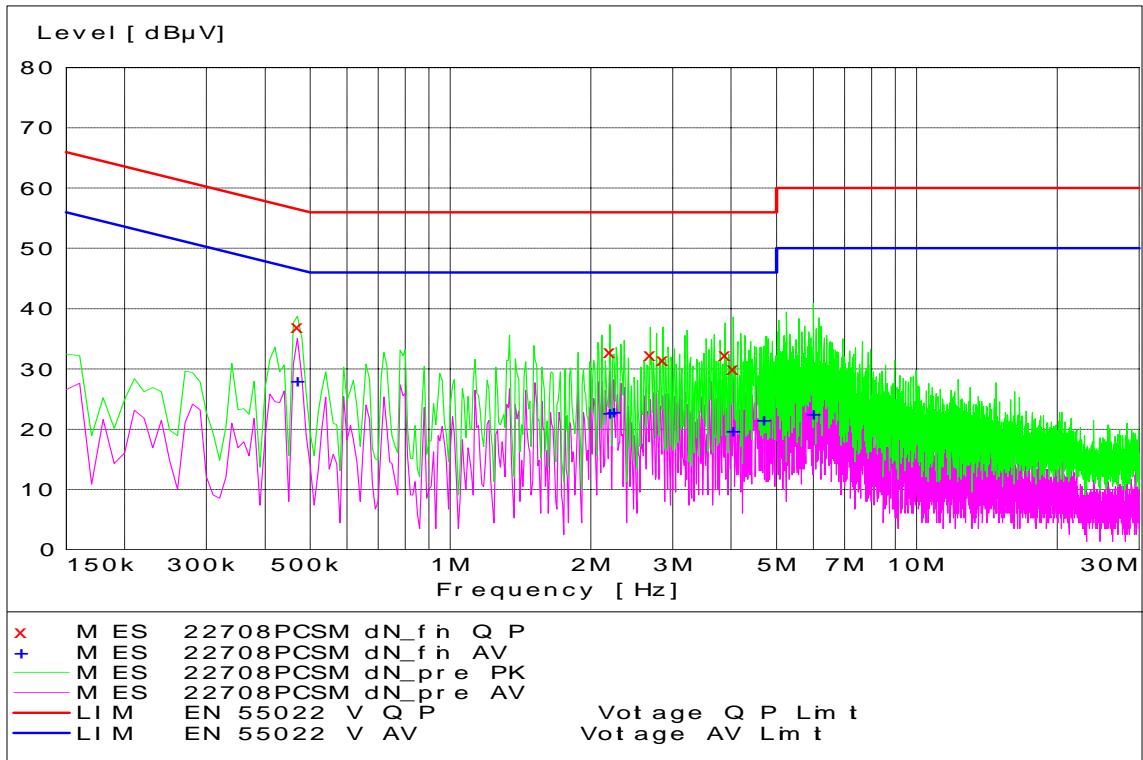


PCS Channel 661 - Tx Mode - Neutral Coupling

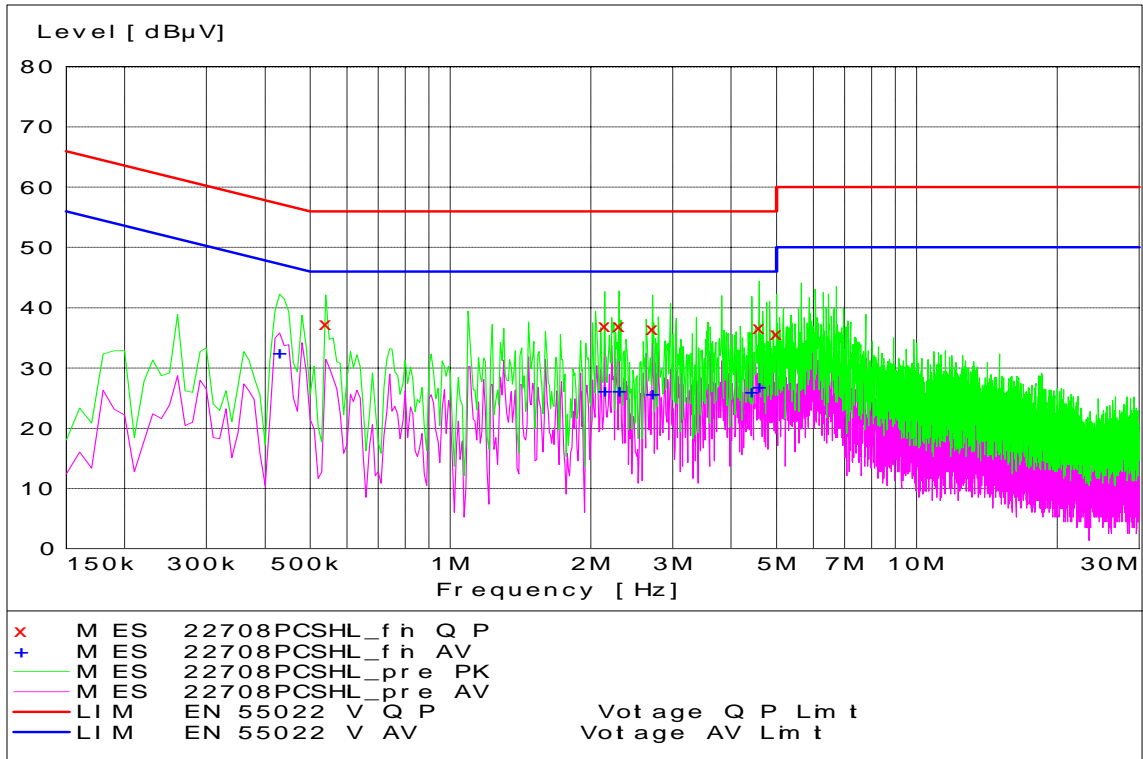


PCS Channel 810 - Tx Mode - Line Coupling

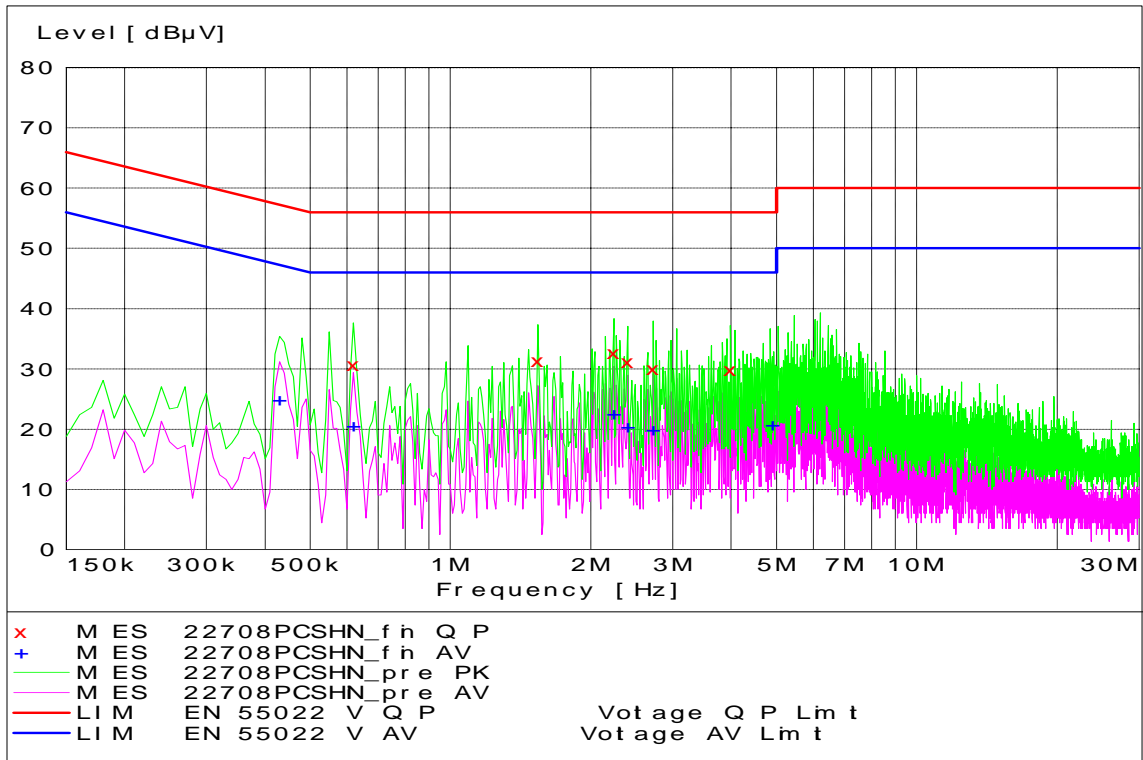


PCS Channel 810 - Tx Mode - Neutral Coupling

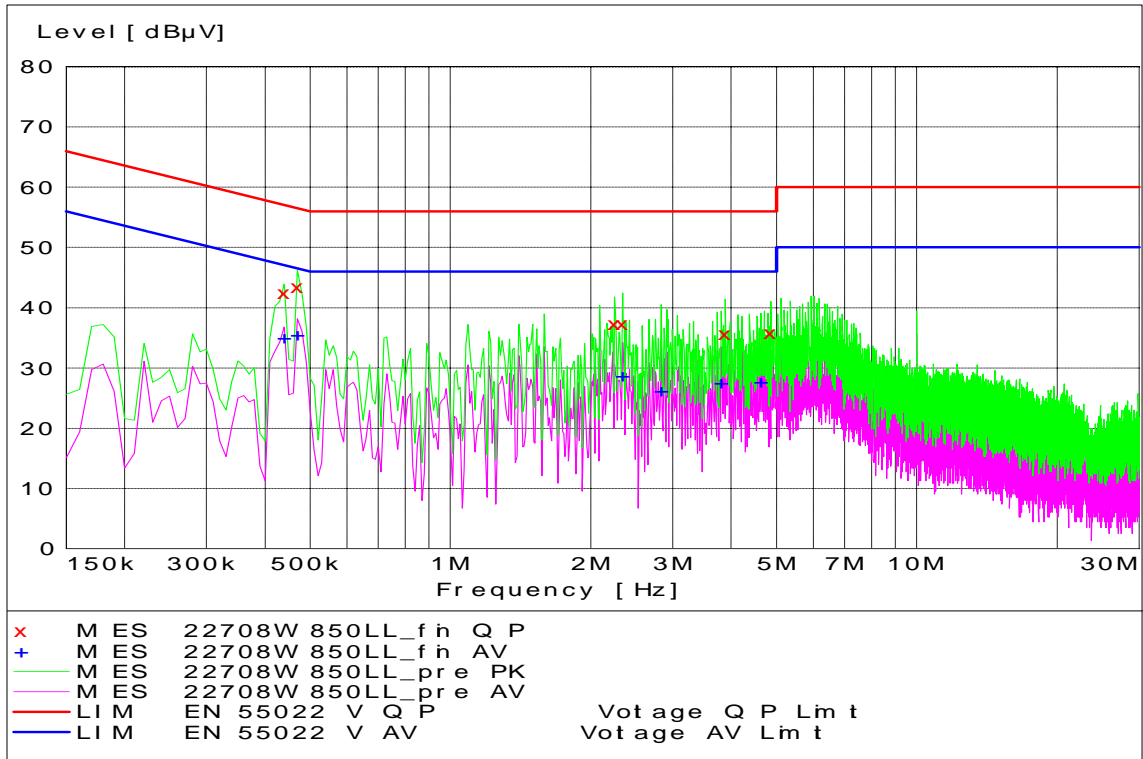


WCDMA 850 Channel 4132 - Tx Mode - Line Coupling

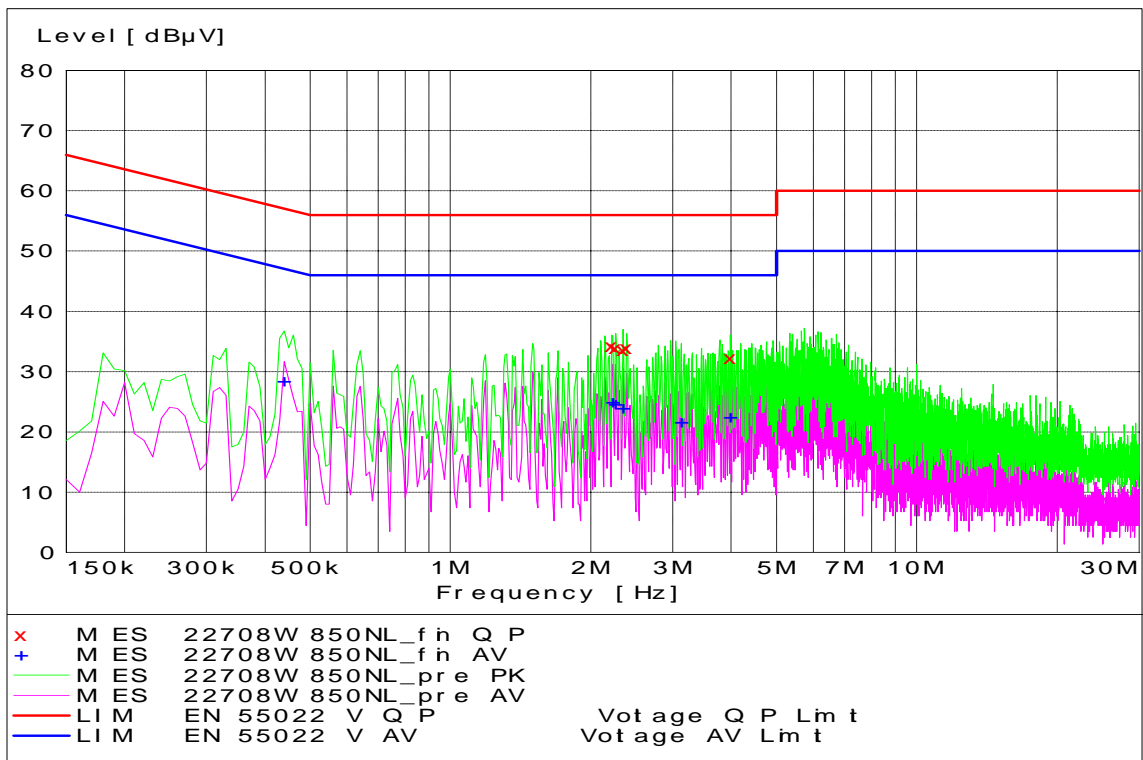


WCDMA 850 Channel 4132 - Tx Mode - Neutral Coupling

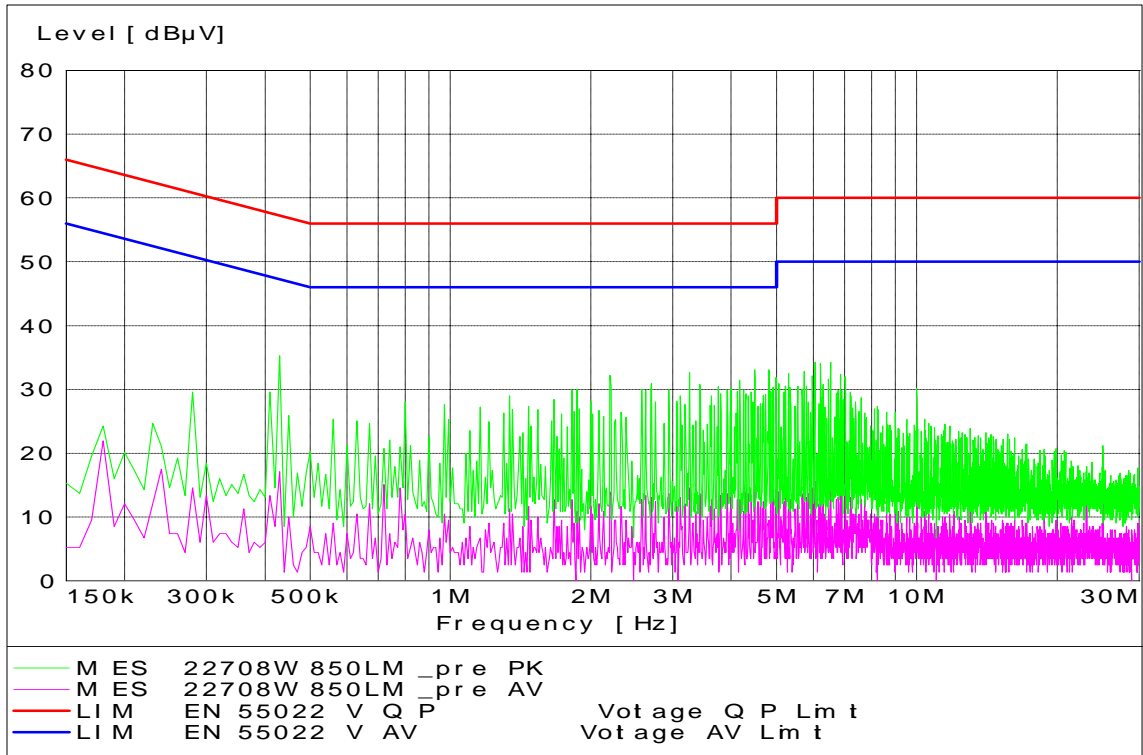


WCDMA 850 Channel 4180 - Tx Mode - Line Coupling

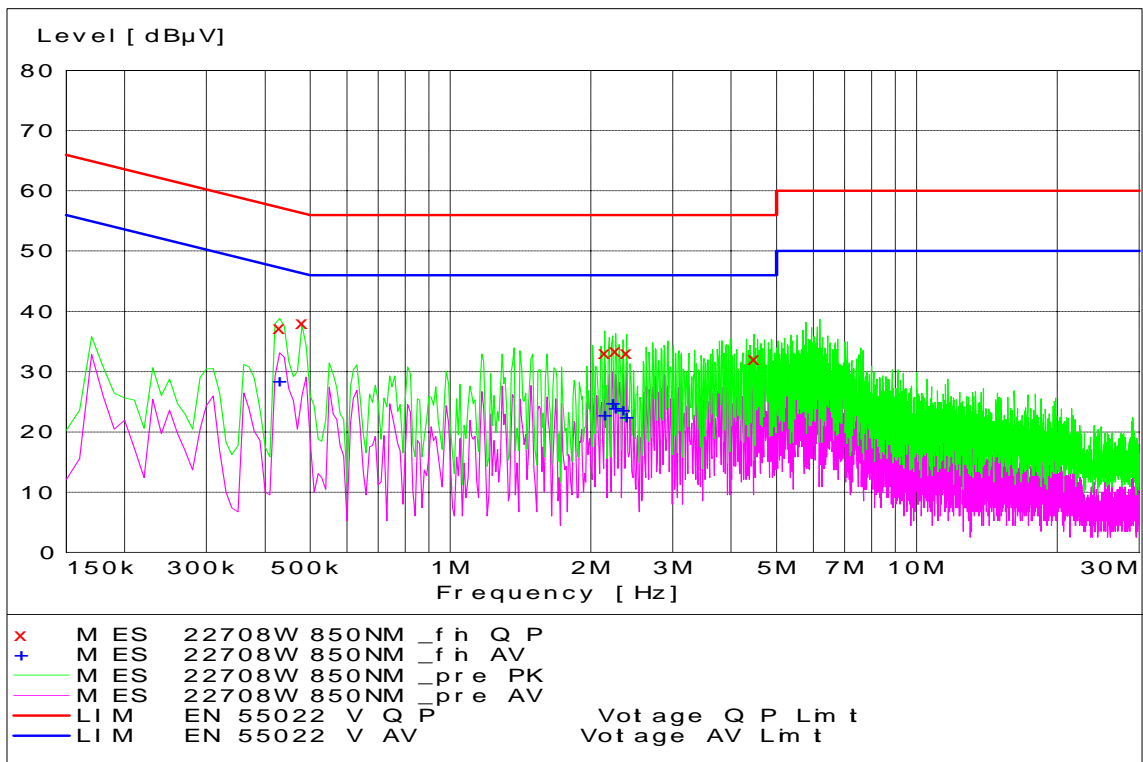


WCDMA 850 Channel 4180 - Tx Mode - Neutral Coupling

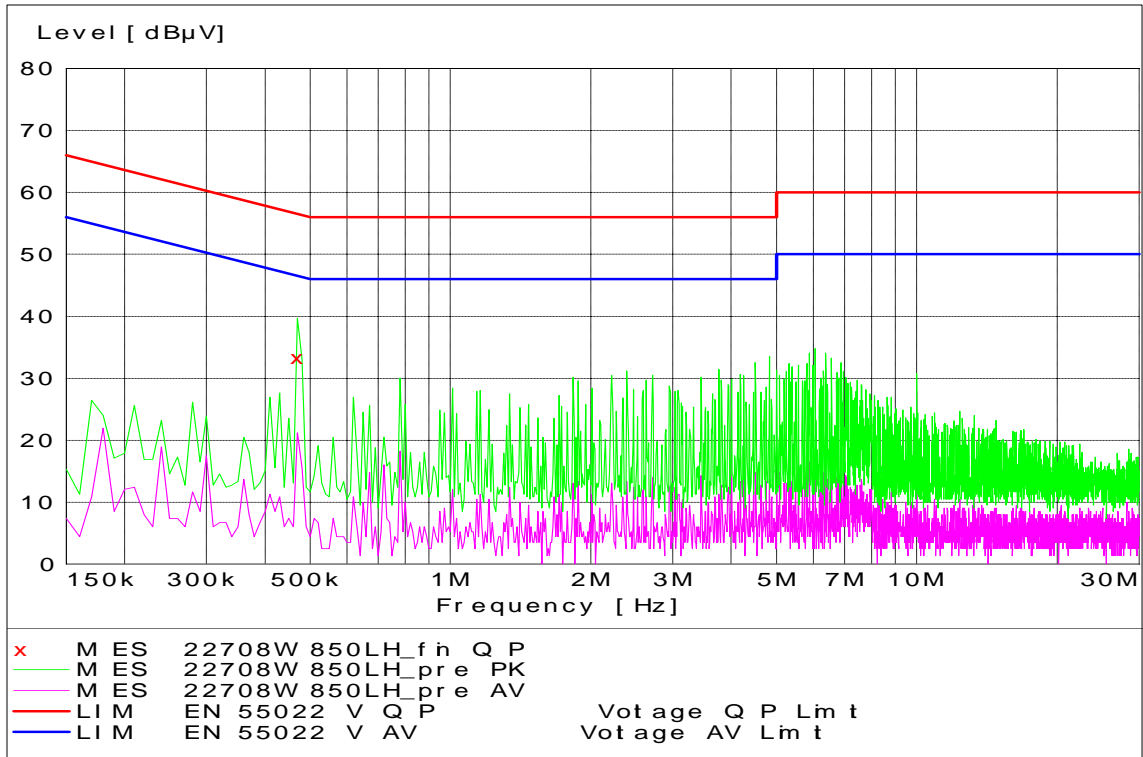


WCDMA 850 Channel 4233 - Tx Mode - Line Coupling

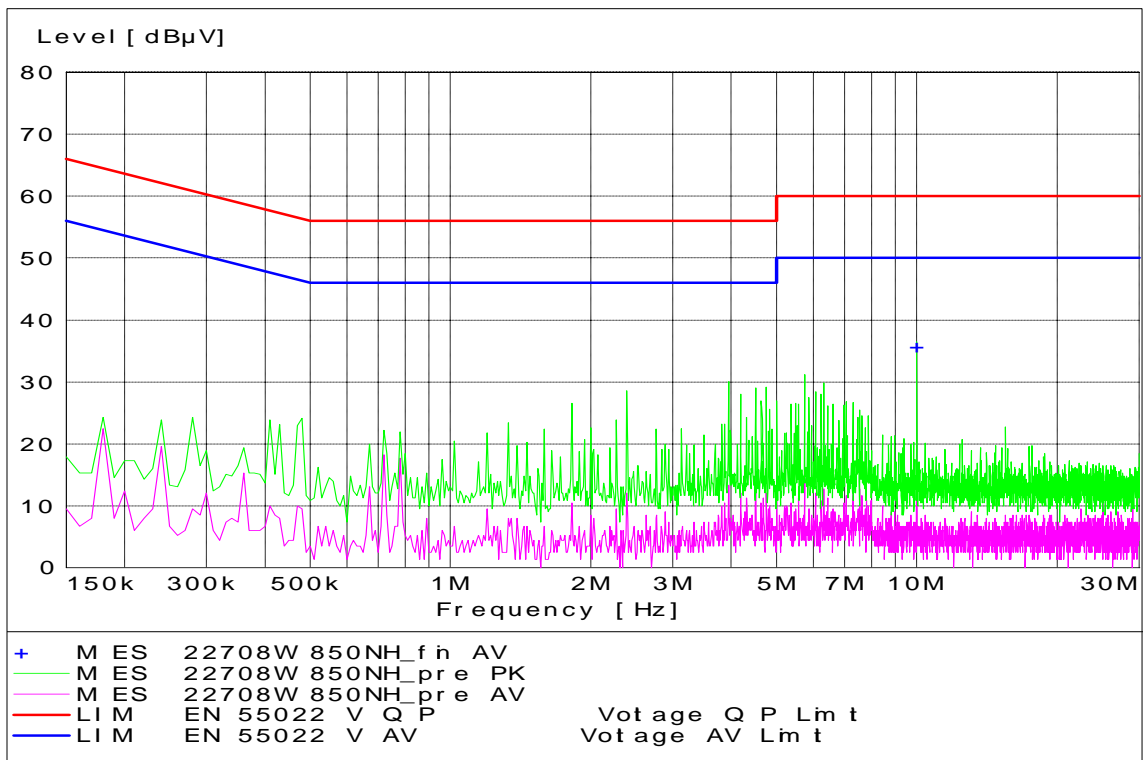


WCDMA 850 Channel 4233 - Tx Mode - Neutral Coupling

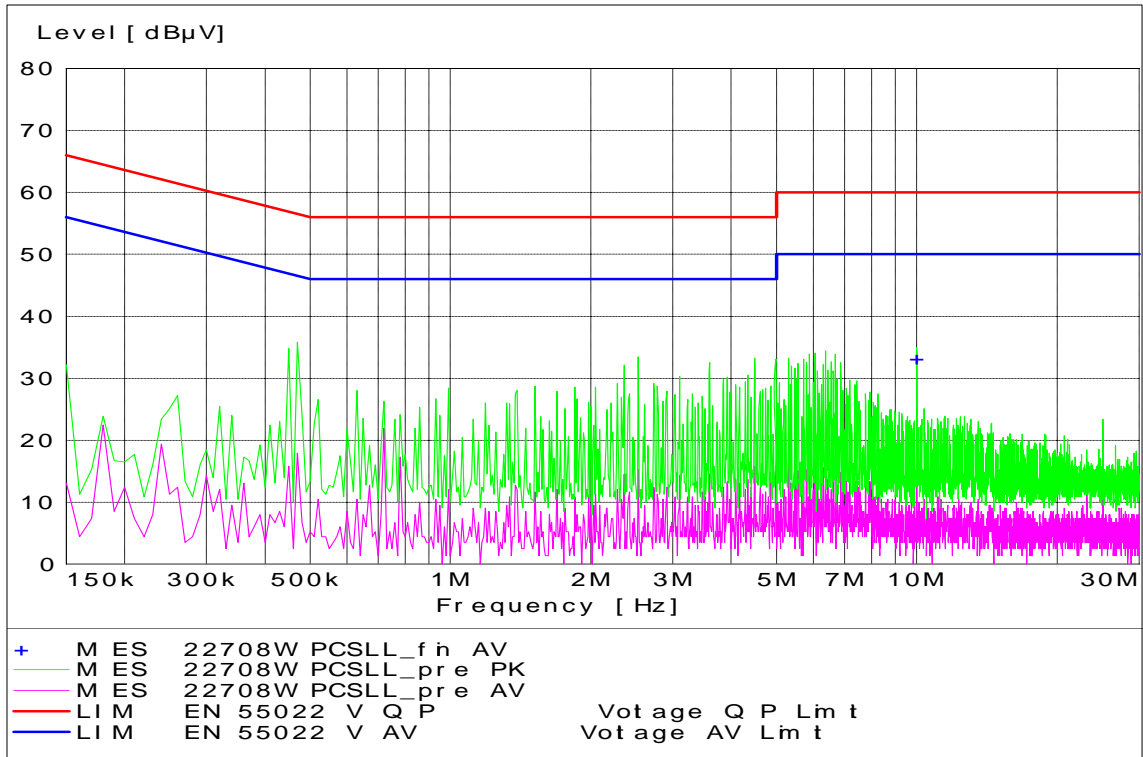


WCDMA PCS Channel 9262 - Tx Mode - Line Coupling

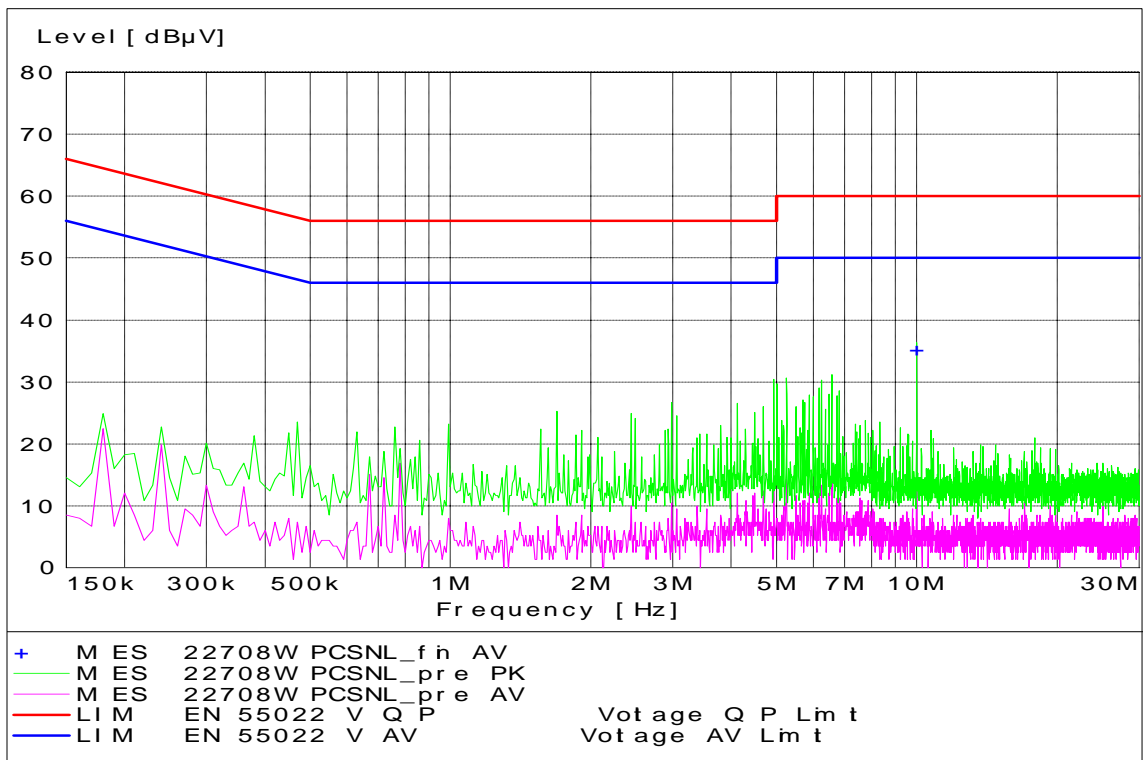


WCDMA PCS Channel 9262 - Tx Mode - Neutral Coupling

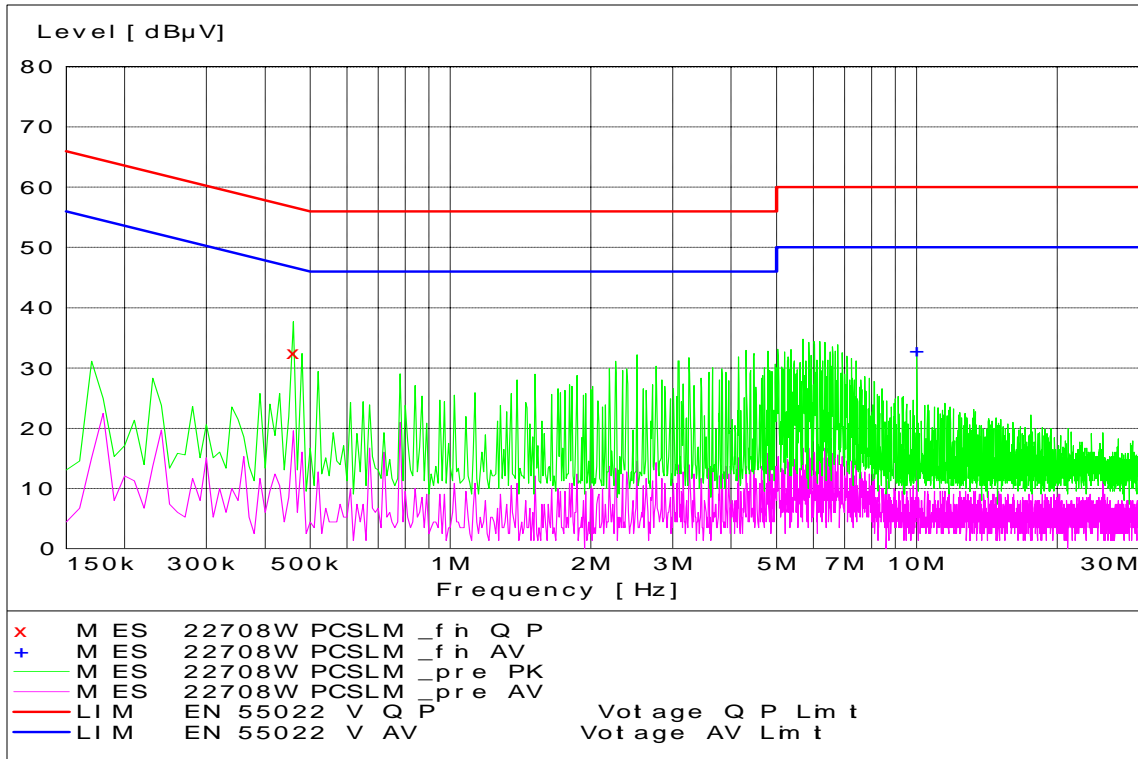


WCDMA PCS Channel 9400 - Tx Mode - Line Coupling

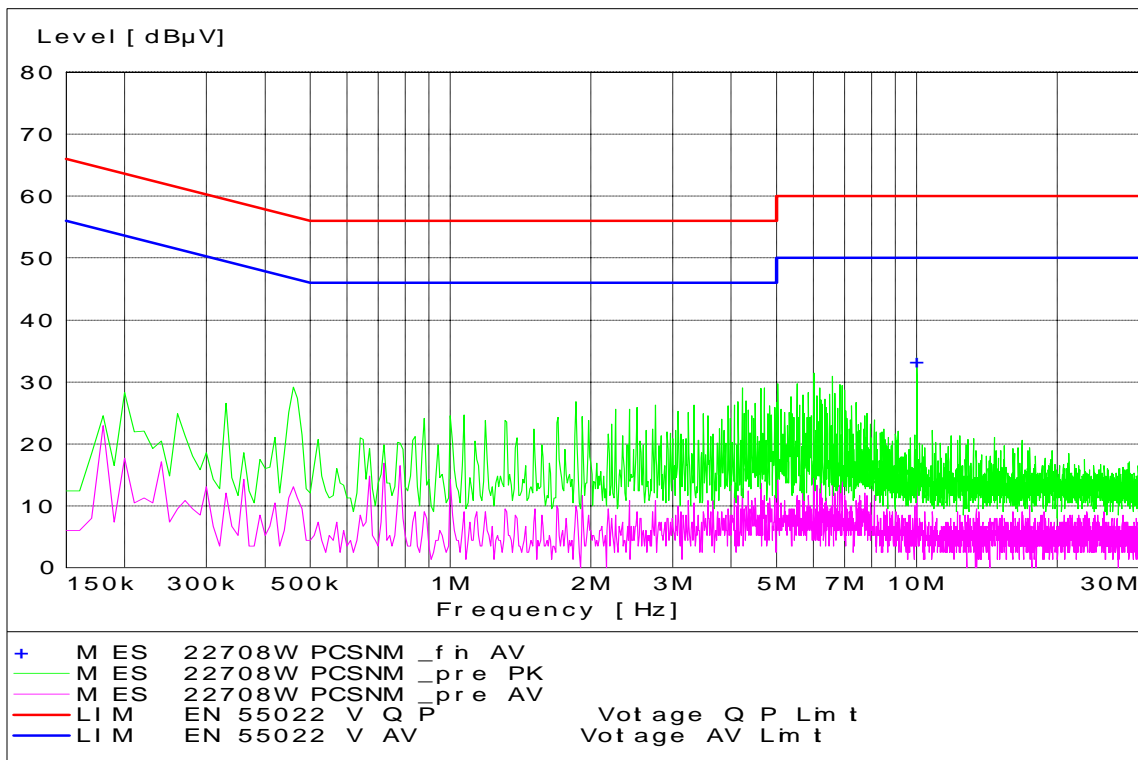

WCDMA PCS Channel 9400 - Tx Mode - Neutral Coupling

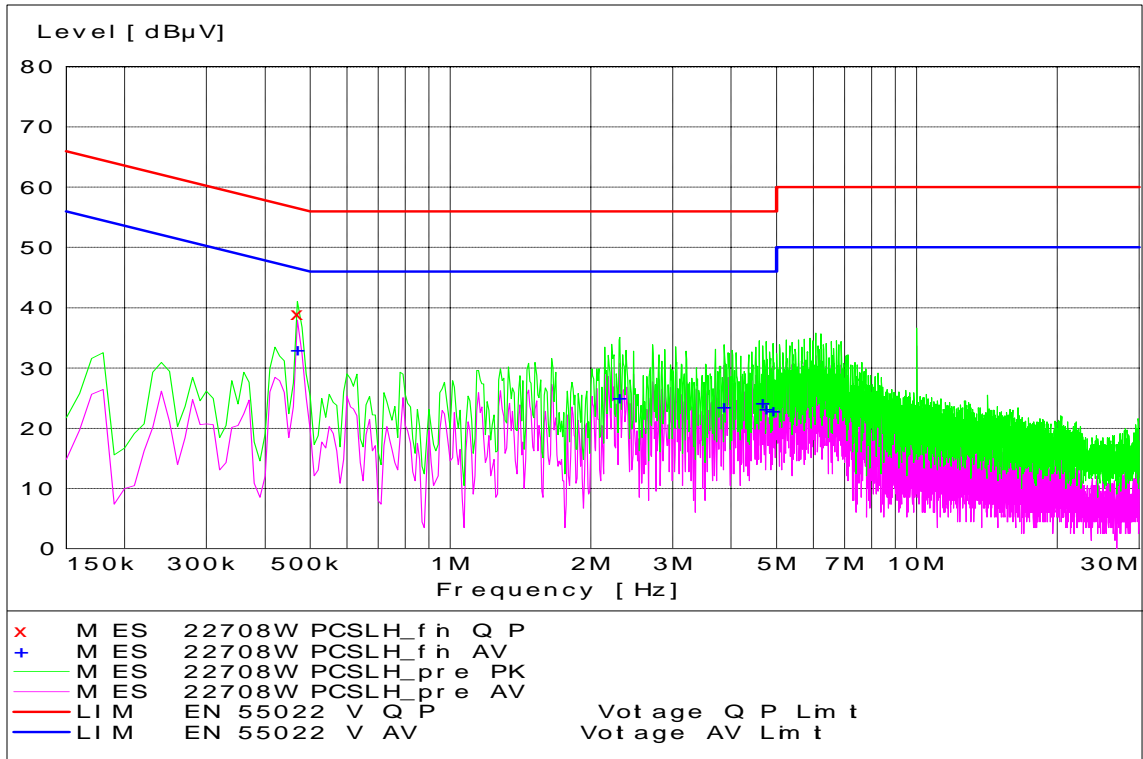

WCDMA PCS Channel 9538 - Tx Mode - Line Coupling

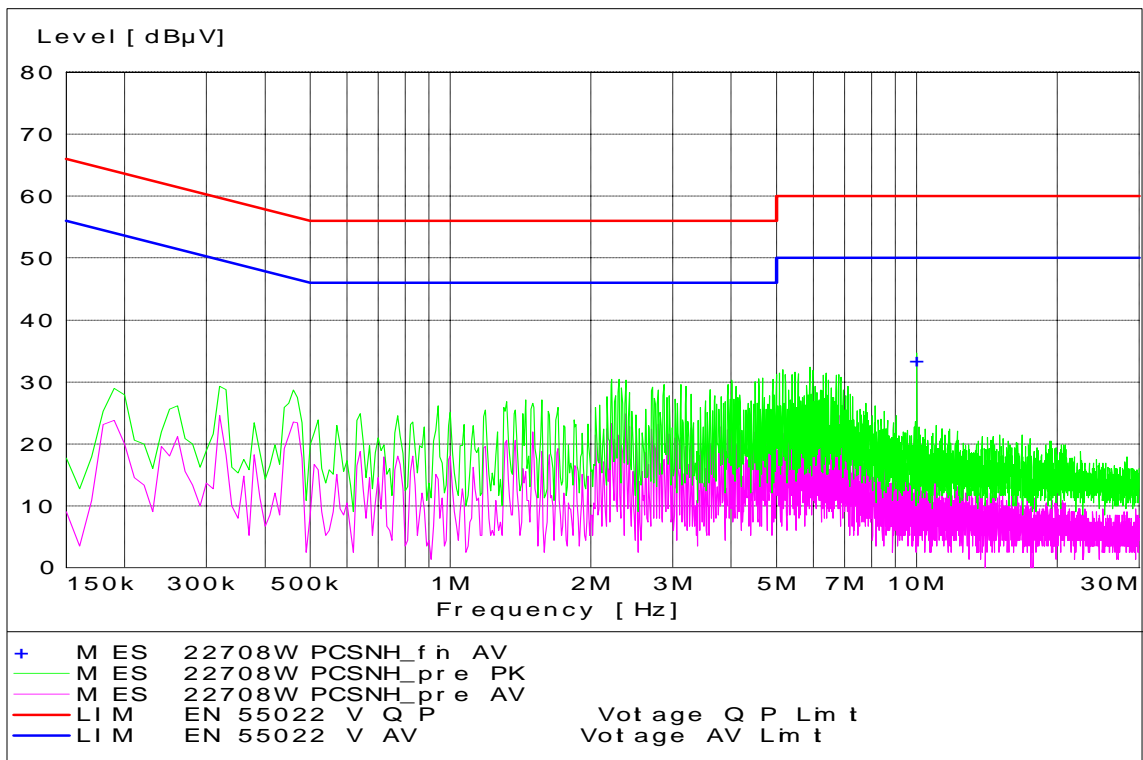

WCDMA PCS Channel 9538 - Tx Mode - Neutral Coupling

End of Test Report