



FCC RF Test Report

APPLICANT : Motorola Mobility, LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola Mobility, LLC
MODEL NAME : 4242
FCC ID : IHDT56QC7
STANDARD : FCC 47 CFR Part 2, and 90(S)
CLASSIFICATION : PCS Licensed Transmitter Held to Ear (PCE)

The product was received on Nov. 15, 2014 and testing was completed on Dec. 14, 2014. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures given in ANSI / TIA / EIA-603-C-2004 and shown compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by: Joseph Lin / Supervisor

Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL INC.

No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



TABLE OF CONTENTS

REVISION HISTORY..... 3

SUMMARY OF TEST RESULT 4

1 GENERAL DESCRIPTION 5

 1.1 Applicant..... 5

 1.2 Manufacturer 5

 1.3 Feature of Equipment Under Test..... 5

 1.4 Product Specification of Equipment Under Test 6

 1.5 Modification of EUT 6

 1.6 Maximum Frequency Tolerance and Emission Designator 6

 1.7 Testing Site..... 7

 1.8 Applied Standards 7

2 TEST CONFIGURATION OF EQUIPMENT UNDER TEST 8

 2.1 Test Mode..... 8

 2.2 Connection Diagram of Test System 9

 2.3 Support Unit used in test configuration and system 9

 2.4 Measurement Results Explanation Example 9

3 TEST RESULT 10

 3.1 Conducted Output Power Measurement..... 10

 3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement..... 13

 3.3 Emissions Mask Measurement 34

 3.4 Emissions Mask – Out Of Band Emissions Measurement..... 59

 3.5 Field Strength of Spurious Radiation Measurement 70

 3.6 Frequency Stability Measurement..... 82

4 LIST OF MEASURING EQUIPMENT 84

5 UNCERTAINTY OF EVALUATION 85



SUMMARY OF TEST RESULT

Report Section	FCC Rule	Description	Limit	Result	Remark
3.1	§2.1046	Conducted Output Power	N/A , Reporting only	PASS	-
3.2	§2.1049 §90.209	Occupied Bandwidth and 26dB Bandwidth	N/A (Reporting only)	PASS	-
3.3	§2.1051 §90.691	Emission masks – In-band emissions	$< 50+10\log_{10}(P[\text{Watts}])$	PASS	-
3.4	§2.1051 §90.691	Emission masks – Out of band emissions	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	-
3.5	§2.1053 §90.691	Field Strength of Spurious Radiation	$< 43+10\log_{10}(P[\text{Watts}])$	PASS	Under limit 44.02 dB at 3256.000 MHz
3.6	§2.1055 §90.213	Frequency Stability for Temperature & Voltage	$< 2.5 \text{ ppm}$	PASS	-



1 General Description

1.1 Applicant

Motorola Mobility, LLC
222 W. Merchandise Mart Plaza, Chicago IL 60654 USA

1.2 Manufacturer

Motorola Mobility, LLC
222 W. Merchandise Mart Plaza, Chicago IL 60654 USA

1.3 Feature of Equipment Under Test

Product Feature	
Equipment	Mobile Cellular Phone
Brand Name	Motorola Mobility, LLC
Model Name	4242
FCC ID	IHDT56QC7
IMEI Code	990005460018022
EUT supports Radios application	GSM/EGPRS/CDMA/EV-DO/WCDMA/HSPA/LTE WLAN 11b/g/n HT20 Bluetooth v2.1 + EDR Bluetooth v4.0 - LE
HW Version	P2B
EUT Stage	Identical Prototype

Accessory List	
AC Adapter	Brand Name : Motorola
	Model Name : SPN5810A

1.4 Product Specification of Equipment Under Test

Product Specification subjective to this standard	
Tx Frequency	814.7 ~ 823.3 MHz
Rx Frequency	859.7 ~ 868.3 MHz
Bandwidth	1.4MHz / 3MHz / 5MHz / 10MHz
Maximum Output Power to Antenna	23.39 dBm
Antenna Type	Fixed Internal Antenna
Type of Modulation	QPSK / 16QAM

Remark: This test report recorded only product characteristics and test results of PCS Licensed Transmitter Held to Ear (PCE).

1.5 Modification of EUT

No modifications are made to the EUT during all test items.

1.6 Maximum Frequency Tolerance and Emission Designator

FCC Rule	System	Type of Modulation	BW	Emission Designator	Frequency Tolerance (ppm)
Part 90S	LTE Band 26	QPSK	1.4 MHz	1M10G7D	-
Part 90S	LTE Band 26	16QAM	1.4 MHz	1M10D7W	-
Part 90S	LTE Band 26	QPSK	3 MHz	2M73G7D	-
Part 90S	LTE Band 26	16QAM	3 MHz	2M73D7W	-
Part 90S	LTE Band 26	QPSK	5 MHz	4M51G7D	-
Part 90S	LTE Band 26	16QAM	5 MHz	4M51D7W	-
Part 90S	LTE Band 26	QPSK	10 MHz	9M11G7D	0.0020 ppm
Part 90S	LTE Band 26	16QAM	10 MHz	9M05D7W	-



1.7 Testing Site

Sporton Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code : 1190) and the FCC designation No. TW1022 under the FCC 2.948(e) by Mutual Recognition Agreement (MRA) in FCC Test.

Test Site	SPORTON INTERNATIONAL INC.	
Test Site Location	No. 52, Hwa Ya 1 st Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978	
Test Site No.	Sporton Site No.	
	TH02-HY	03CH07-HY

1.8 Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC 47 CFR Part 2, 90
- ♦ ANSI / TIA / EIA-603-C-2004
- ♦ FCC KDB 971168 D01 Power Meas. License Digital Systems v02r02

Remark:

1. All test items were verified and recorded according to the standards and without any deviation during the test.
2. This EUT has also been tested and complied with the requirements of FCC Part 15, Subpart B, recorded in a separate test report.



2 Test Configuration of Equipment Under Test


2.1 Test Mode

During all testing, EUT is in link mode with base station emulator at maximum power level. The spurious emission measurements were carried out in semi-anechoic chamber with 3-meter test range, and EUT is rotated on three test planes to find out the worst emission.

Frequency range investigated for radiated emission is 30 MHz to 9000 MHz.

Test Items	Band	Bandwidth (MHz)						Modulation		RB #			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	1	Half	Full	L	M	H
Max. Output Power	26	v	v	v	v	-	-	v	v	v	v	v	v	v	v
26dB and 99% Bandwidth	26	v	v	v	v	-	-	v	v			v	v	v	v
Emission masks In-band emissions	26	v	v	v	v	-	-	v	v	v		v	v		v
Emission masks – Out of band emissions	26	v	v	v	v	-	-	v	v	v			v	v	v
Frequency Stability	26				v	-	-	v				v		v	
Radiated Spurious Emission	26	v	v	v	v	-	-	v		v			v	v	v
Note	1. The mark “v” means that this configuration is chosen for testing 2. The mark “-“ means that this bandwidth is not supported.														

2.2 Connection Diagram of Test System

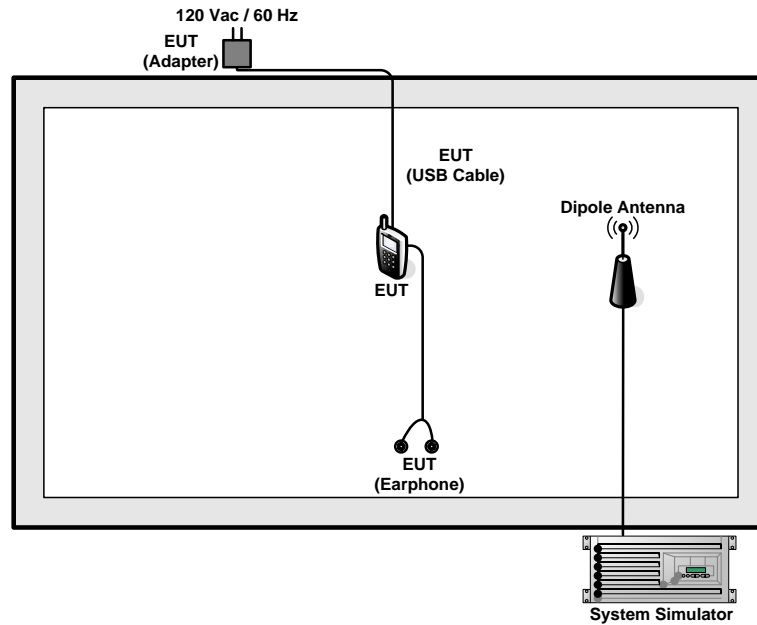

2.3 Support Unit used in test configuration and system

Item	Equipment	Trade Name	Model No.	FCC ID	Data Cable	Power Cord
1.	System Simulator	Anritsu	MT8820C	N/A	N/A	Unshielded, 1.8 m

2.4 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between RF conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level will be exactly the RF output level.

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

Offset = RF cable loss + attenuator factor.

The following shows an offset computation example with RF cable loss 4.2 dB and a 10dB attenuator.

Example :

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

3 Test Result

3.1 Conducted Output Power Measurement

3.1.1 Description of the Conducted Output Power Measurement

A system simulator was used to establish communication with the EUT. Its parameters were set to enforce EUT transmitting at the maximum power. The measured power in the radio frequency on the transmitter output terminals shall be reported.


3.1.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.1.3 Test Procedures

1. The transmitter output port was connected to the system simulator.
2. Set EUT at maximum power through system simulator.
3. Select lowest, middle, and highest channels for each band and different modulation.
4. Measure and record the power level from the system simulator.

3.1.4 Test Setup

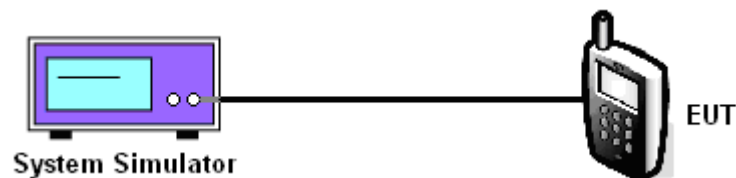



3.1.5 Test Result of Conducted Output Power

<LTE Band 26 Conducted Power>

BW [MHz]	Modulation	RB Size	RB Offset	Power (dBm) Low Ch. / Freq.	Power (dBm) Middle Ch. / Freq.	Power (dBm) High Ch. / Freq.
Channel					26740	
Frequency (MHz)					819	
10	QPSK	1	0		23.39	
10	QPSK	1	24		23.38	
10	QPSK	1	49		23.25	
10	QPSK	25	0		22.29	
10	QPSK	25	12		22.11	
10	QPSK	25	24		22.18	
10	QPSK	50	0		22.10	
10	16QAM	1	0		22.25	
10	16QAM	1	24		22.19	
10	16QAM	1	49		22.08	
10	16QAM	25	0		21.69	
10	16QAM	25	12		21.60	
10	16QAM	25	24		21.57	
10	16QAM	50	0		21.17	
Channel				26715	26740	26765
Frequency (MHz)				816.5	819	821.5
5	QPSK	1	0	23.14	23.22	23.17
5	QPSK	1	12	23.12	23.13	23.08
5	QPSK	1	24	23.00	23.08	22.94
5	QPSK	12	0	22.34	22.26	22.22
5	QPSK	12	6	22.29	22.29	22.37
5	QPSK	12	11	22.23	22.33	22.20
5	QPSK	25	0	22.21	22.23	22.34
5	16QAM	1	0	22.63	22.64	22.49
5	16QAM	1	12	22.38	22.44	22.42
5	16QAM	1	24	22.31	22.38	22.36
5	16QAM	12	0	21.26	21.54	21.11
5	16QAM	12	6	21.42	21.57	21.29
5	16QAM	12	11	21.61	21.56	21.15
5	16QAM	25	0	21.18	21.34	21.21



BW [MHz]	Modulation	RB Size	RB Offset	Power (dBm) Low Ch. / Freq.	Power (dBm) Middle Ch. / Freq.	Power (dBm) High Ch. / Freq.
Channel				26705	26740	26775
Frequency (MHz)				815.5	819	822.5
3	QPSK	1	0	23.05	23.19	23.18
3	QPSK	1	7	23.17	23.18	23.17
3	QPSK	1	14	23.10	23.17	23.19
3	QPSK	8	0	22.37	22.35	22.24
3	QPSK	8	4	22.23	22.36	22.24
3	QPSK	8	7	22.23	22.35	22.19
3	QPSK	15	0	22.29	22.28	22.22
3	16QAM	1	0	22.19	22.47	22.54
3	16QAM	1	7	22.03	22.49	22.43
3	16QAM	1	14	22.12	22.20	22.31
3	16QAM	8	0	21.38	21.47	21.11
3	16QAM	8	4	21.35	21.55	21.27
3	16QAM	8	7	21.34	21.18	21.40
3	16QAM	15	0	21.39	21.05	21.11
Channel				26697	26740	26783
Frequency (MHz)				814.7	819	823.3
1.4	QPSK	1	0	23.18	23.18	23.07
1.4	QPSK	1	2	23.19	23.16	23.18
1.4	QPSK	1	5	23.12	23.14	23.01
1.4	QPSK	3	0	23.20	23.18	23.20
1.4	QPSK	3	1	23.19	23.11	23.19
1.4	QPSK	3	2	23.17	23.15	23.19
1.4	QPSK	6	0	22.30	22.25	22.19
1.4	16QAM	1	0	22.47	22.55	22.44
1.4	16QAM	1	2	22.41	22.22	22.36
1.4	16QAM	1	5	22.33	22.38	22.52
1.4	16QAM	3	0	22.38	22.01	22.40
1.4	16QAM	3	1	22.36	22.06	22.46
1.4	16QAM	3	2	22.41	22.06	22.19
1.4	16QAM	6	0	21.28	20.92	20.92

Note: Maximum average power for LTE.

3.2 99% Occupied Bandwidth and 26dB Bandwidth Measurement

3.2.1 Description of (Occupied) Bandwidth Limitations Measurement

The 99% occupied bandwidth is the width of a frequency band such that, below the lower and above the upper frequency limits, the mean powers emitted are each equal to a specified percentage 0.5% of the total mean transmitted power.

The emission bandwidth is defined as the width of the signal between two points, located at the 2 sides of the carrier frequency, outside of which all emissions are attenuated at least 26 dB below the transmitter power.


3.2.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.2.3 Test Procedures

1. The EUT was connected to spectrum analyzer and system simulator via a power divider.
2. The 26dB and 99% occupied bandwidth (BW) of the middle channel for the highest RF power with full RB sizes were measured.

3.2.4 Test Setup

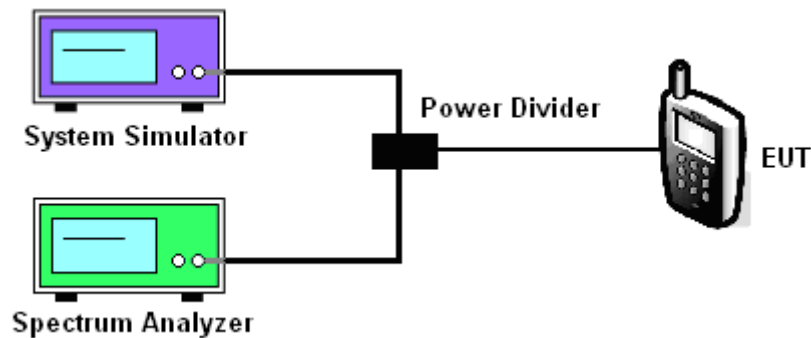





3.2.5 Test Result of 99% Occupied Bandwidth and 26dB Bandwidth

Band :	LTE Band 26	BW / Mod. :	1.4MHz / QPSK
--------	-------------	-------------	---------------

99% Occupied Bandwidth Plot on Channel 26697

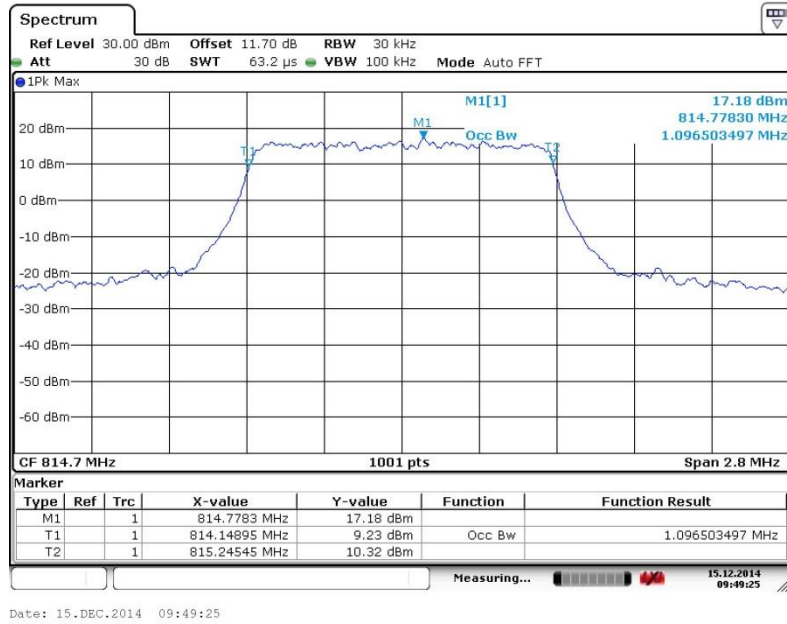


26dB Bandwidth Plot on Channel 26697

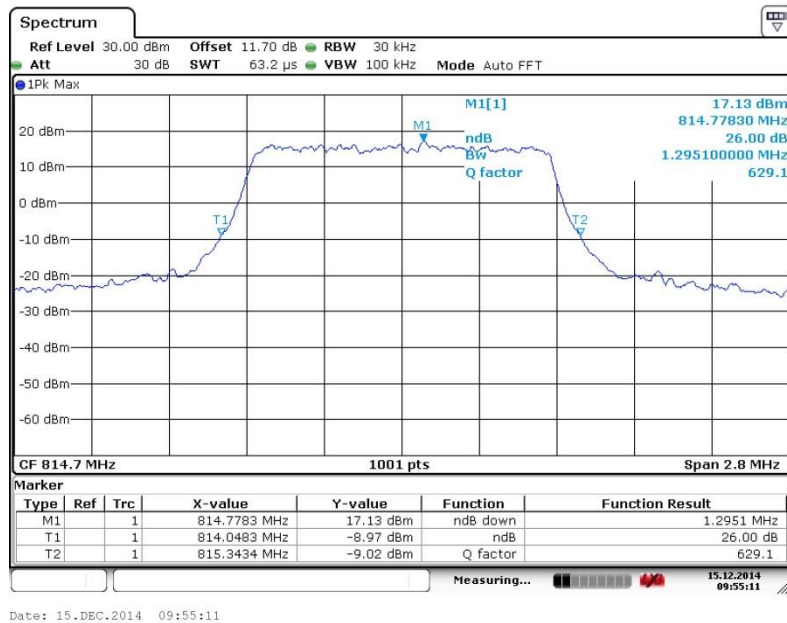




Band :	LTE Band 26	BW / Mod. :	1.4MHz / QPSK
--------	-------------	-------------	---------------

99% Occupied Bandwidth Plot on Channel 26740

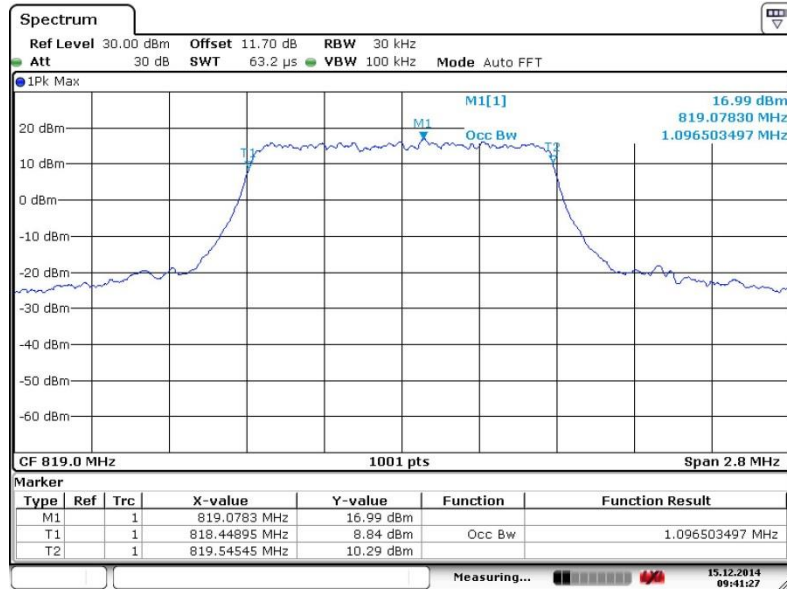

Date: 15.DEC.2014 09:41:27

26dB Bandwidth Plot on Channel 26740

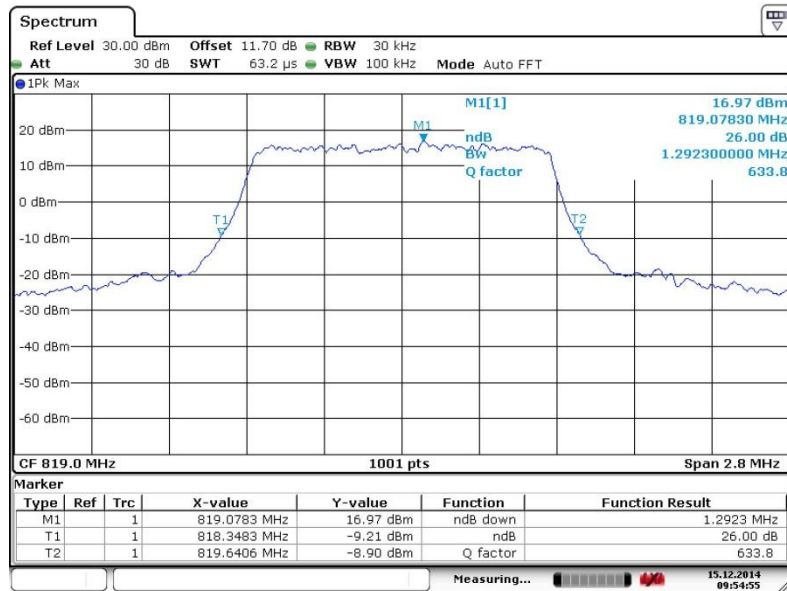


Date: 15.DEC.2014 09:54:55




Band :	LTE Band 26	BW / Mod. :	1.4MHz / QPSK
--------	-------------	-------------	---------------

99% Occupied Bandwidth Plot on Channel 26783

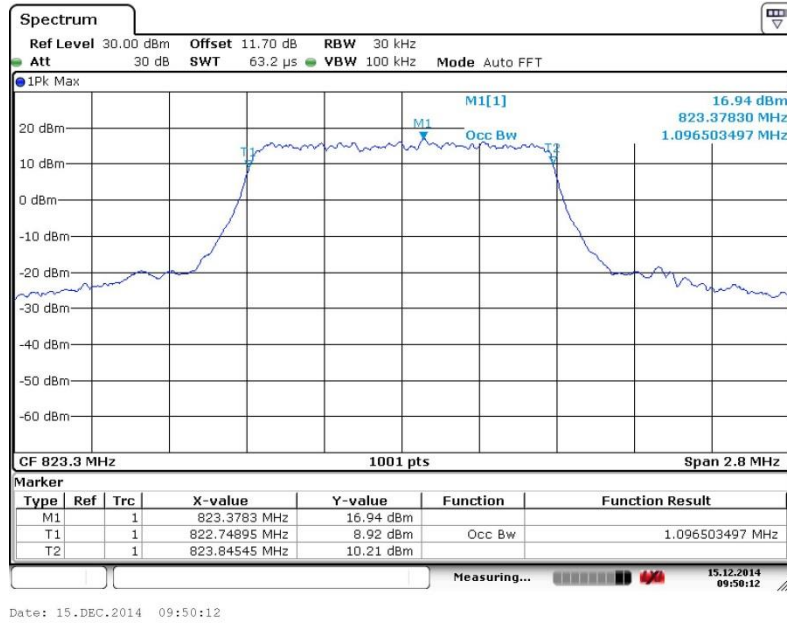


26dB Bandwidth Plot on Channel 26783

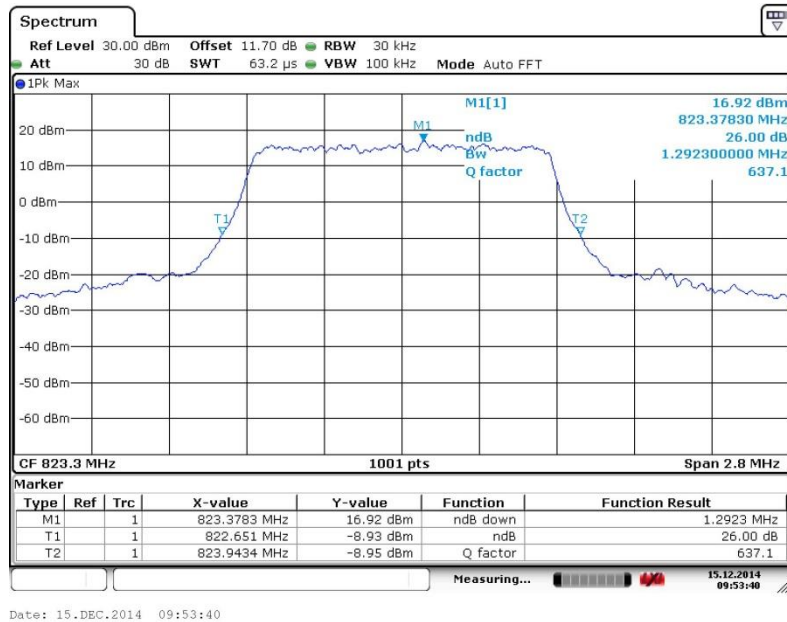




Band :	LTE Band 26	BW / Mod. :	1.4MHz / 16QAM
--------	-------------	-------------	----------------

99% Occupied Bandwidth Plot on Channel 26697

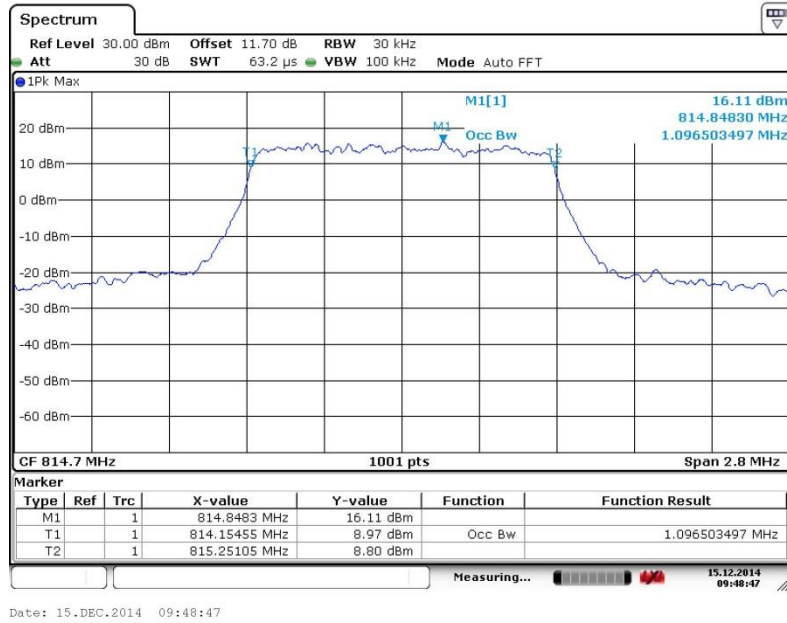


26dB Bandwidth Plot on Channel 26697

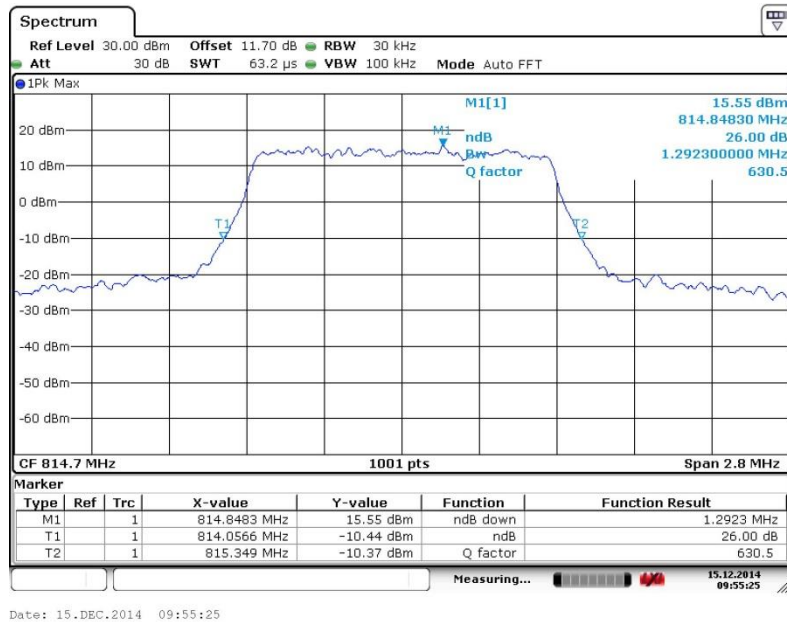




Band :	LTE Band 26	BW / Mod. :	1.4MHz / 16QAM
--------	-------------	-------------	----------------

99% Occupied Bandwidth Plot on Channel 26740

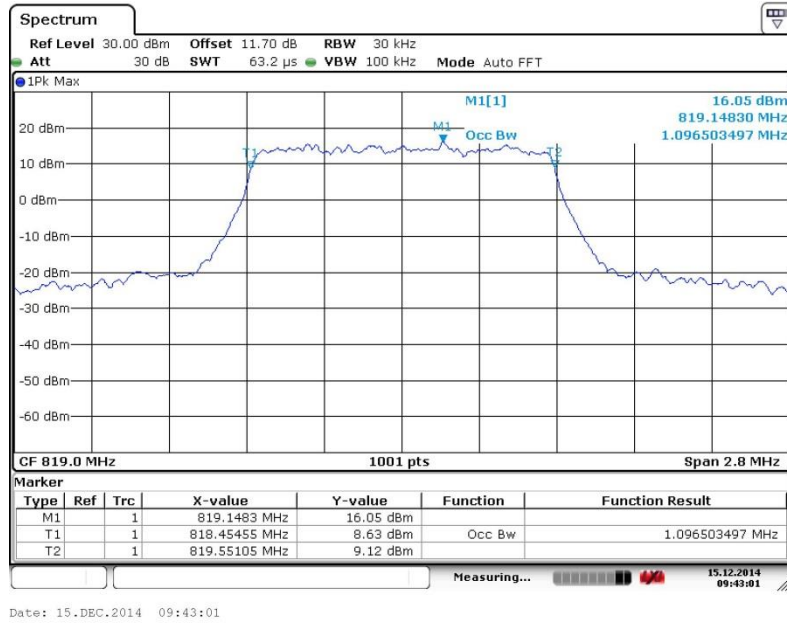


26dB Bandwidth Plot on Channel 26740

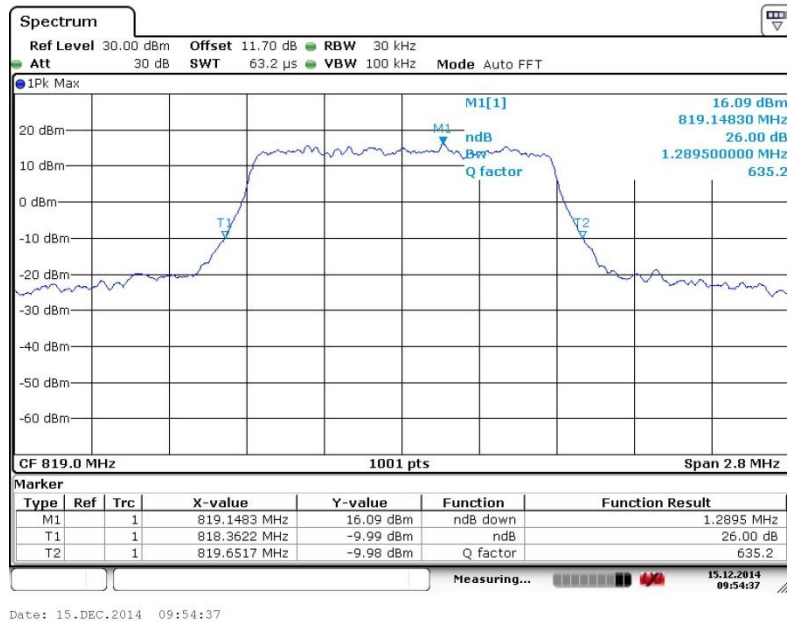




Band :	LTE Band 26	BW / Mod. :	1.4MHz / 16QAM
--------	-------------	-------------	----------------

99% Occupied Bandwidth Plot on Channel 26783

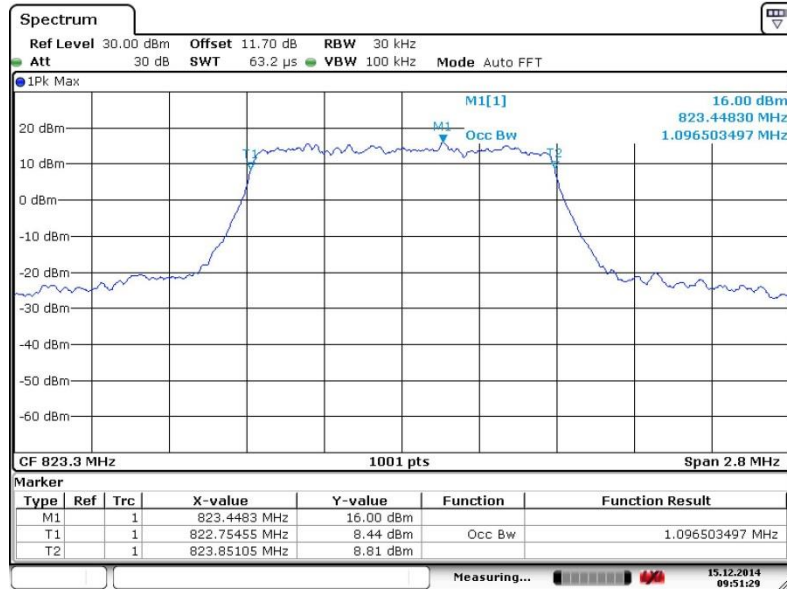

Date: 15.DEC.2014 09:51:29

26dB Bandwidth Plot on Channel 26783

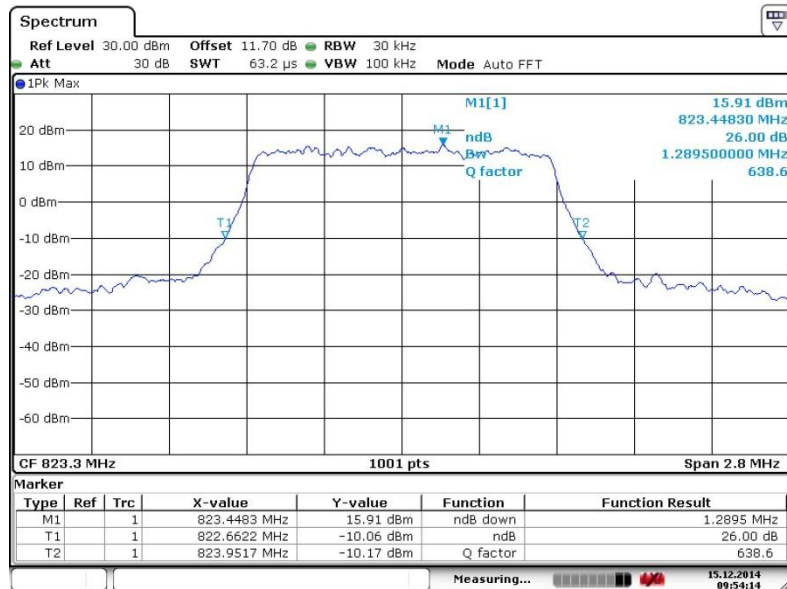


Date: 15.DEC.2014 09:54:14




Band :	LTE Band 26	BW / Mod. :	3MHz / QPSK
--------	-------------	-------------	-------------

99% Occupied Bandwidth Plot on Channel 26705

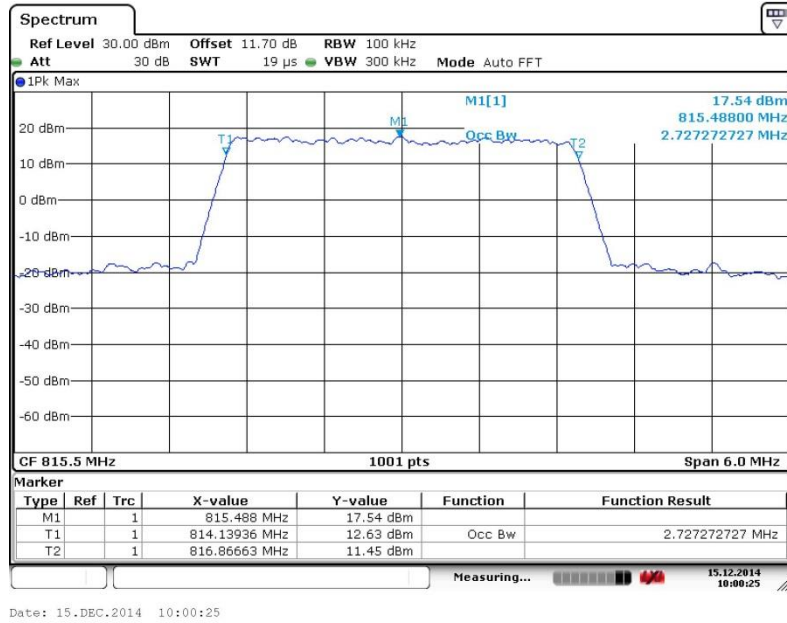


26dB Bandwidth Plot on Channel 26705

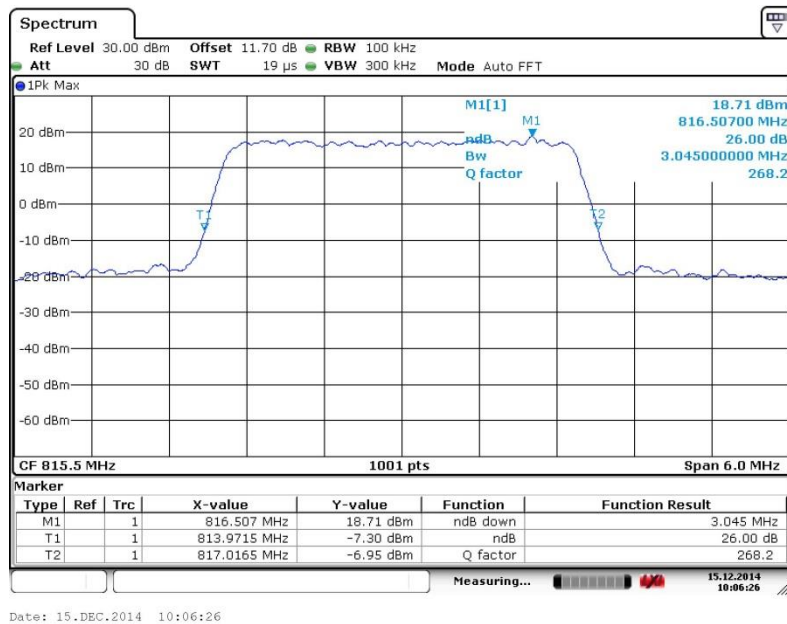




Band :	LTE Band 26	BW / Mod. :	3MHz / QPSK
--------	-------------	-------------	-------------

99% Occupied Bandwidth Plot on Channel 26740

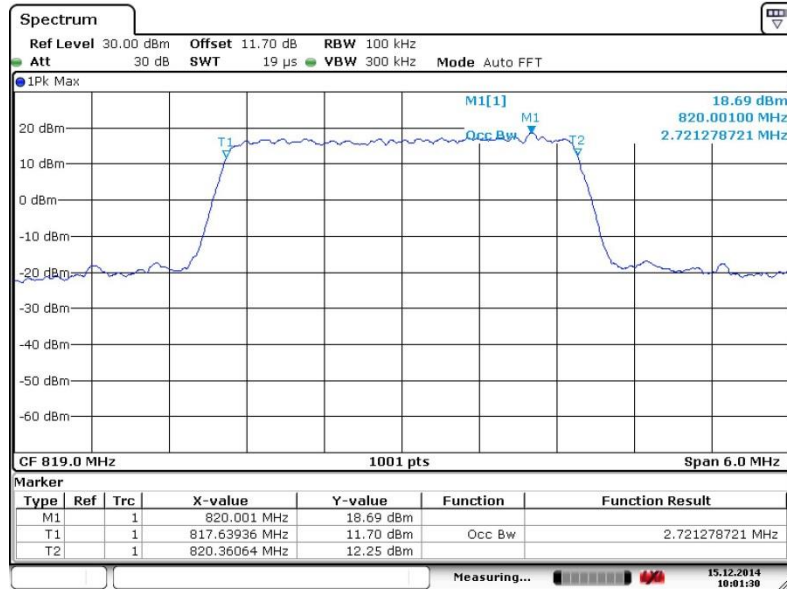

Date: 15.DEC.2014 10:01:30

26dB Bandwidth Plot on Channel 26740

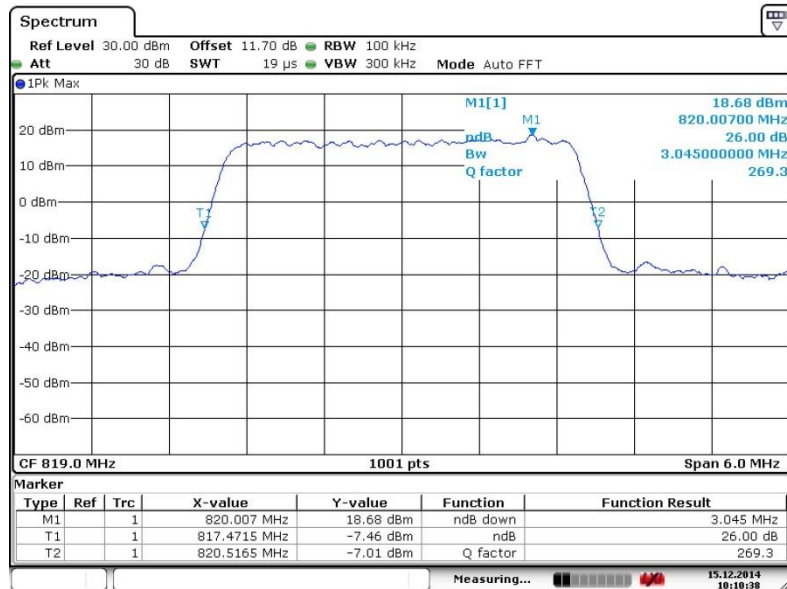


Date: 15.DEC.2014 10:10:38




Band :	LTE Band 26	BW / Mod. :	3MHz / QPSK
--------	-------------	-------------	-------------

99% Occupied Bandwidth Plot on Channel 26775

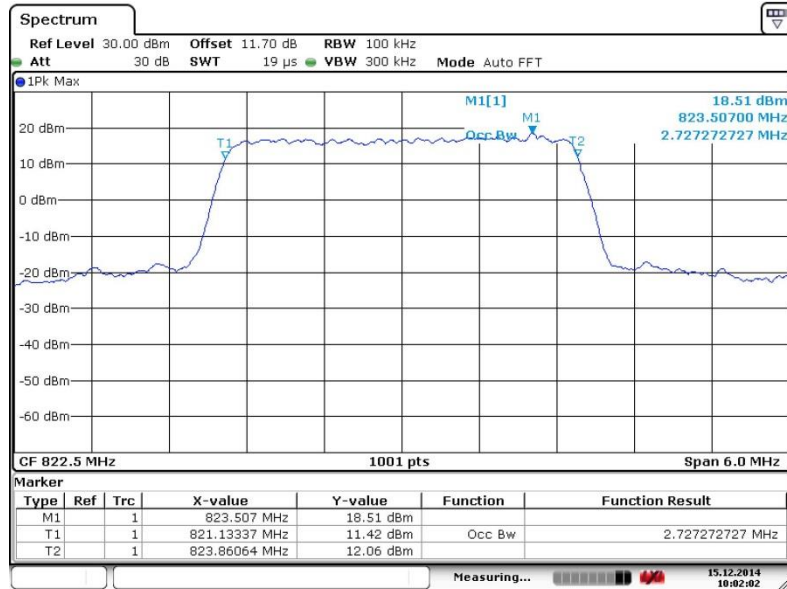

Date: 15.DEC.2014 10:02:02

26dB Bandwidth Plot on Channel 26775

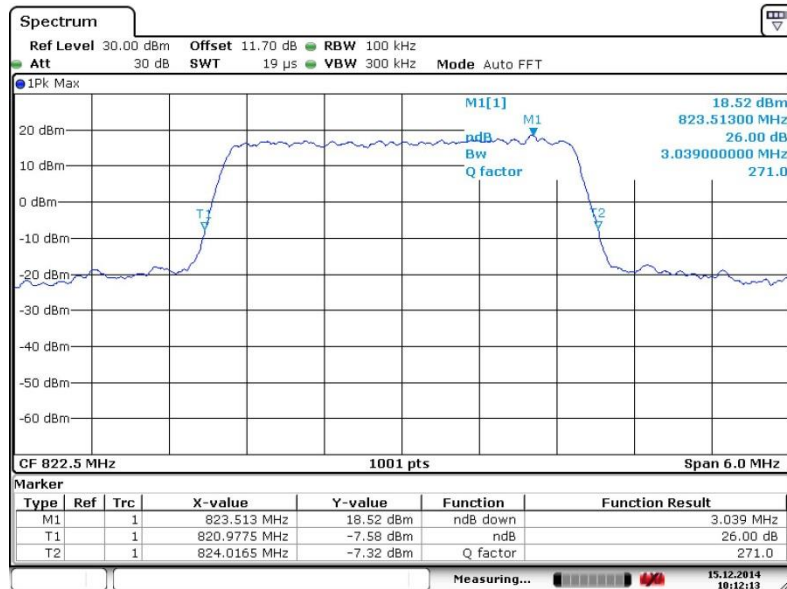


Date: 15.DEC.2014 10:12:13




Band :	LTE Band 26	BW / Mod. :	3MHz / 16QAM
--------	-------------	-------------	--------------

99% Occupied Bandwidth Plot on Channel 26705

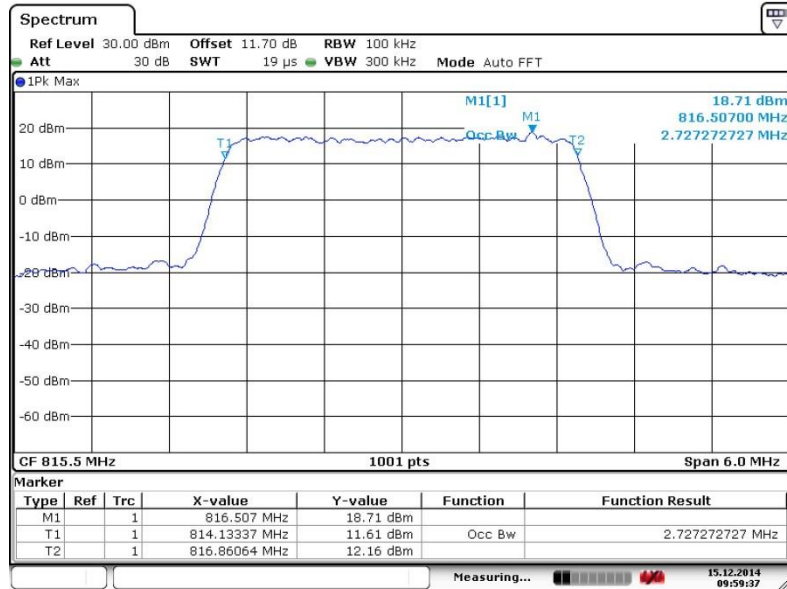


26dB Bandwidth Plot on Channel 26705

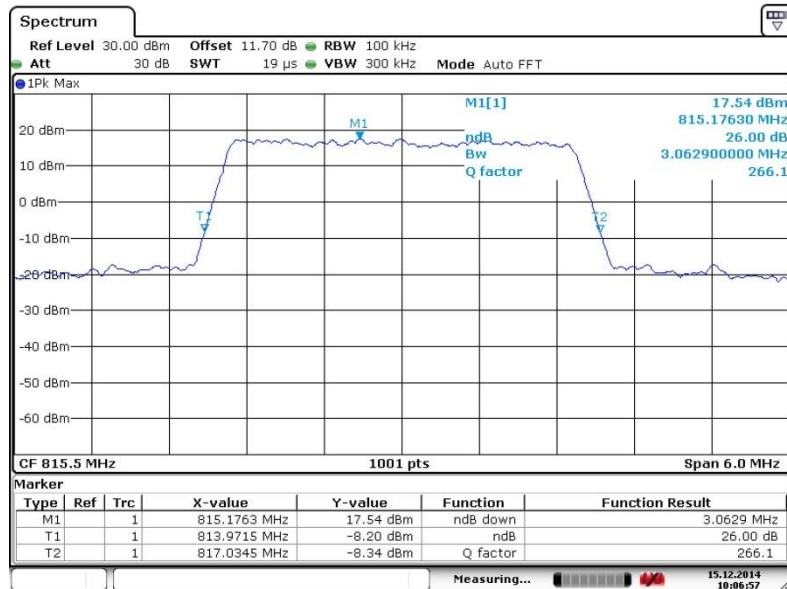




Band :	LTE Band 26	BW / Mod. :	3MHz / 16QAM
--------	-------------	-------------	--------------

99% Occupied Bandwidth Plot on Channel 26740

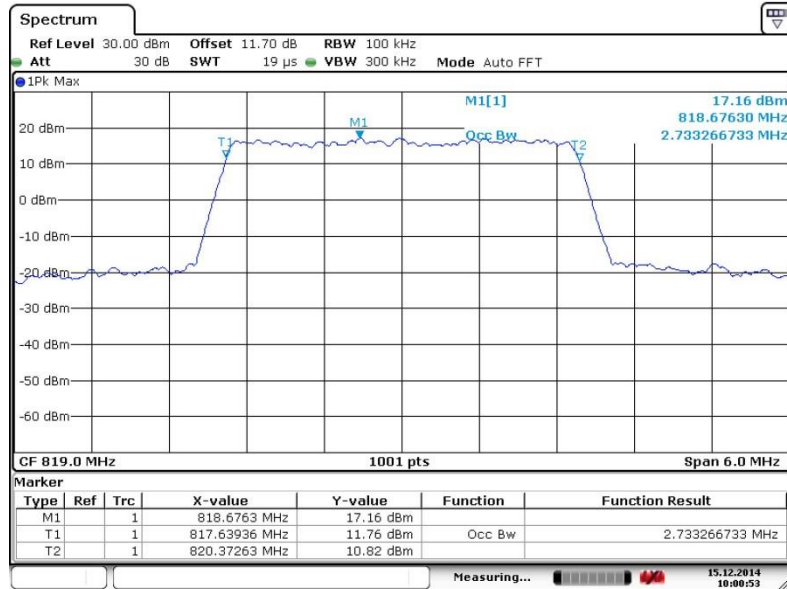

Date: 15.DEC.2014 10:00:53

26dB Bandwidth Plot on Channel 26740

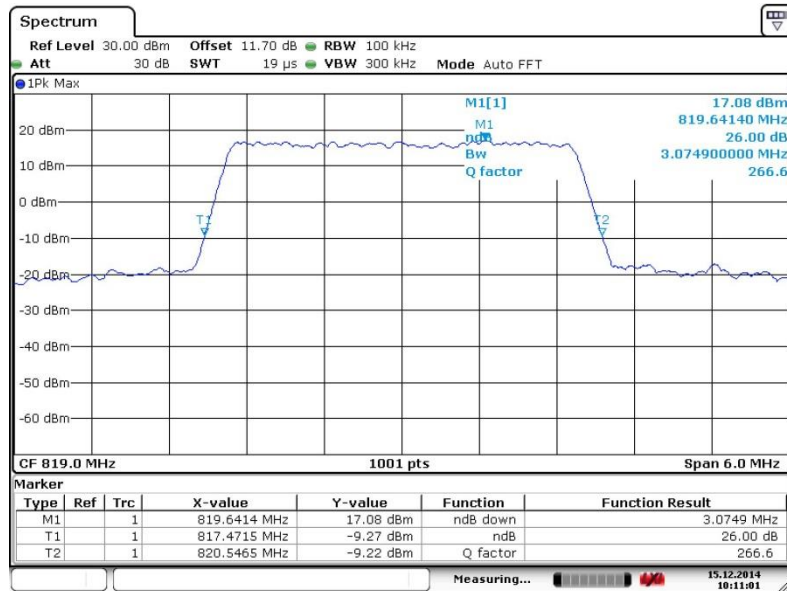


Date: 15.DEC.2014 10:11:01




Band :	LTE Band 26	BW / Mod. :	3MHz / 16QAM
--------	-------------	-------------	--------------

99% Occupied Bandwidth Plot on Channel 26775

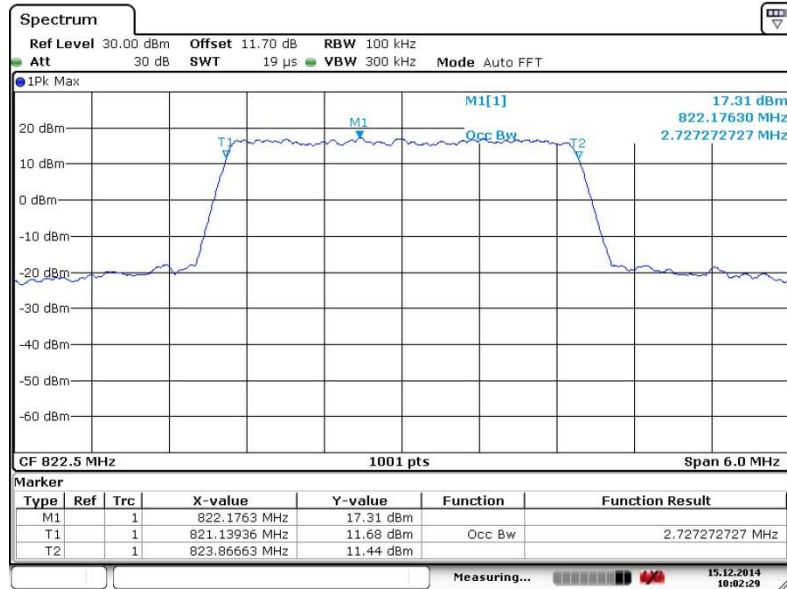

Date: 15.DEC.2014 10:02:29

26dB Bandwidth Plot on Channel 26775

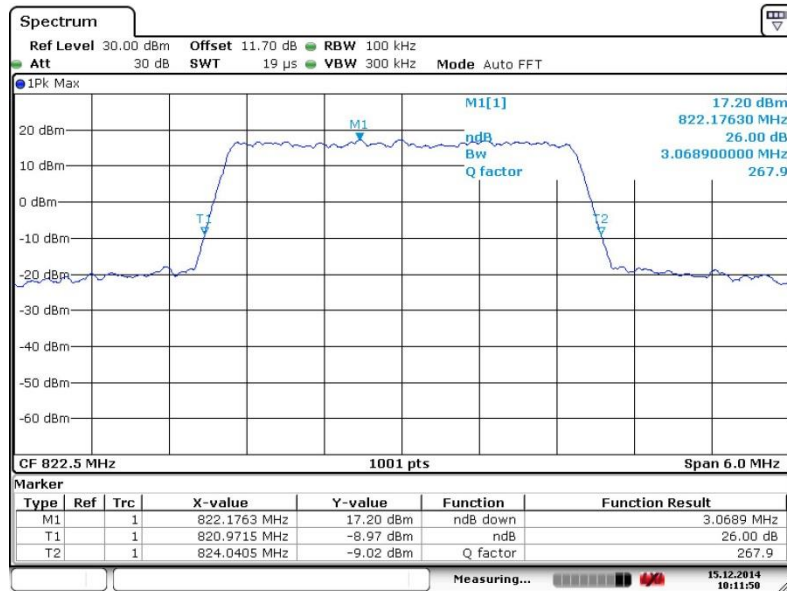


Date: 15.DEC.2014 10:11:50




Band :	LTE Band 26	BW / Mod. :	5MHz / QPSK
--------	-------------	-------------	-------------

99% Occupied Bandwidth Plot on Channel 26715

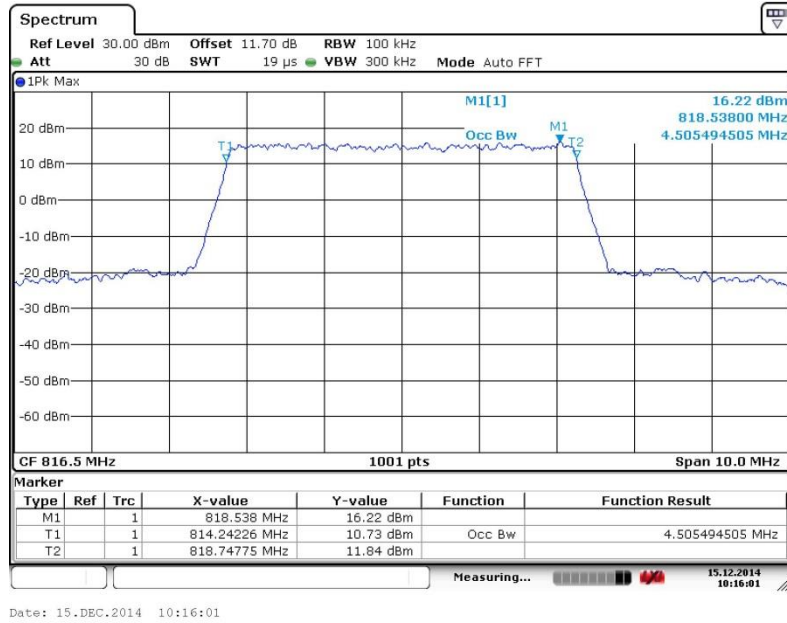


26dB Bandwidth Plot on Channel 26715

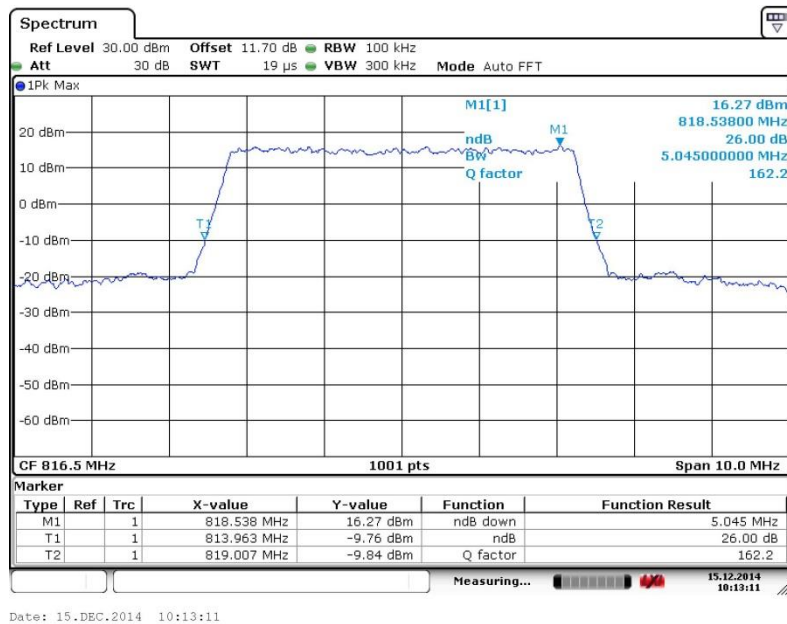




Band :	LTE Band 26	BW / Mod. :	5MHz / QPSK
--------	-------------	-------------	-------------

99% Occupied Bandwidth Plot on Channel 26740

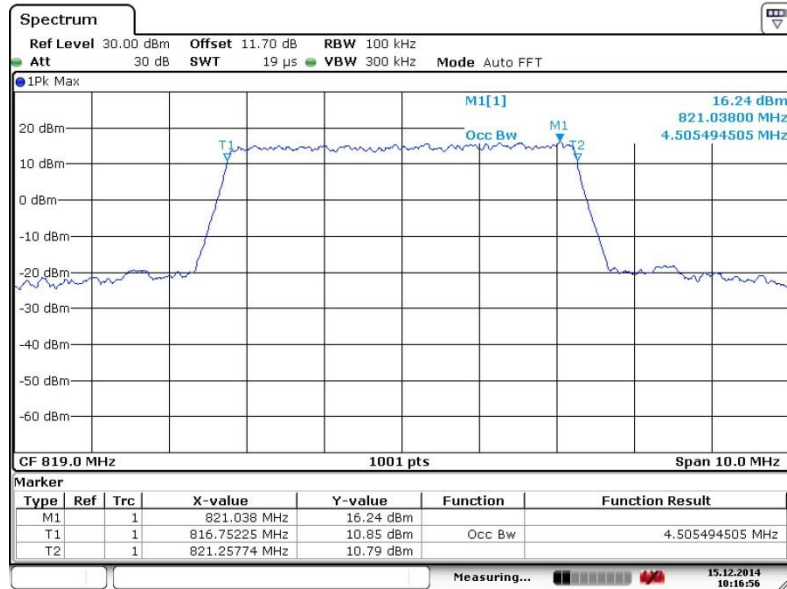

Date: 15.DEC.2014 10:16:56

26dB Bandwidth Plot on Channel 26740

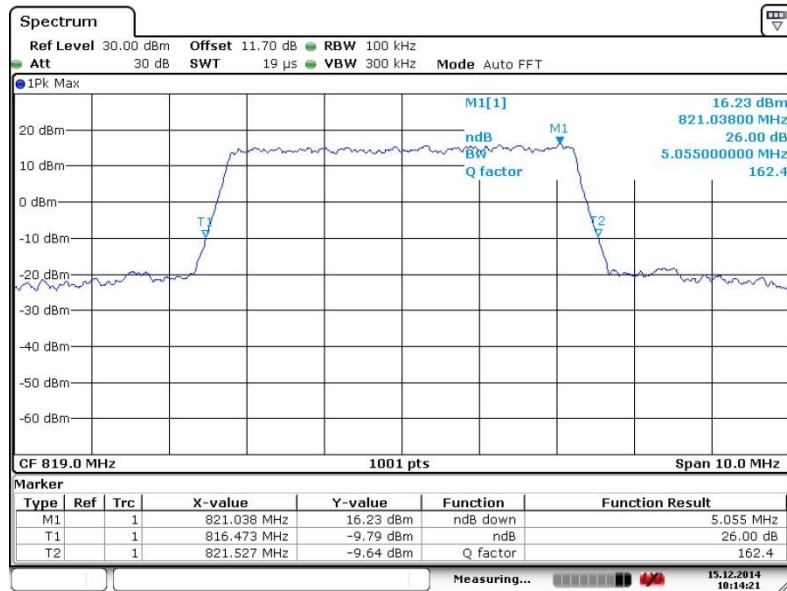


Date: 15.DEC.2014 10:14:21




Band :	LTE Band 26	BW / Mod. :	5MHz / QPSK
---------------	-------------	--------------------	-------------

99% Occupied Bandwidth Plot on Channel 26765

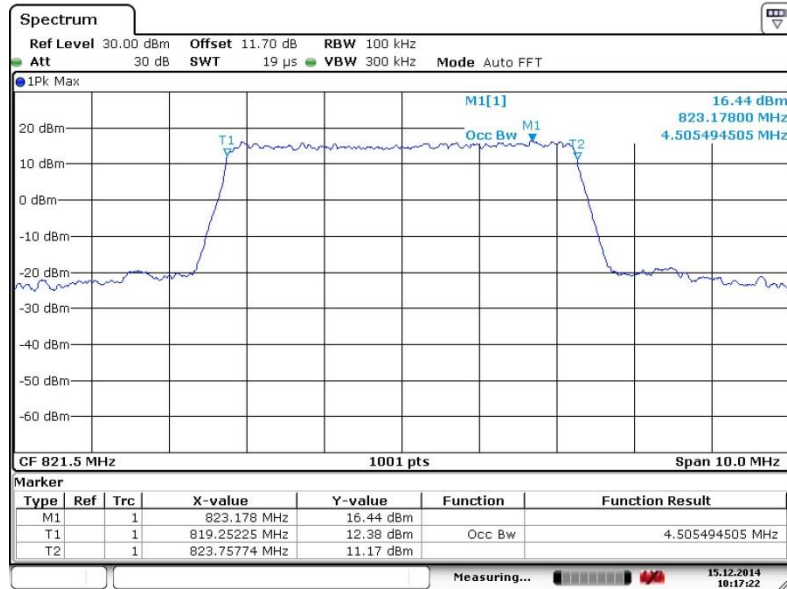

Date: 15.DEC.2014 10:17:22

26dB Bandwidth Plot on Channel 26765

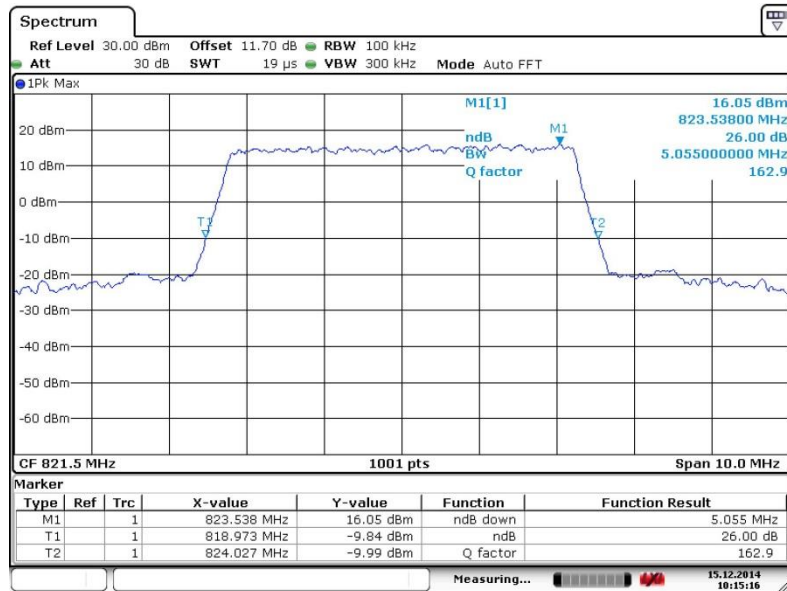


Date: 15.DEC.2014 10:15:16




Band :	LTE Band 26	BW / Mod. :	5MHz / 16QAM
--------	-------------	-------------	--------------

99% Occupied Bandwidth Plot on Channel 26715

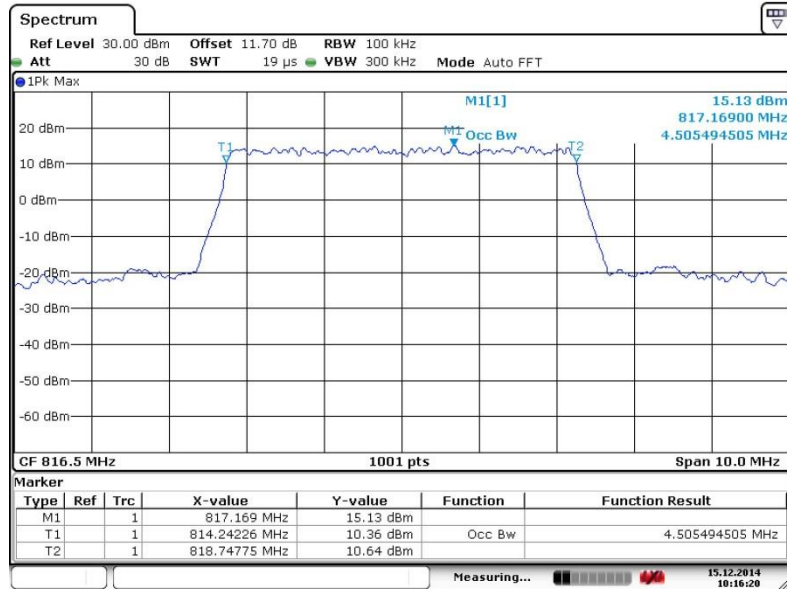

Date: 15.DEC.2014 10:16:20

26dB Bandwidth Plot on Channel 26715

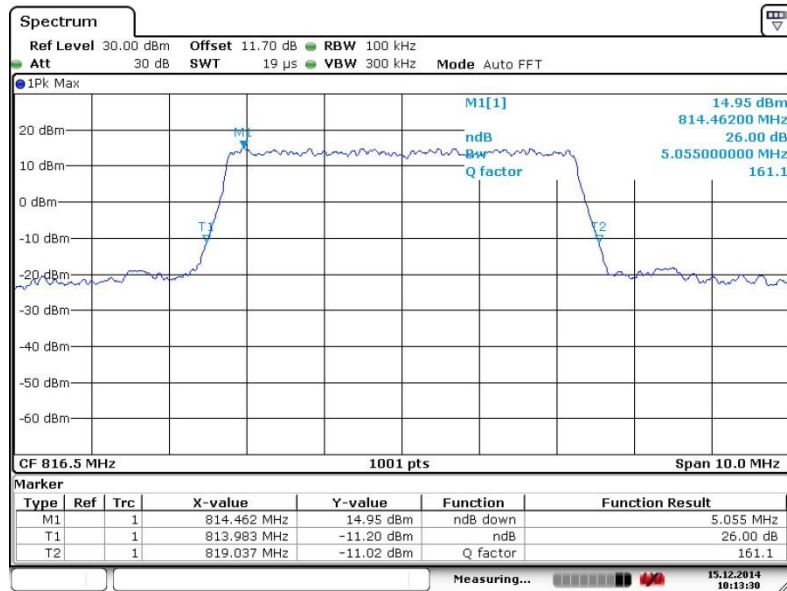


Date: 15.DEC.2014 10:13:30




Band :	LTE Band 26	BW / Mod. :	5MHz / 16QAM
---------------	-------------	--------------------	--------------

99% Occupied Bandwidth Plot on Channel 26740

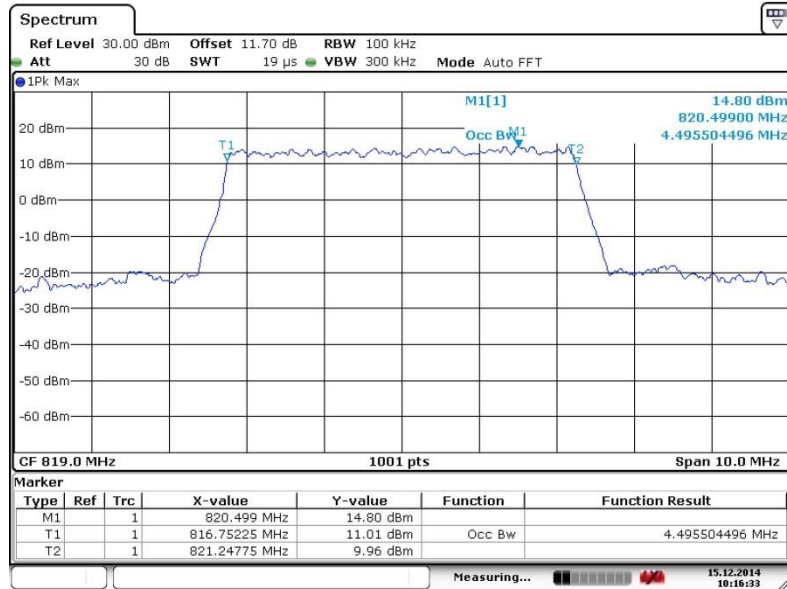

Date: 15.DEC.2014 10:16:33

26dB Bandwidth Plot on Channel 26740

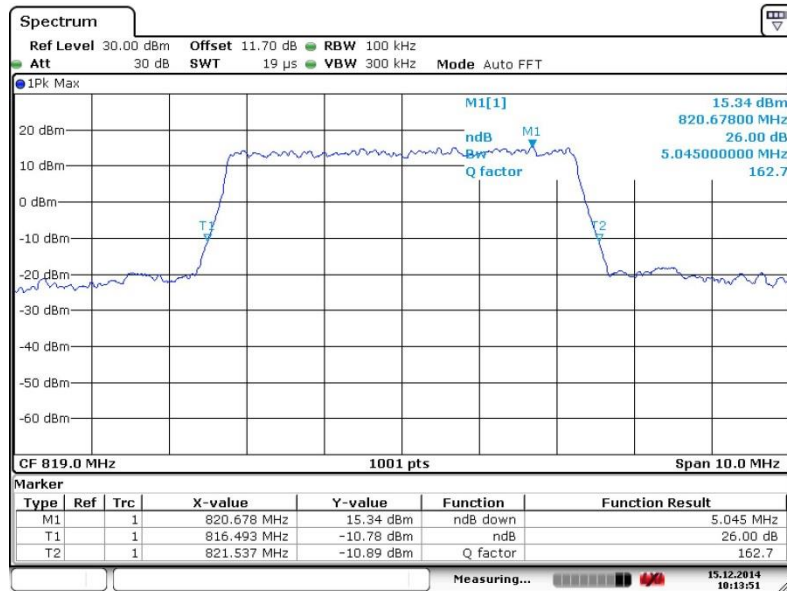


Date: 15.DEC.2014 10:13:51




Band :	LTE Band 26	BW / Mod. :	5MHz / 16QAM
--------	-------------	-------------	--------------

99% Occupied Bandwidth Plot on Channel 26765

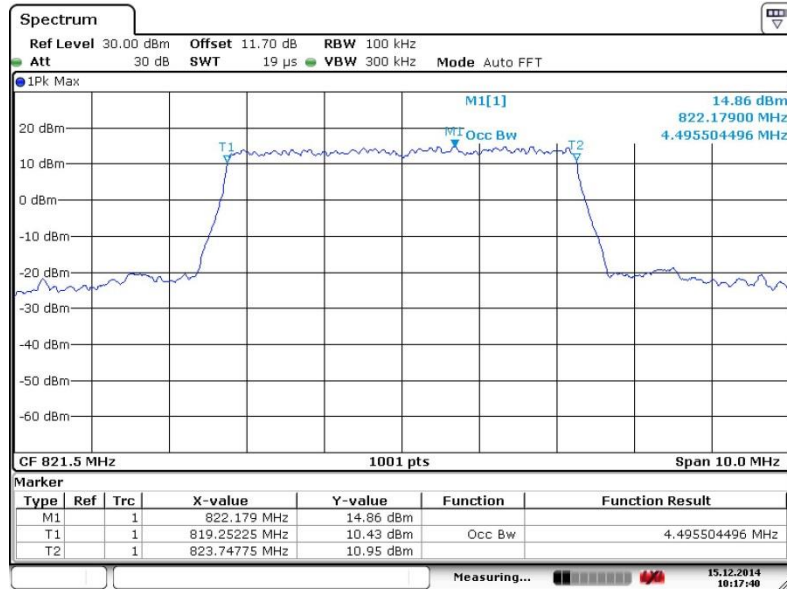

Date: 15.DEC.2014 10:17:40

26dB Bandwidth Plot on Channel 26765

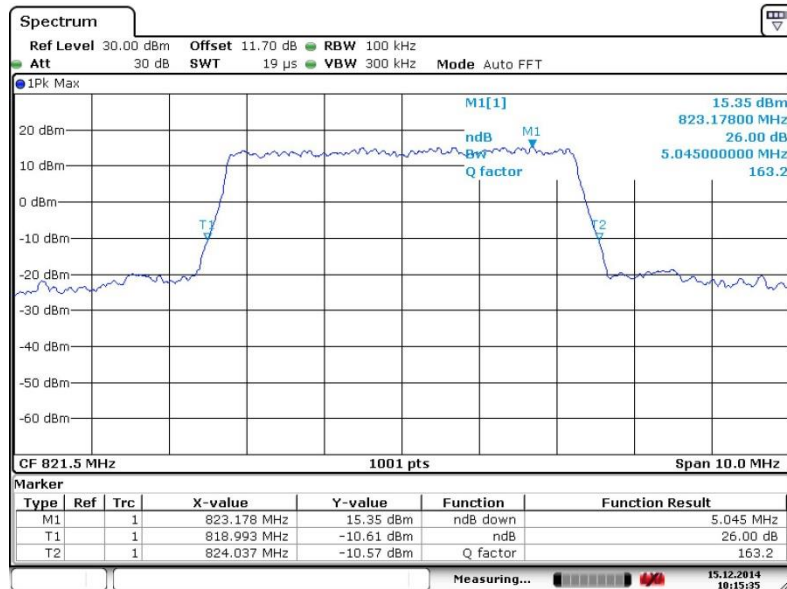


Date: 15.DEC.2014 10:15:35




Band :	LTE Band 26	BW / Mod. :	10MHz / QPSK
--------	-------------	-------------	--------------

99% Occupied Bandwidth Plot on Channel 26740

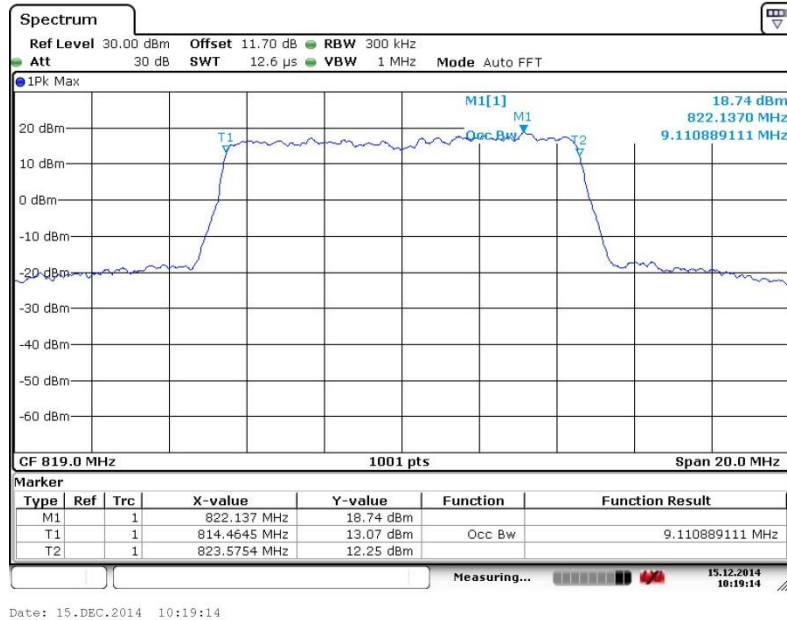


26dB Bandwidth Plot on Channel 26740

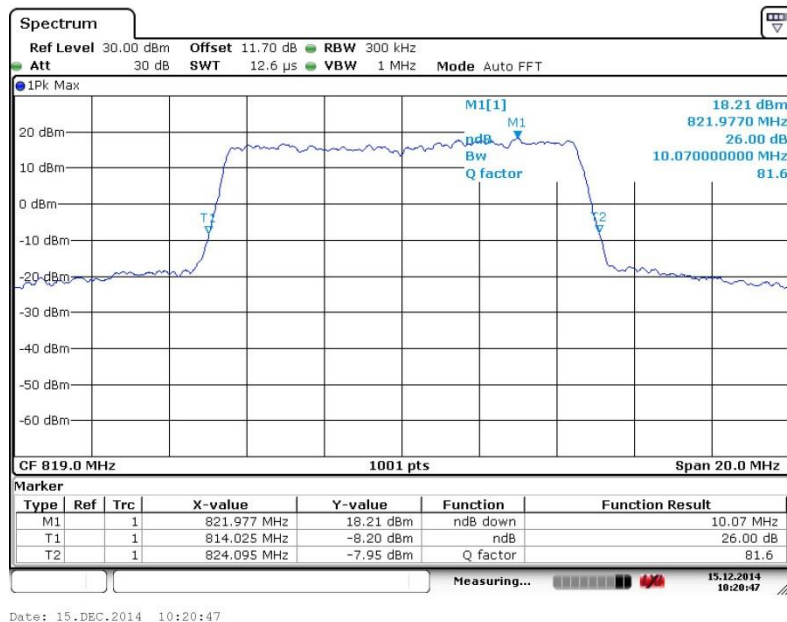




Band :	LTE Band 26	BW / Mod. :	10MHz / 16QAM
--------	-------------	-------------	---------------

99% Occupied Bandwidth Plot on Channel 26740

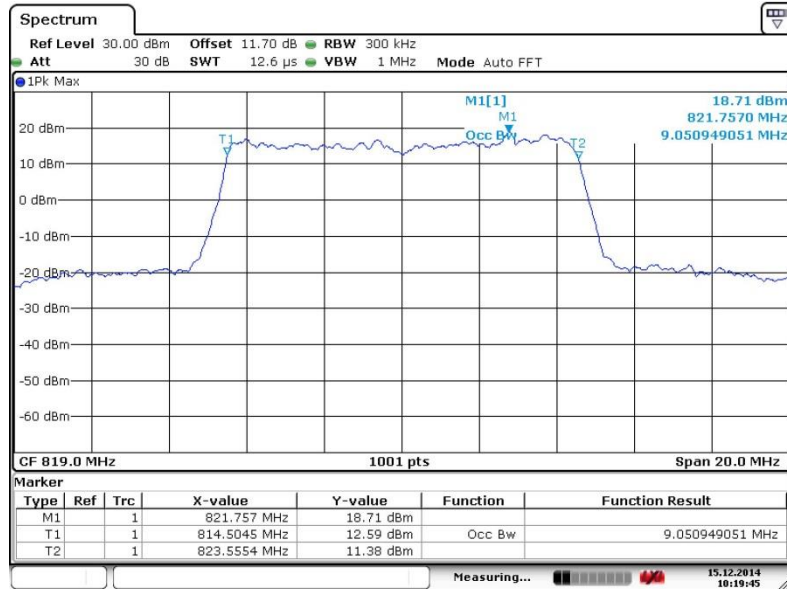

Date: 15.DEC.2014 10:19:45

26dB Bandwidth Plot on Channel 26740

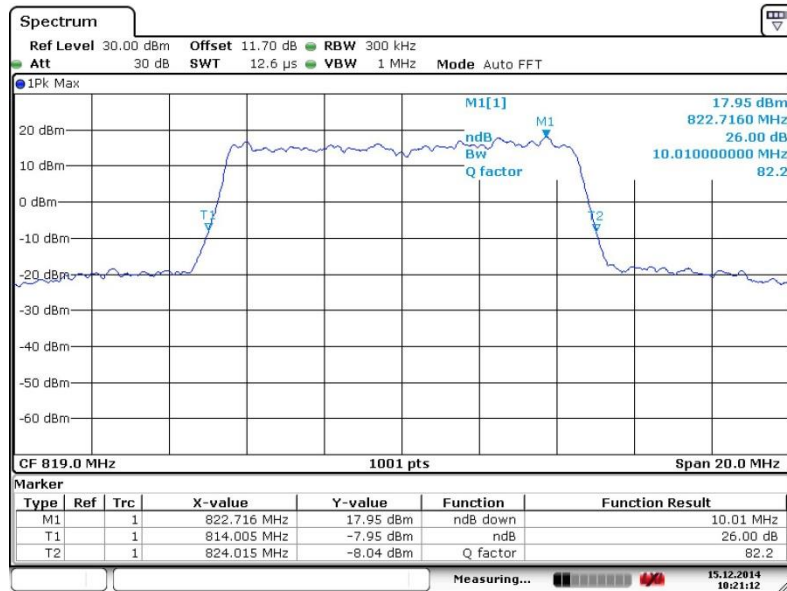

Date: 15.DEC.2014 10:21:12

3.3 Emissions Mask Measurement

3.3.1 Description of Emissions Mask Measurement

Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of FCC Part 90.691.(a)

(a) Out-of-band emission requirement shall apply only to the "outer" channels included in an EA license and to spectrum adjacent to interior channels used by incumbent licensees. The emission limits are as follows:

(1) For any frequency removed from the EA licensee's frequency block by up to and including 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $116 \text{ Log}_{10}(f/6.1)$ decibels or $50 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 12.5 kHz.

(2) For any frequency removed from the EA licensee's frequency block greater than 37.5 kHz, the power of any emission shall be attenuated below the transmitter power (P) in watts by at least $43 + 10 \text{ Log}_{10}(P)$ decibels or 80 decibels, whichever is the lesser attenuation, where f is the frequency removed from the center of the outer channel in the block in kilohertz and where f is greater than 37.5 kHz.


3.3.2 Measuring Instruments

The measuring equipment is listed in the section 4 of this test report.

3.3.3 Test Procedures

1. The EUT was connected to spectrum analyzer and base station via power divider.
2. The emissions mask of low and high channels for the highest RF powers were measured.
3. The measured RBW and the VBW set 3 times of RBW are then set in spectrum analyzer, and the RBW correction factor $10 \log (1\% \text{ of OBW}/\text{measured RBW})(\text{dB})$ was compensated, if required.
4. The test results were shown below plots with a correction offset factor including cable loss, insertion loss of power divider.

3.3.4 Test Setup

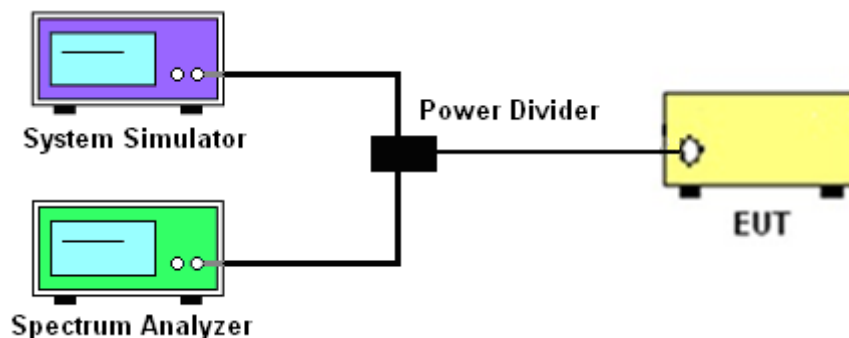




3.3.5 Test Result (Plots) of Conducted Emissions Mask

Band :	LTE Band 26	Band Width :	1.4MHz / QPSK
--------	-------------	--------------	---------------

Lower Band Edge Plot for QPSK-RB Size 1, RB Offset 0

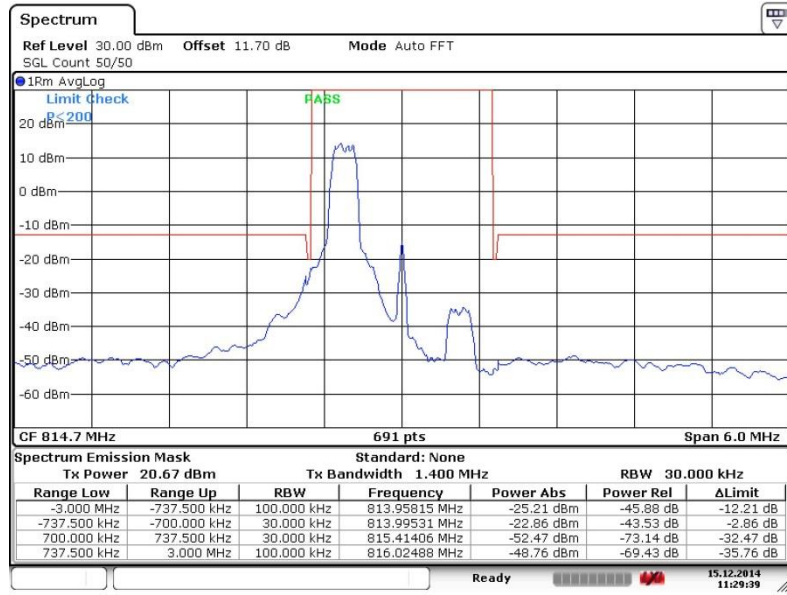

Remark:


$$\begin{aligned} \text{Test Result(dBm)} &= \text{Power Abs(dBm)} + (1\% \text{ of OBW/measured RBW}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 10 \cdot \text{LOG}(37.5\text{kHz}/30\text{kHz}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 0.97 \text{ (dB)} \end{aligned}$$

$$\text{<1> Test result of 813.99531MHz: } -21.57 \text{ (dBm)} + 0.97 \text{ (dB)} = -20.60 \text{ (dBm)}$$

$$\text{<2> Test result of 815.40469MHz: } -55.62 \text{ (dBm)} + 0.97 \text{ (dB)} = -54.65 \text{ (dBm)}$$



Lower Band Edge Plot for QPSK-RB Size 6, RB Offset 0

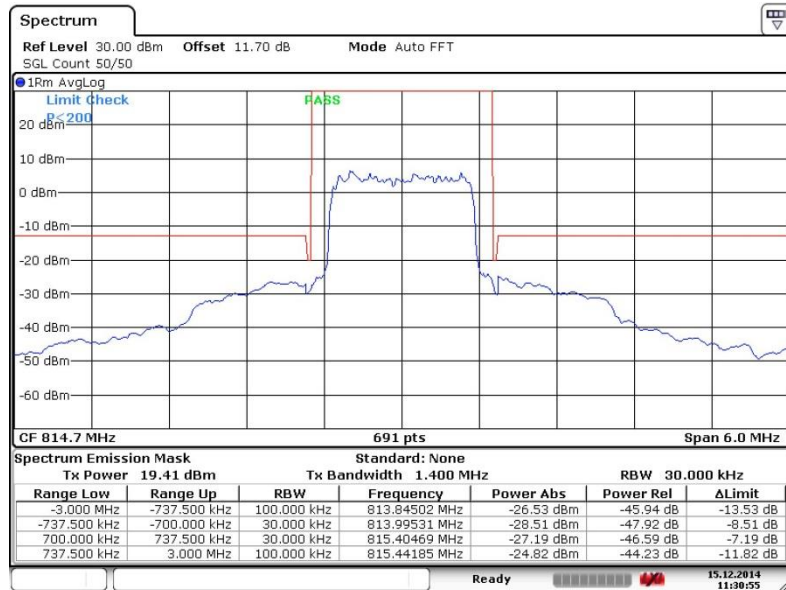

Date: 15.DEC.2014 11:30:55

Remark:


$$\begin{aligned} \text{Test Result(dBm)} &= \text{Power Abs(dBm)} + (1\% \text{ of OBW/measured RBW}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 10 \cdot \text{LOG}(37.5\text{kHz}/30\text{kHz}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 0.97 \text{ (dB)} \end{aligned}$$

<1> Test result of 813.99531MHz: - 28.09(dBm) + 0.97(dB)= -27.12 (dBm)

<2> Test result of 815.40469MHz: - 28.81(dBm) + 0.97(dB)= -27.84 (dBm)



Higher Band Edge Plot for QPSK-RB Size 1, RB Offset 5

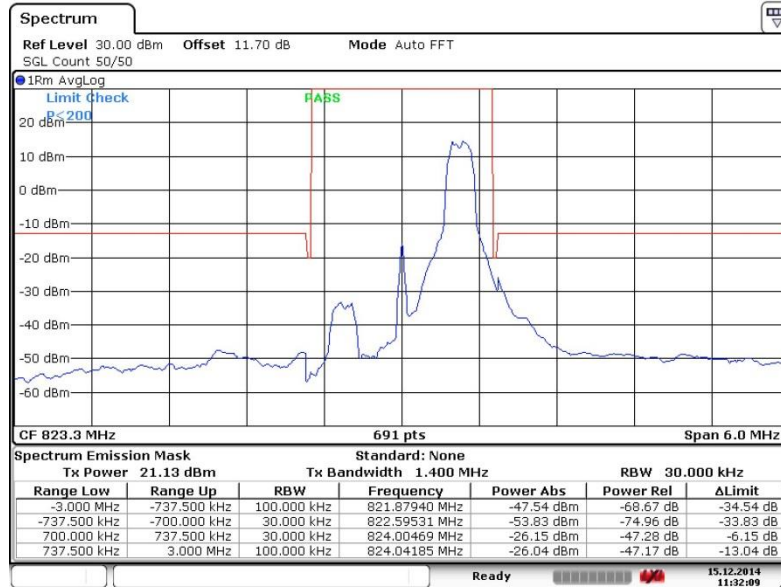

Date: 15.DEC.2014 11:32:09

Remark:


$$\begin{aligned} \text{Test Result(dBm)} &= \text{Power Abs(dBm)} + (1\% \text{ of OBW/measured RBW}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 10 \cdot \text{LOG}(37.5\text{kHz}/30\text{kHz}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 0.97 \text{ (dB)} \end{aligned}$$

<1> Test result of 822.59531MHz: - 56.25(dBm) + 0.97(dB)= -55.28 (dBm)

<2> Test result of 824.00469MHz: - 22.43(dBm) + 0.97(dB)= -21.46 (dBm)



Higher Band Edge Plot for QPSK-RB Size 6, RB Offset 0

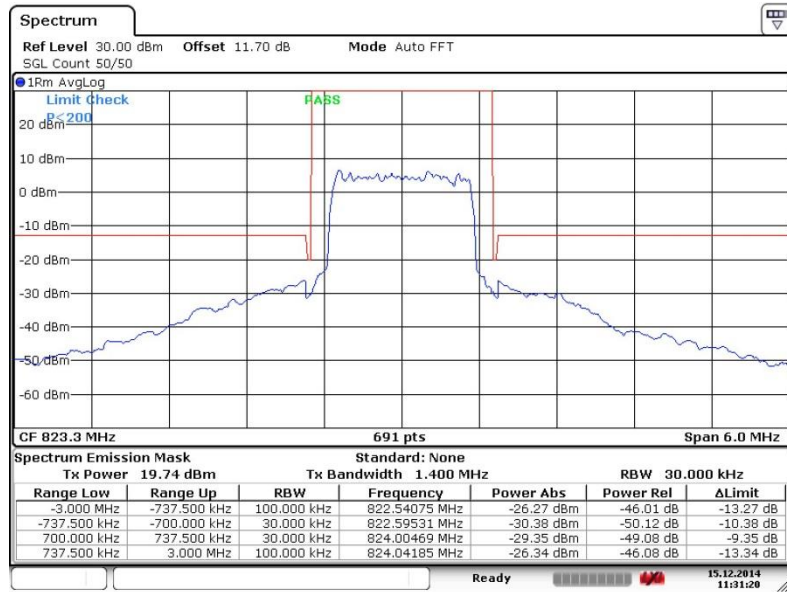

Date: 15.DEC.2014 11:31:20

Remark:

$$\begin{aligned} \text{Test Result(dBm)} &= \text{Power Abs(dBm)} + (1\% \text{ of OBW/measured RBW}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 10 \cdot \text{LOG}(37.5\text{kHz}/30\text{kHz}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 0.97 \text{ (dB)} \end{aligned}$$


<1> Test result of 822.59531MHz: - 28.30(dBm) + 0.97(dB)= -27.33 (dBm)

<2> Test result of 824.00469MHz: - 28.45(dBm) + 0.97(dB)= -27.48 (dBm)



Band :	LTE Band 26	Band Width :	1.4MHz / 16QAM
---------------	-------------	---------------------	----------------

Lower Band Edge Plot for 16QAM -RB Size 1, RB Offset 0

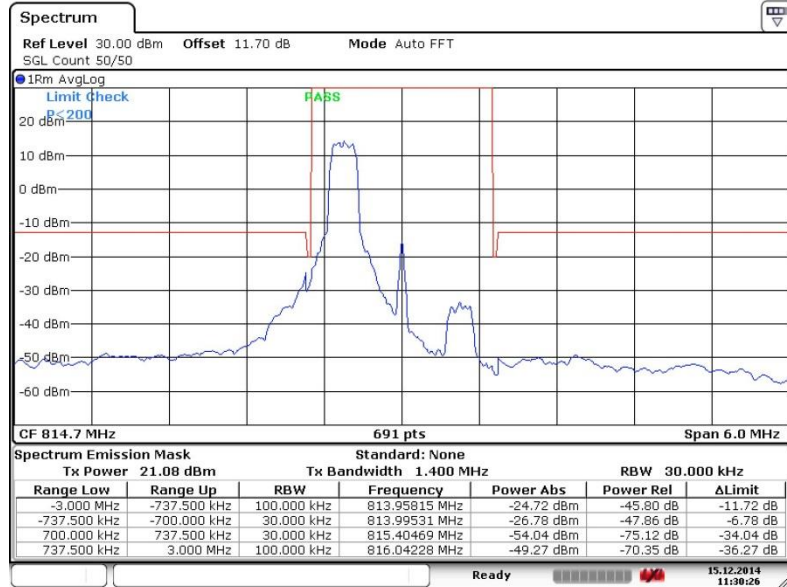

Date: 15.DEC.2014 11:30:26

Remark:


$$\begin{aligned} \text{Test Result(dBm)} &= \text{Power Abs(dBm)} + (1\% \text{ of OBW/measured RBW}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 10 \cdot \text{LOG}(37.5\text{kHz}/30\text{kHz}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 0.97 \text{ (dB)} \end{aligned}$$

<1> Test result of 813.99531MHz: - 21.58(dBm) + 0.97(dB)= -20.61 (dBm)

<2> Test result of 815.40469MHz: - 55.62(dBm) + 0.97(dB)= -54.65 (dBm)



Lower Band Edge Plot for 16QAM-RB Size 6, RB Offset 0

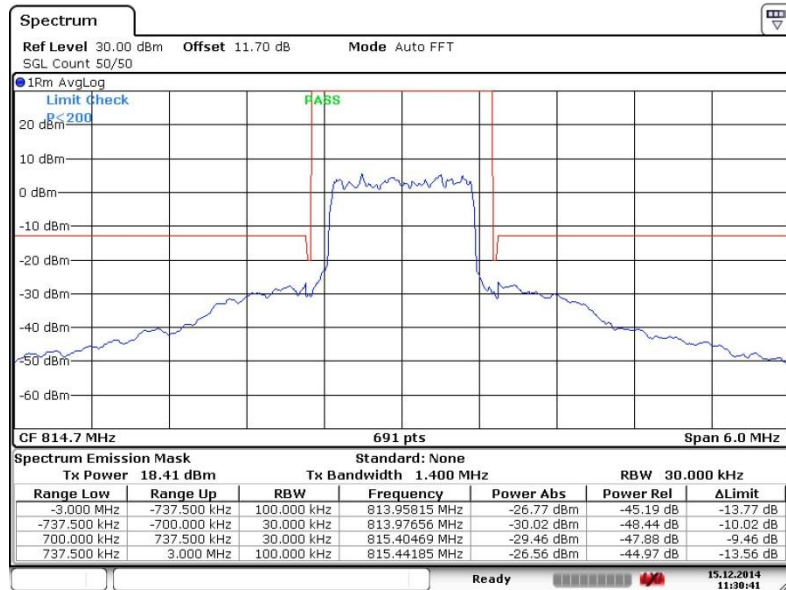

Date: 15.DEC.2014 11:30:41

Remark:


Test Result(dBm) = Power Abs(dBm) + (1% of OBW/measured RBW) (dB)
 = Power Abs (dBm) + 10*LOG(37.5kHz/30kHz)(dB)
 = Power Abs (dBm) + 0.97 (dB)

<1> Test result of 813.99531MHz: - 28.95(dBm) + 0.97(dB)= -27.98 (dBm)

<2> Test result of 815.40469MHz: - 28.64(dBm) + 0.97(dB)= -27.67 (dBm)



Higher Band Edge Plot for 16QAM-RB Size 1, RB Offset 5

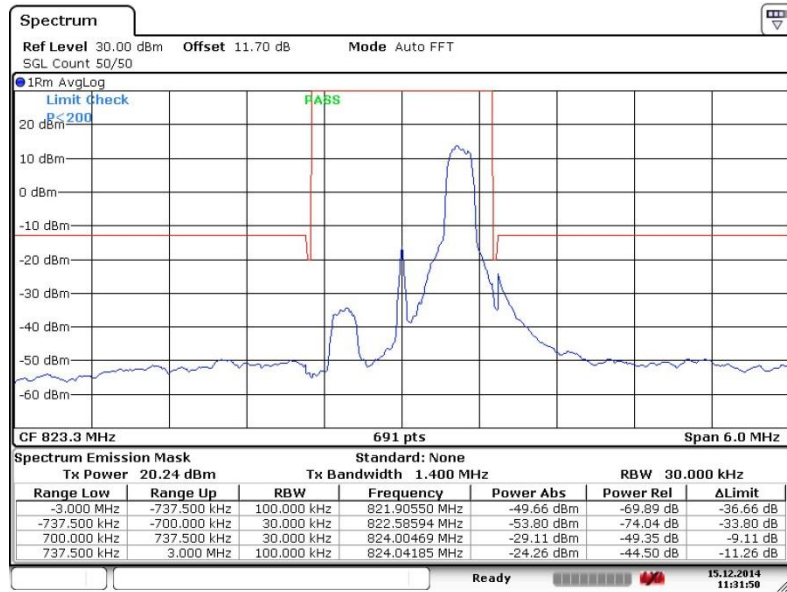

Date: 15.DEC.2014 11:31:49


Remark:

Test Result(dBm) = Power Abs(dBm) + (1% of OBW/measured RBW) (dB)
 = Power Abs (dBm) + 10*LOG(37.5kHz/30kHz)(dB)
 = Power Abs (dBm) + 0.97 (dB)

<1> Test result of 822.59531MHz: - 55.33(dBm) + 0.97(dB)= -54.36 (dBm)
 <2> Test result of 824.00469MHz: -21.00(dBm) + 0.97(dB)= -20.03 (dBm)



Higher Band Edge Plot for 16QAM-RB Size 6, RB Offset 0

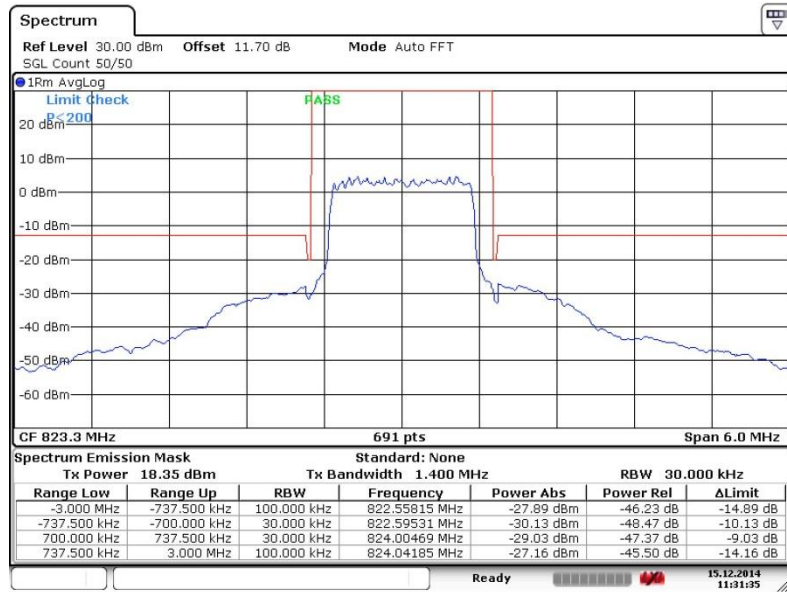

Date: 15.DEC.2014 11:31:35

Remark:

Test Result(dBm) = Power Abs(dBm) + (1% of OBW/measured RBW) (dB)
 = Power Abs (dBm) + 10*LOG(37.5kHz/30kHz)(dB)
 = Power Abs (dBm) + 0.97 (dB)


<1> Test result of 822.59531MHz: - 29.89(dBm) + 0.97(dB)= -28.92 (dBm)

<2> Test result of 824.00469MHz: - 28.74(dBm) + 0.97(dB)= -27.77 (dBm)



Band :	LTE Band 26	Band Width :	3MHz / QPSK
---------------	-------------	---------------------	-------------

Lower Band Edge Plot for QPSK-RB Size 1, RB Offset 0

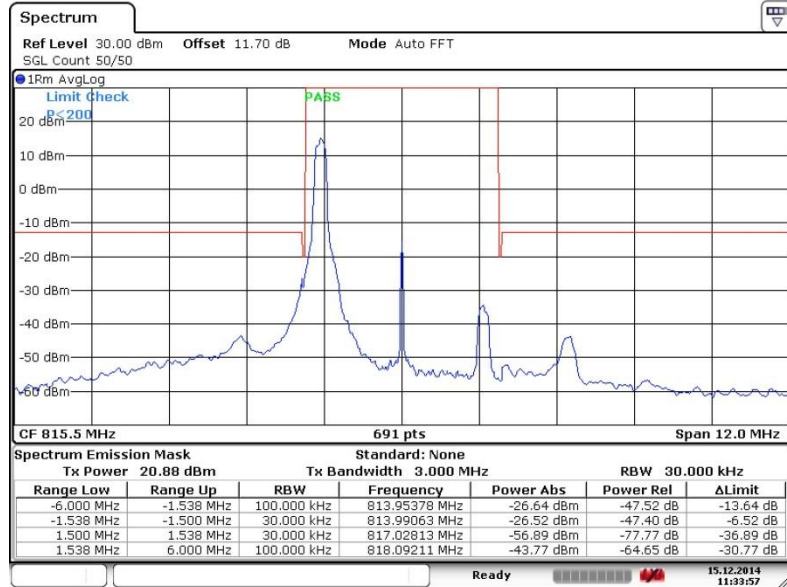

Date: 15.DEC.2014 11:33:57

Remark:


$$\begin{aligned} \text{Test Result(dBm)} &= \text{Power Abs(dBm)} + (1\% \text{ of OBW/measured RBW}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 10 \cdot \text{LOG}(37.5\text{kHz}/30\text{kHz}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 0.97 \text{ (dB)} \end{aligned}$$

$$\text{<1> Test result of 813.99063MHz: } -21.79 \text{ (dBm)} + 0.97 \text{ (dB)} = -20.82 \text{ (dBm)}$$

$$\text{<2> Test result of 817.00937MHz: } -58.27 \text{ (dBm)} + 0.97 \text{ (dB)} = -57.30 \text{ (dBm)}$$



Lower Band Edge Plot for QPSK-RB Size 15, RB Offset 0

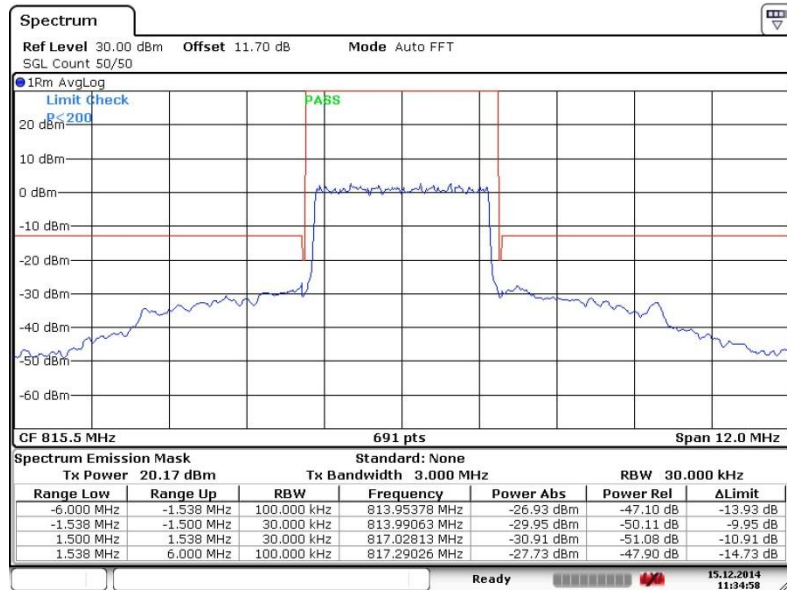

Date: 15.DEC.2014 11:34:58


Remark:

Test Result(dBm) = Power Abs(dBm) + (1% of OBW/measured RBW) (dB)
 = Power Abs (dBm) + 10*LOG(37.5kHz/30kHz)(dB)
 = Power Abs (dBm) + 0.97 (dB)

<1> Test result of 813.99063MHz: - 30.84(dBm) + 0.97(dB)= -29.87 (dBm)
 <2> Test result of 817.00937MHz: -30.37(dBm) + 0.97(dB)= -29.40 (dBm)



Higher Band Edge Plot for QPSK-RB Size 1, RB Offset 14

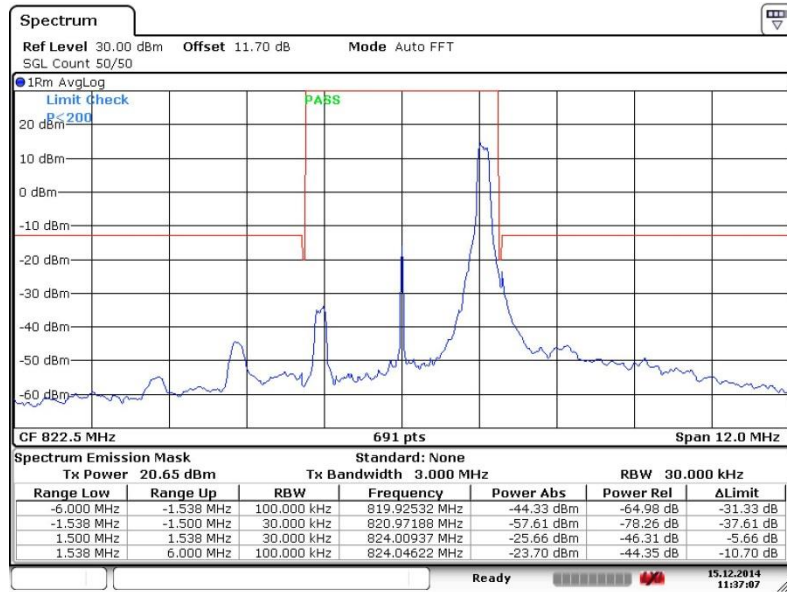

Date: 15.DEC.2014 11:37:07

Remark:


$$\begin{aligned} \text{Test Result(dBm)} &= \text{Power Abs(dBm)} + (1\% \text{ of OBW/measured RBW}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 10 \cdot \text{LOG}(37.5\text{kHz}/30\text{kHz}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 0.97 \text{ (dB)} \end{aligned}$$

<1> Test result of 820.99063MHz: - 59.43(dBm) + 0.97(dB)= -58.46 (dBm)

<2> Test result of 824.00937MHz: - 23.30(dBm) + 0.97(dB)= -22.33 (dBm)



Higher Band Edge Plot for QPSK-RB Size 15, RB Offset 0

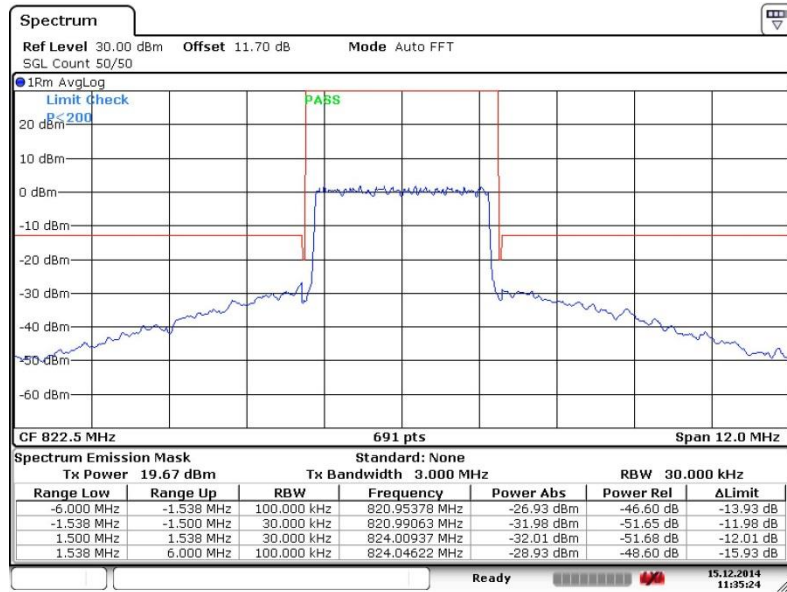

Date: 15.DEC.2014 11:35:24

Remark:

Test Result(dBm) = Power Abs(dBm) + (1% of OBW/measured RBW) (dB)
 = Power Abs (dBm) + 10*LOG(37.5kHz/30kHz)(dB)
 = Power Abs (dBm) + 0.97 (dB)


<1> Test result of 820.99063MHz: - 30.99(dBm) + 0.97(dB)= -30.02 (dBm)

<2> Test result of 824.00937MHz: - 28.79(dBm) + 0.97(dB)= -27.82 (dBm)



Band :	LTE Band 26	Band Width :	3MHz / 16QAM
---------------	-------------	---------------------	--------------

Lower Band Edge Plot for 16QAM-RB Size 1, RB Offset 0

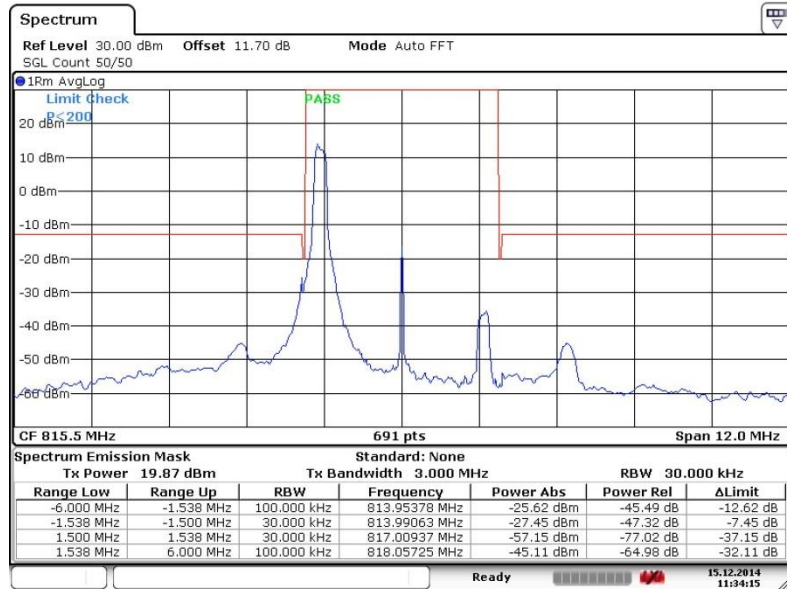

Date: 15.DEC.2014 11:34:15

Remark:


$$\begin{aligned} \text{Test Result(dBm)} &= \text{Power Abs(dBm)} + (1\% \text{ of OBW/measured RBW}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 10 \cdot \text{LOG}(37.5\text{kHz}/30\text{kHz}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 0.97 \text{ (dB)} \end{aligned}$$

<1> Test result of 813.99063MHz: - 22.92(dBm) + 0.97(dB)= -21.95 (dBm)

<2> Test result of 817.00937MHz: - 58.78(dBm) + 0.97(dB)= -57.81 (dBm)



Lower Band Edge Plot for 16QAM-RB Size 15, RB Offset 0

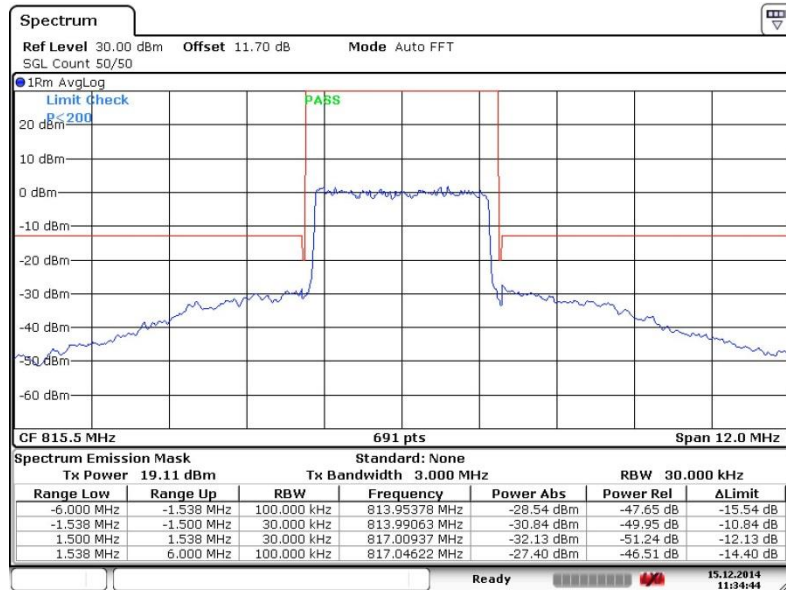

Date: 15.DEC.2014 11:34:44

Remark:


$$\begin{aligned} \text{Test Result(dBm)} &= \text{Power Abs(dBm)} + (1\% \text{ of OBW/measured RBW}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 10 \cdot \text{LOG}(37.5\text{kHz}/30\text{kHz}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 0.97 \text{ (dB)} \end{aligned}$$

<1> Test result of 813.99063MHz: -30.38(dBm) + 0.97(dB)= -29.41 (dBm)

<2> Test result of 817.00937MHz: - 29.86(dBm) + 0.97(dB)= -28.89 (dBm)



Higher Band Edge Plot for 16QAM-RB Size 1, RB Offset 14

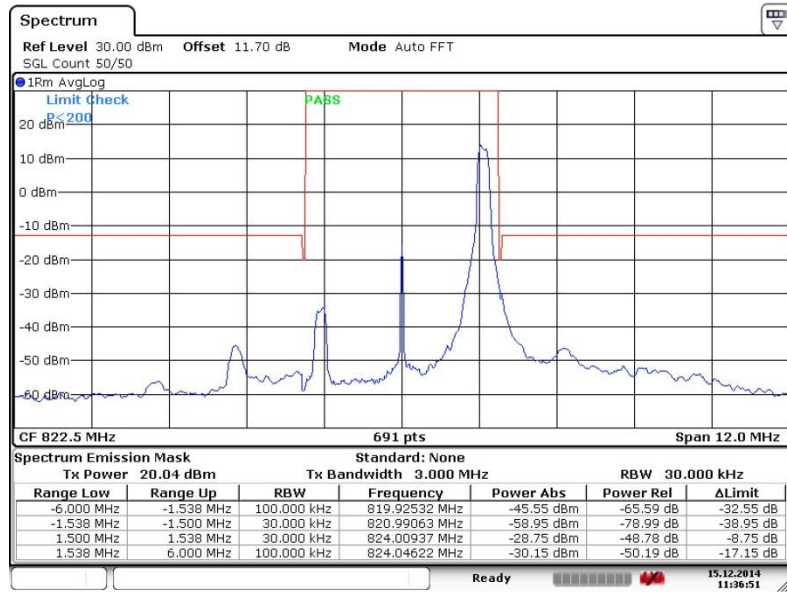

Date: 15.DEC.2014 11:36:51

Remark:


$$\begin{aligned} \text{Test Result(dBm)} &= \text{Power Abs(dBm)} + (1\% \text{ of OBW/measured RBW}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 10 \cdot \text{LOG}(37.5\text{kHz}/30\text{kHz}) \text{ (dB)} \\ &= \text{Power Abs (dBm)} + 0.97 \text{ (dB)} \end{aligned}$$

<1> Test result of 820.99063MHz: - 58.43(dBm) + 0.97(dB)= -57.46 (dBm)

<2> Test result of 824.00937MHz: - 21.62(dBm) + 0.97(dB)= -20.65 (dBm)



Higher Band Edge Plot for 16QAM-RB Size 15, RB Offset 0

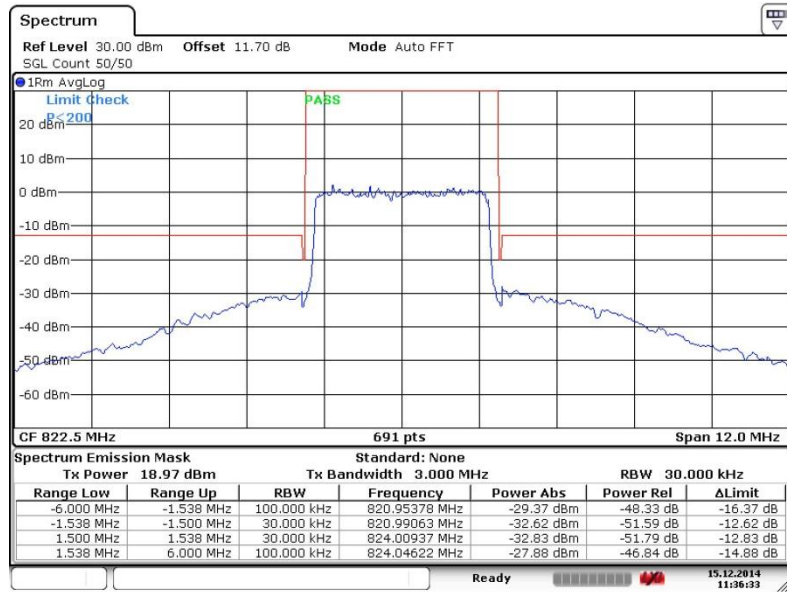

Date: 15.DEC.2014 11:36:33

Remark:

Test Result(dBm) = Power Abs(dBm) + (1% of OBW/measured RBW) (dB)
 = Power Abs (dBm) +10*LOG(37.5kHz/30kHz)(dB)
 = Power Abs (dBm) +0.97 (dB)

<1> Test result of 820.99063MHz: - 31.61(dBm) + 0.97(dB)= -30.64 (dBm)
 <2> Test result of 824.00937MHz: - 29.59(dBm) + 0.97(dB)= -28.62 (dBm)