

## HAC\_E\_Dipole\_835\_141120

### DUT: HAC-Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
 Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.6 °C

#### DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2014/1/30;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2014/7/23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

### E Scan - measurement distance from the probe sensor center to CD835 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x361x1): Interpolated grid:

dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 108.8 V/m; Power Drift = 0.11 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 111.8 V/m

Average value of Total=(111.8+105.4) / 2 = 108.6 V/m

PMF scaled E-field



<b>Grid 1 M4</b> <b>110.2 V/m</b>	<b>Grid 2 M4</b> <b>111.8 V/m</b>	<b>Grid 3 M4</b> <b>109.9 V/m</b>
<b>Grid 4 M4</b> <b>71.12 V/m</b>	<b>Grid 5 M4</b> <b>71.80 V/m</b>	<b>Grid 6 M4</b> <b>70.07 V/m</b>
<b>Grid 7 M4</b> <b>104.7 V/m</b>	<b>Grid 8 M4</b> <b>105.4 V/m</b>	<b>Grid 9 M4</b> <b>102.3 V/m</b>

#### Cursor:

Total = 111.8 V/m

E Category: M4

Location: 0, -69, 9.7 mm

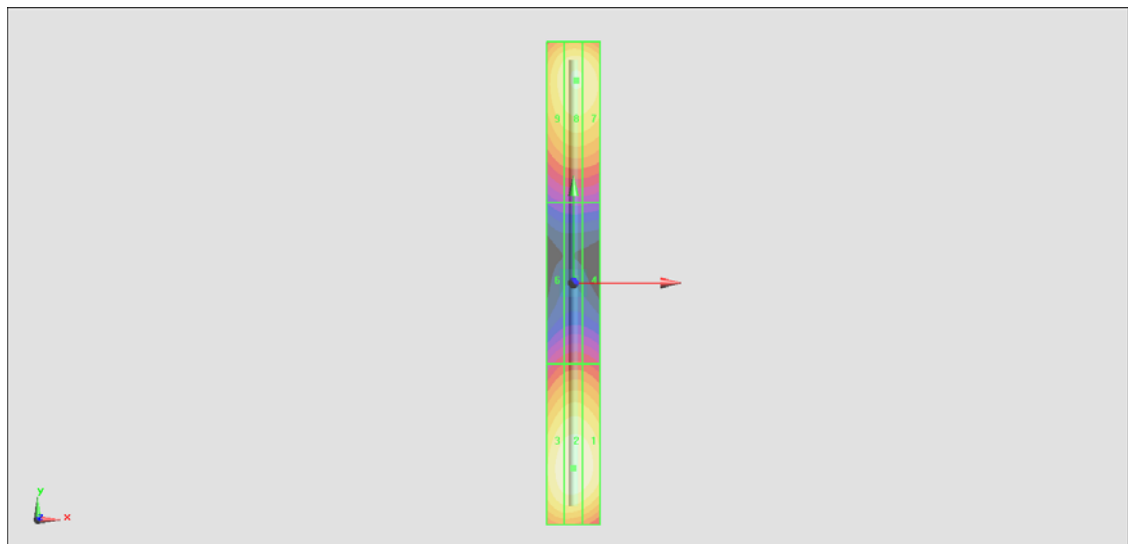

$$0 \text{ dB} = 111.8 \text{ V/m} = 40.97 \text{ dBV/m}$$

## HAC\_E\_Dipole\_1880\_141120

### DUT: HAC Dipole 1880 MHz

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1  
 Medium: Air Medium parameters used:  $\sigma = 0$  S/m,  $\epsilon_r = 1$ ;  $\rho = 0$  kg/m<sup>3</sup>  
 Ambient Temperature : 23.6 °C

#### DASY5 Configuration

- Probe: ER3DV6 - SN2358; ConvF(1, 1, 1); Calibrated: 2014/1/30;
- Sensor-Surface: (Fix Surface)
- Electronics: DAE4 Sn1279; Calibrated: 2014/7/23
- Phantom: HAC Test Arch with AMCC; Type: SD HAC P01 BA;
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

### E Scan - measurement distance from the probe sensor center to CD1880 = 10mm & 15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1): Interpolated grid:

dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 153.4 V/m; Power Drift = 0.02 dB

PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 87.31 V/m

Average value of Total=(87.31+83.23) / 2 = 85.27 V/m

#### PMF scaled E-field



Grid 1 <b>M3</b> <b>85.95 V/m</b>	Grid 2 <b>M3</b> <b>87.31 V/m</b>	Grid 3 <b>M3</b> <b>86.17 V/m</b>
Grid 4 <b>M3</b> <b>67.69 V/m</b>	Grid 5 <b>M3</b> <b>68.27 V/m</b>	Grid 6 <b>M3</b> <b>66.86 V/m</b>
Grid 7 <b>M3</b> <b>81.85 V/m</b>	Grid 8 <b>M3</b> <b>83.23 V/m</b>	Grid 9 <b>M3</b> <b>81.74 V/m</b>

#### Cursor:

Total = 87.31 V/m

E Category: M3

Location: 0, -31, 9.7 mm

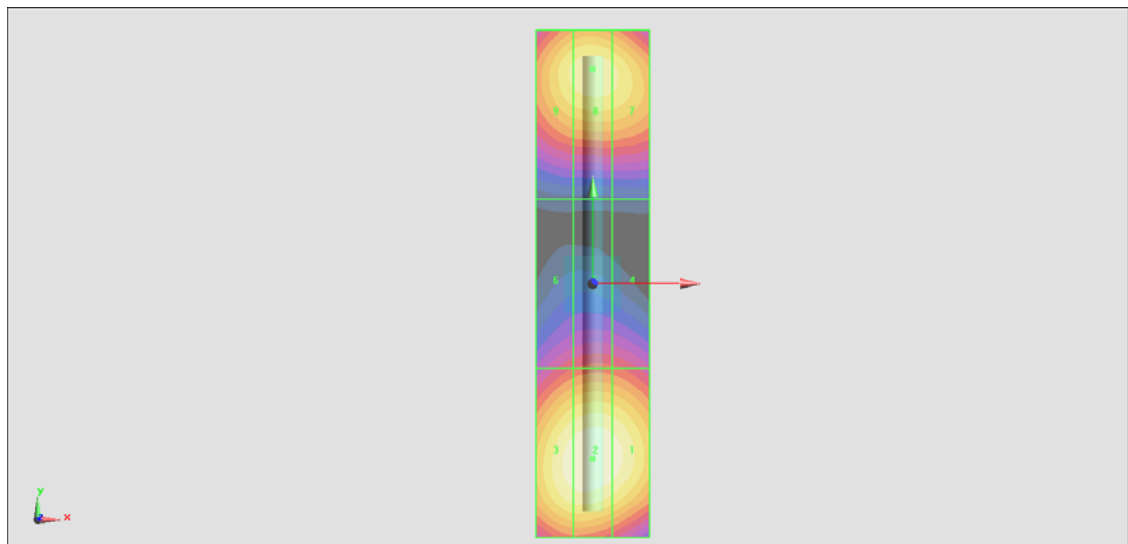

$$0 \text{ dB} = 87.31 \text{ V/m} = 38.82 \text{ dBV/m}$$