

FCC SAR Test Report

APPLICANT : Motorola Mobility LLC
EQUIPMENT : Mobile Cellular Phone
BRAND NAME : Motorola
MODEL NAME : 9888
FCC ID : IHDT56WE1
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2013

We, Sporton International (KunShan) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of Sporton International (KunShan) INC., the test report shall not be reproduced except in full.



Prepared by: Mark Qu / Manager



Approved by: Jones Tsai / Manager

Sporton International (KunShan) INC.
No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China



Table of Contents

1. Statement of Compliance	4
2. Administration Data	5
3. Guidance Applied.....	5
4. Equipment Under Test (EUT) Information.....	6
4.1 General Information	6
4.2 Specification of Accessory	7
4.3 General LTE SAR Test and Reporting Considerations	8
5. RF Exposure Limits.....	9
5.1 Uncontrolled Environment.....	9
5.2 Controlled Environment.....	9
6. Specific Absorption Rate (SAR).....	10
6.1 Introduction	10
6.2 SAR Definition.....	10
7. System Description and Setup	11
7.1 E-Field Probe	12
7.2 Data Acquisition Electronics (DAE)	12
7.3 Phantom.....	13
7.4 Device Holder.....	14
8. Measurement Procedures	15
8.1 Spatial Peak SAR Evaluation.....	15
8.2 Power Reference Measurement.....	16
8.3 Area Scan	16
8.4 Zoom Scan.....	17
8.5 Volume Scan Procedures.....	17
8.6 Power Drift Monitoring.....	17
9. Test Equipment List.....	18
10. System Verification	19
10.1 Tissue Simulating Liquids.....	19
10.2 Tissue Verification	20
10.3 System Performance Check Results.....	21
11. RF Exposure Positions	22
11.1 Ear and handset reference point	22
11.2 Definition of the cheek position.....	23
11.3 Definition of the tilt position.....	24
11.4 Body Worn Accessory	25
11.5 Wireless Router.....	25
12. Conducted RF Output Power (Unit: dBm).....	26
13. Bluetooth Exclusions Applied	45
14. Antenna Location	46
15. SAR Test Results	47
15.1 Head SAR	49
15.2 Hotspot SAR	52
15.3 Body Worn Accessory SAR.....	55
15.4 Repeated SAR Measurement	57
16. Simultaneous Transmission Analysis	58
16.1 Head Exposure Conditions	59
16.2 Hotspot Exposure Conditions.....	60
16.3 Body-Worn Accessory Exposure Conditions	62
17. Uncertainty Assessment	63
18. References	65
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	



Sporton International (KunShan) INC.

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **Motorola Mobility LLC, Mobile Cellular PHONE, 9888** are as follows.

Equipment Class	Frequency Band		Highest SAR Summary			Highest Simultaneous Transmission 1g SAR (W/kg)
			Head (Separation 0mm)	Hotspot (Separation 10mm)	Body-worn (Separation 10mm)	
			1g SAR (W/kg)			
Licensed	GSM	GSM850	0.57	0.95	0.95	1.32
		GSM1900	0.70	0.63	0.63	
	WCDMA	Band V	0.35	0.48	0.48	
		Band II	0.41	0.59	0.59	
	LTE	Band 5	0.28	0.62	0.62	
		Band 7	0.53	1.08	1.19	
		Band 38	0.27	0.92	0.74	
DTS	WLAN	2.4GHz WLAN	0.46	0.13	0.13	1.32
Date of Testing:			2017/2/4 ~ 2017/3/2			

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

2. Administration Data

Testing Site	
Test Site	Sporton International (KunShan) INC.
Test Site Location	No.3-2, Pingxiang Road, Kunshan Development Zone, Jiangsu, China TEL: +86-0512-5790-0158 FAX: +86-0512-5790-0958

Applicant	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

Manufacturer	
Company Name	Motorola Mobility LLC
Address	222 W, Merchandise Mart Plaza, Chicago IL 60654 USA

3. Guidance Applied

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D05 SAR for LTE Devices v02r05
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification	
Equipment Name	Mobile Cellular Phone
Brand Name	Motorola
Model Name	9888
FCC ID	IHDT56WE1
IMEI Code	SIM1: 355645080023875 SIM2: 355645080023883
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	· GSM/GPRS/EGPRS · RMC/AMR 12.2Kbps · HSDPA · HSUPA · DC-HSDPA · HSPA+ · LTE · 802.11b/g/n HT20 · Bluetooth v3.0 + EDR, Bluetooth v4.0 LE, Bluetooth v4.1 LE, Bluetooth v4.2 LE
HW Version	WKHMA1B2-2
SW Version	NRD90M.02 for Single SIM mobile NRD90M.01 for Dual SIM mobile
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Identical Prototype
Remark: 1. This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation. 2. 802.11n-HT40 is not supported in 2.4GHz WLAN. 3. This device 2.4GHz WLAN support hotspot operation. 4. This device does not support DTM operation and support GRPS/EGPRS mode up to multi-slot class 12. 5. There are three types of EUT, the differences between samples is for memory, the sample 1 is 2+16GB capacity, the sample 2 is 1+16GB capacity and the sample 3 is 1+16GB capacity. And sample 1 and sample 2 are dual SIM card, sample 3 is single SIM card. For memory capacity has no effect on SAR distribution, so we only choose dual SIM sample 1 to perform full tests. 6. The dual SIM card mobile has 2 SIM slots and supports dual SIM dual standby. The WWAN radio transmission will be enabled by either one SIM at a time (single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose dual SIM1 card to perform all tests. 7. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of LTE Band 7.	

4.2 Specification of Accessory

Specification of Accessory				
AC Adapter(EU)	Brand Name	Motorola (AcBel)	Model Name	C-P36 SPN5944A
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc, 2000mA		
AC Adapter(US)	Brand Name	Motorola (AcBel)	Model Name	C-P35 SPN5945A
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc, 2000mA		
AC Adapter(UK)	Brand Name	Motorola (AcBel)	Model Name	C-P37 SPN5940A
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc, 2000mA		
AC Adapter(IN)	Brand Name	Motorola (AcBel)	Model Name	C-P49 SPN5946A
	Power Rating	I/P: 100-240 Vac, 300mA, O/P: 5.2Vdc, 2000mA		
AC Adapter(AR)	Brand Name	Motorola (AcBel)	Model Name	C-P47 SPN5942A
	Power Rating	I/P: 100-240 Vac, 500mA, O/P: 5.2Vdc, 2000mA		
Battery	Brand Name	Motorola (Sunwoda)	Model Name	HC60
	Power Rating	3.8Vdc, 3780/4000mAh (Min/Typ)	Type	Li-ion
Earphone	Brand Name	Motorola(HETONG)	Model Name	PY-13A1602-01KC39
	Signal Line	1.2 meter, non-shielded cable, without ferrite core		
USB Cable	Brand Name	Motorola (Saibao)	Model Name	SYD-A017A
	Signal Line	1.0 meter, shielded cable, without ferrite core		

4.3 General LTE SAR Test and Reporting Considerations

Summarized necessary items addressed in KDB 941225 D05 v02r05																																																						
FCC ID	IHDT56WE1																																																					
Equipment Name	Mobile Cellular PHONE																																																					
Operating Frequency Range of each LTE transmission band	LTE Band 5: 824.7 MHz ~ 848.3 MHz LTE Band 7: 2502.5 MHz ~ 2567.5 MHz LTE Band 38: 2572.5 MHz ~ 2617.5 MHz																																																					
Channel Bandwidth	LTE Band 5:1.4MHz, 3MHz, 5MHz, 10MHz LTE Band 7: 5MHz, 10MHz, 15MHz, 20MHz LTE Band 38: 5MHz, 10MHz, 15MHz, 20MHz																																																					
Uplink Modulations Used	QPSK, and 16QAM																																																					
LTE Voice / Data requirements	Voice and Data																																																					
LTE MPR Permanently Built-in by Design	<table><tr><th colspan="8">Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3</th></tr><tr><th rowspan="2">Modulation</th><th colspan="6">Channel bandwidth / Transmission bandwidth (RB)</th><th rowspan="2">MPR (dB)</th></tr><tr><th>1.4 MHz</th><th>3.0 MHz</th><th>5 MHz</th><th>10 MHz</th><th>15 MHz</th><th>20 MHz</th></tr><tr><td>QPSK</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>≤ 5</td><td>≤ 4</td><td>≤ 8</td><td>≤ 12</td><td>≤ 16</td><td>≤ 18</td><td>≤ 1</td></tr><tr><td>16 QAM</td><td>> 5</td><td>> 4</td><td>> 8</td><td>> 12</td><td>> 16</td><td>> 18</td><td>≤ 2</td></tr></table>								Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3								Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz	QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1	16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1	16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2
Table 6.2.3-1: Maximum Power Reduction (MPR) for Power Class 3																																																						
Modulation	Channel bandwidth / Transmission bandwidth (RB)						MPR (dB)																																															
	1.4 MHz	3.0 MHz	5 MHz	10 MHz	15 MHz	20 MHz																																																
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	≤ 1																																															
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	≤ 1																																															
16 QAM	> 5	> 4	> 8	> 12	> 16	> 18	≤ 2																																															
LTE A-MPR	In the base station simulator configuration, Network Setting value is set to NS_01 to disable A-MPR during SAR testing and the LTE SAR tests was transmitting on all TTI frames (Maximum TTI)																																																					
Spectrum Plots for RB Configuration	A properly configured base station simulator was used for the SAR and power measurement; therefore, spectrum plots for each RB allocation and offset configuration are not included in the SAR report.																																																					
Power reduction applied to satisfy SAR compliance	When hotspot mode is enabled, power reduction will be activated to limit the maximum power of LTE Band 7.																																																					
LTE Release Version	R8, Cat 4																																																					
CA Support	Not Supported																																																					
Transmission (H, M, L) channel numbers and frequencies in each LTE band																																																						
LTE Band 5																																																						
	Bandwidth 1.4 MHz		Bandwidth 3 MHz		Bandwidth 5 MHz		Bandwidth 10 MHz																																															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																														
L	20407	824.7	20415	825.5	20425	826.5	20450	829																																														
M	20525	836.5	20525	836.5	20525	836.5	20525	836.5																																														
H	20643	848.3	20635	847.5	20625	846.5	20600	844																																														
LTE Band 7																																																						
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz																																															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																														
L	20775	2502.5	20800	2505	20825	2507.5	20850	2510																																														
M	21100	2535	21100	2535	21100	2535	21100	2535																																														
H	21425	2567.5	21400	2565	21375	2562.5	21350	2560																																														
LTE Band 38																																																						
	Bandwidth 5 MHz		Bandwidth 10 MHz		Bandwidth 15 MHz		Bandwidth 20 MHz																																															
	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)	Ch. #	Freq. (MHz)																																														
L	37775	2572.5	37800	2575	37825	2577.5	37850	2580																																														
M	38000	2595	38000	2595	38000	2595	38000	2595																																														
H	38225	2617.5	38200	2615	38175	2612.5	38150	2610																																														

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

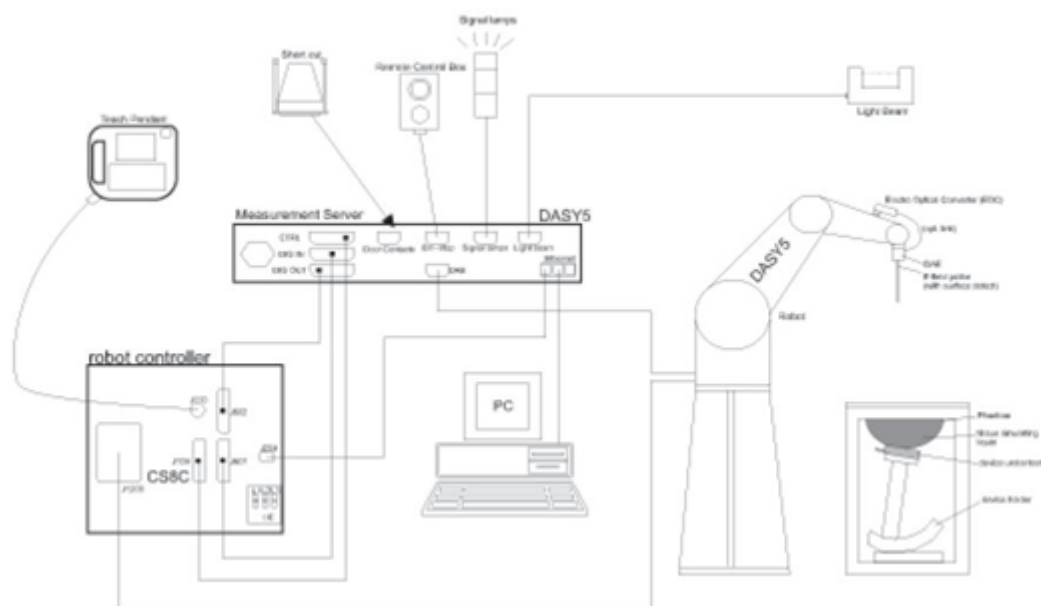

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps, etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz Linearity: ± 0.2 dB (30 MHz – 6 GHz)	
Directivity	± 0.3 dB in TSL (rotation around probe axis) ± 0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μ W/g – >100 mW/g Linearity: ± 0.2 dB (noise: typically <1 μ W/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm) Tip diameter: 2.5 mm (body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

7.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

7.3 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%)	
Filling Volume	Approx. 30 liters	
Dimensions	Major ellipse axis: 600 mm Minor axis: 400 mm	

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.



Mounting Device for Hand-Held Transmitters



Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	≤ 2 GHz: ≤ 15 mm $2 - 3$ GHz: ≤ 12 mm	$3 - 4$ GHz: ≤ 12 mm $4 - 6$ GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

8.4 Zoom Scan

Zoom scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube whose base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{\text{Zoom}}, \Delta y_{\text{Zoom}}$			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{\text{Zoom}}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{\text{Zoom}}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{\text{Zoom}}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{\text{Zoom}}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

8.5 Volume Scan Procedures

The volume scan is used to assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASy measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d151	2016/3/16	2017/3/15
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	2016/11/24	2017/11/23
SPEAG	2450MHz System Validation Kit	D2450V2	840	2016/11/25	2017/11/24
SPEAG	2600MHz System Validation Kit	D2600V2	1061	2016/11/24	2017/11/23
SPEAG	Data Acquisition Electronics	DAE4	1210	2016/5/18	2017/5/17
SPEAG	Data Acquisition Electronics	DAE4	1279	2016/4/4	2017/4/3
SPEAG	Dosimetric E-Field Probe	EX3DV4	3857	2016/5/25	2017/5/24
SPEAG	Dosimetric E-Field Probe	EX3DV4	3954	2016/11/28	2017/11/27
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1477	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1479	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1644	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CB	TP-1542	NCR	NCR
Anritsu	Radio communication analyzer	MT8820C	6201563814	2016/3/21	2017/3/20
Agilent	Wireless Communication Test Set	E5515C	MY52102706	2016/4/22	2017/4/21
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	2016/4/22	2017/4/21
R&S	CBT BLUETOOTH TESTER	CBT	101137	2016/8/9	2017/8/8
SPEAG	DAK Kit	DAK3.5	1144	2016/11/23	2017/11/22
R&S	Signal Generator	SMR40	100455	2017/1/19	2018/1/18
Anritsu	Power Sensor	MA2411B	1644003	2016/12/23	2017/12/22
Anritsu	Power Meter	ML2495A	1531197	2016/12/23	2017/12/22
Anritsu	Power Sensor	MA2411B	1644004	2016/12/23	2017/12/22
Anritsu	Power Meter	ML2495A	1531198	2016/12/23	2017/12/22
R&S	Spectrum Analyzer	FSV7	101631	2016/8/8	2017/8/7
ARRA	Power Divider	A3200-2	NA	Note1	
Agilent	Dual Directional Coupler	778D	50422	Note1	
PASTERNAK	Dual Directional Coupler	PE2214-10	N/A	Note1	
AR	Amplifier	5S1G4	333096	Note1	
mini-circuits	Amplifier	ZVE-3W-83+	162601250	Note1	
MCL	Attenuation1	BW-S10W5+	N/A	Note1	
MCL	Attenuation2	BW-S10W5+	N/A	Note1	
MCL	Attenuation3	BW-S10W5+	N/A	Note1	

General Note:

1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

10. System Verification

10.1 Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 10.2.

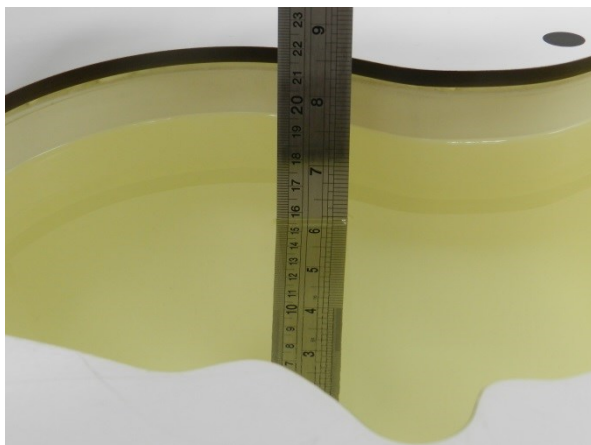


Fig 10.1 Photo of Liquid Height for Head SAR



Fig 10.2 Photo of Liquid Height for Body SAR

10.2 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	Head	22.8	0.933	41.71	0.9	41.5	3.67	0.51	±5	2017/2/20
1900	Head	22.7	1.414	38.079	1.4	40	1.00	-4.80	±5	2017/2/27
2450	Head	22.5	1.881	39.936	1.8	39.2	4.50	1.88	±5	2017/2/4
2600	Head	22.5	2.043	39.312	1.96	39	4.23	0.80	±5	2017/2/26
835	Body	22.8	0.989	56.278	0.97	55.2	1.96	1.95	±5	2017/2/19
1900	Body	22.7	1.524	52.276	1.52	53.3	0.26	-1.92	±5	2017/2/27
2450	Body	22.5	1.988	51.841	1.95	52.7	1.95	-1.63	±5	2017/2/4
2600	Body	22.5	2.173	52.211	2.16	52.5	0.60	-0.55	±5	2017/3/2

10.3 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2017/2/20	835	Head	250	4d151	3954	1279	2.39	9.26	9.56	3.24
2017/2/27	1900	Head	250	5d118	3857	1210	9.57	40.4	38.28	-5.25
2017/2/4	2450	Head	250	840	3857	1210	13.6	54	54.4	0.74
2017/2/26	2600	Head	250	1061	3857	1210	14.3	56	57.2	2.14
2017/2/19	835	Body	250	4d151	3954	1279	2.39	9.52	9.56	0.42
2017/2/27	1900	Body	250	5d118	3857	1210	10.2	40.8	40.8	0.00
2017/2/4	2450	Body	250	840	3857	1210	12.3	50.9	49.2	-3.34
2017/3/2	2600	Body	250	1061	3857	1210	13.5	55.4	54	-2.53

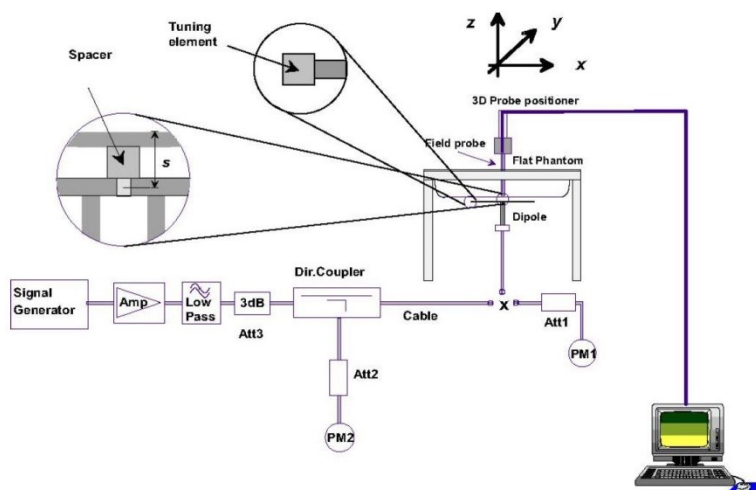


Fig 8.3.1 System Performance Check Setup



Fig 8.3.2 Setup Photo

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.

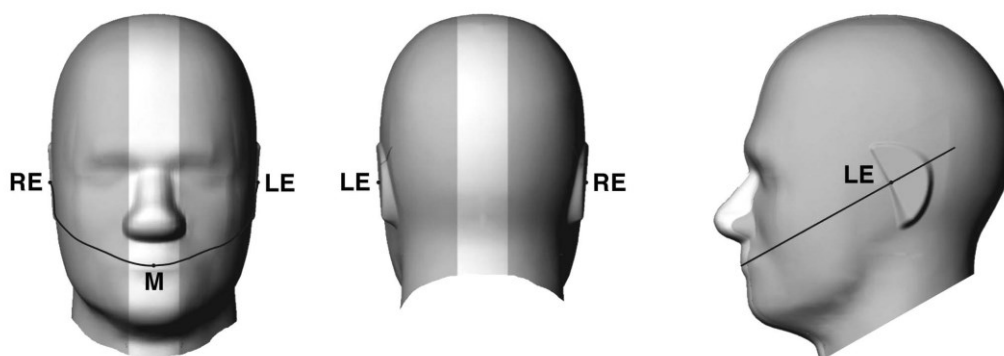


Fig 9.1.1 Front, back, and side views of SAM twin phantom

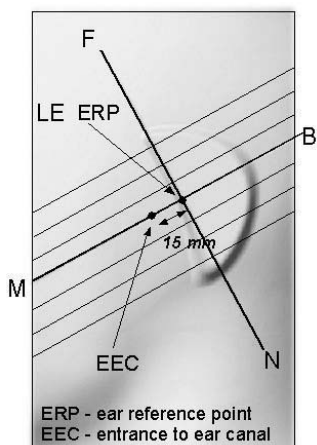


Fig 9.1.2 Close-up side view of phantom showing the ear region.

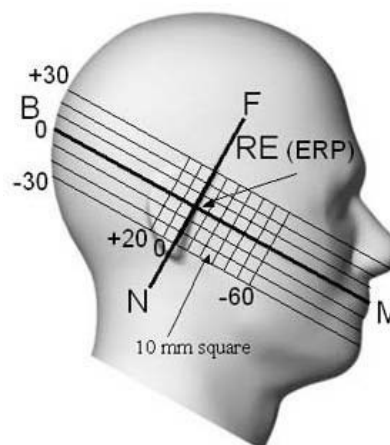


Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

11.2 Definition of the cheek position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width w_t of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width w_b of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
3. Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
4. Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
7. While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

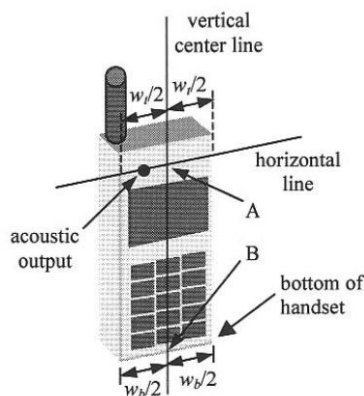


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case"

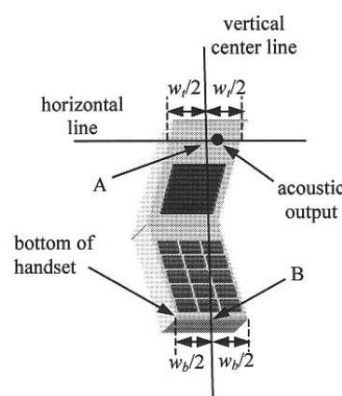


Fig 9.2.2 Handset vertical and horizontal reference lines—"clam-shell case"

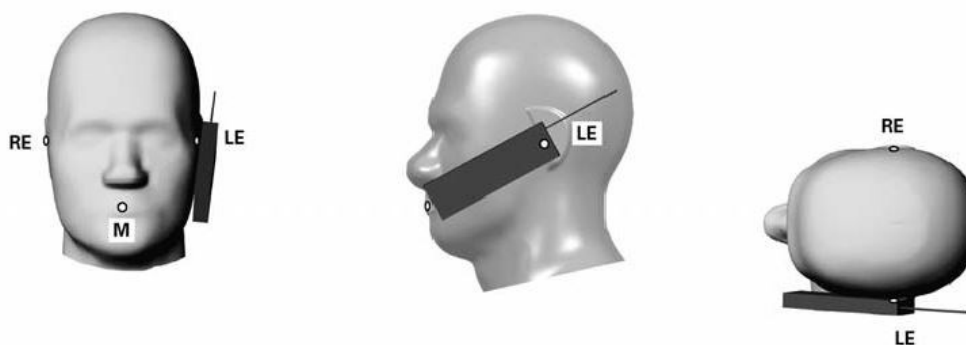


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15° .
3. Rotate the handset around the horizontal line by 15° .
4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

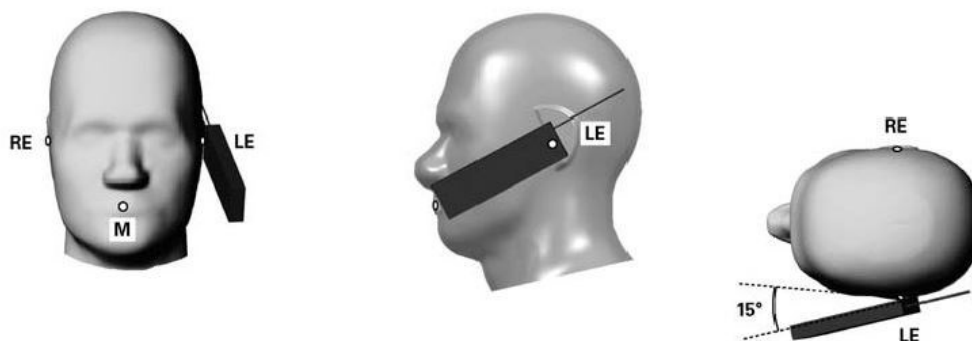


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is $> 1.2 \text{ W/kg}$, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a headset attached to the handset.

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are tested with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-clip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

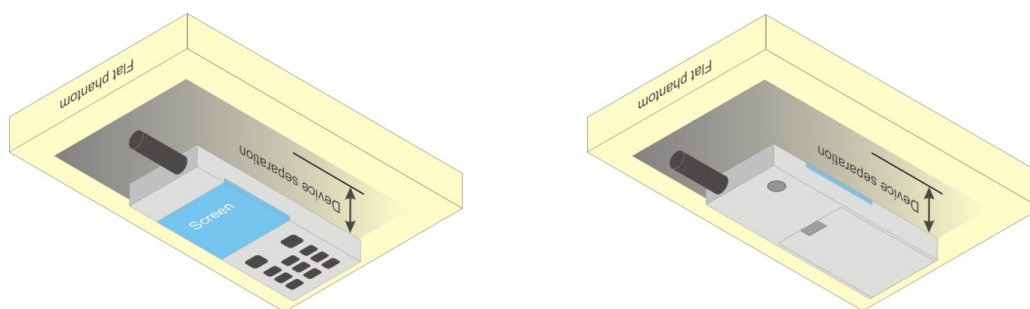


Fig 9.4 Body Worn Position

11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the frame-average power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850 and GPRS (2Tx slots) for GSM1900 are considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

GSM850	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	128	189	251		128	189	251	
Frequency (MHz)	824.2	836.4	848.8		824.2	836.4	848.8	
GSM 1 Tx slot	32.86	32.89	32.90	33.50	23.86	23.89	23.90	24.50
GPRS 1 Tx slot	32.84	32.86	32.87	33.50	23.84	23.86	23.87	24.50
GPRS 2 Tx slots	32.20	32.21	32.22	33.00	26.20	26.21	26.22	27.00
GPRS 3 Tx slots	30.39	30.38	30.35	31.00	26.13	26.12	26.09	26.74
GPRS 4 Tx slots	29.23	29.26	29.27	30.00	26.23	26.26	26.27	27.00
EDGE 1 Tx slot	27.29	27.25	27.13	27.50	18.29	18.25	18.13	18.50
EDGE 2 Tx slots	26.23	26.19	26.05	26.50	20.23	20.19	20.05	20.50
EDGE 3 Tx slots	24.23	24.21	24.01	24.50	19.97	19.95	19.75	20.24
EDGE 4 Tx slots	23.04	23.02	22.93	23.50	20.04	20.02	19.93	20.50

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

GSM1900	Burst Average Power (dBm)			Tune-up Limit (dBm)	Frame-Average Power (dBm)			Tune-up Limit (dBm)
Tx Channel	512	661	810		512	661	810	
Frequency (MHz)	1850.2	1880	1909.8		1850.2	1880	1909.8	
GSM 1 Tx slot	29.77	30.10	30.17	30.50	20.77	21.10	21.17	21.50
GPRS 1 Tx slot	29.75	30.08	30.15	30.50	20.75	21.08	21.15	21.50
GPRS 2 Tx slots	28.86	29.20	29.27	30.00	22.86	23.20	23.27	24.00
GPRS 3 Tx slots	26.78	27.13	27.22	27.50	22.52	22.87	22.96	23.24
GPRS 4 Tx slots	25.55	25.94	26.01	26.50	22.55	22.94	23.01	23.50
EDGE 1 Tx slot	25.71	25.70	25.64	26.00	16.71	16.70	16.64	17.00
EDGE 2 Tx slots	24.68	24.67	24.62	25.00	18.68	18.67	18.62	19.00
EDGE 3 Tx slots	22.56	22.59	22.54	23.00	18.30	18.33	18.28	18.74
EDGE 4 Tx slots	21.33	21.34	21.35	22.00	18.33	18.34	18.35	19.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<WCDMA Conducted Power>

1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
3. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
4. For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$. Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$. Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases. Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.							

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81
Note 1: Δ_{ACK}, Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference. Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$. Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$. Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g. Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.													

Setup Configuration

DC-HSDPA 3GPP release 8 Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set RMC 12.2Kbps + HSDPA mode.
 - ii. Set Cell Power = -25 dBm
 - iii. Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK)
 - iv. Select HSDPA Uplink Parameters
 - v. Set Gain Factors (β_c and β_d) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - a). Subtest 1: $\beta_c/\beta_d=2/15$
 - b). Subtest 2: $\beta_c/\beta_d=12/15$
 - c). Subtest 3: $\beta_c/\beta_d=15/8$
 - d). Subtest 4: $\beta_c/\beta_d=15/4$
 - vi. Set Delta ACK, Delta NACK and Delta CQI = 8
 - vii. Set Ack-Nack Repetition Factor to 3
 - viii. Set CQI Feedback Cycle (k) to 4 ms
 - ix. Set CQI Repetition Factor to 2
 - x. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
Inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.		
Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

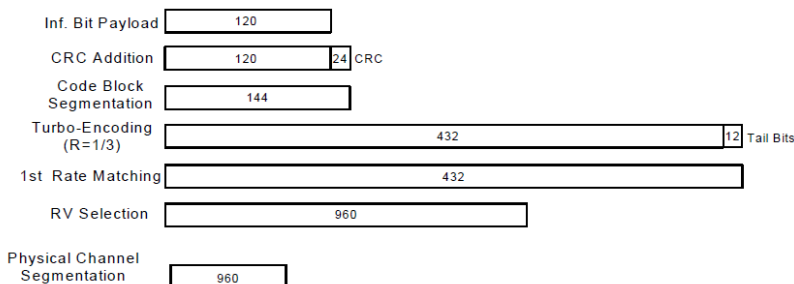


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

Setup Configuration

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2E:HSPA+:UL with 16QAM
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.4, quoted from the TS 34.121-1 s5.2E
 - iii. Set Channel Params
 - iv. Set Cell Power = -86 dBm
 - v. Set Channel Type = HSPA
 - vi. Set UE Target Power =21 dBm
 - vii. Power Ctrl Mode= All Up Bits
 - viii. Set Manual Uplink DPCH Bc/Bd = Manual
 - ix. Set Manual Uplink DPCH Bc and Bd=15,15(for 34.121-1 v8.10.0 table C11.1.4 sub-test 1)
 - x. Set HSPA Conn DL Channel Levels
 - xi. Set HS-SCCH Configs
 - xii. Set RB Test Mode Setup
 - xiii. Set Common HSUPA Parameters
 - xiv. Set Serving Grant
 - xv. Confirm that E-TFCI is equal to the target E-TFCI of 105 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	β_{ed1} : 30/15 β_{ed2} : 30/15	β_{ed3} : 24/15 β_{ed4} : 24/15	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.
 Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).
 Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.
 Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.
 Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

Setup Configuration

<WCDMA Conducted Power>
General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA/HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA/HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA/HSPA+.

Band		WCDMA Band II			Tune-up Limit (dBm)	WCDMA Band V			Tune-up Limit (dBm)
Tx Channel		9262	9400	9538		4132	4182	4233	
Rx Channel		9662	9800	9938		4357	4407	4458	
Frequency (MHz)		1852.4	1880	1907.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	22.96	22.94	22.74	24.00	22.91	22.98	22.99	24.00
3GPP Rel 99	RMC 12.2Kbps	22.98	22.95	22.77	24.00	22.93	23.00	23.01	24.00
3GPP Rel 6	HSDPA Subtest-1	21.69	21.78	21.56	23.00	21.72	21.78	21.80	23.00
3GPP Rel 6	HSDPA Subtest-2	21.71	21.75	21.56	23.00	21.74	21.80	21.83	23.00
3GPP Rel 6	HSDPA Subtest-3	21.27	21.30	21.10	22.50	21.23	21.30	21.35	22.50
3GPP Rel 6	HSDPA Subtest-4	21.24	21.27	21.09	22.50	21.23	21.27	21.33	22.50
3GPP Rel 8	DC-HSDPA Subtest-1	21.61	21.45	21.43	23.00	21.57	21.56	21.68	23.00
3GPP Rel 8	DC-HSDPA Subtest-2	21.55	21.41	21.40	23.00	21.53	21.52	21.68	23.00
3GPP Rel 8	DC-HSDPA Subtest-3	20.98	20.90	20.85	22.50	21.00	21.02	21.08	22.50
3GPP Rel 8	DC-HSDPA Subtest-4	21.00	20.91	20.83	22.50	20.99	20.99	21.12	22.50
3GPP Rel 6	HSUPA Subtest-1	19.77	19.84	19.57	21.00	19.72	19.76	19.82	21.00
3GPP Rel 6	HSUPA Subtest-2	19.72	19.70	19.58	21.00	19.60	19.74	19.80	21.00
3GPP Rel 6	HSUPA Subtest-3	20.71	20.75	20.59	22.00	20.71	20.74	20.79	22.00
3GPP Rel 6	HSUPA Subtest-4	19.24	19.37	19.04	21.00	19.18	19.16	19.33	21.00
3GPP Rel 6	HSUPA Subtest-5	21.70	21.70	21.50	23.00	21.50	21.70	21.80	23.00
3GPP Rel 7	HSPA+ (16QAM) Subtest-1	19.45	19.38	19.31	20.50	19.46	19.47	19.58	20.50

<FDD LTE Conducted Power>**General Note:**

1. Anritsu MT8820C base station simulator was used to setup the connection with EUT; the frequency band, channel bandwidth, RB allocation configuration, modulation type are set in the base station simulator to configure EUT transmitting at maximum power and at different configurations which are requested to be reported to FCC, for conducted power measurement and SAR testing.
2. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
3. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
4. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
5. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
6. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
7. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
8. For LTE B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

<Full Power Mode>

<LTE Band 5>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20450	20525	20600	24.00	0
Frequency (MHz)				829	836.5	844		
10	QPSK	1	0	22.8	22.7	22.83	24.00	0
10	QPSK	1	25	22.7	22.64	22.82		
10	QPSK	1	49	22.64	22.67	22.82		
10	QPSK	25	0	21.84	21.74	21.87	23.00	1
10	QPSK	25	12	21.79	21.69	21.85		
10	QPSK	25	25	21.77	21.71	21.82		
10	QPSK	50	0	21.83	21.75	21.84	23.00	1
10	16QAM	1	0	22.06	21.98	22.04		
10	16QAM	1	25	21.99	21.97	22.04		
10	16QAM	1	49	21.94	22	22.03	22.00	2
10	16QAM	25	0	20.8	20.72	20.84		
10	16QAM	25	12	20.75	20.67	20.85		
10	16QAM	25	25	20.73	20.7	20.87	22.00	2
10	16QAM	50	0	20.78	20.73	20.86		
Channel				20425	20525	20625	24.00	0
Frequency (MHz)				826.5	836.5	846.5		
5	QPSK	1	0	22.79	22.66	22.83	24.00	0
5	QPSK	1	12	22.77	22.61	22.84		
5	QPSK	1	24	22.63	22.55	22.76		
5	QPSK	12	0	21.88	21.77	21.89	23.00	1
5	QPSK	12	7	21.88	21.72	21.88		
5	QPSK	12	13	21.83	21.71	21.88		
5	QPSK	25	0	21.81	21.68	21.86	23.00	1
5	16QAM	1	0	22.03	21.99	22.04		
5	16QAM	1	12	22.06	21.92	22.04		
5	16QAM	1	24	21.9	21.91	22	22.00	2
5	16QAM	12	0	20.84	20.75	20.89		
5	16QAM	12	7	20.83	20.71	20.89		
5	16QAM	12	13	20.78	20.69	20.9	22.00	2
5	16QAM	25	0	20.78	20.67	20.85		

Channel				20415	20525	20635	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				825.5	836.5	847.5		
3	QPSK	1	0	22.71	22.54	22.74	24.00	0
3	QPSK	1	8	22.73	22.57	22.79		
3	QPSK	1	14	22.64	22.47	22.73		
3	QPSK	8	0	21.87	21.72	21.85	23.00	1
3	QPSK	8	4	21.86	21.68	21.88		
3	QPSK	8	7	21.83	21.65	21.86		
3	QPSK	15	0	21.85	21.69	21.87	23.00	1
3	16QAM	1	0	21.98	21.87	21.97		
3	16QAM	1	8	21.95	21.91	21.98		
3	16QAM	1	14	21.89	21.79	21.98	22.00	2
3	16QAM	8	0	20.88	20.77	20.9		
3	16QAM	8	4	20.85	20.73	20.91		
3	16QAM	8	7	20.83	20.69	20.91	22.00	2
3	16QAM	15	0	20.82	20.7	20.89		
Channel				20407	20525	20643	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				824.7	836.5	848.3		
1.4	QPSK	1	0	22.75	22.58	22.78	24.00	0
1.4	QPSK	1	3	22.84	22.64	22.88		
1.4	QPSK	1	5	22.72	22.53	22.77		
1.4	QPSK	3	0	22.85	22.65	22.88		
1.4	QPSK	3	1	22.79	22.6	22.84		
1.4	QPSK	3	3	22.8	22.6	22.82	23.00	1
1.4	QPSK	6	0	21.87	21.65	21.86		
1.4	16QAM	1	0	22.02	21.92	22.03	23.00	1
1.4	16QAM	1	3	22.11	21.96	22.1		
1.4	16QAM	1	5	22	21.84	22		
1.4	16QAM	3	0	21.87	21.71	21.87		
1.4	16QAM	3	1	21.81	21.66	21.82		
1.4	16QAM	3	3	21.8	21.62	21.81	22.00	2
1.4	16QAM	6	0	20.88	20.71	20.92		

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350	23.00	0
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	22.47	22.53	22.27		
20	QPSK	1	49	22.34	22.33	22.15	22.00	1
20	QPSK	1	99	22.38	22.38	22.24		
20	QPSK	50	0	21.45	21.51	21.23		
20	QPSK	50	24	21.37	21.41	21.16	22.00	1
20	QPSK	50	50	21.36	21.4	21.18		
20	QPSK	100	0	21.39	21.45	21.18		
20	16QAM	1	0	21.4	21.75	21.48	22.00	1
20	16QAM	1	49	21.51	21.57	21.41		
20	16QAM	1	99	21.68	21.58	21.53		
20	16QAM	50	0	20.36	20.53	20.3	21.00	2
20	16QAM	50	24	20.42	20.44	20.25		
20	16QAM	50	50	20.46	20.42	20.26		
20	16QAM	100	0	20.38	20.43	20.26	21.00	2
Channel				20825	21100	21375		
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	22.28	22.52	22.2	23.00	0
15	QPSK	1	37	22.37	22.36	22.17		
15	QPSK	1	74	22.43	22.44	22.27		
15	QPSK	36	0	21.35	21.48	21.22	22.00	1
15	QPSK	36	20	21.39	21.41	21.18		
15	QPSK	36	39	21.42	21.42	21.21		
15	QPSK	75	0	21.4	21.45	21.19	22.00	1
15	16QAM	1	0	21.4	21.72	21.43		
15	16QAM	1	37	21.53	21.56	21.41		
15	16QAM	1	74	21.6	21.6	21.49	21.00	2
15	16QAM	36	0	20.37	20.5	20.31		
15	16QAM	36	20	20.4	20.43	20.27		
15	16QAM	36	39	20.42	20.44	20.29	21.00	2
15	16QAM	75	0	20.4	20.45	20.26		

Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	22.23	22.45	22.17	23.00	0
10	QPSK	1	25	22.28	22.32	22.21		
10	QPSK	1	49	22.34	22.35	22.25		
10	QPSK	25	0	21.25	21.42	21.13	22.00	1
10	QPSK	25	12	21.33	21.37	21.17		
10	QPSK	25	25	21.35	21.39	21.24		
10	QPSK	50	0	21.34	21.42	21.2	22.00	1
10	16QAM	1	0	21.39	21.64	21.44		
10	16QAM	1	25	21.44	21.58	21.41		
10	16QAM	1	49	21.51	21.52	21.46	21.00	2
10	16QAM	25	0	20.28	20.44	20.24		
10	16QAM	25	12	20.36	20.37	20.24		
10	16QAM	25	25	20.36	20.4	20.31	21.00	2
10	16QAM	50	0	20.39	20.41	20.3		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	22.21	22.38	22.17	23.00	0
5	QPSK	1	12	22.25	22.34	22.24		
5	QPSK	1	24	22.24	22.3	22.22		
5	QPSK	12	0	21.26	21.43	21.26	22.00	1
5	QPSK	12	7	21.28	21.39	21.27		
5	QPSK	12	13	21.3	21.39	21.28		
5	QPSK	25	0	21.27	21.35	21.22	22.00	1
5	16QAM	1	0	21.35	21.59	21.41		
5	16QAM	1	12	21.4	21.57	21.4		
5	16QAM	1	24	21.36	21.48	21.4	21.00	2
5	16QAM	12	0	20.29	20.46	20.32		
5	16QAM	12	7	20.28	20.41	20.33		
5	16QAM	12	13	20.31	20.39	20.33	21.00	2
5	16QAM	25	0	20.27	20.36	20.27		

<Reduced Power Mode>

<LTE Band 7>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				20850	21100	21350		
Frequency (MHz)				2510	2535	2560		
20	QPSK	1	0	21.37	21.43	21.21	22.00	0
20	QPSK	1	49	21.24	21.24	21.04		
20	QPSK	1	99	21.18	21.27	21.19		
20	QPSK	50	0	20.38	20.43	20.19	21.00	1
20	QPSK	50	24	20.35	20.34	20.13		
20	QPSK	50	50	20.33	20.36	20.17		
20	QPSK	100	0	20.32	20.38	20.15	21.00	1
20	16QAM	1	0	20.39	20.74	20.5		
20	16QAM	1	49	20.54	20.59	20.43		
20	16QAM	1	99	20.62	20.55	20.52	20.00	2
20	16QAM	50	0	19.32	19.43	19.23		
20	16QAM	50	24	19.35	19.33	19.17		
20	16QAM	50	50	19.37	19.34	19.14	20.00	2
20	16QAM	100	0	19.3	19.36	19.18		
Channel				20825	21100	21375	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2507.5	2535	2562.5		
15	QPSK	1	0	21.12	21.37	21.09	22.00	0
15	QPSK	1	37	21.26	21.24	21.05		
15	QPSK	1	74	21.31	21.29	21.18		
15	QPSK	36	0	20.3	20.4	20.16	21.00	1
15	QPSK	36	20	20.35	20.35	20.14		
15	QPSK	36	39	20.38	20.37	20.19		
15	QPSK	75	0	20.33	20.36	20.16	21.00	1
15	16QAM	1	0	20.39	20.66	20.39		
15	16QAM	1	37	20.52	20.53	20.38		
15	16QAM	1	74	20.56	20.55	20.43	20.00	2
15	16QAM	36	0	19.26	19.4	19.21		
15	16QAM	36	20	19.33	19.33	19.17		
15	16QAM	36	39	19.35	19.35	19.2	20.00	2
15	16QAM	75	0	19.3	19.34	19.19		

Channel				20800	21100	21400	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2505	2535	2565		
10	QPSK	1	0	21.1	21.28	21.06	22.00	0
10	QPSK	1	25	21.16	21.24	21.07		
10	QPSK	1	49	21.21	21.2	21.16		
10	QPSK	25	0	20.21	20.31	20.08	21.00	1
10	QPSK	25	12	20.25	20.27	20.11		
10	QPSK	25	25	20.29	20.29	20.18		
10	QPSK	50	0	20.28	20.31	20.16	21.00	1
10	16QAM	1	0	20.34	20.59	20.37		
10	16QAM	1	25	20.43	20.53	20.4		
10	16QAM	1	49	20.45	20.51	20.4	20.00	2
10	16QAM	25	0	19.19	19.3	19.13		
10	16QAM	25	12	19.22	19.26	19.13		
10	16QAM	25	25	19.27	19.28	19.2	20.00	2
10	16QAM	50	0	19.26	19.3	19.18		
Channel				20775	21100	21425	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2502.5	2535	2567.5		
5	QPSK	1	0	21.07	21.23	21.07	22.00	0
5	QPSK	1	12	21.13	21.22	21.1		
5	QPSK	1	24	21.07	21.14	21.1		
5	QPSK	12	0	20.22	20.33	20.2	21.00	1
5	QPSK	12	7	20.21	20.31	20.22		
5	QPSK	12	13	20.24	20.32	20.23		
5	QPSK	25	0	20.19	20.27	20.17	21.00	1
5	16QAM	1	0	20.37	20.56	20.4		
5	16QAM	1	12	20.42	20.53	20.46		
5	16QAM	1	24	20.37	20.46	20.39	20.00	2
5	16QAM	12	0	19.21	19.33	19.22		
5	16QAM	12	7	19.2	19.31	19.25		
5	16QAM	12	13	19.23	19.31	19.26	20.00	2
5	16QAM	25	0	19.17	19.26	19.18		

<TDD LTE SAR Measurement>

TDD LTE configuration setup for SAR measurement

SAR was tested with a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by 3GPP.

- 3GPP TS 36.211 section 4.2 for Type 2 Frame Structure and Table 4.2-2 for uplink-downlink configurations
- "special subframe S" contains both uplink and downlink transmissions, it has been taken into consideration to determine the transmission duty factor according to the worst case uplink and downlink cyclic prefix requirements for UpPTS
- Establishing connections with base station simulators ensure a consistent means for testing SAR and recommended for evaluating SAR. The Anritsu MT8820C (firmware: #22.52#004) was used for LTE output power measurements and SAR testing.

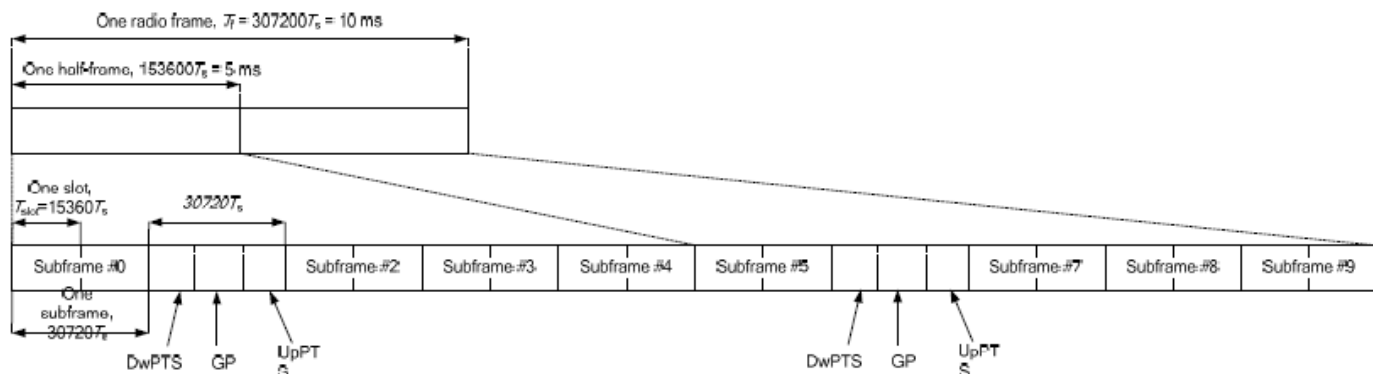


Figure 4.2-1: Frame structure type 2 (for 5 ms switch-point periodicity).

Table 4.2-2: Uplink-downlink configurations.

Uplink-downlink configuration	Downlink-to-Uplink Switch-point periodicity	Subframe number									
		0	1	2	3	4	5	6	7	8	9
0	5 ms	D	S	U	U	U	D	S	U	U	U
1	5 ms	D	S	U	U	D	D	S	U	U	D
2	5 ms	D	S	U	D	D	D	S	U	D	D
3	10 ms	D	S	U	U	U	D	D	D	D	D
4	10 ms	D	S	U	U	D	D	D	D	D	D
5	10 ms	D	S	U	D	D	D	D	D	D	D
6	5 ms	D	S	U	U	U	D	S	U	U	D

Table 4.2-1: Configuration of special subframe (lengths of DwPTS/GP/UpPTS).

Special subframe configuration	Normal cyclic prefix in downlink			Extended cyclic prefix in downlink		
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink		Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
0	$6592 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$	$7680 \cdot T_s$	$2192 \cdot T_s$	$2560 \cdot T_s$
1	$19760 \cdot T_s$			$20480 \cdot T_s$		
2	$21952 \cdot T_s$			$23040 \cdot T_s$		
3	$24144 \cdot T_s$			$25600 \cdot T_s$		
4	$26336 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$	$7680 \cdot T_s$	$4384 \cdot T_s$	$5120 \cdot T_s$
5	$6592 \cdot T_s$			$20480 \cdot T_s$		
6	$19760 \cdot T_s$			$23040 \cdot T_s$		
7	$21952 \cdot T_s$			$12800 \cdot T_s$		
8	$24144 \cdot T_s$			-	-	-
9	$13168 \cdot T_s$			-	-	-

Special subframe (30720·T _s): Normal cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~4	7.13%	8.33%
	5~9	14.3%	16.7%

Special subframe(30720·T _s): Extended cyclic prefix in downlink (UpPTS)			
	Special subframe configuration	Normal cyclic prefix in uplink	Extended cyclic prefix in uplink
Uplink duty factor in one special subframe	0~3	7.13%	8.33%
	4~7	14.3%	16.7%

The highest duty factor is resulted from:

- Uplink-downlink configuration: 0. In a half-frame consisted of 5 subframes, uplink operation is in 3 uplink subframes and 1 special subframe.
- special subframe configuration: 5-9 for normal cyclic prefix in downlink, 4-7 for extended cyclic prefix in downlink
- for special subframe with extended cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.167)/5 = 63.3\%$
- for special subframe with normal cyclic prefix in uplink, the total uplink duty factor in one half-frame is:
 $(3+0.143)/5 = 62.9\%$
- For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The scaled TDD LTE SAR = measured SAR (W/kg)* Tune-up Scaling Factor* scaling factor for extended cyclic prefix.

<LTE Band 38>

BW [MHz]	Modulation	RB Size	RB Offset	Power Low Ch. / Freq.	Power Middle Ch. / Freq.	Power High Ch. / Freq.	Tune-up limit (dBm)	MPR (dB)
Channel				37850	38000	38150		
Frequency (MHz)				2580	2595	2610		
20	QPSK	1	0	22.25	22.41	22.45		
20	QPSK	1	49	22.11	22.2	22.39	23.00	0
20	QPSK	1	99	22.2	22.29	22.37	22.00	1
20	QPSK	50	0	21.23	21.37	21.47		
20	QPSK	50	24	20.49	21.25	21.43		
20	QPSK	50	50	21.2	21.23	21.45		
20	QPSK	100	0	21.2	21.31	21.45	22.00	1
20	16QAM	1	0	21.39	21.23	21.45		
20	16QAM	1	49	21.19	21.15	21.46		
20	16QAM	1	99	21.22	21.44	21.41	21.00	2
20	16QAM	50	0	20.22	20.24	20.51		
20	16QAM	50	24	20.21	20.26	20.54		
20	16QAM	50	50	20.25	20.35	20.52		
20	16QAM	100	0	20.22	20.31	20.5		
Channel				37825	38000	38175		
Frequency (MHz)				2577.5	2595	2612.5		
15	QPSK	1	0	22.18	22.21	22.46	23.00	0
15	QPSK	1	37	22.16	22.2	22.44		
15	QPSK	1	74	22.15	22.42	22.35		
15	QPSK	36	0	21.12	21.23	21.51	22.00	1
15	QPSK	36	20	21.17	21.32	21.5		
15	QPSK	36	39	21.17	21.41	21.46		
15	QPSK	75	0	21.18	21.28	21.47		
15	16QAM	1	0	21.25	21.19	21.49	22.00	1
15	16QAM	1	37	21.25	21.17	21.52		
15	16QAM	1	74	21.18	21.4	21.43		
15	16QAM	36	0	20.18	20.21	20.48	21.00	2
15	16QAM	36	20	20.14	20.26	20.48		
15	16QAM	36	39	20.13	20.33	20.44		
15	16QAM	75	0	20.21	20.24	20.52		

Channel				37800	38000	38200	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2575	2595	2615		
10	QPSK	1	0	22.17	22.13	22.43	23.00	0
10	QPSK	1	25	22.06	22.17	22.41		
10	QPSK	1	49	21.99	22.34	22.35		
10	QPSK	25	0	21.12	21.21	21.44	22.00	1
10	QPSK	25	12	21.09	21.21	21.44		
10	QPSK	25	25	21.09	21.27	21.41		
10	QPSK	50	0	21.11	21.23	21.44		
10	16QAM	1	0	21.17	21.18	21.51	22.00	1
10	16QAM	1	25	21.14	21.12	21.5		
10	16QAM	1	49	21.13	21.34	21.37		
10	16QAM	25	0	20.16	20.17	20.52	21.00	2
10	16QAM	25	12	20.14	20.21	20.51		
10	16QAM	25	25	20.14	20.25	20.49		
10	16QAM	50	0	20.16	20.23	20.51		
Channel				37775	38000	38225	Tune-up limit (dBm)	MPR (dB)
Frequency (MHz)				2572.5	2595	2617.5		
5	QPSK	1	0	22.04	22.28	22.38	23.00	0
5	QPSK	1	12	22.07	22.15	22.41		
5	QPSK	1	24	21.96	22.17	22.27		
5	QPSK	12	0	21.2	21.18	21.44	22.00	1
5	QPSK	12	7	21.07	21.2	21.42		
5	QPSK	12	13	21.1	21.22	21.42		
5	QPSK	25	0	21.12	21.17	21.39		
5	16QAM	1	0	21.1	21.13	21.48	22.00	1
5	16QAM	1	12	21.16	21.12	21.51		
5	16QAM	1	24	21.05	21.16	21.35		
5	16QAM	12	0	20.11	20.14	20.46	21.00	2
5	16QAM	12	7	20.13	20.13	20.43		
5	16QAM	12	13	20.15	20.15	20.43		
5	16QAM	25	0	20.12	20.15	20.46		

<WLAN Conducted Power>**General Note:**

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.
2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %
2.4GHz WLAN	802.11b	CH 1	2412	1Mbps	15.23	16.50	100.00
		CH 6	2437		16.19	16.50	
		CH 11	2462		15.66	16.50	
	802.11g	CH 1	2412	54Mbps	10.19	11.00	82.88
		CH 6	2437		10.75	11.00	
		CH 11	2462		10.31	11.00	
	802.11n-HT20	CH 1	2412	MCS7	10.02	11.00	82.61
		CH 6	2437		10.46	11.00	
		CH 11	2462		10.28	11.00	

13. Bluetooth Exclusions Applied

Mode Band	Average power(dBm)	
	Bluetooth v3.0+EDR	Bluetooth v4.0/4.1/4.2 LE
2.4GHz Bluetooth	7.5	7.5

Note:

Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

$$[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$$
 for 1-g SAR and ≤ 7.5 for 10-g extremity SAR


- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	Exclusion Thresholds
7.5	10	2.48	0.9

Note:

Per KDB 447498 D01v06, the test exclusion threshold is 0.9 which is ≤ 3, SAR testing is not required.

14. Antenna Location

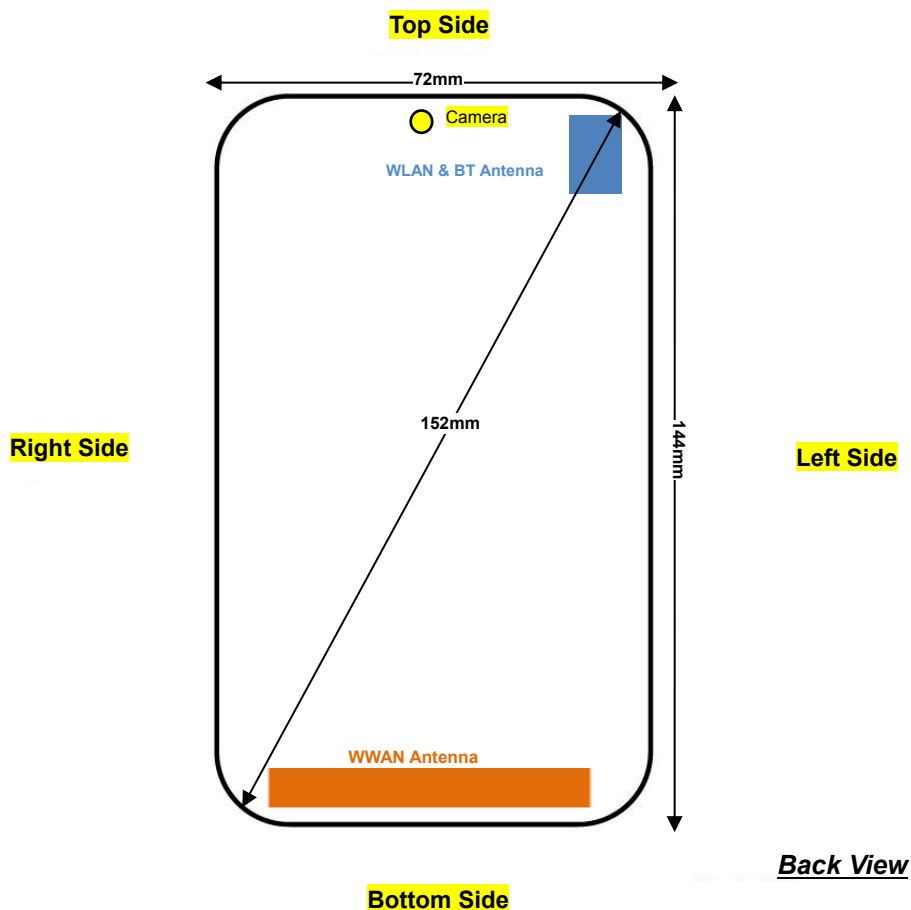

Distance of the Antenna to the EUT surface/edge						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna	≤ 25mm	≤ 25mm	>25mm	≤ 25mm	≤ 25mm	≤ 25mm
WLAN & Bluetooth	≤ 25mm	≤ 25mm	≤ 25mm	>25mm	>25mm	≤ 25mm

Positions for SAR tests; Hotspot mode						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna	Yes	Yes	No	Yes	Yes	Yes
WLAN & Bluetooth	Yes	Yes	Yes	No	No	Yes

General Note:

Referring to KDB 941225 D06 v02r01, when the overall device length and width are $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.

15. SAR Test Results

General Note:

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
 - c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
 - d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. When hotspot mode is enabled, power reduction will be activated to limit the maximum power of LTE Band 7.
5. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.

GSM Note:

1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850 and GPRS (2Tx slots) for GSM1900 are considered as the primary mode.
2. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

UMTS Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.

LTE Note:

1. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
2. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
3. Per KDB 941225 D05v02r05, For QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.
4. Per KDB 941225 D05v02r05, 16QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, 16QAM SAR testing is not required.
5. Per KDB 941225 D05v02r05, Smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported bandwidth is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
6. For LTE B5 / B38 the maximum bandwidth does not support three non-overlapping channels, per KDB 941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.

WLAN Note:

1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
2. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
3. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
4. During SAR testing the WLAN transmission was verified using a spectrum analyzer.

15.1 Head SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Right Cheek	251	848.8	29.27	30.00	1.183	0.04	0.421	0.498
	GSM850	GPRS 4 Tx slots	Right Tilted	251	848.8	29.27	30.00	1.183	0.1	0.348	0.412
01	GSM850	GPRS 4 Tx slots	Left Cheek	251	848.8	29.27	30.00	1.183	0.13	0.479	0.567
	GSM850	GPRS 4 Tx slots	Left Tilted	251	848.8	29.27	30.00	1.183	-0.05	0.260	0.308
02	GSM1900	GPRS 2 Tx slots	Right Cheek	810	1909.8	29.27	30.00	1.183	0.13	0.590	0.698
	GSM1900	GPRS 2 Tx slots	Right Tilted	810	1909.8	29.27	30.00	1.183	-0.06	0.213	0.252
	GSM1900	GPRS 2 Tx slots	Left Cheek	810	1909.8	29.27	30.00	1.183	0.08	0.273	0.323
	GSM1900	GPRS 2 Tx slots	Left Tilted	810	1909.8	29.27	30.00	1.183	0.05	0.196	0.232

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	4233	846.6	23.01	24.00	1.256	0.03	0.256	0.322
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	4233	846.6	23.01	24.00	1.256	0.15	0.185	0.232
03	WCDMA Band V	RMC 12.2Kbps	Left Cheek	4233	846.6	23.01	24.00	1.256	0.19	0.275	0.345
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	4233	846.6	23.01	24.00	1.256	0.12	0.167	0.210
04	WCDMA Band II	RMC 12.2Kbps	Right Cheek	9262	1852.4	22.98	24.00	1.265	0.11	0.323	0.409
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	9262	1852.4	22.98	24.00	1.265	-0.07	0.142	0.180
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	9262	1852.4	22.98	24.00	1.265	-0.04	0.152	0.192
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	9262	1852.4	22.98	24.00	1.265	0.1	0.11	0.139



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Mode	RB Size	RB Offset	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	0	Right Cheek	20525	836.5	22.7	24.00	1.349	0.05	0.164	0.221
	LTE Band 5	10M	QPSK	25	0	Right Cheek	20525	836.5	21.74	23.00	1.337	-0.05	0.135	0.180
	LTE Band 5	10M	QPSK	1	0	Right Tilted	20525	836.5	22.7	24.00	1.349	0.06	0.129	0.174
	LTE Band 5	10M	QPSK	25	0	Right Tilted	20525	836.5	21.74	23.00	1.337	0.12	0.105	0.140
05	LTE Band 5	10M	QPSK	1	0	Left Cheek	20525	836.5	22.7	24.00	1.349	0.17	0.207	0.279
	LTE Band 5	10M	QPSK	25	0	Left Cheek	20525	836.5	21.74	23.00	1.337	0.04	0.138	0.184
	LTE Band 5	10M	QPSK	1	0	Left Tilted	20525	836.5	22.7	24.00	1.349	-0.03	0.113	0.152
	LTE Band 5	10M	QPSK	25	0	Left Tilted	20525	836.5	21.74	23.00	1.337	0.08	0.090	0.120
06	LTE Band 7	20M	QPSK	1	0	Right Cheek	21100	2535	22.53	23.00	1.114	0.03	0.478	0.533
	LTE Band 7	20M	QPSK	50	0	Right Cheek	21100	2535	21.51	22.00	1.119	0.03	0.395	0.442
	LTE Band 7	20M	QPSK	1	0	Right Tilted	21100	2535	22.53	23.00	1.114	0.02	0.144	0.160
	LTE Band 7	20M	QPSK	50	0	Right Tilted	21100	2535	21.51	22.00	1.119	0.12	0.118	0.132
	LTE Band 7	20M	QPSK	1	0	Left Cheek	21100	2535	22.53	23.00	1.114	0.05	0.213	0.237
	LTE Band 7	20M	QPSK	50	0	Left Cheek	21100	2535	21.51	22.00	1.119	0.15	0.174	0.195
	LTE Band 7	20M	QPSK	1	0	Left Tilted	21100	2535	22.53	23.00	1.114	-0.09	0.213	0.237
	LTE Band 7	20M	QPSK	50	0	Left Tilted	21100	2535	21.51	22.00	1.119	0.04	0.182	0.204

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Mode	RB Size	RB offset	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
07	LTE Band 38	20M	QPSK	1	0	Right Cheek	38000	2595	22.41	23.00	1.146	62.9	1.006	0.08	0.236	0.272
	LTE Band 38	20M	QPSK	50	0	Right Cheek	38000	2595	21.37	22.00	1.156	62.9	1.006	0.07	0.184	0.214
	LTE Band 38	20M	QPSK	1	0	Right Tilted	38000	2595	22.41	23.00	1.146	62.9	1.006	0.11	0.071	0.082
	LTE Band 38	20M	QPSK	50	0	Right Tilted	38000	2595	21.37	22.00	1.156	62.9	1.006	0.13	0.056	0.065
	LTE Band 38	20M	QPSK	1	0	Left Cheek	38000	2595	22.41	23.00	1.146	62.9	1.006	0.07	0.104	0.120
	LTE Band 38	20M	QPSK	50	0	Left Cheek	38000	2595	21.37	22.00	1.156	62.9	1.006	0.09	0.084	0.098
	LTE Band 38	20M	QPSK	1	0	Left Tilted	38000	2595	22.41	23.00	1.146	62.9	1.006	-0.08	0.097	0.112
	LTE Band 38	20M	QPSK	50	0	Left Tilted	38000	2595	21.37	22.00	1.156	62.9	1.006	0.01	0.077	0.090

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Peak SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
08	WLAN 2.4GHz	802.11b 1Mbps	Right Cheek	6	2437	16.19	16.5	1.074	100	1.000	-0.07	0.666	0.430	0.462
	WLAN 2.4GHz	802.11b 1Mbps	Right Tilted	6	2437	16.19	16.5	1.074	100	1.000	-0.05	0.584	0.368	0.395
	WLAN 2.4GHz	802.11b 1Mbps	Left Cheek	6	2437	16.19	16.5	1.074	100	1.000		0.270		
	WLAN 2.4GHz	802.11b 1Mbps	Left Tilted	6	2437	16.19	16.5	1.074	100	1.000		0.254		

**15.2 Hotspot SAR****<GSM SAR>**

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Front	10	251	848.8	29.27	30.00	1.183	0.04	0.597	0.706
09	GSM850	GPRS 4 Tx slots	Back	10	251	848.8	29.27	30.00	1.183	0.01	0.802	0.949
	GSM850	GPRS 4 Tx slots	Back	10	128	824.2	29.23	30.00	1.194	0.04	0.721	0.861
	GSM850	GPRS 4 Tx slots	Back	10	189	836.4	29.26	30.00	1.186	0.09	0.779	0.924
	GSM850	GPRS 4 Tx slots	Left Side	10	251	848.8	29.27	30.00	1.183	-0.05	0.559	0.661
	GSM850	GPRS 4 Tx slots	Right Side	10	251	848.8	29.27	30.00	1.183	-0.01	0.465	0.550
	GSM850	GPRS 4 Tx slots	Bottom Side	10	251	848.8	29.27	30.00	1.183	-0.03	0.104	0.123
	GSM1900	GPRS 2 Tx slots	Front	10	810	1909.8	29.27	30.00	1.183	-0.18	0.491	0.581
10	GSM1900	GPRS 2 Tx slots	Back	10	810	1909.8	29.27	30.00	1.183	0.12	0.531	0.628
	GSM1900	GPRS 2 Tx slots	Left Side	10	810	1909.8	29.27	30.00	1.183	-0.06	0.178	0.211
	GSM1900	GPRS 2 Tx slots	Right Side	10	810	1909.8	29.27	30.00	1.183	0.08	0.297	0.351
	GSM1900	GPRS 2 Tx slots	Bottom Side	10	810	1909.8	29.27	30.00	1.183	0.03	0.298	0.353

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	4233	846.6	23.01	24.00	1.256	0.05	0.316	0.397
11	WCDMA Band V	RMC 12.2Kbps	Back	10	4233	846.6	23.01	24.00	1.256	-0.02	0.383	0.481
	WCDMA Band V	RMC 12.2Kbps	Left Side	10	4233	846.6	23.01	24.00	1.256	0.08	0.294	0.369
	WCDMA Band V	RMC 12.2Kbps	Right Side	10	4233	846.6	23.01	24.00	1.256	0.05	0.263	0.330
	WCDMA Band V	RMC 12.2Kbps	Bottom Side	10	4233	846.6	23.01	24.00	1.256	0.01	0.062	0.078
	WCDMA Band II	RMC 12.2Kbps	Front	10	9262	1852.4	22.98	24.00	1.265	-0.12	0.433	0.548
12	WCDMA Band II	RMC 12.2Kbps	Back	10	9262	1852.4	22.98	24.00	1.265	0.03	0.470	0.594
	WCDMA Band II	RMC 12.2Kbps	Left Side	10	9262	1852.4	22.98	24.00	1.265	-0.03	0.133	0.168
	WCDMA Band II	RMC 12.2Kbps	Right Side	10	9262	1852.4	22.98	24.00	1.265	0.15	0.283	0.358
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	10	9262	1852.4	22.98	24.00	1.265	0.06	0.213	0.269



<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Mode	RB Size	RB Offset	Test Position	Gap (mm)	Power Reduction	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
13	LTE Band 5	10M	QPSK	1	0	Front	10	Off	20525	836.5	22.70	24.00	1.349	0.03	0.322	0.434
	LTE Band 5	10M	QPSK	25	0	Front	10	Off	20525	836.5	21.74	23.00	1.337	0.08	0.262	0.350
	LTE Band 5	10M	QPSK	1	0	Back	10	Off	20525	836.5	22.70	24.00	1.349	-0.05	0.456	0.615
	LTE Band 5	10M	QPSK	25	0	Back	10	Off	20525	836.5	21.74	23.00	1.337	0.13	0.357	0.477
	LTE Band 5	10M	QPSK	1	0	Left Side	10	Off	20525	836.5	22.70	24.00	1.349	0.09	0.355	0.479
	LTE Band 5	10M	QPSK	25	0	Left Side	10	Off	20525	836.5	21.74	23.00	1.337	-0.02	0.289	0.386
	LTE Band 5	10M	QPSK	1	0	Right Side	10	Off	20525	836.5	22.70	24.00	1.349	-0.02	0.314	0.424
	LTE Band 5	10M	QPSK	25	0	Right Side	10	Off	20525	836.5	21.74	23.00	1.337	-0.04	0.255	0.341
14	LTE Band 5	10M	QPSK	1	0	Bottom Side	10	Off	20525	836.5	22.70	24.00	1.349	0.02	0.045	0.060
	LTE Band 5	10M	QPSK	25	0	Bottom Side	10	Off	20525	836.5	21.74	23.00	1.337	0.05	0.037	0.049
	LTE Band 7	20M	QPSK	1	0	Front	10	On	21100	2535	21.43	22.00	1.140	-0.16	0.584	0.666
	LTE Band 7	20M	QPSK	50	0	Front	10	On	21100	2535	20.43	21.00	1.140	-0.13	0.455	0.519
	LTE Band 7	20M	QPSK	1	0	Back	10	On	21100	2535	21.43	22.00	1.140	0.06	0.855	0.975
	LTE Band 7	20M	QPSK	1	0	Back	10	On	20850	2510	21.37	22.00	1.156	0.01	0.828	0.957
	LTE Band 7	20M	QPSK	1	0	Back	10	On	21350	2560	21.21	22.00	1.199	0.1	0.804	0.964
	LTE Band 7	20M	QPSK	50	0	Back	10	On	21100	2535	20.43	21.00	1.140	0.09	0.686	0.782
	LTE Band 7	20M	QPSK	100	0	Back	10	On	21100	2535	20.38	21.00	1.153	0.02	0.671	0.774
	LTE Band 7	20M	QPSK	1	0	Left Side	10	On	21100	2535	21.43	22.00	1.140	-0.02	0.003	0.003
	LTE Band 7	20M	QPSK	50	0	Left Side	10	On	21100	2535	20.43	21.00	1.140	0.07	0.003	0.004
	LTE Band 7	20M	QPSK	1	0	Right Side	10	On	21100	2535	21.43	22.00	1.140	-0.1	0.089	0.101
	LTE Band 7	20M	QPSK	50	0	Right Side	10	On	21100	2535	20.43	21.00	1.140	0.01	0.092	0.105
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10	On	21100	2535	21.43	22.00	1.140	0.15	0.949	1.082
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10	On	20850	2510	21.37	22.00	1.156	0.13	0.892	1.031
	LTE Band 7	20M	QPSK	1	0	Bottom Side	10	On	21350	2560	21.21	22.00	1.199	0.13	0.882	1.058
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10	On	21100	2535	20.43	21.00	1.140	0.15	0.748	0.853
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10	On	20850	2510	20.38	21.00	1.153	0.15	0.720	0.830
	LTE Band 7	20M	QPSK	50	0	Bottom Side	10	On	21350	2560	20.19	21.00	1.205	0.15	0.677	0.816
	LTE Band 7	20M	QPSK	100	0	Bottom Side	10	On	21100	2535	20.38	21.00	1.153	0.15	0.726	0.837



<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Mode	RB Size	RB Offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20M	QPSK	1	0	Front	10	38000	2595	22.41	23.00	1.146	62.9	1.006	-0.11	0.435	0.501
	LTE Band 38	20M	QPSK	50	0	Front	10	38000	2595	21.37	22.00	1.156	62.9	1.006	-0.04	0.350	0.407
	LTE Band 38	20M	QPSK	1	0	Back	10	38000	2595	22.41	23.00	1.146	62.9	1.006	0.09	0.640	0.738
	LTE Band 38	20M	QPSK	50	0	Back	10	38000	2595	21.37	22.00	1.156	62.9	1.006	0.15	0.437	0.508
	LTE Band 38	20M	QPSK	1	0	Left Side	10	38000	2595	22.41	23.00	1.146	62.9	1.006	-0.06	0.012	0.014
	LTE Band 38	20M	QPSK	50	0	Left Side	10	38000	2595	21.37	22.00	1.156	62.9	1.006	0.06	0.009	0.010
	LTE Band 38	20M	QPSK	1	0	Right Side	10	38000	2595	22.41	23.00	1.146	62.9	1.006	0.05	0.246	0.283
	LTE Band 38	20M	QPSK	50	0	Right Side	10	38000	2595	21.37	22.00	1.156	62.9	1.006	0.03	0.248	0.288
15	LTE Band 38	20M	QPSK	1	0	Bottom Side	10	38000	2595	22.41	23.00	1.146	62.9	1.006	0.17	0.799	0.921
	LTE Band 38	20M	QPSK	50	0	Bottom Side	10	38000	2595	21.37	22.00	1.156	62.9	1.006	-0.08	0.651	0.757
	LTE Band 38	20M	QPSK	100	0	Bottom Side	10	38000	2595	21.31	22.00	1.172	62.9	1.006	-0.08	0.665	0.784

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Peak SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Front	10	6	2437	16.19	16.50	1.074	100	1.000		0.127		
16	WLAN 2.4GHz	802.11b 1Mbps	Back	10	6	2437	16.19	16.50	1.074	100	1.000	0.02	0.177	0.120	0.129
	WLAN 2.4GHz	802.11b 1Mbps	Left Side	10	6	2437	16.19	16.50	1.074	100	1.000		0.130		
	WLAN 2.4GHz	802.11b 1Mbps	Top Side	10	6	2437	16.19	16.50	1.074	100	1.000		0.081		

15.3 Body Worn Accessory SAR
<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS 4 Tx slots	Front	10	251	848.8	29.27	30.00	1.183	0.04	0.597	0.706
17	GSM850	GPRS 4 Tx slots	Back	10	251	848.8	29.27	30.00	1.183	0.01	0.802	0.949
	GSM850	GPRS 4 Tx slots	Back	10	128	824.2	29.23	30.00	1.194	0.04	0.721	0.861
	GSM850	GPRS 4 Tx slots	Back	10	189	836.4	29.26	30.00	1.186	0.09	0.779	0.924
	GSM1900	GPRS 2 Tx slots	Front	10	810	1909.8	29.27	30.00	1.183	-0.18	0.491	0.581
18	GSM1900	GPRS 2 Tx slots	Back	10	810	1909.8	29.27	30.00	1.183	0.12	0.531	0.628

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	4233	846.6	23.01	24.00	1.256	0.05	0.316	0.397
19	WCDMA Band V	RMC 12.2Kbps	Back	10	4233	846.6	23.01	24.00	1.256	-0.02	0.383	0.481
	WCDMA Band II	RMC 12.2Kbps	Front	10	9262	1852.4	22.98	24.00	1.265	-0.12	0.433	0.548
20	WCDMA Band II	RMC 12.2Kbps	Back	10	9262	1852.4	22.98	24.00	1.265	0.03	0.470	0.594

<FDD LTE SAR>

Plot No.	Band	BW (MHz)	Mode	RB Size	RB Offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 5	10M	QPSK	1	0	Front	10	20525	836.5	22.70	24.00	1.349	0.03	0.322	0.434
	LTE Band 5	10M	QPSK	25	0	Front	10	20525	836.5	21.74	23.00	1.337	0.08	0.262	0.350
21	LTE Band 5	10M	QPSK	1	0	Back	10	20525	836.5	22.70	24.00	1.349	-0.05	0.456	0.615
	LTE Band 5	10M	QPSK	25	0	Back	10	20525	836.5	21.74	23.00	1.337	0.13	0.357	0.477
	LTE Band 7	20M	QPSK	1	0	Front	10	21100	2535	22.53	23.00	1.114	-0.15	0.685	0.763
	LTE Band 7	20M	QPSK	50	0	Front	10	21100	2535	21.51	22.00	1.119	-0.07	0.538	0.602
22	LTE Band 7	20M	QPSK	1	0	Back	10	21100	2535	22.53	23.00	1.114	0.15	1.070	1.192
	LTE Band 7	20M	QPSK	1	0	Back	10	20850	2510	22.47	23.00	1.130	0.15	0.889	1.004
	LTE Band 7	20M	QPSK	1	0	Back	10	21350	2560	22.27	23.00	1.183	0.15	0.876	1.036
	LTE Band 7	20M	QPSK	50	0	Back	10	21100	2535	21.51	22.00	1.119	0.15	0.896	1.003
	LTE Band 7	20M	QPSK	50	0	Back	10	20850	2510	21.45	22.00	1.135	0.15	0.881	1.000
	LTE Band 7	20M	QPSK	50	0	Back	10	21350	2560	21.23	22.00	1.194	0.15	0.855	1.021
	LTE Band 7	20M	QPSK	100	0	Back	10	21100	2535	21.45	22.00	1.135	0.15	0.787	0.893

<TDD LTE SAR>

Plot No.	Band	BW (MHz)	Mode	RB Size	RB Offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	LTE Band 38	20M	QPSK	1	0	Front	10	38000	2595	22.41	23.00	1.146	62.9	1.006	-0.11	0.435	0.501
	LTE Band 38	20M	QPSK	50	0	Front	10	38000	2595	21.37	22.00	1.156	62.9	1.006	-0.04	0.350	0.407
23	LTE Band 38	20M	QPSK	1	0	Back	10	38000	2595	22.41	23.00	1.146	62.9	1.006	0.09	0.640	0.738
	LTE Band 38	20M	QPSK	50	0	Back	10	38000	2595	21.37	22.00	1.156	62.9	1.006	0.15	0.437	0.508

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Peak SAR	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Front	10	6	2437	16.19	16.50	1.074	100	1.000		0.127		
24	WLAN 2.4GHz	802.11b 1Mbps	Back	10	6	2437	16.19	16.50	1.074	100	1.000	0.02	0.177	0.120	0.129

15.4 Repeated SAR Measurement

No.	Band	BW (MHz)	Mode	RB Size	RB Offset	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM850	-	GPRS 4 Tx slots	-	-	Back	10	251	848.8	29.27	30.00	1.183	0.01	0.802	1	0.949
2nd	GSM850	-	GPRS 4 Tx slots	-	-	Back	10	251	848.8	29.27	30.00	1.183	0.03	0.801	1.001	0.948
1st	LTE Band 7	20M	QPSK	1	0	Back	10	21100	2535	22.53	23.00	1.114	0.15	1.070	1	1.192
2nd	LTE Band 7	20M	QPSK	1	0	Back	10	21100	2535	22.53	23.00	1.114	0.05	1.040	1.029	1.159

General Note:

1. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is $\geq 0.8\text{W/kg}$.
2. Per KDB 865664 D01v01r04, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR $< 1.45\text{W/kg}$, only one repeated measurement is required.
3. The ratio is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

16. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Portable Handset			Note
		Head	Body-worn	Hotspot	
1.	GSM Voice + WLAN2.4GHz	Yes	Yes		
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	Hotspot
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Hotspot
4.	LTE + WLAN2.4GHz	Yes	Yes	Yes	Hotspot
5.	GSM Voice + Bluetooth		Yes		
6.	GPRS/EDGE + Bluetooth		Yes		WWAN VoIP
7.	WCDMA + Bluetooth		Yes		WWAN VoIP
8.	LTE + Bluetooth		Yes		WWAN VoIP

General Note:

- This device supports VoIP in GPRS, EGPRS, WCDMA and LTE (e.g. for 3rd-party VoIP), LTE supports VoLTE operation.
- EUT will choose each GSM, WCDMA and LTE according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- WLAN 2.4GHz and Bluetooth share the same antenna so can't transmit simultaneously.
- Chose the worst zoom scan SAR of WLAN2.4GHz SAR correspondingly for co-located with WWAN analysis.
- The reported SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation < 1.6W/kg.
 - $SPLSR = (SAR1 + SAR2)^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - If $SPLSR \leq 0.04$, simultaneously transmission SAR measurement is not necessary.
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth Max Power	Exposure Position	Body Worn
	Test Separation	10 mm
7.5 dBm	Estimated SAR (W/kg)	0.126 W/kg

16.1 Head Exposure Conditions

WWAN Band		Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	
			1g SAR (W/kg)	1g SAR (W/kg)	
GSM	GSM850	Right Cheek	0.498	0.462	0.96
		Right Tilted	0.412	0.462	0.87
		Left Cheek	0.567	0.462	1.03
		Left Tilted	0.308	0.462	0.77
	GSM1900	Right Cheek	0.698	0.462	1.16
		Right Tilted	0.252	0.462	0.71
		Left Cheek	0.323	0.462	0.79
		Left Tilted	0.232	0.462	0.69
	Band V	Right Cheek	0.322	0.462	0.78
		Right Tilted	0.232	0.462	0.69
		Left Cheek	0.345	0.462	0.81
		Left Tilted	0.210	0.462	0.67
	Band II	Right Cheek	0.409	0.462	0.87
		Right Tilted	0.180	0.462	0.64
		Left Cheek	0.192	0.462	0.65
		Left Tilted	0.139	0.462	0.60
LTE	Band 5	Right Cheek	0.221	0.462	0.68
		Right Tilted	0.174	0.462	0.64
		Left Cheek	0.279	0.462	0.74
		Left Tilted	0.152	0.462	0.61
	Band 7	Right Cheek	0.533	0.462	1.00
		Right Tilted	0.160	0.462	0.62
		Left Cheek	0.237	0.462	0.70
		Left Tilted	0.237	0.462	0.70
	Band 38	Right Cheek	0.272	0.462	0.73
		Right Tilted	0.082	0.462	0.54
		Left Cheek	0.120	0.462	0.58
		Left Tilted	0.112	0.462	0.57

16.2 Hotspot Exposure Conditions

WWAN Band		Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	
			1g SAR (W/kg)	1g SAR (W/kg)	
GSM	GSM850	Front	0.706	0.129	0.84
		Back	0.949	0.129	1.08
		Left side	0.661	0.129	0.79
		Right side	0.550		0.55
		Top side		0.129	0.13
		Bottom side	0.123		0.12
	GSM1900	Front	0.581	0.129	0.71
		Back	0.628	0.129	0.76
		Left side	0.211	0.129	0.34
		Right side	0.351		0.35
		Top side		0.129	0.13
		Bottom side	0.353		0.35
WCDMA	Band V	Front	0.397	0.129	0.53
		Back	0.481	0.129	0.61
		Left side	0.369	0.129	0.50
		Right side	0.330		0.33
		Top side		0.129	0.13
		Bottom side	0.078		0.08
	Band II	Front	0.548	0.129	0.68
		Back	0.594	0.129	0.72
		Left side	0.168	0.129	0.30
		Right side	0.358		0.36
		Top side		0.129	0.13
		Bottom side	0.269		0.27

WWAN Band		Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	
			1g SAR (W/kg)	1g SAR (W/kg)	
LTE	Band 5	Front	0.434	0.129	0.56
		Back	0.615	0.129	0.74
		Left side	0.479	0.129	0.61
		Right side	0.424		0.42
		Top side		0.129	0.13
		Bottom side	0.060		0.06
	Band 7	Front	0.666	0.129	0.80
		Back	0.975	0.129	1.10
		Left side	0.004	0.129	0.13
		Right side	0.105		0.11
		Top side		0.129	0.13
		Bottom side	1.082		1.08
	Band 38	Front	0.501	0.129	0.63
		Back	0.738	0.129	0.87
		Left side	0.014	0.129	0.14
		Right side	0.288		0.29
		Top side		0.129	0.13
		Bottom side	0.921		0.92

16.3 Body-Worn Accessory Exposure Conditions

WWAN Band		Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
			WWAN	2.4GHz WLAN	Bluetooth		
			1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)		
GSM	GSM850	Front	0.706	0.129	0.126	0.84	0.83
		Back	0.949	0.129	0.126	1.08	1.08
	GSM1900	Front	0.581	0.129	0.126	0.71	0.71
		Back	0.628	0.129	0.126	0.76	0.75
WCDMA	Band V	Front	0.397	0.129	0.126	0.53	0.52
		Back	0.481	0.129	0.126	0.61	0.61
	Band II	Front	0.548	0.129	0.126	0.68	0.67
		Back	0.594	0.129	0.126	0.72	0.72
LTE	Band 5	Front	0.434	0.129	0.126	0.56	0.56
		Back	0.615	0.129	0.126	0.74	0.74
	Band 7	Front	0.763	0.129	0.126	0.89	0.89
		Back	1.192	0.129	0.126	1.32	1.32
	Band 38	Front	0.501	0.129	0.126	0.63	0.63
		Back	0.738	0.129	0.126	0.87	0.86

Test Engineer : Nick Hu

17. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/ κ ^(b)	1/ $\sqrt{3}$	1/ $\sqrt{6}$	1/ $\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 17.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc. - Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc. - Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Combined Std. Uncertainty						11.4%	11.4%
Coverage Factor for 95 %						K=2	K=2
Expanded STD Uncertainty						22.9%	22.7%

Table 17.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

18. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [6] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.
- [7] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [8] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [9] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [10] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [11] FCC KDB 941225 D05 v02r05, "SAR Evaluation Considerations for LTE Devices", Dec 2015
- [12] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.