

SUBMITTED MEASURED DATA INDEX

6A	RF Power Output, Analog, 800 MHz and 1900 MHz Digital Modes - Measured Data
6B	Audio Response - Graph
6C	Post Limiter Low Pass Filter Response - Graph
6D	Signaling Channel Audio Roll-Off Filter Response - Graph
6E1	Modulation Limiting (Compandor In) - Graph
6E2	Modulation Limiting (Compandor Out) - Graph
6F1	Occupied Bandwidth, Audio - Photograph
6F2	Occupied Bandwidth, Audio and SAT - Graph
6F3	Occupied Bandwidth, Wideband Data - Graph
6F4	Occupied Bandwidth, signaling Tone and SAT - Graph
6F5	Occupied Bandwidth, 800 MHz Digital Mode - Graph
6F6	Occupied Bandwidth, 1900 MHz Digital Mode - Graph
6G1	800MHz Conducted Spurious and Harmonic Emissions, -Graph
6G2	1900MHz Conducted Spurious and Harmonic Emissions, -Graph
6H1	800MHzRadiated Spurious and Harmonic Emissions, -Graph
6H2	1900MHzRadiated Spurious and Harmonic Emissions, -Graph
6J1	Frequency Change vs. Temperature, Analog Mode - Graph
6J2	Frequency Change vs. Temperature, 800 MHz Digital Mode - Graph
6J3	Frequency Change vs. Temperature, 1900 MHz Digital Mode - Graph
6K1	Frequency Change vs. Supply Voltage, Analog Mode - Graph
6K2	Frequency Change vs. Supply Voltage, 800 MHz Digital Mode – Graph
6K3	Frequency Change vs. Supply Voltage, 1900 MHz Digital Mode – Graph
6L	Measurement techniques

RF POWER OUTPUT DATA

The input supply to the transmitter was set at 3.6 Volts. The voltage at the final amplifying device voltage was 3.6V. The RF power output was measured with the indicated voltage and current applied into the final RF amplifying device(s).

ANALOG MODE:

Measured RF Output:	0.320 Watts
Measured DC Voltage:	3.6 Volts
Measured DC Current:	488 mA
Measured RF Input:	0.9 mW

800MHz DIGITAL MODE:

In Digital Mode the values measured for RF Output, DC Current and RF Input Power are all average values which reflect the 1/3 duty cycle of TDMA operation.

Measured RF Output:	0.501 Watts
Measured DC Voltage:	3.6 Volts
Measured DC Current:	272 mA
Measured RF Input:	1 mW

1900MHz DIGITAL MODE:


In Digital Mode the values measured for RF Output, DC Current and RF Input Power are all average values which reflect the 1/3 duty cycle of TDMA operation.

Measured RF Output:	0.501 Watts
Measured DC Voltage:	3.6 Volts
Measured DC Current:	313 mA
Measured RF Input:	1.6 mW


ERP:

The input supply to the transmitter was set at 3.6 Volts. Measurements were made relative to a dipole with a known gain of 2.14dB relative to an isotropic source.


ANALOG MODE:	Measured ERP (Relative to Half-Wavelength Dipole):	0.165 Watts
800MHz DIGITAL MODE:	Measured ERP (Relative to a Half-Wavelength Dipole):	0.206 Watts
1900MHz DIGITAL MODE:	Measured EIRP (Relative to an Isotropic Source):	0.488 Watts

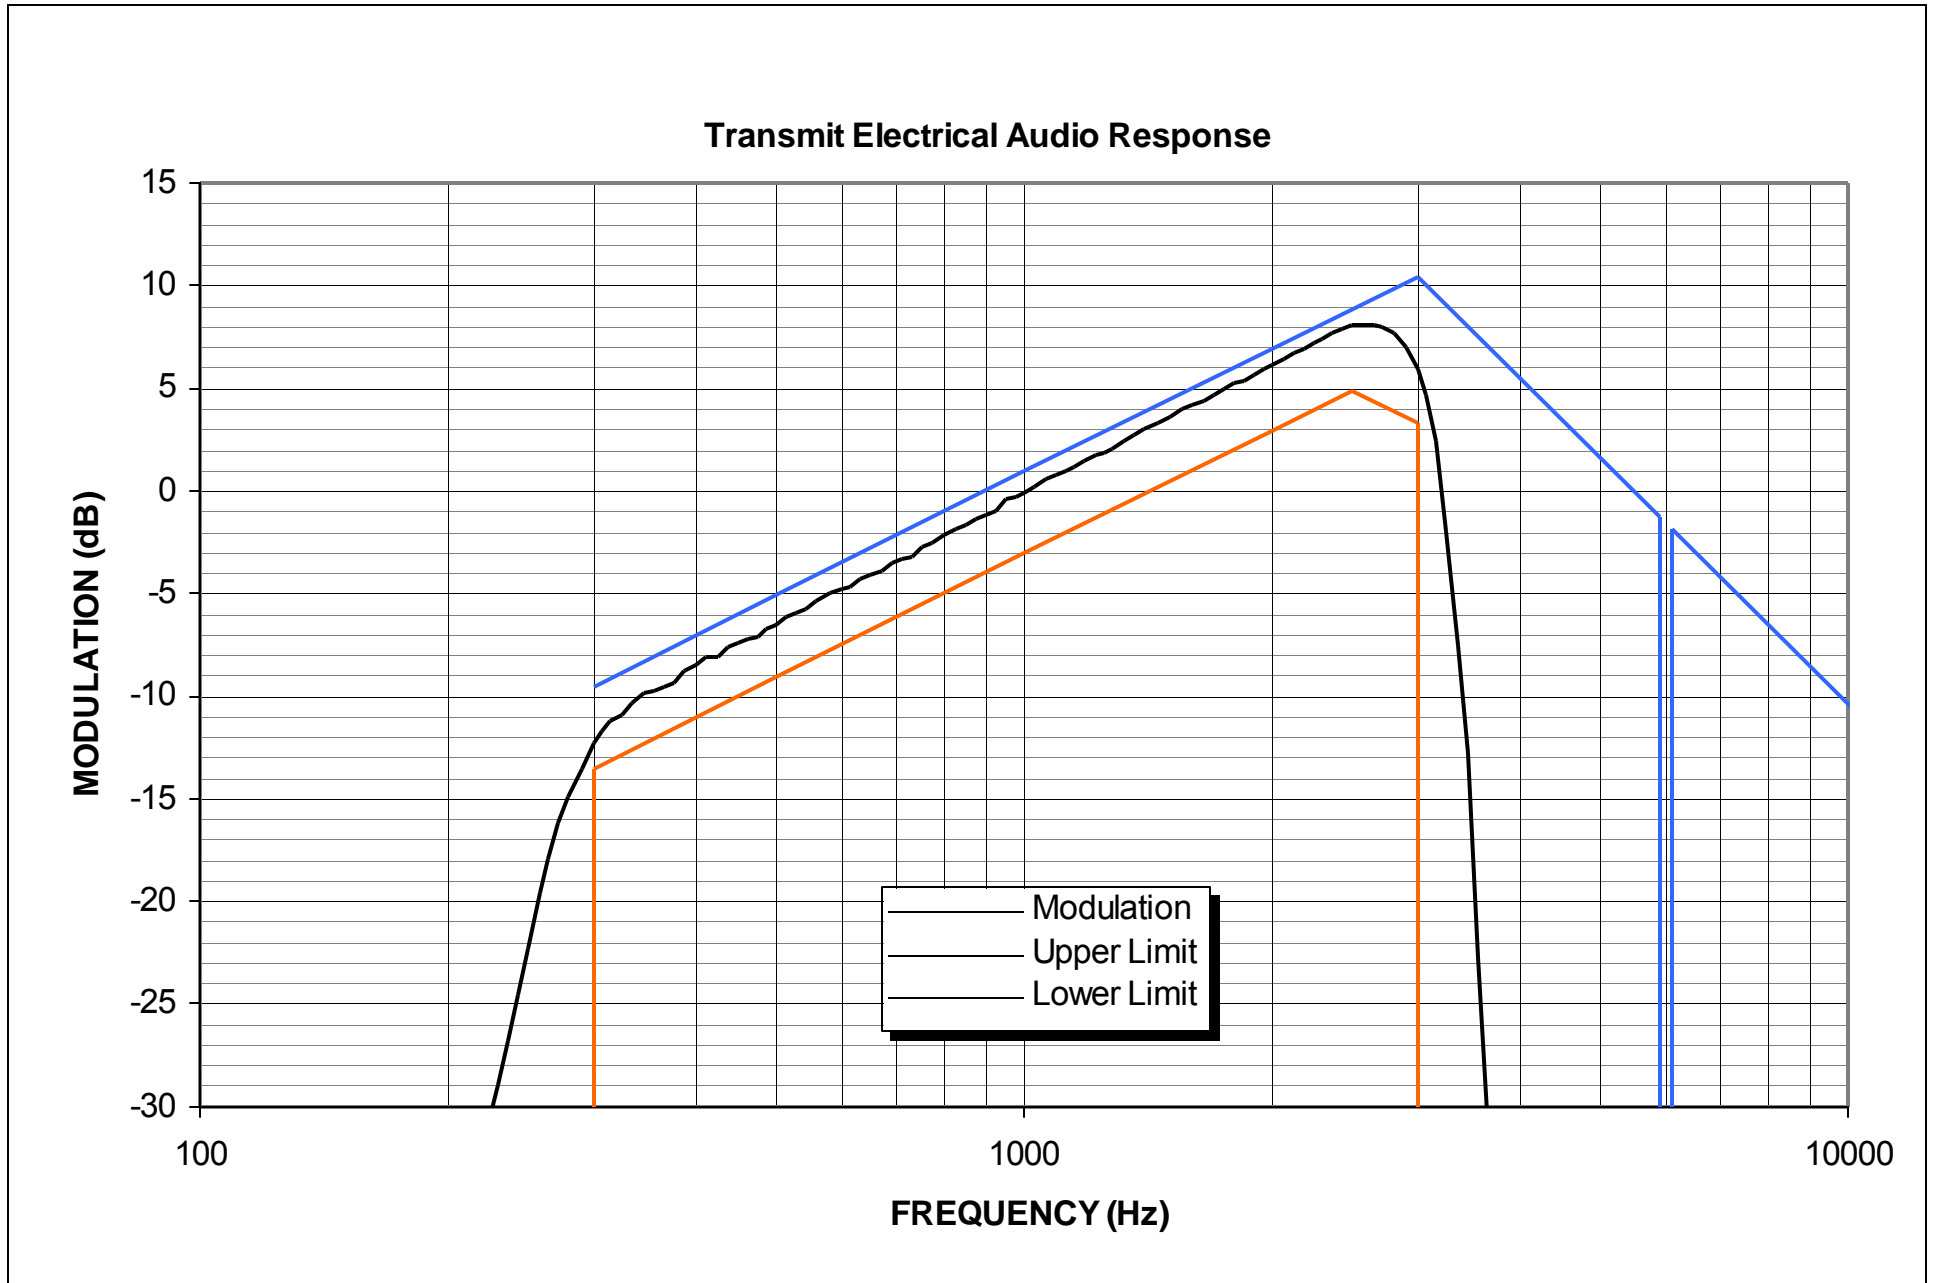


Tx Post-Limiter Lowpass Filter Response

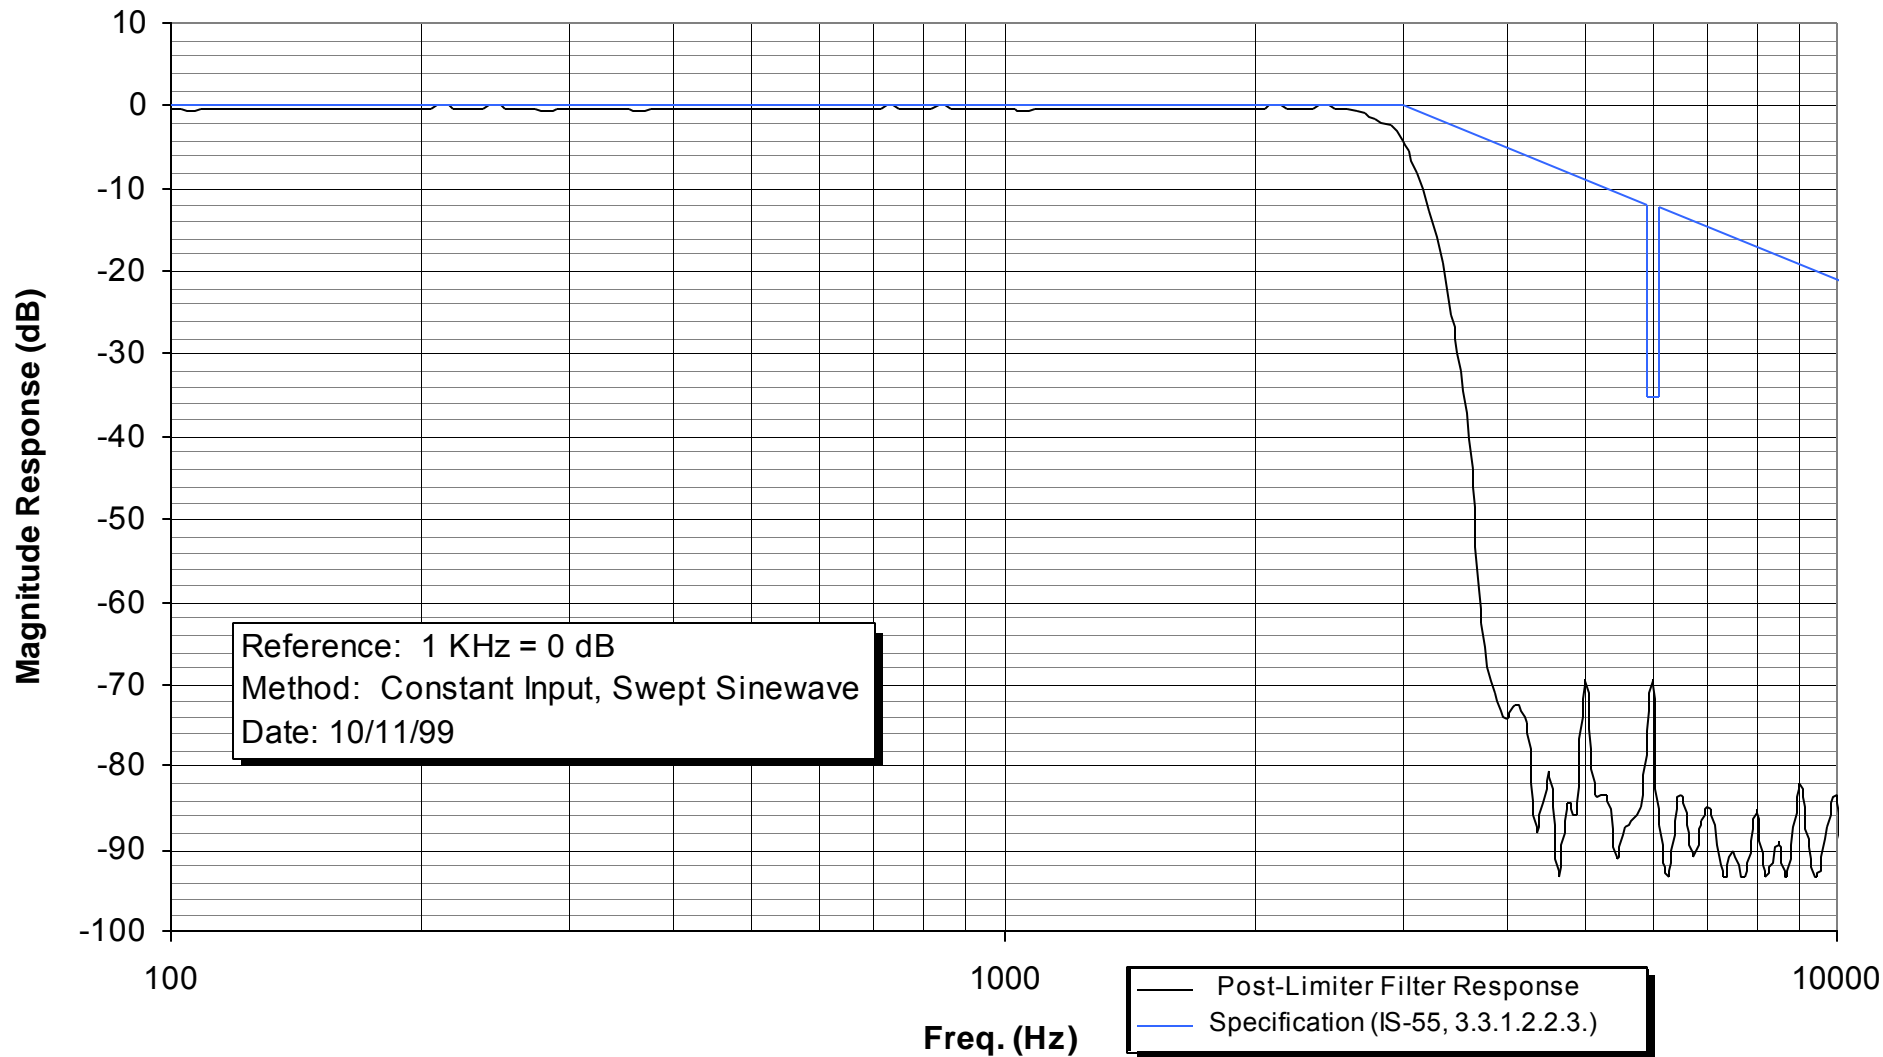


Tx Signaling Channel Audio Roll-Off Filter Response

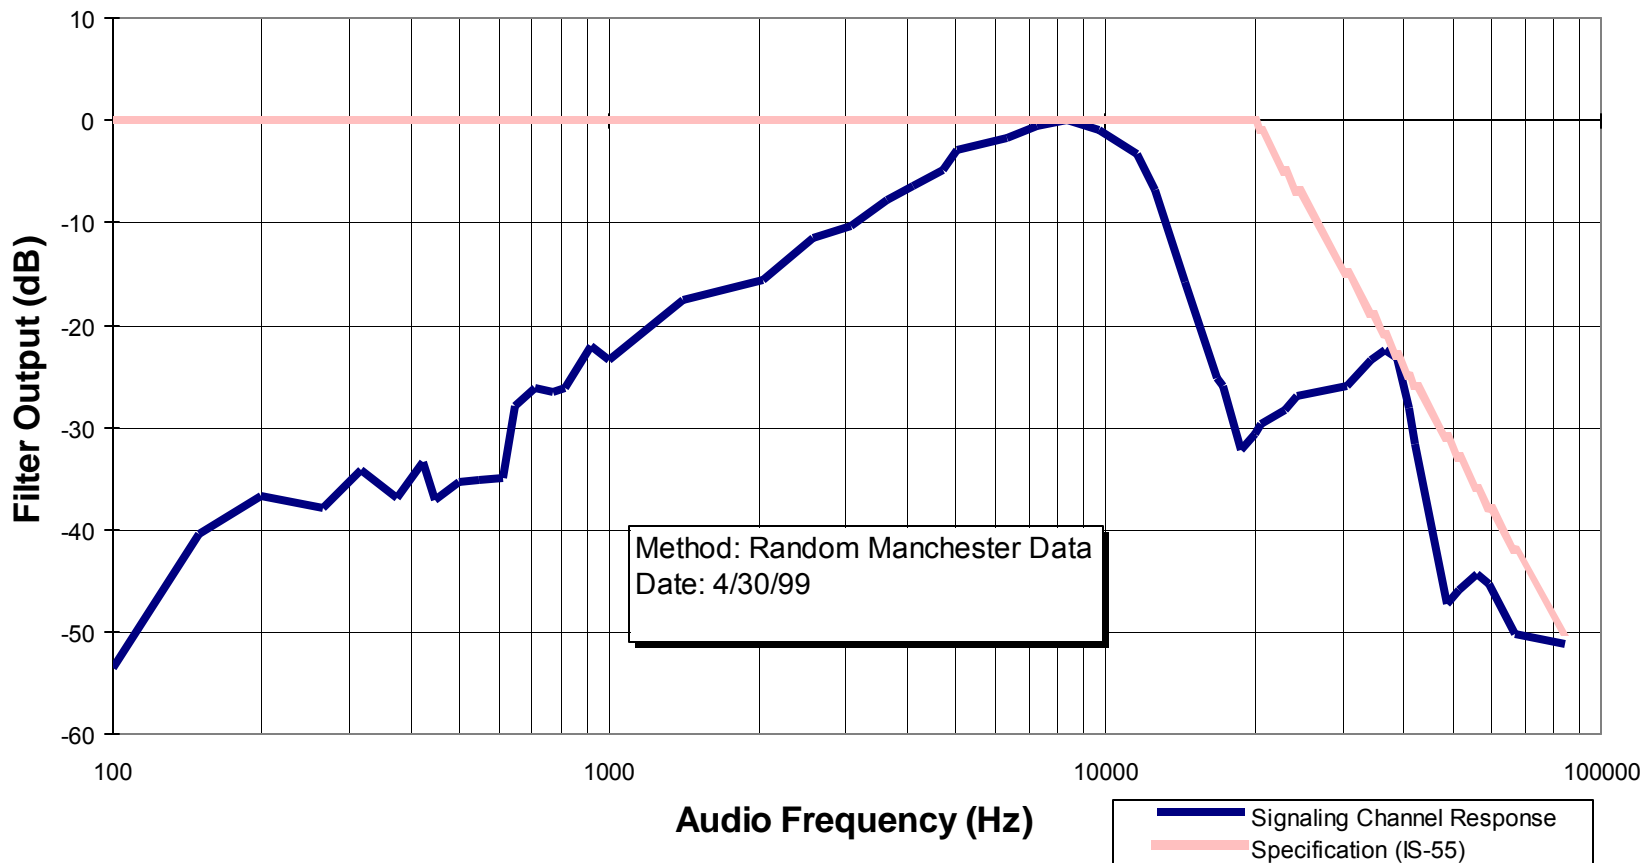

**MODULATION LIMITING
COMPANDOR ON**

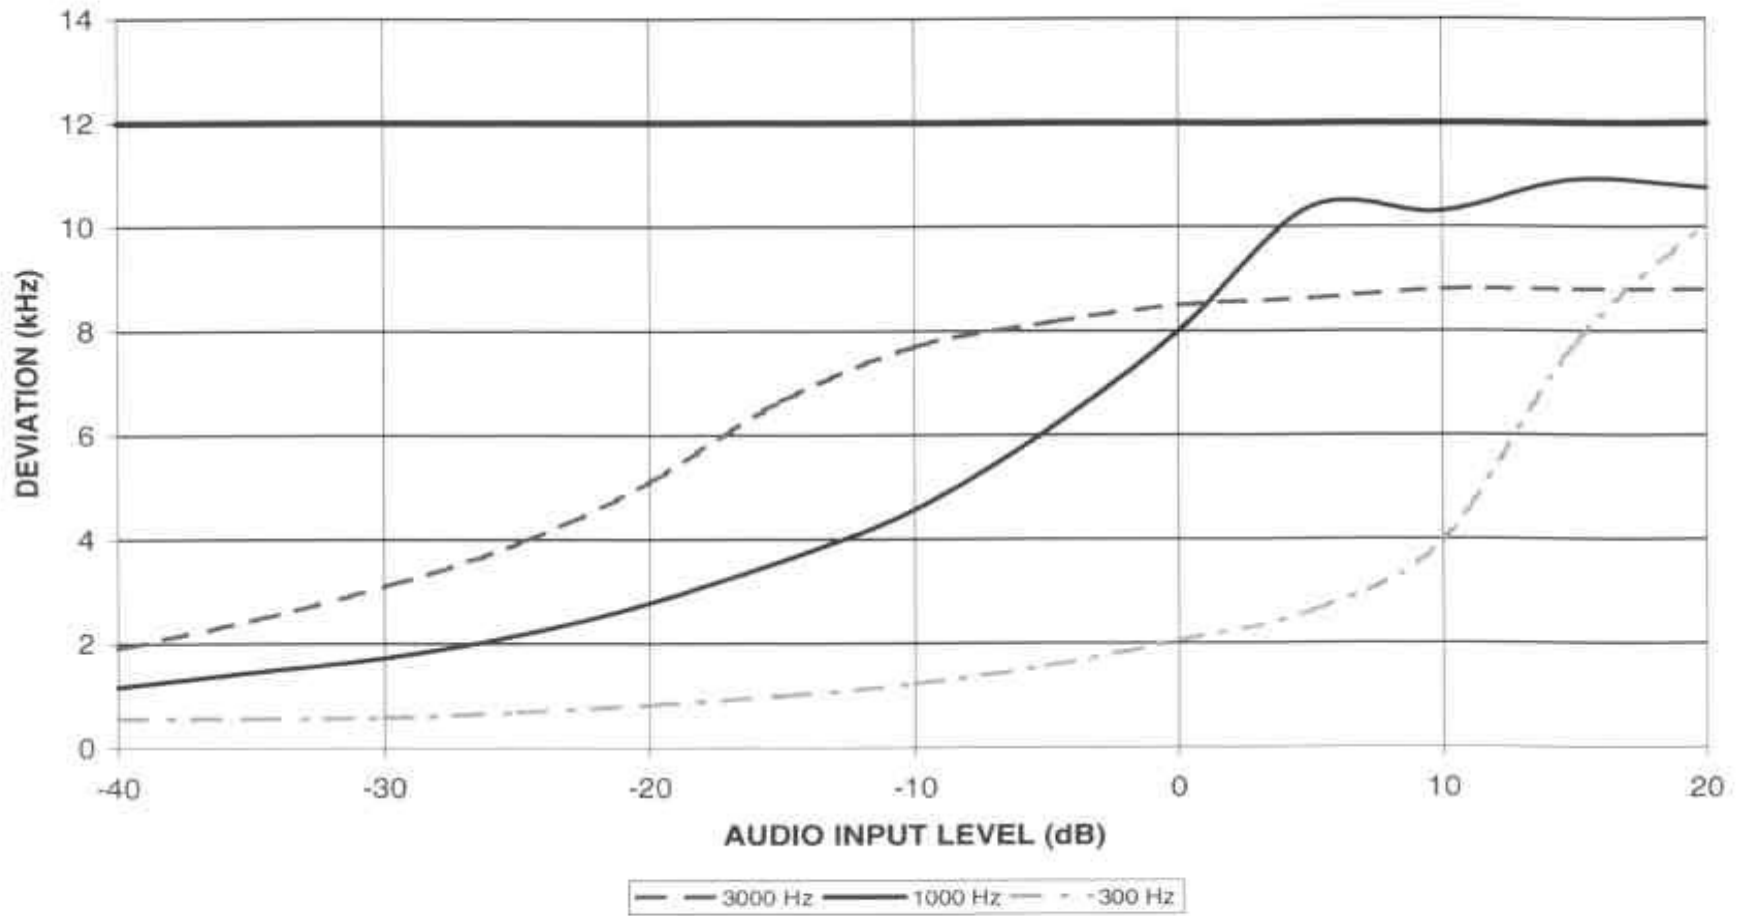

MODULATION LIMITING
COMPANDOR OFF

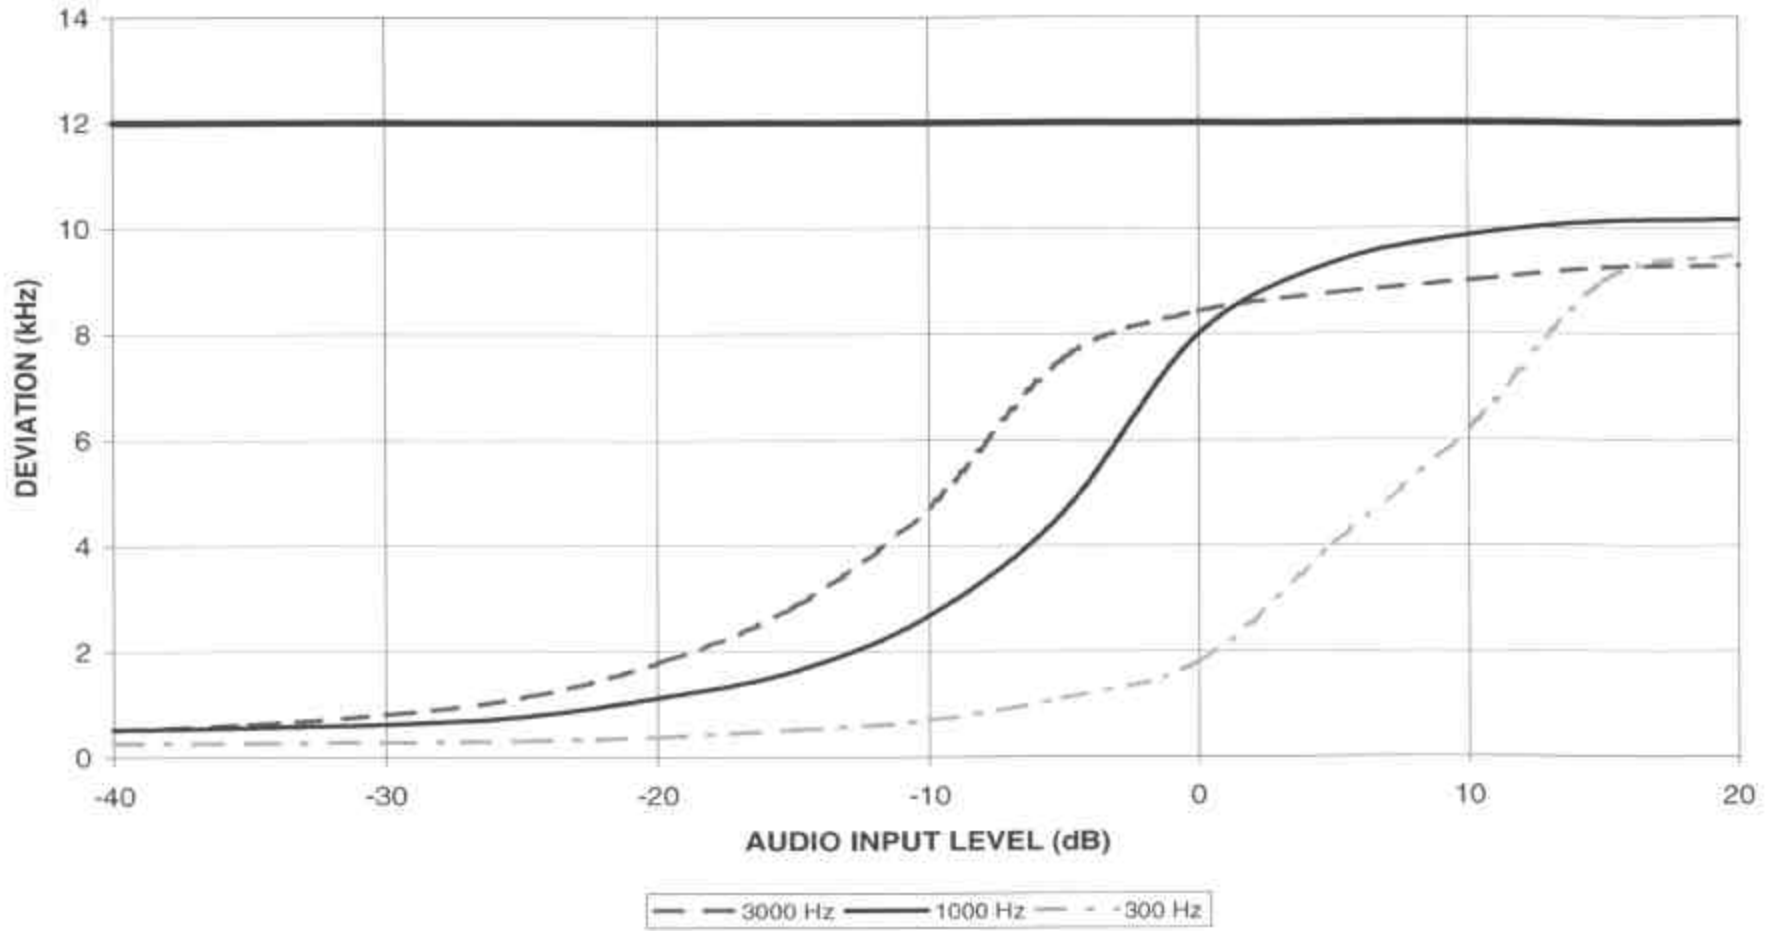


BANDWIDTH MEASUREMENT DATA
FOR TRANSMITTER TYPES F8W

DEVIATION OF THE CARRIER WITH 2500 Hz AUDIO
MODULATION

HORIZONTAL SCALE = 20 kHz/ DIVISION
VERTICAL SCALE = 10 dB/ DIVISION (ATTENUATION)
RESOLUTION BANDWIDTH = 300 Hz
AUDIO LEVEL = 16 dB GREATER THAN LEVEL REQUIRED TO
PRODUCE +/- 6 kHz
POWER LEVEL = 0.6 W

MEASURED DATA:

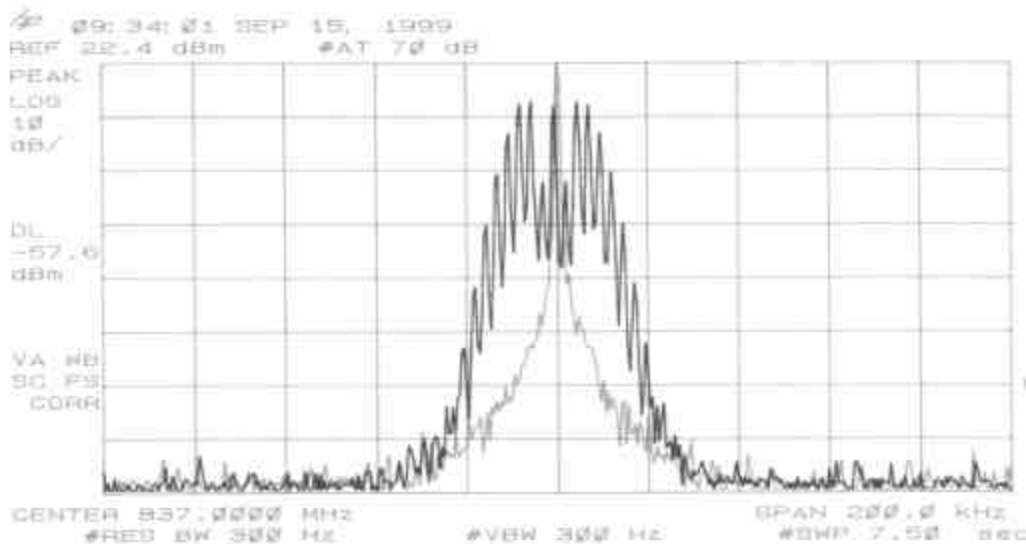

1. Instantaneous Deviation Control set for a maximum of +/- 12 kHz.
2. Tune and adjust to obtain unmodulated carrier on the analyzer scope. Save trace of unmodulated carrier.
3. Modulate the Transmitter with the 2.5 kHz tone, 16 dB greater than that required to produce +/- 6 kHz modulation. Photograph the sideband display while it is superimposed upon the unmodulated carrier.

SPEC LIMITS:

- a. On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45 kHz, the sideband is at least 26 dB below the carrier.


b. On a any frequency removed from the assigned carrier frequency by more than 45 kHz, up to the first multiple of the carrier frequency, the sideband is at least 60 dB below the carrier or $43 + \log_{10}(\text{mean power output in Watts})$ dB, whichever is smaller attenuation.

BANDWIDTH MEASUREMENT DATA
FOR TRANSMITTER TYPES F8W

DEVIATION OF THE CARRIER WITH 2500 Hz AUDIO
MODULATION AND SUPERVISORY AUDIO TONE

HORIZONTAL SCALE = 20 kHz/ DIVISION
VERTICAL SCALE = 10 dB/ DIVISION (ATTENUATION)
RESOLUTION BANDWIDTH = 300 Hz
AUDIO LEVEL = 16 dB GREATER THAN LEVEL REQUIRED TO
PRODUCE +/- 6 kHz
POWER LEVEL = 0.6 W

MEASURED DATA:

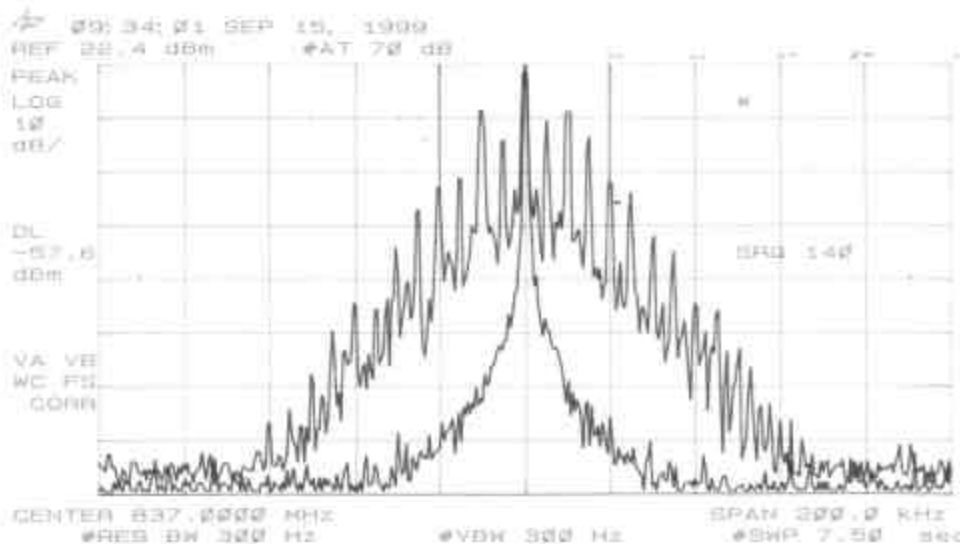

1. Instantaneous Deviation Control set for a maximum of +/- 12 kHz.
2. Tune and adjust to obtain unmodulated carrier on the analyzer scope. Save trace of unmodulated carrier.
3. Modulate the Transmitter with the 2.5 kHz tone, 16 dB greater than that required to produce +/- 6 kHz modulation and add SAT with +/- 2 kHz deviation. Photograph the sideband display while it is superimposed upon the unmodulated carrier.

SPEC LIMITS:

- a. On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45 kHz, the sideband is at least 26 dB below the carrier.
- b. On a any frequency removed from the assigned carrier frequency by more than 45 kHz, up to the first multiple of the carrier frequency, the sideband is at least 60


dB below the carrier or $43 + \log_{10}(\text{mean power output in Watts})$ dB, whichever is smaller attenuation.

BANDWIDTH MEASUREMENT DATA
FOR TRANSMITTER TYPES F1D

DEVIATION OF THE CARRIER WITH 10 KBIT/ SECOND
DATA

HORIZONTAL SCALE = 20 kHz/ DIVISION
VERTICAL SCALE = 10 dB/ DIVISION (ATTENUATION)
RESOLUTION BANDWIDTH = 300 Hz
POWER LEVEL = 0.6 W

MEASURED DATA

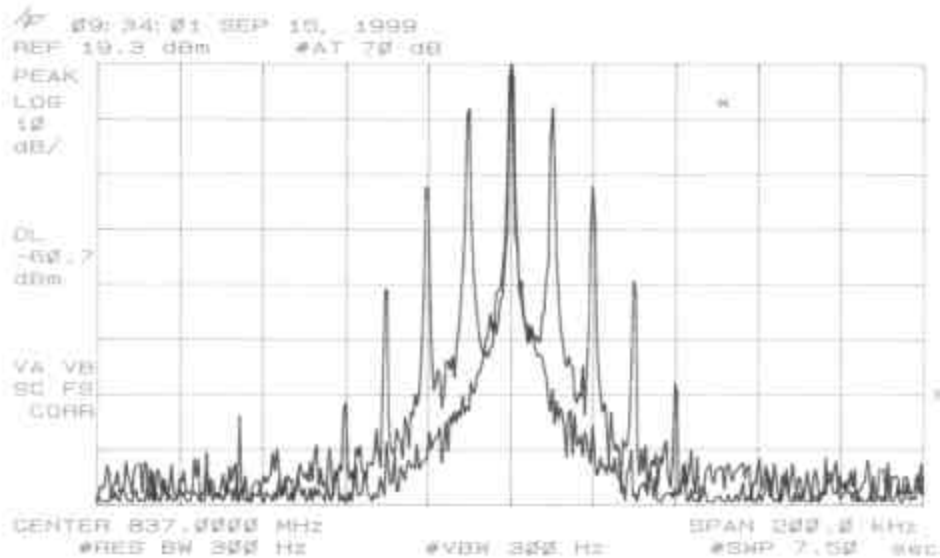

1. Instantaneous Deviation Control set for a maximum of +/- 12 kHz.
2. Tune and adjust to obtain unmodulated carrier on the analyzer scope. Save trace of unmodulated carrier.
3. Modulate the Transmitter with the wideband data with +/- 8 kHz deviation Photograph the sideband display while it is superimposed upon the unmodulated carrier.

SPEC LIMITS:

- a. On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45 kHz, the sideband is at least 26 dB below the carrier.
- b. On any frequency removed from the assigned carrier frequency by more than 45 kHz, up to and including 90 kHz, the sideband is at least 45 dB below the carrier.
- c. On any frequency removed from the assigned carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency, the sideband is at least 60 dB


below the carrier or $43 + \log_{10}(\text{mean power output in Watts})$ dB, whichever is smaller attenuation.

BANDWIDTH MEASUREMENT DATA
FOR TRANSMITTER TYPES F1D

DEVIATION OF THE CARRIER WITH 10 kHz SIGNALING
TONE AND SUPERVISORY AUDIO TONE

HORIZONTAL SCALE = 20 kHz/ DIVISION
VERTICAL SCALE = 10 dB/ DIVISION (ATTENUATION)
RESOLUTION BANDWIDTH = 300 Hz
POWER LEVEL = 0.6 W

MEASURED DATA:

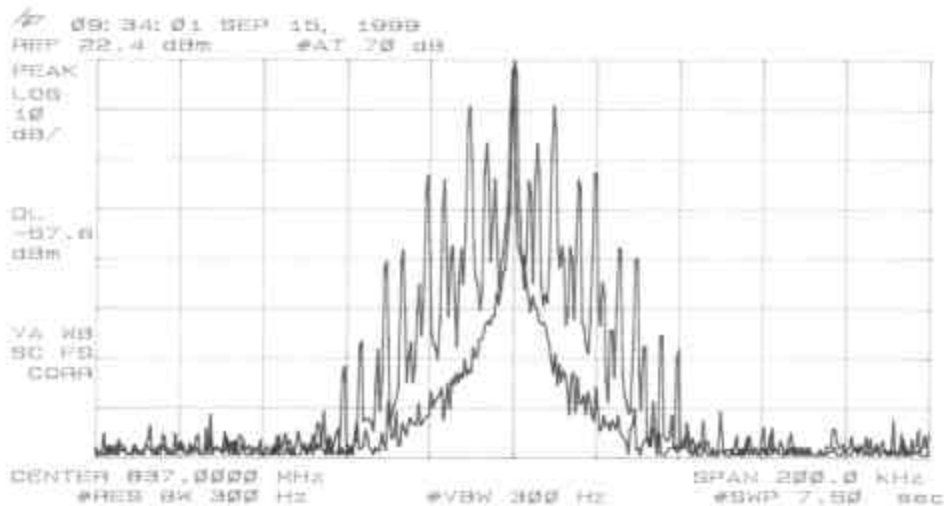

1. Instantaneous Deviation Control set for a maximum of +/- 12 kHz.
2. Tune and adjust to obtain unmodulated carrier on the analyzer scope. Save trace of unmodulated carrier.
3. Modulate the Transmitter with the wideband data with +/- 8 kHz deviation and add SAT with +/- 2 kHz. Photograph the sideband display while it is superimposed upon the unmodulated carrier.

SPEC LIMITS:


- a. On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45 kHz, the sideband is at least 26 dB below the carrier.
- b. On a any frequency removed from the assigned carrier frequency by more than 45 kHz, up to and including 90 kHz, the sideband is at least 45 dB below the carrier.
- c. On any frequency removed from the assigned carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency, the sideband is at least 60 dB below the carrier or $43 + \log_{10}(\text{mean power output in Watts})$ dB, whichever is smaller attenuation.

BANDWIDTH MEASUREMENT DATA
FOR TRANSMITTER TYPES DXW

DEVIATION OF THE CARRIER WITH $\pi/4$ DQPSK
MODULATION

HORIZONTAL SCALE = 20 kHz/ DIVISION
VERTICAL SCALE = 10 dB/ DIVISION (ATTENUATION)
RESOLUTION BANDWIDTH = 300 Hz
POWER LEVEL = 0.6 W

MEASURED DATA:

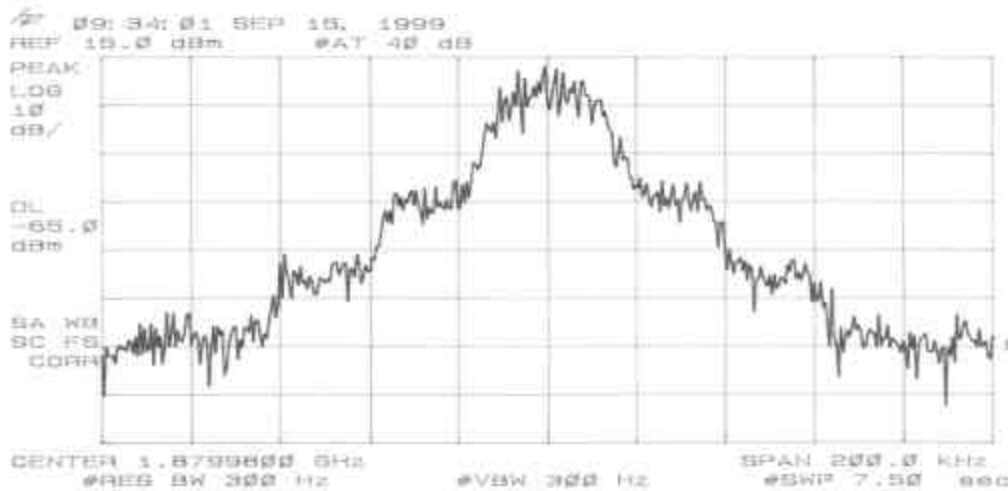

1. Modulate the transmitter with $\pi/4$ DQPSK modulation, using pseudo random data. Obtain image on spectrum analyzer.

SPEC LIMITS:


The emission power in either adjacent channel centered ± 30 kHz from the center frequency, shall not exceed a level of 26 dB below the mean power. The emission power in either alternate channel, centered ± 60 kHz from the center frequency, shall not exceed a level of 45 dB below the mean output power. The emission power in either channel centered ± 90 kHz from center frequency, shall not exceed a level of - 13 dBm.

BANDWIDTH MEASUREMENT DATA
FOR TRANSMITTER TYPES DXW

DEVIATION OF THE CARRIER WITH $\pi/4$ DQPSK
MODULATION

HORIZONTAL SCALE = 20 kHz/ DIVISION
VERTICAL SCALE = 10 dB/ DIVISION (ATTENUATION)
RESOLUTION BANDWIDTH = 300 Hz
POWER LEVEL = 0.6 W

MEASURED DATA:

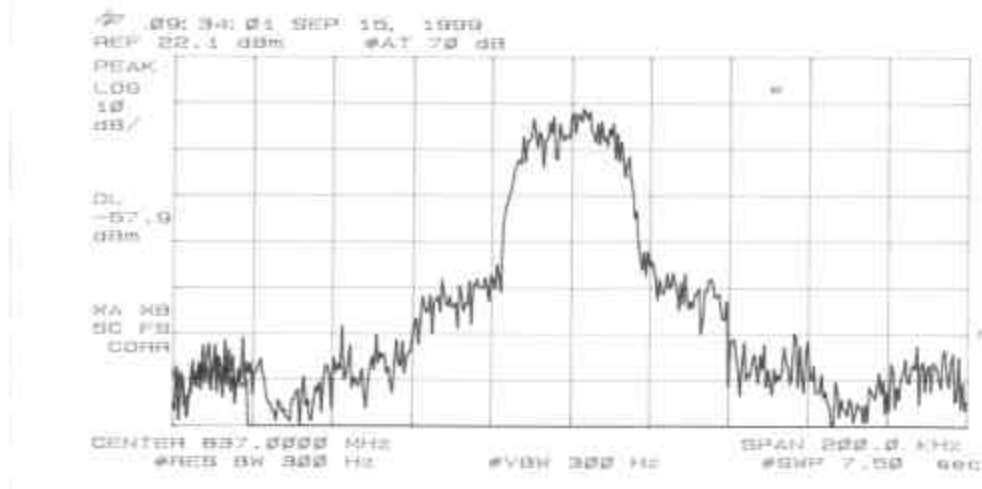

1. Modulate the transmitter with $\pi/4$ DQPSK modulation, using pseudo random data. Obtain image on spectrum analyzer.

SPEC LIMITS:

The emission power in either adjacent channel centered +/- 30 kHz from the center frequency, shall not exceed a level of 26 dB below the mean power. The emission power in either alternate channel, centered +/- 60 kHz from the center frequency, shall not exceed a level of 45 dB below the mean output power. The emission power in either channel centered +/- 90 kHz from center frequency, shall not exceed a level of - 13 dBm.