

SUBMITTED MEASURED DATA INDEX

RF Power Output Data	6A
Audio Frequency Response	6B
Post Limiter Low Pass Filter Response - Graph	6C
Signaling Channel Audio Roll-Off Filter Response - Graph	6D
Modulation Limiting (Compandor On) - Graph	6E1
Modulation Limiting (Compandor Off) - Graph	6E2
Occupied Bandwidth, Audio - Photograph	6F1
Occupied Bandwidth, Audio and SAT - Graph	6F2
Occupied Bandwidth, Wideband Data - Graph	6F3
Occupied Bandwidth, Signaling Tone and SAT - Graph	6F4
Occupied Bandwidth, Digital - Graph	6F5
Analog Conducted Spurious and Harmonic Emissions - Graph	6G1
Digital Conducted Spurious and Harmonic - Graph	6G2
Channel 777 CDMA Band Edge	6G3
Channel 1013 CDMA Band Edge	6G4
Analog Radiated Spurious and Harmonic Emissions - Graph	6H1
Digital Radiated Spurious and Harmonic Emissions - Graph	6H2
Analog Receiver Radiated Spurious- Graph	6J1
Digital Receiver Radiated Spurious - Graph	6J2
Analog Frequency Change vs. Temperature	6K1
Digital Frequency Change vs. Temperature,	6K2
Analog Frequency Change vs. Supply Voltage	6L1
Digital Frequency Change vs. Supply Voltage	6L2
Measurement Techniques	6M

RF POWER OUTPUT DATA

The input supply to the transmitter was set at 3.6 Volts. The RF power output was measured with the indicated voltage and current applied into the ANT port via 50ohm cable

ANALOG MODE

Measured RF output: 27.14 dBm

Measured DC voltage: 3.6V

Measured DC current: 700mA

800 MHz Digital CDMA

In Digital Mode the values measured for RF Output, DC Current and RF Input Power are all average values which reflect a 100% transmit duty cycle in CDMA operation.

Measured RF output: 24.97 dBm

Measured DC voltage: 3.6V


Measured DC current: 600mA

EFFECTIVE RADIATED POWER


Maximum Effective Radiated Power: Analog Mode 29.8 dBm (0.39 W)

Maximum Effective Radiated Power: Digital CDMA Mode 23.8 dBm (0.24 W)


Audio Frequency Response

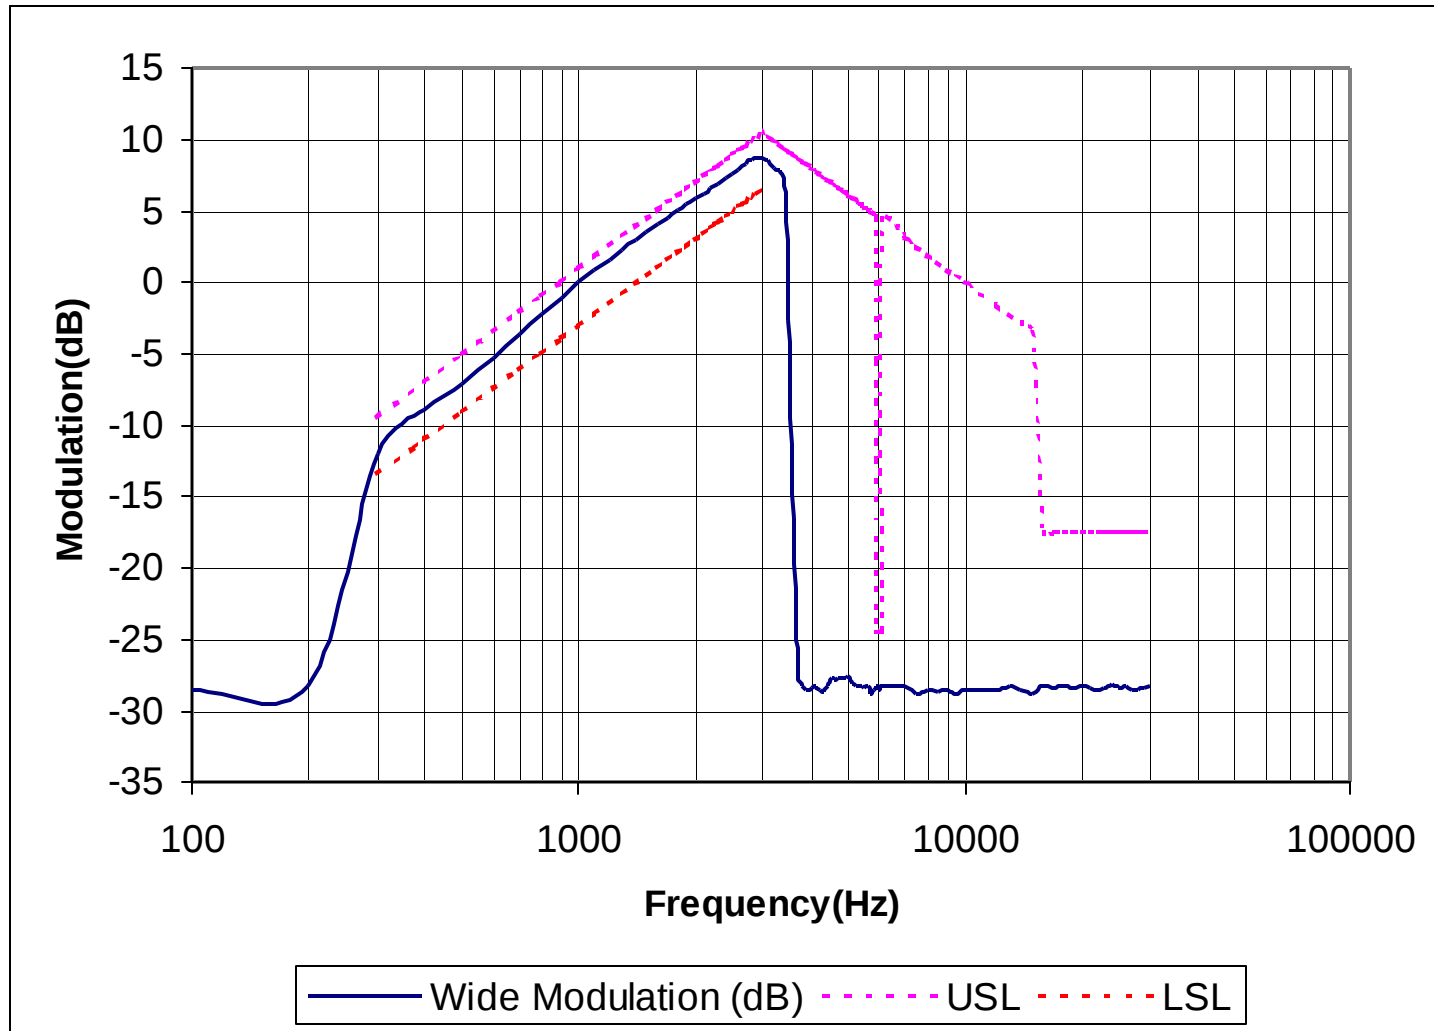

Post Limiter Low Pass Filter Response Graph

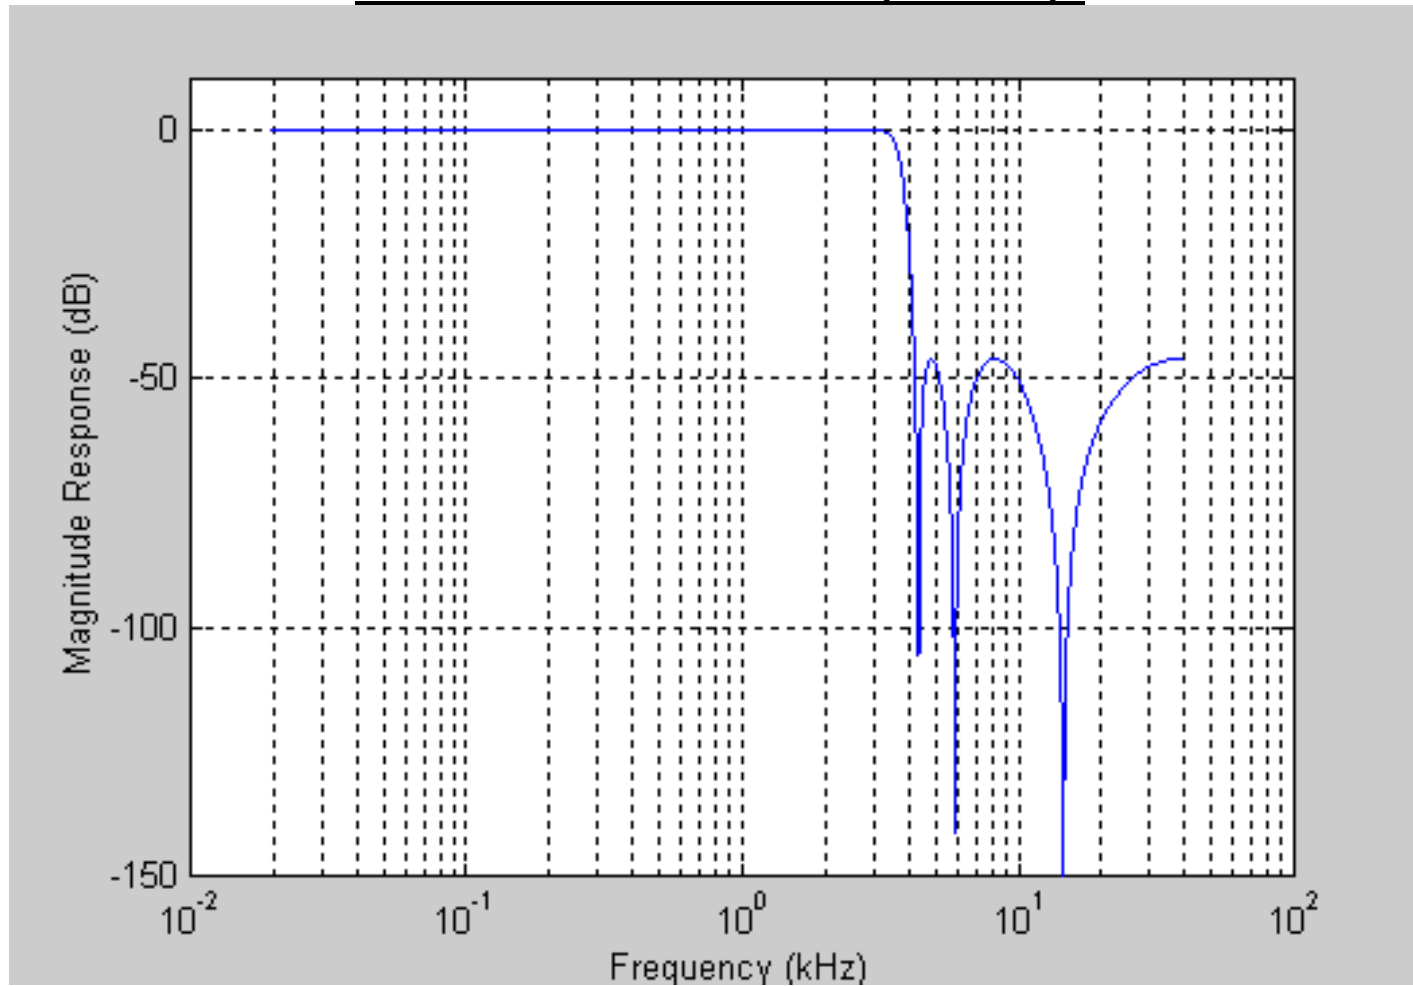

Signaling Channel Audio Roll-Off Filter Response Graph

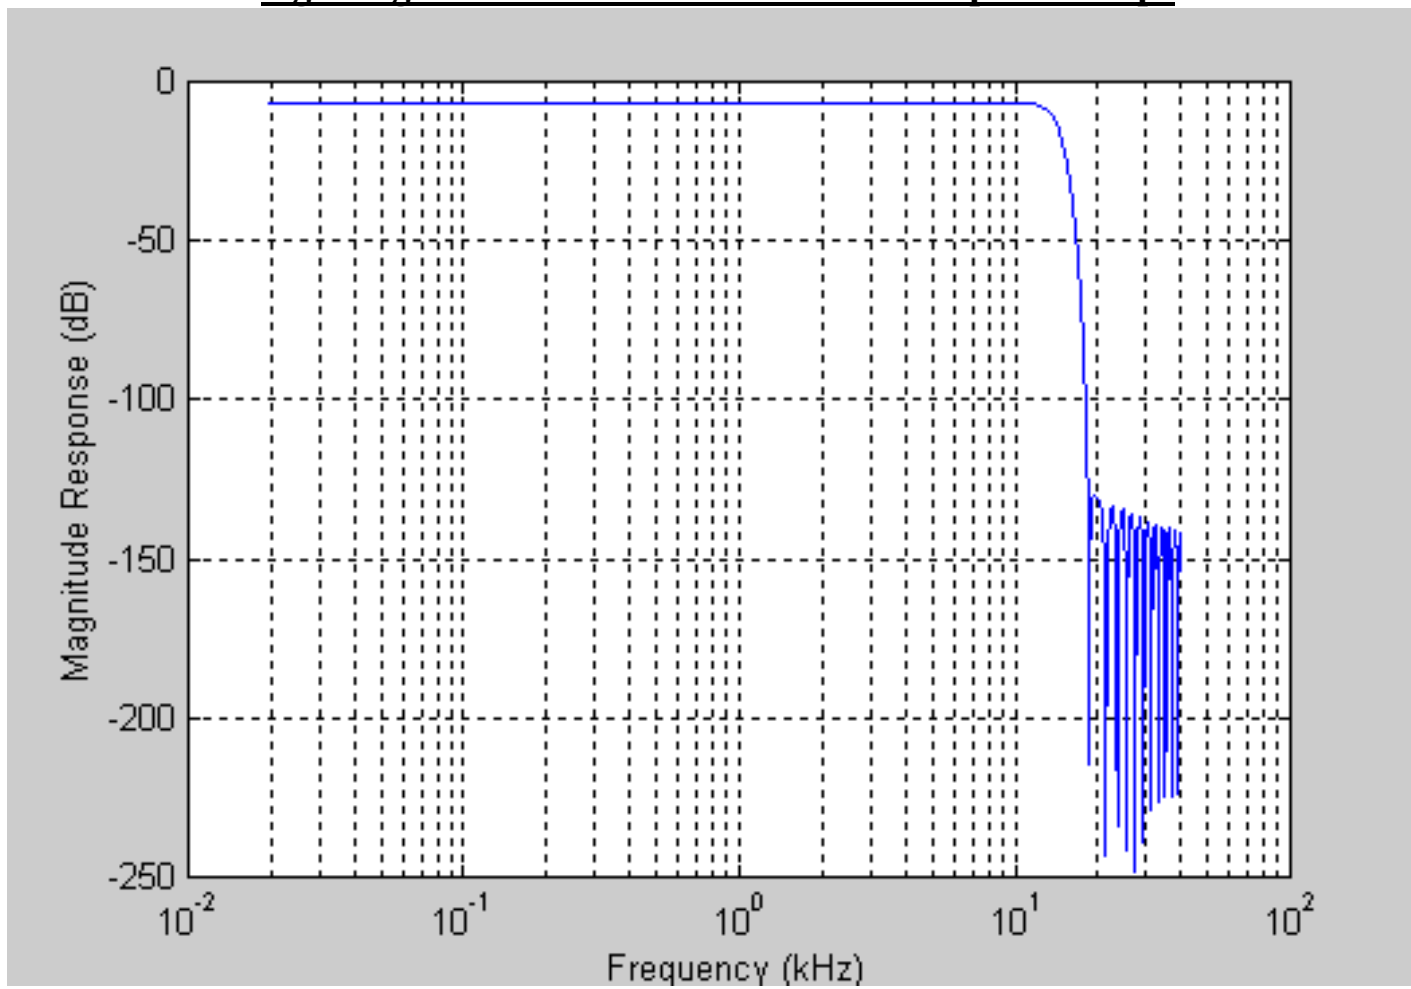


Modulation Limiting (Comander On)

Frequency Deviation Characteristic

Comander On Amps Mode

Channel 384 Power Level 2

0 dB Reference : 1004 Hz , 324mV at Input 8.0KHz Deviation

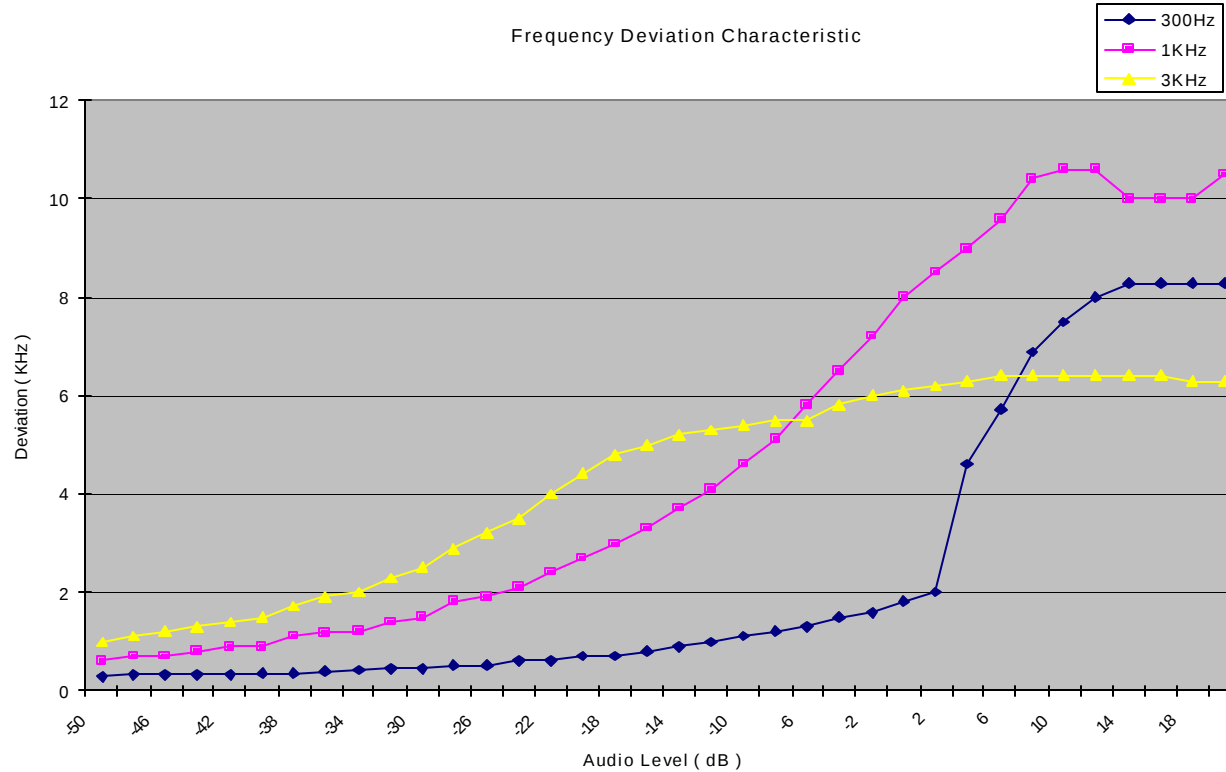


Modulation Limiting (Componder Off)

Frequency Deviation Characteristic

Componder OFF Amps Mode

Channel 384 Power Level 2

0 dB Reference : 1004 Hz , 112mV at Input 8.0KHz Deviation

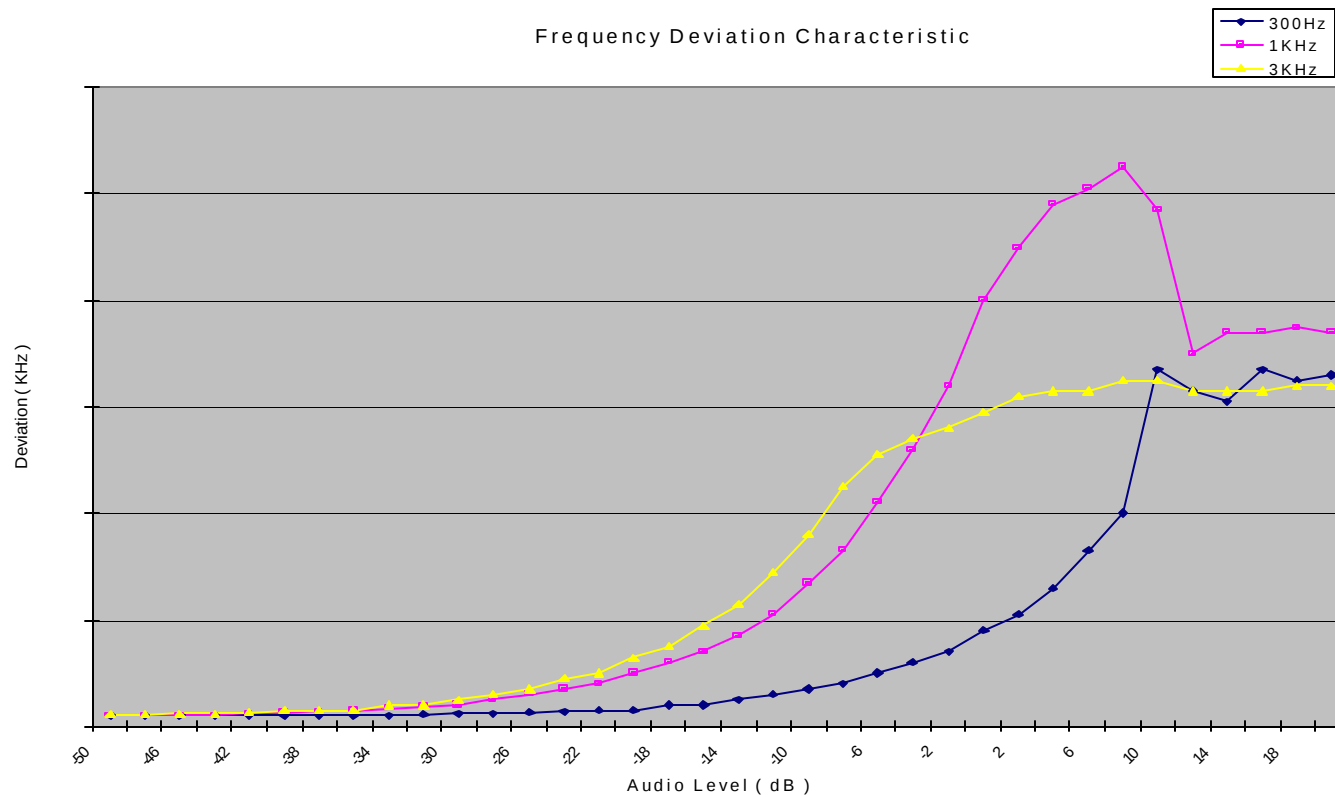

BANDWIDTH MEASUREMENT DATA FOR TRANSMITTER TYPES F8W**DEVIATION OF THE CARRIER WITH 2500 Hz. AUDIO MODULATION**

HORIZONTAL SCALE = 20 kHz / DIVISION

VERTICAL SCALE = 10 dB / DIVISION (REFERENCE LEVEL = -50dBm)

RESOLUTION BANDWIDTH = 1000 Hz

VIDEO BANDWIDTH = 1000 Hz

AUDIO LEVEL = 16 dB GREATER THAN LEVEL REQUIRED TO PRODUCE + / - 6 kHz


POWER LEVEL = -27dBm

MEASURED DATA:

1. Instantaneous Deviation Control set for a maximum of +/- 12 kHz
2. Tune and adjust to obtain unmodulated carrier on the spectrum analyzer. Save trace of the unmodulated carrier.
3. Modulate the transmitter with the 2500 Hz. Tone, 16 dB greater than that required to produce +/- 6 kHz modulation. Photograph the sideband display while it is superimposed upon the unmodulated carrier.

SPEC LIMITS

- a. On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45 kHz, the sideband is at least 26 dB below the carrier.
- b. On any frequency removed from the assigned carrier frequency by more than 45 kHz, up to the first multiple of the carrier frequency, the sideband is at least 60 dB below the carrier or $63 + 10 \log_{10}$ (mean output power in Watts) dB, whichever is the smaller attenuation.

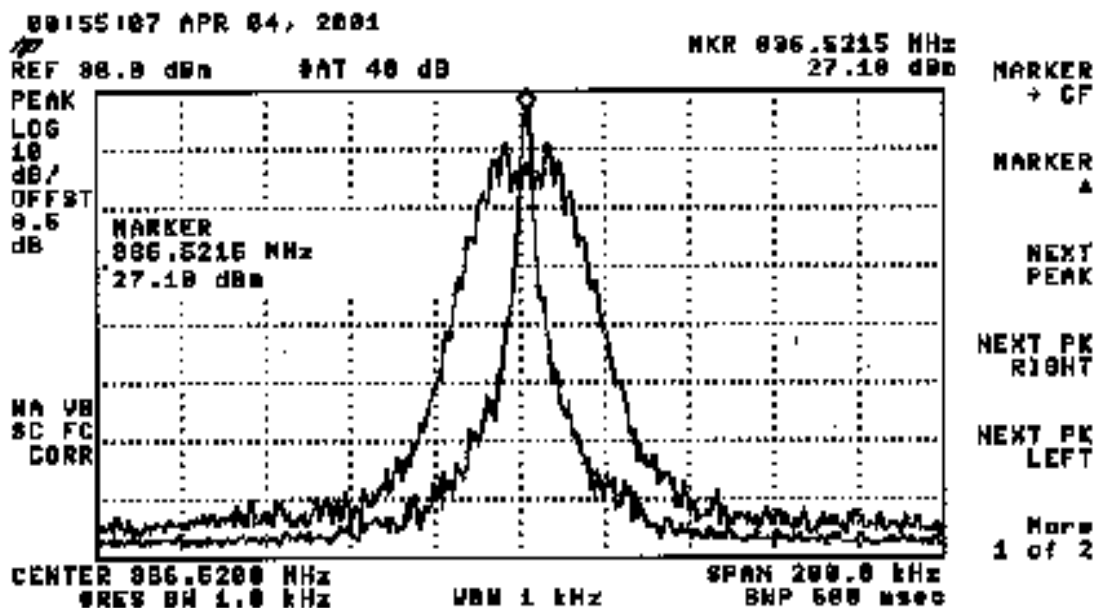

BANDWIDTH MEASUREMENT DATA FOR TRANSMITTER TYPES F8W**DEVIATION OF THE CARRIER WITH 2500 Hz AUDIO MODULATION AND SUPERVISORY AUDIO TONE**

HORIZONTAL SCALE = 20 kHz / DIVISION

VERTICAL SCALE = 10 dB / DIVISION (REFERENCE LEVEL = 30.5 dBm)

RESOLUTION BANDWIDTH = 1000 Hz

VIDEO BANDWIDTH = 1000 Hz


POWER LEVEL = 27dBm

MEASURED DATA:

1. Instantaneous Deviation Control set for a maximum of +/- 12 kHz
2. Tune and adjust to obtain the unmodulated carrier on the spectrum analyzer. Save trace of the unmodulated carrier.
3. Modulate the transmitter with 2500 Hz tone, 16 dB greater than that required to produce +/- 6kHz of deviation and add SAT with +/- 2kHz of deviation. Photograph the sideband display while it is superimposed upon the unmodulated carrier.

SPEC LIMITS

- a. On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45 kHz, the sideband is at least 26 dB below the carrier.
- b. On any frequency removed from the assigned carrier frequency by more than 45 kHz, up to the first multiple of the carrier frequency, the sideband is at least 60 dB below the carrier or $63 + 10 \log_{10}$ (mean output power in Watts) dB, whichever is the smaller attenuation.

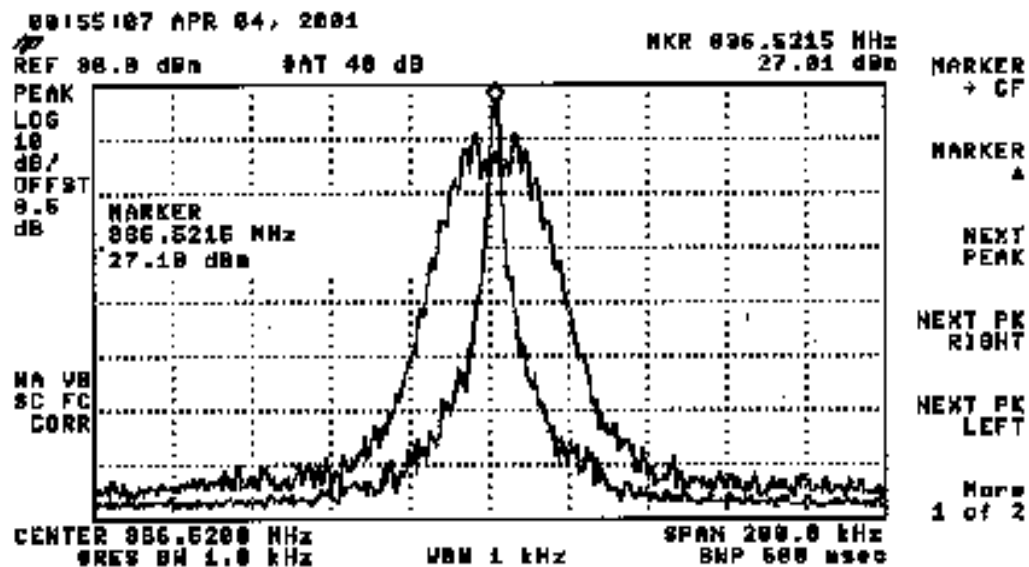

BANDWIDTH MEASUREMENT DATA FOR TRANSMITTER TYPES F1D


DEVIATION OF THE CARRIER WITH WIDE BAND DATA
 HORIZONTAL SCALE = 20 kHz / DIVISION
 VERTICAL SCALE = 10 dB / DIVISION (REFERENCE LEVEL = 30.5 dBm)
 RESOLUTION BANDWIDTH = 1000 Hz
 VIDEO BANDWIDTH = 100 Hz
 POWER LEVEL = 27dBm

MEASURED DATA:

1. Instantaneous Deviation Control set for a maximum of +/- 12 kHz
2. Tune and adjust to obtain the unmodulated carrier on the spectrum analyzer. Save trace of the unmodulated carrier.
3. Modulate the transmitter with wide band data with +/- 8 kHz. Photograph the sideband display while it is superimposed upon the unmodulated carrier.

SPEC LIMITS

- a. On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45 kHz, the sideband is at least 26 dB below the carrier.
- b. On any frequency removed from the assigned carrier frequency by more than 45 kHz, up to and including 90 kHz, the sideband is at least 45 dB below the carrier.
- c. On any frequency removed from the assigned carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency, the sideband is at least 60 dB below the carrier or $63 + 10 \log_{10}$ (mean output power in Watts) dB, whichever is the smaller attenuation.

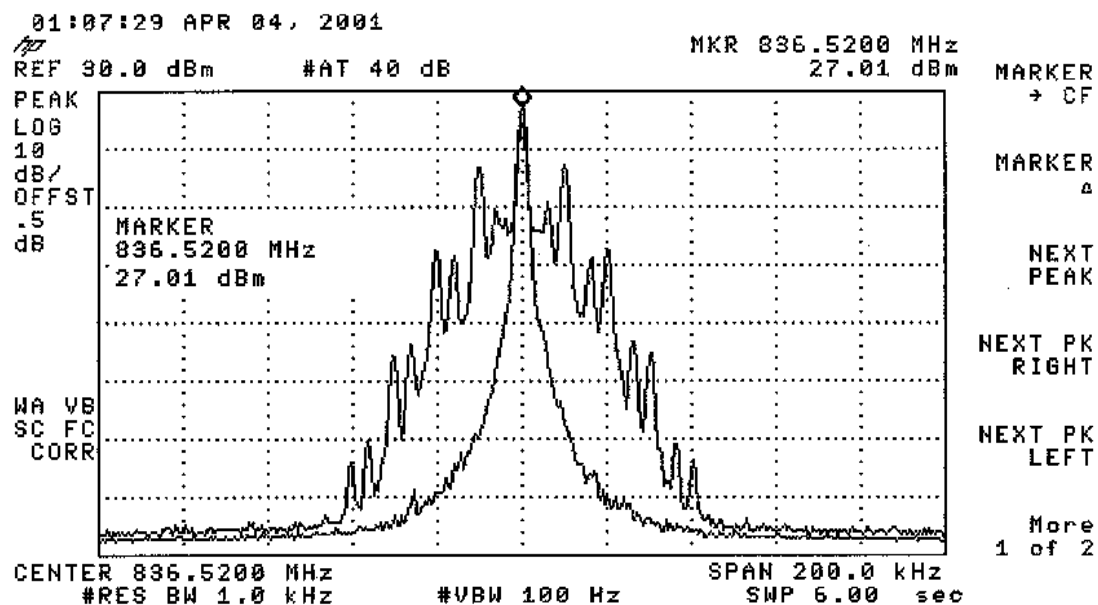

BANDWIDTH MEASUREMENT DATA FOR TRANSMITTER TYPES F1D

DEVIATION OF THE CARRIER WITH 10 kHz SIGNALING TONE AND SUPERVISORY AUDIO TONE

HORIZONTAL SCALE = 20 kHz / DIVISION

VERTICAL SCALE = 10 dB / DIVISION (REFERENCE LEVEL = 30.5 dBm)

RESOLUTION BANDWIDTH = 1000 Hz

VIDEO BANDWIDTH = 1000 Hz


POWER LEVEL = 27dBm

MEASURED DATA:

1. Instantaneous Deviation Control set for a maximum of +/- 12 kHz
2. Tune and adjust to obtain the unmodulated carrier on the spectrum analyzer. Save trace of the unmodulated carrier.
3. Modulate the transmitter with signaling tone with +/- 8 kHz deviation and add SAT with +/- 2kHz of deviation. Photograph the sideband display while it is superimposed upon the unmodulated carrier.

SPEC LIMITS

- a. On any frequency removed from the assigned carrier frequency by more than 20 kHz, up to and including 45 kHz, the sideband is at least 26 dB below the carrier.
- b. On any frequency removed from the assigned carrier frequency by more than 45 kHz, up to and including 90 kHz, the sideband is at least 45 dB below the carrier.
- c. On any frequency removed from the assigned carrier frequency by more than 90 kHz, up to the first multiple of the carrier frequency, the sideband is at least 60 dB below the carrier or $63 + 10 \log_{10}$ (mean output power in Watts) dB, whichever is the smaller attenuation.

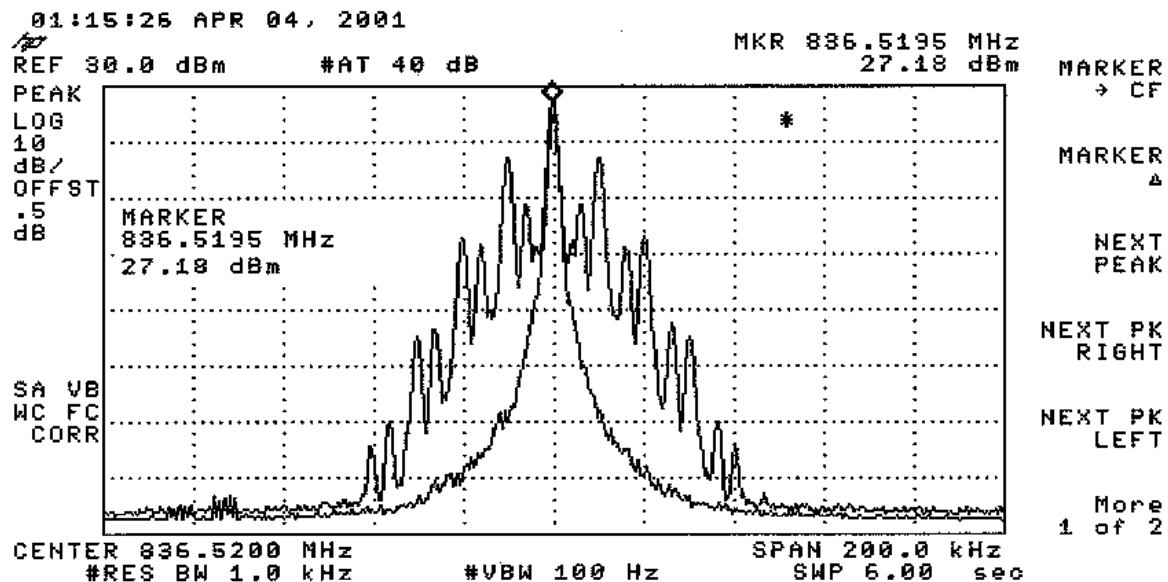

BANDWIDTH MEASUREMENT DATA FOR TRANSMITTER TYPES F9W

DEVIATION OF THE CARRIER WITH OQPSK MODULATION


HORIZONTAL SCALE = 1MHz / DIVISION
 VERTICAL SCALE = 10 dB / DIVISION (ATTENUATION)
 RESOLUTION BANDWIDTH = 30 kHz
 VIDEO BANDWIDTH = 100 Hz
 POWER LEVEL = 25dBm (Average Power in transmitter)


MEASURED DATA:

1. Modulate the transmitter with OQPSK modulation, using pseudo random data. Obtain image on spectrum analyzer.


COMMENTS:

Modulation products in a bandwidth of 30 kHz ,centered +/- 900KHz from the channel center frequency should be at least 45 dB and should be at least 42 dB below the mean output power level.

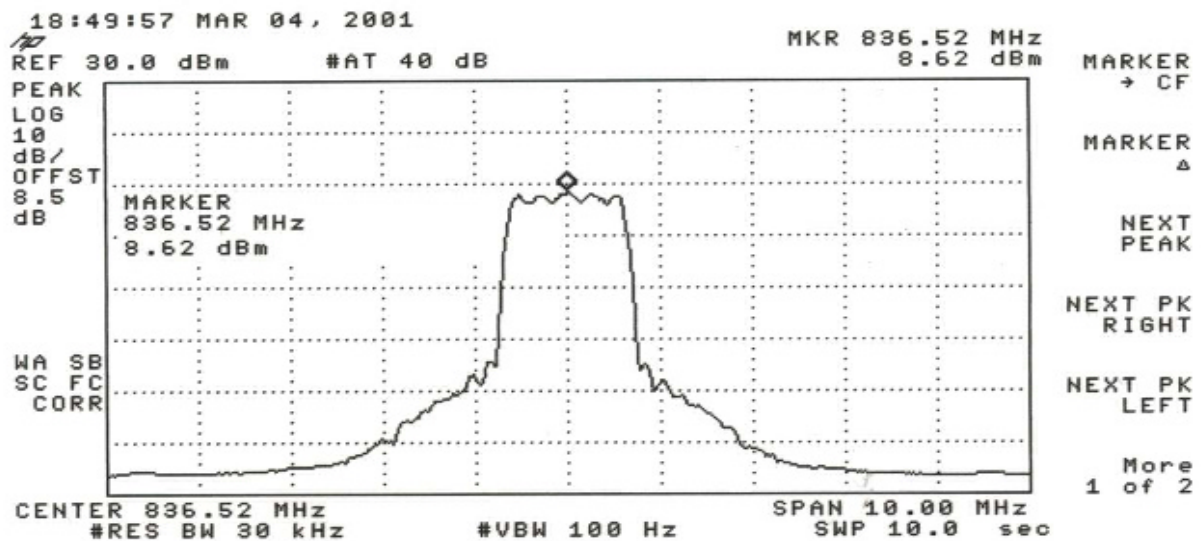

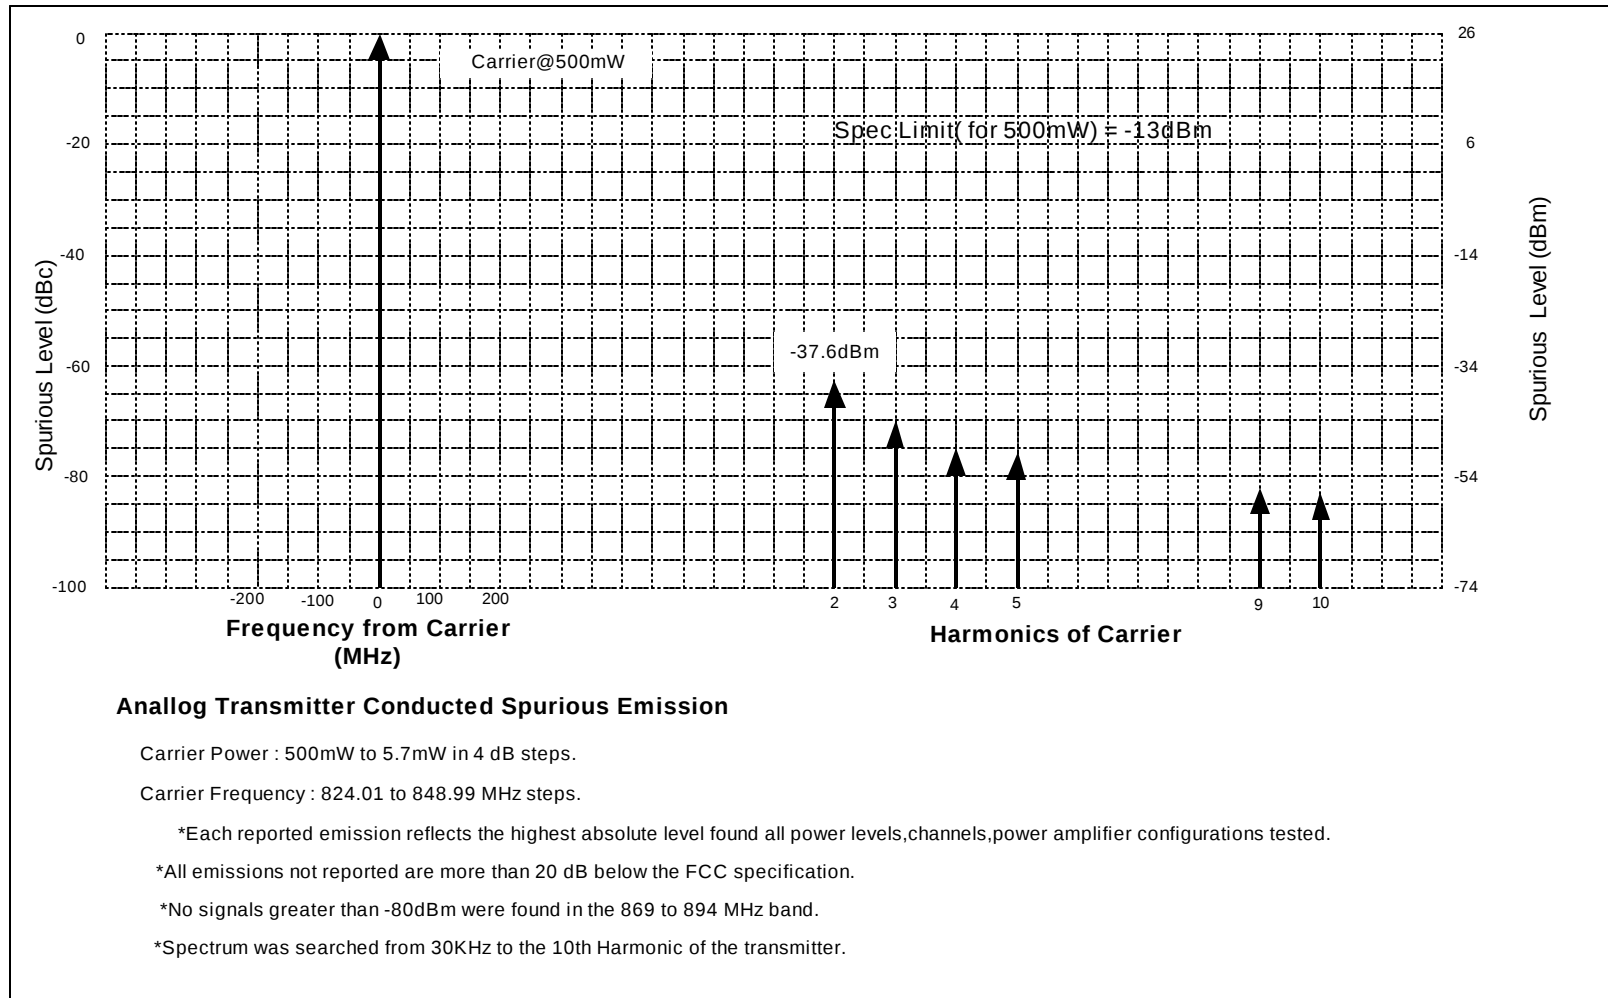ANALOG CONDUCTED SPURIOUS AND HARMONIC EMISSIONS - GRAPH

Transmitter Conducted Spurious and Harmonic Emissions 800 digital - Graph

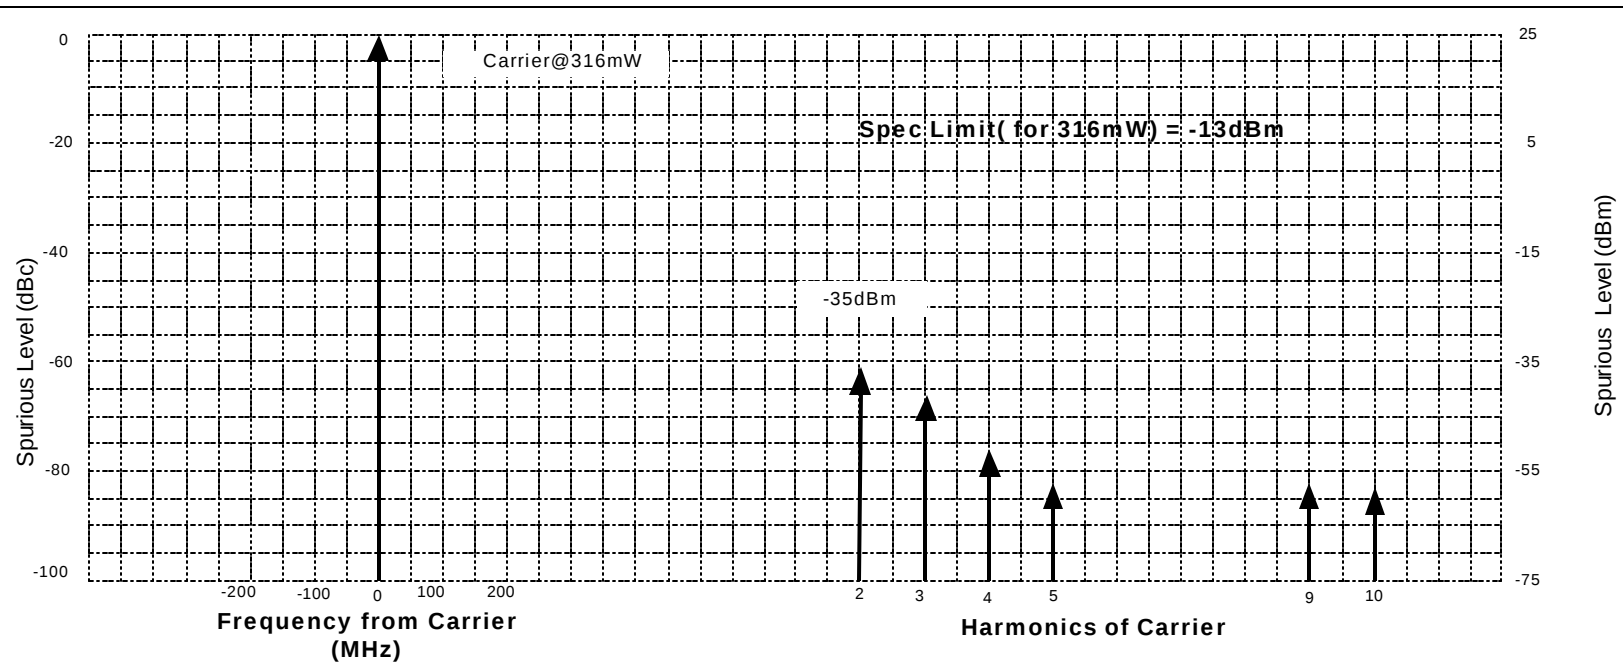

Digital Transmitter Conducted Spurious Emission

Carrier Power : 316mW to 0.00001mW in 4 dB steps.


Carrier Frequency : 824.01 to 848.99 MHz steps.

*Each reported emission reflects the highest absolute level found all power levels, channels, power amplifier configurations tested.


*All emissions not reported are more than 20 dB below the FCC specification.

*No signals greater than -80dBm were found in the 869 to 894 MHz band.


*Spectrum was searched from 30KHz to the 10th Harmonic of the transmitter.

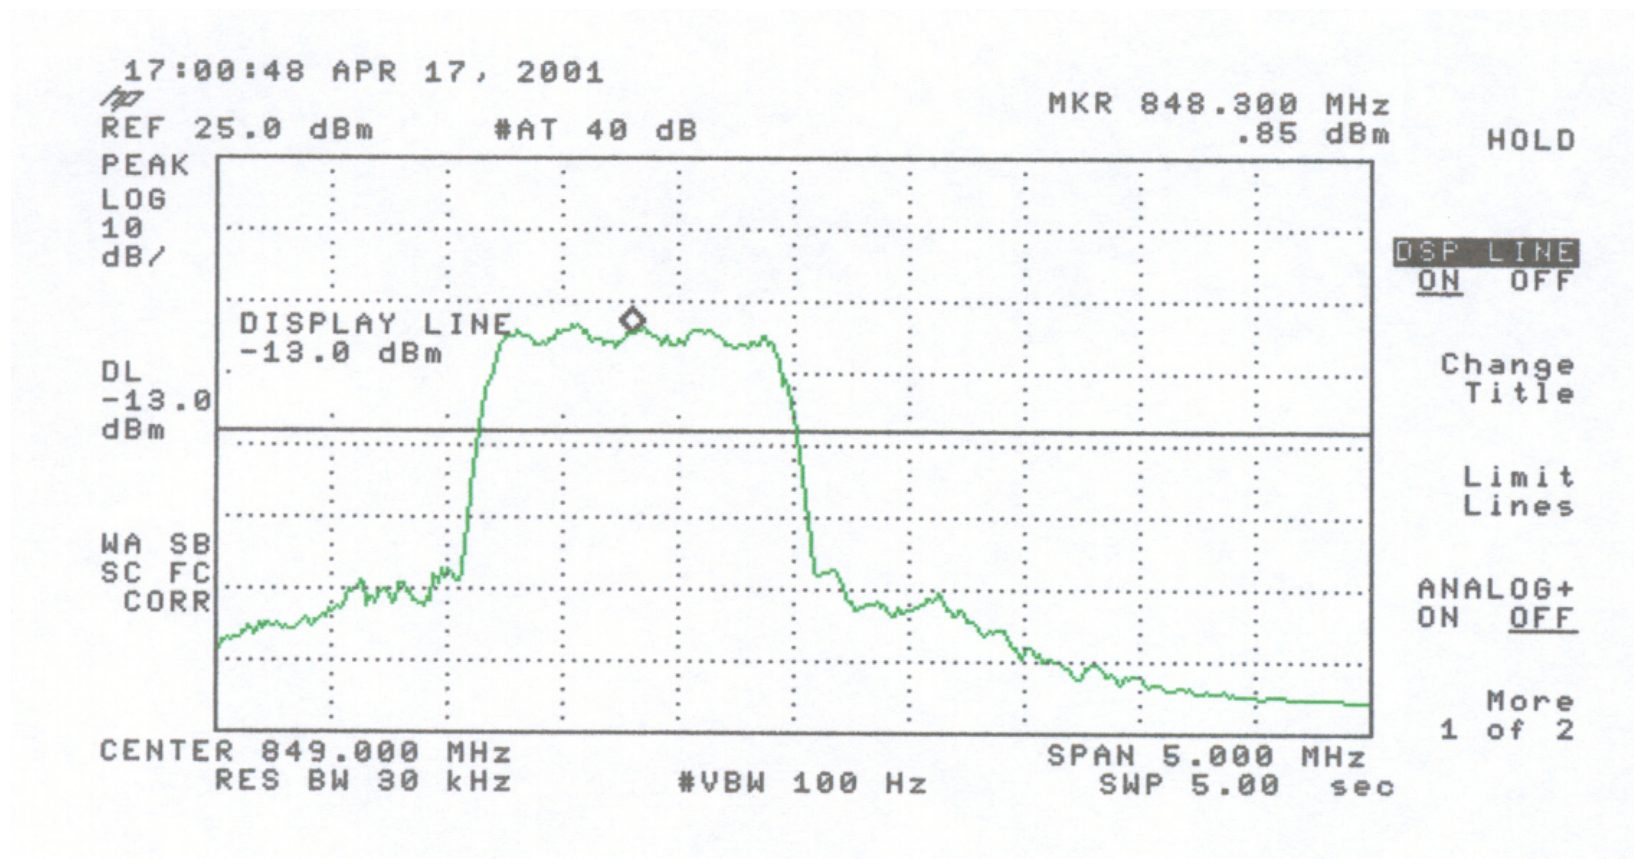Channel 777 (848.3 MHz) CDMA Band-Edge


Channel 1013 (824.7 MHz) CDMA Band-Edge

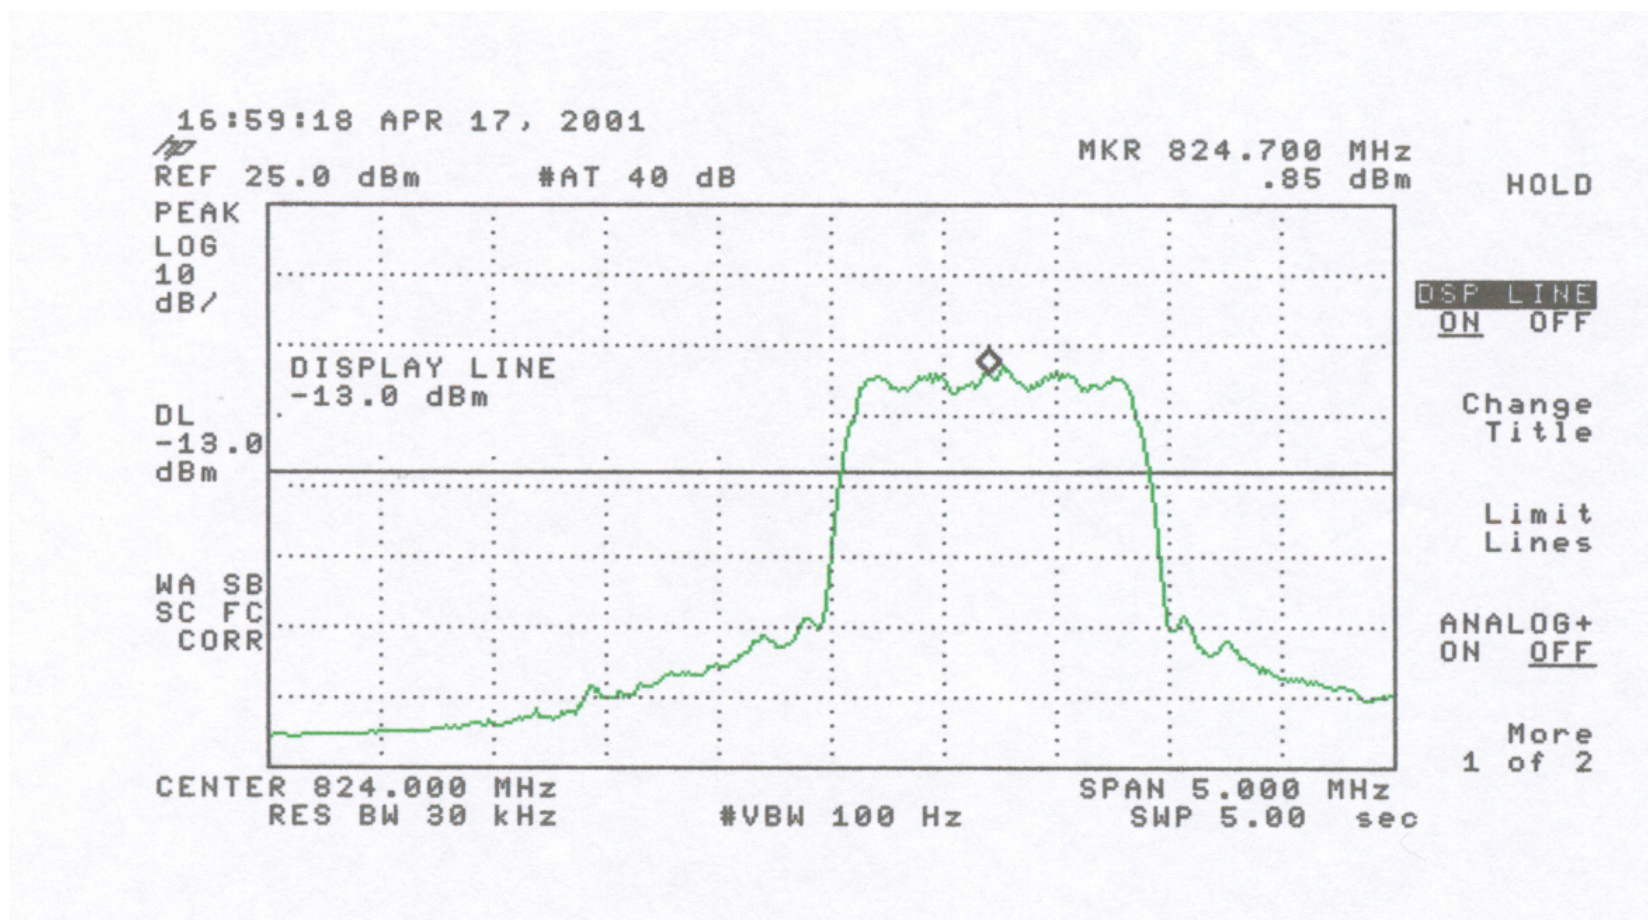


ANALOG RADIATED SPURIOUS AND HARMONIC EMISSIONS - GRAPH

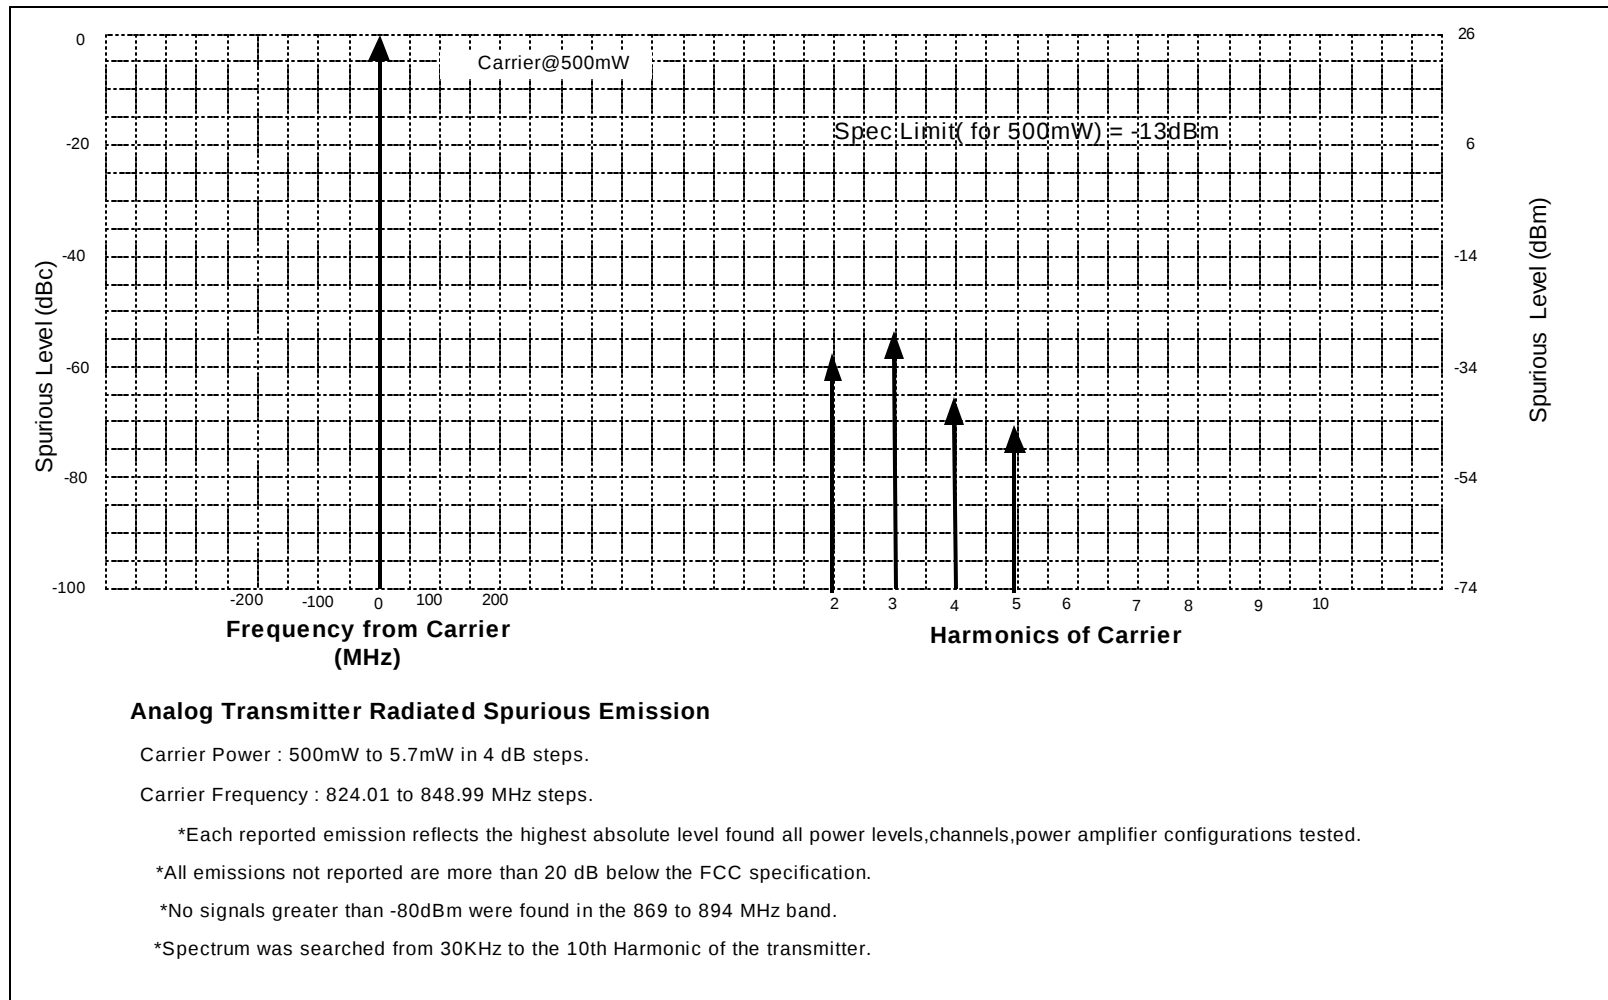


CDMA RADIATED SPURIOUS AND HARMONIC EMISSIONS - GRAPH

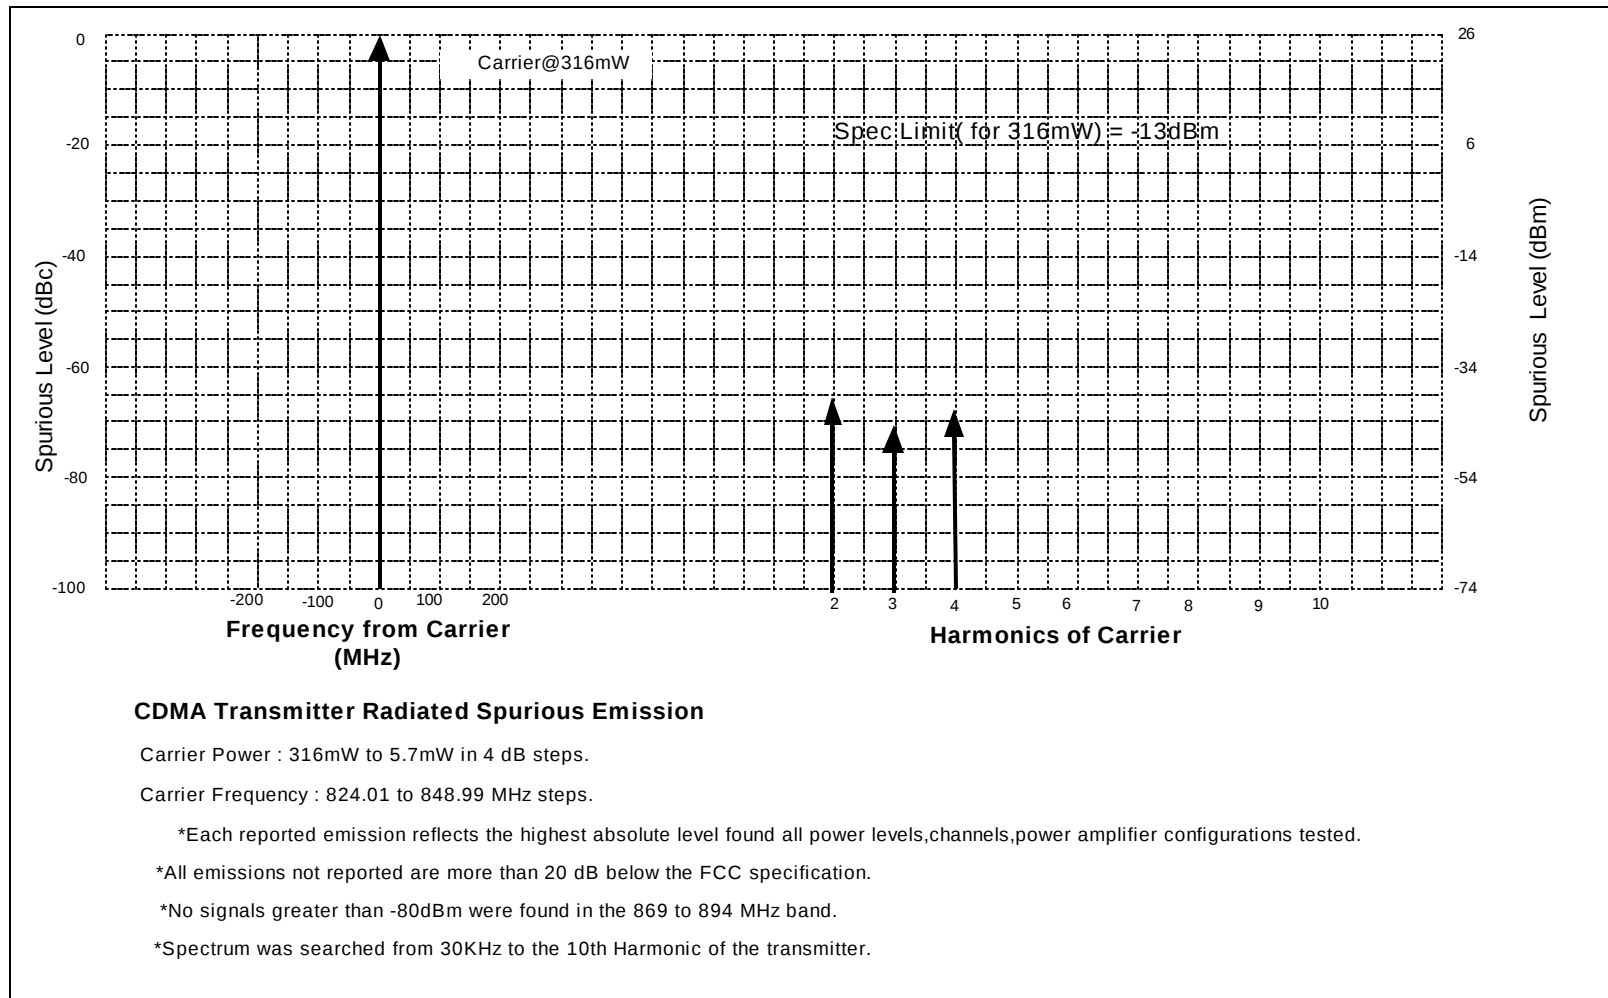


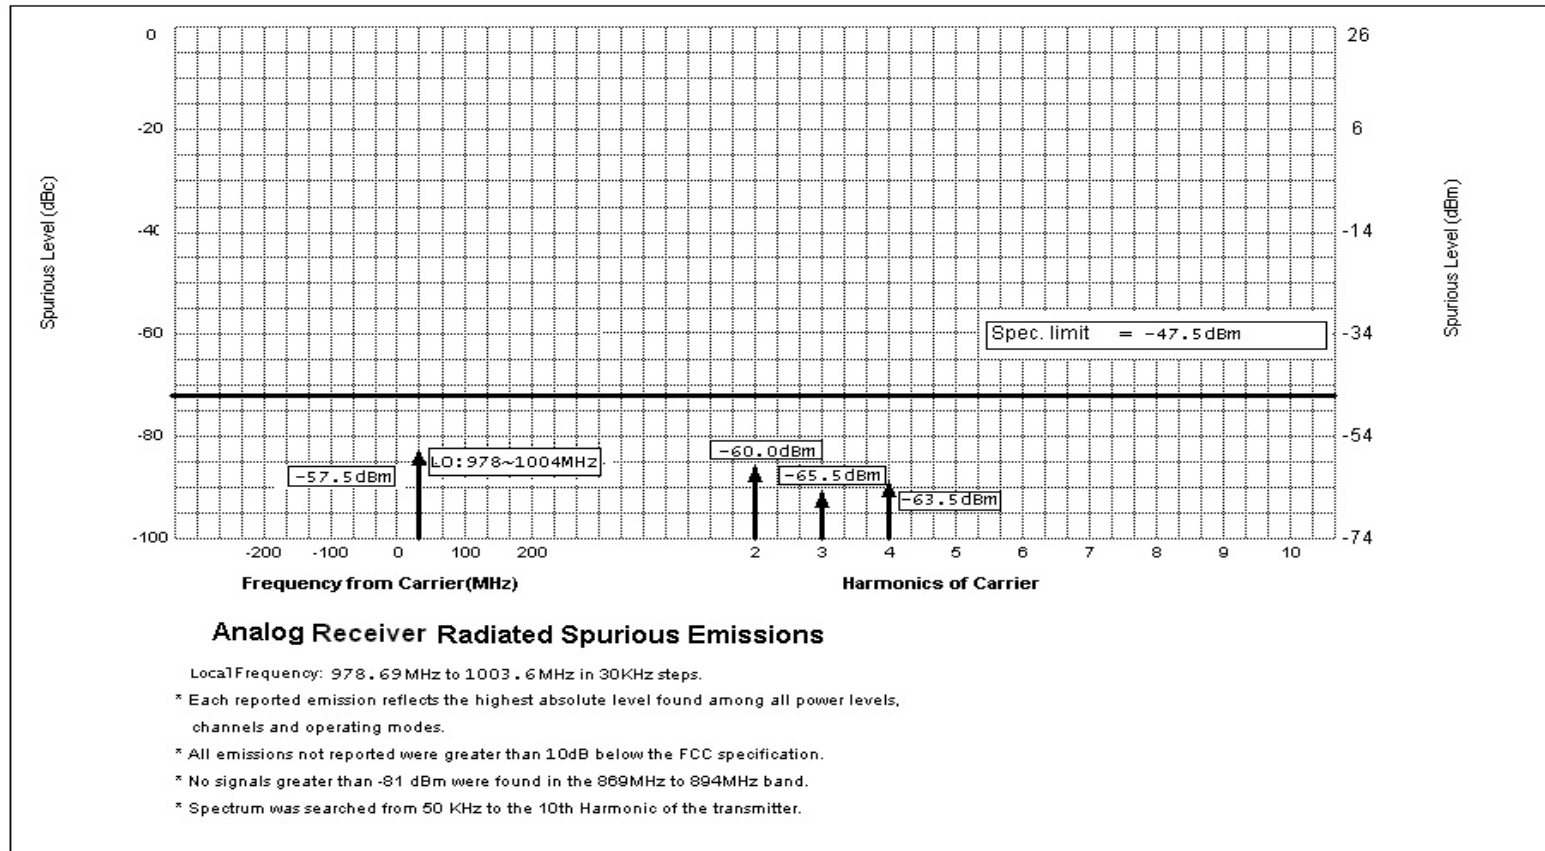RX Radiated Spurious and Harmonic Emissions 800 - Graph

RX Radiated Spurious and Harmonic Emissions 800 - Graph

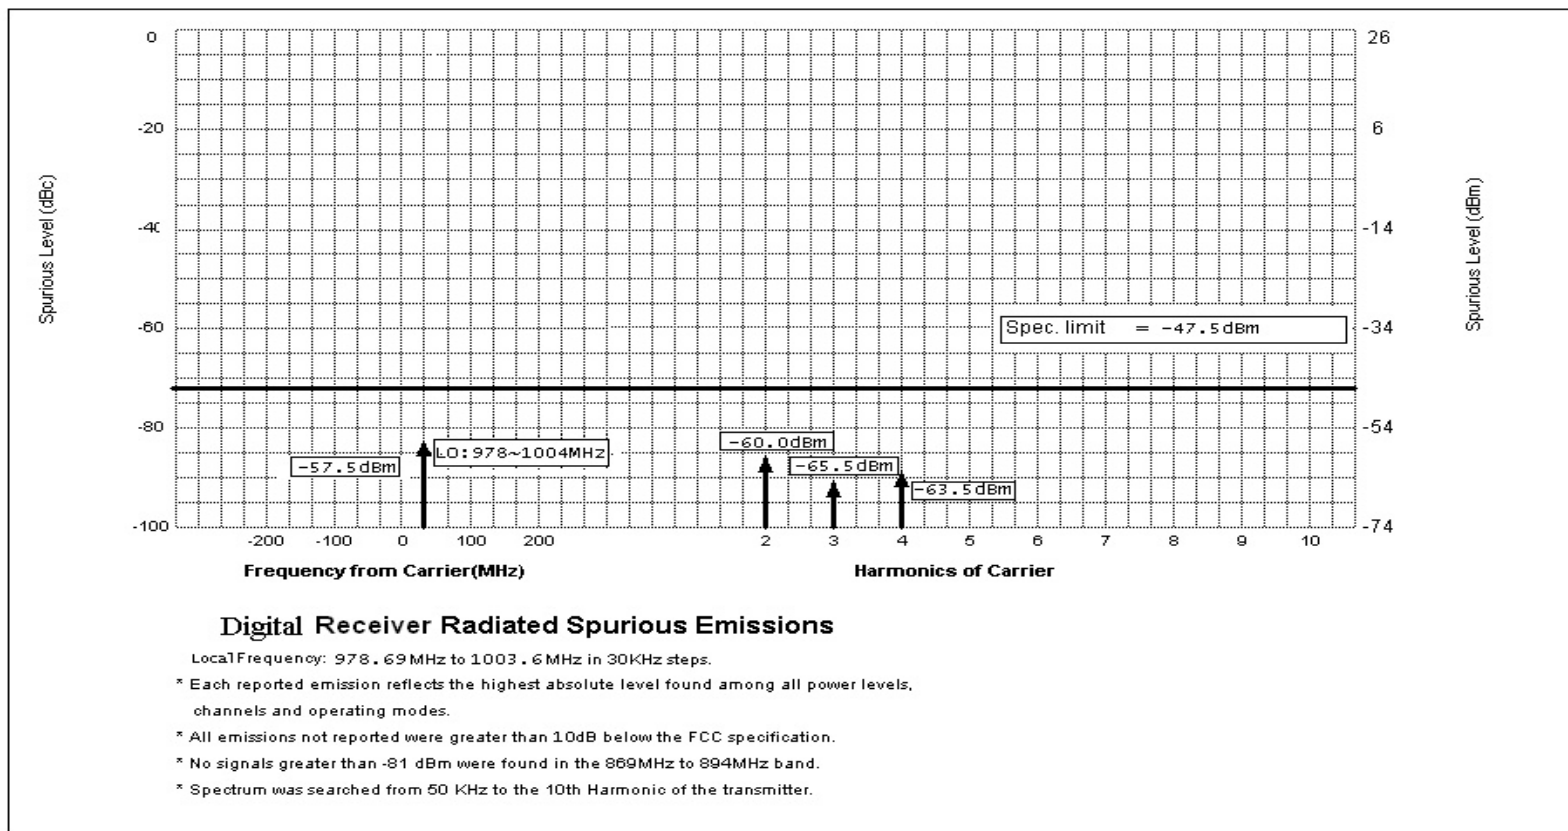


Frequency Change vs. Temperature (Analog Mode)-Graph

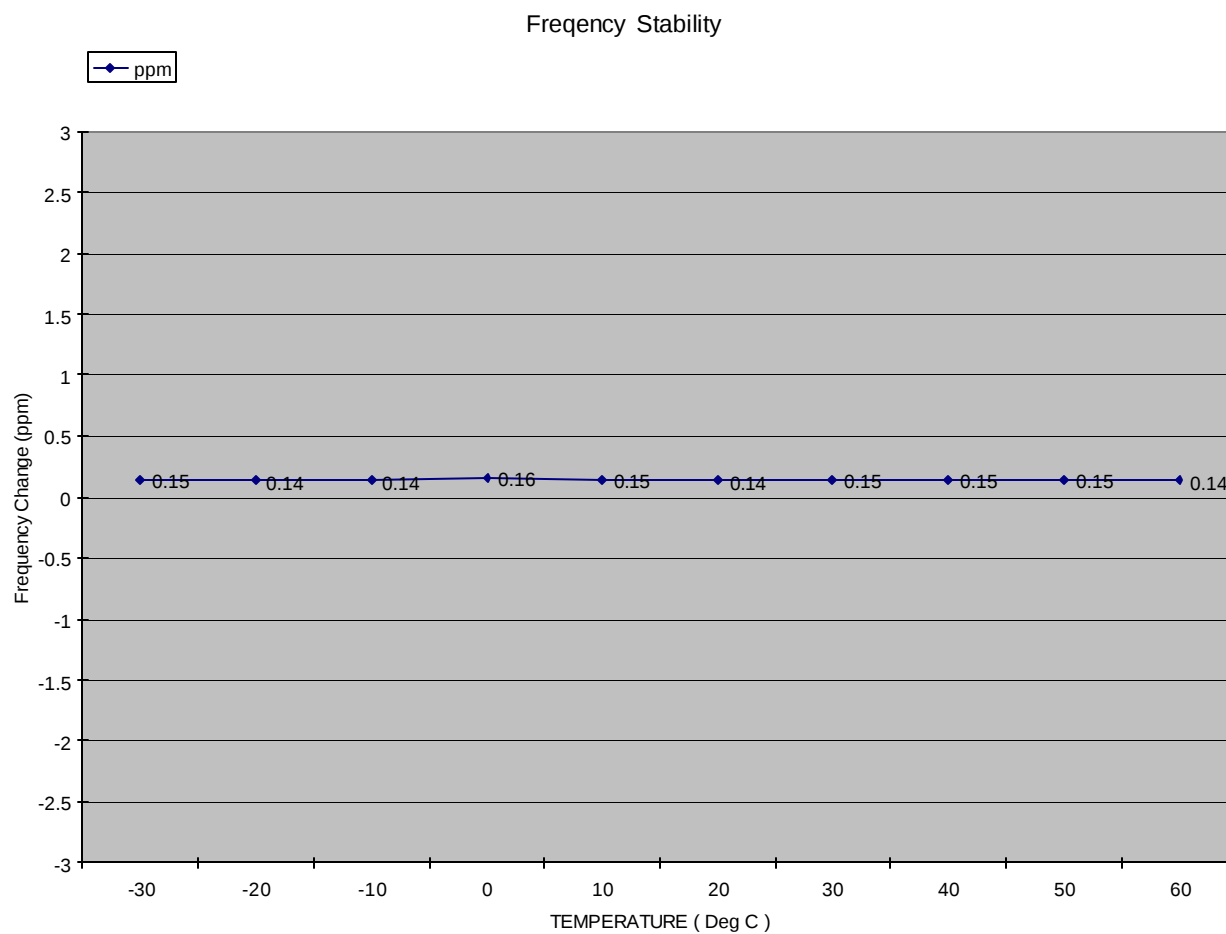


Spec Limit : ± 2.5 ppm

Frequency Change vs. Temperature (Digital Mode(800MHz))

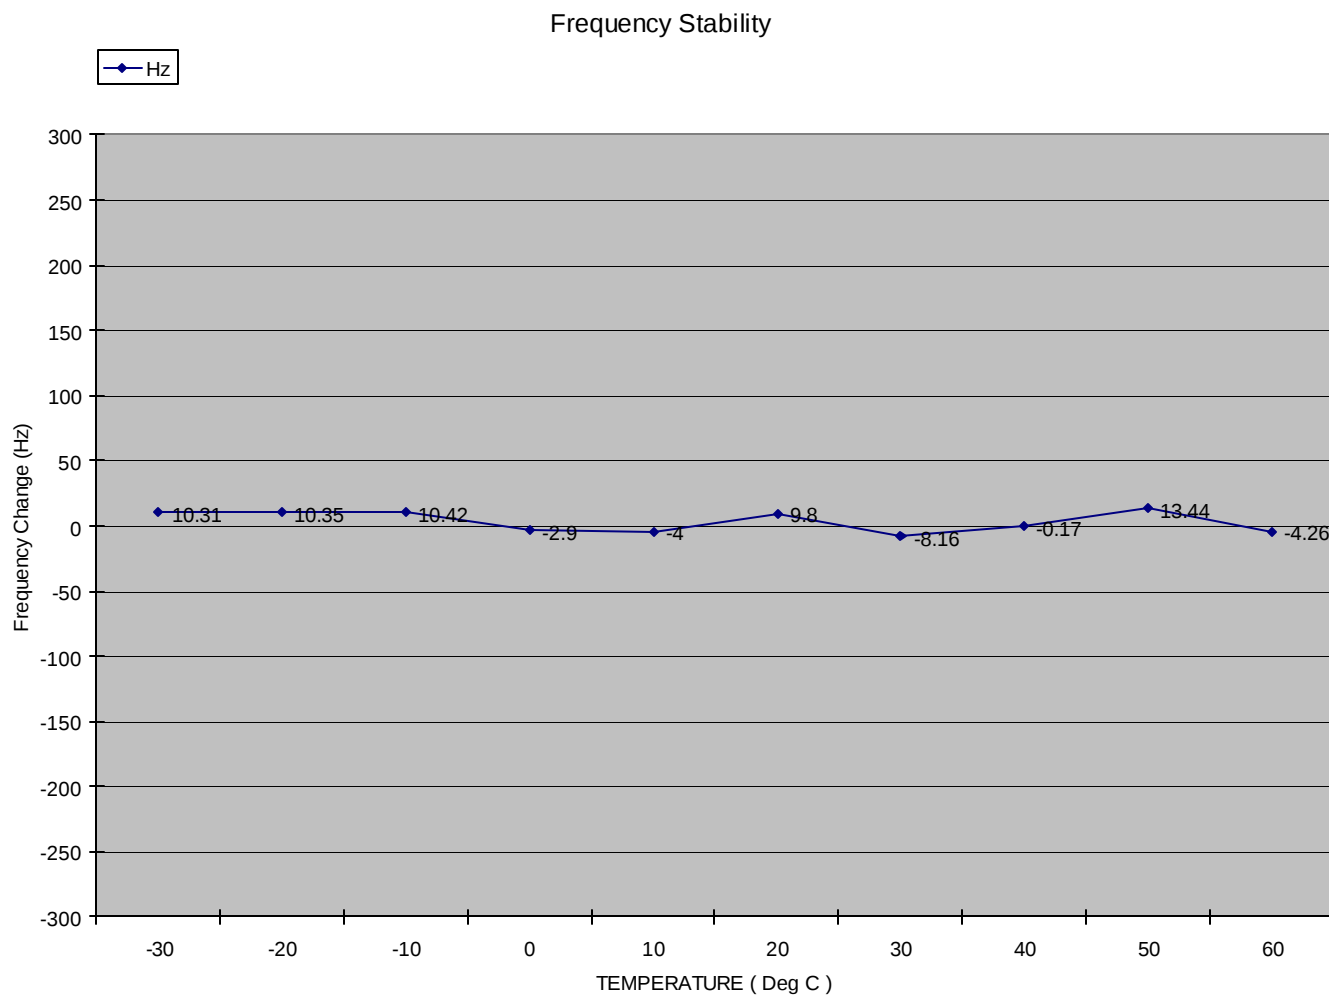


Spec Limit : $\pm 300\text{Hz}$

Frequency Change vs. Supply Voltage (Analog Mode)-Graph

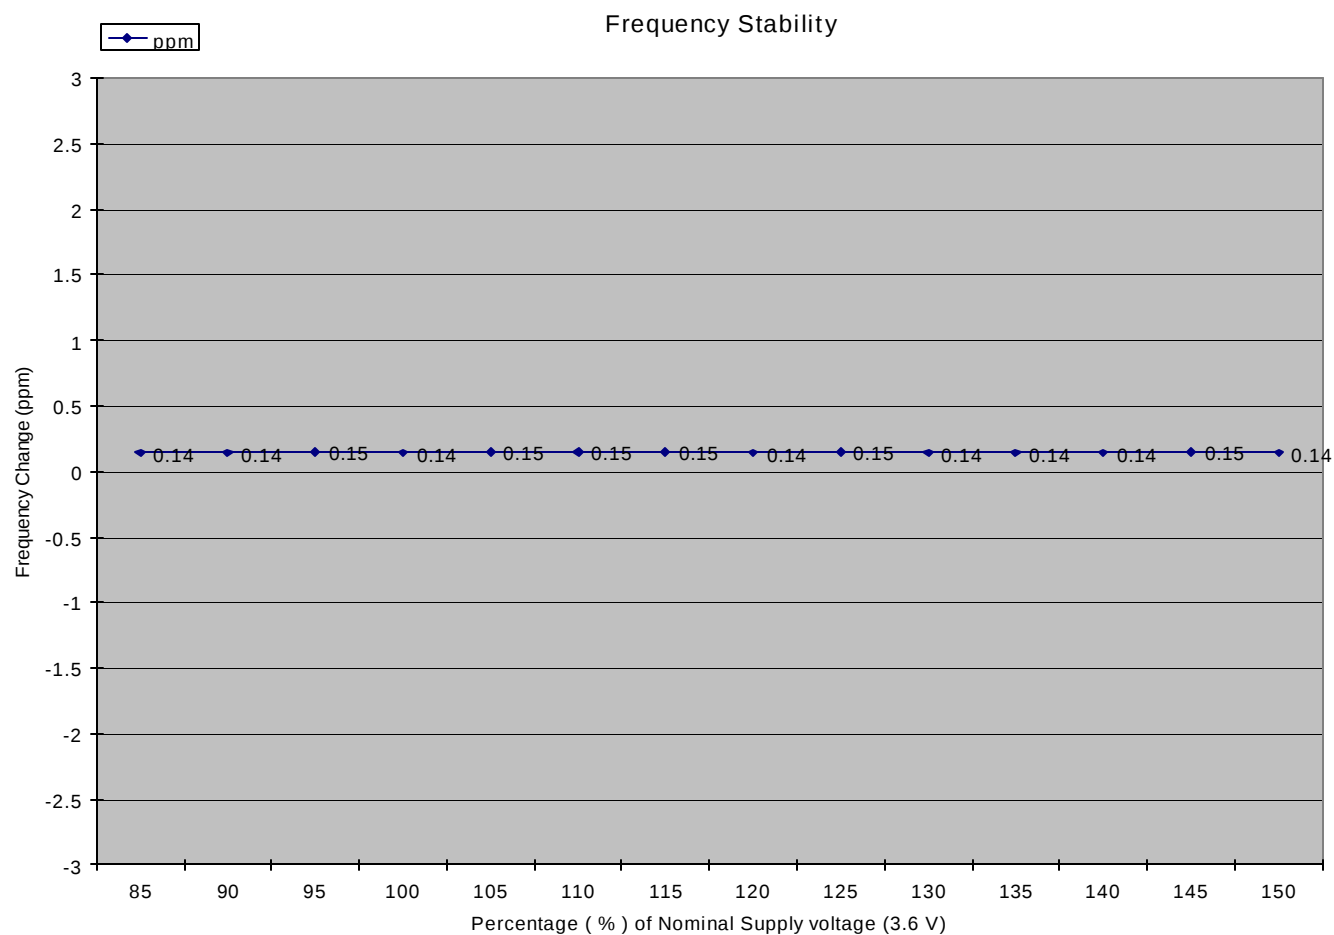

Spec limit : ± 2.5 ppm

Frequency Change vs. Supply Voltage (Digital Mode(800MHz))

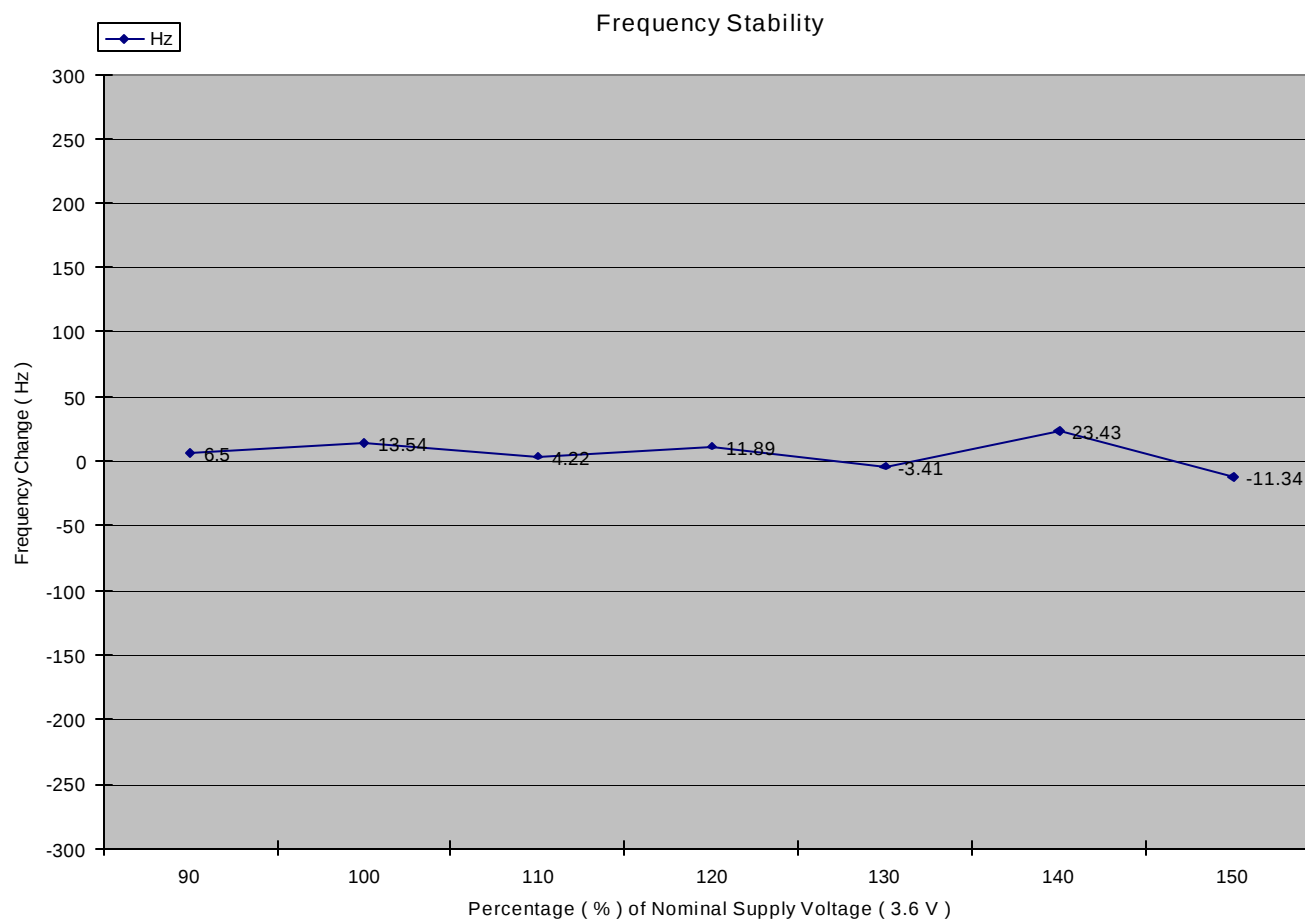

Spec limit : ± 300 Hz

MEASUREMENT TECHNIQUES**2.991 Measurements Required: Conducted Spurious and Harmonic Emissions at Antenna Terminals (Analog Mode)**

Graph attached
EXHIBIT 6G1

Definition - (as used herein) Spurious radiations are the radio frequency voltages or power generated within the equipment and appearing at the equipment' s output terminals when properly loaded with its characteristic non-radiating artificial load.

Minimum standard Conducted spurious and harmonic emissions shall be attenuated 43dB [10 Log10(the mean power output)]. In the range of frequencies between 869.04MHz and 893.97MHz, no spur shall exceed -80dBm.

Method of Measurement The antenna port of the sample was directly coupled to the input of the EMI receiver through a special coupling cable and a 10 dB passive attenuator. Scans were then performed from 30 MHz to 6.5 GHz, while observing the fundamental signal level, plus low order harmonics or other spurious signals. The frequency range of 1 to 6.5GHz was then inspected, and the level of the harmonics was measured and recorded. The output of the sample was then switched to a Hewlett Packard HP8563E spectrum analyzer to verify harmonic signal levels out to the tenth harmonic. The bandwidth was initially set to 1MHz for signature scans, and then reduced to 30 kHz to measure individual signal strengths.

Measurements Required: Conducted Spurious and Harmonic Emissions at Antenna Terminals (Digital Mode)

Graph Attached
EXHIBIT 6G2

Definition - (as used herein) Spurious radiations are the radio frequency voltages or power generated within the equipment and appearing at the equipment' s output terminals when properly loaded with its characteristic non-radiating artificial load.

Minimum standard Conducted spurious and harmonic emissions shall be attenuated 43dB [10 Log10(the mean power output)]. In the range of frequencies between 869.04MHz and 893.97MHz, no spur shall exceed -80dBm.

Method of Measurement - The transmitter was modulated with OQPSK modulation using pseudo random data. The antenna port of the sample was directly coupled to the input of the EMI receiver through a special coupling cable and a 10 dB passive attenuator. Scans were then performed from 30 MHz to 6.5 GHz, while observing the fundamental signal level, plus low order harmonics or other spurious signals. The frequency range of 1 to 6.5GHz was then inspected, and the level of the harmonics was measured and recorded. The output of the sample was then switched to a Hewlett Packard HP8563E spectrum analyzer to verify harmonic signal levels out to the tenth harmonic. The bandwidth was initially set to 1MHz for signature scans, and then reduced to 30 kHz to measure individual signal strengths.

2.993 Measurements Required: Radiated Spurious and Harmonic Radiation (Analog and Digital Modes)

Graph attached
EXHIBIT 6H1, 6H2

Definition - Radiated spurious and harmonic emissions are frequencies from the equipment when loaded into a non-radiating load on a frequency or frequencies which are outside an occupied band sufficient to insure transmission of information of required quality for the class of communications desired. The reduction in the level of these spurious emissions will not effect the quality of the information being transmitted.

Minimum standard - Radiated spurious emissions and harmonic emissions shall be attenuated 43dB [10 Log10(the mean power output)]. In the range of frequencies between 869.04MHz and 893.97MHz, no spur shall exceed -80dBm.

Method of Measurement:

Test Site - Auden, Taiwan, a region which is reasonably free from RF interference. A non-metallic building has been constructed to a special design which minimizes disturbances to RF radiation patterns. The building houses both the equipment under test and all the control and measurement equipment.

Installation of Equipment:

The equipment under test is placed on the turntable, connected to a dummy RF load, and then placed in normal operation using the intended power source. A receiving antenna located 3 meters from the turntable picks up any signal radiated from the transmitter and its operating accessories. The antenna is adjustable in height and can be horizontally and vertically polarized. Tunable receivers covering the necessary frequency range are used to detect and measure any radiation picked up by the antenna]

Measurement Procedure

The equipment is adjustable to obtain peak readings of received signals wherever they occur in the spectrum by:

1. Rotating the transmitter under test.
2. Adjusting the antenna height.

The testing procedure is repeated for both horizontal and vertical polarization of the receiving antenna. Relative signal strength is indicated on meters built into the receiver. To obtain actual radiated signal strength, a standard signal generator with calibrated output is substituted for the transmitter under test. The signal generator is adjusted in output until a reading identical to that obtained with the actual transmitter is obtained at the receiver. Signal strength is then read directly from the generator. Actual measurements are recorded on the attached graph.

2.994 Measurements Required: RX Radiated Spurious and Harmonic Radiation (Analog and Digital Modes)

Graph attached
EXHIBIT 6J1, 6J2

Definition - Radiated spurious emissions are those spurious emission generated or amplified in a

receiver and radiated by antenna ,housing and all power, control and audio leads normally connected to the receiver .

Minimum standard - Radiated spurious emissions and harmonic emissions shall be attenuated as follow.

Frequency range (MHz)	Maximum allowable EIRP
25 to 70	-45dBm
70 to 130	-41dBm
130 to 174	-41~ -32dBm
174 to 260	-32dBm
260 to 470	-32~ -26dBm
470 to 2000	-21dBm

Method of Measurement:

Test Site - Auden, Taiwan, a region which is reasonably free from RF interference. A non-metallic building has been constructed to a special design which minimizes disturbances to RF radiation patterns. The building houses both the equipment under test and all the control and measurement equipment.

Installation of Equipment:

The equipment under test is placed on the turntable, connected to a dummy RF load, and then placed in normal operation using the intended power source. A receiving antenna located 3 meters from the turntable picks up any signal radiated from the receiver and its operating accessories. The antenna is adjustable in height and can be horizontally and vertically polarized. Tunable receivers covering the necessary frequency range are used to detect and measure any radiation picked up by the antenna.

Measurement Procedure

The equipment is adjustable to obtain peak readings of received signals wherever they occur in the spectrum by:

1. Rotating the transmitter under test.
2. Adjusting the antenna height.

The testing procedure is repeated for both horizontal and vertical polarization of the receiving antenna. Relative signal strength is indicated on meters built into the receiver. To obtain actual radiated signal strength, a standard signal generator with calibrated output is substituted for the receiver under test. The signal generator is adjusted in output until a reading identical to that obtained with the actual receiver is obtained at the receiver. Signal strength is then read directly from the generator. Actual measurements are recorded on the attached graph.

2.995 Measurements Required: Frequency Stability (Analog and Digital Modes)

Definition - The carrier frequency stability is the ability of the transmitter to maintain an assigned carrier frequency.

Minimum standard - In the analog modes, the minimum frequency stability shall be $\pm 0.000075\%$ referenced to a received carrier frequency from a base station. This meets the requirement for operational accuracy of 0.00025% in wide mode and 0.00010% in narrow mode. In digital mode, the minimum frequency stability shall be ± 300 Hz referenced to a received carrier frequency from a base station. This meets the requirement for operational accuracy of 0.00005% in digital mode.

Method of Measurement - Frequency measurements shall be made at the extremes of the temperature range -30° to $+60^{\circ}\text{C}$ and at intervals of not more than 10°C throughout the range. A period of time sufficient to stabilize all of the components in the equipment shall be allowed prior to each frequency measurement. The frequency of the transmitter shall be measured by extracting a sample of the carrier and measuring its center frequency by equipment having a degree of accuracy of at least 10 times that of the minimum to be measured.

The frequency stability of transmitting equipment shall be checked with variations in:

- (a) Temperature: Vary the ambient from -30°C to $+60^{\circ}\text{C}$.

Graphs attached EXHIBITS

- (b) Primary Supply Voltage:

Vary the primary supply voltage over the specified battery voltage range.

Graphs attached EXHIBITS

Timing Period and Procedure for Frequency Stability Measurements

1. The carrier frequency of the transmitter was measured at room temperature (usually between 25° and 27°C) to provide a reference.
2. The equipment was then subjected to an overnight soak at -30°C without any power applied.
3. After an overnight soak at -30°C , measurement of the carrier frequency of the transmitter was made within a three minute interval after applying power to the transmitter.
4. Frequency measurements were made at each 10°C interval (-30° , -20° , -10° , 0° , $+10^{\circ}$, $+20^{\circ}$, $+30^{\circ}$, $+40^{\circ}$, $+50^{\circ}$, $+60^{\circ}$). A period of at least one hour was provided to allow stabilization of the equipment at each temperature level.
5. In all measurements, at the various temperature intervals, the temperature was held to $\pm 1^{\circ}\text{C}$ from the temperature level.
6. The artificial load was mounted external to the temperature chamber.