



MOTOROLA

PERSONAL COMMUNICATIONS SECTOR

**PRODUCT SAFETY AND COMPLIANCE
EMC LABORATORY**

EMC TEST REPORT - Addendum

Test Report Number – 14316-1BT

Report Date – July 14, 2004

The test results contained herein relate only to the model(s) identified. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical characteristics.

As the responsible EMC Engineer, I hereby declare that the equipment tested as specified in this report conforms to the requirements indicated.

A handwritten signature in purple ink that reads "Michael E. Hill".

Signature:

Name: Michael E. Hill

Title: Senior Electrical Engineer

Date: July 14, 2004

This report must not be reproduced, except in full, without written approval from this laboratory.

THIS REPORT MUST NOT BE USED TO CLAIM PRODUCT ENDORSEMENT BY A2LA OR ANY AGENCY OF THE U.S. GOVERNMENT.

A2LA Certificate Number: 1846-01



Table of Contents

Test Report Details	4
Applicable Standards	5
Summary of Testing.....	6
General and Special Conditions.....	6
Equipment and Cable Configurations.....	7
Measuring Equipment and Calibration Information	7
Description of Bluetooth Transmitter	8
Measurement Procedures and Data.....	9
CARRIER FREQUENCY SEPARATION	9
Measurement Procedure.....	9
Measurement Results	9
Carrier Frequency Separation	10
NUMBER OF HOPPING FREQUENCIES.....	11
Measurement Procedure.....	11
Measurement Results	11
Number of Hopping Frequencies (Channels 0 – 39)	12
Number of Hopping Frequencies (Channels 39 – 78)	12
TIME OF OCCUPANCY (DWELL TIME).....	13
Measurement Procedure.....	13
Measurement Results	13
Dwell Time	14
20dB Bandwidth	15
Measurement Procedure.....	15
Measurement Results	15
FIELD STRENGTH OF SPURIOUS EMISSIONS.....	17
Measurement Procedure.....	17
Measurement Results	17
30-1000MHz Low Channel Dual Polarization X	18
30-1000MHz Low Channel Dual Polarization Y	19
30-1000MHz Low Channel Dual Polarization Z.....	20
30-1000MHz Mid Channel Dual Polarization X.....	21
30 -1000MHz Mid Channel Dual Polarization Y	22
30 -1000MHz Mid Channel Dual Polarization Z	23
30 -1000MHz High Channel Dual Polarization X.....	24
30 -1000MHz High Channel Dual Polarization Y.....	25
30 -1000MHz High Channel Dual Polarization Z	26
1-12 GHz Low Channel Dual Polarization X	27
1-12 GHz Low Channel Dual Polarization Y	28
1-12 GHz Low Channel Dual Polarization Z	29
1-12 GHz Mid Channel Dual Polarization X.....	30
1-12 GHz Mid Channel Dual Polarization Y.....	31
1-12 GHz Mid Channel Dual Polarization Z	32
1-12 GHz High Channel Dual Polarization X	33
1-12 GHz High Channel Dual Polarization Y	34
1-12 GHz High Channel Dual Polarization Z.....	35

PEAK OUTPUT POWER	36
Measurement Procedure.....	36
Measurement Results	36
Peak Output Power	36
BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS	37
Measurement Procedure.....	37
Measurement Results	37
Low Band Edge with Hopping Disabled	38
High Band Edge with Hopping Enabled.....	39
SPURIOUS RF CONDUCTED EMISSIONS	40
Measurement Procedure.....	40
Measurement Results	40
Conducted Spurious Emissions 30-3000MHz (Low Channel Enabled).....	41
Conducted Spurious Emissions 2-10GHz (Low Channel Enabled)	41
Conducted Spurious Emissions 10-20GHz (Low Channel Enabled)	42
Conducted Spurious Emissions 30-3000MHz (High Channel Enabled).....	45
Conducted Spurious Emissions 2-10GHz (High Channel Enabled).....	45
Conducted Spurious Emissions 10-20GHz (High Channel Enabled).....	46
Conducted Spurious Emissions 20-26.5GHz (High Chan Enabled)	46

Test Report Details

Tests Performed By: Motorola Personal Communications Sector
Product Safety and Compliance Group
600 North US Hwy 45
Libertyville, IL 60048
PH (847) 523-6167 Fax (847) 523-4538
Motorola PCS FRN: 0004321311
FCC Registration Number: 316588
Industry Canada Number: IC3908

Radiated Emissions
Performed By: Underwriters Laboratories
International EMC Services
333 Pfingsten RD
Northbrook, IL 60062
Contact: Lubomir Madjarov
(Tel) 847/664-3957
(Fax) 847/313-3957

Tests Requested By: Motorola Inc.
Personal Communications Sector
600 North US Hwy 45
Libertyville, IL 60048

Product Type: Cellular Phone

Signaling Capability: GSM 1900, Bluetooth

Model Number: A760i/768i

Serial Numbers: 004400-00-667017-0, 004400-00-667018-0,
004400-00-667023-0, 353868-00-000004-0

Testing Complete Date: July 7, 2004

Applicable Standards

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-part J as well as the following parts:

- ☒ Part 15 Subpart C – Intentional Radiators
- ☐ Part 22 Subpart H - Public Mobile Services
- ☐ Part 24 - Personal Communications Services
- ☐ Part 90 - Private Land Mobile Radio Service

Applicable Standards: TIA EIA 137-A, TIA EIA 98-C, ANSI 63.4 2001, RSS-118 (AMPS), RSS-128 (TDMA), RSS-129 (CDMA), RSS-133 (PCS)

DA 00-705, "Filing and Measurement Guidelines for Frequency Hopping Spread Spectrum Systems" published by the Federal Communications Commission was also used in the testing of this product.

Summary of Testing

Test	Test Name	Pass/Fail
1	Carrier Frequency Separation	Pass
2	Number of Hopping Frequencies	Pass
3	Time of Occupancy (Dwell Time)	Pass
4	20 dB Bandwidth	Pass
5	Spurious RF Conducted Emissions	Pass
6	Field Strength of Spurious Emissions	Pass
7	Max Power	N/A
8	Band Edges	See plots
9	Conducted Spurious Emissions	Pass

Test	Test Name	Results
1	Carrier Frequency Separation	999 kHz
2	Number of Hopping	79
3	Time of Occupancy (Dwell Time)	2.93ns
4	20 dB Bandwidth	999 kHz
5	Spurious RF Conducted Emissions	See plots
6	Field Strength of Spurious Emissions	See plots
7	Max Power	3.7 dBm
8	Band Edges	See plots
9	Conducted Spurious Emissions	See plots

The margin with respect to the limit is the minimum margin for all modes and bands. () indicates the margin at which the product exceeds the limit.

General and Special Conditions

The EUT was tested using a fully charged battery when applicable. Where a battery could not be used due to the need for a controlled variation of input voltage, an external power supply was utilized.

All testing was done in an indoor controlled environment with an average temperature of 22° C and relative humidity of 50%.

Equipment and Cable Configurations

The EUT was tested in a stand-alone configuration that is representative of typical use.

Measuring Equipment and Calibration Information

Manufacturer	Equipment Type	Model No.	Serial Number	Cal. Due Date
Rohde & Schwarz	Receiver	ESI26	838786/010	5/17/2005
Hewlett-Packard	EMC Analyzer	8593EM	3536A00118	10/2/2004
Hewlett-Packard	EMC Analyzer	7405	US39440191	11/13/2004
Miteq	Preamplifier 0.1-26.5GHz	NSP2650-NF-S	966350	1/8/2005
ETS	DRG Horn Antenna	3115	6222	9/29/2004
A.H. Systems Inc.	DRG Horn Antenna	SAS-2--/571	365	12/17/2004
ETS	Log-Periodic Antenna	3148	1188	3/5/2005
ETS	Biconical Antenna	3110B	3370	11/14/2004
Attenuator	Weinschel	AS-6	6675	10/14/2004
Attenuator	Weinschel	AS-6	6677	11/4/2004
Rohde & Schwarz	Mobile Test Set	CMD 80	DE29008	N/A
Hewlett-Packard	Signal Generator	83623B	3844A01195	6/20/2005
Thermotron	Environmental Chamber	S-4	31580	1/5/2005
Hewlett-Packard	Pre-Amplifier	8347A	3307A02001	11/4/2004
Agilent	Power Meter	EE4418B	GB40206388	12/5/2004
Agilent	Power Sensor	E4412B	US38486321	11/23/2004
Hewlett-Packard	Pre-Amplifier	8447F	2805A03419	5/19/2005

U.L. Equipment

Hewlett Packard	QP Adapter	85650A	2811A01069	1/8/2005
Hewlett Packard	S/A Display	8566B	2542A12974	1/8/2005
Hewlett Packard	S/A	8566B	2637A03376	1/8/2005
Hewlett Packard	RF Preselector	85685A	2810A00692	1/8/2005
Rohde & Schwarz	S/A	FSEK20	DE2525315	1/9/2005
EMCO	Horn Antenna 1-18GHz	3115	2638	7/10/2005
EMCO	Horn Antenna 18-26.5GHz	3160-09	9904-1165	N/A*
Chase	Bi-Con Antenna 30-300MHz	VBA6106A	1246	6/23/2005
Chase	Log-Periodic Antenna	UPA6108	1120	6/23/2005

All equipment is on a one-year calibration cycle.

Description of Bluetooth Transmitter

The A760i/A768i cell phone offers Bluetooth as a feature. The Bluetooth spread-spectrum, frequency hopping transceiver is designed to operate between 2400 and 2483 MHz. The Bluetooth antenna is mounted on the PCB inside of the EUT. The antenna installation is permanent. For a more thorough description of the functionality please refer to Exhibit 12 of this package.

As a Bluetooth transmitter, it is designed operate with other Bluetooth devices as defined by industrial standard. In this application, the device is battery-operated. Therefore conducted AC line emissions testing as described in CFR47, Part 15.207 was not necessary.

Measurement Procedures and Data

CARRIER FREQUENCY SEPARATION

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

The Bluetooth transmitter of the A768i had its hopping function enabled. The following spectrum analyzer settings were used:


1. Span = wide enough to capture the peaks of two adjacent channels
2. Resolution (or IF) Bandwidth (RBW) $\geq$ 1% of the span
3. Video (or Average) Bandwidth (VBW) $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The marker-delta function was used to determine the separation between the peaks of the adjacent channels.

Measurement Results

See attached.

Carrier Frequency Separation

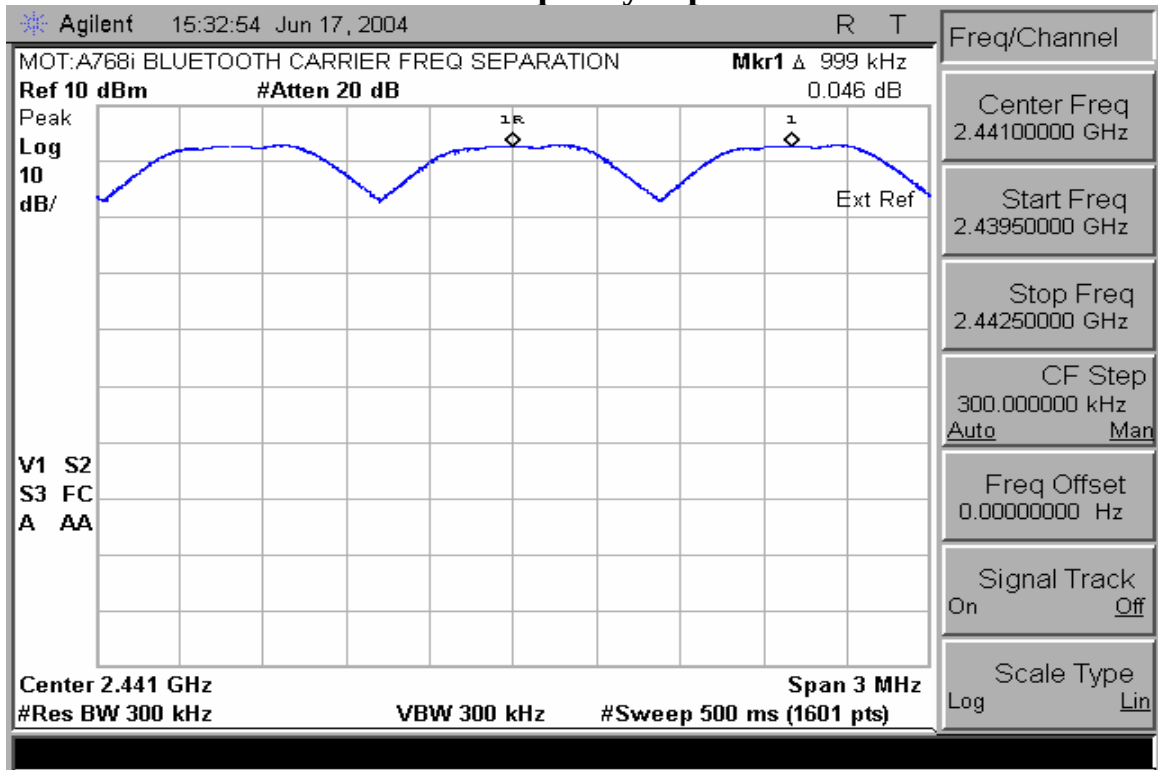

NUMBER OF HOPPING FREQUENCIES

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = the frequency band of operation
2. RBW $\geq$ 1% of the span
3. VBW $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold


The trace was allowed to stabilize.

Measurement Results

See attached.

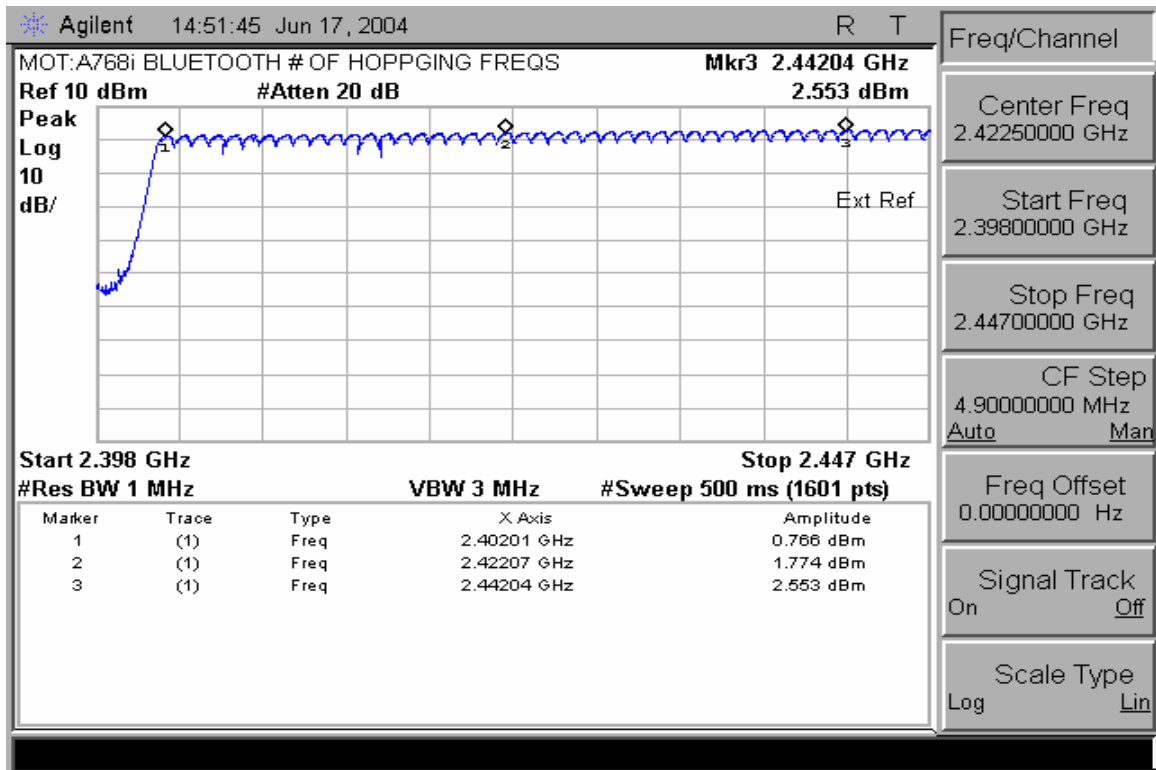

Number of Hopping Frequencies (Channels 0 – 39)

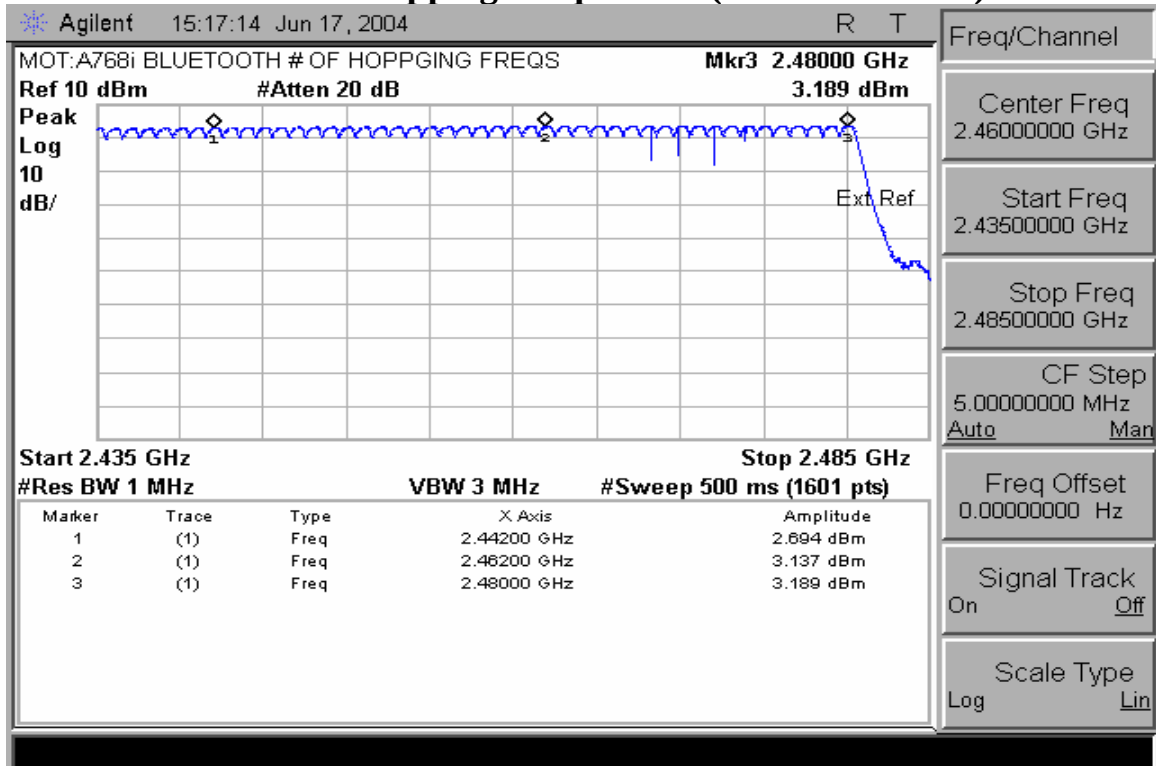

Number of Hopping Frequencies (Channels 39 – 78)

TIME OF OCCUPANCY (DWELL TIME)

CFR47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth hopping function of the EUT was enabled. The following spectrum analyzer settings were used:

1. Span = zero span, centered on a hopping channel
2. RBW = 1 MHz
3. VBW $\geq$ RBW
4. Sweep = as necessary to capture the entire dwell time per hopping channel
5. Detector function = peak
6. Trace = max hold

The marker-delta function was used to determine the dwell time.

Measurement Results

Attached

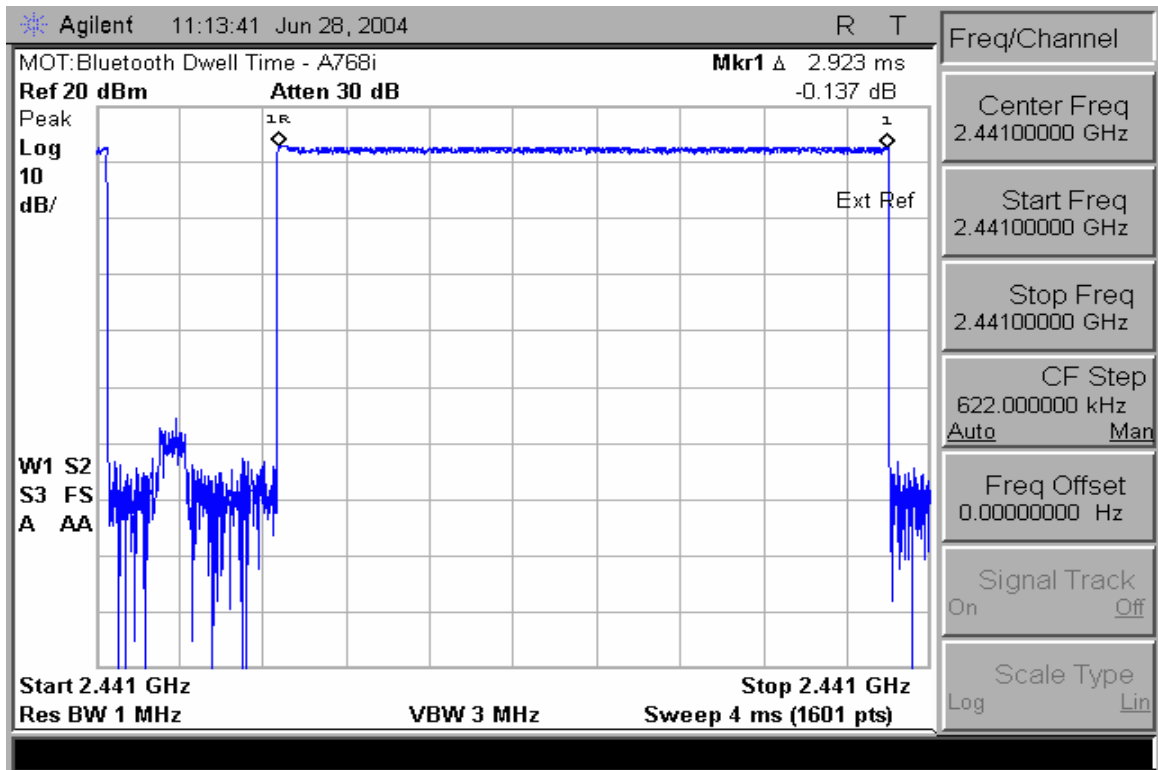

Dwell Time

20dB Bandwidth

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.


The Bluetooth frequency hopping function of the EUT was enabled. The spectrum analyzer used the following settings:

1. Span = approx. 2 to 3 times the 20dB bandwidth, centered on a hopping frequency
2. RBW $\geq$ 1% of the 20dB span
3. VBW $\geq$ RBW
4. Sweep = auto
5. Detector function = peak
6. Trace = max hold

The trace was allowed to stabilize. The EUT was transmitting at its maximum data rate. The marker-to-peak function was used to set the marker to the peak of the emission. The marker-delta function was used to measure 20dB down one side of the emission. The marker-delta function and marker was moved to the other side of the emission until it was even with the reference marker. The marker-delta reading at this point was the 20dB bandwidth of the emission.

Measurement Results

Attached

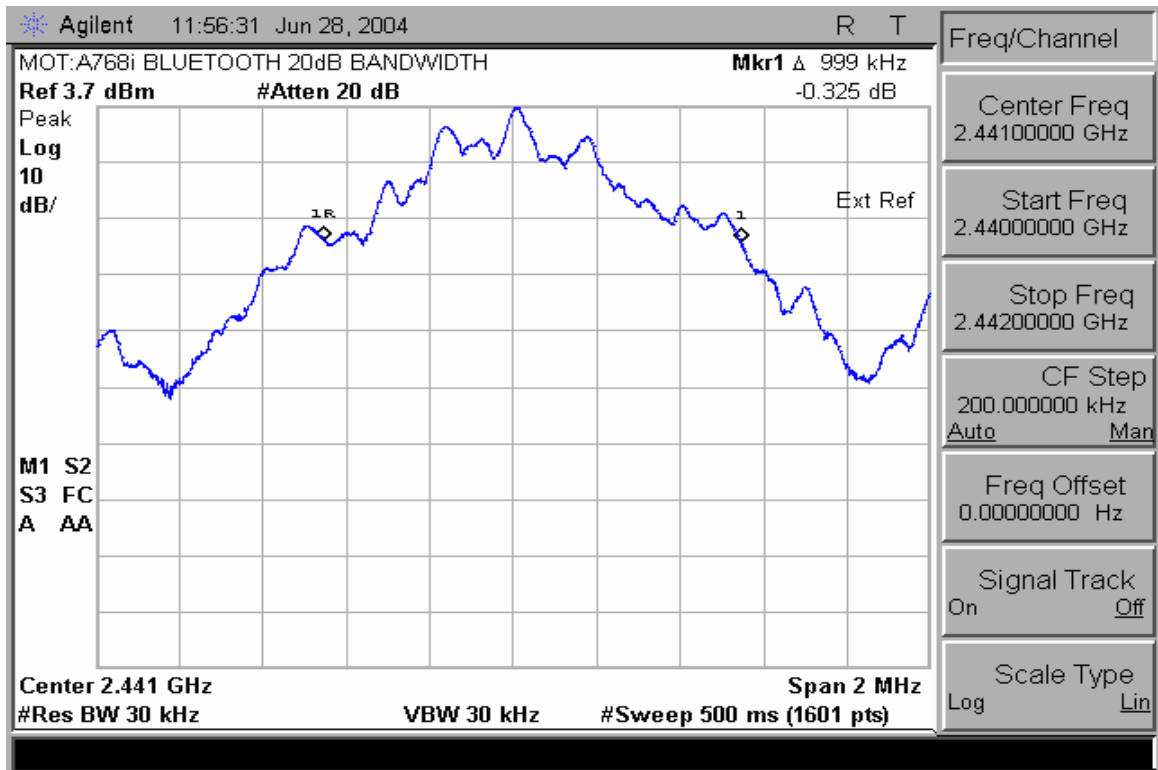

FIELD STRENGTH OF SPURIOUS EMISSIONS

CFR Part 2.1053, 15.249

Measurement Procedure

The Equipment-Under-Test is placed inside the semi-anechoic chamber on a wooden table at the turntable center. For each spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters and the turntable is rotated 360 degrees to obtain a maximum reading on the spectrum analyzer. This is repeated for both horizontal and vertical polarizations of the receive antenna.

The Equipment-Under-Test is then replaced with a substitution antenna fed by a signal generator. With the signal generator tuned to a particular spurious frequency, the antenna mast is raised and lowered from 1 to 4 meters to obtain a maximum reading at the spectrum analyzer. The output of the signal generator is then adjusted until a reading identical to that obtained with the actual transmitter is achieved.

The power in dBm of each spurious emission is calculated by correcting the signal generator level for cable loss and gain of the substitution antenna referenced to a dipole.

The field strength of each radiated emission is calculated by correcting the EMI receiver level for cable loss, amplifier gain, and antenna correction factors.


Field Strength (dBuV/m) = EMI Receiver Level (dBuV) + Cable Loss (dB) -
Amplifier Gain (dB) + Antenna Correction Factor (1/m)

A fully charged battery was used for the supply voltage.

This data was taken at Underwriter's Laboratories.


Measurement Results

Attached

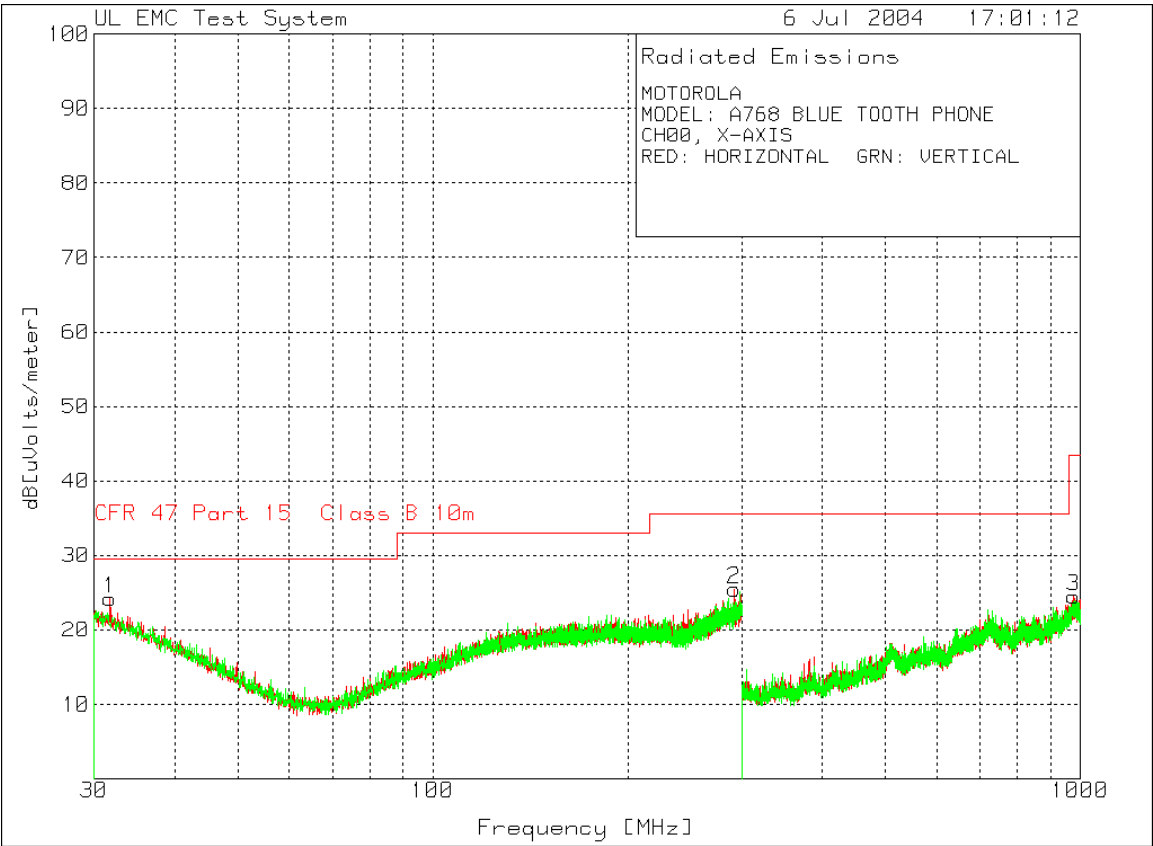

30-1000MHz Low Channel Dual Polarization X

MOTOROLA MODEL: A768 BLUE TOOTH PHONE CH00 X-AXIS RED: HORIZONTAL GRN: VERTICAL											
Marker Number	Test Frequency [MHz]	Meter Reading [dB(uV)]	Detector Type [dB]	Gain/Loss Factor [dB]	Transducer Factor	Level dB[uVolts/meter]	Limit 1	Margin 1[dB]	Azimuth [deg]	Height [cm]	Polarity
Range: 1 30 - 300MHz											
1	31.7537	33.8 pk		-26.9	17.3	24.2	29.6	-5.4	144	100	Horz
2	292.6464	32.8 pk		-25.6	18.3	25.5	35.6	-10.1	171	100	Horz
Range: 3 300 - 1000MHz											
3	976.9179	31.3 pk		-31.2	24.4	24.5	43.5	-19	332	100	Horz
LIMIT 1: CFR 47 Part 15 Class B 10m											
LIMIT 2: NONE											

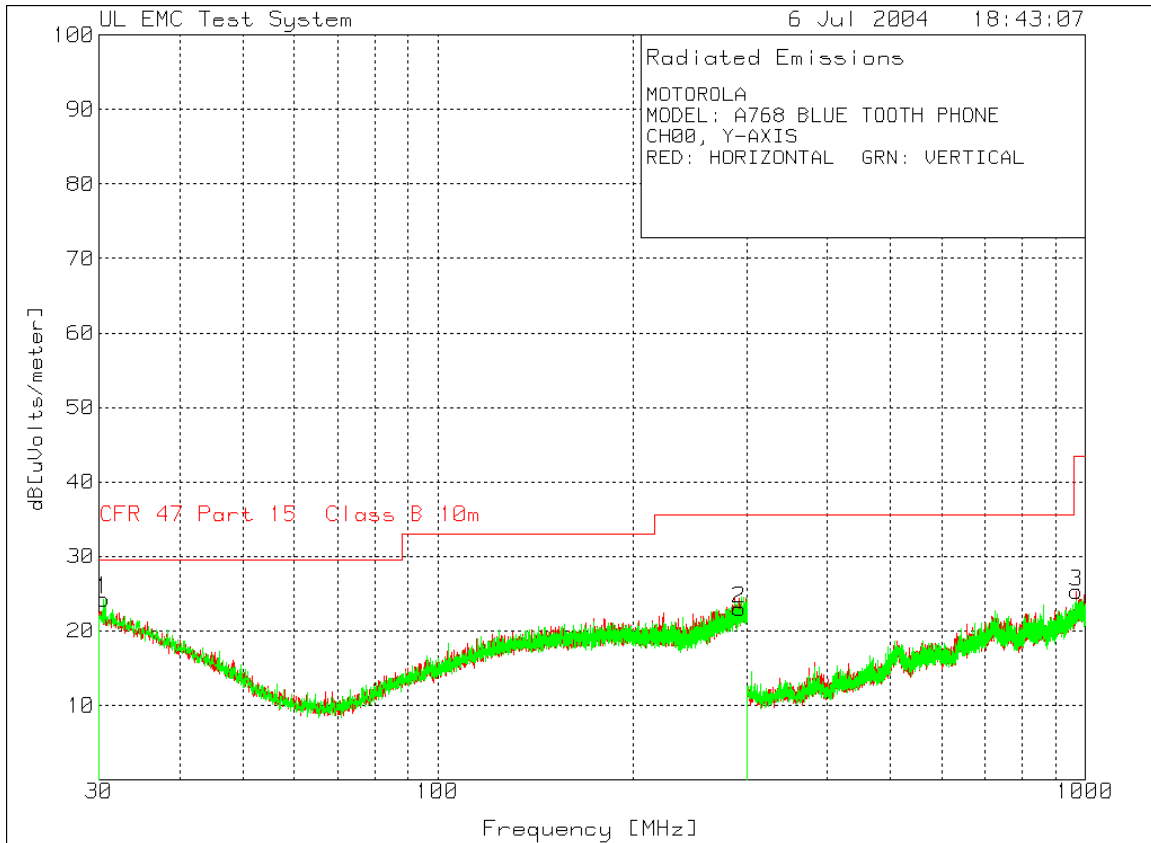

30-1000MHz Low Channel Dual Polarization Y

MOTOROLA

MODEL: A768 BLUE TOOTH PHONE


CH00 Y-AXIS

RED: HORIZONTAL GRN: VERTICAL

Marker Number	Test Frequency [MHz]	Meter Reading [dB(uV)]	Detector Type [dB]	Gain/Loss Factor [dB]	Transducer Factor	Level dB[uVolts/meter]	Limit 1 dB[uVolts/meter]	Margin 1[dB]	Azimuth [deg]	Height [cm]	Polarity
Range: 1 30 - 300MHz											
2	292.3766	30.5 pk		-25.7	18.2	23	35.6	-12.6	245	100	Horz
Range: 2 30 - 300MHz											
1	30.4047	33.4 pk		-26.9	17.8	24.3	29.6	-5.3	250	100	Vert
Range: 3 300 - 1000MHz											
3	968.6991	32.7 pk		-31.3	23.9	25.3	43.5	-18.2	359	100	Horz

LIMIT 1: CFR 47 Part 15 Class B 10m


LIMIT 2: NONE

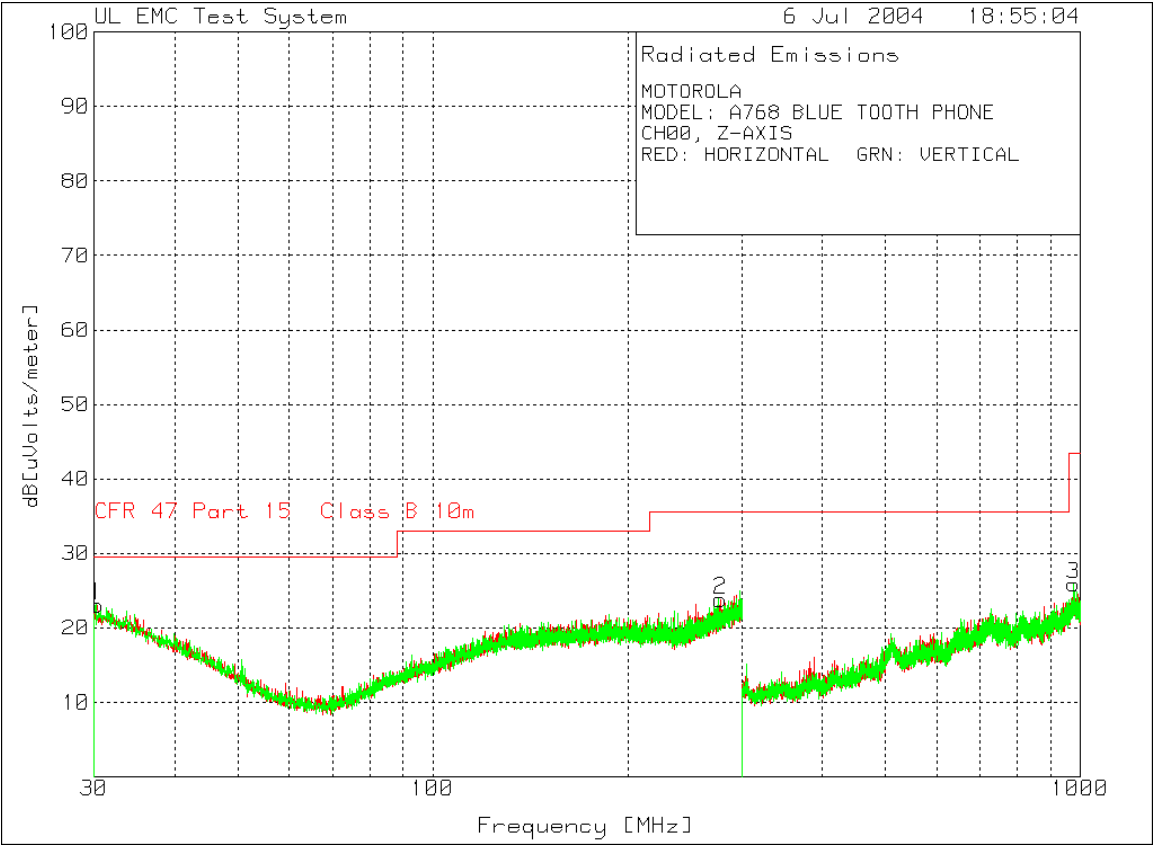

MOTOROLA
MODEL: A768 BLUE TOOTH PHONE
CH00 Z-AXIS
RED: HORIZONTAL GRN: VERTICAL


Marker Number	Test Frequency [MHz]	Meter Reading [dB(uV)]	Detector Type [dB]	Gain/Loss Factor [dB]	Transducer Factor	Level dB[uVolts/meter]	Limit 1	Margin 1[dB]	Azimuth [deg]	Height [cm]	Polarity
Range: 1 30 - 300MHz											
1	30.3372	32.1	pk	-26.9	17.9	23.1	29.6	-6.5	156	100	Horz
2	278.0774	32	pk	-25.8	17.6	23.8	35.6	-11.8	290	100	Horz
Range: 4 300 - 1000MHz											
3	977.0928	32.7	pk	-31.2	24.4	25.9	43.5	-17.6	10	100	Vert

LIMIT 1: CFR 47 Part 15 Class B 10m
LIMIT 2: NONE

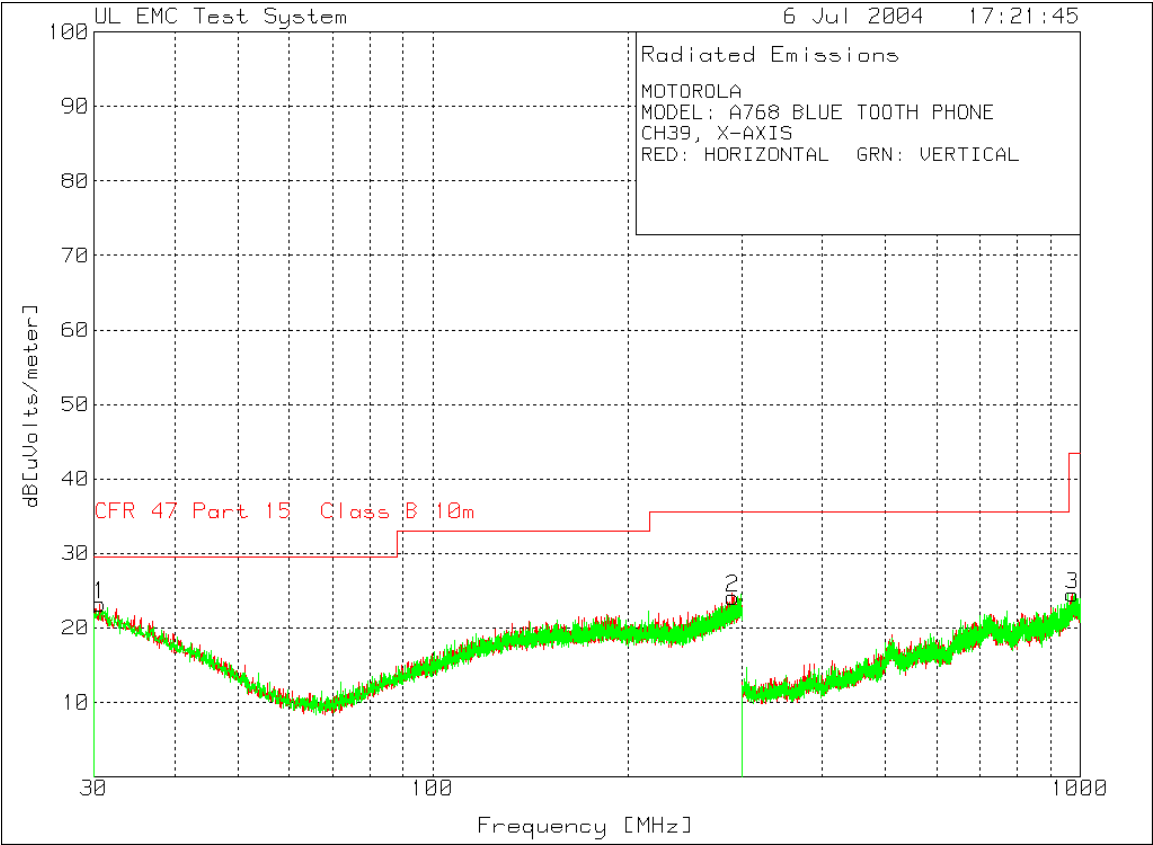


30-1000MHz Mid Channel Dual Polarization X

MOTOROLA MODEL: A768 BLUE TOOTH PHONE CH39 X-AXIS RED: HORIZONTAL GRN: VERTICAL										
Marker Number	Test Frequency [MHz]	Meter Reading [dB(uV)]	Detector Type [dB]	Gain/Loss Factor [dB]	Transducer Factor	Level dB[uVolts/meter]	Limit 1	Margin 1[dB]	Azimuth [deg]	Height [cm] Polarity
Range: 1 30 - 300MHz										
1	30.607	32.4	pk	-26.9	17.7	23.2	29.6	-6.4	237	100 Horz
2	290.5555	31.7	pk	-25.7	18.1	24.1	35.6	-11.5	117	100 Horz
Range: 3 300 - 1000MHz										
3	973.0708	31.7	pk	-31.4	24.2	24.5	43.5	-19	10	100 Horz
LIMIT 1: CFR 47 Part 15 Class B 10m										

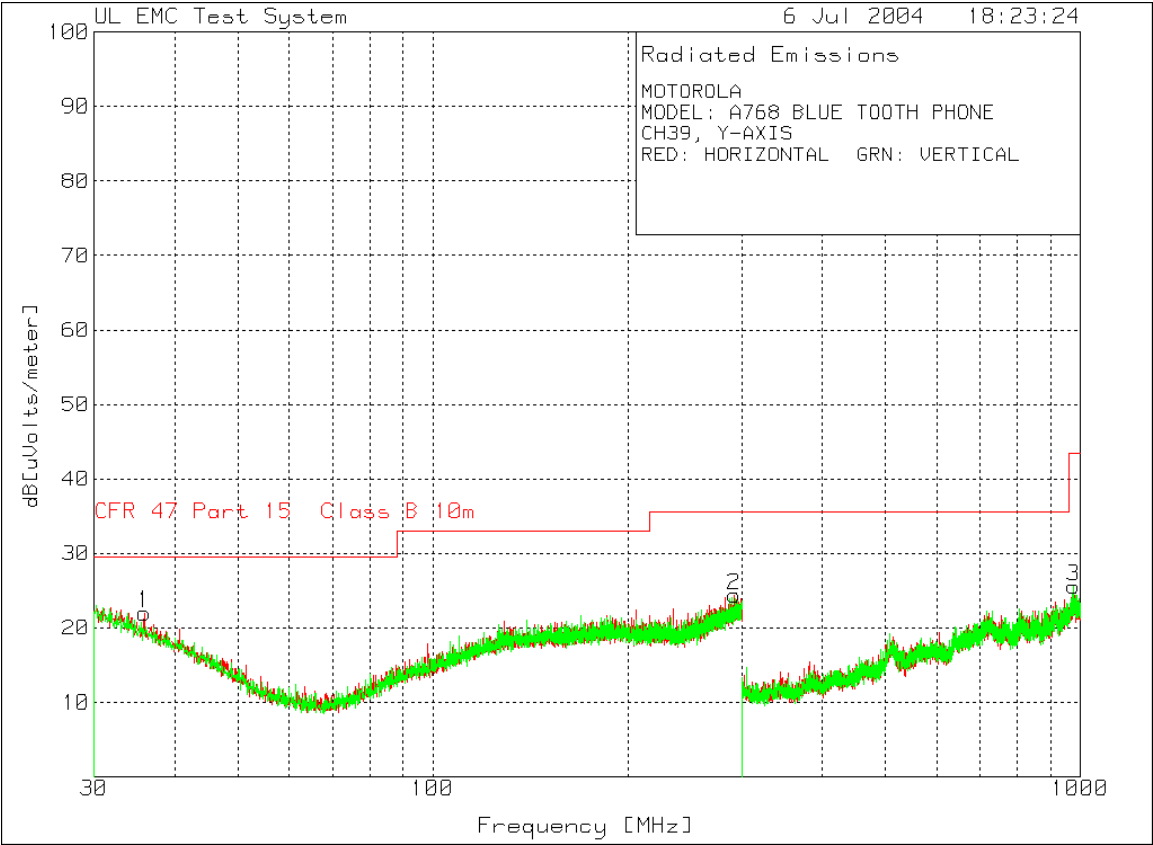


MOTOROLA MODEL: A768 BLUE TOOTH PHONE CH39 Y-AXIS RED: HORIZONTAL GRN: VERTICAL											
Marker Number	Test Frequency [MHz]	Meter Reading [dB(uV)]	Detector Type [dB]	Gain/Loss Factor [dB]	Transducer Factor	Level dB[uVolts/meter]	Limit 1	Margin 1[dB]	Azimuth [degs]	Height [cm]	Polarity
Range: 1 30 - 300MHz											
1	35.8681	33.4	pk	-26.9	15.5	22	29.6	-7.6	250	100	Horz
2	292.6464	31.7	pk	-25.6	18.3	24.4	35.6	-11.2	344	100	Horz
Range: 4 300 - 1000MHz											
3	976.743	32.4	pk	-31.2	24.4	25.6	43.5	-17.9	151	100	Vert
LIMIT 1: CFR 47 Part 15 Class B 10m LIMIT 2: NONE LIMIT 3: NONE LIMIT 4: NONE											

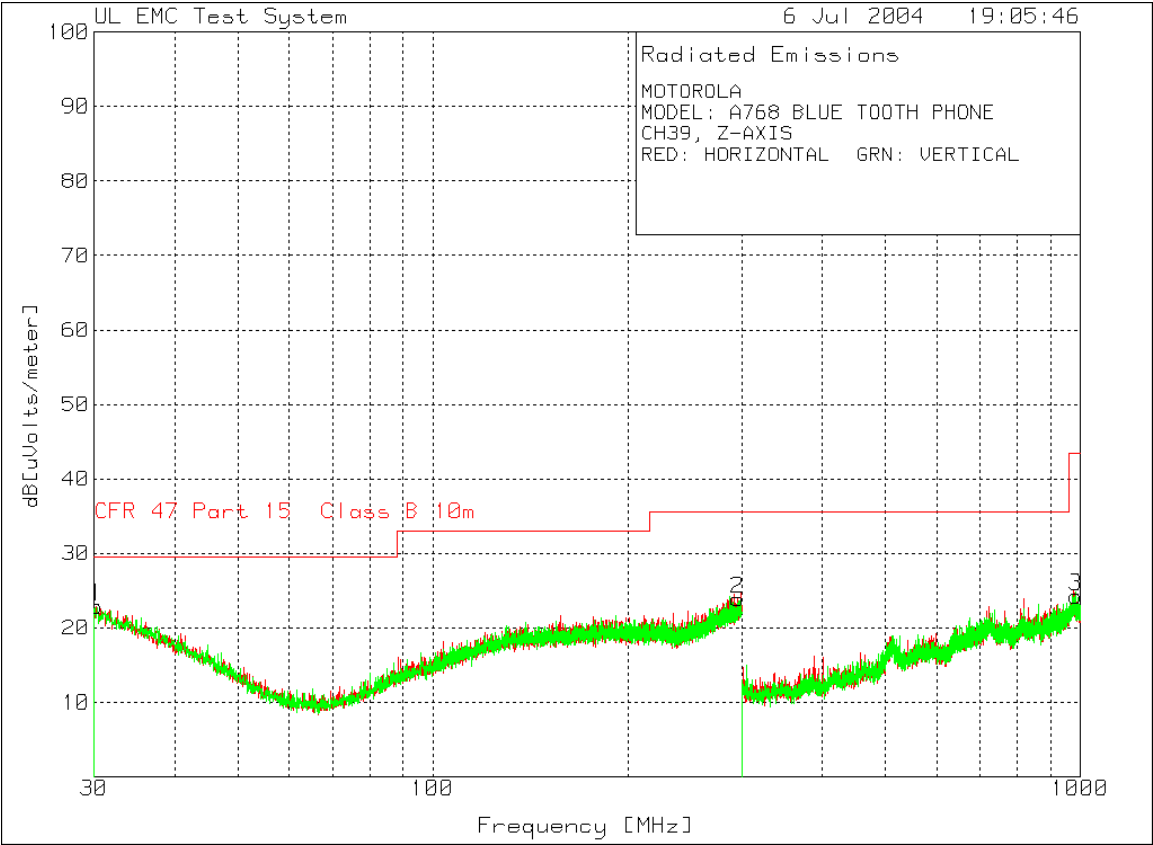


30 -1000MHz Mid Channel Dual Polarization Z

MOTOROLA											
MODEL: A768 BLUE TOOTH PHONE											
CH39 Z-AXIS											
RED: HORIZONTAL GRN: VERTICAL											
Marker	Test	Meter	Detector	Gain/Loss	Transducer	Level	Limit 1	Margin 1[dB]	Azimuth [deg]	Height [cm]	Polarity
Number	Frequency	Reading	Type	Factor	Factor	dB[uVolts/meter]					
	[MHz]	[dB(uV)]	[dB]	[dB]							
Range: 1 30 - 300MHz											
	1	30.2698	31.9 pk	-26.9	17.9	22.9	29.6	-6.7	86	100	Horz
	2	296.0863	31.1 pk	-25.6	18.4	23.9	35.6	-11.7	86	100	Horz
Range: 3 300 - 1000MHz											
	3	985.8362	31.2 pk	-31.1	24.2	24.3	43.5	-19.2	212	100	Horz
LIMIT 1: CFR 47 Part 15 Class B 10m											
LIMIT 2: NONE											

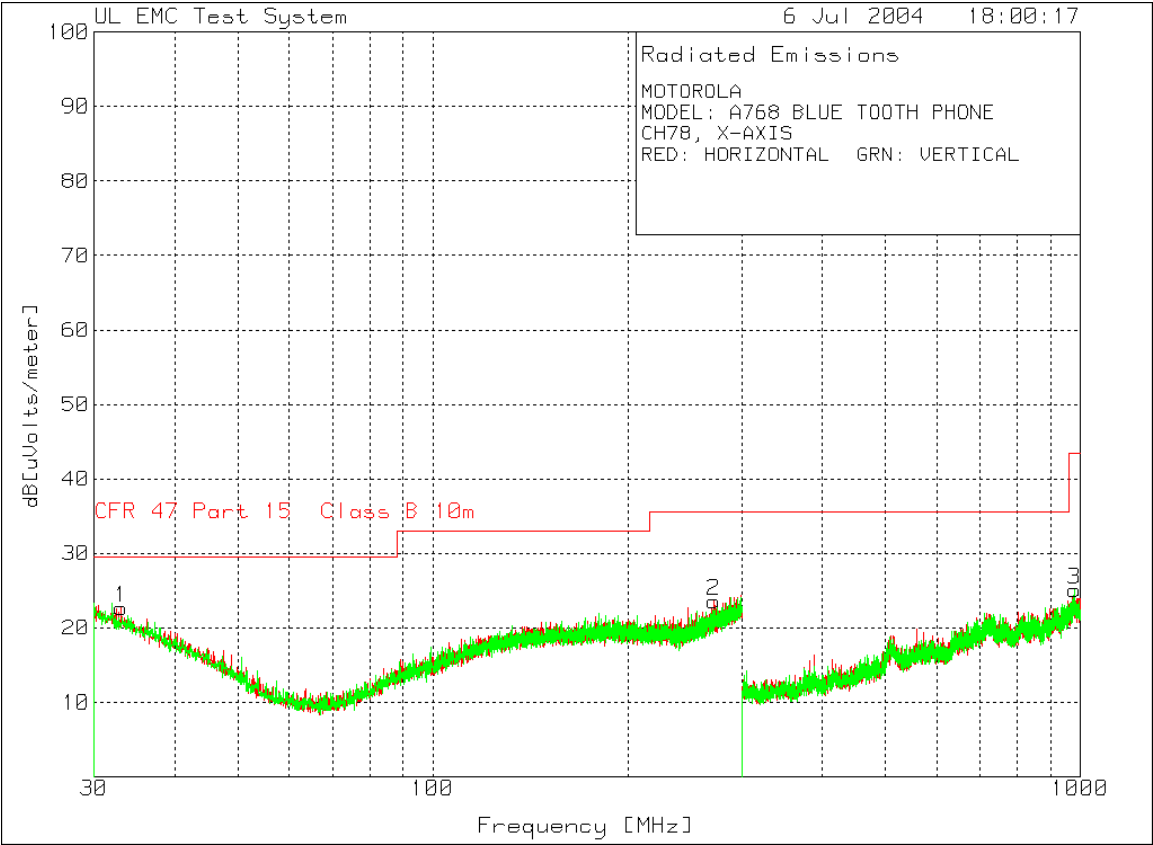


MOTOROLA											
MODEL: A768 BLUE TOOTH PHONE											
CH78 X-AXIS											
RED: HORIZONTAL GRN: VERTICAL											
Marker	Test	Meter	Detector	Gain/Loss	Transducer	Level	Limit 1	Margin 1[dB]	Azimuth [deg]	Height [cm]	Polarity
Number	Frequency	Reading	Type	Factor	Factor	dB[uVolts/meter]					
	[MHz]	[dB(uV)]	[dB]	[dB]							
Range: 1 30 - 300MHz											
	1	33.0352	32.9 pk	-26.9	16.7	22.7	29.6	-6.9	183	100	Horz
	2	271.5349	32.2 pk	-25.8	17.2	23.6	35.6	-12	358	100	Horz
Range: 4 300 - 1000MHz											
	3	979.8907	32 pk	-31.3	24.4	25.1	43.5	-18.4	331	100	Vert
LIMIT 1: CFR 47 Part 15 Class B 10m											
LIMIT 2: NONE											

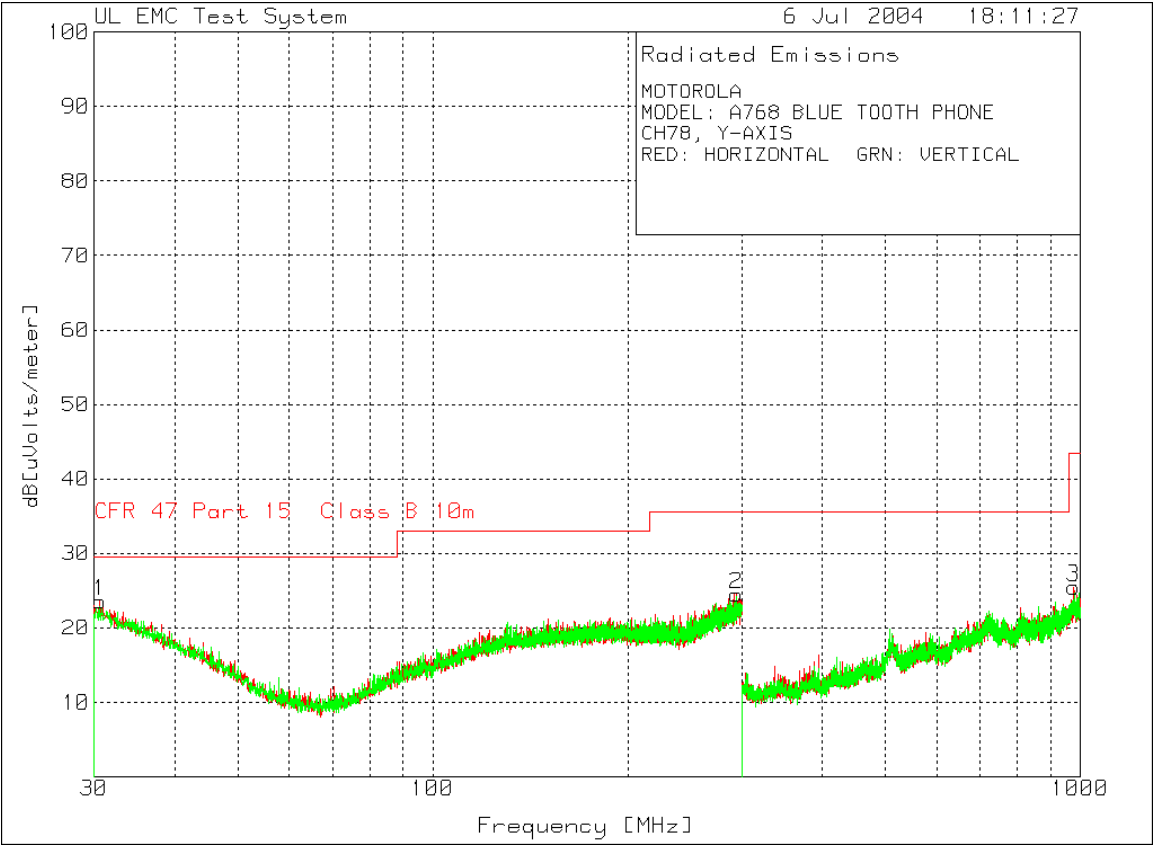

30 -1000MHz High Channel Dual Polarization Y

MOTOROLA											
MODEL: A768 BLUE TOOTH PHONE											
CH78 Y-AXIS											
RED: HORIZONTAL GRN: VERTICAL											
Marker	Test	Meter	Detector	Gain/Loss	Transducer	Level	Limit 1	Margin 1[dB]	Azimuth [deg]	Height [cm]	Polarity
Number	Frequency	Reading	Type	Factor	Factor	dB[uVolts/meter]					
	[MHz]	[dB(uV)]	[dB]	[dB]							
Range: 1 30 - 300MHz											
1	30.607	32.8	pk	-26.9	17.7	23.6	29.6	-6	182	100	Horz
2	294.0628	31.8	pk	-25.6	18.3	24.5	35.6	-11.1	10	100	Horz
Range: 3 300 - 1000MHz											
3	976.743	32.3	pk	-31.2	24.4	25.5	43.5	-18	190	100	Horz
LIMIT 1: CFR 47 Part 15 Class B 10m											
LIMIT 2: NONE											

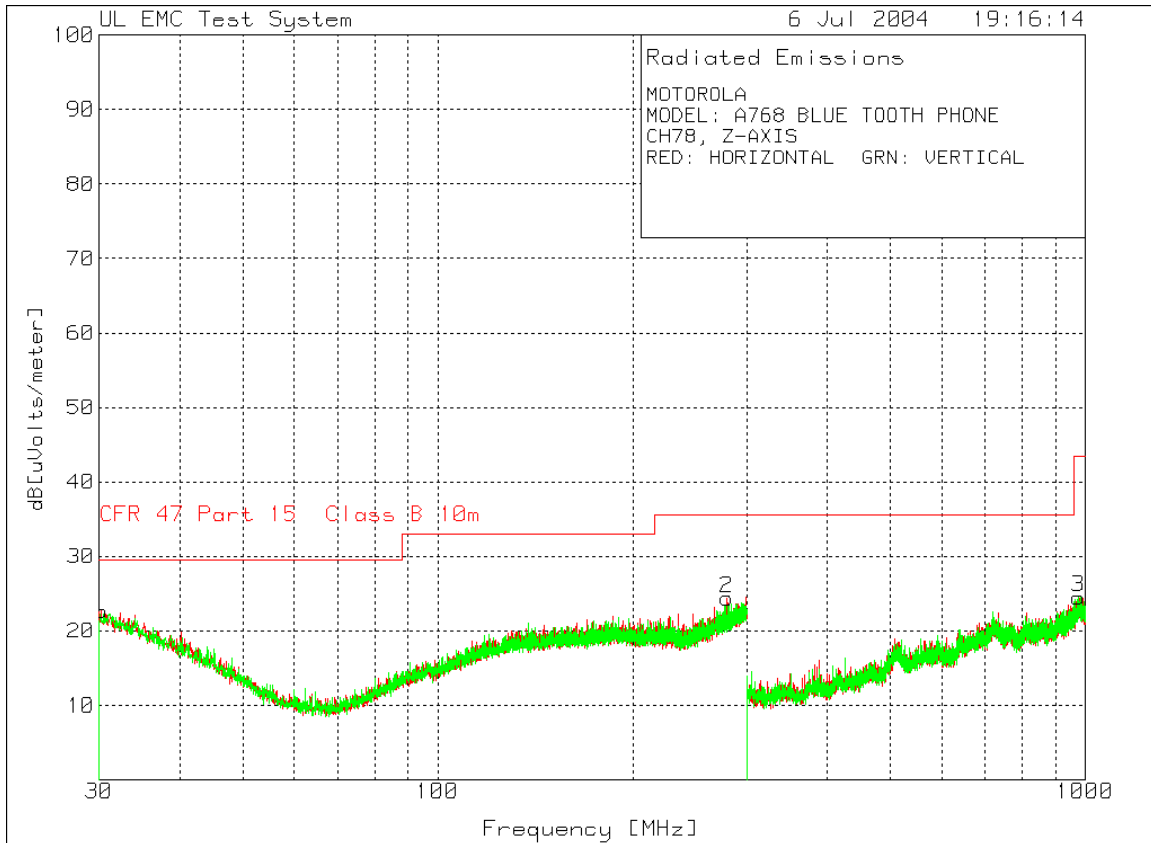


30 -1000MHz High Channel Dual Polarization Z

MOTOROLA
MODEL: A768 BLUE TOOTH PHONE
CH78 Z-AXIS
RED: HORIZONTAL GRN: VERTICAL


Marker Number	Test Frequency [MHz]	Meter Reading [dB(uV)]	Detector Type [dB]	Gain/Loss Factor [dB]	Transducer Factor	Level dB[uVolts/meter]	Limit 1	Margin 1[dB]	Azimuth [deg]	Height [cm]	Polarity
Range: 1 30 - 300MHz											
1	30.2023	31.7 pk		-26.9	17.9	22.7	29.6	-6.9	303	100	Horz
2	279.8311	32.5 pk		-25.7	17.6	24.4	35.6	-11.2	35	100	Horz
Range: 4 300 - 1000MHz											
3	974.8195	31.6 pk		-31.4	24.3	24.5	43.5	-19	332	100	Vert

LIMIT 1: CFR 47 Part 15 Class B 10m
LIMIT 2: NONE

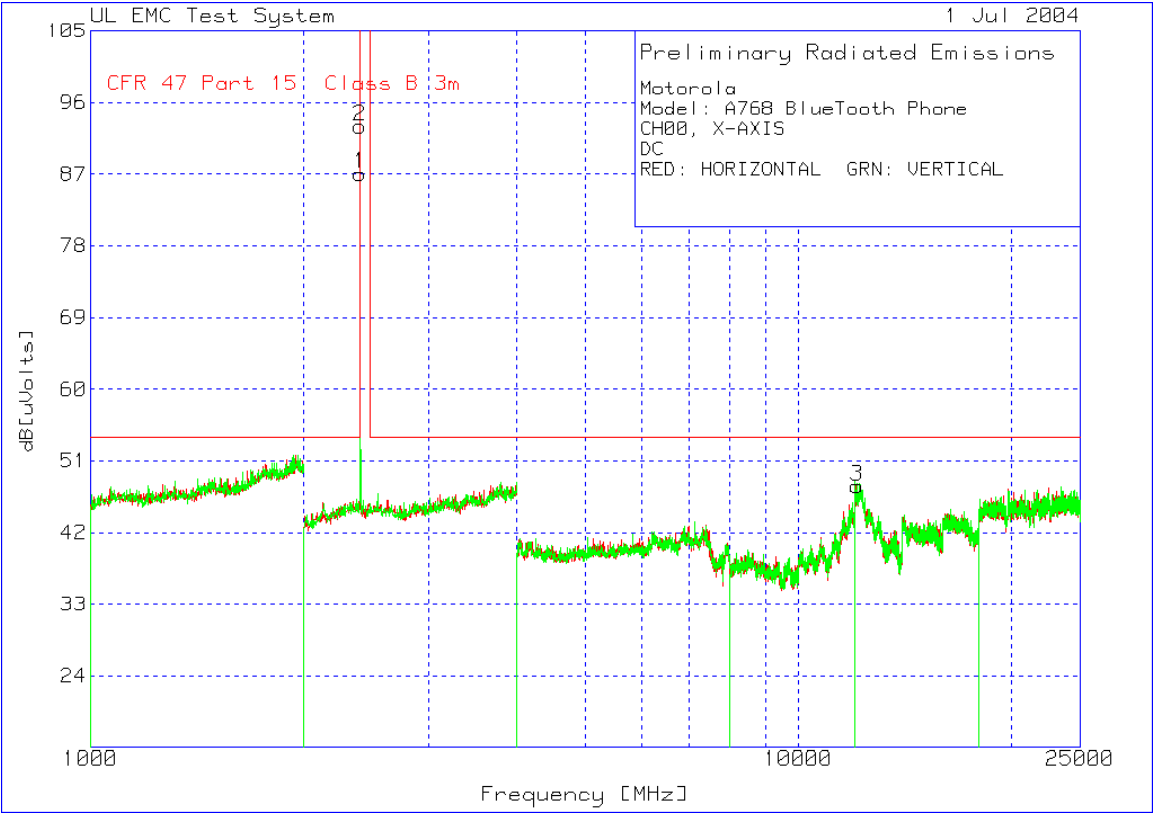


1-12 GHz Low Channel Dual Polarization X

Motorola Model: A768 BlueTooth Phone CH00, X-AXIS DC RED: HORIZONTAL GRN: VERTICAL										
Marker Number	Test Frequency [MHz]	Meter Reading [dB(uV)]	Detector Type [dB]	Gain/Loss Factor [dB]	Transducer Factor	Level dB[uVolts]	Limit 1	Margin 1[dB]	Height [cm]	Polarity
2 - 4GHz 2000 - 4000MHz										
1	2400.802	61.95 pk		3.3	21.8	87.05	999	-911.95	100	Horz
12 - 18GHz 12000 - 18000MHz										
3	12092.061	50.82 pk		-42.4	39.4	47.82	54	-6.18	150	Horz
2 - 4GHz 2000 - 4000MHz										
2	2400.802	67.92 pk		3.3	21.8	93.02	999	-905.98	100	Vert
LIMIT 1: CFR 47 Part 15 Class B 3m										
LIMIT 2: NONE										

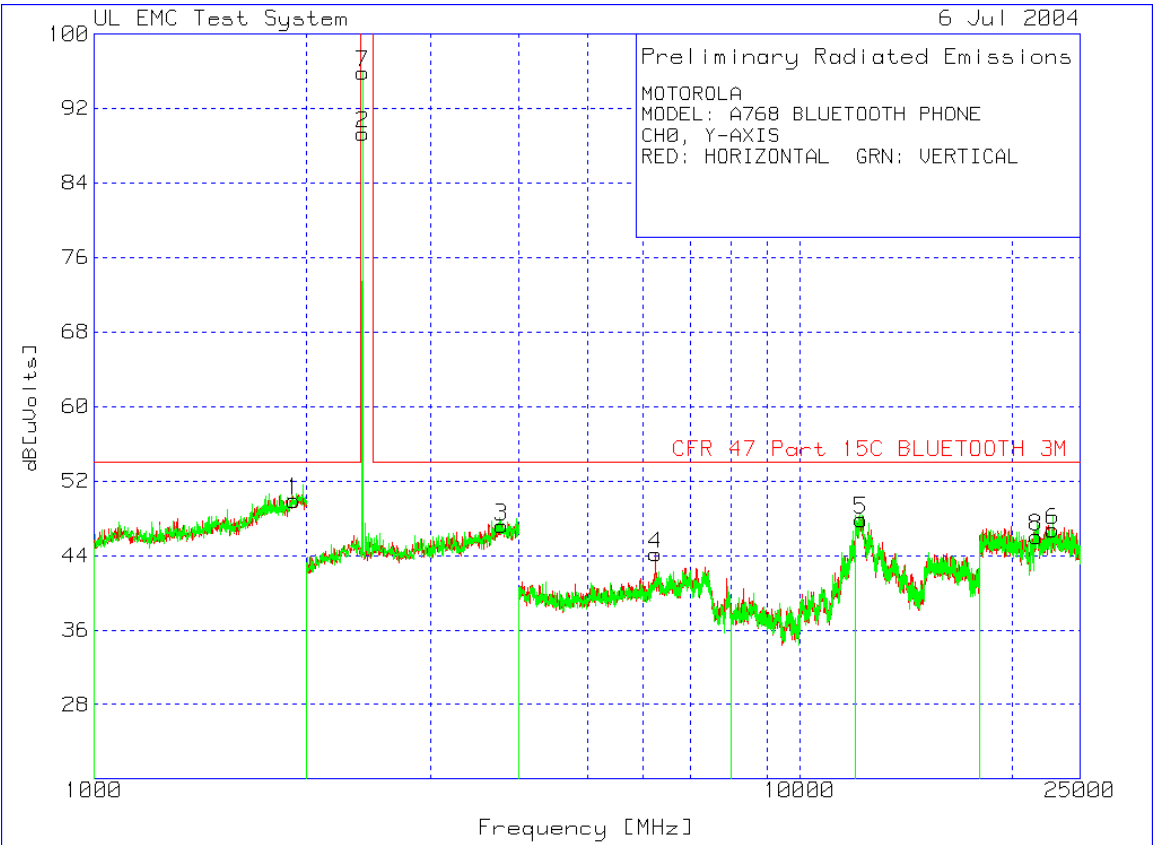


1-12 GHz Low Channel Dual Polarization Y

MOTOROLA											
MODEL: A768 BLUETOOTH PHONE											
CH0, Y-AXIS											
RED: HORIZONTAL GRN: VERTICAL											
Marker	Test	Meter	Detector	Gain/Loss	Transducer	Level	Limit 1	Margin 1[dB]	Height [cm]	Polarity	
Number	Frequency	Reading	Type	Factor	Factor	dB[uVolts]					
	[MHz]	[dB(uV)]	[dB]	[dB]							
1 - 2GHz 1000 - 2000MHz											
1	1919.84	18.95	pk		3	28	49.95	54	-4.05	150	Horz
2 - 4GHz 2000 - 4000MHz											
2	2400.802	64.22	pk		3.3	21.8	89.32	999	-909.68	100	Horz
3	3783.567	19.07	pk		4.1	24	47.17	54	-6.83	100	Horz
4 - 8GHz 4000 - 8000MHz											
4	6258.258	62.54	pk		-47.6	29.2	44.14	54	-9.86	150	Horz
12 - 18GHz 12000 - 18000MHz											
5	12228.228	49.39	pk		-40.9	39.4	47.89	54	-6.11	150	Horz
18-26.5GHz 18000 - 25000MHz											
6	22862.863	62.95	pk		-56.6	40.4	46.75	54	-7.25	100	Horz
2 - 4GHz 2000 - 4000MHz											
7	2400.802	70.77	pk		3.3	21.8	95.87	999	-903.13	100	Vert
18-26.5GHz 18000 - 25000MHz											
8	21650.651	66.74	pk		-61.1	40.4	46.04	54	-7.96	100	Vert
LIMIT 1: CFR 47 Part 15C BLUETOOTH 3M											
LIMIT 2: NONE											

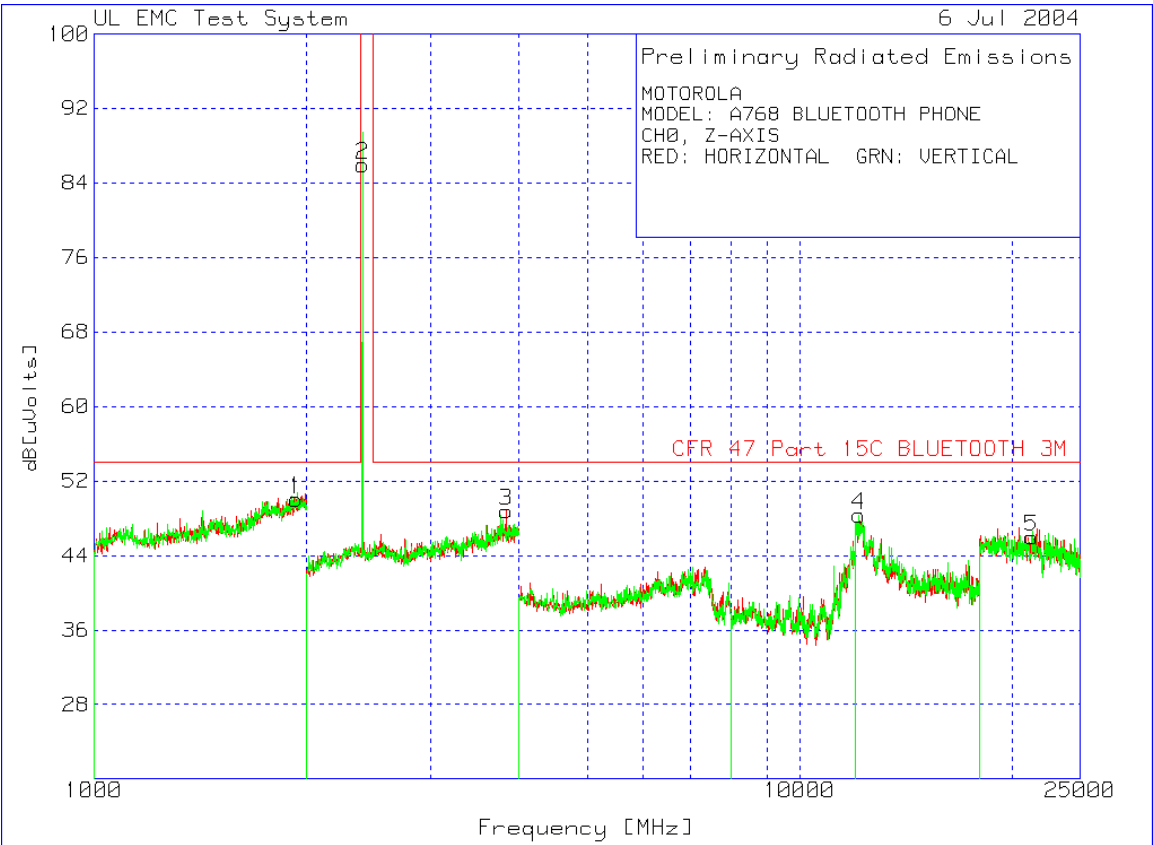


1-12 GHz Low Channel Dual Polarization Z

MOTOROLA MODEL: A768 BLUETOOTH PHONE CH0, Z-AXIS RED: HORIZONTAL GRN: VERTICAL										
Marker Number	Test Frequency [MHz]	Meter Reading [dB(uV)]	Detector Type [dB]	Gain/Loss Factor [dB]	Transducer Factor	Level dB[uVolts]	Limit 1	Margin 1[dB]	Height [cm]	Polarity
1 - 2GHz 1000 - 2000MHz										
1	1931.864	19.05 pk		3	28	50.05	54	-3.95	100	Horz
2 - 4GHz 2000 - 4000MHz										
2	2400.802	60.86 pk		3.3	21.8	85.96	999	-913.04	100	Horz
3	3835.671	20.68 pk		4.1	24	48.78	54	-5.22	100	Horz
12 - 18GHz 12000 - 18000MHz										
4	12144.289	51.07 pk		-42.1	39.4	48.37	54	-5.63	100	Vert
18-26.5GHz 18000 - 25000MHz										
5	21352.705	67.77 pk		-62	40.2	45.97	54	-8.03	100	Vert
LIMIT 1: CFR 47 Part 15C BLUETOOTH 3M										
LIMIT 2: NONE										

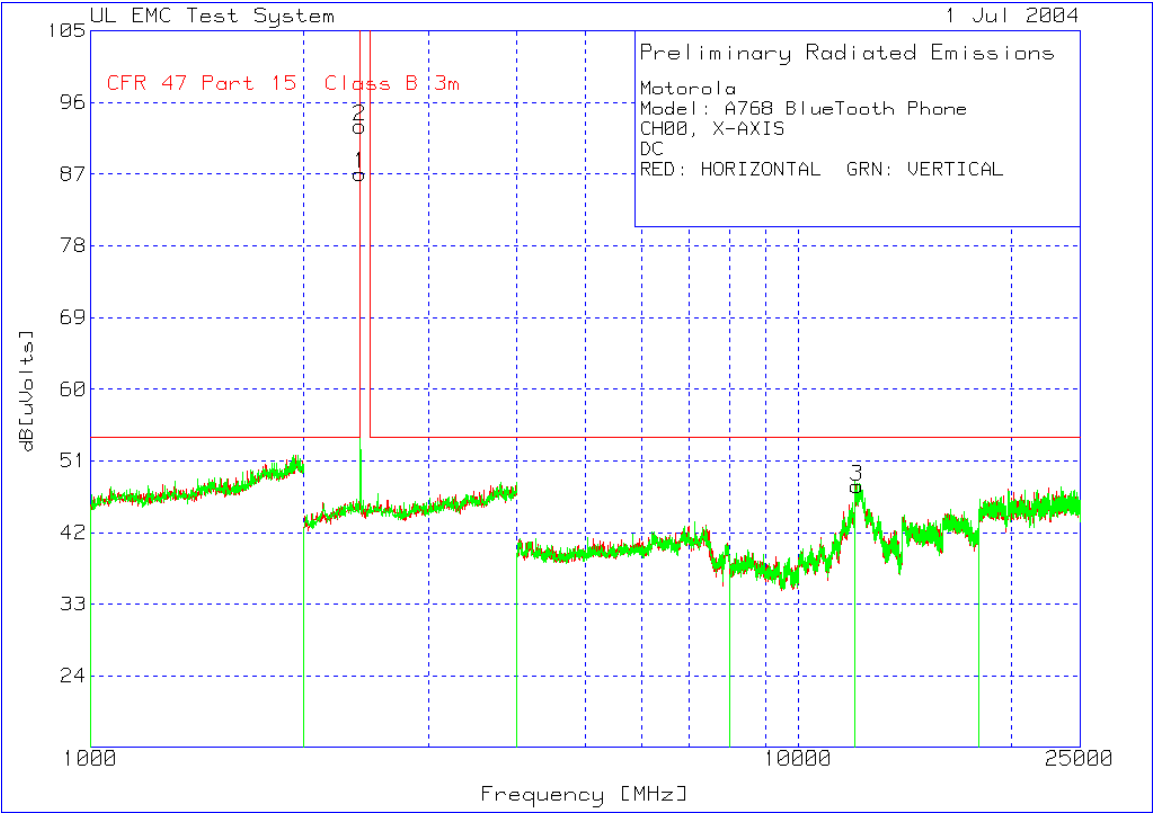


1-12 GHz Mid Channel Dual Polarization X

Motorola Model: A768 BlueTooth Phone CH39, X-AXIS DC RED: HORIZONTAL GRN: VERTICAL										
Marker Number	Test Frequency [MHz]	Meter Reading [dB(uV)]	Detector Type [dB]	Gain/Loss Factor [dB]	Transducer Factor	Level dB[uVolts]	Limit 1	Margin 1[dB]	Height [cm]	Polarity
2 - 4GHz 2000 - 4000MHz										
1	2440.882	63.29 pk		3.3	21.9	88.49	999	-910.51	99	Horz
12 - 18GHz 12000 - 18000MHz										
3	12156.104	50.8 pk		-41.9	39.4	48.3	54	-5.7	149	Horz
2 - 4GHz 2000 - 4000MHz										
2	2440.882	66.57 pk		3.3	21.9	91.77	999	-907.23	100	Vert
LIMIT 1: CFR 47 Part 15 Class B 3m LIMIT 2: NONE										

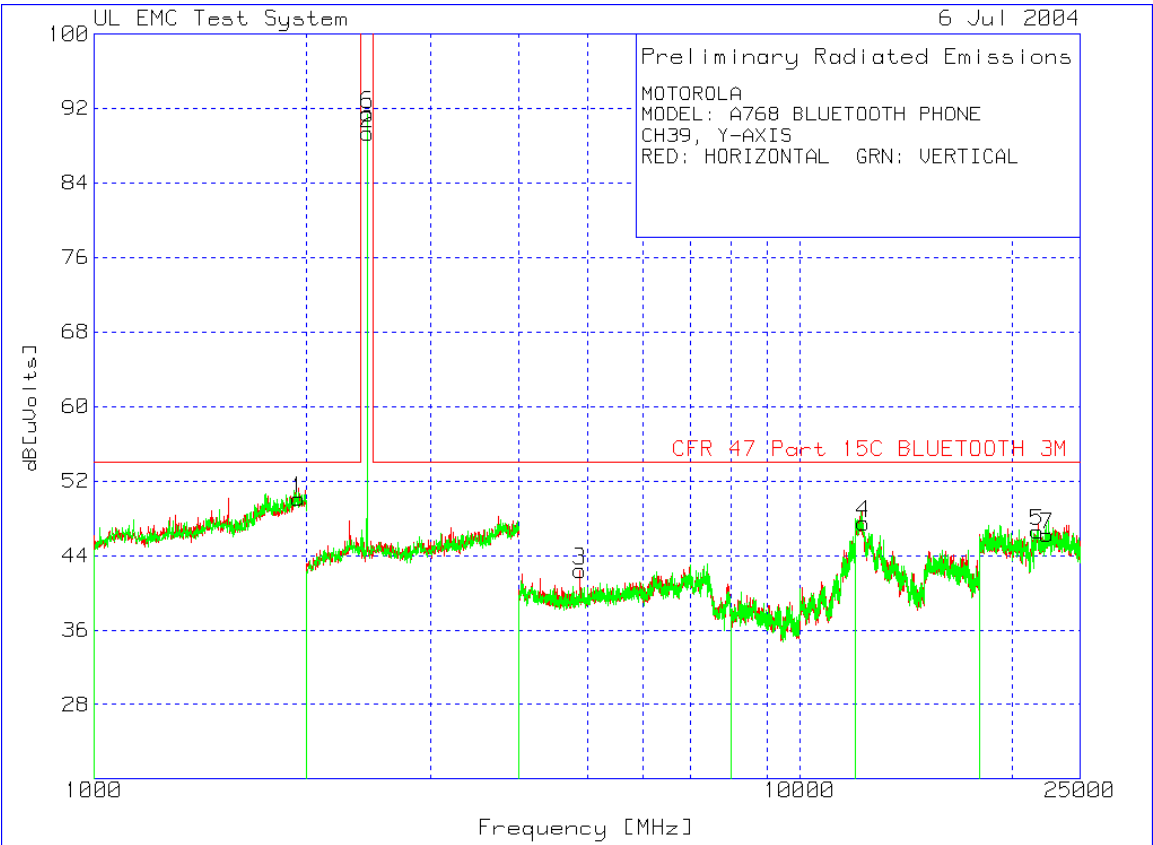


1-12 GHz Mid Channel Dual Polarization Y

MOTOROLA										
MODEL: A768 BLUETOOTH PHONE										
CH39, Y-AXIS										
RED: HORIZONTAL GRN: VERTICAL										
Marker	Test	Meter	Detector	Gain/Loss	Transducer	Level	Limit 1	Margin 1[dB]	Height [cm]	Polarity
Number	Frequency [MHz]	Reading [dB(uV)]	Type [dB]	Factor [dB]	Factor	dB[uVolts]				
1 - 2GHz 1000 - 2000MHz										
1	1947.896	18.99 pk		3.1	28	50.09	54	-3.91	100	Horz
2 - 4GHz 2000 - 4000MHz										
2	2440.882	64.18 pk		3.3	21.9	89.38	999	-909.62	100	Horz
4 - 8GHz 4000 - 8000MHz										
3	4880.881	66.1 pk		-51.4	27.7	42.4	54	-11.6	100	Horz
12 - 18GHz 12000 - 18000MHz										
4	12312.312	49.71 pk		-41.6	39.4	47.51	54	-6.49	100	Horz
18-26.5GHz 18000 - 25000MHz										
5	21720.721	67.12 pk		-60.9	40.4	46.62	54	-7.38	100	Horz
2 - 4GHz 2000 - 4000MHz										
6	2440.882	66.25 pk		3.3	21.9	91.45	999	-907.55	100	Vert
18-26.5GHz 18000 - 25000MHz										
7	22442.442	64.41 pk		-58.7	40.5	46.21	54	-7.79	100	Vert
LIMIT 1: CFR 47 Part 15C BLUETOOTH 3M										
LIMIT 2: NONE										

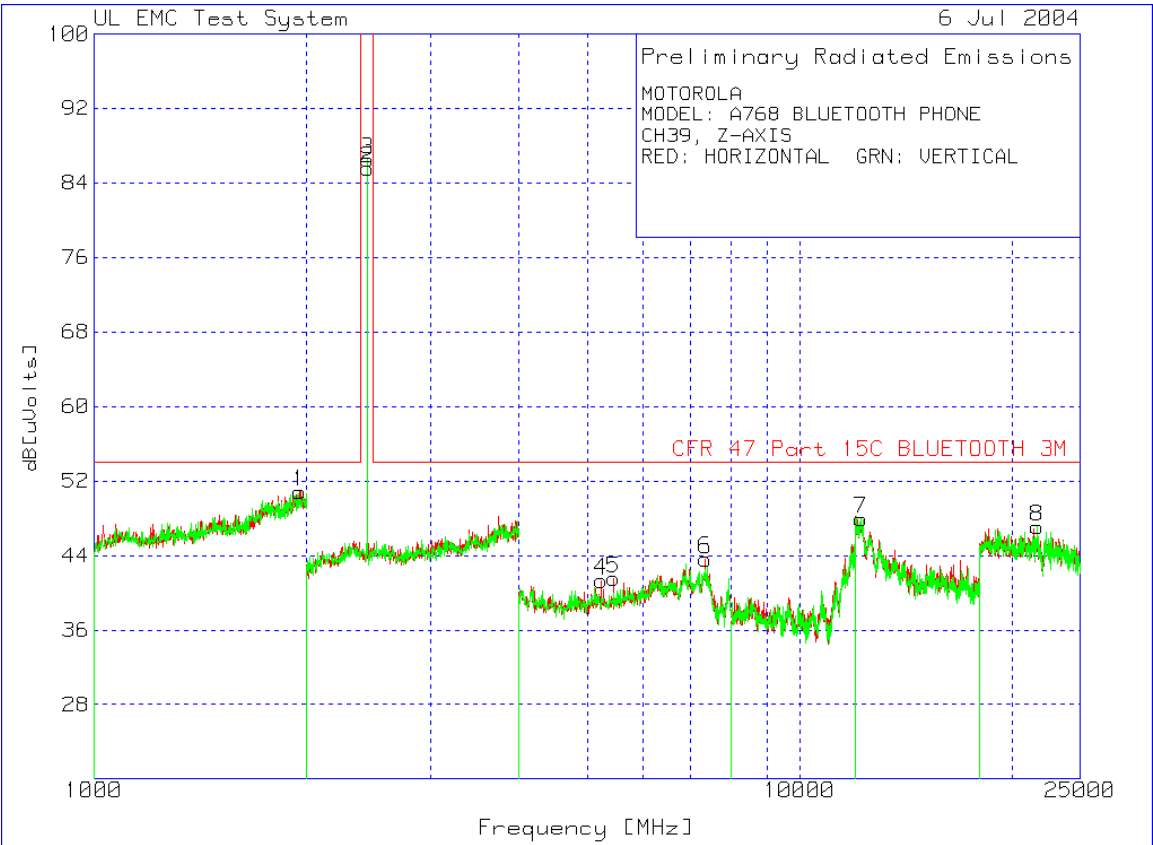


1-12 GHz Mid Channel Dual Polarization Z

MOTOROLA MODEL: A768 BLUETOOTH PHONE CH39, Z-AXIS RED: HORIZONTAL GRN: VERTICAL										
Marker Number	Test Frequency [MHz]	Meter Reading [dB(uV)]	Detector Type [dB]	Gain/Loss Factor [dB]	Transducer Factor	Level dB[uVolts]	Limit 1	Margin 1[dB]	Height [cm]	Polarity
1 - 2GHz 1000 - 2000MHz										
1	1953.908	19.63	pk	3.1	28.1	50.83	54	-3.17	100	Horz
2 - 4GHz 2000 - 4000MHz										
2	2440.882	60.38	pk	3.3	21.9	85.58	999	-913.42	100	Horz
4 - 8GHz 4000 - 8000MHz										
4	5234.469	63.71	pk	-50.6	28.2	41.31	54	-12.69	100	Horz
5	5450.902	63.83	pk	-50.3	28	41.53	54	-12.47	100	Horz
6	7350.701	60.14	pk	-47.3	30.8	43.64	54	-10.36	100	Horz
2 - 4GHz 2000 - 4000MHz										
3	2440.882	61.34	pk	3.3	21.9	86.54	999	-912.46	100	Vert
12 - 18GHz 12000 - 18000MHz										
7	12228.457	49.42	pk	-40.9	39.4	47.92	54	-6.08	100	Vert
18-26.5GHz 18000 - 25000MHz										
8	21745.491	67.47	pk	-60.8	40.4	47.07	54	-6.93	100	Vert
LIMIT 1: CFR 47 Part 15C BLUETOOTH 3M										
LIMIT 2: NONE										

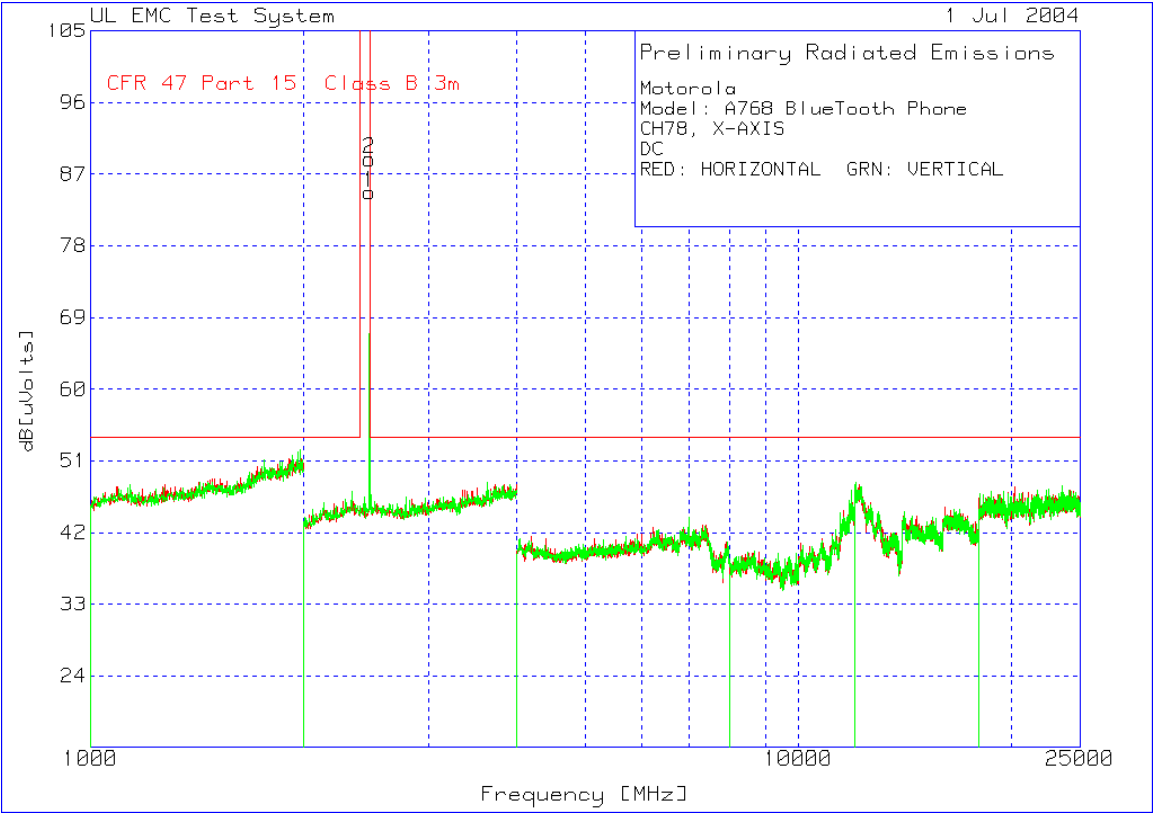


1-12 GHz High Channel Dual Polarization X

Motorola										
Model: A768 BlueTooth Phone										
CH78, X-AXIS										
DC										
RED: HORIZONTAL GRN: VERTICAL										
Marker	Test	Meter	Detector	Gain/Loss	Transducer	Level	Limit 1	Margin 1[dB]	Height [cm]	Polarity
Number	Frequency	Reading	Type	Factor	Factor	dB[uVolts]				
	[MHz]	[dB(uV)]	[dB]	[dB]						
2 - 4GHz 2000 - 4000MHz										
1	2476.954	59.45	pk	3.3	22	84.75	999	-914.25	100	Horz
2 - 4GHz 2000 - 4000MHz										
2	2476.954	63.61	pk	3.3	22	88.91	999	-910.09	100	Vert
LIMIT 1: CFR 47 Part 15 Class B 3m										
LIMIT 2: NONE										

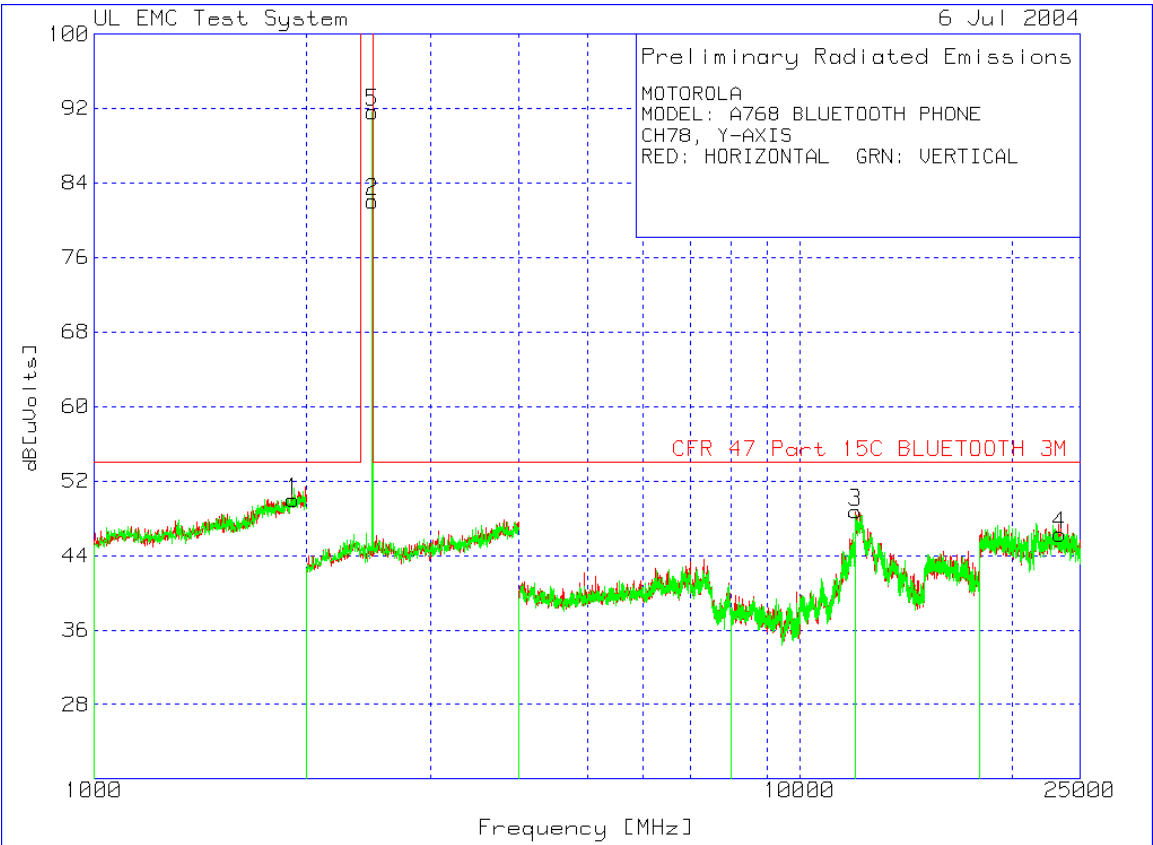

1-12 GHz High Channel Dual Polarization Y

MOTOROLA MODEL: A768 BLUETOOTH PHONE CH78, Y-AXIS RED: HORIZONTAL GRN: VERTICAL										
Marker Number	Test Frequency [MHz]	Meter Reading [dB(uV)]	Detector Type [dB]	Gain/Loss Factor [dB]	Transducer Factor	Level dB[uVolts]	Limit 1	Margin 1[dB]	Height [cm]	Polarity
1 - 2GHz 1000 - 2000MHz										
1	1913.828	19.06	pk		3	27.9	49.96	54	-4.04	100 Horz
2 - 4GHz 2000 - 4000MHz										
2	2480.962	56.79	pk		3.3	22	82.09	999	-916.91	100 Horz
12 - 18GHz 12000 - 18000MHz										
3	12006.006	50.64	pk		-41.3	39.4	48.74	54	-5.26	149 Horz
18-26.5GHz 18000 - 25000MHz										
4	23381.381	61.89	pk		-55.9	40.3	46.29	54	-7.71	149 Horz
2 - 4GHz 2000 - 4000MHz										
5	2480.962	66.36	pk		3.3	22	91.66	999	-907.34	100 Vert
LIMIT 1: CFR 47 Part 15C BLUETOOTH 3M										
LIMIT 2: NONE										

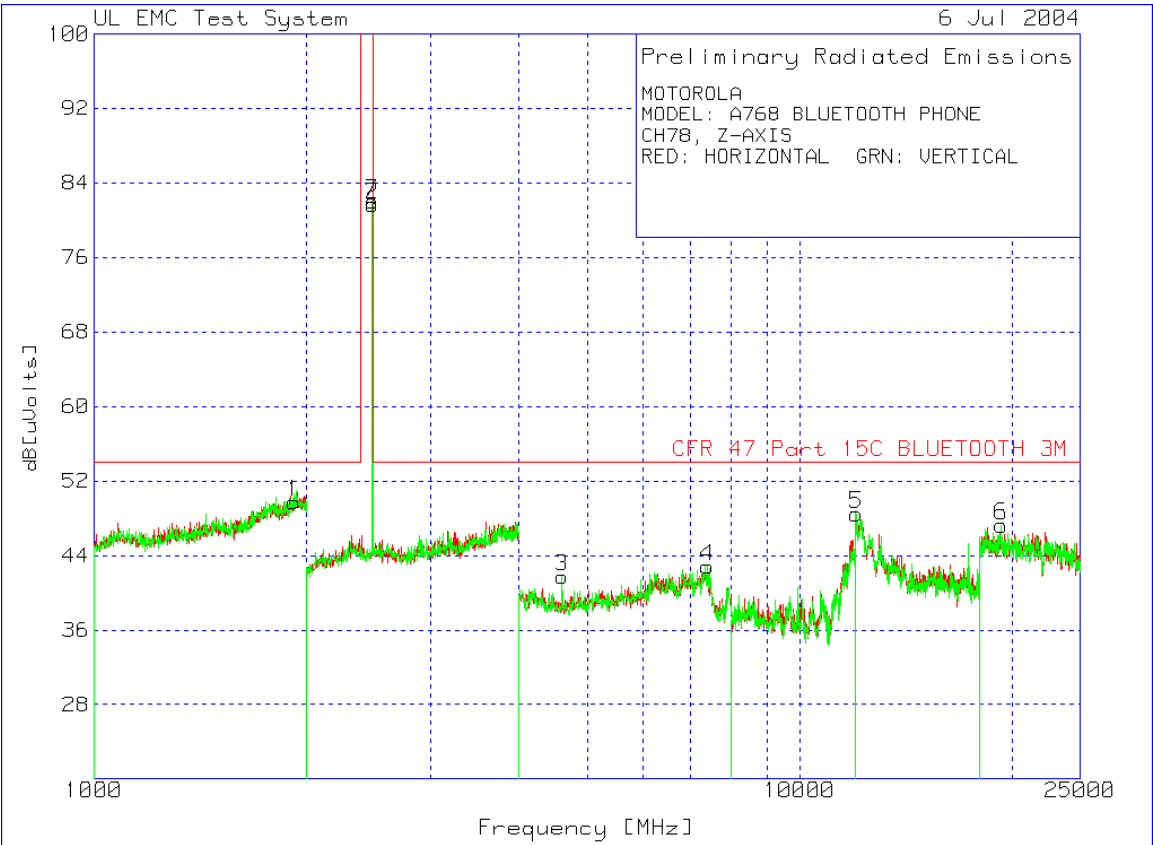

1-12 GHz High Channel Dual Polarization Z

MOTOROLA											
MODEL: A768 BLUETOOTH PHONE											
CH78, Z-AXIS											
RED: HORIZONTAL GRN: VERTICAL											
Marker	Test	Meter	Detector	Gain/Loss	Transducer	Level	Limit 1	Margin 1[dB]	Height [cm]	Polarity	
Number	Frequency	Reading	Type	Factor	Factor	dB[uVolts]					
	[MHz]	[dB(uV)]	[dB]								
1 - 2GHz 1000 - 2000MHz											
1	1919.84	18.74	pk	3	28	49.74	54	-4.26	100	Horz	
2 - 4GHz 2000 - 4000MHz											
2	2480.962	56.39	pk	3.3	22	81.69	999	-917.31	100	Horz	
2 - 4GHz 2000 - 4000MHz											
7	2480.962	56.76	pk	3.3	22	82.06	999	-916.94	100	Vert	
4 - 8GHz 4000 - 8000MHz											
3	4609.218	66.55	pk	-52.5	27.7	41.75	54	-12.25	100	Vert	
4	7406.814	58.83	pk	-47.1	31.1	42.83	54	-11.17	100	Vert	
12 - 18GHz 12000 - 18000MHz											
5	12024.048	50.67	pk	-41.6	39.4	48.47	54	-5.53	100	Vert	
18-26.5GHz 18000 - 25000MHz											
6	19304.609	75.28	pk	-68.3	40.3	47.28	54	-6.72	100	Vert	
LIMIT 1: CFR 47 Part 15C BLUETOOTH 3M											
LIMIT 2: NONE											


PEAK OUTPUT POWER

CFR 47 Part 15.247

Measurement Procedure

The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results

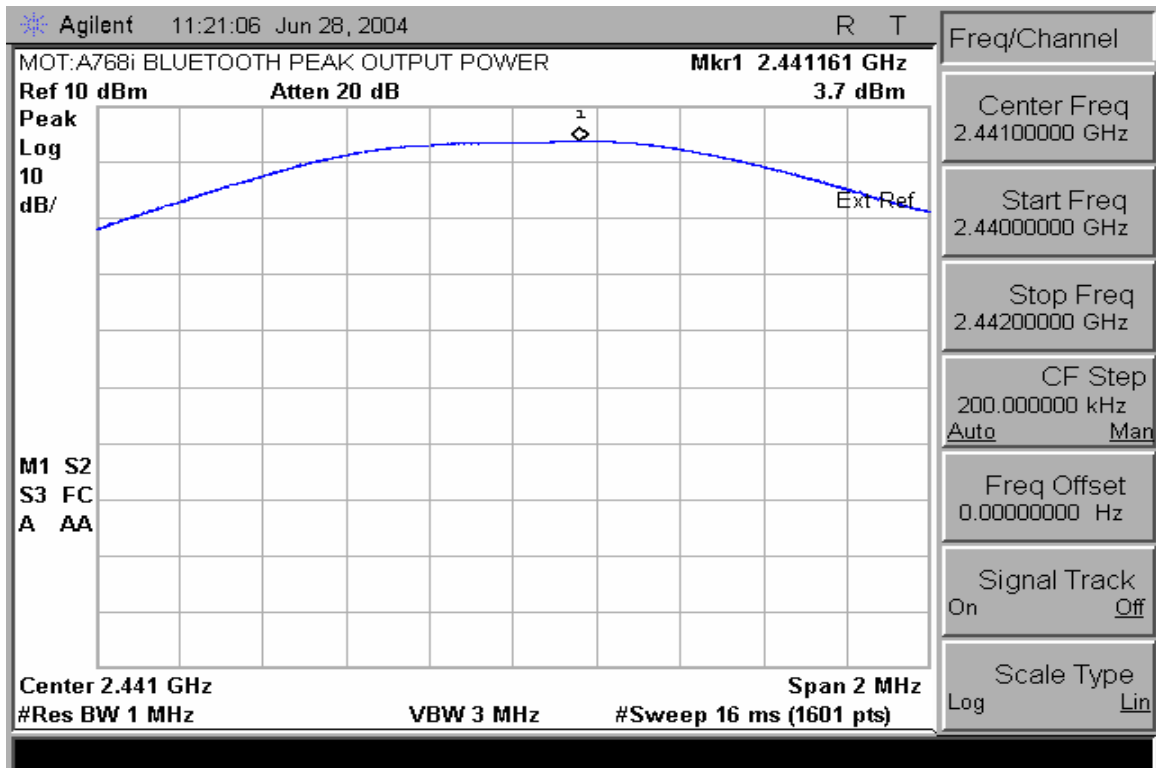

Peak Output Power

BAND-EDGE COMPLIANCE OF RF CONDUCTED EMISSIONS


CFR 47 Part 15.247

Measurement Procedure


The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results


See Attached:

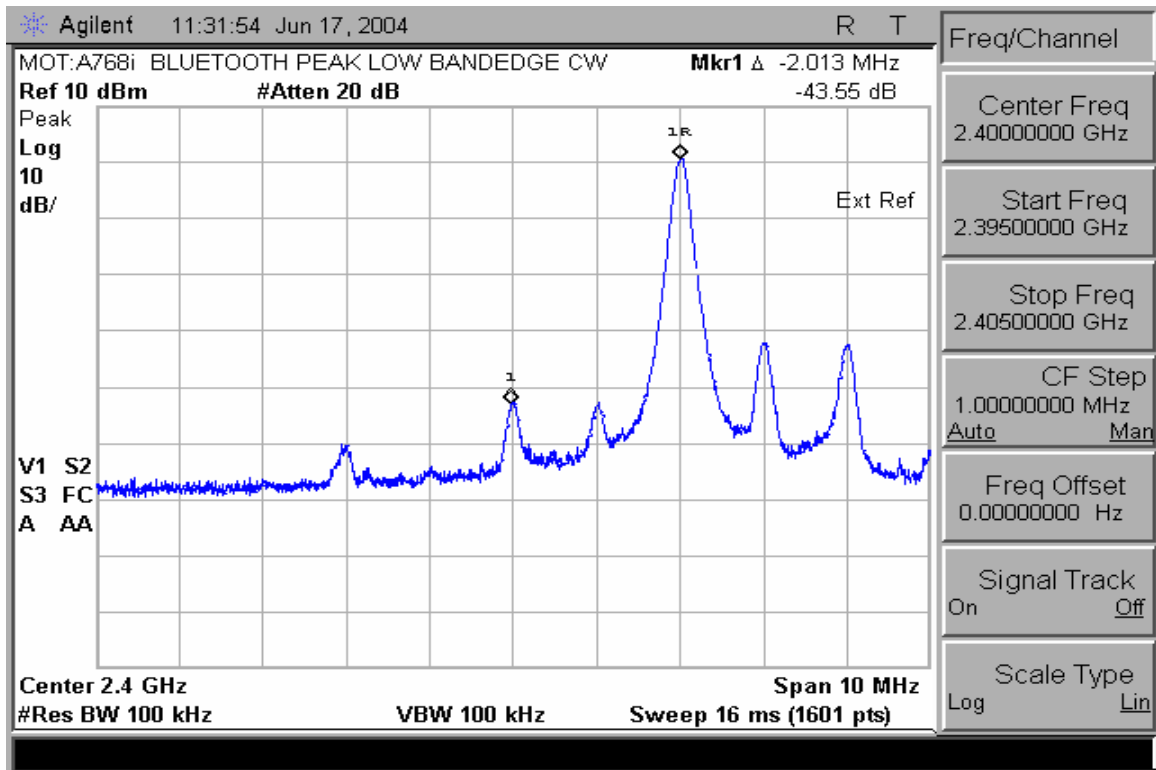


Low Band Edge with Hopping Disabled

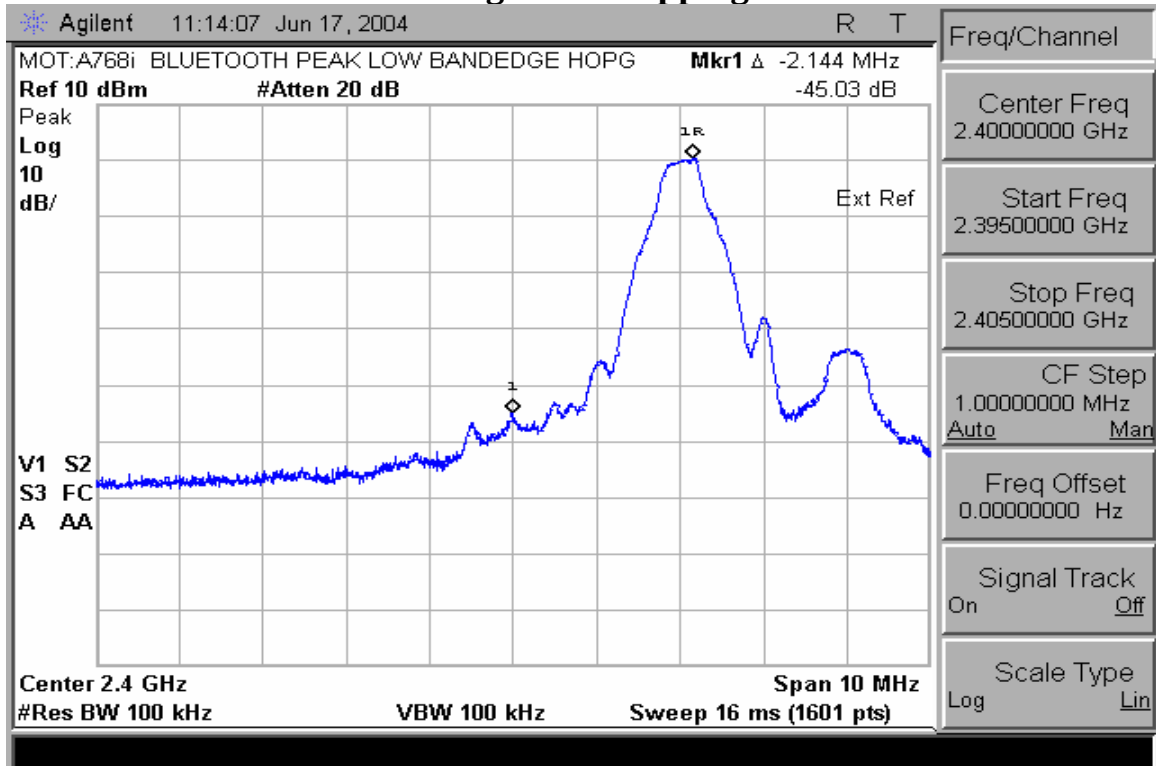

Low Band Edge with Hopping Enabled

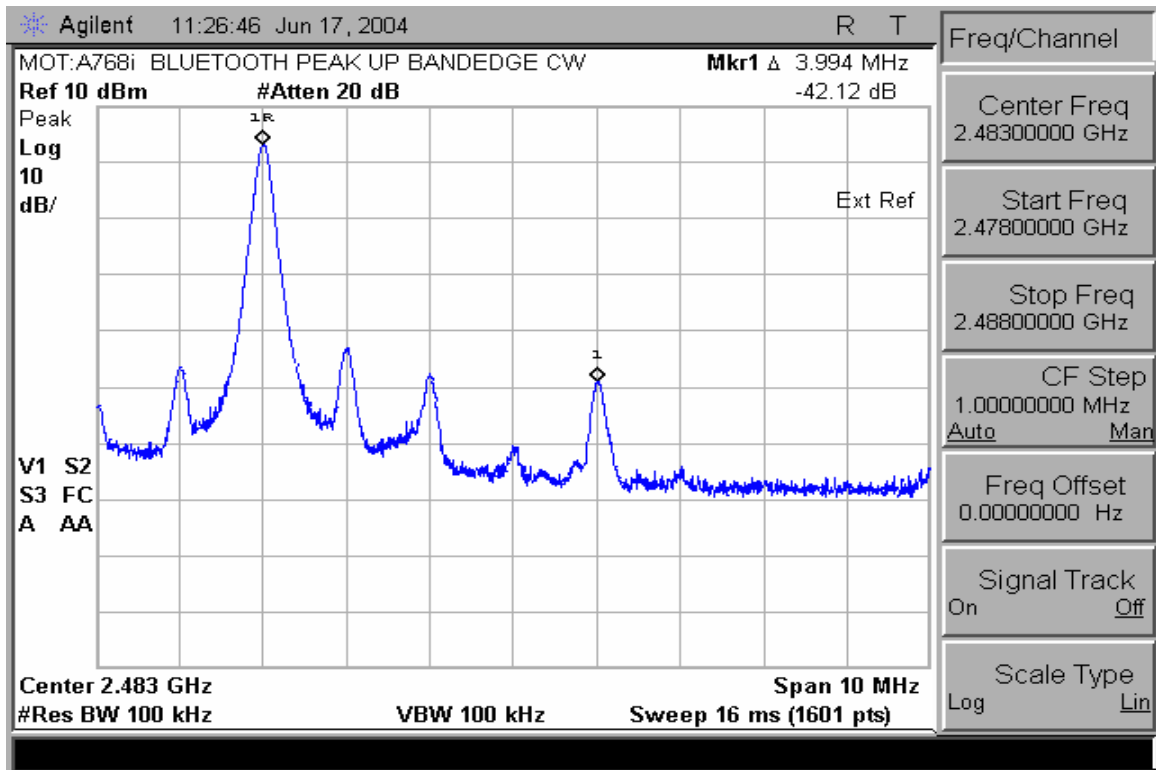

High Band Edge with Hopping Disabled

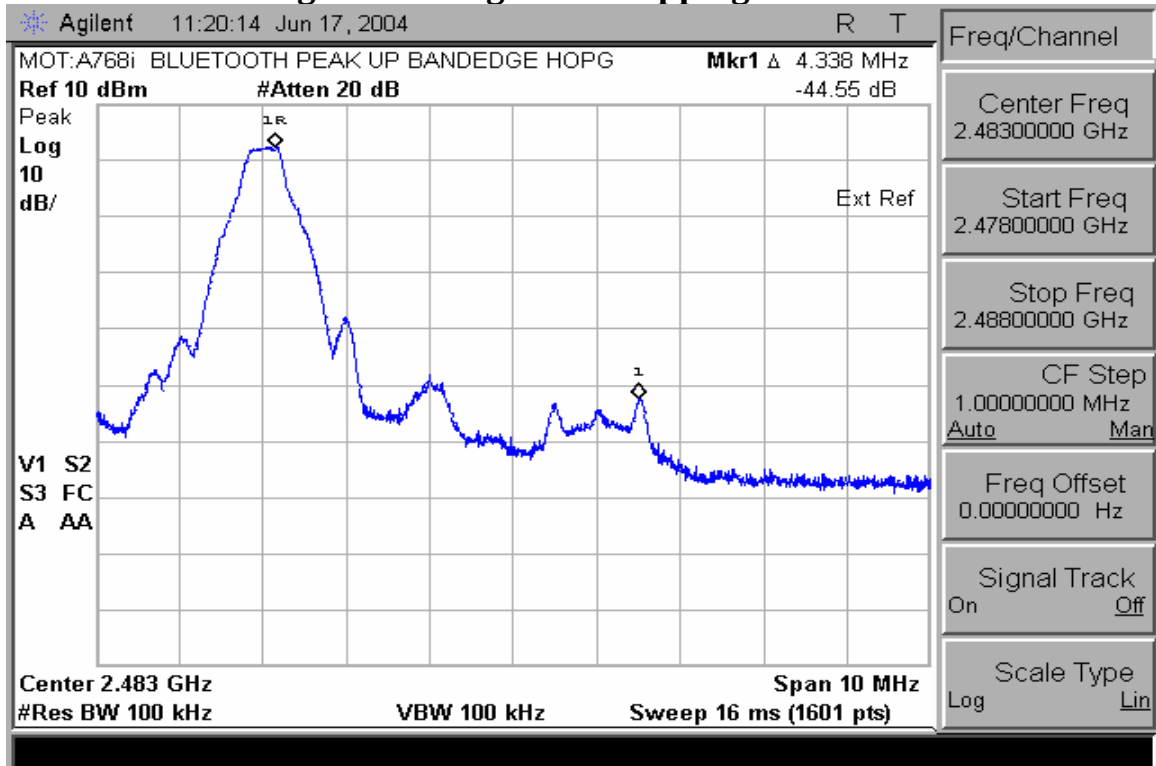

High Band Edge with Hopping Enabled

SPURIOUS RF CONDUCTED EMISSIONS


CFR 47 Part 15.247

Measurement Procedure


The RF output port of the Equipment-Under-Test is directly coupled to the input of the EMC analyzer through a specialized RF connector and a 10dB passive attenuator. A fully charged battery was used for the supply voltage.

Measurement Results


See attached:

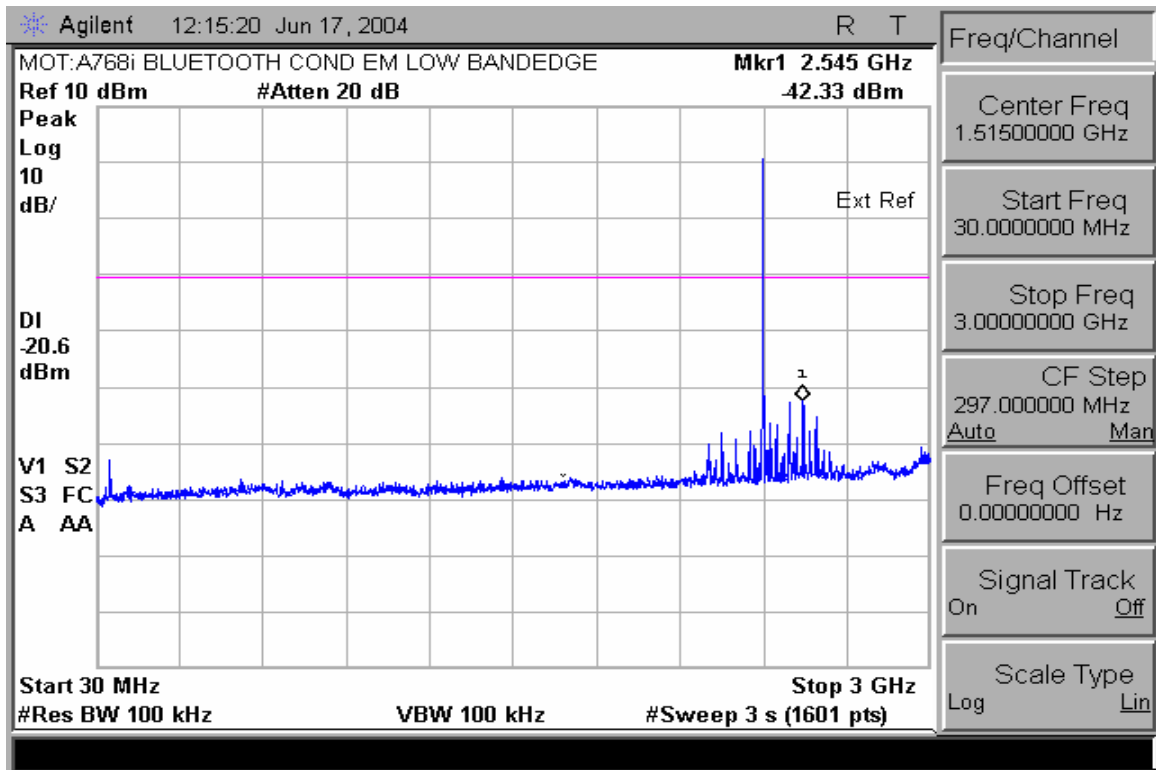


Conducted Spurious Emissions 30-3000MHz (Low Channel Enabled)

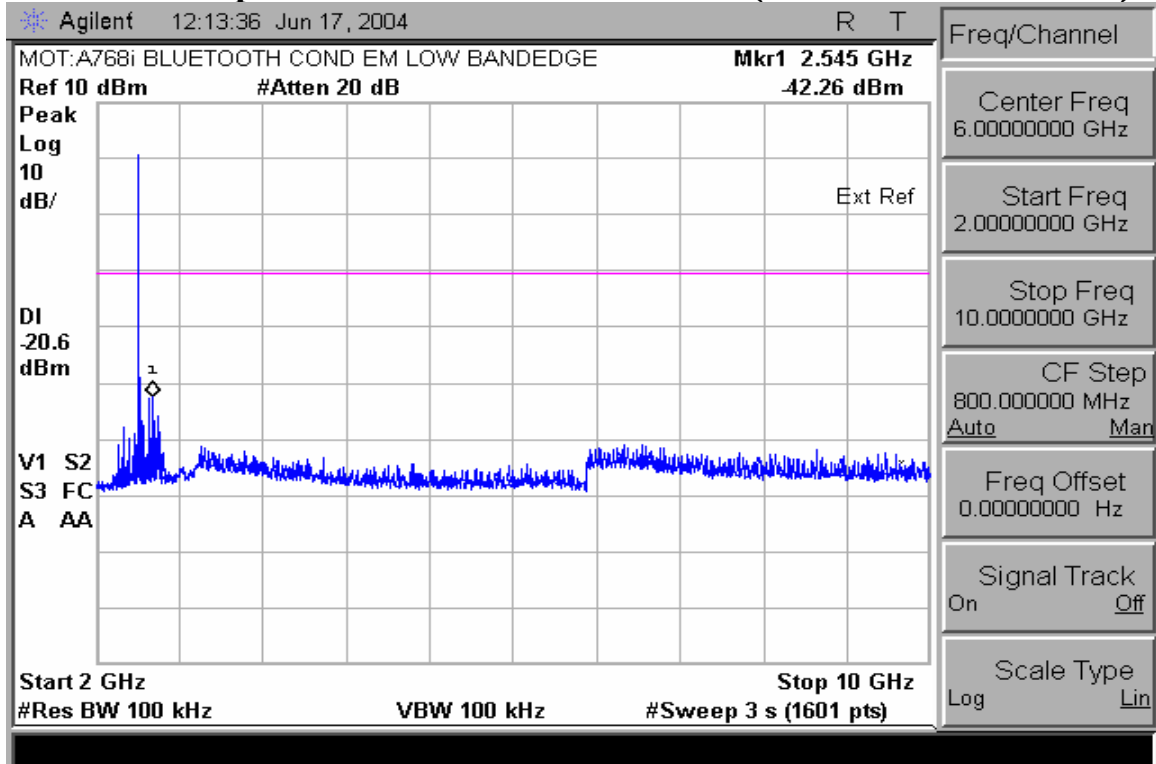


Conducted Spurious Emissions 2-10GHz (Low Channel Enabled)

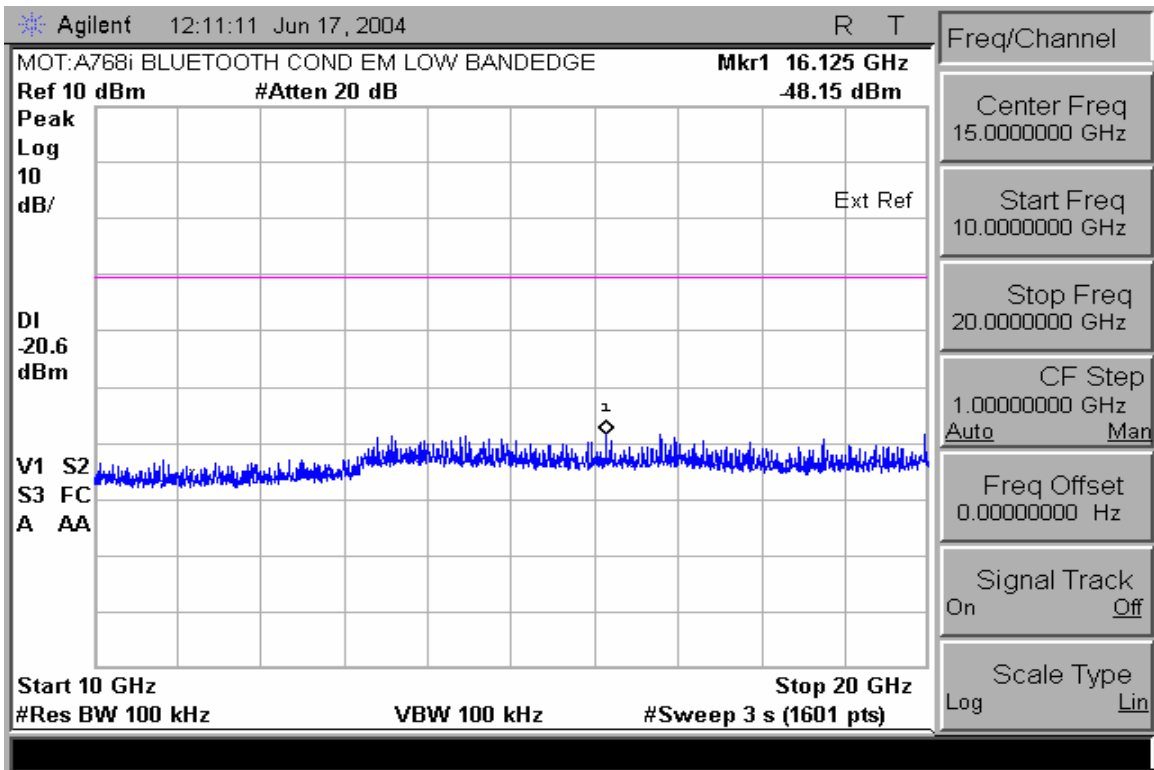


Conducted Spurious Emissions 10-20GHz (Low Channel Enabled)

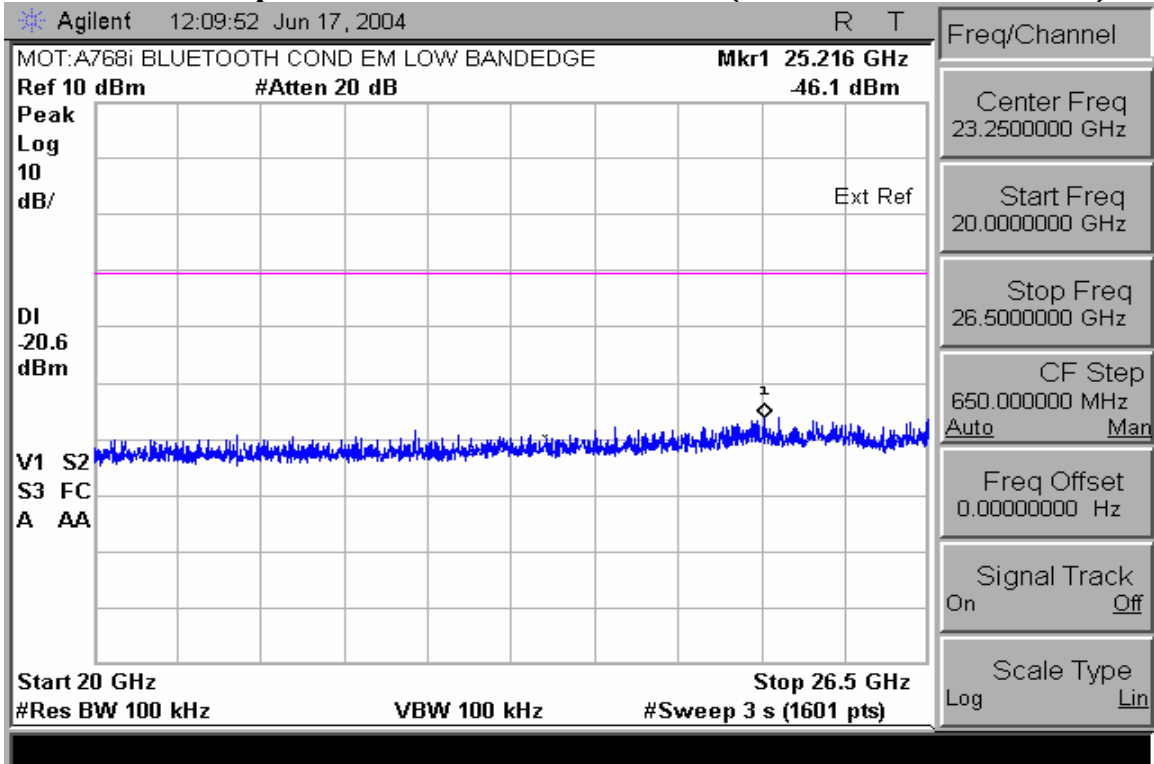


Conducted Spurious Emissions 20-26.5GHz (Low Channel Enabled)

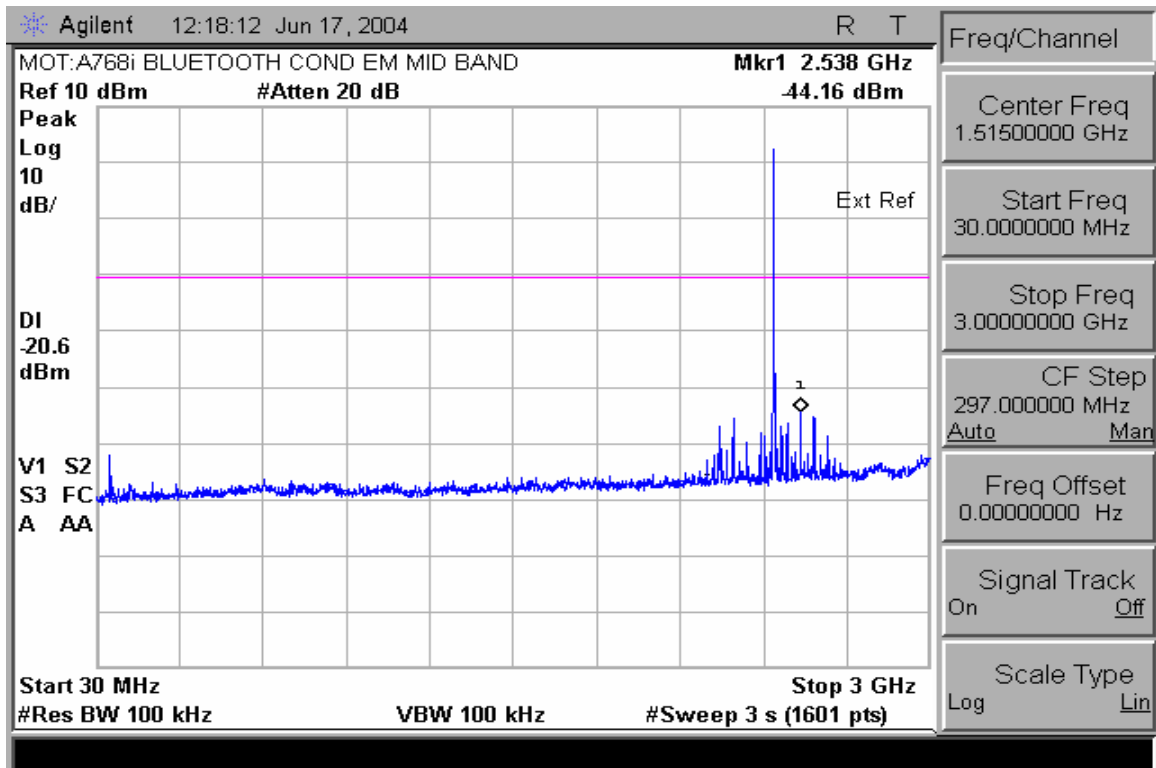


Conducted Spurious Emissions 30-3000MHz (Mid Channel Enabled)

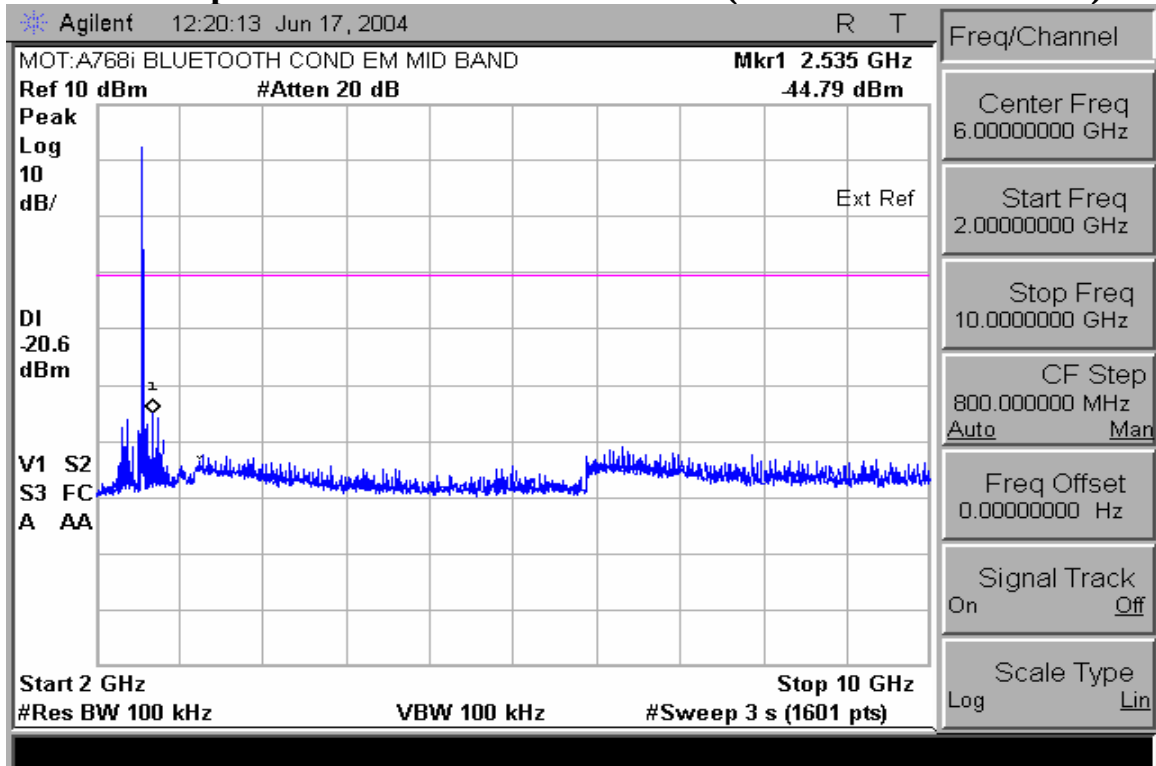


Conducted Spurious Emissions 2-10GHz (Mid Channel Enabled)

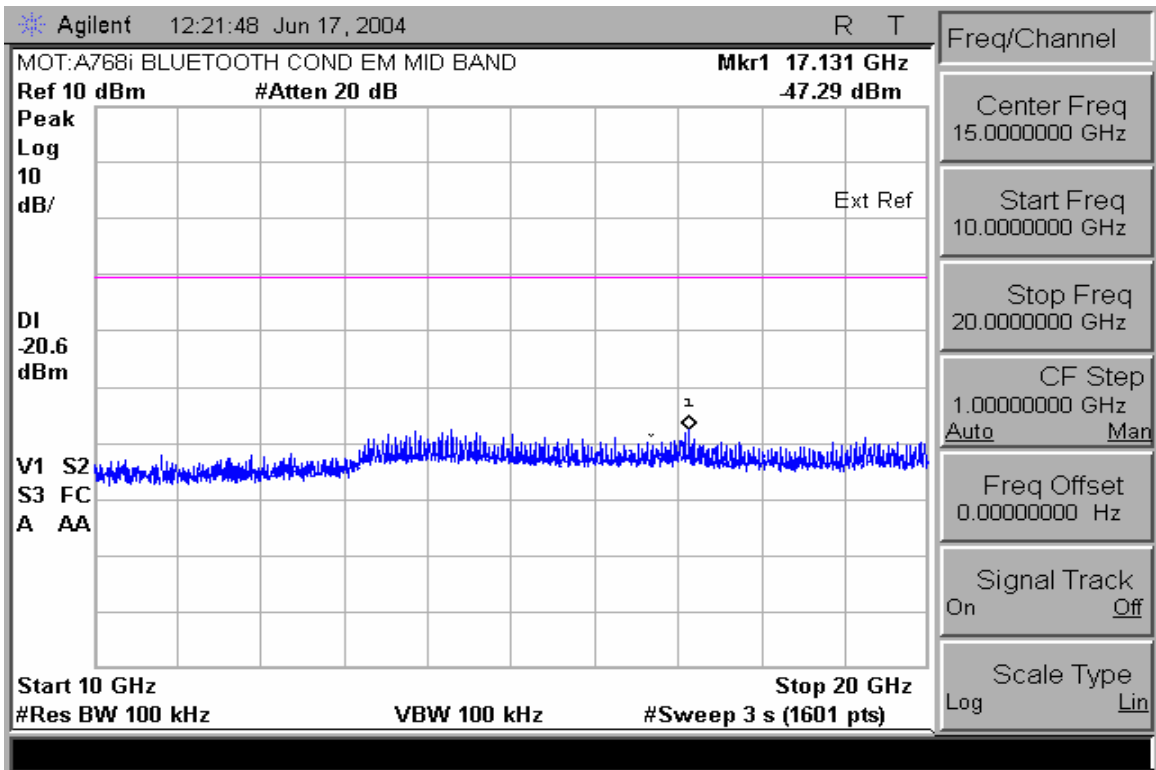


Conducted Spurious Emissions 10-20GHz (Mid Channel Enabled)

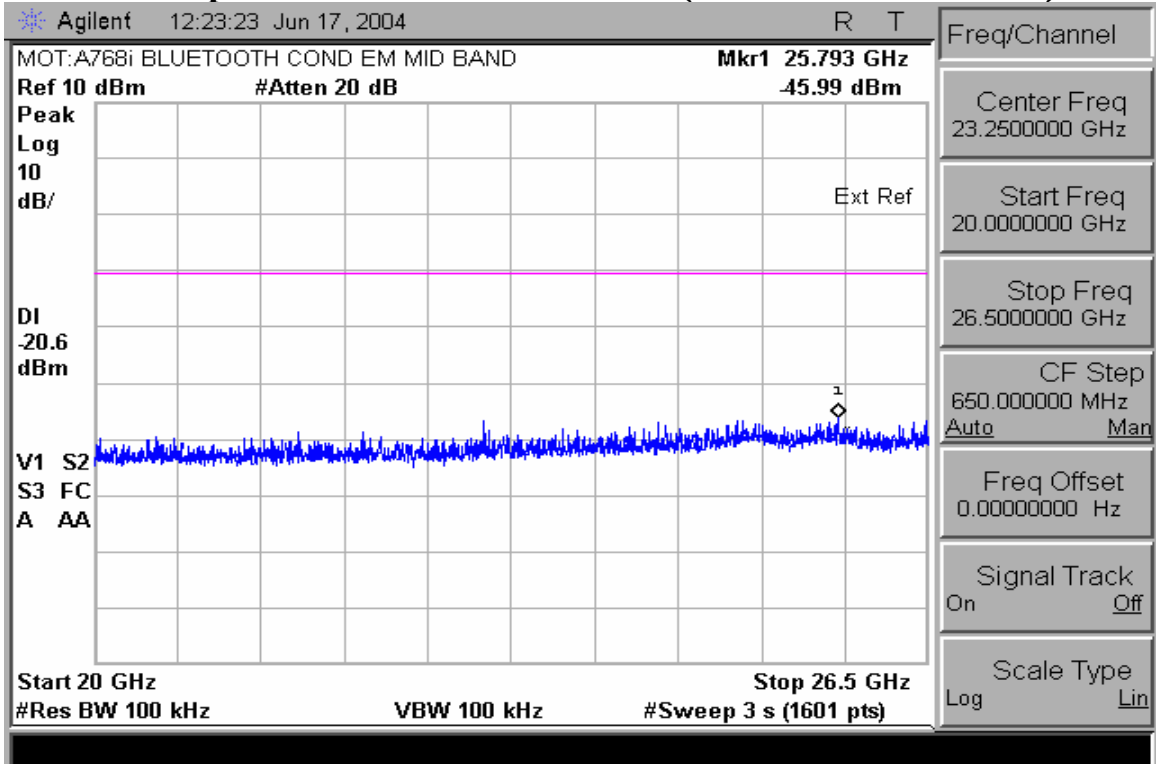


Conducted Spurious Emissions 20-26.5GHz (Mid Chan Enabled)

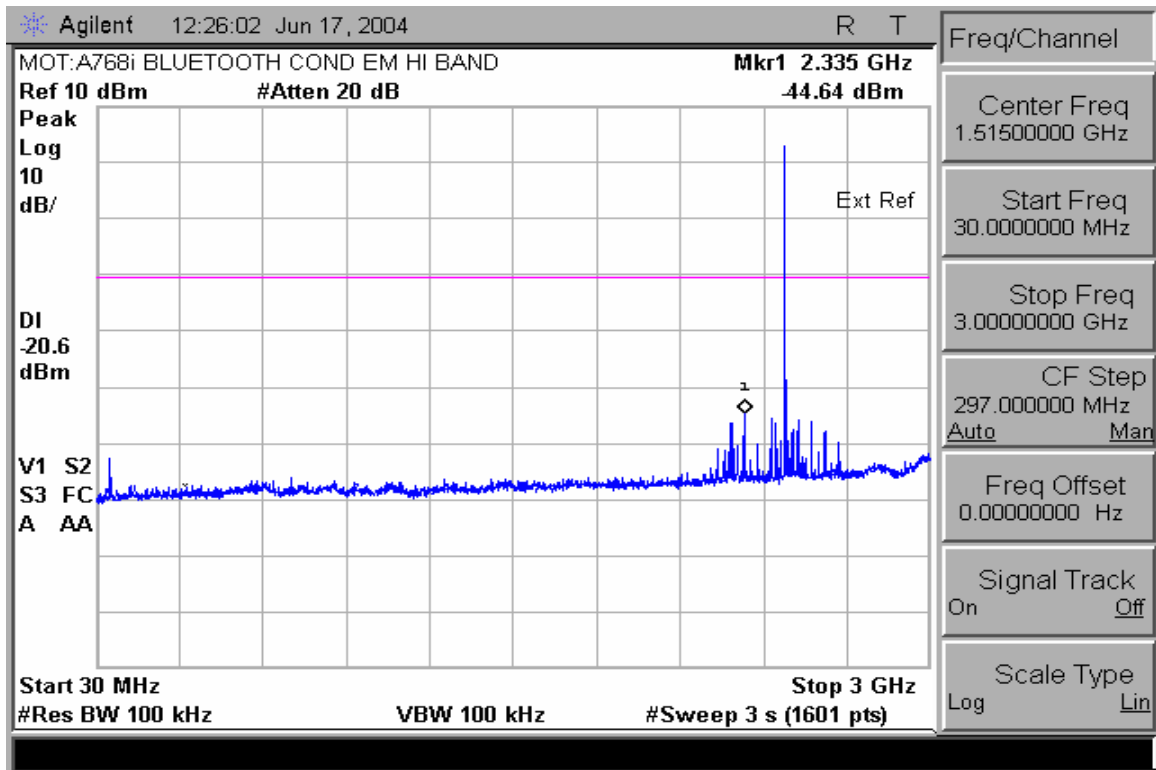


Conducted Spurious Emissions 30-3000MHz (High Channel Enabled)

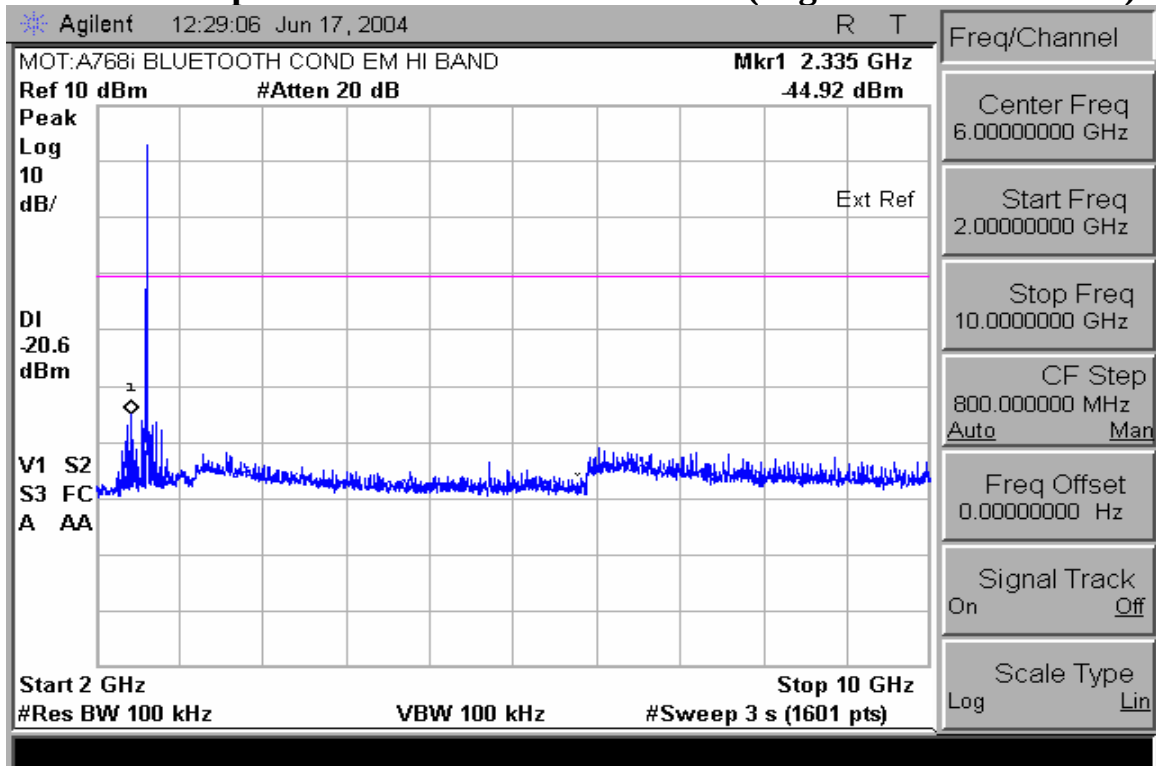

Conducted Spurious Emissions 2-10GHz (High Channel Enabled)

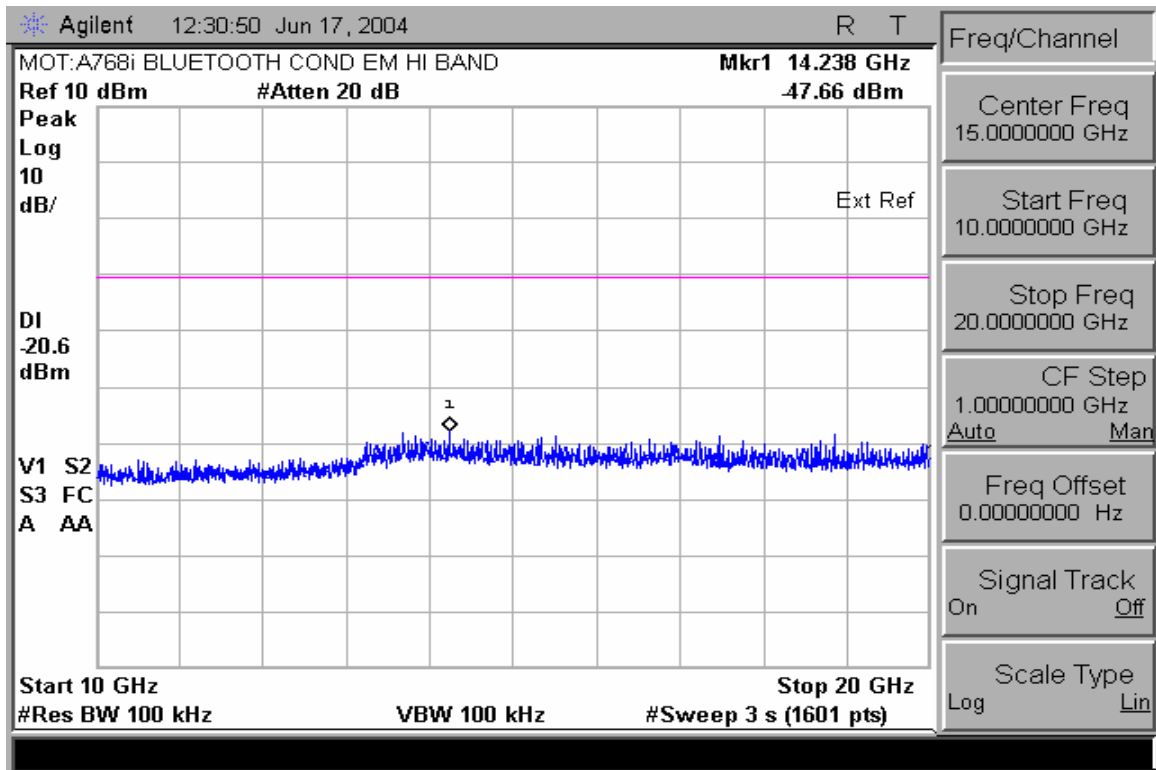

Conducted Spurious Emissions 10-20GHz (High Channel Enabled)

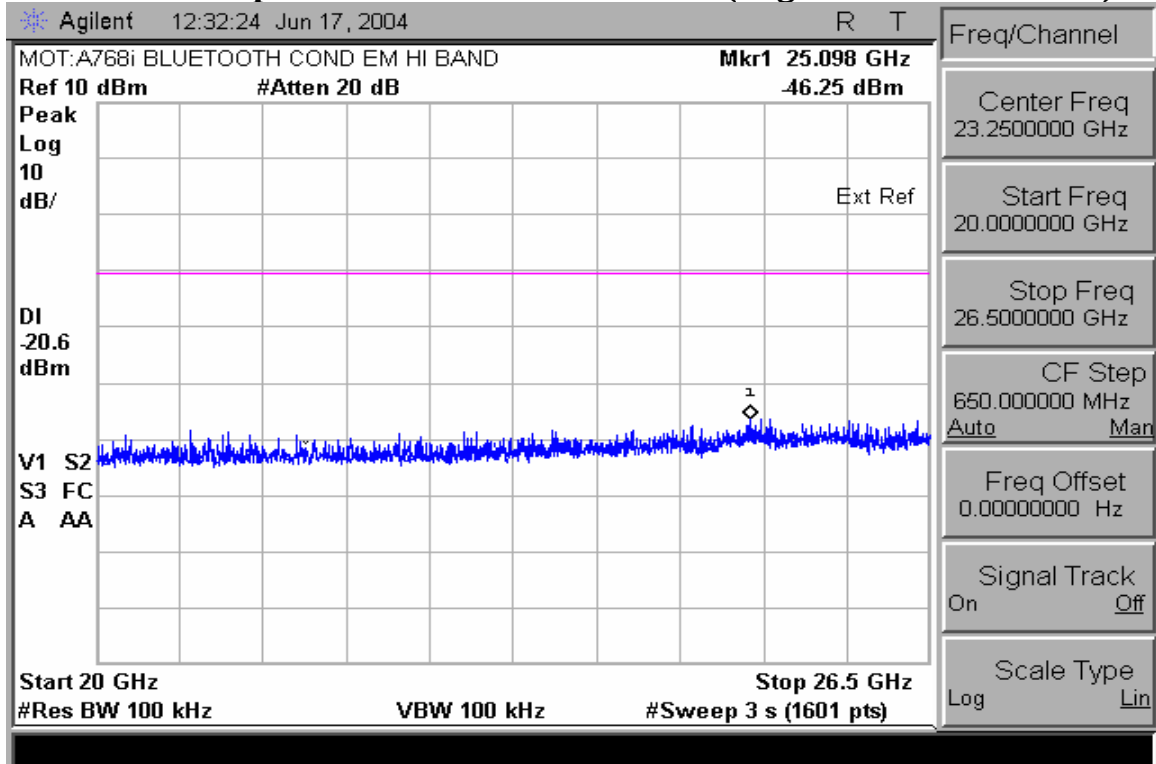

Conducted Spurious Emissions 20-26.5GHz (High Chan Enabled)

End of Test Report