

Report on the RF Testing of:

KYOCERA Corporation
Mobile Phone, Model: EB1055
FCC ID: JOYEB1055

In accordance with FCC Part 24 Subpart E

Prepared for: KYOCERA Corporation
Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku
Yokohama-shi, Kanagawa, Japan
Phone: +81-45-943-6253 Fax: +81-45-943-6314



COMMERCIAL-IN-CONFIDENCE

Document Number: JPD-TR-20194-0

SIGNATURE

NAME	JOB TITLE	RESPONSIBLE FOR	ISSUE DATE
Hiroaki Suzuki	Deputy Manager of RF Group	Approved Signatory	01 OCT 2020

Signatures in this approval box have checked this document in line with the requirements of TÜV SÜD Japan Ltd. document control rules.

EXECUTIVE SUMMARY - Result: Complied

A sample(s) of this product was tested and the result above was confirmed in accordance with FCC Part 24 Subpart E.



DISCLAIMER AND COPYRIGHT

The results in this report are applicable only to the equipment tested.
This report shall not be re-produced except in full without the written approval of TÜV SÜD Japan Ltd.

ACCREDITATION

This test report must not be used by the client to claim product certification, approval, or endorsement by A2LA or any agency of the U.S. Government.

TÜV SÜD Japan Ltd.
Yonezawa Testing Center
5-4149-7 Hachimanpara,
Yonezawa-shi, Yamagata,
992-1128 Japan

Phone: +81 (0) 238 28 2881
Fax: +81 (0) 238 28 2888
www.tuv-sud.jp

Contents

1	Summary of Test	3
1.1	Modification history of the test report	3
1.2	Standards	3
1.3	Test methods.....	3
1.4	Deviation from standards	3
1.5	List of applied test(s) of the EUT	3
1.6	Test information.....	3
1.7	Test set up.....	3
1.8	Test period	3
2	Equipment Under Test.....	4
2.1	EUT information	4
2.2	Modification to the EUT	6
2.3	Variation of family model(s).....	6
2.4	Description of test mode	6
3	Configuration of Equipment.....	7
3.1	Equipment used	7
3.2	System configuration	7
4	Test Result	8
4.1	Equivalent Isotropic Radiated Power	8
4.2	Peak to Average Ratio	14
4.3	Occupied Bandwidth	24
4.4	Band Edge Spurious and Harmonic at Antenna Terminals	34
4.5	Radiated Emissions and Harmonic Emissions	84
4.6	Frequency Stability.....	93
5	Measurement Uncertainty	96
6	Laboratory Information.....	97
	Appendix A. Test Equipment.....	98

1 Summary of Test

1.1 Modification history of the test report

Document Number	Modification History	Issue Date
JPD-TR-20194-0	First Issue	Refer to the cover page

1.2 Standards

CFR47 FCC Part 24 Subpart E

1.3 Test methods

KDB 971168 D01 Power Meas License Digital Systems v03r01
ANSI/TIA/EIA-603-D-2010

1.4 Deviation from standards

None

1.5 List of applied test(s) of the EUT

Test item section	Test item	Condition	Result	Remark
2.1046	Conducted Output Power	Conducted	PASS	*1
24.232(c)	Effective Radiated Power Equivalent Isotropic Radiated Power	Radiated	PASS	-
24.232(d)	Peak to Average Ratio	Conducted	PASS	-
24.238(a) 2.1049	Occupied Bandwidth	Conducted	PASS	-
24.238(a) 2.1051	Band Edge Spurious and Harmonic at Antenna Terminal	Conducted	PASS	-
24.238(a) 2.1053	Radiated emissions and Harmonic Emissions	Radiated	PASS	-
24.235 2.1055	Frequency Stability	Conducted	PASS	-

*1: Refer to RF Exposure Report (Test Report_SAR)

1.6 Test information

None

1.7 Test set up

Table-top

1.8 Test period

27-July-2020 - 27-August-2020

2 Equipment Under Test

2.1 EUT information

Applicant	KYOCERA Corporation Yokohama Office 2-1-1 Kagahara, Tsuzuki-ku Yokohama-shi, Kanagawa, Japan Phone: +81-45-943-6253 Fax: +81-45-943-6314
Equipment Under Test (EUT)	Mobile Phone
Model number	EB1055
Serial number	N/A
Trade name	Kyocera
Number of sample(s)	1
EUT condition	Pre-Production
Power rating	Battery: DC 3.85 V
Size	(W) 76.0 × (D) 8.7 × (H) 162.0 mm
Environment	Indoor and Outdoor use
Terminal limitation	-20°C to 60°C
Hardware version	DMT1
Software version	0.020SI.0020.a
Firmware version	Not applicable
RF Specification	
Frequency of Operation	Up Link GSM1900: 1850.2-1909.8 MHz WCDMA Band II: 1852.4-1907.6MHz LTE Band II: 1850.0-1910.0MHz Down Link GSM1900: 1930.2-1989.8 MHz WCDMA Band II: 1932.4-1987.6MHz LTE Band II: 1930.0-1990.0MHz
Modulation type	GSM1900: GMSK WCDMA Band II: QPSK, 16QAM LTE Band II: QPSK, 16QAM, 64QAM
Emission designator	GSM1900: 246KGXW WCDMA Band II: 4M16F9W LTE Band II: BW 1.4M QPSK: 1M10G7D, 16QAM: 1M10W7D, 64QAM: 1M09W7D BW 3M QPSK: 2M70G7D, 16QAM: 2M70W7D, 64QAM: 2M70W7D BW 5M QPSK: 4M50G7D, 16QAM: 4M50W7D, 64QAM: 4M53W7D BW 10M QPSK: 9M01G7D, 16QAM: 8M98W7D, 64QAM: 8M99W7D BW 15M QPSK: 13M5G7D, 16QAM: 13M5W7D, 64QAM: 13M5W7D BW 20M QPSK: 18M0G7D, 16QAM: 17M9W7D, 16QAM: 18M0W7D



Japan

Equivalent Isotropic Radiated Power (E.I.R.P)	GSM1900: 1.072 W (30.3dBm) WCDMA Band II: 0.240W (23.8dBm) LTE Band II: 0.302W (24.8dBm)
Antenna type	Internal antenna
Antenna gain	GSM1900: -0.2dBi WCDMA Band II: -0.4dBi LTE Band II: -0.4dBi

2.2 Modification to the EUT

The table below details modifications made to the EUT during the test project.

Modification State	Description of Modification	Modification fitted by	Date of Modification
Model: EB1055, Serial Number: N/A			
0	As supplied by the applicant	Not Applicable	Not Applicable

2.3 Variation of family model(s)

2.3.1 List of family model(s)

Not applicable

2.3.2 Reason for selection of EUT

Not applicable

2.4 Description of test mode

The EUT had been tested under operating condition.
There are three channels have been tested as following:

Band	Modulation	Bandwidth [MHz]	Channel	Frequency [MHz]
GSM1900	GMSK	-	512, 661, 810	1850.2, 1880.0, 1909.8
WCDMA Band II	QPSK	-	9262, 9400, 9538	1852.4, 1880.0, 1907.6
	16QAM	-	9262, 9400, 9538	1852.4, 1880.0, 1907.6
LTE Band II	QPSK, 16QAM, 64QAM	1.4	18607, 18900, 19193	1850.7, 1880.0, 1909.3
		3	18615, 18900, 19185	1851.5, 1880.0, 1908.5
		5	18625, 18900, 19175	1852.5, 1880.0, 1907.5
		10	18650, 18900, 19150	1855.0, 1880.0, 1905.0
		15	18675, 18900, 19125	1857.5, 1880.0, 1902.5
		20	18700, 18900, 19100	1860.0, 1880.0, 1900.0

The field strength of spurious emissions was measured at each position of all three axis X, Y and Z to compare the level, and the maximum noise.

The worst emission was found in X-axis (All Bands) and the worst case recorded.

Pre-scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports.

3 Configuration of Equipment

Numbers assigned to equipment on the diagram in “3.2 System configuration” correspond to the list in “3.1 Equipment used”.

Cabling and setup(s) were taken into consideration and test data was taken under worse case condition.

3.1 Equipment used

No.	Equipment	Company	Model No.	Serial No.	FCC ID/DoC	Comment
1	Mobile Phone	KYOCERA	EB1055	N/A	JOYEB1055	EUT

3.2 System configuration

1. Mobile Phone
(EUT)

4 Test Result

4.1 Equivalent Isotropic Radiated Power

4.1.1 Measurement procedure

[FCC 24.232(c)]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) Span = 1.5 times the OBW
- b) RBW = 1-5% of the expected OBW, not to exceed 1 MHz
- c) VBW $\geq 3 \times$ RBW
- d) Number of sweep points $\geq 2 \times$ span / RBW
- e) Sweep time = auto-couple
- f) Detector = RMS (power averaging)
- g) If the EUT can be configured to transmit continuously (i.e., burst duty cycle $\geq 98\%$), then set the trigger to free run.
- h) If the EUT cannot be configured to transmit continuously (i.e., burst duty cycle $< 98\%$), then use a sweep trigger with the level set to enable triggering only on full power bursts and configure the EUT to transmit at full power for the entire duration of each sweep. Ensure that the sweep time is less than or equal to the transmission burst duration.
- i) Trace average at least 100 traces in power averaging (i.e., RMS) mode.
- j) Compute the power by integrating the spectrum across the OBW of the signal using the instrument's band power measurement function, with the band limits set equal to the OBW band edges. If the instrument does not have a band power function, then sum the spectrum levels (in linear power units) at intervals equal to the RBW extending across the entire OBW of the spectrum.

- Test configuration

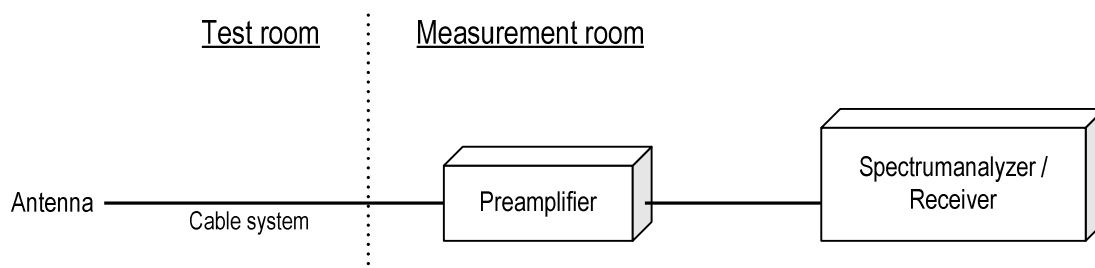



Japan

4.1.2 Calculation method

Result(EIRP) = Ant. Input - Cable loss + Antenna Gain

Margin = Limit – Result (EIRP)

Example:

Limit @ 1880 MHz : 33.0 dBm

Ant. Input = 19.3 dBm Cable loss = 1.1dB Ant. Gain = 8.3 dBi

Result = 19.3 - 1.1 + 8.3 = 26.5 dBm

Margin = 33.0 - 26.5 = 6.5 dB

4.1.3 Limit

2 W (33 dBm)

4.1.4 Test data

Date	: 3~4-August-2020	Test engineer	:	Chiaki Kanno
Temperature	: 23.5 [°C]			
Humidity	: 56.8 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: 4~5-August-2020	Test engineer	:	Chiaki Kanno
Temperature	: 21.8 [°C]			
Humidity	: 52.8 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: 5~6-August-2020	Test engineer	:	Chiaki Kanno
Temperature	: 21.4 [°C]			
Humidity	: 56.1 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: 17-August-2020	Test engineer	:	Chiaki Kanno
Temperature	: 22.9 [°C]			
Humidity	: 64.3 [%]			
Test place	: 3m Semi-anechoic chamber			
Date	: 18-August-2020	Test engineer	:	Chiaki Kanno
Temperature	: 21.7 [°C]			
Humidity	: 63.1 [%]			
Test place	: 3m Semi-anechoic chamber			

[GSM1900]

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1850.2	-31.1	25.6	1.1	4.9	29.4	33.0	3.6
H	1880.0	-30.5	25.4	1.1	4.8	29.0	33.0	4.0
H	1909.8	-29.4	26.8	1.1	4.6	30.3	33.0	2.7

[WCDMA Band II]

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1852.4	-27.4	19.9	1.1	4.9	23.7	33.0	9.3
H	1880.0	-27.3	19.4	1.1	4.8	23.0	33.0	10.0
H	1907.6	-26.7	20.3	1.1	4.6	23.8	33.0	9.2

**[LTE Band II]
QPSK, BW 1.4MHz**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1850.7	-26.7	21.0	1.1	4.9	24.8	33.0	8.2
H	1880.0	-26.7	20.0	1.1	4.8	23.6	33.0	9.4
H	1909.3	-26.3	20.7	1.1	4.6	24.2	33.0	8.8

16QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1850.7	-29.0	14.4	1.1	8.4	21.7	33.0	11.3
H	1880.0	-28.3	16.6	1.1	8.4	23.8	33.0	9.2
H	1909.3	-28.3	14.4	1.2	8.3	21.6	33.0	11.4

64QAM, BW 1.4MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1850.7	-28.3	19.2	1.1	4.9	23.0	33.0	10.0
H	1880.0	-29.3	17.4	1.1	4.8	21.0	33.0	12.0
H	1909.3	-28.1	18.9	1.1	4.6	22.4	33.0	10.6

QPSK, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1851.5	-27.1	20.6	1.1	4.9	24.4	33.0	8.6
H	1880.0	-27.7	19.1	1.1	4.8	22.7	33.0	10.3
H	1908.5	-27.1	20.1	1.1	4.6	23.6	33.0	9.4

16QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1851.5	-28.4	19.3	1.1	4.9	23.1	33.0	9.9
H	1880.0	-28.4	18.4	1.1	4.8	22.0	33.0	11.0
H	1908.5	-28.1	19.1	1.1	4.6	22.6	33.0	10.4

64QAM, BW 3MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1851.5	-29.1	18.6	1.1	4.9	22.4	33.0	10.6
H	1880.0	-29.5	17.3	1.1	4.8	20.9	33.0	12.1
H	1908.5	-28.9	18.3	1.1	4.6	21.8	33.0	11.2

QPSK, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1852.5	-27.1	20.6	1.1	4.9	24.4	33.0	8.6
H	1880.0	-27.7	18.9	1.1	4.8	22.5	33.0	10.5
H	1907.5	-27.1	20.0	1.1	4.6	23.5	33.0	9.5

16QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1852.5	-28.0	19.7	1.1	4.9	23.5	33.0	9.5
H	1880.0	-28.2	18.4	1.1	4.8	22.0	33.0	11.0
H	1907.5	-28.1	19.0	1.1	4.6	22.5	33.0	10.5

64QAM, BW 5MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1852.5	-28.9	18.8	1.1	4.9	22.6	33.0	10.4
H	1880.0	-29.2	17.4	1.1	4.8	21.0	33.0	12.0
H	1907.5	-28.9	18.2	1.1	4.6	21.7	33.0	11.3

QPSK, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1855.0	-27.2	20.5	1.1	4.9	24.3	33.0	8.7
H	1880.0	-27.3	19.4	1.1	4.8	23.0	33.0	10.0
H	1905.0	-27.0	20.6	1.1	4.6	24.1	33.0	8.9

16QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1855.0	-28.3	19.4	1.1	4.9	23.2	33.0	9.8
H	1880.0	-28.2	18.5	1.1	4.8	22.1	33.0	10.9
H	1905.0	-27.8	19.8	1.1	4.6	23.3	33.0	9.7

64QAM, BW 10MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1855.0	-29.0	18.7	1.1	4.9	22.5	33.0	10.5
H	1880.0	-29.4	17.3	1.1	4.8	20.9	33.0	12.1
H	1905.0	-29.1	18.5	1.1	4.6	22.0	33.0	11.0

QPSK, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1857.5	-27.0	20.6	1.1	4.9	24.4	33.0	8.6
H	1880.0	-26.7	19.9	1.1	4.8	23.5	33.0	9.5
H	1902.5	-27.3	20.5	1.1	4.6	24.0	33.0	9.0

16QAM, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1857.5	-28.2	19.4	1.1	4.9	23.2	33.0	9.8
H	1880.0	-27.6	19.0	1.1	4.8	22.6	33.0	10.4
H	1902.5	-28.1	19.7	1.1	4.6	23.2	33.0	9.8

64QAM, BW 15MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1857.5	-29.1	18.5	1.1	4.9	22.3	33.0	10.7
H	1880.0	-28.5	18.1	1.1	4.8	21.7	33.0	11.3
H	1902.5	-28.9	18.9	1.1	4.6	22.4	33.0	10.6

QPSK, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1860.0	-27.7	19.4	1.1	4.9	23.1	33.0	9.9
H	1880.0	-26.8	20.8	1.1	4.8	24.4	33.0	8.6
H	1900.0	-27.5	20.6	1.1	4.6	24.1	33.0	8.9

16QAM, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1860.0	-27.8	19.3	1.1	4.9	23.0	33.0	10.0
H	1880.0	-28.1	19.5	1.1	4.8	23.1	33.0	9.9
H	1900.0	-28.0	20.1	1.1	4.6	23.6	33.0	9.4

64QAM, BW 20MHz

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	1860.0	-29.1	18.0	1.1	4.9	21.7	33.0	11.3
H	1880.0	-29.2	18.4	1.1	4.8	22.0	33.0	11.0
H	1900.0	-29.4	18.7	1.1	4.6	22.2	33.0	10.8

4.2 Peak to Average Ratio

4.2.1 Measurement procedure

[FCC 24.232(d)]

The peak to average ratio was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


[GSM1900]

- a) Span = 5 MHz
- b) RBW = 1 MHz
- c) VBW $\geq 3 \times$ RBW
- d) Detector = Peak / Average
- e) Sweep time = auto-couple
- f) Trace mode=Max hold

[WCDMA Band II, LTE Band II]

- a) Power Stat CCDF mode
- b) Set resolution / measurement bandwidth $\geq$ signal's occupied bandwidth.
- c) Set the number of counts to a value that stabilizes the measured CCDF curve.
- d) Set the measurement interval as follows:
 - 1) For continuous transmissions, set to 1ms.
 - 2) For burst transmissions, employ an external trigger that is synchronized with the EUT burst timing sequence, or use the internal burst trigger with a trigger level that allows the burst duration.
- e) Record the maximum PAPR level associated with a probability of 0.1%.

- Test configuration

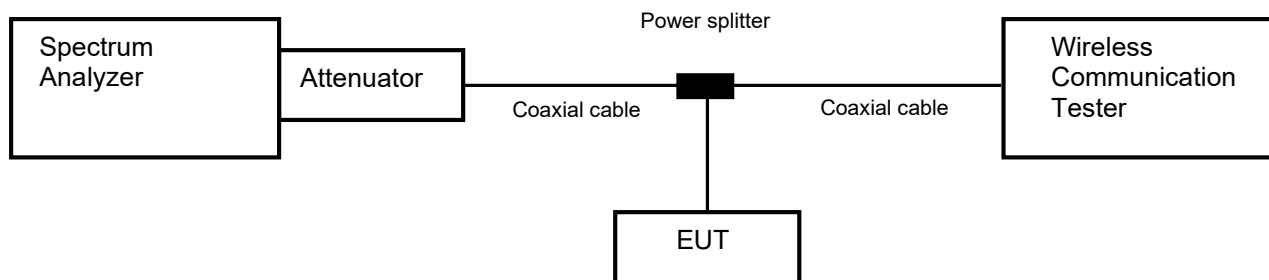

4.2.2 Limit

13 dB or less

4.2.3 Measurement result

Date : 27-July-2020
 Temperature : 23.3 [°C]
 Humidity : 44.8 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kannno

Date : 26-August-2020
 Temperature : 22.6 [°C]
 Humidity : 57.6 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kannno


Band		Channel	Frequency [MHz]	Peak to Average Power Ratio [dB]	Limit [dB]
GSM1900		512	1850.2	0.02	13.0
		661	1880.0	0.01	
		810	1909.8	0.01	
WCDMA Band II		9262	1852.4	3.27	13.0
		9400	1880.0	3.28	
		9538	1907.6	3.32	

Band	Channel	Frequency [MHz]	Modulation	Bandwidth [MHz]	RB	Peak to Average Power Ratio [dB]	Limit [dB]
LTE Band II	18900	1880.0	QPSK	1.4	6-0	5.60	13.0
				3	15-0	6.19	
				5	25-0	5.69	
				10	50-0	4.59	
				15	75-0	5.81	
				20	100-0	6.57	
			16QAM	1.4	6-0	6.44	
				3	15-0	6.57	
				5	25-0	6.54	
				10	50-0	6.30	
				15	75-0	7.02	
				20	100-0	7.27	
			64QAM	1.4	6-0	6.86	
				3	15-0	6.78	
				5	25-0	6.80	
				10	50-0	6.57	
				15	75-0	7.12	
				20	100-0	7.29	


4.2.4 Trace data

[GSM1900]


Channel: 512

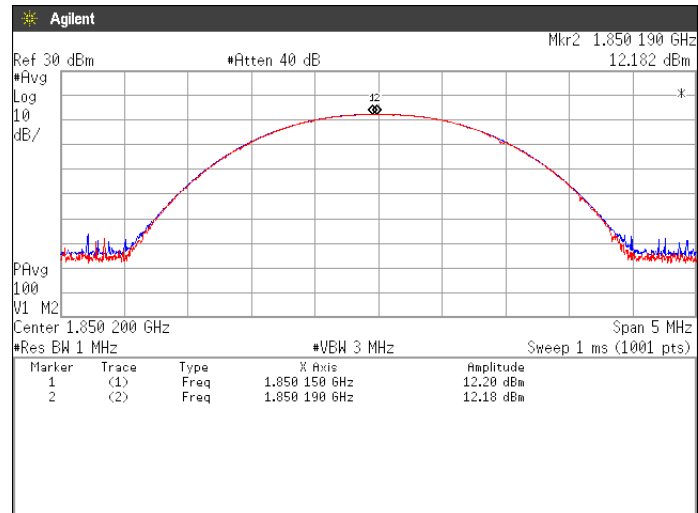


Channel: 661

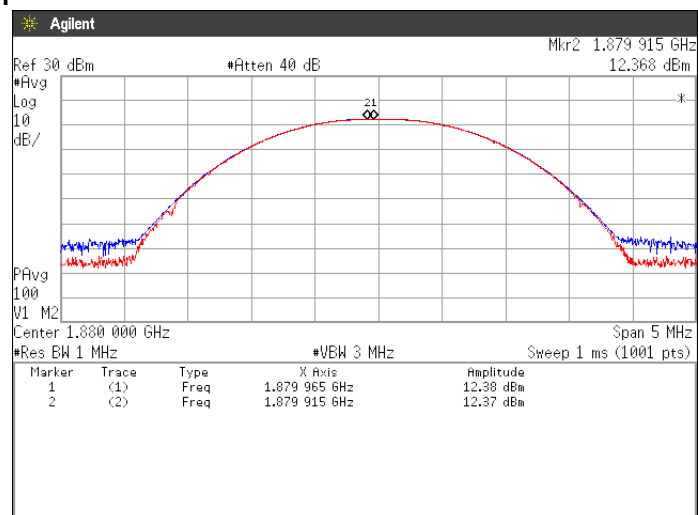


Channel: 810

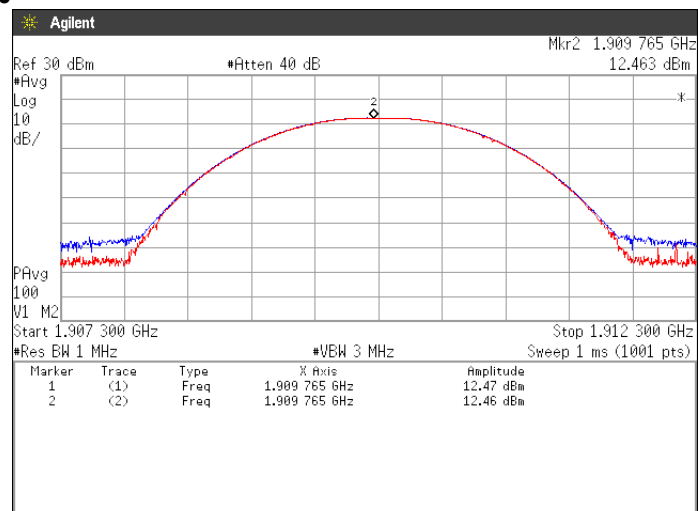


[WCDMA Band II]
Channel: 9262



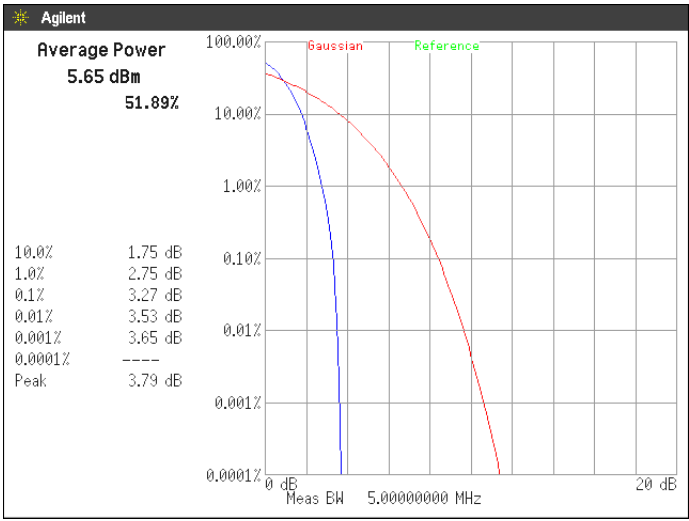


Channel: 9400

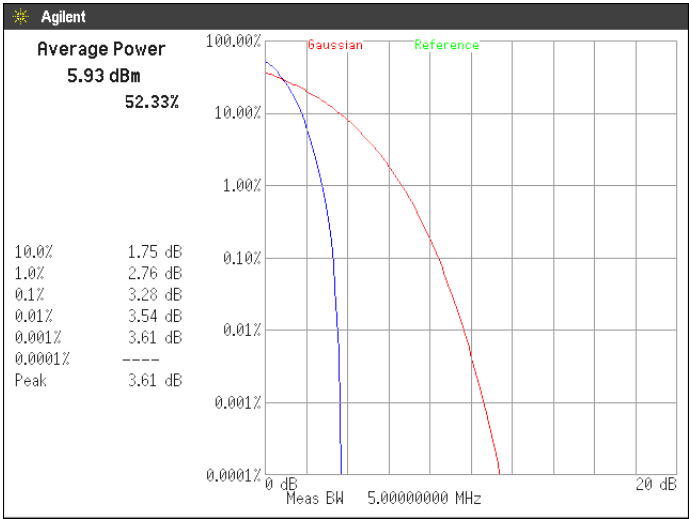


Channel: 9538

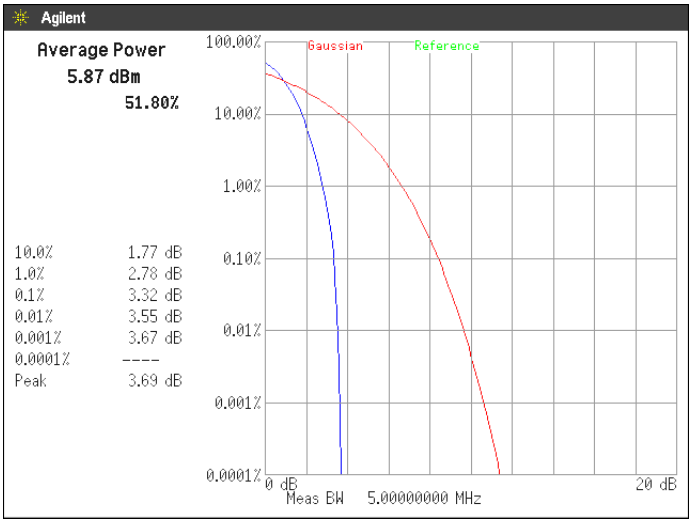


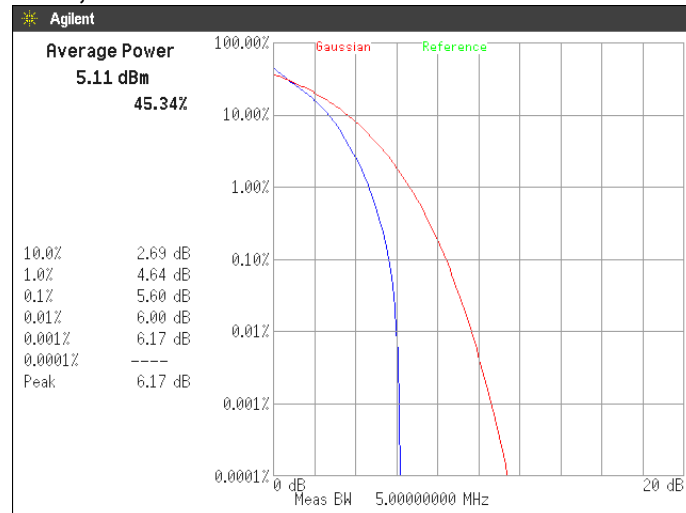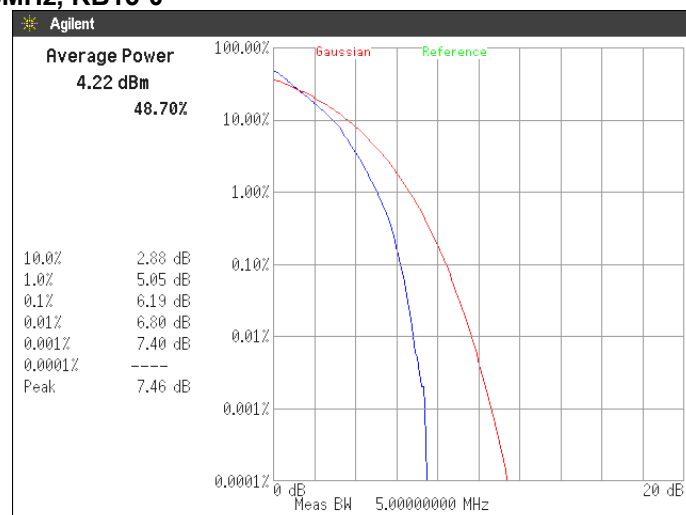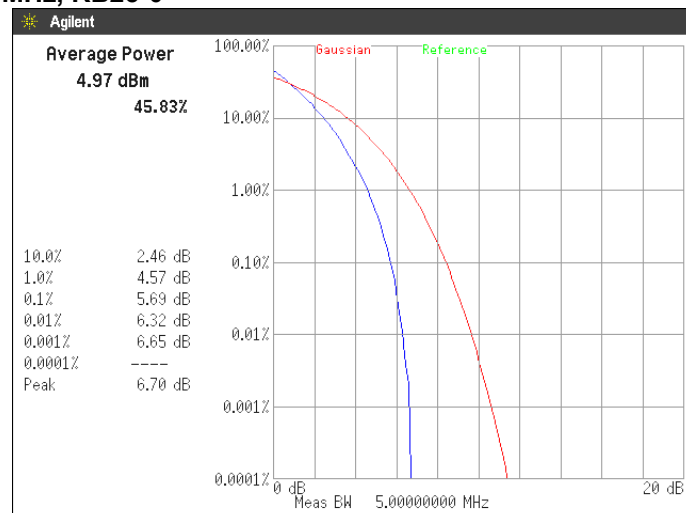[LTE Band II]**Channel: 18900****QPSK, BW 1.4MHz, RB6-0****QPSK, BW 3MHz, RB15-0****QPSK, BW 5MHz, RB25-0**


Channel: 18900
QPSK, BW 10MHz, RB50-0

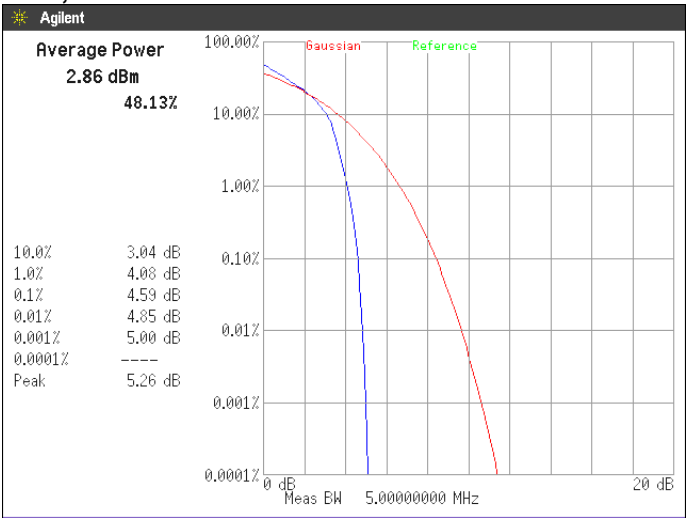


QPSK, BW 15MHz, RB75-0

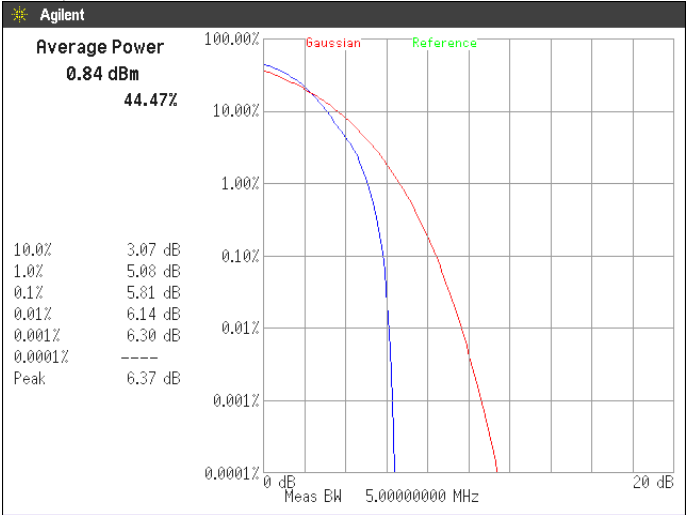


QPSK, BW 20MHz, RB100-0

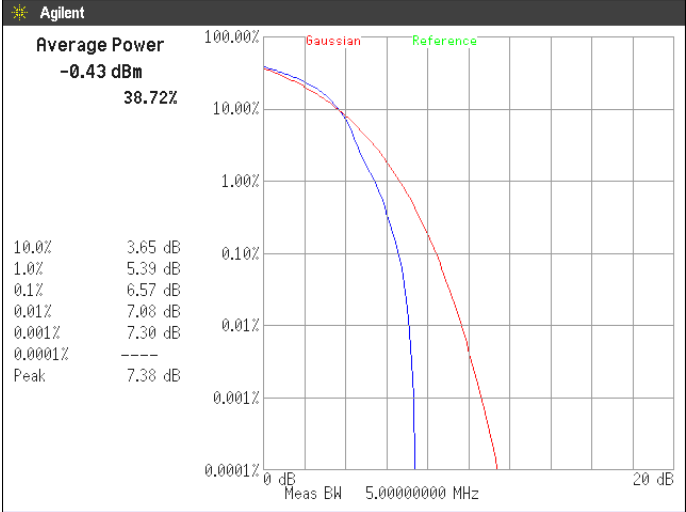


Channel: 18900
16QAM, BW 1.4MHz, RB6-0

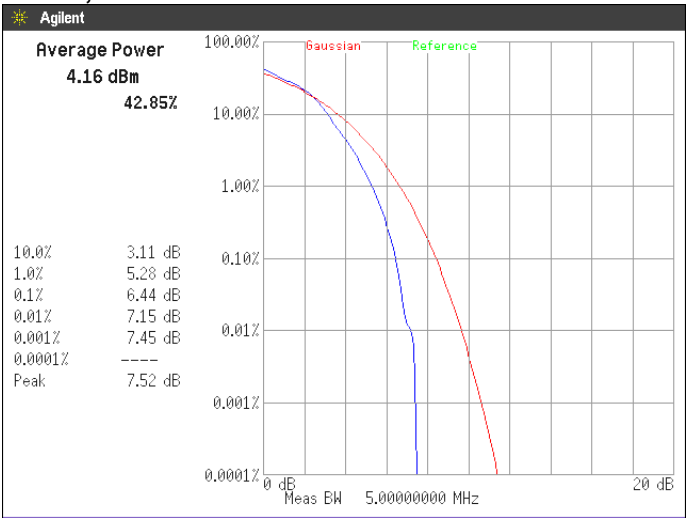


16QAM, BW 3MHz, RB15-0

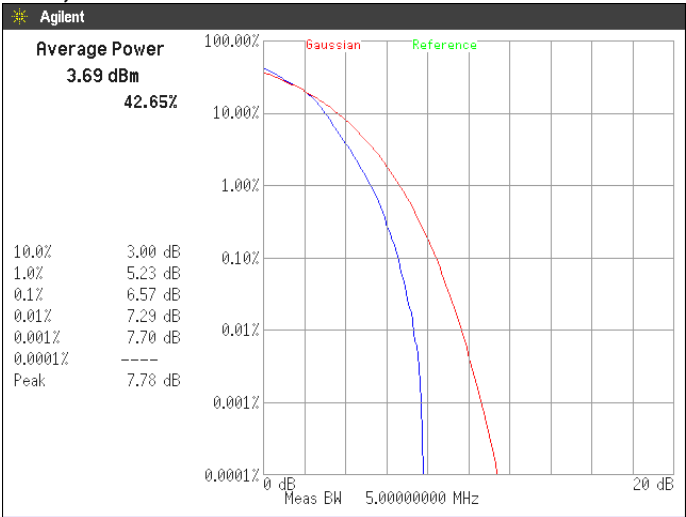


16QAM, BW 5MHz, RB25-0

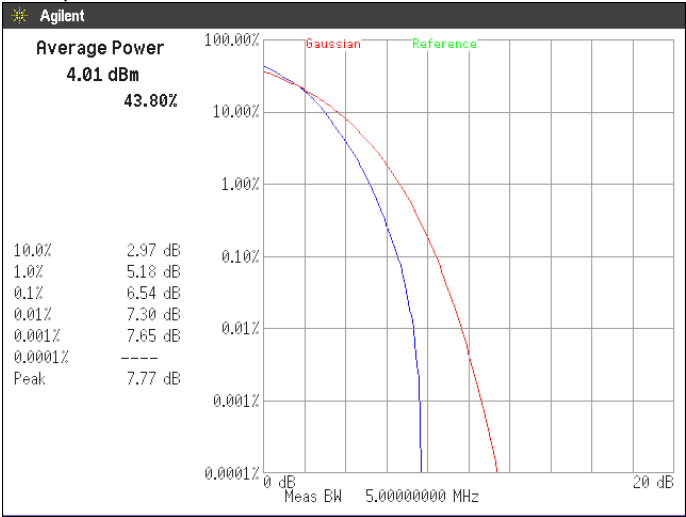


Channel: 18900
16QAM, BW 10MHz, RB50-0

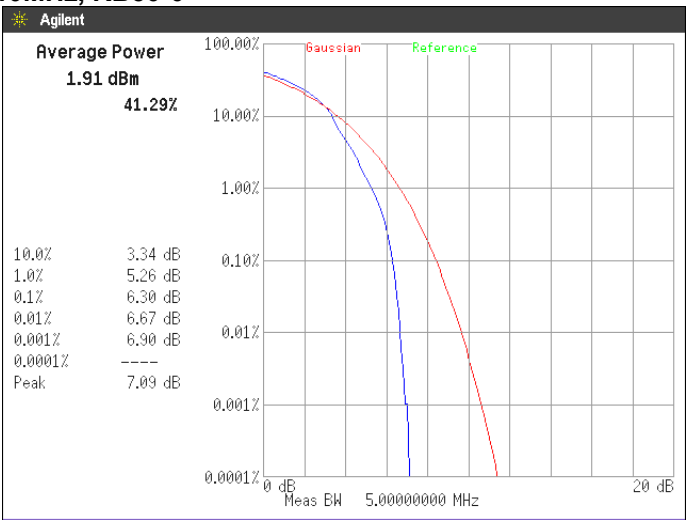


16QAM, BW 15MHz, RB75-0

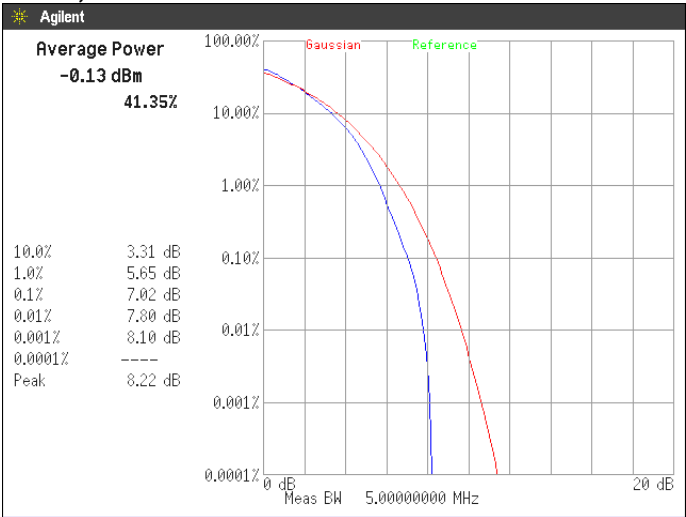


16QAM, BW 20MHz, RB100-0

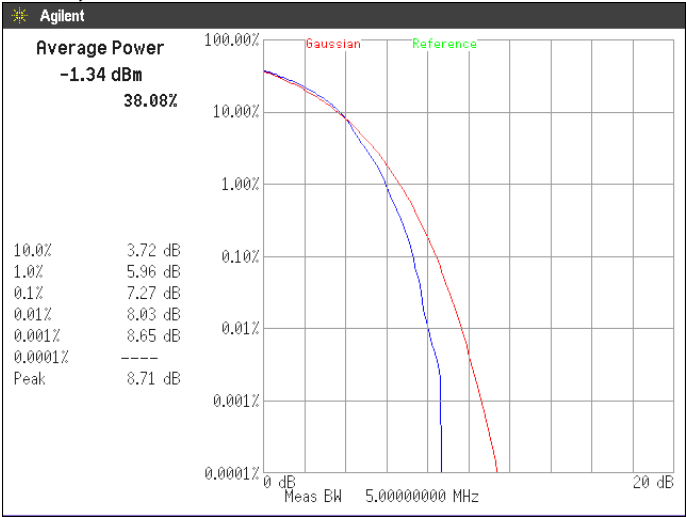


Channel: 18900
64QAM, BW 1.4MHz, RB6-0

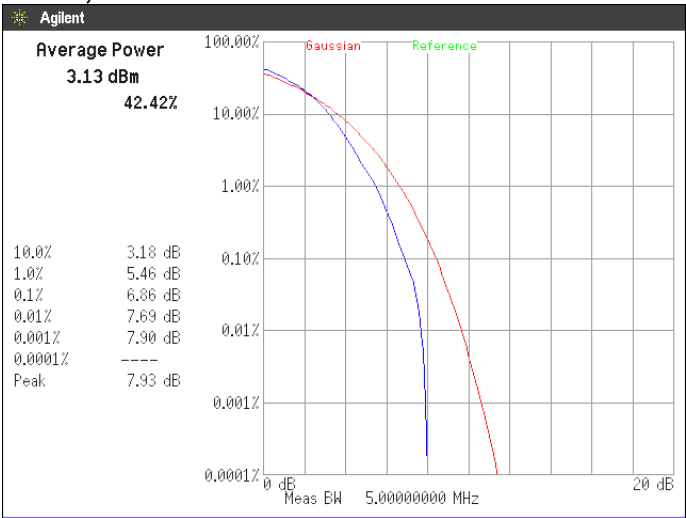


64QAM, BW 3MHz, RB15-0

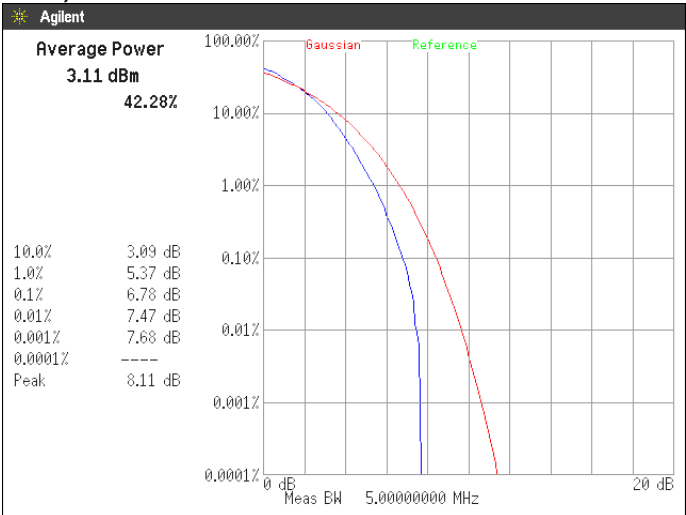


64QAM, BW 5MHz, RB25-0

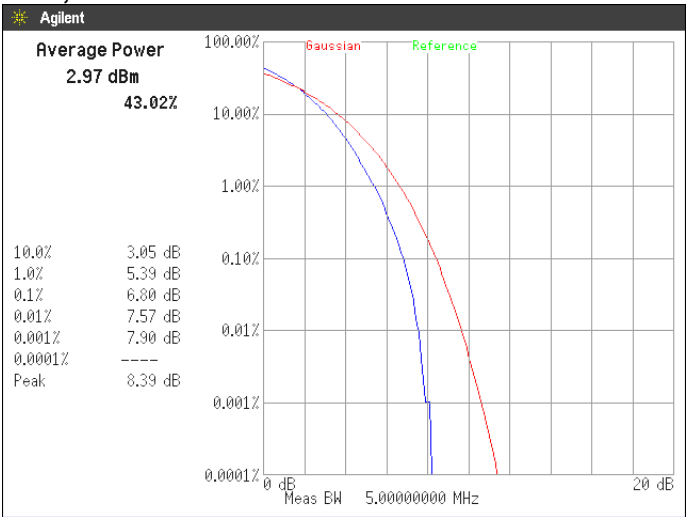


Channel: 18900
64QAM, BW 10MHz, RB50-0

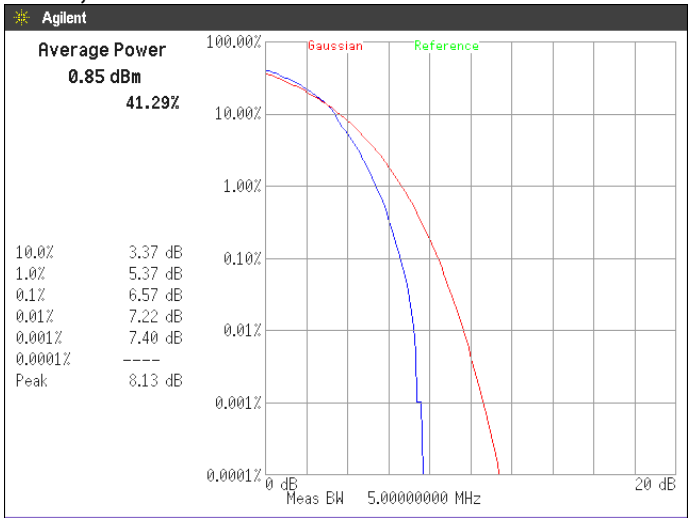

64QAM, BW 15MHz, RB75-0

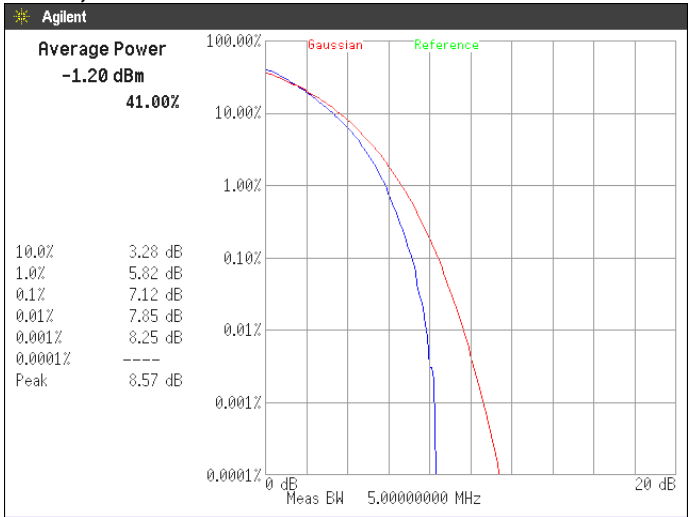

64QAM, BW 20MHz, RB100-0

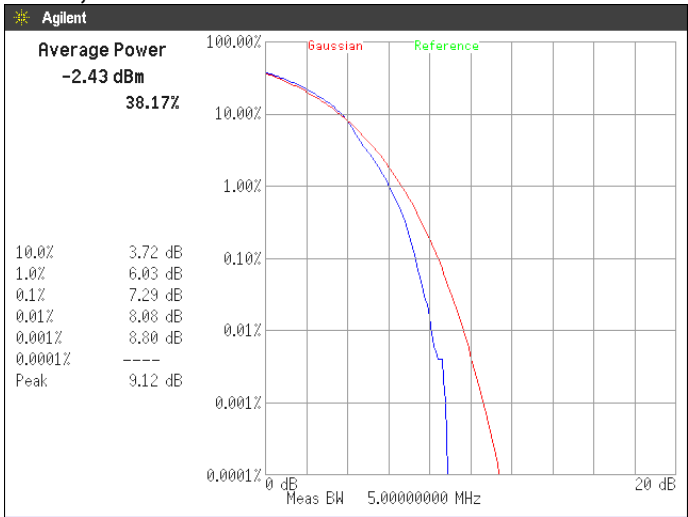

4.3 Occupied Bandwidth

4.3.1 Measurement procedure


[FCC 24.238(a), 2.1049]

The Occupied bandwidth was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;

- a) RBW = 1-5% of the expected OBW & VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

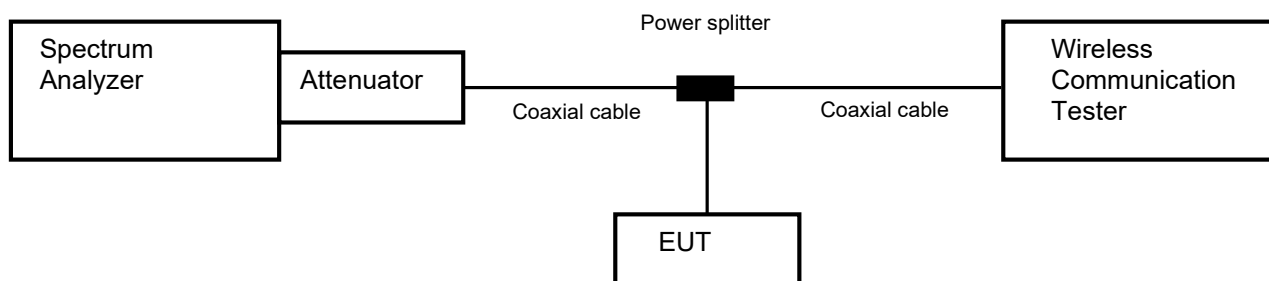

4.3.2 Limit

None

4.3.3 Measurement result

Date : 29-July-2020
 Temperature : 23.3 [°C]
 Humidity : 55.1 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kanno

Date : 26-August-2020
 Temperature : 22.6 [°C]
 Humidity : 57.6 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kanno

Band	Channel	Frequency [MHz]	Test Result [kHz]
GSM1900	512	1850.2	246.3412
	661	1880.0	245.4133
	810	1909.8	244.6990


Band	Channel	Frequency [MHz]	Test Result [kHz]
WCDMA Band II	9262	1852.4	4160.8
	9400	1880.0	4162.3
	9538	1907.6	4151.2

Band	Channel	Frequency [MHz]	Bandwidth [MHz]	Modulation	RB	Test Result [MHz]
LTE Band II	18900	1880.0	1.4	QPSK	3-1	0.6064
					6-0	1.1020
				16QAM	3-1	0.6068
					6-0	1.1005
				64QAM	3-1	0.5936
					6-0	1.0911
			3	QPSK	8-4	1.5178
					15-0	2.6991
				16QAM	8-4	1.5070
					15-0	2.6926
				64QAM	8-4	1.5104
					15-0	2.6985
			5	QPSK	12-7	2.3067
					25-0	4.5046
				16QAM	12-7	2.3052
					25-0	4.4998
				64QAM	12-7	2.2819
					25-0	4.5257
			10	QPSK	25-12	4.6638
					50-0	9.0064
				16QAM	25-12	4.7032
					50-0	8.9843
				64QAM	25-12	4.6959
					50-0	8.9886
			15	QPSK	36-20	6.7675
					75-0	13.4812
				16QAM	36-20	6.6820
					75-0	13.4678
				64QAM	36-20	6.7176
					75-0	13.4832
			20	QPSK	50-24	9.2109
					100-0	17.9612
				16QAM	50-24	9.2161
					100-0	17.9462
				64QAM	50-24	9.2387
					100-0	17.9663


4.3.4 Trace data

[GSM1900]


Channel: 512

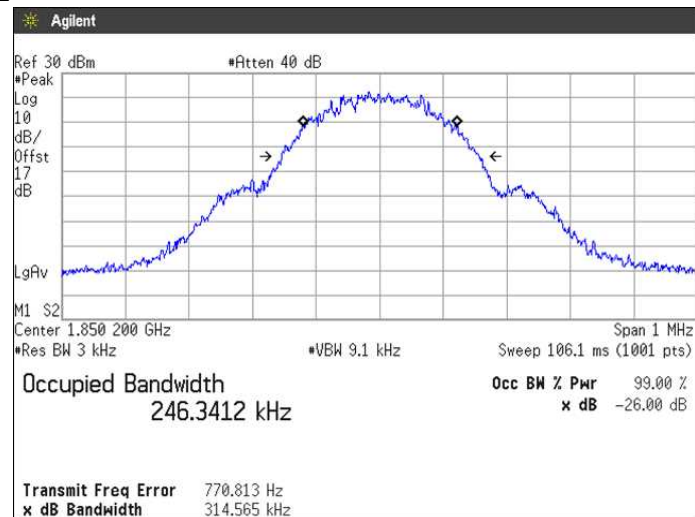


Channel: 661

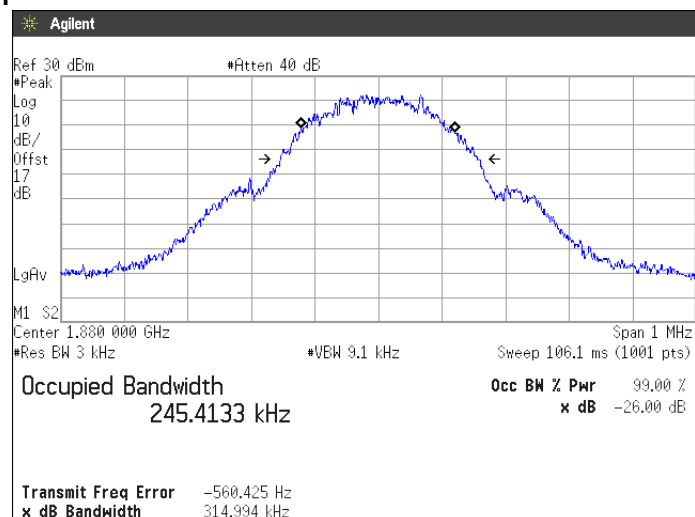


Channel: 810

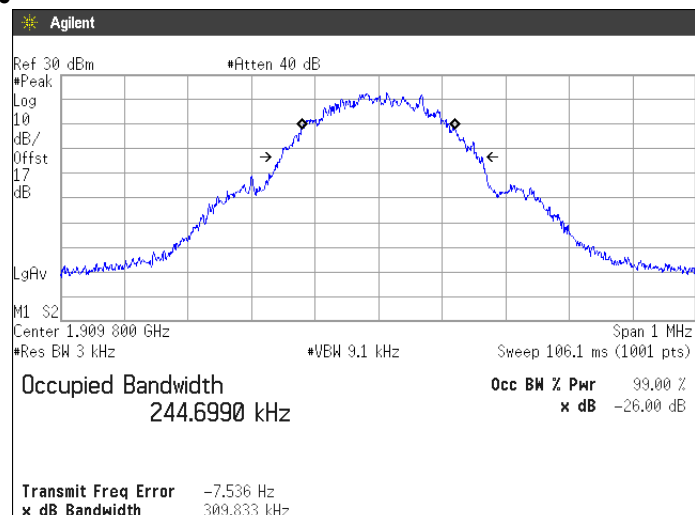


[WCDMA Band II]
Channel: 9262

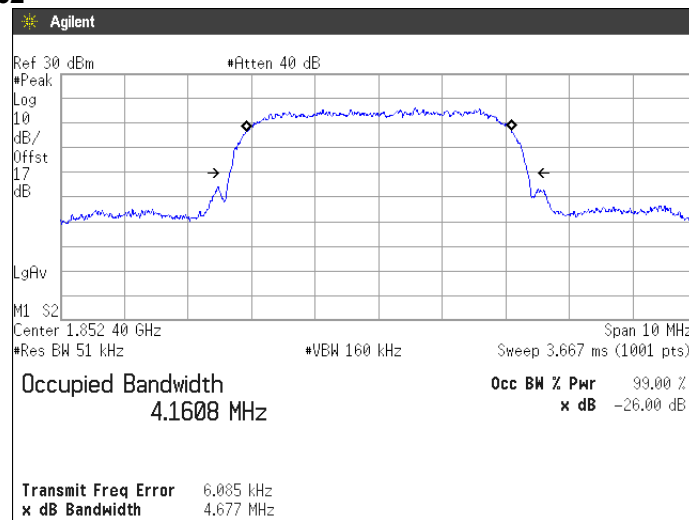

Channel: 9400

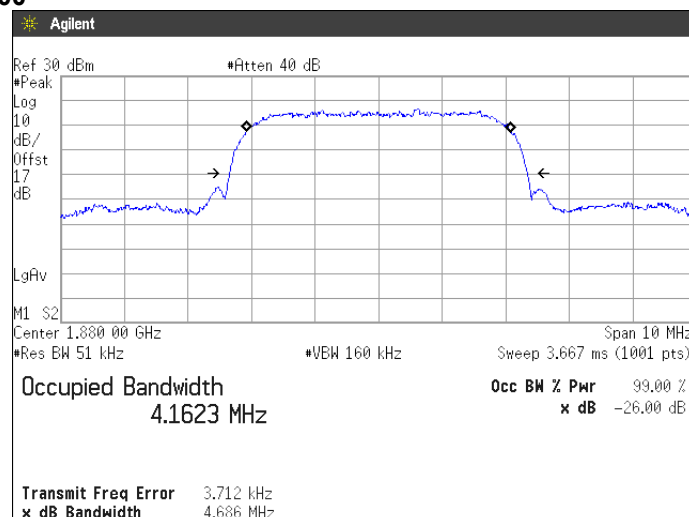


Channel: 9538

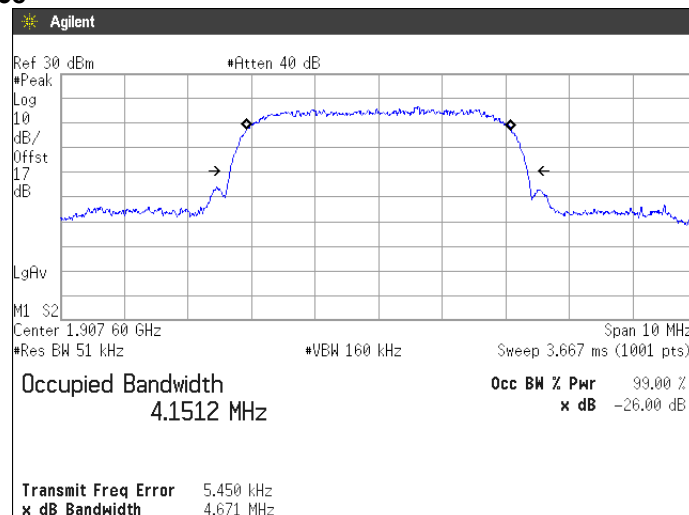


**[LTE Band II]
Channel: 18900**


**QPSK, BW 1.4MHz
RB3-1**

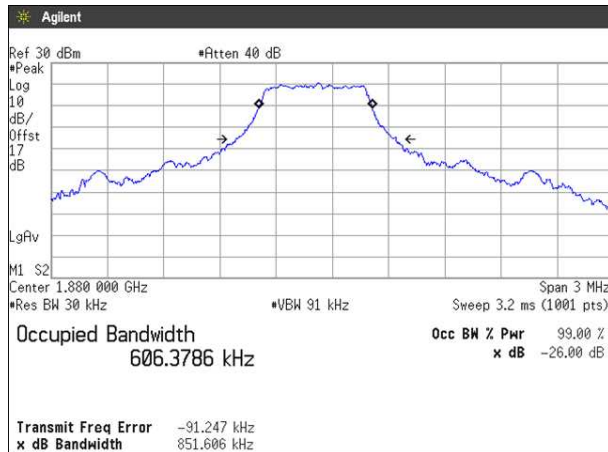


RB6-0

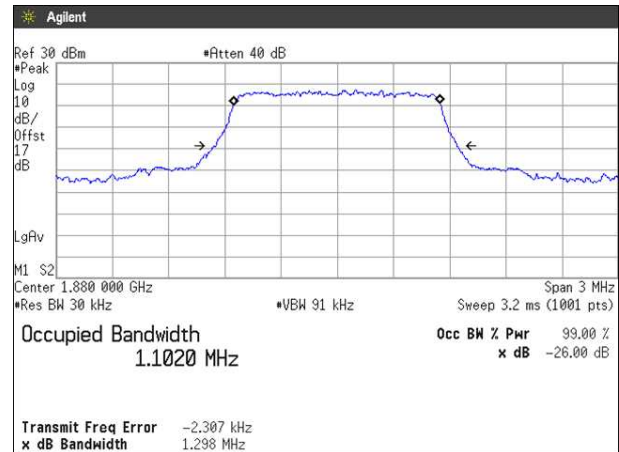


**16QAM, BW 1.4MHz
RB3-1**

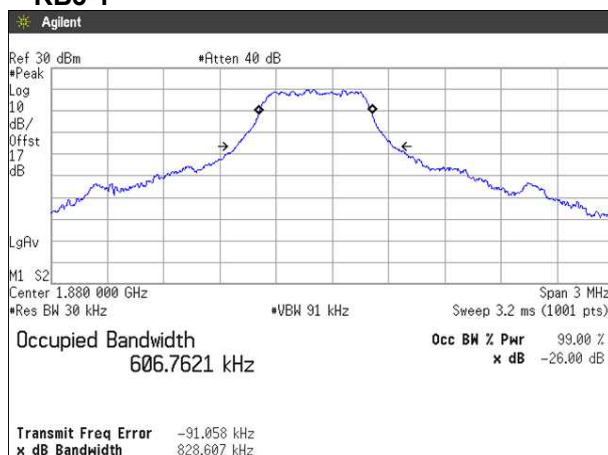


RB6-0






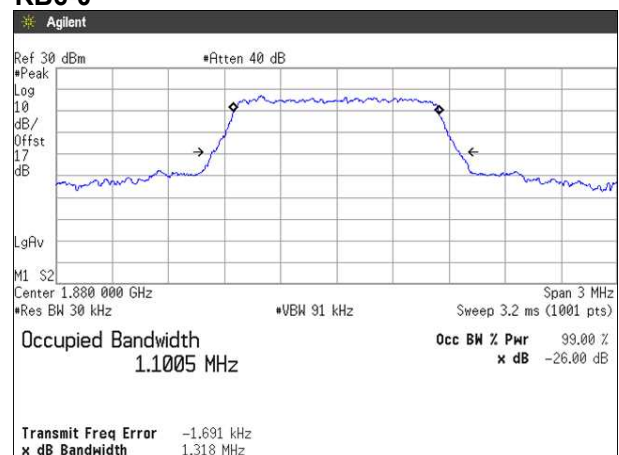


**64QAM, BW 1.4MHz
RB3-1**

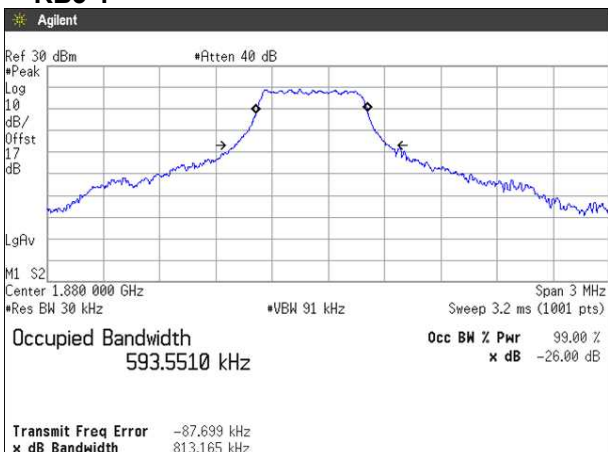


RB6-0

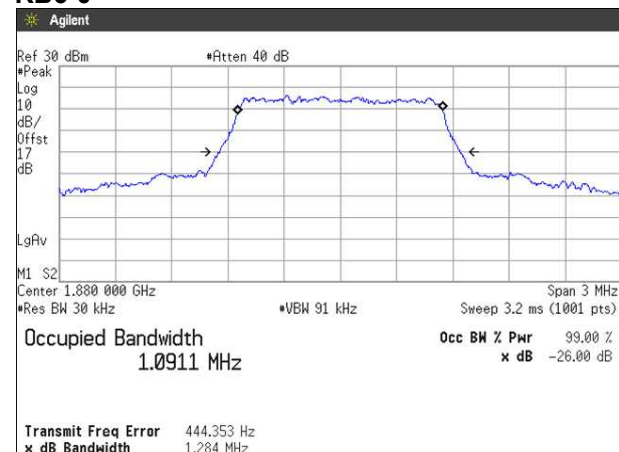


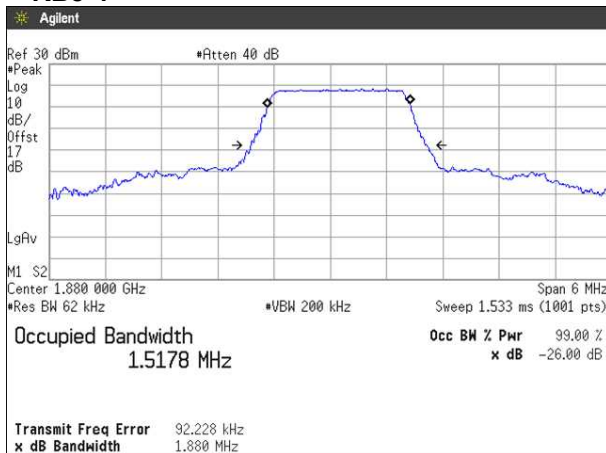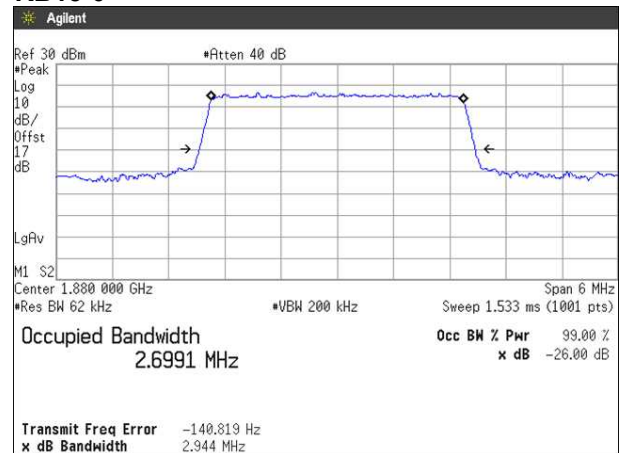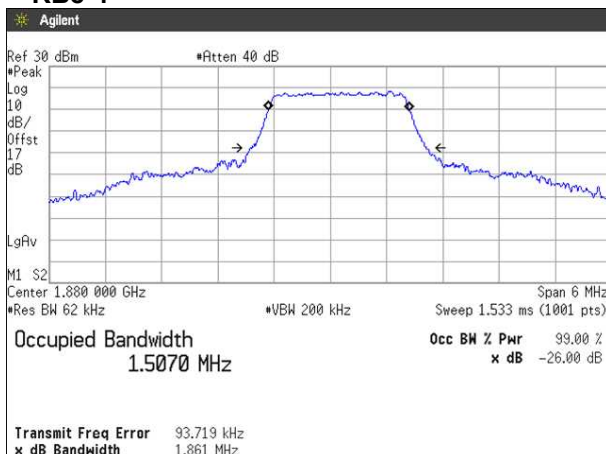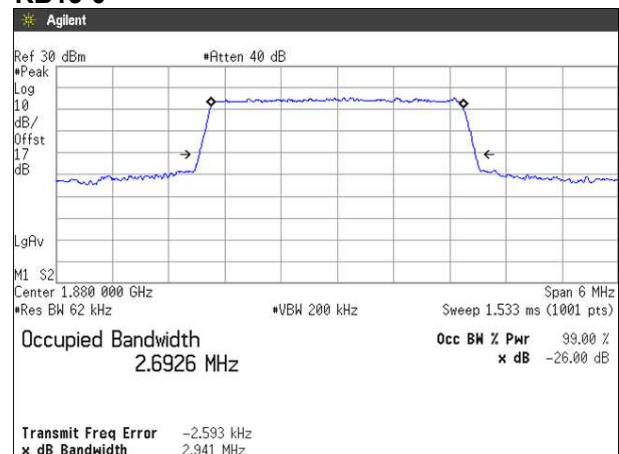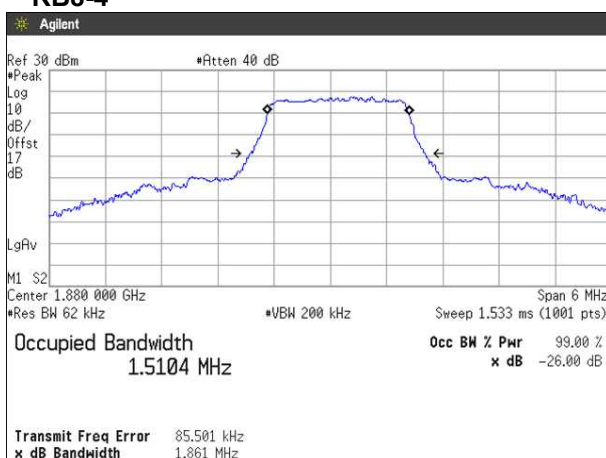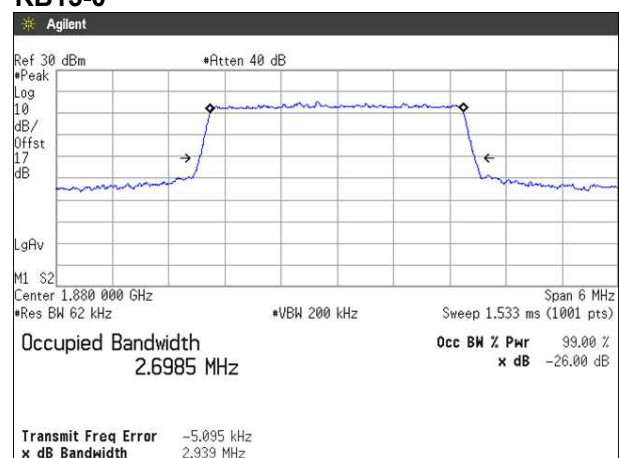QPSK, BW 3MHz**RB8-4****RB15-0****16QAM, BW 3MHz****RB8-4****RB15-0****64QAM, BW 3MHz****RB8-4****RB15-0**


QPSK, BW 5MHz RB12-7

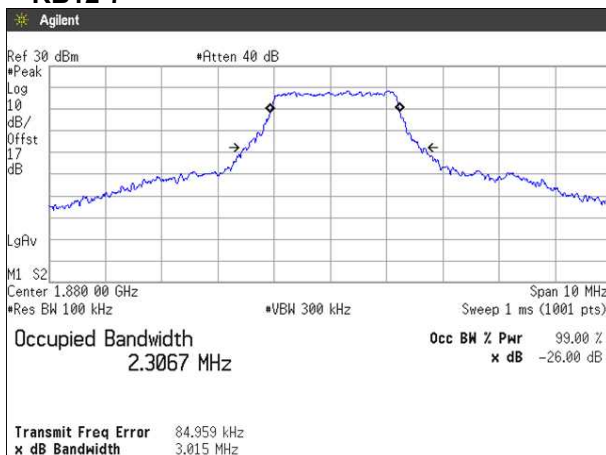


RB25-0

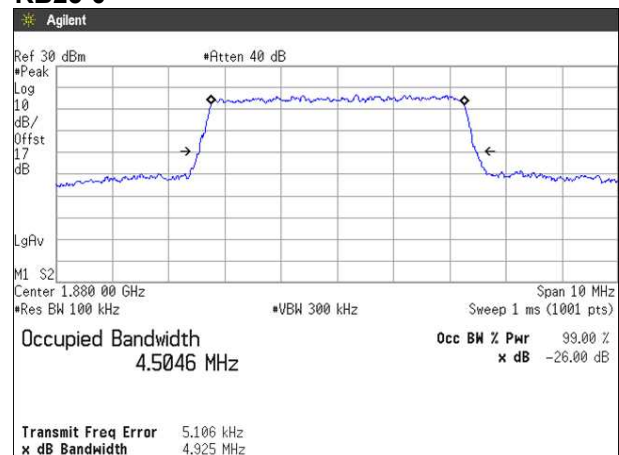


16QAM, BW 5MHz RB12-7

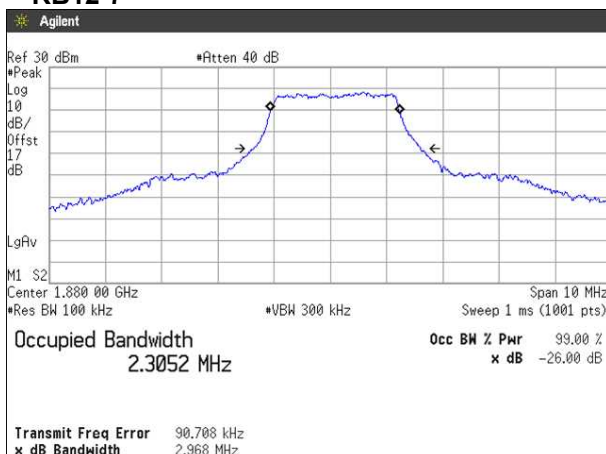


RB25-0

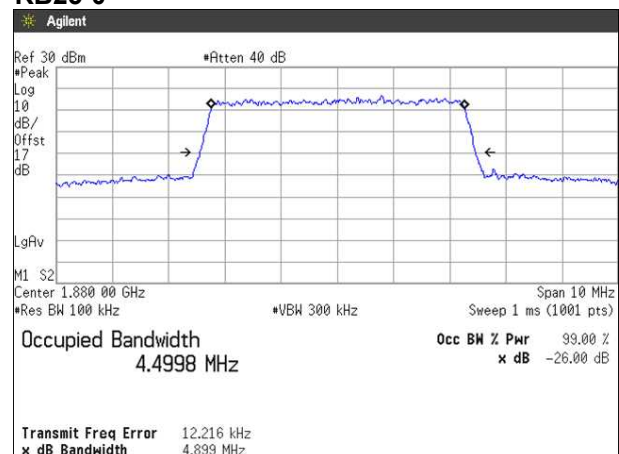


64QAM, BW 5MHz RB12-7

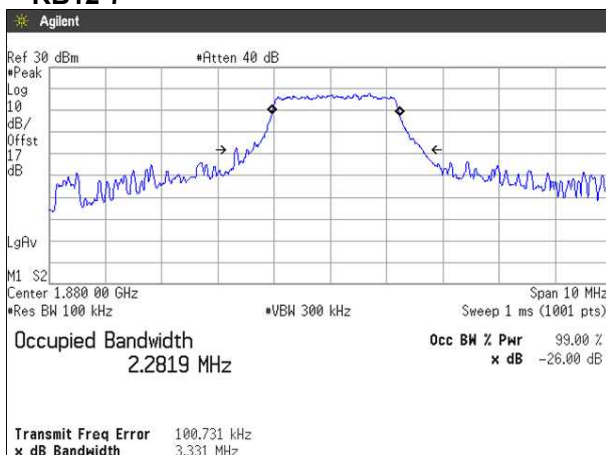


RB25-0

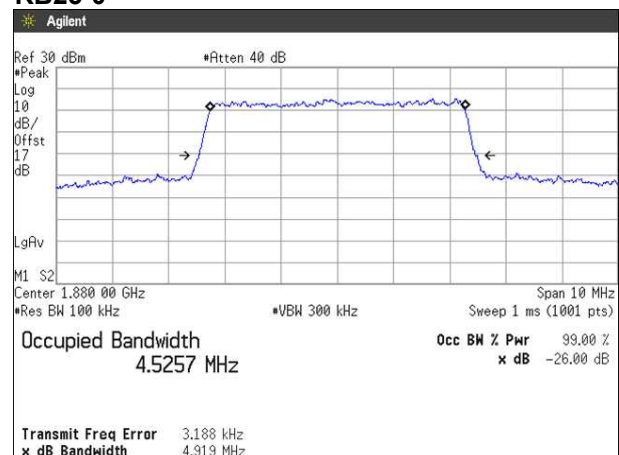


QPSK, BW 10MHz RB25-12

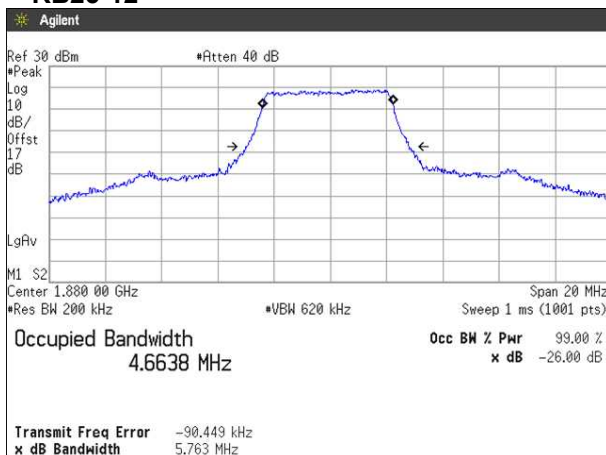


RB50-0

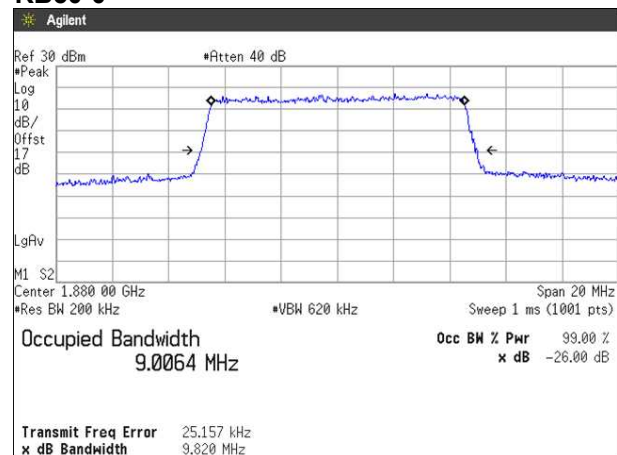


16QAM, BW 10MHz RB25-12

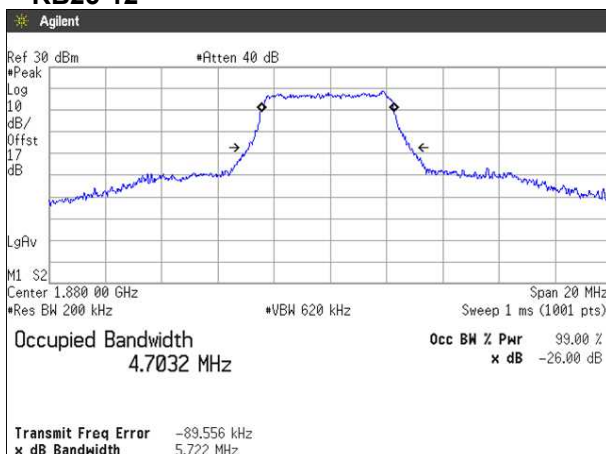


RB50-0

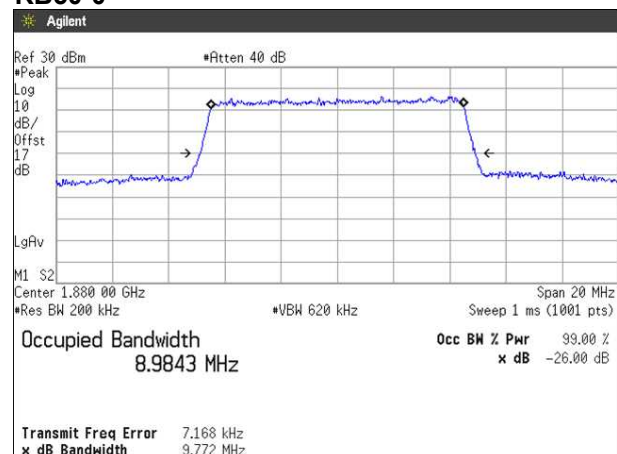


64QAM, BW 10MHz RB25-12

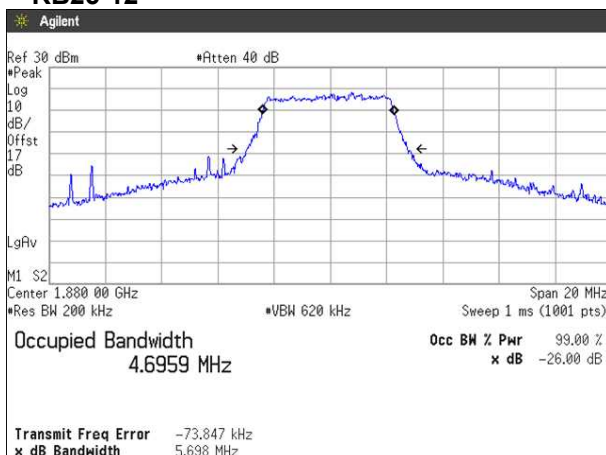


RB50-0

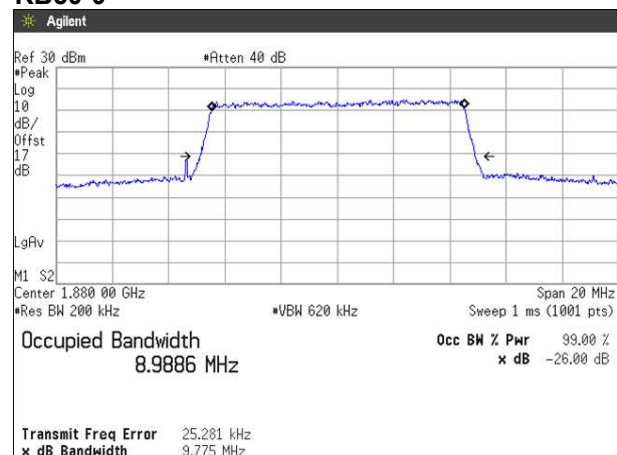


QPSK, BW 15MHz RB36-20

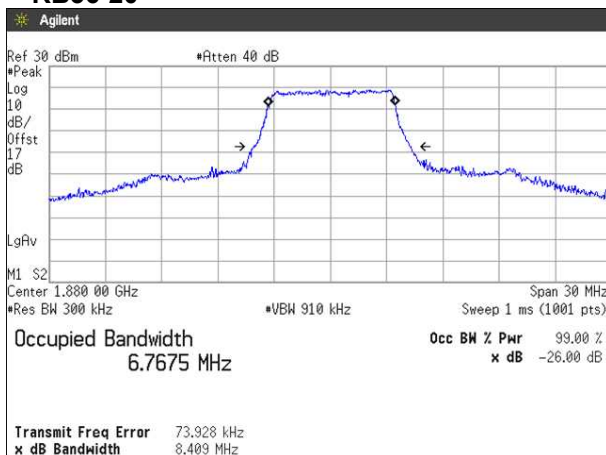


RB75-0

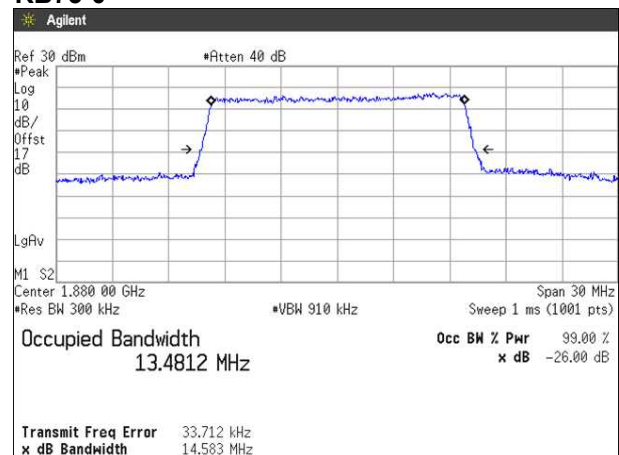


16QAM, BW 15MHz RB36-20

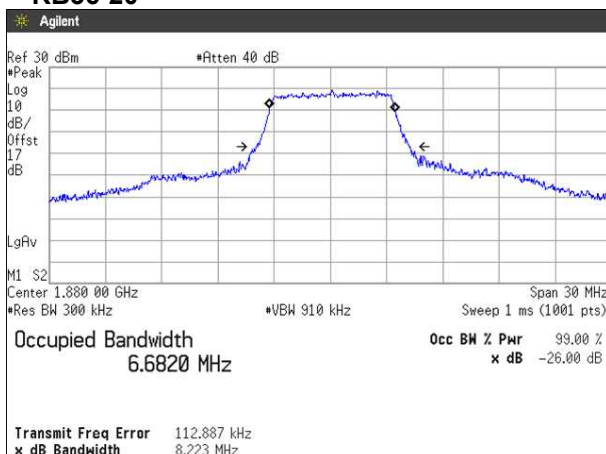


RB75-0

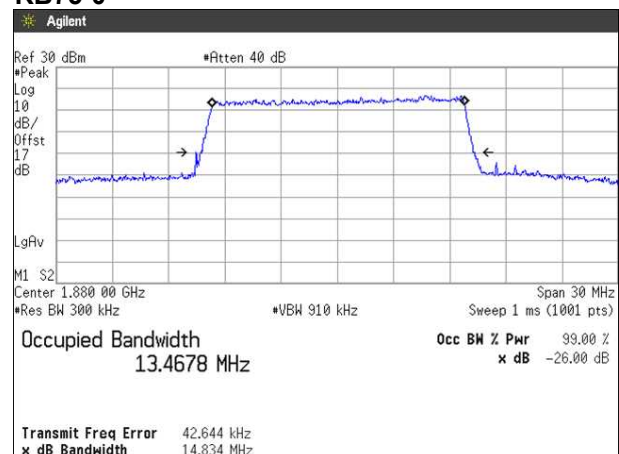


64QAM, BW 15MHz RB36-20

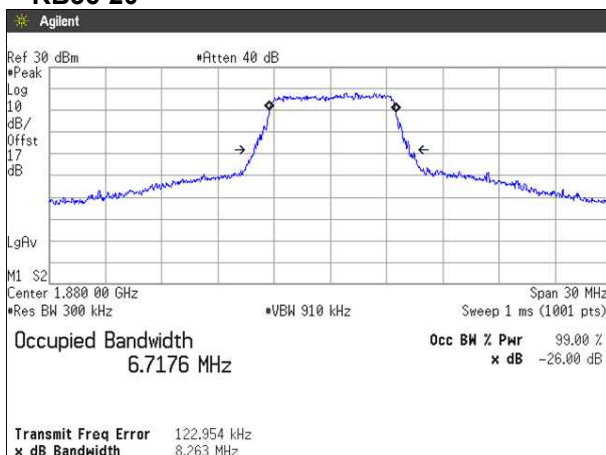


RB75-0

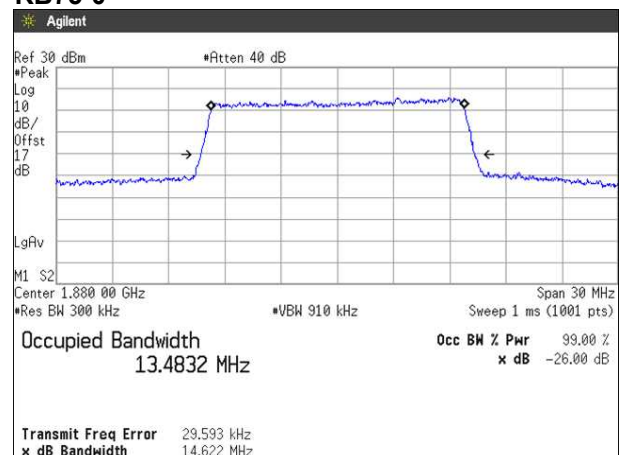


QPSK, BW 20MHz RB50-24

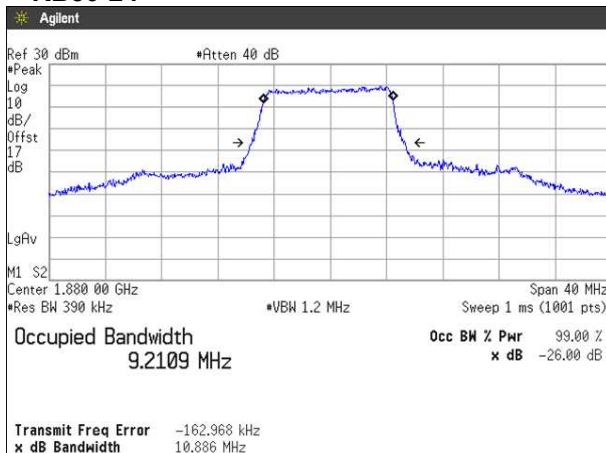


RB100-0

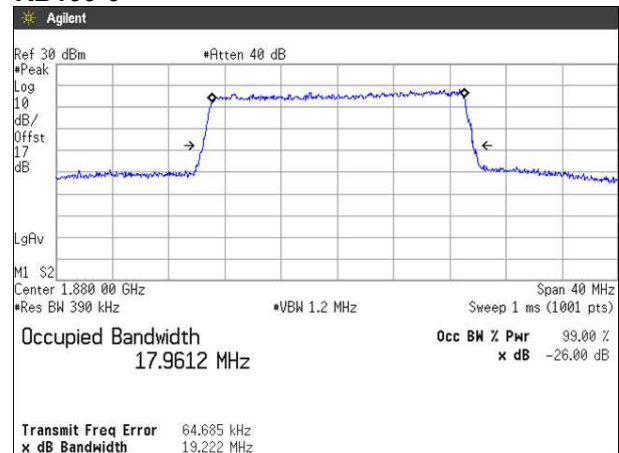


16QAM, BW 20MHz RB50-24

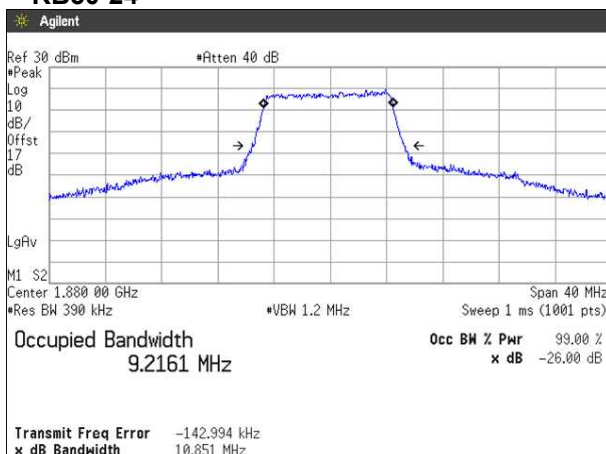


RB100-0

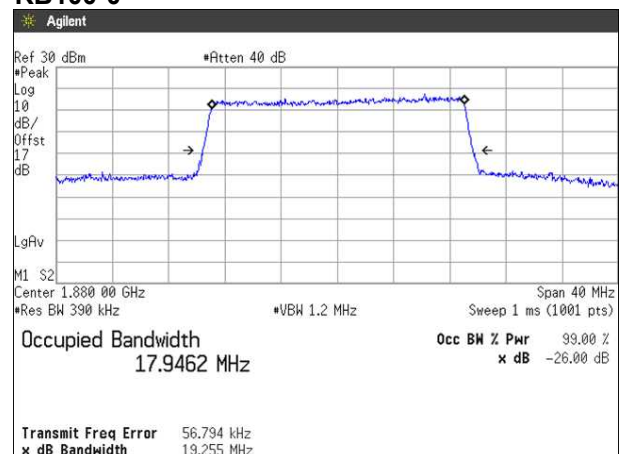

64QAM, BW 20MHz RB50-24

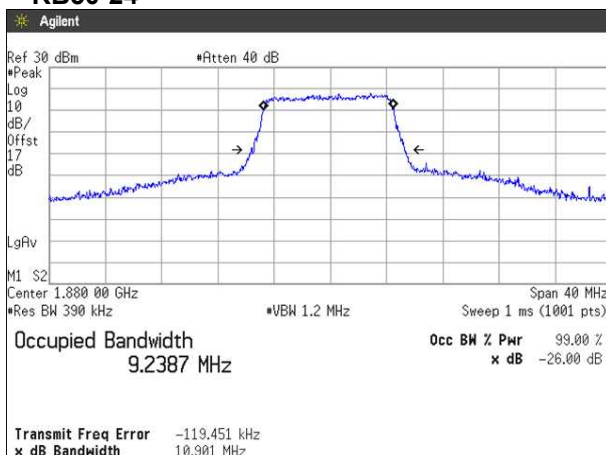

RB100-0

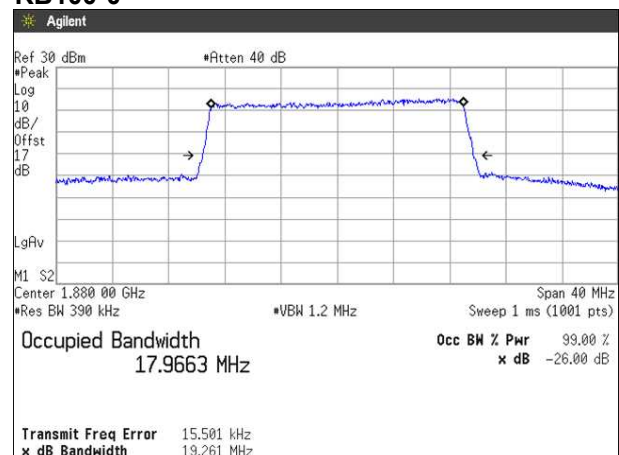

4.4 Band Edge Spurious and Harmonic at Antenna Terminals

4.4.1 Measurement procedure

[FCC 24.238(a), 2.1051]

The band edge spurious and harmonic was measured with a spectrum analyzer connected to the antenna terminal.

The spectrum analyzer is set to;


<Band Edge>

- a) Span was set large enough so as to capture all out of band emissions near the band edge
- b) $RBW \geq 1\%$ of the emission bandwidth or 2% of the emission bandwidth
- c) $VBW \geq 3 \times RBW$
- d) Detector = RMS
- e) Trace mode = Max hold
- f) Sweep time = auto-couple
- g) Number of sweep point $\geq 2 \times \text{span} / RBW$

<Spurious Emissions>

- a) $RBW = 1\text{MHz}$ & $VBW \geq 3 \times RBW$
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple
- e) Number of sweep point $\geq 2 \times \text{span} / RBW$

- Test configuration

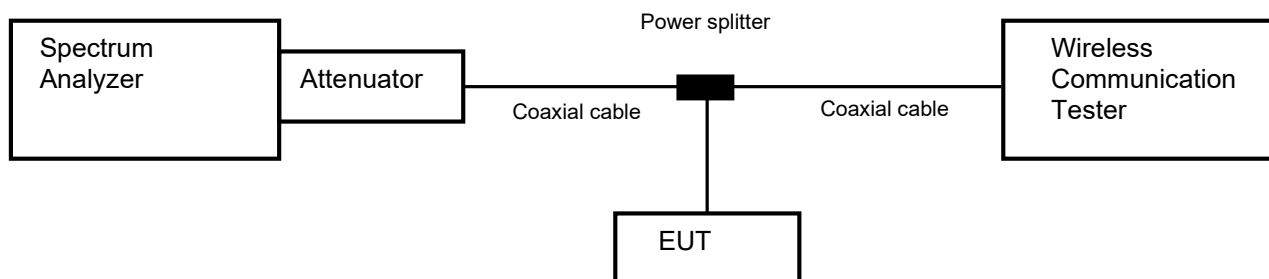

4.4.2 Limit

-13 dBm or less

4.4.3 Measurement result

Date : 30-July-2020
 Temperature : 23.8 [°C]
 Humidity : 51.2 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kanno

Date : 26-August-2020
 Temperature : 22.6 [°C]
 Humidity : 57.6 [%]
 Test place : Shielded room No.4

Test engineer : Chiaki Kanno


Band	Channel	Frequency [MHz]	Limit [dB]	Results	
GSM1900	512	1850.2	-13.0	See the trace data	PASS
	810	1909.8	-13.0	See the trace data	PASS
WCDMA Band II	9262	1852.4	-13.0	See the trace data	PASS
	9538	1907.6	-13.0	See the trace data	PASS

Band	Modulation	Bandwidth [MHz]	Channel	Frequency [MHz]	Limit [dB]	Results	
LTE Band II	QPSK, 16QAM, 64QAM	1.4	18607	1850.7	-13.0	See the trace data	PASS
			19193	1909.3	-13.0	See the trace data	PASS
		3	18615	1851.5	-13.0	See the trace data	PASS
			19185	1908.5	-13.0	See the trace data	PASS
		5	18625	1852.5	-13.0	See the trace data	PASS
			19175	1907.5	-13.0	See the trace data	PASS
		10	18650	1855.0	-13.0	See the trace data	PASS
			19150	1905.0	-13.0	See the trace data	PASS
		15	18675	1857.5	-13.0	See the trace data	PASS
			19125	1902.5	-13.0	See the trace data	PASS
		20	18700	1860.0	-13.0	See the trace data	PASS
			19100	1900.0	-13.0	See the trace data	PASS


4.4.4 Trace data

[GSM1900]
(Band Edge)

Channel: 512




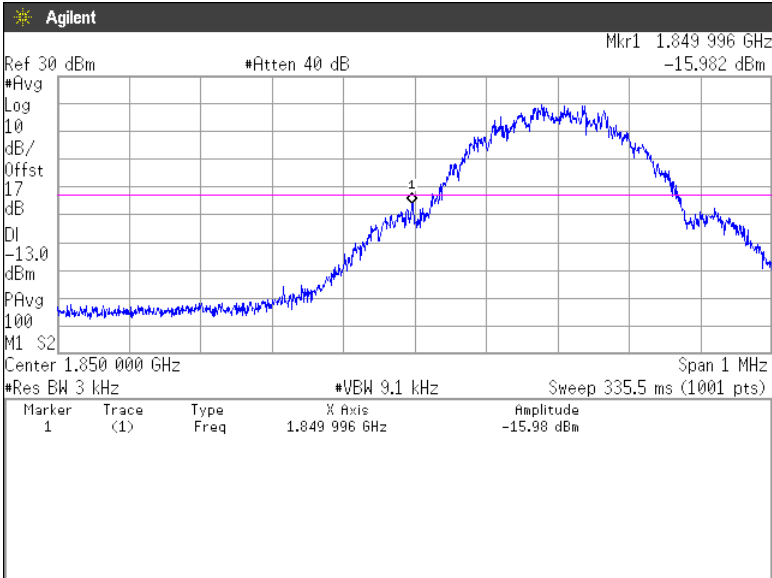






Channel: 810




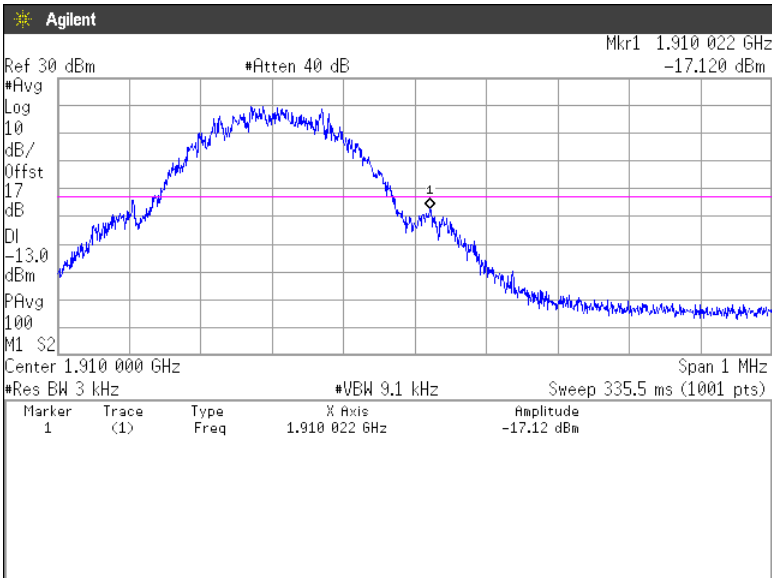


(Spurious Emissions)

Note: Conducted spurious test was measured in the worst case of conducted output power.

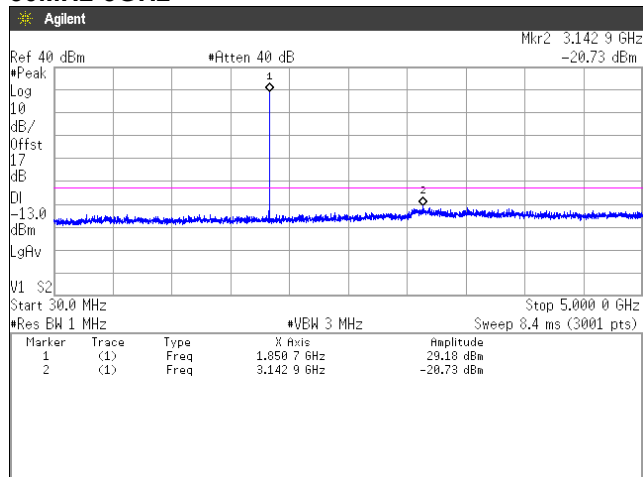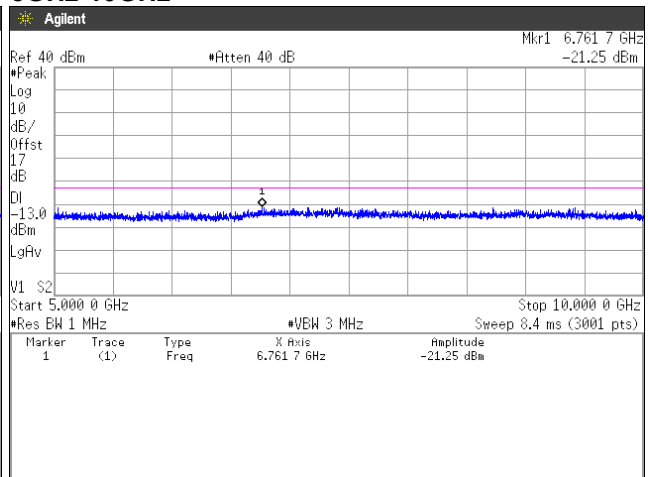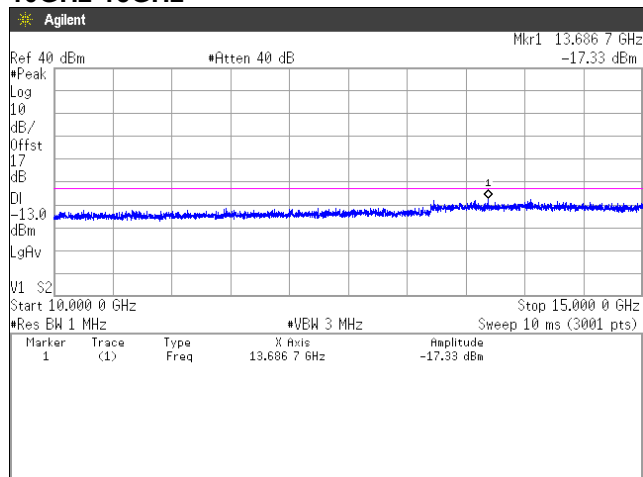
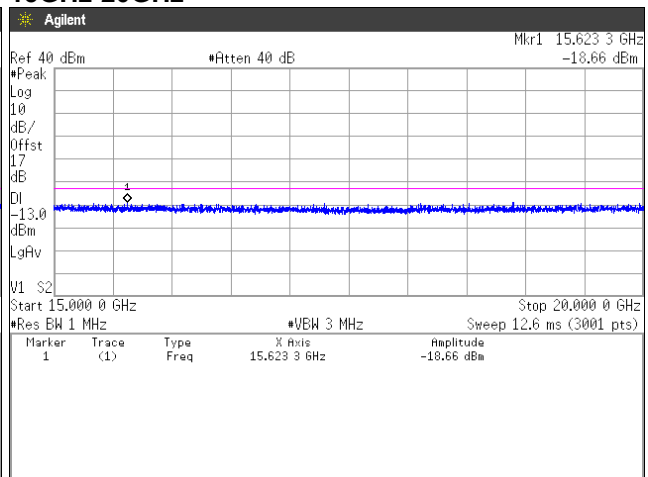
Channel: 512**30MHz-5GHz****5GHz-10GHz****10GHz-15GHz****15GHz-20GHz**

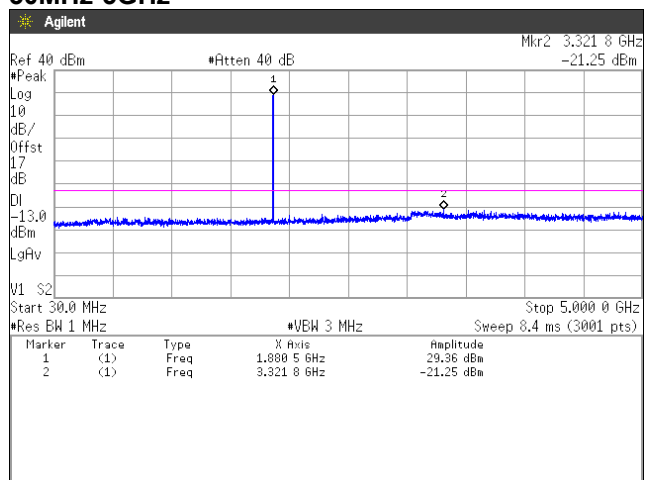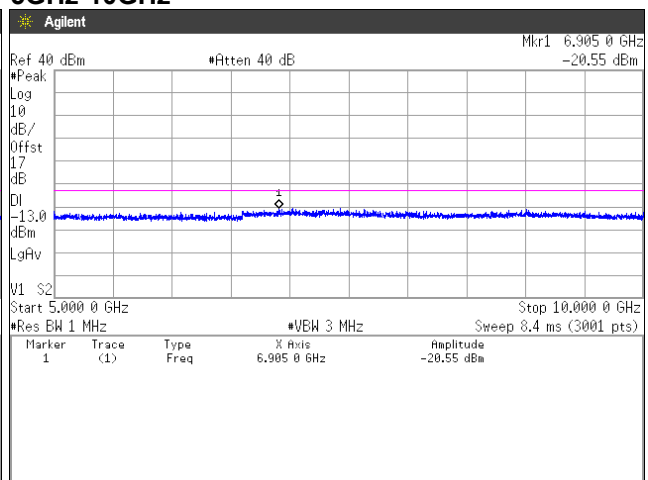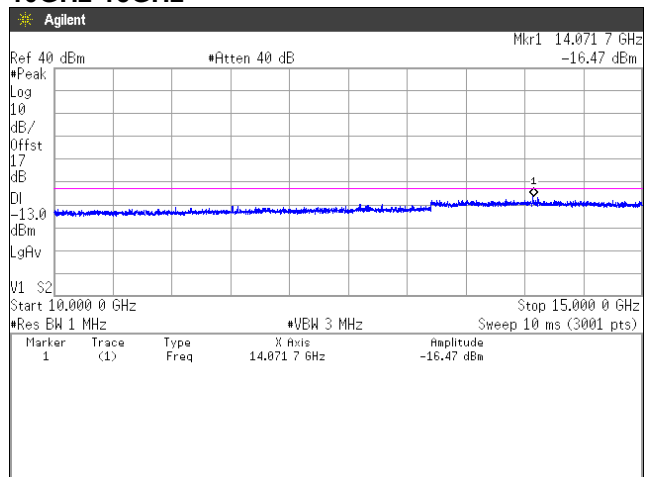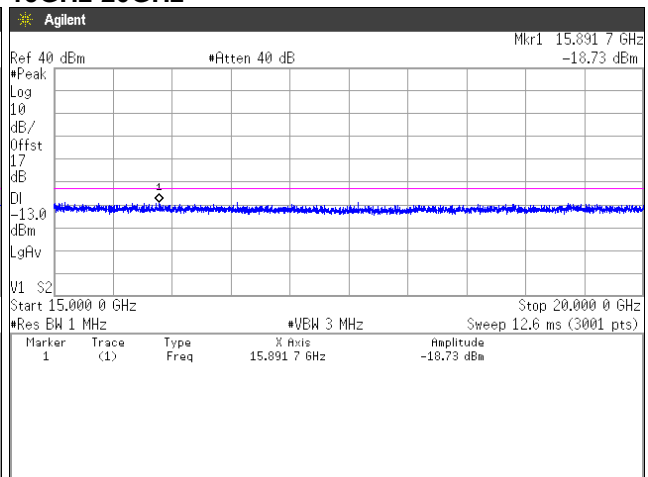Channel: 661**30MHz-5GHz****5GHz-10GHz****10GHz-15GHz****15GHz-20GHz**

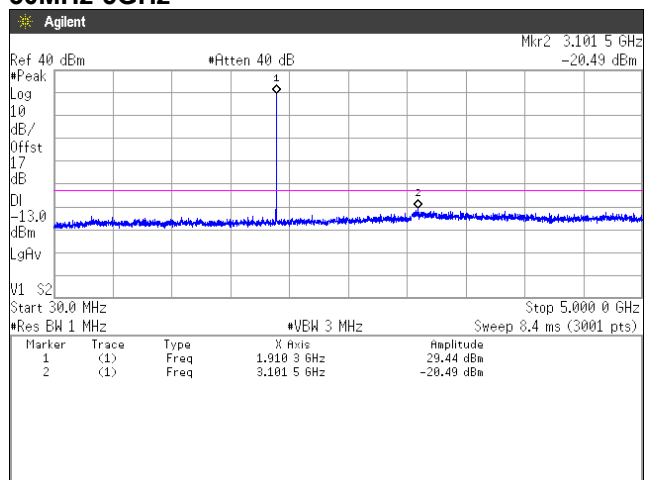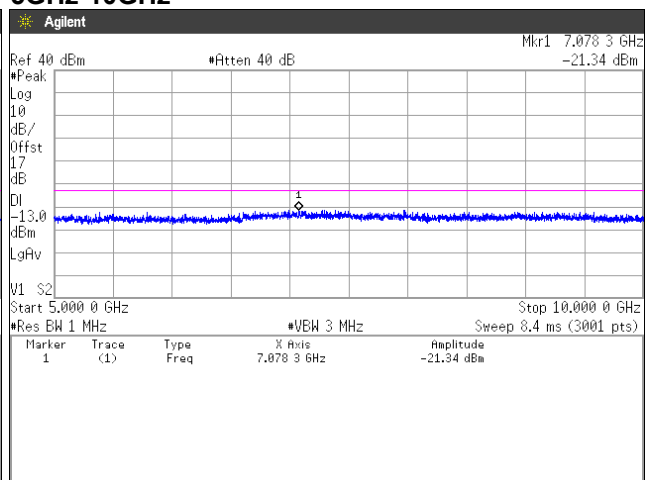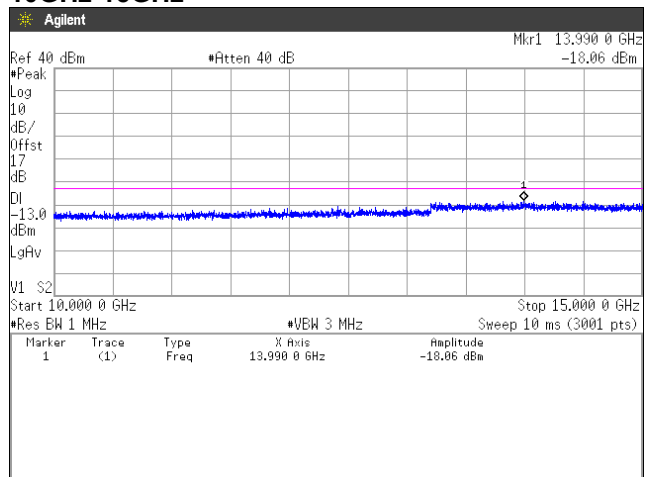
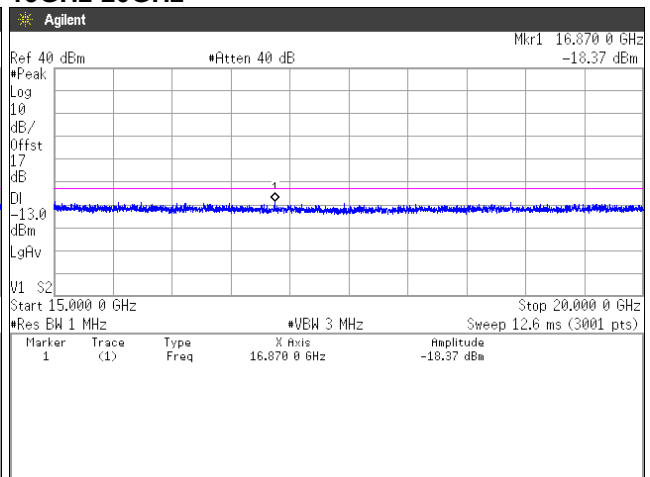
Channel: 810**30MHz-5GHz****5GHz-10GHz****10GHz-15GHz****15GHz-20GHz**

[WCDMA Band II]
(Band Edge)

Channel: 9262

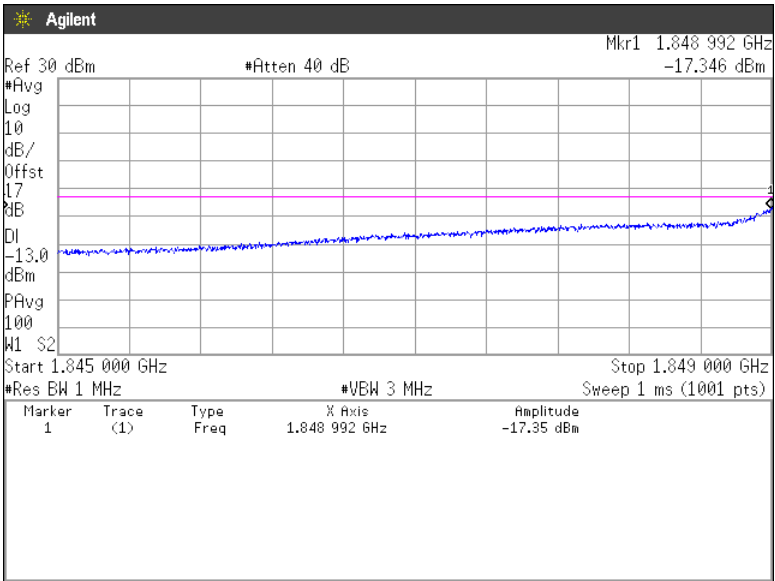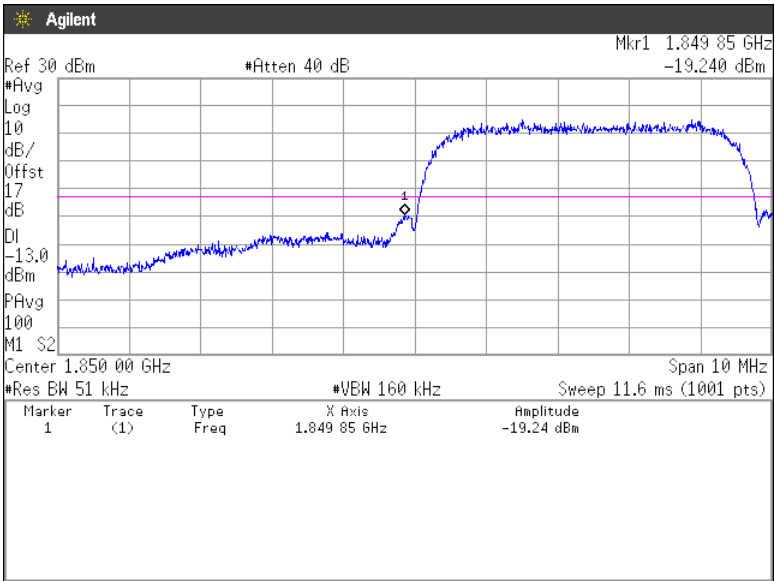

Channel: 9538

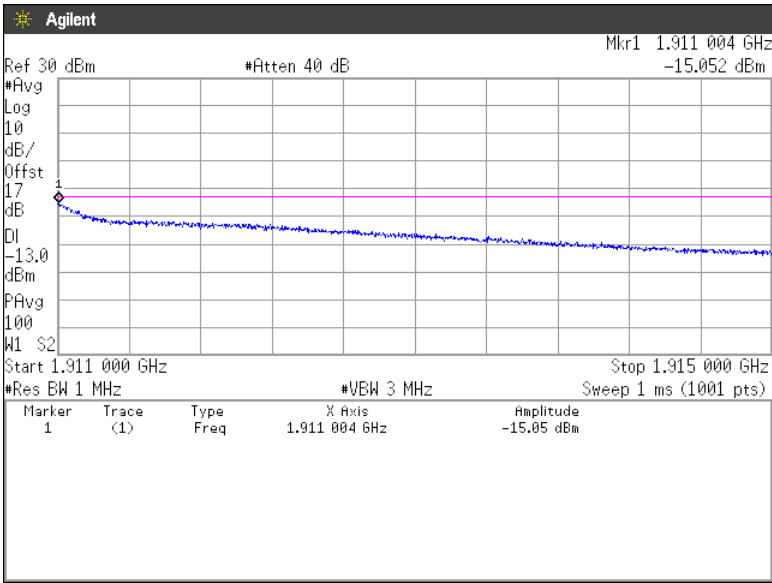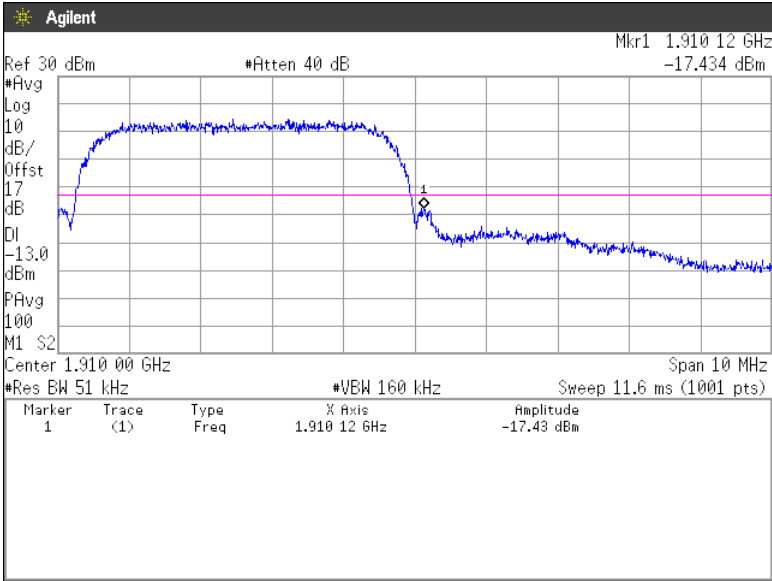


(Spurious Emissions)


Note: Conducted spurious test was measured in the worst case of conducted output power.

Channel: 9262


30MHz-5GHz

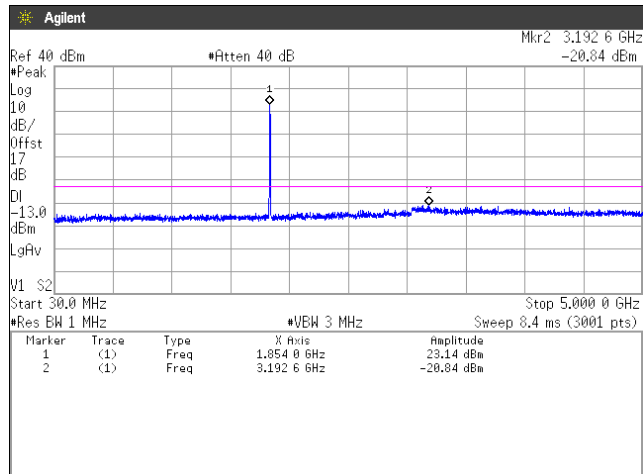


5GHz-10GHz

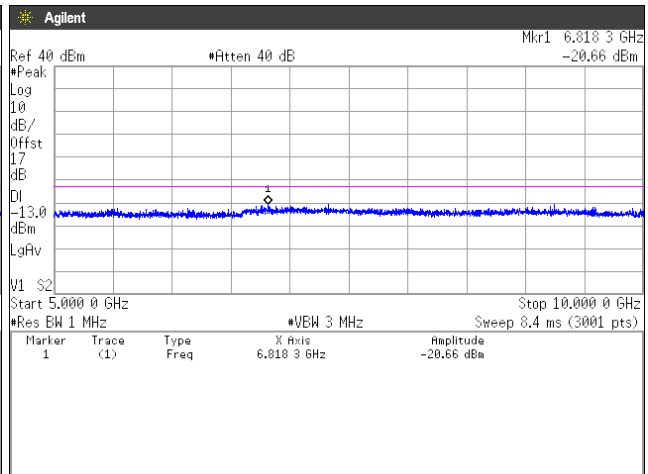

10GHz-15GHz

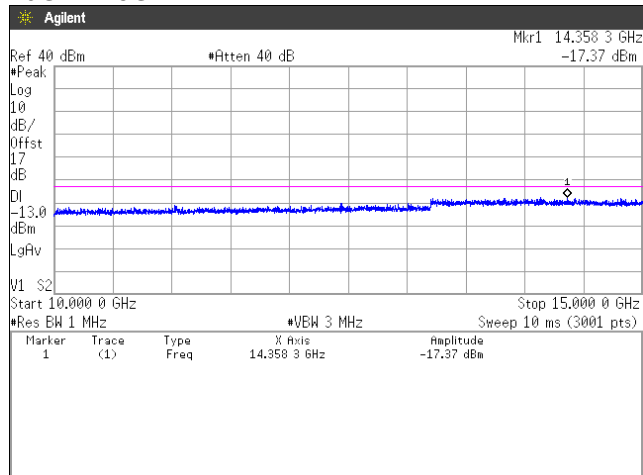


15GHz-20GHz

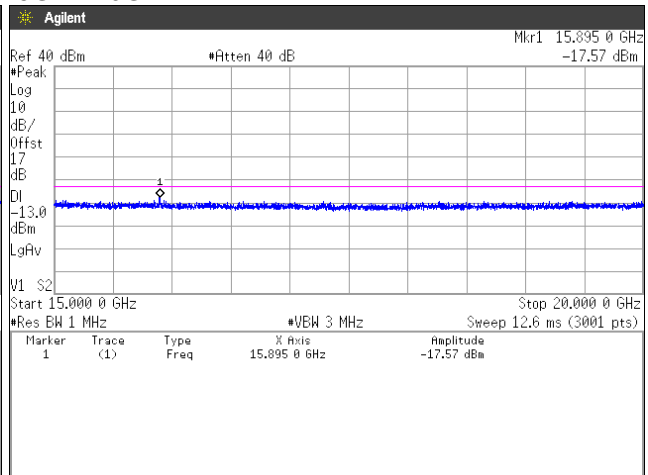


Channel: 9400


30MHz-5GHz

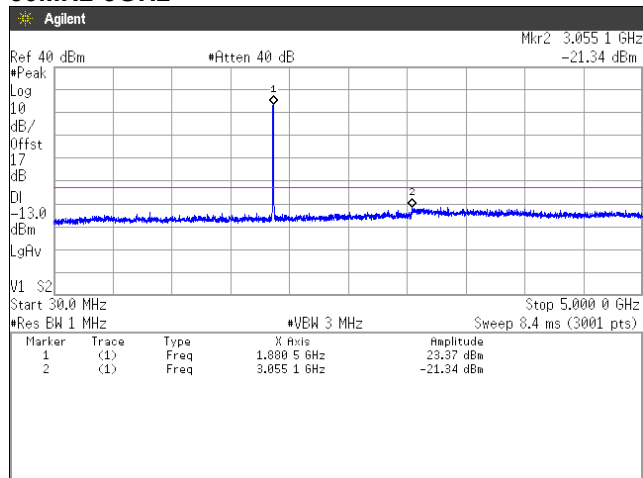


5GHz-10GHz




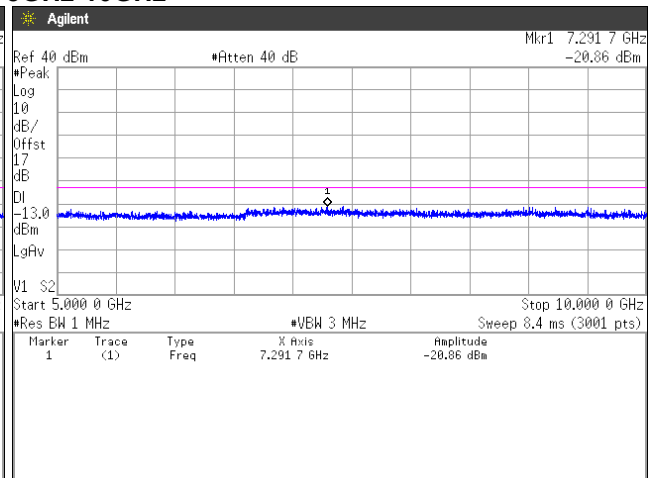


10GHz-15GHz

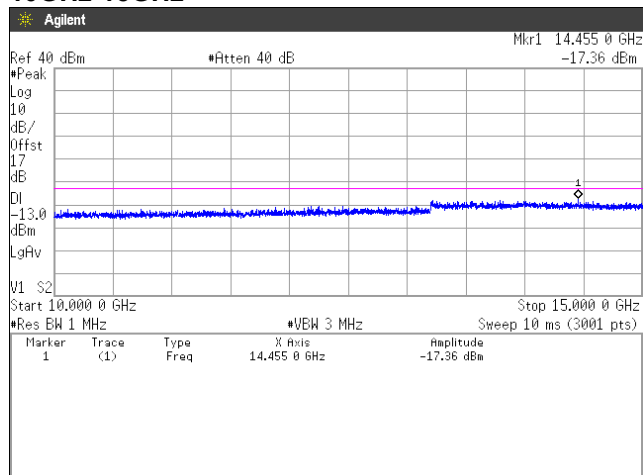


15GHz-20GHz

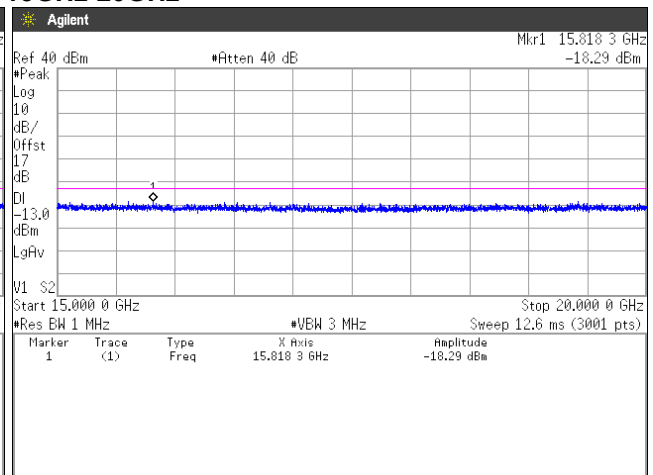


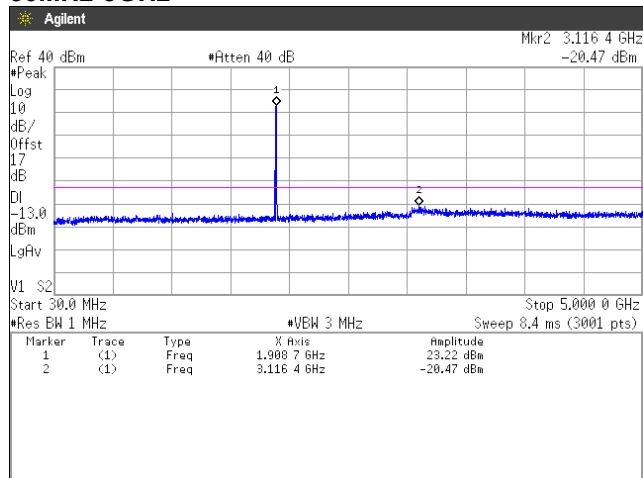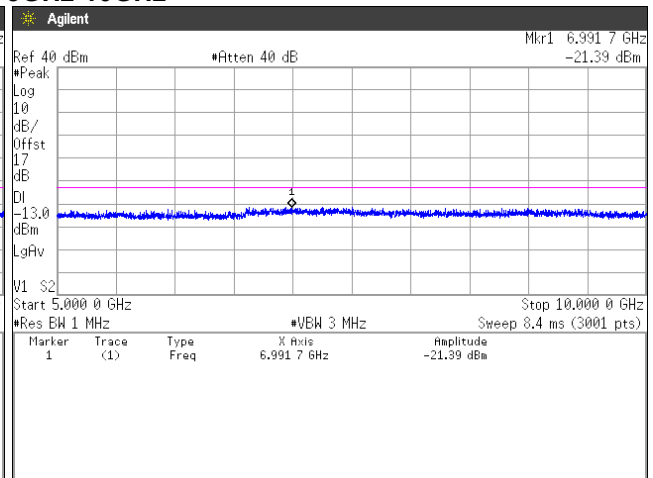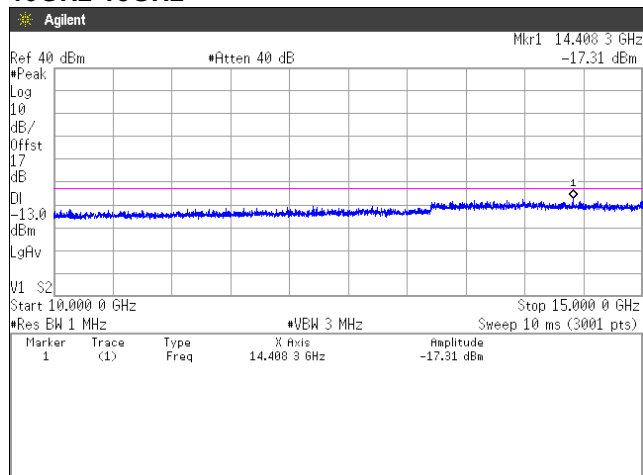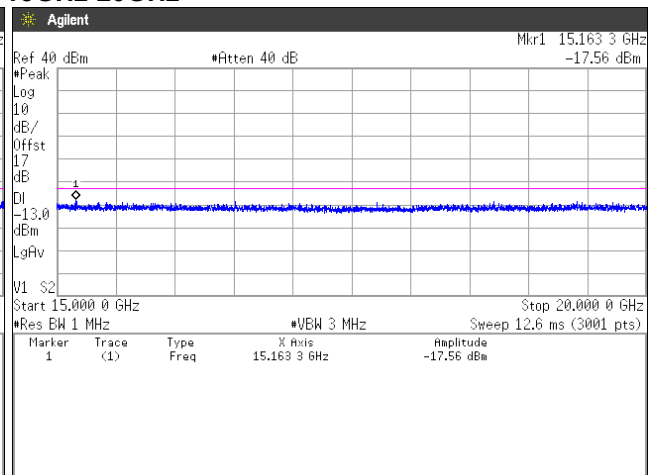Channel: 9538**30MHz-5GHz****5GHz-10GHz****10GHz-15GHz****15GHz-20GHz**


[LTE Band II]
(Band Edge)
QPSK, BW 1.4MHz, RB1-0
Channel: Low

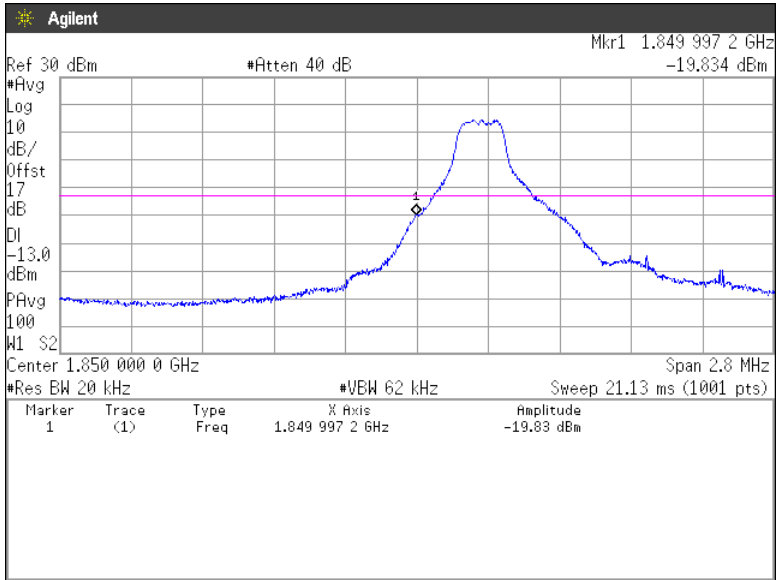


QPSK, BW 1.4MHz, RB1-5
Channel: High

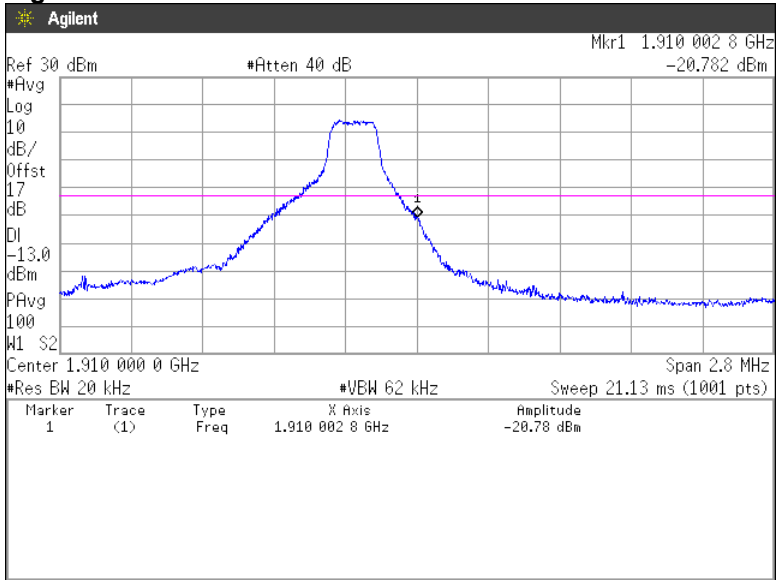


QPSK, BW 1.4MHz, RB6-0
Channel: Low

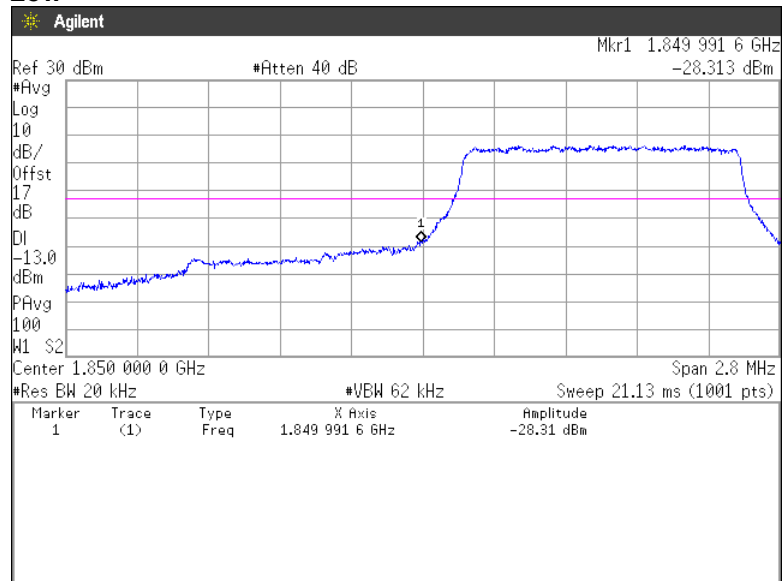


QPSK, BW 1.4MHz, RB6-0
Channel: High

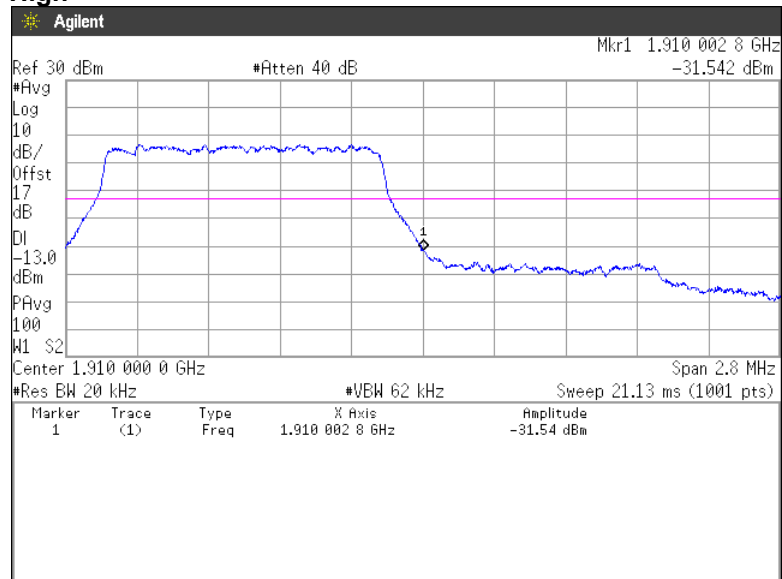


QPSK, BW 3MHz, RB1-0
Channel: Low

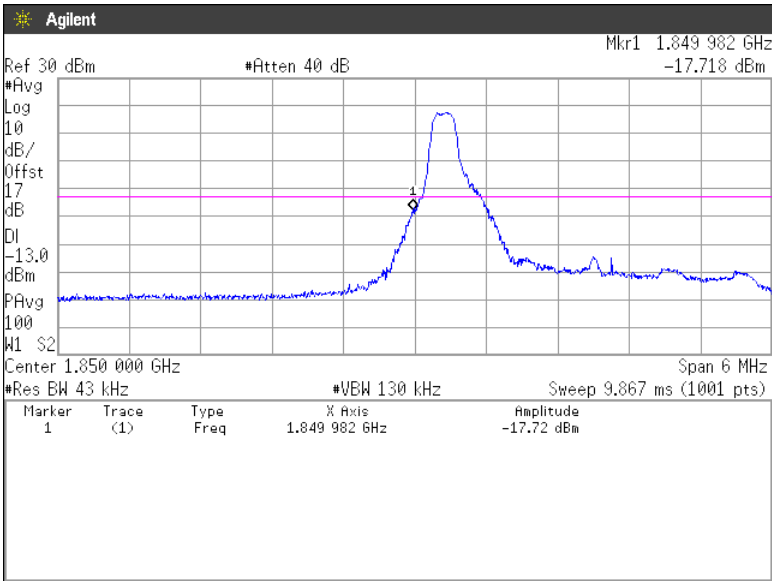


QPSK, BW 3MHz, RB1-14
Channel: High

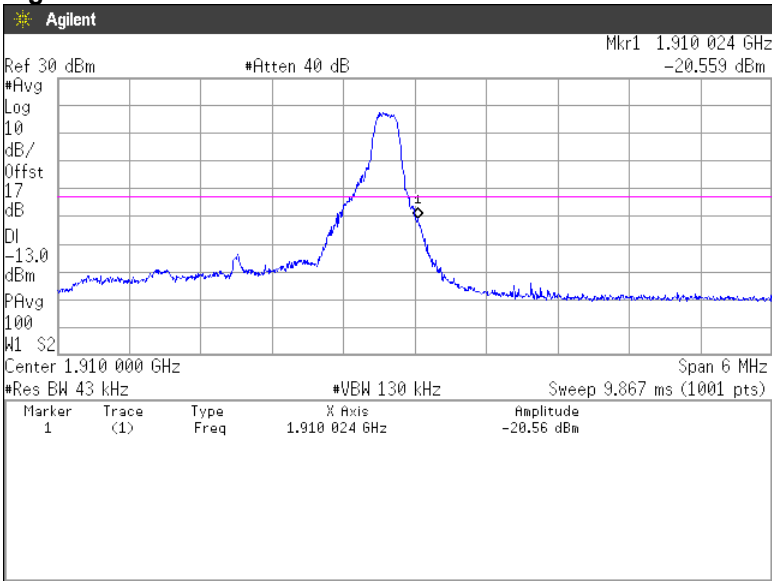


QPSK, BW 3MHz, RB15-0
Channel: Low

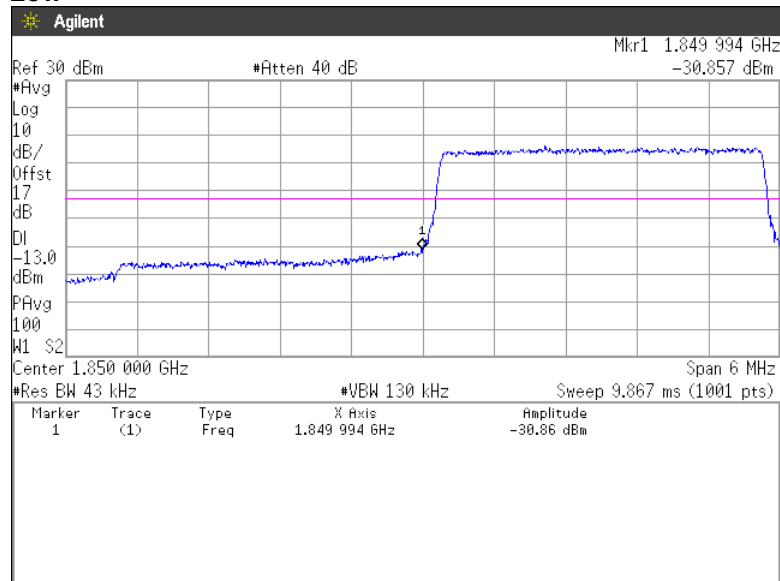


QPSK, BW 3MHz, RB15-0
Channel: High

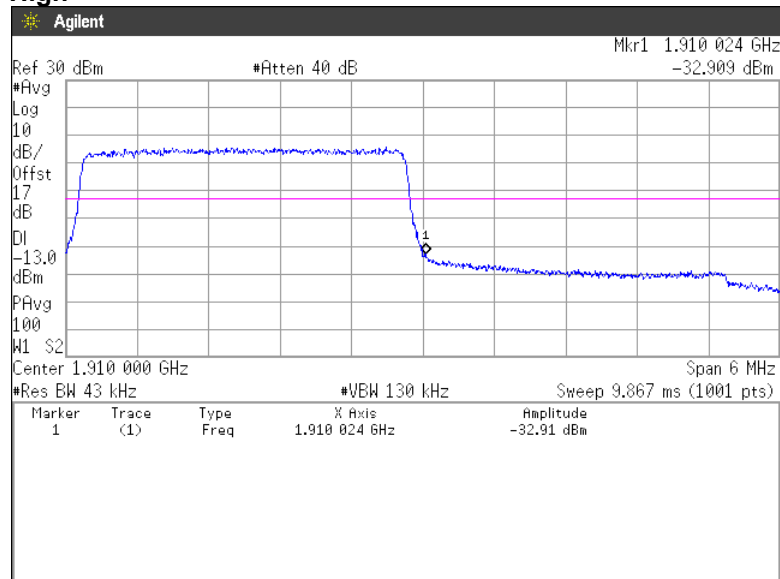


QPSK, BW 5MHz, RB1-0
Channel: Low

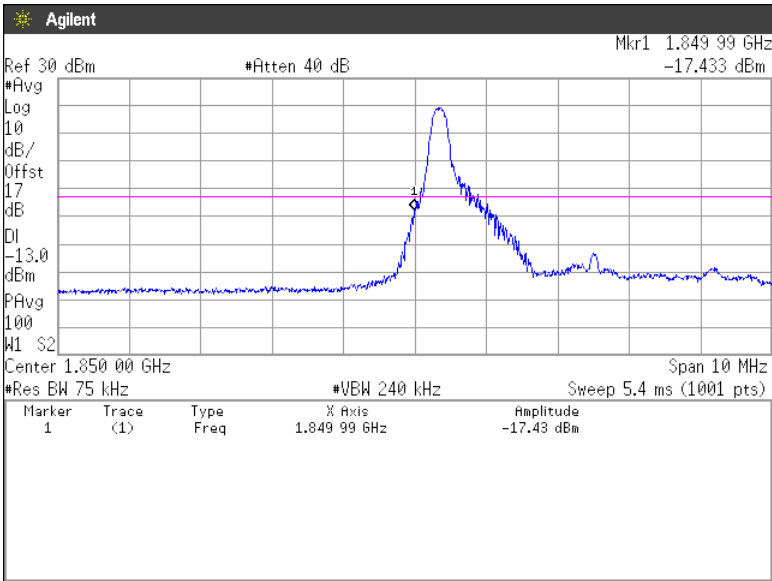


QPSK, BW 5MHz, RB1-24
Channel: High

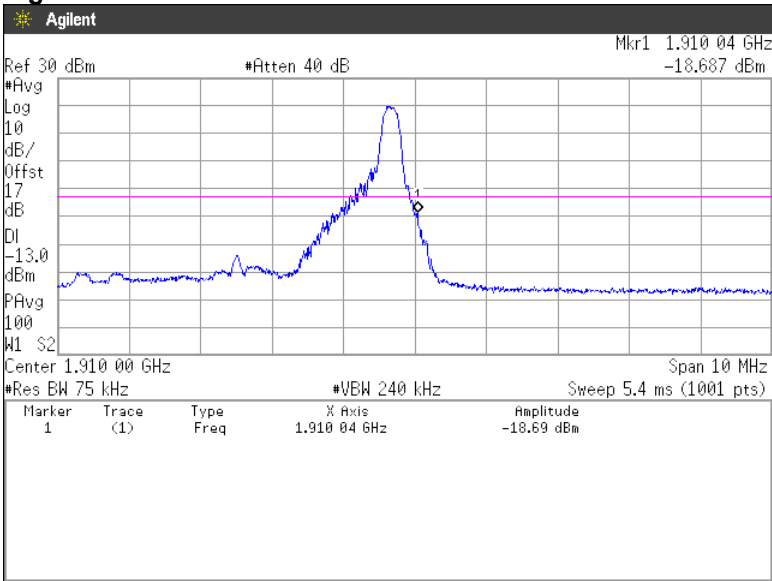


QPSK, BW 5MHz, RB25-0
Channel: Low

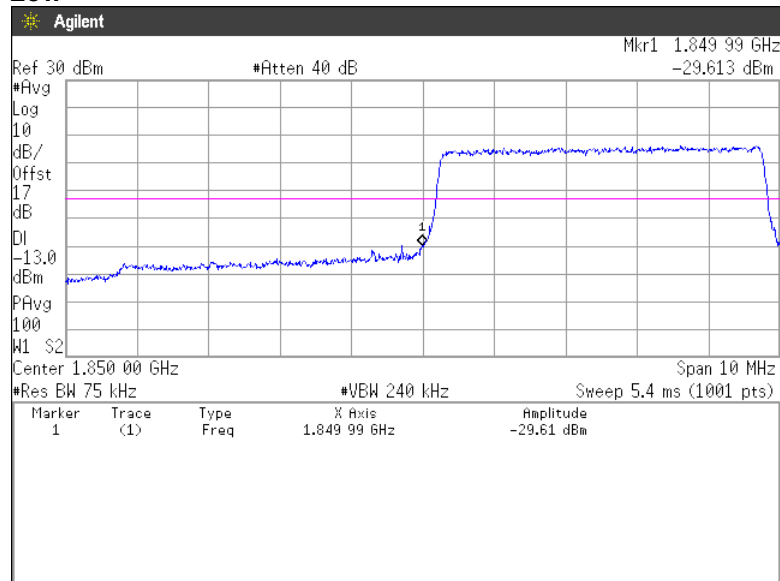


QPSK, BW 5MHz, RB25-0
Channel: High

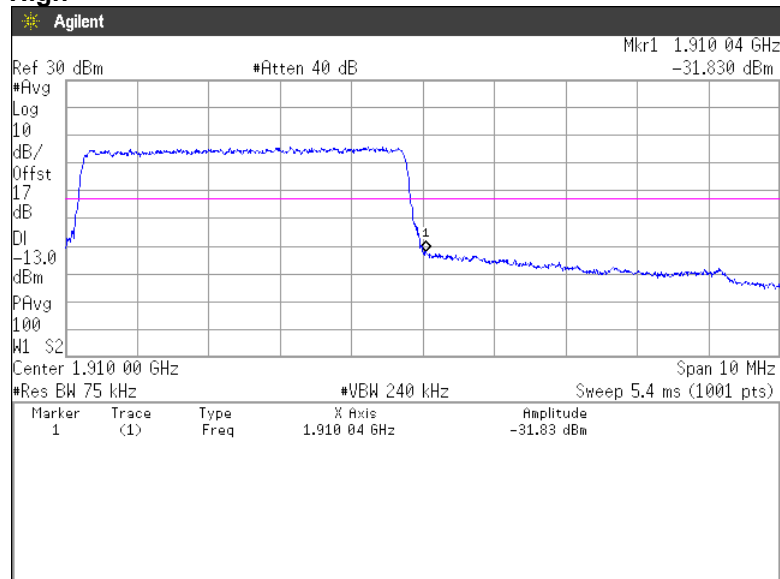


QPSK, BW 10MHz, RB1-0
Channel: Low

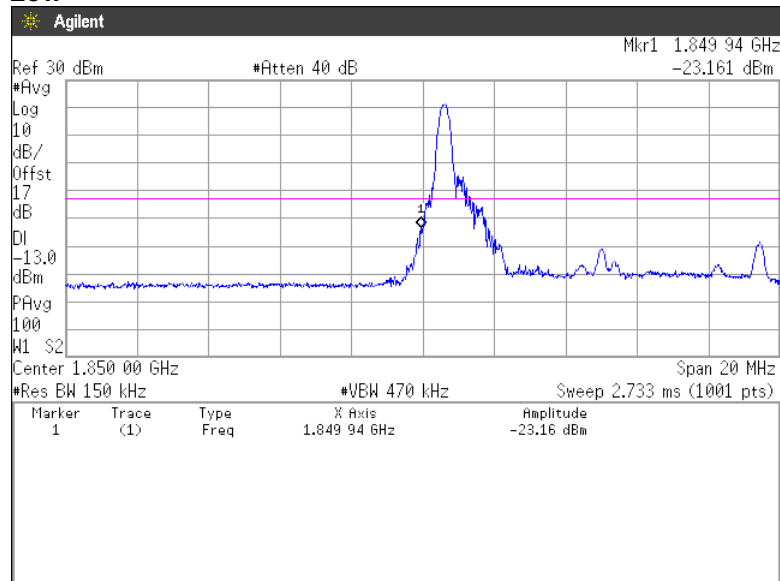


QPSK, BW 10MHz, RB1-49
Channel: High

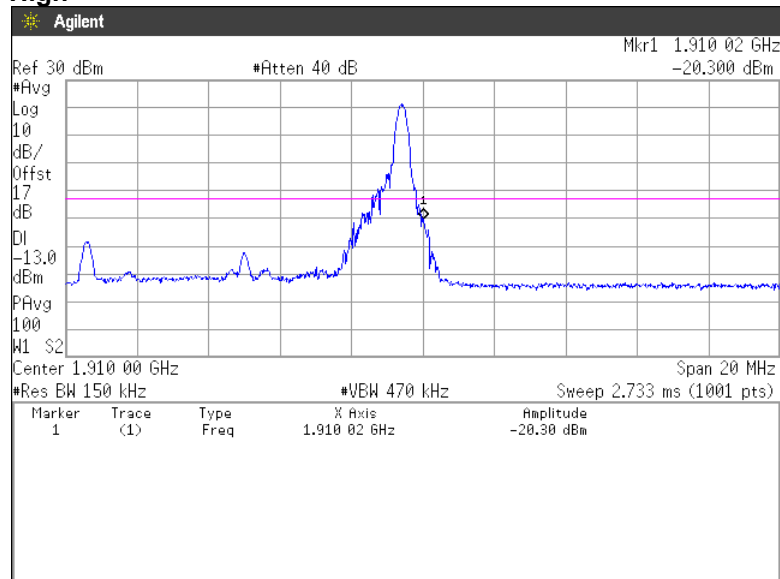


QPSK, BW 10MHz, RB50-0
Channel: Low

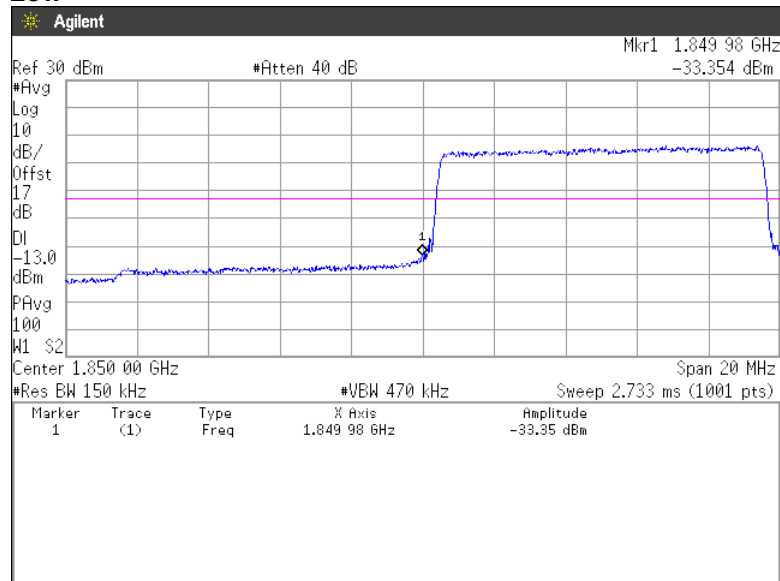


QPSK, BW 10MHz, RB50-0
Channel: High

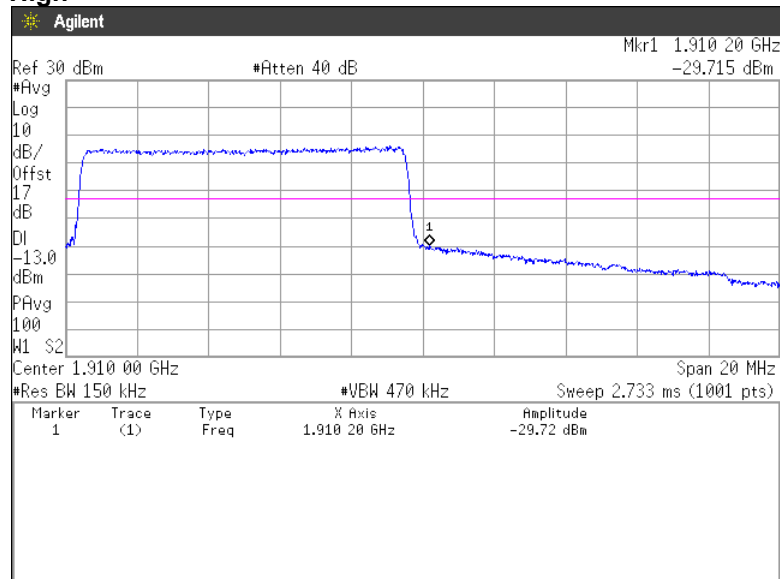


QPSK, BW 15MHz, RB1-0
Channel: Low

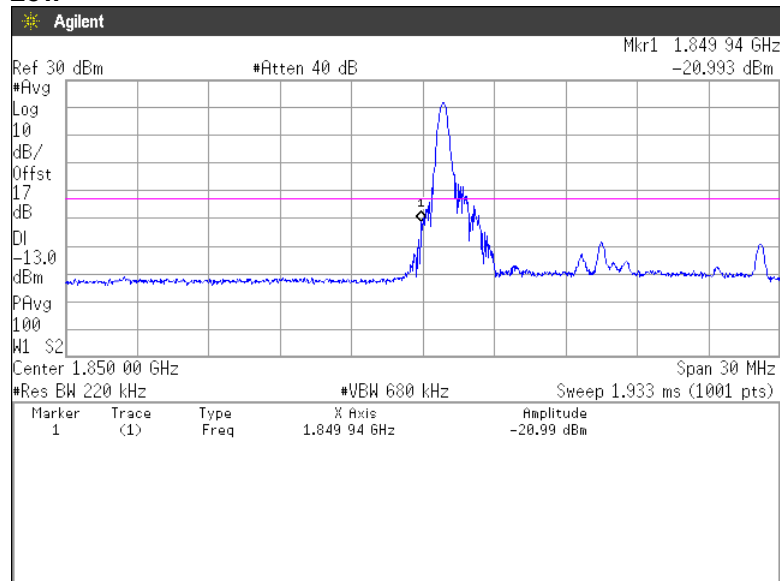


QPSK, BW 15MHz, RB1-74
Channel: High

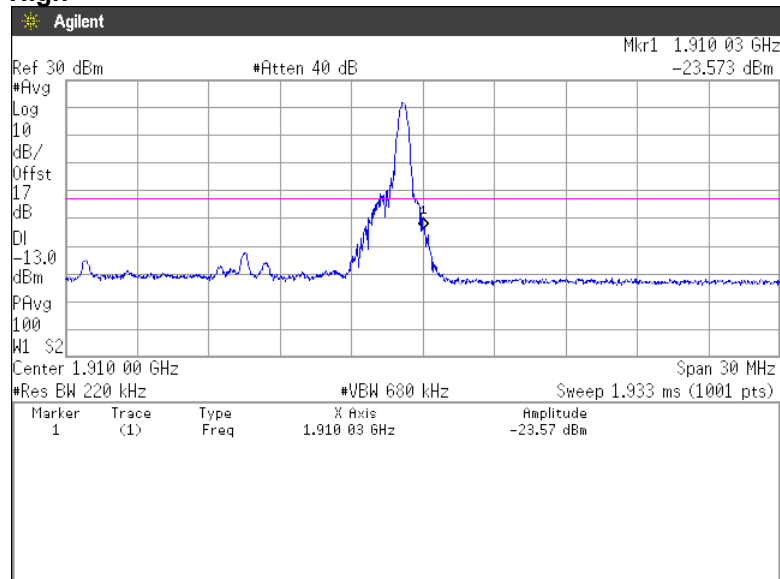


QPSK, BW 15MHz, RB75-0
Channel: Low

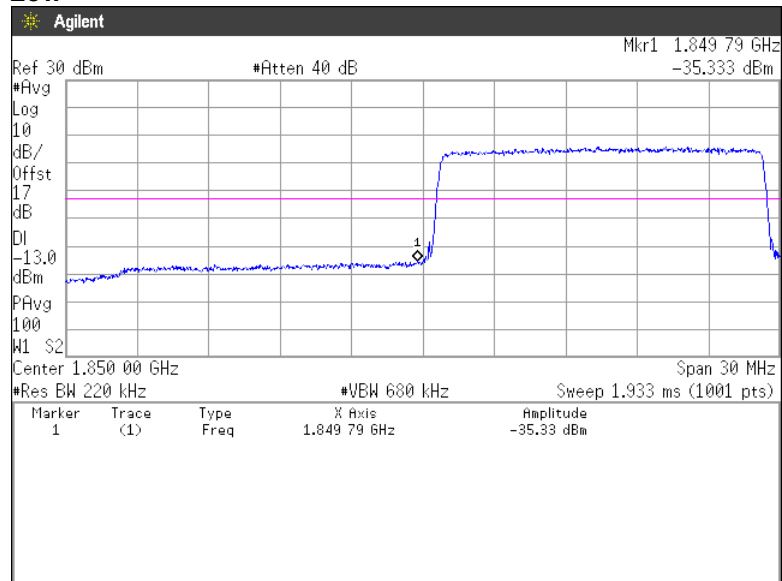


QPSK, BW 15MHz, RB75-0
Channel: High

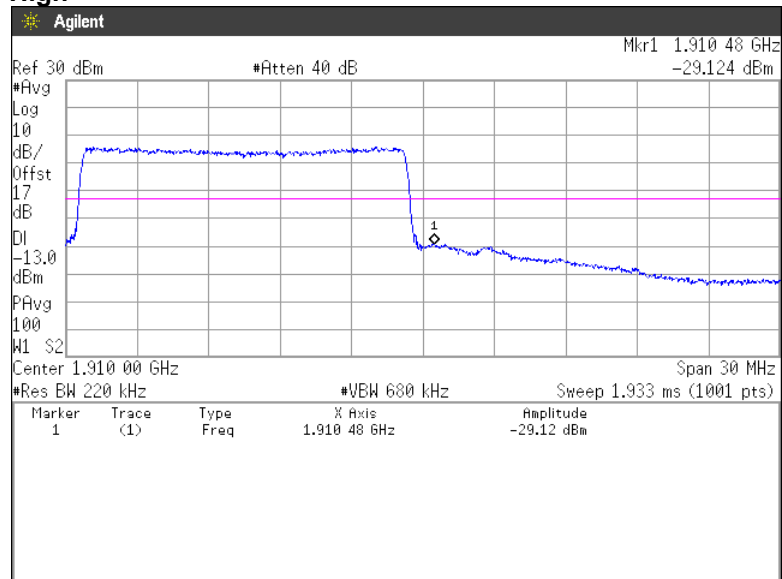


QPSK, BW 20MHz, RB1-0
Channel: Low

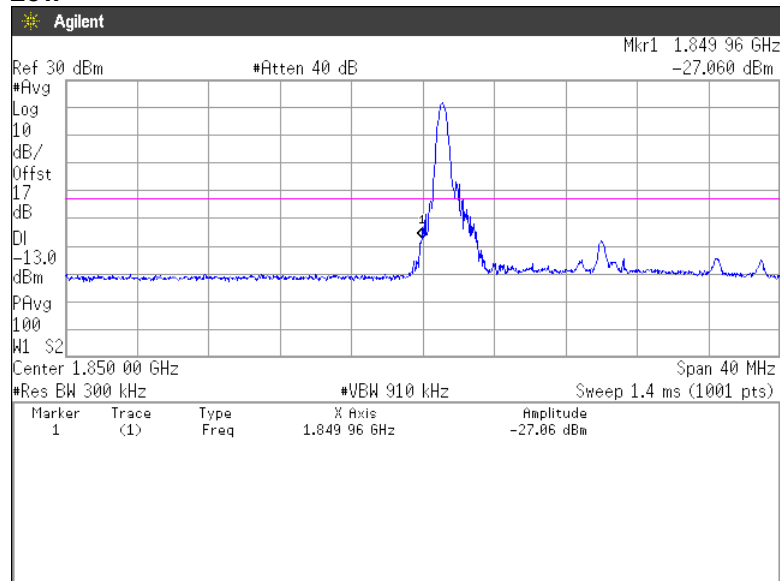


QPSK, BW 20MHz, RB1-99
Channel: High

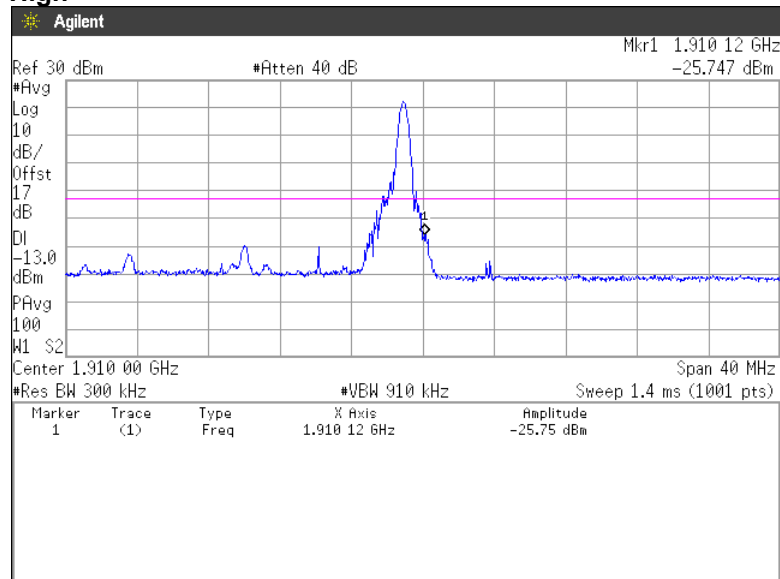


QPSK, BW 20MHz, RB100-0
Channel: Low

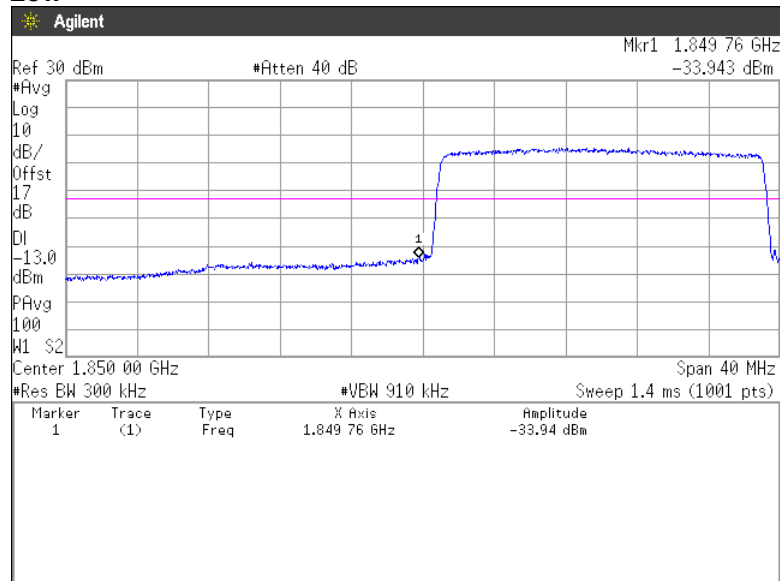


QPSK, BW 20MHz, RB100-0
Channel: High

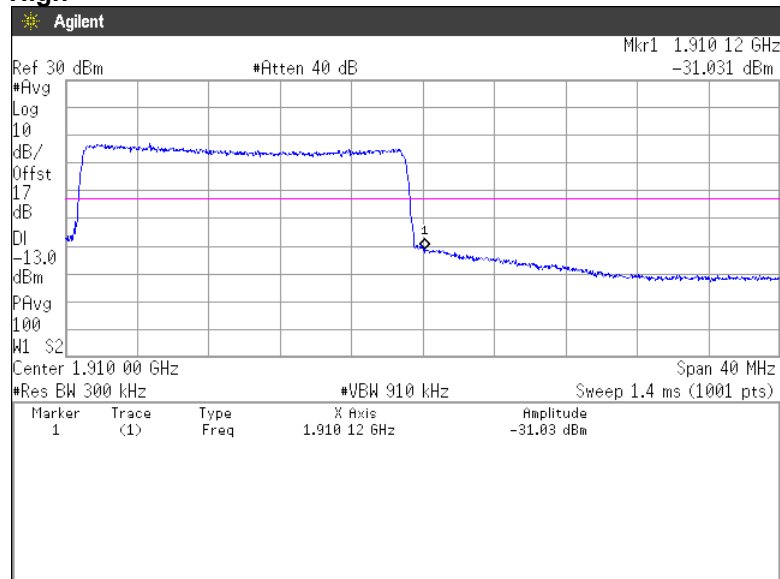


16QAM, BW 1.4MHz, RB1-0
Channel: Low

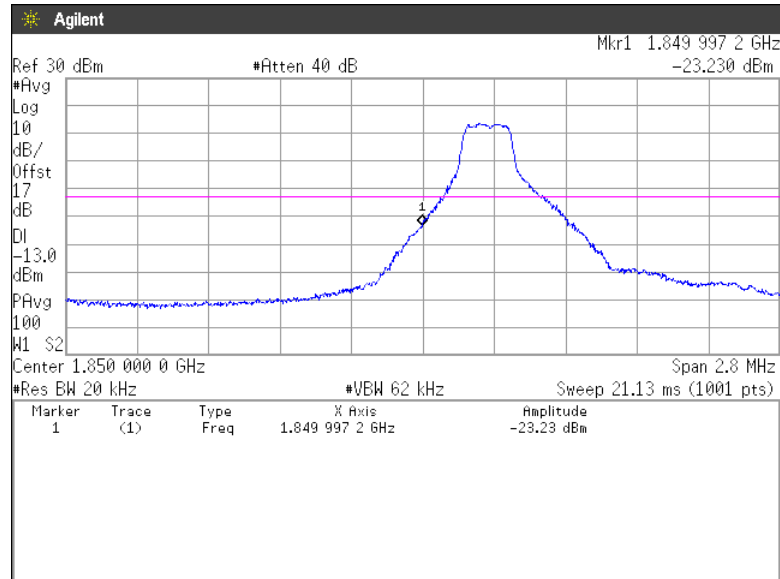


16QAM, BW 1.4MHz, RB1-5
Channel: High

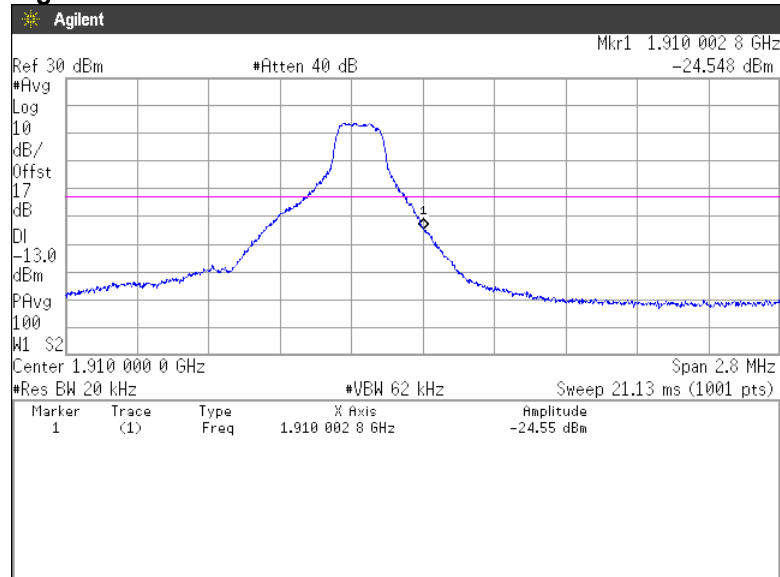


16QAM, BW 1.4MHz, RB6-0
Channel: Low

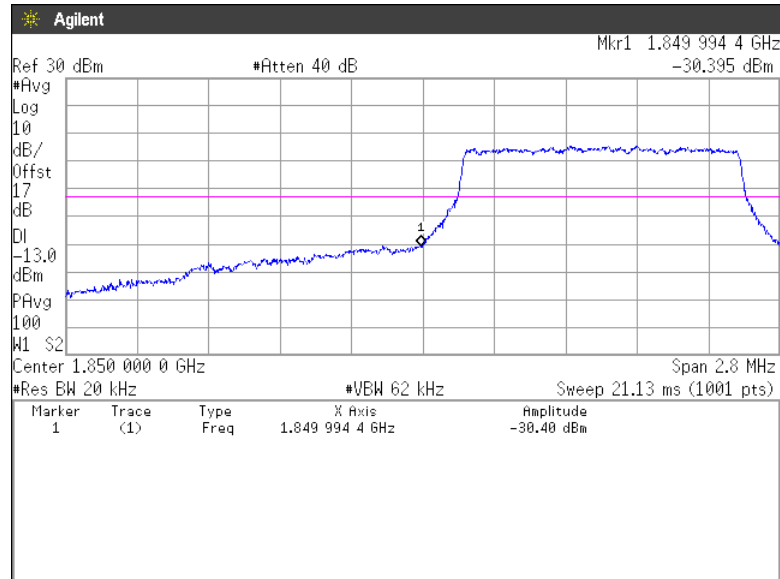


16QAM, BW 1.4MHz, RB6-0
Channel: High

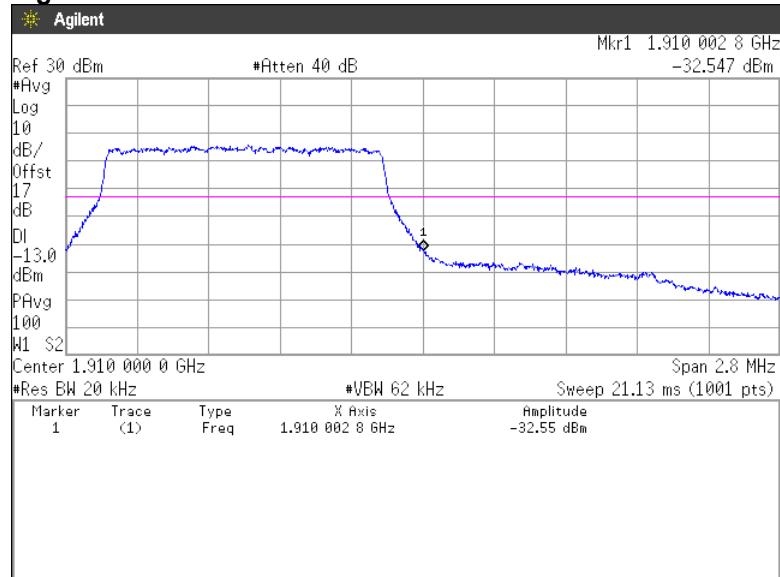


16QAM, BW 3MHz, RB1-0
Channel: Low

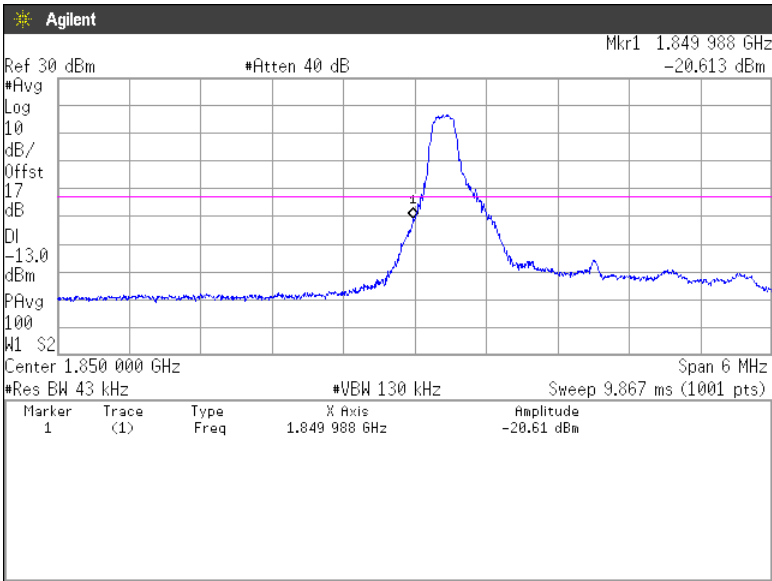


16QAM, BW 3MHz, RB1-14
Channel: High

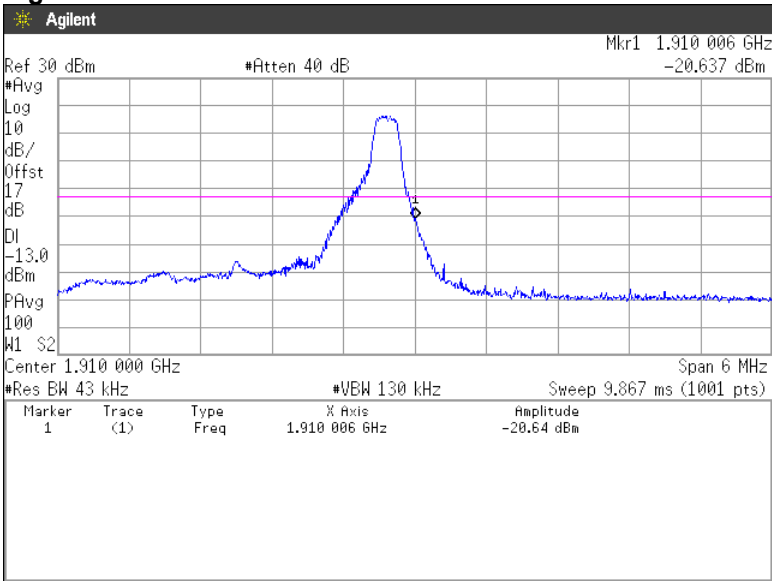


16QAM, BW 3MHz, RB15-0
Channel: Low

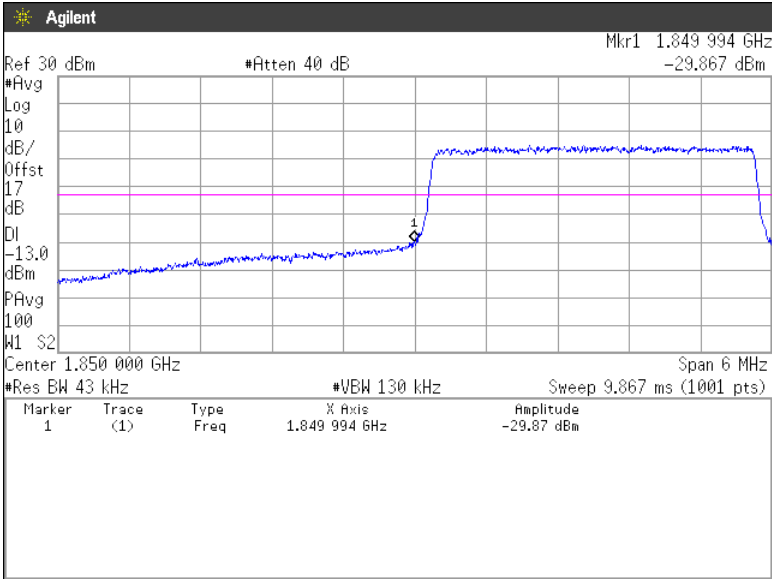


16QAM, BW 3MHz, RB15-0
Channel: High

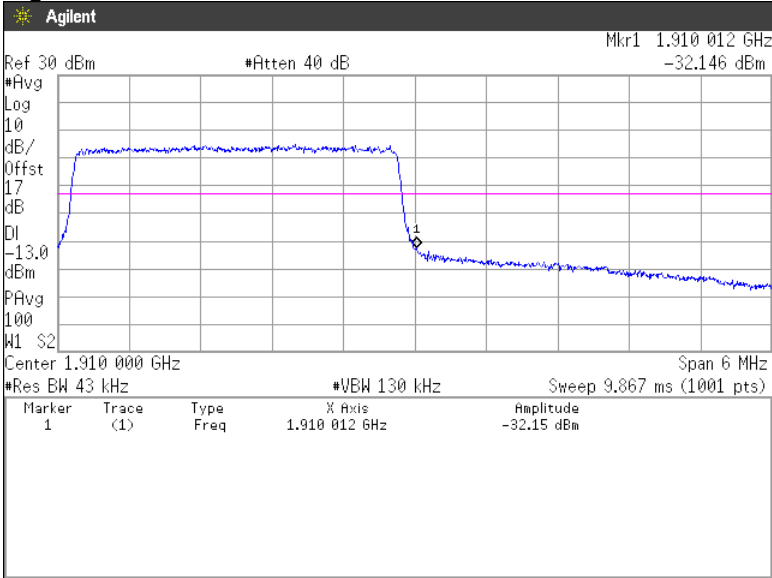


16QAM, BW 5MHz, RB1-0
Channel: Low

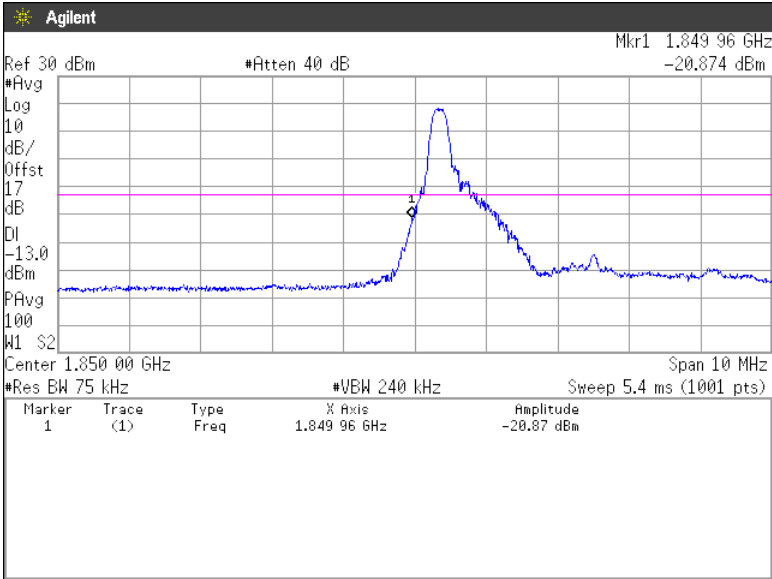


16QAM, BW 5MHz, RB1-24
Channel: High

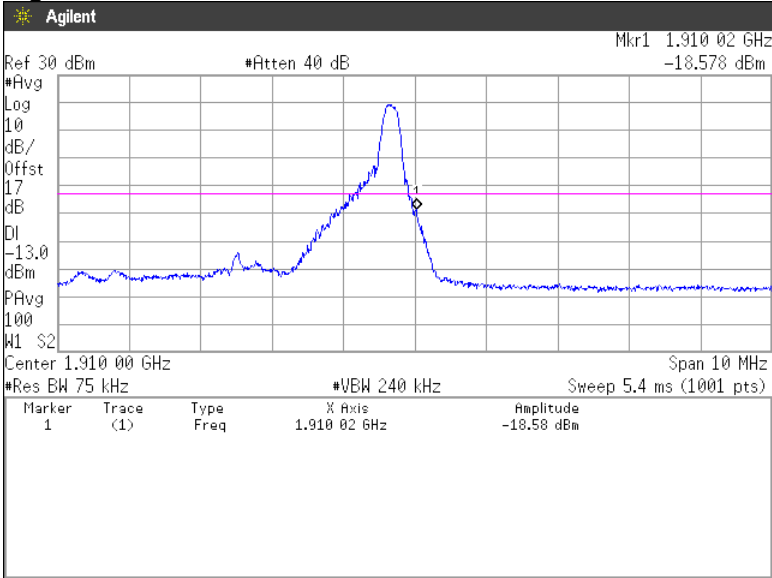


16QAM, BW 5MHz, RB25-0
Channel: Low

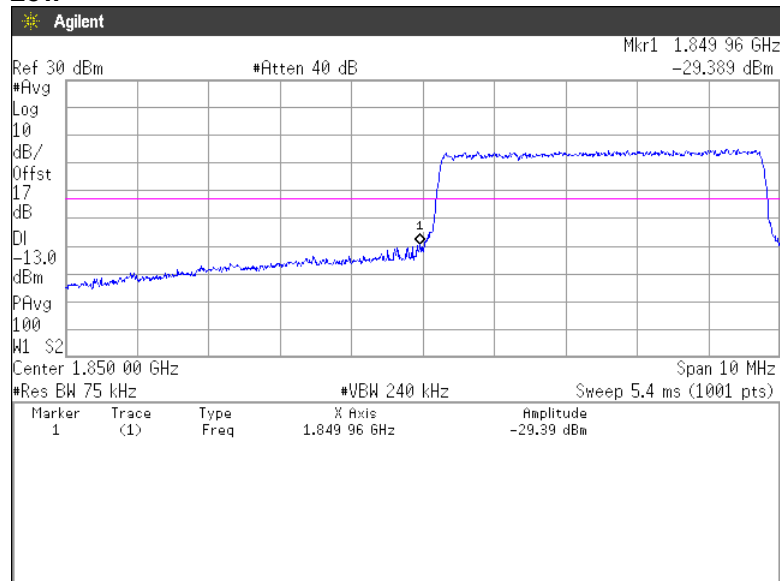


16QAM, BW 5MHz, RB25-0
Channel: High

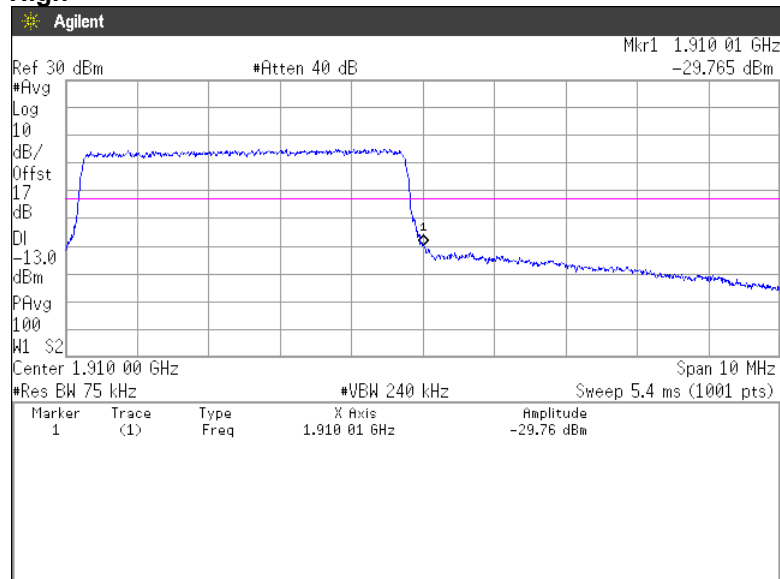


16QAM, BW 10MHz, RB1-0
Channel: Low

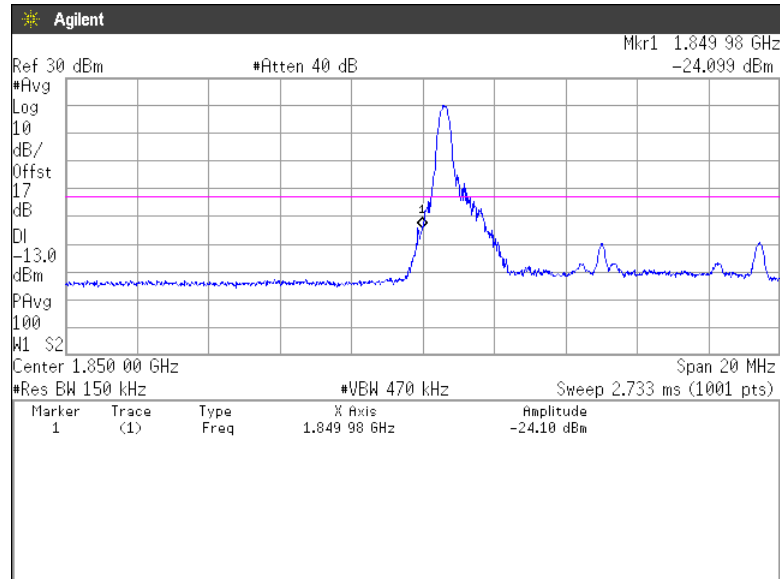


16QAM, BW 10MHz, RB1-49
Channel: High

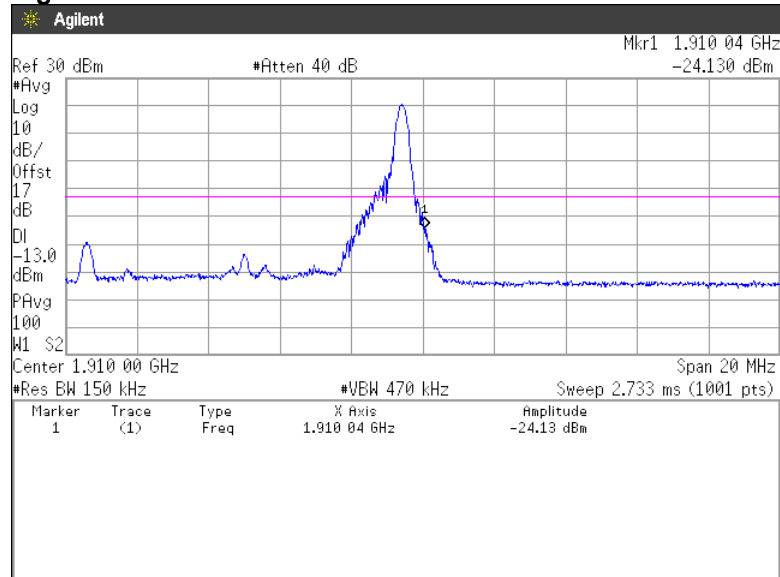


16QAM, BW 10MHz, RB50-0
Channel: Low

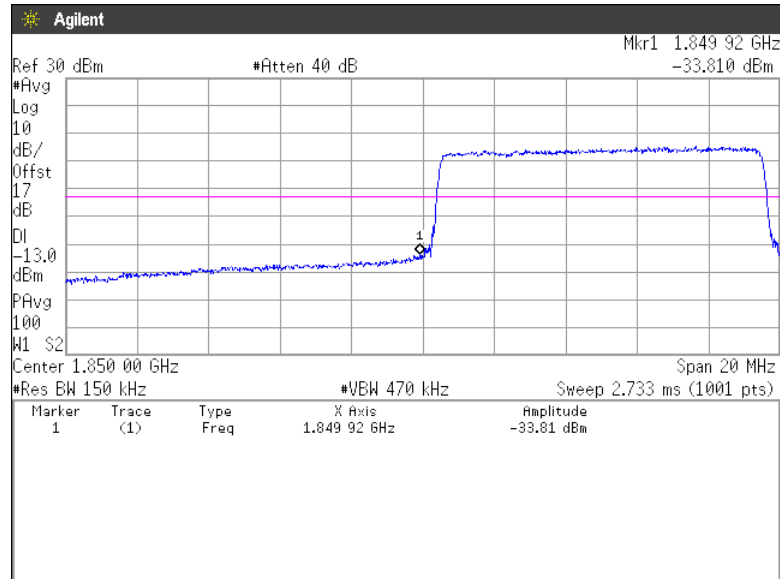


16QAM, BW 10MHz, RB50-0
Channel: High

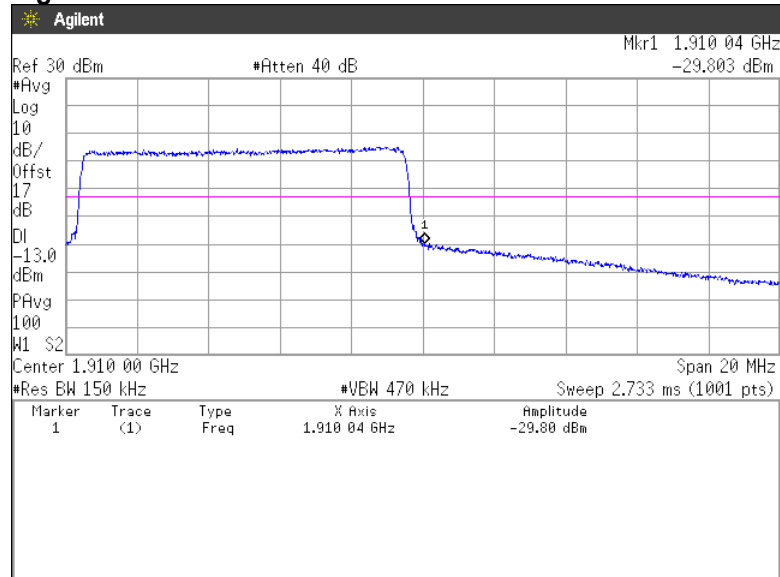


16QAM, BW 15MHz, RB1-0
Channel: Low

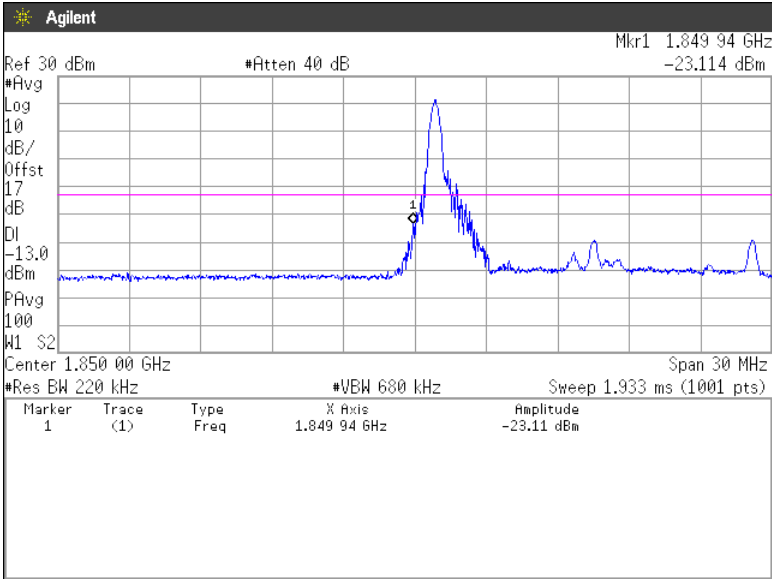


16QAM, BW 15MHz, RB1-74
Channel: High

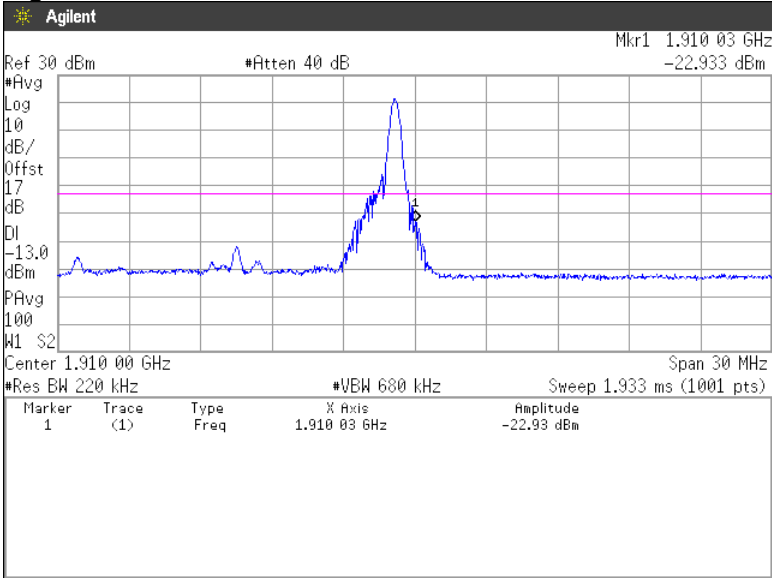


16QAM, BW 15MHz, RB75-0
Channel: Low

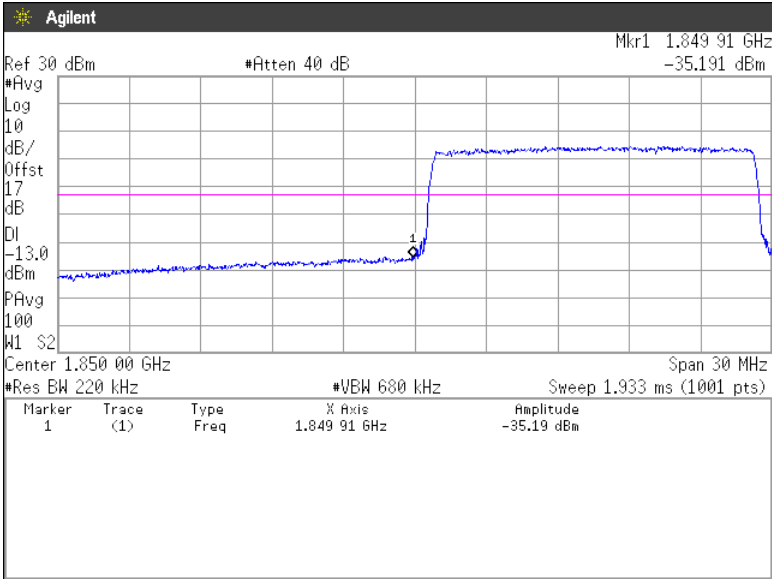


16QAM, BW 15MHz, RB75-0
Channel: High

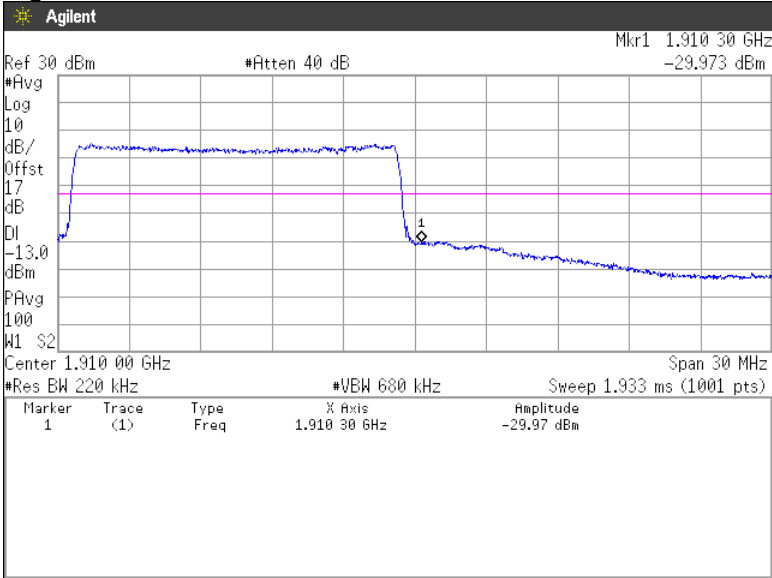


16QAM, BW 20MHz, RB1-0
Channel: Low

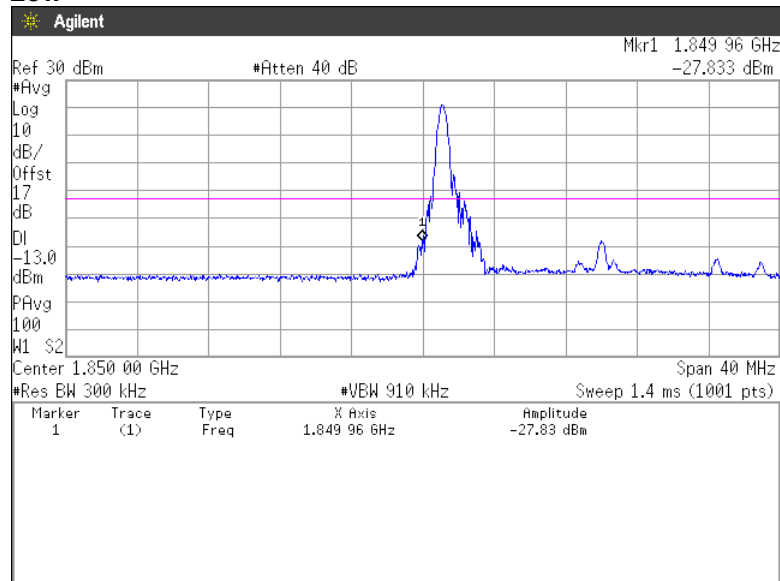


16QAM, BW 20MHz, RB1-99
Channel: High

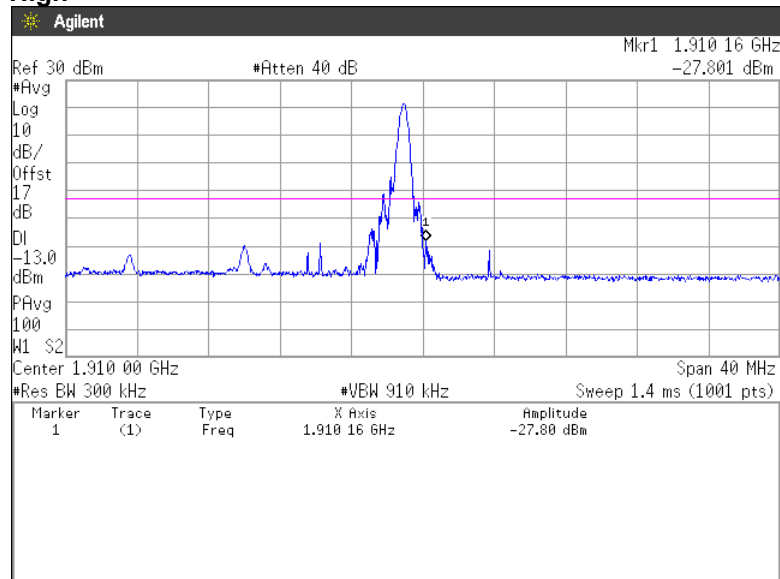


16QAM, BW 20MHz, RB100-0
Channel: Low

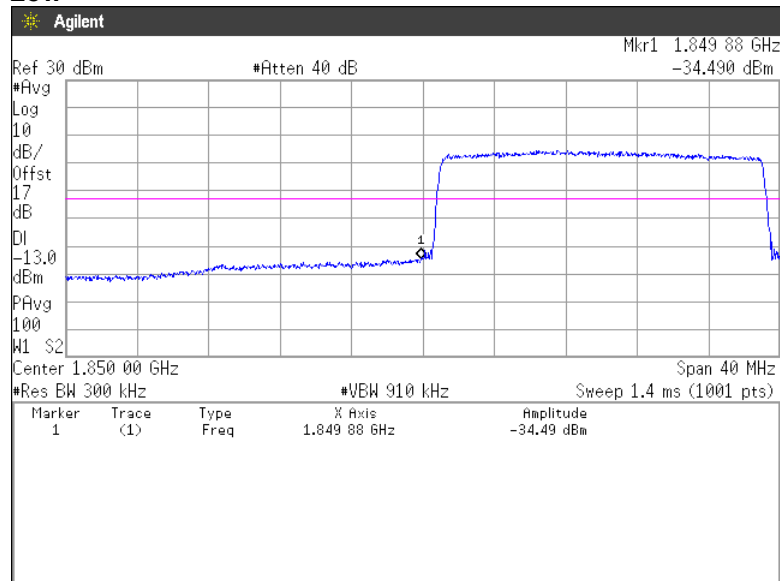


16QAM, BW 20MHz, RB100-0
Channel: High

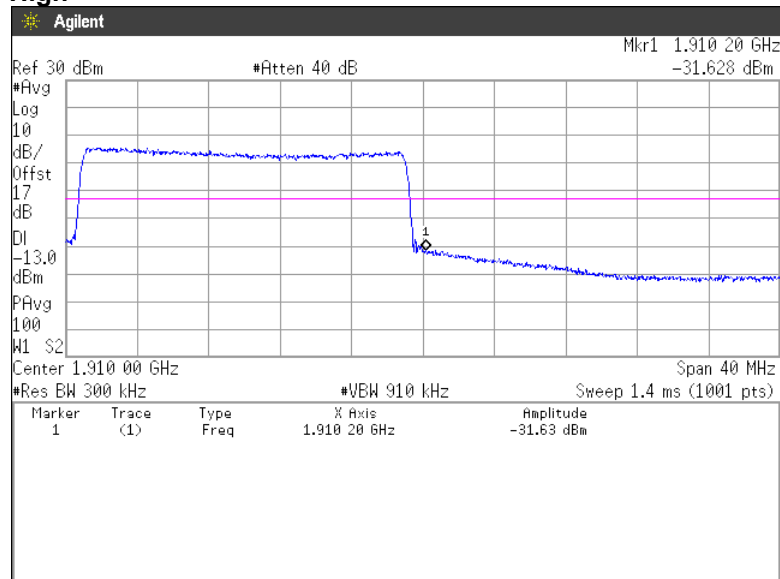


64QAM, BW 1.4MHz, RB1-0
Channel: Low

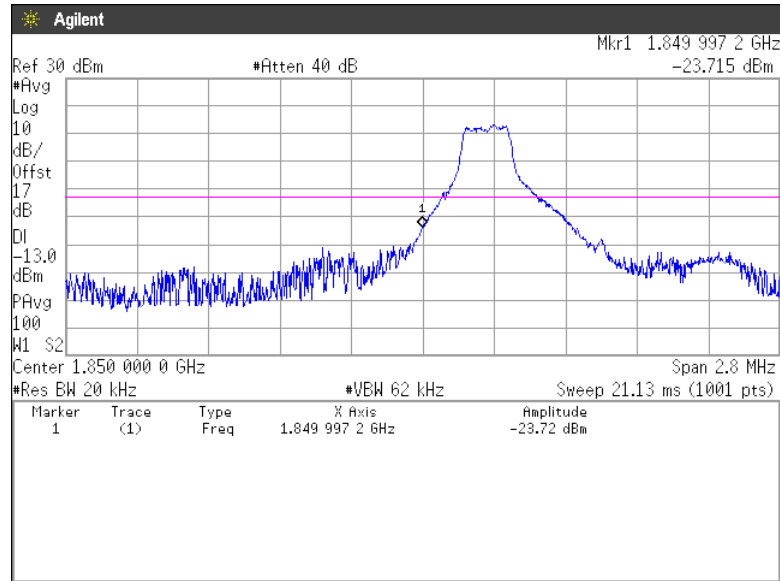


64QAM, BW 1.4MHz, RB1-5
Channel: High

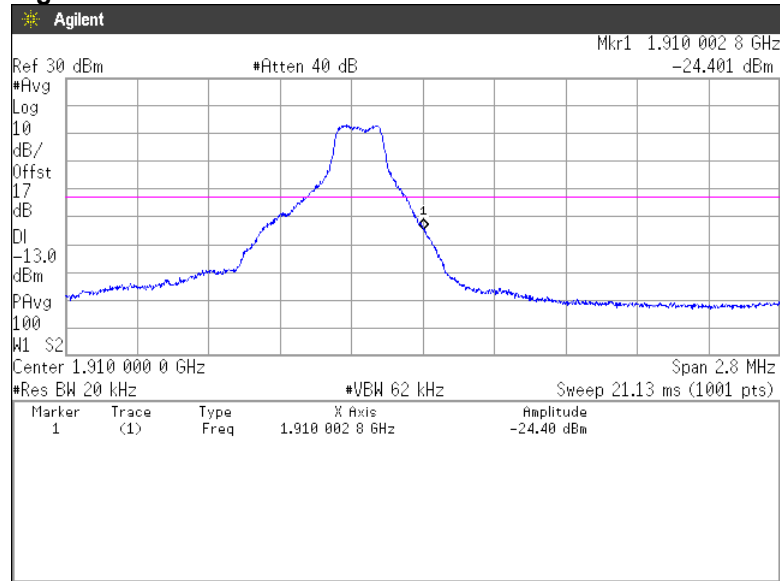


64QAM, BW 1.4MHz, RB6-0
Channel: Low

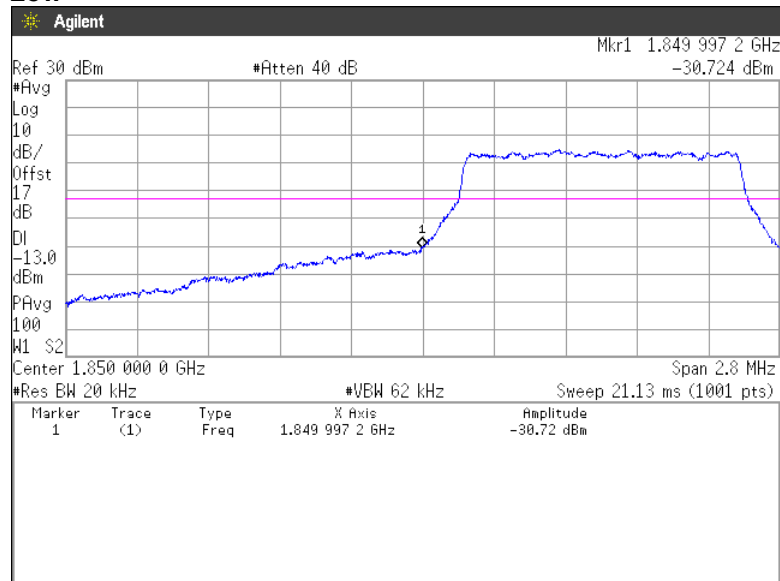


64QAM, BW 1.4MHz, RB6-0
Channel: High

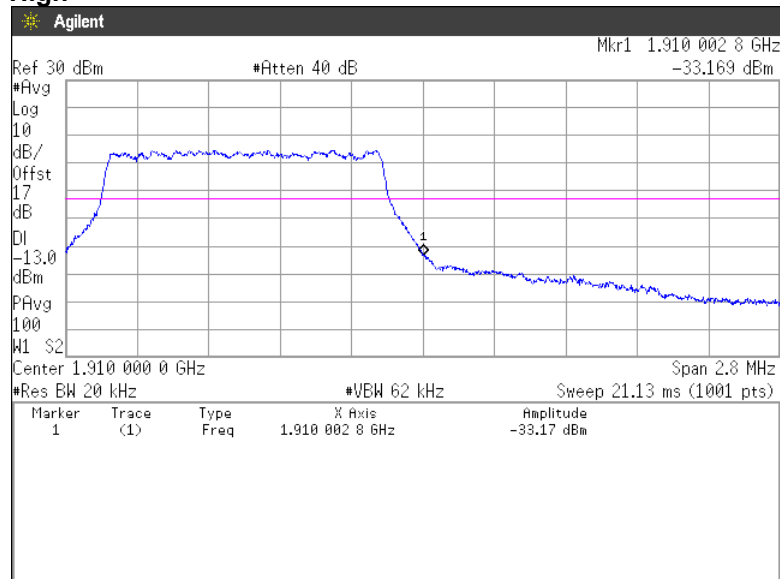


64QAM, BW 3MHz, RB1-0
Channel: Low

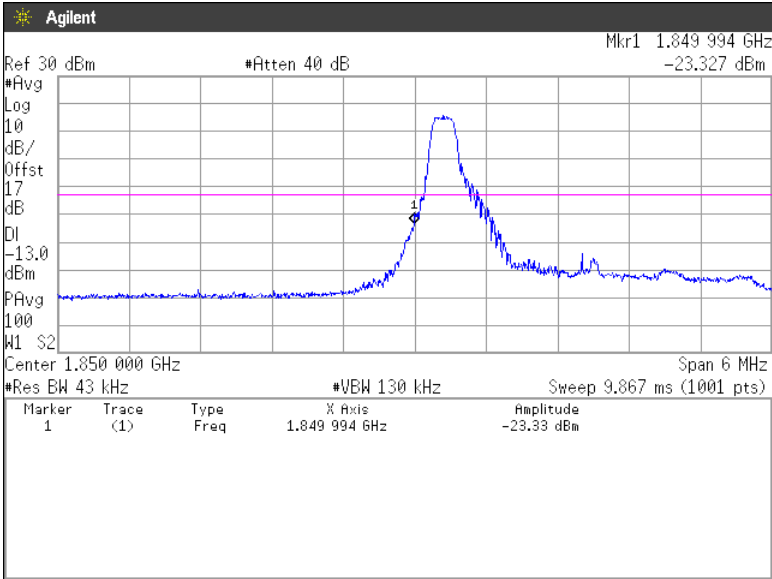


64QAM, BW 3MHz, RB1-14
Channel: High

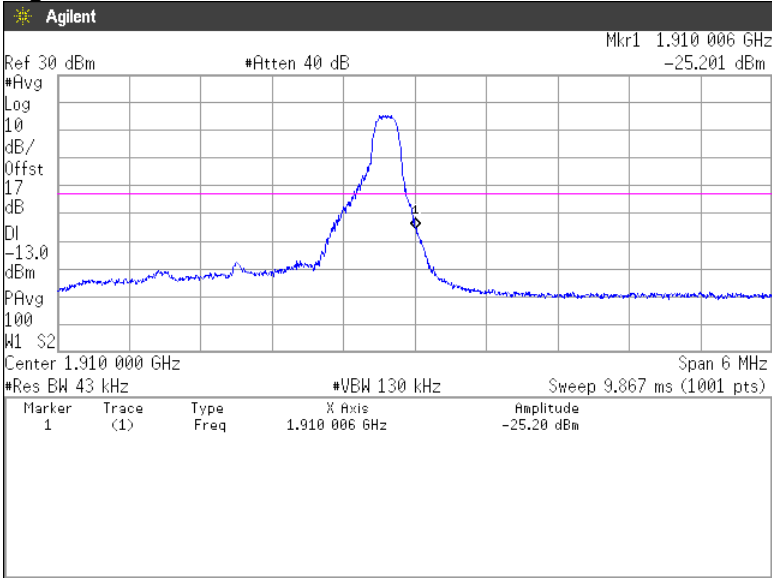


64QAM, BW 3MHz, RB15-0
Channel: Low

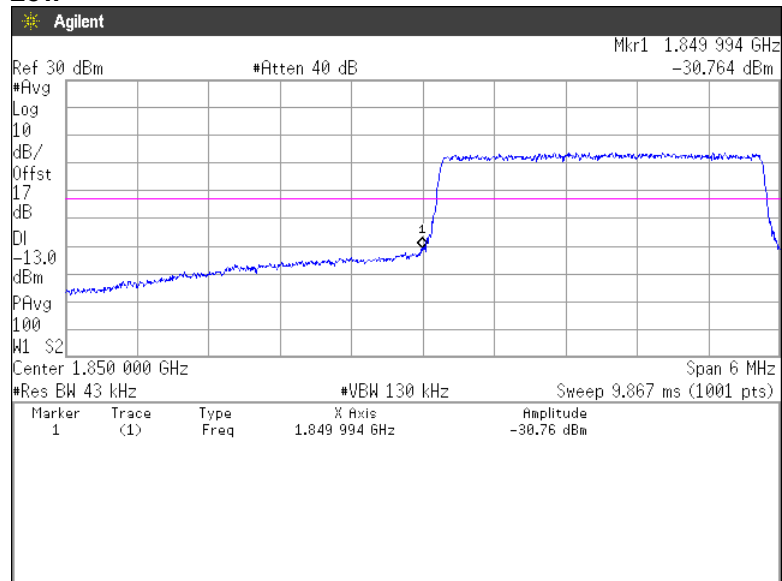


64QAM, BW 3MHz, RB15-0
Channel: High

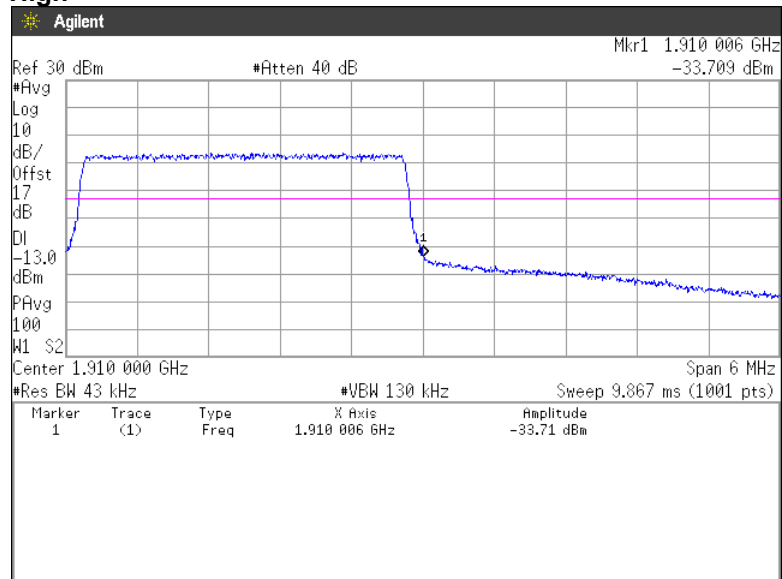


64QAM, BW 5MHz, RB1-0
Channel: Low

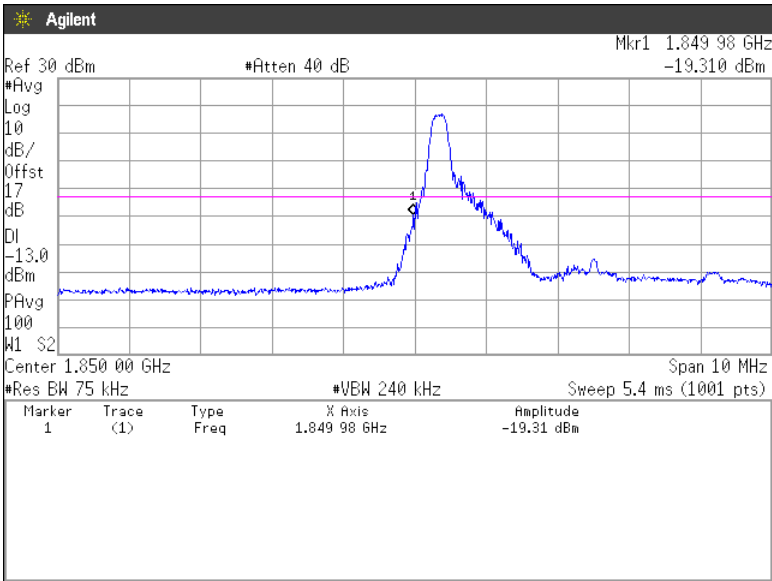


64QAM, BW 5MHz, RB1-24
Channel: High

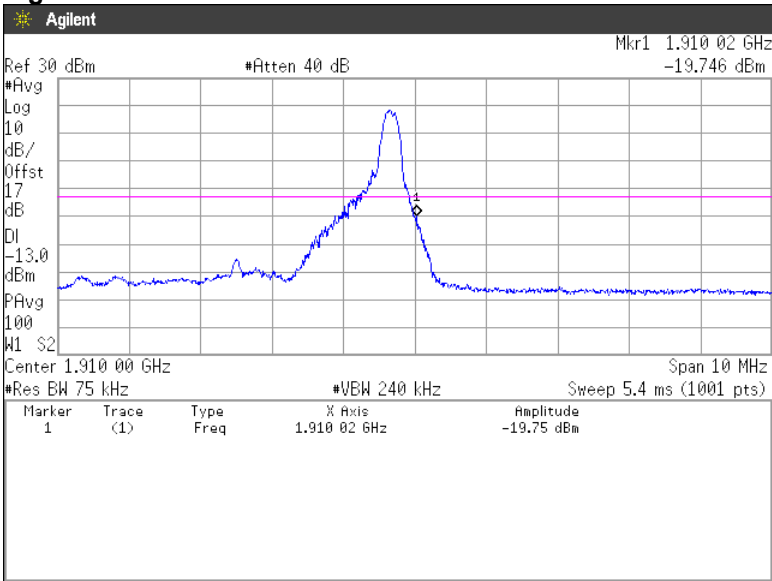


64QAM, BW 5MHz, RB25-0
Channel: Low

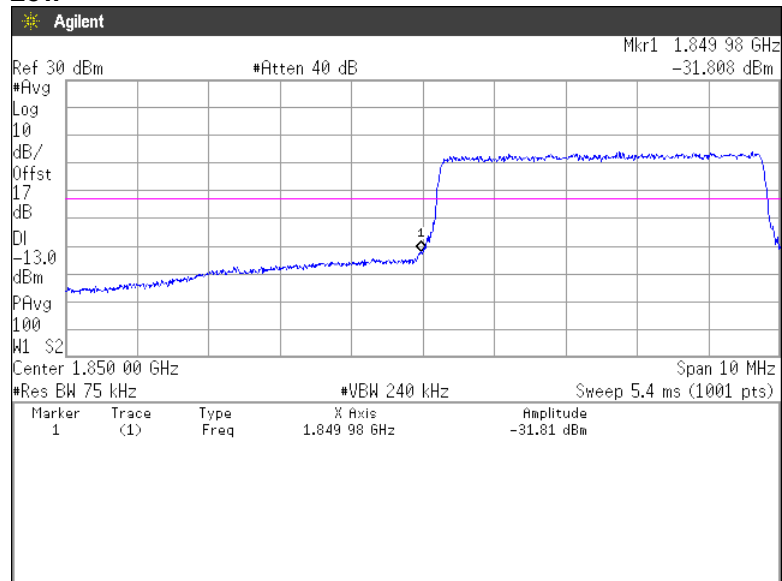


64QAM, BW 5MHz, RB25-0
Channel: High

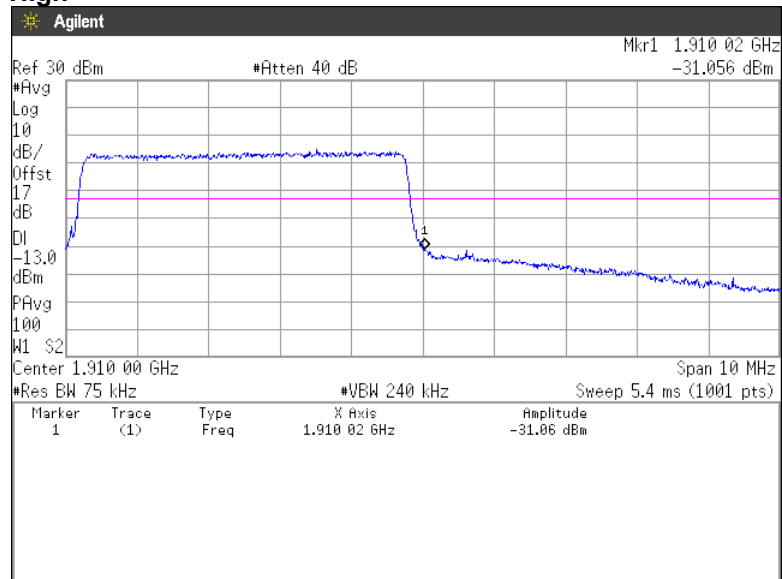


64QAM, BW 10MHz, RB1-0
Channel: Low

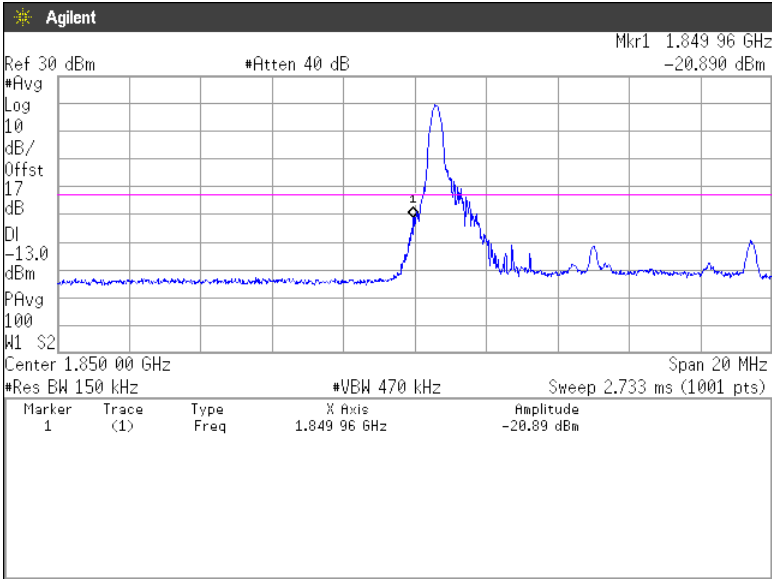


64QAM, BW 10MHz, RB1-49
Channel: High

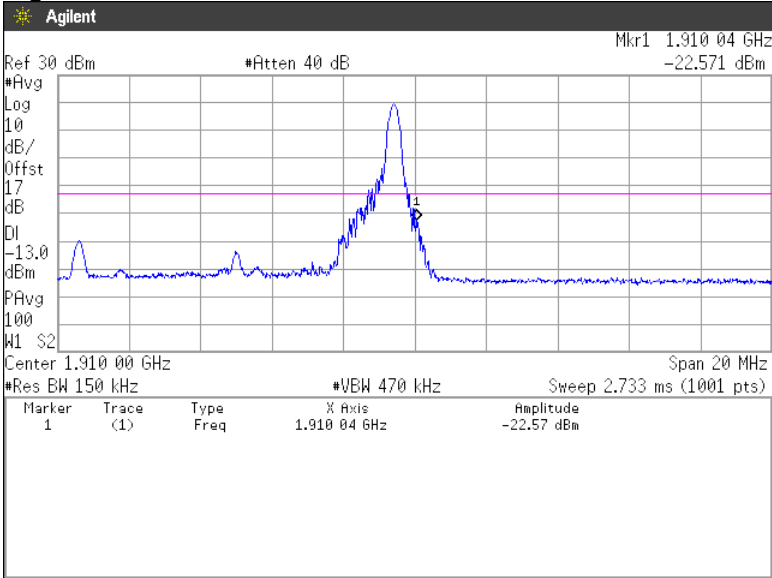


64QAM, BW 10MHz, RB50-0
Channel: Low

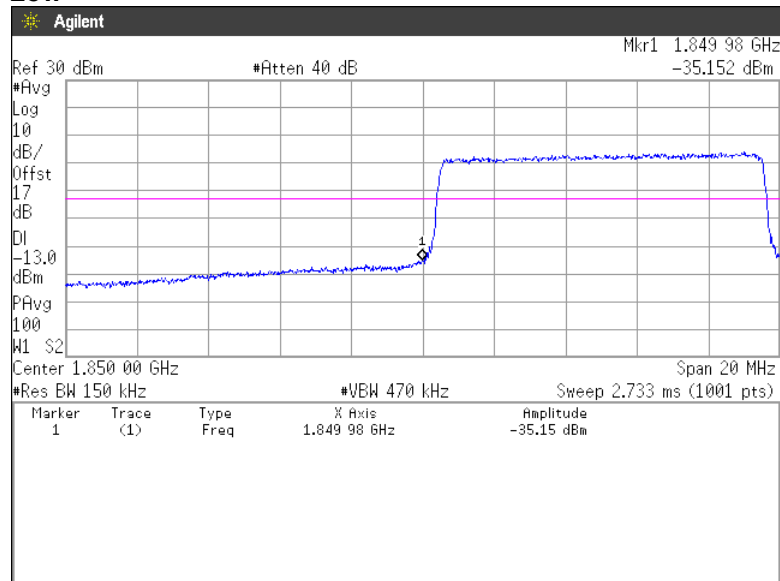


64QAM, BW 10MHz, RB50-0
Channel: High

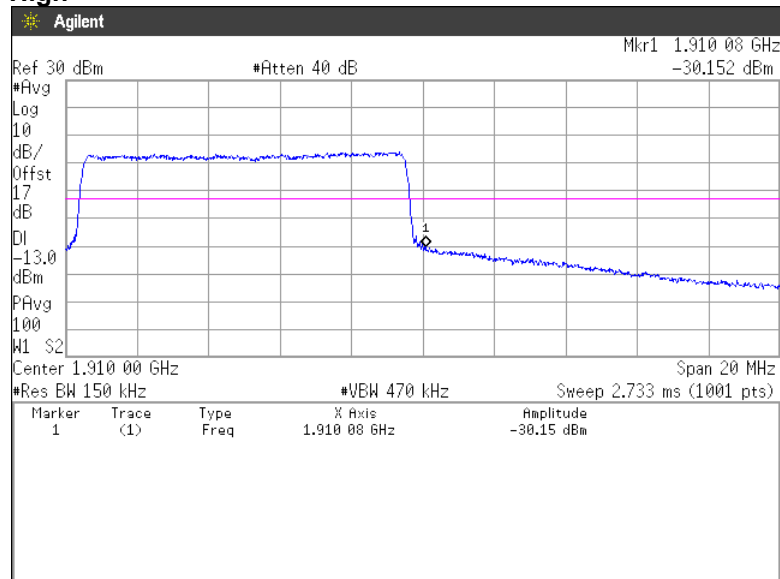


64QAM, BW 15MHz, RB1-0
Channel: Low

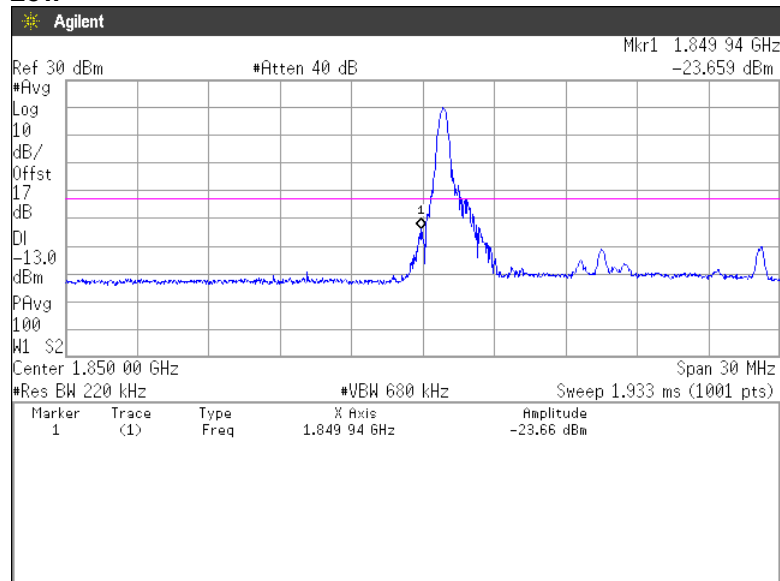


64QAM, BW 15MHz, RB1-74
Channel: High

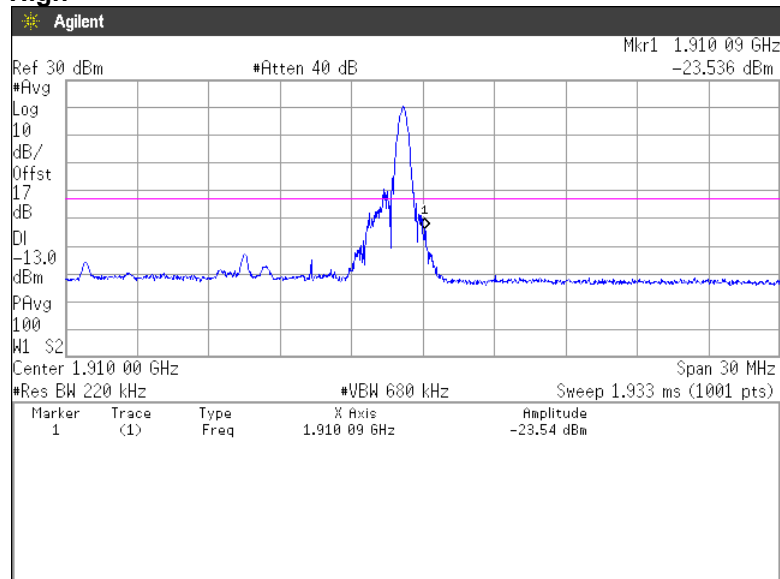


64QAM, BW 15MHz, RB75-0
Channel: Low

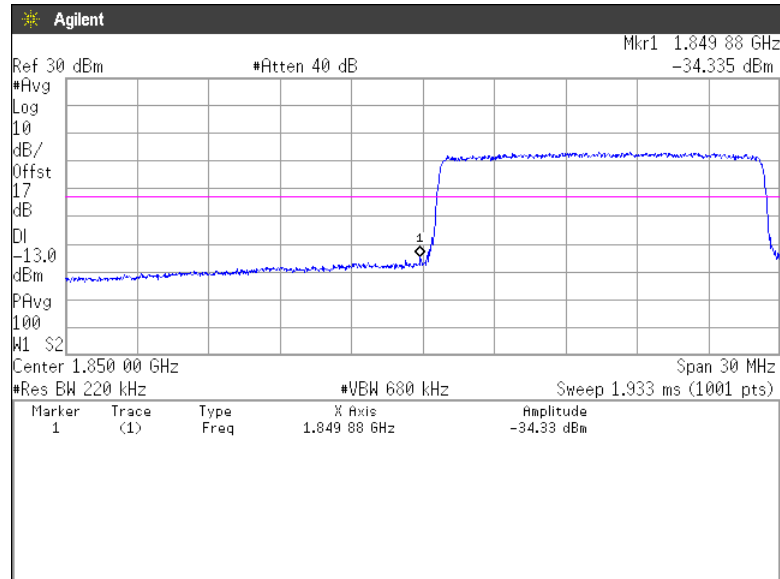


64QAM, BW 15MHz, RB75-0
Channel: High

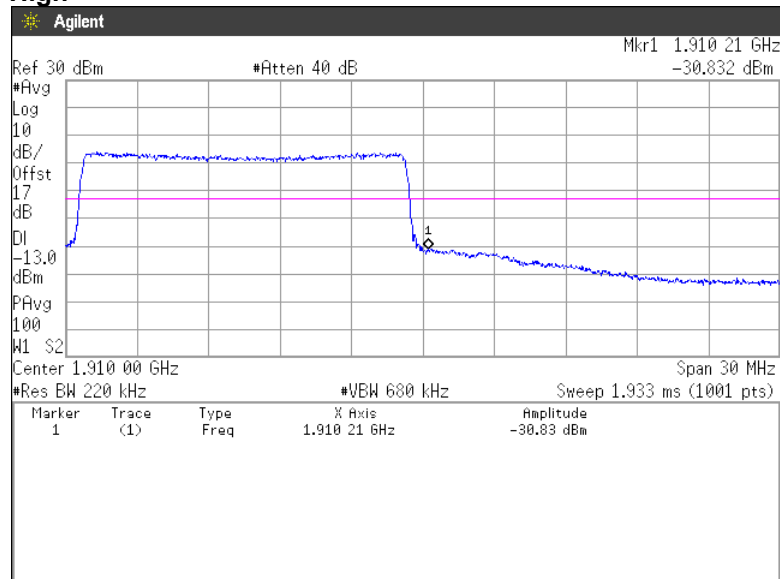


64QAM, BW 20MHz, RB1-0
Channel: Low

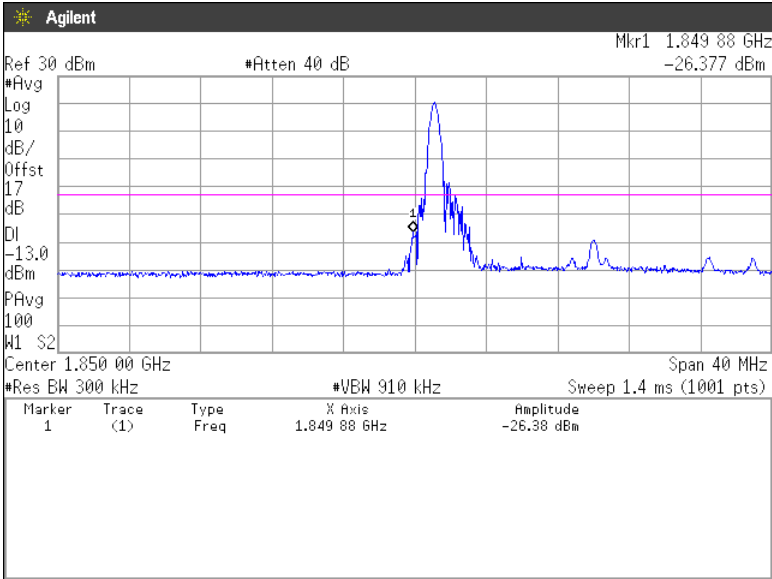


64QAM, BW 20MHz, RB1-99
Channel: High

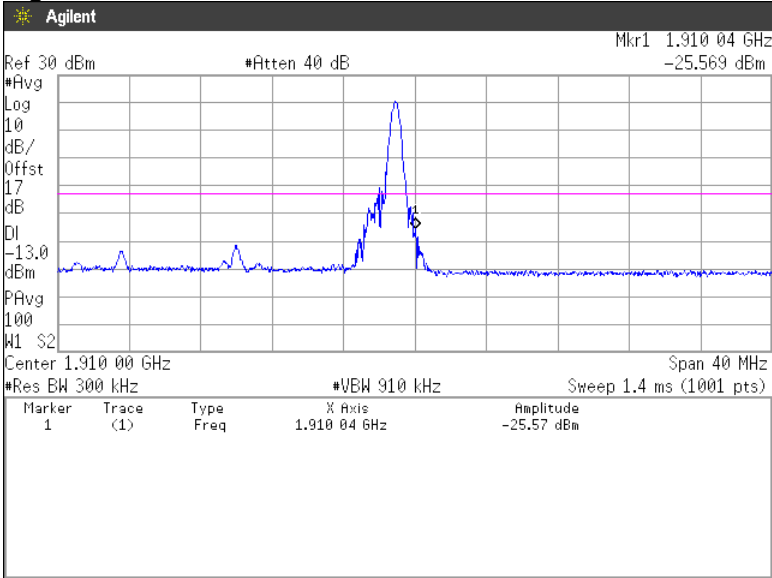

64QAM, BW 20MHz, RB100-0
Channel: Low

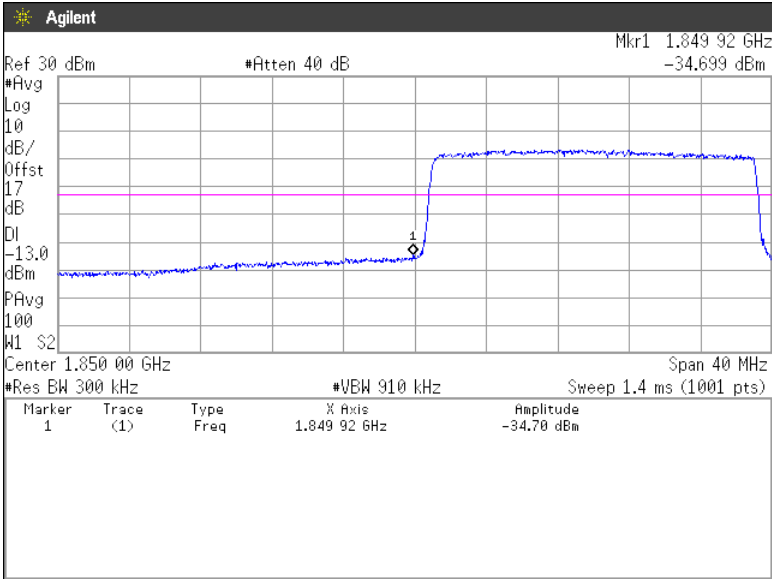

64QAM, BW 20MHz, RB100-0
Channel: High

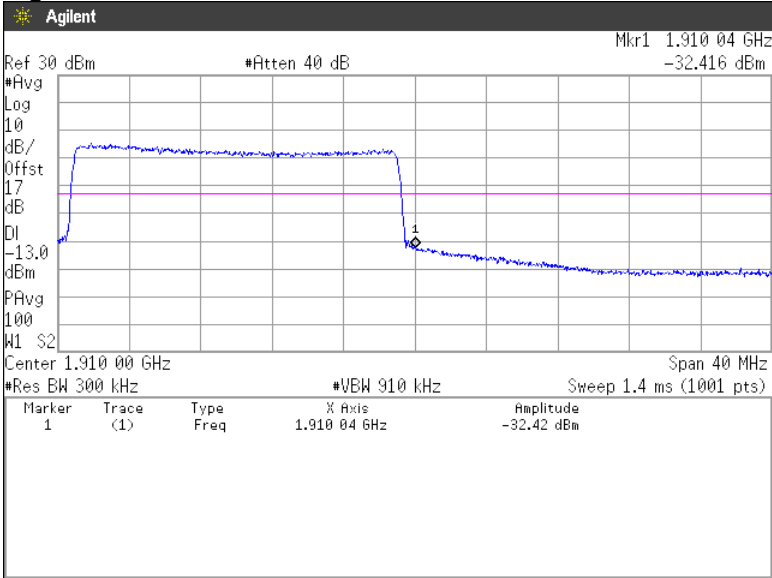


(Spurious Emissions)

Note: Conducted spurious test was measured in the worst case of conducted output power.


QPSK, BW 1.4MHz

Channel: 18607


30MHz-5GHz

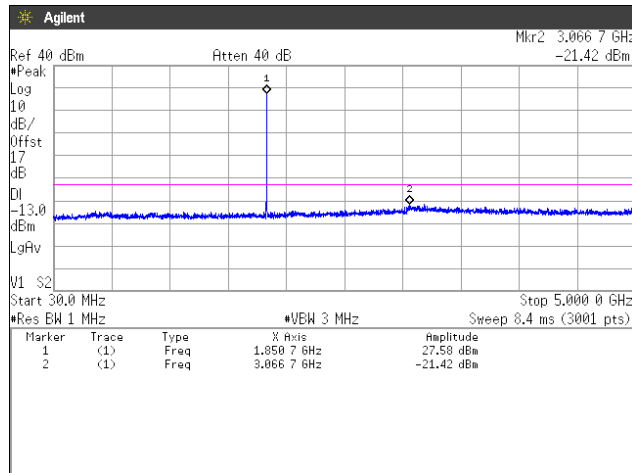


5GHz-10GHz

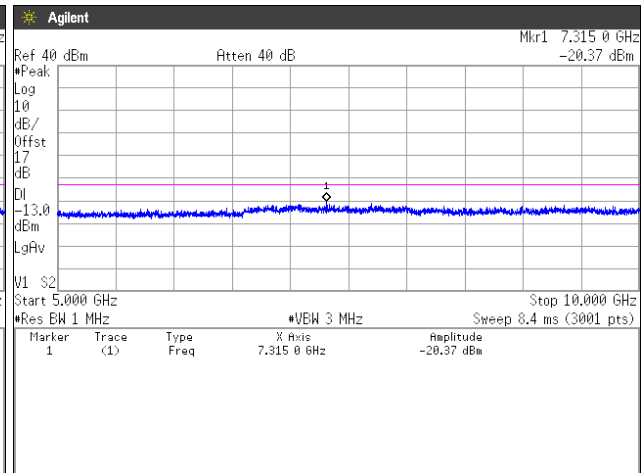


10GHz-15GHz

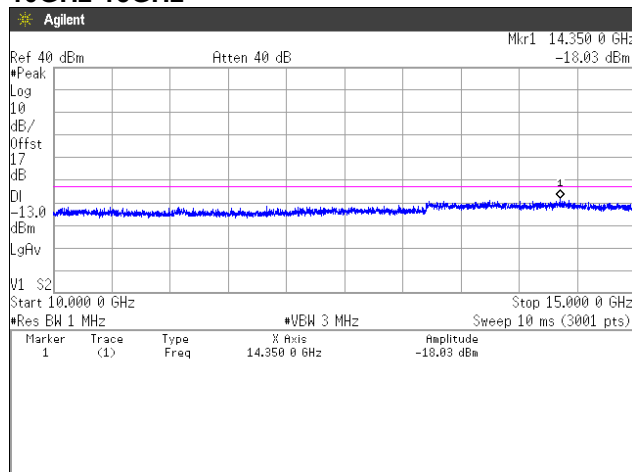


15GHz-20GHz

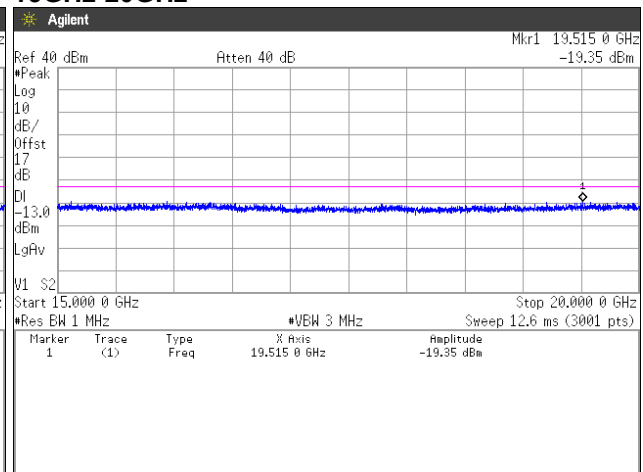


Channel: 18900
30MHz-5GHz

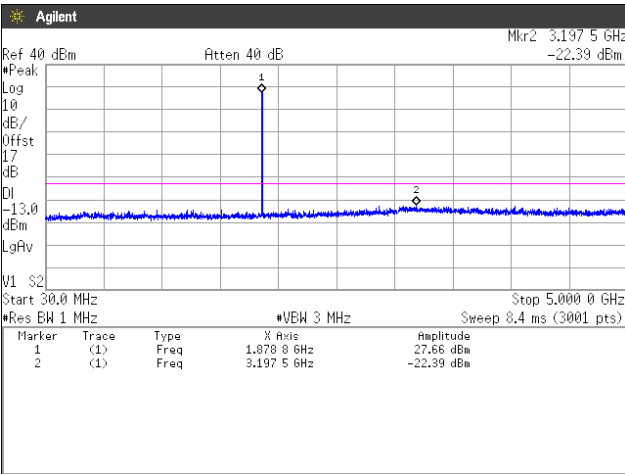


5GHz-10GHz

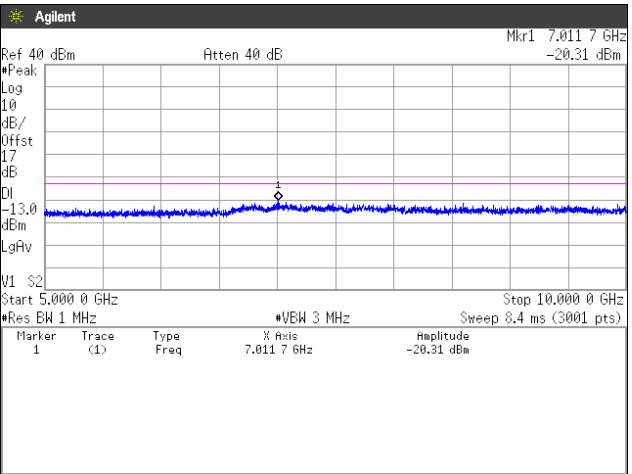

10GHz-15GHz

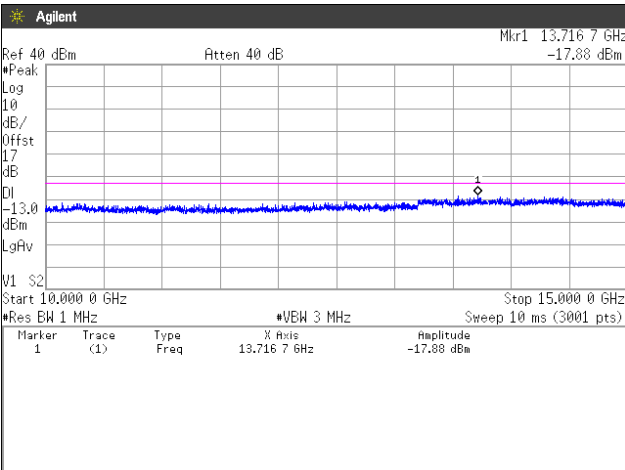


15GHz-20GHz

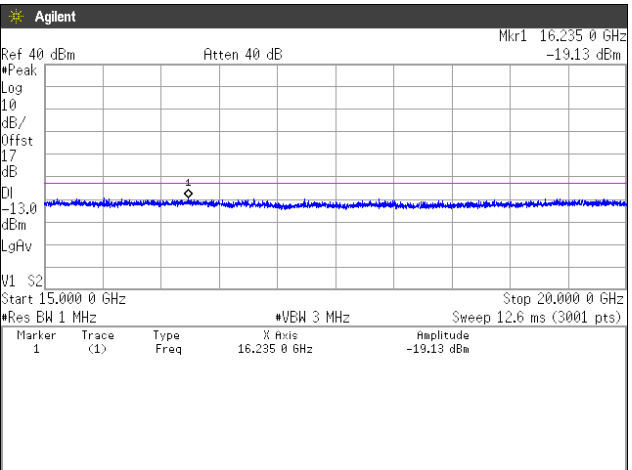


Channel: 19193


30MHz-5GHz

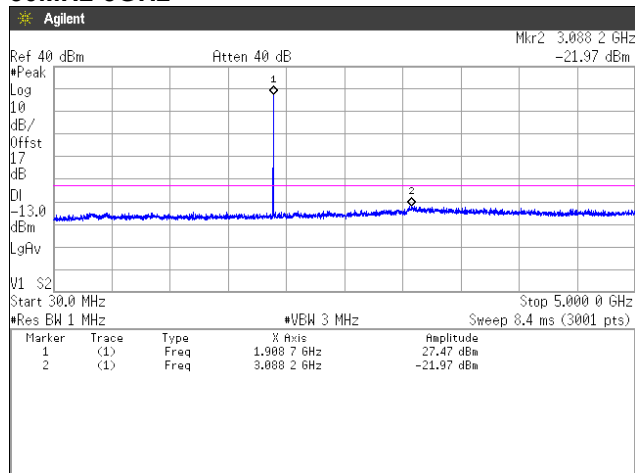


5GHz-10GHz

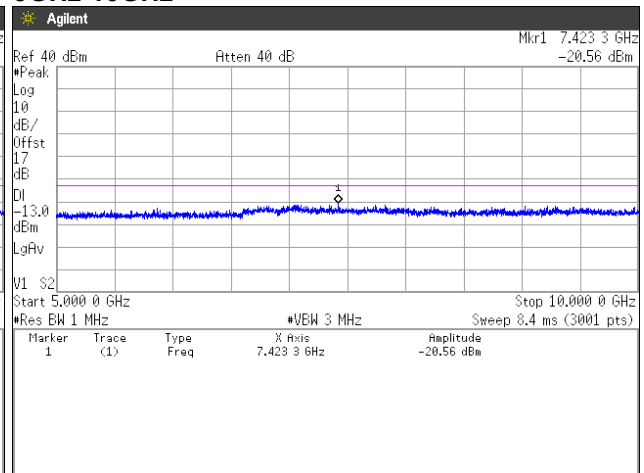

10GHz-15GHz

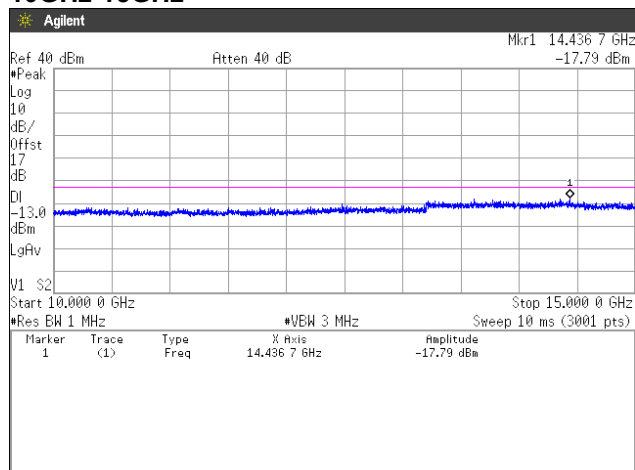

15GHz-20GHz

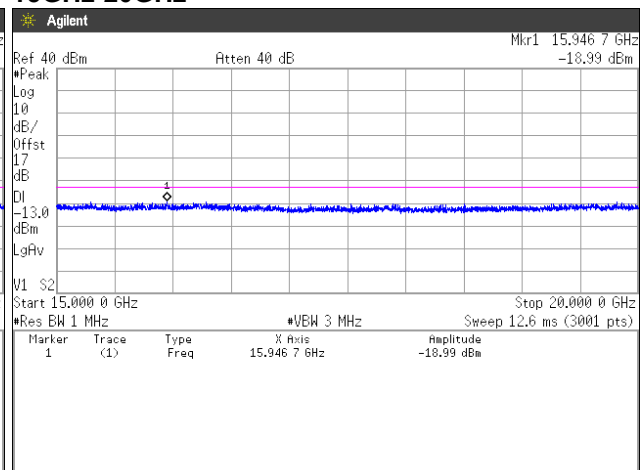

4.5 Radiated Emissions and Harmonic Emissions

4.5.1 Measurement procedure

[FCC 24.238(a), 2.1053]

<Step 1>

The EUT and support equipment are placed on a 1 meter x 1 meter surface, 0.8 meter height styrene foam table. Radiated emission measurements are performed at 3 meter distance with the broadband antenna (Biconical antenna, Log periodic antenna and double ridged guide antenna). The antenna is positioned both the horizontal and vertical planes of polarization and height is varied 1 to 4 meters and stopped at height producing the maximum emission.

The bandwidth of the spectrum analyzer is set to 1 MHz. The turntable is rotated by 360 degrees and stopped at azimuth of producing the maximum emission. The frequency is investigated up to 20 GHz.

<Step 2>

The substitution antenna is replaced by the transmitter antenna (EUT).


The frequency of the signal generator is adjusted to the measurement frequency.

Level of the signal generator is adjusted to the level that is obtained from step 1, and record the emission level of signal generator.

The spectrum analyzer is set to;

- a) RBW = 100 kHz for below 1 GHz and 1 MHz for above 1 GHz / VBW $\geq 3 \times$ RBW
- b) Detector = Peak
- c) Trace mode = Max hold
- d) Sweep time = auto-couple

- Test configuration

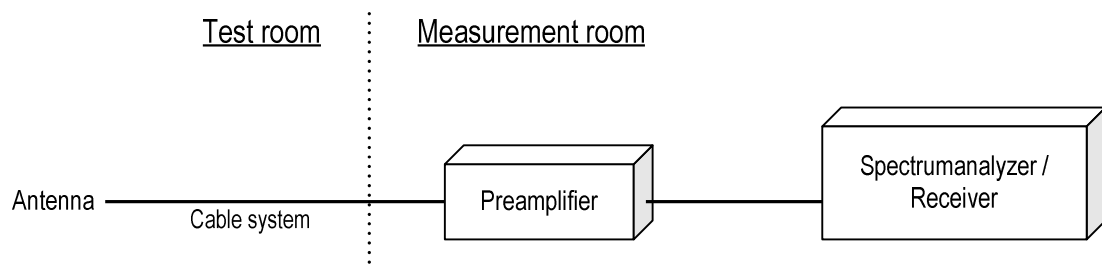

4.5.2 Calculation method

Result = Ant. Input - Cable loss + Antenna Gain

Margin = Limit – Result (EIRP)

Example:

Limit @ 3700.4 MHz : -13.0 dBm

Ant. Input = -55.6 dBm Cable loss = 1.6 dB Ant. Gain = 9.2 dBi

Result = -55.6 - 1.6 + 9.2 = -49.3 dBm

Margin = -13.0 - (-49.3) = 36.3 dB

4.5.3 Limit

-13 dBm or less

4.5.4 Test data

Date	: 8-August-2020		
Temperature	: 21.8 [°C]		
Humidity	: 53.9 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 11~12-August-2020		
Temperature	: 21.9 [°C]		
Humidity	: 59.2 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 12~13-August-2020		
Temperature	: 21.9 [°C]		
Humidity	: 59.2 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>
Date	: 18-August-2020		
Temperature	: 21.7 [°C]		
Humidity	: 63.1 [%]	Test engineer	:
Test place	: 3m Semi-anechoic chamber		<u>Chiaki Kanno</u>

[GSM1900]**Channel: 512**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3700.4	-56.2	-56.3	1.6	8.2	-49.7	-13.0	36.7

Channel: 661

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.2	-56.9	1.6	8.3	-50.2	-13.0	37.2

Channel: 810

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3819.6	-56.4	-57.0	1.6	8.4	-50.2	-13.0	37.2

[WCDMA Band II]**Channel: 9262**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3704.8	-157.5	-57.0	1.6	8.2	-50.4	-13.0	37.4

Channel: 9400

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-157.6	-56.9	1.6	8.3	-50.2	-13.0	37.2

Channel: 9538

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3815.2	-158.0	-56.5	1.6	8.4	-49.7	-13.0	36.7

**[LTE Band II]
QPSK, BW 1.4MHz
Channel: 18607**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3701.4	-56.3	-56.5	1.6	8.2	-49.9	-13.0	36.9

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.6	-56.9	1.6	8.3	-50.2	-13.0	37.2

Channel: 19193

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3818.6	-56.5	-56.7	1.6	8.4	-49.9	-13.0	36.9

**16QAM, BW 1.4MHz
Channel: 18607**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3701.4	-56.4	-56.6	1.6	8.2	-50.0	-13.0	37.0

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.6	-56.9	1.6	8.3	-50.2	-13.0	37.2

Channel: 19193

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3818.6	-56.4	-56.6	1.6	8.4	-49.8	-13.0	36.8

**64QAM, BW 1.4MHz
Channel: 18607**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3701.4	-56.5	-56.7	1.6	8.2	-50.1	-13.0	37.1

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.6	-56.9	1.6	8.3	-50.2	-13.0	37.2

Channel: 19193

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3818.6	-56.5	-56.7	1.6	8.4	-49.9	-13.0	36.9

QPSK, BW 3MHz**Channel: 18615**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3703.0	-56.2	-56.3	1.6	8.2	-49.7	-13.0	36.7

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.2	-56.5	1.6	8.3	-49.8	-13.0	36.8

Channel: 19185

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3817.0	-56.4	-56.6	1.6	8.4	-49.8	-13.0	36.8

16QAM, BW 3MHz**Channel: 18615**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3703.0	-56.2	-56.3	1.6	8.2	-49.7	-13.0	36.7

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.3	-56.6	1.6	8.3	-49.9	-13.0	36.9

Channel: 19185

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3817.0	-56.2	-56.4	1.6	8.4	-49.6	-13.0	36.6

64QAM, BW 3MHz**Channel: 18615**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3703.0	-56.3	-56.2	1.6	8.2	-49.6	-13.0	36.6

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.2	-56.5	1.6	8.3	-49.8	-13.0	36.8

Channel: 19185

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3817.0	-56.3	-56.5	1.6	8.4	-49.7	-13.0	36.7

QPSK, BW 5MHz**Channel: 18625**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3700.7	-56.4	-56.8	1.6	8.2	-50.2	-13.0	37.2

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3755.7	-56.1	-56.4	1.6	8.3	-49.7	-13.0	36.7

Channel: 19175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3810.7	-56.3	-56.6	1.6	8.4	-49.8	-13.0	36.8

16QAM, BW 5MHz**Channel: 18625**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3705.0	-56.1	-56.4	1.6	8.2	-49.8	-13.0	36.8

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.2	-56.4	1.6	8.3	-49.7	-13.0	36.7

Channel: 19175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3815.0	-56.1	-56.4	1.6	8.4	-49.6	-13.0	36.6

64QAM, BW 5MHz**Channel: 18625**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3705.0	-56.3	-56.6	1.6	8.2	-50.0	-13.0	37.0

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.3	-56.5	1.6	8.3	-49.8	-13.0	36.8

Channel: 19175

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3815.0	-56.3	-56.6	1.6	8.4	-49.8	-13.0	36.8

QPSK, BW 10MHz**Channel: 18650**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3710.0	-56.1	-56.6	1.6	8.2	-50.0	-13.0	37.0

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.4	-56.7	1.6	8.3	-50.0	-13.0	37.0

Channel: 19150

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3810.0	-56.3	-56.3	1.6	8.4	-49.5	-13.0	36.5

16QAM, BW 10MHz**Channel: 18650**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3710.0	-56.3	-56.8	1.6	8.2	-50.2	-13.0	37.2

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.4	-56.7	1.6	8.3	-50.0	-13.0	37.0

Channel: 19150

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3810.0	-56.2	-56.4	1.6	8.4	-49.6	-13.0	36.6

64QAM, BW 10MHz**Channel: 18650**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3710.0	-56.4	-56.9	1.6	8.2	-50.3	-13.0	37.3

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.4	-56.7	1.6	8.3	-50.0	-13.0	37.0

Channel: 19150

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3810.0	-56.4	-56.6	1.6	8.4	-49.8	-13.0	36.8

QPSK, BW 15MHz**Channel: 18675**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3715.0	-56.4	-56.6	1.6	8.2	-50.0	-13.0	37.0

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.3	-56.6	1.6	8.3	-49.9	-13.0	36.9

Channel: 19125

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3805.0	-56.2	-56.5	1.6	8.4	-49.8	-13.0	36.8

16QAM, BW 15MHz**Channel: 18675**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3715.0	-56.0	-56.2	1.6	8.2	-49.6	-13.0	36.6

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.0	-56.3	1.6	8.3	-49.6	-13.0	36.6

Channel: 19125

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3805.0	-56.1	-56.4	1.6	8.4	-49.7	-13.0	36.7

64QAM, BW 15MHz**Channel: 18675**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3715.0	-56.1	-56.3	1.6	8.2	-49.7	-13.0	36.7

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.1	-56.4	1.6	8.3	-49.7	-13.0	36.7

Channel: 19125

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3805.0	-56.0	-56.3	1.6	8.4	-49.6	-13.0	36.6

QPSK, BW 20MHz**Channel: 18700**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3720.0	-56.1	-56.3	1.6	8.2	-49.7	-13.0	36.7

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.4	-56.7	1.6	8.3	-50.0	-13.0	37.0

Channel: 19100

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3800.0	-56.0	-56.2	1.6	8.4	-49.5	-13.0	36.5

16QAM, BW 20MHz**Channel: 18700**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3720.0	-56.3	-56.5	1.6	10.4	-47.7	-13.0	34.7

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.2	-56.5	1.6	10.5	-47.6	-13.0	34.6

Channel: 19100

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3800.0	-56.4	-56.6	1.6	10.6	-47.7	-13.0	34.7

64QAM, BW 20MHz**Channel: 18700**

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3720.0	-56.3	-56.5	1.6	10.4	-47.7	-13.0	34.7

Channel: 18900

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3760.0	-56.3	-56.4	1.6	10.5	-47.5	-13.0	34.5

Channel: 19100

H/V	Frequency [MHz]	S.A Reading [dBm]	Ant. Input [dBm]	Cable loss [dB]	Ant.Gain [dBi]	Result [dBm]	Limit [dBm]	Margin [dB]
H	3800.0	-56.2	-56.4	1.6	10.6	-47.5	-13.0	34.5


4.6 Frequency Stability

4.6.1 Measurement procedure

[FCC 24.235, 2.1055]

The EUT was placed inside of a constant temperature chamber as the temperature in the chamber was varied between -30°C and +50°C. The temperature was incremented by 10°C intervals and the unit was allowed to stabilize at each measurement. The frequency drift was measured with the normal Temperature and voltage tolerance and it is presented as the ppm unit.

- Test configuration

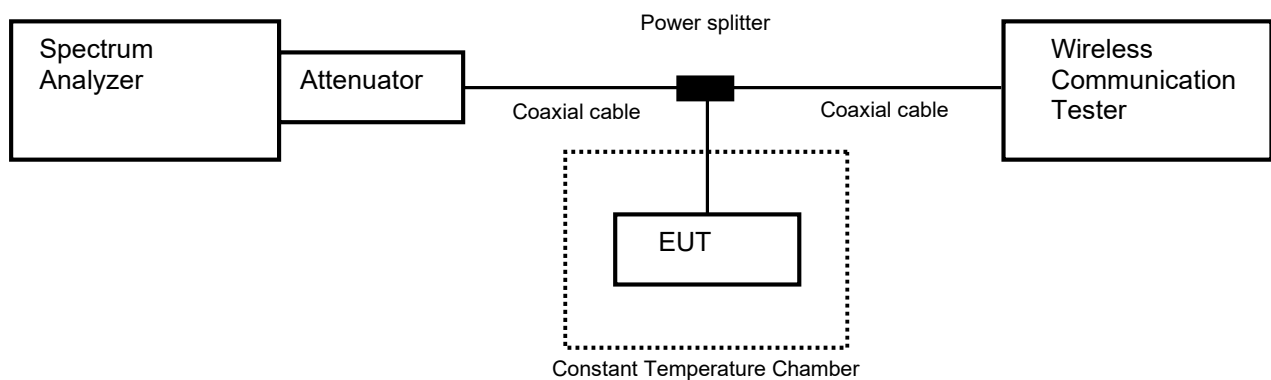

4.6.2 Limit

±2.5 ppm

4.6.3 Measurement result

Date : 27-August-2020

Temperature : 23.9 [°C]

Humidity : 55.9 [%]

Test place : Shielded room No.4

Test engineer :

Chiaki kanno

[GSM1900]

Channel: 661

Limit: $\pm 0.00025\% = \pm 2.5$ ppm					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.85	25(Ref.)	1,880,000,022	0.00000	± 2.5	Pass
	50	1,880,000,021	-0.00054	± 2.5	Pass
	40	1,880,000,043	0.01085	± 2.5	Pass
	30	1,880,000,034	0.00650	± 2.5	Pass
	20	1,880,000,035	0.00661	± 2.5	Pass
	10	1,880,000,023	0.00024	± 2.5	Pass
	0	1,880,000,025	0.00129	± 2.5	Pass
	-10	1,879,999,990	-0.01712	± 2.5	Pass
	-20	1,879,999,985	-0.02001	± 2.5	Pass
	-30	1,879,999,964	-0.03107	± 2.5	Pass
3.27	25	1,880,000,018	-0.00212	± 2.5	Pass
4.43	25	1,880,000,021	-0.00057	± 2.5	Pass

Calculation;

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) x 1000000

[WCDMA Band II]
Channel: 9400

Limit: $\pm 0.00025\% = \pm 2.5$ ppm					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.85	25(Ref.)	1,879,999,982	0.00000	± 2.5	Pass
	50	1,879,999,983	0.00041	± 2.5	Pass
	40	1,879,999,975	-0.00377	± 2.5	Pass
	30	1,879,999,983	0.00074	± 2.5	Pass
	20	1,879,999,977	-0.00246	± 2.5	Pass
	10	1,879,999,983	0.00069	± 2.5	Pass
	0	1,879,999,987	0.00289	± 2.5	Pass
	-10	1,879,999,982	0.00009	± 2.5	Pass
	-20	1,879,999,990	0.00416	± 2.5	Pass
	-30	1,879,999,990	0.00434	± 2.5	Pass
3.27	25	1,879,999,983	0.00076	± 2.5	Pass
4.43	25	1,879,999,985	0.00191	± 2.5	Pass

[LTE Band II]
QPSK, BW 20MHz
Channel: 18900

Limit: $\pm 0.00025\% = \pm 2.5$ ppm					
Power Supply [V]	Temperature [°C]	Measurements Frequency [Hz]	Frequency Tolerance [ppm]	Limit [ppm]	Result
3.85	25(Ref.)	1,879,999,986	0.00000	± 2.5	Pass
	50	1,879,999,980	-0.00322	± 2.5	Pass
	40	1,879,999,982	-0.00205	± 2.5	Pass
	30	1,879,999,982	-0.00176	± 2.5	Pass
	20	1,879,999,993	0.00405	± 2.5	Pass
	10	1,879,999,987	0.00077	± 2.5	Pass
	0	1,879,999,985	-0.00016	± 2.5	Pass
	-10	1,879,999,983	-0.00142	± 2.5	Pass
	-20	1,879,999,986	0.00012	± 2.5	Pass
	-30	1,879,999,983	-0.00133	± 2.5	Pass
3.27	25	1,879,999,989	0.00164	± 2.5	Pass
4.43	25	1,879,999,990	0.00239	± 2.5	Pass

Calculation;

Frequency Tolerance (ppm) = Measurements Frequency (Hz) – Reference Frequency (Hz) / Reference Frequency (Hz) x 1000000

5 Measurement Uncertainty

Expanded uncertainties stated are calculated with a coverage Factor $k=2$.
Please note that these results are not taken into account when measurement uncertainty considerations contained in ETSI TR 100 028 Parts 1 and 2 determining compliance or non-compliance with test result.

Test item	Measurement uncertainty
Conducted emission, AMN (9 kHz – 150 kHz)	± 3.8 dB
Conducted emission, AMN (150 kHz – 30 MHz)	± 3.3 dB
Radiated emission (9kHz – 30 MHz)	± 3.1 dB
Radiated emission (30 MHz – 1000 MHz)	± 4.9 dB
Radiated emission (1 GHz – 6 GHz)	± 4.8 dB
Radiated emission (6 GHz – 18 GHz)	± 5.1 dB
Radiated emission (18 GHz – 40 GHz)	± 5.8 dB
Radio Frequency	$\pm 1.4 \cdot 10^{-8}$
RF power, conducted	± 0.6 dB
Temperature	± 0.6 °C
Humidity	± 1.2 %
Voltage (DC)	± 0.4 %
Voltage (AC, <10kHz)	± 0.2 %

Judge	Measured value and standard limit value	
PASS	Standard limit value +Uncertainty -Uncertainty Measured value Even if it takes uncertainty into consideration, a standard limit value is fulfilled.	Case1
	Standard limit value +Uncertainty -Uncertainty Measured value Although measured value is in a standard limit value, a limit value won't be fulfilled if uncertainty is taken into consideration.	Case2
FAIL	Standard limit value +Uncertainty -Uncertainty Measured value Although measured value exceeds a standard limit value, a limit value will be fulfilled if uncertainty is taken into consideration.	Case3
	Standard limit value +Uncertainty -Uncertainty Measured value Even if it takes uncertainty into consideration, a standard limit value isn't fulfilled.	Case4

6 Laboratory Information

Testing was performed and the report was issued at:

TÜV SÜD Japan Ltd. Yonezawa Testing Center

Address: 5-4149-7 Hachimanpara, Yonezawa-shi, Yamagata, 992-1128 Japan
Phone: +81-238-28-2881
Fax: +81-238-28-2888

Accreditation and Registration

A2LA

Certificate #3686.03

VLAC

Accreditation No.: VLAC-013

BSMI

Laboratory Code: SL2-IN-E-6018, SL2-A1-E-6018

Innovation, Science and Economic Development Canada
ISED#: 4224A

VCCI Council

Registration number	Expiration date
A-0166	03-July-2021

Appendix A. Test Equipment

Antenna port conducted test

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
Spectrum analyzer	Agilent Technologies	E4440A	US44302655	04-Aug-2020	05-Aug-2019
				19-Aug-2021	20-Aug-2020
Attenuator	Weinschel	56-10	J4180	20-Jul-2021	21-Jul-2020
Microwave cable	HUBER+SUHNER	SUCOFLEX 104/1m	199120/4	25-Mar-2021	26-Mar-2020
Microwave cable	HUBER+SUHNER	SUCOFELX102/2m	MY3385/2	25-Mar-2021	26-Mar-2020
Power divider	ANRITSU	K240B	020205	20-Jul-2021	21-Jul-2020
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	13-Nov-2020	14-Nov-2019
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	116338	26-Aug-2020	27-Aug-2019
				01-Sep-2021	02-Sep-2020
Temperature and humidity chamber	ESPEC	PL1KP	14007261	02-Sep-2020	03-Sep-2019

Radiated emission

Equipment	Company	Model No.	Serial No.	Cal. Due	Cal. Date
EMI Receiver	ROHDE&SCHWARZ	ESCI	100765	24-Sep-2020	25-Sep-2019
Spectrum analyzer	Agilent Technologies	E4447A	MY46180188	26-Mar-2021	27-Mar-2020
Spectrum analyzer	Agilent Technologies	E4440A	US40420937	25-Sep-2020	26-Sep-2019
Preamplifier	SONOMA	310	372170	25-Sep-2020	26-Sep-2019
Biconical antenna	Schwarzbeck	VHA9103/BBA9106	VHA91031308	03-Dec-2020	04-Dec-2019
Log periodic antenna	Schwarzbeck	UHALP9108A	0728	16-Apr-2021	17-Apr-2020
Attenuator	TAMAGAWA.ELEC	CFA-01/6dB	N/A(S465)	01-Oct-2020	02-Oct-2019
Attenuator	TAMAGAWA.ELEC	CFA-10/3dB	N/A(S503)	19-Jul-2021	20-Jul-2020
Preamplifier	TSJ	MLA-100M18-B02-40	1929118	27-Aug-2020	28-Aug-2019
Attenuator	AEROFLEX	26A-10	081217-08	25-Mar-2021	26-Mar-2020
Double ridged guide antenna	ETS LINDGREN	3117	00224193	07-Apr-2021	08-Apr-2020
Attenuator	Agilent Technologies	8491B	MY39268633	17-Dec-2020	18-Dec-2019
Double ridged guide antenna	A.H.Systems Inc.	SAS-574	469	27-Aug-2020	28-Aug-2019
Preamplifier	TSJ	MLA-1840-B03-35	1240332	27-Aug-2020	28-Aug-2019
Band rejection filter	Micro-Tronics	BRC50719	014	17-Dec-2020	18-Dec-2019
High Pass Filter	Wainwright	WHKX2.8/18G-6SS	1	20-Jul-2021	21-Jul-2020
Signal generator	ROHDE&SCHWARZ	SMB100A	177525	13-Jul-2021	14-Jul-2020
RF power amplifier	R&K	CGA020M602-2633R	B40240	14-May-2021	15-May-2020
Microwave cable	HUBER+SUHNER	SUCOFELX102/2m	31648	25-Mar-2021	26-Mar-2020
Dipole antenna	Schwarzbeck	VHAP	1020	12-Aug-2021	13-Aug-2020
Dipole antenna	Schwarzbeck	VHAP	1021	12-Aug-2021	13-Aug-2020
Dipole antenna	Schwarzbeck	UHAP	994	05-Aug-2021	06-Aug-2020
Dipole antenna	Schwarzbeck	UHAP	993	05-Aug-2021	06-Aug-2020
Double ridged guide antenna	EMCO	3115	5205	23-Apr-2021	24-Apr-2020
Double ridged guide antenna	ETS LINDGREN	3117	00218815	25-Mar-2021	26-Mar-2020
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	126079	13-Nov-2020	14-Nov-2019
Wideband Radio Frequency Tester	ROHDE&SCHWARZ	CMW500	116338	26-Aug-2020	27-Aug-2019
				01-Sep-2021	02-Sep-2020
Microwave cable	HUBER+SUHNER	SUCOFLEX104/9m	MY30037/4	07-Jan-2021	08-Jan-2020
		SUCOFLEX104/1m	my24610/4	07-Jan-2021	08-Jan-2020
		SUCOFLEX104/8m	SN MY30031/4	07-Jan-2021	08-Jan-2020
		SUCOFLEX104	MY32976/4	07-Jan-2021	08-Jan-2020
		SUCOFLEX104/1.5m	MY19309/4	07-Jan-2021	08-Jan-2020
		SUCOFLEX104/7m	41625/6	07-Jan-2021	08-Jan-2020
PC	DELL	DIMENSION E521	75465BX	N/A	N/A
Software	TOYO Corporation	EP5/RE-AJ	0611193/V5.6.0	N/A	N/A
Absorber	RIKEN	PFP30	N/A	N/A	N/A
3m Semi an-echoic Chamber	TOKIN	N/A	N/A(9002-NSA)	27-May-2021	28-May-2020

*: The calibrations of the above equipment are traceable to NIST or equivalent standards of the reference organizations.