

1.6 User Manual

ENGLISH

1

Contents

Getting to Know Your WAA(Wireless Audio Adapter).....3

How to Insert a Strap to Your WAA.....5

Charging Your WAA.....6

Normal Charge Time.....7

Talk and Standby Time.....8

Low Battery.....8

Turning On/ Off Your WAA.....9

Turning On Your WAA.....9

Turning Off Your WAA.....9

Pairing and Connecting Your WAA.....10

Handling Calls When Not Playing Music.....13


Answering Calls.....13

Ending Calls.....14

Rejecting Calls.....14

Dialling from Your Mobile Handset.....14

GSL Group Sense Ltd. Your WAA (Wireless Audio Adapter) and the Speaker

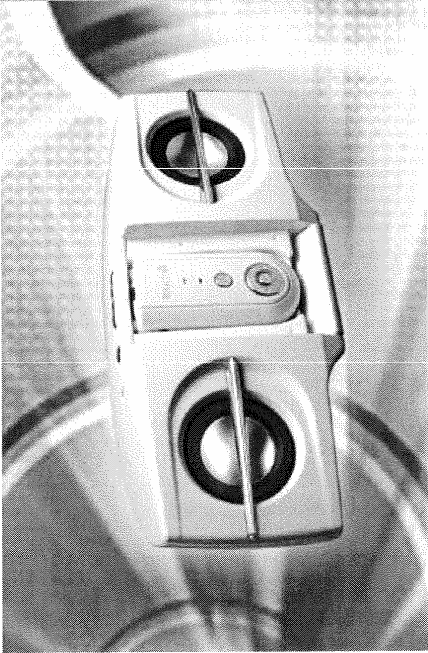

BTM-710

Voice Dialling from Your WAA.....15

Redialling the Last Number from Your WAA.....15

Listening to Music from Your PC.....16

Handling Calls When Playing Music.....18

Adjusting the Volume.....19

Increasing the Volume.....19

Decreasing the Volume.....19

Muting WAA Microphone.....20

Turning On/ Off the WAA Buzzer.....21

Transferring Calls.....22

Limited Warranty Service.....23


Our Repair & Maintenance Warranty.....23

After-Sale Services.....23

Terms & Conditions.....25

Troubleshooting.....28



Getting to Know Your WAA(Wireless Audio Adapter)

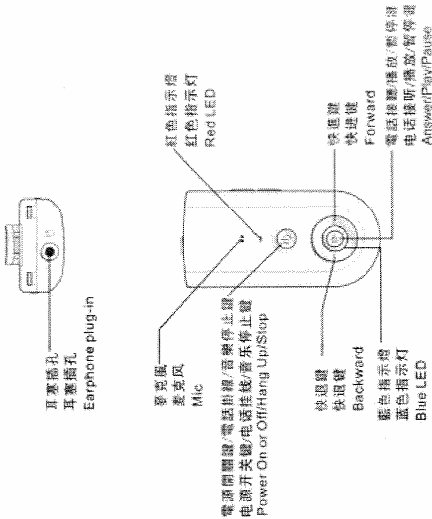

ENGLISH

5

How to Insert a Strap to Your WAA

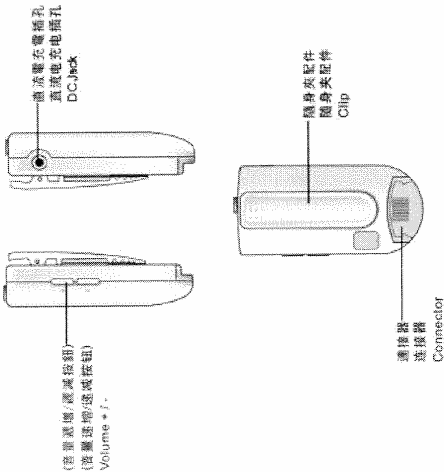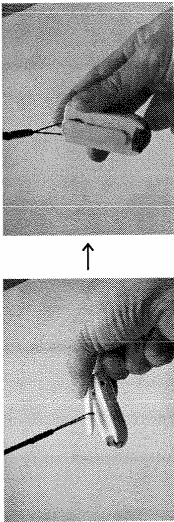

ENGLISH

4

ENGLISH

Note: Dispose of batteries according to local regulations. Do not dispose as household waste.

Charging indication will be delayed for a few minutes if the WAA has not been used for a long time or the battery is drained.


Normal Charge Time

Charging the battery fully is normally within 3 hours. When the battery is fully charged, the Blue LED will turn off. Disconnect the charger from the AC wall outlet and the WAA. Press and hold [Power] for 2 seconds to turn the WAA on, the Blue LED will flash 3 times in 2 seconds and you will hear a tone. Please refer to "Turning On/ Off Your WAA" for details.

7

Charging Your WAA

WAA can be charged by directly connected to a computer with an USB cable. The Red LED will turn on. When the battery is fully charged, the Red LED will turn off.

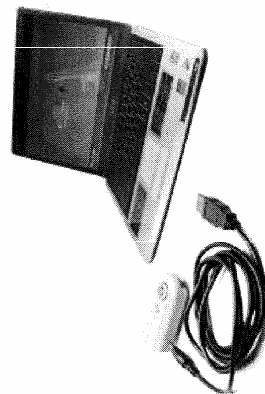

ENGLISH

6

ENGLISH

Turning On/ Off Your WAA

Turning On Your WAA

Press and hold the [Power] for 2 seconds to power on, and the Blue LED will flash 3 times in 2 seconds, and then you can hear a tone.

Turning Off Your WAA

Press and hold the [Power] for 3 seconds to power off, the Red LED will flash 3 times in 2 seconds and then you can hear a tone.

ENGLISH

Talk and Standby Time

The fully charged battery can offer up to 7 hours of operation time and up to 78 hours of standby time. When no calls are in progress, the WAA remains ON in standby mode.

Low Battery

When the WAA is ON, the Red LED will flash once every 3 seconds if low voltage is detected, please recharge the battery as described above.

9

8

ENGLISH

4. Activate your mobile handset's Bluetooth function by referring to your mobile handset user guide for details.
5. Set the mobile handset to search for the Bluetooth devices as instructed in the mobile handset user guide and select "WAA" from the list.
6. When prompted by the mobile handset, enter the preprogrammed PIN code "0000" ("0000" is the default PIN code.). When pairing is completed, connect the WAA to the mobile handset as instructed.
7. Upon completion, the Red and Blue LED are flashing twice alternatively.
8. Then the WAA is ready to pair and connect with the second device, which is your Bluetooth-enabled computer.
9. The pairing and connecting procedures are just similar as described above, but it is subject to the Bluetooth software you used in your computer.

11

Pairing and Connecting Your WAA

Prior to using your WAA for the first time, you must pair and connect it with a Bluetooth-enabled mobile handset and/ or a computer.

The following information describes the pairing and connecting instruction, and they are subject to different models of mobile handsets and the Bluetooth software used in your computer.

Steps:

1. Place the WAA and the mobile handset no more than 1 meter apart and ensure there are nothing between them.
2. Ensure the WAA is off.
3. Press and hold the [Power] until the Red and Blue LED are flashing alternatively and you will hear a tone. Release [Power], and now the WAA is in pairing mode.

ENGLISH

10

ENGLISH

10. After pairing and connecting as required, the WAA will be ready to make, receive calls and/ or listen to music.
11. You can pair and connect in the order you like.
12. If you do not enter the PIN code within certain period, the WAA will exit pairing mode, you will hear a tone.

Note: The WAA is capable of storing two phone's link keys and two audio source's link keys.

12

ENGLISH

Handling Calls When Not Playing Music Answering Calls

When there is an incoming call, if the in-band ring tone is supported, the in-band ring will be played via synchronous connection-oriented channel from the mobile handset.

If in-band ring tone is not supported, the Blue LED will flash every second, a default ring can be heard.

Press [Play] shortly to answer the incoming call.

Press [Play] shortly to accept the incoming call and put the current call hold-on or press [Power] to end the current call and then accept the incoming call by pressing [Play], if there is another call coming.

13

ENGLISH

Voice Dialling from Your WAA

If your mobile handset is equipped with a voice dialling function, simply press [BF] for 1 second on your WAA, and then say the voice tag and then you can hear a tone. Press [Power] to cancel voice tag.

Note: Please make sure to record voice tag into the mobile handset first before using voice dialling function.

Redialling the Last Number from Your WAA

Press [FF] for 1 second to redial the last number stored in your mobile handset and then you can hear a tone. Press [Power] to cancel the redialling.

15

ENGLISH

While one call is connected and the other on-hold, press [Play] shortly to switch the active call.

Ending Calls

Press [Power] shortly to end the call or end the call via your mobile handset in the normal way and then you can hear a tone.

Rejecting Calls

Press [Power] shortly to reject the incoming call during ringing or reject the call via your mobile handset in the normal way and then you can hear a tone.

Dialling from Your Mobile Handset

Simply make calls on your mobile handset in the normal way.

14

ENGLISH

3. When last number redialling or voice dialling is activated, the music will be paused if music is playing. Press [Power] shortly to cancel the dialling.

4. The operation and compatibility varies if different PC Bluetooth Driver and different media player are used.

17

Listening to Music from Your PC

Plug in the USB dongle to USB port of your PC, then connect the WAA with it via PC Bluetooth Driver, e.g. IVT bluesoleil, then you can listen to the audio from your PC through the WAA.

Press [Play] shortly to play music, and press [Play] shortly again to pause playing when music playing.

Press [Power] shortly to stop playing.

Press [FF] shortly to play next song, and press [BF] shortly to play previous song.

Note: 1. Music is streamed in sub-band code format, MP3 and via asynchronous connection-less channel.

2. The music player needs advance audio distribution profile.

ENGLISH

16

ENGLISH

Adjusting the Volume Increasing the Volume

Press [Vol+] key to increase volume by one step, repeat this procedure until you have reached the desired level.

When the maximum volume is reached, a tone will be heard from the earpiece.

Decreasing the Volume

Press [Vol-] to decrease volume by one step, repeat this procedure until you have reached the desired level.

When the minimum volume is reached, a tone will be heard from the earpiece.

19

ENGLISH

Handling Calls When Playing Music

When you are listening to music, there is an incoming call, the music will be paused automatically, and you can answer the call. When the call ends, music will be resumed automatically.

Note: *The operation is the same as "Handling Calls When Not Playing Music".*

18

ENGLISH

Turning On/ Off the Buzzer

Press [Power] and [Vol+] keys for 1 second to enable buzzer. A tone will be heard from the earpiece and the buzzer will generate a beep sound.

Press [Power] and [Vol-] keys for 1 second to disable buzzer. A tone will be heard from the earpiece.

And when the buzzer tone is on, press [Vol+] key or [Vol-] key for 1 second to stop the buzzer temporarily.

21

ENGLISH

Muting WAA Microphone

You can mute or not mute the microphone temporarily by pressing [BF] for 3 seconds and you will hear a tone to indicate microphone is muted.

20

ENGLISH	Limited Warranty Service Should your product need warranty service, please re- turn it to the dealer from whom it was purchased, or contact any of your local dealers.	23
ENGLISH	Our Repair & Maintenance Warranty Subject to conditions of this Limited Warranty, GSL warrants this Product to be free from defects in design, material and manufacturing within the valid warranty period from the date of its original purchase by a consumer.	22
ENGLISH	After-Sale Services If, during the warranty period, this Product fails to oper- ate under normal use due to defects in design, mate- rial or manufacturing, GSL authorized distributors or	22
ENGLISH	Transferring Calls You can transfer connected call from your WAA to your mobile handset or vice versa by pressing [FF] for 3 seconds and you will hear a tone.	22
ENGLISH	Transferring Calls You can transfer connected call from your WAA to your mobile handset or vice versa by pressing [FF] for 3 seconds and you will hear a tone.	22
ENGLISH	Transferring Calls You can transfer connected call from your WAA to your mobile handset or vice versa by pressing [FF] for 3 seconds and you will hear a tone.	22
ENGLISH	Transferring Calls You can transfer connected call from your WAA to your mobile handset or vice versa by pressing [FF] for 3 seconds and you will hear a tone.	22
ENGLISH	Transferring Calls You can transfer connected call from your WAA to your mobile handset or vice versa by pressing [FF] for 3 seconds and you will hear a tone.	22

ENGLISH

Terms & Conditions

1. The warranty is valid only if the original invoice for purchase of this Product issued to the original purchaser by a GSL authorized dealer, specifying the date of purchase, model and serial number, is presented with the Product for warranty service.

GSL reserves the right to refuse warranty service if the information on the warranty certificate has been removed or altered after the original purchase of the Product from the dealer.

2. If GSL repairs or replaces the Product, warranty for the repaired or replaced Product shall be valid for the remaining time of the original warranty period. Repair or replacement may involve the use of functionally equivalent reconditioned units. Replaced defective parts or components will not be returned and GSL has absolute right for their disposal.

25

ENGLISH

service partners in the country/ region where you have purchased the Product will, at their discretion, either repair or replace the Product in accordance with the terms and conditions stipulated herein.

GSL and its licensed service centres reserve the right to charge a handling fee if a returned Product is found not to be under warranty according to the terms & conditions below.

Please note that your personal settings/ downloads might be lost when the Product is repaired or replaced.

24



71

This device complies with Part 15 of the FCC Rules.
Operation is subject to the following two conditions:
(1) this device may not cause harmful interference,
and (2) this device must accept any interference
received, including interference that may cause un-
desired operation.
Changes of modifications not expressly approved
by the party responsible for compliance could void
the user's authority to operate the equipment.



Troubleshooting
In general, if you cannot solve the problem with this
manual, you should either switch off your WAA and
your mobile handset, and then switch on again or press
[Vol+] and [FF] keys once.

ALL Rights Reserved



28

ENGLISH

Your WAA (Wireless Audio Adapter) and the Speaker



GSL Group Sense Ltd.