



***EXHIBIT B***

***Test Report***

Report No.	V0374277
Specifications Test Method	FCC Part 74 – Certification ANSI C63.4 1992
Applicant address	11F, No. 29, Lane 169, Kang-Ning Street, Hsi-Chih, Tahu Science Industrial Park, Taipei Hsien, Taiwan, R.O.C.
Applicant Items tested Model No.	VOICE CRAFT ELECTRONICS CO., LTD. WIRELESS HANDHELD TRANSMITTER WM-928
Results Sample received date	<b>Compliance</b> (As detailed within this report) 01/26/2000 (month / day / year)
Prepared by	 _____  _____ MAR. 08, 2000
Authorized by	_____  _____ General Manager (Frank Tsai)
Issue date	(month / day / year)
Modifications	None
Tested by	Training Research Co., Ltd.
Office at	2, Lane 194, Huan-Ho Street, Hsichih, Taipei Hsien 221, Taiwan
Anechoic Chamber at	2, Lane 194, Huan-Ho Street, Hsichih, Taipei Hsien 221, Taiwan

**Conditions of issue:**

- (1) **This test report shall not be reproduced except in full, without written approval of TRC. And the test result contained within this report only relate to the sample submitted for testing.**
- (2) **This report must not be used by the client to claim product endorsement by NVLAP or any agency of U.S. Government.**

★ FCC ID : K97WM-928

# Contents

## Chapter 0 Application for Certification ..... 4

### Chapter 1 General

1.1 Introduction.....	5
1.2 Description of Support Equipment .....	5
1.3 Configuration of System Under Test.....	6
1.4 Location of the Measurement Site.....	6
1.5 General Test Condition.....	6

## Chapter 2 Power Output Measurement

2.1 Rules and Specification Limits.....	7
2.2 Measurement Condition and Setup .....	7
2.3 List of Measurement Instrument .....	8
2.4 Measurement Configuration.....	9
2.5 Measurement Result .....	10

## Chapter 3 Modulation Characteristics Measurement

3.1 Rules and Specification Limits.....	11
3.2 Test Configuration & List of Test Instruments.....	11
3.3 Measurement Condition & Setup .....	12
3.4 Frequency Response of Audio Low Pass Filter Measurement Condition & Setup .....	12
3.5 Modulation Limiting Measurement Condition & Setup .....	12

## Chapter 4 Occupied Bandwidth Measurement & Calculation

4.1 Rules and Specification Limits.....	15
4.2 Test Condition & Test Instruments.....	15
4.3 Measurement Procedure.....	16
4.4 Measurement Result .....	16

## Chapter 5 Field Strength of Spurious Radiation Measurement

5.1 Rules and Specification Limits.....	17
5.2 Measurement Condition & Setup .....	17
5.3 List of Measurement Instruments.....	18
5.4 Measurement Configuration.....	19
5.5 Measurement Result .....	21

## Chapter 6 Frequency Stability Tolerance Measurement

6.1 Rules and Specification limits .....	29
6.2 Measurement Condition & Setup with Temperature Variation.....	29
6.3 List of Measurement Instruments with Temperature Variation .....	29
6.4 Measurement Configuration with Temperature Variation.....	30
6.5 Measurement Result with Temperature Variation.....	31
6.6 Measurement Condition & Setup with Voltage Variation.....	32
6.7 List of Measurement Instruments with Voltage Variation.....	32
6.8 Measurement Configuration with Voltage Variation .....	32
6.9 Measurement Result with Voltage Variation .....	32

## ***Chapter 0 Application for Certification***

2.983 ( a ) : **VOICE CRAFT ELECTRONICS CO., LTD.** – applicant and manufacturer

2.983 ( b ) : The equipment is a transmitter, wireless microphone  
Model No.: WM-928

2.983 ( c ) : Quantity production is planned

2.983 ( d ) ( 1 ) : Type of emission – F3E- FM Modulation

2.983 ( d ) ( 2 ) : 100 Hz ~ 6.116 KHz

2.983 ( d ) ( 3 ) : 0.022 mW

2.983 ( d ) ( 4 ) : Specification of 250 mW is met by the equipment in the applicable part 74.861 (e)(1)

2.983 ( d ) ( 5 ) : Final RF amplifier stage current : 9V

2.983 ( d ) ( 6 ) : Description follows

2.983 ( d ) ( 7 ) : Complete circuit diagrams are included. No modification was made

2.983 ( d ) ( 8 ) : Instruction sheet to user included

2.983 ( d ) ( 9 ) : Tune up procedure follows

2.983 ( d ) (11) : Description follows

2.983 ( d ) (12) : N/A

## ***Chapter I GENERAL***

### ***1.1 Introduction :***

The following measurement report is submitted on behalf of *VOICE CRAFT ELECTRONICS CO., LTD.* in support of a wireless microphone certification in accordance with FCC Rules. 2.981 through 2.999 and 74.861.

### ***Description of EUT :***


EUT	:	WIRELESS HANDHELD MICROPHONE
Model No.	:	WM-928
Carrier Frequency Range	:	174 ~ 178 MHz
RF Power Output	:	0.022 mW
Supply Voltage	:	DC 9V
Supply Current	:	20 mA
Frequency Response	:	100 Hz ~ 6.116 KHz
Frequency Stability	:	0.005%
Operating Temperature	:	– 30 to + 50 degree centigrade

Wireless microphone is a transmitter which operates in the frequency range of 174 ~ 178 MHz. (174.233MHz and 176.710MHz tested) This microphone is worn by a performer and other participants in a program, filming, reporting ...etc.

### ***1.2 Description of Support Equipment :***

N/A

### 1.3 Configuration of test setup

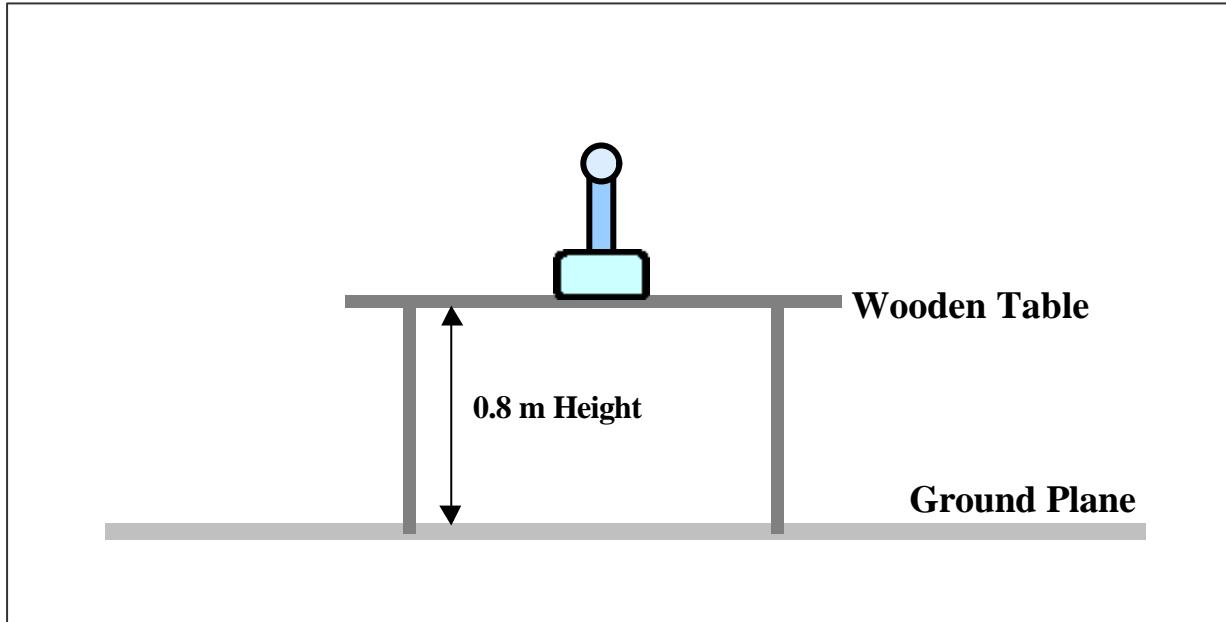

### 1.4 Location of the Measurement Site :

The radiated emissions measurements required by the Rules were performed on the Three-meter, anechoic chamber at test site maintained by **Training Research Co., Ltd.**, 2, Lane 194, Huan-Ho Street, Hsichih, Taipei Hsien 221, Taiwan. Complete description and measurement data have been placed on file with the Commission. The conducted power line Emissions tests were performed in a shielded enclosure also located at the above facility.

**Training Research Co., Ltd.** is listed by the FCC (Registration Number: 93906) as a facility available to do measurement work for others on a contract basis.

### 1.5 General Test Condition :

The conditions under which the EUT operates were varied to determine their effect on the equipment's emission characteristics. The final configuration of the test system and the mode of operation used during these tests was chosen as that which produced the highest emission levels. However, only those conditions, which the EUT was considered likely to encounter in normal use were investigated.

## Chapter 2 Power Output Measurement

### 2.1 Rules and Specification Limits

2.985

74.861 ( e )( 1 ) : The power of the measured unmodulated carrier power at output of the transmitter power amplifier ( antenna input power ) may not exceed the following:

1. 54 – 72, 76 – 88 and 174 – 216 MHz band 50 mW.
2. 470 – 608 AND 614 – 806 MHz band 250 mW.

### 2.2 Test condition and setup :

1. Measurement was made on open-field test site. The EUT system was placed on non-conductive turntable which is 0.8 meters height, top surface 1.0 X 1.5 meter. The EUT was placed in three direction of the space in order to obtain maximum emission.
2. A SCHAFFNER whole range antenna with horizontal and vertical polarization was raised from 1 – 4 meter as well as the turntable was rotate from 0 to 360 degree to search for the maximum Field Strength Spectrum where the spectrum analyzer was operated in the quasi-peak detection mode. Recorded all the values, which measured under horizontal and vertical position for the biconical antenna.
3. The following procedures were used to convert the emission levels measured in decibels referenced to 1 microvolt (dB $\mu$ V) into field intensity in Watt.
  - (1) The actual field intensity in decibels referenced to 1 micro volt per meter (dB $\mu$ V/m) is determined by algebraically adding the measured reading in dB $\mu$ V, the antenna factor (dB), and cable loss (dB) at the appropriate frequency.
  - (2) The field intensity in Volt can then be determined by the following equation:  

$$FI(Volt) = 10^{\frac{FI(dB\mu V/m)}{20}} \times 10^{-6}$$

$$FI_a(dBmV/m) = FI_r(dBmV) - \text{Corrected (dB)}$$

$$\text{Corrected (dB)} = AF(dB) + [CL(dB) - \text{Amplitude Gain}]$$

FI<sub>a</sub> : Actual Field Intensity

FI<sub>r</sub> : Reading of the Field Intensity

AF : Antenna Factor

CL : Cable Loss

The field intensity in Watt can then be determined by the following equation :

$$P \text{ (watt)} = F \cdot I^2 \text{ (Volt)} \times d^2 \text{ (meter)} / 49.2$$

P : Power in Watt


D : Measurement Distance ( 3 m )

### **2.3 List of test Instrument :**

<u>Instrument Name</u>	<u>Model No.</u>	<u>Brand</u>	<u>Serial No.</u>	<u>Calibration Date</u>
EMI Receiver	8546A	H P	3520A00242	10/18/99 10/18/00
RF Filter Section	85460A	H P	3448A00217	10/18/99 10/18/00
Bi-log Antenna	CBL6141A	SCHAFFNER	4150	05/21/99 05/21/00
Anechoic Chamber (Amplify, cable calibrated together)				04/16/99 04/16/00

The level of confidence of 95%, the uncertainty of measurement of radiated emission is  $\pm 4.96$  dB.

## 2.4 Measurement Configuration

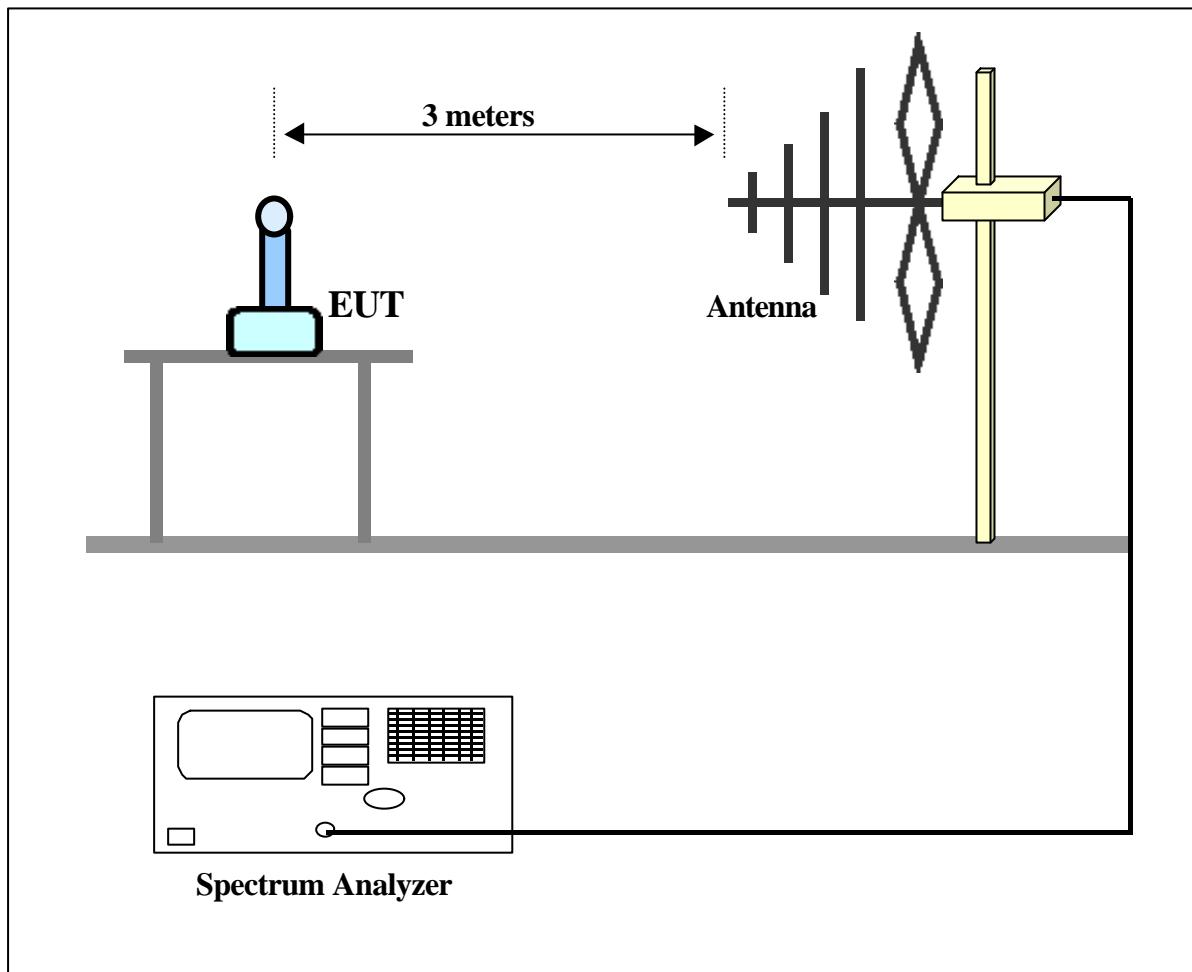

## 2.5 Measurement Result

### (1) Frequency: 174.233 MHz

$$\begin{aligned}\text{Corrected (dB)} &= \text{AF(dB)} + [\text{CL(dB)} - \text{Amplitude Gain}] \\ &= -13.06 \text{ dB/m}\end{aligned}$$

$$\begin{aligned}\text{FI}_a (\text{dBmV/m}) &= \text{FI}_r (\text{dBmV}) - \text{Corrected (dB)} \\ &= 67.84 - (-13.06) \\ &= 80.90 \text{ dB}\mu\text{V/m}\end{aligned}$$

The maximum field measured is 80.90 dB $\mu$ V/m

$$\text{FI ( Volt )} = 10^{80.90/20} \times 10^{-6} = 0.01109 \text{ V}$$

$$\text{FI ( mW )} = (0.01109 \times 3)^2 / 49.2 = 0.022505 \text{ mW}$$

### (2) Frequency: 176.710 MHz

$$\begin{aligned}\text{Corrected (dB)} &= \text{AF(dB)} + [\text{CL(dB)} - \text{Amplitude Gain}] \\ &= -12.89 \text{ dB/m}\end{aligned}$$

$$\begin{aligned}\text{FI}_a (\text{dBmV/m}) &= \text{FI}_r (\text{DbmV}) - \text{Corrected (dB)} \\ &= 58.25 - (-12.89) \\ &= 71.14 \text{ dB}\mu\text{V/m}\end{aligned}$$

The maximum field measured is 71.14 dB $\mu$ V/m

$$\text{FI ( Volt )} = 10^{71.14/20} \times 10^{-6} = 0.00361 \text{ V}$$


$$\text{FI ( mW )} = (0.00361 \times 3)^2 / 49.2 = 0.002378 \text{ mW}$$

## Chapter 3 Modulation Characteristics Measurement

### 3.1 Rules and Specification Limits

- 2. 987( a ): Voice modulated communication equipment
- 4. 987( b ): Equipment which employs modulation limiting

### 3.2 Test Configuration & List of Test Instruments

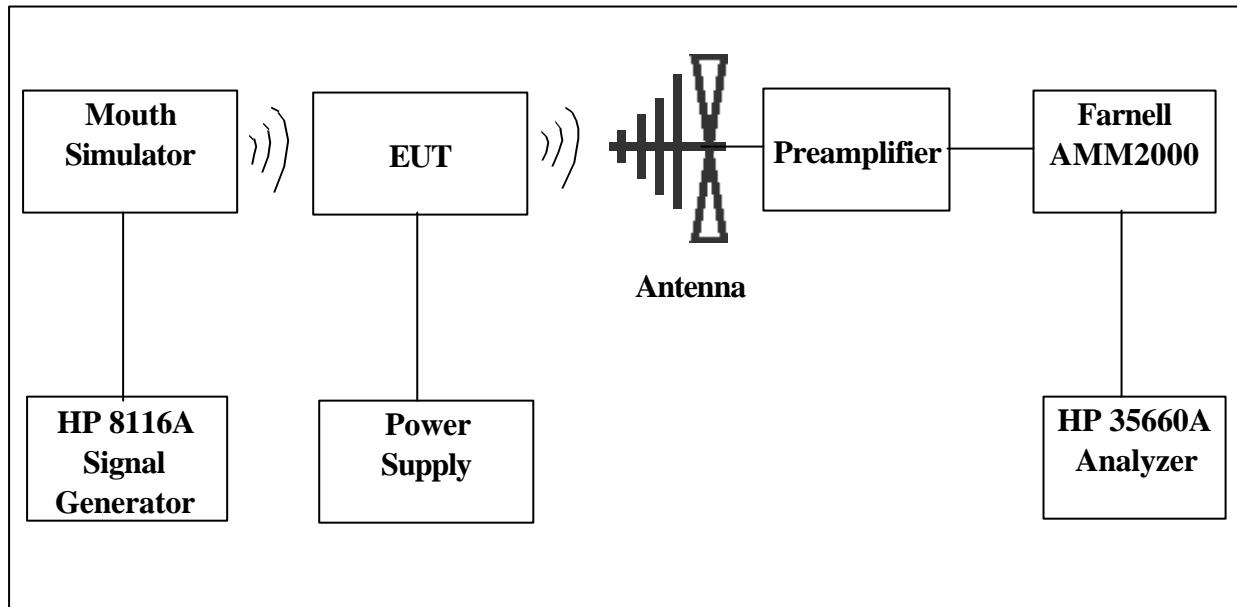

#### List of test instrument:

Manufacturer	Device	Model No.	Input Impedance
HP	Dynamic Signal Analyzer	HP35660A	50
HP	Signal Generator 50 MHz	HP8116A	50
SCHAFFNER	Bi-log Antenna	CBL6141A	50
Farnell	Modulation Meter	AMM2000	50
TRC	Preamplifier	TRC001	50
B&K	Mouth Simulator	4227	---

### **3.3 Frequency Response of Audio Modulation Circuit Measurement Condition & Setup**

#### **2.987 ( a )**

1. The EUT and test equipment were set up as shown on the Section 4.2.
2. The Plus/Function generator was connected to the microphone of the EUT via artificial mouth Simulator.
3. The audio signal input was adjusted to obtain 50% modulation at 1 KHz.
4. With input levels held constant and below limiting at all frequencies, the generator was varied from 100 Hz to 51.3 kHz.
5. The response in dBVrms relative to 1kHz was then measured, using the HP 35660A Dynamic Signal Analyzer as follow page.

### **3.4 Frequency Response of Audio Low Pass Filter Measurement Condition & Setup**

1. The measurement condition and setup as Section 3.3.
2. With input levels held constant and below limiting at all frequencies, the generator was varied from 1KHz to 103.4KHz.
3. The response in dBVrms relative to 1kHz was then measured, using the HP 35660A Dynamic Signal Analyzer as follow page.

### **3.5 Modulation Limiting Measurement Condition & Setup**

1. The Plus/Function generator was connected to the microphone of the EUT via artificial mouth Simulator.
2. The modulation response was measured for each of four frequencies: 100Hz, 484Hz, 1KHz, 3.940KHz and 6.116KHz.
3. The input level was varied from 30% modulation to at least 20 dB higher than the saturation point.
4. Measurements were performed for both negative and positive modulation and the respective results were recorded.
5. Measurement results as Chart 3.1 to 3.2

Offset: OFF


X Ref: 51.2 kHz

Y Ref: -26.99 dBm

AVERAGE IN PROGRESS

Meas

Marker X: 3.94 kHz Y: 17.34 dBm

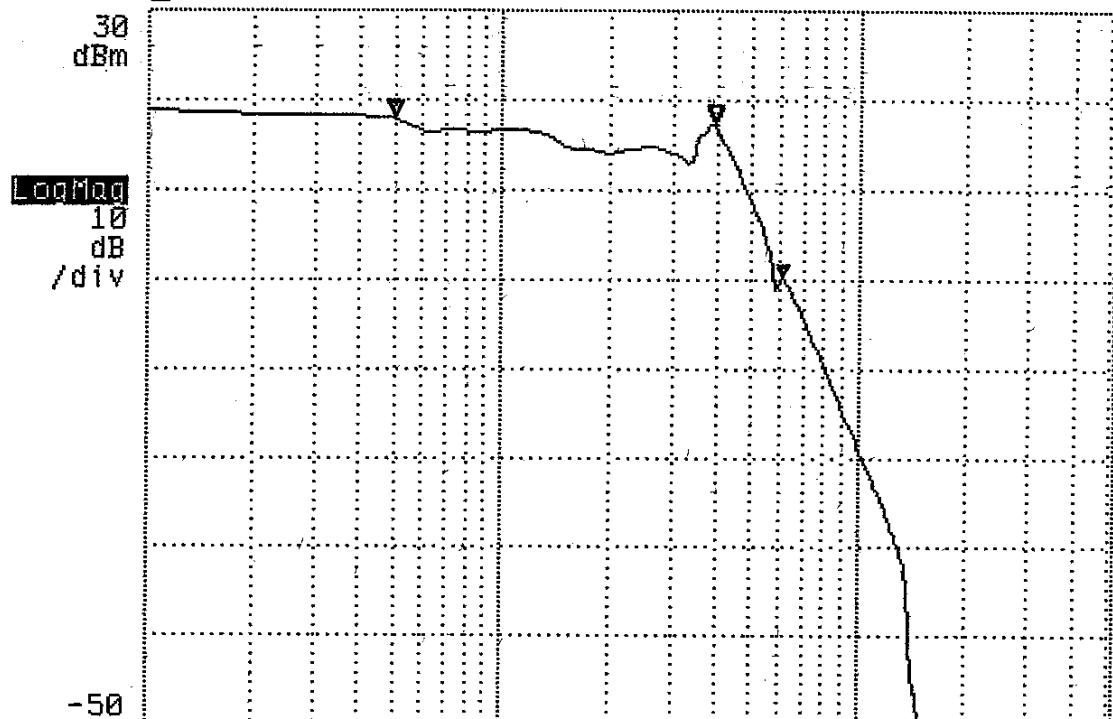

Start: 100 Hz  
Spectrum Chan 1

Stop: 51.3 kHz  
PERK: 1464

Number: 10  
Overlap: 0%

Update Rate: 5

Meas

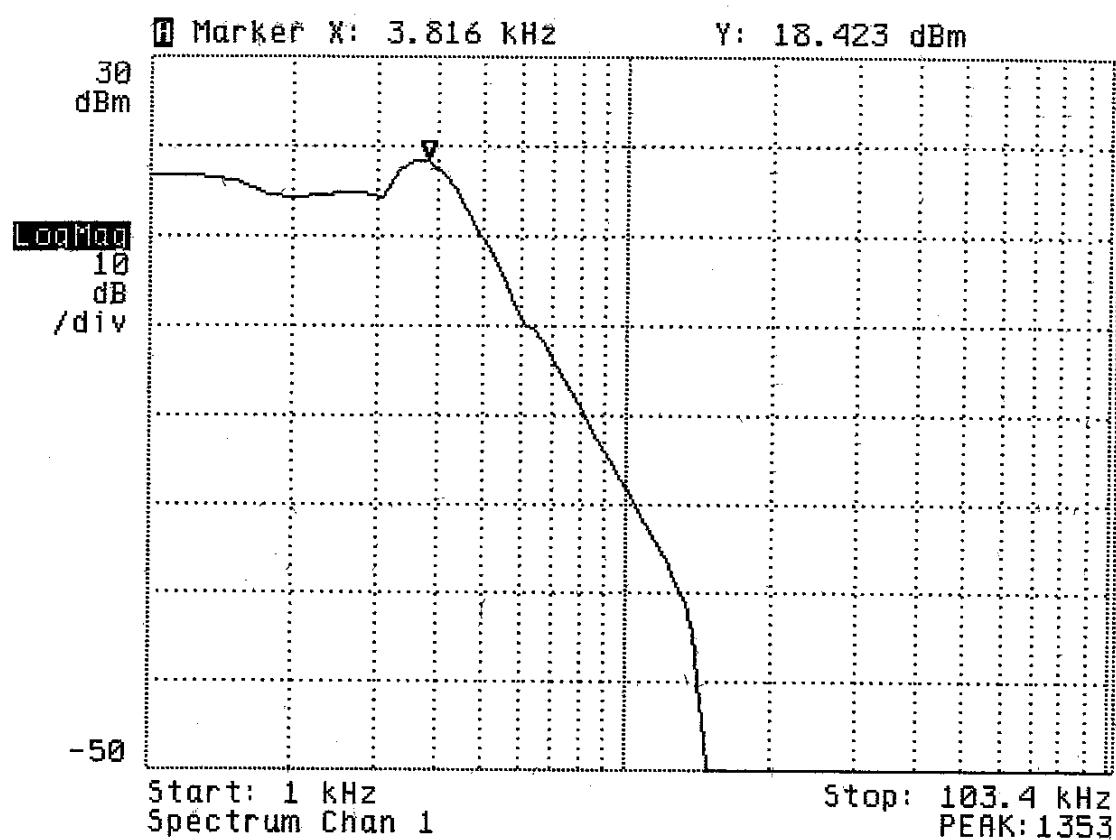


Chart 3.1 Modulation Limiting Measurement Negative


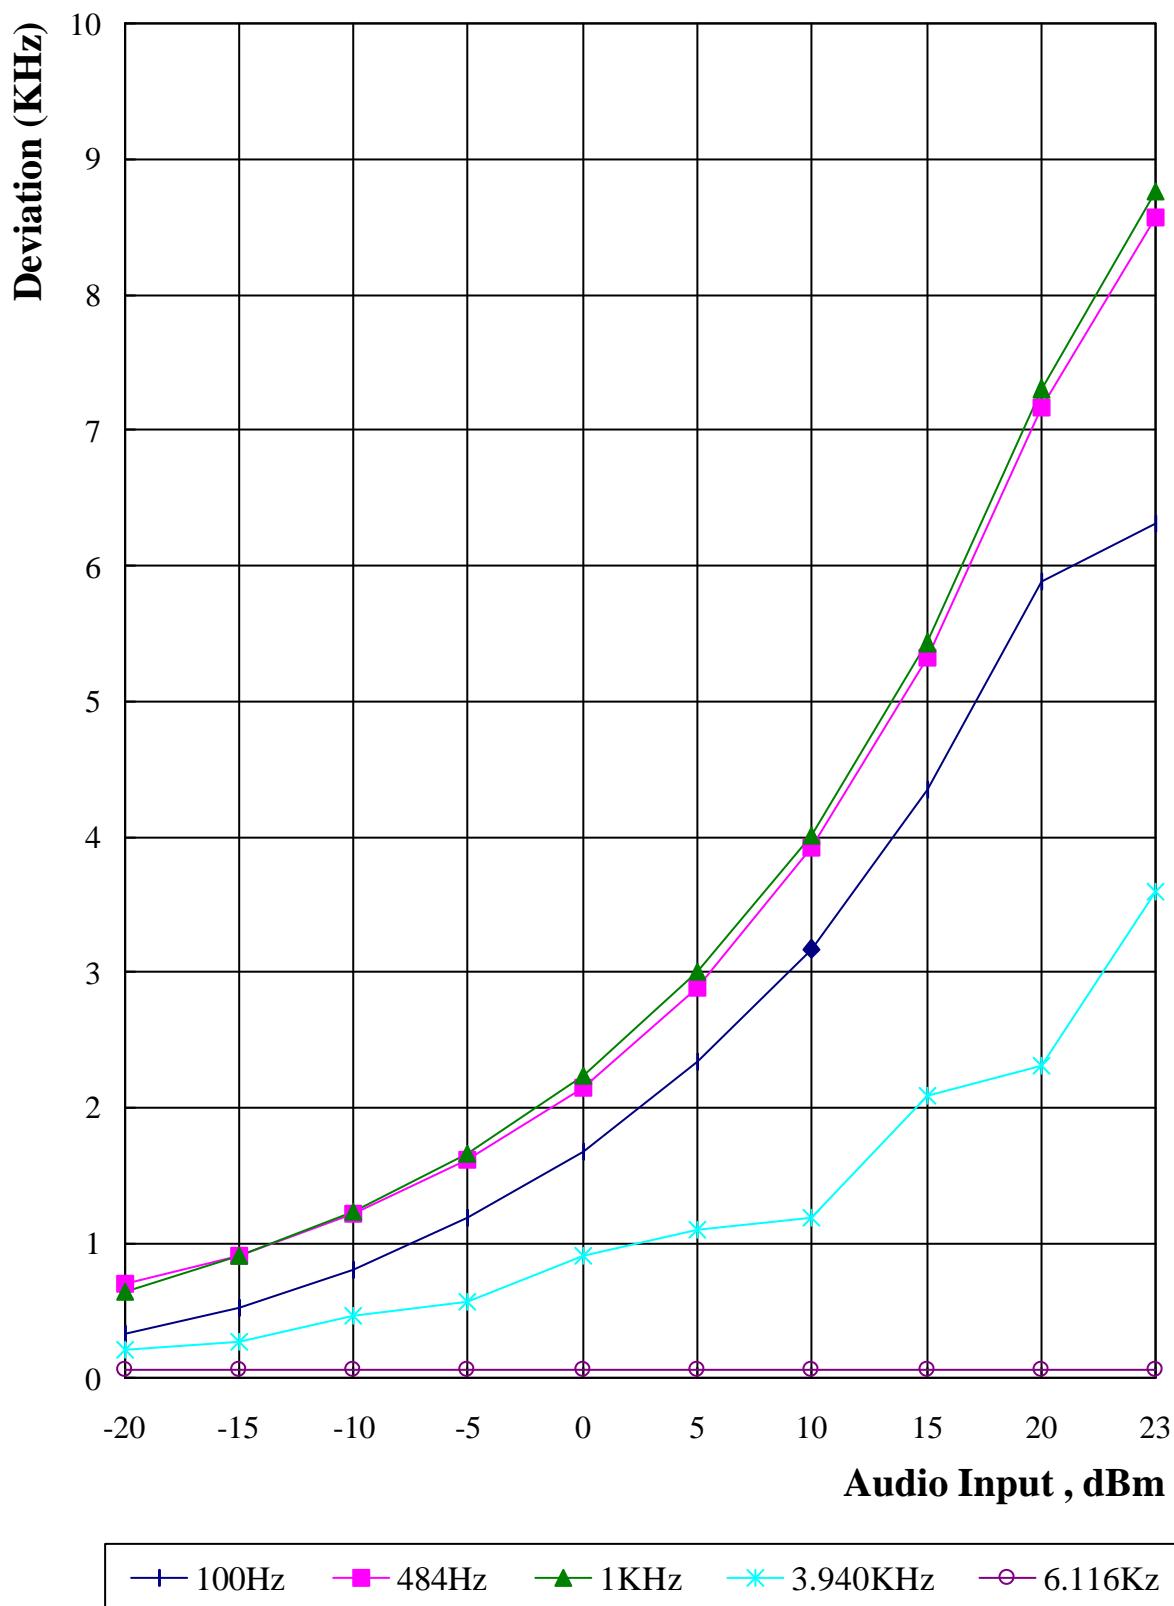


Chart 3.2 Modulation Limiting Measuerment Positive

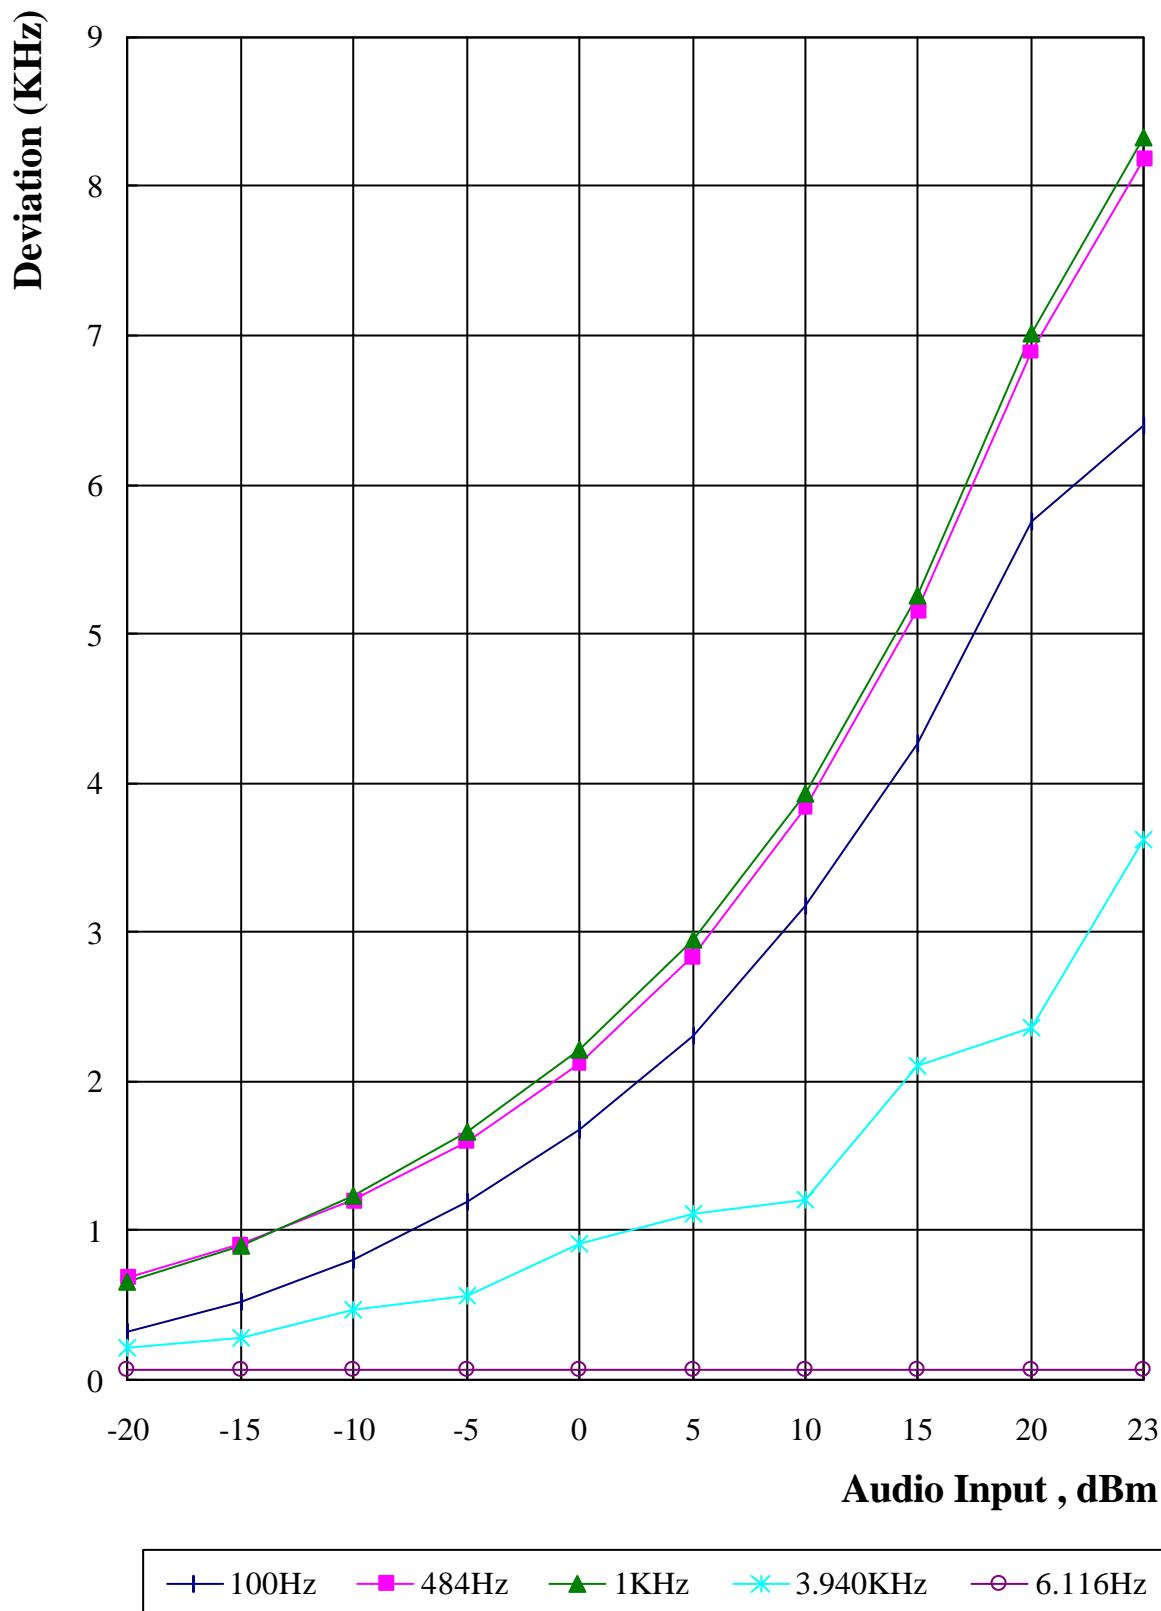

## Chapter 4 Occupied Bandwidth Measurement


### 4.1 Rules and Specification Limits

2.989 .

74.861 ( e )( 3 ): Any form of modulation may be used. A maximum deviation of  $\pm 75$  KHz is permitted when frequency modulation is employed.

74.861 ( e )( 5 ): The operation bandwidth shall not exceed 200 KHz.

### 4.2 Test Configuration & List of Test Instruments

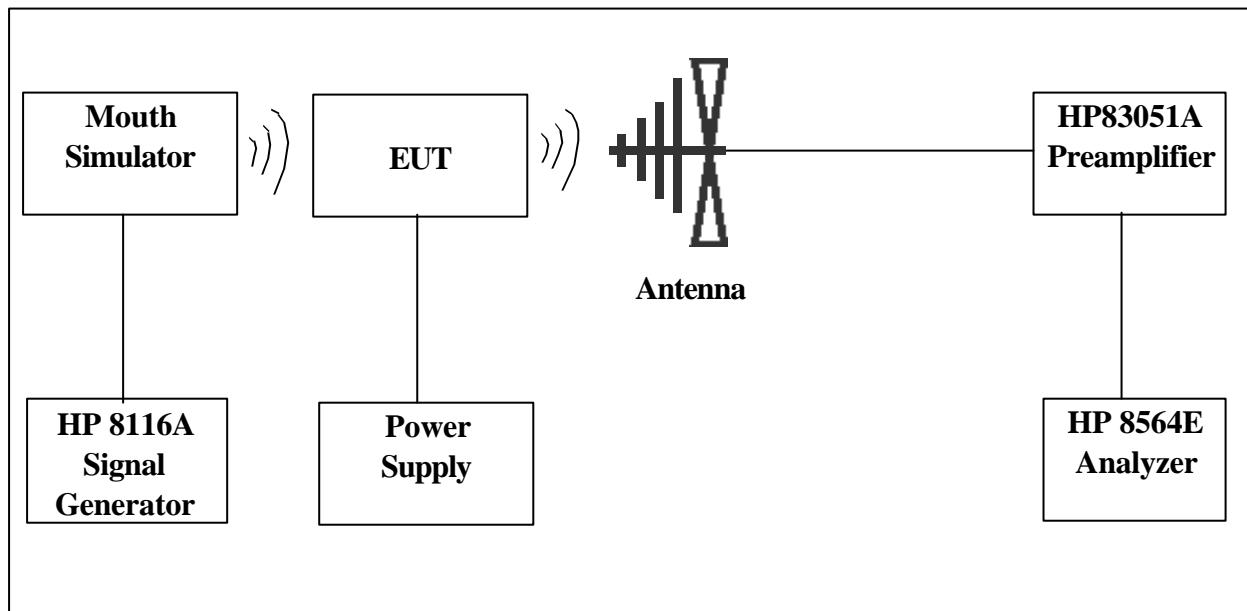

#### List of test Instrument :

Instrument Name	Model No.	Brand	Input Impedance
Spectrum analyzer (9K~40GHz)	8564E	HP	50
Preamplifier (45M~50GHz)	83051A	HP	50
Bi-log Antenna	CBL6141A	SCHAFFNER	50

### **4.3 Measurement Procedure**

1. Connect the EUT as Section 4.2 .
2. Plot the unmodulated chart shows on spectrum.
3. Set the output of the signal generator to 100Hz, 484Hz, 1KHz, 3.940KHz and 6.116KHz. Increase the amplitude of the signal, while monitoring the modulation meter. Until modulation is max. Measure the bandwidth under 26 dB compared to the unmodulated fundamental carrier peak level of the modulated signal displayed on the spectrum analyzer.
4. The occupied Bandwidth was measured as follow pages.

### **4.4 Measurement Result**

The occupied bandwidth's plot is presented on following pager which illustrates compliance with the rules.

Calculation of Necessary Bandwidth ( Bn )


$$Bn = 2M + 2D$$

$$M = \text{Max. Modulation Frequency} = 6.116 \text{ KHz}$$


$$D = \text{Peak Frequency Deviation} = 8.760 \text{ KHz} \quad (\text{Chart 3-1})$$

$$K = 1$$


$$Bn = 29.752 \text{ KHz}$$

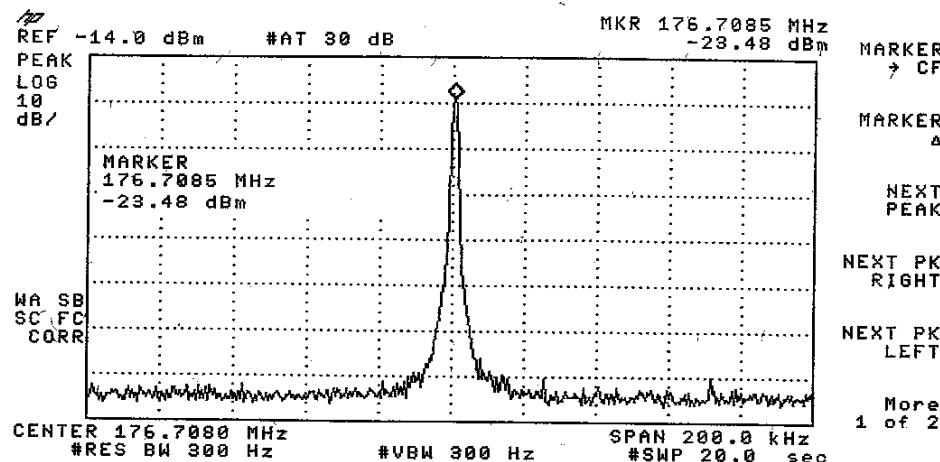




Unmodulation

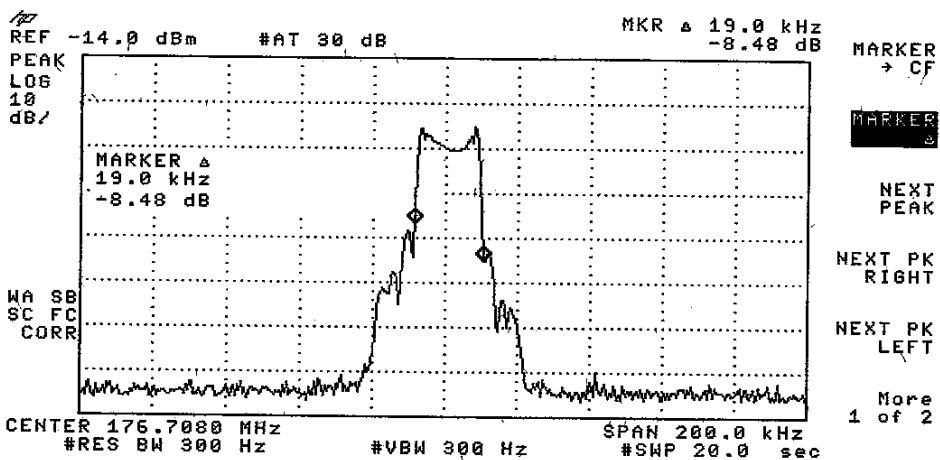

100 Hz

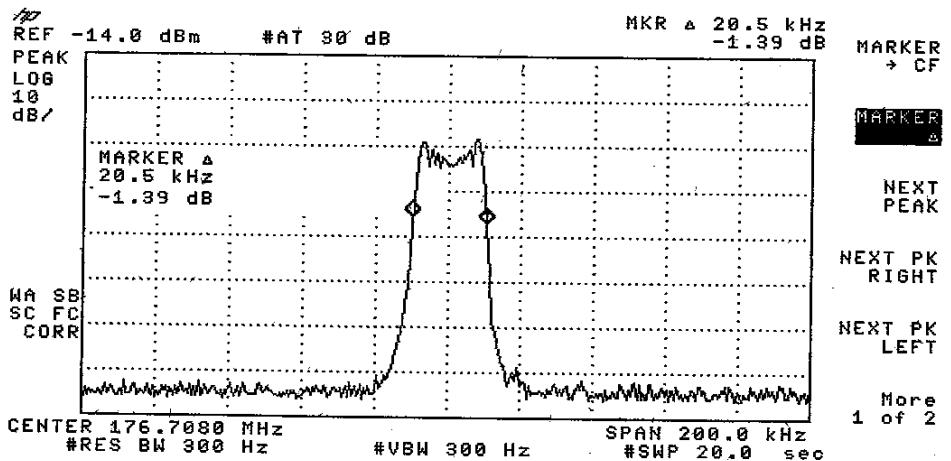

484 Hz

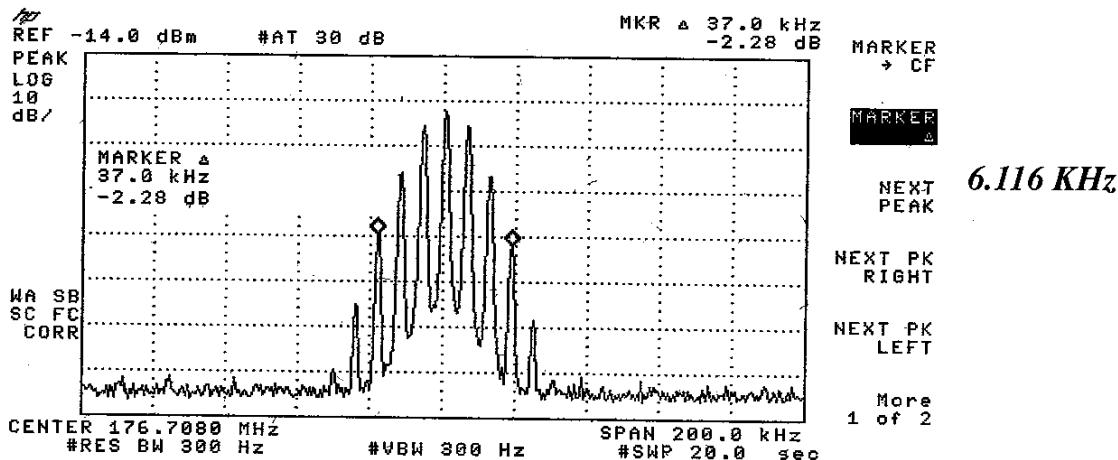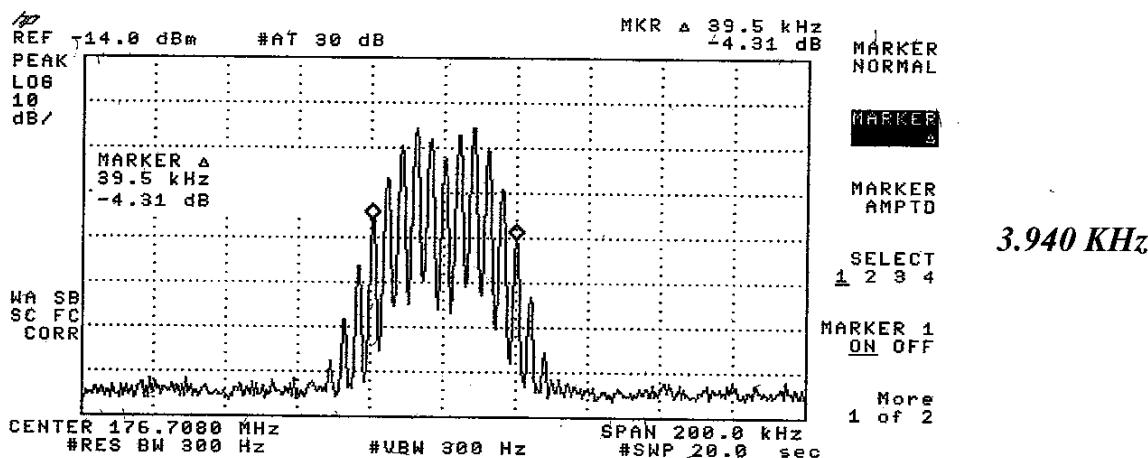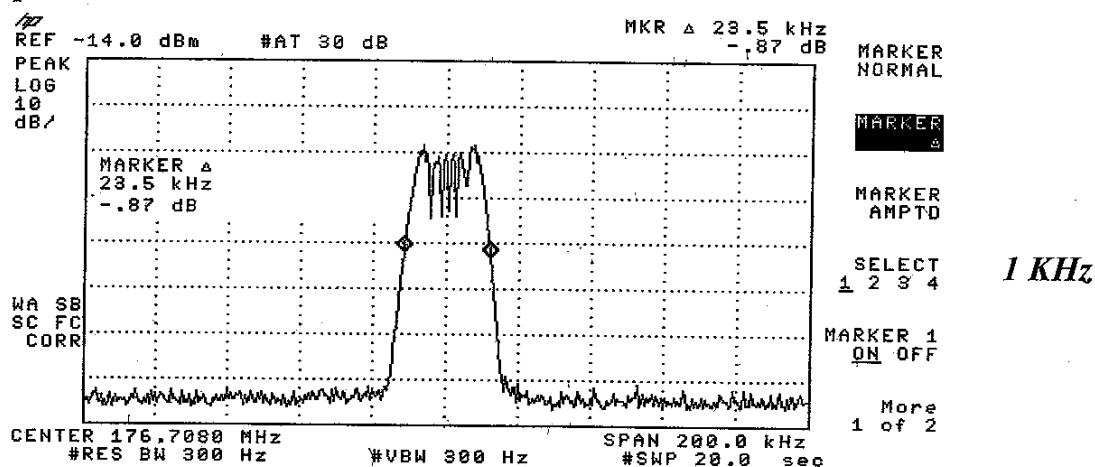

## Chapter 5 Field Strength of Spurious Radiation Measurement

### 5.1 Rules and Specification Limits

**2.993 ( a ) :** Measurements shall be made to detect spurious emissions that may be radiated directly from the cabinet, control circuits, Power leads, or intermediate circuit elements under normal conditions of installation and operation.

**74.861( e )( b )(iii) :** Spurious and harmonics must be at least  $43 + 10 \log$  (Output Power ) below the Carrier peak

**2.997 :** In all measurements set forth , the spectrum should be investigated from the lowest radio frequency generated in the equipment up to at least the 10<sup>th</sup> harmonic of the carrier frequency.

### 5.2 Measurement Condition & Setup

**Pretest :** The EUT is placed in a anechoic chamber, and scan from 30MHz to 1GHz.This is done to ensure the radiation exactly emits form the EUT.

**Final test :** Final radiation measurements is made on a **3 - meter, anechoic chamber.** The EUT is placed on a nonconductive table, which is 0.8m height, the top surface is 1.0 x 1.5 meter. All the placement is according to ANSI C63.4 - 1992.

The spectrum is examined from 30 MHz to 18 GHz measured by HP spectrum.

The SCHAFFNER and EMCO whole range Antenna is used to measure frequency from 30 MHz to 18 GHz. The final test is used the spectrum HP 8546A, HP 85460A and 8564E.

Measure more than six top marked frequencies generated form pretest by computer step by step at each frequency. The EUT is rotated 360 degrees, and antenna is raised and lowered from 1 to 4 meter to find the maximum emission levels. The antenna is used with both horizontal and vertical polarization.

Appropriated preamplifier which is made by TRC is used for improving sensitivity and precautions is taken to avoid overloading .The spectrum analyzer's 6dB bandwidth is set to 120 K Hz , and the EUT is measured at quasi-peak mode.

If the emission is close to the frequency band of ambient, the tester will recheck the data and the corrected data will be written in the test data sheet. If the emission is just within the ambient, the data from anechoic will be taken as the final data.

The actual field intensity in decibels referenced to 1 microvolt per meter (dB $\mu$ V/m) is determined by algebraically adding the measured reading in dB $\mu$ V, the antenna factor (dB) and cable loss (dB) at the appropriate frequency.

(1) Band of Frequency: (30M Hz ~ 1G Hz)

$$FI_a (\text{dB}\mu\text{V/m}) = FI_r (\text{dB}\mu\text{V}) - \text{Corrected (dB)}$$

$$\text{Corrected (dB)} = \text{AF(dB)} + \text{CL (dB)} - \text{Amplifier Gain}$$

FI<sub>a</sub> : Actual Field Intensity

FI<sub>r</sub> : Reading of the Field Intensity

AF : Antenna Factor

CL : Cable Loss

(2) Band of Frequency: (1G Hz ~ 18 G Hz)

$$FI_a (\text{dB}\mu\text{V/m}) = FI_r (\text{dB}\mu\text{V}) + \text{AF (dB)} + \text{CL(dB)}$$

FI<sub>a</sub> : Actual Field Intensity

FI<sub>r</sub> : Reading of the Field Intensity

AF : Antenna Factor


CL : Cable Loss

### 5.3 List of Measurement Instruments

Instrument Name	Model No.	Brand	Serial No.	Calibration Date
EMI Receiver	8546A	H P	3520A00242	10/18/99
RF Filter Section	85460A	H P	3448A00217	10/18/99
Bi-log Antenna	CBL6141A	SCHAFFNER	4150	05/21/99
Spectrum Analyzer	8564E	H P	US36433002	08/09/99
Antenna (1G-18G Hz)	3142	EMCO	5178	08/09/99
Anechoic Chamber (Amplify, cable calibrated together)				04/16/99
				04/16/00

The level of confidence of 95%, the uncertainty of measurement of radiated emission is  $\pm 4.96$  dB.

## 5.4 Measurement Configuration

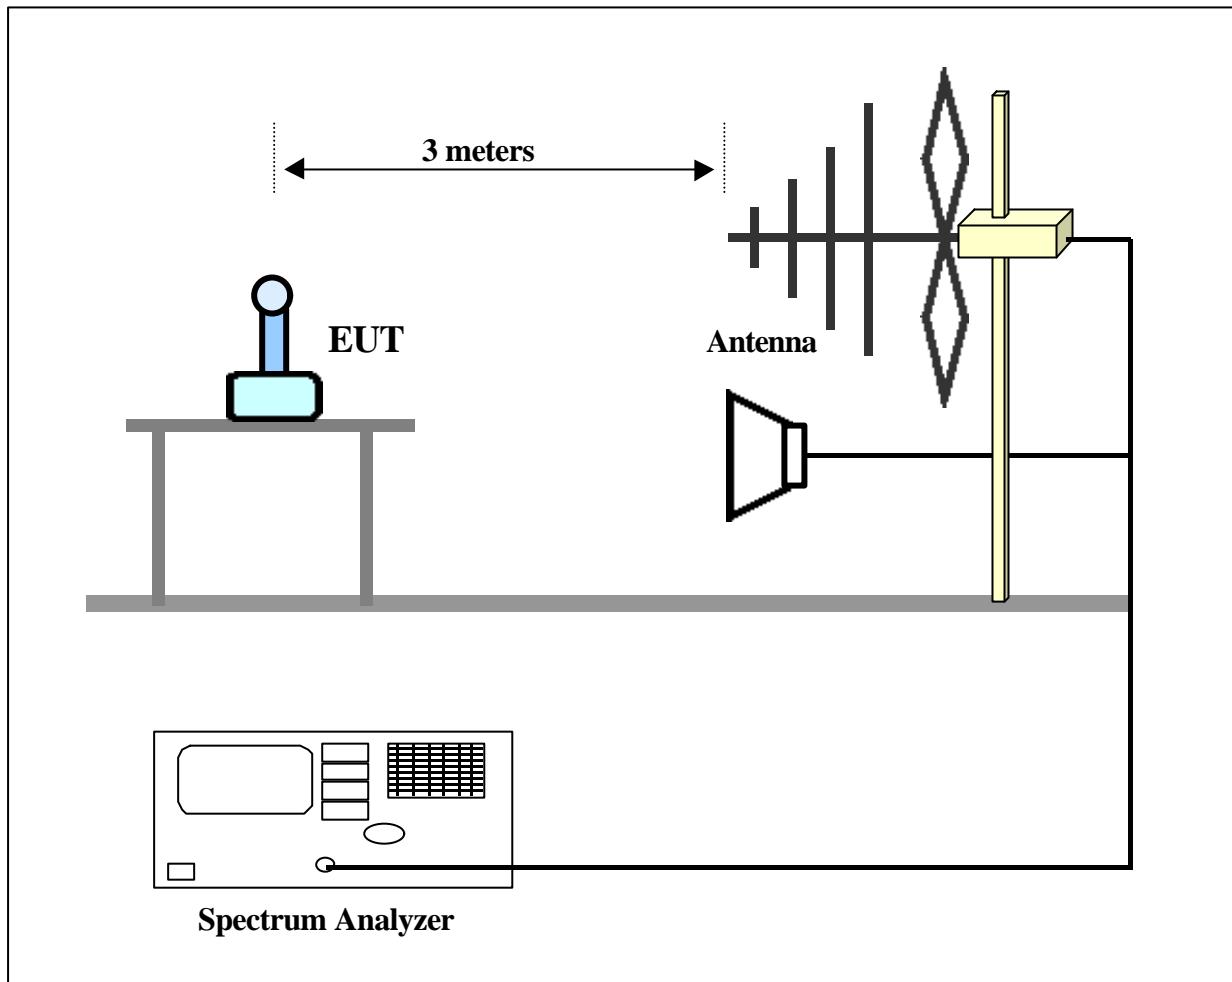



*Pic 1 Front View of Test Configuration*



*Pic 2 Rear View of the Test Configuration*

## 5.5 Measurement Result:

( Test Frequency: 174.233MHz , Horizontal , 30 MHz ~ 1 GHz )

Test Conditions:

Testing room : Temperature : 26 °C      Humidity : 73 % RH

Testing site : Temperature : 31 °C      Humidity : 75 % RH

Frequency	Reading Amplitude	Ant. Height	Table	Correction Factors	Corrected Amplitude	Limit	Margin
MHz	dB $\mu$ V	m	degree	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB

159.713	32.04	1.94	111	-14.28	46.32	84.38	-38.06
188.758	31.23	1.00	94	-12.71	43.94	84.38	-38.06
348.458	24.23	1.00	104	-18.12	42.35	84.38	-42.03
609.798	25.04	1.93	69	-23.19	48.23	84.38	-36.15
624.323	17.73	1.93	152	-23.23	40.96	84.38	-43.42
784.030	11.93	1.00	86	-26.20	38.13	84.38	-46.25
***							

Note:

1. Margin = Amplitude - limit, *if margin is minus means under limit.*
2. Corrected Amplitude = Reading Amplitude – Correction Factors
3. Correction factor = Antenna factor + ( Cable Loss – Amplitude Gain )  
( For example : 30MHz correction Amplitude = 15.5 – (–15.26) = 30.76 dB/m )
4. Attenuation required =  $43 + 10 \log ( 0.022505 \text{ mW} ) = -3.48$   
Limit =  $67.84 - (-80.90) = 84.38$

**Measurement Result:**

( Test Frequency: 174.233MHz , Horizontal , 1 GHz ~ 18 GHz )

<i>Radiated Emission</i>				<i>Correction Factors</i>	<i>Corrected Amplitude</i> (dB $\mu$ V/m)	<i>FCC Class B</i> (3 m)	
<i>Frequency</i> (GHz)	<i>Amplitude</i> (dB $\mu$ V/m)	<i>Ant. H.</i> (cm)	<i>Table</i> ( ° )	( dB )		<i>Limit</i> (dB $\mu$ V/m)	<i>Margin</i> (dB)
***							

***							

\*The emissions of this polarity are all under the limits more than twenty dB.

**Radiated Emission Test Result:**

( Test Frequency: 174.233MHz , Vertical , 30 MHz ~ 1 GHz )

Frequency	Reading Amplitude	Ant. Height	Table	Correction Factors	Corrected Amplitude	Limit	Margin
MHz	dB $\mu$ V	m	degree	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB
159.713	29.92	0.99	94	-13.42	43.34	84.38	-41.04
522.690	22.47	0.99	73	-22.23	44.70	84.38	-41.04
537.203	18.33	1.01	137	-22.69	41.02	84.38	-43.36
595.280	17.33	1.00	82	-23.52	40.85	84.38	-43.53
609.805	25.06	1.93	8	-23.54	48.60	84.38	-35.78
624.323	20.42	1.94	15	-23.55	43.97	84.38	-40.41
***							

**Radiated Emission Test Result:**

( Test Frequency: 174.233MHz , Vertical , 1 GHz ~ 18 GHz )

Radiated Emission				Correction Factors	Corrected Amplitude (dB $\mu$ V/m)	FCC Class B (3 m)	
Frequency (GHz)	Amplitude (dB $\mu$ V/m)	Ant. H. (cm)	Table ( ° )	( dB )		Limit (dB $\mu$ V/m)	Margin (dB)
1.030	54.01	1.00	6	-8.67	45.34	54.00	-8.01
***							

Note:

1. Margin = Corrected - Limit.
2. Peak Amplitude + Correction Factor = Corrected

**Measurement Result:**

( Test Frequency: 176.710MHz , Horizontal , 30 MHz ~ 1 GHz )

Frequency	Reading Amplitude	Ant. Height	Table	Correction Factors	Corrected Amplitude	Limit	Margin
MHz	dB $\mu$ V	m	degree	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB
191.440	23.92	1.00	91	-12.83	36.75	84.38	-47.63
221.890	19.52	1.00	0	-15.57	35.09	84.38	-47.63
353.420	19.10	1.00	90	-18.24	37.34	84.38	-47.04
618.480	18.24	1.00	79	-23.14	41.38	84.38	-43.00
633.210	23.58	1.00	71	-23.60	47.18	84.38	-37.20
647.930	9.88	1.00	142	-24.42	34.30	84.38	-50.08
662.660	9.03	1.00	0	-24.48	34.30	84.38	-50.08
***							

Note:

1. Margin = Amplitude - limit, *if margin is minus means under limit.*
2. Corrected Amplitude = Reading Amplitude – Correction Factors
3. Correction factor = Antenna factor + ( Cable Loss – Amplitude gain )  
( For example : 30MHz correction factor = 15.5 – (–15.26) = 30.76 dB/m )
4. Attenuation required =  $43 + 10 \log ( 0.002378 \text{ mW} ) = -13.24$   
Limit =  $71.14 - (-13.24) = 84.38$

**Measurement Result:**

( Test Frequency: 176.710MHz , Horizontal , 1 GHz ~ 18 GHz )

Radiated Emission				Correction Factors	Corrected Amplitude (dB $\mu$ V/m)	FCC Class B (3 m)	
Frequency (GHz)	Amplitude (dB $\mu$ V/m)	Ant. H. (cm)	Table ( ° )	( dB )		Limit (dB $\mu$ V/m)	Margin (dB)
***							

\*The emissions of this polarity are all under the limits more than twenty dB.

**Radiated Emission Test Result:**

( Test Frequency: 176.710MHz , Vertical , 30 MHz ~ 1 GHz )

Frequency	Reading Amplitude	Ant. Height	Table	Correction Factors	Corrected Amplitude	Limit	Margin
MHz	dB $\mu$ V	m	degree	dB/m	dB $\mu$ V/m	dB $\mu$ V/m	dB
176.720	50.91	1.00	116	-10.54	61.45	84.38	-22.93
485.950	12.15	1.00	60	-21.54	33.69	84.38	-22.93
530.130	13.12	1.00	92	-22.45	35.57	84.38	-48.81
544.860	19.76	1.00	133	-23.43	43.19	84.38	-41.19
618.490	16.73	1.93	51	-23.53	40.26	84.38	-44.12
633.210	21.34	1.00	100	-23.71	45.05	84.38	-39.33
942.450	4.10	1.00	6	-29.95	45.05	84.38	-39.33
***							

**Radiated Emission Test Result:**

( Test Frequency: 176.710MHz , Vertical , 1 GHz ~ 18 GHz )

Radiated Emission				Correction Factors	Corrected Amplitude (dB $\mu$ V/m)	FCC Class B (3 m)	
Frequency (GHz)	Amplitude (dB $\mu$ V/m)	Ant. H. (cm)	Table ( ° )	( dB )		Limit (dB $\mu$ V/m)	Margin (dB)
***							

\*The emissions of this polarity are all under the limits more than twenty dB.

## Chapter 6 Frequency Stability Tolerance Measurement

### 6.1 Rules and Specification Limits

2.995

74.861(e)(4): The frequency tolerance of the transmitter shall be 0.005 percent.


### 6.2 Measurement Condition & Setup with Temperature Variation

1. Place the EUT in the chamber, powered in its normal operation.
2. Set the temperature of the chamber -30 degree Centigrade. Allow the equipment to stabilize at that temperature.
3. Measured the carrier frequency using preamplifier and frequency counter.
4. Repeated procedures 1 to 3 from -20 to 50 degree Centigrade at intervals of 10 degree.

### 6.3 List of Measurement Instruments with Temperature Variation List of test Instrument :

Instrument Name	Model No.	Brand	Remark
Spectrum Analyzer	8591A	H P	1.8GHz
Temperature Chamber	THS-MV2	King Son	
Near field Probe	7405-901	EMCO	
Power Supply	GPR-6030	Good Will	
Auto Transformer	Powerstat	Supprior Elec. Co.	

#### 6.4 Measurement Configuration of Temperature Variation Test:

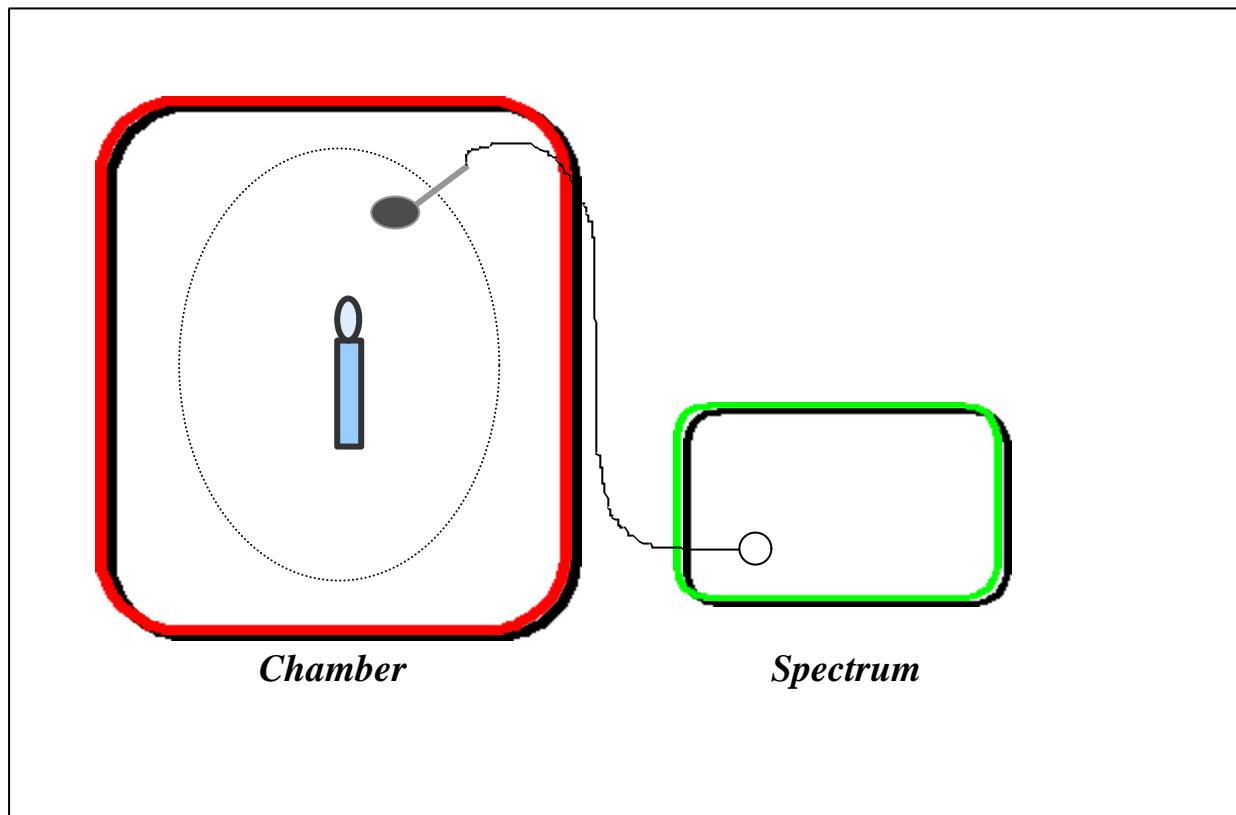


## 6.5 Measurement Result with Temperature Variation

A plot and table is presented which illustrates compliance with the rule where the center frequency is 176.710 MHz.

**Temperature Variation Table**

<b>Temperature ( Centigrade )</b>	<b>Frequency ( MHz )</b>	<b>Tolerance ( MHz )</b>
-30	176.711885	176.701165 ~ 176.718836
-20	176.711724	176.701165 ~ 176.718836
-10	176.709801	176.701165 ~ 176.718836
0	176.708453	176.701165 ~ 176.718836
10	176.707398	176.701165 ~ 176.718836
20	176.707980	176.701165 ~ 176.718836
30	176.707980	176.701165 ~ 176.718836
40	176.707693	176.701165 ~ 176.718836
50	176.706854	176.701165 ~ 176.718836

**Temperatuer Variation Vs. Frequency Chart**

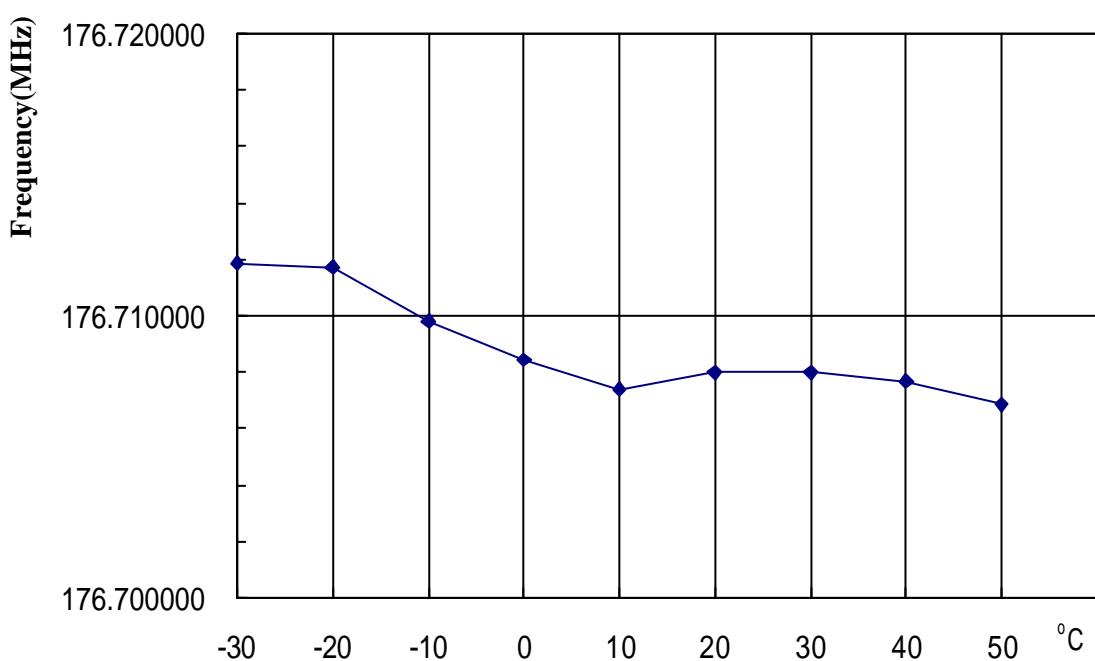


## 6.6 Measurement Condition & Setup with Voltage Variation

1. Attached the power line of the power supply to the battery position of the EUT.
2. Tuned the output power level to battery end point, 85 %, 100%, 115% of the normal operation power of EUT.
3. Recorded the frequency with a frequency counter.

## 6.7 List of Test Instrument :

Instrument Name	Model No.	Brand	Remark
Spectrum Analyzer	8591A	H P	1.8GHz
Temperature Chamber	THS-MV2	King Son	
Near field Probe	7405-901	EMCO	
Power Supply	GPR-6030	Good Will	
Auto Transformer	Powerstat	Supprior Elec. Co.	

## 6.8 Configuration of Voltage Variation Test :

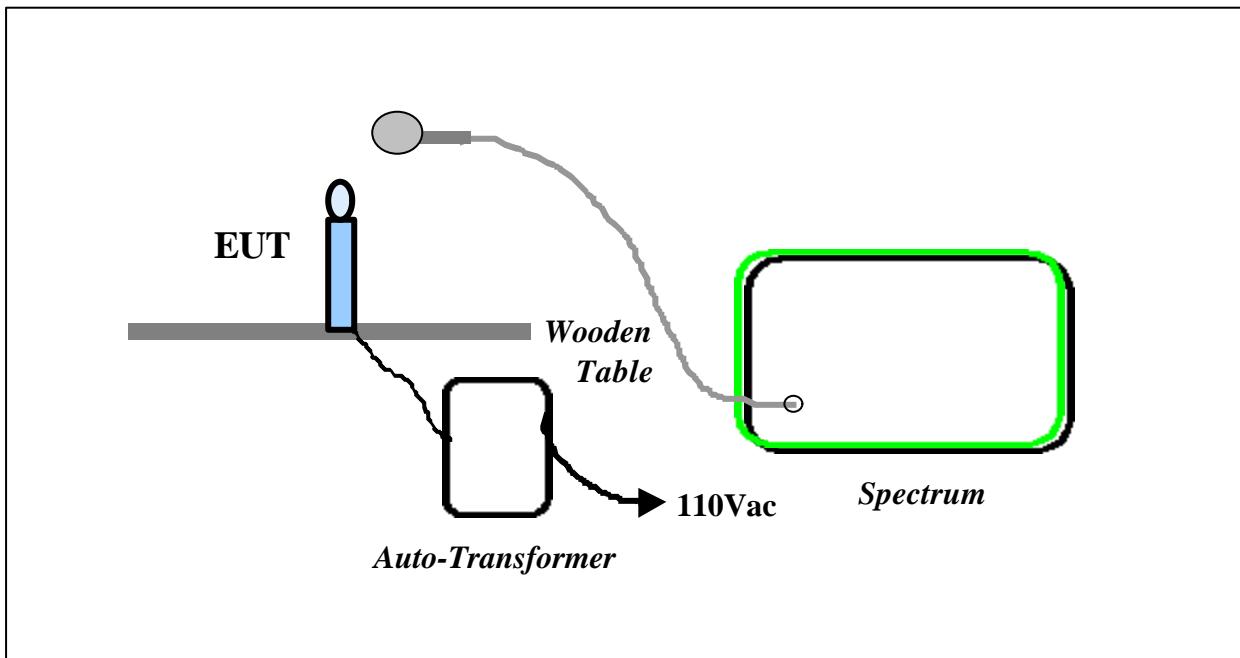

## 6.9 Measurement Result with Voltage Variation

**Frequency Stability of Voltage Variation Measurement Table**

<i>Supply Voltage ( Volt )</i>	<i>Frequency ( MHz )</i>	<i>Tolerance ( MHz )</i>
7.65 ( 85% )	176.708028	176.701165 ~ 176.718836
9 ( 100% )	176.708083	176.701165 ~ 176.718836
10.35 ( 115% )	176.708035	176.701165 ~ 176.718836
<b>Endpoint-Voltage : 5.98 V</b>		

**Voltage Variation Vs. Frequency Chart**

