


# FCC Radio Test Report

## FCC ID: KA2AP3711A1


This report concerns: Original Grant

**Project No.** : 2004H005  
**Equipment** : 5km Long Range 802.11ac Wireless Bridge  
**Brand Name** : D-Link Corporation  
**Test Model** : DAP-3711  
**Series Model** : N/A  
**Applicant** : D-Link Corporation  
**Address** : 17595 Mt. Herrmann, Fountain Valley, California United State 92708  
**Manufacturer** : D-Link Corporation  
**Address** : No.289, SinHu 3rd Rd.,Neihi District Taiper City 114, Taiwan, R.O.C  
**Date of Receipt** : Apr. 17, 2020  
**Date of Test** : May 04, 2020 ~ May 14, 2020  
**Issued Date** : Aug. 07, 2020  
**Report Version** : R03  
**Test Sample** : Engineering Sample No.: SH202004176/SH202004177/SH2020041715  
**Standard(s)** : FCC Part15, Subpart E(15.407)  
                   ANSI C63.10-2013  
                   FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01  
                   FCC KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.



Prepared by : Krain Wu



Approved by : Ryan Wang



Certificate # 5123. 03

Add: No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210,China

TEL: +86-021-61765666

Web: [www.newbtl.com](http://www.newbtl.com)

**Declaration**

**BTL** represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

**BTL's** reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

**BTL's** laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

**BTL** is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

**Limitation**

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

| <b>Table of Contents</b>                                     | <b>Page</b> |
|--------------------------------------------------------------|-------------|
| <b>REPORT ISSUED HISTORY</b>                                 | <b>5</b>    |
| <b>1 . SUMMARY OF TEST RESULTS</b>                           | <b>6</b>    |
| 1.1 TEST FACILITY                                            | 7           |
| 1.2 MEASUREMENT UNCERTAINTY                                  | 7           |
| 1.3 TEST ENVIRONMENT CONDITIONS                              | 7           |
| <b>2 . GENERAL INFORMATION</b>                               | <b>8</b>    |
| 2.1 GENERAL DESCRIPTION OF EUT                               | 8           |
| 2.2 TEST MODES                                               | 11          |
| 2.3 PARAMETERS OF TEST SOFTWARE                              | 13          |
| 2.4 DUTY CYCLE                                               | 14          |
| 2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED | 16          |
| 2.6 SUPPORT UNITS                                            | 16          |
| <b>3 . AC POWER LINE CONDUCTED EMISSIONS TEST</b>            | <b>17</b>   |
| 3.1 LIMIT                                                    | 17          |
| 3.2 TEST PROCEDURE                                           | 17          |
| 3.3 DEVIATION FROM TEST STANDARD                             | 17          |
| 3.4 TEST SETUP                                               | 18          |
| 3.5 EUT OPERATION CONDITIONS                                 | 18          |
| 3.6 TEST RESULTS                                             | 18          |
| <b>4 . RADIATED EMISSIONS TEST</b>                           | <b>19</b>   |
| 4.1 LIMIT                                                    | 19          |
| 4.2 TEST PROCEDURE                                           | 20          |
| 4.3 DEVIATION FROM TEST STANDARD                             | 20          |
| 4.4 TEST SETUP                                               | 21          |
| 4.5 EUT OPERATION CONDITIONS                                 | 23          |
| 4.6 TEST RESULTS - 9 KHZ to 30 MHZ                           | 23          |
| 4.7 TEST RESULTS - 30 MHz TO 1000 MHz                        | 23          |
| 4.8 TEST RESULTS - ABOVE 1000 MHz                            | 23          |
| <b>5 . BANDWIDTH TEST</b>                                    | <b>24</b>   |
| 5.1 LIMIT                                                    | 24          |
| 5.2 TEST PROCEDURE                                           | 24          |
| 5.3 TEST PROCEDURE                                           | 24          |
| 5.4 TEST SETUP                                               | 25          |

| <b>Table of Contents</b>                                | <b>Page</b> |
|---------------------------------------------------------|-------------|
| 5.5 EUT OPERATION CONDITIONS                            | 25          |
| 5.6 TEST RESULTS                                        | 25          |
| <b>6 . MAXIMUM OUTPUT POWER TEST</b>                    | <b>26</b>   |
| 6.1 LIMIT                                               | 26          |
| 6.2 TEST PROCEDURE                                      | 26          |
| 6.3 DEVIATION FROM STANDARD                             | 26          |
| 6.4 TEST SETUP                                          | 26          |
| 6.5 EUT OPERATION CONDITIONS                            | 26          |
| 6.6 TEST RESULTS                                        | 26          |
| <b>7 . POWER SPECTRAL DENSITY TEST</b>                  | <b>27</b>   |
| 7.1 LIMIT                                               | 27          |
| 7.2 TEST PROCEDURE                                      | 27          |
| 7.3 DEVIATION FROM STANDARD                             | 27          |
| 7.4 TEST SETUP                                          | 28          |
| 7.5 EUT OPERATION CONDITIONS                            | 28          |
| 7.6 TEST RESULTS                                        | 28          |
| <b>8 . MEASUREMENT INSTRUMENTS LIST</b>                 | <b>29</b>   |
| <b>9 . EUT TEST PHOTOS</b>                              | <b>31</b>   |
| <b>APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS</b>   | <b>34</b>   |
| <b>APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ</b> | <b>37</b>   |
| <b>APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1 GHZ</b> | <b>38</b>   |
| <b>APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ</b>  | <b>41</b>   |
| <b>APPENDIX E - BANDWIDTH</b>                           | <b>154</b>  |
| <b>APPENDIX F - CONDUCTED OUTPUT POWER</b>              | <b>165</b>  |
| <b>APPENDIX G - POWER SPECTRAL DENSITY</b>              | <b>181</b>  |

**REPORT ISSUED HISTORY**

| Report Version | Description                                                 | Issued Date   |
|----------------|-------------------------------------------------------------|---------------|
| R00            | Original Issue.                                             | Jun. 15, 2020 |
| R01            | Correct the limit of output power & power spectral density. | Jun. 29, 2020 |
| R02            | Update the data of Band 1.                                  | Jul. 21, 2020 |
| R03            | Revised report to address TCB's comments.                   | Aug. 07, 2020 |

## 1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

| FCC Part15, Subpart E(15.407)       |                                           |                                        |           |          |
|-------------------------------------|-------------------------------------------|----------------------------------------|-----------|----------|
| Standard(s)<br>Section              | Test Item                                 | Test Result                            | Judgement | Remark   |
| 15.207<br>15.407(b)                 | AC Power Line Conducted Emissions         | APPENDIX A                             | PASS      | -----    |
| 15.407(b)<br>15.205(a)<br>15.209(a) | Radiated Emissions                        | APPENDIX B<br>APPENDIX C<br>APPENDIX D | PASS      | -----    |
| 15.407(a)<br>15.407(e)              | Spectrum Bandwidth                        | APPENDIX E                             | PASS      | -----    |
| 15.407(a)                           | Maximum Output Power                      | APPENDIX F                             | PASS      | -----    |
| 15.407(a)                           | Power Spectral Density                    | APPENDIX G                             | PASS      | -----    |
| 15.407(g)                           | Frequency Stability                       | APPENDIX H                             | PASS      | -----    |
| 15.203                              | Antenna Requirements                      | -----                                  | PASS      | NOTE (3) |
| 15.407(c)                           | Automatically Discontinue<br>Transmission | -----                                  | PASS      | NOTE (3) |

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a  
☒ Access point device    ☐ Client device

### 1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China  
 BTL's Test Firm Registration Number for FCC: 476765  
 BTL's Designation Number for FCC: CN1241

### 1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ ))  
 The BTL measurement uncertainty as below table:

#### A. AC Power Line Conducted Emissions test:

| Test Site | Method | Measurement Frequency Range | U, (dB) |
|-----------|--------|-----------------------------|---------|
| SH-C01    | CISPR  | 9 kHz ~ 150 MHz             | 2.92    |

#### B. Radiated emissions test:

| Test Site | Method | Measurement Frequency Range | Ant. H / V | U, (dB) |
|-----------|--------|-----------------------------|------------|---------|
| SH-CB01   | CISPR  | 9 KHz~30 MHz                | V          | 3.79    |
|           |        | 9 KHz~30 MHz                | H          | 3.57    |
|           |        | 30 MHz~200 MHz              | V          | 4.04    |
|           |        | 30 MHz~200 MHz              | H          | 3.76    |
|           |        | 200 MHz~1,000 MHz           | V          | 4.24    |
|           |        | 200 MHz~1,000 MHz           | H          | 3.84    |
|           |        | 1 GHz~18 GHz                | V          | 4.46    |
|           |        | 1 GHz~18 GHz                | H          | 4.40    |
|           |        | 18 GHz~40 GHz               | V          | 3.95    |
|           |        | 18 GHz~40 GHz               | H          | 3.95    |

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

### 1.3 TEST ENVIRONMENT CONDITIONS

| Test Item                         | Temperature      | Humidity | Test Voltage     | Tested By  |
|-----------------------------------|------------------|----------|------------------|------------|
| AC Power Line Conducted Emissions | 25.7°C           | 49%      | AC 120V          | Forest Li  |
| Radiated Emissions-9K-30MHz       | 23°C             | 46%      | AC 120V          | Vince Zong |
| Radiated Emissions-30 MHz to 1GHz | 23°C             | 46%      | AC 120V          | Vince Zong |
| Radiated Emissions-Above 1000 MHz | 23°C             | 46%      | AC 120V          | Vince Zong |
| Spectrum Bandwidth                | 25.7°C           | 49%      | AC 120V          | Forest Li  |
| Maximum Output Power              | 25.7°C           | 49%      | AC 120V          | Forest Li  |
| Power Spectral Density            | 25.7°C           | 49%      | AC 120V          | Forest Li  |
| Frequency Stability               | Normal & Extreme | 49%      | Normal & Extreme | Forest Li  |

## 2. GENERAL INFORMATION

### 2.1 GENERAL DESCRIPTION OF EUT

|                                                                 |                                                                                                                                                                                                                                                                           |
|-----------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Equipment                                                       | 5km Long Range 802.11ac Wireless Bridge                                                                                                                                                                                                                                   |
| Brand Name                                                      | D-Link Corporation                                                                                                                                                                                                                                                        |
| Test Model                                                      | DAP-3711                                                                                                                                                                                                                                                                  |
| Series Model                                                    | N/A                                                                                                                                                                                                                                                                       |
| Model Difference(s)                                             | N/A                                                                                                                                                                                                                                                                       |
| Software Version                                                | v1.0.2                                                                                                                                                                                                                                                                    |
| Hardware Version                                                | A1                                                                                                                                                                                                                                                                        |
| Power Source                                                    | PoE supplied.                                                                                                                                                                                                                                                             |
| Power Rating                                                    | I/P: 100~240V 0.35A<br>O/P: 24V 0.5A                                                                                                                                                                                                                                      |
| Operation Frequency                                             | UNII-1: 5150 MHz~5250 MHz<br>UNII-3: 5725 MHz~5850 MHz                                                                                                                                                                                                                    |
| Modulation Type                                                 | OFDM                                                                                                                                                                                                                                                                      |
| Bit Rate of Transmitter                                         | Up to 866Mbps                                                                                                                                                                                                                                                             |
| Maximum Conducted Output Power for UNII-1 (2TX) Non-Beamforming | IEEE 802.11a: 16.08 dBm (0.0406 W)<br>IEEE 802.11n (HT20): 16.44 dBm (0.0441 W)<br>IEEE 802.11n (HT40): 17.56 dBm (0.0570 W)<br>IEEE 802.11ac (VHT20): 16.10 dBm (0.0407 W)<br>IEEE 802.11ac (VHT40): 17.83 dBm (0.0607 W)<br>IEEE 802.11ac (VHT80): 15.65 dBm (0.0367 W) |
| Maximum Conducted Output Power for UNII-3 (2TX) Non-Beamforming | IEEE 802.11a: 17.63 dBm (0.0579 W)<br>IEEE 802.11n (HT20): 17.96 dBm (0.0625 W)<br>IEEE 802.11n (HT40): 17.88 dBm (0.0614 W)<br>IEEE 802.11ac (VHT20): 17.62 dBm (0.0578 W)<br>IEEE 802.11ac (VHT40): 17.75 dBm (0.0596 W)<br>IEEE 802.11ac (VHT80): 17.61 dBm (0.0577 W) |

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.



## 2. Channel List:

| IEEE 802.11a<br>IEEE 802.11n (HT20)<br>IEEE 802.11ac (VHT20) |                 | IEEE 802.11n (HT40)<br>IEEE 802.11ac (VHT40) |                 | IEEE 802.11ac (VHT80) |                 |
|--------------------------------------------------------------|-----------------|----------------------------------------------|-----------------|-----------------------|-----------------|
| UNII-1                                                       |                 | UNII-1                                       |                 | UNII-1                |                 |
| Channel                                                      | Frequency (MHz) | Channel                                      | Frequency (MHz) | Channel               | Frequency (MHz) |
| 36                                                           | 5180            | 38                                           | 5190            | 42                    | 5210            |
| 40                                                           | 5200            | 46                                           | 5230            |                       |                 |
| 44                                                           | 5220            |                                              |                 |                       |                 |
| 48                                                           | 5240            |                                              |                 |                       |                 |

| IEEE 802.11a<br>IEEE 802.11n (HT20)<br>IEEE 802.11ac (VHT20) |                 | IEEE 802.11n (HT40)<br>IEEE 802.11ac (VHT40) |                 | IEEE 802.11ac (VHT80) |                 |
|--------------------------------------------------------------|-----------------|----------------------------------------------|-----------------|-----------------------|-----------------|
| UNII-3                                                       |                 | UNII-3                                       |                 | UNII-3                |                 |
| Channel                                                      | Frequency (MHz) | Channel                                      | Frequency (MHz) | Channel               | Frequency (MHz) |
| 149                                                          | 5745            | 151                                          | 5755            | 155                   | 5775            |
| 153                                                          | 5765            | 159                                          | 5795            |                       |                 |
| 157                                                          | 5785            |                                              |                 |                       |                 |
| 161                                                          | 5805            |                                              |                 |                       |                 |
| 165                                                          | 5825            |                                              |                 |                       |                 |

### 3. Antenna Specification:

| Ant. | Brand | Model Name | Antenna Type | Connector | Gain (dBi) | Note |
|------|-------|------------|--------------|-----------|------------|------|
| 1    | N/A   | N/A        | PCB          | N/A       | 15         | N/A  |
| 2    | N/A   | N/A        | PCB          | N/A       | 15         | N/A  |

Note:

- (1) Antenna Gain=15 dBi. This EUT supports MIMO 2X2, any transmit signals are correlated with each other, so Directional gain =  $G_{Ant.} + 10\log(N)$  dBi, that is Directional gain =  $15 + 10\log(2)$  dBi = 18.01; So, the UNII-1, UNII-3 output power limit is  $30 - 18.01 + 6 = 17.99$ .

The UNII-1 power spectral density limit is  $17 - 18.01 + 6 = 4.99$ , the UNII-3 power spectral density limit is  $30 - 18.01 + 6 = 17.99$ .

### 4. Table for Antenna Configuration:

| Operating Mode        | TX Mode | 2TX                 |
|-----------------------|---------|---------------------|
| IEEE 802.11a          |         | V (Ant. 1 + Ant. 2) |
| IEEE 802.11n (HT20)   |         | V (Ant. 1 + Ant. 2) |
| IEEE 802.11n (HT40)   |         | V (Ant. 1 + Ant. 2) |
| IEEE 802.11ac (VHT20) |         | V (Ant. 1 + Ant. 2) |
| IEEE 802.11ac (VHT40) |         | V (Ant. 1 + Ant. 2) |
| IEEE 802.11ac (VHT80) |         | V (Ant. 1 + Ant. 2) |

## 2.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

| Pretest Mode | Description                                     |
|--------------|-------------------------------------------------|
| Mode 1       | TX A Mode / CH36, CH40, CH48 (UNII-1)           |
| Mode 2       | TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)    |
| Mode 3       | TX N (HT40) Mode / CH38, CH46 (UNII-1)          |
| Mode 4       | TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)  |
| Mode 5       | TX AC (VHT40) Mode / CH38, CH46 (UNII-1)        |
| Mode 6       | TX AC (VHT80) Mode / CH42 (UNII-1)              |
| Mode 7       | TX A Mode / CH149,CH157,CH165 (UNII-3)          |
| Mode 8       | TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)   |
| Mode 9       | TX N (HT40) Mode / CH151,CH159 (UNII-3)         |
| Mode 10      | TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3) |
| Mode 11      | TX AC (VHT40) Mode / CH151,CH159 (UNII-3)       |
| Mode 12      | TX AC (VHT80) Mode / CH155 (UNII-3)             |
| Mode 13      | TX AC(VHT80) Mode / CH155 (UNII-3)              |

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

| AC power line conducted emissions test |                                    |
|----------------------------------------|------------------------------------|
| Final Test Mode                        | Description                        |
| Mode 13                                | TX AC(VHT80) Mode / CH155 (UNII-3) |

| Radiated emissions test |                                                 |
|-------------------------|-------------------------------------------------|
| Final Test Mode         | Description                                     |
| Mode 1                  | TX A Mode / CH36, CH40, CH48 (UNII-1)           |
| Mode 2                  | TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)    |
| Mode 3                  | TX N (HT40) Mode / CH38, CH46 (UNII-1)          |
| Mode 4                  | TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)  |
| Mode 5                  | TX AC (VHT40) Mode / CH38, CH46 (UNII-1)        |
| Mode 6                  | TX AC (VHT80) Mode / CH42 (UNII-1)              |
| Mode 7                  | TX A Mode / CH149,CH157,CH165 (UNII-3)          |
| Mode 8                  | TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)   |
| Mode 9                  | TX N (HT40) Mode / CH151,CH159 (UNII-3)         |
| Mode 10                 | TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3) |
| Mode 11                 | TX AC (VHT40) Mode / CH151,CH159 (UNII-3)       |
| Mode 12                 | TX AC (VHT80) Mode / CH155 (UNII-3)             |

| Conducted test |                                                    |
|----------------|----------------------------------------------------|
| Test Mode      | Description                                        |
| Mode 1         | TX A Mode / CH36, CH40, CH48 (UNII-1)              |
| Mode 2         | TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)       |
| Mode 3         | TX N (HT40) Mode / CH38, CH46 (UNII-1)             |
| Mode 4         | TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)     |
| Mode 5         | TX AC (VHT40) Mode / CH38, CH46 (UNII-1)           |
| Mode 6         | TX AC (VHT80) Mode / CH42 (UNII-1)                 |
| Mode 7         | TX A Mode / CH52, CH60, CH64 (UNII-2A)             |
| Mode 8         | TX N (HT20) Mode / CH52, CH60, CH64 (UNII-2A)      |
| Mode 9         | TX N (HT40) Mode / CH54, CH62 (UNII-2A)            |
| Mode 10        | TX AC (VHT20) Mode / CH52, CH60, CH64 (UNII-2A)    |
| Mode 11        | TX AC (VHT40) Mode / CH54, CH62 (UNII-2A)          |
| Mode 12        | TX AC (VHT80) Mode / CH58 (UNII-2A)                |
| Mode 13        | TX A Mode / CH100, CH116, CH140 (UNII-2C)          |
| Mode 14        | TX N (HT20) Mode / CH100, CH116, CH140 (UNII-2C)   |
| Mode 15        | TX N (HT40) Mode / CH102, CH110, CH134 (UNII-2C)   |
| Mode 16        | TX AC (VHT20) Mode / CH100, CH116, CH140 (UNII-2C) |
| Mode 17        | TX AC (VHT40) Mode / CH102, CH110, CH134 (UNII-2C) |
| Mode 18        | TX AC (VHT80) Mode / CH106, CH122 (UNII-2C)        |
| Mode 19        | TX A Mode / CH149,CH157,CH165 (UNII-3)             |
| Mode 20        | TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)      |
| Mode 21        | TX N (HT40) Mode / CH151,CH159 (UNII-3)            |
| Mode 22        | TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)    |
| Mode 23        | TX AC (VHT40) Mode / CH151,CH159 (UNII-3)          |
| Mode 24        | TX AC (VHT80) Mode / CH155 (UNII-3)                |

Note:

- (1) For radiated emission below 1 GHz test, the IEEE 802.11ac80 is found to be the worst case and recorded.
- (2) For radiated emission above 1 GHz test, 1GHz~26.5GHz and 26.5GHz~40GHz have been pre-tested and in this report only recorded the worst case. The remaining spurious points are all below the limit value of 20dB.


## 2.3 PARAMETERS OF TEST SOFTWARE

| Test Software         | artgui |      |      |
|-----------------------|--------|------|------|
| Test Frequency (MHz)  | 5180   | 5200 | 5240 |
| IEEE 802.11a          | 13     | 13   | 13   |
| IEEE 802.11n (HT20)   | 13     | 13   | 13   |
| IEEE 802.11ac (VHT20) | 13     | 13   | 13   |
| Test Frequency (MHz)  | 5190   | 5230 |      |
| IEEE 802.11n (HT40)   | 14.5   | 14.5 |      |
| IEEE 802.11ac (VHT40) | 14     | 14.5 |      |
| Test Frequency (MHz)  | 5745   | 5785 | 5825 |
| IEEE 802.11a          | 14     | 13.5 | 13   |
| IEEE 802.11n (HT20)   | 13.5   | 13.5 | 13   |
| IEEE 802.11ac (VHT20) | 13.5   | 13.5 | 13   |
| Test Frequency (MHz)  | 5755   | 5795 |      |
| IEEE 802.11n (HT40)   | 14     | 14   |      |
| IEEE 802.11ac (VHT40) | 14     | 13.5 |      |
| Test Frequency (MHz)  | 5210   |      |      |
| IEEE 802.11ac (VHT80) | 12.5   |      |      |
| Test Frequency (MHz)  | 5775   |      |      |
| IEEE 802.11ac (VHT80) | 14     |      |      |

## 2.4 DUTY CYCLE

If duty cycle is  $\geq 98\%$ , duty factor is not required.  
 If duty cycle is  $< 98\%$ , duty factor shall be considered.  
 The output power = measured power + duty factor.


### IEEE 802.11a

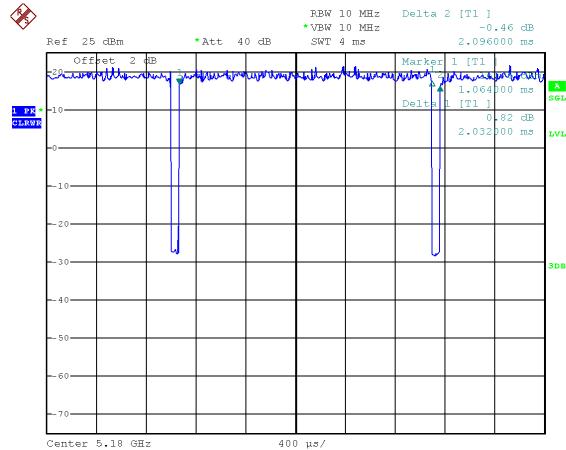

Date: 27.APR.2020 15:39:34

Duty cycle =  $2.032 \text{ ms} / 2.096 \text{ ms} = 96.95\%$   
 Duty Factor =  $10 * \log(1 / \text{Duty cycle}) = 0.13 \text{ dB}$


### IEEE 802.11n (HT40)

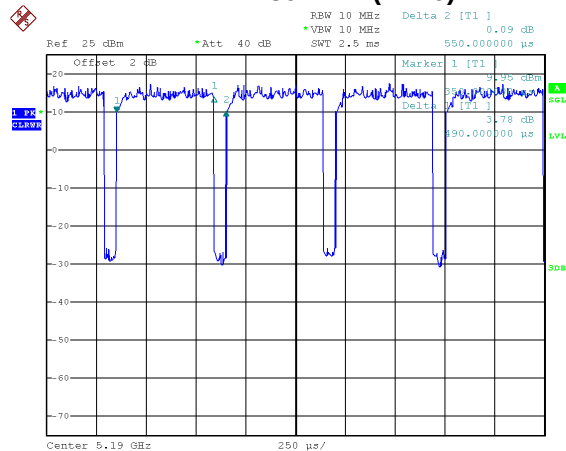

Date: 27.APR.2020 15:45:47

Duty cycle =  $0.490 \text{ ms} / 0.550 \text{ ms} = 89.09\%$   
 Duty Factor =  $10 * \log(1 / \text{Duty cycle}) = 0.50 \text{ dB}$


### IEEE 802.11n (HT20)

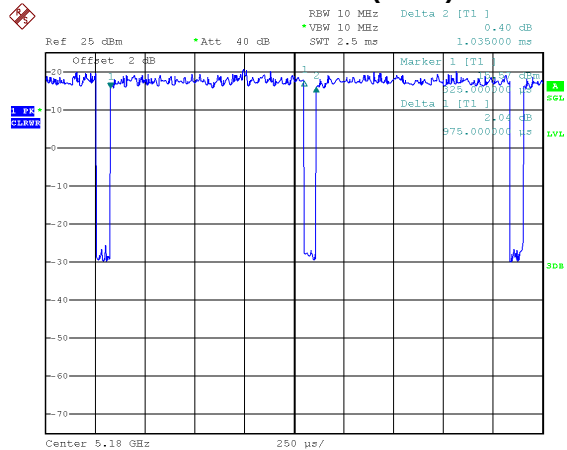

Date: 27.APR.2020 15:44:46

Duty cycle =  $0.975 \text{ ms} / 1.035 \text{ ms} = 94.20\%$   
 Duty Factor =  $10 * \log(1 / \text{Duty cycle}) = 0.26 \text{ dB}$


### IEEE 802.11ac (VHT20)

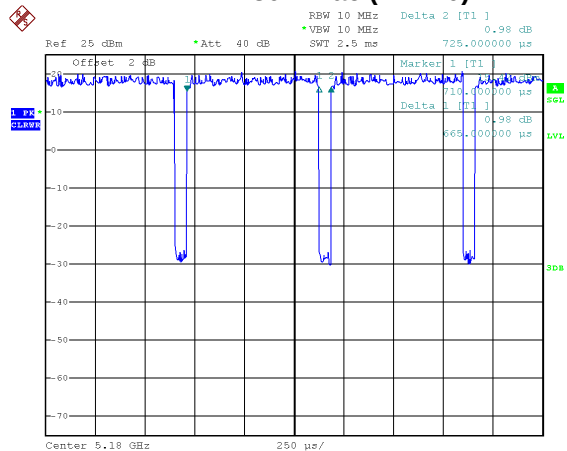

Date: 27.APR.2020 15:46:34

Duty cycle =  $0.665 \text{ ms} / 0.725 \text{ ms} = 91.72\%$   
 Duty Factor =  $10 * \log(1 / \text{Duty cycle}) = 0.11 \text{ dB}$


## IEEE 802.11ac (VHT40)

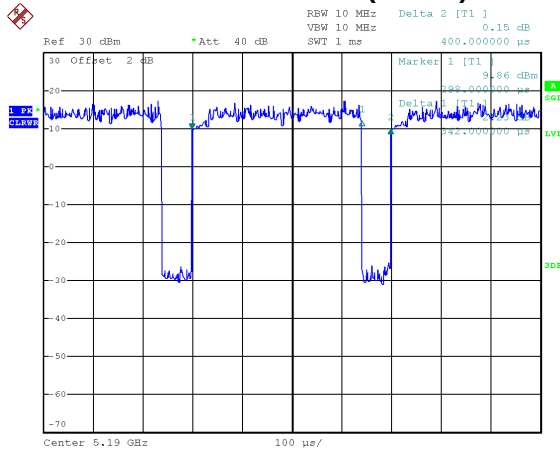

Date: 27.APR.2020 15:56:38

Duty cycle = 0.342 ms / 0.400 ms = 85.50%  
Duty Factor = 10 \* log(1 / Duty cycle) = 0.68 dB

## IEEE 802.11ac (VHT80)

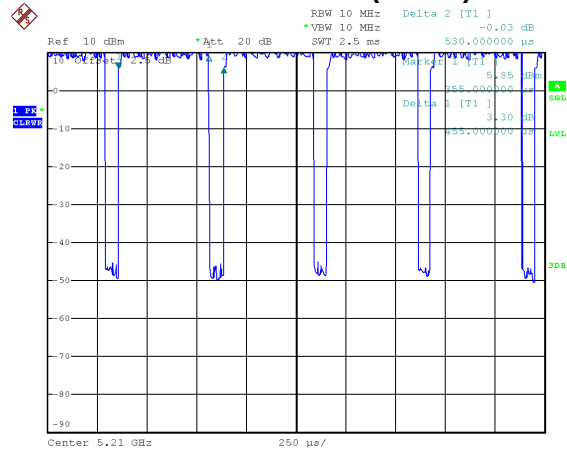

Date: 8.MAY.2020 18:27:41

Duty cycle = 0.455 ms / 0.530 ms = 85.85%  
Duty Factor = 10 \* log(1 / Duty cycle) = 0.66 dB

### NOTE:

For IEEE 802.11a:

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 0.49 kHz (Duty cycle < 98%).

For IEEE 802.11n (HT20) and IEEE 802.11ac (VHT20):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 1.50 kHz (Duty cycle < 98%).


For IEEE 802.11n (HT40) and IEEE 802.11ac (VHT40):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2.92 kHz (Duty cycle < 98%).

For IEEE 802.11ac (VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 2.19 kHz (Duty cycle < 98%).

## 2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

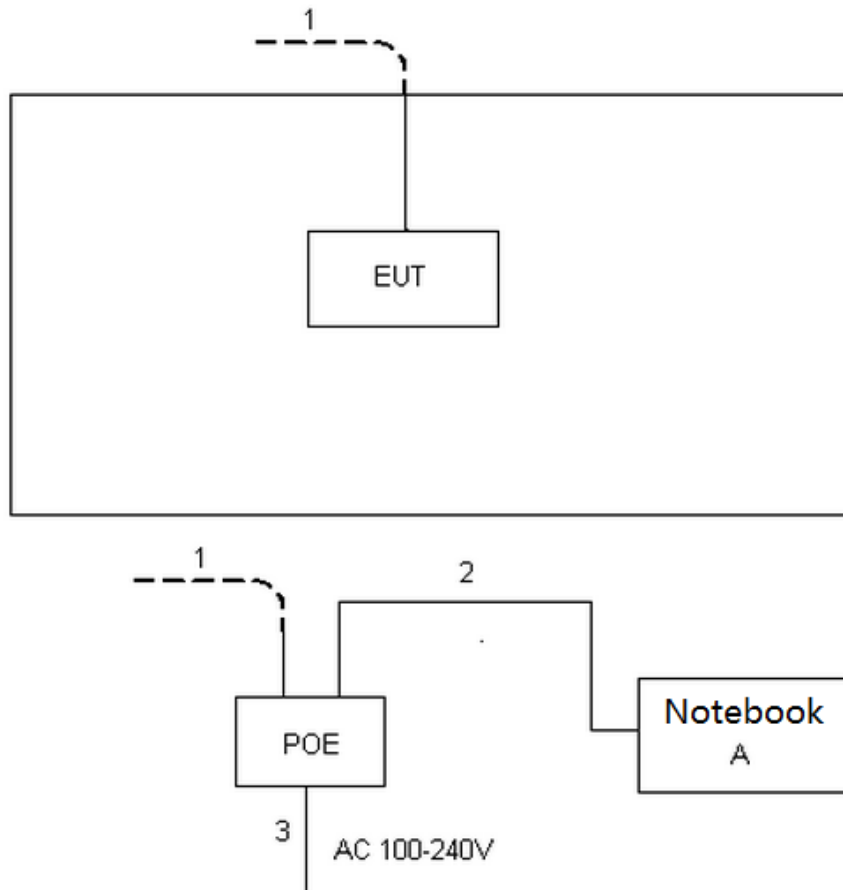

## 2.6 SUPPORT UNITS

| Item | Equipment | Brand  | Model No. | Series No. |
|------|-----------|--------|-----------|------------|
| A    | Notebook  | Lenovo | #P152014  | N/A        |

| Item | Cable Type | Shielded Type | Ferrite Core | Length |
|------|------------|---------------|--------------|--------|
| 1    | RJ45 Cable | NO            | NO           | 10m    |
| 2    | RJ45 Cable | NO            | NO           | 1m     |
| 3    | AC Cable   | NO            | NO           | 1m     |



### 3. AC POWER LINE CONDUCTED EMISSIONS TEST

#### 3.1 LIMIT

| Frequency<br>(MHz) | Limit (dB $\mu$ V) |           |
|--------------------|--------------------|-----------|
|                    | Quasi-peak         | Average   |
| 0.15 - 0.5         | 66 to 56*          | 56 to 46* |
| 0.50 - 5.0         | 56                 | 46        |
| 5.0 - 30.0         | 60                 | 50        |

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " \* " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

| Receiver Parameter | Setting  |
|--------------------|----------|
| Attenuation        | 10 dB    |
| Start Frequency    | 0.15 MHz |
| Stop Frequency     | 30 MHz   |
| IF Bandwidth       | 9 KHz    |


#### 3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

#### 3.3 DEVIATION FROM TEST STANDARD

No deviation

### 3.4 TEST SETUP

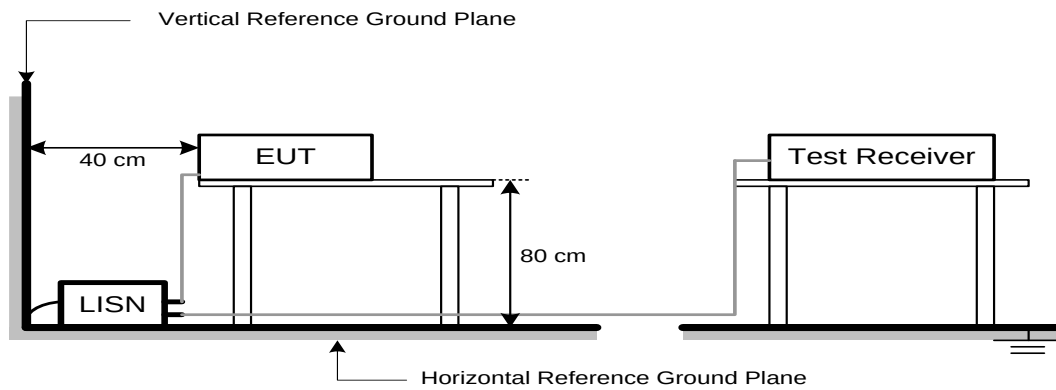

### 3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

### 3.6 TEST RESULTS

Please refer to the APPENDIX A.

## 4. RADIATED EMISSIONS TEST

### 4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

#### LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

| Frequency (MHz) | Field Strength (microvolts/meter) | Measurement Distance (meters) |
|-----------------|-----------------------------------|-------------------------------|
| 0.009-0.490     | 2400/F(kHz)                       | 300                           |
| 0.490-1.705     | 24000/F(kHz)                      | 30                            |
| 1.705-30.0      | 30                                | 30                            |
| 30-88           | 100                               | 3                             |
| 88-216          | 150                               | 3                             |
| 216-960         | 200                               | 3                             |
| Above 960       | 500                               | 3                             |

#### LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

| Frequency (MHz) | EIRP Limit (dBm/MHz) | Equivalent Field Strength at 3m (dBμV/m) |
|-----------------|----------------------|------------------------------------------|
| 5150-5250       | -27                  | 68.3                                     |
| 5250-5350       | -27                  | 68.3                                     |
| 5470-5725       | -27                  | 68.3                                     |
| 5725-5850       | -27 NOTE (2)         | 68.3                                     |
|                 | 10 NOTE (2)          | 105.3                                    |
|                 | 15.6 NOTE (2)        | 110.9                                    |
|                 | 27 NOTE (2)          | 122.3                                    |

#### NOTE:

(1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

(2) According to 15.407(b)(4)(i), all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

## 4.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.  
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

## 4.3 DEVIATION FROM TEST STANDARD


No deviation

## 4.4 TEST SETUP


9 kHz to 30 MHz

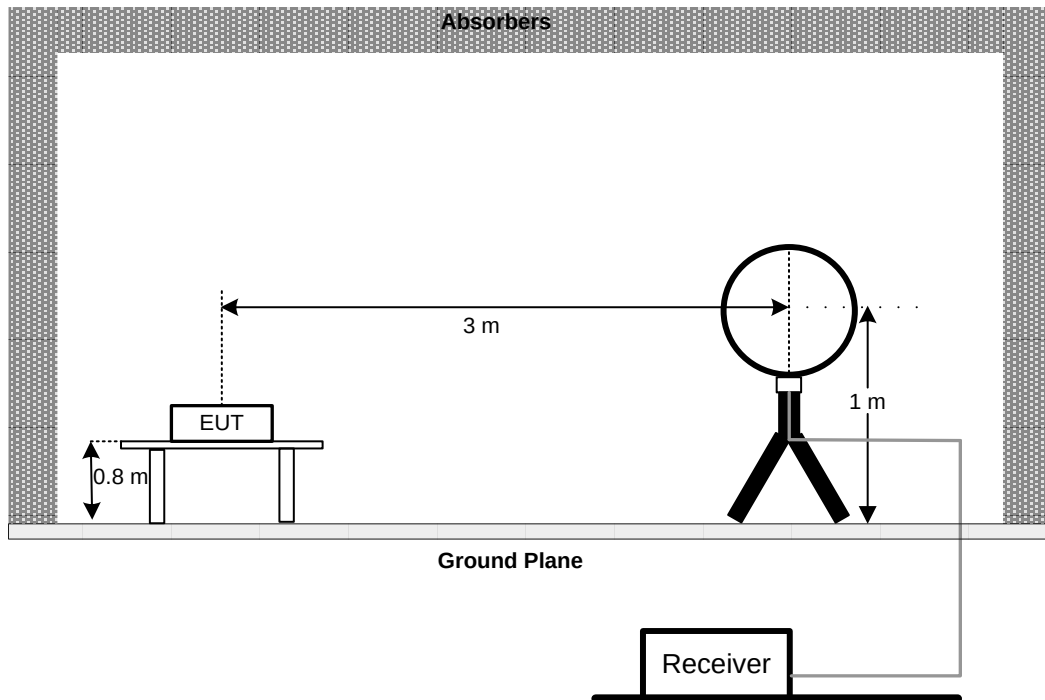


30 MHz to 1 GHz

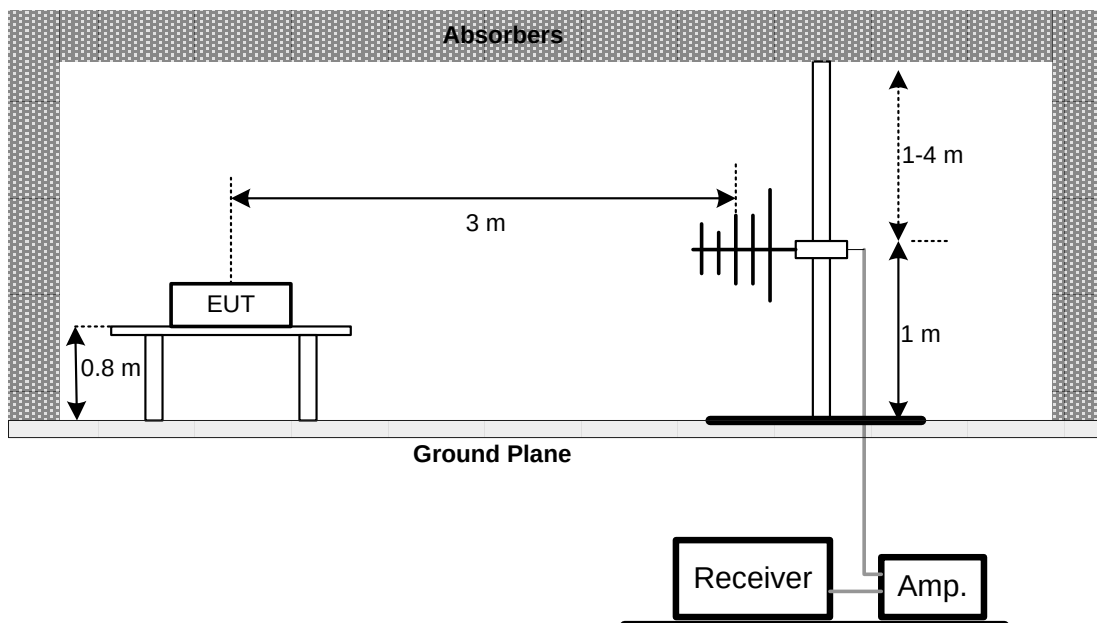

## Above 1 GHz

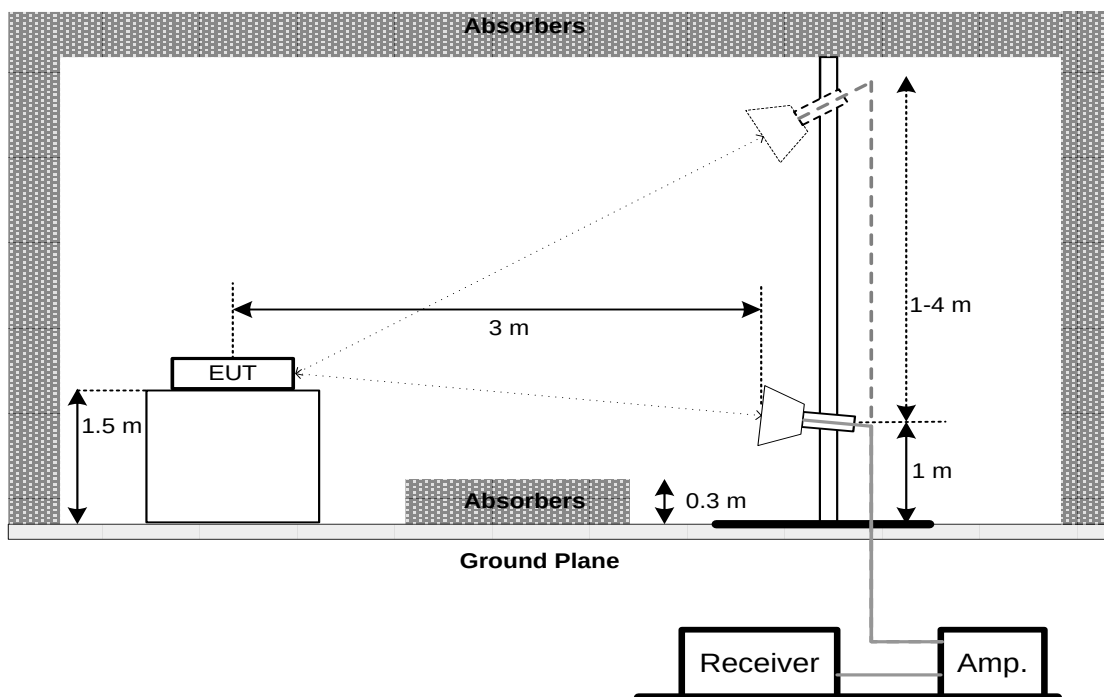

## Above 1 GHz Band edge

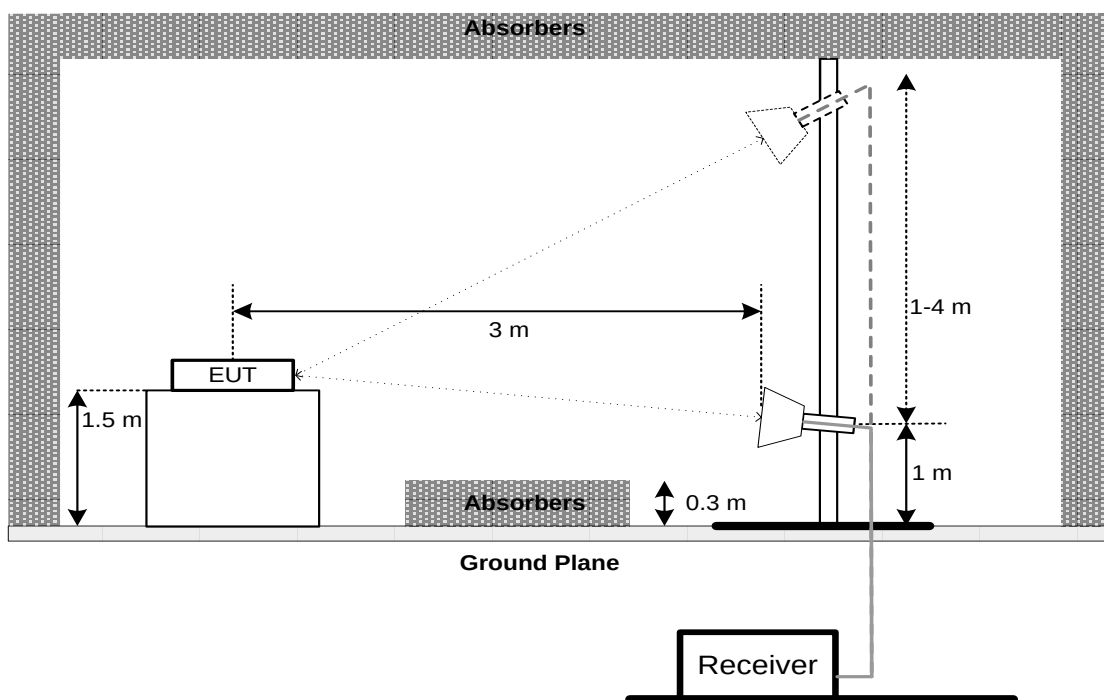

#### **4.5 EUT OPERATION CONDITIONS**

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

#### **4.6 TEST RESULTS - 9 KHZ to 30 MHZ**

Please refer to the APPENDIX B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

#### **4.7 TEST RESULTS - 30 MHz TO 1000 MHz**

Please refer to the APPENDIX C.

#### **4.8 TEST RESULTS - ABOVE 1000 MHz**

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.  
For fundamental signal judgment was referred to Peak output test.

## 5. BANDWIDTH TEST

### 5.1 LIMIT

| FCC Part15, Subpart E (15.407) |                 |                 |                       |
|--------------------------------|-----------------|-----------------|-----------------------|
| Section                        | Test Item       | Limit           | Frequency Range (MHz) |
| 15.407(a)<br>15.407(e)         | 26 dB Bandwidth | -               | 5150-5250             |
|                                | 26 dB Bandwidth | -               | 5250-5350             |
|                                | 26 dB Bandwidth | -               | 5470-5725             |
|                                | 6 dB Bandwidth  | Minimum 500 kHz | 5725-5850             |

### 5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- b. a. Spectrum Setting:  
For UNII-1, UNII-2A, UNII-2C:

| Spectrum Parameter | Setting                                                           |
|--------------------|-------------------------------------------------------------------|
| Attenuation        | Auto                                                              |
| Span Frequency     | > 26 dB Bandwidth                                                 |
| RBW                | 300 kHz (Bandwidth 20 MHz)<br>1 MHz (Bandwidth 40 MHz and 80 MHz) |
| VBW                | 1 MHz (Bandwidth 20 MHz)<br>3 MHz (Bandwidth 40 MHz and 80 MHz)   |
| Detector           | Peak                                                              |
| Trace              | Max Hold                                                          |
| Sweep Time         | Auto                                                              |

For UNII-3:


| Spectrum Parameter | Setting        |
|--------------------|----------------|
| Attenuation        | Auto           |
| Span Frequency     | 6 dB Bandwidth |
| RBW                | 100 kHz        |
| VBW                | 300 kHz        |
| Detector           | Peak           |
| Trace              | Max Hold       |
| Sweep Time         | Auto           |

- c. Measured the spectrum width with power higher than 26 dB below carrier

### 5.3 TEST PROCEDURE

No deviation.

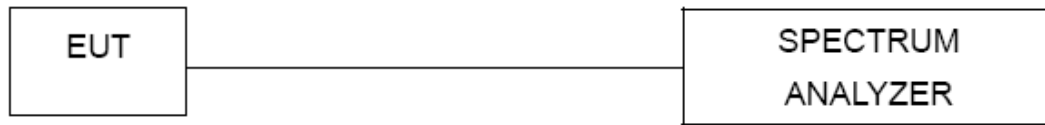

**5.4 TEST SETUP****5.5 EUT OPERATION CONDITIONS**

The EUT was programmed to be in continuously transmitting mode.

**5.6 TEST RESULTS**

Please refer to the APPENDIX E.

## 6. MAXIMUM OUTPUT POWER TEST

### 6.1 LIMIT

| FCC Part15, Subpart E (15.407) |                        |                                                              |                       |
|--------------------------------|------------------------|--------------------------------------------------------------|-----------------------|
| Section                        | Test Item              | Limit                                                        | Frequency Range (MHz) |
| 15.407(a)                      | Conducted Output Power | AP device: 1 Watt (30 dBm)<br>Client device: 250 mW (24 dBm) | 5150-5250             |
|                                |                        | 250 mW (24 dBm)                                              | 5250-5350             |
|                                |                        | 250 mW (24 dBm)                                              | 5470-5725             |
|                                |                        | 1 Watt (30dBm)                                               | 5725-5850             |

Note:

- For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).
- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or  $11 \text{ dBm} + 10\log B$ , where B is the 26dB Bandwidth in megahertz.

### 6.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- Test test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

### 6.3 DEVIATION FROM STANDARD

No deviation.

### 6.4 TEST SETUP



### 6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

### 6.6 TEST RESULTS

Please refer to the APPENDIX F.

## 7. POWER SPECTRAL DENSITY TEST

### 7.1 LIMIT

| FCC Part15, Subpart E (15.407) |                        |                                                    |                       |
|--------------------------------|------------------------|----------------------------------------------------|-----------------------|
| Section                        | Test Item              | Limit                                              | Frequency Range (MHz) |
| 15.407(a)                      | Power Spectral Density | AP device: 17 dBm/MHz<br>Client device: 11 dBm/MHz | 5150-5250             |
|                                |                        | 11 dBm/MHz                                         | 5250-5350             |
|                                |                        | 11 dBm/MHz                                         | 5470-5725             |
|                                |                        | 30 dBm/500 kHz                                     | 5725-5850             |

### 7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting

| Spectrum Parameter | Setting                                                      |
|--------------------|--------------------------------------------------------------|
| Attenuation        | Auto                                                         |
| Span Frequency     | Encompass the entire emissions bandwidth (EBW) of the signal |
| RBW                | = 1 MHz.                                                     |
| VBW                | ≥ 3 MHz.                                                     |
| Detector           | RMS                                                          |
| Trace average      | 100 trace                                                    |
| Sweep Time         | Auto                                                         |

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 1 MHz and VBW at 3 MHz if the spectrum analyzer does not have 500 kHz RBW.
- The value measured with RBW=1 MHz is to be added with  $10\log(500 \text{ kHz}/1 \text{ MHz})$  which is -3 dB. For example, if the measured value is +10dBm using RBW=1 MHz (that is +10 dBm/MHz), then the converted value will be +7dBm/500kHz.

### 7.3 DEVIATION FROM STANDARD

No deviation.

#### 7.4 TEST SETUP



#### 7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

#### 7.6 TEST RESULTS

Please refer to the APPENDIX G.

## 8. MEASUREMENT INSTRUMENTS LIST

| AC Power Line Conducted Emissions |                                      |              |                       |            |                  |
|-----------------------------------|--------------------------------------|--------------|-----------------------|------------|------------------|
| Item                              | Kind of Equipment                    | Manufacturer | Type No.              | Serial No. | Calibrated until |
| 1                                 | Line Impedance Stabilisation Network | Schwarzbeck  | NNLK 8121             | 8121-822   | Mar. 21, 2021    |
| 2                                 | TWO-LINE V-NETWORK                   | R&S          | ENV216                | 101340     | Sep. 01, 2020    |
| 3                                 | EMI Test Receiver                    | R&S          | ESCI                  | 100082     | Jul. 15, 2020    |
| 4                                 | 50Ω coaxial switch                   | Anritsu      | MP59B                 | 6201750902 | Mar. 28, 2021    |
| 5                                 | Cable                                | 10m          | EMCRG400-BM-NM-10000  | 170628     | Mar. 21, 2021    |
| 6                                 | Measurement Software                 | Farad        | EZ-EMC Ver.NB-03A1-01 | N/A        | N/A              |

| Radiated Emissions - 30 MHz to 1 GHz |                          |              |                       |            |                  |
|--------------------------------------|--------------------------|--------------|-----------------------|------------|------------------|
| Item                                 | Kind of Equipment        | Manufacturer | Type No.              | Serial No. | Calibrated until |
| 1                                    | TRILOG Broadband Antenna | Schwarzbeck  | VULB 9168             | 719        | Mar. 28, 2021    |
| 2                                    | Pre-Amplifier            | emci         | EMC9135               | 980400     | Mar. 21, 2021    |
| 3                                    | MXE EMI Receiver         | Keysight     | N9038A                | MY57150106 | Mar. 21, 2021    |
| 4                                    | Test Cable               | emci         | EMC104-SM-SM-7000     | 170330     | Apr. 16, 2021    |
| 5                                    | Test Cable               | emci         | EMC104-SM-SM-1000     | 170331     | Apr. 16, 2021    |
| 6                                    | Test Cable               | emci         | EMC104-SM-NM-3500     | 170621     | Apr. 16, 2021    |
| 7                                    | Measurement Software     | Farad        | EZ-EMC Ver.BTL-2ANT-1 | N/A        | N/A              |

| Radiated Emissions - Above 1 GHz |                                      |              |                       |            |                  |
|----------------------------------|--------------------------------------|--------------|-----------------------|------------|------------------|
| Item                             | Kind of Equipment                    | Manufacturer | Type No.              | Serial No. | Calibrated until |
| 1                                | Double-Ridged Waveguide Horn Antenna | ETS-Lindgren | 9120D                 | 00206960   | Mar. 28, 2021    |
| 2                                | Pre-Amplifier                        | emci         | EMC012645SE           | 980421     | Mar. 28, 2021    |
| 3                                | EXA Spectrum Analyzer                | Keysight     | N9010A                | MY56480545 | Mar. 21, 2021    |
| 4                                | Test Cable                           | emci         | EMC104-SM-SM-7000     | 170330     | Apr. 16, 2021    |
| 5                                | Test Cable                           | emci         | EMC104-SM-SM-1000     | 170331     | Apr. 16, 2021    |
| 6                                | Test Cable                           | emci         | EMC104-SM-NM-3500     | 170621     | Apr. 16, 2021    |
| 7                                | Measurement Software                 | Farad        | EZ-EMC Ver.NB-03A1-01 | N/A        | N/A              |
| 8                                | MXE EMI Receiver                     | Keysight     | N9038A                | MY57150106 | Mar. 28, 2021    |

| Bandwidth |                   |              |          |            |                  |
|-----------|-------------------|--------------|----------|------------|------------------|
| Item      | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1         | Spectrum Analyzer | R&S          | FSP40    | 100626     | Mar. 21, 2021    |

| Conducted Output Power |                   |              |          |            |                  |
|------------------------|-------------------|--------------|----------|------------|------------------|
| Item                   | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1                      | Spectrum Analyzer | R&S          | FSP40    | 100626     | Mar. 21, 2021    |

| Power Spectral Density |                   |              |          |            |                  |
|------------------------|-------------------|--------------|----------|------------|------------------|
| Item                   | Kind of Equipment | Manufacturer | Type No. | Serial No. | Calibrated until |
| 1                      | Spectrum Analyzer | R&S          | FSP40    | 100626     | Mar. 21, 2021    |

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.



## 9. EUT TEST PHOTOS

### Conducted Emissions Test Photos




## Radiated Emissions Test Photos

30 MHz to 1 GHz

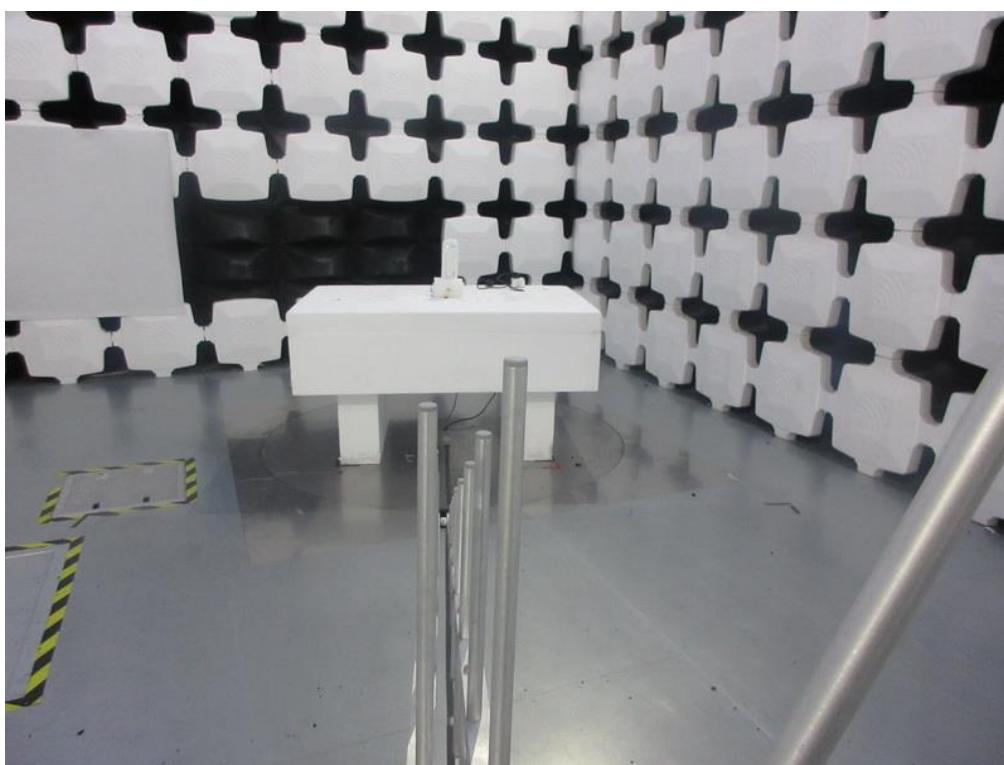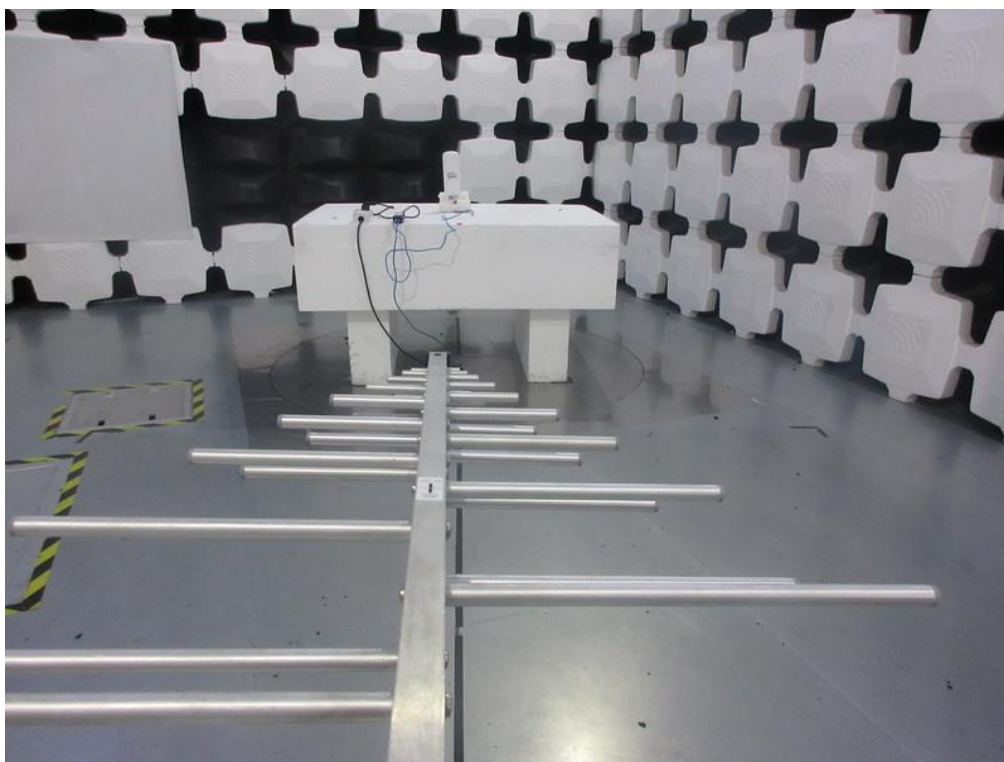

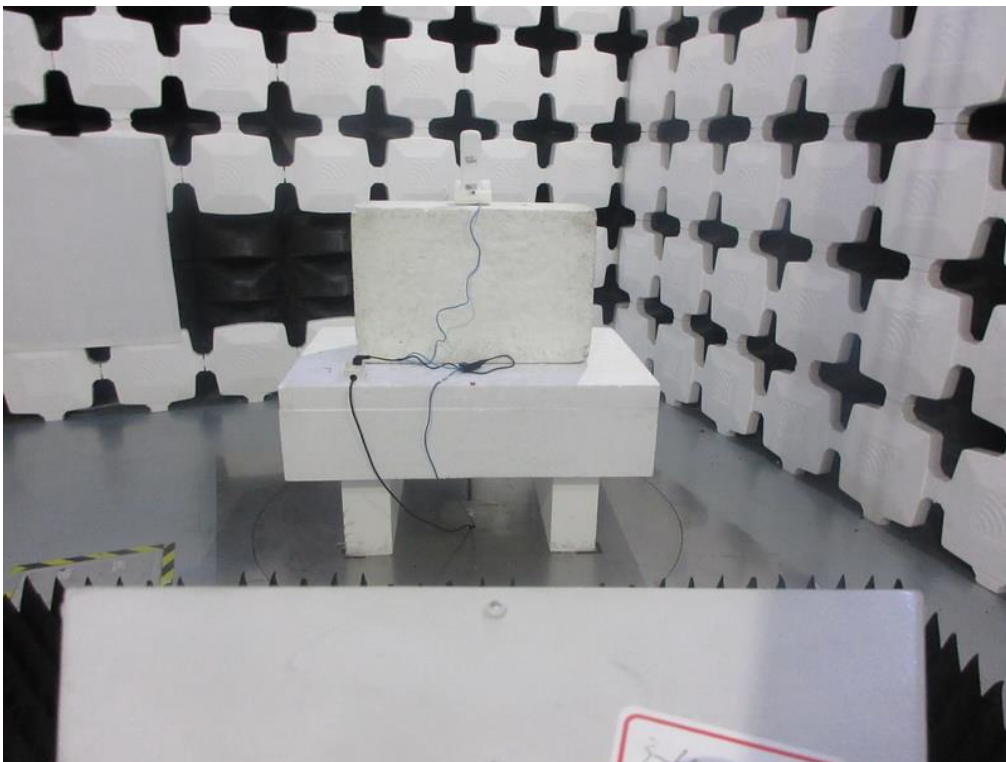


**Radiated Emissions Test Photos****Above 1 GHz**

**APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS**

Test Mode: TX Mode

## Line

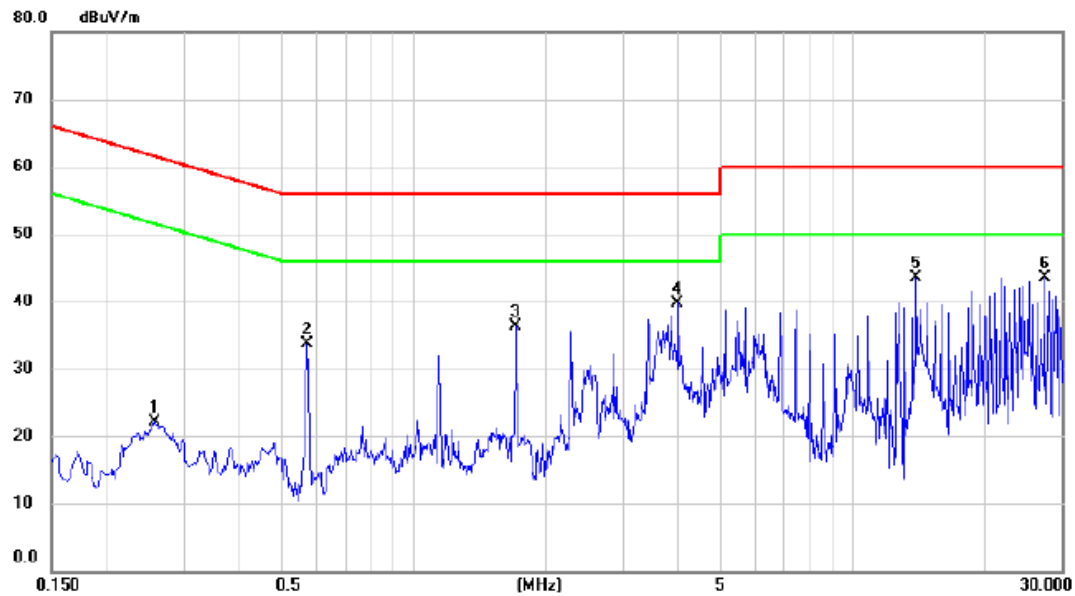


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|----------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.2575       | 12.43                      | 9.61                    | 22.04                      | 61.51           | -39.47       | peak     |         |
| 2   |     | 0.5731       | 23.99                      | 9.67                    | 33.66                      | 56.00           | -22.34       | peak     |         |
| 3   |     | 1.7160       | 26.53                      | 9.71                    | 36.24                      | 56.00           | -19.76       | peak     |         |
| 4   | *   | 4.0060       | 29.89                      | 9.77                    | 39.66                      | 56.00           | -16.34       | peak     |         |
| 5   |     | 13.9885      | 33.53                      | 9.97                    | 43.50                      | 60.00           | -16.50       | peak     |         |
| 6   |     | 27.4160      | 33.44                      | 10.10                   | 43.54                      | 60.00           | -16.46       | peak     |         |

### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX Mode

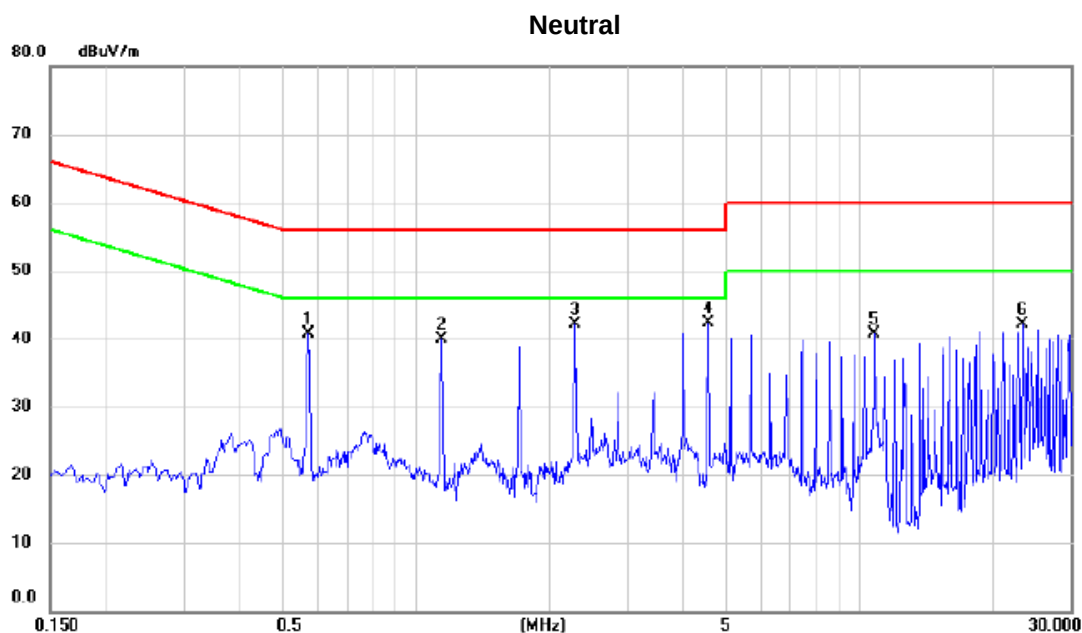

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|----------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 0.5701       | 31.09                      | 9.67                    | 40.76                      | 56.00           | -15.24       | peak     |         |
| 2   |     | 1.1411       | 30.26                      | 9.68                    | 39.94                      | 56.00           | -16.06       | peak     |         |
| 3   |     | 2.2845       | 32.30                      | 9.72                    | 42.02                      | 56.00           | -13.98       | peak     |         |
| 4   | *   | 4.5734       | 32.61                      | 9.79                    | 42.40                      | 56.00           | -13.60       | peak     |         |
| 5   |     | 10.8473      | 30.74                      | 9.93                    | 40.67                      | 60.00           | -19.33       | peak     |         |
| 6   |     | 23.3870      | 32.07                      | 10.07                   | 42.14                      | 60.00           | -17.86       | peak     |         |

## REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.

## **APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ**

Note: Below 30MHz, The measured value have enough margin over 20dB than the limit,  
therefore they are not reported

## **APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1 GHZ**

Test Mode: TX AC80 MODE CHANNEL 155

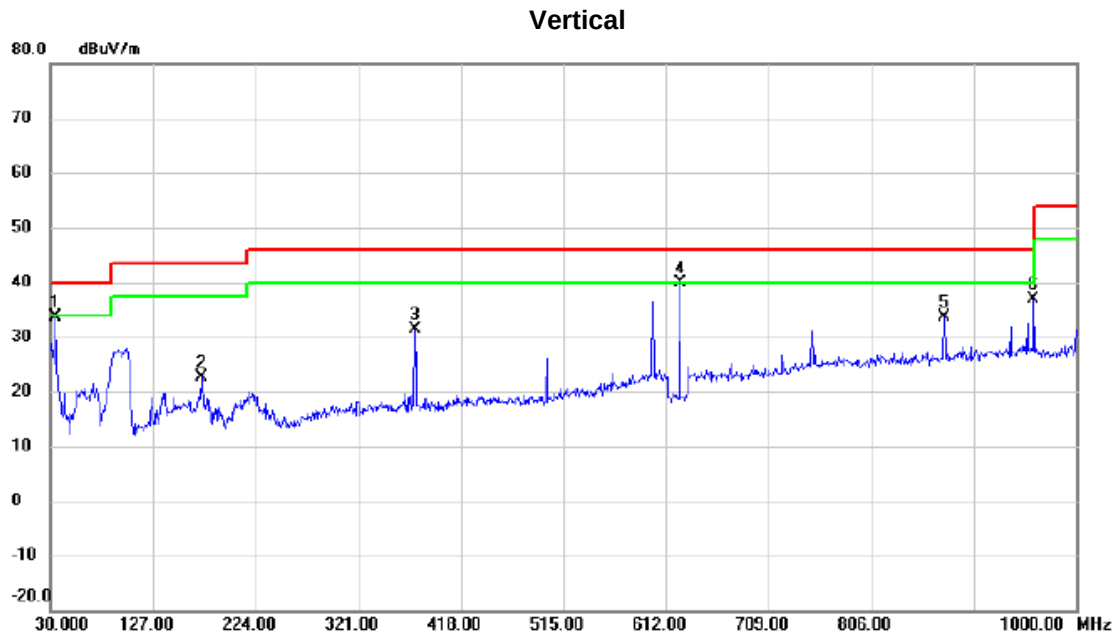


| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 34.8500      | 50.77                    | -17.26                  | 33.51                      | 40.00           | -6.49        | peak     |         |
| 2   |     | 172.5900     | 38.78                    | -16.09                  | 22.69                      | 43.50           | -20.81       | peak     |         |
| 3   |     | 374.8350     | 45.30                    | -13.86                  | 31.44                      | 46.00           | -14.56       | peak     |         |
| 4   | *   | 625.0950     | 48.35                    | -8.58                   | 39.77                      | 46.00           | -6.23        | peak     |         |
| 5   |     | 874.8700     | 39.36                    | -5.72                   | 33.64                      | 46.00           | -12.36       | peak     |         |
| 6   |     | 959.7450     | 41.97                    | -5.09                   | 36.88                      | 46.00           | -9.12        | peak     |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AC80 MODE CHANNEL 155

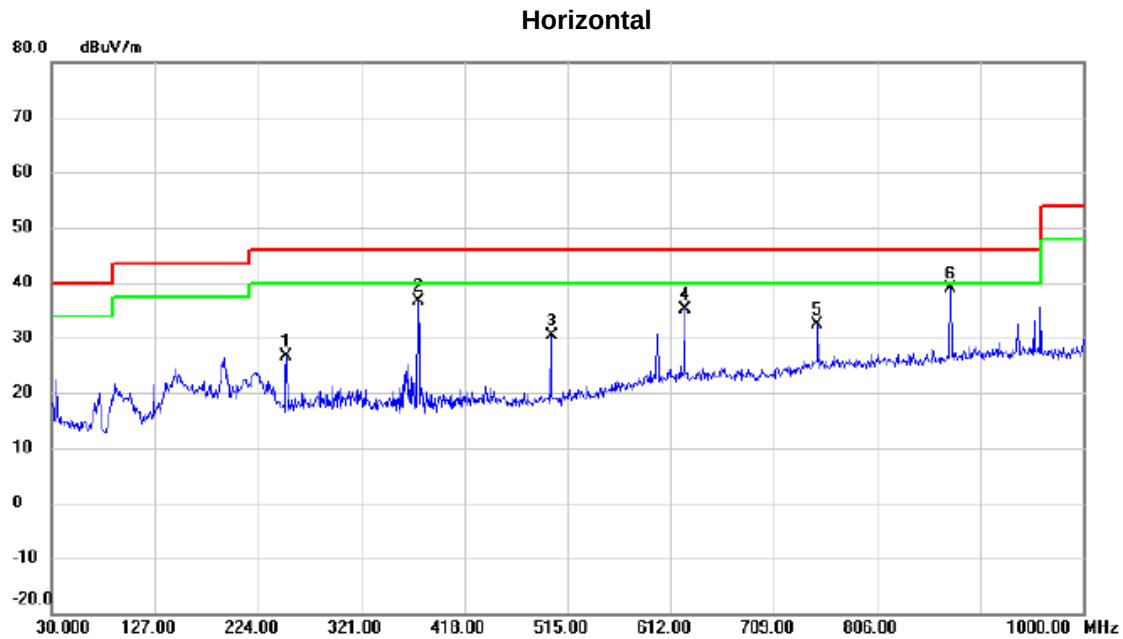

| No. | Mk. | Freq.<br>MHz | Reading<br>Level<br>dBuV | Correct<br>Factor<br>dB | Measure-<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|-----|--------------|--------------------------|-------------------------|----------------------------|-----------------|--------------|----------|---------|
| 1   |     | 250.1900     | 43.54                    | -16.86                  | 26.68                      | 46.00           | -19.32       | peak     |         |
| 2   |     | 374.8350     | 50.59                    | -13.86                  | 36.73                      | 46.00           | -9.27        | peak     |         |
| 3   |     | 499.9650     | 42.89                    | -12.63                  | 30.26                      | 46.00           | -15.74       | peak     |         |
| 4   |     | 625.0950     | 43.65                    | -8.58                   | 35.07                      | 46.00           | -10.93       | peak     |         |
| 5   |     | 749.7400     | 38.98                    | -6.68                   | 32.30                      | 46.00           | -13.70       | peak     |         |
| 6   | *   | 874.8700     | 44.67                    | -5.72                   | 38.95                      | 46.00           | -7.05        | peak     |         |

**REMARKS:**


- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.



## **APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ**

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-1_TX A Mode 5180 MHz |

## Vertical

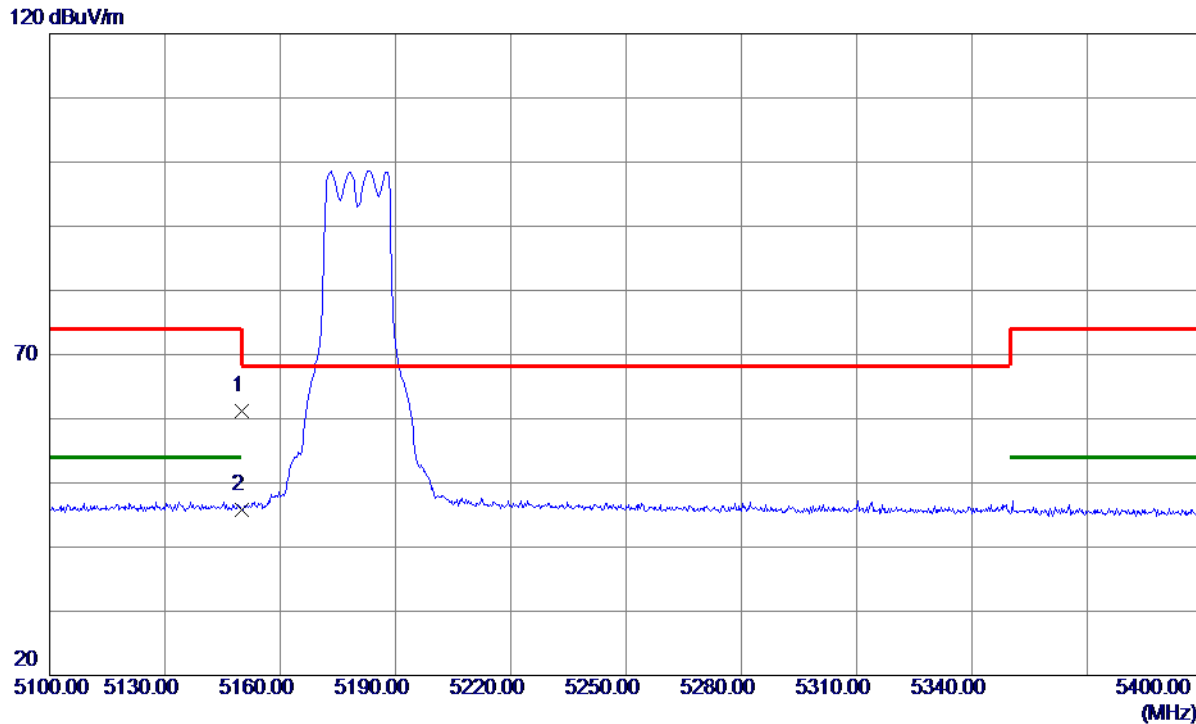


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5150.0000    | 22.14                      | 39.07                   | 61.21                     | 74.00           | -12.79       | Peak     |         |
| 2 * | 5150.0000    | 6.67                       | 39.07                   | 45.74                     | 54.00           | -8.26        | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-1_TX A Mode 5180 MHz |

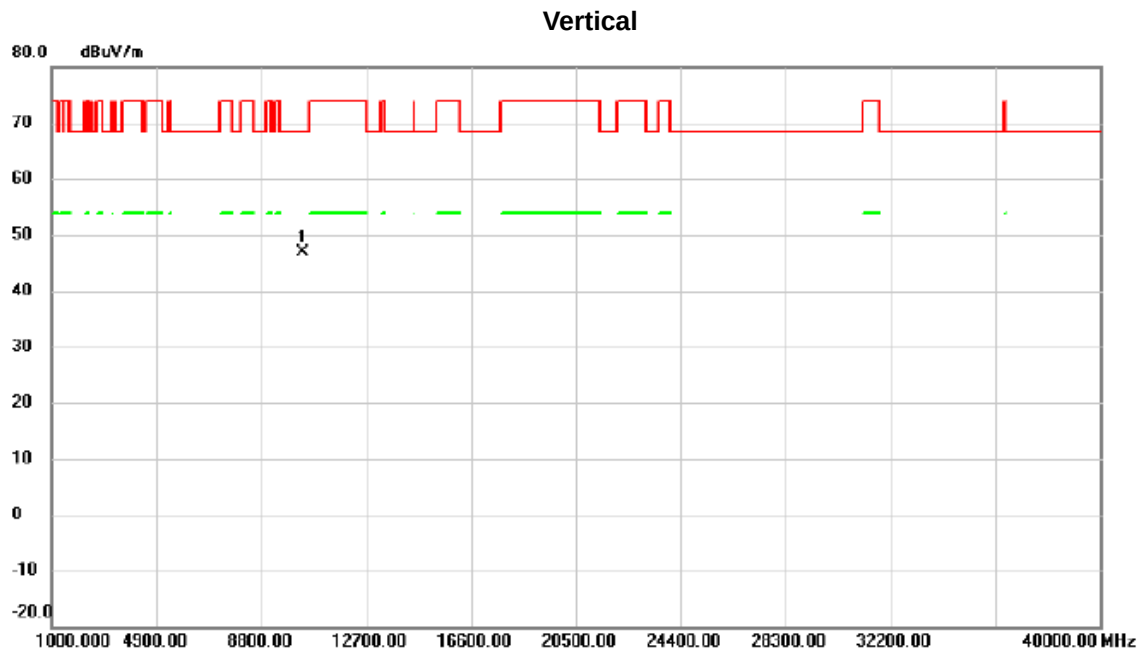


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10359.88 | 48.59         | -1.64          | 46.95       | 68.30  | -21.35 | peak     |         |

**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-1_TX A Mode 5180 MHz |

## Horizontal

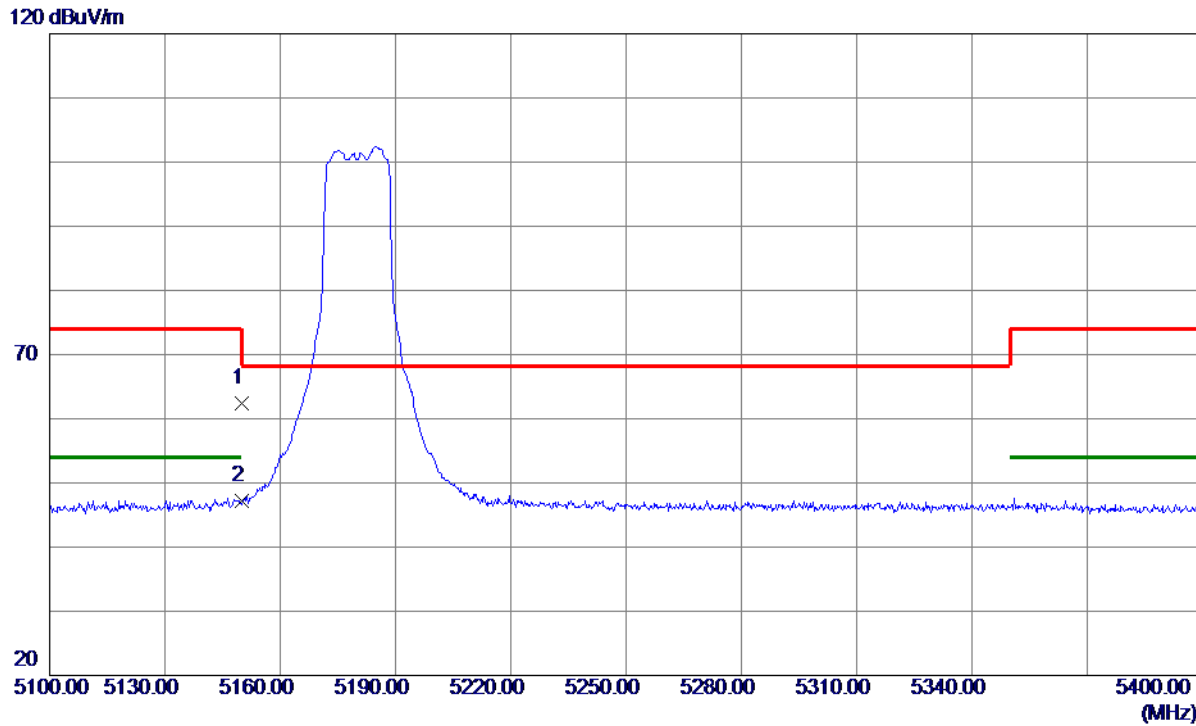


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5150.0000    | 23.27                      | 39.07                   | 62.34                     | 74.00           | -11.66       | Peak     |         |
| 2 * | 5150.0000    | 8.12                       | 39.07                   | 47.19                     | 54.00           | -6.81        | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-1_TX A Mode 5180 MHz |

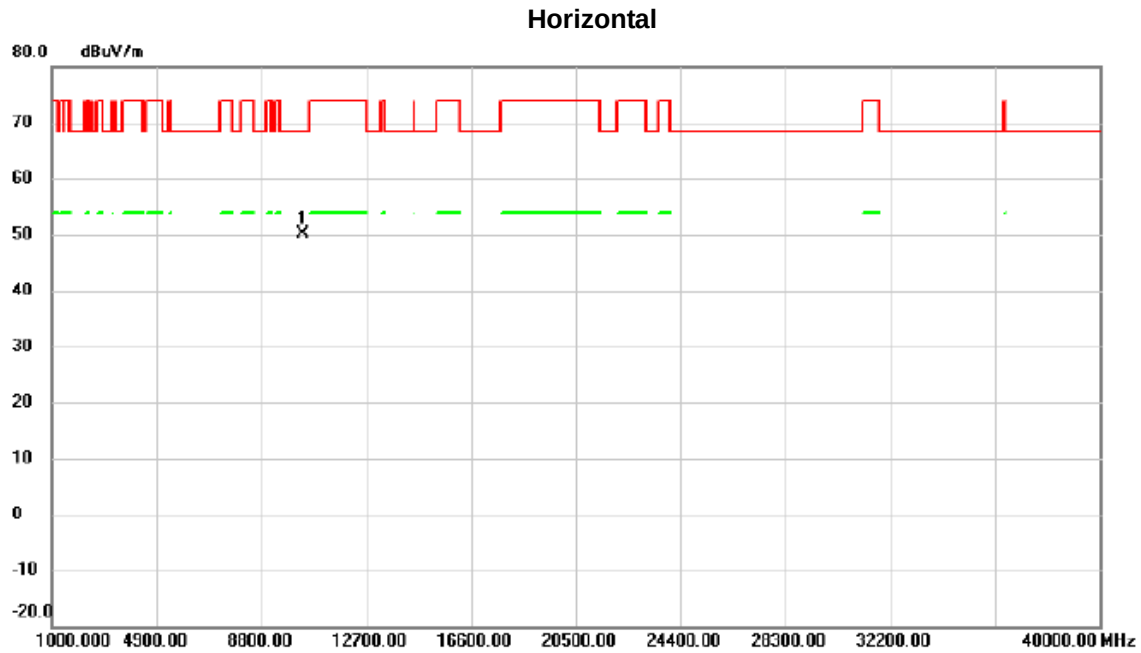


| No. | Mk. | Freq.    | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|-----|----------|---------------|----------------|-------------|--------|--------|----------|---------|
|     |     | MHz      | dBuV          | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1   | *   | 10358.62 | 51.75         | -1.64          | 50.11       | 68.30  | -18.19 | peak     |         |

## REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-1_TX A Mode 5200 MHz |

## Vertical

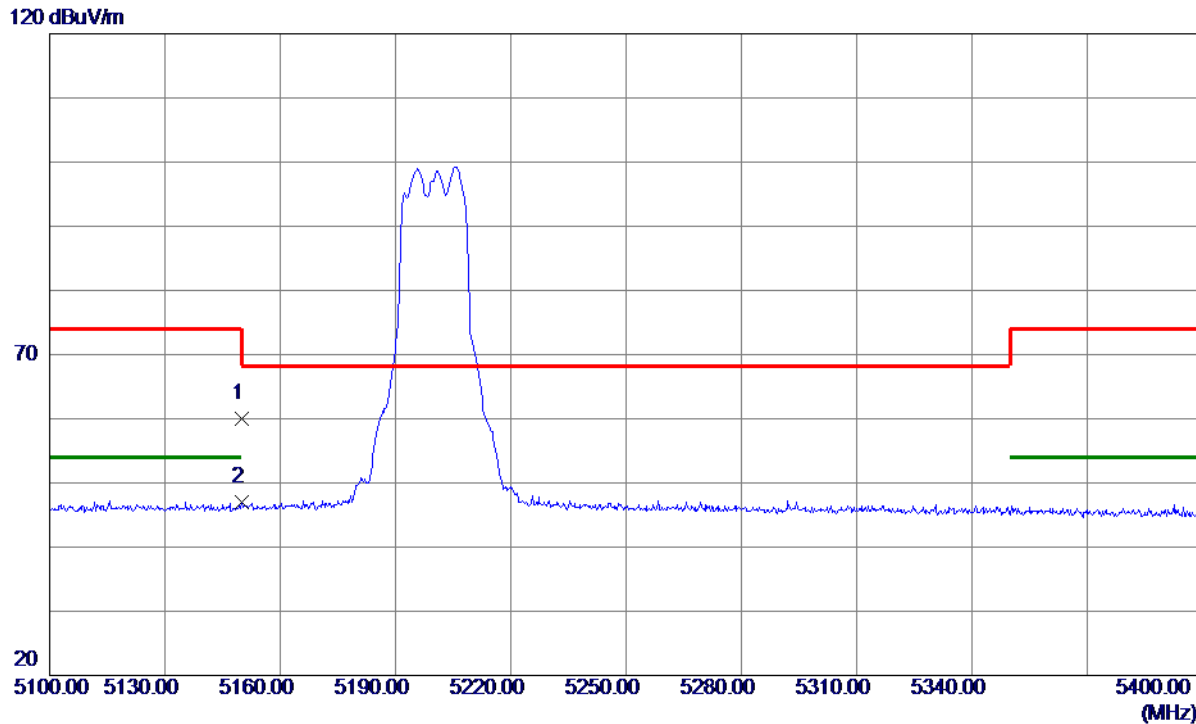

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5150.0000    | 20.87                      | 39.07                   | 59.94                     | 74.00           | -14.06       | Peak     |         |
| 2 * | 5150.0000    | 7.89                       | 39.07                   | 46.96                     | 54.00           | -7.04        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-1_TX A Mode 5200 MHz |

## Vertical

80 dBuV/m

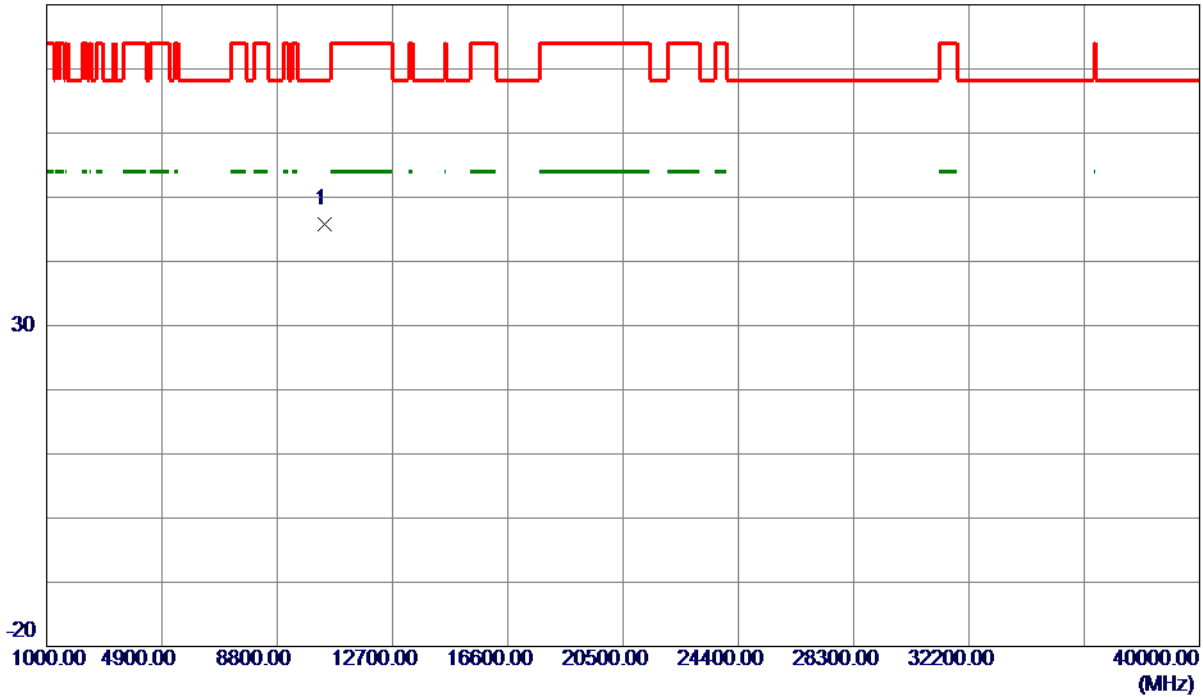


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10399.6200   | 47.45                      | -1.61                   | 45.84                     | 68.30           | -22.46       | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-1_TX A Mode 5200 MHz |

## Horizontal

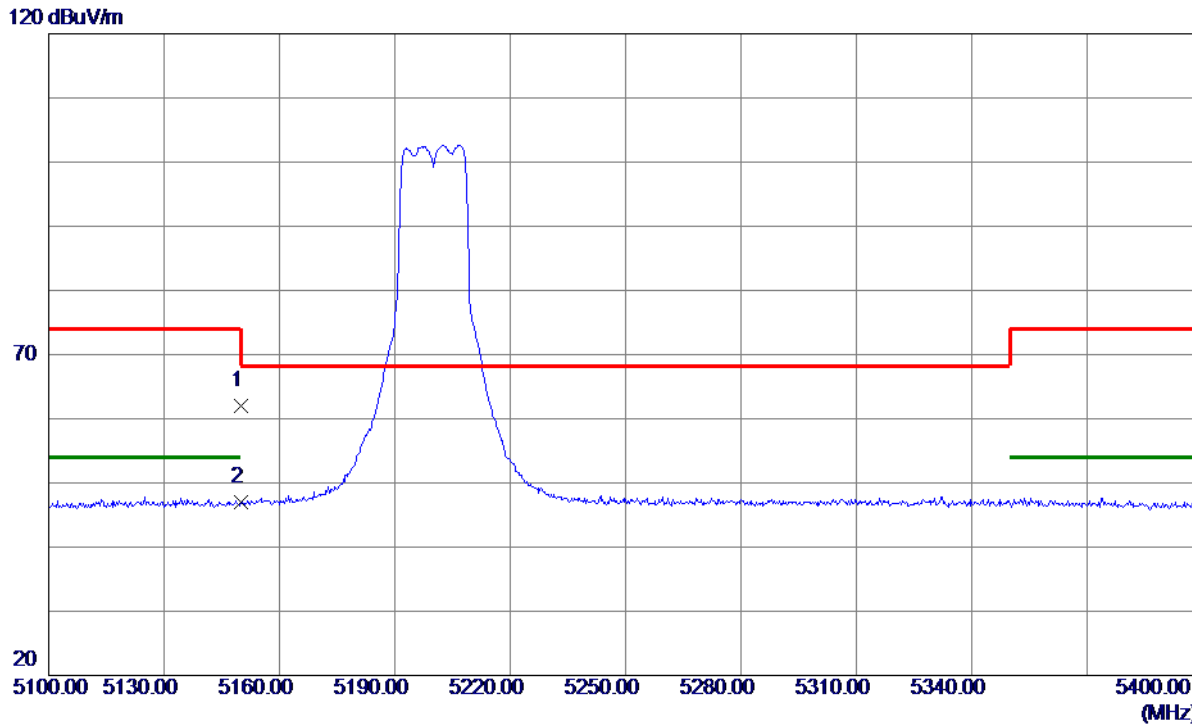

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5150.0000    | 22.87                      | 39.07                   | 61.94                     | 74.00           | -12.06       | Peak     |         |
| 2 * | 5150.0000    | 7.88                       | 39.07                   | 46.95                     | 54.00           | -7.05        | AVG      |         |

### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.



|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-1_TX A Mode 5200 MHz |

## Horizontal

80 dBuV/m

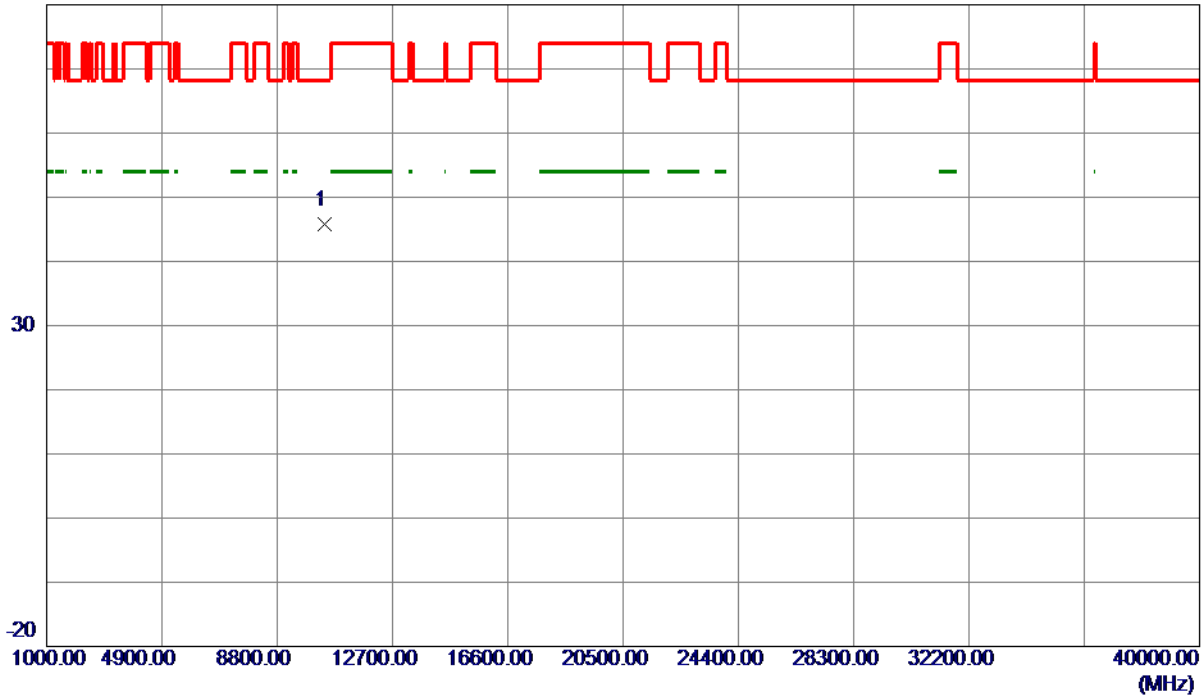

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10398.3400   | 47.31                      | -1.61                   | 45.70                     | 68.30           | -22.60       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-1_TX A Mode 5240 MHz |

## Vertical

120 dBuV/m

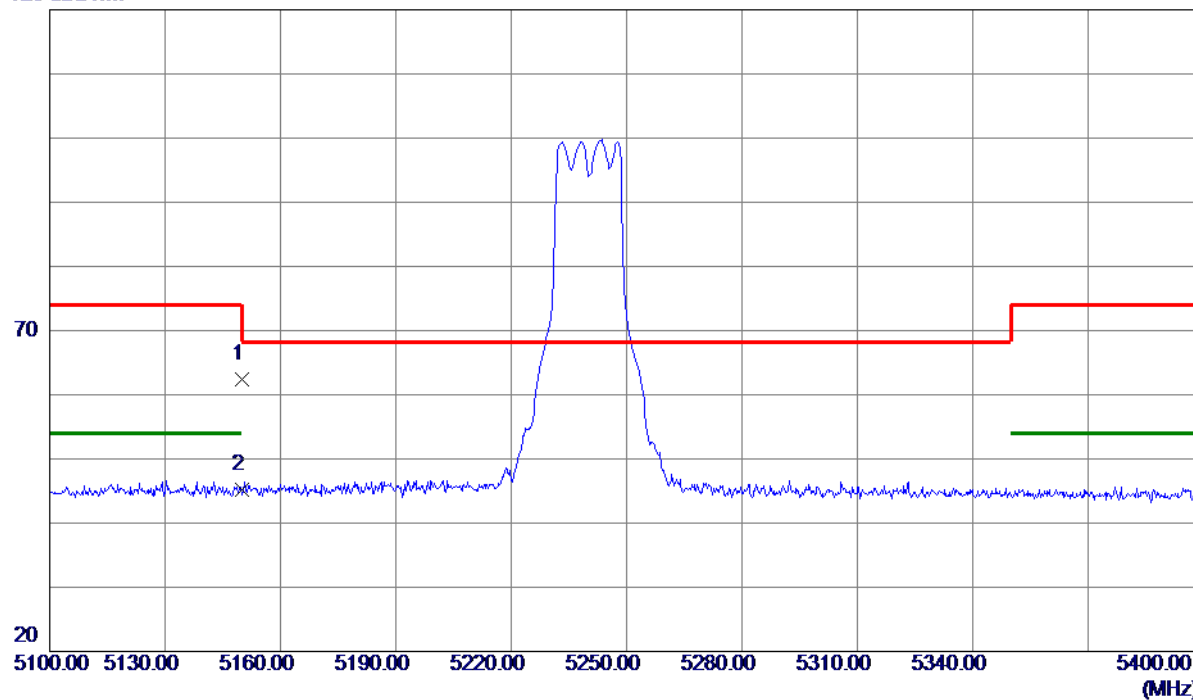

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5150.0000    | 23.40                      | 39.07                   | 62.47                     | 74.00           | -11.53       | Peak     |         |
| 2 * | 5150.0000    | 6.04                       | 39.07                   | 45.11                     | 54.00           | -8.89        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-1_TX A Mode 5240 MHz |

## Vertical

80 dBuV/m

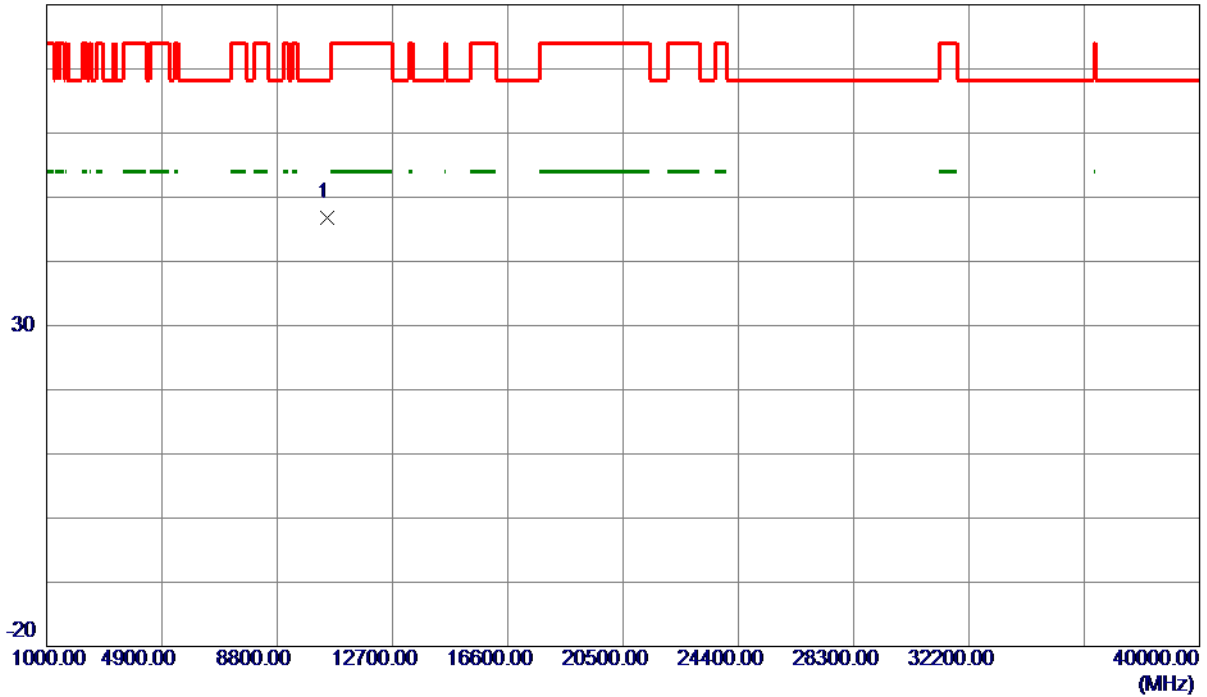


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 10480.8400 | 48.39         | -1.53          | 46.86       | 68.30  | -21.44 | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-1_TX A Mode 5240 MHz |

## Horizontal

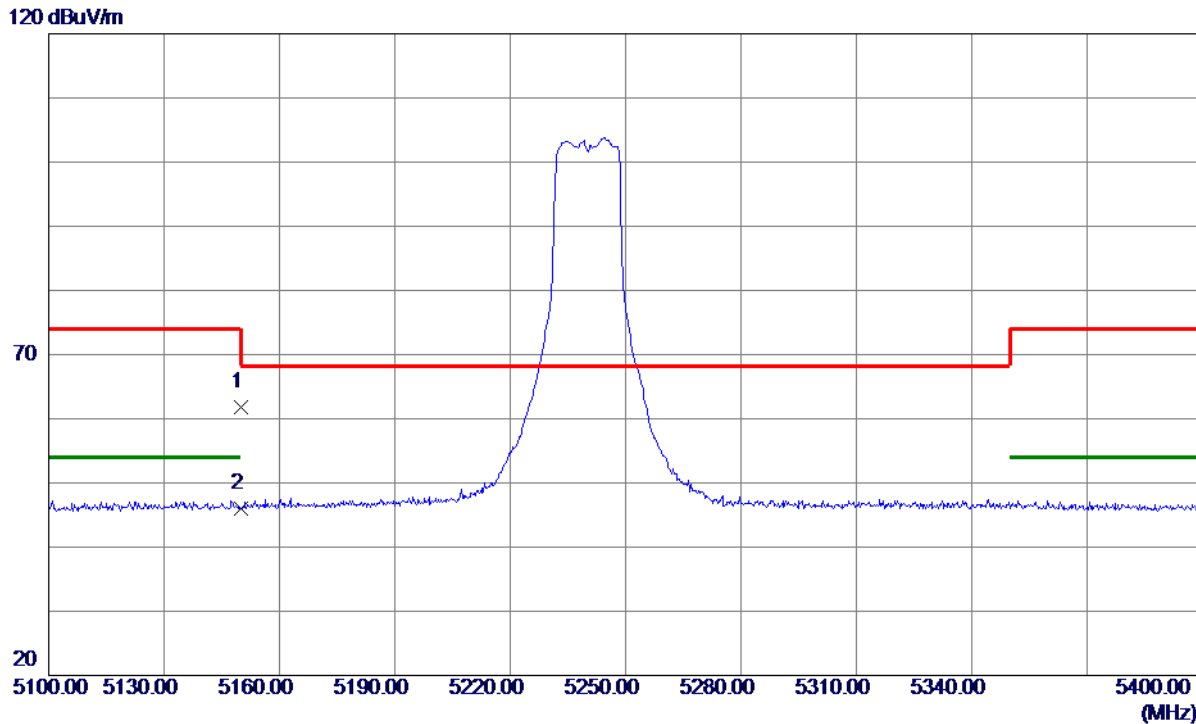

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5150.0000    | 22.73                      | 39.07                   | 61.80                     | 74.00           | -12.20       | Peak     |         |
| 2 * | 5150.0000    | 7.01                       | 39.07                   | 46.08                     | 54.00           | -7.92        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-1_TX A Mode 5240 MHz |

## Horizontal

80 dBuV/m

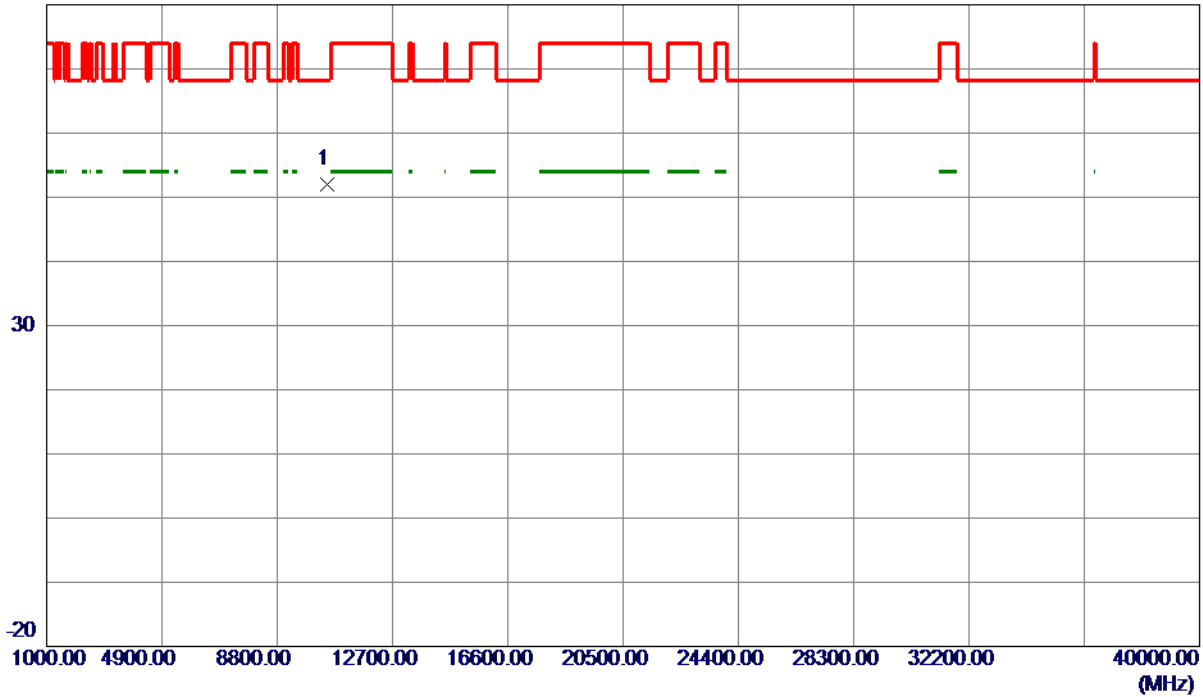

| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 10480.5320 | 53.61         | -1.53          | 52.08       | 68.30  | -16.22 | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5180 MHz |

## Vertical

120 dBuV/m

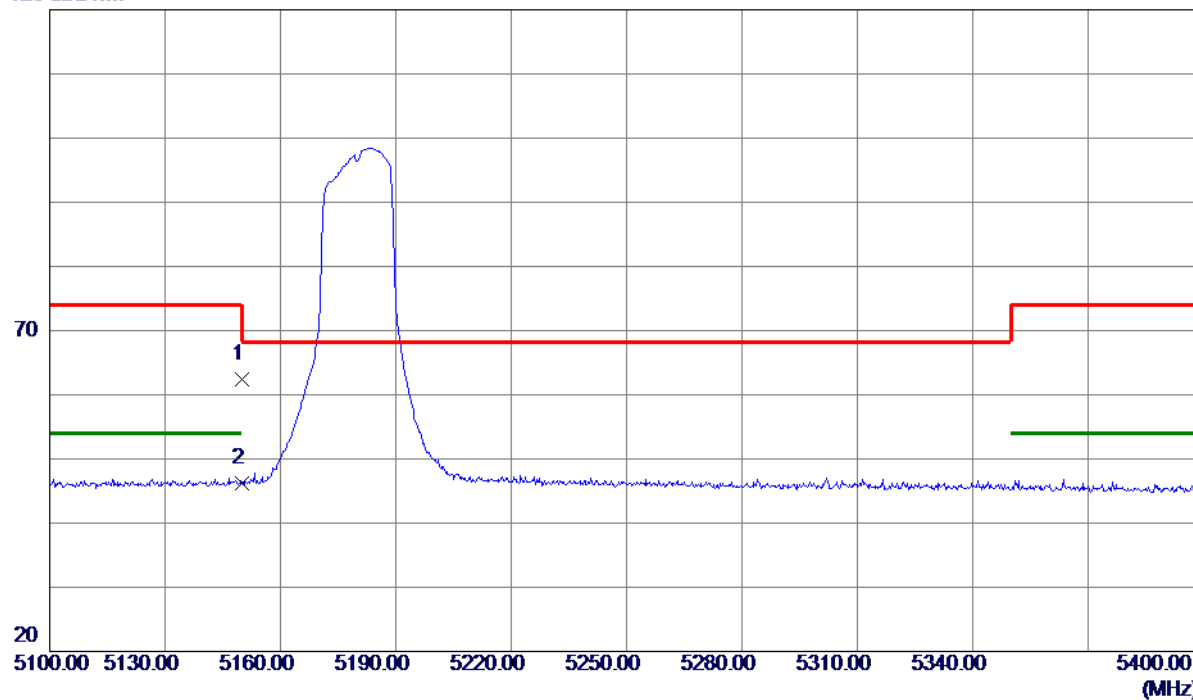

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5150.0000    | 23.39                      | 39.07                   | 62.46                     | 74.00           | -11.54       | Peak     |         |
| 2 * | 5150.0000    | 7.13                       | 39.07                   | 46.20                     | 54.00           | -7.80        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5180 MHz |

## Vertical

80 dBuV/m

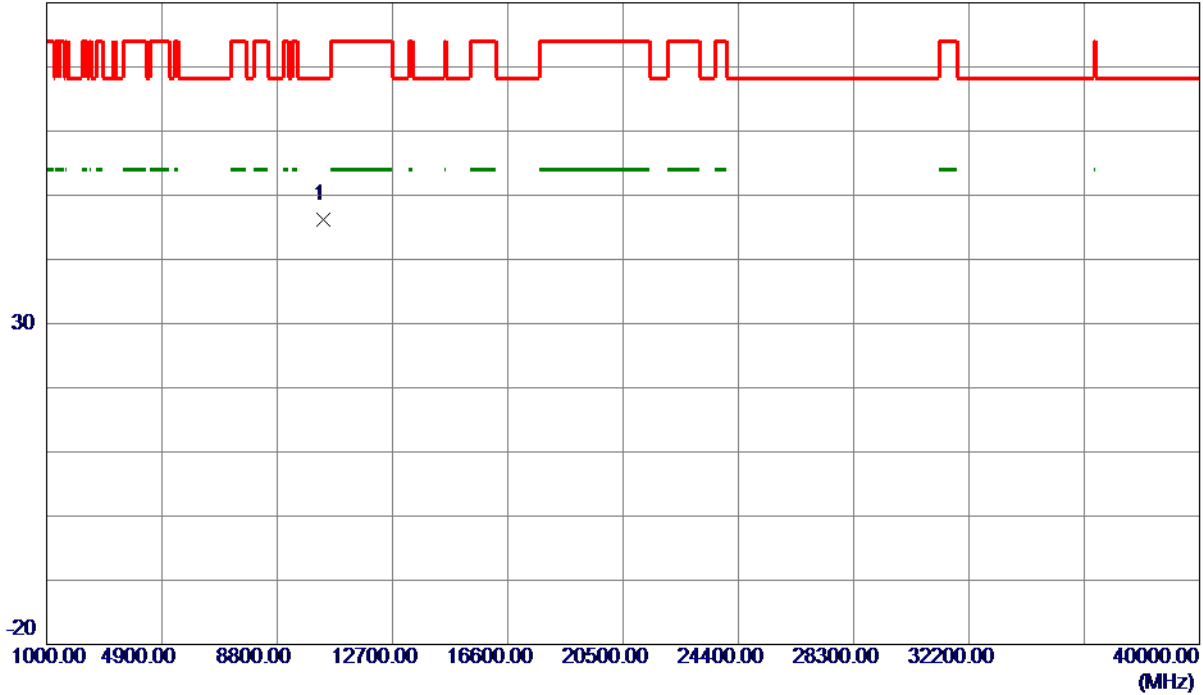

| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 10361.1110 | 47.77         | -1.64          | 46.13       | 68.30  | -22.17 | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5180 MHz |

## Horizontal

120 dBuV/m

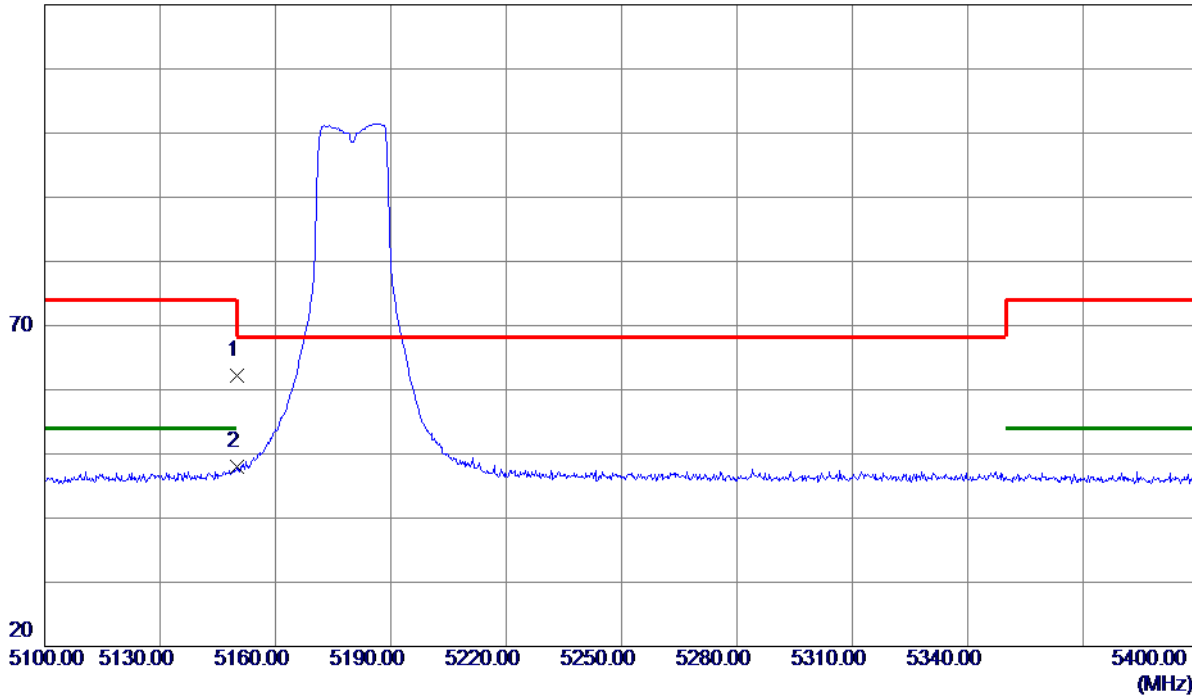

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5150.0000    | 23.06                      | 39.07                   | 62.13                     | 74.00           | -11.87       | Peak     |         |
| 2 * | 5150.0000    | 8.99                       | 39.07                   | 48.06                     | 54.00           | -5.94        | AVG      |         |

### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.



|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5180 MHz |

## Horizontal

80 dBuV/m

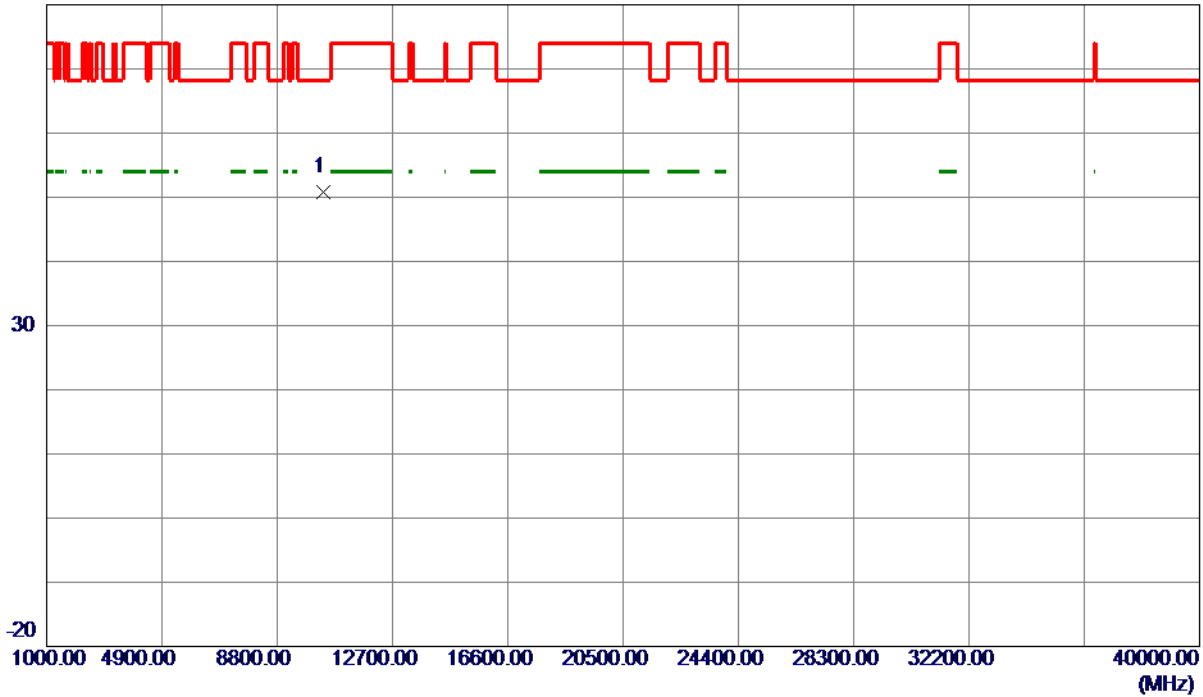

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10358.3740   | 52.40                      | -1.65                   | 50.75                     | 68.30           | -17.55       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5200 MHz |

## Vertical

120 dBuV/m

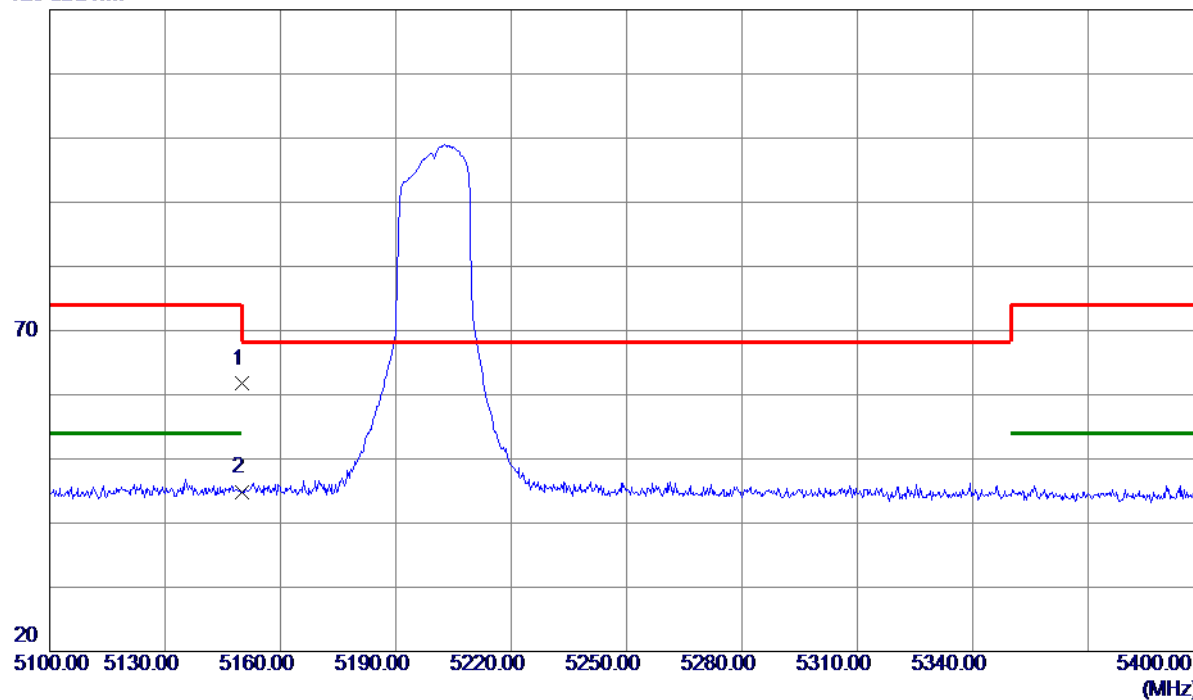

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5150.0000    | 22.63                      | 39.07                   | 61.70                     | 74.00           | -12.30       | Peak     |         |
| 2 * | 5150.0000    | 5.74                       | 39.07                   | 44.81                     | 54.00           | -9.19        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5200 MHz |

## Vertical

80 dBuV/m

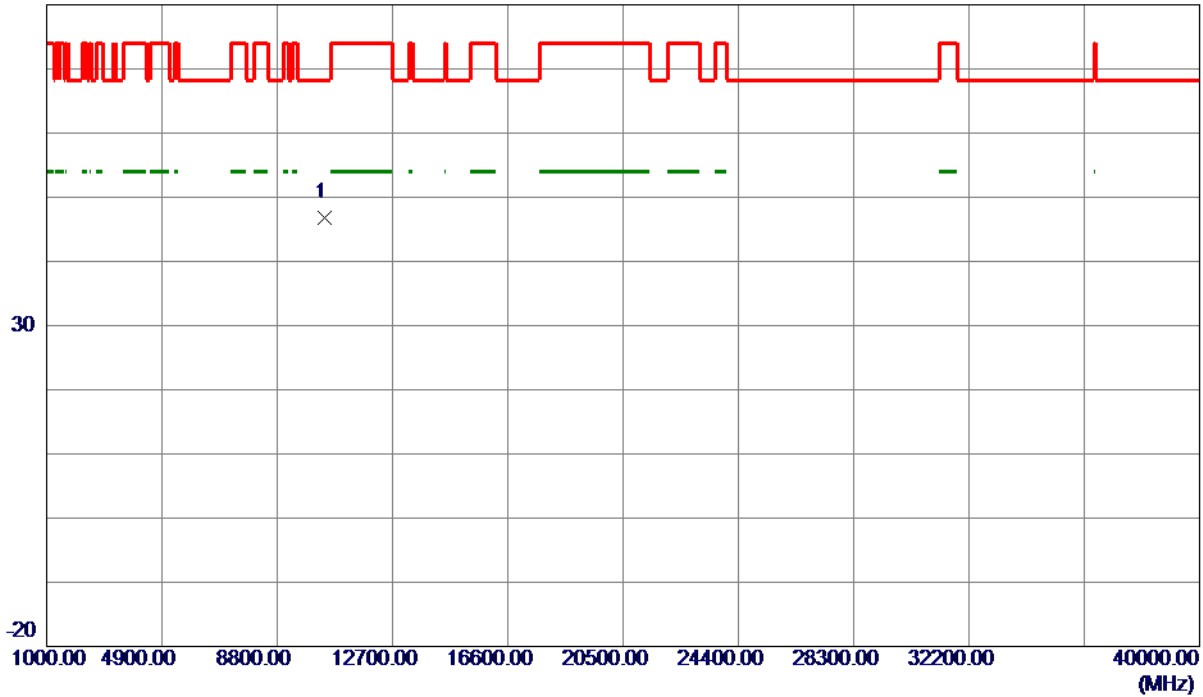

| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 10399.7330 | 48.35         | -1.61          | 46.74       | 68.30  | -21.56 | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5200 MHz |

## Horizontal

120 dBuV/m

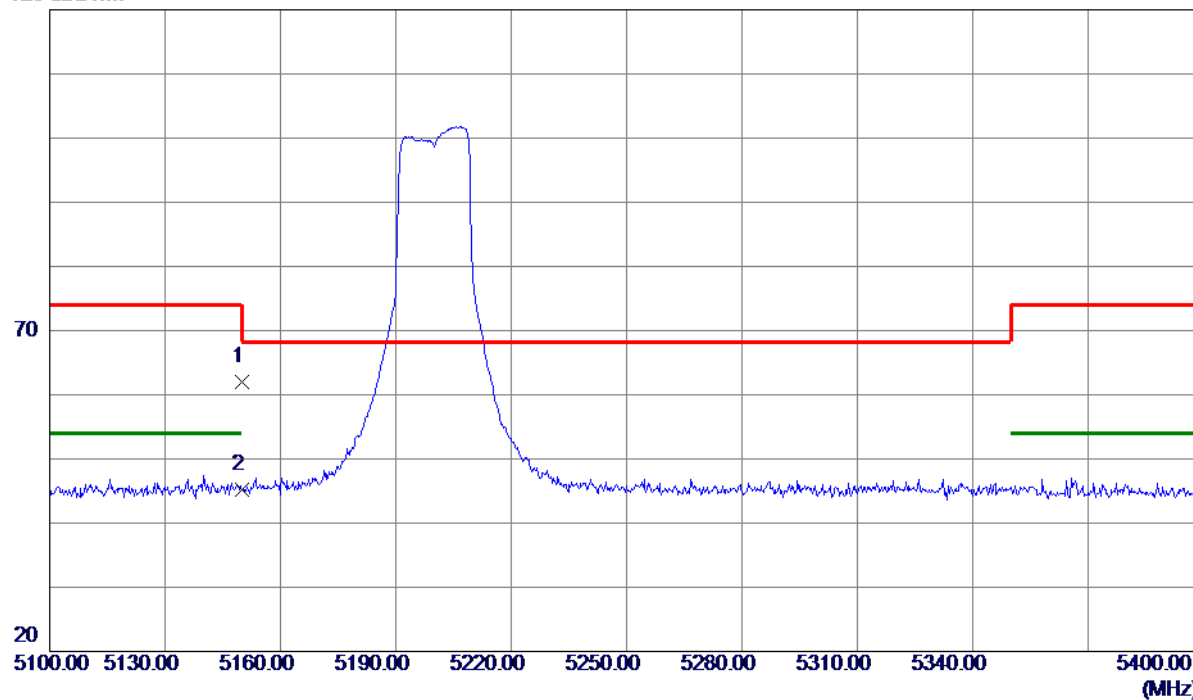

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5150.0000    | 22.90                      | 39.07                   | 61.97                     | 74.00           | -12.03       | Peak     |         |
| 2 * | 5150.0000    | 6.22                       | 39.07                   | 45.29                     | 54.00           | -8.71        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5200 MHz |

## Horizontal

80 dBuV/m

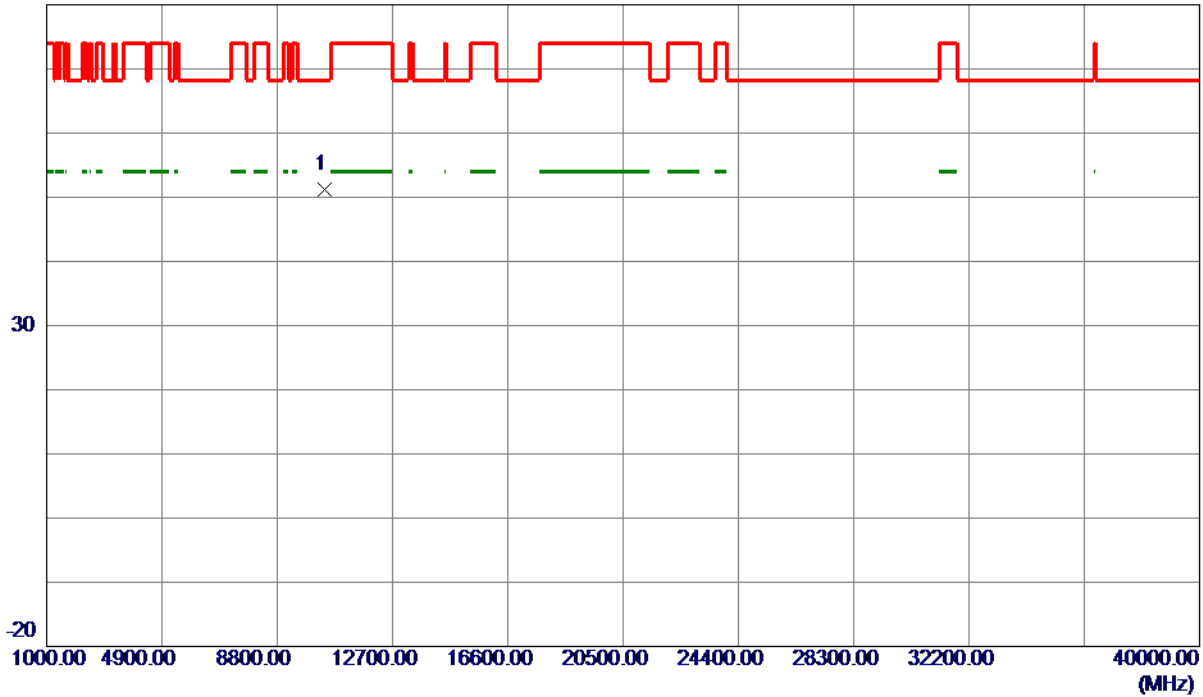

| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 10399.3860 | 52.79         | -1.61          | 51.18       | 68.30  | -17.12 | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5240 MHz |

## Vertical

120 dBuV/m

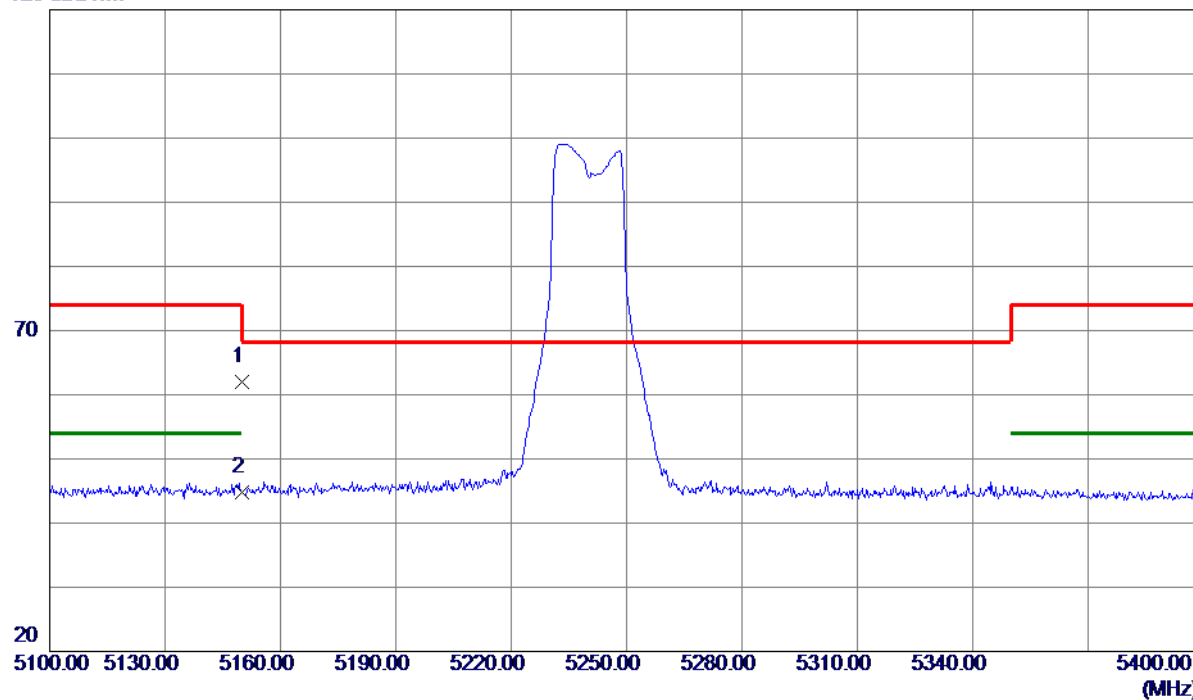

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5150.0000    | 22.98                      | 39.07                   | 62.05                     | 74.00           | -11.95       | Peak     |         |
| 2 * | 5150.0000    | 5.81                       | 39.07                   | 44.88                     | 54.00           | -9.12        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5240 MHz |

## Vertical

80 dBuV/m

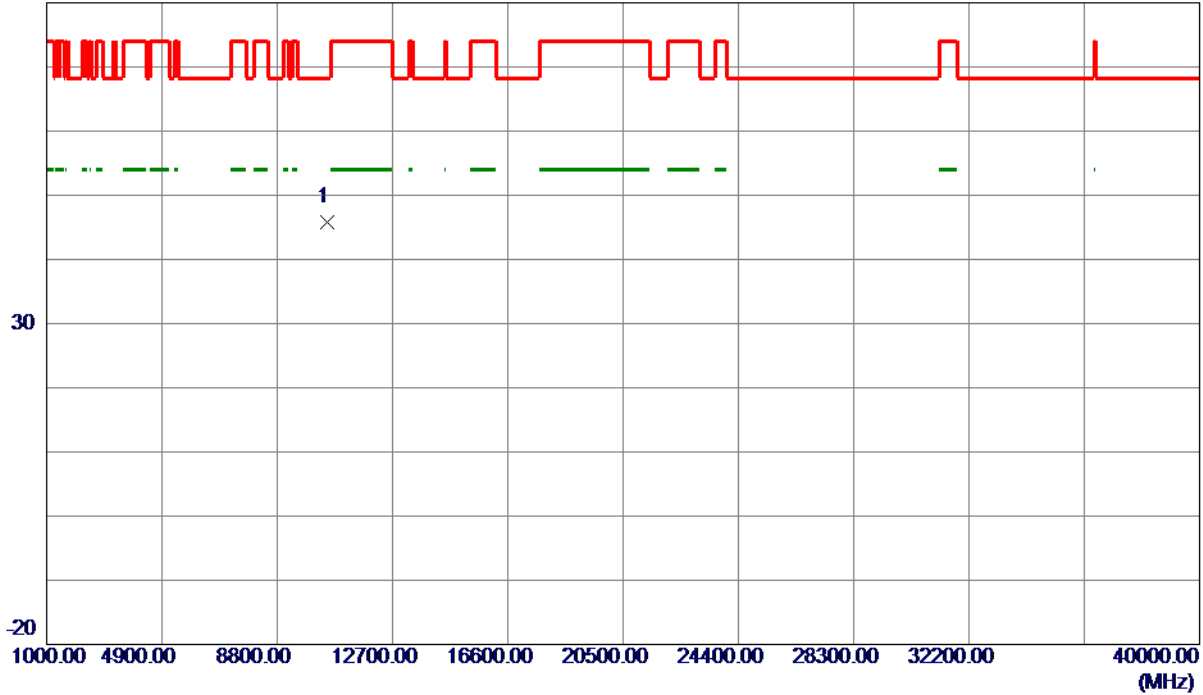

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10477.9260   | 47.41                      | -1.53                   | 45.88                     | 68.30           | -22.42       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5240 MHz |

## Horizontal

120 dBuV/m

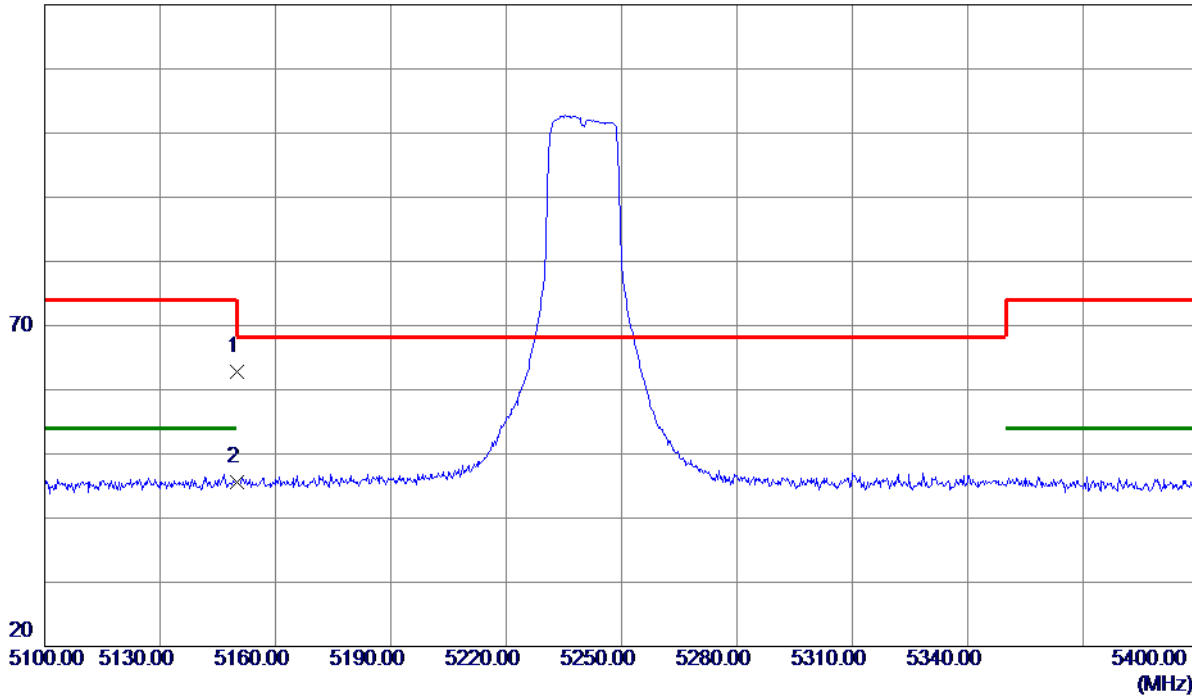

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5150.0000    | 23.65                      | 39.07                   | 62.72                     | 74.00           | -11.28       | Peak     |         |
| 2 * | 5150.0000    | 6.56                       | 39.07                   | 45.63                     | 54.00           | -8.37        | AVG      |         |

### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.



|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT20) Mode 5240 MHz |

## Horizontal

80 dBuV/m

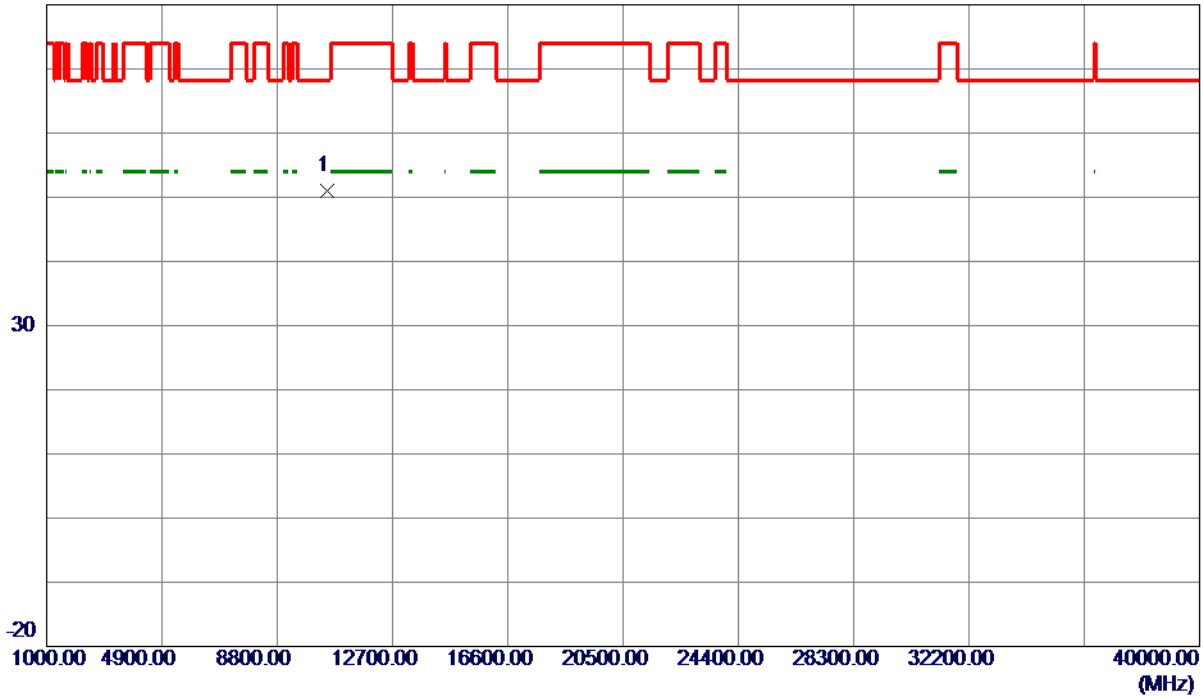

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10480.1890   | 52.47                      | -1.53                   | 50.94                     | 68.30           | -17.36       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT40) Mode 5190 MHz |

## Vertical

120 dBuV/m

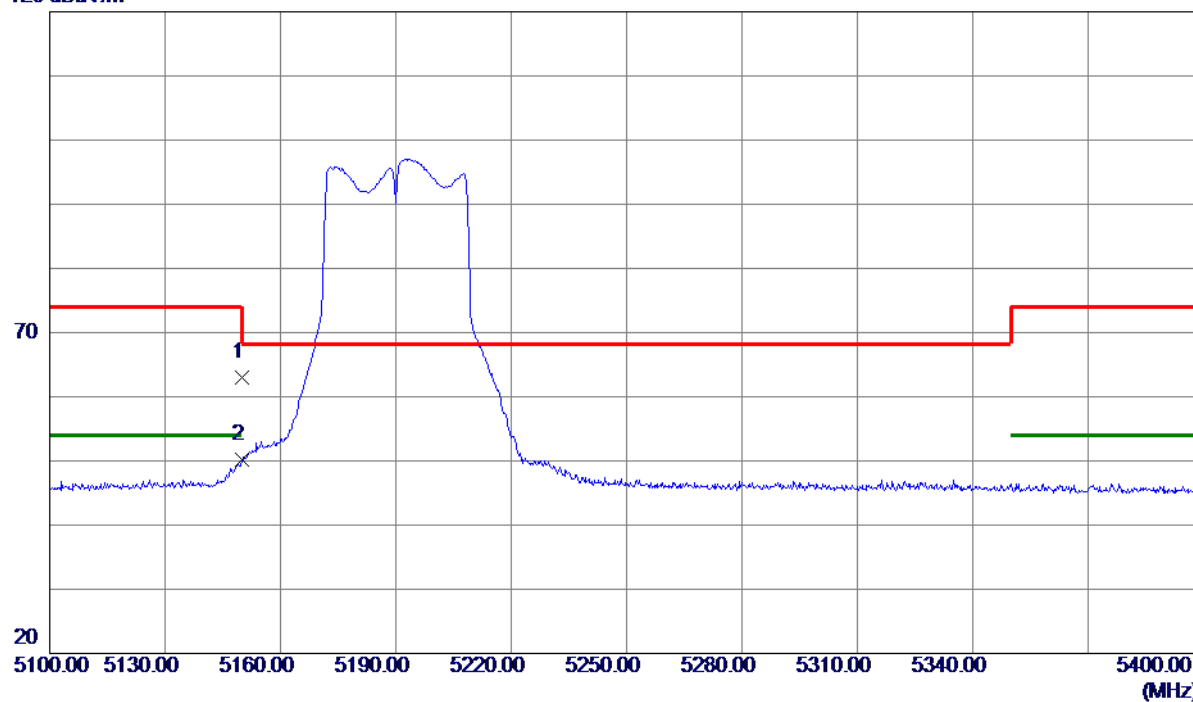

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5150.0000    | 24.02                      | 39.07                   | 63.09                     | 74.00           | -10.91       | Peak     |         |
| 2 * | 5150.0000    | 11.20                      | 39.07                   | 50.27                     | 54.00           | -3.73        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT40) Mode 5190 MHz |

## Vertical

80 dBuV/m

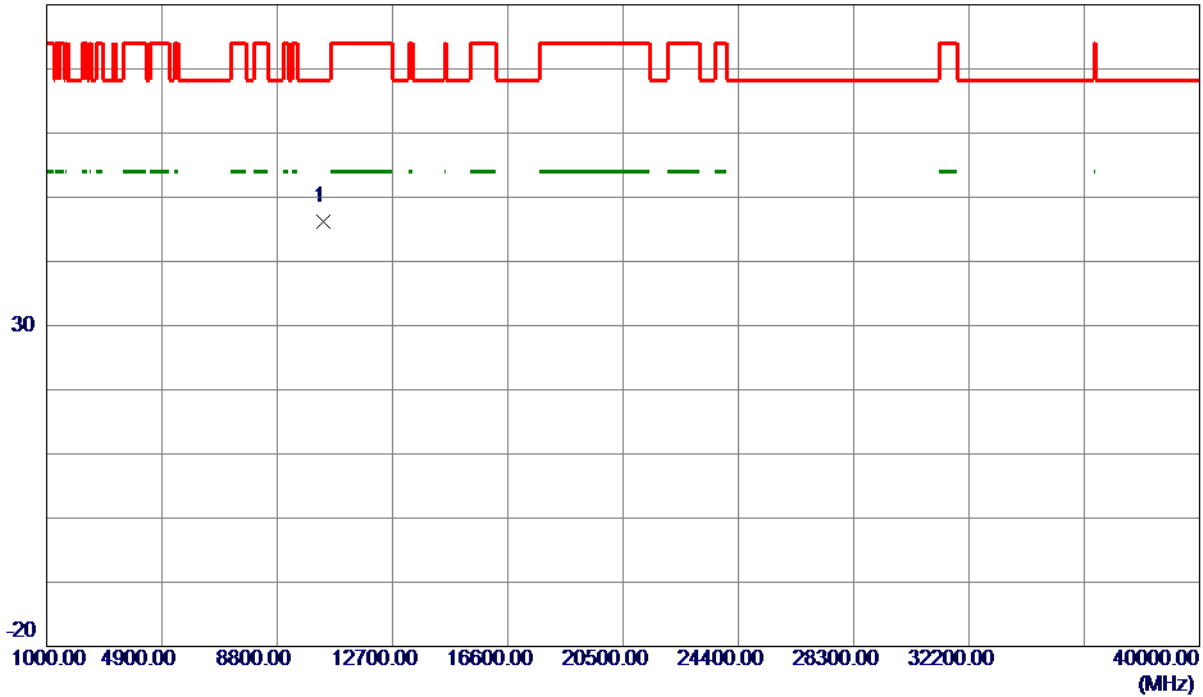


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10377.9780   | 47.82                      | -1.63                   | 46.19                     | 68.30           | -22.11       | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT40) Mode 5190 MHz |

## Horizontal

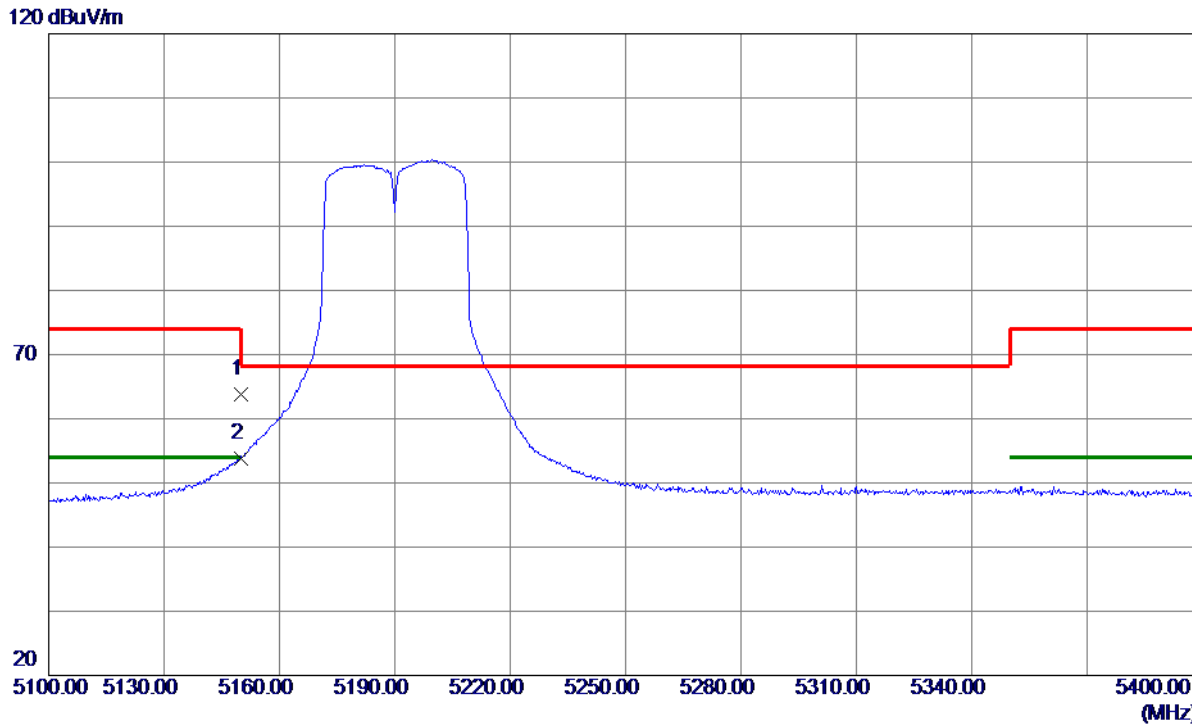

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5150.0000    | 24.72                      | 39.07                   | 63.79                     | 74.00           | -10.21       | Peak     |         |
| 2 * | 5150.0000    | 14.64                      | 39.07                   | 53.71                     | 54.00           | -0.29        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT40) Mode 5190 MHz |

## Horizontal

80 dBuV/m

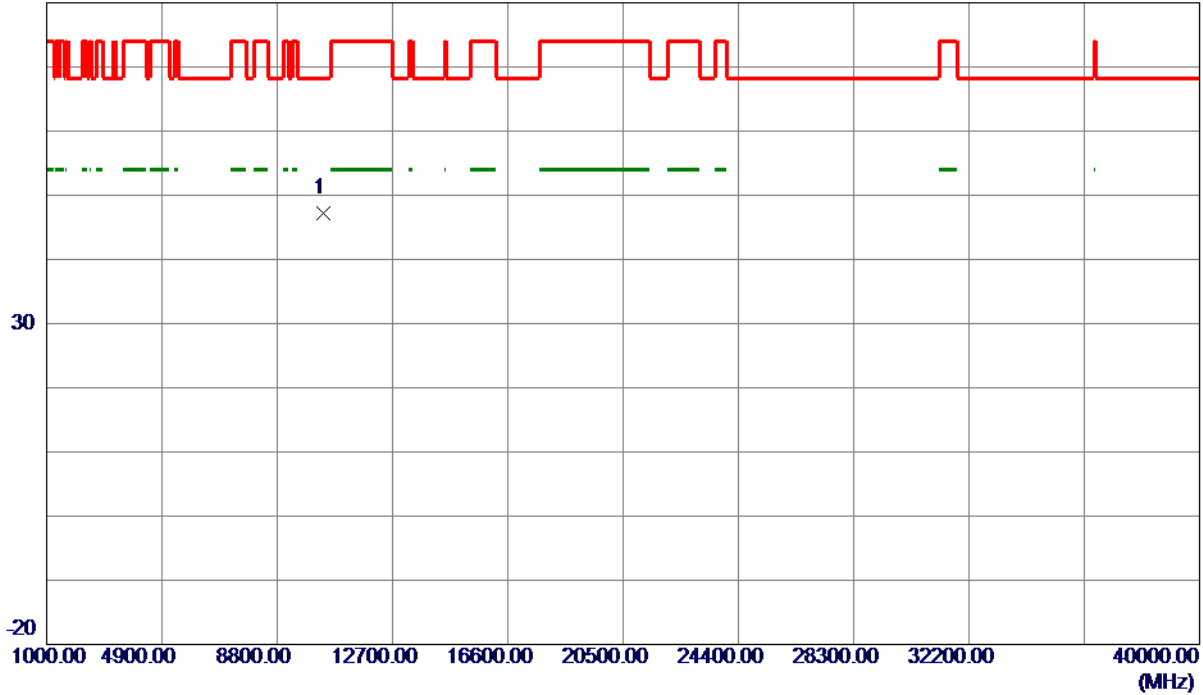


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10380.0340   | 48.76                      | -1.63                   | 47.13                     | 68.30           | -21.17       | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT40) Mode 5230 MHz |

## Vertical

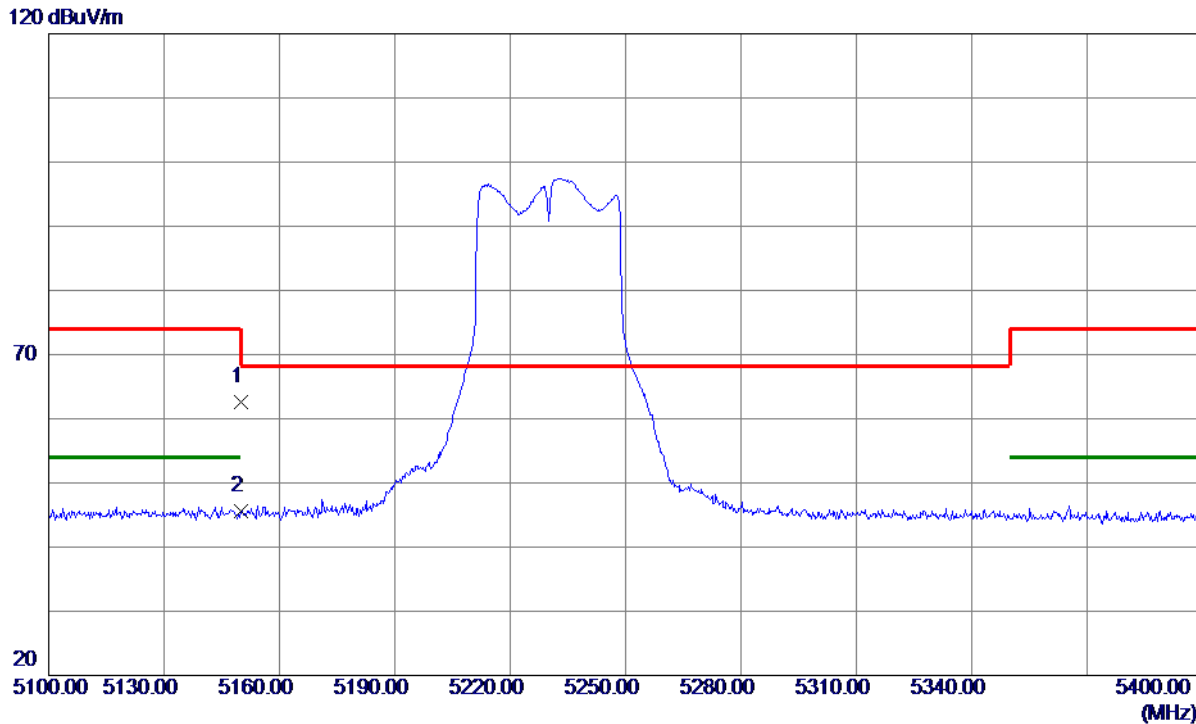

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5150.0000    | 23.46                      | 39.07                   | 62.53                     | 74.00           | -11.47       | Peak     |         |
| 2 * | 5150.0000    | 6.49                       | 39.07                   | 45.56                     | 54.00           | -8.44        | AVG      |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT40) Mode 5230 MHz |

## Vertical

80 dBuV/m

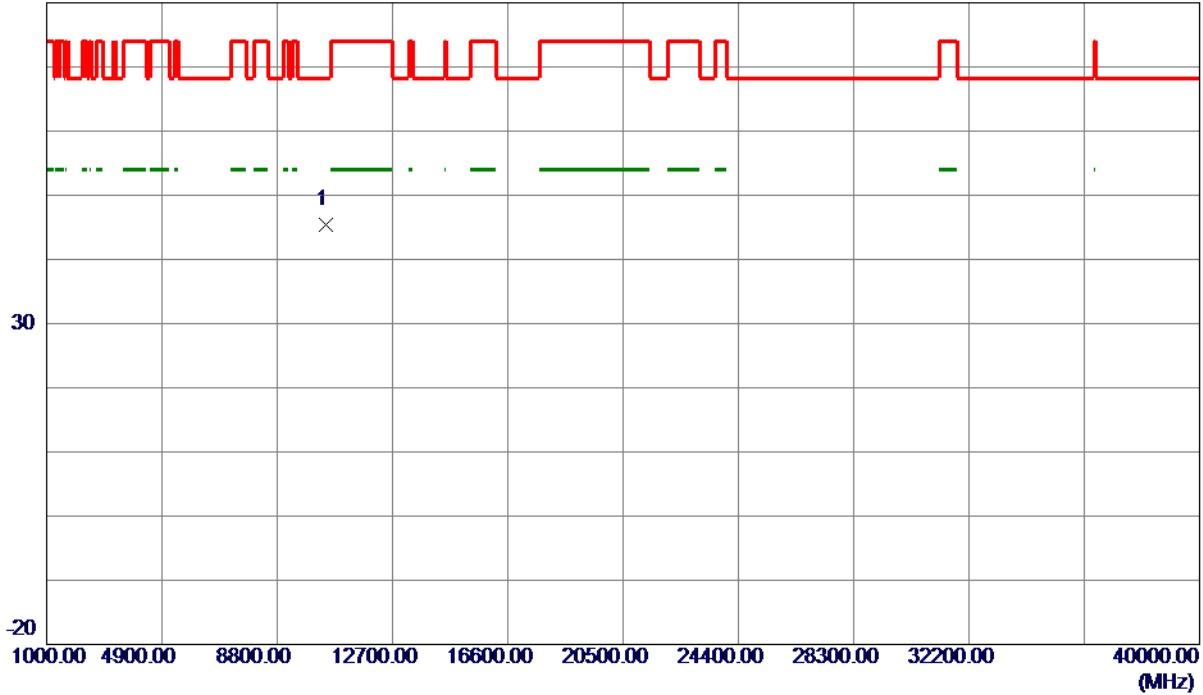


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10459.2460   | 46.91                      | -1.55                   | 45.36                     | 68.30           | -22.94       | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT40) Mode 5230 MHz |

## Horizontal

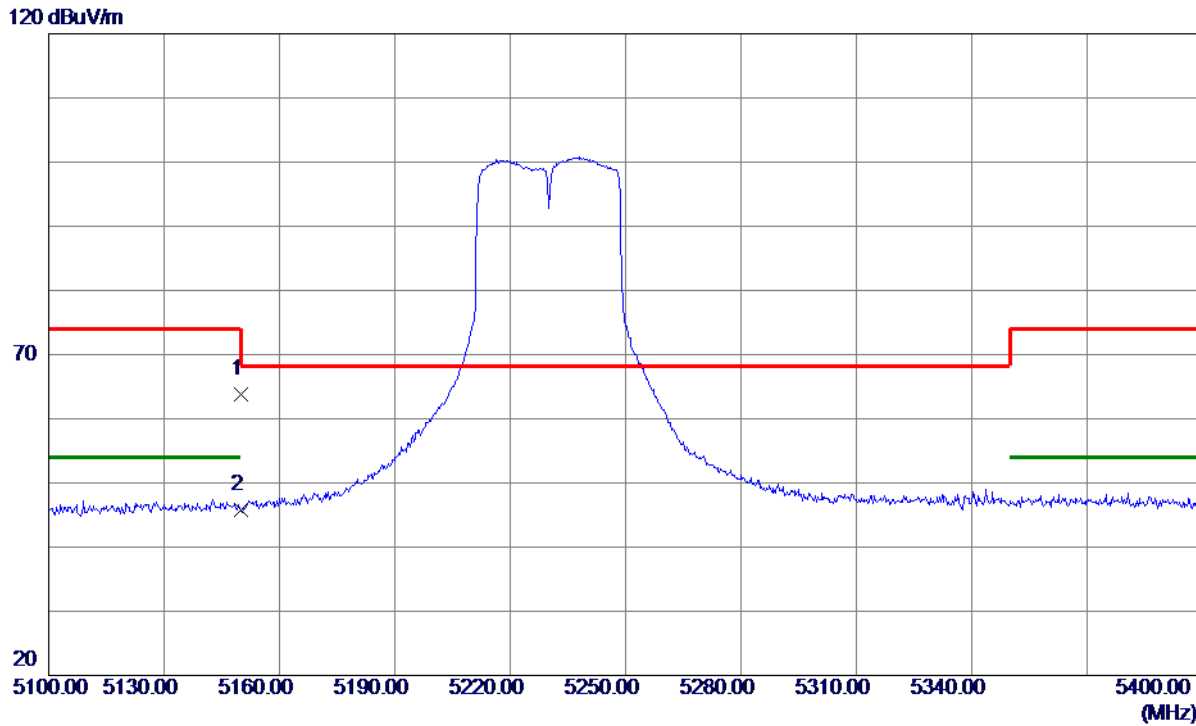

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5150.0000    | 24.80                      | 39.07                   | 63.87                     | 74.00           | -10.13       | Peak     |         |
| 2 * | 5150.0000    | 6.78                       | 39.07                   | 45.85                     | 54.00           | -8.15        | AVG      |         |

### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.



|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-1_TX N (HT40) Mode 5230 MHz |

## Horizontal

80 dBuV/m

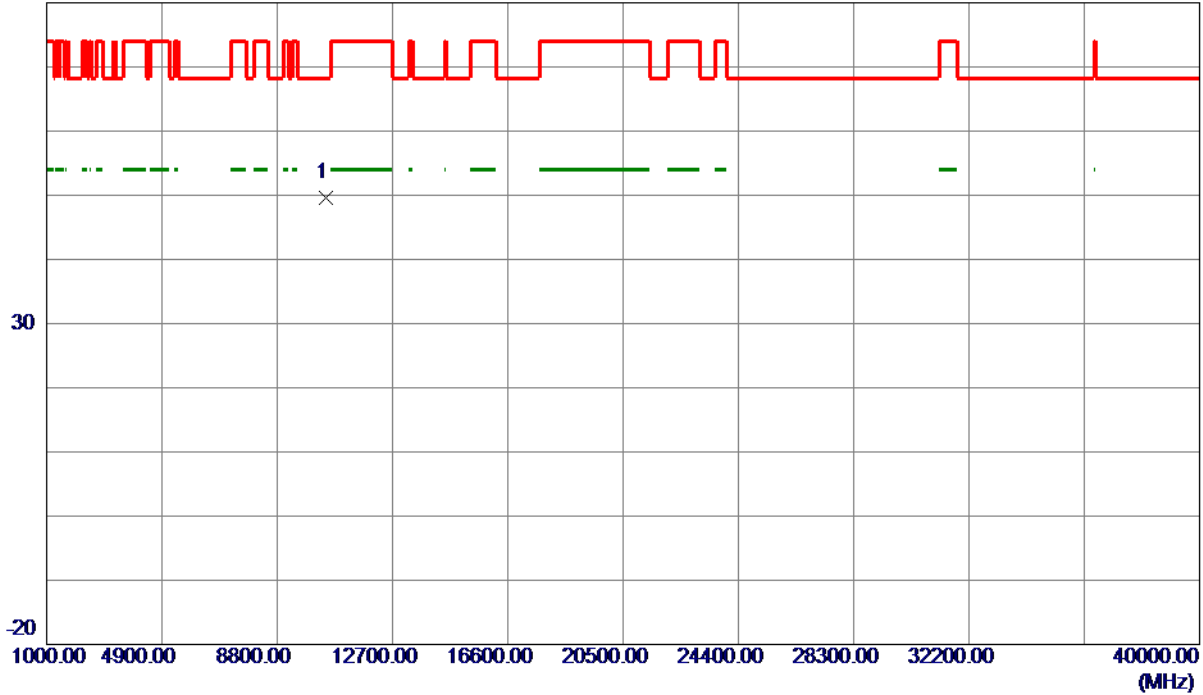


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 10460.2480   | 51.16                      | -1.55                   | 49.61                     | 68.30           | -18.69       | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5745 MHz |

## Vertical

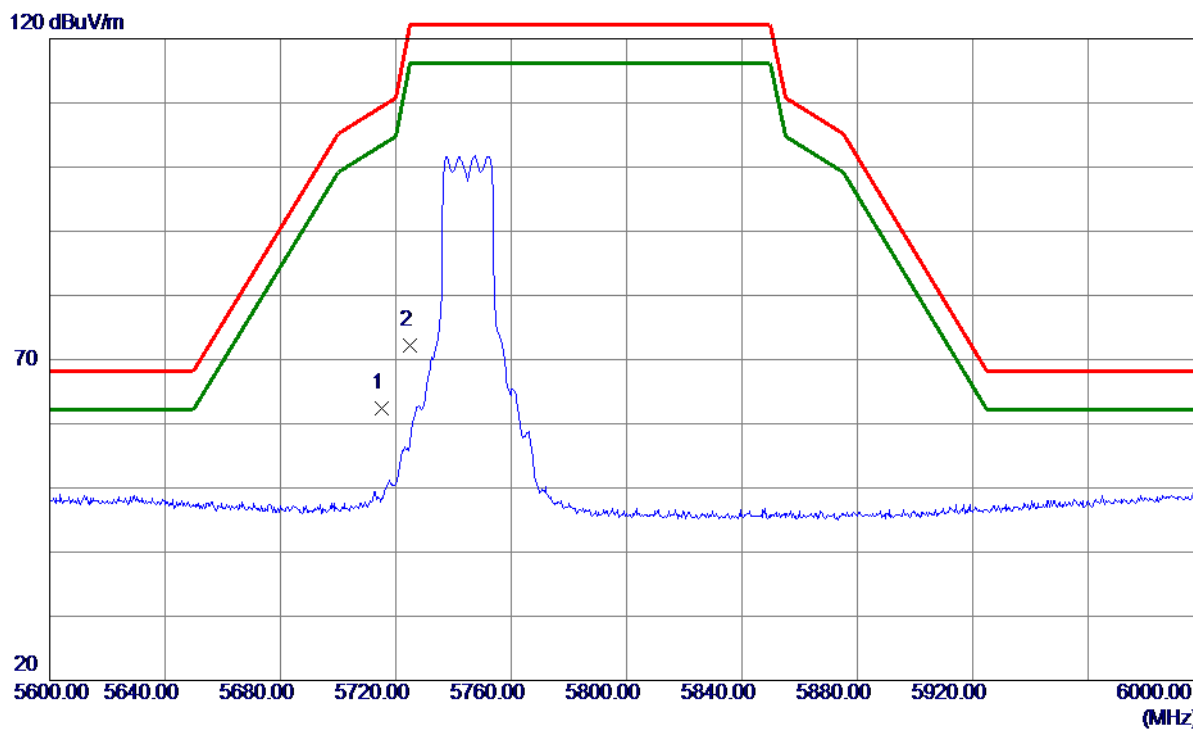

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5715.0000    | 22.41                      | 40.02                   | 62.43                     | 109.40          | -46.97       | Peak     |         |
| 2   | 5725.0000    | 32.11                      | 40.05                   | 72.16                     | 122.20          | -50.04       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5745 MHz |

## Vertical

80 dBuV/m

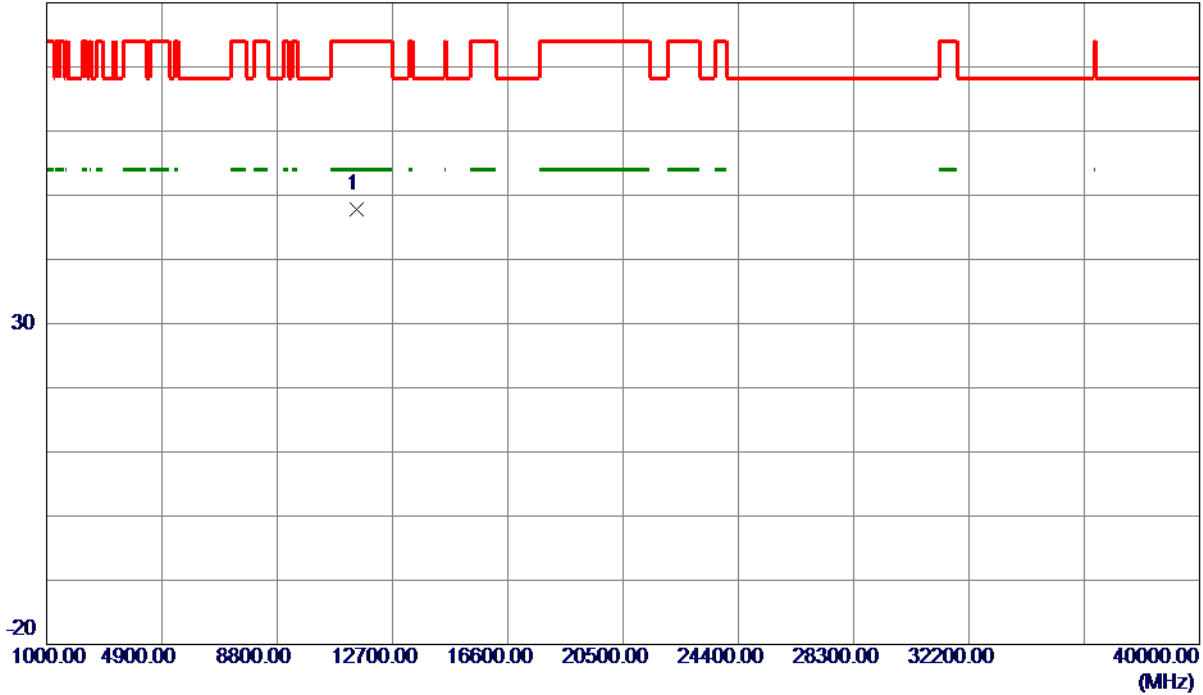


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11488.5490   | 48.22                      | -0.37                   | 47.85                     | 74.00           | -26.15       | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5745 MHz |

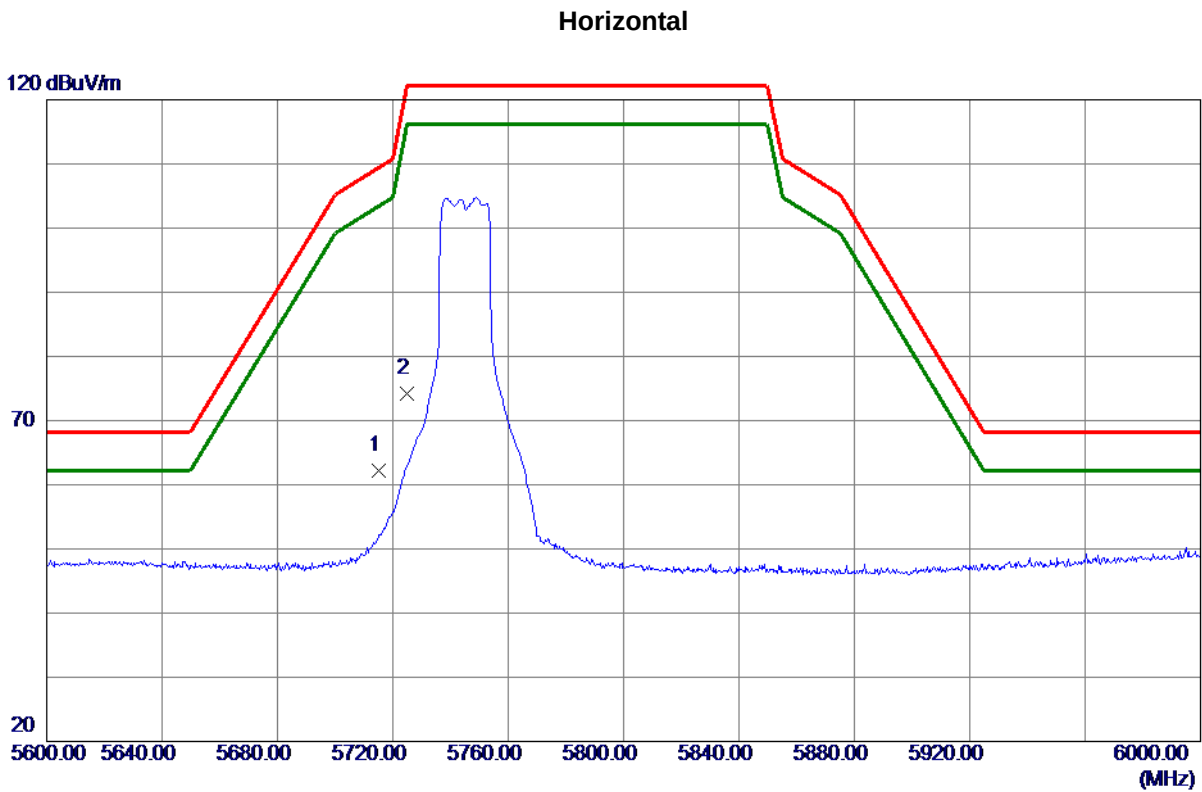

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5715.0000    | 22.19                      | 40.02                   | 62.21                     | 109.40          | -47.19       | Peak     |         |
| 2   | 5725.0000    | 34.10                      | 40.05                   | 74.15                     | 122.20          | -48.05       | Peak     |         |


**REMARKS:**

- (1) Measurement Value = Reading Level + Correct Factor.  
 (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5745 MHz |

## Horizontal

80 dBuV/m

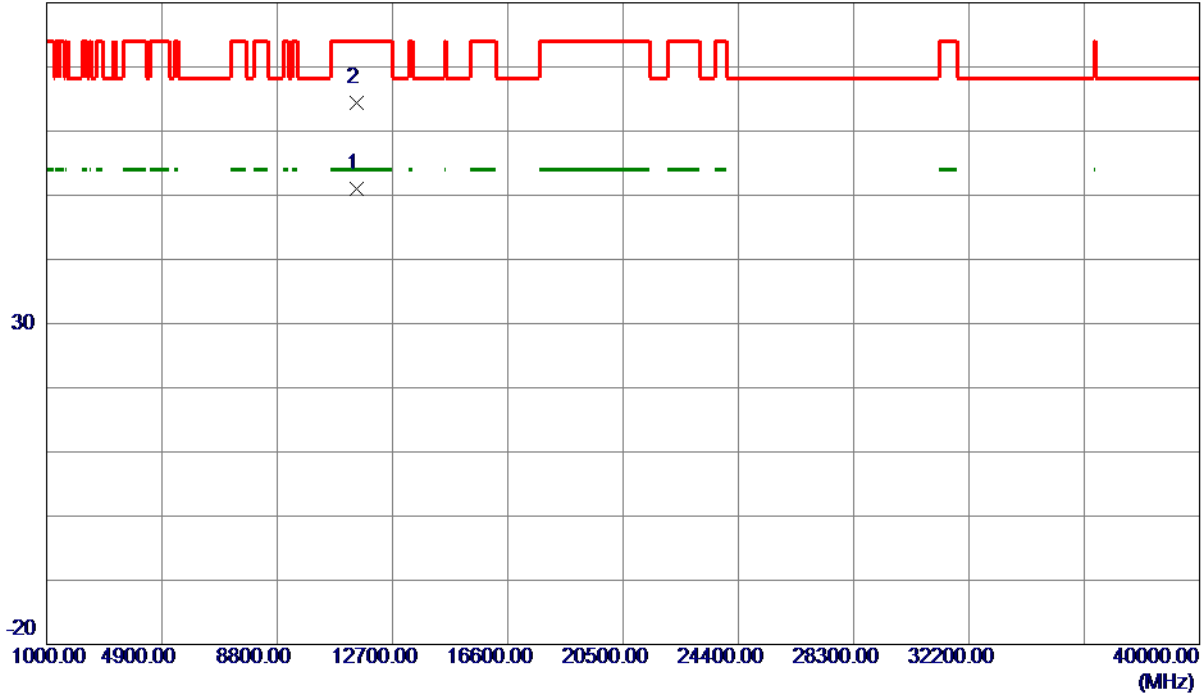


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11488.2870   | 51.41                      | -0.36                   | 51.05                     | 54.00           | -2.95        | AVG      |         |
| 2   | 11490.6280   | 64.75                      | -0.37                   | 64.38                     | 74.00           | -9.62        | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5785 MHz |

## Vertical

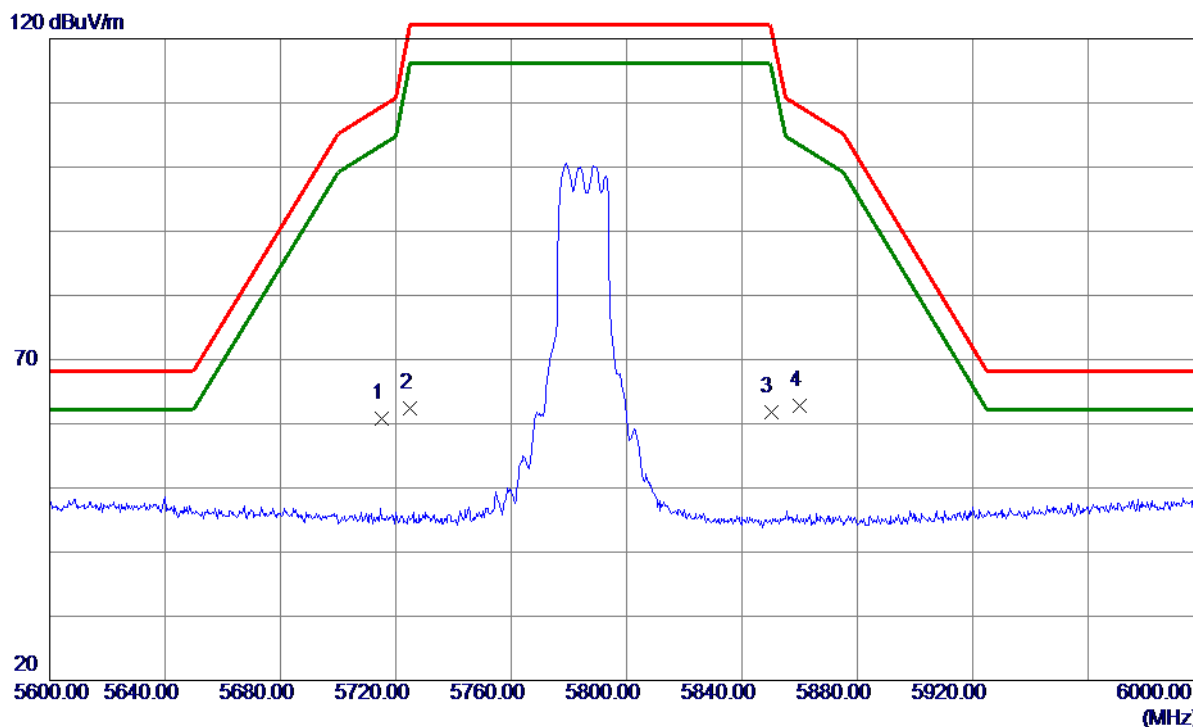

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 20.77                      | 40.02                   | 60.79                     | 109.40          | -48.61       | Peak     |         |
| 2   | 5725.0000    | 22.44                      | 40.05                   | 62.49                     | 122.20          | -59.71       | Peak     |         |
| 3   | 5850.0000    | 21.49                      | 40.34                   | 61.83                     | 122.20          | -60.37       | Peak     |         |
| 4 * | 5860.0000    | 22.38                      | 40.37                   | 62.75                     | 109.40          | -46.65       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5785 MHz |

## Vertical

80 dBuV/m

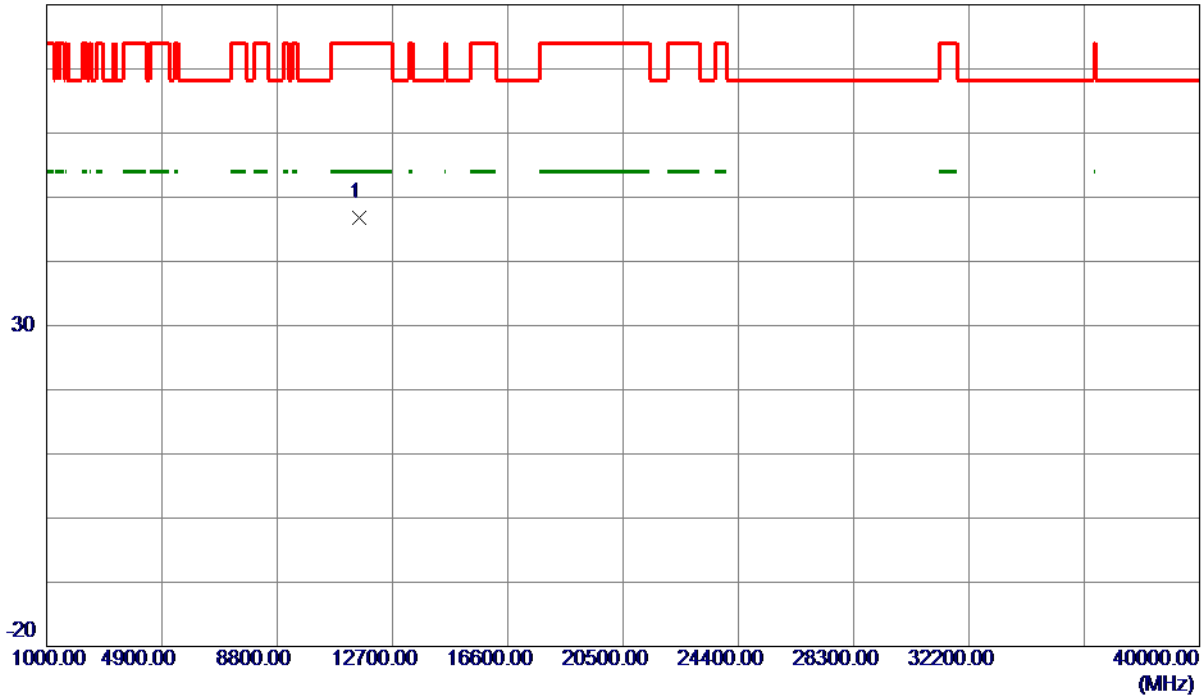


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11572.4210   | 47.22                      | -0.34                   | 46.88                     | 74.00           | -27.12       | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5785 MHz |

## Horizontal

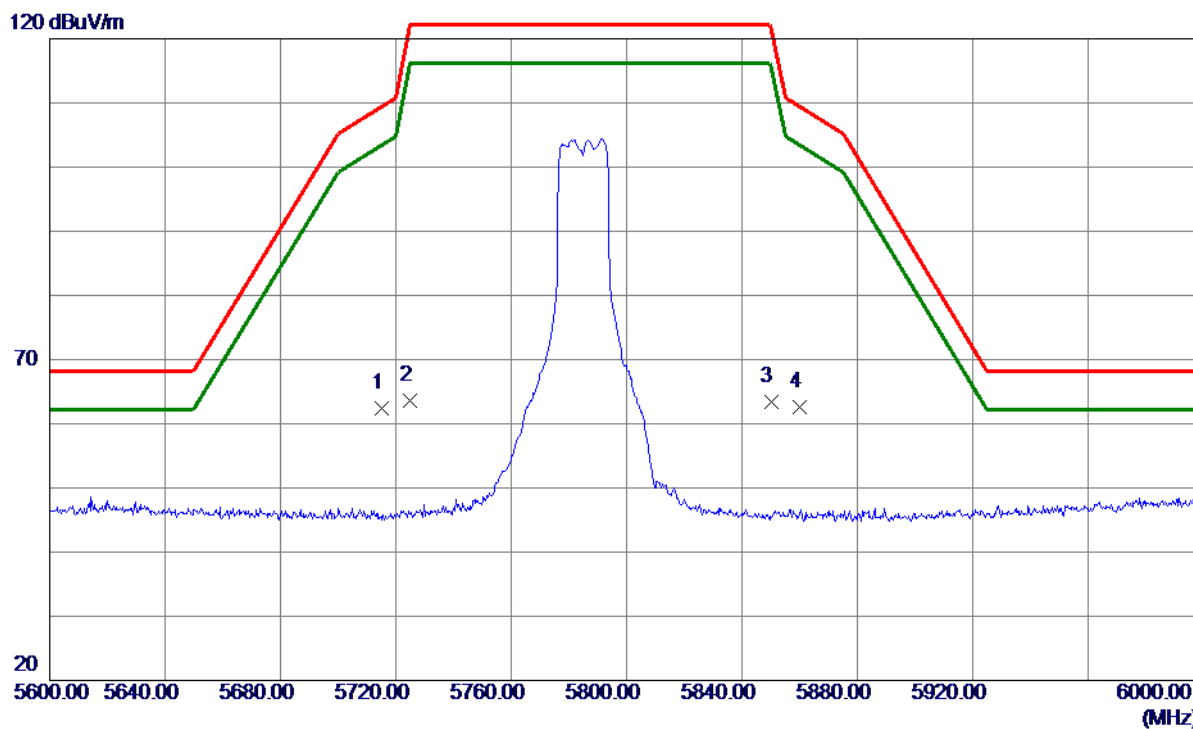

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 22.43                      | 40.02                   | 62.45                     | 109.40          | -46.95       | Peak     |         |
| 2   | 5725.0000    | 23.47                      | 40.05                   | 63.52                     | 122.20          | -58.68       | Peak     |         |
| 3   | 5850.0000    | 23.05                      | 40.34                   | 63.39                     | 122.20          | -58.81       | Peak     |         |
| 4 * | 5860.0000    | 22.25                      | 40.37                   | 62.62                     | 109.40          | -46.78       | Peak     |         |

### REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.



|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5785 MHz |

## Horizontal

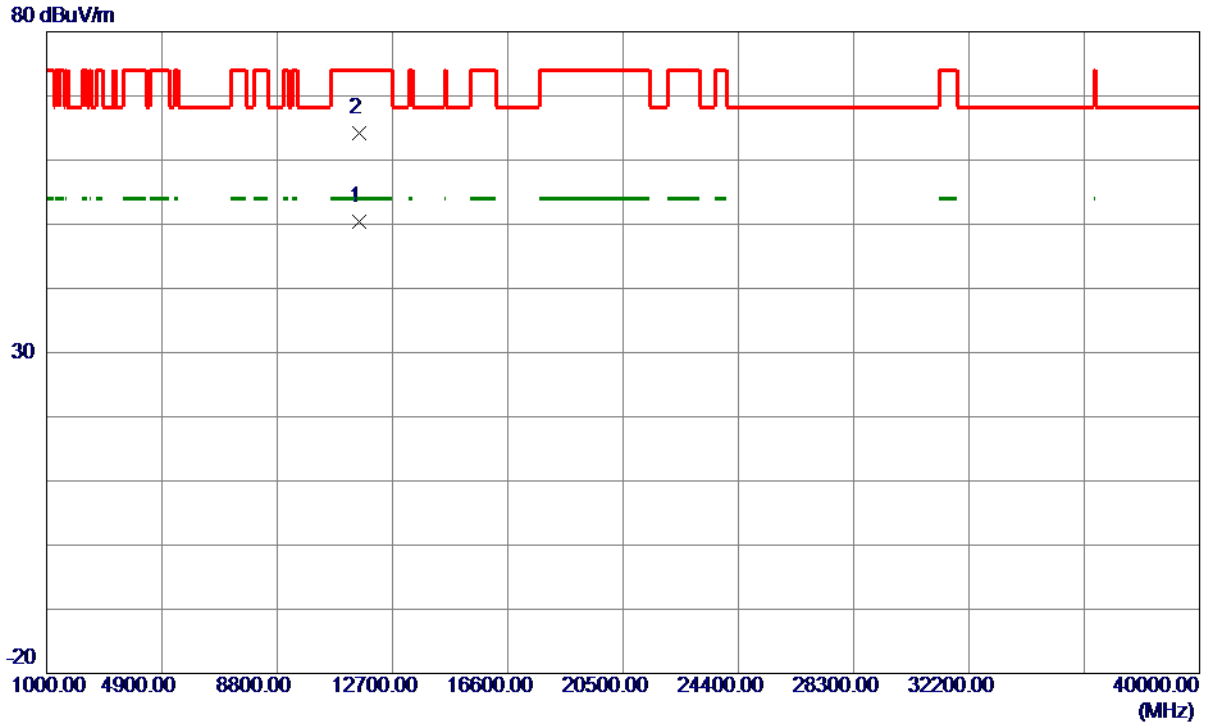


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11568.4870   | 50.81                      | -0.34                   | 50.47                     | 54.00           | -3.53        | AVG      |         |
| 2   | 11572.2250   | 64.59                      | -0.34                   | 64.25                     | 74.00           | -9.75        | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5825 MHz |

## Vertical

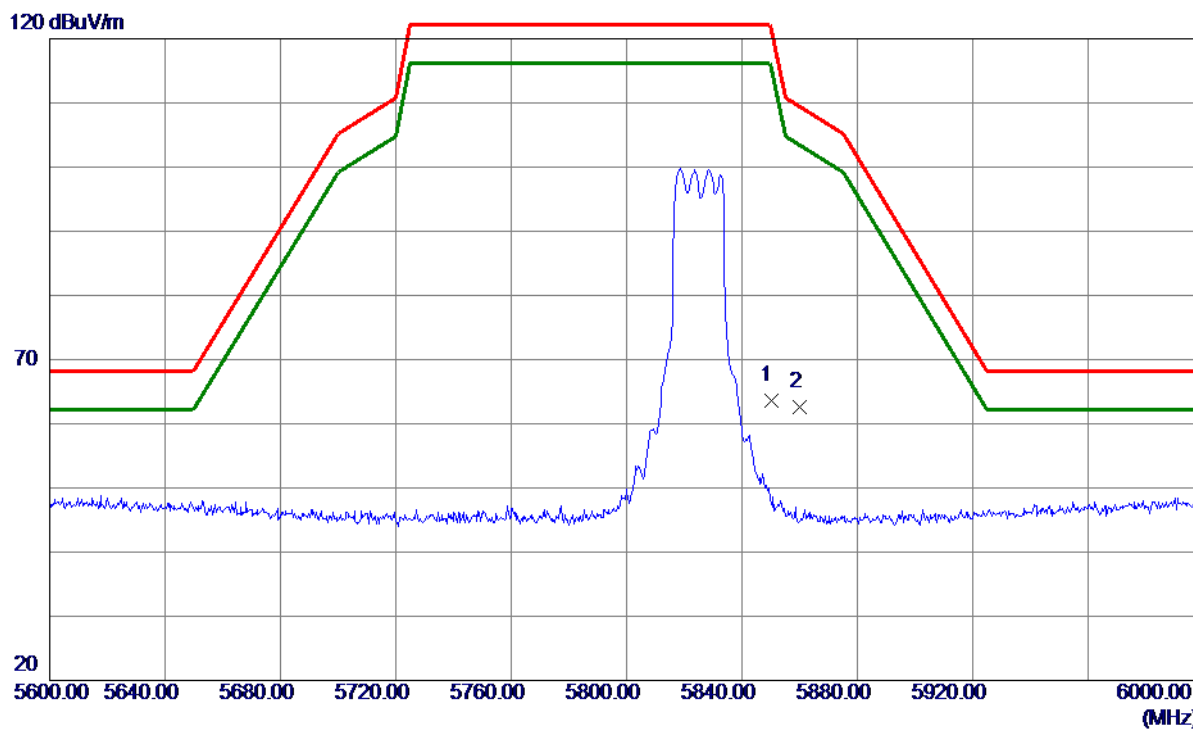

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5850.0000    | 23.22                      | 40.34                   | 63.56                     | 122.20          | -58.64       | Peak     |         |
| 2 * | 5860.0000    | 22.24                      | 40.37                   | 62.61                     | 109.40          | -46.79       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5825 MHz |

## Vertical

80 dBuV/m

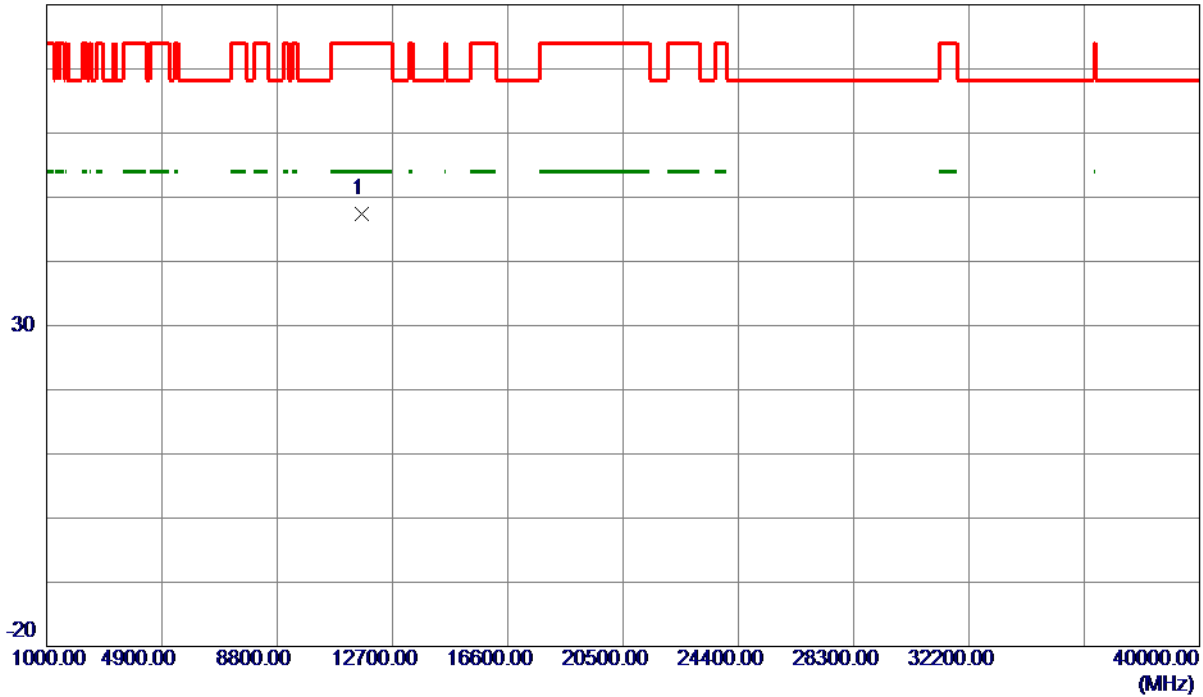


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11648.8280   | 47.76                      | -0.30                   | 47.46                     | 74.00           | -26.54       | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5825 MHz |

## Horizontal

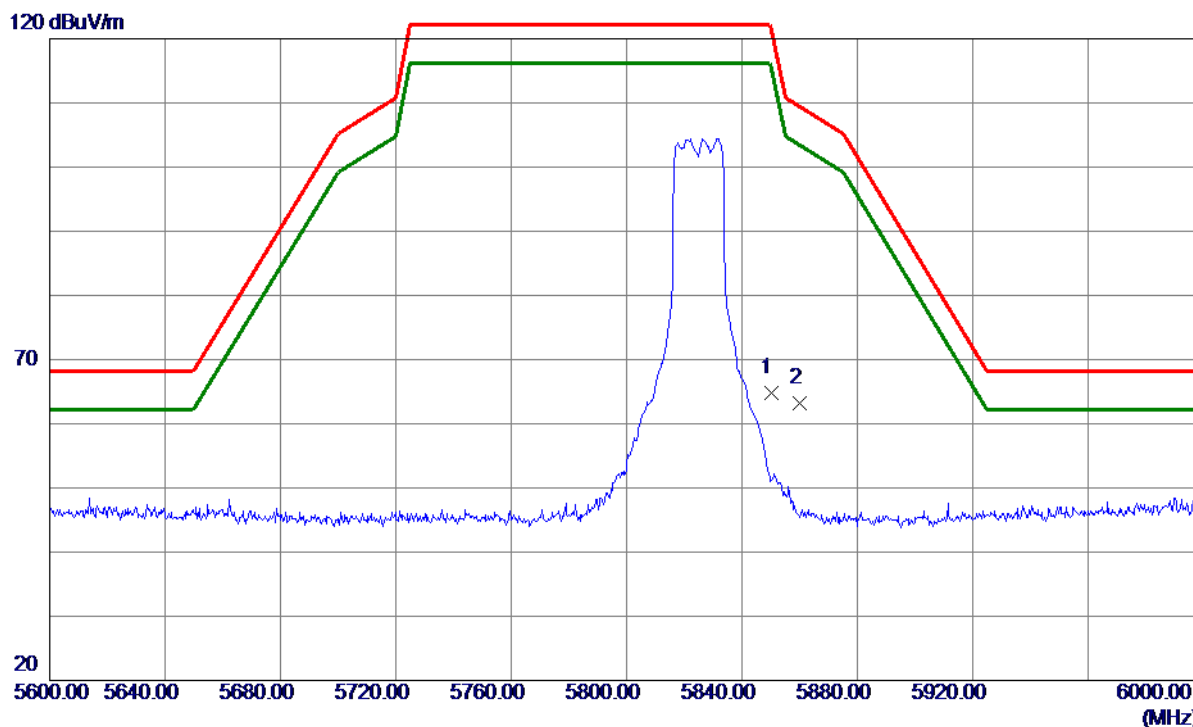

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5850.0000    | 24.52                      | 40.34                   | 64.86                     | 122.20          | -57.34       | Peak     |         |
| 2 * | 5860.0000    | 22.91                      | 40.37                   | 63.28                     | 109.40          | -46.12       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                           |
|-----------------|---------------------------|
| Orthogonal Axis | X                         |
| Test Mode       | UNII-3_TX A Mode 5825 MHz |

## Horizontal

80 dBuV/m

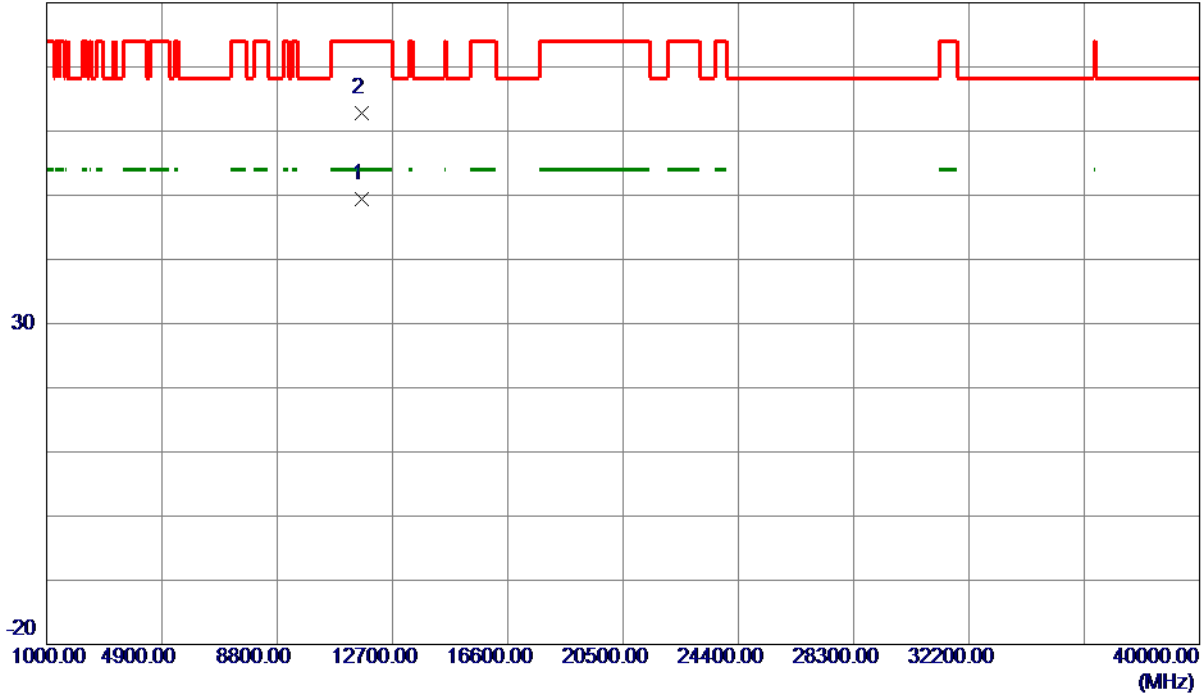


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11647.9210   | 49.72                      | -0.30                   | 49.42                     | 54.00           | -4.58        | AVG      |         |
| 2   | 11652.4530   | 63.10                      | -0.29                   | 62.81                     | 74.00           | -11.19       | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5745 MHz |

## Vertical

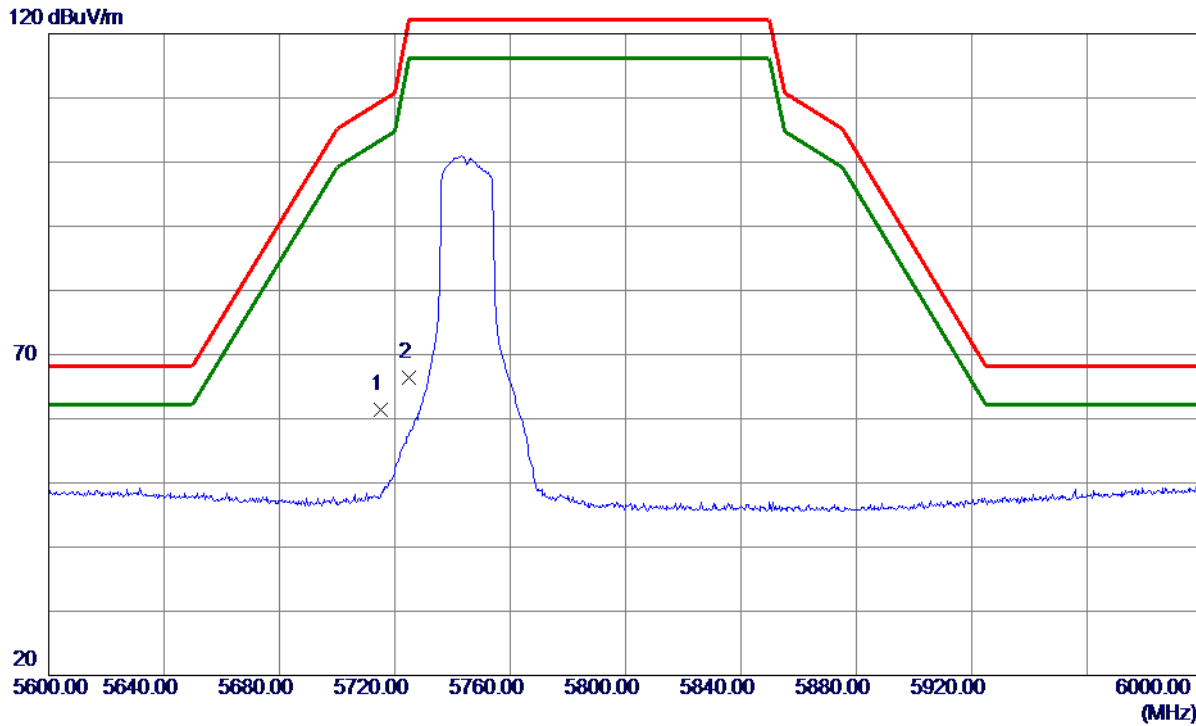

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5715.0000    | 21.32                      | 40.02                   | 61.34                     | 109.40          | -48.06       | Peak     |         |
| 2   | 5725.0000    | 26.34                      | 40.05                   | 66.39                     | 122.20          | -55.81       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5745 MHz |

## Vertical

80 dBuV/m

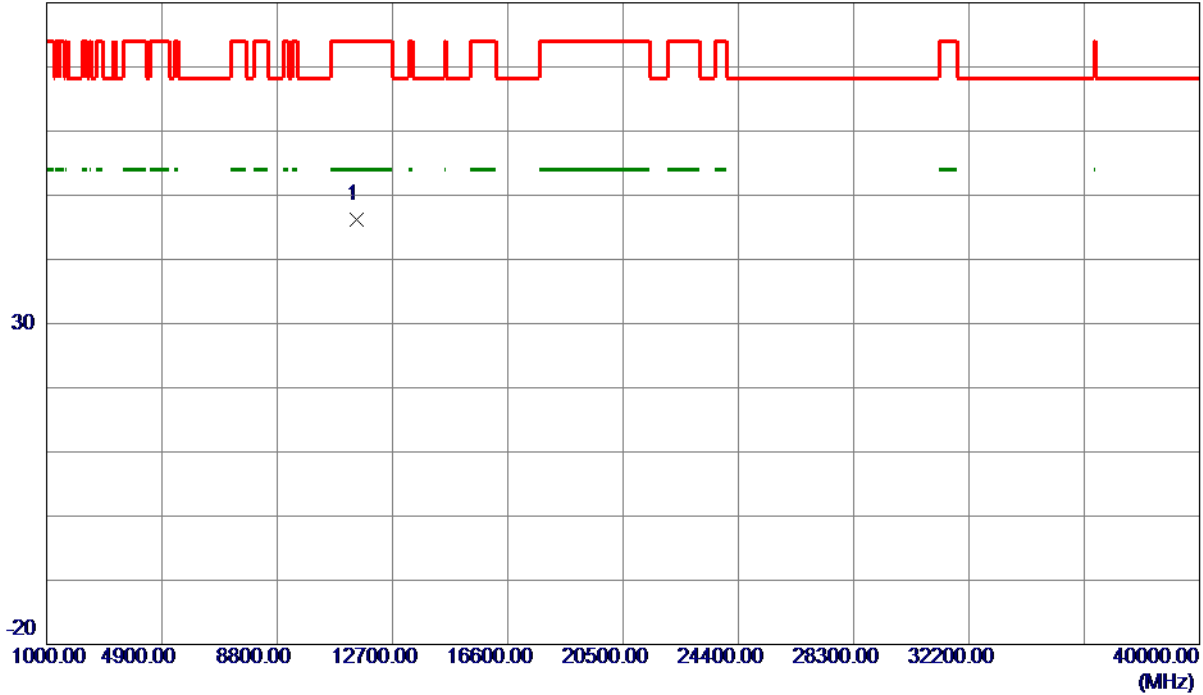


| No. | Freq.      | Reading Level | Correct Factor | Measurement | Limit  | Margin |          |         |
|-----|------------|---------------|----------------|-------------|--------|--------|----------|---------|
|     | MHz        | dBuV/m        | dB             | dBuV/m      | dBuV/m | dB     | Detector | Comment |
| 1 * | 11490.1609 | 46.63         | -0.37          | 46.26       | 74.00  | -27.74 | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5745 MHz |

## Horizontal

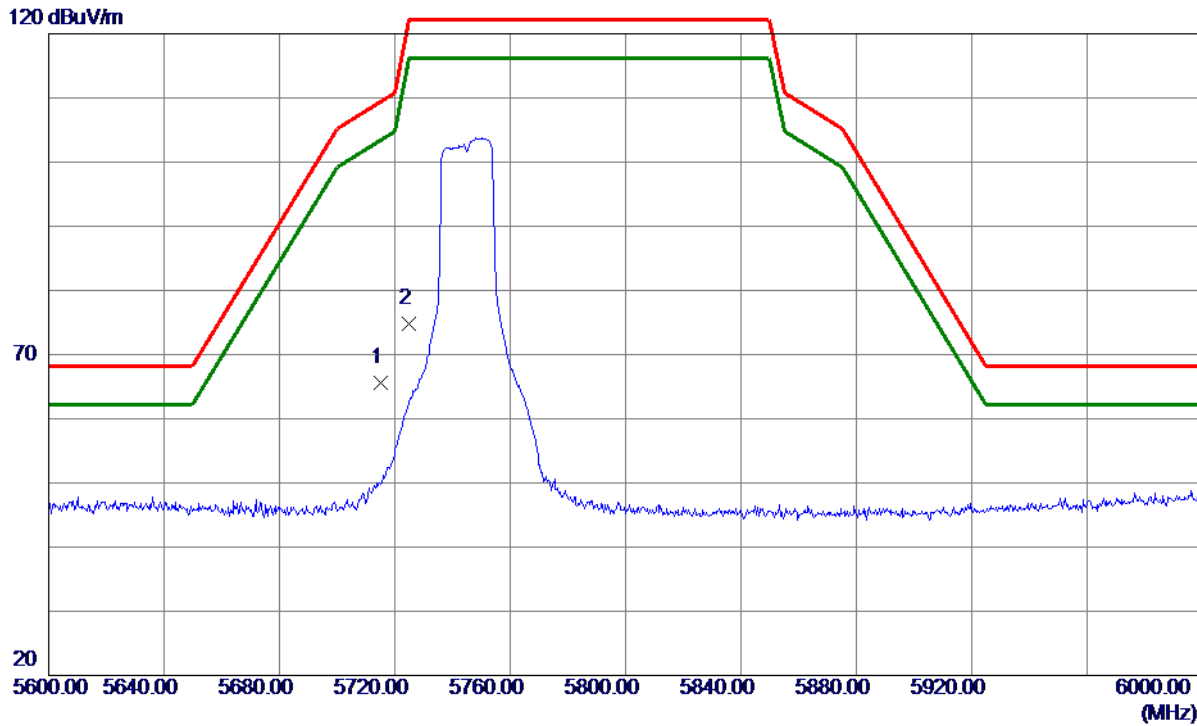

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5715.0000    | 25.51                      | 40.02                   | 65.53                     | 109.40          | -43.87       | Peak     |         |
| 2   | 5725.0000    | 34.83                      | 40.05                   | 74.88                     | 122.20          | -47.32       | Peak     |         |

### REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.



|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5745 MHz |

## Horizontal

80 dBuV/m

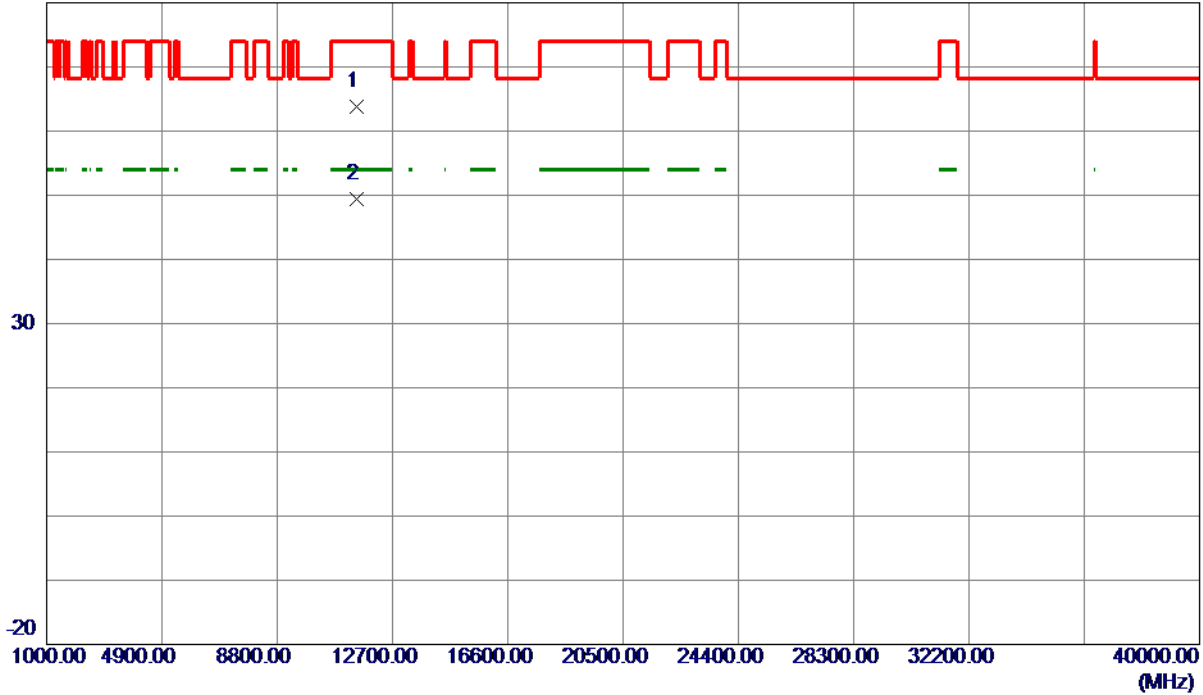


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11488.4980   | 64.21                      | -0.37                   | 63.84                     | 74.00           | -10.16       | Peak     |         |
| 2 * | 11490.9230   | 49.80                      | -0.37                   | 49.43                     | 54.00           | -4.57        | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5785 MHz |

## Vertical

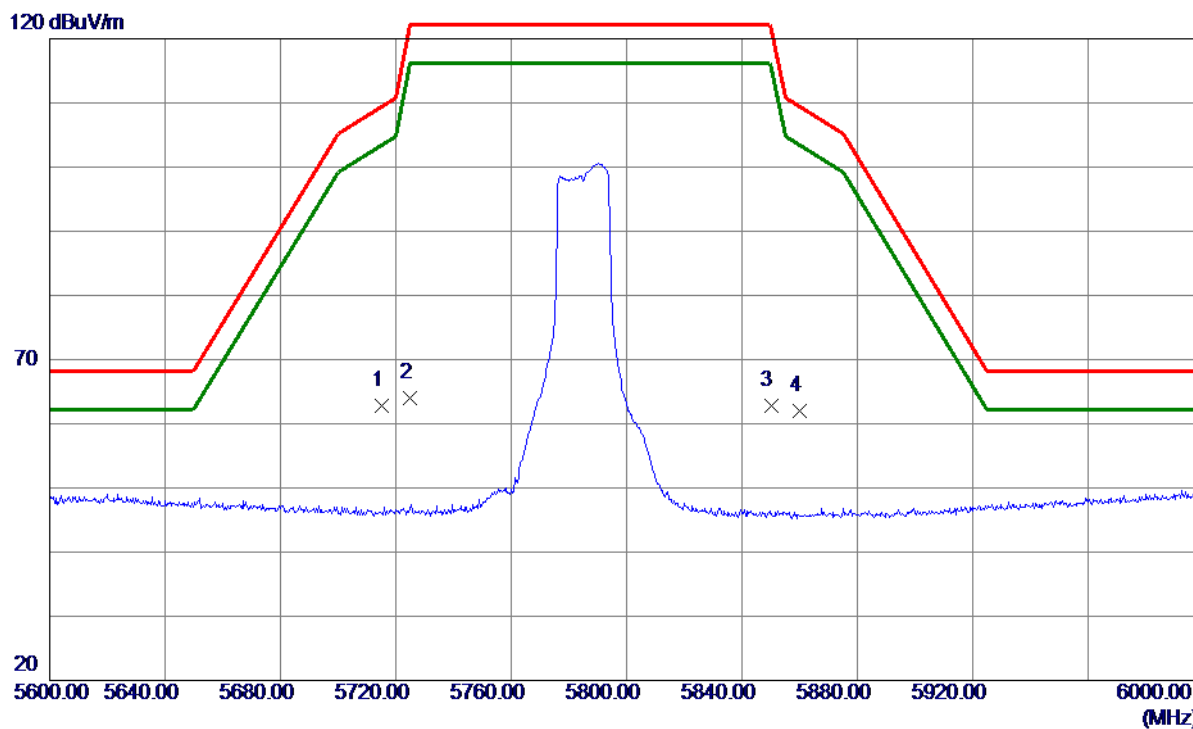

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5715.0000    | 22.79                      | 40.02                   | 62.81                     | 109.40          | -46.59       | Peak     |         |
| 2   | 5725.0000    | 23.89                      | 40.05                   | 63.94                     | 122.20          | -58.26       | Peak     |         |
| 3   | 5850.0000    | 22.40                      | 40.34                   | 62.74                     | 122.20          | -59.46       | Peak     |         |
| 4   | 5860.0000    | 21.58                      | 40.37                   | 61.95                     | 109.40          | -47.45       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5785 MHz |

## Vertical

80 dBuV/m

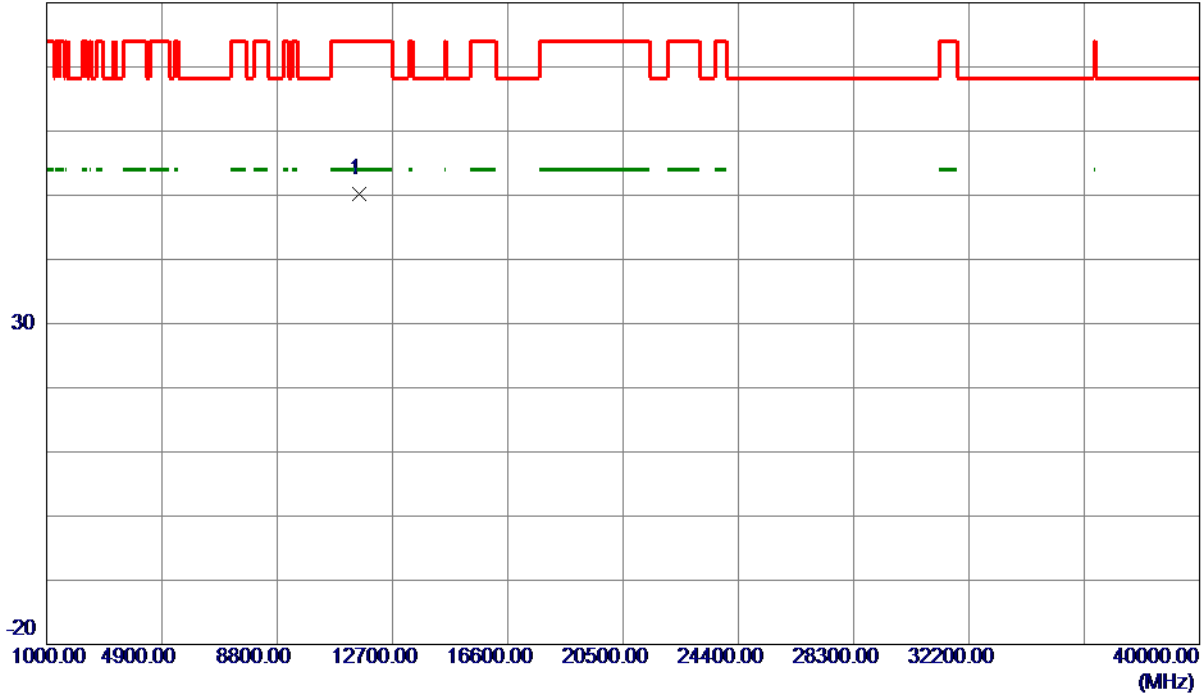


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11570.9200   | 50.49                      | -0.34                   | 50.15                     | 74.00           | -23.85       | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5785 MHz |

## Horizontal

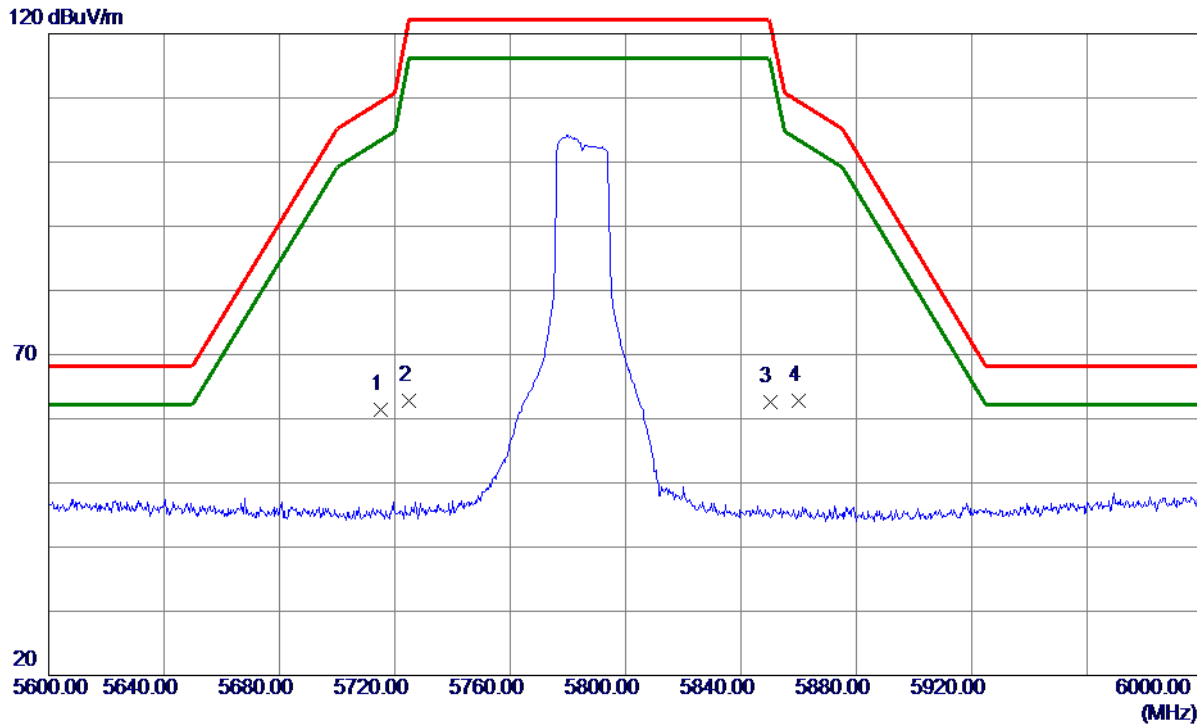

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5715.0000    | 21.33                      | 40.02                   | 61.35                     | 109.40          | -48.05       | Peak     |         |
| 2   | 5725.0000    | 22.77                      | 40.05                   | 62.82                     | 122.20          | -59.38       | Peak     |         |
| 3   | 5850.0000    | 22.25                      | 40.34                   | 62.59                     | 122.20          | -59.61       | Peak     |         |
| 4 * | 5860.0000    | 22.49                      | 40.37                   | 62.86                     | 109.40          | -46.54       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5785 MHz |

## Horizontal

80 dBuV/m

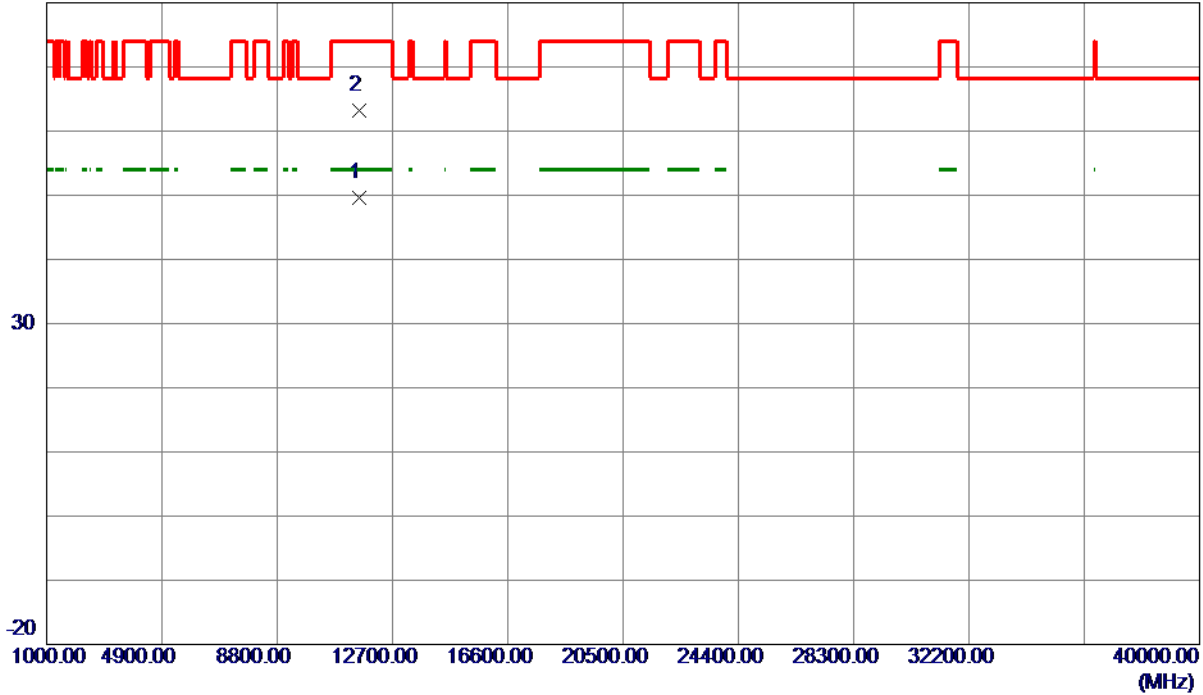


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11569.6090   | 50.00                      | -0.34                   | 49.66                     | 54.00           | -4.34        | AVG      |         |
| 2   | 11570.5880   | 63.54                      | -0.34                   | 63.20                     | 74.00           | -10.80       | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5825 MHz |

## Vertical

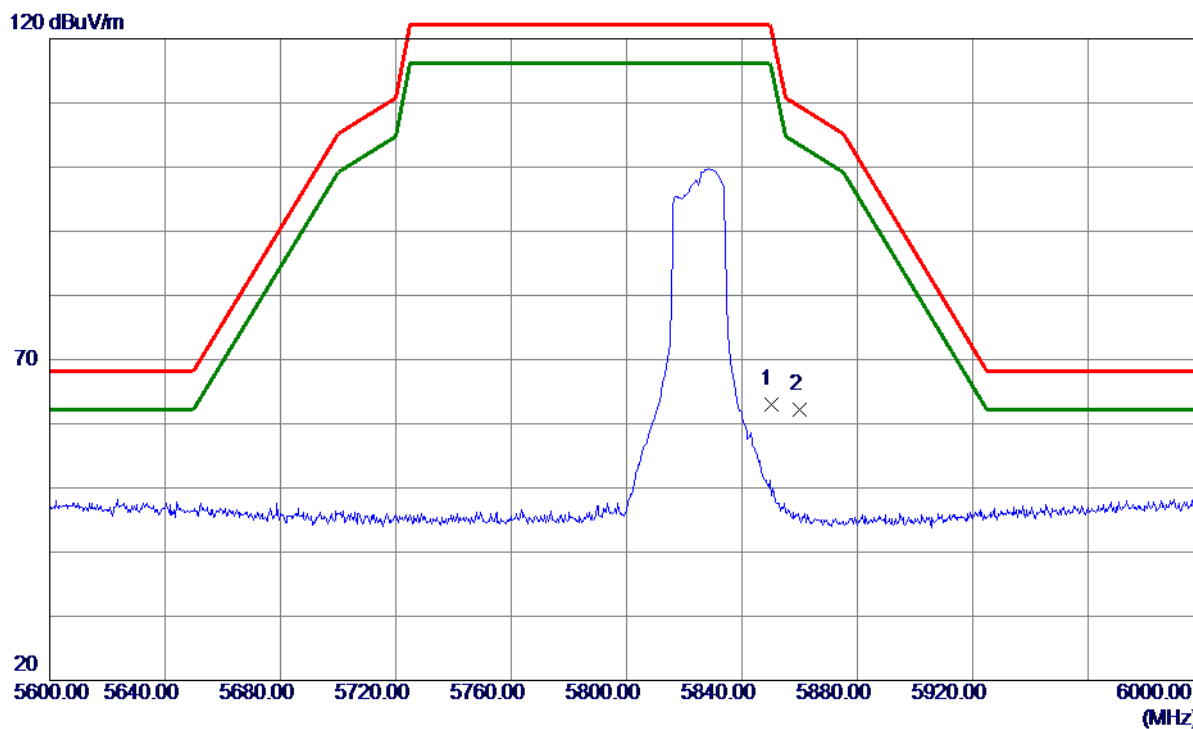

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5850.0000    | 22.59                      | 40.34                   | 62.93                     | 122.20          | -59.27       | Peak     |         |
| 2 * | 5860.0000    | 21.91                      | 40.37                   | 62.28                     | 109.40          | -47.12       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5825 MHz |

## Vertical

80 dBuV/m

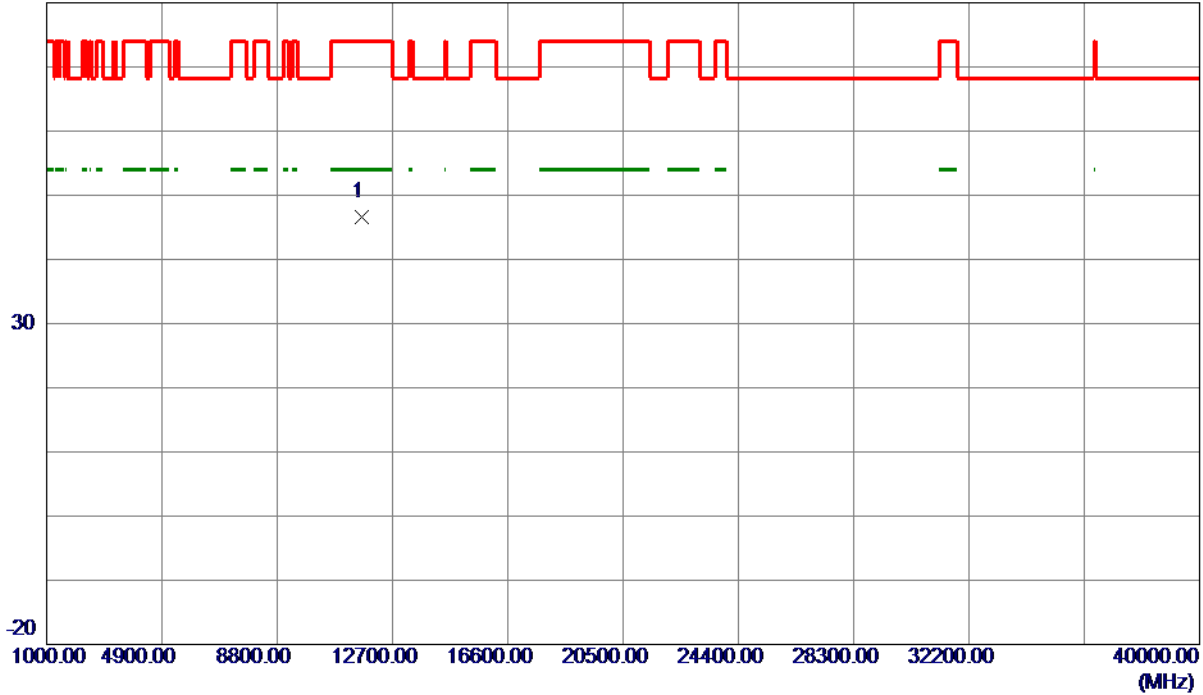


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11651.3480   | 46.89                      | -0.30                   | 46.59                     | 74.00           | -27.41       | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5825 MHz |

## Horizontal

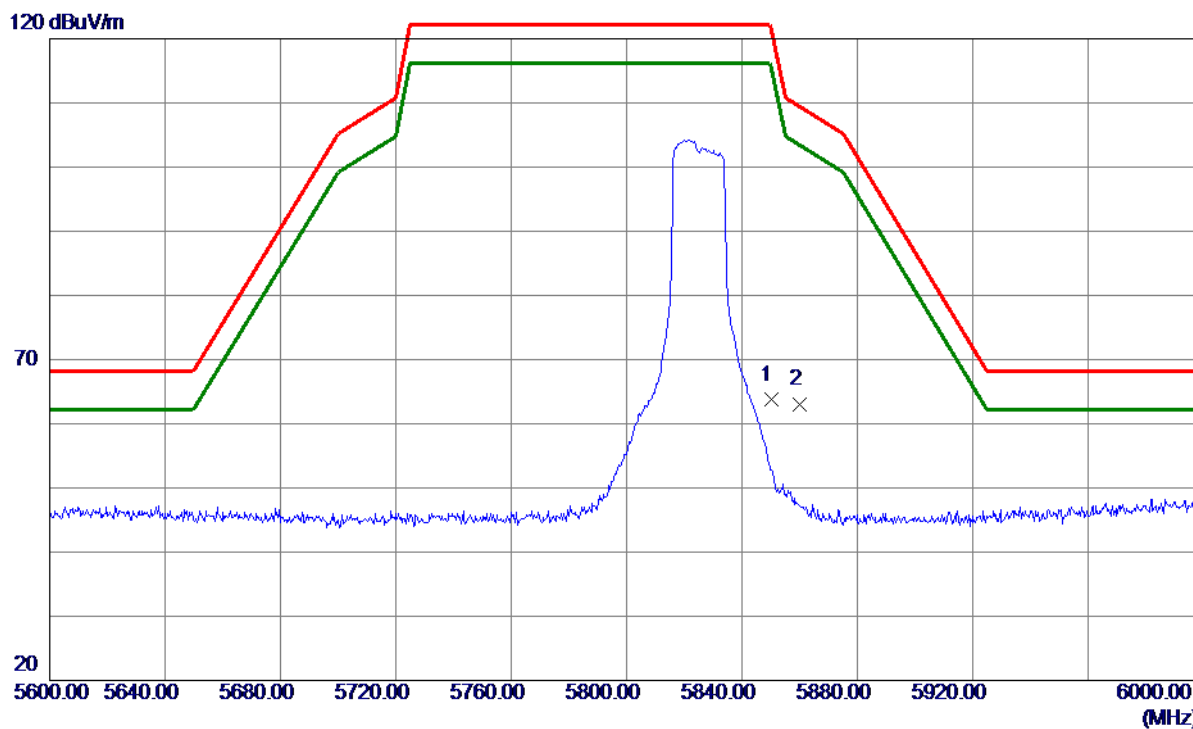

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 5850.0000    | 23.36                      | 40.34                   | 63.70                     | 122.20          | -58.50       | Peak     |         |
| 2 * | 5860.0000    | 22.55                      | 40.37                   | 62.92                     | 109.40          | -46.48       | Peak     |         |

### REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.



|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT20) Mode 5825 MHz |

## Horizontal

80 dBuV/m

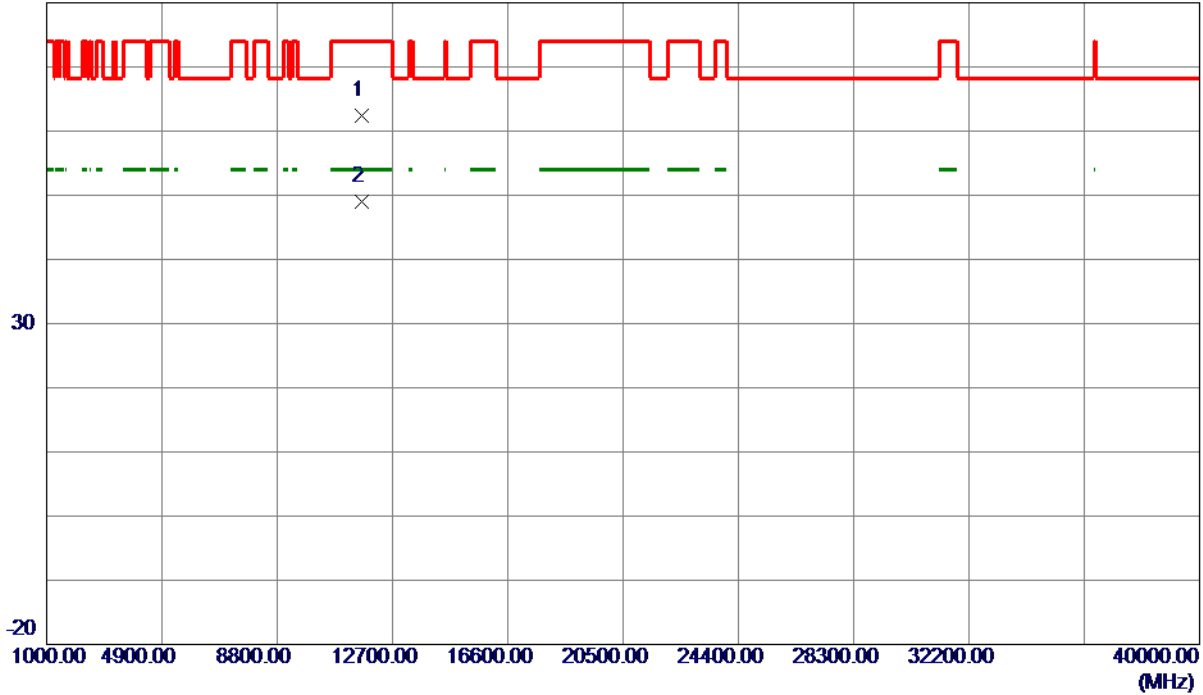


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1   | 11649.3810   | 62.78                      | -0.30                   | 62.48                     | 74.00           | -11.52       | Peak     |         |
| 2 * | 11649.7400   | 49.39                      | -0.30                   | 49.09                     | 54.00           | -4.91        | AVG      |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT40) Mode 5755 MHz |

## Vertical

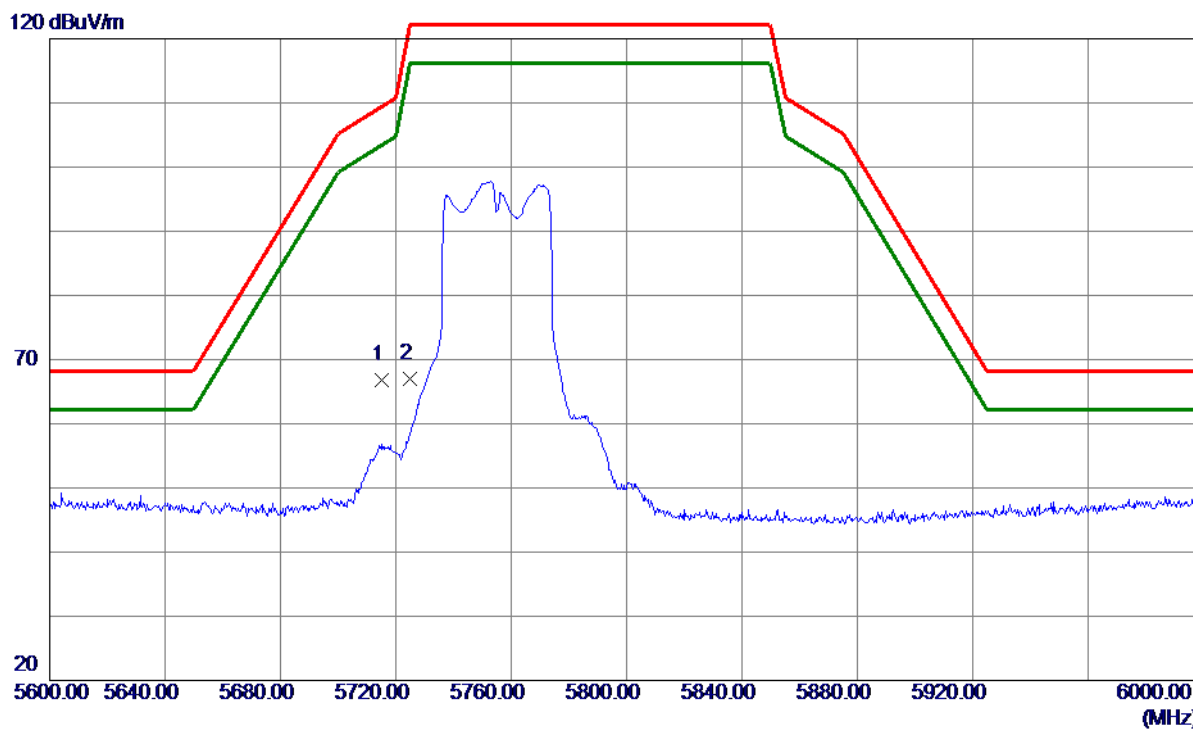

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5715.0000    | 26.71                      | 40.02                   | 66.73                     | 109.40          | -42.67       | Peak     |         |
| 2   | 5725.0000    | 26.93                      | 40.05                   | 66.98                     | 122.20          | -55.22       | Peak     |         |


### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT40) Mode 5755 MHz |

## Vertical

80 dBuV/m

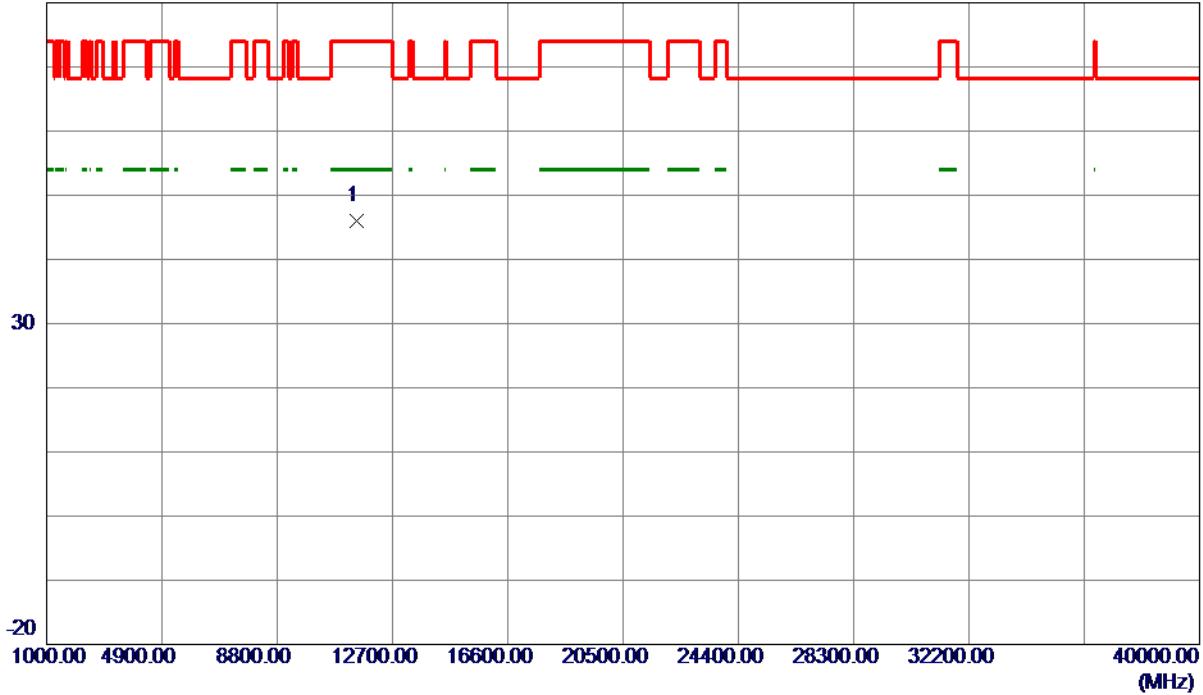


| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 11505.7440   | 46.40                      | -0.38                   | 46.02                     | 74.00           | -27.98       | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

|                 |                                  |
|-----------------|----------------------------------|
| Orthogonal Axis | X                                |
| Test Mode       | UNII-3_TX N (HT40) Mode 5755 MHz |

## Horizontal

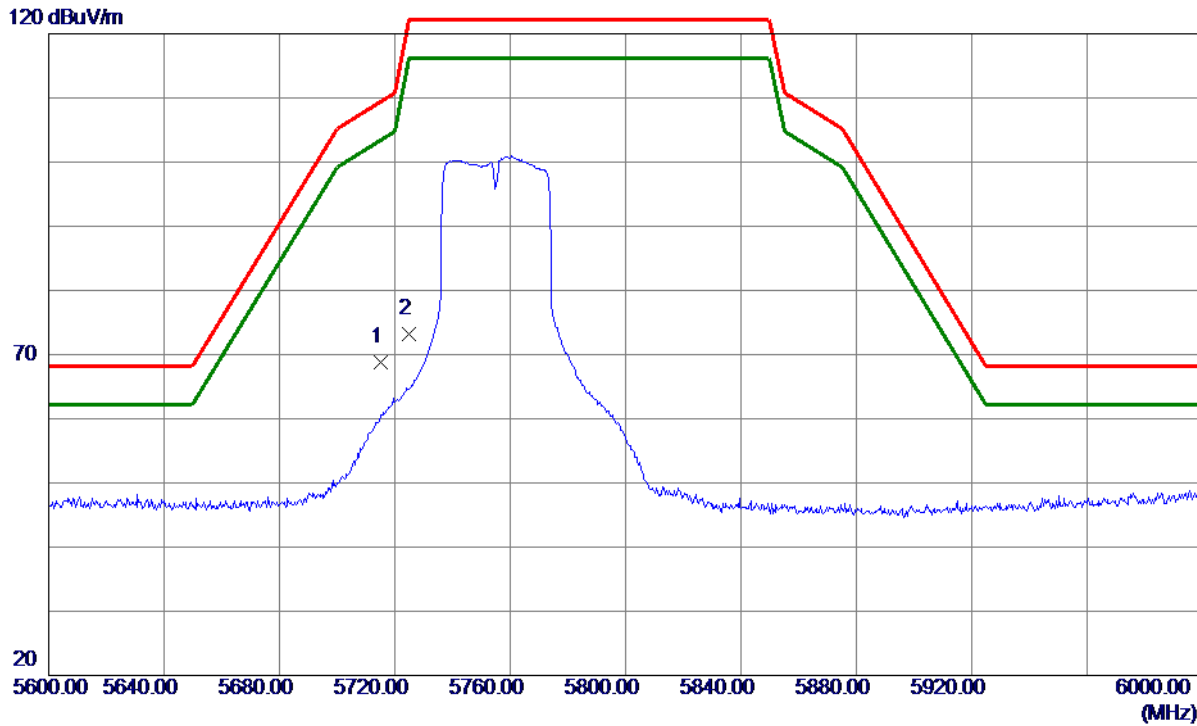

| No. | Freq.<br>MHz | Reading<br>Level<br>dBuV/m | Correct<br>Factor<br>dB | Measure<br>ment<br>dBuV/m | Limit<br>dBuV/m | Margin<br>dB | Detector | Comment |
|-----|--------------|----------------------------|-------------------------|---------------------------|-----------------|--------------|----------|---------|
| 1 * | 5715.0000    | 28.82                      | 40.02                   | 68.84                     | 109.40          | -40.56       | Peak     |         |
| 2   | 5725.0000    | 33.20                      | 40.05                   | 73.25                     | 122.20          | -48.95       | Peak     |         |

### REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.  
(2) Margin Level = Measurement Value - Limit Value.