

## DFS Test Report

Applicant : D-Link Corporation  
 Product Name : AX3000 Wi-Fi 6 Travel Router  
 Trade Name : D-Link  
 Model Number : DBR-330  
 Applicable Standard : FCC 47 CFR PART 15 SUBPART E  
 ANSI C63.10:2013  
 Received Date : Mar. 10, 2025  
 Test Period : May 24, 2025 ~ May 26, 2025  
 Issued Date : Jul. 01, 2025

### Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.  
 No. 140-1, Changan Street, Bade District,  
 Taoyuan City, Taiwan (R.O.C.)  
 Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Bade test site :

Test Firm Registration Number: 226252

Test Firm Designation Number: TW0010

Wugu test site :

Test Firm Registration Number: 191812

Test Firm Designation Number: TW0034

#### Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

### Revision History

Rev.	Issued Date	Description	Revised By
00	Jul. 01, 2025	Initial Issue	Abby Hsu

## Verification of Compliance

Applicant : D-Link Corporation

Product Name : AX3000 Wi-Fi 6 Travel Router

Trade Name : D-Link

Model Number : DBR-330

FCC ID : KA2BR330A1

Applicable Standard : FCC 47 CFR PART 15 SUBPART E  
ANSI C63.10:2013

Test Result : Complied

Issued By : Eurofins E&E Wireless Taiwan Co., Ltd.  
No. 140-1, Changan Street, Bade District,  
Taoyuan City, Taiwan (R.O.C.)  
Tel : +886-3-2710188 / Fax : +886-3-2710190  
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : \_\_\_\_\_

## TABLE OF CONTENTS

<b>1</b>	<b>General Information .....</b>	<b>5</b>
1.1.	Summary of Test Result .....	5
1.2.	Testing Location .....	6
1.3.	Test Site Environment.....	6
<b>2</b>	<b>EUT Description.....</b>	<b>7</b>
<b>3</b>	<b>Test Methodology.....</b>	<b>9</b>
3.1.	Mode of Operation.....	9
3.2.	EUT Test Step .....	9
3.3.	Test Instruments .....	10
<b>4</b>	<b>Dynamic Frequency Selection .....</b>	<b>11</b>
4.1.	Limits .....	11
4.2.	Test and Measurement System .....	15
<b>5</b>	<b>Test Results .....</b>	<b>17</b>
5.1.	Radar Waveforms and Traffic .....	17
5.2.	Channel Loading .....	30
5.3.	Channel Availability Check Time.....	33
5.4.	Channel Move Time and Channel Closing Transmission Time.....	36
5.5.	Non-Occupancy Period .....	38
5.6.	U-NII Detection Bandwidth .....	39
5.7.	Statistical Performance check .....	42

### Appendix A. Test Setup Photographs

# 1 General Information

## 1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(h)(2)	Channel Availability Check Time	PASS	---
15.407(h)(2)	Channel Move Time	PASS	---
15.407(h)(2)	Channel Closing Transmission Time	PASS	---
15.407(h)(2)	Non-Occupancy Period	PASS	---
15.407(h)(2)	U-NII Detection Bandwidth	PASS	---
15.407(h)(2)	Statistical Performance check	PASS	---

### Decision Rule

- Uncertainty is not included.
- Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
Canada RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

## 1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.  
Site Address:  No. 140-1, Changan Street, Bade District, Taoyuan City, Taiwan (R.O.C.)  
Site Address:  No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

## 1.3. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(\*)The measurement ambient temperature is within this range.

## 2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity

Applicant	D-Link Corporation 14420 Myford Road Suite 100 Irvine California United States 92606				
Product Name	AX3000 Wi-Fi 6 Travel Router				
Trade Name	D-Link				
Model Number	DBR-330				
FCC ID	KA2BR330A1				
Operate Frequency	Frequency Band			Frequency Range (MHz)	
	802.11a	U-NII Band 2-A		5260 – 5320	
		U-NII Band 2-C		5500 – 5700	
	802.11n HT20/ 802.11ac VHT20/ 802.11ax HE20	U-NII Band 2-A		5260 – 5320	
		U-NII Band 2-C		5500 – 5700	
	802.11n HT40/ 802.11ac VHT40/ 802.11ax HE40	U-NII Band 2-A		5270 – 5310	
		U-NII Band 2-C		5510 – 5670	
	802.11ac VHT80/ 802.11ax HE80	U-NII Band 2-A		5290	
U-NII Band 2-C		5530 – 5610			
Modulation Type	OFDM/OFDMA				
Antenna information	Antenna	Model	Type	Max. Gain (dBi)	
	ANT-0 (ANT 1)	5G1	Chip Antenna	U-NII Band 2-A	2.61
				U-NII Band 2-C	3.39
	ANT-1 (ANT 2)	5G2	Chip Antenna	U-NII Band 2-A	3.04
				U-NII Band 2-C	2.99
	ANT-2 (RX Only)	5G3	Chip Antenna	U-NII Band 2-A	3.47
U-NII Band 2-C				2.94	
Antenna Delivery	802.11a: 2TX (CDD) 802.11n / ac / ax : 2TX (MIMO/Beamforming on)				
Operate Temp. Range	0 ~ +40 °C				
EUT Power Rating	12 Vdc / 3.0 A				

Testing Sample No.	
Test Item	Sample Number
Normal	C253149_A005

Items	Description	
Communication Mode	<input checked="" type="checkbox"/> IP Based (Load Based)	<input type="checkbox"/> Frame Based
TPC Function	<input checked="" type="checkbox"/> With TPC	<input type="checkbox"/> Without TPC
Weather Band (5600 ~ 5650 MHz)	<input checked="" type="checkbox"/> With 5600 ~ 5650 MHz	<input type="checkbox"/> Without 5600 ~ 5650 MHz
Beamforming Function	<input checked="" type="checkbox"/> With Beamforming	<input type="checkbox"/> Without Beamforming
Equipment Type	<input type="checkbox"/> Outdoor access point	
	<input checked="" type="checkbox"/> Indoor access point	
	<input type="checkbox"/> Fixed point-to-point access points	
	<input type="checkbox"/> Client devices	
Operating mode	<input checked="" type="checkbox"/> Master	
	<input type="checkbox"/> Client with radar detection	
	<input type="checkbox"/> Client without radar detection	
	<input type="checkbox"/> Ad-Hoc	
	<input type="checkbox"/> Bridge	
	<input type="checkbox"/> MESH	

Note : DFS controls (hardware or software) related to radar detection are NOT accessible to the user.  
Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

### 3 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

The tests documented in this report were performed in accordance with FCC KDB request:

- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

#### 3.1. Mode of Operation

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
802.11ax HE20
802.11ax HE40
802.11ax HE80

802.11ax HE20:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5300 MHz.

802.11ax HE40:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5310 MHz.

802.11ax HE80:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5290 MHz.

#### 3.2. EUT Test Step

1.	Setup the EUT shown on 3.2.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to Access Point.
4.	The EUT is operated in the normal mode to the purposes of measurement.

### 3.3. Test Instruments

For Conducted

Test Period: May 24, 2025 ~ May 26, 2025

Testing Engineer: An Wu

Test Site		RF02-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
<input checked="" type="checkbox"/>	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY64020105	Jan. 20, 2025	1 year
<input checked="" type="checkbox"/>	Signal Generator	R&S	SMM100A	101740	Jan. 21, 2025	1 year

Note: N.C.R. = No Calibration Request.

## 4 Dynamic Frequency Selection

### 4.1. Limits

§15.407 (h) and FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 Compliance measurement procedures for unlicensed-national information infrastructure devcies operating in the 5250-5350 MHZ and 5470-5725 MHZ bands incorporating dynamic frequency selection.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel			
Requirement	Operational Mode		
	Master	Client (without Radar Detection)	Client (with Radar Detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation		
Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client With Radar Detection	Client without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note : Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequencies between the bonded 20 MHz channel blocks		

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection	
Maximum Transmit Power	U-NII Band 2-Aalue (See Notes 1,2 and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and Power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
<p>Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p>Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p>Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to FCC KDB Publication 662911 D01.</p>	

Table 4: DFS Response Requirement U-NII Band 2-Aalues	
Parameter	U-NII Band 2-Aalue
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100 % of the U-NII 99 % transmission power bandwidth. See Note 3.
<p>Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.</p> <p>Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.</p> <p>Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.</p>	

**Table 5: Short Pulse Radar Test Waveforms**

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	<p>Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a</p> <hr/> <p>Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A</p>	$\text{Roundup} \left\{ \begin{array}{l} \left( \frac{1}{360} \right) \cdot \\ \left( \frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \end{array} \right\}$	60 %	30
2	1-5	150-230	23-29	60 %	30
3	6-10	200-500	16-18	60 %	30
4	11-20	200-500	12-16	60 %	30
Aggregate (Radar Types 1-4)				80 %	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 5a: Pulse Repetition Intervals U-NII Band 2-Aalues for Test A		
Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066


Table 6 – Long Pulse Radar Test Signal							
Radar Waveform	Bursts	Pulses per Burst	Pulse Width (µsec)	Chirp Width (MHz)	PRI (µsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80 %	30

Table 7 – Frequency Hopping Radar Test Signal							
Radar Waveform	Pulse Width (µsec)	PRI (µsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70 %	30

## 4.2. Test and Measurement System

### 4.2.1. Setup for Master with injection at the Master

Example Radiated Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

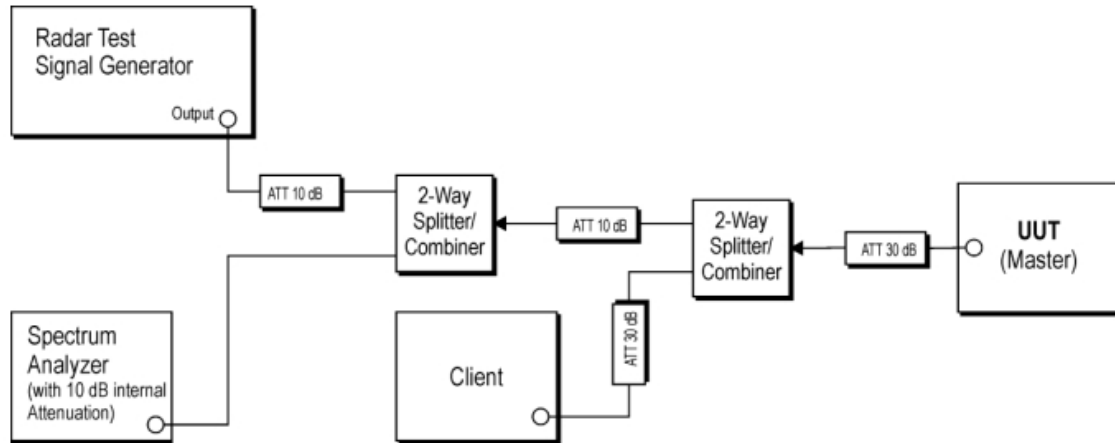

#### Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	ID
1.	Smart Phone	SAMSUNG	SM-S9210	A3LSMS921U

#### 4.2.2. System Calibration

The short pulse types 0,1,2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time. The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the May 2014 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

#### 4.2.3. System Calibration

The Interference Radar Detection Threshold Level is (-63 dBm), The above equipment setup was used to calibrate the radiated Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50 ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (U-NII Band 2-ABW) were set to at least 3 MHz.


The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was (-63 dBm). Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

#### 4.2.4. Adjustment of Displayed Traffic Level


A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. Software to ping the client is permitted to simulate data transfer but must have random ping intervals. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


## 5 Test Results


### 5.1. Radar Waveforms and Traffic

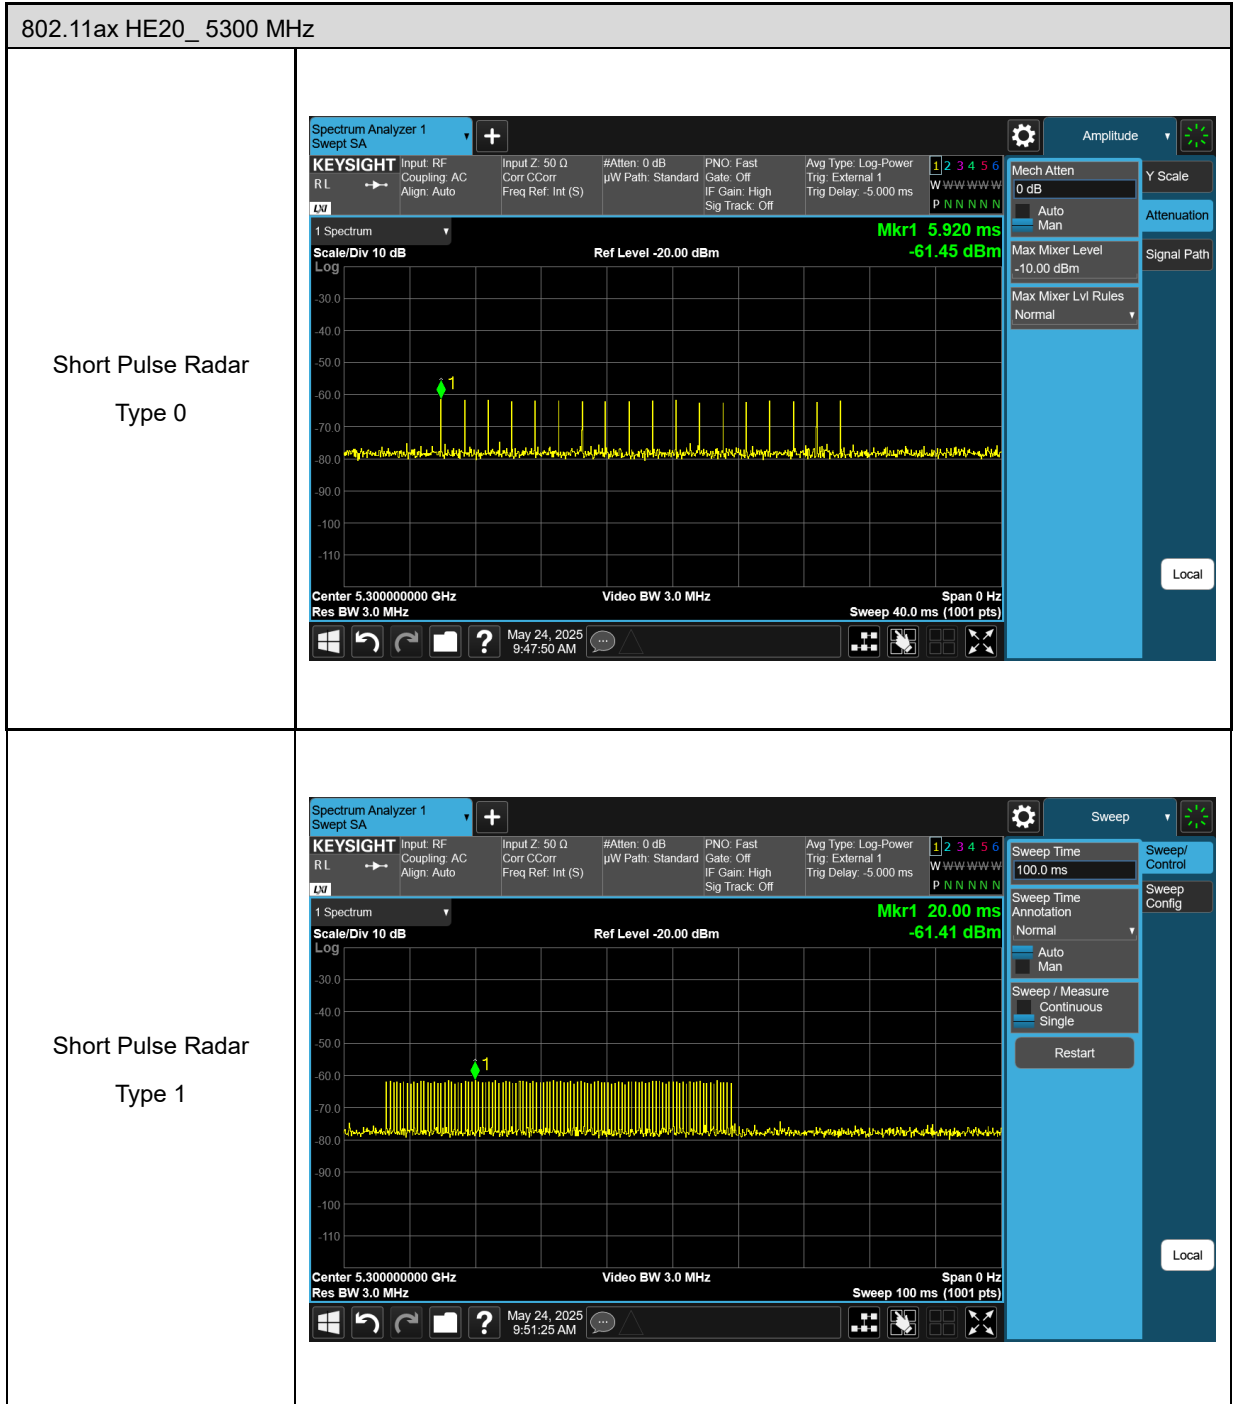



802.11ax HE20_ 5300 MHz	
<p>Short Pulse Radar Type 2</p>	
<p>Short Pulse Radar Type 3</p>	

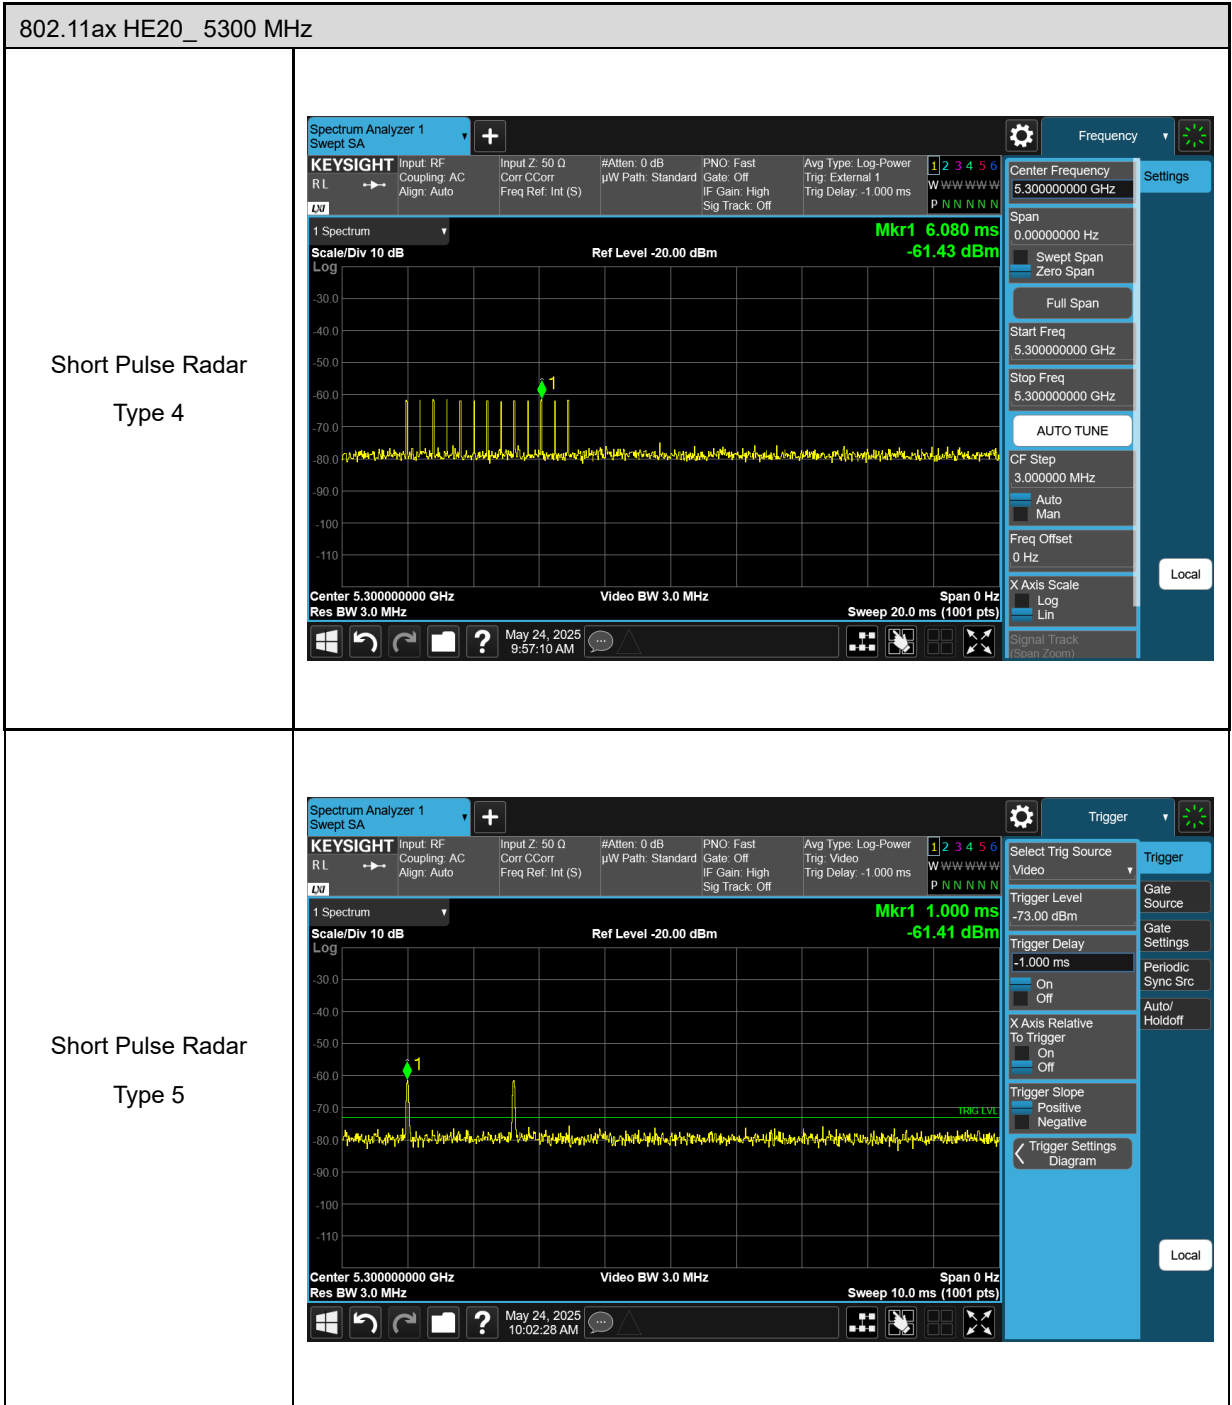


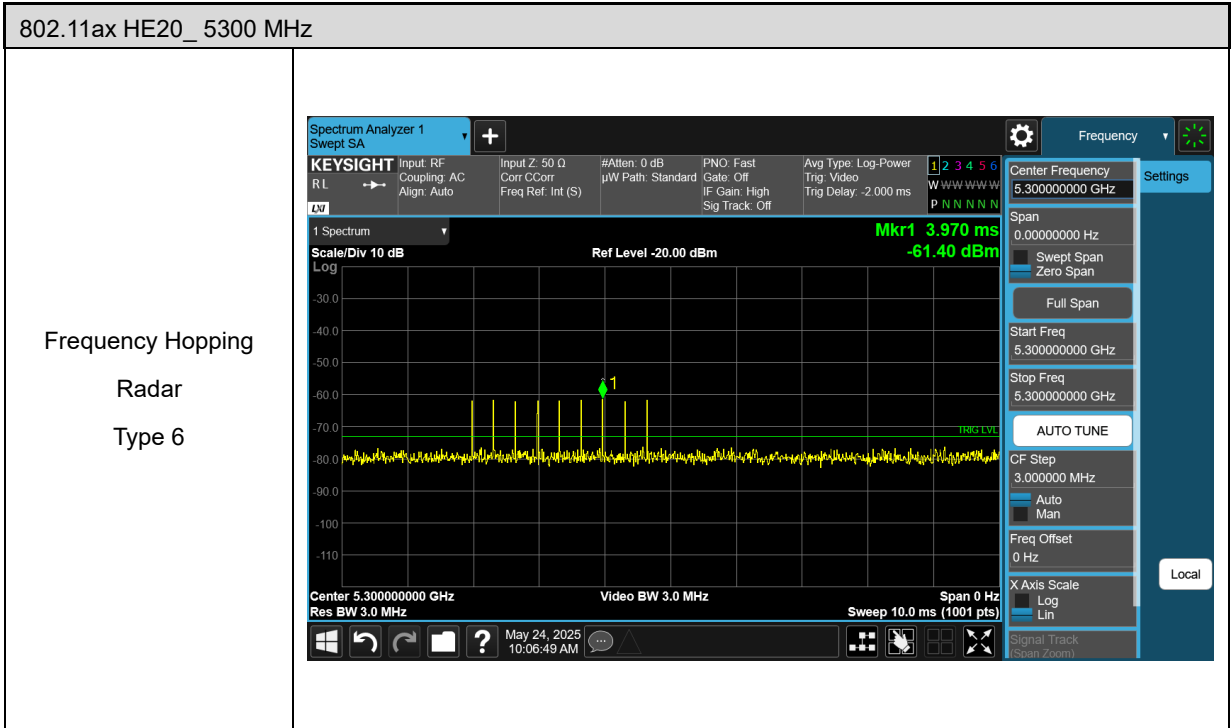


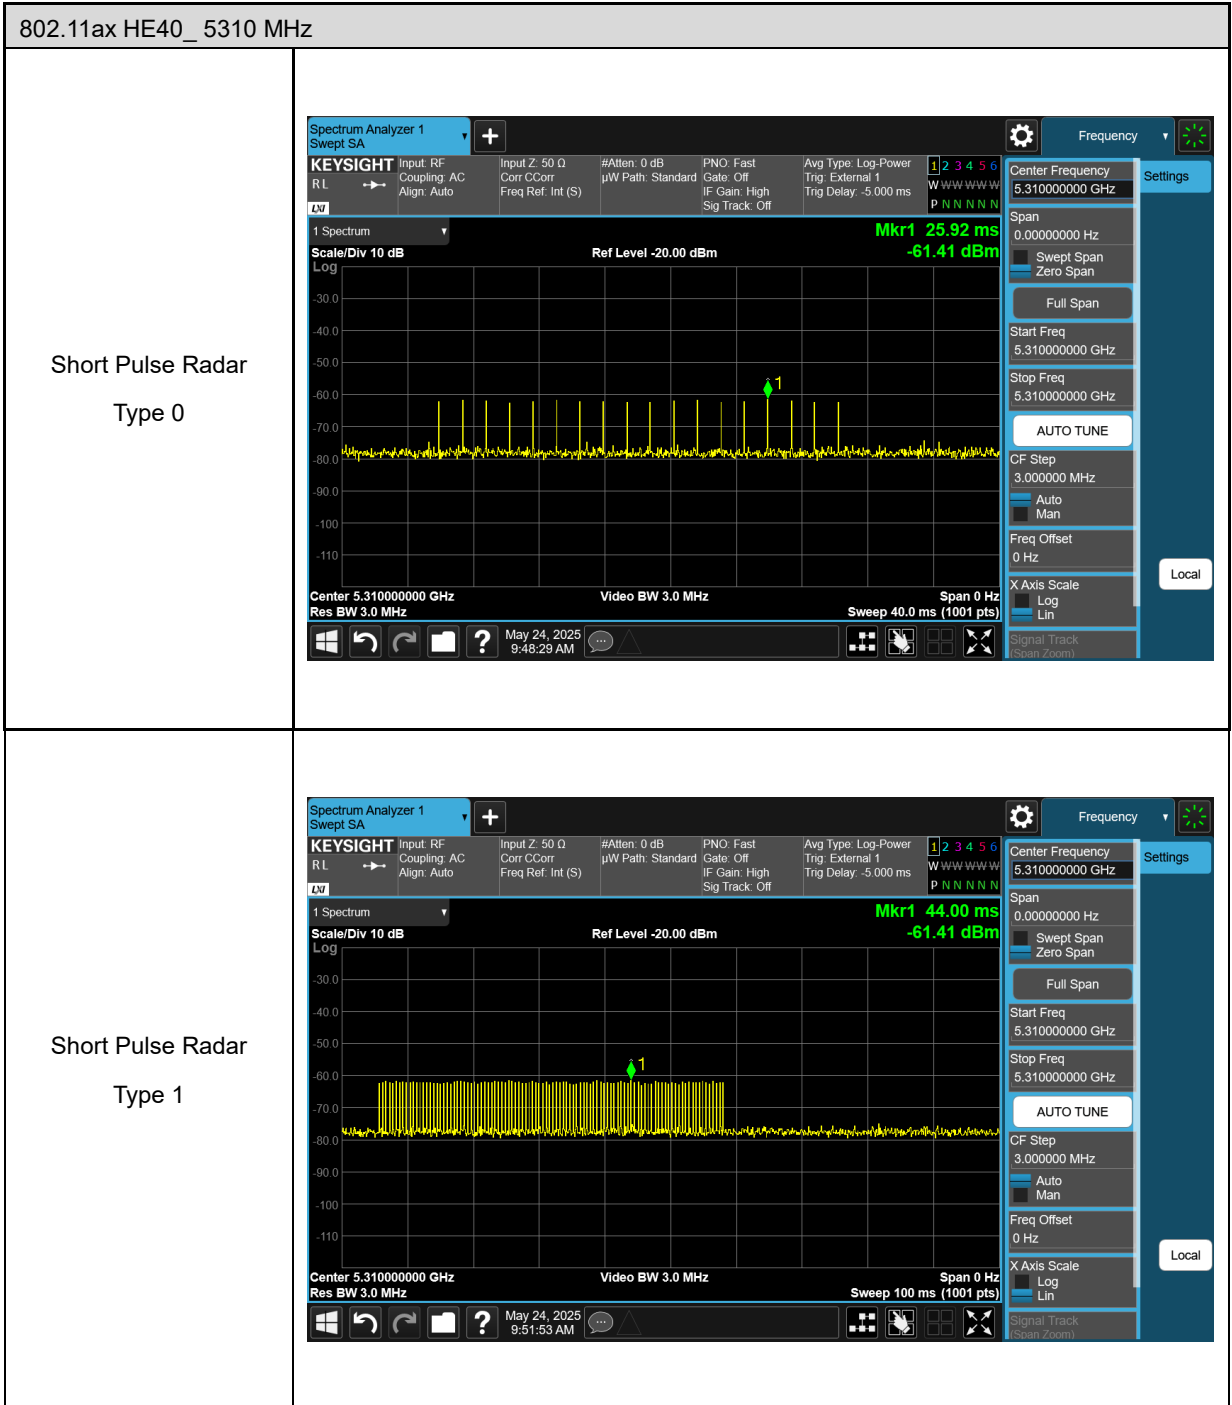

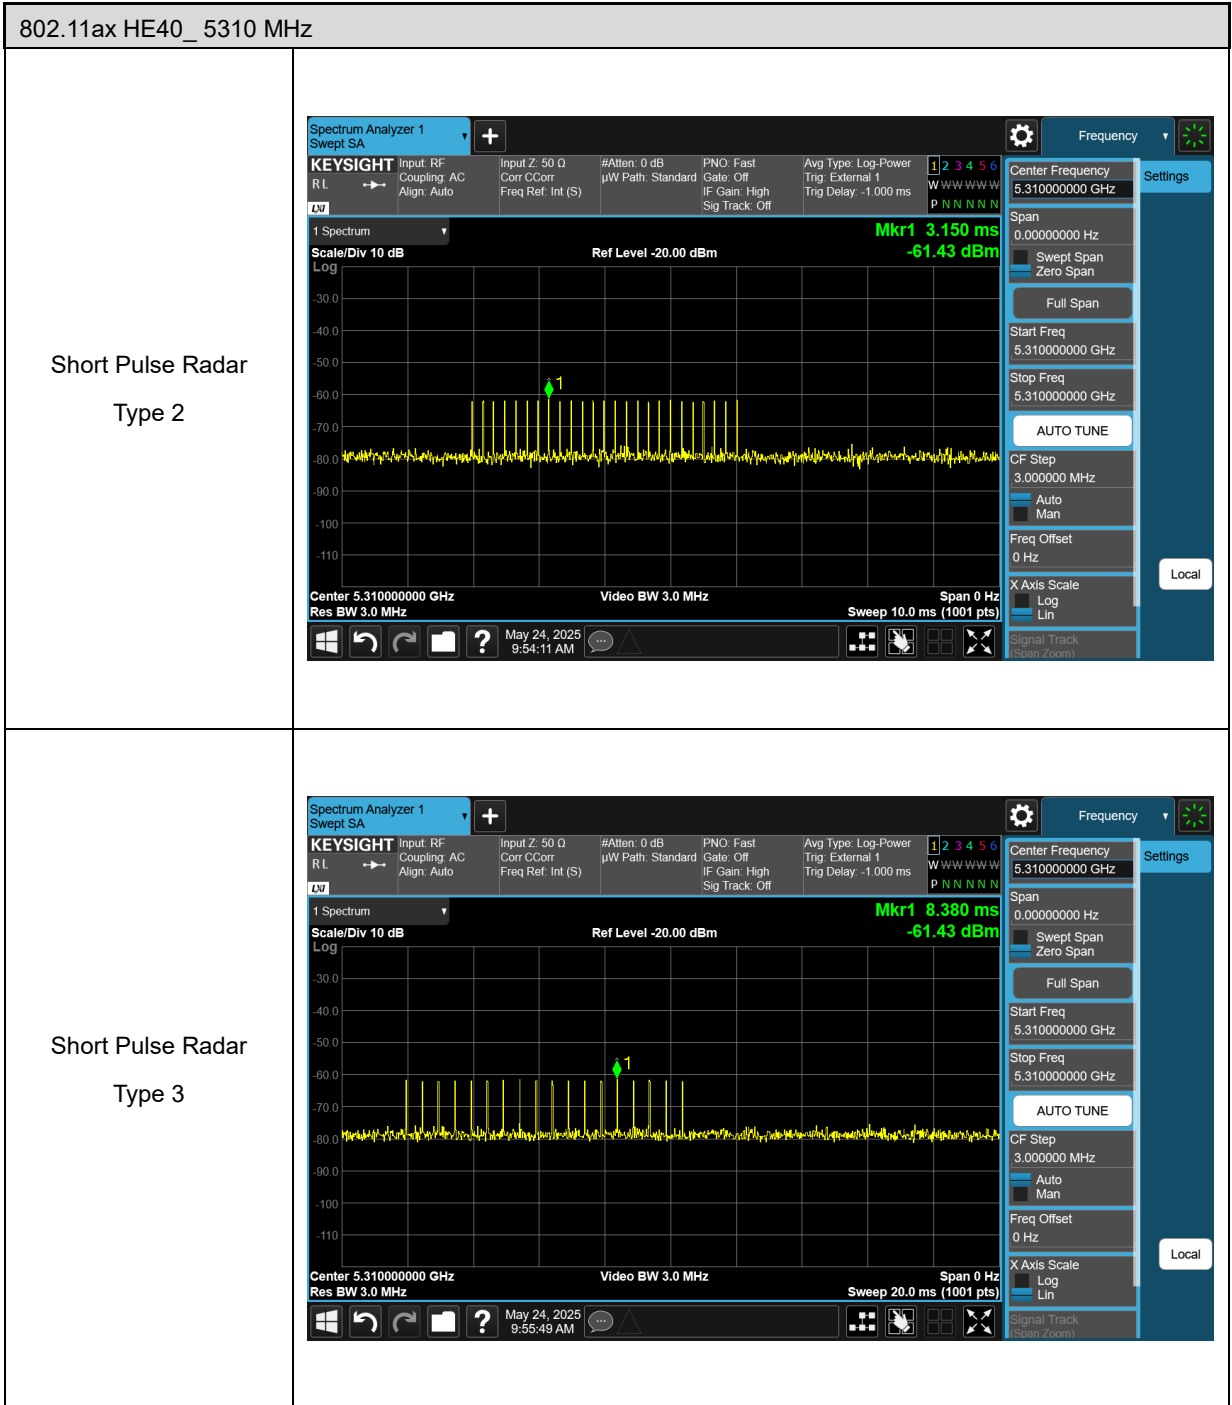


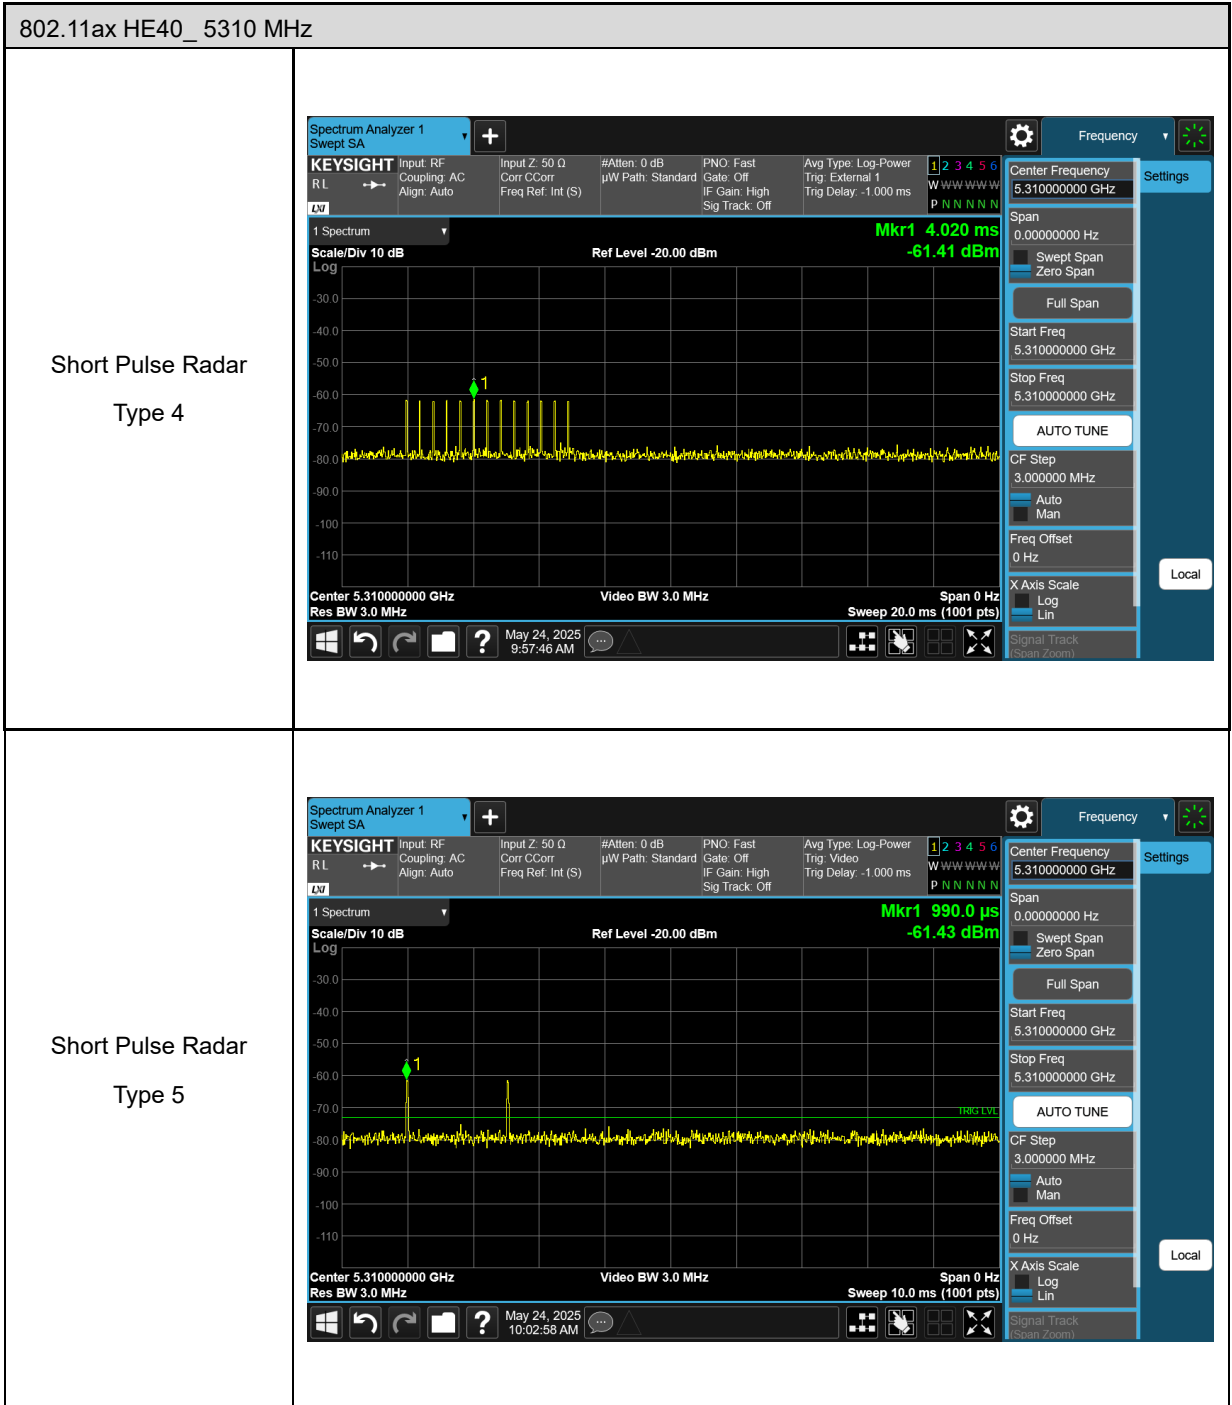


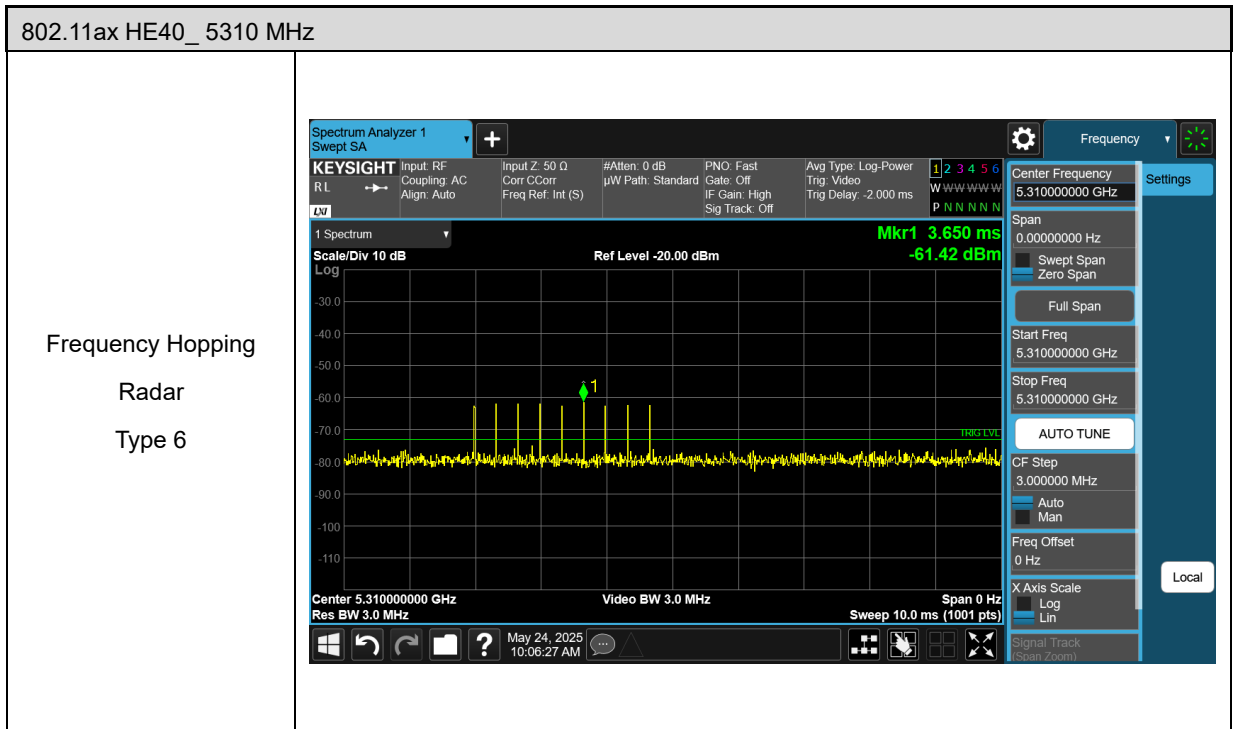


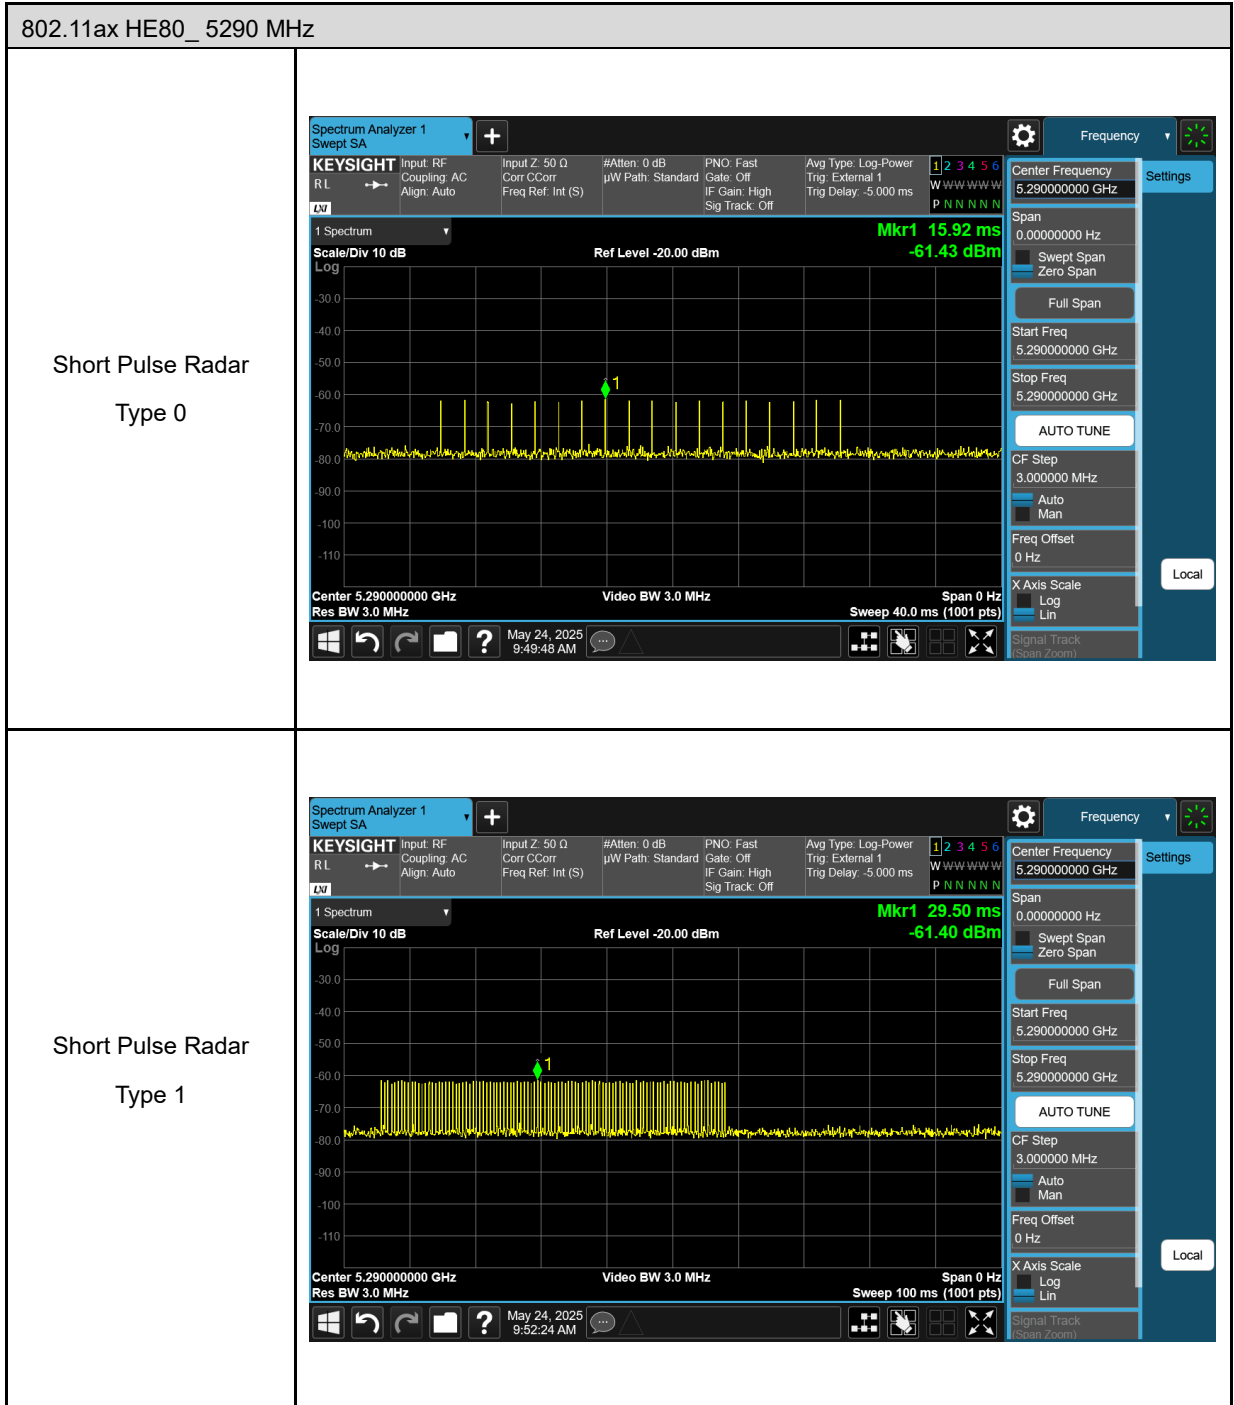



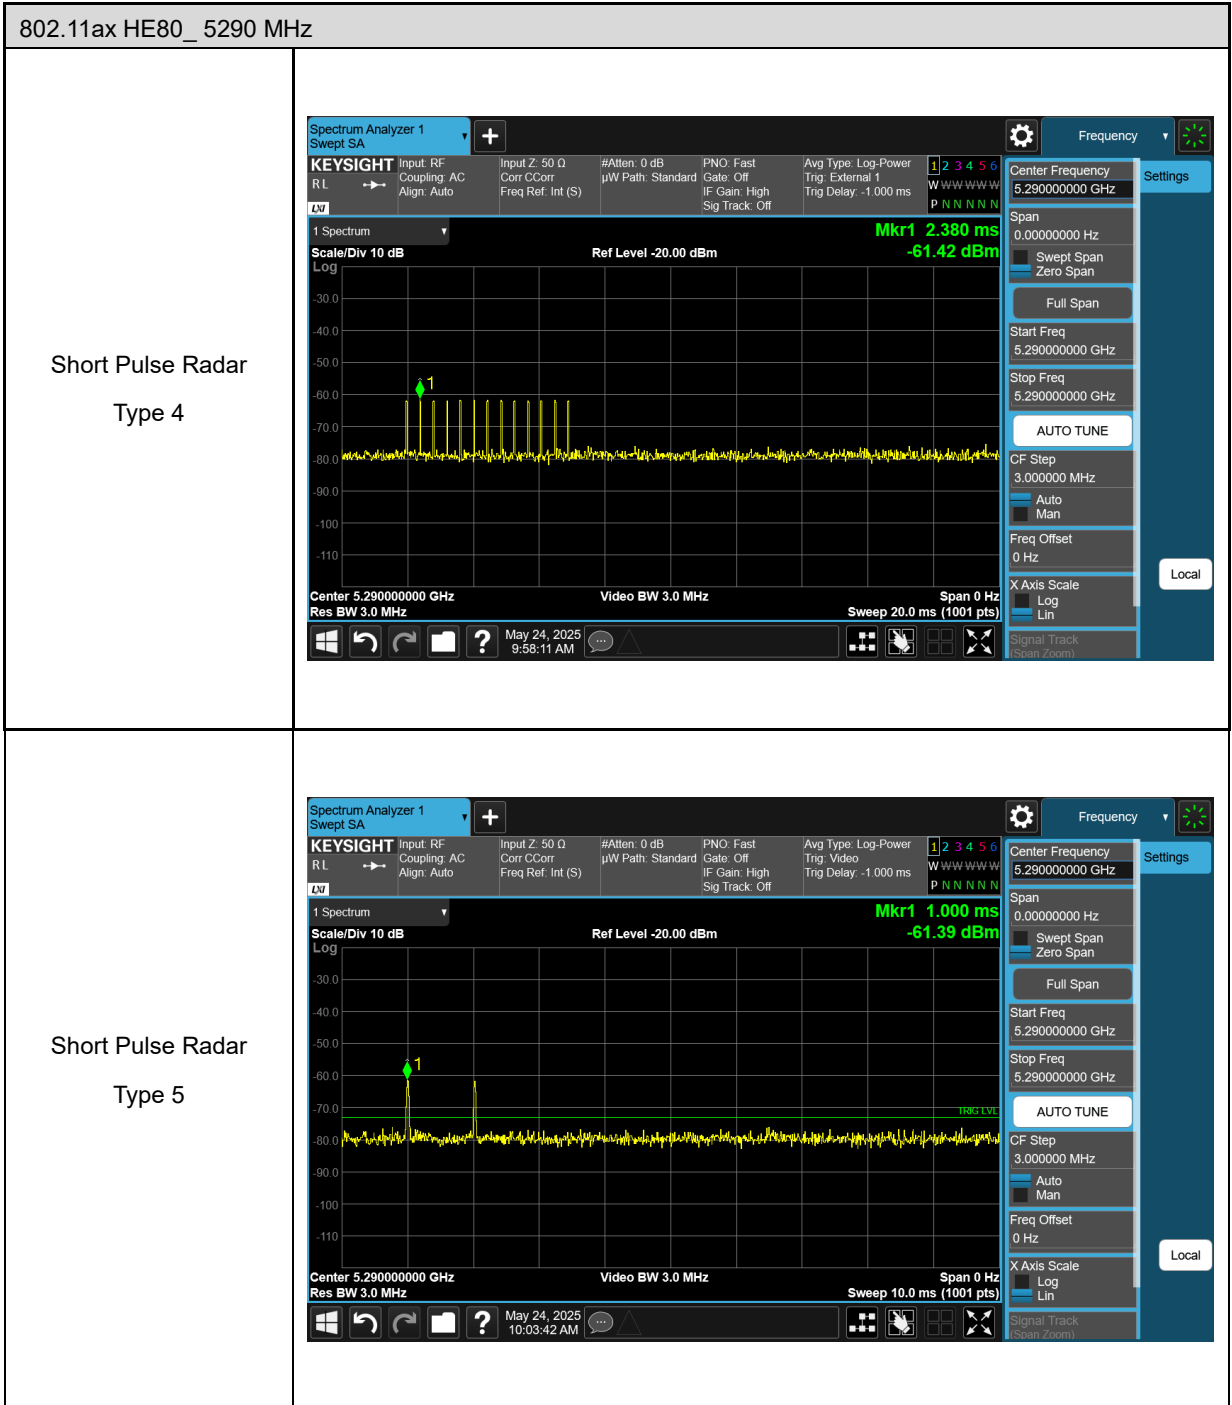

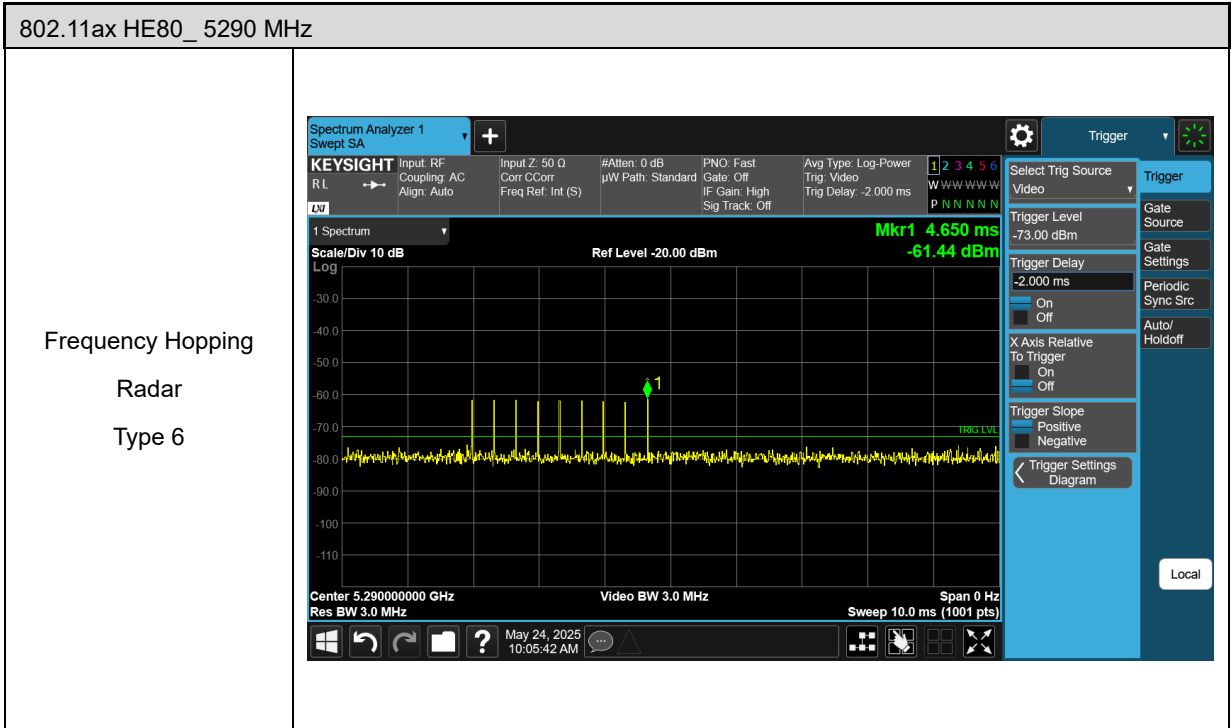


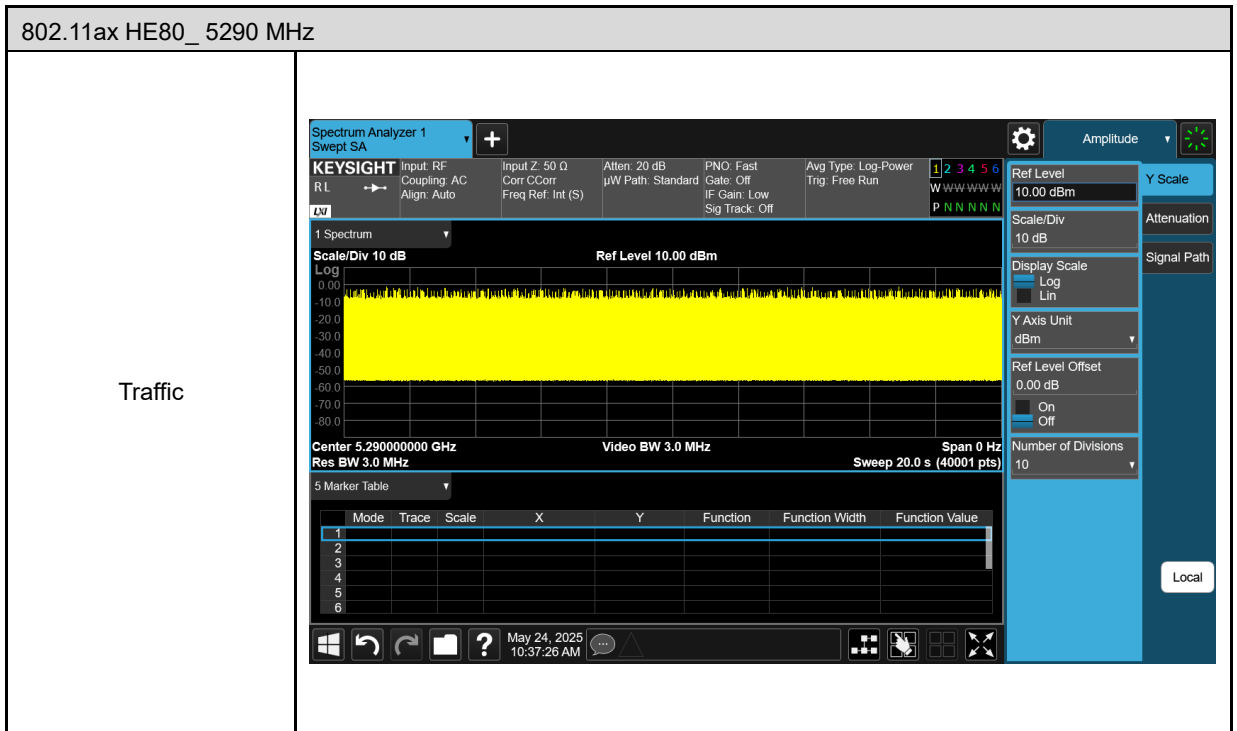

## 5.2. Channel Loading

- Duty cycle  $\geq 17\%$

802.11ax HE20

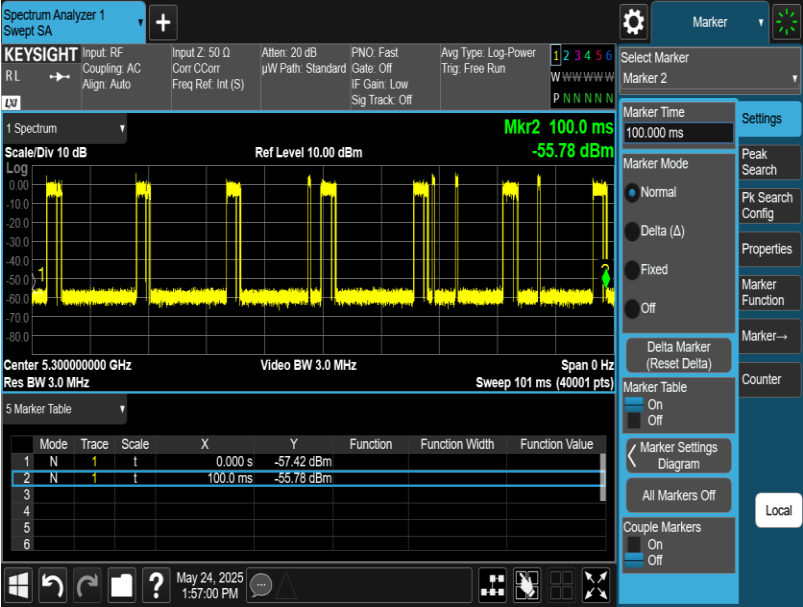



Mode	Trace	Scale	X	Y	Function	Function Width	Function Value
1	N	1	t	0.000 s	-57.42 dBm		
2	N	1	t	100.0 ms	-55.78 dBm		
3							
4							
5							
6							

DFS and Adaptivity

Device			
Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-50	0	100.00ms	100.00ms
On Time Point:	Total Point:	Sum of On Time(s):	
7410	39474	18.77ms	
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
101.33ms	40001	18.77%	

RUN

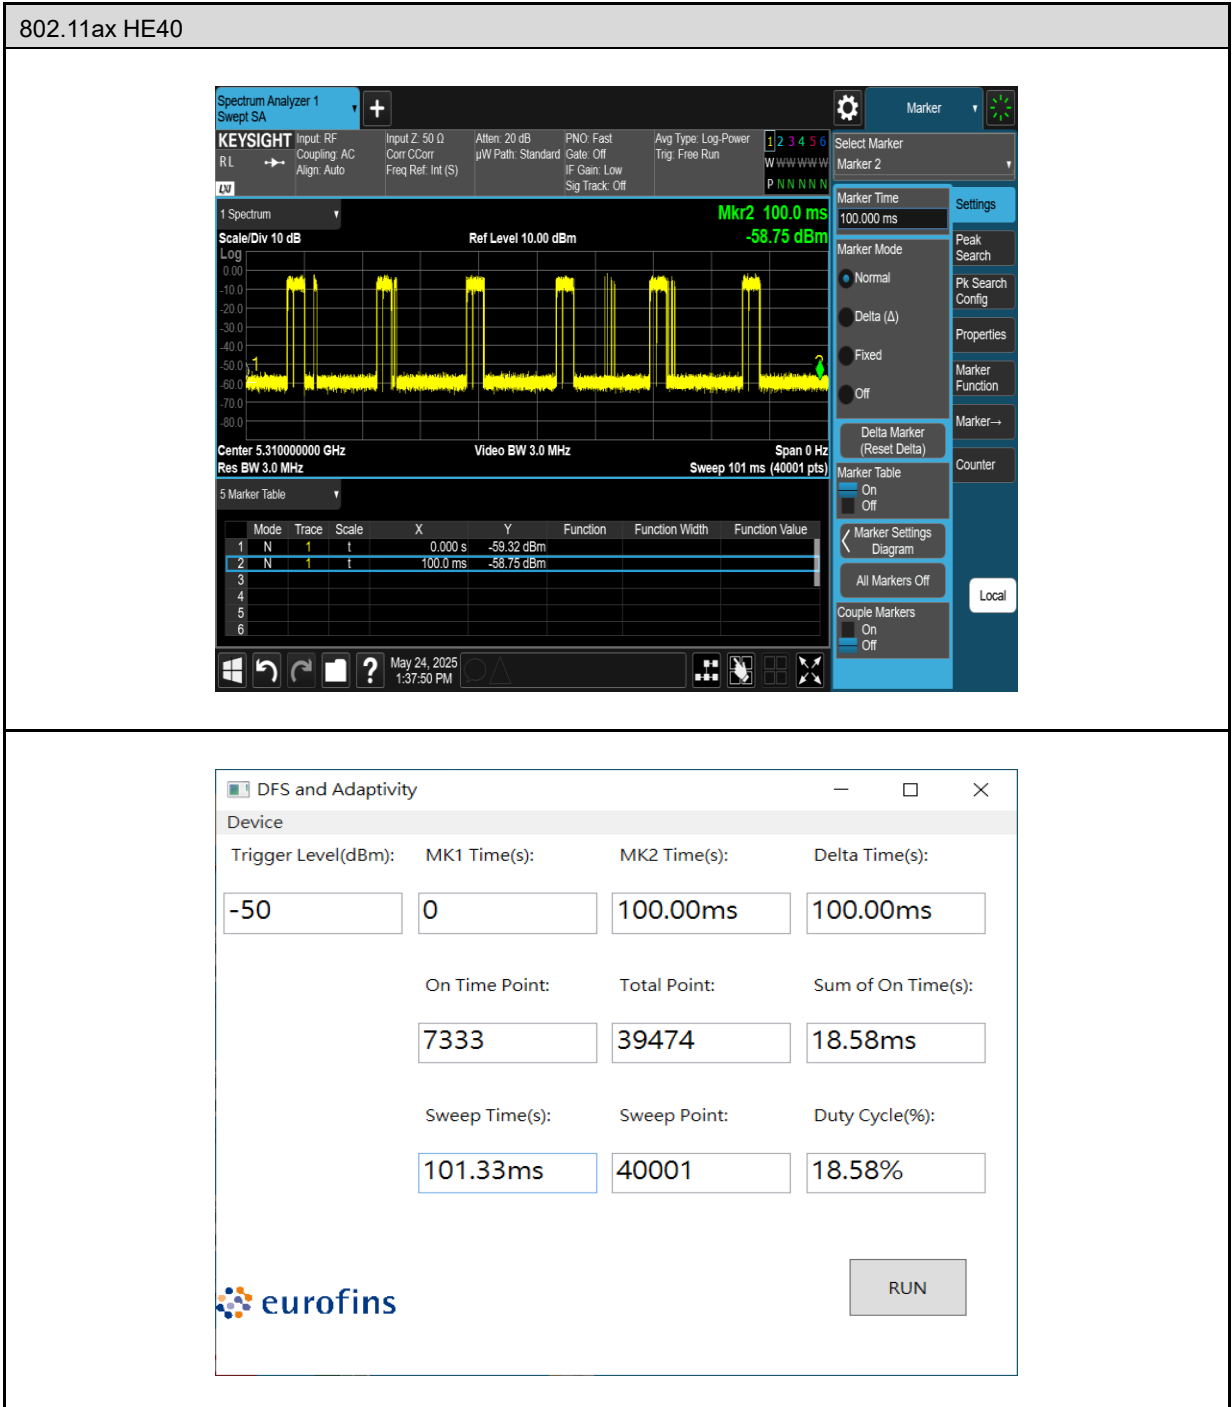

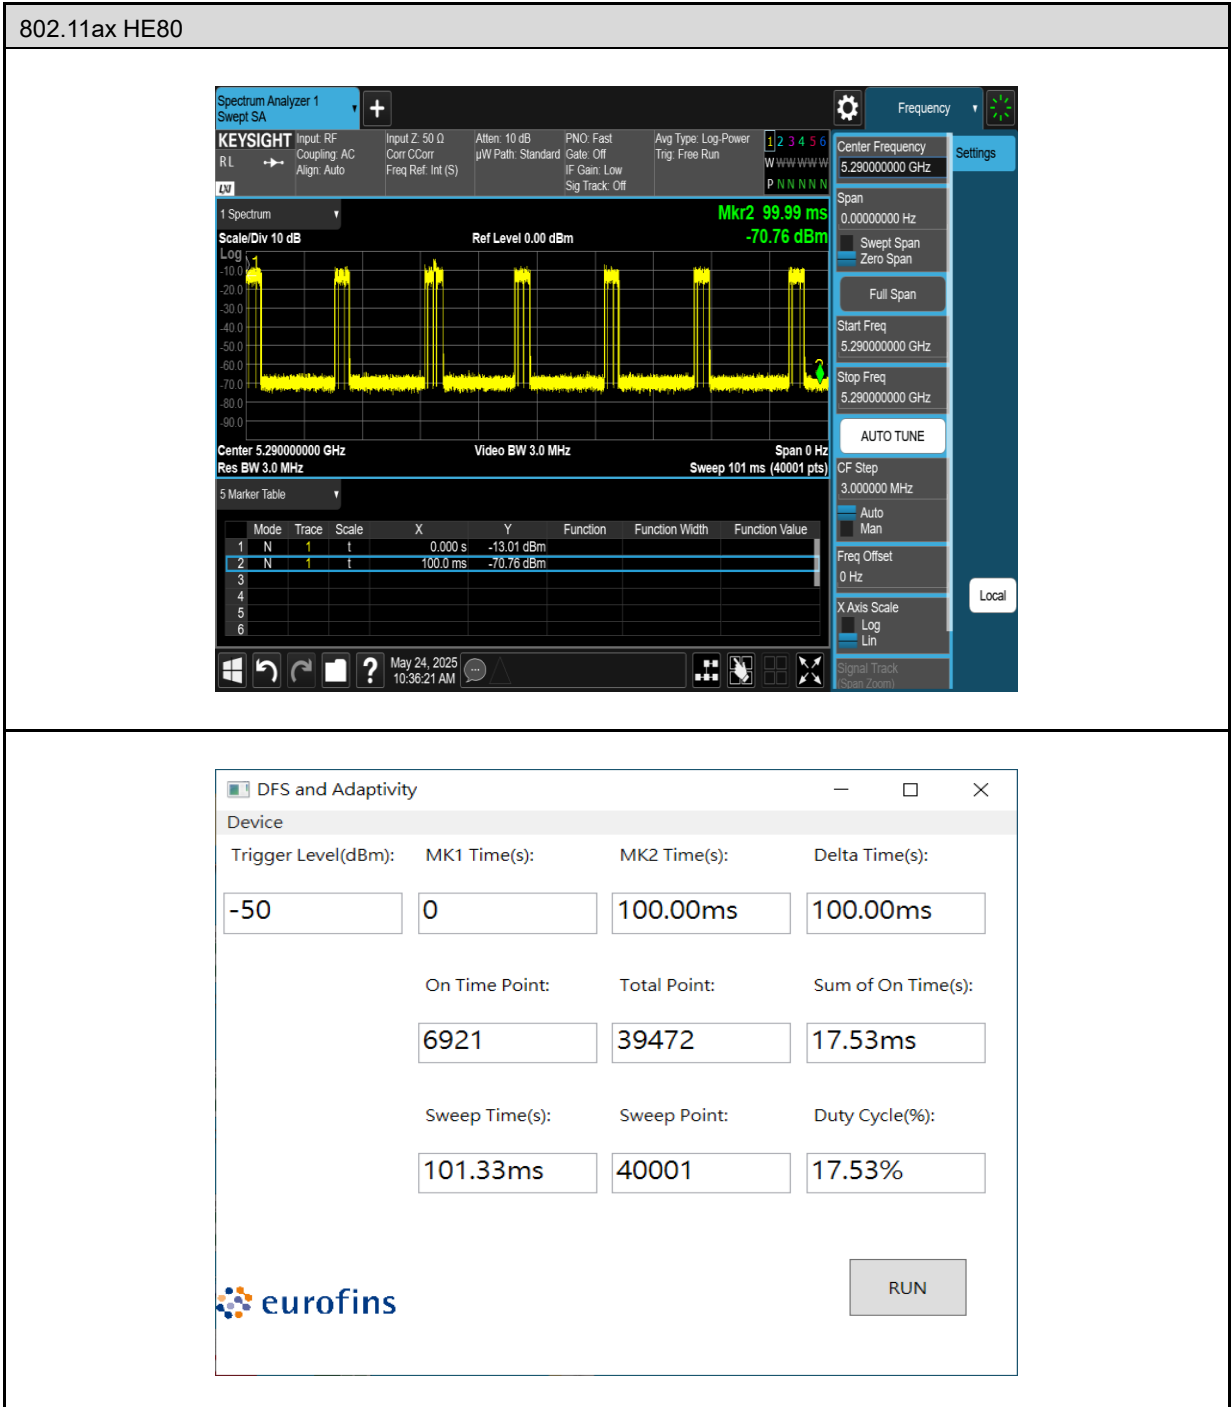

DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-50	0	100.00ms	100.00ms
On Time Point:	Total Point:	Sum of On Time(s):	
6921	39472	17.53ms	
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
101.33ms	40001	17.53%	

RUN

### 5.3. Channel Availability Check Time

#### 5.3.1. Procedure to Determine Initial Power-Up Cycle Time

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

#### 5.3.2. Procedure for Timing Of Radar Burst


With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

#### 5.3.3. Qualitative Results

Timing of Radar Burst	Display on Control Computer	Spectrum Analyzer Display
No Radar Triggered	EUT marks Channel as active	Transmissions begin on channel after completion of the initial power-up cycle and the CAC
Within 0 to 6 second window	EUT indicates radar detected	No transmissions on channel
Within 54 to 60 second window	EUT indicates radar detected	No transmissions on channel



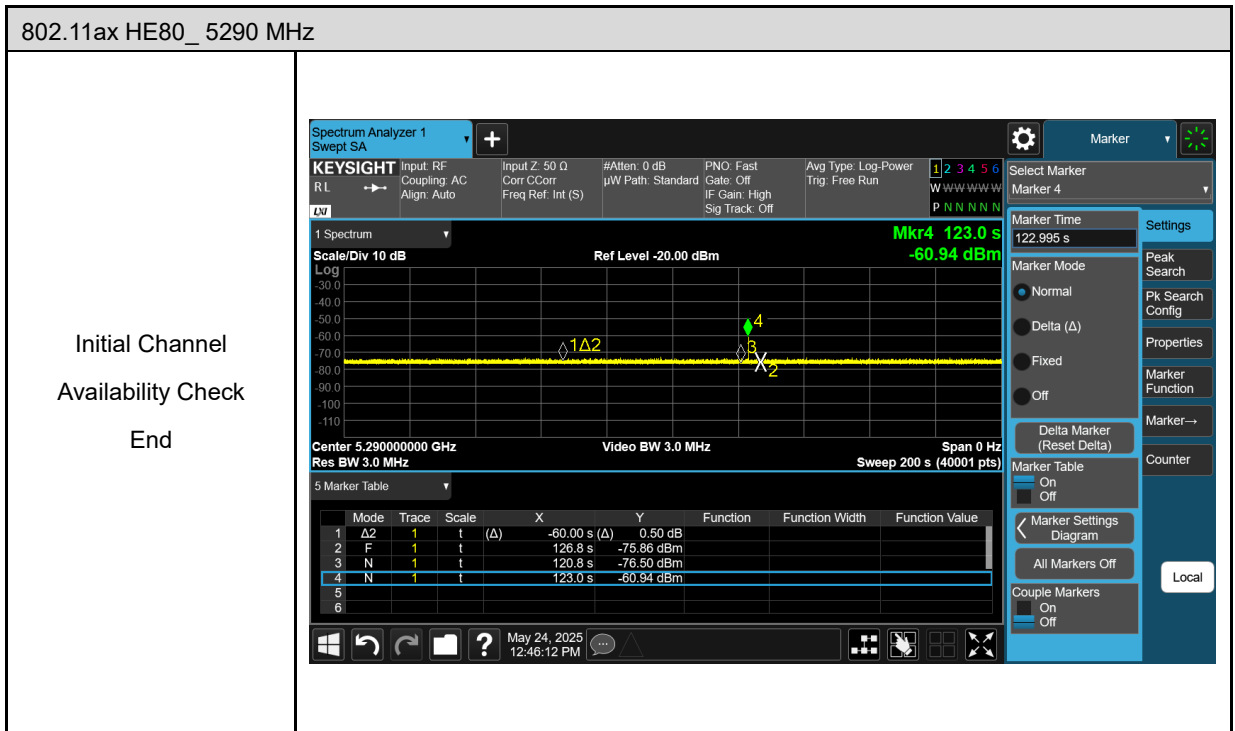

## 5.4. Channel Move Time and Channel Closing Transmission Time

### 5.4.1. Reporting Notes

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse.  
This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = (Number of analyzer bins showing transmission) \* (dwell time per bin)

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

#### Results


Frequency (MHz)	Radar Type	Channel Move Time (ms)	Limit (sec)
		Master	
5290	Type 0	1271	10

Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (ms)	Limit (msec)
		Master	
5290	Type 0	16.0	60

Master :

802.11ax HE80\_ 5290 MHz

Channel Move and Closing Time

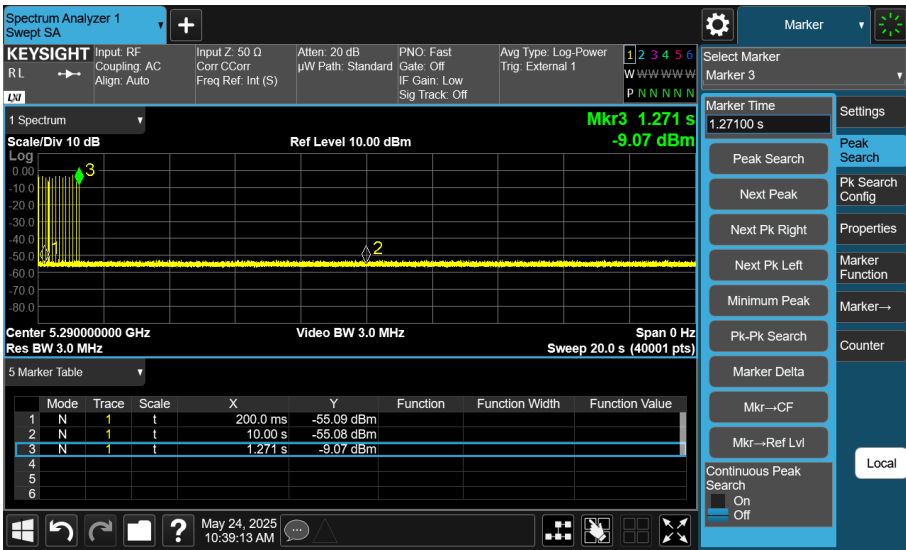

The screenshot shows a Keysight Spectrum Analyzer interface. The main display is a spectrum plot with a center frequency of 5.290000000 GHz and a resolution bandwidth of 3.0 MHz. A peak is marked at 1.271 s with a power level of -9.07 dBm. A marker table below the plot lists the following data:

Mode	Trace	Scale	X	Y	Function	Function Width	Function Value
1	N	1	t	200.0 ms	-55.09 dBm		
2	N	1	t	10.00 s	-53.03 dBm		
3	N	1	t	1.271 s	-9.07 dBm		
4							
5							
6							


DFS and Adaptivity

Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-50	200.00ms	10000.00ms	9800.00ms
On Time Point:		Total Point:	Sum of On Time(s):
32		19600	16.00ms
Sweep Time(s):	Sweep Point:	Duty Cycle(%):	
20000.00ms	40001	0.16%	

**RUN**

### 5.5. Non-Occupancy Period

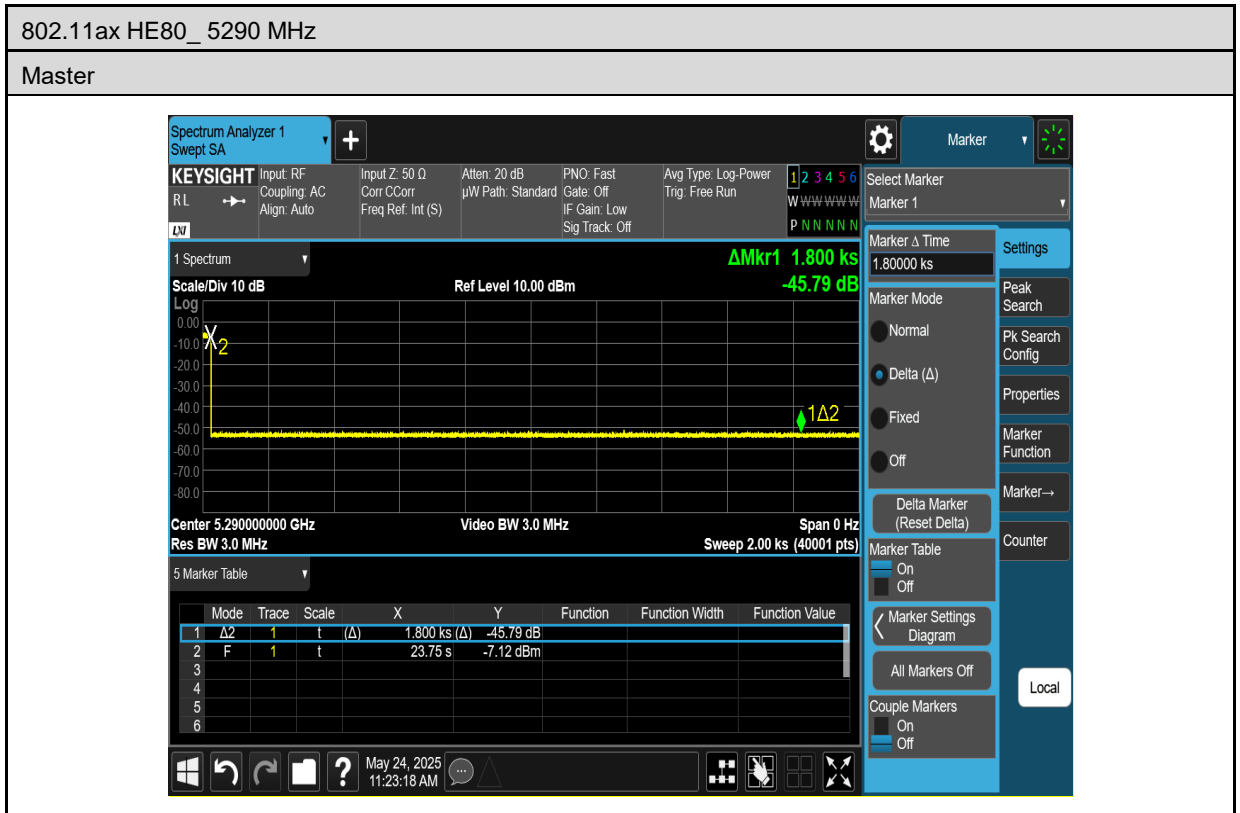

Note: Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

## 5.6. U-NII Detection Bandwidth



### ■ Test Results


Test Mode		802.11ax HE20				
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5300	5290	5310	20	18.9	105.82	≥ 100

Test Mode		802.11ax HE40				
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5310	5530	5570	40	37.316	107.19	≥ 100

Test Mode		802.11ax HE80				
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5290	5250	5330	80	76.151	105.05	≥ 100

■ Test Graphs

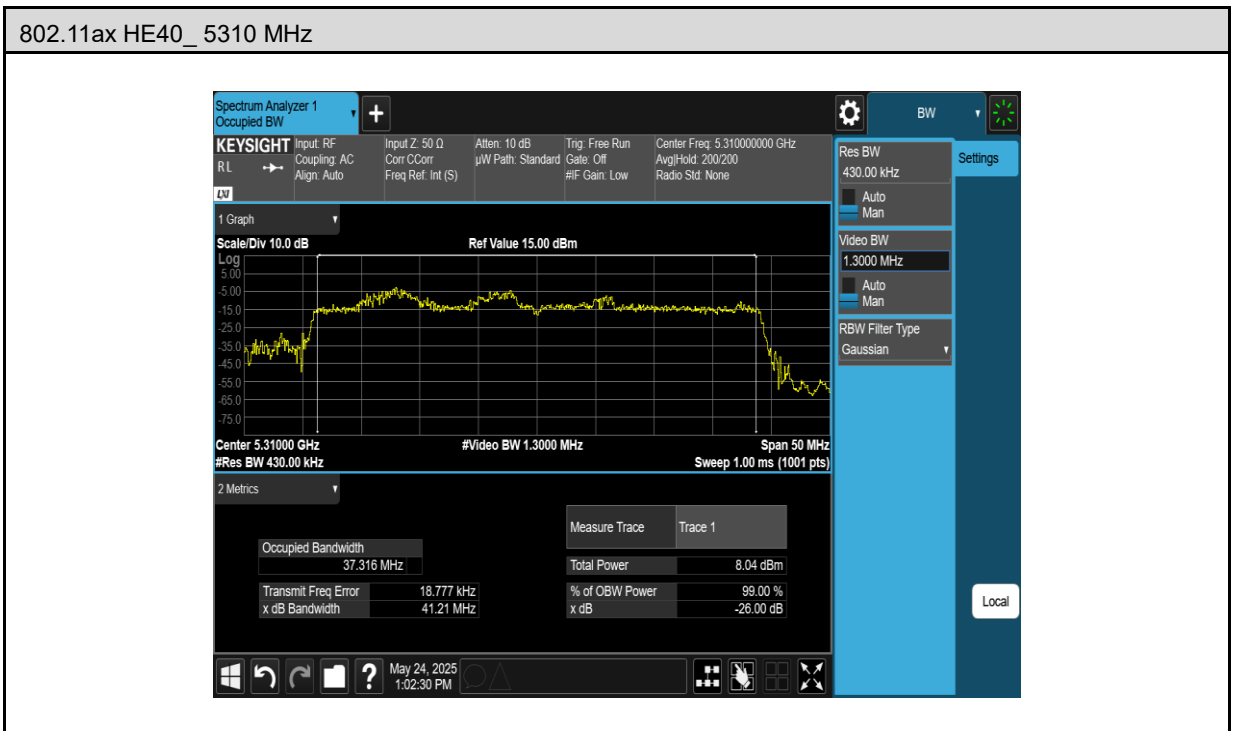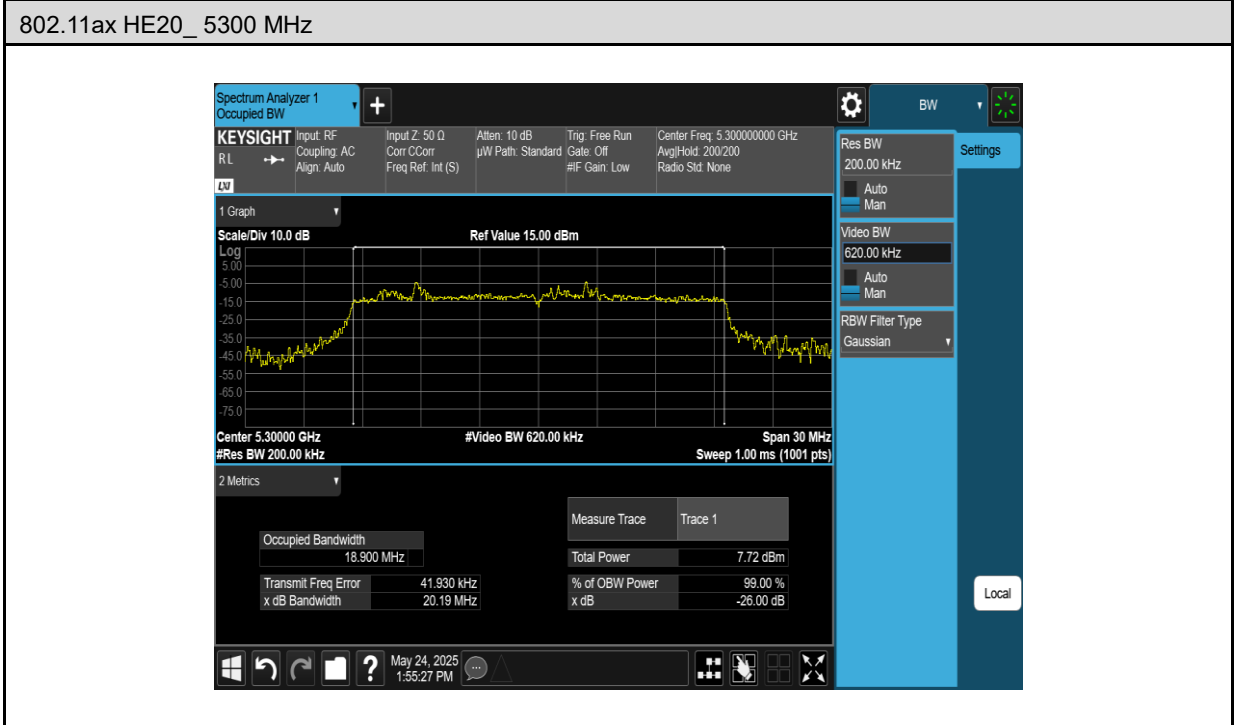

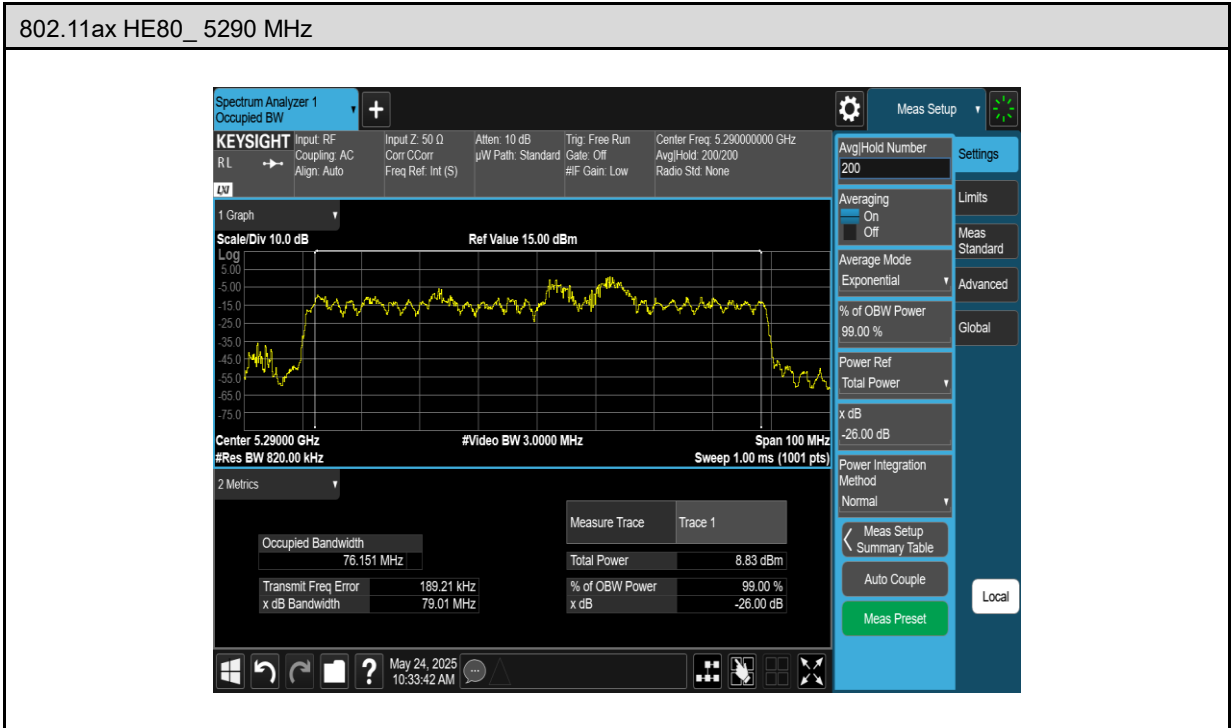

## 5.7. Statistical Performance check

### ■ Test Results

Test Mode		802.11ax HE20					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5300	Type1	Table 5a	1	28	2	93.33%	≥ 60 %
	Type2	Random	Random	29	1	96.67%	≥ 60 %
	Type3	Random	Random	26	4	86.67%	≥ 60 %
	Type4	Random	Random	27	3	90.00%	≥ 60 %
	Type1~4					91.67 %	≥ 80 %
	Type5	Random	Random	26	4	86.67%	≥ 80 %
	Type6	Hopping	1	30	0	100.00%	≥ 70 %

Test Mode		802.11ax HE40					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5310	Type1	Table 5a	1	28	2	93.33%	≥ 60 %
	Type2	Random	Random	27	3	90.00%	≥ 60 %
	Type3	Random	Random	27	3	90.00%	≥ 60 %
	Type4	Random	Random	28	2	93.33%	≥ 60 %
	Type1~4					91.67 %	≥ 80 %
	Type5	Random	Random	27	3	90.00%	≥ 80 %
	Type6	Hopping	1	30	0	100.00%	≥ 70 %

Test Mode		802.11ax HE80					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5290	Type1	Table 5a	1	27	3	90.00%	≥ 60 %
	Type2	Random	Random	26	4	86.67%	≥ 60 %
	Type3	Random	Random	28	2	93.33%	≥ 60 %
	Type4	Random	Random	27	3	90.00%	≥ 60 %
	Type1~4					90.00%	≥ 80 %
	Type5	Random	Random	26	4	86.67%	≥ 80 %
	Type6	Hopping	1	30	0	100.00%	≥ 70 %

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	1	658	81	1520	1
2	5300	1	798	67	1253	0
3	5300	1	518	102	1931	1
4	5300	1	758	70	1319	1
5	5300	1	558	95	1792	1
6	5300	1	658	81	1520	1
7	5300	1	738	72	1355	1
8	5300	1	518	102	1931	1
9	5300	1	818	65	1222	1
10	5300	1	658	81	1520	1
11	5300	1	558	95	1792	1
12	5300	1	758	70	1319	1
13	5300	1	718	74	1393	0
14	5300	1	658	81	1520	1
15	5300	1	938	57	1066	1
16	5300	1	2472	22	405	1
17	5300	1	2399	22	417	1
18	5300	1	519	102	1927	1
19	5300	1	1610	33	621	1
20	5300	1	669	79	1495	1
21	5300	1	2832	19	353	1
22	5300	1	1622	33	617	1
23	5300	1	1741	31	574	1
24	5300	1	2890	19	346	1
25	5300	1	2151	25	465	1
26	5300	1	2294	24	436	1
27	5300	1	557	95	1795	1
28	5300	1	2220	24	450	1
29	5300	1	915	58	1093	1
30	5300	1	1763	30	567	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	4.50	196.90	27	5079	1
2	5300	2.50	210.80	28	4744	1
3	5300	3.10	171.70	25	5824	0
4	5300	2.90	222.70	26	4490	1
5	5300	2.40	157.20	26	6361	1
6	5300	1.90	202.50	25	4938	1
7	5300	2.20	178.80	25	5593	1
8	5300	4.40	158.00	26	6329	1
9	5300	3.70	166.90	29	5992	1
10	5300	1.10	195.20	27	5123	1
11	5300	3.00	186.00	27	5376	1
12	5300	3.80	222.20	26	4500	1
13	5300	1.00	173.50	29	5764	1
14	5300	4.80	198.70	26	5033	1
15	5300	4.40	197.30	23	5068	1
16	5300	2.90	212.00	27	4717	1
17	5300	3.10	202.50	25	4938	1
18	5300	3.90	180.10	28	5552	1
19	5300	4.80	219.50	29	4556	1
20	5300	4.60	157.90	25	6333	1
21	5300	2.70	171.50	25	5831	1
22	5300	3.40	154.00	27	6494	1
23	5300	2.60	203.60	23	4912	1
24	5300	1.20	154.60	25	6468	1
25	5300	1.30	213.70	29	4679	1
26	5300	3.50	151.30	24	6609	1
27	5300	2.30	202.30	26	4943	1
28	5300	3.40	160.20	28	6242	1
29	5300	4.60	199.30	25	5018	1
30	5300	2.50	157.00	27	6369	1
Detection Percentage (%)						96.67

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	7.50	488.90	18	2045.41	1
2	5300	9.80	447.00	17	2237.14	0
3	5300	6.20	427.60	17	2338.63	0
4	5300	8.60	244.90	16	4083.30	1
5	5300	6.50	385.10	18	2596.73	1
6	5300	7.50	348.10	16	2872.74	1
7	5300	9.50	201.90	18	4952.95	1
8	5300	7.90	438.90	16	2278.42	1
9	5300	8.30	405.60	16	2465.48	1
10	5300	9.10	377.50	18	2649.01	1
11	5300	6.10	306.60	18	3261.58	1
12	5300	6.30	420.60	17	2377.56	1
13	5300	8.50	308.90	16	3237.29	1
14	5300	8.90	305.90	18	3269.04	1
15	5300	8.20	491.20	18	2035.83	1
16	5300	6.10	206.60	18	4840.27	1
17	5300	9.90	256.90	18	3892.57	1
18	5300	9.70	474.80	16	2106.15	1
19	5300	6.50	326.40	16	3063.73	1
20	5300	10.00	426.80	18	2343.02	1
21	5300	7.10	398.30	17	2510.67	0
22	5300	7.20	454.60	16	2199.74	1
23	5300	6.90	319.20	17	3132.83	1
24	5300	9.70	291.50	18	3430.53	1
25	5300	9.00	363.50	16	2751.03	1
26	5300	8.70	250.30	18	3995.21	1
27	5300	6.40	393.20	16	2543.23	1
28	5300	7.10	264.50	18	3780.72	1
29	5300	6.50	229.30	16	4361.10	0
30	5300	9.80	300.90	18	3323.36	1
Detection Percentage (%)						86.67

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	19.60	481.00	12	2079	1
2	5300	19.00	267.20	16	3743	0
3	5300	18.20	317.30	12	3152	1
4	5300	17.70	489.50	14	2043	1
5	5300	14.00	266.80	14	3748	1
6	5300	14.80	230.10	12	4346	0
7	5300	18.80	276.10	14	3622	1
8	5300	15.80	275.30	16	3632	1
9	5300	16.50	433.80	13	2305	1
10	5300	16.30	254.30	13	3932	1
11	5300	16.50	438.80	14	2279	1
12	5300	16.70	234.90	12	4257	1
13	5300	17.40	273.80	16	3652	1
14	5300	16.10	478.20	12	2091	1
15	5300	11.40	382.20	16	2616	1
16	5300	19.80	231.50	12	4320	1
17	5300	12.80	497.00	13	2012	1
18	5300	11.80	389.60	15	2567	1
19	5300	11.10	344.80	15	2900	1
20	5300	12.10	371.00	13	2695	1
21	5300	14.80	473.00	14	2114	1
22	5300	13.50	428.20	16	2335	1
23	5300	15.30	464.20	14	2154	0
24	5300	14.30	320.30	16	3122	1
25	5300	12.40	337.50	13	2963	1
26	5300	14.50	233.00	13	4292	1
27	5300	18.20	446.60	14	2239	1
28	5300	17.20	206.10	15	4852	1
29	5300	16.30	208.50	14	4796	1
30	5300	15.50	491.70	13	2034	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5297.5	1	99.4	17	1337.6	1	1
	5294.5	2	83.4	10	1495.0	2	
	5296.5	3	65.6	15	1900.6	3	
	5293.5	4	96.0	7	1121.7	1	
	5294.5	5	88.5	9	1475.2	2	
	5292.5	6	66.3	6	1050.4	1	
	5292.5	7	59.5	6	1822.0	1	
	5296.5	8	78.0	14	1091.2	1	
	5296.5	9	91.9	15	1633.8	2	
	5296.5	10	86.6	16	1003.3	1	
	5293.5	11	96.3	7	1250.6	1	
2	5296.5	1	70.8	15	1922.2	2	1
	5297.5	2	63.7	18	1514.0	3	
	5296.5	3	75.3	16	1831.6	1	
	5293.5	4	70.6	8	1401.5	2	
	5295.5	5	99.7	13	1336.6	2	
	5293.5	6	57.7	7	1945.2	3	
	5296.5	7	77.3	16	1182.4	2	
	5294.5	8	61.5	10	1144.3	1	
	5293.5	9	53.2	8	1535.4	3	
	5296.5	10	93.3	16	1132.7	2	
	5294.5	11	61.5	10	1716.4	3	
	5292.5	12	83.5	5	1700.9	3	
3	5294.5	1	88.5	9	1293.0	2	1
	5292.5	2	50.2	6	1745.7	1	
	5294.5	3	75.5	10	1377.9	3	
	5293.5	4	83.9	8	1139.2	2	
	5297.5	5	72.5	17	1112.4	1	
	5294.5	6	65.6	11	1735.8	2	
	5298.5	7	53.3	20	1102.3	3	
	5294.5	8	86.3	9	1097.6	1	
	5296.5	9	52.5	15	1258.4	1	
	5297.5	10	78.0	17	1798.9	2	
	5294.5	11	66.1	10	1798.3	2	
	5294.5	12	54.8	11	1253.2	2	
	5292.5	13	51.2	5	1951.0	1	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5292.5	1	78.4	6	1594.0	3	1
	5297.5	2	61.0	18	1229.9	1	
	5298.5	3	97.1	20	1972.6	1	
	5292.5	4	50.8	6	1318.7	2	
	5296.5	5	68.7	14	1217.7	1	
	5294.5	6	80.7	9	1416.2	2	
	5294.5	7	76.8	9	1942.8	3	
	5294.5	8	95.4	11	1623.6	1	
	5296.5	9	83.5	16	1536.6	1	
5	5294.5	1	88.8	11	1623.7	3	1
	5294.5	2	81.6	11	1764.2	3	
	5297.5	3	66.7	17	1853.2	1	
	5294.5	4	68.1	10	1235.6	1	
	5296.5	5	71.9	16	1808.1	3	
	5294.5	6	90.6	9	1025.1	1	
	5294.5	7	99.6	9	1482.6	1	
	5294.5	8	95.7	10	1977.0	2	
	5296.5	9	61.2	16	1486.1	2	
	5294.5	10	91.3	10	1919.1	1	
	5292.5	11	58.3	6	1006.8	2	
	5293.5	12	97.6	7	1070.8	2	
	5296.5	13	51.3	14	1537.8	2	
	5297.5	14	57.3	17	1800.9	2	
	5295.5	15	62.9	13	1386.2	3	
6	5295.5	1	93.0	12	1741.2	1	1
	5295.5	2	90.2	13	1217.4	1	
	5294.5	3	89.9	11	1012.1	3	
	5296.5	4	63.0	16	1252.4	2	
	5292.5	5	64.2	6	1292.4	1	
	5293.5	6	69.0	8	1639.4	1	
	5293.5	7	86.2	7	1250.0	3	
	5296.5	8	98.9	15	1993.9	2	
	5296.5	9	77.9	14	1751.5	3	
	5296.5	10	50.4	14	1675.0	2	
	5296.5	11	66.5	15	1318.6	3	
	5293.5	12	96.8	7	1059.7	1	
	5294.5	13	62.9	10	1498.0	1	
	5293.5	14	93.5	7	1638.9	1	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5294.5	1	63.3	10	1130.0	1	0
	5294.5	2	56.4	9	1817.0	2	
	5294.5	3	70.8	11	1286.1	1	
	5292.5	4	79.0	5	1064.4	2	
	5292.5	5	81.8	6	1502.0	1	
	5293.5	6	59.3	7	1840.8	2	
	5295.5	7	55.5	13	1069.1	3	
	5293.5	8	50.7	8	1464.5	2	
	5296.5	9	97.9	14	1359.5	2	
	5294.5	10	76.6	10	1768.2	2	
	5296.5	11	78.0	15	1550.7	3	
	5298.5	12	77.8	20	1781.7	3	
	5296.5	13	96.4	16	1501.4	3	
	5297.5	14	54.7	18	1068.1	3	
	5293.5	15	61.9	7	1793.5	2	
	5298.5	16	52.1	19	1797.1	2	
	5296.5	17	69.3	16	1864.8	2	
8	5293.5	1	65.5	7	1801.8	1	1
	5293.5	2	71.3	8	1936.4	1	
	5297.5	3	54.3	18	1708.4	1	
	5298.5	4	55.1	19	1010.5	2	
	5296.5	5	87.1	15	1878.0	1	
	5297.5	6	94.4	17	1456.7	3	
	5293.5	7	51.6	8	1933.0	3	
	5295.5	8	98.0	13	1720.5	2	
	5295.5	9	84.9	13	1372.2	1	
	5295.5	10	83.6	12	1523.2	2	
	5298.5	11	71.3	19	1381.1	3	
	5296.5	12	80.4	15	1575.4	1	
	5292.5	13	70.8	6	1901.2	2	
	5294.5	14	70.9	9	1975.6	2	
	5292.5	15	75.8	5	1502.9	1	
	5296.5	16	79.1	15	1436.0	3	
	5295.5	17	81.1	13	1147.6	2	
	5295.5	18	63.2	13	1559.9	1	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5294.5	1	89.0	9	1348.5	1	1
	5292.5	2	66.4	6	1067.5	1	
	5298.5	3	66.4	19	1010.2	3	
	5297.5	4	80.5	18	1732.3	3	
	5294.5	5	71.3	11	1202.2	1	
	5294.5	6	90.3	9	1991.1	3	
	5297.5	7	57.2	18	1053.9	1	
	5293.5	8	71.6	8	1730.8	2	
	5295.5	9	67.0	12	1655.3	3	
	5296.5	10	55.8	16	1510.5	3	
	5294.5	11	75.9	9	1267.6	2	
	5296.5	12	80.9	14	1342.5	3	
	5293.5	13	75.3	7	1951.8	3	
	5297.5	14	79.7	17	1860.3	2	
	5296.5	15	63.9	14	1346.9	3	
	5296.5	16	72.4	14	1995.1	1	
	5294.5	17	76.1	9	1434.7	3	
	5297.5	18	63.9	18	1156.7	3	
	5298.5	19	58.8	19	1598.9	1	
10	5294.5	1	96.5	11	1177.5	3	1
	5297.5	2	50.1	17	1994.7	1	
	5292.5	3	85.4	5	1112.0	2	
	5297.5	4	69.5	18	1137.7	1	
	5296.5	5	54.4	15	1232.2	1	
	5292.5	6	80.2	6	1554.4	2	
	5294.5	7	51.2	11	1313.5	2	
	5293.5	8	93.8	8	1134.9	1	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5300	1	73.2	17	1655.1	3	1
	5300	2	93.7	17	1466.2	2	
	5300	3	73.8	16	1690.8	3	
	5300	4	90.4	8	1792.7	1	
	5300	5	66.5	7	1281.8	3	
	5300	6	84.3	9	1971.3	2	
	5300	7	92.9	9	1657.3	2	
	5300	8	86.2	12	1414.5	1	
	5300	9	66.3	11	1252.9	1	
	5300	10	92.9	9	1828.2	3	
	5300	11	74.5	19	1209.3	3	
	5300	12	99.4	10	1813.0	3	
	5300	13	63.1	6	1511.4	1	
	5300	14	58.3	18	1828.7	3	
	5300	15	96.8	12	1144.3	1	
	12	5300	16	95.5	14	1638.9	
5300		1	54.7	11	1926.4	1	
5300		2	73.0	13	1098.6	3	
5300		3	58.0	19	1966.5	3	
5300		4	64.8	20	1039.8	2	
5300		5	71.7	13	1068.8	2	
5300		6	51.0	15	1357.4	1	
5300		7	62.3	13	1731.7	3	
5300		8	57.1	17	1525.5	1	
5300		9	59.0	6	1837.9	2	
5300		10	94.9	17	1530.2	3	
5300		11	97.5	14	1765.9	2	
5300		12	96.6	10	1663.0	1	
5300		13	99.2	19	1908.4	2	
5300		14	82.8	16	1973.0	1	
5300		15	61.3	15	1802.3	2	
5300		16	92.6	17	1498.4	2	
5300		17	79.3	8	1656.9	3	
5300		18	76.5	15	1873.1	3	
5300		19	54.7	16	1577.4	1	
5300	20	90.3	16	1820.9	1		

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5300	1	51.9	18	1838.4	3	1
	5300	2	75.1	12	1104.7	2	
	5300	3	61.8	8	1528.8	1	
	5300	4	64.4	11	1787.7	1	
	5300	5	51.6	19	1045.7	1	
	5300	6	96.1	9	1354.3	3	
	5300	7	69.3	6	1576.0	3	
	5300	8	57.0	10	1134.5	1	
	5300	9	98.5	11	1016.4	3	
	5300	10	77.3	14	1268.9	3	
14	5300	1	89.9	13	1999.2	2	1
	5300	2	92.7	16	1652.1	3	
	5300	3	96.9	14	1663.2	3	
	5300	4	89.5	15	1991.2	3	
	5300	5	69.8	15	1113.1	2	
	5300	6	97.3	12	1900.9	2	
	5300	7	83.3	11	1151.1	1	
	5300	8	70.8	9	1845.1	3	
	5300	9	93.3	16	1458.7	1	
	5300	10	78.7	15	1769.1	1	
	5300	11	87.7	15	1288.4	2	
	5300	12	86.6	15	1384.4	3	
	5300	13	91.6	12	1441.5	2	
	5300	14	86.6	18	1000.9	3	
	5300	15	72.1	11	1127.8	3	
	5300	16	99.4	7	1502.4	2	
	5300	17	71.8	5	1483.7	3	
	5300	18	68.5	9	1860.8	2	
	5300	19	88.6	10	1098.5	3	
	5300	20	50.1	18	1172.6	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5300	1	62.9	8	1444.1	1	1
	5300	2	83.6	9	1214.1	1	
	5300	3	90.3	17	1843.5	3	
	5300	4	79.6	11	1972.5	1	
	5300	5	63.9	14	1629.5	1	
	5300	6	55.0	18	1196.7	3	
	5300	7	75.7	19	1308.9	2	
	5300	8	56.4	16	1536.8	3	
	5300	9	92.9	6	1234.6	3	
	5300	10	70.8	15	1158.4	1	
	5300	11	52.3	16	1324.6	3	
	5300	12	80.3	16	1982.7	2	
	5300	13	88.2	14	1725.8	1	
	5300	14	79.4	20	1393.2	3	
	5300	15	75.9	6	1587.4	3	
	5300	16	81.4	11	1823.5	1	
	5300	17	64.3	16	1487.9	2	
	5300	18	75.3	16	1417.3	3	
	5300	19	92.2	19	1746.6	3	
16	5300	1	53.5	14	1110.6	2	1
	5300	2	72.6	14	1353.0	3	
	5300	3	81.7	16	1594.9	3	
	5300	4	62.5	20	1822.7	2	
	5300	5	88.0	19	1102.6	3	
	5300	6	53.2	14	1022.8	1	
	5300	7	66.0	6	1009.6	2	
	5300	8	56.7	14	1704.1	1	
	5300	9	95.3	7	1341.2	2	
	5300	10	64.2	16	1614.4	1	
	5300	11	61.4	14	1063.9	3	
	5300	12	52.8	13	1028.4	1	
	5300	13	69.7	6	1203.2	1	
	5300	14	60.2	6	1342.7	2	
	5300	15	85.2	20	1938.2	3	
	5300	16	66.1	6	1159.2	3	
	5300	17	61.4	14	1238.2	2	
	5300	18	89.9	11	1117.9	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5300	1	72.6	15	1404.0	2	0
	5300	2	91.2	17	1894.8	2	
	5300	3	77.5	6	1563.3	2	
	5300	4	67.0	12	1957.5	2	
	5300	5	69.1	14	1763.9	3	
	5300	6	56.3	19	1195.5	3	
	5300	7	65.1	10	1988.3	1	
	5300	8	63.1	19	1217.4	3	
	5300	9	61.5	16	1135.5	2	
	5300	10	77.3	11	1644.2	3	
	5300	11	50.2	9	1826.3	1	
	5300	12	56.0	16	1361.7	2	
	5300	13	89.4	17	1924.4	3	
	5300	14	50.0	17	1543.1	2	
	5300	15	60.9	16	1586.0	1	
	5300	16	83.0	12	1211.1	1	
	5300	17	58.1	8	1433.6	1	
18	5300	1	92.3	9	1750.9	2	1
	5300	2	75.5	16	1018.5	1	
	5300	3	87.7	10	1909.9	1	
	5300	4	77.1	11	1507.6	2	
	5300	5	92.3	8	1652.3	1	
	5300	6	88.0	6	1160.8	3	
	5300	7	82.2	8	1386.2	1	
	5300	8	88.0	18	1217.6	1	
	5300	9	57.7	17	1558.5	1	
	5300	10	64.6	16	1021.7	3	
	5300	11	80.7	15	1065.2	3	
	5300	12	87.3	16	1378.0	2	
	5300	13	73.7	18	1199.5	1	
	5300	14	85.9	12	1881.9	2	
	5300	15	82.6	7	1927.5	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5300	1	59.3	17	1700.5	1	1
	5300	2	65.2	14	1567.7	1	
	5300	3	71.5	9	1268.9	3	
	5300	4	80.5	19	1682.8	3	
	5300	5	87.2	10	1618.8	1	
	5300	6	71.5	7	1438.3	2	
	5300	7	95.7	17	1990.0	2	
	5300	8	60.7	13	1328.9	3	
	5300	9	85.1	9	1617.4	1	
	5300	10	91.4	14	1626.5	3	
	5300	11	88.8	13	1178.0	1	
	5300	12	77.9	9	1250.3	1	
	5300	13	98.9	11	1184.9	2	
	5300	14	99.8	11	1202.3	3	
20	5300	1	75.0	18	1480.0	1	1
	5300	2	51.3	19	1609.8	3	
	5300	3	75.5	13	1835.1	1	
	5300	4	52.0	10	1754.9	1	
	5300	5	71.7	11	1100.4	1	
	5300	6	85.3	17	1710.3	3	
	5300	7	79.4	8	1556.5	1	
	5300	8	64.9	16	1575.4	3	
	5300	9	59.9	16	1947.9	3	
	5300	10	94.1	9	1470.8	3	
21	5301.5	1	92.2	19	1410.8	1	1
	5303.5	2	50.5	14	1874.3	2	
	5305.5	3	84.4	9	1453.9	2	
	5301.5	4	93.9	19	1968.1	3	
	5305.5	5	80.9	9	1749.7	3	
	5302.5	6	82.4	17	1011.9	2	
	5303.5	7	94.7	16	1993.8	2	
	5301.5	8	87.9	19	1199.1	3	
	5303.5	9	78.6	16	1282.8	3	
	5301.5	10	86.1	20	1992.0	3	
	5304.5	11	66.8	13	1478.2	3	
	5303.5	12	85.6	15	1369.3	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5301.5	1	75.2	19	1062.0	2	1
	5306.5	2	65.3	7	1937.1	2	
	5305.5	3	90.4	11	1851.3	1	
	5302.5	4	84.3	18	1337.0	1	
	5304.5	5	87.0	13	1802.5	2	
	5306.5	6	55.2	7	1972.3	3	
	5304.5	7	53.5	12	1272.3	1	
	5302.5	8	79.9	18	1526.9	2	
	5302.5	9	56.5	17	1855.1	3	
23	5302.5	1	78.8	18	1293.1	3	1
	5302.5	2	93.2	17	1939.6	1	
	5302.5	3	58.7	17	1325.7	3	
	5306.5	4	51.7	7	1370.8	3	
	5301.5	5	73.5	20	1055.8	1	
	5307.5	6	78.4	5	1785.3	2	
	5303.5	7	88.4	15	1669.7	1	
	5301.5	8	69.3	19	1982.7	1	
	5303.5	9	95.5	14	1354.2	3	
	5304.5	10	67.0	13	1420.4	2	
	5307.5	11	91.3	6	1079.6	2	
	5306.5	12	72.2	7	1925.7	3	
	5307.5	13	74.4	6	1522.2	3	
	5306.5	14	96.0	8	1570.8	3	
	5307.5	15	90.7	6	1898.8	3	
24	5307.5	1	70.6	6	1492.5	3	0
	5302.5	2	64.4	17	1865.0	2	
	5304.5	3	89.1	13	1989.4	3	
	5305.5	4	77.6	9	1248.4	1	
	5307.5	5	86.9	5	1026.3	2	
	5307.5	6	82.2	5	1427.1	3	
	5301.5	7	64.2	19	1633.4	3	
	5305.5	8	70.0	11	1705.5	1	
	5307.5	9	65.5	5	1848.5	2	
	5305.5	10	50.4	9	1223.3	1	
	5301.5	11	92.8	19	1978.4	3	
	5304.5	12	72.4	13	1916.2	2	
	5305.5	13	52.8	9	1545.6	2	
	5302.5	14	71.3	18	1143.6	1	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5302.5	1	53.5	17	1916.0	1	1
	5301.5	2	67.9	19	1577.3	1	
	5305.5	3	63.6	10	1707.3	1	
	5305.5	4	94.3	10	1436.5	3	
	5306.5	5	94.5	7	1035.5	1	
	5303.5	6	64.7	15	1034.7	3	
	5307.5	7	53.0	6	1851.3	1	
	5303.5	8	98.2	16	1489.4	3	
	5302.5	9	96.5	17	1222.7	1	
	5302.5	10	78.1	17	1624.2	3	
	5303.5	11	53.4	15	1237.5	1	
	5303.5	12	73.6	14	1289.4	2	
	5304.5	13	88.0	12	1040.7	2	
	5305.5	14	51.7	11	1421.6	1	
	5301.5	15	82.3	19	1943.7	1	
	5303.5	16	71.5	14	1580.4	3	
	5307.5	17	74.6	6	1205.3	2	
	5301.5	18	94.1	19	1112.9	2	
26	5305.5	1	97.1	11	1999.4	2	1
	5304.5	2	74.6	12	1176.0	2	
	5301.5	3	61.0	19	1880.8	3	
	5304.5	4	84.6	13	1371.1	2	
	5303.5	5	88.6	15	1527.5	1	
	5302.5	6	91.7	18	1202.8	3	
	5307.5	7	88.2	5	1023.9	3	
	5304.5	8	97.8	12	1359.4	1	
	5303.5	9	93.5	16	1246.5	2	
	5305.5	10	66.5	11	1835.8	2	
	5306.5	11	84.2	7	1098.3	2	
	5305.5	12	86.8	11	1837.3	1	
	5305.5	13	67.8	11	1167.6	3	
	5307.5	14	79.6	6	1612.4	1	
	5307.5	15	93.0	6	1156.9	3	
	5304.5	16	71.3	13	1500.1	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5306.5	1	66.2	8	1633.1	3	0
	5303.5	2	87.5	15	1578.3	1	
	5306.5	3	76.9	7	1502.1	3	
	5303.5	4	76.8	16	1284.8	1	
	5302.5	5	53.2	17	1022.0	3	
	5307.5	6	61.4	6	1092.1	2	
	5303.5	7	74.3	16	1241.0	3	
	5304.5	8	95.2	12	1083.7	2	
	5302.5	9	73.6	17	1988.2	3	
	5303.5	10	73.1	14	1274.3	3	
	5304.5	11	54.0	12	1087.3	1	
	5303.5	12	87.3	16	1359.0	1	
	5305.5	13	67.3	10	1035.8	2	
	5306.5	14	50.7	7	1645.8	2	
	5306.5	15	69.6	8	1436.0	1	
	5302.5	16	70.3	18	1041.1	3	
	5306.5	17	78.4	7	1793.3	3	
	5304.5	18	94.6	13	1937.4	3	
	5307.5	19	77.6	6	1034.8	2	
	5307.5	20	96.3	5	1648.5	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5302.5	1	61.6	17	1364.3	1	1
	5304.5	2	79.8	12	1256.8	2	
	5305.5	3	58.7	10	1639.2	1	
	5305.5	4	68.7	10	1898.3	1	
	5305.5	5	80.2	10	1524.4	3	
	5305.5	6	57.4	11	1827.5	2	
	5307.5	7	54.9	5	1033.3	1	
	5301.5	8	56.1	20	1135.7	1	
	5306.5	9	57.0	8	1103.7	2	
	5306.5	10	81.6	7	1642.0	2	
	5305.5	11	50.6	10	1852.5	1	
	5301.5	12	64.3	19	1155.8	3	
	5303.5	13	64.4	14	1849.6	3	
	5306.5	14	50.1	7	1739.7	1	
	5304.5	15	57.4	13	1974.3	3	
	5303.5	16	98.0	15	1067.9	1	
	5304.5	17	79.9	13	1207.4	2	
	5303.5	18	96.0	16	1355.4	1	
	5307.5	19	78.6	6	1997.2	3	
	5303.5	20	65.0	14	1060.4	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5301.5	1	81.6	20	1322.4	2	1
	5302.5	2	64.8	17	1325.7	2	
	5303.5	3	90.9	16	1011.4	1	
	5302.5	4	85.7	17	1460.2	2	
	5305.5	5	52.2	11	1303.1	3	
	5302.5	6	79.0	17	1393.7	1	
	5307.5	7	76.7	6	1133.1	3	
	5307.5	8	82.3	6	1830.5	2	
	5303.5	9	81.1	16	1121.9	2	
	5307.5	10	82.9	6	1787.2	2	
	5306.5	11	82.2	8	1381.5	3	
	5301.5	12	79.7	20	1236.2	1	
	5303.5	13	93.3	15	1700.0	2	
	5305.5	14	98.0	10	1737.8	2	
	5302.5	15	71.4	18	1361.9	2	
	5304.5	16	71.0	13	1979.4	3	
	5305.5	17	61.0	11	1524.5	3	
30	5304.5	1	69.0	12	1186.5	2	1
	5303.5	2	95.1	15	1444.2	2	
	5305.5	3	60.8	9	1066.1	2	
	5304.5	4	65.2	12	1504.6	1	
	5303.5	5	65.5	16	1166.5	1	
	5303.5	6	86.7	16	1993.0	1	
	5301.5	7	86.2	19	1693.2	3	
	5307.5	8	87.7	6	1293.8	1	
	5302.5	9	73.6	17	1676.0	2	
	5304.5	10	56.8	12	1997.2	2	
	5305.5	11	79.1	10	1192.7	3	
	5303.5	12	58.4	14	1620.8	3	
	5302.5	13	53.9	18	1119.3	1	
	5304.5	14	55.2	12	1119.0	2	
Detection Percentage (%)							86.67

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	1	718	74	1393	1
2	5310	1	798	67	1253	1
3	5310	1	818	65	1222	0
4	5310	1	938	57	1066	1
5	5310	1	558	95	1792	1
6	5310	1	738	72	1355	1
7	5310	1	698	76	1433	1
8	5310	1	658	81	1520	1
9	5310	1	798	67	1253	1
10	5310	1	918	58	1089	1
11	5310	1	518	102	1931	1
12	5310	1	598	89	1672	1
13	5310	1	938	57	1066	1
14	5310	1	738	72	1355	1
15	5310	1	738	72	1355	1
16	5310	1	1004	53	996	1
17	5310	1	770	69	1299	1
18	5310	1	1362	39	734	1
19	5310	1	650	82	1538	1
20	5310	1	2000	27	500	1
21	5310	1	1284	42	779	1
22	5310	1	1660	32	602	1
23	5310	1	2619	21	382	1
24	5310	1	956	56	1046	1
25	5310	1	2417	22	414	0
26	5310	1	2708	20	369	1
27	5310	1	1718	31	582	1
28	5310	1	1872	29	534	1
29	5310	1	1951	28	513	1
30	5310	1	1228	43	814	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	1.70	200.90	25	4978	0
2	5310	2.60	155.90	24	6414	1
3	5310	3.30	221.80	25	4509	1
4	5310	3.50	198.30	23	5043	1
5	5310	2.40	220.80	27	4529	1
6	5310	4.80	208.00	27	4808	1
7	5310	2.30	187.50	27	5333	1
8	5310	4.10	151.80	23	6588	1
9	5310	3.60	207.30	23	4824	1
10	5310	4.00	199.60	27	5010	1
11	5310	4.50	191.30	25	5227	1
12	5310	3.60	155.90	24	6414	0
13	5310	1.10	181.30	28	5516	1
14	5310	2.10	173.30	26	5770	1
15	5310	3.70	153.70	29	6506	1
16	5310	1.50	173.90	24	5750	1
17	5310	3.90	160.50	28	6231	1
18	5310	1.40	193.90	25	5157	1
19	5310	1.30	186.60	29	5359	1
20	5310	2.80	194.00	25	5155	1
21	5310	2.80	185.30	24	5397	1
22	5310	3.90	155.90	28	6414	1
23	5310	4.70	220.40	23	4537	1
24	5310	3.80	176.20	25	5675	1
25	5310	3.50	229.40	28	4359	1
26	5310	3.70	209.80	29	4766	1
27	5310	2.10	177.10	23	5647	1
28	5310	2.00	164.50	27	6079	1
29	5310	1.20	152.50	23	6557	1
30	5310	2.70	170.20	24	5875	0
Detection Percentage (%)						90.00

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	7.00	239.90	16	4168.40	1
2	5310	10.00	429.60	16	2327.75	1
3	5310	6.00	417.00	17	2398.08	1
4	5310	6.20	223.80	16	4468.28	1
5	5310	6.50	290.80	16	3438.79	1
6	5310	6.30	263.50	17	3795.07	1
7	5310	6.60	450.40	17	2220.25	1
8	5310	6.30	204.30	18	4894.76	0
9	5310	6.00	301.60	18	3315.65	1
10	5310	7.30	454.30	18	2201.19	1
11	5310	9.90	370.80	17	2696.87	1
12	5310	9.90	463.30	16	2158.43	1
13	5310	6.70	225.30	17	4438.53	1
14	5310	6.30	211.70	17	4723.67	1
15	5310	7.10	291.30	17	3432.89	1
16	5310	6.70	415.50	17	2406.74	1
17	5310	7.50	474.40	17	2107.93	1
18	5310	9.10	370.70	17	2697.60	1
19	5310	7.50	456.30	17	2191.54	1
20	5310	7.50	329.70	17	3033.06	1
21	5310	9.80	294.20	18	3399.05	1
22	5310	6.20	353.90	17	2825.66	1
23	5310	9.60	485.10	18	2061.43	0
24	5310	8.40	378.30	18	2643.40	1
25	5310	9.10	422.50	17	2366.86	1
26	5310	7.30	384.40	18	2601.46	1
27	5310	8.60	396.80	16	2520.16	0
28	5310	7.80	314.40	17	3180.66	1
29	5310	8.90	200.00	16	5000.00	1
30	5310	8.60	248.80	18	4019.29	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	15.80	472.30	15	2117	1
2	5310	14.40	488.70	16	2046	0
3	5310	12.40	446.40	12	2240	1
4	5310	11.50	246.60	15	4055	1
5	5310	11.90	301.70	16	3315	0
6	5310	14.70	326.80	12	3060	1
7	5310	14.70	482.90	13	2071	1
8	5310	13.40	302.70	12	3304	1
9	5310	13.70	292.80	14	3415	1
10	5310	17.90	259.40	14	3855	1
11	5310	19.20	261.00	14	3831	1
12	5310	15.70	235.80	12	4241	1
13	5310	19.20	348.10	14	2873	1
14	5310	16.50	455.20	12	2197	1
15	5310	14.60	248.70	12	4021	1
16	5310	17.90	288.40	12	3467	1
17	5310	16.50	438.80	15	2279	1
18	5310	12.70	340.60	13	2936	1
19	5310	19.50	366.50	12	2729	1
20	5310	11.40	395.60	16	2528	1
21	5310	13.90	211.60	15	4726	1
22	5310	16.70	286.10	14	3495	1
23	5310	13.60	292.60	12	3418	1
24	5310	19.80	287.90	13	3473	1
25	5310	13.00	445.30	12	2246	1
26	5310	16.50	343.80	16	2909	1
27	5310	12.80	204.70	16	4885	1
28	5310	18.80	326.20	13	3066	1
29	5310	15.70	452.00	14	2212	1
30	5310	14.70	320.30	16	3122	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5294	1	78.6	7	1790.4	3	1
	5298	2	82.0	18	1758.9	1	
	5297	3	99.3	15	1132.3	2	
	5299	4	76.8	19	1427.7	2	
	5298	5	73.9	18	1293.2	2	
	5294	6	82.8	7	1954.1	2	
	5297	7	68.5	16	1742.6	1	
	5295	8	69.9	9	1357.3	2	
	5296	9	52.6	12	1004.2	2	
	5293	10	54.8	6	1814.2	1	
	5297	11	76.5	16	1802.4	1	
2	5294	1	95.6	8	1546.4	3	1
	5294	2	52.0	7	1924.7	1	
	5295	3	64.0	9	1638.2	2	
	5297	4	55.2	16	1196.9	3	
	5295	5	73.3	9	1540.5	2	
	5298	6	81.1	18	1880.0	3	
	5293	7	63.3	6	1876.8	3	
	5295	8	74.6	9	1163.6	2	
	5298	9	86.1	18	1836.0	3	
	5299	10	60.8	19	1652.4	1	
	5298	11	72.0	18	1234.4	3	
	5295	12	51.1	11	1726.8	3	
3	5296	1	91.0	12	1943.3	1	1
	5298	2	51.1	17	1171.7	3	
	5298	3	76.8	17	1753.1	3	
	5297	4	68.2	16	1815.0	2	
	5297	5	52.1	16	1489.6	1	
	5297	6	59.7	16	1960.5	1	
	5297	7	74.8	14	1212.9	3	
	5297	8	54.6	14	1539.9	1	
	5299	9	98.2	19	1283.7	1	
	5295	10	72.8	11	1983.9	3	
	5297	11	80.0	14	1854.3	2	
	5293	12	65.1	6	1088.4	2	
	5294	13	79.3	7	1978.3	1	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5293	1	95.7	6	1729.4	1	1
	5298	2	97.7	18	1463.5	3	
	5294	3	78.0	7	1416.6	2	
	5294	4	79.2	7	1113.3	1	
	5296	5	57.3	13	1452.6	3	
	5297	6	51.6	16	1292.3	1	
	5298	7	56.1	17	1201.4	3	
	5298	8	97.1	17	1511.0	2	
	5299	9	76.1	19	1370.8	2	
5	5299	1	82.5	19	1784.2	2	0
	5296	2	51.3	12	1808.7	1	
	5296	3	50.2	13	1036.2	3	
	5299	4	89.9	19	1472.0	3	
	5294	5	97.7	7	1022.1	2	
	5297	6	71.9	15	1809.5	1	
	5295	7	53.5	11	1499.6	1	
	5297	8	83.6	14	1195.2	2	
	5294	9	64.9	7	1493.7	1	
	5294	10	69.1	8	1428.9	3	
	5298	11	78.7	18	1823.5	1	
	5297	12	74.6	15	1435.2	2	
	5299	13	95.8	20	1317.7	2	
	5294	14	51.6	8	1166.8	2	
	5295	15	71.3	10	1667.5	1	
6	5298	1	58.2	18	1477.4	1	0
	5295	2	62.3	11	1278.8	2	
	5296	3	75.4	13	1098.5	3	
	5299	4	85.7	20	1466.5	2	
	5297	5	70.5	16	1914.3	1	
	5298	6	71.9	17	1964.5	2	
	5298	7	79.7	17	1001.1	2	
	5297	8	96.0	14	1355.3	2	
	5293	9	68.7	6	1533.9	3	
	5298	10	74.2	17	1014.4	1	
	5299	11	58.8	19	1461.8	2	
	5296	12	72.2	12	1109.3	2	
	5293	13	93.6	5	1867.5	3	
	5297	14	57.4	14	1643.6	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5298	1	71.7	18	1989.7	2	1
	5299	2	61.0	19	1613.2	1	
	5297	3	90.6	15	1752.1	1	
	5295	4	72.7	9	1435.3	3	
	5297	5	93.7	15	1599.3	3	
	5293	6	81.3	5	1777.9	3	
	5298	7	65.8	18	1414.3	3	
	5294	8	97.8	8	1424.8	3	
	5296	9	66.2	13	1029.8	2	
	5297	10	98.5	15	1968.6	3	
	5299	11	98.9	19	1219.1	2	
	5296	12	64.1	13	1364.9	3	
	5295	13	83.0	9	1049.7	2	
	5296	14	98.0	13	1873.3	1	
	5295	15	55.1	9	1088.4	2	
	5294	16	94.2	8	1741.7	1	
	5299	17	61.2	19	1670.8	2	
8	5297	1	75.6	14	1430.8	1	1
	5298	2	57.0	17	1845.6	1	
	5297	3	74.7	15	1393.0	1	
	5294	4	82.2	8	1346.8	1	
	5295	5	66.6	11	1028.3	1	
	5294	6	91.8	7	1713.5	2	
	5295	7	55.7	9	1579.3	3	
	5298	8	80.3	17	1663.9	3	
	5298	9	50.9	17	1510.7	3	
	5297	10	78.3	15	1799.7	3	
	5297	11	99.4	16	1500.2	3	
	5296	12	59.5	13	1290.3	3	
	5297	13	50.7	16	1401.3	1	
	5295	14	84.3	10	1173.1	1	
	5298	15	61.7	18	1019.8	1	
	5298	16	69.4	17	1308.3	3	
	5296	17	97.2	13	1512.1	3	
	5297	18	89.8	15	1410.9	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5298	1	69.3	17	1882.1	2	1
	5296	2	58.7	13	1944.0	3	
	5297	3	81.8	14	1848.2	3	
	5297	4	80.7	15	1767.7	1	
	5294	5	66.4	7	1559.0	2	
	5297	6	86.0	16	1559.9	2	
	5297	7	83.7	14	1050.7	1	
	5298	8	50.7	17	1328.6	1	
	5298	9	79.7	17	1712.6	2	
	5295	10	56.5	9	1595.2	2	
	5299	11	89.9	20	1778.1	2	
	5298	12	74.0	18	1060.8	2	
	5296	13	90.0	12	1338.5	1	
	5294	14	67.8	8	1113.1	1	
	5299	15	91.1	20	1871.1	1	
	5293	16	86.7	6	1949.2	3	
	5297	17	54.5	14	1275.8	1	
	5298	18	79.1	18	1475.5	3	
	5294	19	50.8	8	1162.7	1	
10	5294	1	91.0	8	1508.9	2	1
	5293	2	58.5	6	1448.1	3	
	5296	3	86.7	12	1704.3	2	
	5295	4	73.8	10	1439.8	3	
	5293	5	61.3	5	1356.0	1	
	5293	6	70.7	6	1156.2	3	
	5296	7	81.7	12	1214.6	3	
	5298	8	91.3	17	1348.0	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5310	1	72.5	15	1464.8	3	1
	5310	2	58.1	12	1324.4	1	
	5310	3	52.0	19	1185.9	1	
	5310	4	64.0	17	1510.0	3	
	5310	5	55.9	17	1168.6	3	
	5310	6	56.7	16	1769.6	2	
	5310	7	71.1	15	1409.1	3	
	5310	8	51.8	11	1552.1	1	
	5310	9	93.5	17	1673.8	2	
	5310	10	91.9	20	1216.9	2	
	5310	11	63.8	12	1483.2	1	
	5310	12	71.5	8	1186.6	3	
	5310	13	95.8	14	1712.1	2	
	5310	14	87.4	9	1046.9	3	
	5310	15	82.8	17	1230.1	1	
	12	5310	16	74.3	19	1225.0	
5310		1	51.1	13	1749.8	1	
5310		2	56.2	13	1306.4	1	
5310		3	88.4	6	1975.5	1	
5310		4	50.1	6	1370.8	1	
5310		5	82.7	8	1783.0	1	
5310		6	70.8	16	1937.6	2	
5310		7	96.8	10	1386.0	2	
5310		8	83.7	19	1153.1	2	
5310		9	89.0	6	1593.6	3	
5310		10	66.7	16	1860.6	3	
5310		11	73.9	12	1245.4	1	
5310		12	62.7	18	1144.2	3	
5310		13	51.8	19	1916.5	2	
5310		14	97.6	7	1443.2	3	
5310		15	93.6	11	1650.6	2	
5310		16	75.4	16	1387.7	2	
5310		17	57.8	17	1406.1	1	
5310		18	52.1	15	1155.3	1	
5310		19	50.0	6	1310.7	2	
5310	20	93.4	6	1622.6	1		

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5310	1	86.5	17	1903.0	3	1
	5310	2	55.0	17	1223.2	2	
	5310	3	64.5	12	1992.5	3	
	5310	4	76.4	15	1457.9	3	
	5310	5	76.0	5	1438.7	2	
	5310	6	73.1	12	1913.3	1	
	5310	7	75.0	12	1754.3	3	
	5310	8	71.4	6	1581.8	2	
	5310	9	79.5	6	1386.6	2	
	5310	10	53.3	9	1266.0	2	
14	5310	1	94.7	7	1849.0	2	1
	5310	2	73.3	10	1491.1	1	
	5310	3	63.2	8	1520.6	3	
	5310	4	70.2	18	1398.6	3	
	5310	5	80.8	16	1821.8	3	
	5310	6	72.1	8	1849.2	3	
	5310	7	86.8	13	1054.0	1	
	5310	8	73.2	20	1739.9	3	
	5310	9	87.2	16	1423.0	1	
	5310	10	64.3	13	1805.4	1	
	5310	11	95.4	9	1252.0	2	
	5310	12	83.4	14	1994.5	1	
	5310	13	89.9	19	1497.9	2	
	5310	14	81.9	16	1065.9	1	
	5310	15	83.4	15	1512.7	1	
	5310	16	85.0	7	1924.3	3	
	5310	17	79.5	13	1837.4	2	
	5310	18	94.0	9	1847.0	3	
	5310	19	71.5	14	1126.2	3	
	5310	20	73.1	13	1750.7	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5310	1	74.3	14	1299.6	3	1
	5310	2	74.2	14	1143.7	1	
	5310	3	91.4	14	1114.4	1	
	5310	4	56.4	19	1062.0	3	
	5310	5	81.6	16	1815.6	2	
	5310	6	70.5	12	1614.4	3	
	5310	7	58.4	19	1298.4	1	
	5310	8	79.9	6	1226.6	1	
	5310	9	88.8	15	1797.4	1	
	5310	10	95.7	6	1177.4	2	
	5310	11	68.9	9	1407.8	2	
	5310	12	88.9	12	1699.7	1	
	5310	13	74.7	12	1355.3	2	
	5310	14	65.0	15	1432.6	2	
	5310	15	70.8	12	1964.9	1	
	5310	16	69.8	17	1419.6	2	
	5310	17	99.0	6	1629.8	1	
	5310	18	53.0	7	1381.1	3	
	5310	19	78.1	7	1941.5	2	
16	5310	1	62.6	18	1144.7	1	1
	5310	2	57.1	14	1928.5	3	
	5310	3	74.2	9	1988.4	3	
	5310	4	84.5	7	1738.1	3	
	5310	5	76.3	11	1326.0	3	
	5310	6	82.1	13	1369.8	2	
	5310	7	74.5	12	1226.8	2	
	5310	8	79.3	19	1653.3	3	
	5310	9	82.2	15	1258.8	3	
	5310	10	54.9	17	1639.5	2	
	5310	11	68.0	12	1609.5	3	
	5310	12	84.4	9	1623.6	3	
	5310	13	73.8	12	1058.2	2	
	5310	14	63.8	11	1068.9	1	
	5310	15	81.1	16	1314.7	1	
	5310	16	72.0	6	1565.3	3	
	5310	17	76.7	10	1879.3	1	
	5310	18	88.0	15	1876.3	1	

Test Mode		802.11ax HE40							
Frequency		5310 MHz							
Radar Signal		Type 5							
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection		
17	5310	1	71.1	11	1265.0	2	1		
	5310	2	92.9	6	1347.0	2			
	5310	3	74.9	17	1162.0	1			
	5310	4	50.4	17	1207.3	1			
	5310	5	89.2	13	1047.8	2			
	5310	6	74.1	12	1110.8	2			
	5310	7	84.1	15	1054.2	3			
	5310	8	57.0	17	1356.8	3			
	5310	9	83.5	9	1891.2	1			
	5310	10	94.1	9	1042.1	2			
	5310	11	83.9	20	1905.6	2			
	5310	12	50.5	6	1477.6	1			
	5310	13	78.9	19	1675.3	3			
	5310	14	51.8	14	1007.2	2			
	5310	15	99.9	9	1377.5	1			
	18	5310	1	86.2	12	1249.3		2	1
		5310	2	73.4	6	1096.5		3	
5310		3	88.0	5	1344.4	1			
5310		4	82.0	14	1862.7	3			
5310		5	72.5	13	1832.2	1			
5310		6	64.3	8	1665.5	3			
5310		7	54.9	14	1417.1	1			
5310		8	72.3	19	1213.9	3			
5310		9	58.0	12	1124.8	2			
5310		10	91.9	12	1261.5	2			
5310		11	95.2	12	1284.8	3			
5310		12	94.1	10	1568.1	1			
5310		13	58.1	15	1103.8	3			
5310		14	79.1	14	1745.2	2			
5310		15	64.3	11	1190.1	2			

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5310	1	91.8	20	1639.4	1	1
	5310	2	94.7	14	1591.3	1	
	5310	3	65.1	8	1874.8	1	
	5310	4	71.0	19	1589.8	2	
	5310	5	51.9	7	1445.6	2	
	5310	6	81.8	5	1631.5	1	
	5310	7	66.6	19	1624.7	3	
	5310	8	70.3	17	1417.1	3	
	5310	9	84.0	9	1074.5	3	
	5310	10	81.2	11	1664.1	3	
	5310	11	70.0	8	1718.5	2	
	5310	12	67.1	7	1571.7	2	
	5310	13	85.3	9	1248.2	3	
	5310	14	55.4	13	1368.1	3	
20	5310	1	68.9	5	1539.5	2	1
	5310	2	97.7	13	1020.7	1	
	5310	3	54.8	16	1137.4	2	
	5310	4	79.1	9	1461.6	1	
	5310	5	80.8	6	1000.3	3	
	5310	6	92.7	14	1429.0	2	
	5310	7	56.0	14	1938.7	2	
	5310	8	53.4	19	1015.4	3	
	5310	9	57.2	18	1052.6	1	
	5310	10	66.3	15	1824.8	3	
21	5325	1	91.6	11	1356.7	1	1
	5327	2	82.7	5	1439.0	1	
	5326	3	70.2	7	1694.3	2	
	5326	4	57.5	8	1570.2	3	
	5324	5	51.9	13	1200.9	2	
	5323	6	65.0	15	1438.6	1	
	5324	7	94.0	13	1081.2	3	
	5326	8	86.1	8	1563.3	2	
	5325	9	99.4	11	1322.8	3	
	5324	10	98.1	12	1289.5	3	
	5321	11	89.2	20	1062.2	1	
	5326	12	65.7	8	1842.9	3	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5326	1	52.9	7	1369.8	1	1
	5323	2	64.7	15	1787.3	3	
	5321	3	59.7	19	1294.3	1	
	5326	4	54.6	7	1641.8	3	
	5323	5	99.5	14	1625.1	2	
	5324	6	78.0	12	1195.6	3	
	5323	7	96.1	14	1852.6	2	
	5325	8	87.2	9	1714.6	1	
	5323	9	88.2	14	1362.0	3	
23	5324	1	85.1	12	1564.3	1	1
	5325	2	82.2	10	1897.2	2	
	5323	3	70.3	15	1819.2	1	
	5323	4	68.1	15	1435.7	1	
	5323	5	60.3	14	1221.8	2	
	5325	6	60.8	10	1510.3	3	
	5325	7	82.6	10	1042.3	3	
	5326	8	84.1	8	1130.5	2	
	5321	9	51.6	20	1514.3	1	
	5326	10	70.4	7	1394.0	1	
	5321	11	54.2	19	1311.8	1	
	5325	12	89.2	9	1200.3	3	
	5323	13	99.9	14	1363.4	2	
	5323	14	55.0	14	1463.0	2	
	5323	15	64.3	15	1772.4	3	
24	5322	1	99.3	18	1335.8	2	1
	5321	2	93.7	20	1515.6	3	
	5327	3	78.0	5	1658.2	2	
	5323	4	76.6	16	1266.8	2	
	5324	5	89.8	13	1813.4	2	
	5325	6	53.2	9	1273.3	1	
	5323	7	63.5	14	1796.4	1	
	5324	8	67.9	13	1668.4	1	
	5321	9	64.4	19	1583.6	1	
	5325	10	57.7	10	1654.0	3	
	5327	11	99.7	5	1074.5	1	
	5326	12	53.3	7	1193.9	3	
	5325	13	51.0	11	1852.6	1	
	5325	14	80.6	9	1030.6	3	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5324	1	84.8	13	1935.7	2	1
	5322	2	70.6	17	1370.7	1	
	5323	3	63.4	16	1494.8	2	
	5324	4	78.1	12	1131.2	1	
	5326	5	97.2	8	1425.4	2	
	5323	6	66.0	15	1429.5	1	
	5324	7	82.6	12	1523.9	3	
	5327	8	54.5	6	1210.9	1	
	5326	9	50.4	7	1937.5	3	
	5321	10	78.0	20	1120.0	2	
	5325	11	87.7	9	1515.4	1	
	5322	12	54.2	17	1247.9	1	
	5322	13	80.6	17	1241.5	1	
	5323	14	51.7	15	1752.7	2	
	5324	15	89.4	12	1152.5	3	
	5326	16	93.7	8	1953.3	2	
	5323	17	57.3	14	1859.8	1	
	5322	18	87.8	17	1441.8	3	
26	5325	1	63.0	10	1293.1	1	1
	5327	2	59.6	6	1438.1	2	
	5325	3	96.8	11	1265.7	2	
	5322	4	70.2	17	1297.1	1	
	5327	5	67.0	6	1471.2	1	
	5324	6	65.7	13	1992.8	1	
	5323	7	82.3	14	1029.3	1	
	5325	8	94.6	11	1139.7	3	
	5327	9	50.9	5	1411.5	1	
	5323	10	95.6	15	1405.3	1	
	5322	11	75.3	17	1799.5	3	
	5326	12	81.8	8	1598.7	2	
	5325	13	57.3	9	1710.8	1	
	5326	14	90.5	8	1400.3	1	
	5323	15	83.2	16	1878.9	1	
	5323	16	51.5	14	1089.9	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5323	1	61.3	15	1718.7	2	1
	5322	2	73.7	18	1926.3	3	
	5323	3	53.2	16	1000.2	2	
	5326	4	77.6	7	1636.3	1	
	5325	5	62.5	11	1833.6	3	
	5326	6	89.0	8	1689.1	1	
	5323	7	59.0	14	1509.5	2	
	5321	8	56.8	19	1005.6	3	
	5323	9	79.6	15	1480.0	2	
	5327	10	75.3	6	1039.9	3	
	5325	11	63.4	11	1652.0	2	
	5323	12	94.1	15	1787.3	1	
	5323	13	92.4	15	1881.0	1	
	5323	14	99.3	14	1320.3	3	
	5323	15	70.9	15	1243.0	2	
	5323	16	68.7	16	1605.0	2	
	5326	17	53.0	8	1026.0	3	
	5327	18	76.5	6	1773.8	2	
	5324	19	75.4	12	1269.8	2	
	5322	20	99.8	18	1437.6	1	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5323	1	75.6	14	1226.1	3	1
	5323	2	100.0	15	1484.3	1	
	5325	3	53.0	11	1686.0	1	
	5323	4	67.0	16	1801.7	2	
	5327	5	66.5	5	1126.5	2	
	5325	6	84.5	9	1366.4	2	
	5322	7	96.4	18	1831.6	2	
	5325	8	88.8	11	1402.7	2	
	5324	9	70.2	12	1678.4	2	
	5325	10	83.1	11	1312.0	3	
	5322	11	50.2	18	1539.1	3	
	5327	12	77.2	6	1654.2	2	
	5324	13	85.6	13	1420.2	2	
	5325	14	55.5	11	1984.0	3	
	5326	15	68.3	8	1021.1	2	
	5321	16	52.4	19	1206.2	3	
	5326	17	56.1	8	1014.5	1	
	5326	18	90.3	8	1863.5	3	
	5325	19	78.1	9	1643.4	1	
	5326	20	67.6	7	1615.2	3	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5325	1	64.8	11	1988.8	1	1
	5322	2	69.4	17	1768.2	3	
	5325	3	82.7	10	1985.0	2	
	5324	4	70.1	13	1402.5	2	
	5323	5	61.0	16	1671.4	1	
	5321	6	81.7	20	1421.2	2	
	5326	7	92.2	8	1095.4	1	
	5327	8	66.9	5	1494.9	1	
	5325	9	63.6	11	1232.0	3	
	5325	10	79.9	9	1486.7	1	
	5326	11	74.0	7	1410.6	1	
	5325	12	53.0	11	1212.5	1	
	5327	13	64.2	6	1098.1	1	
	5324	14	78.6	13	1150.9	1	
	5323	15	60.2	15	1062.4	3	
	5322	16	97.6	17	1498.3	3	
	5325	17	72.8	10	1335.9	3	
30	5326	1	59.4	8	1628.4	1	0
	5326	2	76.6	8	1845.2	1	
	5322	3	63.6	18	1071.4	3	
	5323	4	61.0	16	1421.0	3	
	5322	5	87.2	17	1634.5	3	
	5325	6	99.6	10	1955.4	2	
	5323	7	84.9	16	1209.0	1	
	5327	8	98.2	6	1912.6	1	
	5321	9	97.3	19	1909.7	3	
	5323	10	66.7	15	1252.1	2	
	5325	11	95.7	9	1974.1	2	
	5322	12	71.2	17	1382.5	1	
	5327	13	80.6	5	1374.2	1	
	5321	14	68.8	19	1504.7	2	
Detection Percentage (%)							90.00

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE80				
Frequency		5290 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	1	3066	18	326	1
2	5290	1	878	61	1139	1
3	5290	1	3066	18	326	1
4	5290	1	838	63	1193	1
5	5290	1	938	57	1066	1
6	5290	1	598	89	1672	1
7	5290	1	938	57	1066	1
8	5290	1	3066	18	326	0
9	5290	1	538	99	1859	1
10	5290	1	598	89	1672	0
11	5290	1	918	58	1089	1
12	5290	1	618	86	1618	1
13	5290	1	918	58	1089	1
14	5290	1	778	68	1285	1
15	5290	1	598	89	1672	1
16	5290	1	1494	36	669	1
17	5290	1	2113	25	473	1
18	5290	1	533	100	1876	1
19	5290	1	633	84	1580	1
20	5290	1	1732	31	577	1
21	5290	1	2112	25	473	1
22	5290	1	2111	26	474	1
23	5290	1	2991	18	334	1
24	5290	1	1473	36	679	0
25	5290	1	782	68	1279	1
26	5290	1	1785	30	560	1
27	5290	1	1154	46	867	1
28	5290	1	2967	18	337	1
29	5290	1	604	88	1656	1
30	5290	1	2124	25	471	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE80				
Frequency		5290 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	2.80	188.20	25	5313	1
2	5290	2.60	204.80	26	4883	1
3	5290	2.70	197.40	28	5066	1
4	5290	3.20	223.70	26	4470	0
5	5290	4.00	161.00	23	6211	1
6	5290	2.40	196.50	26	5089	1
7	5290	1.60	218.30	23	4581	1
8	5290	1.80	213.40	25	4686	1
9	5290	1.40	223.20	23	4480	0
10	5290	3.20	201.10	29	4973	1
11	5290	3.20	222.00	23	4505	1
12	5290	3.40	211.70	23	4724	1
13	5290	1.10	207.80	26	4812	1
14	5290	3.70	220.30	23	4539	1
15	5290	4.90	214.90	27	4653	1
16	5290	3.60	164.60	24	6075	1
17	5290	2.00	184.30	24	5426	1
18	5290	2.00	223.50	23	4474	0
19	5290	1.80	212.60	23	4704	0
20	5290	5.00	157.60	28	6345	1
21	5290	3.30	190.60	27	5247	1
22	5290	4.40	199.10	24	5023	1
23	5290	2.50	187.30	24	5339	1
24	5290	4.10	176.80	23	5656	1
25	5290	2.60	201.20	25	4970	1
26	5290	4.00	205.00	24	4878	1
27	5290	4.60	198.50	26	5038	1
28	5290	4.20	209.70	24	4769	1
29	5290	1.20	189.00	26	5291	1
30	5290	1.30	179.60	25	5568	1
Detection Percentage (%)						86.67

Test Mode		802.11ax HE80				
Frequency		5290 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	9.00	205.30	18	4870.92	1
2	5290	6.70	440.60	17	2269.63	1
3	5290	9.60	437.70	16	2284.67	1
4	5290	8.30	400.30	18	2498.13	1
5	5290	9.60	355.70	17	2811.36	1
6	5290	7.50	248.70	16	4020.91	1
7	5290	7.70	221.80	16	4508.57	1
8	5290	8.50	317.90	16	3145.64	0
9	5290	9.10	477.10	16	2096.00	1
10	5290	7.10	209.70	18	4768.72	1
11	5290	7.10	467.70	17	2138.12	1
12	5290	8.10	295.50	17	3384.09	0
13	5290	7.30	423.50	16	2361.28	1
14	5290	8.40	280.40	18	3566.33	1
15	5290	7.00	385.00	17	2597.40	1
16	5290	8.30	254.50	16	3929.27	1
17	5290	6.80	318.20	17	3142.68	1
18	5290	9.10	324.60	16	3080.71	1
19	5290	9.30	387.50	18	2580.65	1
20	5290	8.50	279.50	18	3577.82	1
21	5290	7.80	370.50	18	2699.06	1
22	5290	6.30	393.40	18	2541.94	1
23	5290	8.70	454.40	16	2200.70	1
24	5290	8.60	337.90	16	2959.46	1
25	5290	9.50	225.00	17	4444.44	1
26	5290	6.70	354.20	17	2823.26	1
27	5290	7.40	375.60	18	2662.41	1
28	5290	8.70	252.30	17	3963.54	1
29	5290	9.20	225.50	17	4434.59	1
30	5290	7.80	219.90	17	4547.52	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE80				
Frequency		5290 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	19.10	302.60	15	3305	0
2	5290	12.00	202.00	14	4950	1
3	5290	12.30	311.80	14	3207	1
4	5290	14.00	278.20	14	3595	1
5	5290	14.00	368.10	16	2717	1
6	5290	12.90	427.50	15	2339	1
7	5290	15.30	378.70	15	2641	1
8	5290	14.70	271.40	15	3685	1
9	5290	19.40	307.00	12	3257	1
10	5290	17.90	252.00	12	3968	1
11	5290	19.40	220.70	15	4531	1
12	5290	18.60	375.20	13	2665	1
13	5290	14.10	312.50	16	3200	1
14	5290	19.00	208.50	13	4796	1
15	5290	18.60	421.20	15	2374	1
16	5290	18.30	278.40	13	3592	1
17	5290	18.10	325.20	12	3075	1
18	5290	15.80	375.60	14	2662	1
19	5290	18.40	443.60	12	2254	1
20	5290	16.80	397.90	13	2513	0
21	5290	18.50	207.20	12	4826	1
22	5290	12.30	225.10	14	4442	1
23	5290	11.30	438.10	16	2283	1
24	5290	13.20	241.30	13	4144	1
25	5290	16.60	217.90	12	4589	0
26	5290	11.60	397.50	12	2516	1
27	5290	11.30	441.90	12	2263	1
28	5290	14.00	370.60	16	2698	1
29	5290	17.70	204.80	14	4883	1
30	5290	18.20	267.70	16	3736	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5257.5	1	74.1	14	1350.8	1	1
	5255.5	2	73.5	9	1106.9	1	
	5254.5	3	74.0	8	1169.6	2	
	5257.5	4	63.1	14	1874.5	1	
	5258.5	5	67.9	18	1288.9	2	
	5253.5	6	85.4	6	1904.4	3	
	5255.5	7	54.2	10	1512.0	3	
	5257.5	8	83.9	14	1700.8	3	
	5256.5	9	76.6	13	1544.0	1	
	5254.5	10	76.8	8	1540.8	2	
	5255.5	11	73.7	11	1510.5	2	
2	5255.5	1	86.1	10	1332.4	3	1
	5258.5	2	77.7	18	1017.6	3	
	5255.5	3	66.7	11	1396.6	1	
	5257.5	4	65.5	16	1790.7	2	
	5255.5	5	71.5	10	1798.5	1	
	5255.5	6	90.7	10	1104.5	2	
	5256.5	7	81.2	12	1597.7	1	
	5254.5	8	50.9	8	1306.8	3	
	5258.5	9	67.8	18	1879.3	1	
	5253.5	10	90.1	6	1391.3	2	
	5255.5	11	88.9	11	1613.8	1	
	5255.5	12	95.0	9	1468.0	3	
3	5255.5	1	61.4	10	1669.3	1	1
	5256.5	2	88.1	13	1066.0	1	
	5257.5	3	94.5	15	1202.7	3	
	5254.5	4	80.0	7	1929.6	3	
	5259.5	5	52.0	19	1233.7	1	
	5259.5	6	87.3	19	1224.5	2	
	5257.5	7	91.7	16	1505.8	2	
	5255.5	8	56.7	11	1129.9	1	
	5259.5	9	51.3	19	1475.4	2	
	5253.5	10	73.9	5	1950.1	3	
	5256.5	11	77.8	12	1748.3	1	
	5257.5	12	74.6	16	1656.3	1	
	5257.5	13	51.5	16	1963.5	2	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5259.5	1	89.0	20	1797.7	1	1
	5256.5	2	89.5	13	1412.2	2	
	5255.5	3	75.0	11	1017.4	1	
	5256.5	4	72.2	13	1784.9	3	
	5255.5	5	53.4	10	1278.3	3	
	5256.5	6	61.3	12	1729.1	2	
	5255.5	7	54.3	10	1110.1	3	
	5259.5	8	95.8	19	1358.8	1	
	5256.5	9	81.0	13	1145.8	1	
5	5256.5	1	73.2	12	1149.5	1	1
	5257.5	2	63.3	16	1497.0	3	
	5255.5	3	75.7	9	1556.6	3	
	5257.5	4	95.4	14	1687.0	3	
	5257.5	5	93.5	15	1043.3	3	
	5256.5	6	55.5	12	1665.0	2	
	5254.5	7	59.2	7	1953.9	2	
	5254.5	8	89.1	8	1042.8	1	
	5255.5	9	51.9	10	1251.4	3	
	5256.5	10	63.2	12	1209.8	2	
	5253.5	11	74.3	5	1496.8	1	
	5253.5	12	87.1	6	1609.4	1	
	5254.5	13	57.8	7	1948.8	2	
	5255.5	14	82.2	9	1505.9	2	
	5259.5	15	93.7	19	1066.8	1	
6	5258.5	1	93.9	18	1213.3	1	1
	5254.5	2	55.3	8	1200.1	2	
	5258.5	3	63.0	17	1125.5	3	
	5254.5	4	61.8	7	1958.5	3	
	5258.5	5	92.5	17	1417.7	3	
	5254.5	6	93.7	8	1631.4	3	
	5257.5	7	89.3	16	1753.4	1	
	5255.5	8	92.8	10	1643.3	1	
	5254.5	9	77.8	7	1794.9	3	
	5257.5	10	51.3	15	1165.0	1	
	5259.5	11	54.6	20	1047.9	2	
	5259.5	12	98.4	19	1105.1	1	
	5253.5	13	50.1	6	1316.1	2	
	5257.5	14	91.4	15	1443.9	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5255.5	1	71.3	9	1290.0	1	1
	5254.5	2	71.3	7	1267.6	2	
	5253.5	3	55.5	5	1752.6	1	
	5256.5	4	93.4	13	1158.4	2	
	5258.5	5	88.0	18	1110.8	1	
	5255.5	6	57.0	10	1736.1	3	
	5254.5	7	51.4	7	1637.6	1	
	5253.5	8	95.1	5	1229.6	3	
	5255.5	9	99.0	10	1373.0	2	
	5256.5	10	53.6	12	1851.7	3	
	5259.5	11	61.2	20	1044.9	1	
	5256.5	12	78.8	13	1138.5	3	
	5253.5	13	52.1	6	1091.8	1	
	5255.5	14	71.9	11	1206.5	1	
	5253.5	15	84.8	6	1254.0	1	
	5255.5	16	60.8	9	1838.2	1	
	5259.5	17	60.3	19	1392.0	1	
8	5259.5	1	51.0	19	1943.4	2	0
	5254.5	2	87.7	8	1427.2	1	
	5259.5	3	59.7	19	1001.5	1	
	5258.5	4	92.4	18	1151.7	3	
	5257.5	5	76.2	15	1453.8	1	
	5255.5	6	99.7	10	1198.1	1	
	5255.5	7	58.5	11	1639.0	2	
	5257.5	8	89.7	15	1582.0	1	
	5254.5	9	70.3	8	1911.5	3	
	5258.5	10	81.0	18	1532.7	3	
	5259.5	11	75.3	19	1856.0	3	
	5259.5	12	86.1	20	1027.0	2	
	5258.5	13	93.3	18	1339.3	1	
	5254.5	14	87.6	8	1691.0	1	
	5257.5	15	87.1	16	1553.4	2	
	5255.5	16	98.6	10	1431.9	3	
	5253.5	17	80.6	6	1756.4	2	
	5255.5	18	69.1	9	1420.3	2	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5254.5	1	64.9	8	1012.4	1	1
	5257.5	2	87.8	14	1828.1	3	
	5258.5	3	65.4	18	1581.5	1	
	5256.5	4	94.4	13	1690.0	3	
	5255.5	5	96.3	9	1219.1	3	
	5259.5	6	74.8	19	1419.6	1	
	5257.5	7	68.6	14	1330.5	1	
	5259.5	8	98.3	19	1528.5	2	
	5255.5	9	95.5	10	1575.8	1	
	5255.5	10	85.8	11	1132.5	1	
	5255.5	11	65.7	9	1295.6	1	
	5255.5	12	80.1	10	1392.1	3	
	5254.5	13	74.2	7	1184.2	3	
	5255.5	14	55.8	11	1322.1	1	
	5254.5	15	78.2	8	1702.8	2	
	5256.5	16	88.0	13	1611.9	1	
	5257.5	17	94.3	15	1988.4	3	
	5258.5	18	59.9	18	1330.1	1	
	5254.5	19	81.8	7	1577.5	3	
10	5256.5	1	78.5	12	1370.4	3	1
	5253.5	2	53.2	6	1229.2	1	
	5259.5	3	84.1	19	1916.0	1	
	5255.5	4	63.0	9	1125.0	2	
	5258.5	5	98.6	17	1335.0	3	
	5256.5	6	84.2	12	1515.9	3	
	5257.5	7	70.6	15	1067.6	1	
	5257.5	8	61.8	15	1190.8	2	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5290	1	51.9	13	1136.5	3	1
	5290	2	67.4	18	1795.1	2	
	5290	3	82.1	8	1174.3	1	
	5290	4	96.5	15	1564.0	1	
	5290	5	69.1	13	1593.5	2	
	5290	6	96.0	12	1757.8	2	
	5290	7	90.5	12	1819.8	1	
	5290	8	84.4	9	1821.4	3	
	5290	9	69.4	11	1244.4	2	
	5290	10	64.3	20	1027.3	3	
	5290	11	67.7	9	1345.9	2	
	5290	12	57.1	10	1473.0	3	
	5290	13	71.8	16	1144.1	3	
	5290	14	94.8	18	1211.0	2	
	5290	15	93.2	8	1615.1	3	
	12	5290	16	93.9	12	1058.5	
5290		1	93.9	9	1044.6	3	
5290		2	97.0	8	1983.9	2	
5290		3	89.2	10	1442.6	1	
5290		4	88.4	16	1038.7	1	
5290		5	86.3	15	1066.8	3	
5290		6	74.2	19	1940.6	3	
5290		7	92.7	6	1428.3	3	
5290		8	82.7	17	1329.2	1	
5290		9	79.8	11	1912.3	1	
5290		10	83.1	13	1438.5	1	
5290		11	78.4	12	1834.3	3	
5290		12	55.3	10	1826.7	2	
5290		13	72.6	10	1938.2	3	
5290		14	74.2	7	1068.2	2	
5290		15	78.4	18	1527.0	1	
5290		16	61.3	15	1007.1	2	
5290		17	87.3	15	1683.6	1	
5290		18	64.5	9	1549.4	3	
5290		19	92.0	6	1649.6	2	
5290	20	71.4	14	1702.3	2		

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5290	1	81.5	18	1306.7	1	1
	5290	2	57.0	16	1827.4	1	
	5290	3	53.4	14	1989.8	1	
	5290	4	82.2	12	1032.6	1	
	5290	5	51.9	10	1554.9	2	
	5290	6	91.2	13	1299.5	3	
	5290	7	59.9	11	1176.6	2	
	5290	8	75.1	17	1832.0	3	
	5290	9	62.0	12	1375.9	1	
	5290	10	84.4	19	1914.5	3	
14	5290	1	57.8	15	1206.5	2	1
	5290	2	59.7	10	1889.9	2	
	5290	3	99.5	13	1745.2	2	
	5290	4	76.5	16	1340.3	1	
	5290	5	79.4	10	1390.0	1	
	5290	6	80.6	6	1962.6	1	
	5290	7	91.6	12	1955.3	2	
	5290	8	72.7	10	1511.0	2	
	5290	9	67.0	5	1799.8	1	
	5290	10	76.8	12	1207.2	3	
	5290	11	66.1	13	1939.0	2	
	5290	12	62.7	16	1245.8	2	
	5290	13	65.8	7	1092.4	3	
	5290	14	87.4	10	1155.1	3	
	5290	15	84.4	11	1170.0	3	
	5290	16	77.7	7	1526.8	2	
	5290	17	60.3	10	1291.6	1	
	5290	18	63.1	11	1941.0	2	
	5290	19	88.9	8	1148.0	1	
	5290	20	54.8	17	1006.7	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5290	1	66.5	14	1137.6	1	1
	5290	2	86.4	11	1114.7	1	
	5290	3	55.1	9	1290.4	2	
	5290	4	58.0	11	1564.5	1	
	5290	5	75.3	18	1932.7	2	
	5290	6	88.2	13	1560.1	1	
	5290	7	72.0	13	1970.7	2	
	5290	8	99.8	14	1544.6	2	
	5290	9	90.4	15	1698.2	2	
	5290	10	54.5	18	1556.9	3	
	5290	11	69.9	16	1057.3	1	
	5290	12	51.8	11	1796.0	2	
	5290	13	75.0	5	1445.3	2	
	5290	14	52.1	18	1795.5	2	
	5290	15	82.4	19	1545.1	3	
	5290	16	94.5	19	1166.1	2	
	5290	17	60.5	9	1009.7	2	
	5290	18	59.9	9	1554.4	2	
	5290	19	52.3	8	1680.3	2	
16	5290	1	95.2	9	1627.4	1	1
	5290	2	72.9	10	1829.6	1	
	5290	3	77.0	17	1883.2	1	
	5290	4	71.2	17	1473.9	2	
	5290	5	84.2	9	1943.0	1	
	5290	6	50.3	8	1619.3	1	
	5290	7	89.1	19	1659.3	1	
	5290	8	68.2	15	1073.7	1	
	5290	9	53.7	11	1170.8	1	
	5290	10	55.8	16	1200.2	3	
	5290	11	99.2	12	1539.7	1	
	5290	12	90.9	6	1289.6	2	
	5290	13	64.4	8	1824.0	1	
	5290	14	78.5	9	1829.4	2	
	5290	15	90.8	18	1862.4	1	
	5290	16	88.8	11	1048.4	2	
	5290	17	99.8	20	1245.0	1	
	5290	18	79.1	19	1521.7	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5290	1	86.4	16	1034.2	3	0
	5290	2	89.4	7	1708.9	1	
	5290	3	88.0	6	1923.0	1	
	5290	4	63.8	7	1013.9	2	
	5290	5	83.7	11	1652.2	3	
	5290	6	61.2	11	1023.1	1	
	5290	7	71.5	16	1230.0	3	
	5290	8	96.8	5	1431.3	2	
	5290	9	96.8	17	1025.7	3	
	5290	10	71.2	9	1348.3	3	
	5290	11	89.2	19	1197.7	1	
	5290	12	66.4	8	1586.7	3	
	5290	13	54.6	10	1027.8	3	
	5290	14	76.7	18	1005.6	3	
	5290	15	63.7	9	1636.6	2	
	5290	16	68.1	14	1801.8	2	
	5290	17	78.0	18	1057.9	1	
18	5290	1	87.9	12	1060.7	3	1
	5290	2	76.9	9	1809.8	2	
	5290	3	84.9	5	1321.7	1	
	5290	4	62.5	17	1073.3	1	
	5290	5	55.7	6	1976.4	2	
	5290	6	95.9	10	1201.3	1	
	5290	7	68.3	18	1782.0	2	
	5290	8	63.5	16	1205.1	1	
	5290	9	94.1	8	1525.2	3	
	5290	10	89.5	18	1566.4	3	
	5290	11	59.8	14	1537.2	1	
	5290	12	84.2	10	1831.8	1	
	5290	13	79.6	9	1553.1	2	
	5290	14	72.3	10	1773.9	3	
	5290	15	77.7	9	1721.1	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5290	1	84.3	7	1318.2	2	0
	5290	2	67.8	14	1066.4	1	
	5290	3	85.8	15	1584.0	2	
	5290	4	80.1	9	1263.9	1	
	5290	5	92.0	11	1591.1	2	
	5290	6	75.6	15	1957.3	2	
	5290	7	84.4	8	1022.8	3	
	5290	8	88.0	8	1145.0	2	
	5290	9	90.7	19	1229.0	3	
	5290	10	82.0	8	1232.4	1	
	5290	11	51.1	7	1485.9	2	
	5290	12	94.0	8	1565.4	1	
	5290	13	70.5	6	1507.6	2	
	5290	14	72.3	5	1089.6	2	
20	5290	1	72.9	6	1058.8	3	1
	5290	2	98.3	17	1264.9	2	
	5290	3	56.6	18	1613.3	3	
	5290	4	83.4	17	1590.4	2	
	5290	5	94.0	13	1242.2	1	
	5290	6	94.1	20	1665.4	2	
	5290	7	96.8	7	1168.7	2	
	5290	8	62.5	12	1878.6	2	
	5290	9	61.6	12	1870.4	1	
	5290	10	83.0	9	1733.6	2	
21	5323.5	1	66.5	13	1277.0	3	0
	5326.5	2	96.4	6	1115.0	3	
	5323.5	3	65.1	13	1563.2	2	
	5325.5	4	65.1	7	1368.2	3	
	5325.5	5	65.8	8	1392.3	2	
	5324.5	6	93.8	11	1494.8	2	
	5326.5	7	59.9	5	1163.8	1	
	5322.5	8	65.9	16	1275.6	1	
	5323.5	9	91.4	12	1559.3	2	
	5325.5	10	52.3	8	1206.7	3	
	5323.5	11	79.2	12	1040.1	2	
	5321.5	12	73.5	18	1685.2	2	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5324.5	1	72.7	9	1308.0	3	1
	5320.5	2	86.9	19	1455.7	3	
	5326.5	3	64.4	6	1494.0	3	
	5323.5	4	88.6	13	1012.2	1	
	5324.5	5	53.4	9	1606.9	3	
	5324.5	6	53.3	11	1189.8	3	
	5323.5	7	82.0	13	1045.7	3	
	5320.5	8	87.1	19	1409.8	1	
	5321.5	9	76.5	18	1863.3	2	
23	5323.5	1	98.5	13	1855.8	3	1
	5322.5	2	74.6	14	1644.5	1	
	5322.5	3	59.5	16	1278.7	1	
	5321.5	4	89.2	18	1529.4	3	
	5324.5	5	90.0	11	1542.3	2	
	5324.5	6	78.9	11	1787.2	2	
	5322.5	7	67.1	14	1865.0	3	
	5324.5	8	99.3	9	1207.2	1	
	5323.5	9	93.3	12	1325.2	3	
	5326.5	10	68.5	6	1597.1	1	
	5320.5	11	77.1	19	1759.9	1	
	5326.5	12	80.2	6	1695.7	3	
	5321.5	13	82.0	18	1440.6	3	
	5324.5	14	88.6	11	1143.9	3	
	5323.5	15	72.7	12	1641.5	1	
24	5321.5	1	52.4	18	1946.3	3	1
	5321.5	2	67.9	17	1044.0	2	
	5324.5	3	68.3	11	1212.1	1	
	5325.5	4	52.4	8	1397.6	1	
	5322.5	5	59.3	16	1894.7	1	
	5323.5	6	56.7	12	1728.6	3	
	5324.5	7	68.6	11	1058.1	2	
	5324.5	8	88.0	11	1367.7	2	
	5326.5	9	65.2	6	1680.3	2	
	5323.5	10	93.5	12	1474.2	1	
	5323.5	11	57.6	13	1428.6	3	
	5321.5	12	98.7	17	1851.5	2	
	5323.5	13	59.9	13	1816.2	1	
	5320.5	14	92.9	20	1959.4	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5324.5	1	88.6	11	1826.0	1	1
	5320.5	2	73.1	20	1705.1	2	
	5326.5	3	83.7	5	1024.5	1	
	5323.5	4	51.2	13	1866.6	1	
	5322.5	5	69.5	16	1816.4	3	
	5326.5	6	82.5	6	1212.4	1	
	5320.5	7	73.4	19	1703.2	1	
	5323.5	8	59.1	12	1173.1	1	
	5324.5	9	64.9	10	1793.2	3	
	5322.5	10	62.8	16	1603.5	1	
	5322.5	11	59.7	15	1539.9	1	
	5326.5	12	65.9	5	1893.6	2	
	5325.5	13	56.5	7	1871.0	2	
	5322.5	14	98.5	16	1088.3	3	
	5324.5	15	50.2	10	1177.7	2	
	5325.5	16	68.3	8	1394.8	2	
	5322.5	17	93.9	15	1724.9	3	
	5323.5	18	94.0	13	1902.0	3	
26	5322.5	1	62.1	15	1768.2	1	1
	5326.5	2	74.4	6	1725.2	1	
	5324.5	3	84.4	9	1215.9	1	
	5322.5	4	67.5	16	1958.6	2	
	5321.5	5	85.3	18	1414.4	2	
	5322.5	6	86.2	15	1810.9	1	
	5325.5	7	55.8	7	1599.9	1	
	5323.5	8	69.8	13	1344.0	1	
	5324.5	9	92.6	11	1719.1	3	
	5324.5	10	58.1	10	1421.8	1	
	5323.5	11	74.9	13	1458.0	3	
	5322.5	12	55.7	16	1648.5	1	
	5325.5	13	58.4	8	1103.8	2	
	5320.5	14	69.5	19	1878.3	3	
	5322.5	15	58.6	16	1257.5	1	
	5322.5	16	75.9	14	1009.4	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5323.5	1	71.6	13	1611.4	1	1
	5324.5	2	76.8	11	1777.7	3	
	5321.5	3	72.0	18	1561.8	3	
	5321.5	4	82.2	18	1058.0	2	
	5322.5	5	99.3	16	1989.3	1	
	5326.5	6	93.8	6	1848.7	1	
	5324.5	7	94.5	11	1445.0	2	
	5325.5	8	77.0	8	1963.9	1	
	5322.5	9	84.3	15	1305.1	1	
	5325.5	10	57.4	8	1547.5	3	
	5324.5	11	89.1	11	1470.6	1	
	5323.5	12	83.2	13	1879.2	2	
	5322.5	13	75.3	14	1329.8	3	
	5323.5	14	57.8	12	1831.9	1	
	5321.5	15	77.7	17	1226.2	2	
	5323.5	16	81.2	13	1145.2	3	
	5326.5	17	74.6	6	1941.1	1	
	5320.5	18	54.9	20	1095.6	2	
	5324.5	19	81.7	10	1331.4	3	
	5324.5	20	90.3	11	1242.3	3	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5323.5	1	65.8	13	1104.9	3	1
	5324.5	2	62.9	10	1808.2	3	
	5322.5	3	64.8	14	1332.0	2	
	5323.5	4	84.3	12	1765.6	3	
	5321.5	5	83.8	17	1977.5	3	
	5323.5	6	95.0	13	1463.4	2	
	5324.5	7	62.5	9	1667.9	2	
	5320.5	8	87.1	19	1397.9	1	
	5325.5	9	56.8	8	1465.3	3	
	5325.5	10	62.5	7	1314.5	1	
	5324.5	11	66.0	11	1196.0	2	
	5322.5	12	50.3	14	1957.1	1	
	5322.5	13	72.3	14	1163.0	3	
	5321.5	14	53.8	18	1433.3	1	
	5324.5	15	69.5	9	1187.1	3	
	5324.5	16	68.8	10	1999.5	3	
	5320.5	17	59.0	19	1132.2	2	
	5321.5	18	76.6	17	1221.3	2	
	5321.5	19	94.0	17	1535.2	1	
	5326.5	20	88.9	6	1174.5	2	

Test Mode		802.11ax HE80					
Frequency		5290 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5322.5	1	87.6	15	1314.8	2	1
	5323.5	2	51.8	13	1265.9	3	
	5326.5	3	72.1	6	1986.7	3	
	5322.5	4	95.1	14	1236.2	1	
	5320.5	5	72.6	19	1437.3	3	
	5326.5	6	53.7	5	1532.7	2	
	5324.5	7	69.8	11	1386.9	2	
	5325.5	8	51.9	7	1462.7	1	
	5323.5	9	74.4	13	1404.5	2	
	5322.5	10	54.5	15	1634.4	2	
	5322.5	11	54.5	16	1309.3	2	
	5322.5	12	70.8	16	1765.9	2	
	5324.5	13	60.4	11	1913.9	3	
	5325.5	14	62.6	8	1804.5	2	
	5321.5	15	98.4	18	1600.0	2	
	5321.5	16	79.0	18	1938.7	3	
	5320.5	17	50.5	19	1364.4	1	
30	5325.5	1	64.9	7	1615.2	3	1
	5323.5	2	60.1	13	1246.4	3	
	5323.5	3	69.4	12	1730.5	2	
	5321.5	4	93.1	17	1152.7	2	
	5325.5	5	97.2	7	1576.1	2	
	5320.5	6	66.2	20	1153.8	3	
	5321.5	7	76.0	17	1365.8	3	
	5322.5	8	61.9	14	1399.5	1	
	5322.5	9	64.9	16	1336.3	1	
	5322.5	10	67.3	14	1579.8	2	
	5322.5	11	59.2	16	1598.3	1	
	5320.5	12	51.1	19	1471.8	1	
	5326.5	13	83.2	6	1614.6	3	
	5323.5	14	62.7	13	1979.1	3	
Detection Percentage (%)							86.67

Test Mode		802.11ax HE80				
Frequency		5290 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

---END---