

DFS Test Report

Applicant : D-Link Corporation

Product Name : 5G NR AX3000 Wi-Fi 6 Router

Trade Name : D-Link

Model Number : G530, G530/XX, G530/XXX, G530/XXX (X is A-Z and 0-9)

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Received Date : Dec. 11, 2024

Test Period : Dec. 24, 2024 ~ Dec. 26, 2024

Issued Date : Feb. 18, 2025

Issued by

Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190



Taiwan Accreditation Foundation accreditation number: 1330

Bade test site :

Test Firm Registration Number: 226252

Test Firm Designation Number: TW0010

Wugu test site :

Test Firm Registration Number: 191812

Test Firm Designation Number: TW0034

Note:

1. The test results are valid only for samples provided by customers and under the test conditions described in this report.
2. This report shall not be reproduced except in full, without the written approval of Eurofins E&E Wireless Taiwan Co., Ltd.
3. The relevant information is provided by customers in this test report. According to the correctness, appropriateness or completeness of the information provided by the customer, if there is any doubt or error in the information which affects the validity of the test results, the laboratory does not take the responsibility.

Revision History

Rev.	Issued Date	Description	Revised By
00	Feb. 18, 2025	Initial Issue	Abby Hsu

Verification of Compliance

Applicant : D-Link Corporation

Product Name : 5G NR AX3000 Wi-Fi 6 Router

Trade Name : D-Link

Model Number : G530, G530/XX, G530/XXX, G530/XXX (X is A-Z and 0-9)

FCC ID : KA2G530A3

Applicable Standard : FCC 47 CFR PART 15 SUBPART E
ANSI C63.10:2013

Test Result : Complied

Performing Lab. : Eurofins E&E Wireless Taiwan Co., Ltd.
No. 140-1, Changan Street, Bade District,
Taoyuan City, Taiwan (R.O.C.)
Tel : +886-3-2710188 / Fax : +886-3-2710190
Taiwan Accreditation Foundation accreditation number: 1330



Eurofins E&E Wireless Taiwan Co., Ltd. tested the above equipment in accordance with the requirements set forth in the above standards. All indications of Pass/Fail in this report are opinions expressed by Eurofins E&E Wireless Taiwan Co., Ltd. based on interpretations and/or observations of test results. The test results show that the equipment tested is capable of demonstrating compliance with the requirements as documented in this report.

Approved By : Kai Yu Yang

TABLE OF CONTENTS

1	General Information	5
1.1.	Summary of Test Result	5
1.2.	Testing Location	6
1.3.	Test Site Environment.....	6
2	EUT Description.....	7
3	Test Methodology	9
3.1.	Mode of Operation	9
3.2.	EUT Test Step	9
3.3.	Test Instruments	10
4	Dynamic Frequency Selection	11
4.1.	Limits	11
4.2.	Test and Measurement System	15
5	Test Results	17
5.1.	Radar Waveforms and Traffic	17
5.2.	Channel Loading	34
5.3.	Channel Availability Check Time.....	38
5.4.	Channel Move Time and Channel Closing Transmission Time.....	41
5.5.	Non-Occupancy Period	43
5.6.	U-NII Detection Bandwidth	44
5.7.	Statistical Performance check	47

Appendix A. Test Setup Photographs

1 General Information

1.1. Summary of Test Result

Standard	Item	Result	Remark
15.407(h)(2)	Channel Availability Check Time	PASS	---
15.407(h)(2)	Channel Move Time	PASS	---
15.407(h)(2)	Channel Closing Transmission Time	PASS	---
15.407(h)(2)	Non-Occupancy Period	PASS	---
15.407(h)(2)	U-NII Detection Bandwidth	PASS	---
15.407(h)(2)	Statistical Performance check	PASS	---

Decision Rule

- ☒ Uncertainty is not included.
- ☐ Uncertainty is included.

Standard	Description
CFR47, Part 15, Subpart E	Unlicensed National Information Infrastructure Devices
Canada RSS-247 Issue 3	Digital Transmission Systems (DTSs), Frequency Hopping Systems (FHSs) and Licence-Exempt Local Area Network (LE-LAN) Devices
ANSI C63. 10: 2013	American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices
KDB789033: D02	Guidelines for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices Part 15, Subpart E
KDB 662911 D01 v02r01	Emissions Testing of Transmitters with Multiple Outputs in the Same Band (e.g., MIMO, Smart Antenna, etc)

1.2. Testing Location

Lab Name: Eurofins E&E Wireless Taiwan Co., Ltd.

Site Address: ☐ No. 140-1, Changan Street, Bade District, Taoyuan City, Taiwan (R.O.C.)

Site Address: ☒ No. 2, Wuquan 5th Rd. Wugu Dist., New Taipei City, Taiwan (R.O.C.)

1.3. Test Site Environment

Items	Required (IEC 60068-1)	Interval(*)
Temperature (°C)	15-35	20-30
Humidity (%RH)	25-75	45-75

(*)The measurement ambient temperature is within this range.

2 EUT Description

The product specifications of the EUT presented in the report are declared by the manufacturer who shall take full responsibility for the authenticity

Applicant	D-Link Corporation 14420 Myford Road Suite 100 Irvine California United States 92606				
Product Name	5G NR AX3000 Wi-Fi 6 Router				
Trade Name	D-Link				
Model Number	G530, G530/XX, G530/XXX, G530/XXX (X is A-Z and 0-9)				
Models different description	Different model number is for marketing purpose. No physical difference.				
FCC ID	KA2G530A3				
Operate Frequency	Frequency Band			Frequency Range (MHz)	
	802.11a	U-NII Band 2-A		5260 – 5320	
		U-NII Band 2-C		5500 – 5700	
	802.11n HT20 / 802.11ac VHT20 / 802.11ax HE20	U-NII Band 2-A		5260 – 5320	
		U-NII Band 2-C		5500 – 5700	
	802.11n HT40 / 802.11ac VHT40 / 802.11ax HE40	U-NII Band 2-A		5270 – 5310	
		U-NII Band 2-C		5510 – 5670	
	802.11ac VHT80 / 802.11ax HE80	U-NII Band 2-A		5290	
		U-NII Band 2-C		5530 –5610	
	802.11ac VHT160 / 802.11ax HE160	U-NII Band 2-A		5250	
U-NII Band 2-C		5570			
Modulation Type	OFDM/OFDMA				
Antenna information	Antenna	Model	Type	Max. Gain (dBi)	
	ANT-0 (ANT-1)	ARY196-0232-044-00	PCB antenna	U-NII Band 2-A	2.90
				U-NII Band 2-C	2.79
	ANT-1 (ANT-2)	ARY196-0232-045-00	PCB antenna	U-NII Band 2-A	3.00
				U-NII Band 2-C	3.08
	ANT-2 (ANT-3)	ARY196-0232-046-00	PCB antenna	U-NII Band 2-A	3.09
				U-NII Band 2-C	3.04
Antenna Delivery	3TX				
Operate Temp. Range	0 ~ +40 °C				
EUT Power Rating	12 Vdc				

Items	Description	
Communication Mode	☒ IP Based (Load Based)	☐ Frame Based
TPC Function	☒ With TPC	☐ Without TPC
Weather Band (5600 ~ 5650 MHz)	☒ With 5600 ~ 5650 MHz	☐ Without 5600 ~ 5650 MHz
Beamforming Function	☒ With Beamforming	☐ Without Beamforming
Equipment Type	☐ Outdoor access point	
	☒ Indoor access point	
	☐ Fixed point-to-point access points	
	☐ Client devices	
Operating mode	☒ Master	
	☐ Client with radar detection	
	☐ Client without radar detection	
	☐ Ad-Hoc	
	☐ Bridge	
	☐ MESH	

Note : DFS controls (hardware or software) related to radar detection are NOT accessible to the user.
Manufacturer statement confirming that information regarding the parameters of the detected Radar Waveforms is not available to the end user.

EUT Modify Description :

Modify Description:
CIIPC

For marketing purposes, the software enabled 5250MHz ~ 5350 MHz and 5470 ~ 5725 MHz, there is no difference in the hardware, and nothing else has changed.

After the evaluation is completed, all test items within the newly added frequency range must be retested.

3 Test Methodology

The tests documented in this report were performed in accordance with ANSI C63.10-2013, FCC CFR 47 Part 2, FCC CFR 47 Part 15.

The tests documented in this report were performed in accordance with FCC KDB request:

- FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02
- FCC KDB 905462 D03 UNII Clients Without Radar Detection New Rules v01r02

3.1. Mode of Operation

In the test report use EUT model: G530 to operate testing.

Decision of Test Eurofins has verified the construction and function in typical operation. All the test modes were carried out with the EUT in normal operation, which was shown in this test report and defined as:

Test Mode
802.11ax HE20
802.11ax HE40
802.11ax HE80
802.11ax HE160

802.11ax HE20:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5300 MHz.

802.11ax HE40:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5310 MHz.

802.11ax HE80:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5290 MHz.

802.11ax HE160:

Unless otherwise noted, all tests were performed with the radar burst at the channel center frequency of 5250 MHz.

3.2. EUT Test Step

1.	Setup the EUT shown on 3.2.
2.	Turn on the power of all equipment.
3.	Turn on Wi-Fi function link to Access Point.
4.	The EUT is operated in the normal mode to the purposes of measurement.

3.3. Test Instruments

For Conducted

Test Period: Dec. 24 , 2024 ~ Dec. 26 , 2024

Testing Engineer: An Wu

Test Site		RF02-WG				
Use	Equipment	Manufacturer	Model Number	Serial Number	Cal. Date	Cal. Period
☒	Spectrum Analyzer (10 Hz~26.5 GHz)	Keysight	N9010B	MY63460164	Mar. 8, 2024	1 year
☒	Signal Generator	R&S	SMM100A	101740	Jan. 26, 2024	1 year

Note: N.C.R. = No Calibration Request.

4 Dynamic Frequency Selection

4.1. Limits

§15.407 (h) and FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02 Compliance measurement procedures for unlicensed-national information infrastructure devcies operating in the 5250-5350 MHz and 5470-5725 MHz bands incorporating dynamic frequency selection.

Table 1: Applicability of DFS Requirements Prior to Use of a Channel			
Requirement	Operational Mode		
	Master	Client (without Radar Detection)	Client (with Radar Detection)
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 2: Applicability of DFS requirements during normal operation		
Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client With Radar Detection	Client without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required
Note : Frequencies selected for statistical performance check (Section 7.8.4) should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in all 20 MHz channel blocks and a null frequencies between the bonded 20 MHz channel blocks		

Table 3: DFS Detection Thresholds for Master Devices and Client Devices With Radar Detection

Maximum Transmit Power	U-NII Band 2-Aalue (See Notes 1,2 and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and Power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to FCC KDB Publication 662911 D01.	

Table 4: DFS Response Requirement U-NII Band 2-Aalues

Parameter	U-NII Band 2-Aalue
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100 % of the U-NII 99 % transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 5: Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60 %	30
2	1-5	150-230	23-29	60 %	30
3	6-10	200-500	16-18	60 %	30
4	11-20	200-500	12-16	60 %	30
Aggregate (Radar Types 1-4)				80 %	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 5a: Pulse Repetition Intervals U-NII Band 2-Aalues for Test A

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 6 – Long Pulse Radar Test Signal

Radar Waveform	Bursts	Pulses per Burst	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80 %	30


Table 7 – Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Burst Length (ms)	Pulses per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70 %	30

4.2. Test and Measurement System

4.2.1. Setup for Master with injection at the Master

Example Radiated Setup where UUT is a Master and Radar Test Waveforms are injected into the Master

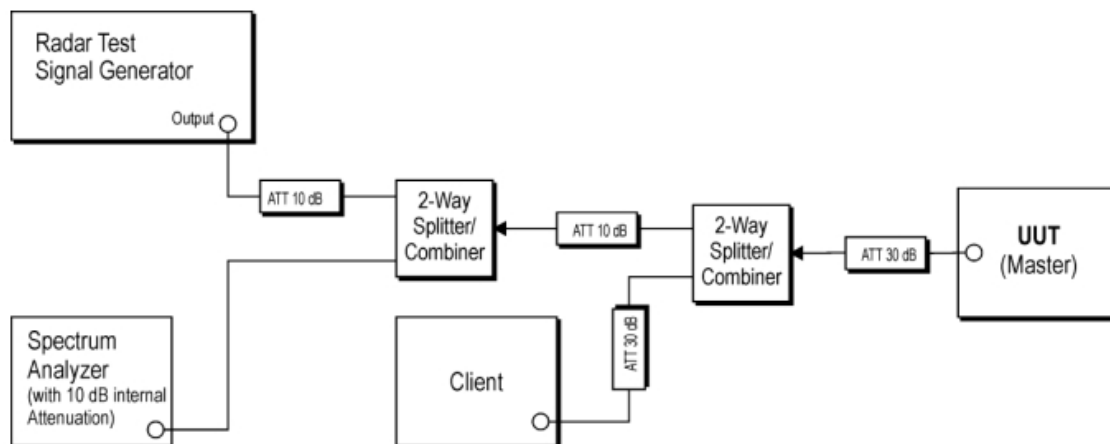

Tested System Details

The types for all equipments, plus descriptions of all cables used in the tested system (including inserted cards) are:

	Product	Manufacturer	Model No.	ID
1.	Smart Phone	SAMSUNG	SM-S9210	A3LSMS921U

4.2.2. System Calibration

The short pulse types 0,1,2, 3 and 4, and the long pulse type 5 parameters are randomized at run-time. The hopping type 6 pulse parameters are fixed while the hopping sequence is based on the May 2014 NTIA Hopping Frequency List. The initial starting point randomized at run-time and each subsequent starting point is incremented by 475. Each frequency in the 100-length segment is compared to the boundaries of the EUT Detection Bandwidth and the software creates a hopping burst pattern in accordance with Section 7.4.1.3 Method #2 Simulated Frequency Hopping Radar Waveform Generating Subsystem of FCC KDB 905462 D02 UNII DFS Compliance Procedures New Rules v02. The frequency of the signal generator is incremented in 1 MHz steps from FL to FH for each successive trial. This incremental sequence is repeated as required to generate a minimum of 30 total trials and to maintain a uniform frequency distribution over the entire Detection Bandwidth.

The signal monitoring equipment consists of a spectrum analyzer. The aggregate ON time is calculated by multiplying the number of bins above a threshold during a particular observation period by the dwell time per bin, with the analyzer set to peak detection and max hold.

4.2.3. System Calibration

The Interference Radar Detection Threshold Level is (-63 dBm). The above equipment setup was used to calibrate the radiated Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50 ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (U-NII Band 2-ABW) were set to at least 3 MHz.


The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was (-63 dBm). Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

4.2.4. Adjustment of Displayed Traffic Level

A link is established between the Master and Slave and the distance between the units is adjusted as needed to provide a suitable received level at the Master and Slave devices. Software to ping the client is permitted to simulate data transfer but must have random ping intervals. The monitoring antenna is adjusted so that the WLAN traffic level, as displayed on the spectrum analyzer, is at lower amplitude than the radar detection threshold.


5 Test Results

5.1. Radar Waveforms and Traffic

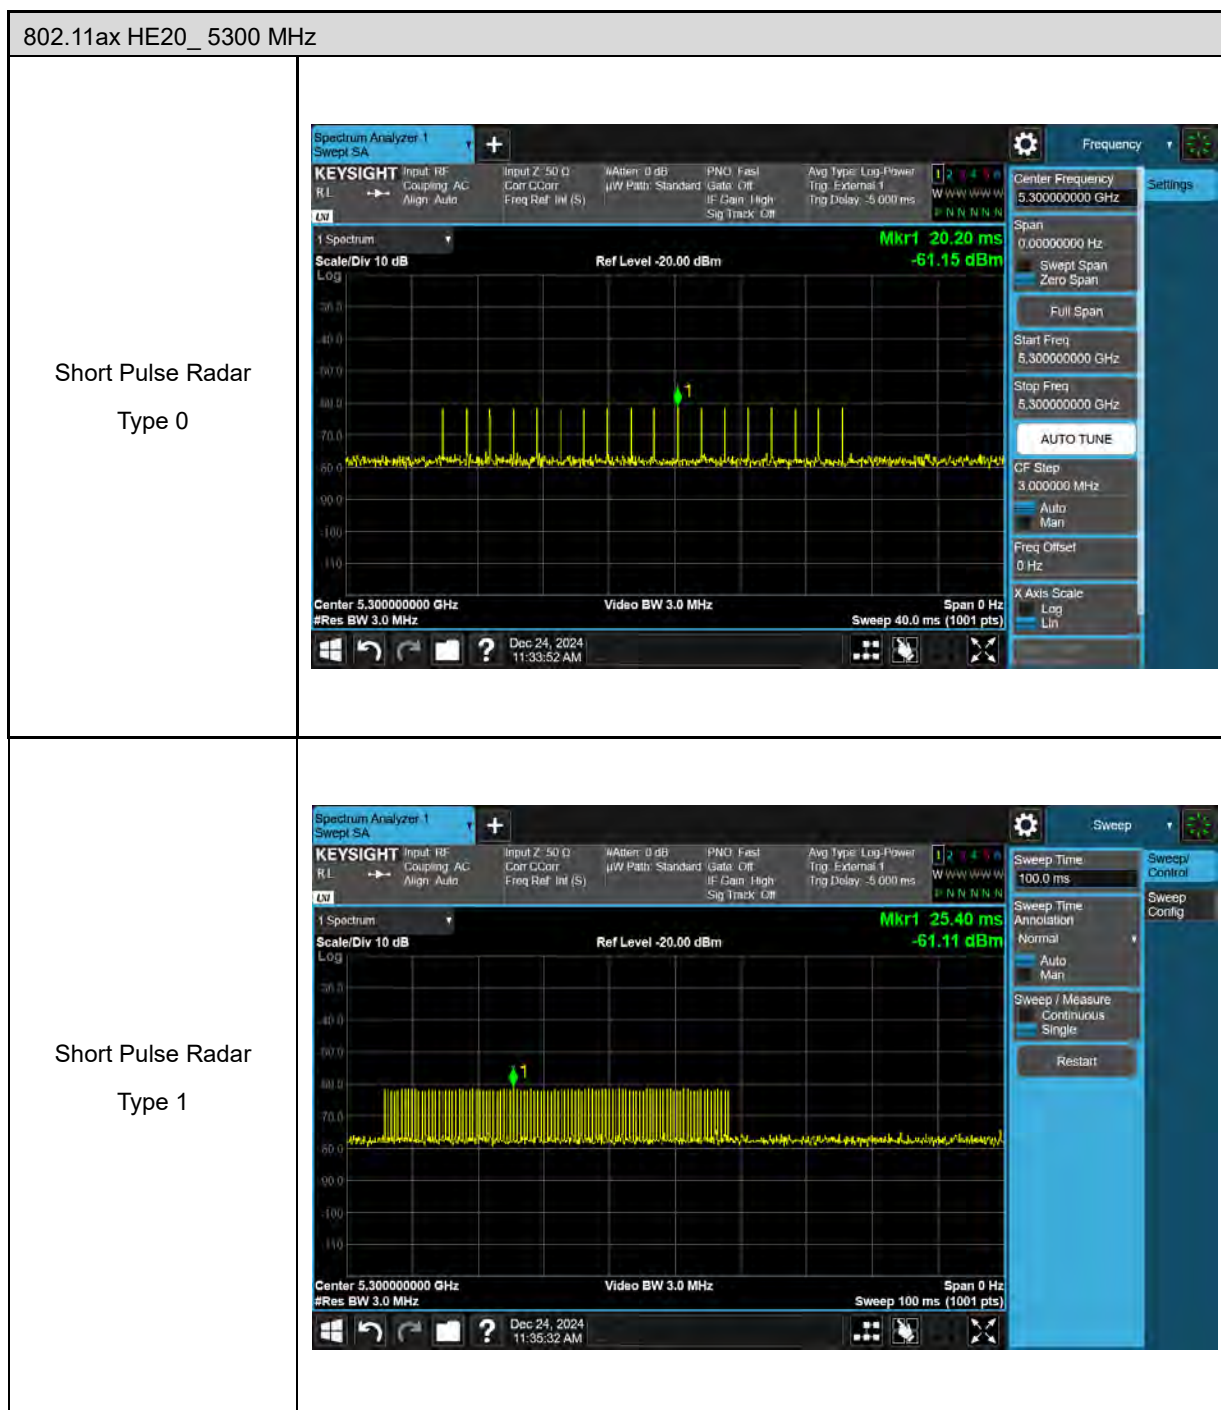


802.11ax HE20_ 5300 MHz

Short Pulse Radar
Type 2

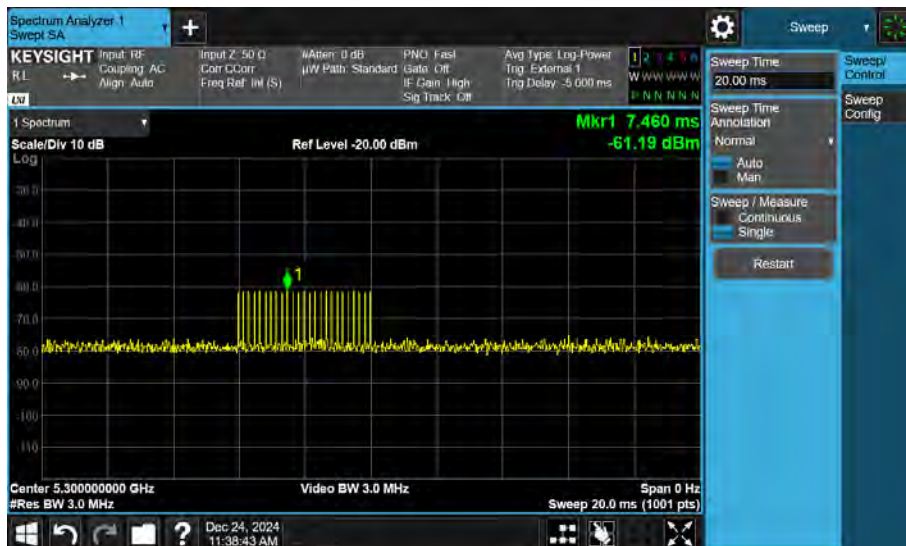


802.11ax HE20_ 5300 MHz

Short Pulse Radar
Type 3

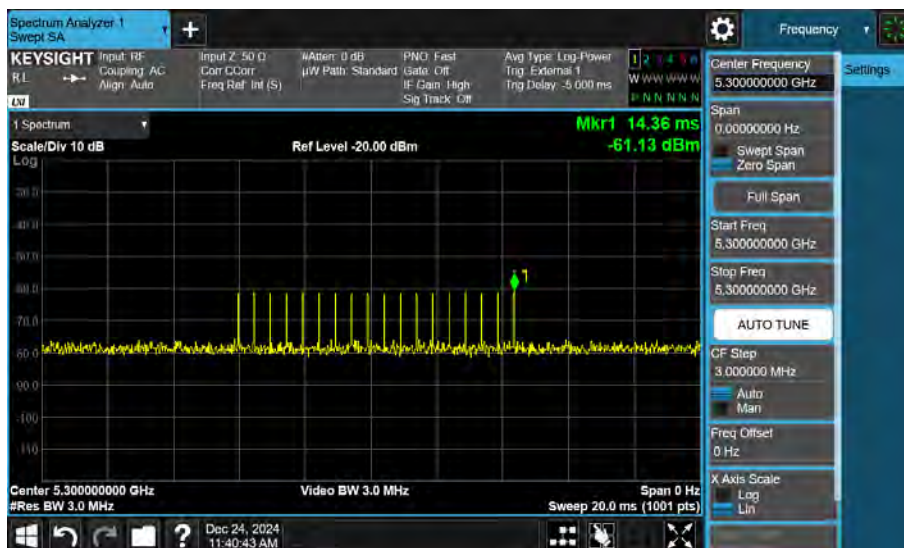


Short Pulse Radar
Type 4

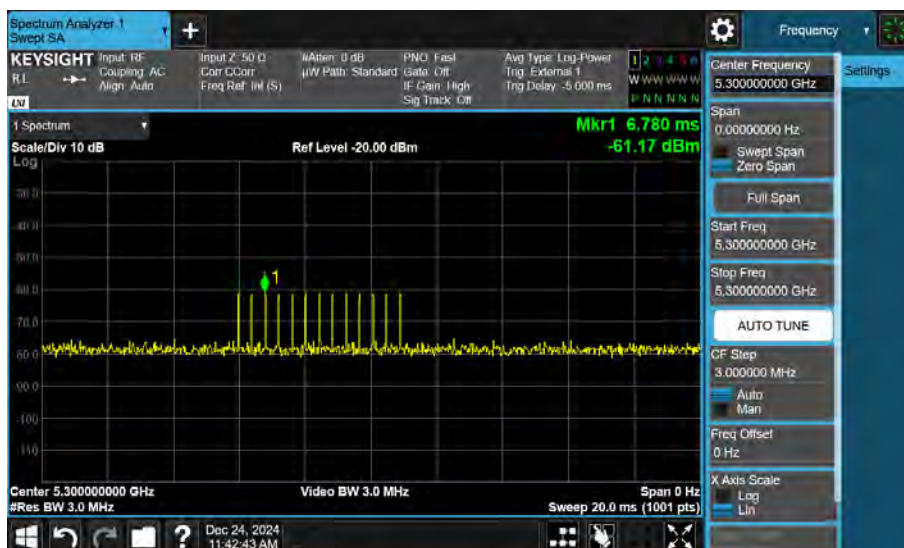


802.11ax HE20_ 5300 MHz

Long Pulse Radar
Type 5

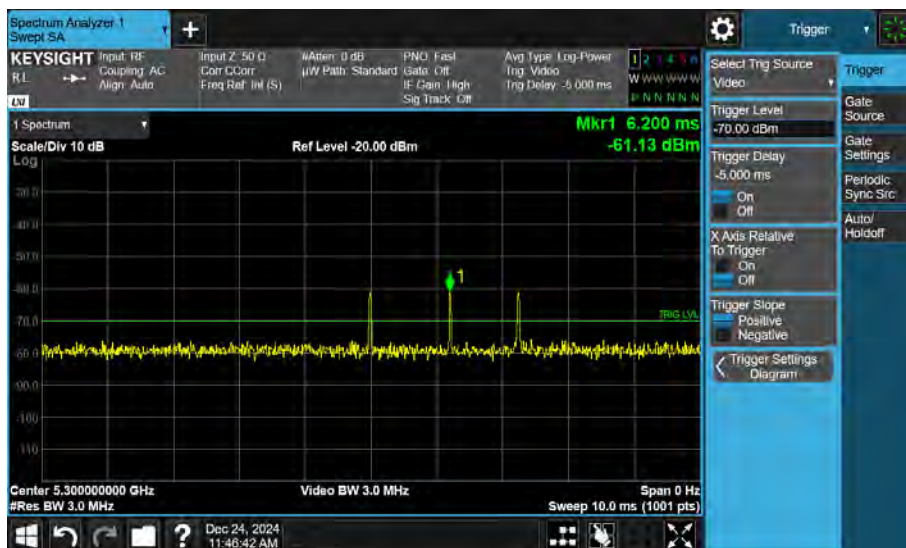

Frequency Hopping
Radar
Type 6

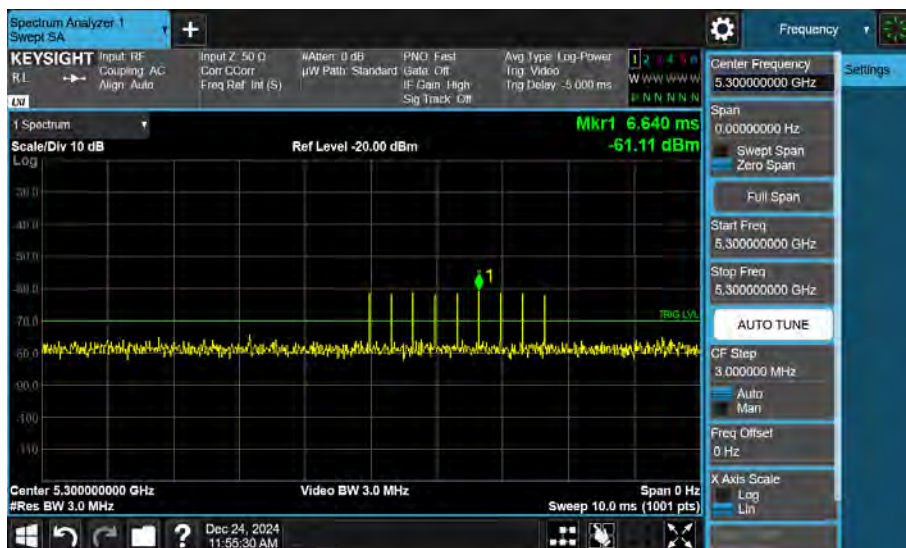


802.11ax HE40_ 5310 MHz

Short Pulse Radar
Type 0




Short Pulse Radar
Type 1

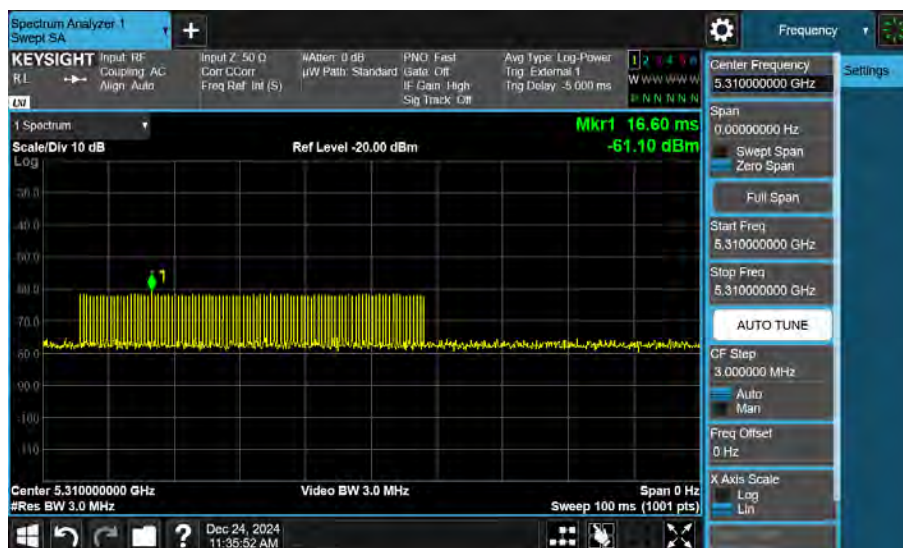


802.11ax HE40_ 5310 MHz

Short Pulse Radar
Type 2

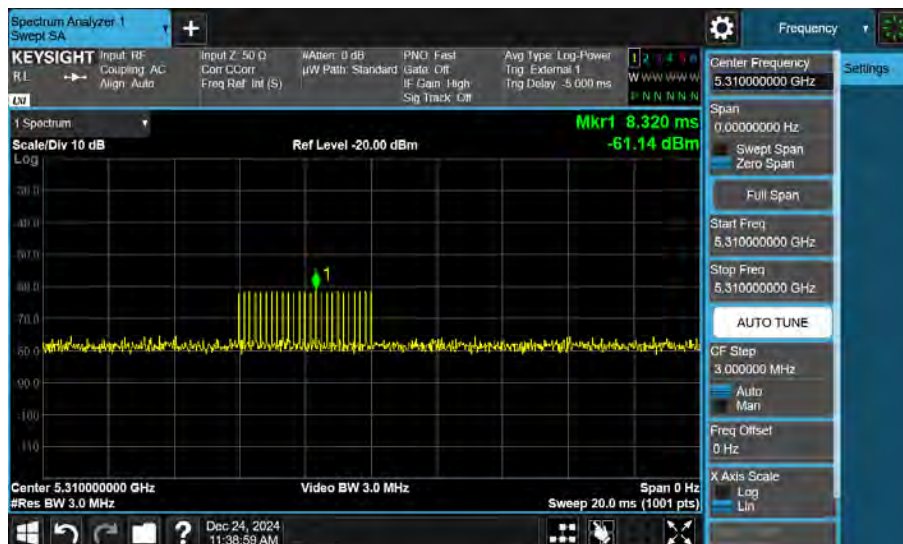


802.11ax HE40_ 5310 MHz

Short Pulse Radar
Type 3

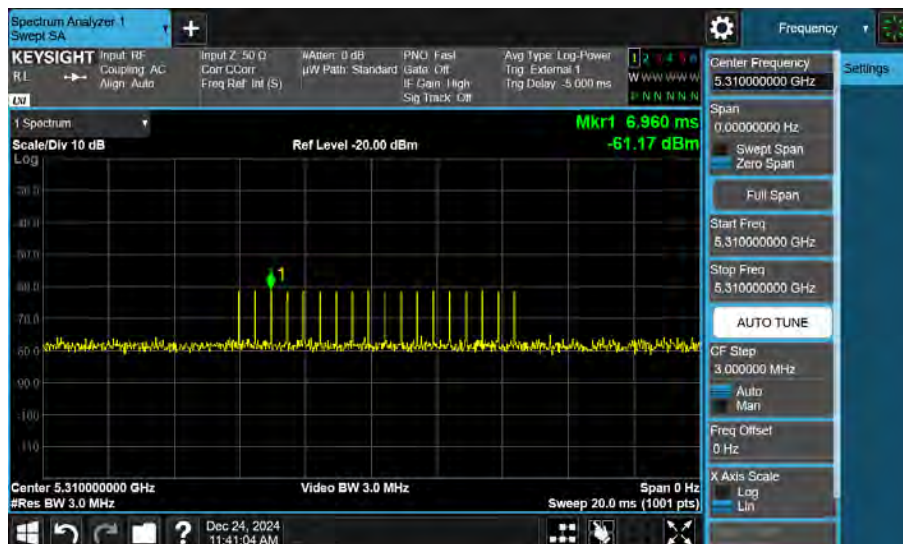


Short Pulse Radar
Type 4

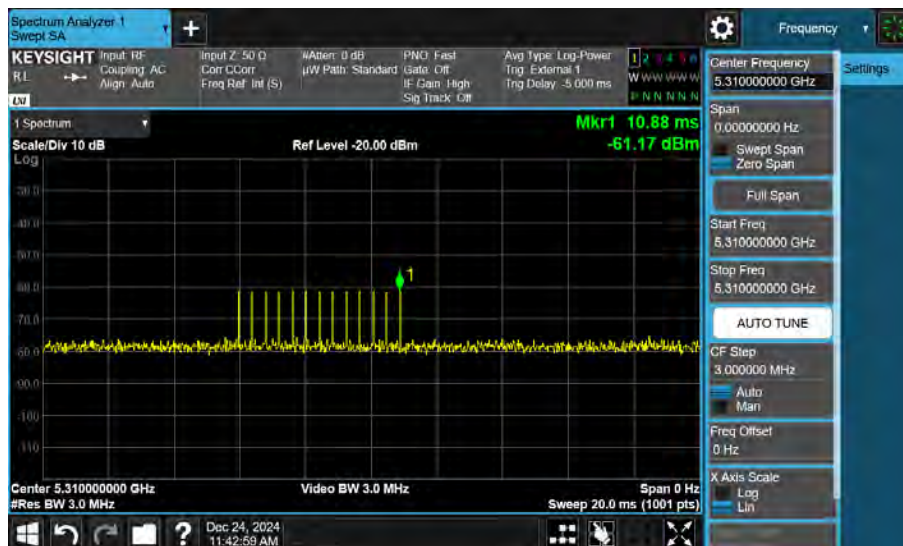


802.11ax HE40_ 5310 MHz

Long Pulse Radar
Type 5

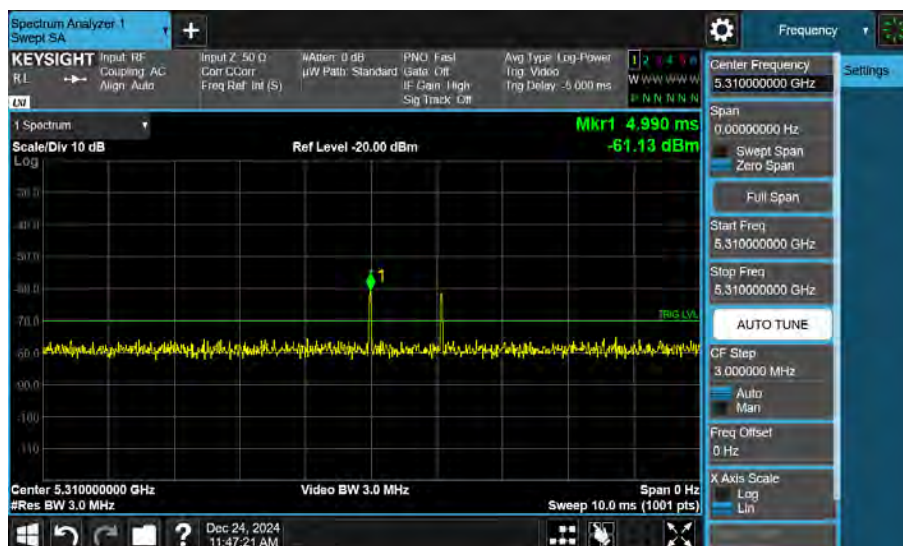


Frequency Hopping
Radar
Type 6

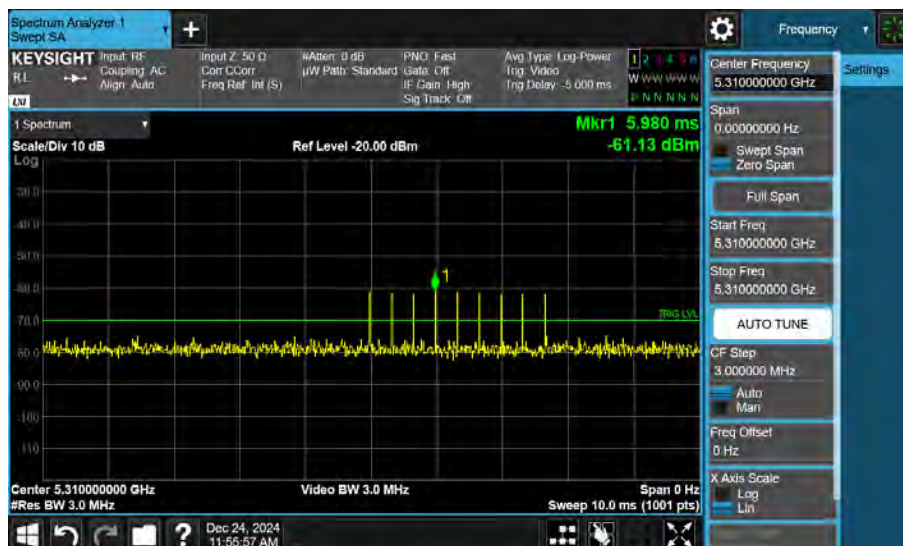


802.11ax HE80_ 5290 MHz

Short Pulse Radar
Type 0

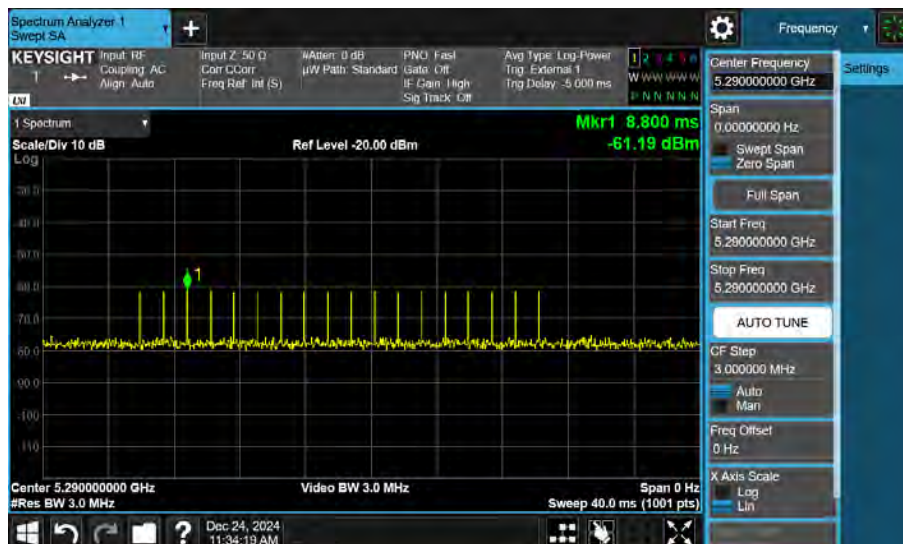


Short Pulse Radar
Type 1

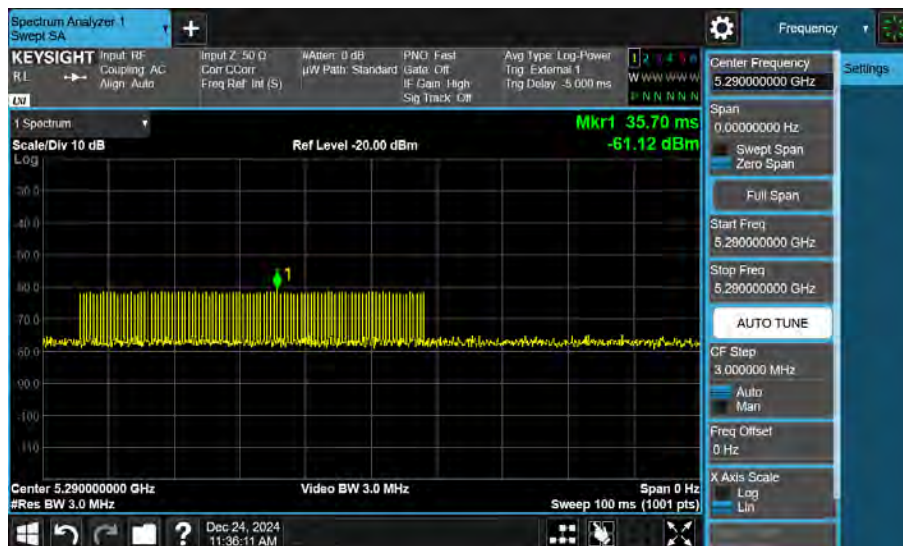


802.11ax HE80_ 5290 MHz

Short Pulse Radar
Type 2

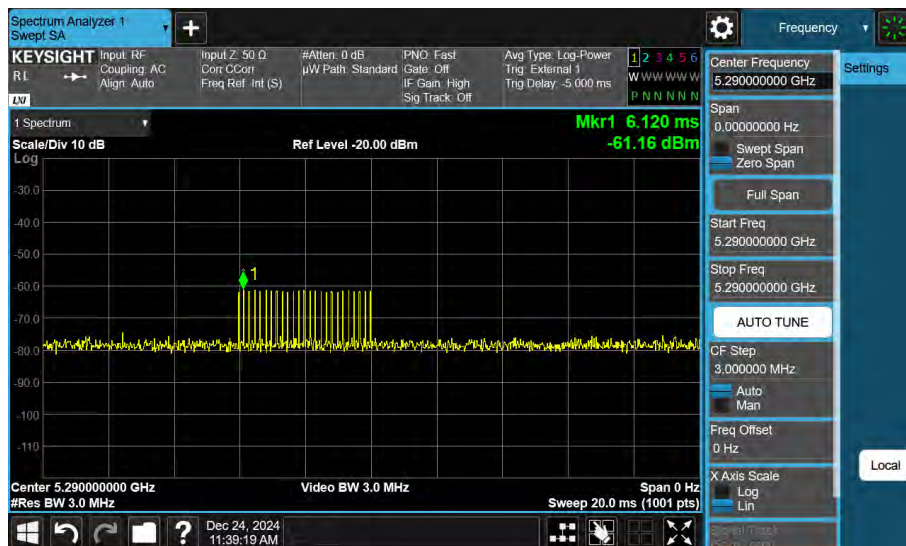


802.11ax HE80_ 5290 MHz

Short Pulse Radar
Type 3

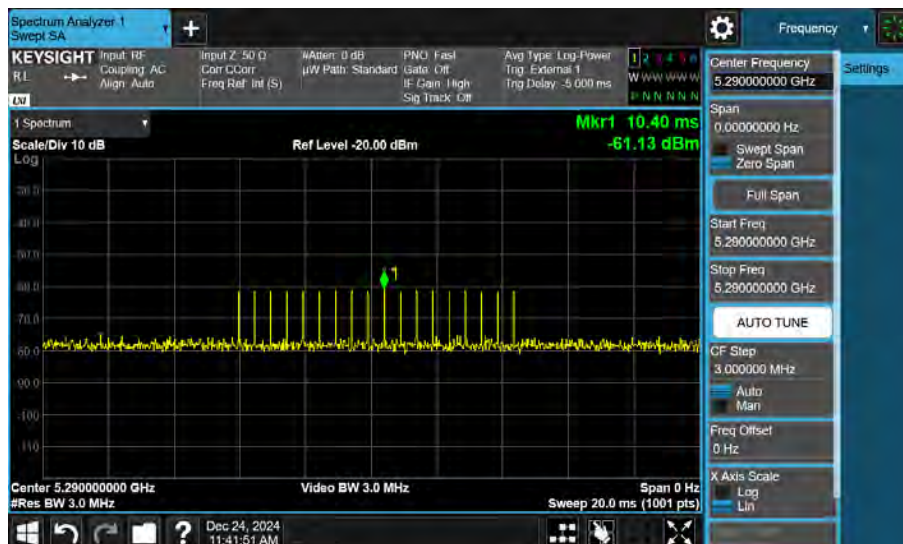


Short Pulse Radar
Type 4

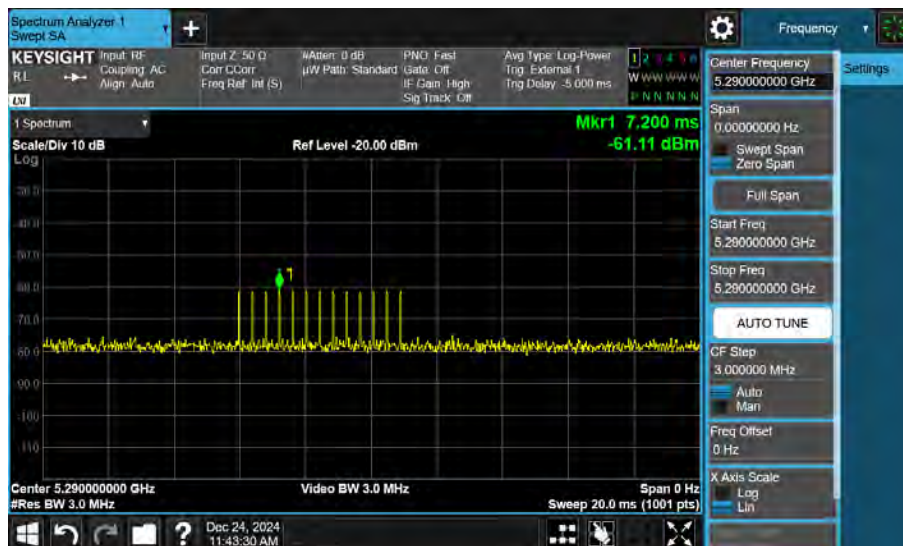


802.11ax HE80_ 5290 MHz

Long Pulse Radar
Type 5

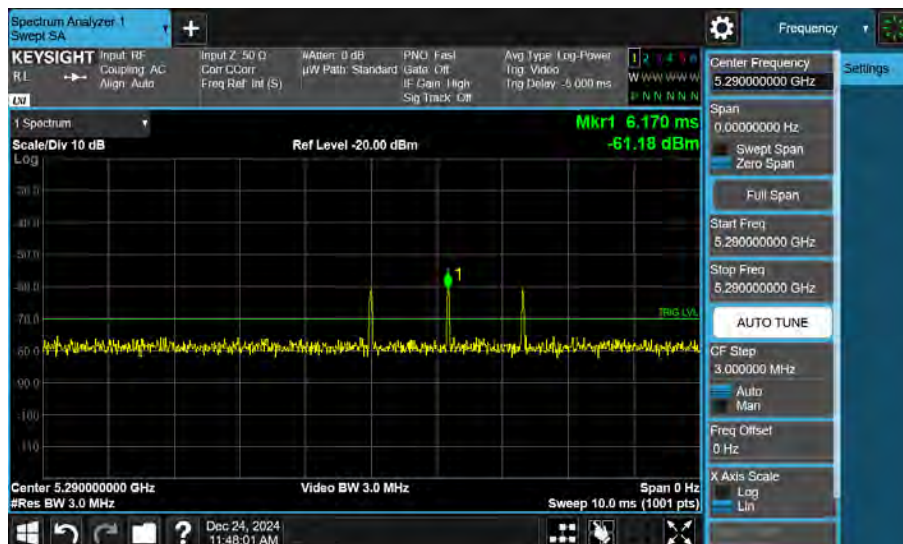

Frequency Hopping
Radar
Type 6

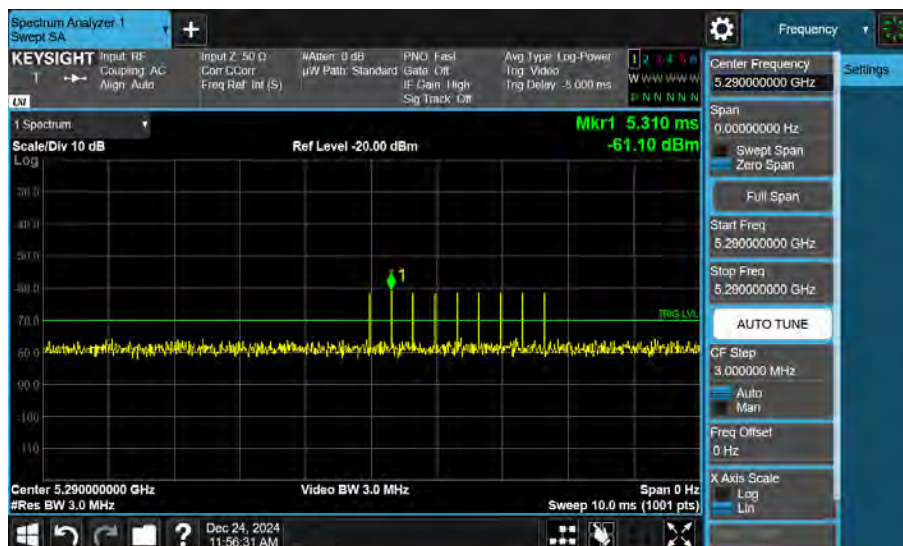


802.11ax HE160_ 5250 MHz

Short Pulse Radar
Type 0




Short Pulse Radar
Type 1

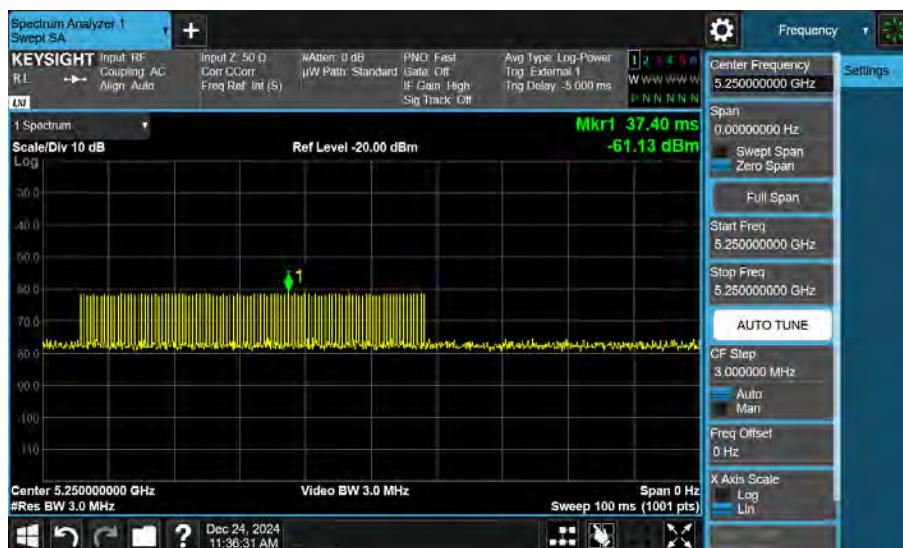

802.11ax HE160_ 5250 MHz


Short Pulse Radar
Type 2

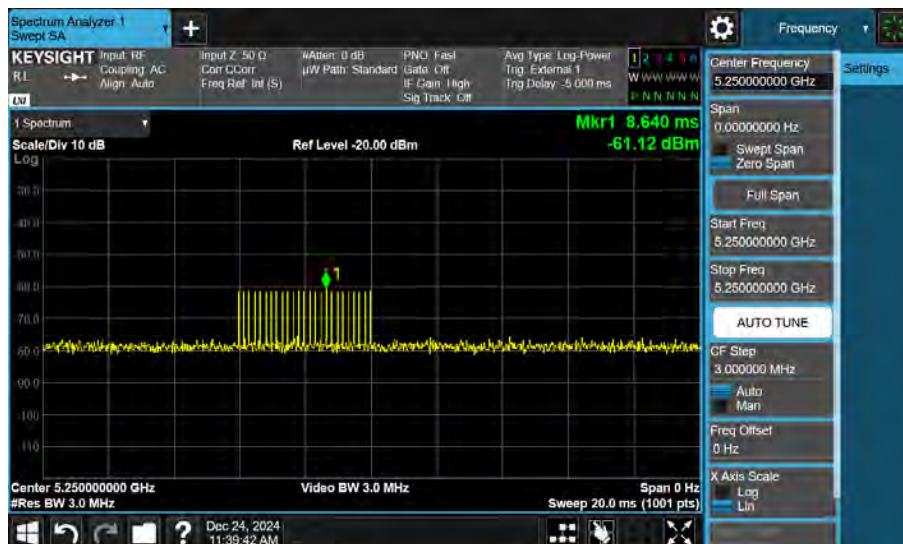

802.11ax HE160_ 5250 MHz


Short Pulse Radar

Type 3

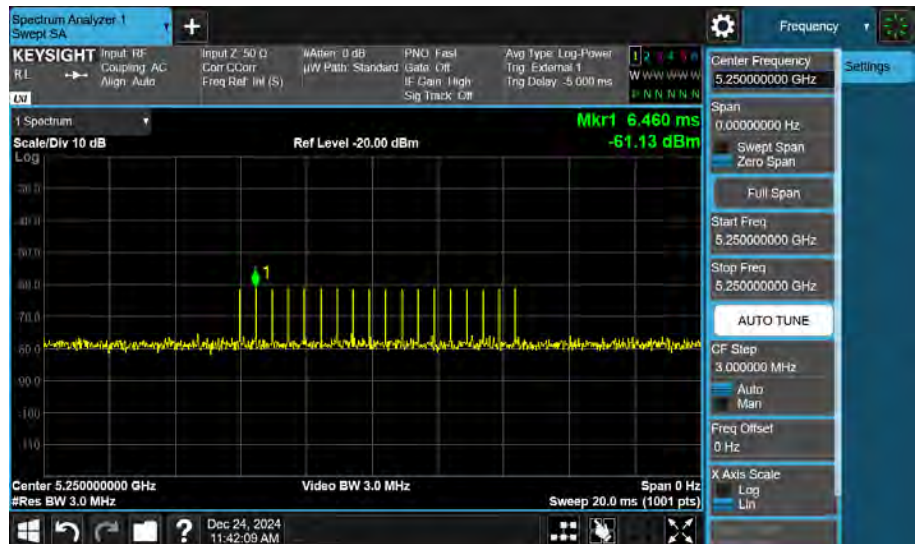


Short Pulse Radar

Type 4

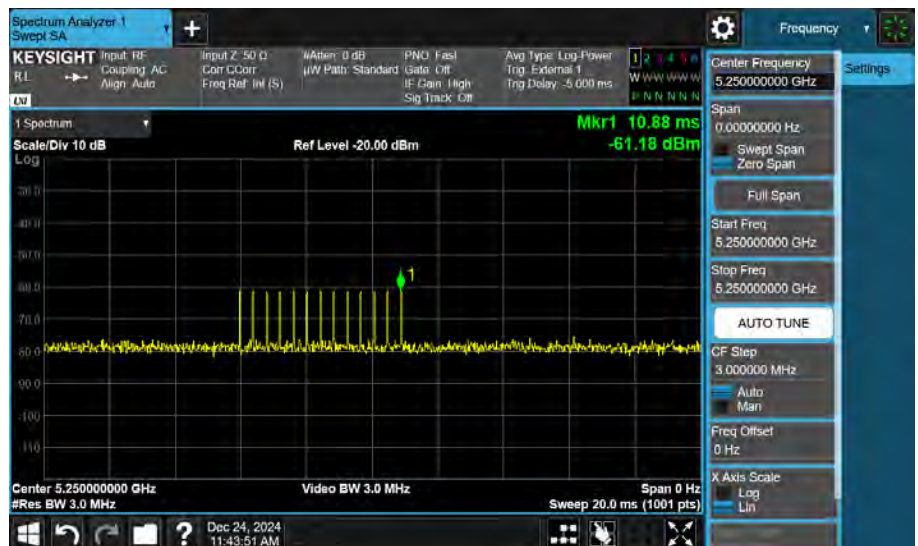


802.11ax HE160_ 5250 MHz

Long Pulse Radar
Type 5

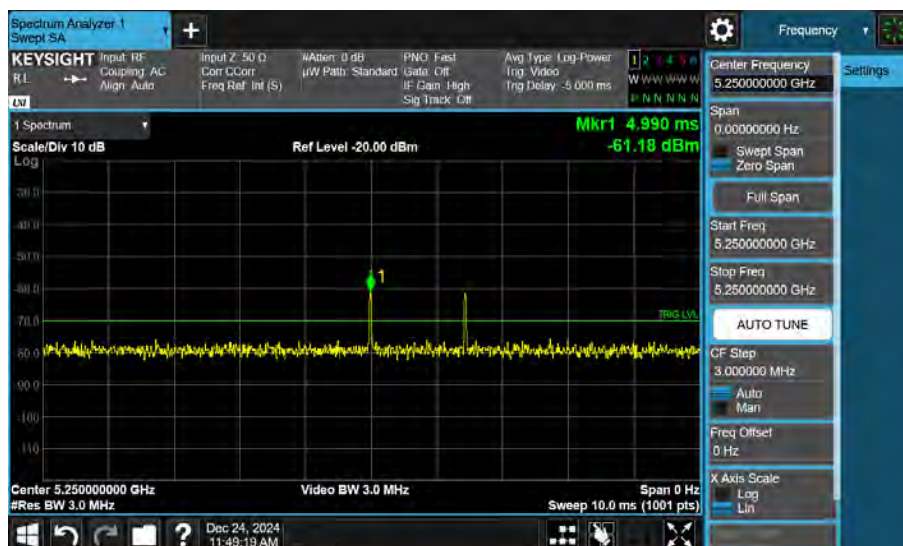


Frequency Hopping
Radar
Type 6

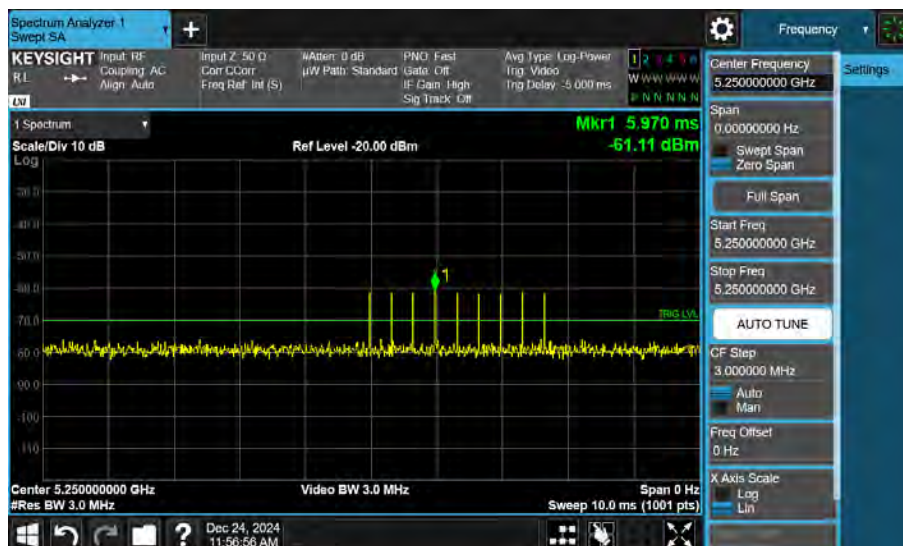

802.11ax HE160_ 5250 MHz


Traffic

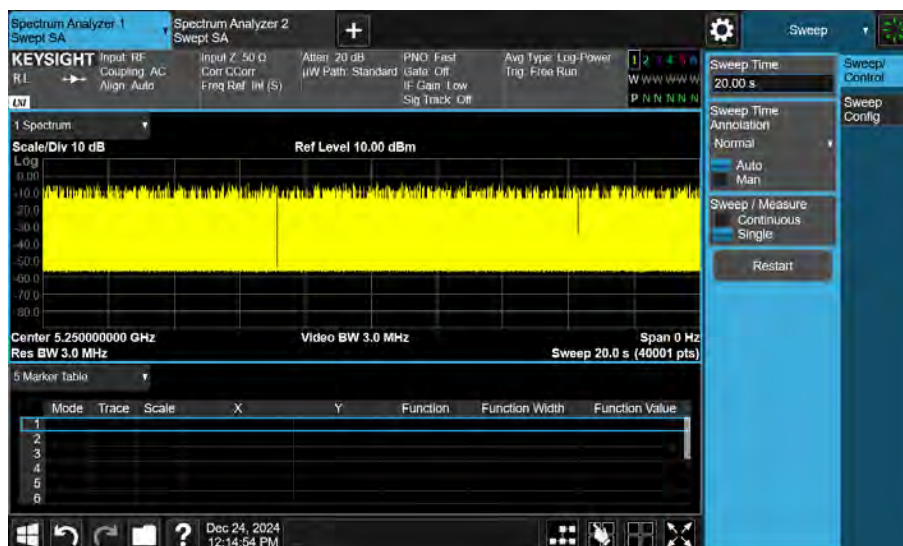

5.2. Channel Loading

■ Duty cycle $\geq 17\%$

802.11ax HE20

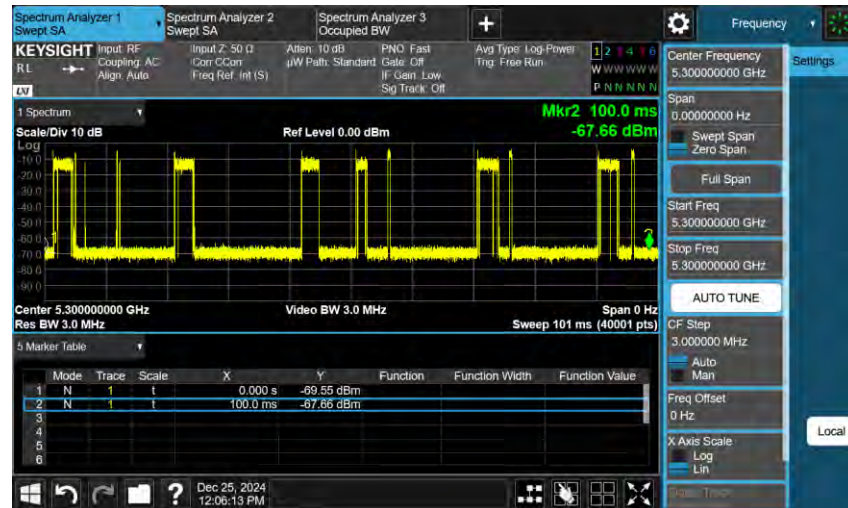

DFS and Adaptivity

Device

Trigger Level(dBm):
MK1 Time(s):
MK2 Time(s):
Delta Time(s):

-50
0
100.00ms
100.00ms

On Time Point:
Total Point:
Sum of On Time(s):

7410
39474
18.77ms


Sweep Time(s):
Sweep Point:
Duty Cycle(%):

101.33ms
40001
18.77%

eurofins

RUN

802.11ax HE40

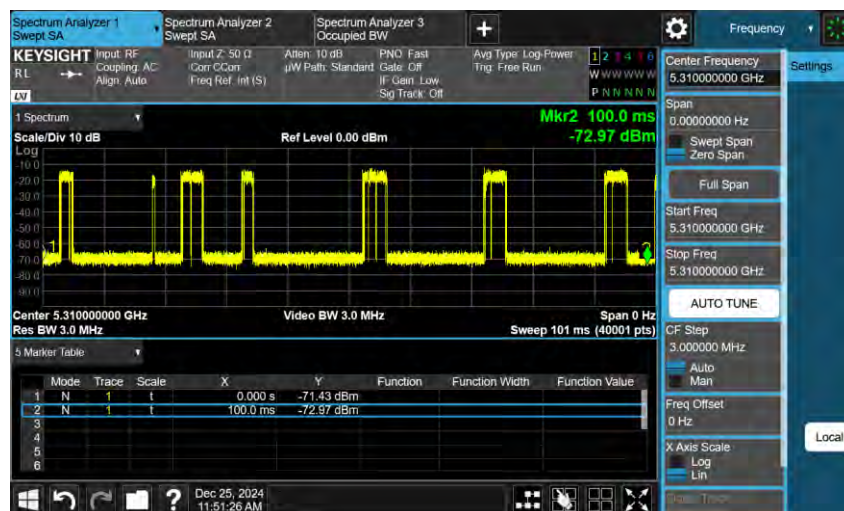

DFS and Adaptivity


Device

Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-50	0	100.00ms	100.00ms
On Time Point:		Total Point:	Sum of On Time(s):
7328		39474	18.56ms
Sweep Time(s):		Sweep Point:	Duty Cycle(%):
101.33ms		40001	18.56%

eurofins

RUN

802.11ax HE80

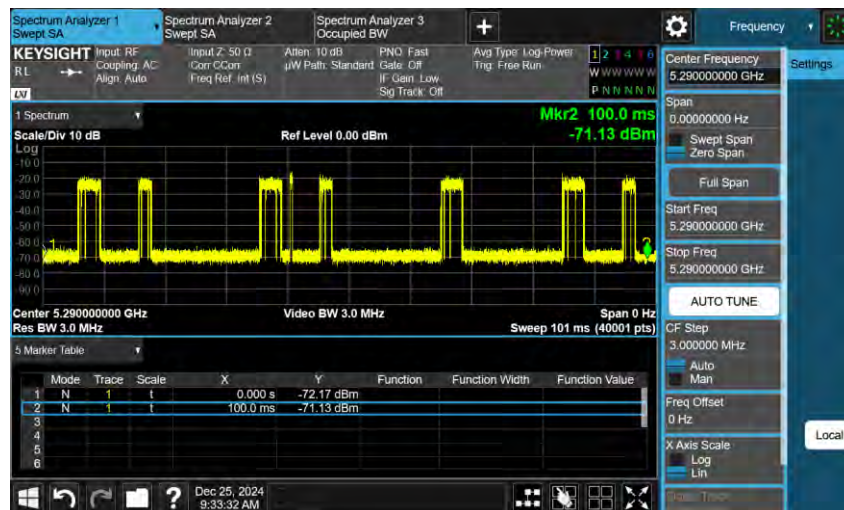

DFS and Adaptivity

Device

Trigger Level(dBm):
MK1 Time(s):
MK2 Time(s):
Delta Time(s):

-50
0
100.00ms
100.00ms

On Time Point:
Total Point:
Sum of On Time(s):

7313
39474
18.53ms


Sweep Time(s):
Sweep Point:
Duty Cycle(%):

101.33ms
40001
18.53%

eurofins

RUN

802.11ax HE160

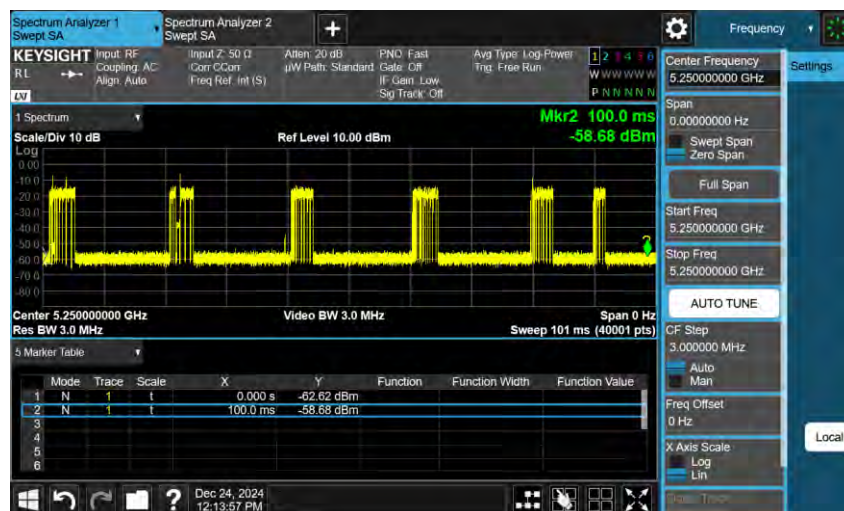

DFS and Adaptivity

Device

Trigger Level(dBm):
MK1 Time(s):
MK2 Time(s):
Delta Time(s):

-50
0
100.00ms
100.00ms

On Time Point:
Total Point:
Sum of On Time(s):

7043
39474
17.84ms

Sweep Time(s):
Sweep Point:
Duty Cycle(%):

101.33ms
40001
17.84%

eurofins

RUN

5.3. Channel Availability Check Time

5.3.1. Procedure to Determine Initial Power-Up Cycle Time

A link was established on channel then the EUT was rebooted. The time from the cessation of traffic to the re-initialization of traffic was measured as the time required for the EUT to complete the total power-up cycle. The time to complete the initial power-up period is 60 seconds less than this total power-up time.

5.3.2. Procedure for Timing Of Radar Burst

With a link established on channel, the EUT was rebooted. A radar signal was triggered within 0 to 6 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.


The Non-Occupancy list was cleared. With a link established on channel, the EUT was rebooted. A radar signal was triggered within 54 to 60 seconds after the initial power-up period, and transmissions on the channel were monitored on the spectrum analyzer.

5.3.3. Qualitative Results


Timing of Radar Burst	Display on Control Computer	Spectrum Analyzer Display
No Radar Triggered	EUT marks Channel as active	Transmissions begin on channel after completion of the initial power-up cycle and the CAC
Within 0 to 6 second window	EUT indicates radar detected	No transmissions on channel
Within 54 to 60 second window	EUT indicates radar detected	No transmissions on channel

802.11ax HE160_ 5250 MHz

Initial Channel
Availability Check

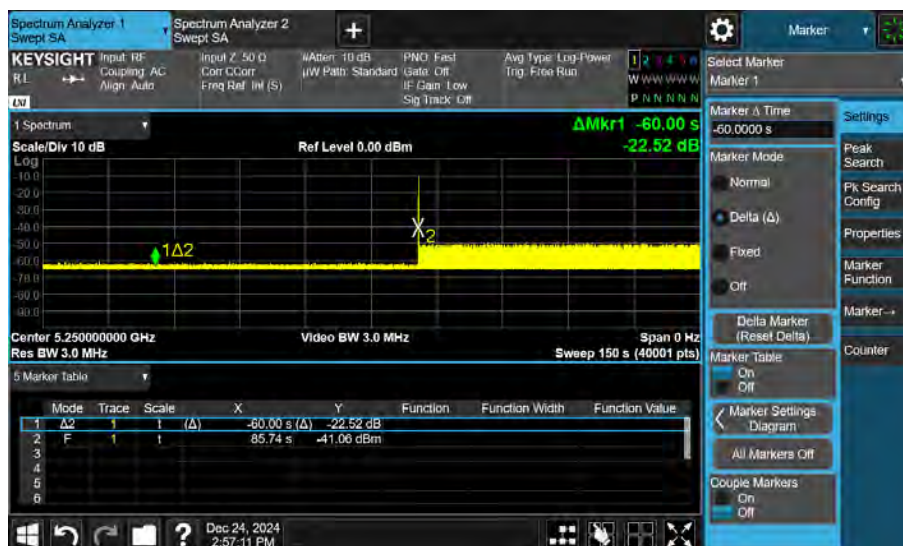


Initial Channel
Availability Check
Begin

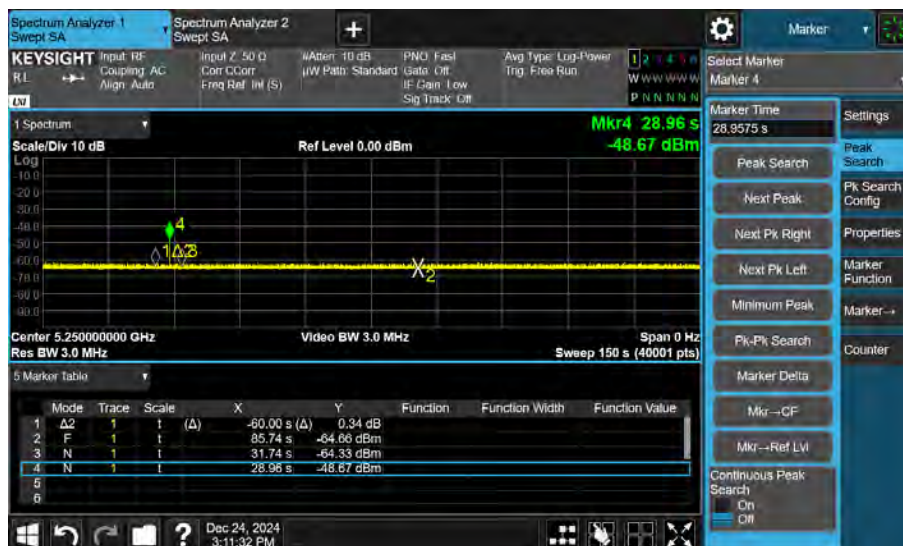

802.11ax HE160_ 5250 MHz

Initial Channel
Availability Check
End

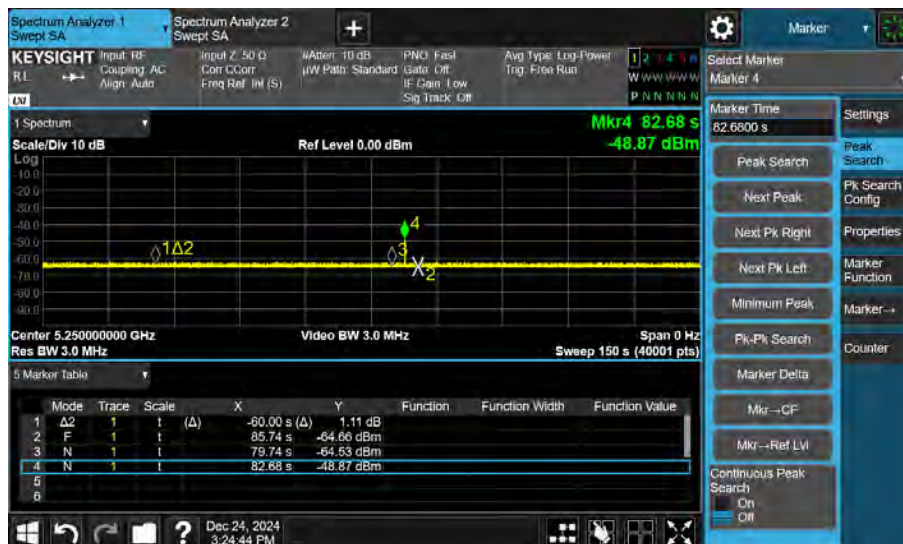

5.4. Channel Move Time and Channel Closing Transmission Time

5.4.1. Reporting Notes

The reference marker is set at the end of last radar pulse.

The delta marker is set at the end of the last WLAN transmission following the radar pulse.
This delta is the channel move time.

The aggregate channel closing transmission time is calculated as follows:

Aggregate Transmission Time = (Number of analyzer bins showing transmission) * (dwell time per bin)

The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.


Results

Frequency (MHz)	Radar Type	Channel Move Time (msec)	Limit (sec)
		Master	
5250	Type 0	1368	10

Frequency (MHz)	Radar Type	Aggregate Channel Closing Transmission Time (msec)	Limit (msec)
		Master	
5250	Type 0	13.5	60

Master :

802.11ax HE160_ 5250 MHz

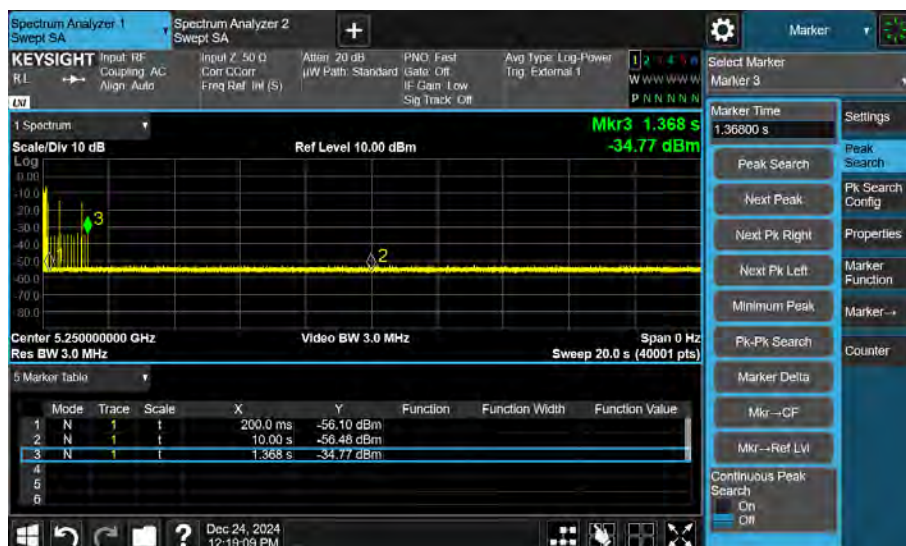

Channel Move and
Closing Time

DFS and Adaptivity

Device


Trigger Level(dBm):	MK1 Time(s):	MK2 Time(s):	Delta Time(s):
-50	200.00ms	10000.00ms	9800.00ms

On Time Point:	Total Point:	Sum of On Time(s):
27	19600	13.50ms

Sweep Time(s):	Sweep Point:	Duty Cycle(%)
20000.00ms	40001	0.14%

RUN

5.5. Non-Occupancy Period

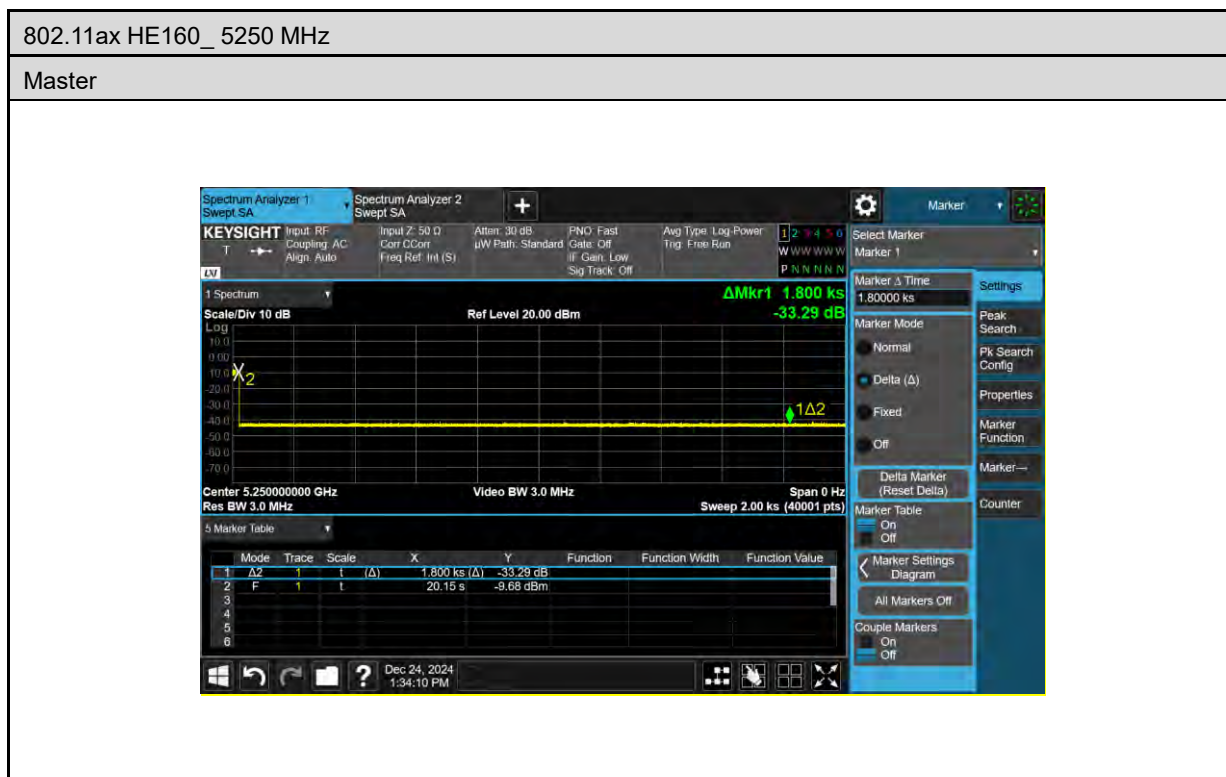

Note: Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

5.6. U-NII Detection Bandwidth

■ Test Results

Test Mode						
802.11ax HE20						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5300	5290	5310	20	18.738	106.73	≥ 100

Test Mode						
802.11ax HE40						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5310	5290	5330	40	37.65	106.24	≥ 100

Test Mode						
802.11ax HE80						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5290	5250	5330	80	76.672	104.34	≥ 100


Test Mode						
802.11ax HE160						
Frequency (MHz)	FL (MHz)	FH (MHz)	Detection Bandwidth (MHz)	99 % Power Bandwidth (MHz)	Ratio of Detection BW to 99 % Power BW (%)	Minimum Limit (%)
5250	5250	5330	80	78.479	101.94	≥ 100

Test Graphs


802.11ax HE20_ 5300 MHz




802.11ax HE40_ 5310 MHz

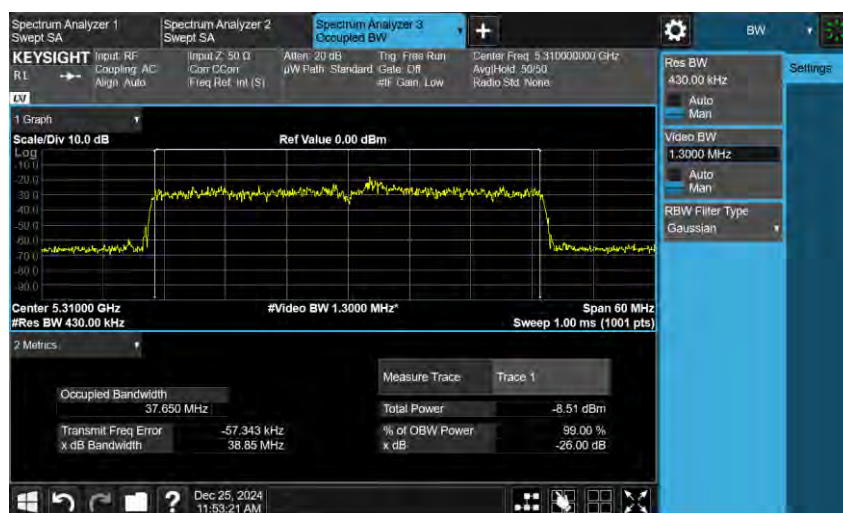

802.11ax HE80_ 5290 MHz

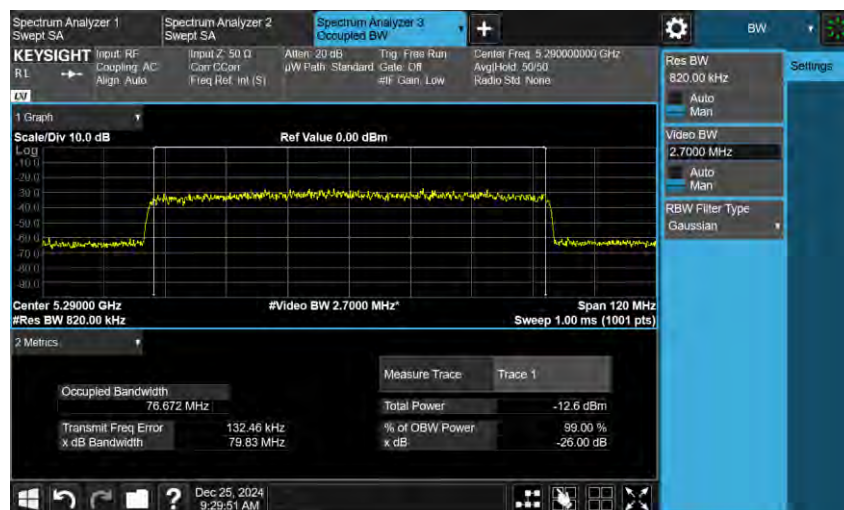

802.11ax HE160_ 5250 MHz

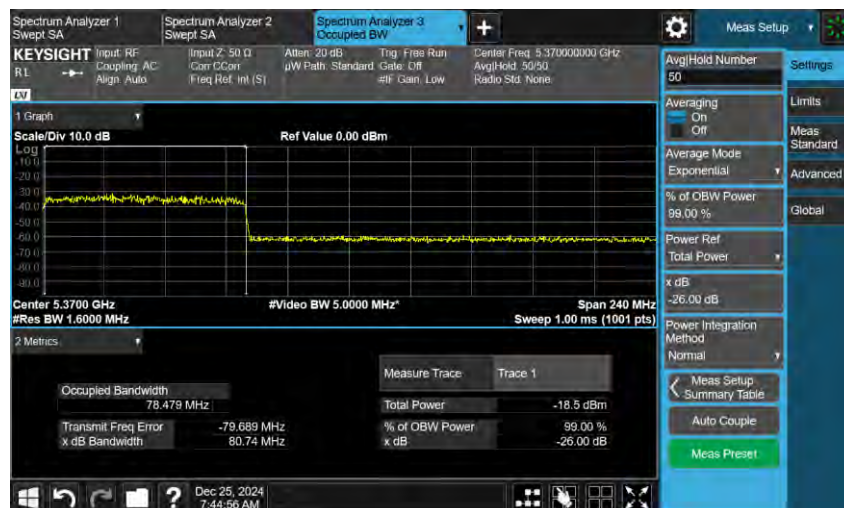

5.7. Statistical Performance check

■ Test Results

Test Mode		802.11ax HE20					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5300	Type1	Table 5a	1	27	3	90.00 %	≥60 %
	Type2	Random	Random	26	4	86.67 %	≥60 %
	Type3	Random	Random	25	5	83.33 %	≥60 %
	Type4	Random	Random	23	7	76.67 %	≥60 %
	Type1~4					89.17%	≥80 %
	Type5	Random	Random	26	4	86.67 %	≥80 %
	Type6	Hopping	1	26	4	86.67 %	≥70 %

Test Mode		802.11ax HE40					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5510	Type1	Table 5a	1	27	3	90.00%	≥ 60 %
	Type2	Random	Random	28	2	93.33%	≥ 60 %
	Type3	Random	Random	26	4	86.67%	≥ 60 %
	Type4	Random	Random	27	3	90.00%	≥ 60 %
	Type1~4					84.17 %	≥ 80 %
	Type5	Random	Random	25	5	83.33%	≥ 80 %
	Type6	Hopping	1	30	0	100.00%	≥ 70 %

Test Mode		802.11ax HE80					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5290	Type1	Table 5a	1	28	2	93.33%	≥ 60 %
	Type2	Random	Random	29	1	96.67%	≥ 60 %
	Type3	Random	Random	27	3	90.00%	≥ 60 %
	Type4	Random	Random	28	2	93.33%	≥ 60 %
	Type1~4					93.33%	≥ 80 %
	Type5	Random	Random	26	4	86.67%	≥ 80 %
	Type6	Hopping	1	30	0	100.00%	≥ 70 %

Test Mode		802.11ax HE160					
Frequency (MHz)	Radar Signal	PRI (Msec)	Pulse width W (μs)	Pass Times	Fail Times	Probability	Limit
5250	Type1	Table 5a	1	28	2	93.33%	≥ 60 %
	Type2	Random	Random	29	1	96.67%	≥ 60 %
	Type3	Random	Random	27	3	90.00%	≥ 60 %
	Type4	Random	Random	26	4	86.67%	≥ 60 %
	Type1~4					91.67%	≥ 80 %
	Type5	Random	Random	26	4	86.67%	≥ 80 %
	Type6	Hopping	1	30	0	100.00%	≥ 70 %

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	1	558	95	1792	1
2	5300	1	798	67	1253	1
3	5300	1	678	78	1475	1
4	5300	1	918	58	1089	1
5	5300	1	638	83	1567	1
6	5300	1	618	86	1618	1
7	5300	1	938	57	1066	1
8	5300	1	878	61	1139	1
9	5300	1	518	102	1931	0
10	5300	1	878	61	1139	1
11	5300	1	878	61	1139	1
12	5300	1	558	95	1792	1
13	5300	1	838	63	1193	1
14	5300	1	938	57	1066	1
15	5300	1	518	102	1931	0
16	5300	1	2591	21	386	1
17	5300	1	599	89	1669	1
18	5300	1	978	54	1022	1
19	5300	1	2411	22	415	1
20	5300	1	830	64	1205	1
21	5300	1	2212	24	452	0
22	5300	1	2063	26	485	1
23	5300	1	1331	40	751	1
24	5300	1	2717	20	368	1
25	5300	1	725	73	1379	1
26	5300	1	1781	30	561	1
27	5300	1	1504	36	665	1
28	5300	1	1498	36	668	1
29	5300	1	1475	36	678	1
30	5300	1	594	89	1684	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	3.20	199.90	23	5003	1
2	5300	4.40	212.60	28	4704	0
3	5300	4.30	225.90	23	4427	0
4	5300	2.00	227.30	26	4399	1
5	5300	2.80	215.90	23	4632	1
6	5300	1.40	211.60	27	4726	1
7	5300	1.50	203.30	23	4919	1
8	5300	4.70	152.20	24	6570	1
9	5300	1.50	180.40	29	5543	1
10	5300	1.80	158.60	27	6305	1
11	5300	3.40	201.30	26	4968	1
12	5300	3.20	219.70	25	4552	1
13	5300	1.50	226.10	28	4423	1
14	5300	1.20	183.10	25	5461	1
15	5300	1.30	175.10	25	5711	1
16	5300	4.10	212.70	23	4701	1
17	5300	3.50	191.30	27	5227	1
18	5300	2.70	171.80	29	5821	1
19	5300	3.50	200.30	24	4993	1
20	5300	1.80	159.50	29	6270	1
21	5300	3.40	200.90	25	4978	1
22	5300	4.10	208.60	28	4794	1
23	5300	1.60	186.30	23	5368	1
24	5300	2.80	213.40	24	4686	0
25	5300	3.50	173.40	23	5767	1
26	5300	4.50	150.70	24	6636	1
27	5300	3.50	222.90	29	4486	1
28	5300	2.60	203.60	27	4912	1
29	5300	4.00	202.80	28	4931	1
30	5300	1.60	185.40	25	5394	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	9.30	258.50	18	3868.47	1
2	5300	6.60	371.20	16	2693.97	1
3	5300	8.70	473.90	17	2110.15	1
4	5300	7.10	394.10	18	2537.43	1
5	5300	8.60	489.60	16	2042.48	1
6	5300	6.30	286.30	16	3492.84	1
7	5300	7.30	470.20	17	2126.75	0
8	5300	9.40	294.60	16	3394.43	1
9	5300	7.60	485.90	16	2058.04	1
10	5300	8.80	475.20	18	2104.38	0
11	5300	7.60	443.60	17	2254.28	1
12	5300	6.40	469.70	17	2129.02	1
13	5300	9.60	448.40	18	2230.15	1
14	5300	9.40	340.90	18	2933.41	1
15	5300	7.00	279.70	17	3575.26	1
16	5300	9.00	236.60	18	4226.54	1
17	5300	6.40	346.80	18	2883.51	1
18	5300	9.50	448.40	17	2230.15	1
19	5300	6.60	238.90	16	4185.85	1
20	5300	6.60	283.00	18	3533.57	0
21	5300	9.30	221.20	18	4520.80	0
22	5300	8.30	451.40	16	2215.33	1
23	5300	7.70	357.70	18	2795.64	1
24	5300	7.80	270.20	18	3700.96	1
25	5300	6.00	413.30	17	2419.55	1
26	5300	8.30	297.00	17	3367.00	1
27	5300	6.00	427.30	18	2340.28	1
28	5300	9.50	231.00	16	4329.00	1
29	5300	6.90	475.30	18	2103.93	1
30	5300	7.00	229.70	18	4353.50	1
Detection Percentage (%)						86.67

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5300	17.60	360.20	13	2776	1
2	5300	14.50	326.00	13	3067	1
3	5300	17.50	419.80	16	2382	1
4	5300	12.90	201.40	14	4965	1
5	5300	11.70	493.20	13	2028	1
6	5300	16.10	305.20	12	3277	1
7	5300	11.50	376.30	15	2657	1
8	5300	12.60	420.20	12	2380	1
9	5300	11.50	343.90	13	2908	1
10	5300	13.50	384.50	13	2601	1
11	5300	18.40	356.80	12	2803	0
12	5300	13.00	290.90	15	3438	0
13	5300	15.50	466.70	12	2143	1
14	5300	20.00	233.20	15	4288	1
15	5300	16.00	371.50	13	2692	1
16	5300	18.00	418.00	12	2392	1
17	5300	15.70	330.90	14	3022	1
18	5300	15.30	218.10	13	4585	1
19	5300	11.00	380.80	14	2626	1
20	5300	12.60	240.90	12	4151	1
21	5300	14.50	345.90	15	2891	1
22	5300	17.10	358.20	16	2792	1
23	5300	11.30	361.10	16	2769	1
24	5300	17.20	211.40	13	4730	0
25	5300	19.70	210.20	13	4757	1
26	5300	19.00	497.60	13	2010	1
27	5300	15.20	239.60	12	4174	1
28	5300	12.20	264.90	13	3775	1
29	5300	18.20	273.60	16	3655	1
30	5300	12.40	355.10	13	2816	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5294.5	1	68.8	9	1502.9	1	1
	5295.5	2	62.6	13	1145.2	1	
	5296.5	3	94.1	14	1890.3	2	
	5296.5	4	67.6	14	1241.1	2	
	5295.5	5	96.3	12	1699.0	2	
	5292.5	6	65.5	6	1563.6	2	
	5292.5	7	78.5	6	1868.7	1	
	5295.5	8	60.3	12	1685.9	3	
	5297.5	9	80.0	17	1051.2	3	
	5295.5	10	64.1	13	1411.8	1	
	5297.5	11	52.7	18	1038.4	3	
2	5295.5	1	93.7	13	1982.1	2	1
	5297.5	2	79.1	18	1402.9	3	
	5297.5	3	62.1	17	1698.0	2	
	5296.5	4	80.0	15	1938.7	2	
	5294.5	5	81.3	10	1619.3	3	
	5297.5	6	68.8	18	1146.1	3	
	5294.5	7	85.7	11	1509.5	2	
	5293.5	8	95.8	8	1503.3	3	
	5297.5	9	58.4	17	1031.7	2	
	5295.5	10	70.1	12	1396.1	1	
	5294.5	11	63.9	9	1831.6	2	
	5297.5	12	81.3	18	1080.3	2	
3	5292.5	1	94.4	6	1863.8	3	1
	5294.5	2	77.5	10	1116.7	3	
	5294.5	3	77.5	11	1383.5	1	
	5297.5	4	89.4	17	1688.6	3	
	5296.5	5	65.5	16	1480.5	1	
	5295.5	6	73.3	13	1108.6	1	
	5294.5	7	91.6	9	1325.3	3	
	5296.5	8	68.3	15	1486.8	3	
	5297.5	9	87.8	18	1495.9	1	
	5296.5	10	66.1	15	1564.4	2	
	5293.5	11	63.3	8	1895.9	3	
	5295.5	12	63.6	12	1711.0	2	
	5297.5	13	74.8	17	1393.2	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5298.5	1	98.4	20	1677.4	1	1
	5297.5	2	67.7	18	1146.6	1	
	5296.5	3	60.4	15	1852.7	2	
	5297.5	4	68.0	18	1679.7	1	
	5295.5	5	64.7	12	1655.5	2	
	5294.5	6	63.6	10	1695.6	3	
	5295.5	7	54.1	12	1779.4	3	
	5293.5	8	61.9	8	1456.1	2	
	5296.5	9	62.8	15	1386.4	1	
5	5295.5	1	66.7	13	1165.4	2	1
	5296.5	2	86.1	14	1495.3	1	
	5297.5	3	95.9	18	1813.3	1	
	5296.5	4	58.2	15	1559.1	2	
	5292.5	5	80.4	5	1300.2	3	
	5294.5	6	64.8	11	1992.9	3	
	5292.5	7	99.4	6	1111.8	2	
	5296.5	8	82.2	16	1069.4	1	
	5295.5	9	55.1	13	1887.7	3	
	5294.5	10	67.3	10	1781.5	1	
	5296.5	11	69.5	16	1141.7	3	
	5293.5	12	53.4	8	1653.0	2	
	5298.5	13	59.6	20	1168.7	2	
	5293.5	14	50.8	8	1429.4	3	
	5298.5	15	74.8	20	1866.2	3	
6	5294.5	1	66.0	9	1761.9	1	1
	5295.5	2	84.0	12	1056.9	3	
	5297.5	3	99.2	17	1415.7	1	
	5292.5	4	87.6	5	1363.7	1	
	5298.5	5	60.4	19	1796.4	2	
	5297.5	6	78.6	17	1860.5	1	
	5298.5	7	59.0	19	1277.2	2	
	5292.5	8	84.6	6	1655.7	3	
	5297.5	9	61.6	17	1145.7	3	
	5296.5	10	87.4	14	1331.2	1	
	5293.5	11	56.8	8	1475.7	3	
	5297.5	12	99.3	18	1759.3	3	
	5293.5	13	74.8	7	1692.8	3	
	5297.5	14	92.3	18	1012.6	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5296.5	1	63.3	15	1006.6	3	1
	5294.5	2	79.9	10	1856.2	1	
	5295.5	3	57.8	12	1340.7	1	
	5292.5	4	67.7	6	1630.6	1	
	5296.5	5	53.4	15	1541.3	1	
	5294.5	6	61.1	10	1393.1	3	
	5296.5	7	82.4	16	1838.2	3	
	5292.5	8	86.2	5	1169.8	2	
	5297.5	9	61.1	17	1279.8	1	
	5293.5	10	51.0	7	1911.5	3	
	5297.5	11	58.7	17	1520.3	3	
	5296.5	12	68.1	15	1606.8	2	
	5292.5	13	90.4	5	1189.8	3	
	5294.5	14	97.5	9	1104.6	2	
	5293.5	15	65.0	8	1916.2	2	
	5294.5	16	98.6	9	1592.2	3	
	5295.5	17	69.4	13	1812.2	2	
8	5292.5	1	92.2	6	1264.0	2	1
	5293.5	2	51.2	8	1889.5	1	
	5294.5	3	58.3	10	1613.3	1	
	5297.5	4	64.6	18	1597.9	1	
	5293.5	5	76.8	7	1362.8	1	
	5296.5	6	74.2	16	1279.5	1	
	5293.5	7	84.1	8	1964.5	2	
	5296.5	8	71.5	14	1043.4	2	
	5292.5	9	98.7	5	1746.7	2	
	5294.5	10	69.1	10	1491.6	2	
	5293.5	11	88.0	7	1413.6	2	
	5295.5	12	79.1	13	1908.9	3	
	5296.5	13	91.2	14	1374.5	2	
	5293.5	14	94.5	7	1285.9	1	
	5296.5	15	90.2	15	1144.6	3	
	5297.5	16	96.3	17	1860.2	2	
	5295.5	17	84.6	12	1644.7	2	
	5293.5	18	85.2	7	1940.8	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5296.5	1	74.7	16	1715.2	3	1
	5294.5	2	80.1	10	1374.3	3	
	5295.5	3	76.1	13	1617.0	1	
	5296.5	4	79.7	14	1024.5	1	
	5295.5	5	71.6	13	1009.2	2	
	5294.5	6	89.1	10	1423.5	3	
	5295.5	7	97.6	13	1372.6	2	
	5293.5	8	73.2	7	1196.2	1	
	5296.5	9	51.9	16	1255.6	2	
	5292.5	10	85.0	6	1013.7	1	
	5292.5	11	93.9	6	1489.7	3	
	5295.5	12	77.7	13	1110.8	2	
	5298.5	13	72.6	20	1482.8	3	
	5296.5	14	76.5	15	1323.5	1	
	5296.5	15	57.9	14	1377.4	2	
	5295.5	16	72.8	12	1557.1	1	
	5292.5	17	96.0	6	1360.9	3	
	5297.5	18	75.6	17	1930.1	2	
	5295.5	19	54.7	13	1871.9	1	
10	5298.5	1	85.5	20	1057.5	2	0
	5298.5	2	55.0	20	1892.3	3	
	5297.5	3	90.2	18	1408.6	2	
	5296.5	4	70.1	15	1068.4	1	
	5296.5	5	81.3	16	1753.7	1	
	5294.5	6	95.7	9	1780.5	3	
	5296.5	7	92.1	15	1721.6	3	
	5295.5	8	69.8	12	1174.7	1	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5300	1	83.2	20	1215.4	1	1
	5300	2	77.0	5	1336.2	2	
	5300	3	75.1	11	1019.6	1	
	5300	4	95.4	18	1700.7	2	
	5300	5	55.0	9	1429.9	2	
	5300	6	53.9	12	1211.6	2	
	5300	7	88.0	15	1448.6	3	
	5300	8	96.3	18	1590.8	3	
	5300	9	74.3	17	1160.6	2	
	5300	10	75.4	11	1270.3	1	
	5300	11	75.0	13	1136.6	3	
	5300	12	90.1	5	1548.0	2	
	5300	13	74.8	7	1291.6	3	
	5300	14	60.5	10	1763.7	3	
	5300	15	71.4	19	1692.0	3	
	5300	16	84.3	12	1883.3	1	
12	5300	1	90.0	6	1920.9	3	1
	5300	2	91.1	7	1291.9	1	
	5300	3	83.7	17	1517.0	1	
	5300	4	88.7	7	1269.4	3	
	5300	5	94.7	19	1758.5	2	
	5300	6	96.8	8	1307.3	2	
	5300	7	84.2	12	1596.1	2	
	5300	8	57.4	7	1366.8	3	
	5300	9	96.3	7	1868.4	1	
	5300	10	99.4	11	1820.2	2	
	5300	11	65.4	15	1476.4	3	
	5300	12	74.6	8	1305.2	1	
	5300	13	71.2	15	1507.2	1	
	5300	14	69.0	10	1610.2	2	
	5300	15	90.2	9	1731.3	2	
	5300	16	52.8	17	1367.6	2	
	5300	17	91.2	18	1421.7	3	
	5300	18	79.2	16	1381.6	2	
	5300	19	58.9	8	1483.0	1	
	5300	20	60.4	20	1955.5	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5300	1	88.7	17	1768.6	3	1
	5300	2	50.6	11	1384.6	1	
	5300	3	55.1	14	1370.0	2	
	5300	4	52.1	16	1842.8	2	
	5300	5	68.3	18	1191.6	2	
	5300	6	61.9	9	1412.6	3	
	5300	7	73.0	12	1578.9	2	
	5300	8	74.4	11	1514.3	1	
	5300	9	86.3	8	1346.1	3	
	5300	10	85.1	8	1138.0	3	
14	5300	1	76.0	9	1146.6	1	1
	5300	2	82.4	13	1303.7	2	
	5300	3	90.6	12	1475.2	3	
	5300	4	68.1	20	1486.0	2	
	5300	5	99.8	16	1584.4	3	
	5300	6	70.5	10	1358.5	1	
	5300	7	59.3	9	1348.7	3	
	5300	8	61.6	7	1723.6	3	
	5300	9	67.7	14	1209.0	3	
	5300	10	91.5	13	1937.9	3	
	5300	11	73.2	8	1942.3	2	
	5300	12	67.1	17	1886.0	2	
	5300	13	52.4	11	1878.8	2	
	5300	14	93.8	10	1732.6	1	
	5300	15	63.5	16	1658.1	1	
	5300	16	81.2	18	1786.7	1	
	5300	17	93.4	11	1845.6	2	
	5300	18	93.1	13	1643.6	3	
	5300	19	60.1	14	1409.8	2	
	5300	20	82.4	17	1784.3	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5300	1	62.2	16	1765.4	3	0
	5300	2	92.7	18	1623.5	2	
	5300	3	55.8	10	1814.9	2	
	5300	4	99.5	11	1205.2	3	
	5300	5	87.7	7	1892.0	3	
	5300	6	97.9	16	1935.1	1	
	5300	7	53.8	11	1077.0	2	
	5300	8	69.7	13	1643.6	1	
	5300	9	97.5	16	1472.9	1	
	5300	10	87.3	15	1076.4	3	
	5300	11	78.1	13	1200.8	3	
	5300	12	63.2	16	1626.8	3	
	5300	13	89.7	9	1602.4	2	
	5300	14	67.7	14	1602.7	1	
	5300	15	84.3	19	1023.7	1	
	5300	16	84.7	18	1973.8	1	
	5300	17	87.8	13	1658.3	1	
	5300	18	98.1	15	1316.1	1	
	5300	19	77.2	12	1694.5	1	
16	5300	1	86.3	8	1475.6	3	1
	5300	2	57.6	12	1610.1	2	
	5300	3	90.0	11	1011.4	1	
	5300	4	97.1	6	1280.1	3	
	5300	5	86.3	7	1518.2	3	
	5300	6	71.7	12	1596.8	1	
	5300	7	65.9	7	1732.9	1	
	5300	8	94.0	15	1310.2	3	
	5300	9	69.9	12	1946.7	2	
	5300	10	51.5	7	1403.5	2	
	5300	11	61.1	19	1410.1	1	
	5300	12	74.9	16	1901.3	3	
	5300	13	58.5	19	1823.4	1	
	5300	14	72.9	19	1714.9	3	
	5300	15	98.3	9	1778.9	1	
	5300	16	79.0	10	1854.0	3	
	5300	17	57.2	8	1321.0	1	
	5300	18	62.0	20	1025.0	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5300	1	73.3	13	1656.8	1	1
	5300	2	99.7	6	1864.2	2	
	5300	3	77.3	16	1755.8	1	
	5300	4	60.0	17	1895.0	3	
	5300	5	85.1	6	1558.3	3	
	5300	6	68.2	19	1981.2	2	
	5300	7	55.9	8	1018.2	2	
	5300	8	92.4	13	1950.9	1	
	5300	9	92.6	16	1933.7	2	
	5300	10	97.1	14	1637.0	2	
	5300	11	94.3	14	1414.7	2	
	5300	12	59.2	11	1666.5	1	
	5300	13	83.5	10	1797.2	1	
	5300	14	52.2	18	1894.0	3	
	5300	15	67.3	14	1355.8	1	
	5300	16	54.2	17	1263.5	3	
	5300	17	53.8	15	1399.0	2	
18	5300	1	94.1	12	1717.0	3	1
	5300	2	67.4	14	1769.6	1	
	5300	3	71.0	10	1249.8	3	
	5300	4	96.2	6	1133.8	3	
	5300	5	59.1	9	1882.3	2	
	5300	6	57.6	18	1161.8	2	
	5300	7	55.3	11	1105.4	1	
	5300	8	60.1	17	1271.2	1	
	5300	9	92.0	16	1065.2	3	
	5300	10	57.4	17	1000.6	1	
	5300	11	75.1	11	1982.6	1	
	5300	12	57.2	10	1320.6	3	
	5300	13	93.6	15	1148.3	3	
	5300	14	81.5	7	1260.0	3	
	5300	15	70.8	6	1853.4	3	
	5300	1	73.3	13	1656.8	1	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5300	1	97.8	12	1207.8	1	1
	5300	2	92.4	9	1179.6	3	
	5300	3	84.8	16	1302.8	3	
	5300	4	83.9	10	1247.5	3	
	5300	5	61.4	18	1380.8	1	
	5300	6	96.8	15	1740.7	1	
	5300	7	96.6	14	1537.3	1	
	5300	8	76.8	20	1031.2	3	
	5300	9	67.0	18	1960.2	3	
	5300	10	67.5	5	1241.6	2	
	5300	11	99.1	16	1800.9	2	
	5300	12	94.1	7	1513.3	3	
	5300	13	61.4	8	1646.3	2	
	5300	14	56.0	6	1793.4	2	
20	5300	1	88.0	7	1442.6	2	1
	5300	2	95.3	15	1849.3	2	
	5300	3	76.2	8	1929.3	1	
	5300	4	64.3	9	1968.4	1	
	5300	5	67.8	10	1343.6	2	
	5300	6	67.4	12	1685.4	1	
	5300	7	99.3	16	1928.7	2	
	5300	8	85.3	14	1530.8	3	
	5300	9	54.4	7	1841.3	2	
	5300	10	85.8	9	1117.5	1	
21	5307.5	1	54.2	6	1075.8	1	1
	5303.5	2	54.1	16	1480.1	2	
	5302.5	3	71.1	18	1849.3	2	
	5301.5	4	77.6	19	1752.5	2	
	5304.5	5	83.3	13	1694.2	3	
	5306.5	6	90.2	7	1892.3	1	
	5303.5	7	94.6	14	1397.7	1	
	5304.5	8	95.6	13	1551.0	1	
	5304.5	9	99.9	13	1494.4	1	
	5302.5	10	98.8	18	1028.1	1	
	5307.5	11	74.2	6	1376.3	3	
	5301.5	12	71.3	20	1028.7	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5305.5	1	77.0	11	1898.1	2	1
	5301.5	2	75.1	19	1033.2	3	
	5306.5	3	71.0	7	1667.6	2	
	5303.5	4	84.2	15	1035.5	3	
	5301.5	5	50.7	19	1972.2	1	
	5303.5	6	92.5	14	1621.0	3	
	5305.5	7	62.9	10	1190.9	1	
	5303.5	8	78.2	16	1134.2	3	
	5306.5	9	89.9	8	1786.1	2	
23	5305.5	1	68.6	11	1925.6	3	1
	5305.5	2	73.8	10	1778.2	2	
	5305.5	3	78.7	9	1323.9	2	
	5307.5	4	84.8	5	1098.0	3	
	5306.5	5	71.0	7	1804.4	2	
	5306.5	6	94.1	7	1001.3	3	
	5306.5	7	72.5	8	1691.6	3	
	5303.5	8	65.8	15	1606.2	1	
	5302.5	9	69.7	17	1810.7	1	
	5305.5	10	70.0	11	1527.7	2	
	5303.5	11	80.6	15	1995.7	1	
	5306.5	12	56.9	8	1869.3	2	
	5304.5	13	52.2	12	1930.2	3	
	5305.5	14	50.1	9	1633.7	3	
	5306.5	15	61.3	7	1117.5	2	
24	5307.5	1	70.0	5	1262.7	3	1
	5305.5	2	95.9	11	1580.5	1	
	5302.5	3	71.1	18	1564.2	3	
	5303.5	4	76.1	14	1507.2	1	
	5303.5	5	72.5	14	1059.5	3	
	5302.5	6	72.6	17	1678.0	1	
	5305.5	7	50.3	10	1546.3	1	
	5304.5	8	59.6	13	1996.3	1	
	5302.5	9	98.8	18	1335.6	1	
	5303.5	10	92.2	14	1743.6	3	
	5307.5	11	82.0	6	1543.4	2	
	5303.5	12	59.4	15	1787.1	2	
	5302.5	13	88.3	18	1382.6	2	
	5304.5	14	50.4	13	1815.3	2	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5301.5	1	68.9	19	1169.0	3	1
	5303.5	2	57.4	15	1427.1	1	
	5305.5	3	89.6	10	1103.4	3	
	5307.5	4	98.4	6	1801.6	1	
	5303.5	5	99.1	14	1821.0	2	
	5304.5	6	89.1	13	1728.9	3	
	5305.5	7	93.0	11	1665.1	3	
	5305.5	8	61.9	9	1942.5	1	
	5304.5	9	52.3	13	1981.7	3	
	5303.5	10	73.3	14	1064.8	1	
	5304.5	11	83.6	12	1581.0	2	
	5301.5	12	88.3	19	1301.6	3	
	5303.5	13	85.0	15	1734.7	1	
	5303.5	14	70.4	14	1906.3	2	
	5304.5	15	80.9	12	1425.5	2	
	5305.5	16	52.9	11	1571.9	1	
	5305.5	17	93.1	9	1917.2	1	
	5305.5	18	58.8	9	1922.6	1	
26	5302.5	1	83.4	18	1956.5	1	0
	5306.5	2	71.5	8	1617.3	2	
	5305.5	3	98.4	9	1506.5	1	
	5302.5	4	95.6	18	1280.3	2	
	5304.5	5	66.7	12	1580.7	3	
	5304.5	6	73.0	13	1912.4	1	
	5301.5	7	75.5	19	1800.1	1	
	5303.5	8	61.7	15	1726.2	2	
	5307.5	9	95.0	6	1343.4	3	
	5301.5	10	81.4	20	1638.7	2	
	5305.5	11	75.5	11	1267.3	1	
	5304.5	12	83.4	13	1381.4	1	
	5303.5	13	84.7	14	1857.3	1	
	5306.5	14	99.2	7	1657.9	3	
	5303.5	15	81.0	16	1594.5	3	
	5305.5	16	50.4	9	1905.5	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5304.5	1	95.2	12	1804.2	3	1
	5303.5	2	91.1	14	1549.1	2	
	5302.5	3	81.6	17	1365.5	2	
	5301.5	4	75.7	20	1818.4	2	
	5306.5	5	57.7	7	1748.8	3	
	5303.5	6	59.4	15	1705.5	2	
	5307.5	7	68.2	6	1864.7	1	
	5302.5	8	67.6	18	1496.7	2	
	5306.5	9	90.6	7	1015.5	1	
	5305.5	10	52.2	10	1686.5	1	
	5302.5	11	59.9	18	1890.0	3	
	5302.5	12	96.8	17	1247.7	2	
	5303.5	13	99.3	16	1822.3	1	
	5303.5	14	67.7	15	1931.5	2	
	5305.5	15	78.2	9	1064.0	1	
	5307.5	16	59.2	6	1670.3	2	
	5305.5	17	56.0	11	1758.0	3	
	5303.5	18	75.1	15	1577.4	2	
	5302.5	19	63.5	17	1214.7	3	
	5306.5	20	60.3	7	1782.9	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5303.5	1	60.4	14	1131.6	3	1
	5302.5	2	82.9	18	1076.7	3	
	5305.5	3	63.1	9	1166.3	3	
	5302.5	4	77.9	18	1626.2	1	
	5303.5	5	69.0	16	1125.7	1	
	5305.5	6	59.7	10	1133.1	3	
	5305.5	7	58.8	9	1760.9	2	
	5301.5	8	65.8	20	1052.3	1	
	5307.5	9	81.3	6	1088.2	1	
	5305.5	10	74.4	9	1306.6	2	
	5305.5	11	72.8	11	1683.8	1	
	5302.5	12	93.4	17	1074.3	2	
	5302.5	13	84.4	18	1325.1	1	
	5301.5	14	83.9	19	1092.1	2	
	5301.5	15	69.8	20	1770.8	1	
	5304.5	16	88.9	13	1987.0	3	
	5306.5	17	79.1	8	1913.9	2	
	5305.5	18	85.9	10	1328.3	2	
	5304.5	19	94.6	13	1479.5	3	
	5302.5	20	82.4	18	1506.8	3	

Test Mode		802.11ax HE20					
Frequency		5300 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5306.5	1	68.6	7	1268.2	3	1
	5302.5	2	65.6	17	1164.4	1	
	5303.5	3	79.6	16	1968.4	2	
	5301.5	4	66.1	19	1930.9	2	
	5305.5	5	91.2	10	1985.0	3	
	5303.5	6	77.0	16	1961.4	1	
	5305.5	7	99.7	11	1509.0	3	
	5301.5	8	67.6	19	1825.0	2	
	5306.5	9	72.2	7	1595.7	2	
	5306.5	10	53.1	8	1291.4	1	
	5304.5	11	87.6	13	1607.0	2	
	5304.5	12	63.3	13	1903.7	2	
	5306.5	13	58.5	8	1870.2	2	
	5303.5	14	91.1	16	1137.3	2	
	5307.5	15	50.1	6	1665.1	3	
	5304.5	16	53.9	13	1107.7	3	
	5305.5	17	99.2	11	1327.1	1	
30	5305.5	1	71.3	10	1370.6	3	1
	5305.5	2	61.6	10	1839.2	3	
	5303.5	3	84.6	16	1138.2	3	
	5303.5	4	82.6	15	1023.7	3	
	5303.5	5	66.3	15	1259.0	1	
	5301.5	6	67.9	19	1624.3	2	
	5305.5	7	61.8	9	1385.7	2	
	5306.5	8	50.3	8	1969.5	2	
	5303.5	9	70.8	15	1020.5	1	
	5305.5	10	67.7	9	1834.5	3	
	5307.5	11	86.5	6	1398.0	1	
	5303.5	12	81.2	15	1215.8	3	
	5301.5	13	53.9	19	1339.7	1	
	5305.5	14	77.2	9	1915.4	2	
Detection Percentage (%)							86.67

Test Mode		802.11ax HE20				
Frequency		5300 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	1	918	58	1089	1
2	5310	1	698	76	1433	0
3	5310	1	898	59	1114	1
4	5310	1	618	86	1618	1
5	5310	1	718	74	1393	1
6	5310	1	558	95	1792	1
7	5310	1	798	67	1253	1
8	5310	1	658	81	1520	1
9	5310	1	938	57	1066	1
10	5310	1	738	72	1355	0
11	5310	1	518	102	1931	1
12	5310	1	878	61	1139	1
13	5310	1	938	57	1066	1
14	5310	1	818	65	1222	1
15	5310	1	718	74	1393	1
16	5310	1	3016	18	332	1
17	5310	1	643	83	1555	1
18	5310	1	697	76	1435	1
19	5310	1	2927	19	342	1
20	5310	1	2678	20	373	1
21	5310	1	780	68	1282	1
22	5310	1	1336	40	749	1
23	5310	1	1266	42	790	1
24	5310	1	750	71	1333	1
25	5310	1	613	87	1631	0
26	5310	1	1786	30	560	1
27	5310	1	2134	25	469	1
28	5310	1	1818	30	550	1
29	5310	1	2595	21	385	1
30	5310	1	1373	39	728	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	2.10	210.50	27	4751	1
2	5310	1.80	194.70	25	5136	1
3	5310	4.90	158.80	24	6297	0
4	5310	1.00	221.30	28	4519	1
5	5310	4.10	220.00	27	4545	1
6	5310	4.70	192.50	27	5195	1
7	5310	4.70	222.00	25	4505	1
8	5310	4.90	218.40	28	4579	1
9	5310	2.10	164.10	27	6094	1
10	5310	2.60	216.20	29	4625	1
11	5310	4.30	188.00	27	5319	1
12	5310	2.50	217.10	26	4606	1
13	5310	3.50	158.30	28	6317	1
14	5310	1.30	188.80	27	5297	1
15	5310	3.30	167.00	28	5988	1
16	5310	4.80	206.60	26	4840	1
17	5310	2.60	191.80	29	5214	1
18	5310	2.40	230.00	25	4348	1
19	5310	2.80	185.30	27	5397	1
20	5310	1.50	163.20	29	6127	1
21	5310	3.00	182.70	23	5473	1
22	5310	4.80	212.60	29	4704	1
23	5310	4.90	226.70	28	4411	1
24	5310	2.30	214.80	26	4655	1
25	5310	4.30	191.50	23	5222	1
26	5310	1.70	200.20	25	4995	1
27	5310	4.10	166.80	23	5995	1
28	5310	3.50	184.90	29	5408	1
29	5310	4.90	167.20	27	5981	0
30	5310	4.50	188.90	27	5294	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	8.20	305.90	17	3269.04	1
2	5310	9.90	203.60	17	4911.59	1
3	5310	7.00	489.60	18	2042.48	1
4	5310	9.00	422.70	18	2365.74	1
5	5310	7.50	217.50	16	4597.70	0
6	5310	6.70	204.10	17	4899.56	1
7	5310	9.70	462.80	18	2160.76	1
8	5310	7.30	334.90	17	2985.97	1
9	5310	8.70	441.00	17	2267.57	0
10	5310	6.80	297.30	16	3363.61	0
11	5310	7.30	311.80	16	3207.18	1
12	5310	9.00	301.90	18	3312.36	1
13	5310	9.60	317.70	17	3147.62	1
14	5310	7.40	301.20	18	3320.05	1
15	5310	7.20	315.50	17	3169.57	1
16	5310	7.10	372.30	17	2686.01	1
17	5310	8.80	448.70	17	2228.66	1
18	5310	9.90	301.50	18	3316.75	1
19	5310	7.60	350.00	17	2857.14	1
20	5310	9.40	348.90	17	2866.15	1
21	5310	9.20	213.90	17	4675.08	1
22	5310	8.60	289.90	16	3449.47	1
23	5310	9.20	240.30	16	4161.46	1
24	5310	9.40	480.80	17	2079.87	1
25	5310	8.40	355.20	18	2815.32	1
26	5310	8.50	270.50	17	3696.86	0
27	5310	7.20	203.90	16	4904.36	1
28	5310	9.20	331.30	18	3018.41	1
29	5310	7.20	391.70	16	2552.97	1
30	5310	9.60	261.20	16	3828.48	1
Detection Percentage (%)						86.67

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5310	13.70	282.90	15	3535	1
2	5310	14.70	253.90	14	3939	1
3	5310	15.20	399.50	16	2503	1
4	5310	19.80	339.50	16	2946	0
5	5310	14.70	326.80	14	3060	1
6	5310	14.30	460.30	13	2172	1
7	5310	18.30	236.30	14	4232	1
8	5310	13.70	391.60	12	2554	1
9	5310	13.90	419.10	15	2386	1
10	5310	11.70	470.70	13	2124	1
11	5310	18.60	276.20	16	3621	1
12	5310	17.70	483.90	14	2067	1
13	5310	15.40	466.40	15	2144	1
14	5310	18.20	323.60	14	3090	1
15	5310	17.20	360.60	13	2773	1
16	5310	18.90	417.20	16	2397	1
17	5310	19.80	367.80	14	2719	1
18	5310	15.90	339.30	16	2947	1
19	5310	13.50	465.80	14	2147	1
20	5310	18.60	395.10	12	2531	1
21	5310	16.70	441.60	15	2264	1
22	5310	19.70	332.30	16	3009	1
23	5310	13.20	385.40	12	2595	1
24	5310	14.40	220.70	12	4531	1
25	5310	17.30	498.20	12	2007	1
26	5310	17.20	341.10	15	2932	1
27	5310	16.60	361.70	15	2765	1
28	5310	15.70	378.10	15	2645	0
29	5310	12.40	286.20	13	3494	1
30	5310	19.40	426.00	14	2347	0
Detection Percentage (%)						90.00

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5295	1	91.4	11	1763.0	2	1
	5297	2	84.8	16	1165.0	3	
	5294	3	92.8	8	1664.2	2	
	5295	4	72.7	10	1594.9	2	
	5295	5	56.3	11	1079.1	3	
	5296	6	99.3	12	1801.7	3	
	5297	7	67.7	16	1362.6	3	
	5293	8	58.7	6	1604.6	1	
	5295	9	89.2	10	1764.3	3	
	5295	10	56.0	10	1408.9	3	
	5295	11	55.7	10	1599.9	2	
2	5297	1	97.6	14	1605.0	3	1
	5296	2	77.9	13	1825.8	2	
	5297	3	95.8	16	1890.9	3	
	5294	4	76.9	8	1472.0	3	
	5295	5	81.7	10	1509.5	1	
	5295	6	60.8	11	1498.6	2	
	5293	7	74.3	5	1770.1	2	
	5297	8	86.9	14	1847.8	3	
	5297	9	84.0	16	1254.5	2	
	5297	10	70.9	16	1294.5	2	
	5295	11	65.2	10	1319.6	1	
	5295	12	74.8	10	1767.8	1	
3	5298	1	58.4	18	1746.9	1	0
	5295	2	67.2	10	1619.1	1	
	5299	3	79.2	19	1655.9	1	
	5296	4	67.3	13	1519.6	1	
	5293	5	81.8	5	1020.0	1	
	5296	6	54.3	13	1739.0	2	
	5294	7	91.1	8	1239.7	2	
	5293	8	76.0	5	1820.1	2	
	5297	9	96.0	16	1489.5	2	
	5299	10	68.9	19	1853.8	2	
	5295	11	88.0	10	1972.3	2	
	5296	12	53.1	13	1492.3	3	
	5297	13	96.9	14	1147.5	1	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5295	1	82.2	9	1038.0	3	1
	5293	2	68.9	6	1522.6	2	
	5299	3	95.6	19	1935.5	2	
	5294	4	81.6	7	1752.6	3	
	5294	5	81.3	7	1326.9	3	
	5298	6	94.4	17	1050.9	2	
	5295	7	64.3	10	1753.1	1	
	5297	8	72.1	14	1304.4	3	
	5296	9	99.1	12	1392.5	1	
5	5297	1	66.4	14	1250.7	3	1
	5296	2	80.2	13	1810.6	2	
	5295	3	94.8	9	1873.9	1	
	5293	4	80.6	6	1594.1	2	
	5293	5	83.3	6	1854.0	1	
	5299	6	90.3	20	1630.5	1	
	5296	7	86.8	12	1625.4	3	
	5294	8	83.9	8	1185.7	1	
	5298	9	97.5	18	1827.1	3	
	5298	10	50.8	17	1991.0	3	
	5296	11	99.2	12	1097.0	1	
	5295	12	58.5	11	1019.4	3	
	5294	13	83.4	8	1621.8	2	
	5296	14	98.9	12	1564.1	2	
	5295	15	52.5	9	1768.9	1	
6	5296	1	78.0	13	1809.1	1	1
	5297	2	79.9	16	1185.8	2	
	5299	3	53.8	19	1721.1	2	
	5295	4	91.9	9	1424.7	1	
	5296	5	69.7	12	1864.3	2	
	5296	6	97.6	12	1820.5	1	
	5295	7	94.5	10	1824.2	1	
	5294	8	86.3	7	1714.4	3	
	5299	9	52.1	20	1840.8	3	
	5297	10	97.5	16	1932.7	2	
	5295	11	58.8	9	1823.7	3	
	5293	12	97.0	6	1908.9	1	
	5295	13	88.4	11	1893.9	3	
	5295	14	75.0	11	1234.2	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5295	1	83.1	10	1415.0	3	1
	5298	2	65.2	17	1451.3	1	
	5294	3	96.9	7	1918.4	3	
	5294	4	79.9	7	1152.5	3	
	5295	5	53.9	9	1701.6	3	
	5298	6	97.5	17	1258.0	3	
	5297	7	84.1	15	1828.6	2	
	5299	8	94.1	19	1980.2	3	
	5295	9	67.6	10	1213.0	1	
	5298	10	78.3	18	1661.5	1	
	5297	11	93.0	15	1993.7	2	
	5294	12	89.4	8	1848.2	3	
	5295	13	85.8	10	1502.2	2	
	5294	14	97.6	8	1865.2	2	
	5297	15	99.5	14	1028.3	1	
	5297	16	92.0	16	1738.5	2	
	5294	17	99.9	7	1705.0	3	
8	5296	1	51.5	12	1219.5	1	0
	5297	2	56.7	15	1289.8	1	
	5298	3	52.6	17	1415.5	2	
	5294	4	56.1	7	1753.7	3	
	5298	5	99.5	18	1175.2	2	
	5299	6	70.5	20	1808.4	1	
	5298	7	65.2	18	1368.6	3	
	5299	8	56.9	19	1418.7	3	
	5294	9	61.8	8	1689.7	3	
	5293	10	89.6	5	1076.6	3	
	5298	11	90.1	17	1165.2	2	
	5296	12	82.3	13	1921.6	2	
	5294	13	84.0	7	1356.8	2	
	5296	14	58.6	13	1694.9	3	
	5294	15	53.6	8	1471.2	2	
	5299	16	98.3	20	1776.1	1	
	5296	17	66.1	13	1388.3	3	
	5298	18	98.1	18	1100.1	1	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5297	1	98.8	16	1313.1	2	1
	5298	2	93.2	17	1047.6	3	
	5295	3	87.7	9	1304.8	1	
	5296	4	84.6	13	1862.8	2	
	5294	5	80.7	7	1452.7	2	
	5296	6	94.2	12	1012.9	3	
	5295	7	69.6	9	1957.2	1	
	5298	8	53.7	17	1513.1	2	
	5293	9	98.6	6	1568.0	3	
	5298	10	92.4	17	1277.9	1	
	5293	11	85.8	6	1247.4	1	
	5295	12	77.0	9	1860.4	1	
	5296	13	61.8	13	1096.4	2	
	5297	14	61.0	15	1932.3	2	
	5293	15	88.0	6	1182.8	1	
	5295	16	88.5	10	1191.3	1	
	5298	17	55.2	17	1777.4	2	
	5297	18	84.9	15	1528.8	2	
	5296	19	56.9	13	1313.1	2	
10	5294	1	74.0	8	1115.3	3	1
	5298	2	61.1	18	1547.7	3	
	5295	3	94.7	10	1986.9	3	
	5299	4	59.2	20	1305.3	3	
	5297	5	55.6	15	1420.0	3	
	5297	6	53.8	16	1944.3	1	
	5298	7	52.2	18	1669.5	2	
	5297	8	66.3	14	1537.2	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5310	1	80.2	5	1001.8	2	0
	5310	2	73.4	18	1123.2	3	
	5310	3	57.5	10	1654.6	1	
	5310	4	73.6	13	1279.2	1	
	5310	5	82.7	13	1233.3	2	
	5310	6	69.7	16	1689.8	2	
	5310	7	68.3	11	1248.1	3	
	5310	8	52.8	6	1446.8	2	
	5310	9	90.0	6	1156.1	3	
	5310	10	69.9	12	1656.8	1	
	5310	11	70.4	17	1244.9	3	
	5310	12	70.2	6	1537.9	2	
	5310	13	65.1	8	1958.1	1	
	5310	14	57.5	7	1198.9	3	
	5310	15	75.3	14	1504.0	3	
	5310	16	80.8	11	1068.7	3	
12	5310	1	74.8	12	1886.3	2	1
	5310	2	59.4	19	1187.0	2	
	5310	3	68.8	13	1972.1	3	
	5310	4	85.7	20	1416.5	2	
	5310	5	78.8	6	1244.1	2	
	5310	6	74.4	20	1179.5	2	
	5310	7	85.3	19	1249.8	2	
	5310	8	71.5	19	1854.1	3	
	5310	9	92.5	7	1310.0	3	
	5310	10	51.8	17	1609.4	3	
	5310	11	71.0	17	1998.6	1	
	5310	12	59.8	9	1711.8	1	
	5310	13	62.5	13	1498.4	2	
	5310	14	73.6	19	1635.6	1	
	5310	15	75.9	17	1075.0	3	
	5310	16	65.3	16	1286.4	3	
	5310	17	78.3	13	1197.6	2	
	5310	18	83.5	9	1441.7	3	
	5310	19	79.1	18	1852.6	3	
	5310	20	67.5	8	1509.5	3	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5310	1	54.4	19	1472.8	1	1
	5310	2	80.7	12	1659.2	3	
	5310	3	96.3	12	1749.1	3	
	5310	4	50.3	19	1270.6	3	
	5310	5	53.4	10	1828.9	1	
	5310	6	54.3	7	1625.6	3	
	5310	7	57.2	17	1132.5	1	
	5310	8	77.5	12	1296.9	2	
	5310	9	67.1	15	1870.0	1	
	5310	10	96.8	15	1559.2	2	
14	5310	1	73.2	8	1944.8	1	1
	5310	2	78.7	15	1206.2	1	
	5310	3	69.4	20	1168.5	2	
	5310	4	57.4	8	1584.5	2	
	5310	5	71.8	9	1907.2	1	
	5310	6	61.0	10	1061.1	2	
	5310	7	71.2	16	1910.6	3	
	5310	8	66.7	9	1701.9	1	
	5310	9	73.0	7	1237.4	1	
	5310	10	91.8	17	1882.1	2	
	5310	11	85.7	18	1214.8	3	
	5310	12	88.3	13	1829.7	1	
	5310	13	52.5	10	1725.5	3	
	5310	14	87.9	6	1060.6	3	
	5310	15	52.7	12	1549.2	3	
	5310	16	70.9	11	1433.3	2	
	5310	17	91.3	14	1753.3	2	
	5310	18	75.6	17	1787.5	2	
	5310	19	95.8	7	1655.6	2	
	5310	20	73.1	14	1212.7	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5310	1	70.0	18	1418.7	1	1
	5310	2	79.1	12	1194.6	3	
	5310	3	65.3	8	1028.0	2	
	5310	4	76.3	18	1018.6	1	
	5310	5	74.6	18	1919.8	2	
	5310	6	79.8	11	1546.4	2	
	5310	7	93.4	12	1406.6	2	
	5310	8	90.5	10	1727.7	3	
	5310	9	56.3	18	1627.3	2	
	5310	10	55.4	18	1034.6	1	
	5310	11	55.9	16	1476.0	2	
	5310	12	83.2	16	1573.7	1	
	5310	13	51.1	13	1244.4	1	
	5310	14	87.0	11	1860.3	3	
	5310	15	60.9	11	1338.5	2	
	5310	16	76.0	6	1902.7	2	
	5310	17	94.4	7	1524.6	2	
	5310	18	90.2	18	1087.2	2	
	5310	19	67.5	12	1183.8	2	
16	5310	1	94.1	19	1790.8	3	1
	5310	2	64.9	7	1151.3	2	
	5310	3	67.3	16	1093.1	1	
	5310	4	63.6	8	1255.0	3	
	5310	5	97.5	11	1717.8	1	
	5310	6	92.8	9	1383.0	1	
	5310	7	77.8	7	1547.8	2	
	5310	8	70.0	19	1222.4	2	
	5310	9	73.7	17	1935.0	1	
	5310	10	94.7	13	1327.4	1	
	5310	11	90.3	6	1873.3	2	
	5310	12	96.2	14	1134.0	3	
	5310	13	91.1	16	1843.9	2	
	5310	14	74.4	9	1933.8	3	
	5310	15	85.0	12	1805.0	3	
	5310	16	68.2	20	1344.1	3	
	5310	17	83.8	7	1728.8	2	
	5310	18	52.8	14	1983.6	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5310	1	73.2	20	1319.8	2	1
	5310	2	61.2	14	1332.3	2	
	5310	3	78.8	19	1994.3	2	
	5310	4	81.0	6	1081.2	1	
	5310	5	69.4	15	1051.2	2	
	5310	6	85.3	13	1279.6	2	
	5310	7	62.2	7	1968.6	2	
	5310	8	80.3	7	1586.0	1	
	5310	9	87.8	18	1458.4	2	
	5310	10	96.2	7	1559.2	3	
	5310	11	73.2	13	1639.2	3	
	5310	12	66.4	7	1597.9	1	
	5310	13	51.7	10	1424.3	1	
	5310	14	53.1	9	1871.0	2	
	5310	15	57.4	7	1701.6	2	
	5310	16	51.9	11	1323.1	1	
	5310	17	86.2	16	1796.5	2	
18	5310	1	92.9	16	1814.5	1	1
	5310	2	99.0	20	1958.3	1	
	5310	3	88.4	14	1649.8	1	
	5310	4	56.1	16	1466.9	1	
	5310	5	53.2	6	1340.0	3	
	5310	6	75.4	6	1365.1	3	
	5310	7	78.3	11	1003.0	1	
	5310	8	62.9	6	1994.9	3	
	5310	9	93.1	11	1104.5	3	
	5310	10	52.0	18	1484.0	2	
	5310	11	60.4	10	1239.3	2	
	5310	12	71.1	8	1622.5	3	
	5310	13	83.5	13	1150.6	1	
	5310	14	89.8	16	1496.8	2	
	5310	15	73.0	18	1663.3	2	
	5310	1	73.2	20	1319.8	2	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5310	1	84.2	9	1275.4	3	1
	5310	2	71.8	16	1055.6	2	
	5310	3	94.2	14	1265.9	1	
	5310	4	85.1	12	1261.1	2	
	5310	5	70.5	7	1471.2	3	
	5310	6	87.3	12	1847.5	3	
	5310	7	61.8	7	1829.4	3	
	5310	8	54.8	19	1788.4	3	
	5310	9	85.7	9	1942.8	2	
	5310	10	63.5	11	1819.7	2	
	5310	11	80.4	18	1822.5	2	
	5310	12	84.4	11	1991.8	3	
	5310	13	93.3	13	1584.7	3	
	5310	14	72.8	16	1916.3	3	
20	5310	1	78.8	18	1662.6	1	1
	5310	2	96.8	15	1717.9	1	
	5310	3	84.4	15	1943.7	2	
	5310	4	92.7	15	1902.7	3	
	5310	5	83.6	15	1656.6	2	
	5310	6	64.1	7	1428.1	1	
	5310	7	69.2	12	1665.2	1	
	5310	8	53.1	7	1779.8	2	
	5310	9	85.2	11	1172.7	3	
	5310	10	54.3	12	1825.8	3	
21	5325	1	71.1	10	1679.8	3	1
	5323	2	96.7	14	1923.4	1	
	5326	3	56.4	8	1971.3	2	
	5323	4	87.7	14	1990.5	3	
	5323	5	67.4	16	1290.3	1	
	5324	6	80.6	13	1747.3	1	
	5326	7	70.4	8	1949.3	2	
	5322	8	98.5	17	1442.8	3	
	5324	9	63.8	13	1823.0	3	
	5322	10	60.4	18	1538.7	3	
	5322	11	85.0	18	1876.2	1	
	5326	12	78.0	8	1277.6	1	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5325	1	99.6	11	1771.0	1	0
	5323	2	75.2	14	1356.9	2	
	5325	3	68.3	11	1972.0	1	
	5323	4	70.5	15	1909.7	3	
	5325	5	62.1	11	1772.5	2	
	5324	6	66.0	13	1074.9	2	
	5322	7	71.8	18	1877.2	3	
	5324	8	60.7	13	1124.2	2	
	5325	9	80.7	9	1192.1	2	
23	5327	1	73.2	5	1574.3	1	0
	5326	2	88.1	7	1097.9	2	
	5322	3	54.5	17	1285.4	1	
	5322	4	90.7	17	1892.0	1	
	5327	5	82.2	5	1664.4	1	
	5326	6	91.5	7	1731.5	1	
	5322	7	51.9	17	1933.8	3	
	5324	8	60.3	13	1384.8	1	
	5323	9	71.3	15	1978.3	1	
	5325	10	71.0	10	1954.5	2	
	5325	11	84.6	11	1858.3	3	
	5326	12	81.3	7	1157.3	3	
	5323	13	67.2	15	1687.0	1	
	5323	14	87.7	15	1992.4	3	
	5323	15	89.5	14	1469.8	3	
24	5327	1	59.6	6	1014.0	2	1
	5323	2	94.1	15	1054.7	2	
	5322	3	71.7	17	1079.8	1	
	5322	4	88.6	17	1135.9	2	
	5323	5	81.4	14	1448.5	2	
	5323	6	86.5	16	1534.3	3	
	5326	7	66.9	8	1454.6	3	
	5325	8	80.9	10	1784.3	3	
	5325	9	98.8	11	1413.6	3	
	5322	10	50.8	17	1565.9	2	
	5326	11	53.0	7	1909.0	2	
	5322	12	64.3	17	1437.9	2	
	5323	13	52.1	15	1960.3	2	
	5325	14	52.7	9	1795.3	3	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5325	1	90.2	9	1703.9	2	1
	5327	2	93.3	6	1196.9	1	
	5325	3	53.0	9	1351.1	3	
	5321	4	79.5	20	1757.3	1	
	5323	5	75.7	16	1166.8	3	
	5322	6	61.0	18	1371.4	2	
	5326	7	81.9	8	1626.0	3	
	5326	8	55.2	7	1930.3	3	
	5322	9	67.0	18	1866.0	1	
	5323	10	80.3	16	1269.7	2	
	5326	11	75.1	8	1572.2	2	
	5326	12	78.6	8	1545.4	3	
	5324	13	79.0	13	1191.2	3	
	5321	14	67.1	19	1581.2	3	
	5325	15	96.1	11	1458.5	2	
	5327	16	93.4	6	1152.3	2	
	5326	17	58.2	8	1122.4	3	
	5322	18	72.0	18	1617.0	2	
26	5327	1	50.1	6	1366.6	2	1
	5326	2	98.0	8	1248.4	2	
	5325	3	61.9	11	1629.1	2	
	5322	4	57.4	17	1660.1	1	
	5324	5	78.5	12	1384.7	1	
	5322	6	56.3	18	1907.9	3	
	5326	7	78.6	7	1726.2	3	
	5327	8	68.2	5	1299.1	1	
	5325	9	91.2	11	1376.3	1	
	5325	10	76.5	10	1570.9	1	
	5327	11	75.7	5	1134.6	1	
	5325	12	99.5	11	1243.0	1	
	5324	13	98.3	13	1499.4	1	
	5324	14	77.7	13	1591.1	1	
	5321	15	65.5	20	1291.8	2	
	5321	16	79.4	19	1998.9	3	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5327	1	83.2	5	1832.5	1	1
	5324	2	98.1	12	1812.2	1	
	5323	3	97.8	14	1882.3	1	
	5325	4	82.9	9	1907.2	3	
	5326	5	83.9	7	1429.4	2	
	5326	6	50.7	7	1479.2	3	
	5327	7	50.2	6	1758.3	2	
	5327	8	57.7	5	1314.2	3	
	5327	9	59.5	6	1813.4	1	
	5322	10	57.3	18	1449.7	2	
	5323	11	52.0	14	1374.9	2	
	5322	12	78.6	17	1159.0	3	
	5327	13	54.2	5	1484.3	3	
	5323	14	97.6	16	1637.8	1	
	5325	15	81.7	10	1100.2	1	
	5326	16	83.0	8	1863.9	3	
	5326	17	64.6	8	1528.1	1	
	5323	18	94.5	14	1386.1	1	
	5325	19	54.6	10	1784.3	3	
	5326	20	80.4	7	1471.6	3	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5326	1	53.2	7	1646.8	3	1
	5324	2	67.7	12	1532.4	3	
	5324	3	64.2	12	1018.4	3	
	5325	4	58.1	11	1806.3	2	
	5323	5	51.6	16	1803.2	2	
	5323	6	74.1	15	1939.8	3	
	5322	7	54.0	18	1377.4	3	
	5322	8	60.0	18	1846.5	3	
	5322	9	50.3	18	1908.3	3	
	5326	10	60.0	7	1658.6	3	
	5324	11	52.2	12	1831.7	1	
	5327	12	74.5	6	1744.1	2	
	5324	13	81.4	12	1077.3	1	
	5324	14	51.2	12	1045.7	1	
	5325	15	73.2	11	1587.3	3	
	5323	16	95.4	14	1787.6	2	
	5327	17	64.2	5	1764.7	3	
	5327	18	77.4	6	1780.6	2	
	5325	19	67.4	9	1722.5	1	
	5323	20	51.6	15	1657.0	1	

Test Mode		802.11ax HE40					
Frequency		5310 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5327	1	85.4	5	1474.6	1	1
	5323	2	67.8	14	1579.9	2	
	5323	3	62.2	14	1748.8	1	
	5321	4	65.8	20	1428.5	3	
	5326	5	88.9	7	1258.8	1	
	5323	6	62.9	14	1538.4	3	
	5322	7	91.4	17	1837.3	2	
	5326	8	89.0	8	1864.9	3	
	5323	9	97.9	15	1060.9	1	
	5322	10	76.7	17	1015.4	2	
	5326	11	59.9	8	1074.9	1	
	5322	12	56.9	18	1895.1	3	
	5326	13	75.6	7	1861.7	1	
	5327	14	63.6	6	1167.0	2	
	5324	15	81.4	13	1070.1	3	
	5324	16	94.3	13	1679.7	3	
	5325	17	75.8	9	1885.5	2	
30	5326	1	99.0	7	1070.8	3	1
	5325	2	52.9	10	1722.9	2	
	5321	3	83.7	20	1695.8	3	
	5327	4	74.0	5	1027.4	2	
	5322	5	78.8	17	1034.7	2	
	5322	6	52.5	18	1320.2	1	
	5323	7	77.2	15	1667.9	2	
	5323	8	88.9	16	1391.8	1	
	5321	9	68.5	20	1165.4	3	
	5325	10	58.4	10	1794.4	2	
	5321	11	73.1	19	1840.5	1	
	5323	12	80.2	16	1693.4	1	
	5321	13	78.1	20	1312.2	2	
	5325	14	67.6	11	1583.9	1	
Detection Percentage (%)							83.33

Test Mode		802.11ax HE40				
Frequency		5310 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	5310	1	333	9	0.333	300
2	5310	1	333	9	0.333	300
3	5310	1	333	9	0.333	300
4	5310	1	333	9	0.333	300
5	5310	1	333	9	0.333	300
6	5310	1	333	9	0.333	300
7	5310	1	333	9	0.333	300
8	5310	1	333	9	0.333	300
9	5310	1	333	9	0.333	300
10	5310	1	333	9	0.333	300
11	5310	1	333	9	0.333	300
12	5310	1	333	9	0.333	300
13	5310	1	333	9	0.333	300
14	5310	1	333	9	0.333	300
15	5310	1	333	9	0.333	300
16	5310	1	333	9	0.333	300
17	5310	1	333	9	0.333	300
18	5310	1	333	9	0.333	300
19	5310	1	333	9	0.333	300
20	5310	1	333	9	0.333	300
21	5310	1	333	9	0.333	300
22	5310	1	333	9	0.333	300
23	5310	1	333	9	0.333	300
24	5310	1	333	9	0.333	300
25	5310	1	333	9	0.333	300
26	5310	1	333	9	0.333	300
27	5310	1	333	9	0.333	300
28	5310	1	333	9	0.333	300
29	5310	1	333	9	0.333	300
30	5310	1	333	9	0.333	300
Detection Percentage (%)						100.00

Test Mode		802.11ac VHT80				
Frequency		5530 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	1	638	83	1567	1
2	5290	1	738	72	1355	1
3	5290	1	918	58	1089	1
4	5290	1	898	59	1114	1
5	5290	1	838	63	1193	0
6	5290	1	698	76	1433	1
7	5290	1	938	57	1066	1
8	5290	1	518	102	1931	1
9	5290	1	758	70	1319	1
10	5290	1	518	102	1931	1
11	5290	1	538	99	1859	1
12	5290	1	838	63	1193	1
13	5290	1	758	70	1319	1
14	5290	1	718	74	1393	1
15	5290	1	658	81	1520	1
16	5290	1	1969	27	508	1
17	5290	1	1678	32	596	1
18	5290	1	702	76	1425	1
19	5290	1	2912	19	343	1
20	5290	1	2002	27	500	1
21	5290	1	1397	38	716	1
22	5290	1	2677	20	374	1
23	5290	1	2672	20	374	1
24	5290	1	2710	20	369	1
25	5290	1	2926	19	342	0
26	5290	1	967	55	1034	1
27	5290	1	2796	19	358	1
28	5290	1	1852	29	540	1
29	5290	1	1498	36	668	1
30	5290	1	1994	27	502	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	2.10	202.50	27	4938	1
2	5290	4.00	171.90	29	5817	1
3	5290	2.70	224.30	23	4458	1
4	5290	2.80	174.60	26	5727	0
5	5290	2.30	188.90	27	5294	1
6	5290	2.80	169.50	28	5900	1
7	5290	2.20	161.00	25	6211	1
8	5290	1.60	190.00	29	5263	1
9	5290	4.40	179.50	23	5571	1
10	5290	1.10	179.20	28	5580	1
11	5290	2.50	206.20	24	4850	1
12	5290	4.40	201.20	25	4970	1
13	5290	4.20	168.00	28	5952	1
14	5290	4.70	226.80	25	4409	1
15	5290	2.20	220.40	24	4537	1
16	5290	4.60	174.00	27	5747	1
17	5290	1.10	183.30	29	5456	1
18	5290	1.70	206.50	24	4843	1
19	5290	3.80	229.00	24	4367	1
20	5290	2.10	226.00	29	4425	1
21	5290	1.90	180.10	24	5552	1
22	5290	2.00	153.60	26	6510	1
23	5290	1.90	194.90	26	5131	1
24	5290	1.90	191.90	28	5211	1
25	5290	1.90	178.00	26	5618	1
26	5290	2.30	199.80	24	5005	1
27	5290	2.10	201.70	28	4958	1
28	5290	2.10	206.20	23	4850	1
29	5290	1.90	204.30	26	4895	1
30	5290	2.50	171.00	24	5848	1
Detection Percentage (%)						96.67

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	9.90	270.60	18	3695.49	1
2	5290	9.20	478.40	17	2090.30	1
3	5290	6.90	270.20	18	3700.96	0
4	5290	9.40	469.80	16	2128.57	1
5	5290	9.30	223.30	17	4478.28	1
6	5290	6.30	233.50	16	4282.66	1
7	5290	9.00	415.20	18	2408.48	1
8	5290	7.60	458.90	16	2179.12	1
9	5290	9.70	305.70	18	3271.18	1
10	5290	6.30	249.40	17	4009.62	1
11	5290	7.90	397.20	17	2517.62	1
12	5290	9.90	286.70	17	3487.97	1
13	5290	7.00	329.10	16	3038.59	1
14	5290	9.80	471.60	16	2120.44	1
15	5290	6.50	348.80	18	2866.97	1
16	5290	6.20	363.60	18	2750.28	1
17	5290	7.40	205.20	17	4873.29	0
18	5290	8.80	497.20	17	2011.26	1
19	5290	7.50	466.60	17	2143.16	1
20	5290	6.40	425.60	16	2349.62	1
21	5290	9.90	474.60	17	2107.04	0
22	5290	8.80	410.40	16	2436.65	1
23	5290	6.90	392.50	16	2547.77	1
24	5290	9.60	201.40	17	4965.24	1
25	5290	8.40	294.50	16	3395.59	1
26	5290	8.00	494.00	18	2024.29	1
27	5290	6.20	235.20	17	4251.70	1
28	5290	7.50	291.20	16	3434.07	1
29	5290	9.40	475.30	18	2103.93	1
30	5290	8.00	217.00	16	4608.29	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5290	19.50	211.30	13	4733	1
2	5290	11.20	371.20	13	2694	1
3	5290	14.90	241.20	13	4146	1
4	5290	14.60	205.90	14	4857	1
5	5290	19.10	255.40	15	3915	1
6	5290	18.20	205.40	15	4869	1
7	5290	14.90	353.70	16	2827	0
8	5290	16.70	206.80	16	4836	1
9	5290	18.90	402.30	13	2486	1
10	5290	19.80	448.90	16	2228	1
11	5290	12.10	404.30	13	2473	1
12	5290	15.30	348.40	14	2870	1
13	5290	17.90	389.10	14	2570	1
14	5290	17.80	245.30	12	4077	1
15	5290	13.70	322.80	13	3098	0
16	5290	11.00	369.50	15	2706	1
17	5290	15.20	384.20	14	2603	1
18	5290	19.30	282.10	14	3545	1
19	5290	17.10	425.30	13	2351	1
20	5290	15.40	443.80	13	2253	1
21	5290	19.60	390.20	13	2563	1
22	5290	15.60	316.70	16	3158	1
23	5290	15.10	464.00	14	2155	1
24	5290	14.50	405.20	12	2468	1
25	5290	12.10	394.60	16	2534	1
26	5290	19.50	418.00	12	2392	1
27	5290	11.80	482.40	15	2073	1
28	5290	15.80	402.50	12	2484	1
29	5290	17.10	232.30	14	4305	1
30	5290	16.20	415.50	16	2407	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
1	5255.5	1	62.7	9	1831.1	1	0
	5253.5	2	66.0	6	1314.9	1	
	5259.5	3	57.3	20	1651.6	3	
	5257.5	4	53.4	14	1409.3	1	
	5257.5	5	79.7	16	1082.9	2	
	5257.5	6	68.4	16	1974.4	1	
	5255.5	7	91.5	10	1695.9	2	
	5253.5	8	76.9	5	1700.6	2	
	5255.5	9	69.6	11	1566.6	2	
	5253.5	10	73.9	6	1901.8	1	
	5257.5	11	69.2	16	1108.9	3	
2	5256.5	1	59.0	12	1664.2	1	1
	5255.5	2	83.7	11	1601.5	3	
	5255.5	3	67.9	9	1567.6	1	
	5256.5	4	70.2	12	1994.8	3	
	5258.5	5	89.9	18	1814.2	3	
	5256.5	6	55.5	12	1299.3	1	
	5255.5	7	97.0	10	1587.5	2	
	5255.5	8	60.8	10	1426.0	3	
	5257.5	9	64.4	16	1929.3	1	
	5254.5	10	99.0	7	1752.4	2	
	5256.5	11	81.2	13	1982.5	2	
	5254.5	12	96.0	7	1303.5	1	
3	5254.5	1	62.4	8	1335.6	3	1
	5253.5	2	95.5	6	1635.2	1	
	5255.5	3	74.3	11	1025.7	1	
	5257.5	4	53.2	14	1194.5	1	
	5258.5	5	83.7	18	1161.9	3	
	5257.5	6	56.6	14	1815.6	3	
	5253.5	7	81.7	6	1369.0	2	
	5255.5	8	52.2	10	1306.8	2	
	5257.5	9	75.5	16	1380.1	3	
	5256.5	10	55.3	12	1924.6	3	
	5255.5	11	95.7	10	1098.6	1	
	5255.5	12	94.6	11	1855.4	3	
	5258.5	13	89.3	17	1880.1	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
4	5258.5	1	98.0	18	1997.7	2	1
	5257.5	2	89.6	14	1712.9	1	
	5256.5	3	66.5	12	1712.4	2	
	5256.5	4	86.3	12	1253.7	3	
	5258.5	5	78.2	18	1500.4	3	
	5255.5	6	79.3	11	1383.3	3	
	5258.5	7	54.7	18	1654.4	3	
	5259.5	8	81.3	20	1211.2	2	
	5255.5	9	70.5	9	1152.9	2	
5	5253.5	1	74.7	5	1542.0	3	1
	5253.5	2	70.6	6	1258.0	3	
	5258.5	3	81.9	17	1004.7	1	
	5255.5	4	77.5	10	1263.0	2	
	5256.5	5	55.0	13	1142.8	2	
	5255.5	6	66.6	9	1760.5	2	
	5259.5	7	53.5	19	1042.1	1	
	5253.5	8	60.4	6	1858.3	1	
	5256.5	9	58.3	13	1062.0	3	
	5258.5	10	90.2	18	1403.0	2	
	5253.5	11	74.6	6	1104.5	3	
	5256.5	12	77.0	13	1751.6	3	
	5256.5	13	71.3	12	1556.3	3	
	5255.5	14	65.5	10	1118.1	3	
	5259.5	15	75.5	20	1828.9	2	
6	5255.5	1	54.2	9	1273.7	3	1
	5257.5	2	90.8	16	1772.3	1	
	5255.5	3	67.6	10	1334.9	2	
	5259.5	4	66.7	19	1303.2	3	
	5254.5	5	72.6	7	1378.1	3	
	5255.5	6	62.6	9	1966.2	2	
	5255.5	7	69.2	10	1135.4	2	
	5258.5	8	91.7	18	1891.5	2	
	5254.5	9	60.9	8	1697.6	3	
	5254.5	10	83.9	7	1399.6	2	
	5257.5	11	76.6	14	1555.9	2	
	5255.5	12	50.4	10	1664.2	2	
	5254.5	13	78.0	8	1454.9	3	
	5255.5	14	57.4	11	1602.9	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
7	5259.5	1	65.4	19	1974.7	3	1
	5258.5	2	91.2	18	1801.7	2	
	5257.5	3	86.3	15	1979.1	1	
	5259.5	4	95.7	20	1651.4	2	
	5254.5	5	70.4	8	1686.5	2	
	5253.5	6	58.8	5	1947.7	1	
	5254.5	7	85.5	7	1059.6	2	
	5254.5	8	67.3	8	1707.6	1	
	5258.5	9	84.7	17	1761.4	2	
	5258.5	10	73.6	17	1722.0	2	
	5258.5	11	76.0	18	1469.6	3	
	5253.5	12	65.3	5	1899.6	2	
	5256.5	13	56.6	12	1830.2	1	
	5255.5	14	81.6	11	1008.9	3	
	5255.5	15	73.6	11	1726.2	1	
	5257.5	16	95.8	14	1079.0	3	
	5255.5	17	86.7	9	1684.7	1	
8	5257.5	1	86.8	16	1480.6	2	1
	5253.5	2	51.3	5	1450.9	1	
	5254.5	3	53.8	8	1808.6	3	
	5257.5	4	98.5	14	1607.6	1	
	5255.5	5	58.0	9	1733.7	2	
	5253.5	6	60.0	6	1070.0	3	
	5254.5	7	52.3	7	1812.0	1	
	5254.5	8	94.0	8	1399.4	3	
	5254.5	9	75.3	8	1992.8	1	
	5253.5	10	66.8	5	1834.6	1	
	5257.5	11	74.7	16	1609.4	1	
	5255.5	12	58.9	10	1469.0	2	
	5257.5	13	69.2	15	1703.9	3	
	5259.5	14	70.6	19	1683.2	2	
	5255.5	15	83.3	9	1972.7	2	
	5256.5	16	97.7	12	1044.4	3	
	5259.5	17	53.1	20	1714.4	1	
	5256.5	18	95.5	12	1220.0	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
9	5253.5	1	56.8	6	1314.6	1	1
	5255.5	2	96.7	9	1205.7	3	
	5253.5	3	55.4	6	1301.7	2	
	5253.5	4	84.5	6	1274.8	2	
	5259.5	5	72.5	19	1500.8	2	
	5255.5	6	78.9	9	1294.3	3	
	5258.5	7	72.0	17	1471.2	2	
	5255.5	8	79.1	10	1320.7	3	
	5258.5	9	71.2	17	1877.9	2	
	5257.5	10	66.1	15	1806.7	1	
	5255.5	11	50.5	9	1886.4	3	
	5253.5	12	92.0	6	1488.7	3	
	5256.5	13	99.7	12	1378.6	3	
	5255.5	14	68.6	11	1564.1	2	
	5255.5	15	61.0	11	1507.5	1	
	5257.5	16	65.8	15	1985.7	3	
	5254.5	17	90.2	8	1171.7	2	
	5255.5	18	84.0	11	1298.0	2	
	5257.5	19	73.4	16	1322.4	1	
10	5258.5	1	95.6	17	1202.1	3	1
	5255.5	2	83.0	9	1184.0	1	
	5257.5	3	89.4	15	1114.9	1	
	5256.5	4	81.5	12	1423.1	1	
	5256.5	5	56.7	12	1842.1	2	
	5257.5	6	62.2	16	1485.2	1	
	5256.5	7	95.9	13	1149.9	3	
	5255.5	8	65.9	10	1313.2	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5290	1	72.1	10	1014.2	3	1
	5290	2	60.2	15	1522.7	2	
	5290	3	84.8	17	1878.4	1	
	5290	4	89.9	10	1006.6	1	
	5290	5	50.2	14	1753.7	3	
	5290	6	90.2	17	1217.0	2	
	5290	7	79.6	19	1961.5	2	
	5290	8	69.3	10	1793.5	1	
	5290	9	91.5	7	1457.3	2	
	5290	10	73.9	9	1227.9	2	
	5290	11	92.5	18	1270.1	1	
	5290	12	90.0	13	1504.2	1	
	5290	13	50.8	20	1662.9	1	
	5290	14	73.0	9	1591.2	1	
	5290	15	80.3	13	1480.9	2	
	5290	16	70.4	5	1265.0	1	
12	5290	1	73.6	18	1607.6	2	1
	5290	2	82.2	9	1664.9	3	
	5290	3	70.8	16	1238.6	3	
	5290	4	72.2	15	1893.2	3	
	5290	5	81.9	5	1937.4	1	
	5290	6	95.6	9	1128.6	2	
	5290	7	97.1	7	1595.4	2	
	5290	8	53.3	18	1881.6	2	
	5290	9	58.8	11	1006.7	2	
	5290	10	83.3	19	1384.3	2	
	5290	11	72.7	18	1773.8	3	
	5290	12	94.9	17	1908.7	3	
	5290	13	67.9	13	1575.2	3	
	5290	14	66.2	17	1090.6	3	
	5290	15	59.2	7	1442.4	2	
	5290	16	77.9	7	1168.0	2	
	5290	17	81.4	13	1620.7	1	
	5290	18	68.6	7	1840.6	2	
	5290	19	77.5	12	1030.3	3	
	5290	20	83.4	17	1541.7	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5290	1	68.9	15	1448.8	3	1
	5290	2	67.1	9	1680.8	2	
	5290	3	91.2	13	1872.3	2	
	5290	4	95.6	13	1366.4	3	
	5290	5	74.6	16	1058.6	3	
	5290	6	81.2	20	1038.9	1	
	5290	7	69.8	17	1277.5	1	
	5290	8	73.1	15	1815.2	3	
	5290	9	88.4	13	1053.6	3	
	5290	10	52.7	7	1008.3	2	
14	5290	1	65.5	6	1978.6	3	0
	5290	2	64.5	18	1514.1	2	
	5290	3	84.6	17	1974.2	2	
	5290	4	96.7	12	1257.5	2	
	5290	5	88.8	14	1038.8	1	
	5290	6	98.9	13	1606.9	2	
	5290	7	68.4	15	1608.8	2	
	5290	8	91.2	6	1847.7	3	
	5290	9	67.5	17	1109.7	3	
	5290	10	74.2	6	1893.8	3	
	5290	11	62.4	10	1012.2	2	
	5290	12	85.8	6	1161.1	1	
	5290	13	71.9	12	1339.6	1	
	5290	14	59.7	8	1101.3	3	
	5290	15	82.4	17	1583.8	3	
	5290	16	65.7	12	1204.9	3	
	5290	17	70.1	13	1209.8	2	
	5290	18	77.7	10	1669.9	2	
	5290	19	84.4	17	1901.7	1	
	5290	20	52.1	18	1500.1	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5290	1	99.6	5	1497.4	1	1
	5290	2	72.9	13	1364.5	2	
	5290	3	61.4	16	1533.6	3	
	5290	4	99.3	14	1312.2	2	
	5290	5	55.5	9	1488.8	3	
	5290	6	79.0	16	1526.5	3	
	5290	7	88.9	7	1628.6	2	
	5290	8	80.3	16	1197.2	2	
	5290	9	98.3	13	1530.8	3	
	5290	10	90.8	9	1281.3	3	
	5290	11	62.6	7	1657.4	1	
	5290	12	64.4	8	1033.7	3	
	5290	13	74.1	11	1396.8	3	
	5290	14	85.3	15	1042.7	1	
	5290	15	91.1	9	1230.9	3	
	5290	16	52.1	10	1690.0	2	
	5290	17	90.0	6	1397.7	2	
	5290	18	97.6	5	1316.6	1	
	5290	19	59.6	19	1083.5	2	
16	5290	1	91.2	18	1249.1	1	1
	5290	2	52.5	20	1424.6	3	
	5290	3	56.2	20	1780.3	3	
	5290	4	50.3	8	1704.8	2	
	5290	5	67.6	10	1210.2	1	
	5290	6	89.9	9	1971.6	1	
	5290	7	63.7	13	1915.6	2	
	5290	8	50.4	17	1813.0	1	
	5290	9	89.4	18	1192.5	1	
	5290	10	68.0	19	1795.9	3	
	5290	11	64.1	6	1351.5	1	
	5290	12	65.2	10	1887.2	3	
	5290	13	79.7	13	1779.6	2	
	5290	14	69.5	6	1604.5	3	
	5290	15	96.6	20	1977.8	2	
	5290	16	99.3	6	1697.3	2	
	5290	17	96.2	14	1547.6	2	
	5290	18	92.9	17	1652.4	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5290	1	70.2	8	1283.1	3	1
	5290	2	79.0	8	1171.1	2	
	5290	3	68.4	16	1877.1	3	
	5290	4	91.3	20	1853.0	2	
	5290	5	85.5	15	1461.2	3	
	5290	6	87.4	8	1655.5	2	
	5290	7	53.8	10	1790.4	1	
	5290	8	80.9	6	1614.5	1	
	5290	9	53.6	6	1787.5	3	
	5290	10	80.4	14	1899.4	3	
	5290	11	58.8	20	1708.7	1	
	5290	12	82.5	8	1308.0	3	
	5290	13	57.3	17	1815.6	1	
	5290	14	96.6	8	1861.4	2	
	5290	15	98.4	19	1554.3	3	
	5290	16	87.2	19	1978.1	3	
	5290	17	81.5	16	1951.4	2	
18	5290	1	85.8	16	1913.0	2	1
	5290	2	85.0	12	1377.6	1	
	5290	3	73.2	7	1477.0	2	
	5290	4	92.6	7	1299.7	1	
	5290	5	96.5	15	1153.5	1	
	5290	6	52.0	20	1401.1	3	
	5290	7	80.2	6	1837.3	2	
	5290	8	69.1	11	1431.7	2	
	5290	9	81.0	13	1002.4	3	
	5290	10	72.3	16	1958.1	1	
	5290	11	81.3	15	1220.9	3	
	5290	12	95.0	11	1354.1	1	
	5290	13	67.2	10	1094.9	2	
	5290	14	84.6	19	1788.6	3	
	5290	15	95.0	6	1371.1	2	
	5290	1	70.2	8	1283.1	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5290	1	55.7	7	1770.1	1	1
	5290	2	87.9	8	1077.2	1	
	5290	3	78.4	16	1671.3	2	
	5290	4	74.8	10	1062.1	2	
	5290	5	66.2	6	1749.9	3	
	5290	6	92.6	7	1238.0	2	
	5290	7	88.9	11	1996.5	3	
	5290	8	78.0	12	1801.5	3	
	5290	9	65.9	6	1892.3	3	
	5290	10	78.6	16	1742.3	2	
	5290	11	78.3	13	1881.0	3	
	5290	12	90.9	6	1480.8	1	
	5290	13	75.6	15	1758.7	3	
	5290	14	73.0	6	1192.2	1	
20	5290	1	67.5	8	1587.5	3	1
	5290	2	53.4	6	1856.1	1	
	5290	3	72.1	7	1861.9	2	
	5290	4	56.5	20	1349.1	1	
	5290	5	72.7	20	1718.4	3	
	5290	6	58.3	9	1117.5	2	
	5290	7	54.8	5	1966.6	3	
	5290	8	85.1	5	1220.2	1	
	5290	9	59.6	9	1820.5	1	
	5290	10	79.3	14	1761.1	2	
21	5324.5	1	98.9	11	1916.3	1	1
	5321.5	2	77.2	18	1686.8	1	
	5320.5	3	75.1	19	1711.0	1	
	5321.5	4	61.0	17	1567.1	1	
	5323.5	5	92.3	12	1190.7	2	
	5325.5	6	63.6	8	1980.9	2	
	5323.5	7	70.4	13	1731.7	2	
	5323.5	8	52.0	13	1650.1	1	
	5324.5	9	72.4	10	1037.4	1	
	5322.5	10	63.7	16	1134.5	3	
	5322.5	11	96.9	15	1426.3	3	
	5322.5	12	65.1	14	1009.2	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5322.5	1	61.3	16	1474.3	2	1
	5322.5	2	88.8	16	1975.2	3	
	5320.5	3	58.4	19	1528.5	3	
	5326.5	4	62.1	5	1894.2	3	
	5326.5	5	62.2	5	1690.5	2	
	5321.5	6	81.8	17	1369.2	3	
	5320.5	7	75.0	20	1911.6	2	
	5322.5	8	90.7	14	1819.0	3	
	5321.5	9	63.0	18	1262.1	2	
23	5322.5	1	97.4	15	1779.0	3	1
	5325.5	2	53.8	8	1171.4	2	
	5320.5	3	74.9	19	1102.9	2	
	5325.5	4	75.0	8	1260.6	3	
	5322.5	5	90.9	16	1310.8	2	
	5322.5	6	72.8	16	1771.0	3	
	5326.5	7	93.0	6	1147.0	3	
	5325.5	8	75.5	7	1989.7	2	
	5326.5	9	81.6	6	1216.6	3	
	5323.5	10	60.6	12	1398.3	1	
	5321.5	11	68.9	17	1560.8	1	
	5322.5	12	57.1	16	1706.4	2	
	5324.5	13	82.8	9	1986.4	1	
	5324.5	14	89.0	10	1237.7	2	
	5323.5	15	74.9	12	1414.6	2	
24	5324.5	1	92.7	11	1128.9	3	1
	5321.5	2	67.7	17	1039.5	1	
	5323.5	3	78.5	13	1725.0	1	
	5325.5	4	99.6	7	1392.8	3	
	5325.5	5	65.4	8	1096.4	1	
	5320.5	6	61.1	19	1519.3	1	
	5320.5	7	59.6	19	1732.0	1	
	5322.5	8	98.8	16	1978.5	3	
	5321.5	9	56.6	18	1407.7	3	
	5322.5	10	77.7	16	1105.3	3	
	5326.5	11	66.3	6	1800.2	2	
	5321.5	12	66.4	18	1337.4	1	
	5326.5	13	70.2	5	1080.7	2	
	5324.5	14	55.0	9	1221.4	3	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5323.5	1	74.9	13	1354.0	1	1
	5322.5	2	55.0	14	1391.9	1	
	5325.5	3	57.2	7	1367.3	3	
	5325.5	4	95.6	8	1380.9	3	
	5324.5	5	90.0	11	1443.7	1	
	5322.5	6	52.5	16	1882.4	1	
	5324.5	7	51.0	9	1406.7	2	
	5320.5	8	78.3	20	1620.2	2	
	5325.5	9	66.3	7	1295.5	3	
	5322.5	10	61.3	14	1906.8	1	
	5325.5	11	62.6	8	1073.8	2	
	5322.5	12	68.4	14	1498.2	1	
	5321.5	13	58.9	18	1091.1	3	
	5322.5	14	60.2	15	1054.0	3	
	5326.5	15	59.5	6	1820.5	3	
	5325.5	16	79.1	7	1454.6	2	
	5324.5	17	93.0	10	1376.5	1	
	5320.5	18	63.9	19	1783.5	3	
26	5325.5	1	55.1	7	1952.8	3	1
	5326.5	2	80.9	5	1772.3	1	
	5322.5	3	98.1	15	1068.5	2	
	5323.5	4	61.6	13	1926.0	2	
	5321.5	5	82.0	18	1116.7	1	
	5322.5	6	62.7	15	1989.6	2	
	5321.5	7	79.2	18	1716.0	1	
	5326.5	8	63.6	6	1669.4	2	
	5321.5	9	62.1	17	1454.6	3	
	5326.5	10	78.1	6	1618.1	2	
	5321.5	11	74.2	18	1569.2	3	
	5321.5	12	81.5	18	1453.3	3	
	5325.5	13	55.8	8	1632.1	3	
	5324.5	14	81.2	10	1350.7	3	
	5320.5	15	71.5	20	1206.9	3	
	5323.5	16	72.6	12	1413.8	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5324.5	1	58.7	10	1666.7	3	1
	5325.5	2	56.2	7	1988.4	3	
	5323.5	3	92.7	13	1507.5	3	
	5323.5	4	56.3	13	1393.5	2	
	5324.5	5	85.0	9	1657.7	3	
	5321.5	6	53.6	18	1477.2	1	
	5322.5	7	75.2	14	1482.3	3	
	5322.5	8	60.5	16	1418.6	2	
	5324.5	9	64.7	9	1911.5	2	
	5323.5	10	50.7	12	1343.5	3	
	5322.5	11	57.2	15	1552.0	1	
	5322.5	12	58.8	15	1084.2	3	
	5322.5	13	97.3	14	1509.5	3	
	5325.5	14	69.2	8	1755.9	1	
	5324.5	15	79.9	9	1546.5	1	
	5325.5	16	97.5	8	1544.2	2	
	5320.5	17	88.0	19	1540.9	1	
	5323.5	18	56.7	12	1804.3	1	
	5322.5	19	76.2	15	1242.4	2	
	5324.5	20	94.3	9	1065.5	2	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5323.5	1	76.8	13	1609.4	1	1
	5323.5	2	93.7	12	1801.5	1	
	5321.5	3	67.6	17	1781.4	3	
	5321.5	4	60.8	17	1823.5	1	
	5323.5	5	75.2	12	1451.6	1	
	5325.5	6	78.6	7	1330.3	3	
	5322.5	7	51.1	15	1397.2	1	
	5320.5	8	75.3	20	1619.4	2	
	5323.5	9	88.9	13	1788.3	2	
	5321.5	10	95.0	18	1988.6	3	
	5323.5	11	78.1	12	1611.6	2	
	5322.5	12	91.5	15	1539.4	1	
	5323.5	13	96.7	13	1727.0	1	
	5322.5	14	94.3	15	1670.7	2	
	5326.5	15	65.6	6	1386.8	3	
	5326.5	16	95.7	5	1316.4	2	
	5322.5	17	54.1	16	1024.5	1	
	5320.5	18	59.6	19	1586.3	1	
	5323.5	19	79.7	13	1880.9	2	
	5323.5	20	76.6	12	1358.7	1	

Test Mode		802.11ax HE80					
Frequency		5530 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5322.5	1	57.1	14	1507.6	1	1
	5322.5	2	72.2	15	1691.3	1	
	5325.5	3	96.8	7	1553.2	1	
	5325.5	4	61.8	7	1120.1	3	
	5322.5	5	76.8	15	1359.7	2	
	5323.5	6	86.3	12	1701.7	3	
	5321.5	7	69.8	18	1130.7	3	
	5325.5	8	90.7	8	1272.9	1	
	5325.5	9	66.9	8	1353.8	2	
	5325.5	10	73.4	8	1732.1	3	
	5321.5	11	82.3	17	1578.6	1	
	5325.5	12	76.5	8	1540.3	3	
	5321.5	13	84.7	17	1747.0	1	
	5320.5	14	84.0	20	1380.4	1	
	5323.5	15	66.1	12	1902.6	3	
	5322.5	16	65.0	16	1997.6	1	
	5320.5	17	69.9	19	1507.7	1	
30	5324.5	1	92.2	9	1099.2	2	1
	5324.5	2	98.7	11	1580.9	1	
	5326.5	3	83.7	6	1636.3	2	
	5325.5	4	63.2	7	1848.6	1	
	5322.5	5	50.7	14	1004.7	1	
	5326.5	6	95.5	5	1951.2	2	
	5321.5	7	72.3	17	1047.3	2	
	5326.5	8	70.3	6	1951.5	1	
	5323.5	9	96.4	12	1516.3	3	
	5321.5	10	88.9	17	1501.9	1	
	5324.5	11	93.1	10	1906.9	2	
	5324.5	12	87.7	9	1183.9	1	
	5322.5	13	92.5	16	1715.2	3	
	5322.5	14	67.6	16	1374.5	3	
Detection Percentage (%)							86.67

Test Mode		802.11ax HE80				
Frequency		5530 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

Test Mode		802.11ax HE160				
Frequency		5250 MHz				
Radar Signal		Type 1				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	1	638	83	1567	1
2	5250	1	858	62	1166	1
3	5250	1	798	67	1253	1
4	5250	1	658	81	1520	1
5	5250	1	898	59	1114	1
6	5250	1	738	72	1355	1
7	5250	1	878	61	1139	1
8	5250	1	878	61	1139	1
9	5250	1	638	83	1567	1
10	5250	1	818	65	1222	1
11	5250	1	898	59	1114	1
12	5250	1	898	59	1114	1
13	5250	1	818	65	1222	1
14	5250	1	558	95	1792	0
15	5250	1	638	83	1567	1
16	5250	1	2527	21	396	1
17	5250	1	997	53	1003	1
18	5250	1	2424	22	413	1
19	5250	1	2214	24	452	1
20	5250	1	2623	21	381	1
21	5250	1	1022	52	978	1
22	5250	1	2492	22	401	1
23	5250	1	1646	33	608	1
24	5250	1	1489	36	672	0
25	5250	1	1336	40	749	1
26	5250	1	2523	21	396	1
27	5250	1	1609	33	622	1
28	5250	1	2893	19	346	1
29	5250	1	2153	25	464	1
30	5250	1	2142	25	467	1
Detection Percentage (%)						93.33

Test Mode		802.11ax HE160				
Frequency		5250 MHz				
Radar Signal		Type 2				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	4.40	212.10	28	4715	1
2	5250	2.30	179.50	26	5571	1
3	5250	2.70	191.30	27	5227	1
4	5250	4.50	215.00	25	4651	1
5	5250	1.10	193.20	26	5176	1
6	5250	3.60	222.40	28	4496	1
7	5250	4.50	229.50	23	4357	1
8	5250	1.80	166.80	24	5995	1
9	5250	2.50	170.30	28	5872	1
10	5250	3.90	180.60	27	5537	1
11	5250	2.80	228.60	28	4374	1
12	5250	1.20	172.90	25	5784	0
13	5250	3.40	208.30	28	4801	1
14	5250	2.00	186.10	28	5373	1
15	5250	1.20	226.80	28	4409	1
16	5250	4.80	158.00	23	6329	1
17	5250	1.40	198.10	25	5048	1
18	5250	3.80	198.20	26	5045	1
19	5250	4.60	228.70	27	4373	1
20	5250	1.60	157.20	27	6361	1
21	5250	4.00	229.30	24	4361	1
22	5250	4.60	171.50	26	5831	1
23	5250	3.70	160.30	23	6238	1
24	5250	4.60	153.00	23	6536	1
25	5250	2.70	171.60	29	5828	1
26	5250	2.90	171.70	28	5824	1
27	5250	1.20	199.10	25	5023	1
28	5250	2.50	157.60	24	6345	1
29	5250	1.20	193.30	25	5173	1
30	5250	1.60	185.00	25	5405	1
Detection Percentage (%)						96.67

Test Mode		802.11ax HE160				
Frequency		5250 MHz				
Radar Signal		Type 3				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	9.00	442.70	16	2258.87	1
2	5250	9.90	412.50	16	2424.24	1
3	5250	6.70	390.20	16	2562.79	1
4	5250	6.10	285.00	18	3508.77	1
5	5250	6.70	417.70	16	2394.06	1
6	5250	7.50	414.00	17	2415.46	1
7	5250	7.40	331.90	17	3012.96	1
8	5250	9.40	470.50	18	2125.40	1
9	5250	9.30	431.40	17	2318.03	1
10	5250	7.80	280.00	18	3571.43	0
11	5250	8.70	341.00	16	2932.55	1
12	5250	6.10	328.20	18	3046.92	1
13	5250	8.90	396.00	18	2525.25	1
14	5250	8.60	499.90	16	2000.40	1
15	5250	9.80	204.70	17	4885.20	1
16	5250	6.40	370.40	17	2699.78	1
17	5250	8.90	417.50	18	2395.21	1
18	5250	7.20	338.00	18	2958.58	1
19	5250	7.10	249.80	18	4003.20	0
20	5250	8.90	224.20	18	4460.30	1
21	5250	7.50	435.70	16	2295.16	1
22	5250	6.90	224.80	17	4448.40	1
23	5250	6.40	394.50	17	2534.85	1
24	5250	9.30	288.30	18	3468.61	1
25	5250	8.10	385.60	17	2593.36	1
26	5250	9.10	209.90	18	4764.17	1
27	5250	9.80	351.10	18	2848.19	1
28	5250	7.50	223.20	16	4480.29	0
29	5250	9.60	272.90	18	3664.35	1
30	5250	7.40	456.20	16	2192.02	1
Detection Percentage (%)						90.00

Test Mode		802.11ax HE160				
Frequency		5250 MHz				
Radar Signal		Type 4				
Trial #	Test Frequency (MHz)	Pulse Width (us)	PRI (us)	Number of Pluse	PRF (Hz)	1=Detection ; 0=No Detection
1	5250	18.10	243.70	12	4103	1
2	5250	12.10	287.30	13	3481	1
3	5250	18.00	461.90	13	2165	1
4	5250	18.00	382.60	15	2614	1
5	5250	14.80	264.60	16	3779	1
6	5250	14.90	279.90	15	3573	1
7	5250	17.50	356.00	13	2809	1
8	5250	11.10	490.70	14	2038	1
9	5250	19.60	327.40	15	3054	1
10	5250	19.90	242.80	15	4119	0
11	5250	17.30	270.60	13	3695	0
12	5250	11.30	477.80	15	2093	1
13	5250	17.70	499.70	13	2001	1
14	5250	12.20	412.40	16	2425	1
15	5250	15.30	231.40	15	4322	1
16	5250	17.00	374.60	13	2670	1
17	5250	15.80	441.30	16	2266	1
18	5250	12.90	342.30	12	2921	1
19	5250	17.80	340.30	13	2939	0
20	5250	12.10	210.30	16	4755	1
21	5250	15.10	491.20	14	2036	1
22	5250	12.70	392.60	15	2547	0
23	5250	17.60	498.60	14	2006	1
24	5250	15.40	430.90	16	2321	1
25	5250	11.80	368.40	12	2714	1
26	5250	11.60	423.70	12	2360	1
27	5250	13.70	482.50	16	2073	1
28	5250	16.00	389.30	12	2569	1
29	5250	14.00	436.60	15	2290	1
30	5250	12.50	419.30	12	2385	1
Detection Percentage (%)						86.67

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
11	5250	1	54.7	11	1664.3	2	1
	5250	2	77.9	12	1735.6	1	
	5250	3	74.1	19	1714.3	2	
	5250	4	61.6	18	1486.5	2	
	5250	5	82.7	18	1691.3	3	
	5250	6	61.2	9	1655.0	2	
	5250	7	97.0	8	1524.8	1	
	5250	8	94.2	10	1468.9	3	
	5250	9	85.8	7	1745.9	2	
	5250	10	87.1	19	1409.2	3	
	5250	11	90.0	13	1143.0	1	
	5250	12	85.4	13	1251.5	3	
	5250	13	67.5	20	1175.0	2	
	5250	14	84.6	16	1900.5	1	
	5250	15	64.5	20	1381.3	2	
	5250	16	88.9	9	1278.8	3	
12	5250	1	96.2	7	1397.6	2	1
	5250	2	59.8	15	1902.2	2	
	5250	3	95.4	15	1698.3	2	
	5250	4	52.2	12	1801.2	2	
	5250	5	75.9	12	1745.9	1	
	5250	6	75.8	13	1418.5	1	
	5250	7	66.5	11	1604.1	3	
	5250	8	53.1	14	1369.8	2	
	5250	9	66.6	13	1773.9	2	
	5250	10	61.2	11	1575.7	2	
	5250	11	73.4	15	1276.2	2	
	5250	12	92.1	6	1576.6	1	
	5250	13	68.9	18	1577.3	2	
	5250	14	50.1	5	1575.5	2	
	5250	15	67.5	17	1936.2	2	
	5250	16	57.0	8	1035.9	2	
	5250	17	86.3	19	1475.8	2	
	5250	18	78.8	16	1581.4	3	
	5250	19	77.4	13	1746.1	1	
	5250	20	69.6	7	1439.5	2	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
13	5250	1	86.9	7	1784.1	2	1
	5250	2	57.9	14	1444.3	2	
	5250	3	50.4	6	1475.4	2	
	5250	4	59.0	13	1571.0	2	
	5250	5	83.0	14	1620.3	2	
	5250	6	81.7	6	1046.8	2	
	5250	7	50.6	6	1156.5	1	
	5250	8	52.6	12	1599.0	1	
	5250	9	69.3	11	1050.6	1	
	5250	10	75.1	17	1046.4	3	
14	5250	1	78.6	12	1681.3	3	1
	5250	2	92.0	6	1331.4	3	
	5250	3	62.1	17	1681.3	3	
	5250	4	63.9	20	1561.2	1	
	5250	5	94.2	8	1283.6	1	
	5250	6	86.3	11	1166.3	2	
	5250	7	51.8	6	1987.4	2	
	5250	8	94.0	8	1265.5	3	
	5250	9	51.0	14	1815.6	2	
	5250	10	98.7	10	1441.2	2	
	5250	11	87.9	13	1425.4	1	
	5250	12	69.1	17	1734.8	2	
	5250	13	98.7	6	1685.0	3	
	5250	14	62.0	12	1351.0	2	
	5250	15	92.5	19	1607.6	2	
	5250	16	99.6	13	1702.7	2	
	5250	17	66.3	10	1358.0	1	
	5250	18	83.1	17	1283.1	2	
	5250	19	77.0	9	1435.7	3	
	5250	20	56.1	6	1116.6	3	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
15	5250	1	73.2	13	1535.0	3	0
	5250	2	53.9	9	1955.3	3	
	5250	3	98.3	15	1685.6	1	
	5250	4	78.9	17	1248.2	3	
	5250	5	74.7	20	1778.8	3	
	5250	6	86.3	10	1843.7	3	
	5250	7	74.7	15	1605.8	3	
	5250	8	68.7	15	1369.2	1	
	5250	9	74.5	17	1930.5	1	
	5250	10	79.5	8	1427.4	1	
	5250	11	86.5	9	1752.2	1	
	5250	12	98.0	9	1250.3	1	
	5250	13	51.3	17	1808.9	3	
	5250	14	84.4	18	1567.6	2	
	5250	15	87.4	15	1246.7	1	
	5250	16	87.2	13	1020.3	1	
	5250	17	64.0	20	1483.3	1	
	5250	18	85.1	7	1186.5	1	
	5250	19	62.6	15	1654.7	3	
16	5250	1	89.8	10	1707.8	3	1
	5250	2	94.0	11	1982.1	1	
	5250	3	58.6	20	1180.2	3	
	5250	4	66.2	16	1015.6	1	
	5250	5	60.8	14	1346.0	2	
	5250	6	67.4	5	1430.3	2	
	5250	7	60.6	8	1822.2	3	
	5250	8	51.7	19	1833.9	1	
	5250	9	51.2	13	1775.7	1	
	5250	10	75.0	19	1925.5	2	
	5250	11	63.6	6	1872.2	3	
	5250	12	72.5	11	1499.9	1	
	5250	13	62.3	18	1672.0	1	
	5250	14	66.4	9	1910.5	1	
	5250	15	57.4	19	1059.5	1	
	5250	16	72.3	14	1047.7	3	
	5250	17	66.7	7	1096.2	2	
	5250	18	64.2	10	1588.4	3	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
17	5250	1	57.3	15	1808.9	3	0
	5250	2	53.7	18	1912.0	2	
	5250	3	84.4	13	1358.4	3	
	5250	4	52.9	12	1301.9	1	
	5250	5	51.5	11	1749.2	2	
	5250	6	51.7	16	1227.7	1	
	5250	7	96.8	14	1268.0	3	
	5250	8	78.2	10	1613.3	1	
	5250	9	83.2	12	1783.3	1	
	5250	10	87.1	16	1407.7	1	
	5250	11	80.3	10	1642.5	2	
	5250	12	96.7	6	1778.6	3	
	5250	13	54.5	9	1678.8	2	
	5250	14	87.7	11	1627.2	2	
	5250	15	89.1	13	1612.1	3	
	5250	16	89.5	18	1738.6	2	
	5250	17	96.3	19	1981.4	1	
18	5250	1	97.8	16	1112.3	2	0
	5250	2	77.4	8	1645.2	1	
	5250	3	64.2	9	1339.2	1	
	5250	4	96.7	9	1521.5	1	
	5250	5	54.2	13	1766.4	3	
	5250	6	91.2	17	1515.0	2	
	5250	7	69.4	8	1868.5	1	
	5250	8	66.9	6	1977.7	3	
	5250	9	76.3	15	1816.6	3	
	5250	10	91.4	7	1909.1	3	
	5250	11	54.4	18	1134.1	1	
	5250	12	90.4	7	1905.8	1	
	5250	13	87.9	19	1769.0	1	
	5250	14	67.6	20	1056.0	1	
	5250	15	50.1	14	1049.9	1	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
19	5250	1	87.6	9	1536.5	3	1
	5250	2	81.2	13	1005.6	2	
	5250	3	60.5	6	1905.3	3	
	5250	4	87.8	10	1355.8	3	
	5250	5	89.0	16	1476.0	2	
	5250	6	82.0	17	1848.0	2	
	5250	7	82.0	7	1524.6	1	
	5250	8	81.5	16	1337.6	3	
	5250	9	96.2	15	1876.8	1	
	5250	10	50.6	16	1806.7	2	
	5250	11	79.1	19	1364.5	3	
	5250	12	50.6	8	1325.9	3	
	5250	13	82.4	17	1817.5	3	
	5250	14	55.7	13	1665.5	3	
20	5250	1	86.6	19	1079.8	3	1
	5250	2	78.0	16	1450.8	2	
	5250	3	51.3	16	1152.7	2	
	5250	4	51.1	8	1601.7	1	
	5250	5	53.1	9	1970.2	2	
	5250	6	97.7	5	1576.8	1	
	5250	7	51.4	8	1787.9	1	
	5250	8	54.0	11	1087.3	2	
	5250	9	50.0	19	1388.6	1	
	5250	10	57.2	6	1955.0	3	
21	5323.5	1	87.0	16	1467.5	3	1
	5322.5	2	99.4	18	1328.5	2	
	5325.5	3	77.8	9	1935.1	3	
	5323.5	4	71.4	14	1486.8	1	
	5325.5	5	57.5	10	1558.6	2	
	5323.5	6	89.5	15	1752.0	3	
	5326.5	7	81.1	8	1970.3	3	
	5325.5	8	59.2	11	1829.3	1	
	5322.5	9	63.1	17	1873.2	2	
	5325.5	10	85.9	11	1364.5	2	
	5325.5	11	69.1	11	1745.3	3	
	5326.5	12	90.2	8	1426.6	2	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
22	5324.5	1	75.8	13	1531.6	1	1
	5322.5	2	78.7	17	1896.1	3	
	5324.5	3	69.5	12	1271.1	2	
	5324.5	4	83.4	13	1950.2	3	
	5325.5	5	61.7	9	1423.4	1	
	5325.5	6	90.9	9	1234.7	3	
	5324.5	7	65.1	12	1372.4	1	
	5323.5	8	53.9	14	1985.1	2	
	5326.5	9	75.3	8	1085.3	3	
23	5321.5	1	89.1	20	1235.2	2	1
	5327.5	2	85.4	5	1105.2	1	
	5325.5	3	90.7	11	1674.8	3	
	5326.5	4	92.9	7	1409.2	1	
	5327.5	5	73.2	5	1691.3	3	
	5325.5	6	86.4	11	1174.7	2	
	5325.5	7	88.8	11	1784.0	3	
	5324.5	8	89.1	12	1094.1	2	
	5323.5	9	75.7	15	1232.7	2	
	5324.5	10	65.7	13	1336.9	3	
	5327.5	11	77.9	5	1488.2	1	
	5321.5	12	63.3	19	1188.6	1	
	5327.5	13	89.0	6	1680.7	2	
	5325.5	14	92.5	11	1285.3	1	
	5323.5	15	89.5	15	1077.4	2	
24	5327.5	1	53.1	6	1854.8	1	1
	5323.5	2	87.3	14	1109.9	2	
	5326.5	3	94.9	8	1519.6	2	
	5325.5	4	55.5	9	1382.4	3	
	5323.5	5	81.6	15	1022.2	1	
	5323.5	6	82.3	14	1967.1	3	
	5322.5	7	61.2	17	1682.3	3	
	5322.5	8	51.2	17	1443.3	2	
	5323.5	9	75.8	15	1975.3	2	
	5326.5	10	74.5	8	1988.0	1	
	5322.5	11	61.4	17	1184.1	2	
	5326.5	12	52.5	7	1829.8	2	
	5326.5	13	83.3	7	1432.9	2	
	5324.5	14	78.2	12	1782.8	3	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
25	5325.5	1	94.5	10	1856.1	3	0
	5321.5	2	71.2	20	1087.8	1	
	5327.5	3	53.0	5	1332.5	1	
	5321.5	4	98.6	19	1577.3	1	
	5326.5	5	55.6	7	1808.8	3	
	5326.5	6	88.7	7	1652.2	3	
	5324.5	7	96.3	13	1018.0	2	
	5324.5	8	78.8	13	1957.9	2	
	5326.5	9	87.7	8	1862.3	3	
	5323.5	10	70.2	16	1899.3	1	
	5323.5	11	58.0	14	1042.6	1	
	5323.5	12	66.1	14	1133.6	2	
	5322.5	13	54.5	17	1841.3	1	
	5326.5	14	61.0	7	1734.2	3	
	5325.5	15	89.4	11	1176.2	3	
	5325.5	16	83.2	9	1458.7	3	
	5321.5	17	88.6	19	1584.5	3	
	5326.5	18	92.8	8	1201.7	2	
26	5324.5	1	67.2	13	1870.0	1	1
	5322.5	2	85.5	18	1226.2	3	
	5325.5	3	93.7	9	1957.5	2	
	5327.5	4	74.6	5	1499.8	1	
	5323.5	5	77.4	16	1978.8	2	
	5323.5	6	77.5	14	1287.1	2	
	5327.5	7	89.6	6	1923.9	3	
	5326.5	8	78.3	7	1050.8	1	
	5325.5	9	84.5	10	1315.0	2	
	5327.5	10	70.4	6	1700.7	3	
	5324.5	11	51.4	13	1088.6	3	
	5326.5	12	80.8	7	1537.6	3	
	5323.5	13	85.7	14	1079.4	2	
	5326.5	14	66.8	8	1257.9	1	
	5322.5	15	83.1	18	1517.3	3	
	5324.5	16	84.8	13	1402.9	1	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
27	5327.5	1	75.4	6	1998.5	2	1
	5324.5	2	93.7	12	1655.8	3	
	5327.5	3	60.8	5	1633.1	3	
	5322.5	4	61.6	18	1510.2	3	
	5326.5	5	74.0	8	1485.4	2	
	5325.5	6	77.6	11	1725.0	1	
	5324.5	7	72.3	13	1585.4	1	
	5324.5	8	86.4	12	1560.5	2	
	5325.5	9	87.8	10	1236.2	3	
	5323.5	10	71.6	15	1106.8	2	
	5323.5	11	94.8	15	1208.6	3	
	5322.5	12	67.1	17	1194.2	1	
	5327.5	13	60.4	6	1149.6	2	
	5321.5	14	52.6	20	1613.6	3	
	5326.5	15	54.7	7	1924.9	2	
	5324.5	16	94.4	12	1321.4	1	
	5325.5	17	85.6	10	1492.6	1	
	5327.5	18	57.1	5	1031.6	2	
	5324.5	19	80.8	12	1949.0	2	
	5325.5	20	73.2	10	1413.6	1	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
28	5322.5	1	70.5	18	1890.2	2	1
	5323.5	2	84.7	14	1746.0	3	
	5321.5	3	98.6	19	1181.2	2	
	5323.5	4	96.1	16	1986.3	3	
	5321.5	5	66.5	19	1639.8	1	
	5326.5	6	91.9	8	1666.3	1	
	5322.5	7	82.8	18	1612.4	1	
	5324.5	8	86.3	13	1438.6	2	
	5324.5	9	54.5	13	1456.4	2	
	5326.5	10	79.8	8	1523.1	1	
	5327.5	11	94.1	6	1702.5	1	
	5322.5	12	96.1	18	1245.9	3	
	5323.5	13	67.8	15	1980.1	3	
	5322.5	14	58.9	17	1687.4	1	
	5322.5	15	98.2	18	1318.2	1	
	5325.5	16	60.9	11	1051.5	1	
	5322.5	17	88.8	18	1838.8	3	
	5325.5	18	87.6	10	1939.1	3	
	5323.5	19	72.0	16	1112.5	3	
	5322.5	20	77.4	17	1549.1	3	

Test Mode		802.11ax HE160					
Frequency		5250 MHz					
Radar Signal		Type 5					
Trial #	Test Frequency (MHz)	Burst#	Pulse Width (us)	Chirp Width (MHz)	PRI (us)	Number of Pulses / Burst	1=Detection ; 0=No Detection
29	5321.5	1	74.8	20	1575.1	3	1
	5325.5	2	65.1	10	1579.8	1	
	5321.5	3	89.9	20	1657.9	1	
	5323.5	4	52.4	16	1363.2	3	
	5326.5	5	94.8	7	1442.4	1	
	5326.5	6	94.2	7	1033.9	3	
	5324.5	7	68.1	12	1195.3	1	
	5326.5	8	88.6	7	1101.2	1	
	5325.5	9	67.3	9	1447.5	3	
	5322.5	10	65.1	17	1027.4	2	
	5327.5	11	97.3	6	1685.1	3	
	5323.5	12	90.1	16	1221.1	1	
	5322.5	13	83.1	18	1180.0	1	
	5325.5	14	98.8	11	1613.8	2	
	5326.5	15	51.2	8	1556.3	2	
	5326.5	16	82.4	8	1263.1	2	
	5325.5	17	89.3	10	1416.5	3	
30	5325.5	1	82.6	11	1238.9	3	1
	5325.5	2	54.9	9	1125.1	2	
	5321.5	3	76.4	19	1651.4	1	
	5325.5	4	82.3	10	1896.2	1	
	5322.5	5	63.7	17	1662.6	3	
	5322.5	6	55.3	18	1082.9	2	
	5323.5	7	87.4	15	1030.3	2	
	5323.5	8	69.3	16	1613.8	3	
	5326.5	9	83.0	8	1940.4	1	
	5324.5	10	95.5	12	1388.5	3	
	5325.5	11	95.1	10	1214.8	1	
	5325.5	12	69.2	11	1764.2	3	
	5322.5	13	90.3	18	1504.9	2	
	5322.5	14	92.2	18	1982.3	1	
Detection Percentage (%)							86.67

Test Mode		802.11ax HE160				
Frequency		5250 MHz				
Radar Signal		Type 6				
Trial #	Pulse Width (us)	PRI (us)	Pulses / Hop	Hopping Rate (kHz)	Hopping Sequence Length (ms)	1=Detection ; 0=No Detection
1	1	333	9	0.333	300	1
2	1	333	9	0.333	300	1
3	1	333	9	0.333	300	1
4	1	333	9	0.333	300	1
5	1	333	9	0.333	300	1
6	1	333	9	0.333	300	1
7	1	333	9	0.333	300	1
8	1	333	9	0.333	300	1
9	1	333	9	0.333	300	1
10	1	333	9	0.333	300	1
11	1	333	9	0.333	300	1
12	1	333	9	0.333	300	1
13	1	333	9	0.333	300	1
14	1	333	9	0.333	300	1
15	1	333	9	0.333	300	1
16	1	333	9	0.333	300	1
17	1	333	9	0.333	300	1
18	1	333	9	0.333	300	1
19	1	333	9	0.333	300	1
20	1	333	9	0.333	300	1
21	1	333	9	0.333	300	1
22	1	333	9	0.333	300	1
23	1	333	9	0.333	300	1
24	1	333	9	0.333	300	1
25	1	333	9	0.333	300	1
26	1	333	9	0.333	300	1
27	1	333	9	0.333	300	1
28	1	333	9	0.333	300	1
29	1	333	9	0.333	300	1
30	1	333	9	0.333	300	1
Detection Percentage (%)						100.00

---END---