


FCC Radio Test Report


FCC ID: KA2IR842G1

This report concerns: Original Grant

Project No. : 2006H006
Equipment : AC1200 Wi-Fi Gigabit Router
Brand Name : D-Link
Test Model : DIR-842
Series Model : DIR-825
Applicant : D-Link Corporation
Address : 17595 Mt. Herrmann, Fountain Valley, California United State 92708
Manufacturer : D-Link Corporation
Address : 17595 Mt. Herrmann, Fountain Valley, California United State 92708
Date of Receipt : Jun. 08, 2020
Date of Test : Jun. 10, 2020~Jul. 10, 2020
Issued Date : Jul. 27, 2020
Report Version : R00
Test Sample : Engineering Sample No.: SH2020060867, SH2020060867-5, AMS200-1201500F
Standard(s) : FCC Part15, Subpart E(15.407)
 ANSI C63.10-2013
 FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01
 FCC KDB 662911 D01 Multiple Transmitter Output v02r01

The above equipment has been tested and found compliance with the requirement of the relative standards by BTL Inc.


Prepared by : Krain Wu


Approved by : Ryan Wang



Certificate # 5123. 03

Add: No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China
 TEL: +86-021-61765666
 Web: www.newbtl.com

Declaration

BTL represents to the client that testing is done in accordance with standard procedures as applicable and that test instruments used has been calibrated with standards traceable to international standard(s) and/or national standard(s).

BTL's reports apply only to the specific samples tested under conditions. It is manufacture's responsibility to ensure that additional production units of this model are manufactured with the identical electrical and mechanical components. **BTL** shall have no liability for any declarations, inferences or generalizations drawn by the client or others from **BTL** issued reports.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, A2LA, or any agency of the U.S. Government.

This report is the confidential property of the client. As a mutual protection to the clients, the public and ourselves, the test report shall not be reproduced, except in full, without our written approval.

BTL's laboratory quality assurance procedures are in compliance with the **ISO/IEC 17025** requirements, and accredited by the conformity assessment authorities listed in this test report.

BTL is not responsible for the sampling stage, so the results only apply to the sample as received.

The information, data and test plan are provided by manufacturer which may affect the validity of results, so it is manufacturer's responsibility to ensure that the apparatus meets the essential requirements of applied standards and in all the possible configurations as representative of its intended use.

Limitation

For the use of the authority's logo is limited unless the Test Standard(s)/Scope(s)/Item(s) mentioned in this test report is (are) included in the conformity assessment authorities acceptance respective.

Please note that the measurement uncertainty is provided for informational purpose only and are not use in determining the Pass/Fail results.

Table of Contents	Page
REPORT ISSUED HISTORY	5
1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACILITY	7
1.2 MEASUREMENT UNCERTAINTY	7
1.3 TEST ENVIRONMENT CONDITIONS	7
2 . GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF EUT	8
2.2 TEST MODES	10
2.3 PARAMETERS OF TEST SOFTWARE	12
2.4 DUTY CYCLE	14
2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	16
2.6 SUPPORT UNITS	16
3 . AC POWER LINE CONDUCTED EMISSIONS TEST	17
3.1 LIMIT	17
3.2 TEST PROCEDURE	17
3.3 DEVIATION FROM TEST STANDARD	17
3.4 TEST SETUP	18
3.5 EUT OPERATION CONDITIONS	18
3.6 TEST RESULTS	18
4 . RADIATED EMISSIONS TEST	19
4.1 LIMIT	19
4.2 TEST PROCEDURE	20
4.3 DEVIATION FROM TEST STANDARD	20
4.4 TEST SETUP	21
4.5 EUT OPERATION CONDITIONS	23
4.6 TEST RESULTS - 9 KHZ to 30 MHZ	23
4.7 TEST RESULTS - 30 MHz TO 1000 MHz	23
4.8 TEST RESULTS - ABOVE 1000 MHz	23
5 . BANDWIDTH TEST	24
5.1 LIMIT	24
5.2 TEST PROCEDURE	24
5.3 TEST PROCEDURE	24

Table of Contents	Page
5.4 TEST SETUP	25
5.5 EUT OPERATION CONDITIONS	25
5.6 TEST RESULTS	25
6 . MAXIMUM OUTPUT POWER TEST	26
6.1 LIMIT	26
6.2 TEST PROCEDURE	26
6.3 DEVIATION FROM STANDARD	26
6.4 TEST SETUP	26
6.5 EUT OPERATION CONDITIONS	26
6.6 TEST RESULTS	26
7 . POWER SPECTRAL DENSITY TEST	27
7.1 LIMIT	27
7.2 TEST PROCEDURE	27
7.3 DEVIATION FROM STANDARD	27
7.4 TEST SETUP	28
7.5 EUT OPERATION CONDITIONS	28
7.6 TEST RESULTS	28
8 . MEASUREMENT INSTRUMENTS LIST	29
9 . EUT TEST PHOTOS	31
APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS	33
APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ	36
APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1 GHZ	37
APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ	40
APPENDIX E - BANDWIDTH	115
APPENDIX F - CONDUCTED OUTPUT POWER	124
APPENDIX G - POWER SPECTRAL DENSITY	137

REPORT ISSUED HISTORY

Report Version	Description	Issued Date
R00	Original Issue.	Jul. 27, 2020

1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standard(s):

FCC Part15, Subpart E(15.407)				
Standard(s) Section	Test Item	Test Result	Judgement	Remark
15.207 15.407(b)	AC Power Line Conducted Emissions	APPENDIX A	PASS	-----
15.407(b) 15.205(a) 15.209(a)	Radiated Emissions	APPENDIX B APPENDIX C APPENDIX D	PASS	-----
15.407(a) 15.407(e)	Spectrum Bandwidth	APPENDIX E	PASS	-----
15.407(a)	Maximum Output Power	APPENDIX F	PASS	-----
15.407(a)	Power Spectral Density	APPENDIX G	PASS	-----
15.407(g)	Frequency Stability	APPENDIX H	PASS	-----
15.203	Antenna Requirements	-----	PASS	NOTE (3)
15.407(c)	Automatically Discontinue Transmission	-----	PASS	NOTE (3)

Note:

- (1) "N/A" denotes test is not applicable in this test report.
- (2) The device what use a permanently attached antenna were considered sufficient to comply with the provisions of 15.203.
- (3) During no any information transmission, the EUT can automatically discontinue transmission and become standby mode for power saving. the EUT can detect the controlling signal of ACK message transmitting from remote device and verify whether it shall resend or discontinue transmission.
- (4) For UNII-1 this device was functioned as a
☒ Access point device ☐ Client device

1.1 TEST FACILITY

The test facilities used to collect the test data in this report is at the location of No. 29, Jintang Road, Tangzhen Industry Park, Pudong New Area, Shanghai 201210, China

BTL's Test Firm Registration Number for FCC: 476765

BTL's Designation Number for FCC: CN1241

1.2 MEASUREMENT UNCERTAINTY

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ($k=2$))

The BTL measurement uncertainty as below table:

A. Radiated emissions test:

Test Site	Method	Measurement Frequency Range	Ant. H / V	U, (dB)
SH-CB01	CISPR	9 KHz~30 MHz	V	3.79
		9 KHz~30 MHz	H	3.57
		30 MHz~200 MHz	V	4.04
		30 MHz~200 MHz	H	3.76
		200 MHz~1,000 MHz	V	4.24
		200 MHz~1,000 MHz	H	3.84
		1 GHz~18 GHz	V	4.46
		1 GHz~18 GHz	H	4.40
		18 GHz~40 GHz	V	3.95
		18 GHz~40 GHz	H	3.95

Note: Unless specifically mentioned, the uncertainty of measurement has not been taken into account to declare the compliance or non-compliance to the specification.

1.3 TEST ENVIRONMENT CONDITIONS

Test Item	Temperature	Humidity	Test Voltage	Tested By
AC Power Line Conducted Emissions	24°C	58 %	AC 120V/60Hz	Vince Zong
Radiated Emissions-9K-30MHz	22°C	52 %	AC 120V/60Hz	Vince Zong
Radiated Emissions-30 MHz to 1GHz	22°C	52 %	AC 120V/60Hz	Vince Zong
Radiated Emissions-Above 1000 MHz	22°C	52 %	AC 120V/60Hz	Vince Zong
Spectrum Bandwidth	25°C	55 %	AC 120V/60Hz	Forest Li
Maximum Output Power	25°C	55 %	AC 120V/60Hz	Forest Li
Power Spectral Density	25°C	55 %	AC 120V/60Hz	Forest Li

2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Equipment	AC1200 Wi-Fi Gigabit Router
Brand Name	D-Link
Test Model	DIR-842
Series Model	DIR-825
Model Difference(s)	Only the model name is differen
Software Version	1.0.0
Hardware Version	G1,I1
Power Source	DC voltage supplied from AC/DC adapter. 1# Brand/Model:AMIGO/AMS200-1201500F 2# Brand/Model:HEWEISHUN/BN074-A18012U
Power Rating	1# I/P:100-240V~50/60Hz 0.8A Max O/P:12.0V $\overline{\text{---}}$ 1.5A 18.0W 2# I/P:100-240V~50/60Hz 0.6A O/P:12V $\overline{\text{---}}$ 1.5A
Operation Frequency	UNII-1: 5150 MHz~5250 MHz UNII-3: 5725 MHz~5850 MHz
Modulation Type	OFDM
Bit Rate of Transmitter	Up to 866.6 Mbps

Maximum Conducted Output Power for UNII-1 (2TX) CDD	IEEE 802.11a: 20.00 dBm (0.1000 W) IEEE 802.11n (HT20): 19.88 dBm (0.0973 W) IEEE 802.11n (HT40): 22.65 dBm (0.1841 W) IEEE 802.11ac (VHT20): 19.93 dBm (0.0984 W) IEEE 802.11ac (VHT40): 22.79 dBm (0.1901 W) IEEE 802.11ac (VHT80): 18.21 dBm (0.0662 W)
Maximum Conducted Output Power for UNII-3 (2TX) CDD	IEEE 802.11a: 20.94 dBm (0.1242 W) IEEE 802.11n (HT20): 21.09 dBm (0.1285 W) IEEE 802.11n (HT40): 22.47 dBm (0.1766 W) IEEE 802.11ac (VHT20): 21.18 dBm (0.1312 W) IEEE 802.11ac (VHT40): 22.61 dBm (0.1824 W) IEEE 802.11ac (VHT80): 22.91 dBm (0.1954 W)

Note:

1. For a more detailed features description, please refer to the manufacturer's specifications or the user's manual.

2. Channel List:

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
UNII-1		UNII-1		UNII-1	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
36	5180	38	5190	42	5210
40	5200	46	5230		
44	5220				
48	5240				

IEEE 802.11a IEEE 802.11n (HT20) IEEE 802.11ac (VHT20)		IEEE 802.11n (HT40) IEEE 802.11ac (VHT40)		IEEE 802.11ac (VHT80)	
UNII-3		UNII-3		UNII-3	
Channel	Frequency (MHz)	Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755	155	5775
153	5765	159	5795		
157	5785				
161	5805				
165	5825				

3. Antenna Specification:

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	Note
1	N/A	N/A	Dipole	N/A	5	N/A
2	N/A	N/A	Dipole	N/A	5	N/A

Note:

All antennas have the same gain, Directional gain = $G_{ANT} + \text{Array Gain}$,

For power spectral density measurements, $N_{ANT} = 2$, $N_{SS} = 1$. So Directional gain = $G_{ANT} +$

Array Gain = $10 \log (N_{ANT} / N_{SS}) \text{ dB} = 5 + 10 \log (2/1) \text{ dB} = 8.01$. Then, the UNII-1 power density

limit is $17 - (8.01 - 6) = 14.99$. the UNII-3 power density limit is $30 - 8.01 + 6 = 27.99$

For power measurements, Array Gain = 0 dB ($N_{ANT} \leq 4$), so the Directional gain = 5.

4. Table for Antenna Configuration:

Operating Mode TX Mode	Ant. 1	Ant. 2	Ant. 1+2
IEEE 802.11a	✓	✓	✓
IEEE 802.11n (HT20)	✓	✓	✓
IEEE 802.11n (HT40)	✓	✓	✓
IEEE 802.11ac (VHT20)	✓	✓	✓
IEEE 802.11ac (VHT40)	✓	✓	✓
IEEE 802.11ac (VHT80)	✓	✓	✓

2.2 TEST MODES

The test system was pre-tested based on the consideration of all possible combinations of EUT operation mode.

Pretest Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX N (HT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX N (HT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 5	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 6	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 7	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 8	TX N (HT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 9	TX N (HT40) Mode / CH151,CH159 (UNII-3)
Mode 10	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 11	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 12	TX AC (VHT80) Mode / CH155 (UNII-3)
Mode 13	TX AC(VHT80) Mode / CH155 (UNII-3)

Following mode(s) as (were) found to be the worst case(s) and selected for the final test.

AC power line conducted emissions test	
Final Test Mode	Description
Mode 13	TX AC(VHT80) Mode / CH155 (UNII-3)

Radiated emissions test	
Final Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 5	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 6	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 7	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 8	TX AC (VHT80) Mode / CH155 (UNII-3)

Conducted test	
Test Mode	Description
Mode 1	TX A Mode / CH36, CH40, CH48 (UNII-1)
Mode 2	TX AC (VHT20) Mode / CH36, CH40, CH48 (UNII-1)
Mode 3	TX AC (VHT40) Mode / CH38, CH46 (UNII-1)
Mode 4	TX AC (VHT80) Mode / CH42 (UNII-1)
Mode 5	TX A Mode / CH149,CH157,CH165 (UNII-3)
Mode 6	TX AC (VHT20) Mode / CH149,CH157,CH165 (UNII-3)
Mode 7	TX AC (VHT40) Mode / CH151,CH159 (UNII-3)
Mode 8	TX AC (VHT80) Mode / CH155 (UNII-3)

Note:

- (1) For radiated emission below 1 GHz test, the IEEE 802.11ac80 is found to be the worst case and recorded.

2.3 PARAMETERS OF TEST SOFTWARE

CDD

UNII-1 - 2TX			
Test Software	MP_TOOL		
Test Frequency (MHz)	5180	5200	5240
IEEE 802.11a	103	100	100
Test Frequency (MHz)	5180	5200	5240
IEEE 802.11n (HT20)	96	96	96
Test Frequency (MHz)	5190	5230	
IEEE 802.11n (HT40)	100	110	

UNII-3 - 2TX			
Test Software	MP_TOOL		
Test Frequency (MHz)	5745	5785	5825
IEEE 802.11a	106	110	108
Test Frequency (MHz)	5745	5785	5825
IEEE 802.11n (HT20)	100	104	103
Test Frequency (MHz)	5755	5795	
IEEE 802.11n (HT40)	112	112	


UNII-1 - 2TX			
Test Software	MP_TOOL		
Test Frequency (MHz)	5180	5200	5240
IEEE 802.11ac (VHT20)	102	102	102
Test Frequency (MHz)	5190	5230	
IEEE 802.11ac (VHT40)	106	120	
Test Frequency (MHz)	5210		
IEEE 802.11ac (VHT80)	96		

UNII-3 - 2TX			
Test Software	MP_TOOL		
Test Frequency (MHz)	5745	5785	5825
IEEE 802.11ac (VHT20)	106	110	109
Test Frequency (MHz)	5755	5795	
IEEE 802.11ac (VHT40)	115	115	
Test Frequency (MHz)	5775		
IEEE 802.11ac (VHT80)	120		

2.4 DUTY CYCLE

If duty cycle is $\geq 98\%$, duty factor is not required.
 If duty cycle is $< 98\%$, duty factor shall be considered.
 The output power = measured power + duty factor.


IEEE 802.11a

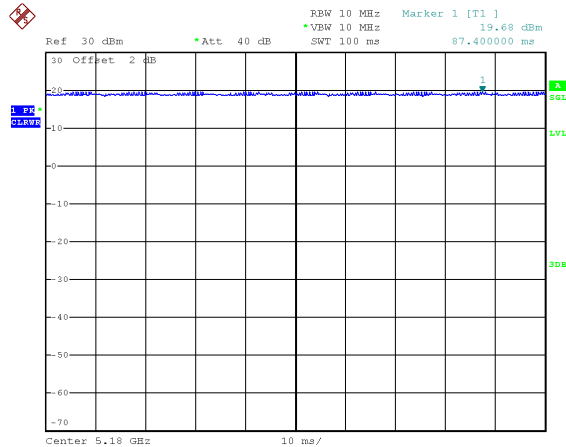

Date: 10.JUL.2020 11:18:46

Duty cycle = 2.500 ms / 2.500 ms = 100%
 Duty Factor = $10 * \log(1 / \text{Duty cycle}) = 0.00 \text{ dB}$


IEEE 802.11n (HT40)

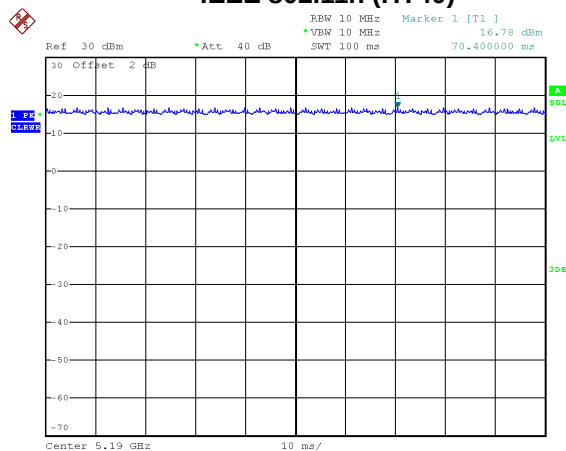

Date: 10.JUL.2020 11:28:41

Duty cycle = 2.500 ms / 2.500 ms = 100%
 Duty Factor = $10 * \log(1 / \text{Duty cycle}) = 0.00 \text{ dB}$


IEEE 802.11n (HT20)

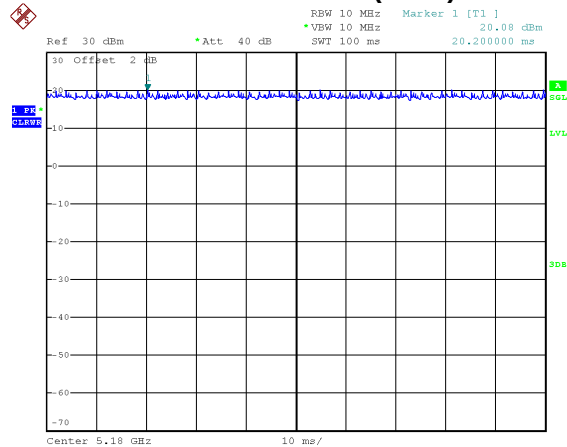

Date: 10.JUL.2020 11:24:10

Duty cycle = 2.500 ms / 2.500 ms = 100%
 Duty Factor = $10 * \log(1 / \text{Duty cycle}) = 0.00 \text{ dB}$


IEEE 802.11ac (VHT20)

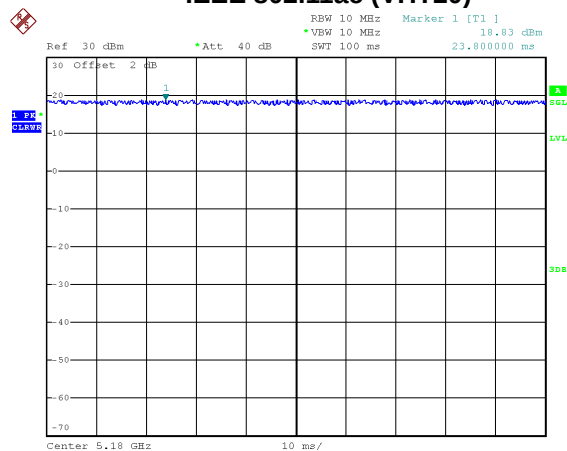


Date: 10.JUL.2020 11:20:00

Duty cycle = 2.500 ms / 2.500 ms = 100%
 Duty Factor = $10 * \log(1 / \text{Duty cycle}) = 0.00 \text{ dB}$

IEEE 802.11ac (VHT40)

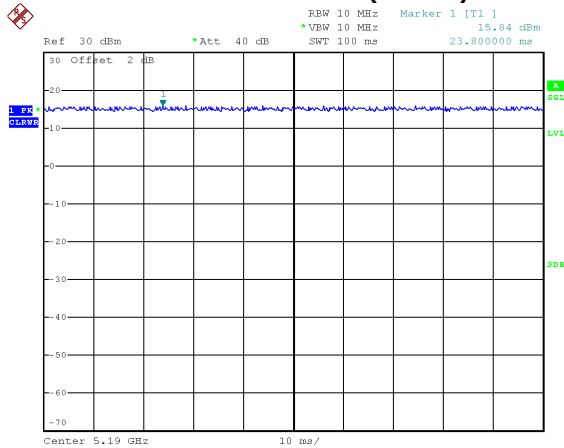

IEEE 802.11ac (VHT80)

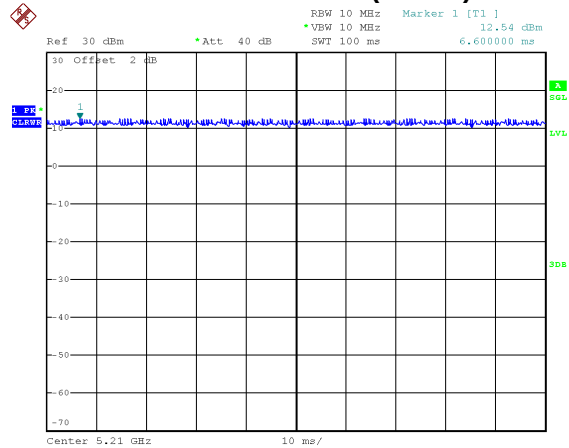

Date: 10.JUL.2020 11:28:15

Date: 10.JUL.2020 11:29:19

Duty cycle = 2.500 ms / 2.500 ms = 100%
 Duty Factor = $10 \cdot \log(1 / \text{Duty cycle}) = 0.00 \text{ dB}$

Duty cycle = 2.500 ms / 2.500 ms = 100%
 Duty Factor = $10 \cdot \log(1 / \text{Duty cycle}) = 0.00 \text{ dB}$

NOTE:


For IEEE 802.11a, IEEE 802.11n (HT20) and IEEE 802.11ac (VHT20)

IEEE 802.11n (HT40) and IEEE 802.11ac (VHT40)

IEEE 802.11ac (VHT80):

For radiated emissions frequency above 1 GHz, the resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and the video bandwidth is 0.01 kHz (Duty cycle > 98%).

2.5 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED

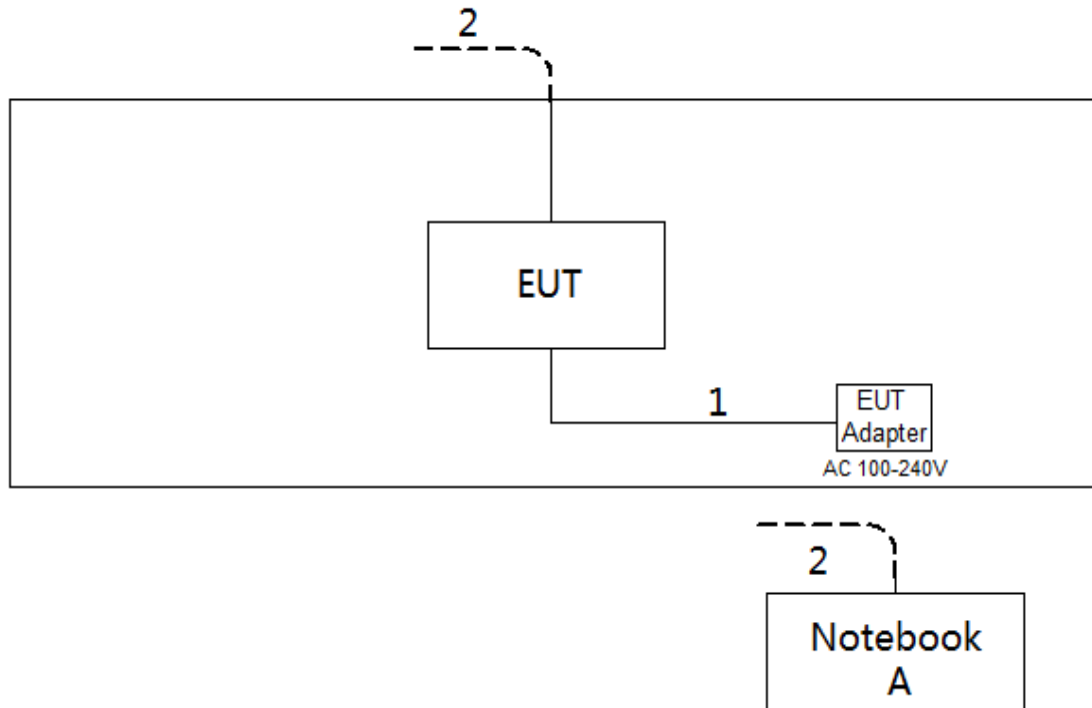

2.6 SUPPORT UNITS

Item	Equipment	Brand	Model No.	Series No.
A	Notebook	Lenovo	#P152014	N/A

Item	Cable Type	Shielded Type	Ferrite Core	Length
1	DC Cable	NO	NO	1.5m
2	RJ45 Cable	NO	NO	10m

3. AC POWER LINE CONDUCTED EMISSIONS TEST

3.1 LIMIT

Frequency (MHz)	Limit (dB μ V)	
	Quasi-peak	Average
0.15 - 0.5	66 to 56*	56 to 46*
0.50 - 5.0	56	46
5.0 - 30.0	60	50

NOTE:

- (1) The tighter limit applies at the band edges.
- (2) The limit of " * " marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameter	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz


3.2 TEST PROCEDURE

- a. The EUT was placed 0.8 meters from the horizontal ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipment powered from additional LISN(s). The LISN provide 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- c. I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- d. LISN at least 80 cm from nearest part of EUT chassis.
- e. For the actual test configuration, please refer to the related Item -EUT Test Photos.

3.3 DEVIATION FROM TEST STANDARD

No deviation

3.4 TEST SETUP

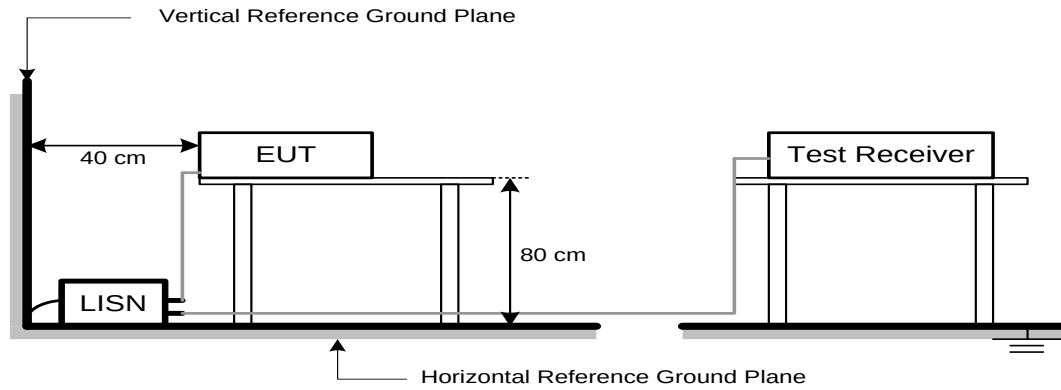

3.5 EUT OPERATION CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.

The EUT was programmed to be in continuously transmitting/TX mode.

3.6 TEST RESULTS

Please refer to the APPENDIX A.

4. RADIATED EMISSIONS TEST

4.1 LIMIT

In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

LIMITS OF RADIATED EMISSIONS MEASUREMENT (9 kHz to 1000 MHz)

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009-0.490	2400/F(kHz)	300
0.490-1.705	24000/F(kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

LIMITS OF UNWANTED EMISSION OUT OF THE RESTRICTED BANDS

Frequency (MHz)	EIRP Limit (dBm/MHz)	Band edge at 3m (dBμV/m)	Harmonic at 1.5m (dBμV/m)
5150-5250	-27	68.3	74.3 (Note 3)
5250-5350	-27	68.3	74.3 (Note 3)
5470-5725	-27	68.3	74.3 (Note 3)
5725-5850	-27 NOTE (2)	68.3	74.3 (Note 3)
	10 NOTE (2)	105.3	111.3 (Note 3)
	15.6 NOTE (2)	110.9	116.9 (Note 3)
	27 NOTE (2)	122.3	128.3 (Note 3)

NOTE:

- (1) The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts)}$$

- (2) According to FCC 16-24, all emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

- (3)

$$FS_{\text{limit}} = FS_{\text{max}} - 20\log\left(\frac{d_{\text{limit}}}{d_{\text{measure}}}\right)$$

$$20\log d_{\text{limit}}/d_{\text{measure}}=20\log 3/1.5=6 \text{ dB.}$$

4.2 TEST PROCEDURE


- a. The measuring distance of 3 m shall be used for measurements. The EUT was placed on the top of a rotating table 0.8 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(below 1GHz)
- b. The measuring distance of 3 m or 1.5m shall be used for measurements. The EUT was placed on the top of a rotating table 1.5 meter above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.(above 1GHz)
- c. The height of the equipment or of the substitution antenna shall be 0.8m or 1.5m; the height of the test antenna shall vary between 1 m to 4 m. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights find the maximum reading (used Bore sight function).
- e. The receiver system was set to peak and average detect function and specified bandwidth with maximum hold mode when the test frequency is above 1 GHz.
- f. The initial step in collecting radiated emission data is a receiver peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and then Quasi Peak detector mode re-measured.
- g. All readings are Peak unless otherwise stated QP in column of Note. Peak denotes that the Peak reading compliance with the QP Limits and then QP Mode measurement didn't perform.
(below 1 GHz)
- h. All readings are Peak Mode value unless otherwise stated AVG in column of Note. If the Peak Mode Measured value compliance with the Peak Limits and lower than AVG Limits, the EUT shall be deemed to meet both Peak & AVG Limits and then only Peak Mode was measured, but AVG Mode didn't perform. (above 1 GHz)
- i. For the actual test configuration, please refer to the related Item –EUT Test Photos.

4.3 DEVIATION FROM TEST STANDARD


No deviation

4.4 TEST SETUP


9 kHz to 30 MHz

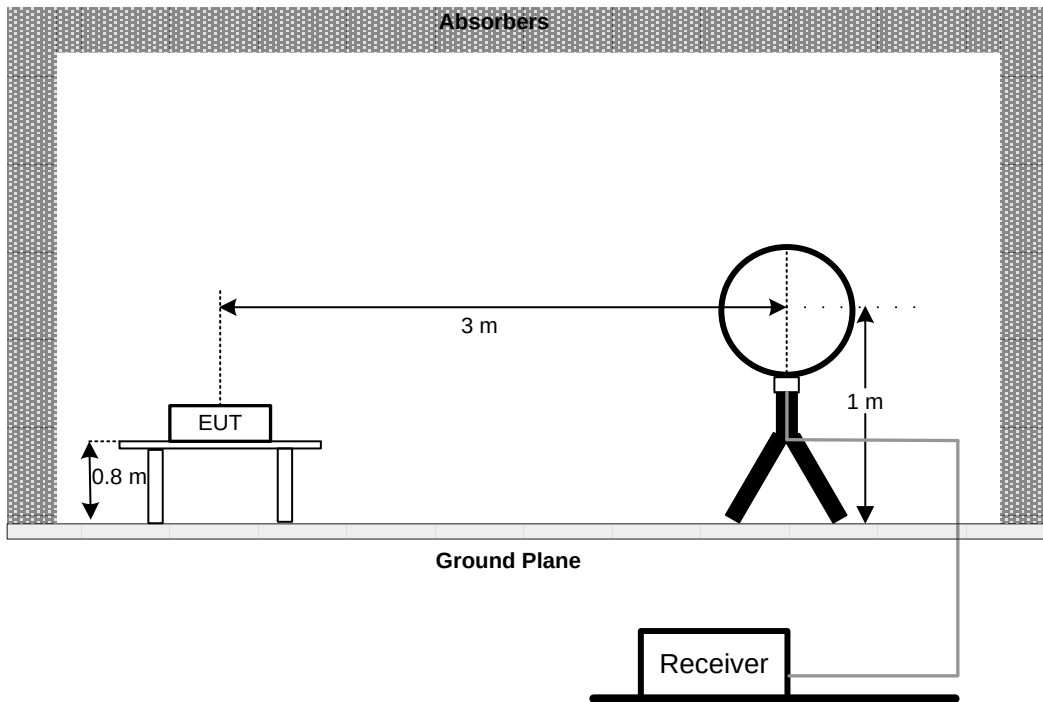


30 MHz to 1 GHz

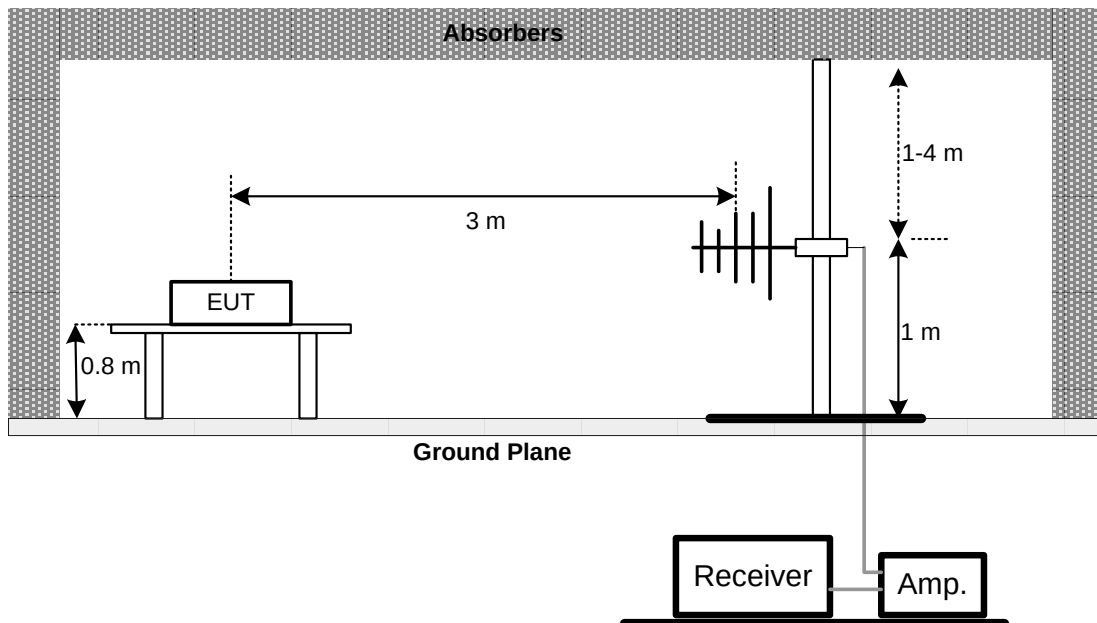

Harmonic (1 GHz to 18 GHz)

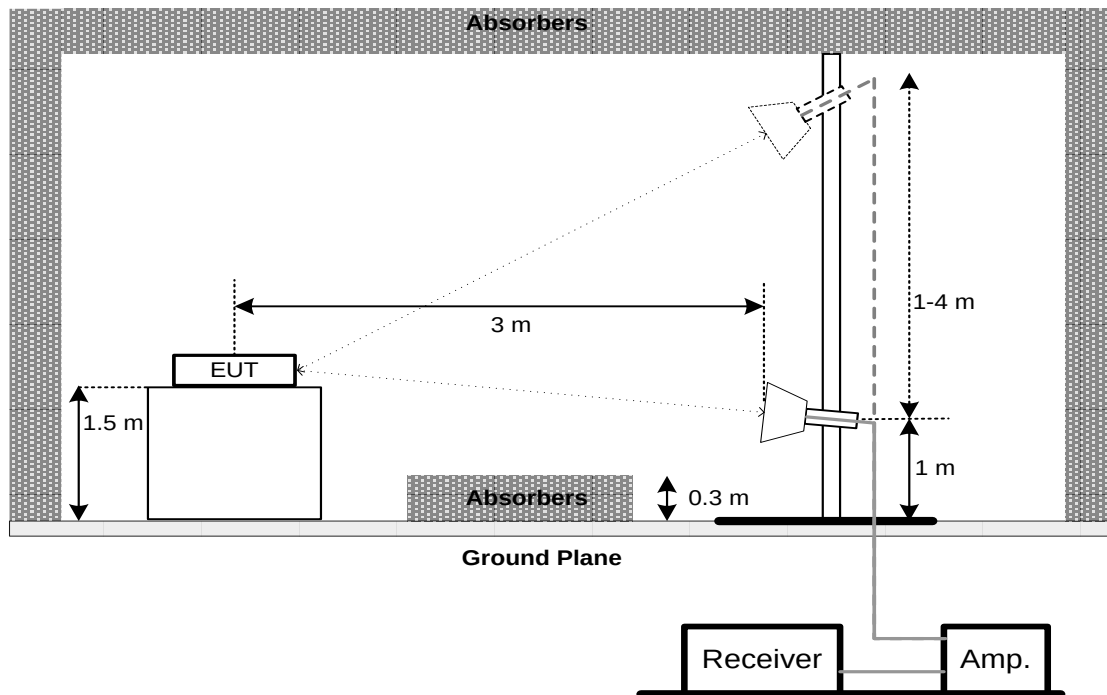

Harmonic (18 GHz to 26.5 GHz)

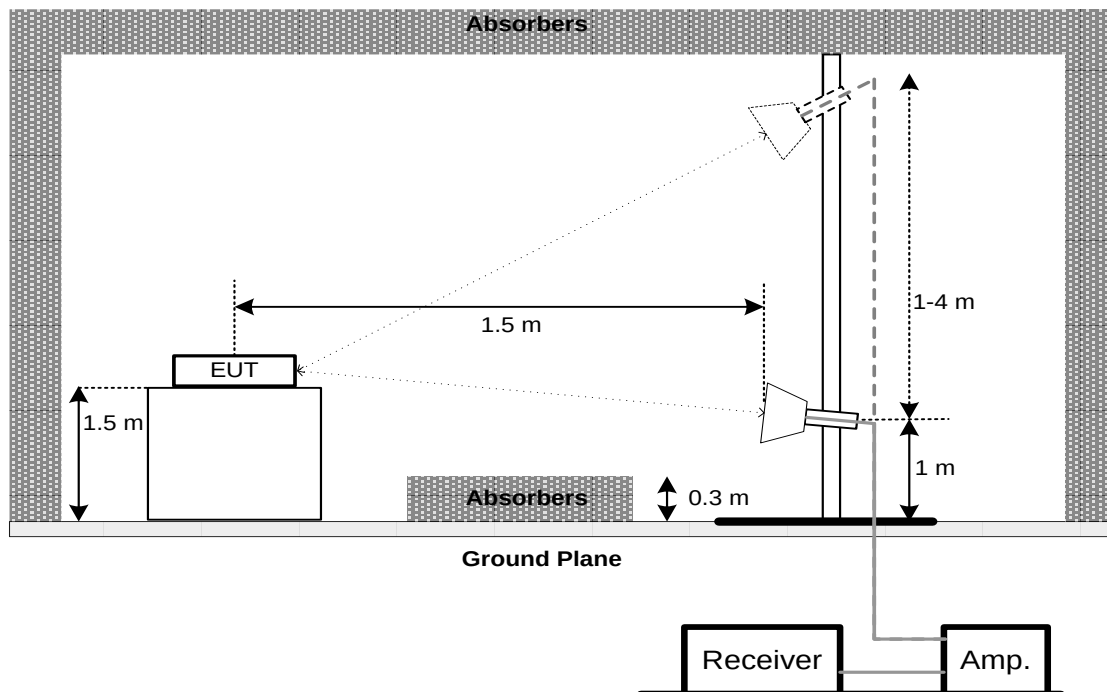

4.5 EUT OPERATION CONDITIONS

The EUT tested system was configured as the statements of 3.5 unless otherwise a special operating condition is specified in the follows during the testing.

4.6 TEST RESULTS - 9 KHZ to 30 MHZ

Please refer to the APPENDIX B

Remark:

- (1) The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.
- (2) Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB).
- (3) Limit line = specific limits (dBuV) + distance extrapolation factor.

4.7 TEST RESULTS - 30 MHz TO 1000 MHz

Please refer to the APPENDIX C.

4.8 TEST RESULTS - ABOVE 1000 MHz

Please refer to the APPENDIX D.

Remark:

- (1) No limit: This is fundamental signal, the judgment is not applicable.
For fundamental signal judgment was referred to Peak output test.

5. BANDWIDTH TEST

5.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a) 15.407(e)	26 dB Bandwidth	-	5150-5250
	26 dB Bandwidth	-	5250-5350
	26 dB Bandwidth	-	5470-5725
	6 dB Bandwidth	Minimum 500 kHz	5725-5850

5.2 TEST PROCEDURE

- a. The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below
- b. a. Spectrum Setting:
For UNII-1, UNII-2A, UNII-2C:

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	> 26 dB Bandwidth
RBW	300 kHz (Bandwidth 20 MHz) 1 MHz (Bandwidth 40 MHz and 80 MHz)
VBW	1 MHz (Bandwidth 20 MHz) 3 MHz (Bandwidth 40 MHz and 80 MHz)
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

For UNII-3:


Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	6 dB Bandwidth
RBW	100 kHz
VBW	300 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

- c. Measured the spectrum width with power higher than 26 dB below carrier

5.3 TEST PROCEDURE

No deviation.

5.4 TEST SETUP

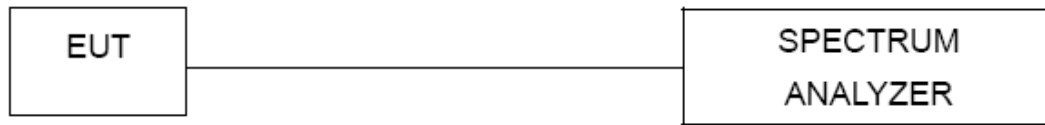

5.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

5.6 TEST RESULTS

Please refer to the APPENDIX E.

6. MAXIMUM OUTPUT POWER TEST

6.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Conducted Output Power	AP device: 1 Watt (30 dBm) Client device: 250 mW (24 dBm)	5150-5250
		250 mW (24 dBm)	5250-5350
		250 mW (24 dBm)	5470-5725
		1 Watt (30dBm)	5725-5850

Note:

- For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.
- For the 5.25-5.35 GHz and 5.47-5.725 GHz bands, the maximum conducted output power over the frequency bands of operation shall not exceed the lesser of 250 mW or 11 dBm + 10log B, where B is the 26dB Bandwidth in megahertz.


6.2 TEST PROCEDURE

- The EUT was directly connected to the power meter and antenna output port as show in the block diagram below.
- Test test was performed in accordance with method of FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01.

6.3 DEVIATION FROM STANDARD

No deviation.

6.4 TEST SETUP

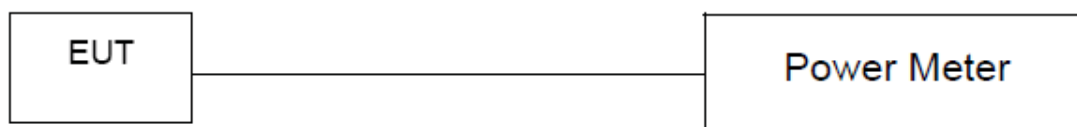

6.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

6.6 TEST RESULTS

Please refer to the APPENDIX F.

7. POWER SPECTRAL DENSITY TEST

7.1 LIMIT

FCC Part15, Subpart E (15.407)			
Section	Test Item	Limit	Frequency Range (MHz)
15.407(a)	Power Spectral Density	AP device: 17 dBm/MHz Client device: 11 dBm/MHz	5150-5250
		11 dBm/MHz	5250-5350
		11 dBm/MHz	5470-5725
		30 dBm/500 kHz	5725-5850

7.2 TEST PROCEDURE

- The EUT was directly connected to the spectrum analyzer and antenna output port as show in the block diagram below.
- Spectrum Setting

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	= 1 MHz.
VBW	≥ 3 MHz.
Detector	RMS
Trace average	100 trace
Sweep Time	Auto

Note:

- For UNII-3, according to KDB publication 789033 D02 General UNII Test Procedures New Rules v02r01, section II.F.5., it is acceptable to set RBW at 1 MHz and VBW at 3 MHz if the spectrum analyzer does not have 500 kHz RBW.
- The value measured with RBW=1 MHz is to be added with $10\log(500 \text{ kHz}/1 \text{ MHz})$ which is -3 dB. For example, if the measured value is +10dBm using RBW=1 MHz (that is +10 dBm/MHz), then the converted value will be +7dBm/500kHz.

7.3 DEVIATION FROM STANDARD

No deviation.

7.4 TEST SETUP



7.5 EUT OPERATION CONDITIONS

The EUT was programmed to be in continuously transmitting mode.

7.6 TEST RESULTS

Please refer to the APPENDIX G.

8. MEASUREMENT INSTRUMENTS LIST

AC Power Line Conducted Emissions					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Line Impedance Stabilisation Network	Schwarzbeck	NNLK 8121	8121-822	Mar. 21, 2021
2	TWO-LINE V-NETWORK	R&S	ENV216	101340	Sep. 01, 2020
3	Test Cable	emci	EMCRG400-BM-N M-10000	170628	Jul. 15, 2020
4	EMI Test Receiver	R&S	ESCI	100082	Mar. 28, 2021
5	50Ω Terminator	SHX	TF2-1G-A	17051602	Mar. 21, 2021
6	50Ω coaxial switch	Anritsu	MP59B	6201750902	Mar. 21, 2021
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 9 kHz to 30 MHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Loop Antenna	EMCI	EMCI LPA600	275	Mar. 28, 2021
2	EMI Test Receiver	R&S	ESCI	100082	Mar. 28, 2021
3	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - 30 MHz to 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	TRILOG Broadband Antenna	Schwarzbeck	VULB 9168	719	Mar. 28, 2021
2	Pre-Amplifier	emci	EMC9135	980400	Mar. 21, 2021
3	MXE EMI Receiver	Keysight	N9038A	MY57150106	Mar. 21, 2021
4	Test Cable	emci	EMC104-SM-SM-7000	170330	Apr. 16, 2021
5	Test Cable	emci	EMC104-SM-SM-1000	170331	Apr. 16, 2021
6	Test Cable	emci	EMC104-SM-NM-3500	170621	Apr. 16, 2021
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A

Radiated Emissions - Above 1 GHz					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Double-Ridged Waveguide Horn Antenna	ETS-Lindgren	9120D	00206960	Mar. 28, 2021
2	Pre-Amplifier	emci	EMC012645SE	980421	Mar. 28, 2021
3	EXA Spectrum Analyzer	Keysight	N9010A	MY56480545	Mar. 21, 2021
4	Test Cable	emci	EMC104-SM-SM-7000	170330	Apr. 16, 2021
5	Test Cable	emci	EMC104-SM-SM-1000	170331	Apr. 16, 2021
6	Test Cable	emci	EMC104-SM-NM-3500	170621	Apr. 16, 2021
7	Measurement Software	Farad	EZ-EMC Ver.NB-03A1-01	N/A	N/A
8	MXE EMI Receiver	Keysight	N9038A	MY57150106	Mar. 28, 2021
9	Antenna	Schwarzbeck	BBHA9170	9170-651	Apr. 02, 2021
10	Pre-Amplifier	EMC INSTRUMENT	EMC184045B	980265	Mar. 21, 2021
11	EXA Spectrum Analyzer	Keysight	N9010A	MY56480579	Mar. 21, 2021
12	Test Cable	emci	EMC102-SM-SM-800	170335	Apr. 13, 2021
13	Test Cable	emci	EMC102-KM-KM-2500	170627	Apr. 13, 2021



Bandwidth					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 21, 2021



Maximum Output Power					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Peak Power Analyze	Keysight	8990B	MY51000507	Mar. 21, 2021
2	Wideband Power Sensor	Keysight	N9123A	MY58310003	Mar. 21, 2021

Power Spectral Density					
Item	Kind of Equipment	Manufacturer	Type No.	Serial No.	Calibrated until
1	Spectrum Analyzer	R&S	FSP40	100626	Mar. 21, 2021

Remark: "N/A" denotes no model name, serial no. or calibration specified.

All calibration period of equipment list is one year.

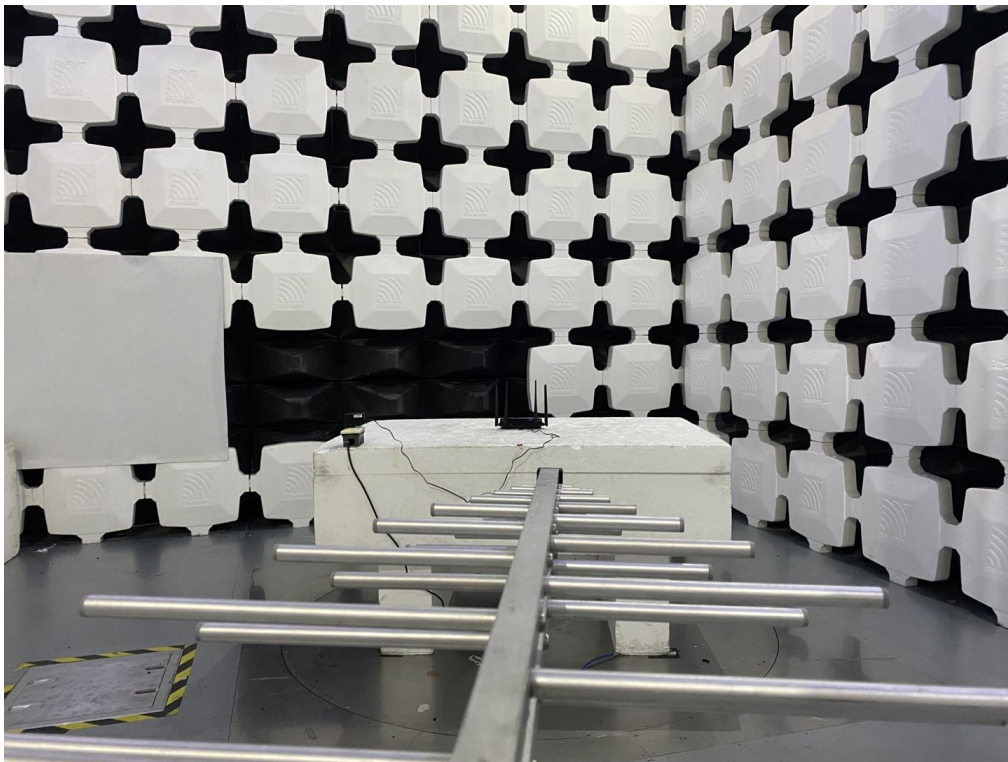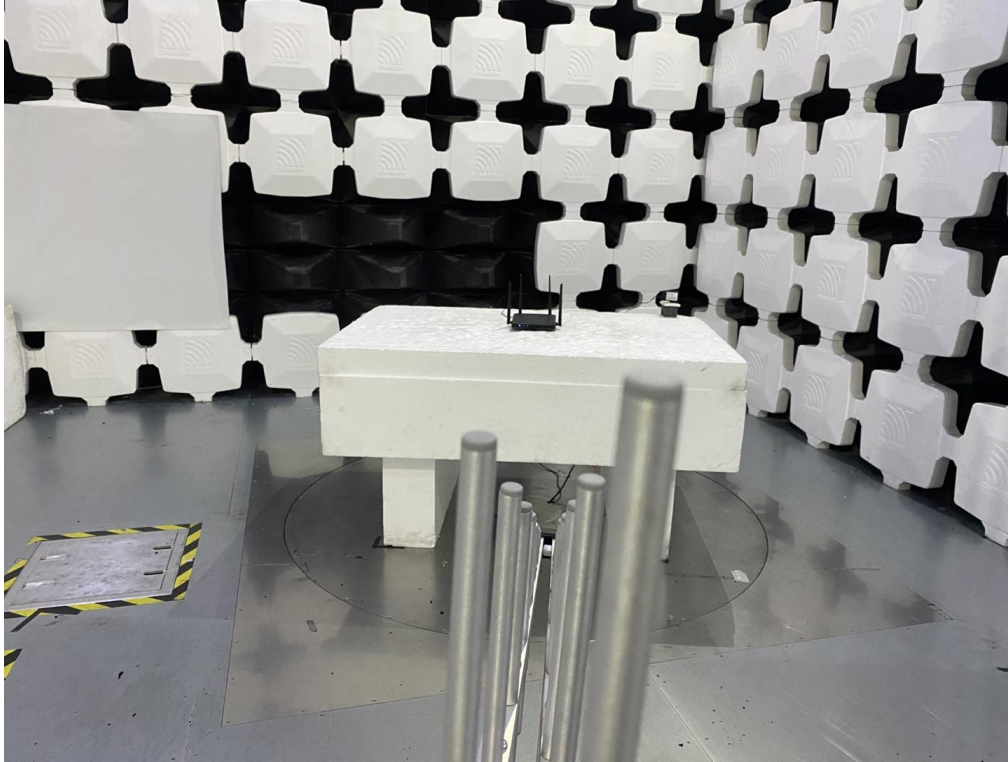
9. EUT TEST PHOTOS**Radiated Emissions Test Photos****30 MHz to 1 GHz**

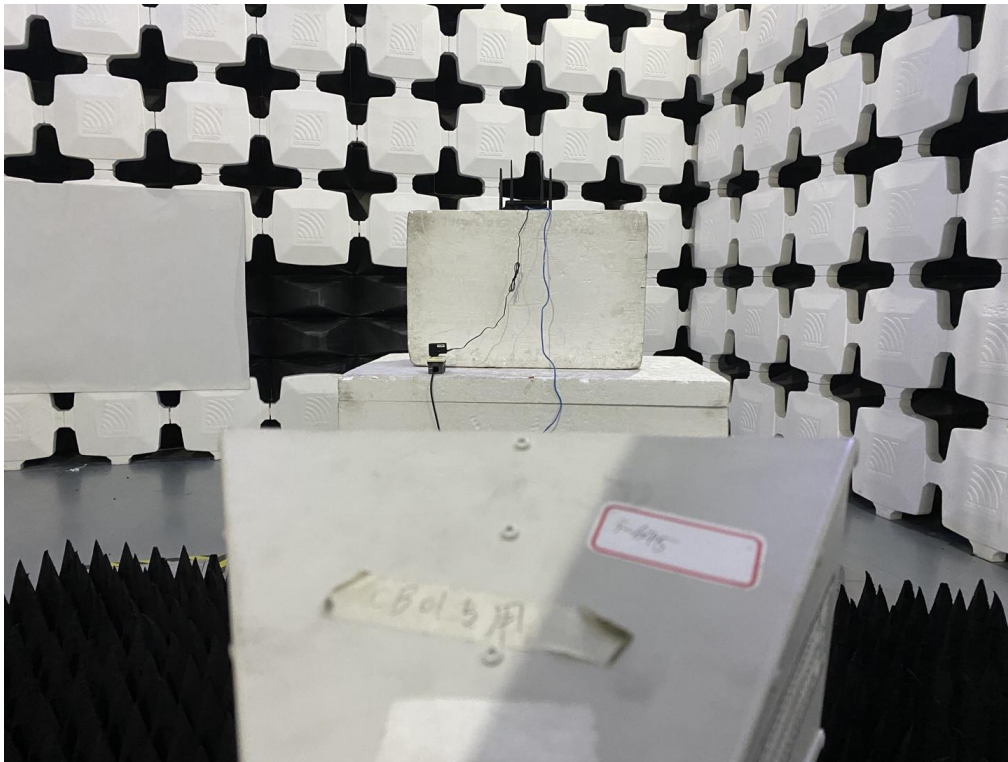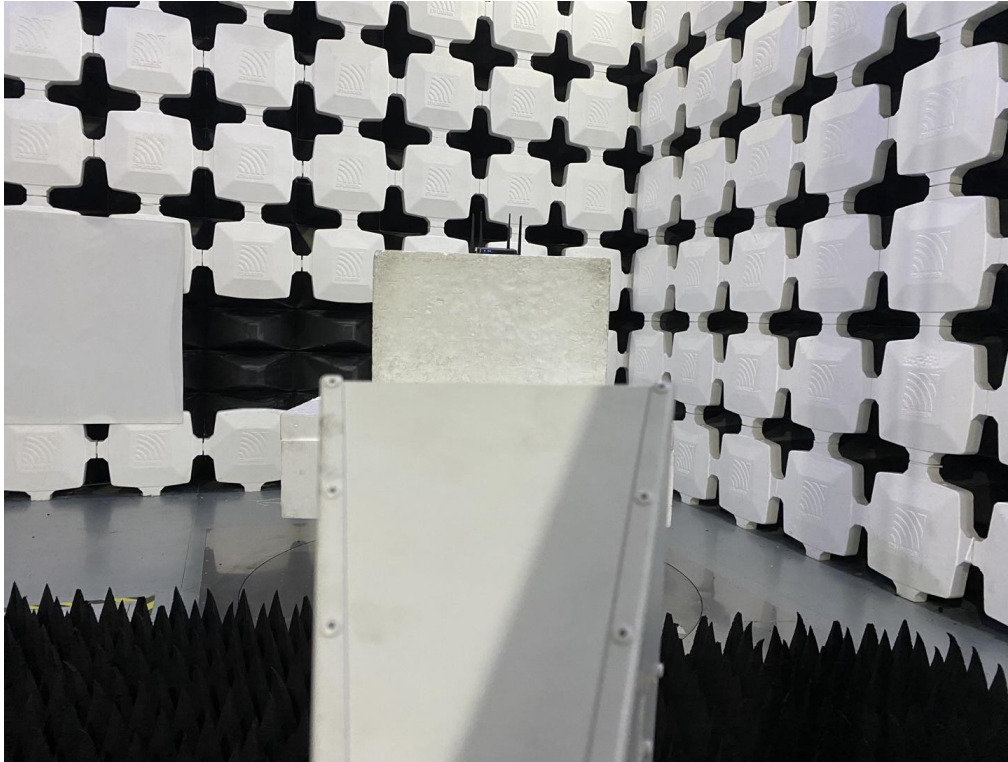Radiated Emissions Test Photos**Above 1 GHz**

APPENDIX A - AC POWER LINE CONDUCTED EMISSIONS

Test Mode: TX AC80 MODE CHANNEL 155

Line

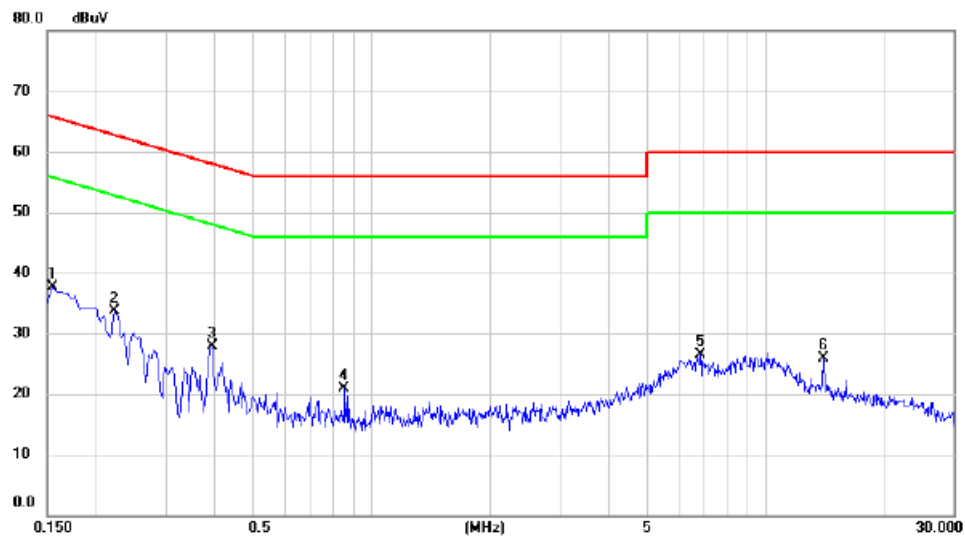


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV	Limit dBuV	Margin dB	Detector	Comment
1	*	0.1545	27.90	9.73	37.63	65.75	-28.12	peak	
2		0.2220	23.83	9.79	33.62	62.74	-29.12	peak	
3		0.3930	18.12	9.86	27.98	58.00	-30.02	peak	
4		0.8520	11.18	9.79	20.97	56.00	-35.03	peak	
5		6.8370	16.42	10.08	26.50	60.00	-33.50	peak	
6		14.0010	15.79	10.19	25.98	60.00	-34.02	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AC80 MODE CHANNEL 155

Neutral

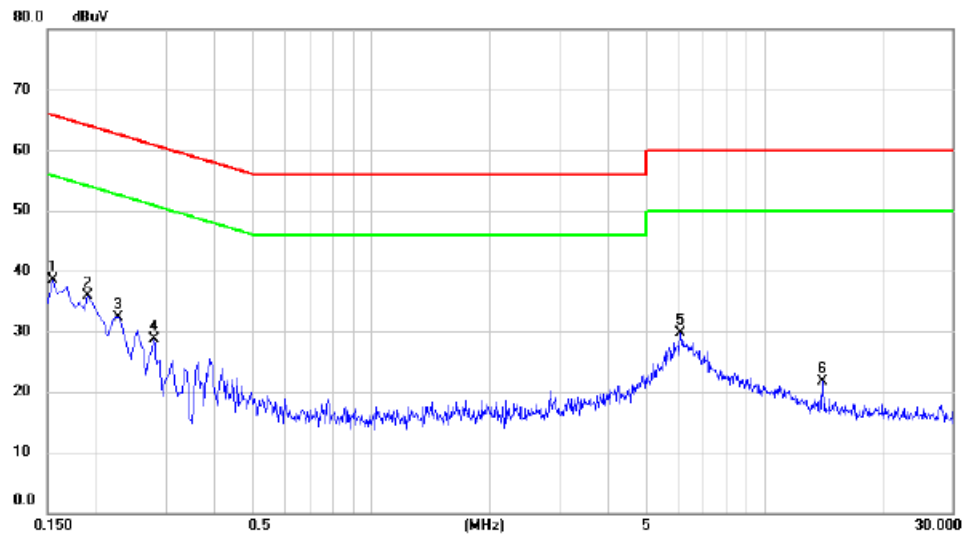

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment
1	*	0.1545	28.82	9.61	38.43	65.75	-27.32	peak	
2		0.1905	26.32	9.63	35.95	64.01	-28.06	peak	
3		0.2265	22.76	9.63	32.39	62.58	-30.19	peak	
4		0.2805	19.15	9.65	28.80	60.80	-32.00	peak	
5		6.0900	19.69	10.01	29.70	60.00	-30.30	peak	
6		14.0010	11.62	10.15	21.77	60.00	-38.23	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.


APPENDIX B - RADIATED EMISSION - 9 KHZ TO 30 MHZ

Note: Below 30MHz, The measured value have enough margin over 20dB than the limit,
therefore they are not reported

APPENDIX C - RADIATED EMISSION - 30 MHZ TO 1 GHZ

Test Mode:	TX AC80 MODE CHANNEL 155
------------	--------------------------

Vertical

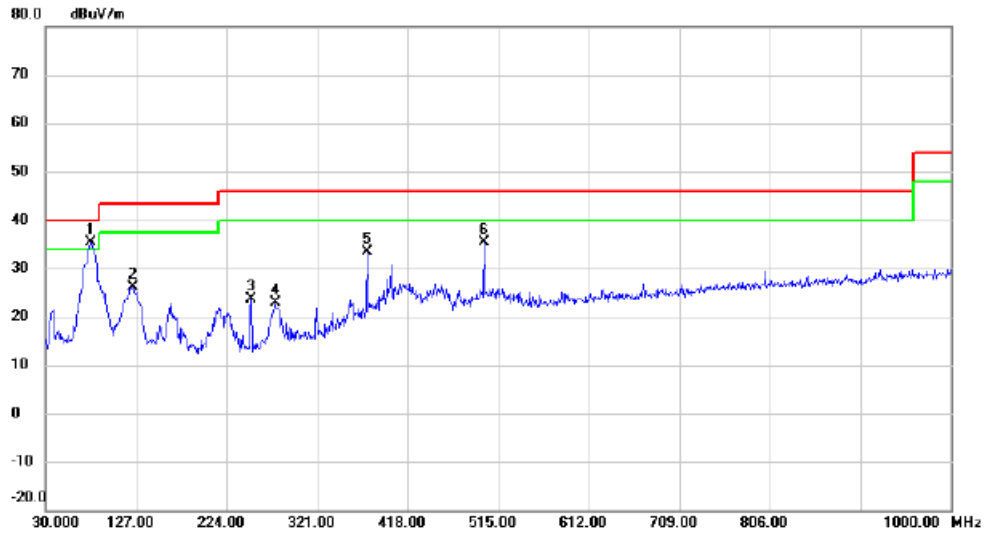


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	78.5000	55.42	-20.15	35.27	40.00	-4.73	peak	
2		123.1200	44.14	-17.89	26.25	43.50	-17.25	peak	
3		250.1900	40.28	-16.67	23.61	46.00	-22.39	peak	
4		275.8950	38.49	-15.56	22.93	46.00	-23.07	peak	
5		374.8350	46.38	-13.11	33.27	46.00	-12.73	peak	
6		499.9650	45.80	-10.32	35.48	46.00	-10.52	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode: TX AC80 MODE CHANNEL 155

Horizontal

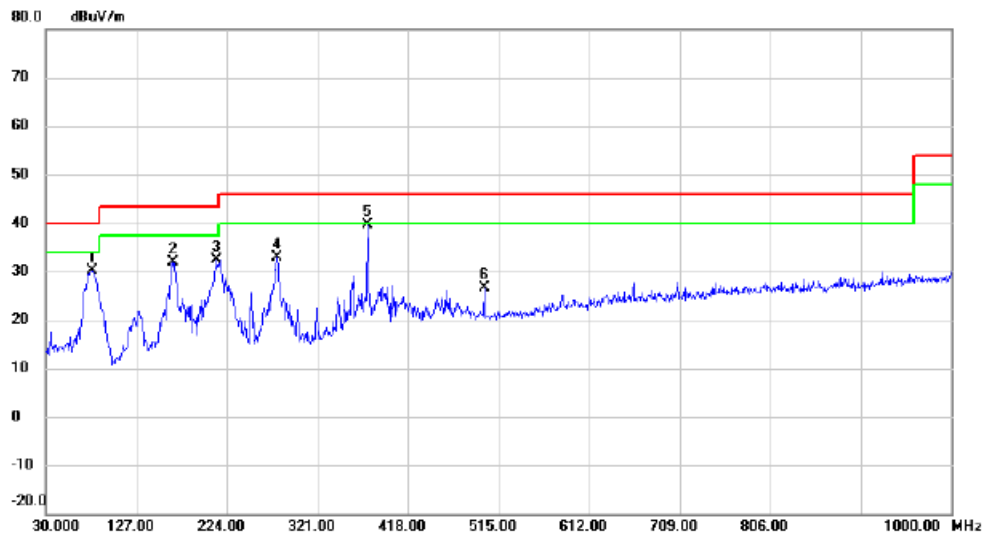

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		79.4700	50.61	-20.38	30.23	40.00	-9.77	peak	
2		166.7700	47.61	-15.70	31.91	43.50	-11.59	peak	
3		213.3300	51.08	-18.69	32.39	43.50	-11.11	peak	
4		277.3500	48.37	-15.49	32.88	46.00	-13.12	peak	
5	*	374.8350	52.71	-13.11	39.60	46.00	-6.40	peak	
6		499.9650	36.96	-10.32	26.64	46.00	-19.36	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX D - RADIATED EMISSION - ABOVE 1000 MHZ

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

Vertical

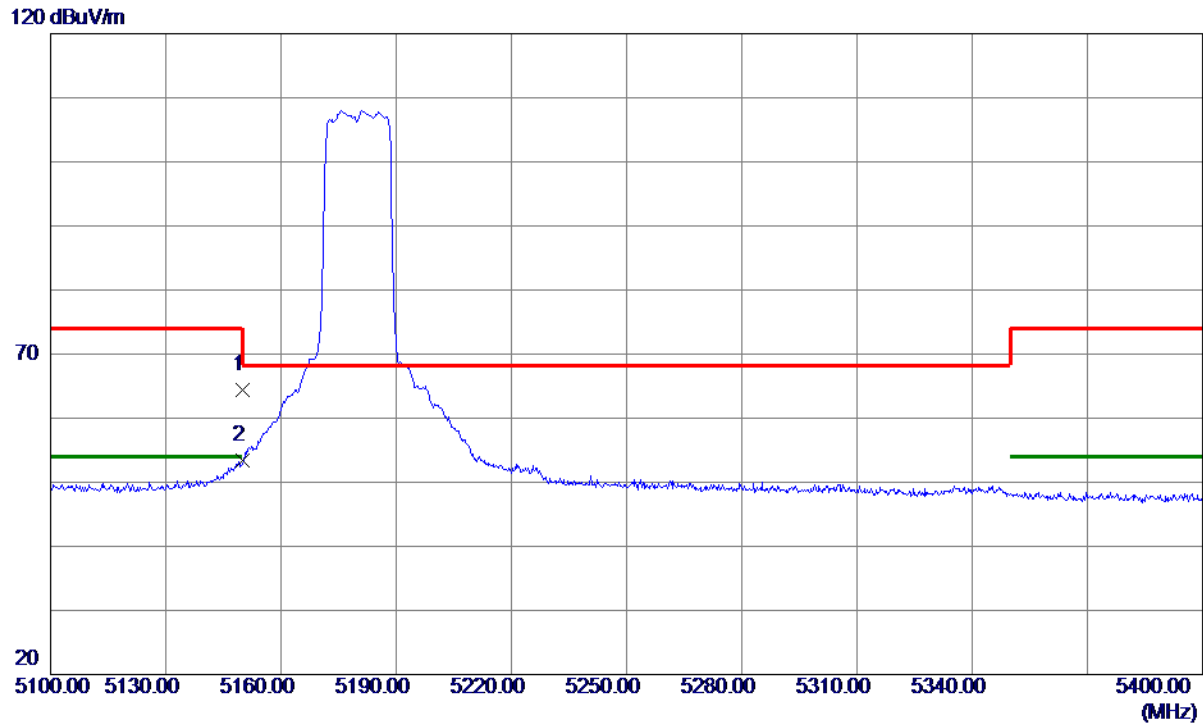

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.78	40.53	64.31	74.00	-9.69	Peak	
2 *	5150.0000	12.96	40.53	53.49	54.00	-0.51	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

Vertical

80 dBuV/m

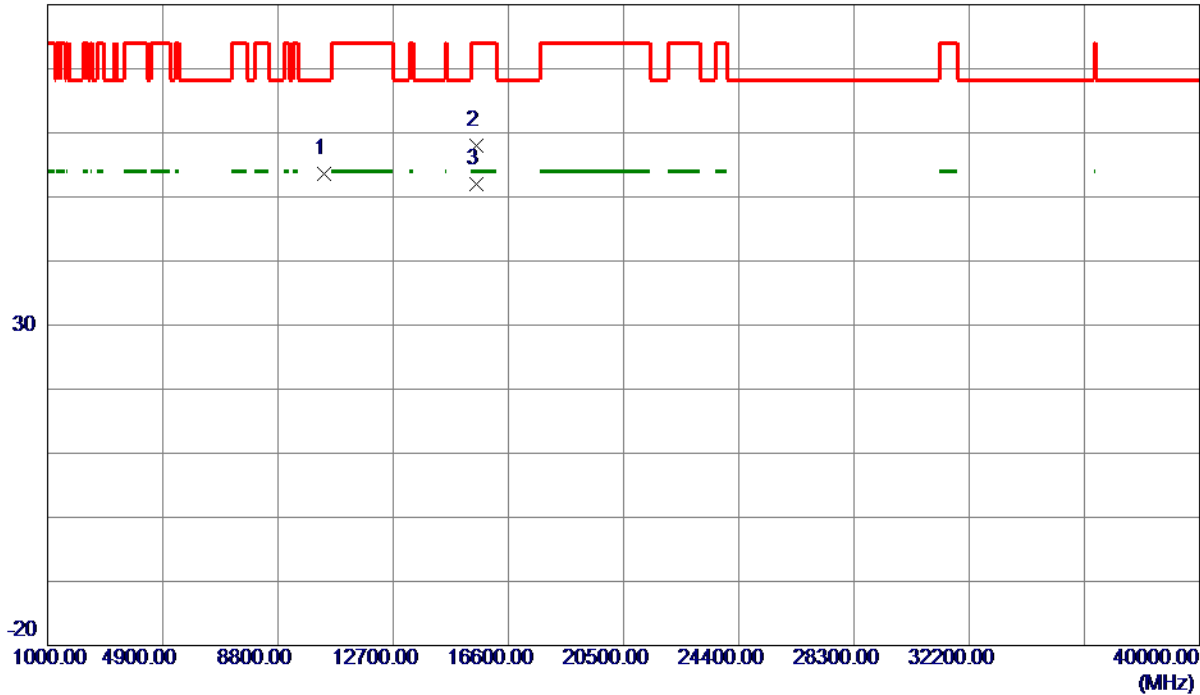

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10360.0000	47.82	5.85	53.67	68.30	-14.63	Peak	
2	15535.3000	50.74	7.35	58.09	74.00	-15.91	Peak	
3 *	15535.3000	44.69	7.35	52.04	54.00	-1.96	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

Horizontal

120 dBuV/m

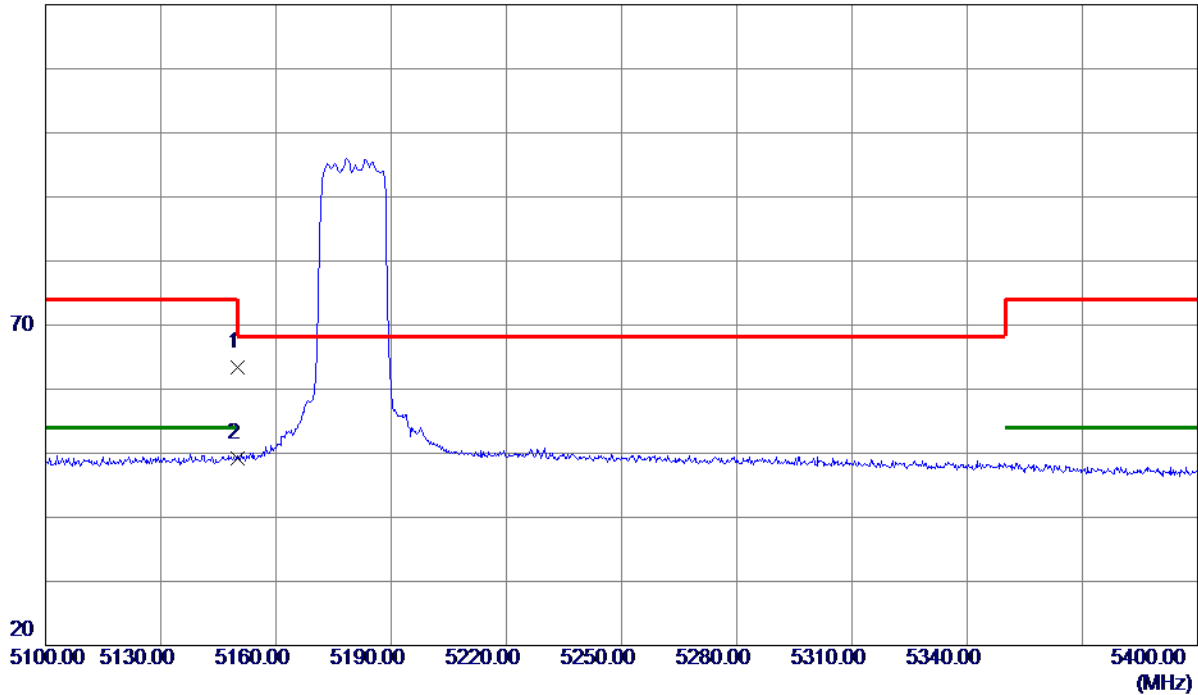


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	22.89	40.53	63.42	74.00	-10.58	Peak	
2 *	5150.0000	8.67	40.53	49.20	54.00	-4.80	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5180 MHz

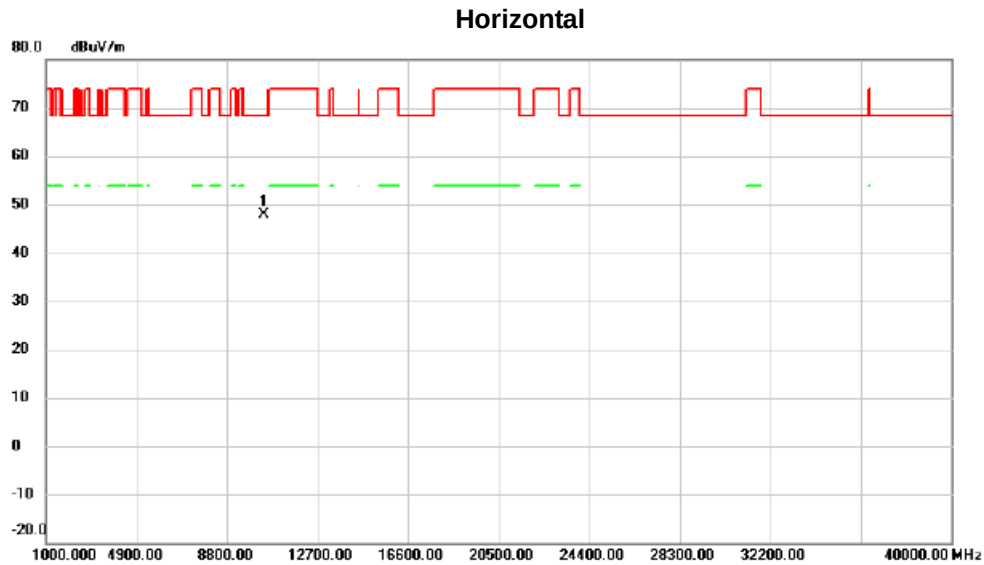


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	10360.00	42.06	5.86	47.92	68.30	-20.38	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

Vertical

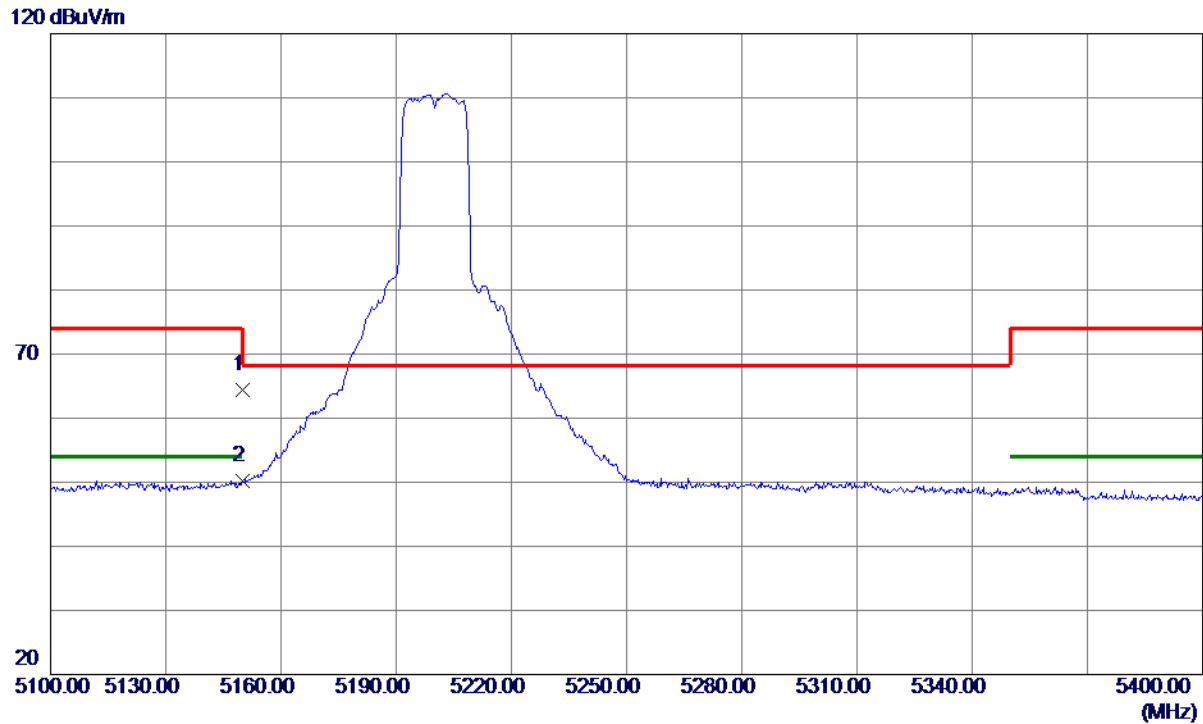

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.95	40.53	64.48	74.00	-9.52	Peak	
2 *	5150.0000	9.73	40.53	50.26	54.00	-3.74	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

Vertical

80 dBuV/m

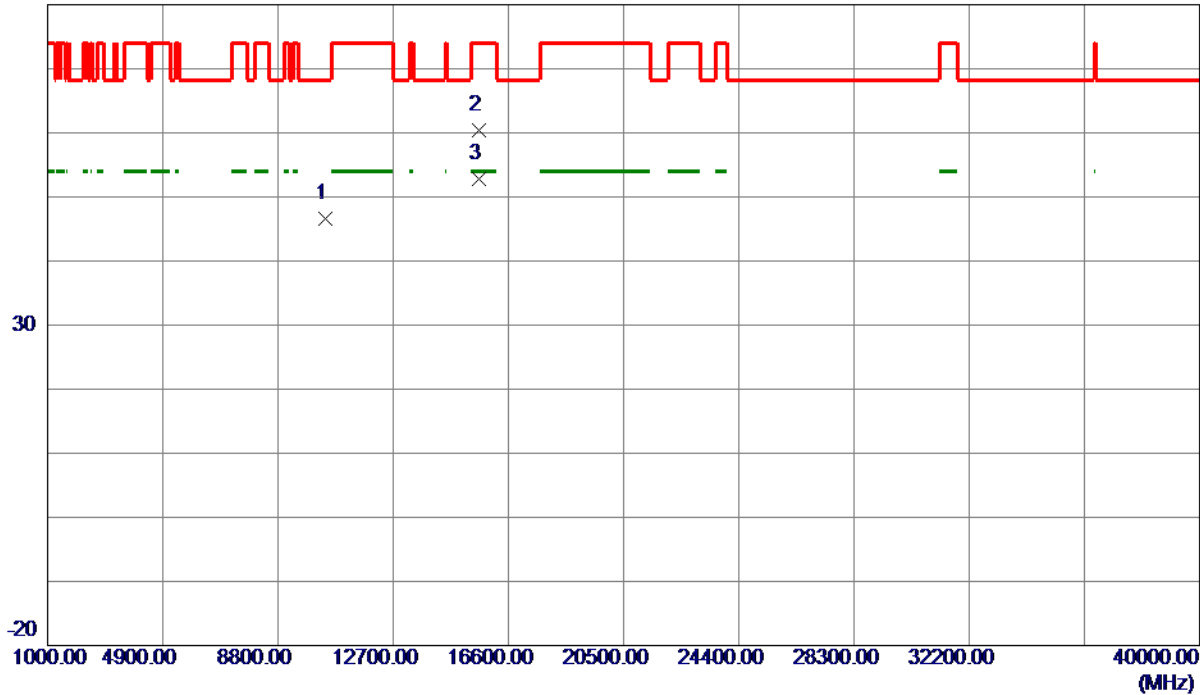

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10400.0000	40.60	5.96	46.56	68.30	-21.74	Peak	
2	15605.5000	53.06	7.34	60.40	74.00	-13.60	Peak	
3 *	15605.5000	45.52	7.34	52.86	54.00	-1.14	AVG	

REMARKS:


(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

Horizontal

120 dBuV/m

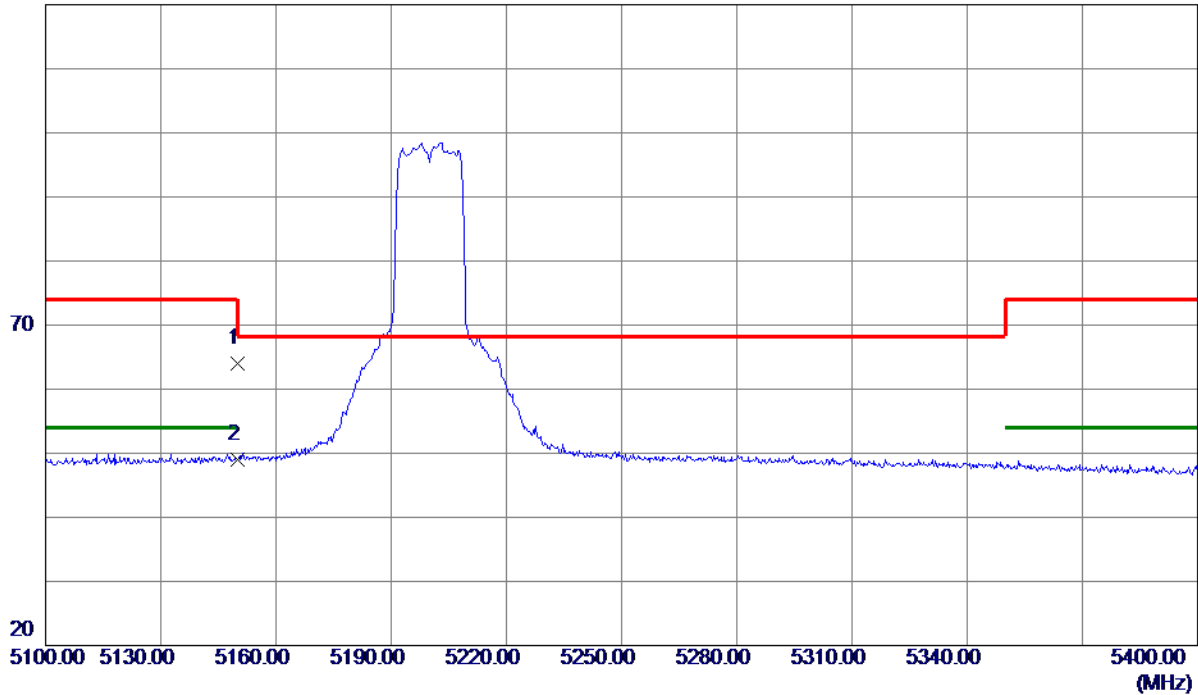

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.44	40.53	63.97	74.00	-10.03	Peak	
2 *	5150.0000	8.46	40.53	48.99	54.00	-5.01	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5200 MHz

Horizontal

80 dBuV/m

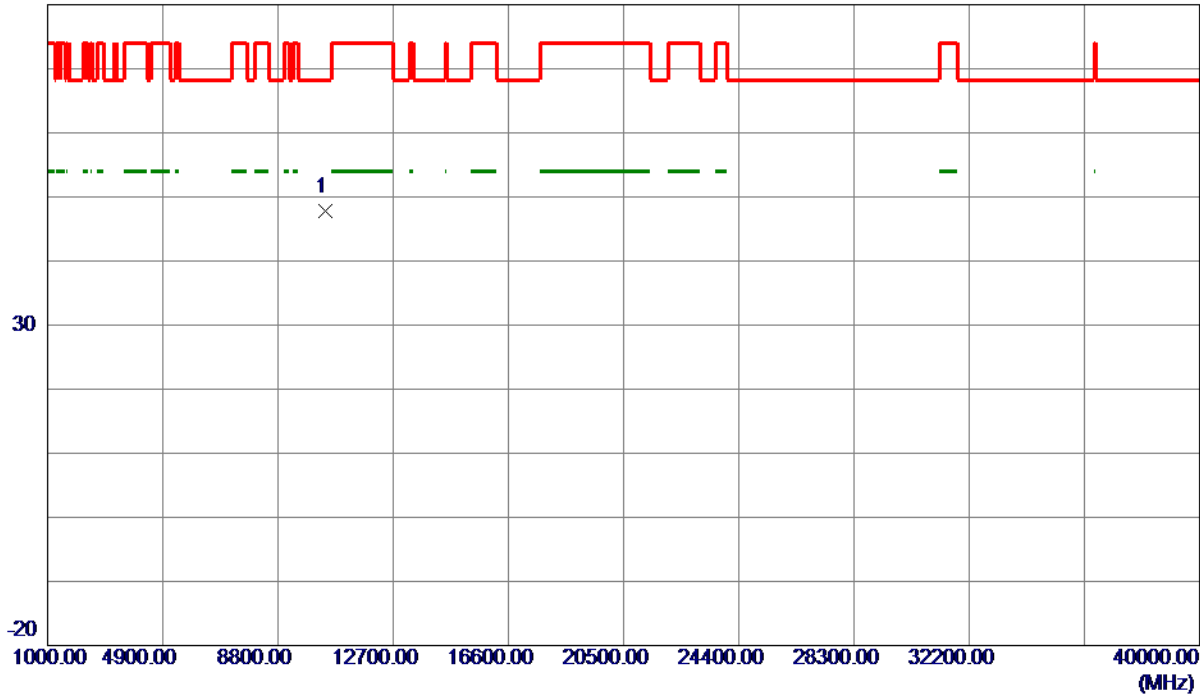


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.0000	41.74	5.96	47.70	68.30	-20.60	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

Vertical

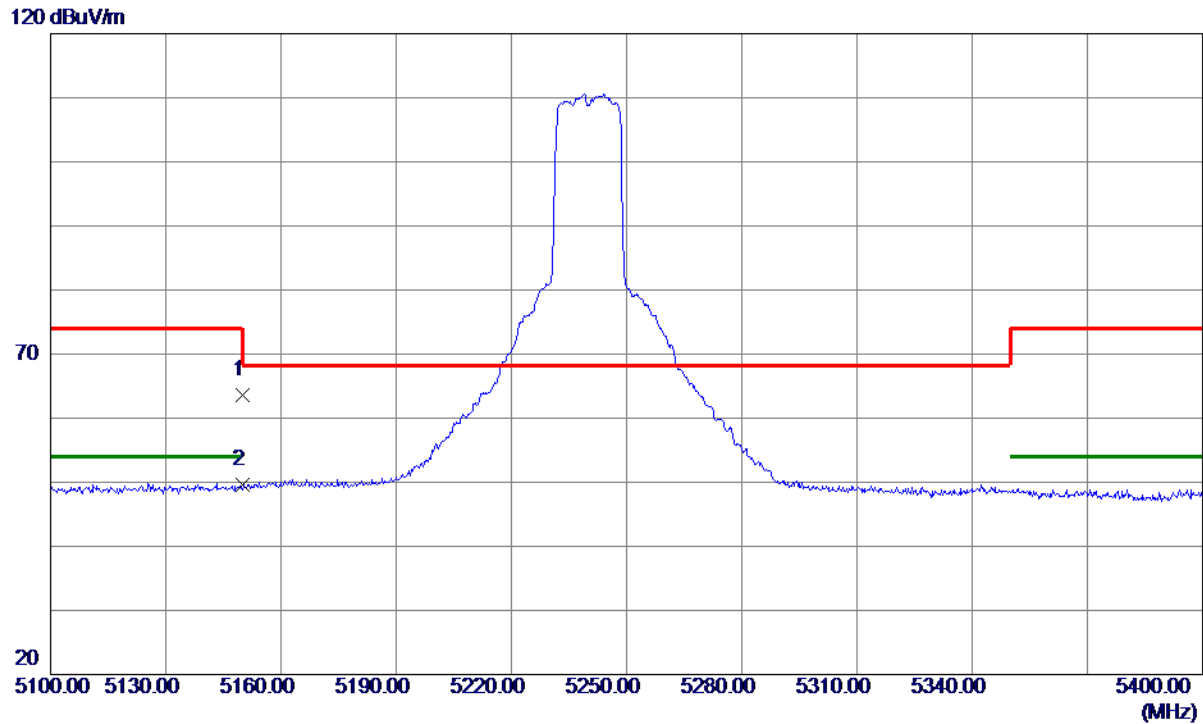

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.05	40.53	63.58	74.00	-10.42	Peak	
2 *	5150.0000	9.12	40.53	49.65	54.00	-4.35	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

Vertical

80 dBuV/m

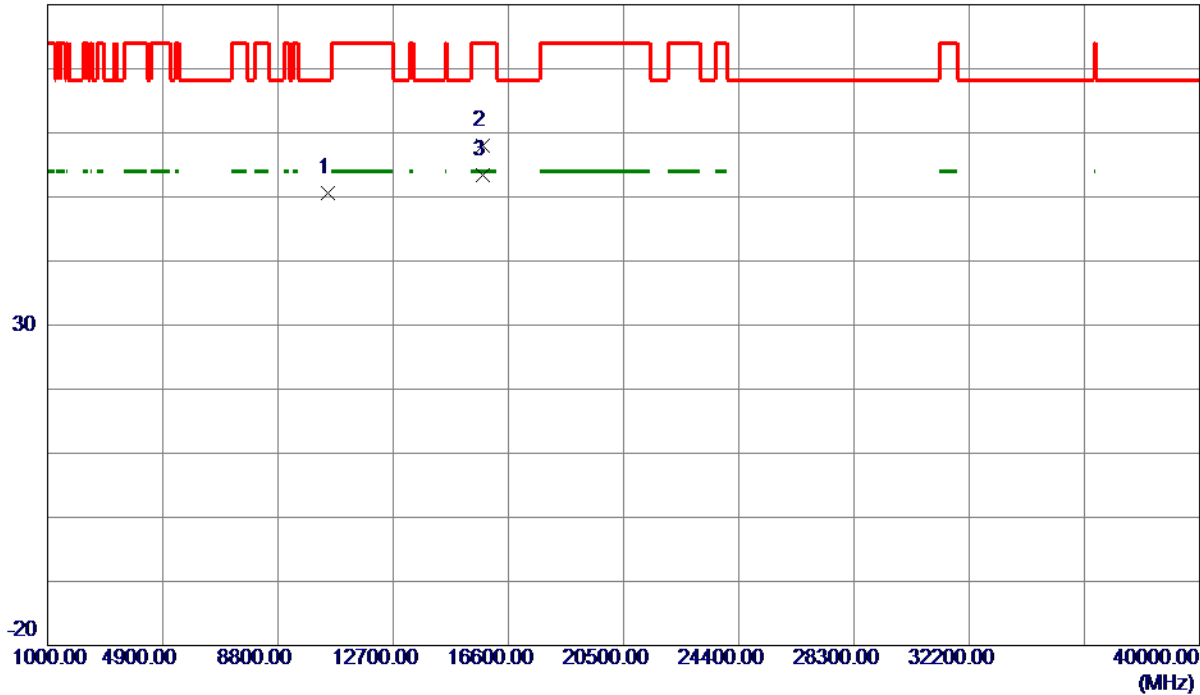

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.0000	44.35	6.16	50.51	68.30	-17.79	Peak	
2	15722.5000	50.58	7.33	57.91	74.00	-16.09	Peak	
3 *	15722.5000	46.04	7.33	53.37	54.00	-0.63	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

Horizontal

120 dBuV/m

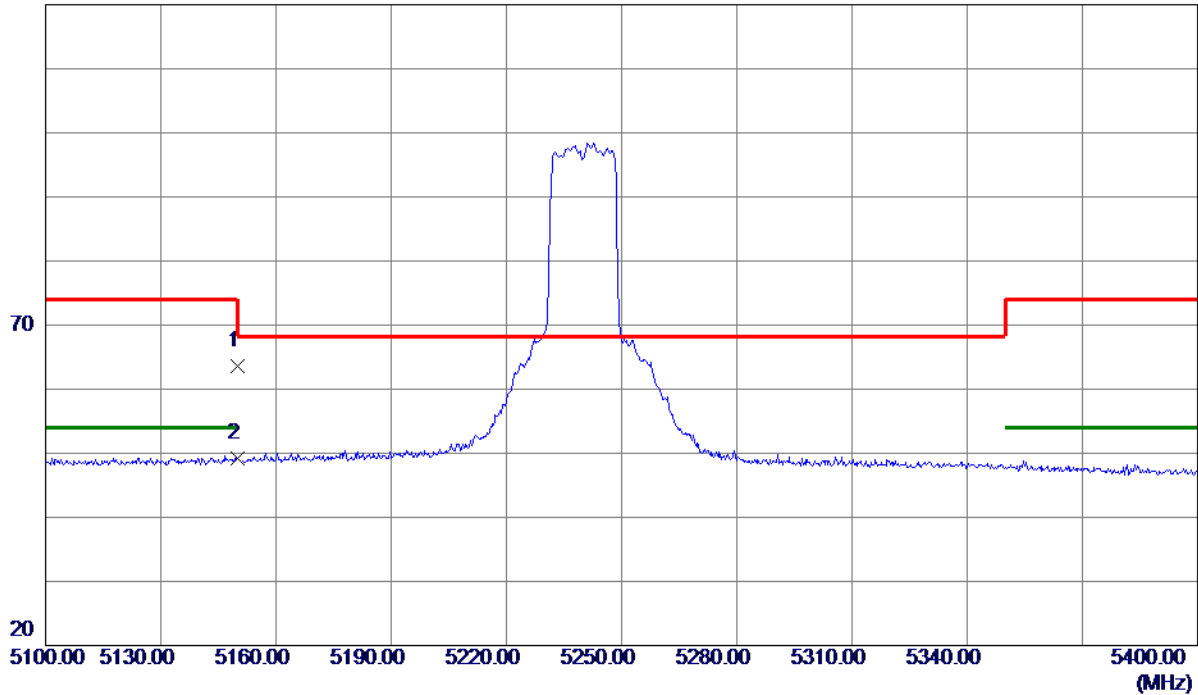

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.04	40.53	63.57	74.00	-10.43	Peak	
2 *	5150.0000	8.70	40.53	49.23	54.00	-4.77	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX A Mode 5240 MHz

Horizontal

80 dBuV/m

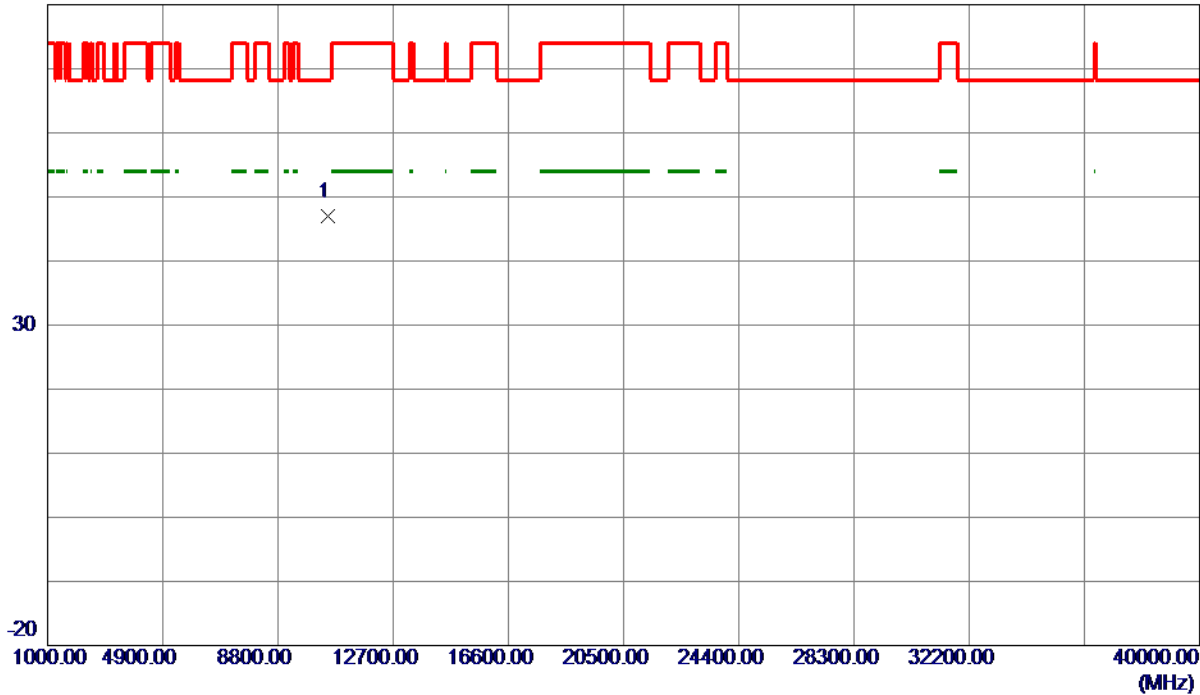


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0000	40.74	6.16	46.90	68.30	-21.40	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

Vertical

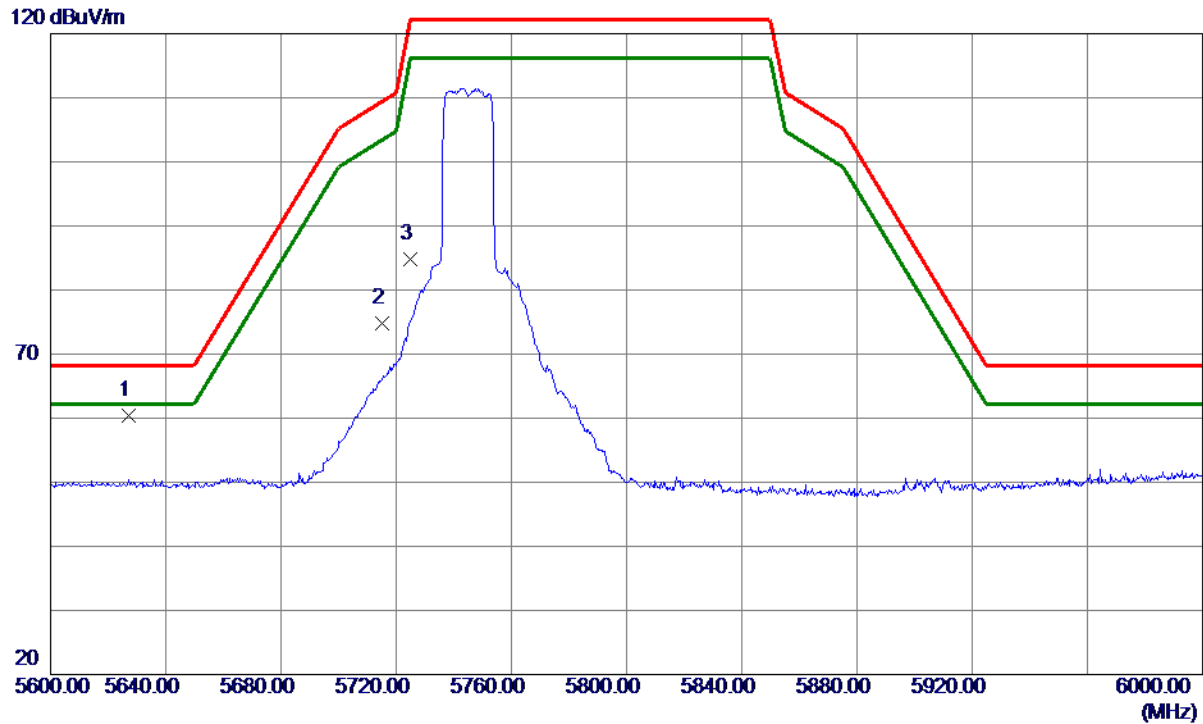

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5627.2000	19.00	41.45	60.45	68.20	-7.75	Peak	
2	5715.0000	33.27	41.59	74.86	109.40	-34.54	Peak	
3	5725.0000	43.23	41.60	84.83	122.20	-37.37	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

Vertical

80 dBuV/m

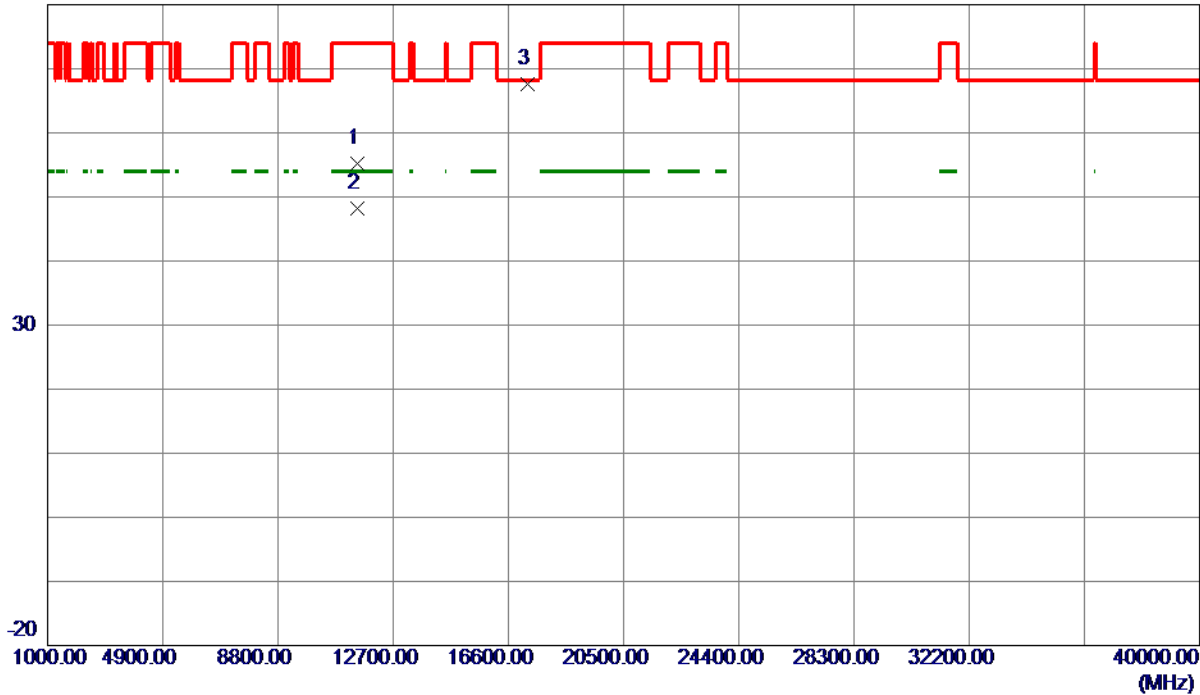


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11487.1000	48.39	6.83	55.22	74.00	-18.78	Peak	
2	11487.1000	41.39	6.83	48.22	54.00	-5.78	AVG	
3 *	17239.6000	55.27	12.39	67.66	68.30	-0.64	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

Horizontal

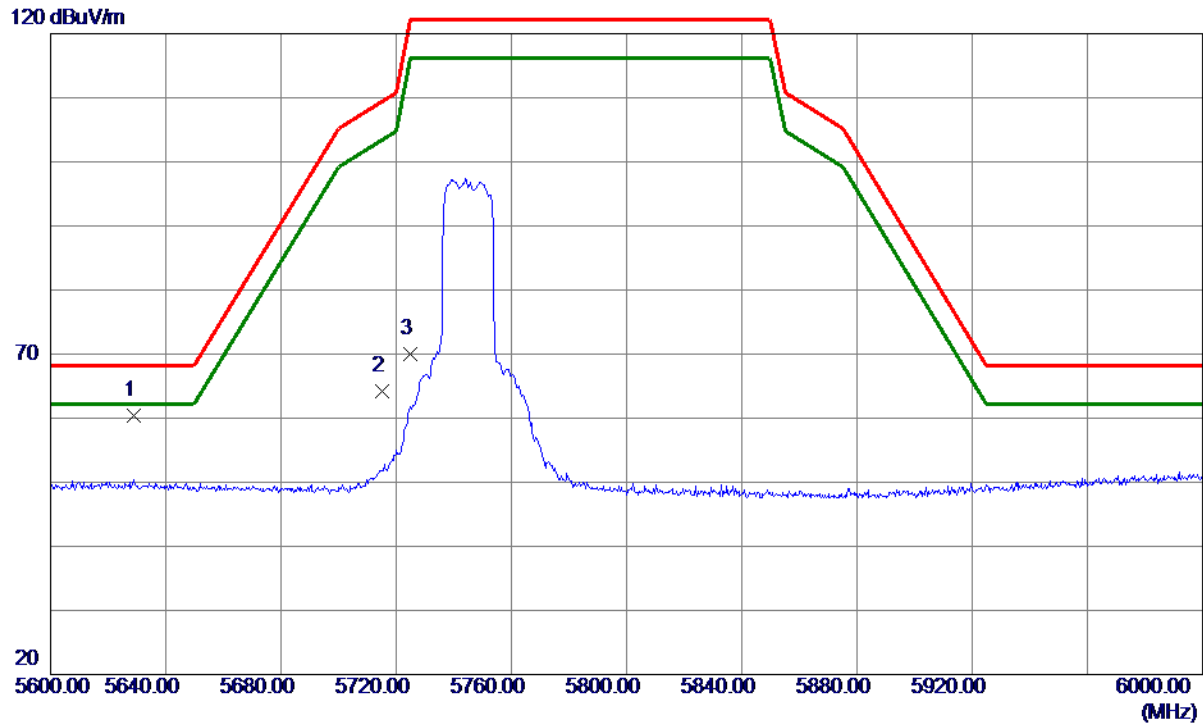

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5628.8000	18.86	41.45	60.31	68.20	-7.89	Peak	
2	5715.0000	22.70	41.59	64.29	109.40	-45.11	Peak	
3	5725.0000	28.43	41.60	70.03	122.20	-52.17	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5745 MHz

Horizontal

80 dBuV/m

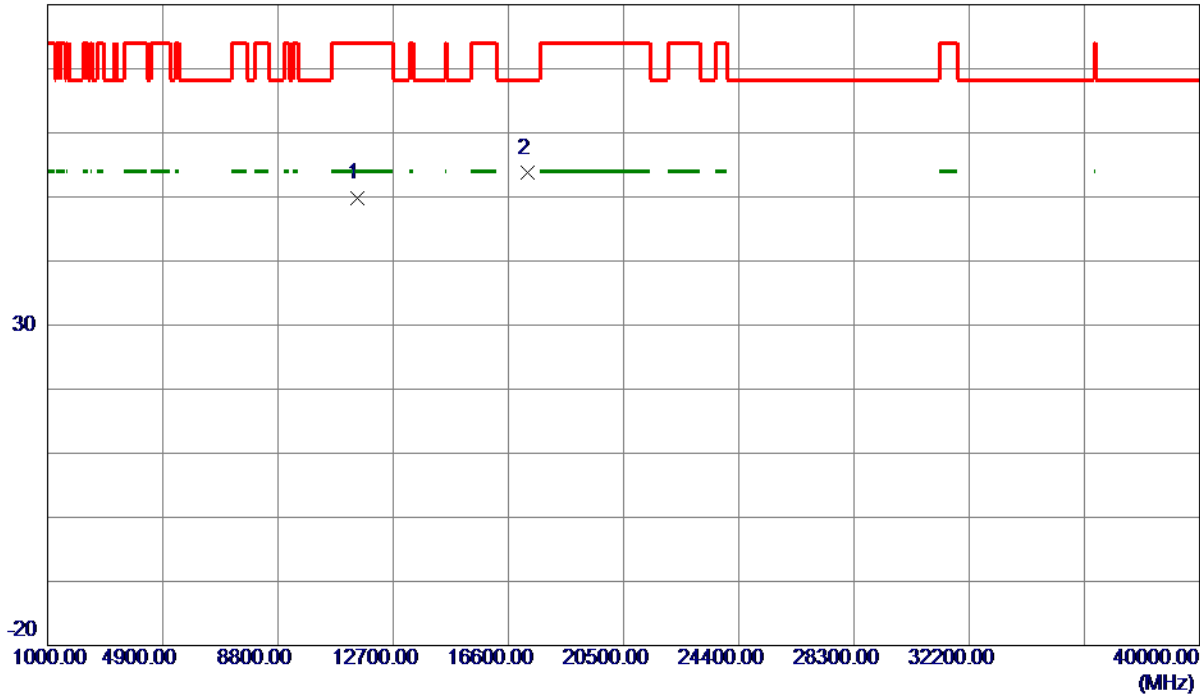


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	43.02	6.83	49.85	74.00	-24.15	Peak	
2 *	17231.8000	41.35	12.35	53.70	68.30	-14.60	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

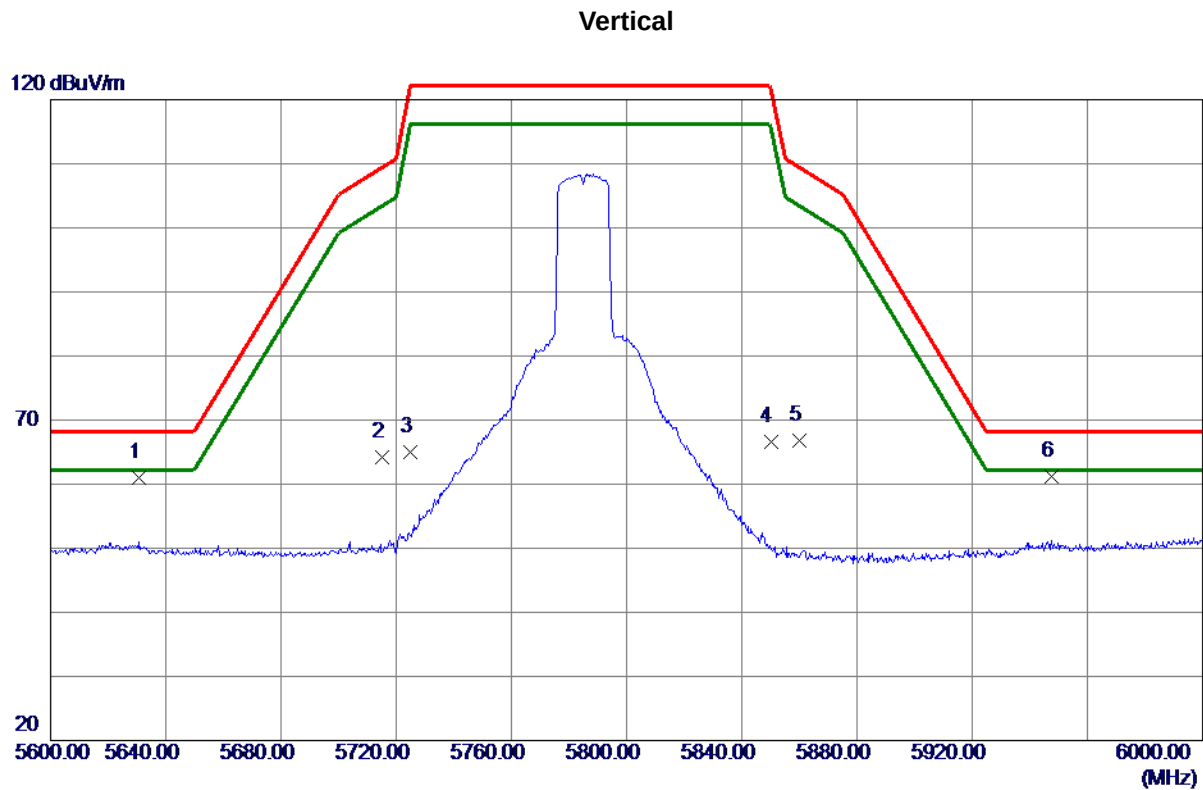

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5630.8000	19.53	41.45	60.98	68.20	-7.22	Peak	
2	5715.0000	22.65	41.59	64.24	109.40	-45.16	Peak	
3	5725.0000	23.42	41.60	65.02	122.20	-57.18	Peak	
4	5850.0000	24.77	41.80	66.57	122.20	-55.63	Peak	
5	5860.0000	25.00	41.81	66.81	109.40	-42.59	Peak	
6 *	5947.6000	19.31	41.95	61.26	68.20	-6.94	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

Vertical

80 dBuV/m

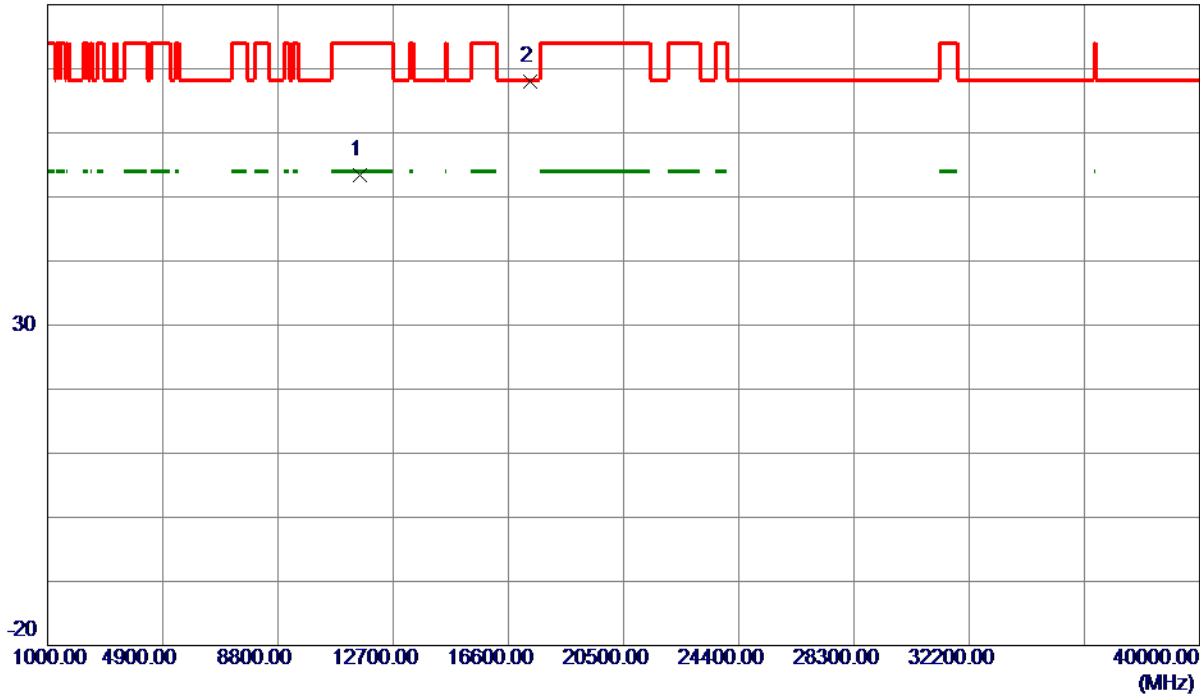


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	46.61	6.73	53.34	74.00	-20.66	Peak	
2 *	17356.6000	55.08	13.00	68.08	68.30	-0.22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

Horizontal

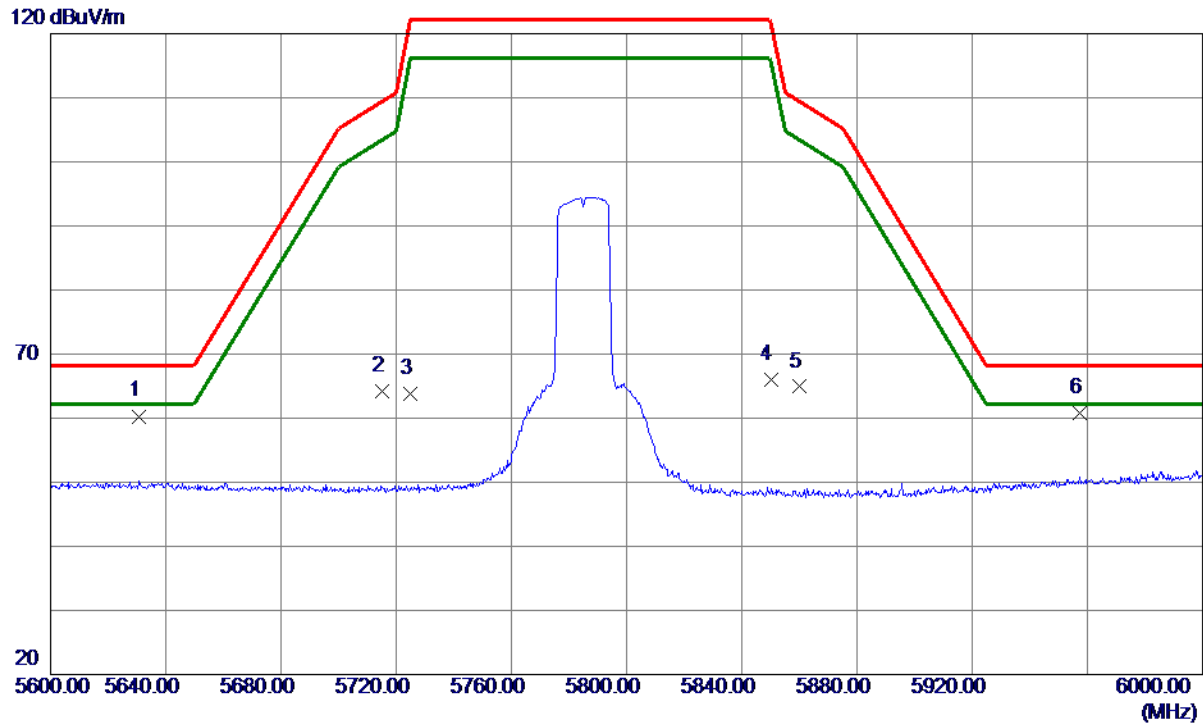

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5630.8000	18.85	41.45	60.30	68.20	-7.90	Peak	
2	5715.0000	22.66	41.59	64.25	109.40	-45.15	Peak	
3	5725.0000	22.13	41.60	63.73	122.20	-58.47	Peak	
4	5850.0000	24.18	41.80	65.98	122.20	-56.22	Peak	
5	5860.0000	23.09	41.81	64.90	109.40	-44.50	Peak	
6 *	5957.4000	18.78	41.96	60.74	68.20	-7.46	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5785 MHz

Horizontal

80 dBuV/m

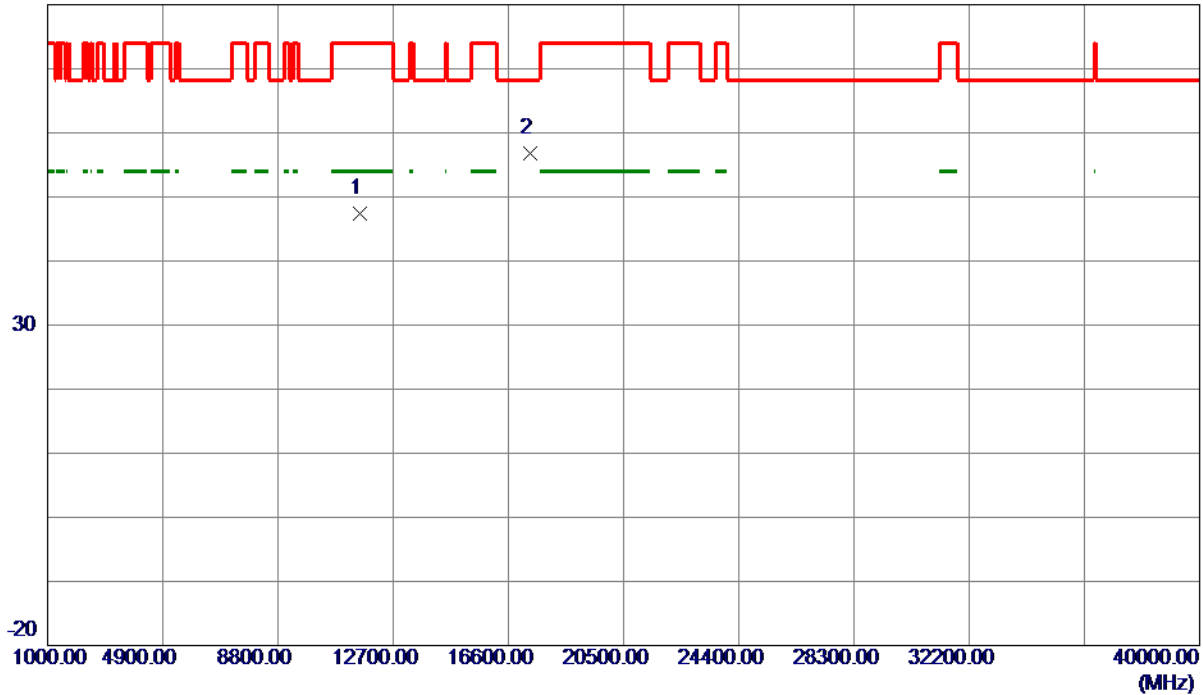


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	40.76	6.73	47.49	74.00	-26.51	Peak	
2 *	17355.0000	43.85	12.99	56.84	68.30	-11.46	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

Vertical

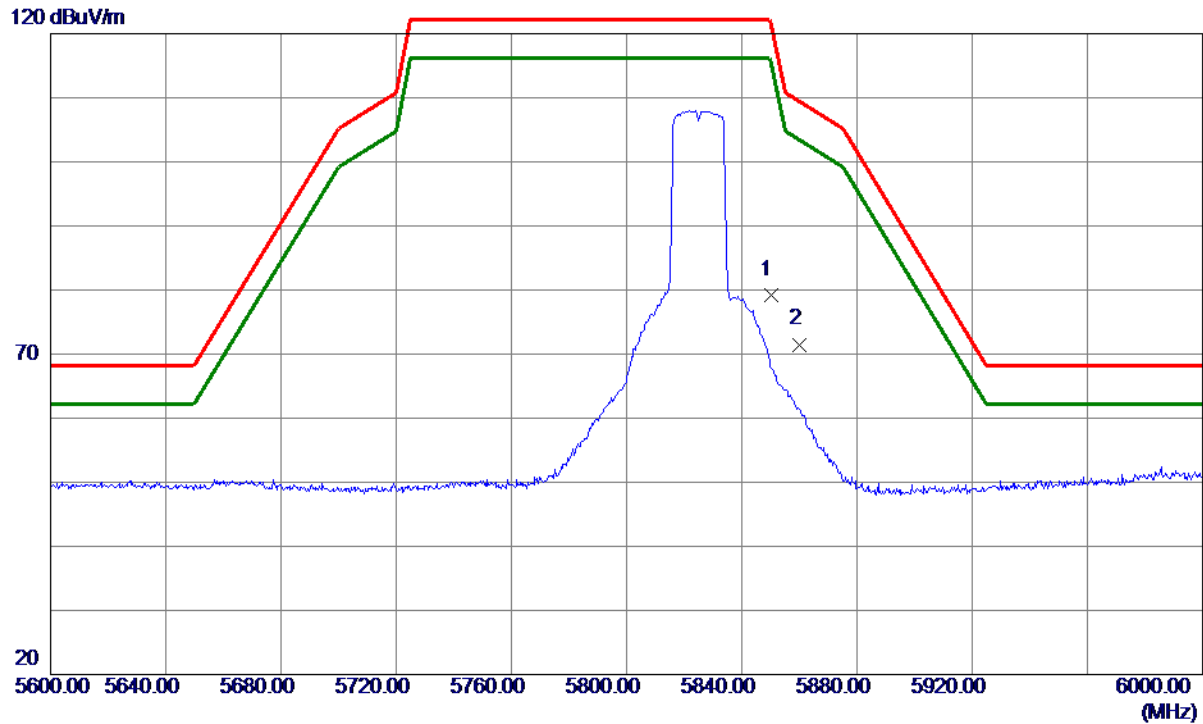

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5850.0000	37.44	41.80	79.24	122.20	-42.96	Peak	
2 *	5860.0000	29.69	41.81	71.50	109.40	-37.90	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

Vertical

80 dBuV/m

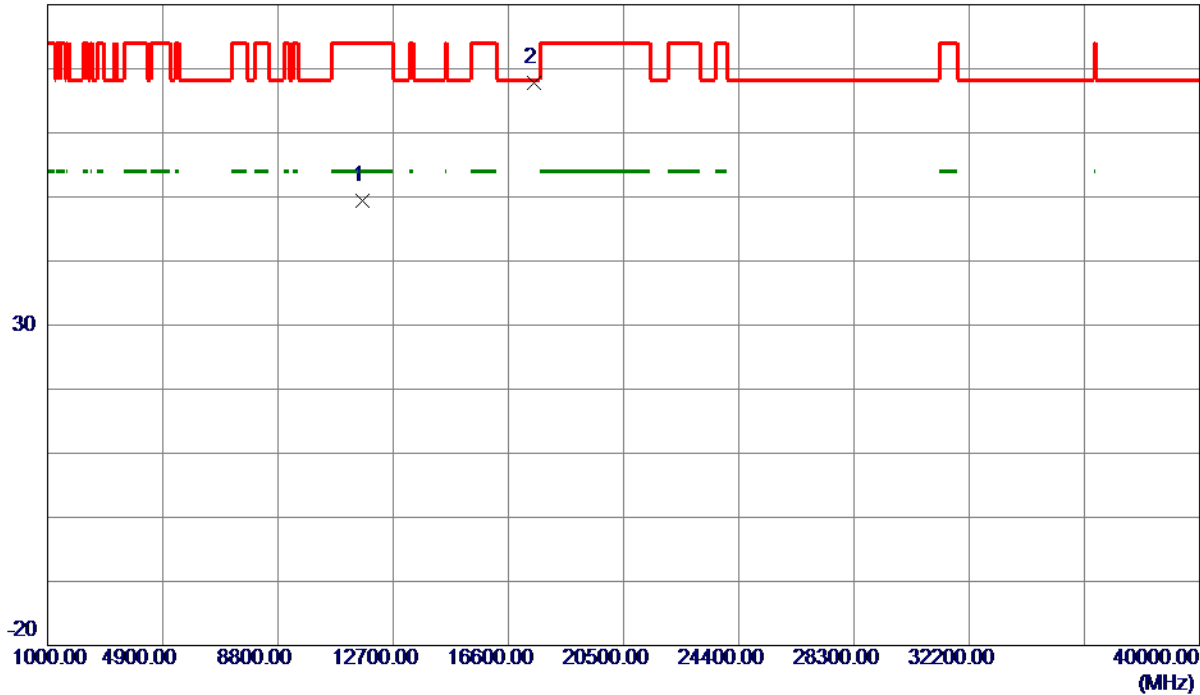


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	42.72	6.63	49.35	74.00	-24.65	Peak	
2 *	17475.0000	54.16	13.62	67.78	68.30	-0.52	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

Horizontal

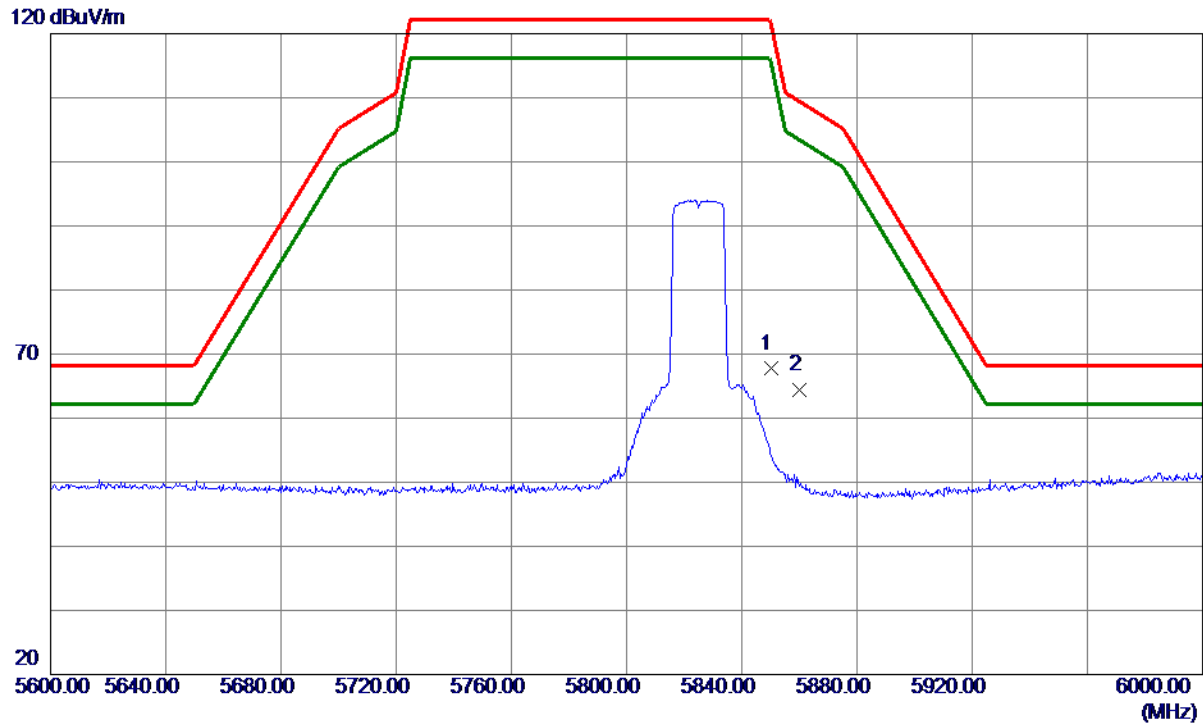

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5850.0000	25.90	41.80	67.70	122.20	-54.50	Peak	
2 *	5860.0000	22.64	41.81	64.45	109.40	-44.95	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX A Mode 5825 MHz

Horizontal

80 dBuV/m

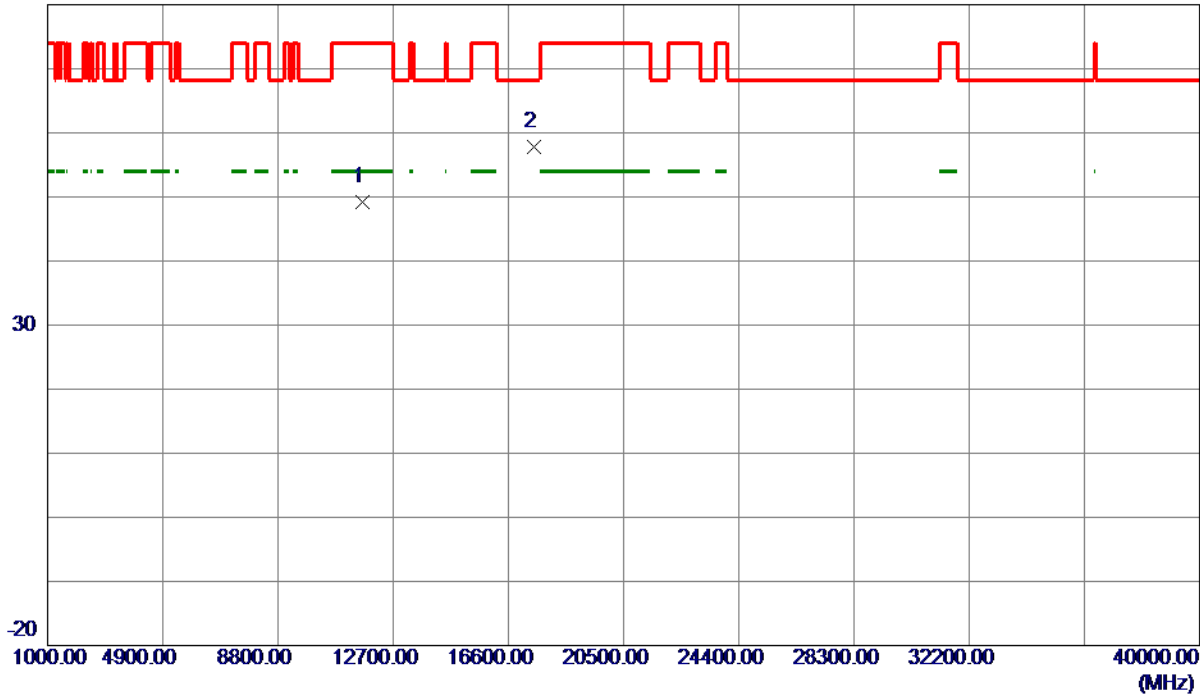

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	42.49	6.63	49.12	74.00	-24.88	Peak	
2 *	17475.0000	44.18	13.62	57.80	68.30	-10.50	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Vertical

120 dBuV/m

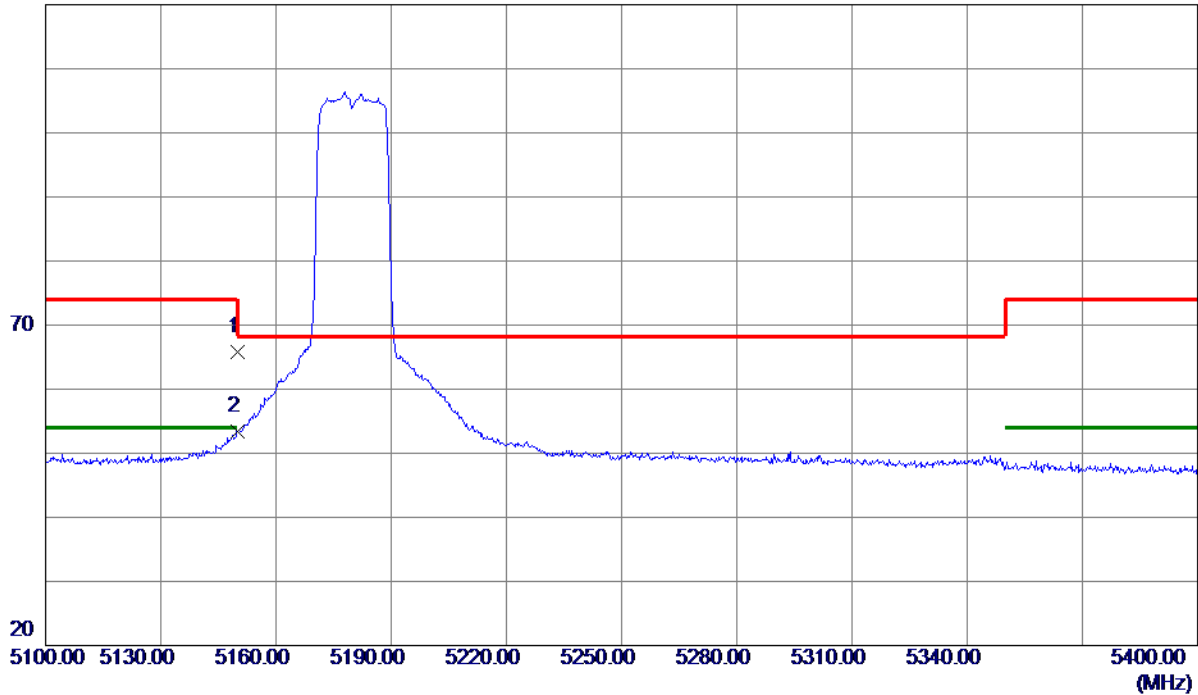

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	25.36	40.53	65.89	74.00	-8.11	Peak	
2 *	5150.0000	12.88	40.53	53.41	54.00	-0.59	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Vertical

80 dBuV/m

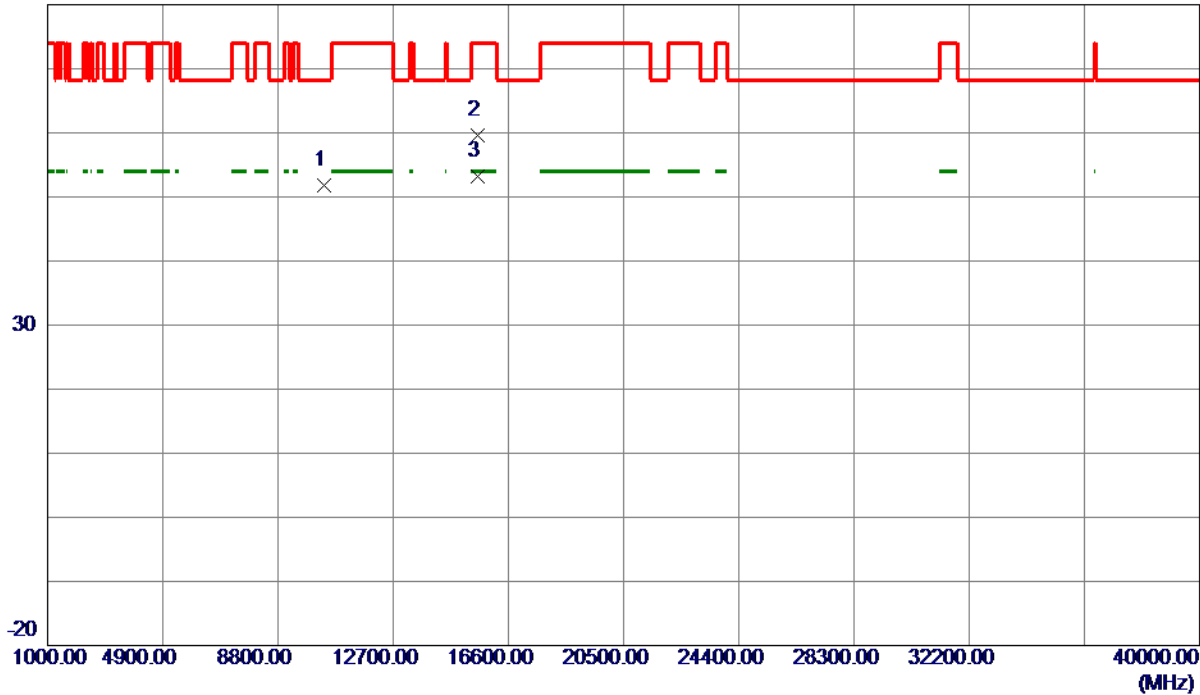

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10356.1000	45.96	5.84	51.80	68.30	-16.50	Peak	
2	15539.2000	52.23	7.35	59.58	74.00	-14.42	Peak	
3 *	15539.2000	45.87	7.35	53.22	54.00	-0.78	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Horizontal

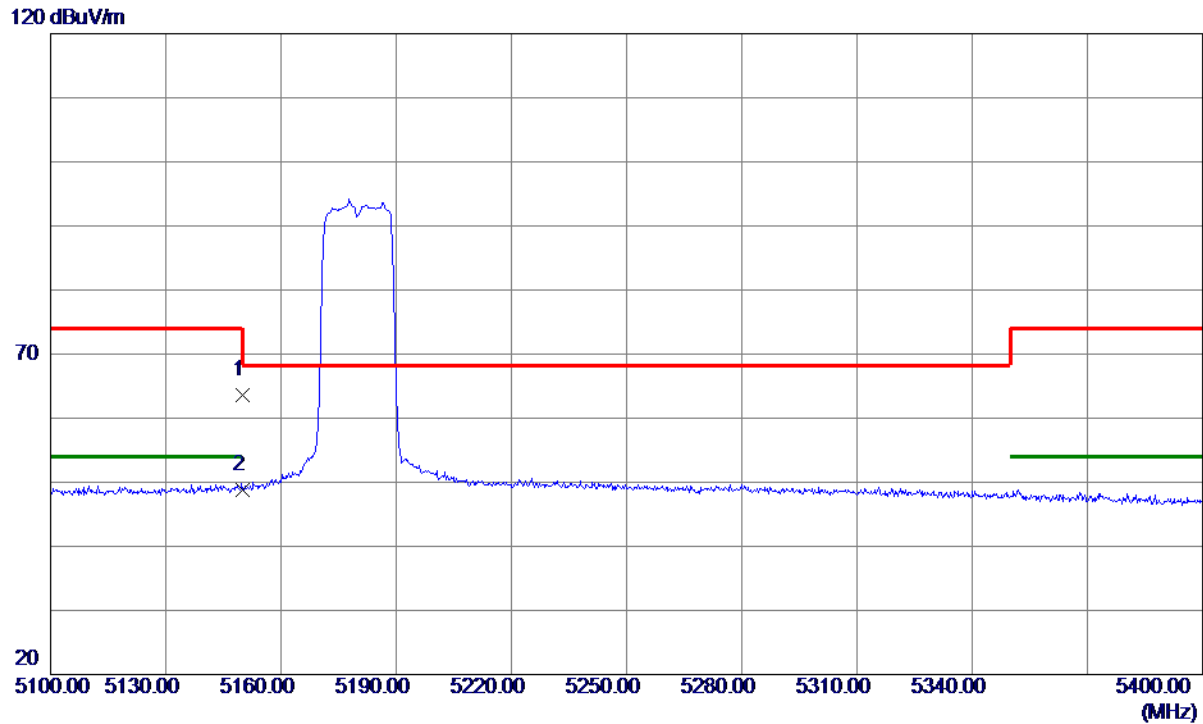

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.16	40.53	63.69	74.00	-10.31	Peak	
2 *	5150.0000	8.27	40.53	48.80	54.00	-5.20	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5180 MHz

Horizontal

80 dBuV/m

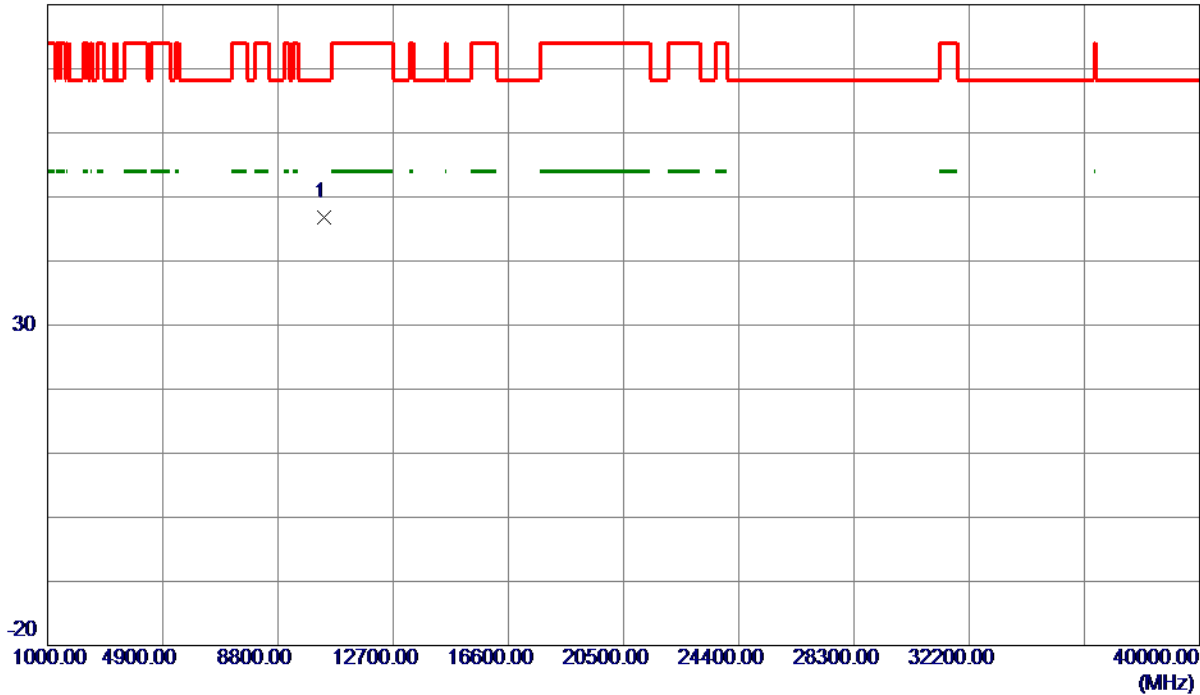

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10360.0000	40.89	5.85	46.74	68.30	-21.56	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Vertical

120 dBuV/m

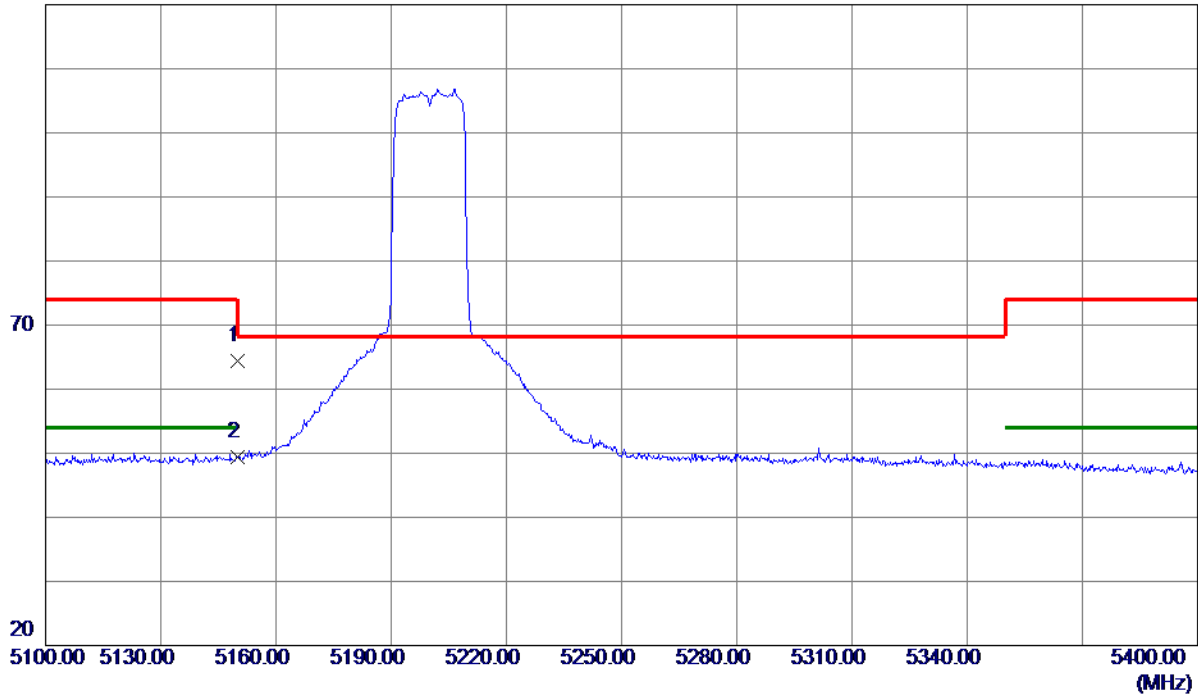

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.93	40.53	64.46	74.00	-9.54	Peak	
2 *	5150.0000	8.86	40.53	49.39	54.00	-4.61	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Vertical

80 dBuV/m

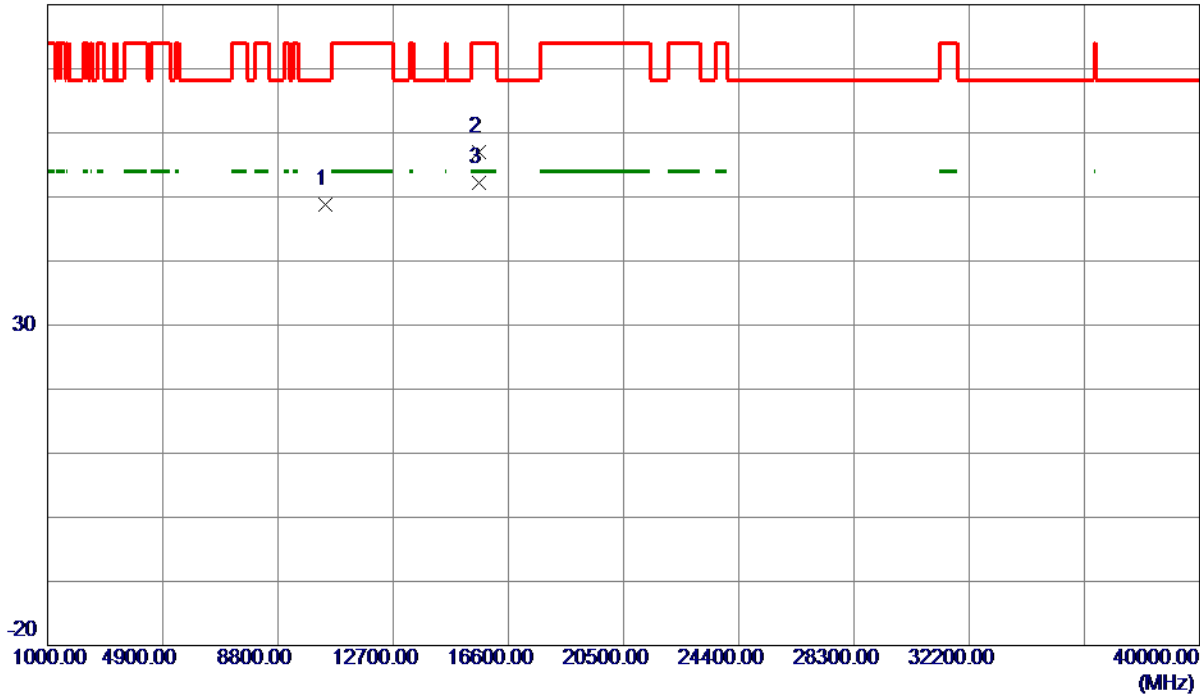


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10400.0000	42.88	5.96	48.84	68.30	-19.46	Peak	
2	15605.5000	49.75	7.34	57.09	74.00	-16.91	Peak	
3 *	15605.5000	44.84	7.34	52.18	54.00	-1.82	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Horizontal

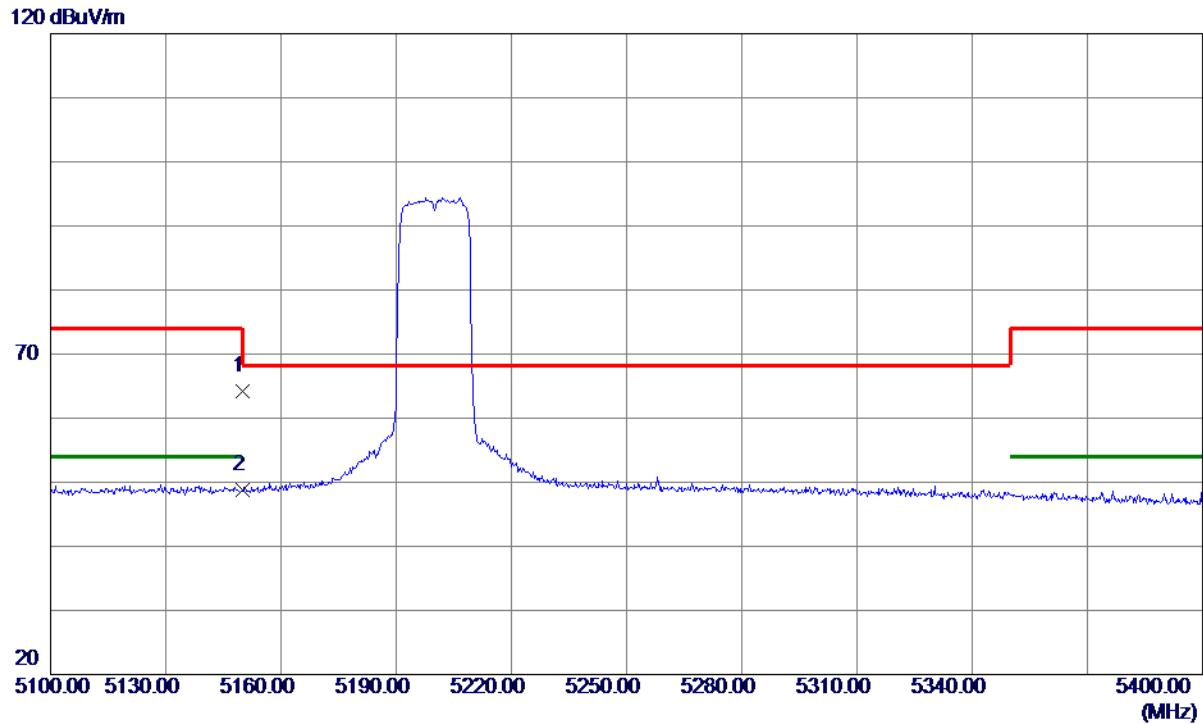

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.63	40.53	64.16	74.00	-9.84	Peak	
2 *	5150.0000	8.24	40.53	48.77	54.00	-5.23	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5200 MHz

Horizontal

80 dBuV/m

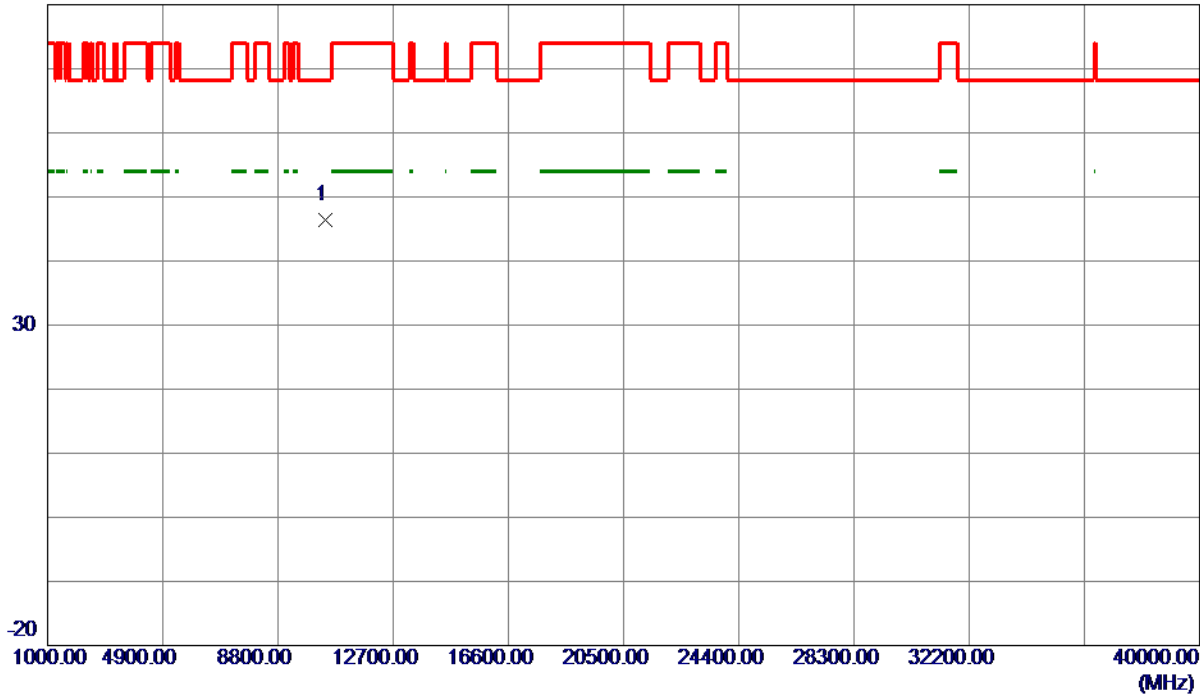

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10400.0000	40.44	5.96	46.40	68.30	-21.90	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Vertical

120 dBuV/m

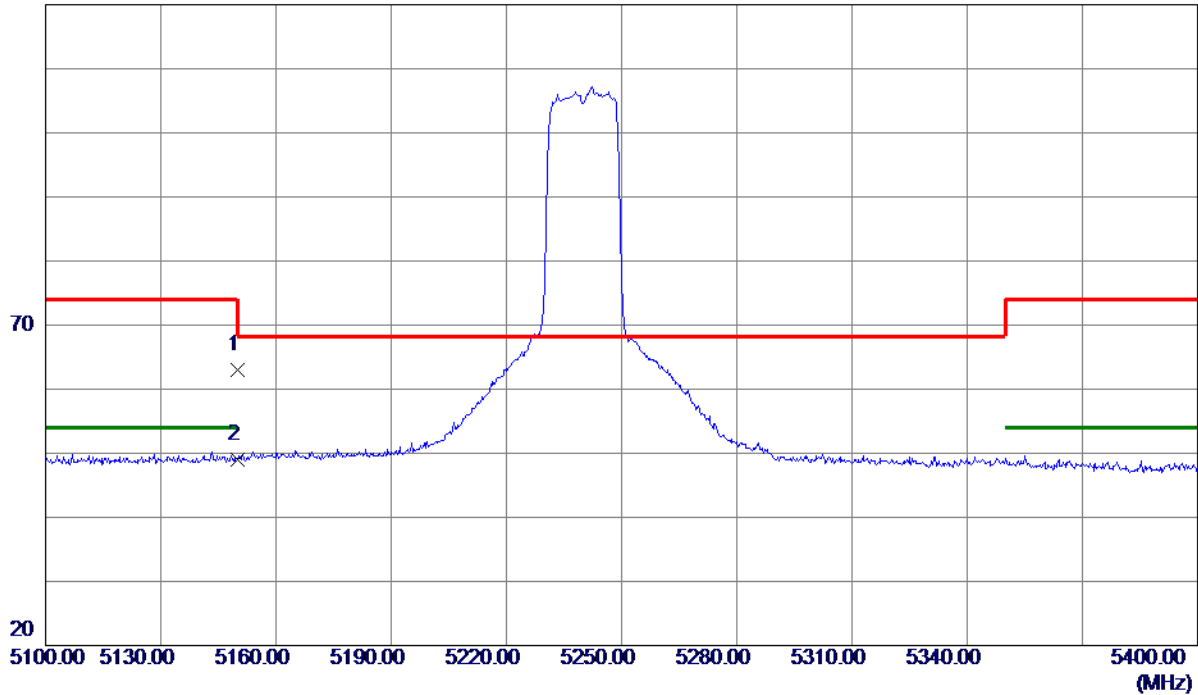

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	22.52	40.53	63.05	74.00	-10.95	Peak	
2 *	5150.0000	8.47	40.53	49.00	54.00	-5.00	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Vertical

80 dBuV/m

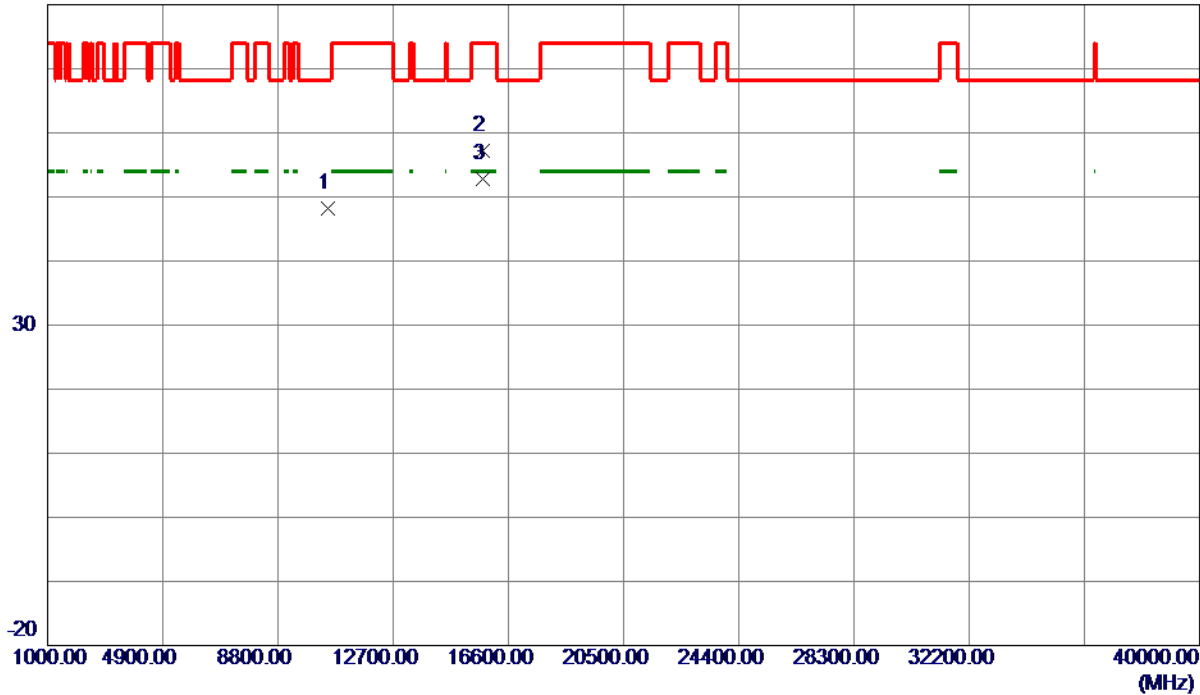


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10480.0000	41.97	6.16	48.13	68.30	-20.17	Peak	
2	15718.6000	49.93	7.33	57.26	74.00	-16.74	Peak	
3 *	15718.6000	45.47	7.33	52.80	54.00	-1.20	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Horizontal

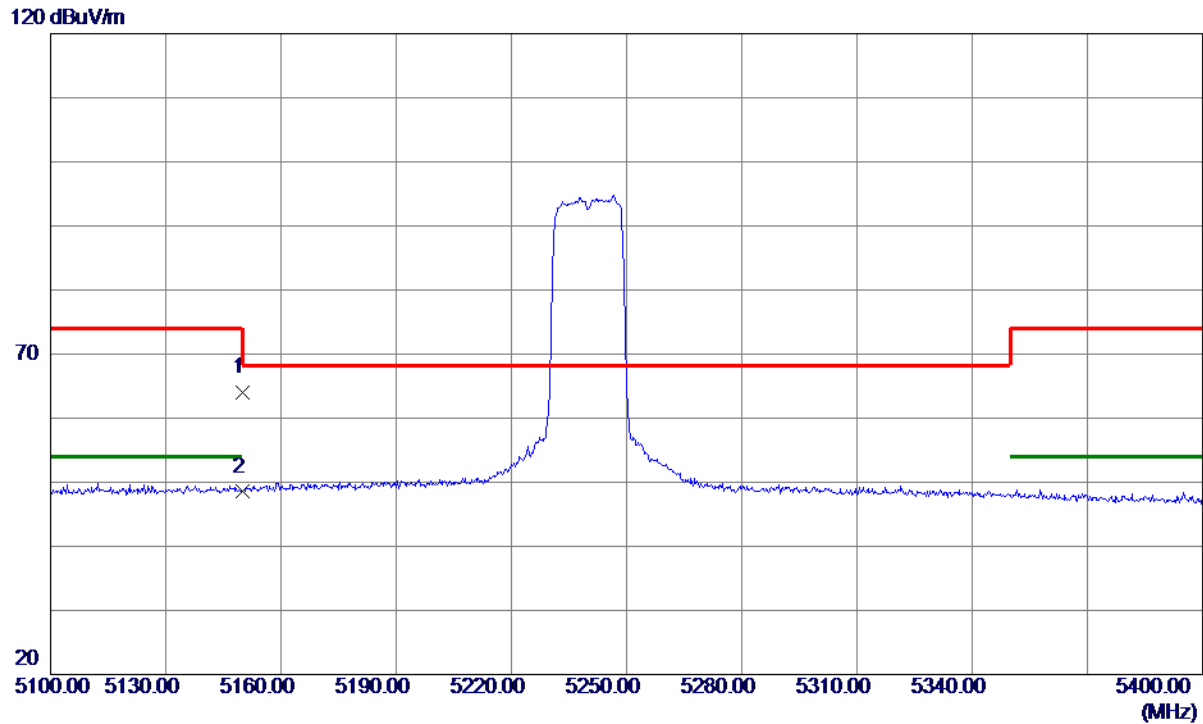

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.44	40.53	63.97	74.00	-10.03	Peak	
2 *	5150.0000	7.97	40.53	48.50	54.00	-5.50	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT20) Mode 5240 MHz

Horizontal

80 dBuV/m

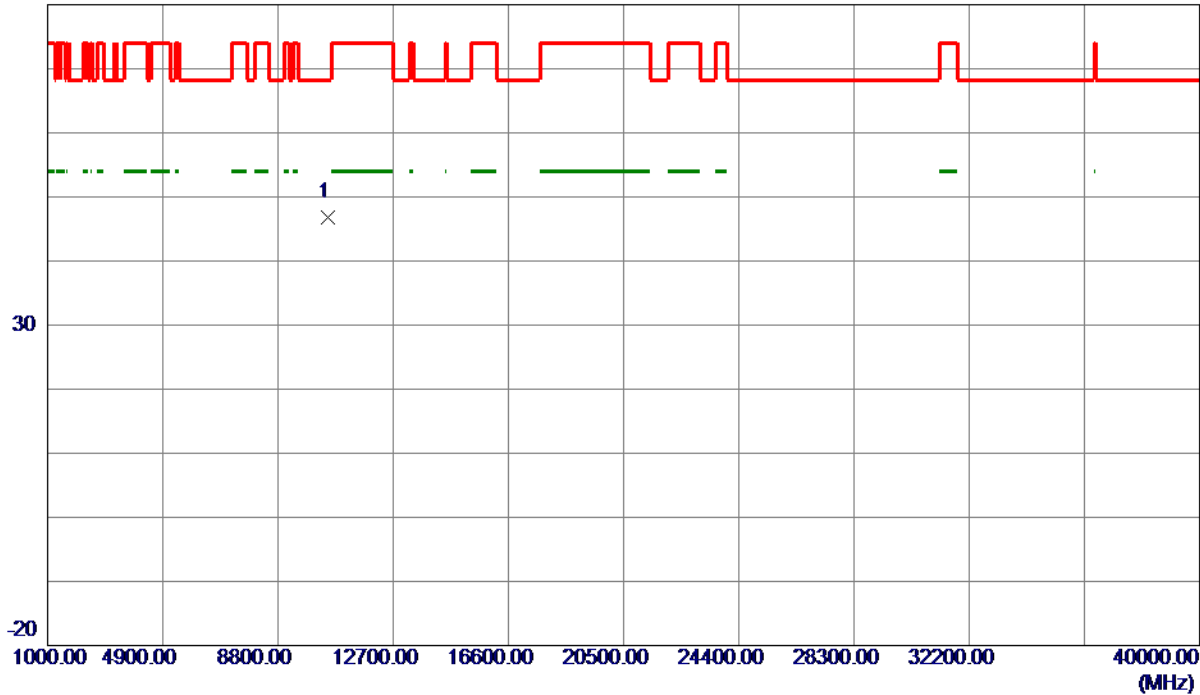


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10480.0000	40.63	6.16	46.79	68.30	-21.51	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Vertical

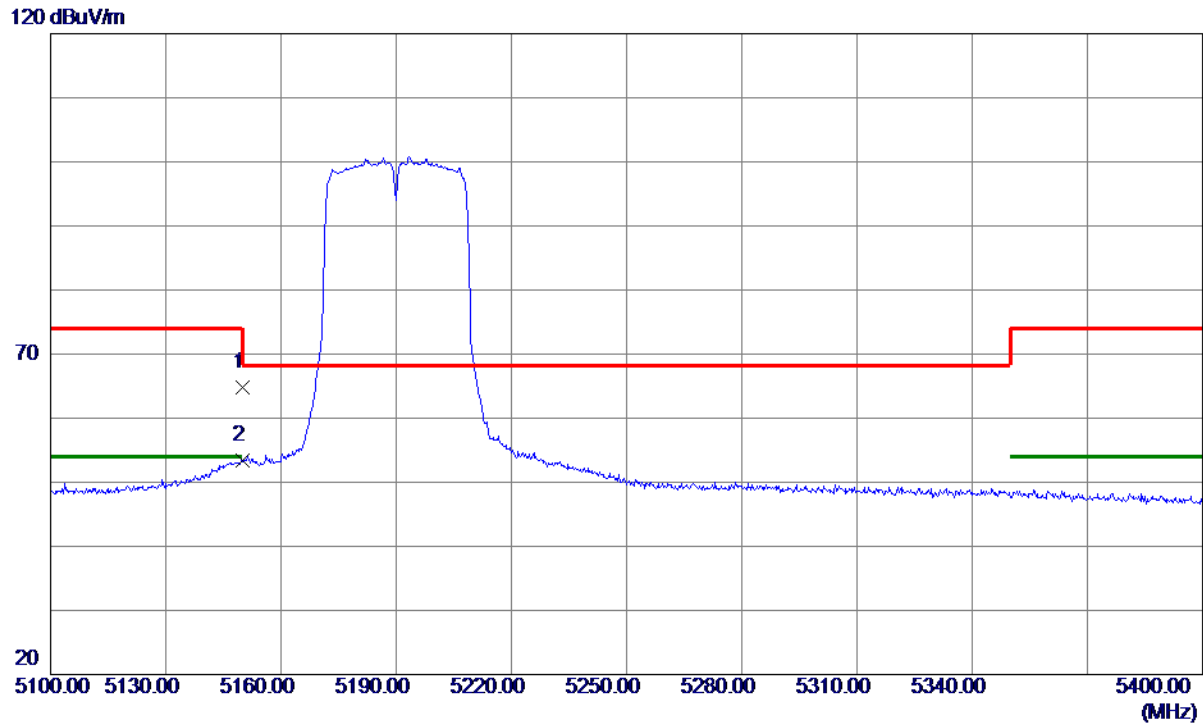

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	24.32	40.53	64.85	74.00	-9.15	Peak	
2 *	5150.0000	12.80	40.53	53.33	54.00	-0.67	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Vertical

80 dBuV/m

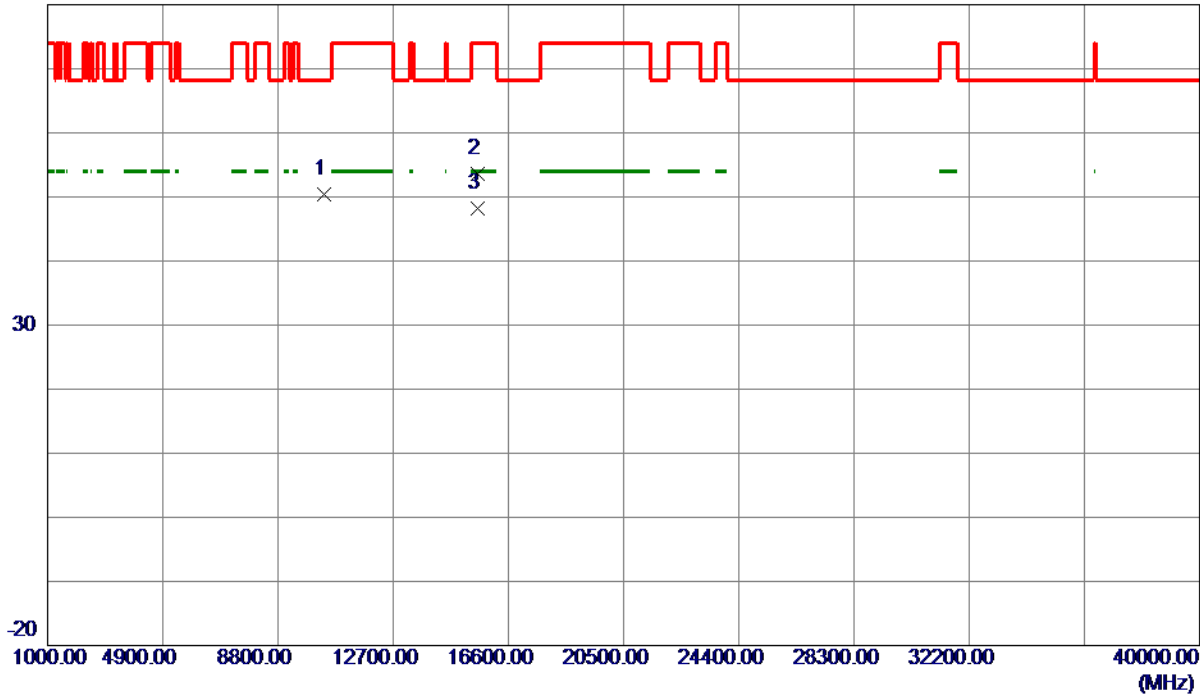


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10380.0000	44.56	5.91	50.47	68.30	-17.83	Peak	
2	15550.9000	46.32	7.35	53.67	74.00	-20.33	Peak	
3 *	15550.9000	40.82	7.35	48.17	54.00	-5.83	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Horizontal

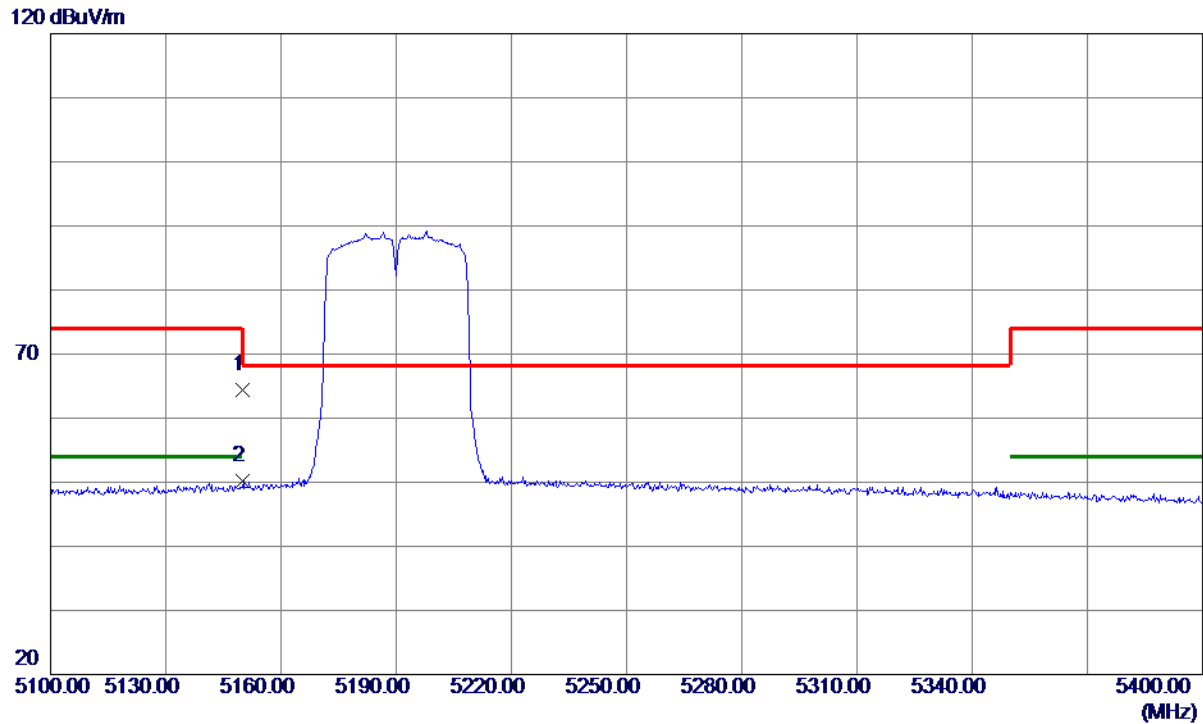

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.81	40.53	64.34	74.00	-9.66	Peak	
2 *	5150.0000	9.63	40.53	50.16	54.00	-3.84	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5190 MHz

Horizontal

80 dBuV/m

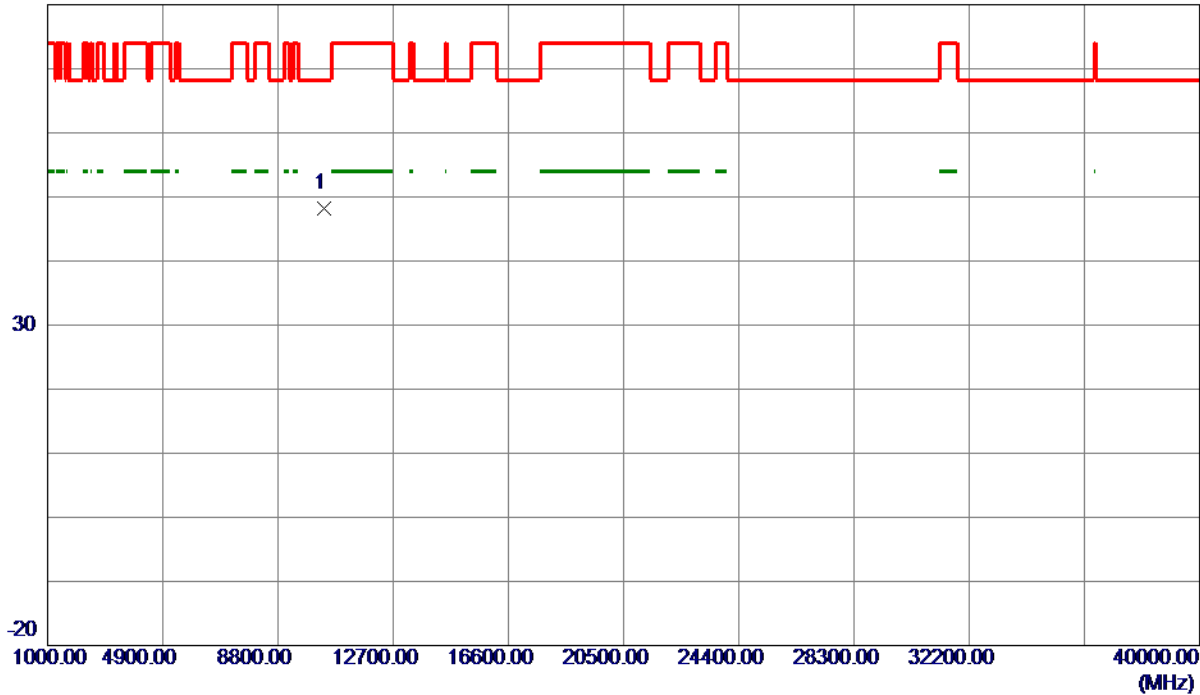


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10380.0000	42.36	5.91	48.27	68.30	-20.03	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Vertical

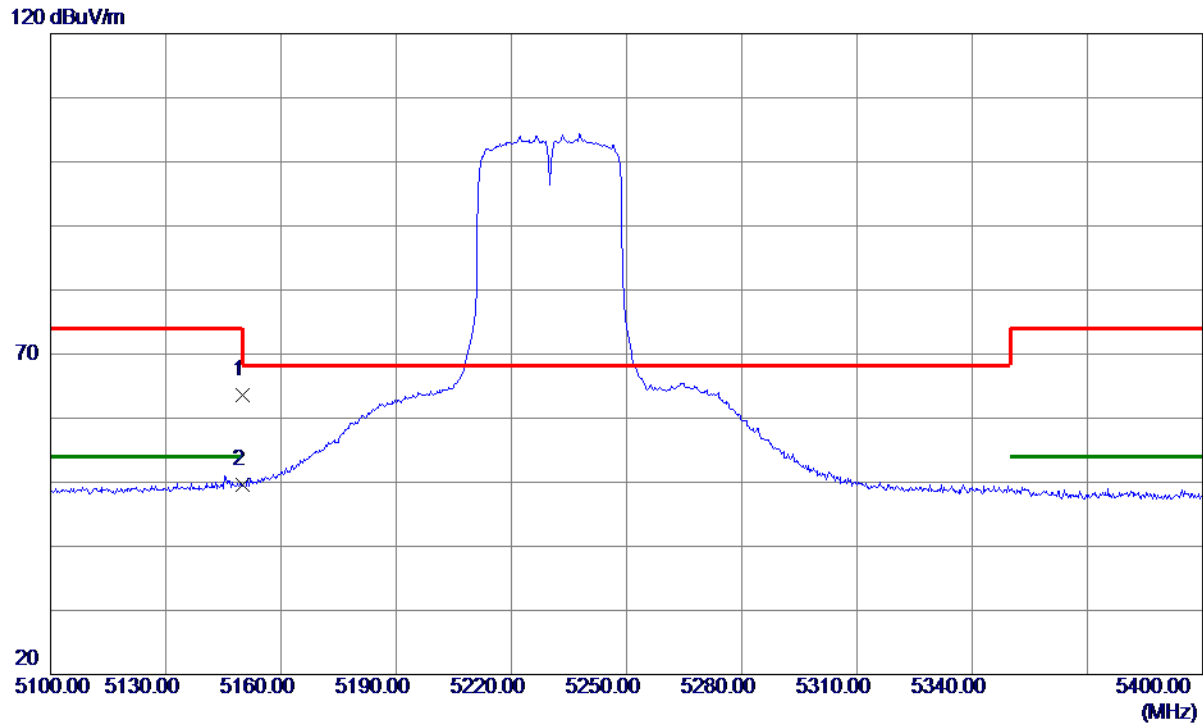

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.16	40.53	63.69	74.00	-10.31	Peak	
2 *	5150.0000	9.09	40.53	49.62	54.00	-4.38	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Vertical

80 dBuV/m

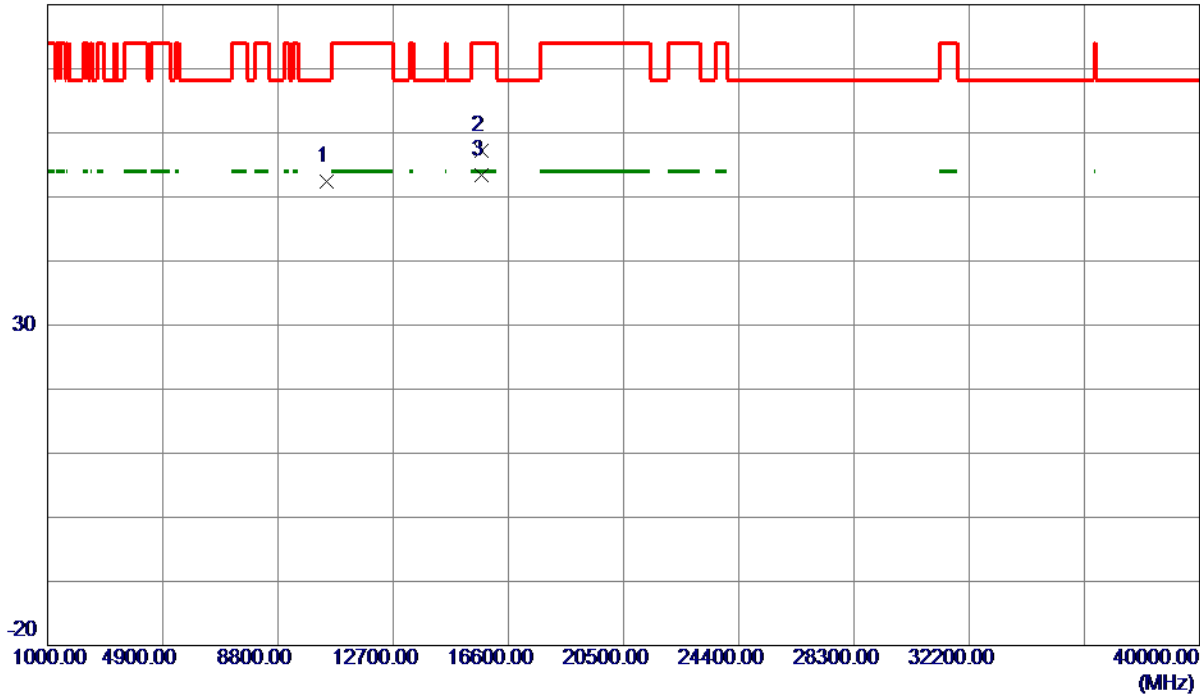

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10460.0000	46.31	6.11	52.42	68.30	-15.88	Peak	
2	15691.3000	49.88	7.33	57.21	74.00	-16.79	Peak	
3 *	15691.3000	45.98	7.33	53.31	54.00	-0.69	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Horizontal

120 dBuV/m

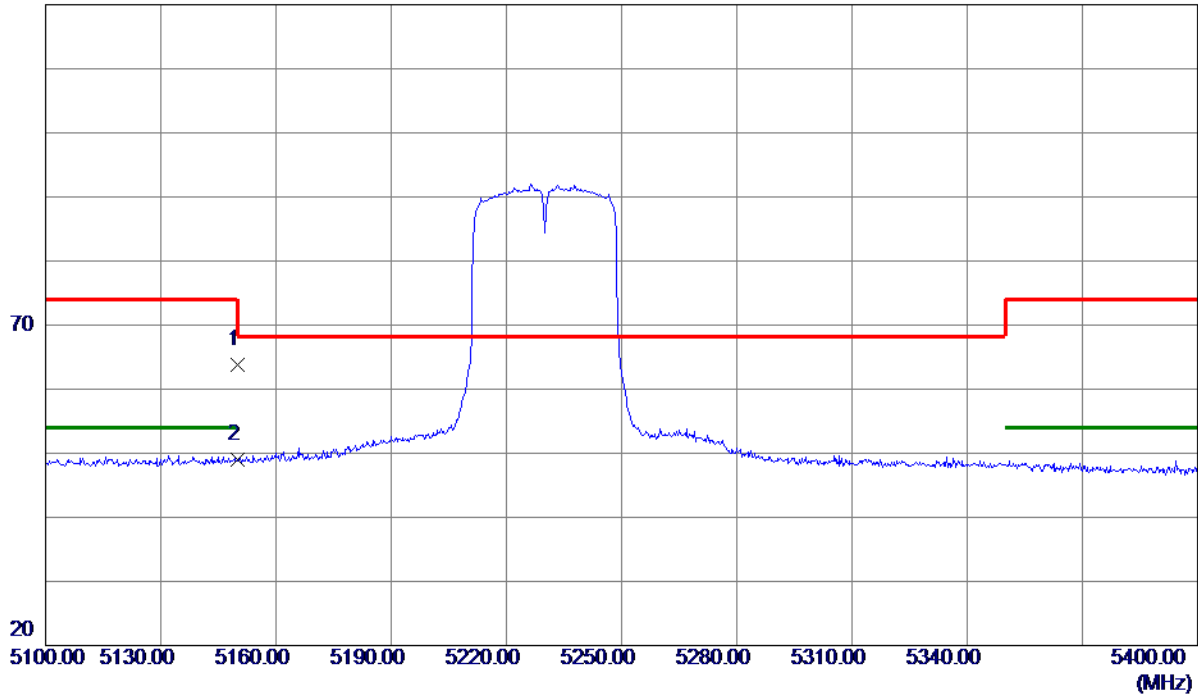

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.33	40.53	63.86	74.00	-10.14	Peak	
2 *	5150.0000	8.46	40.53	48.99	54.00	-5.01	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT40) Mode 5230 MHz

Horizontal

80 dBuV/m

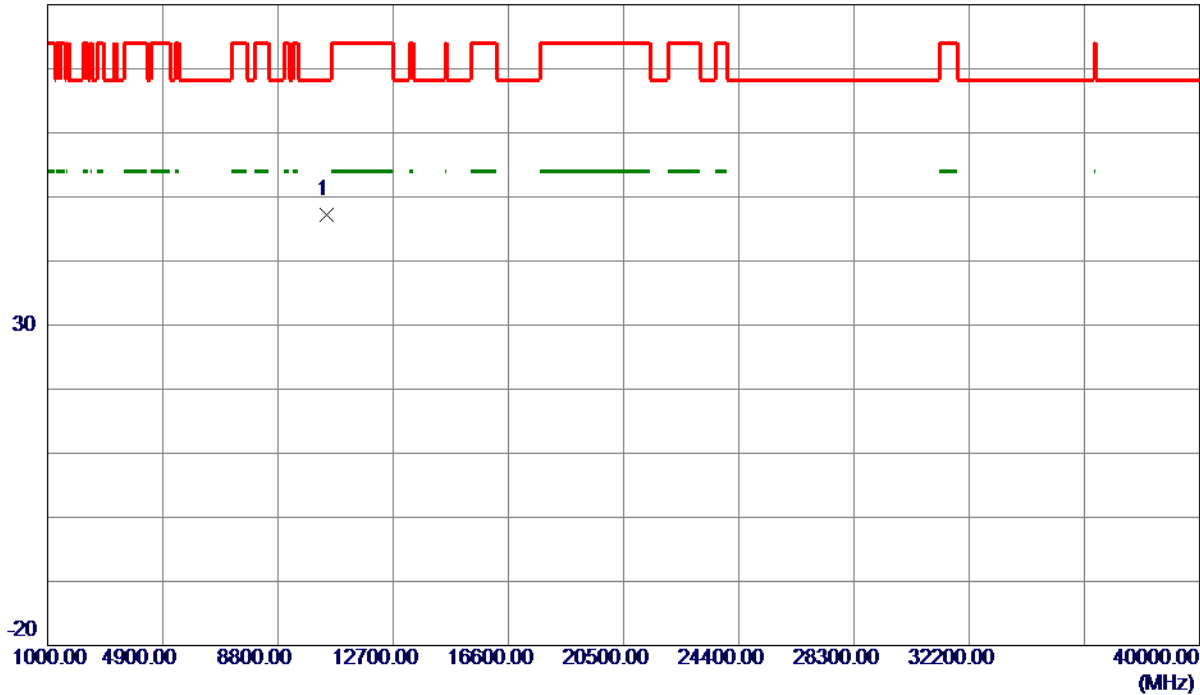

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10460.0000	41.09	6.11	47.20	68.30	-21.10	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Vertical

120 dBuV/m

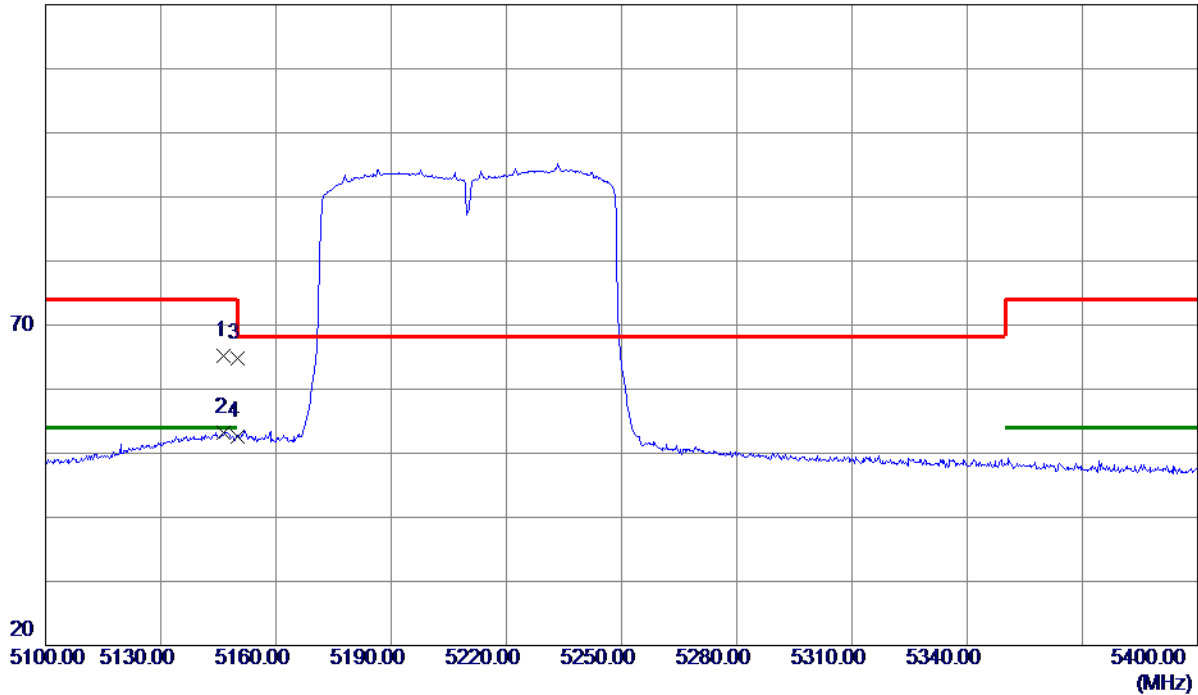

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5146.5000	24.76	40.52	65.28	74.00	-8.72	Peak	
2 *	5146.5000	12.71	40.52	53.23	54.00	-0.77	AVG	
3	5150.0000	24.35	40.53	64.88	74.00	-9.12	Peak	
4	5150.0000	12.16	40.53	52.69	54.00	-1.31	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Vertical

80 dBuV/m

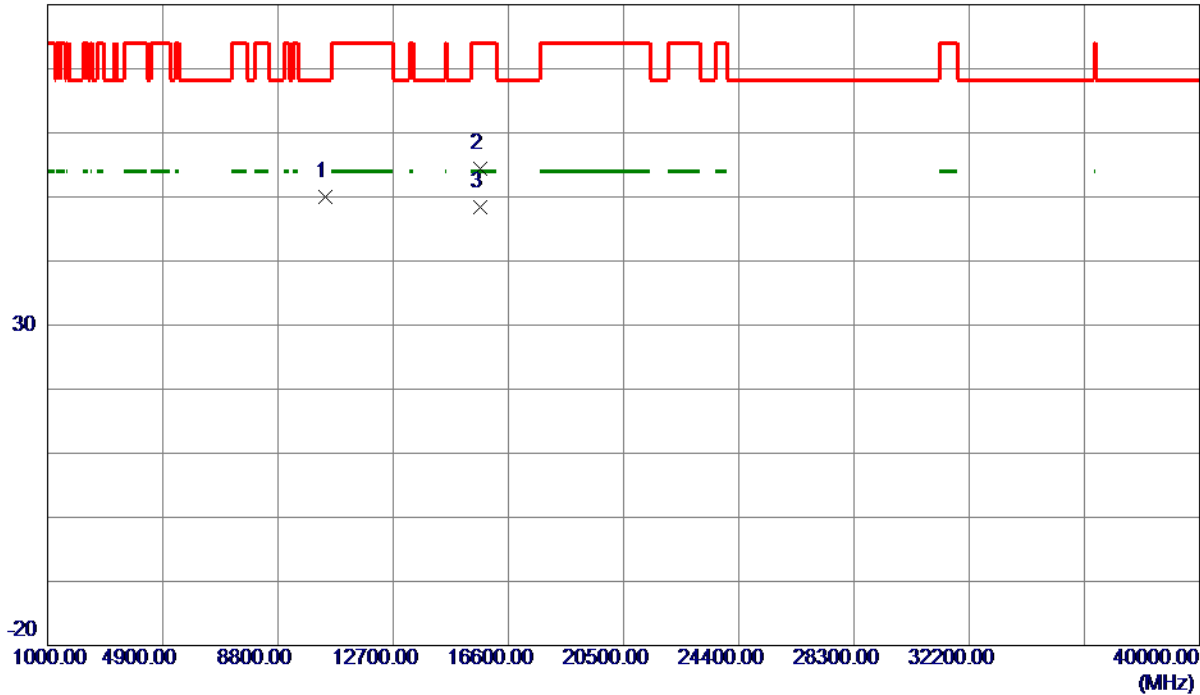


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	10420.0000	43.90	6.01	49.91	68.30	-18.39	Peak	
2	15628.9000	47.11	7.34	54.45	74.00	-19.55	Peak	
3 *	15628.9000	41.11	7.34	48.45	54.00	-5.55	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Horizontal

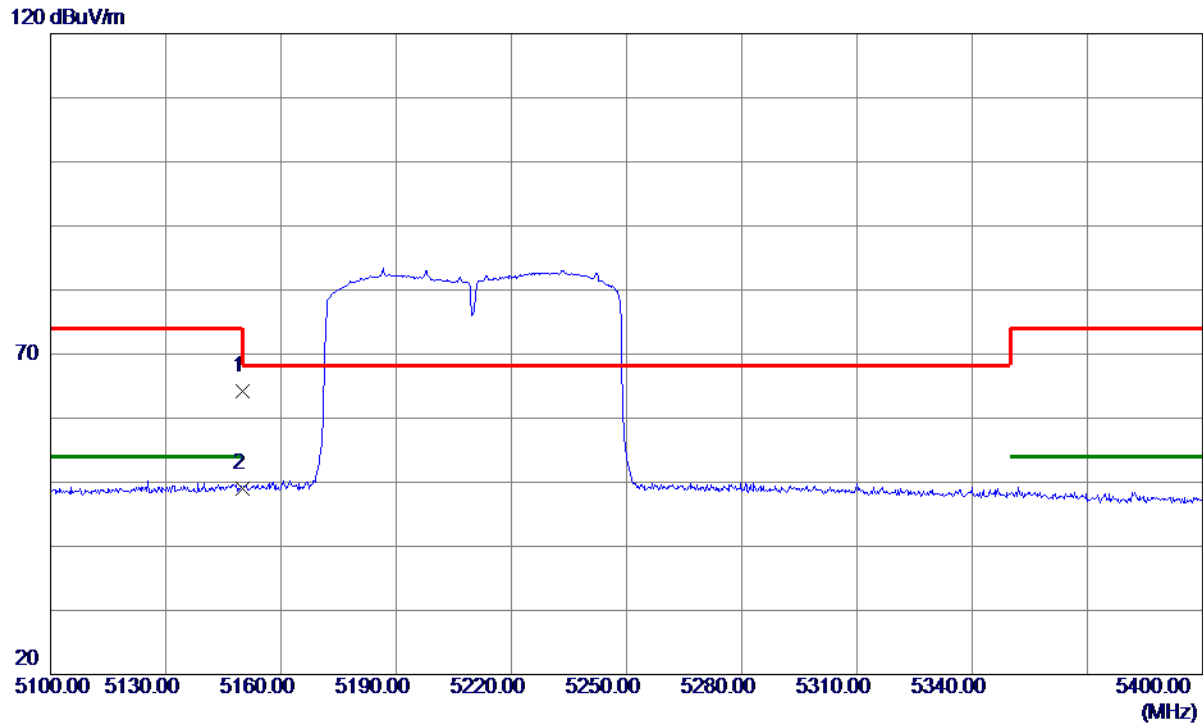

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5150.0000	23.60	40.53	64.13	74.00	-9.87	Peak	
2 *	5150.0000	8.42	40.53	48.95	54.00	-5.05	AVG	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-1_TX AC (VHT80) Mode 5210 MHz

Horizontal

80 dBuV/m

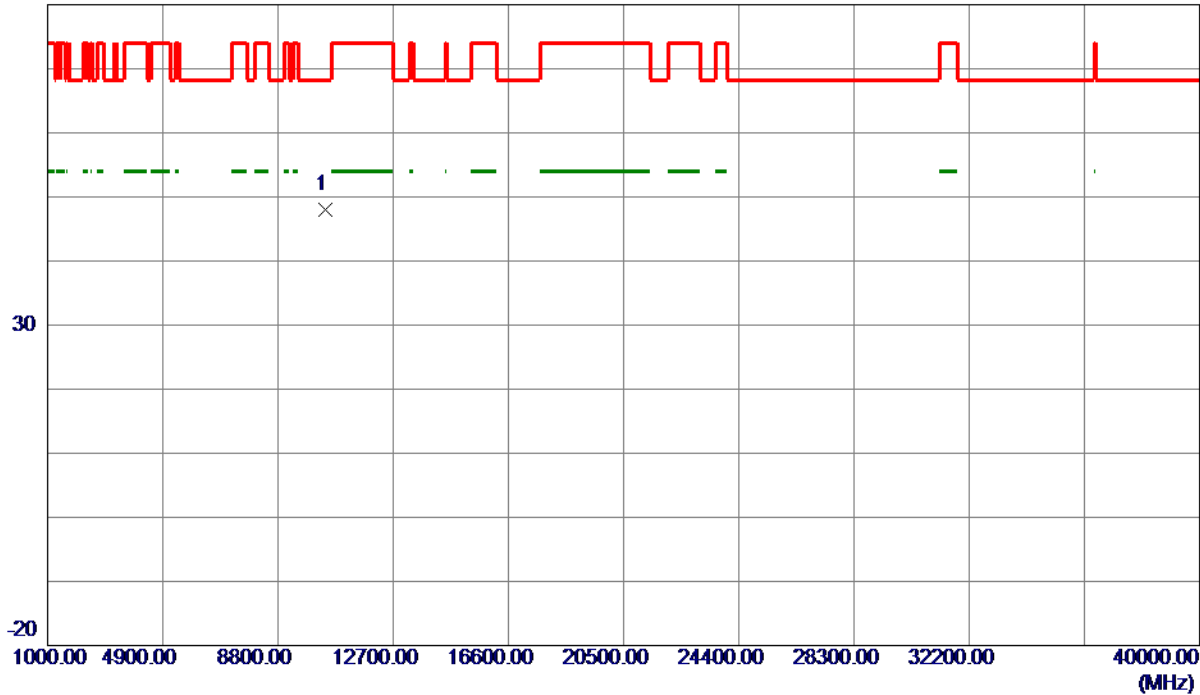


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	10420.0000	41.91	6.01	47.92	68.30	-20.38	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Vertical

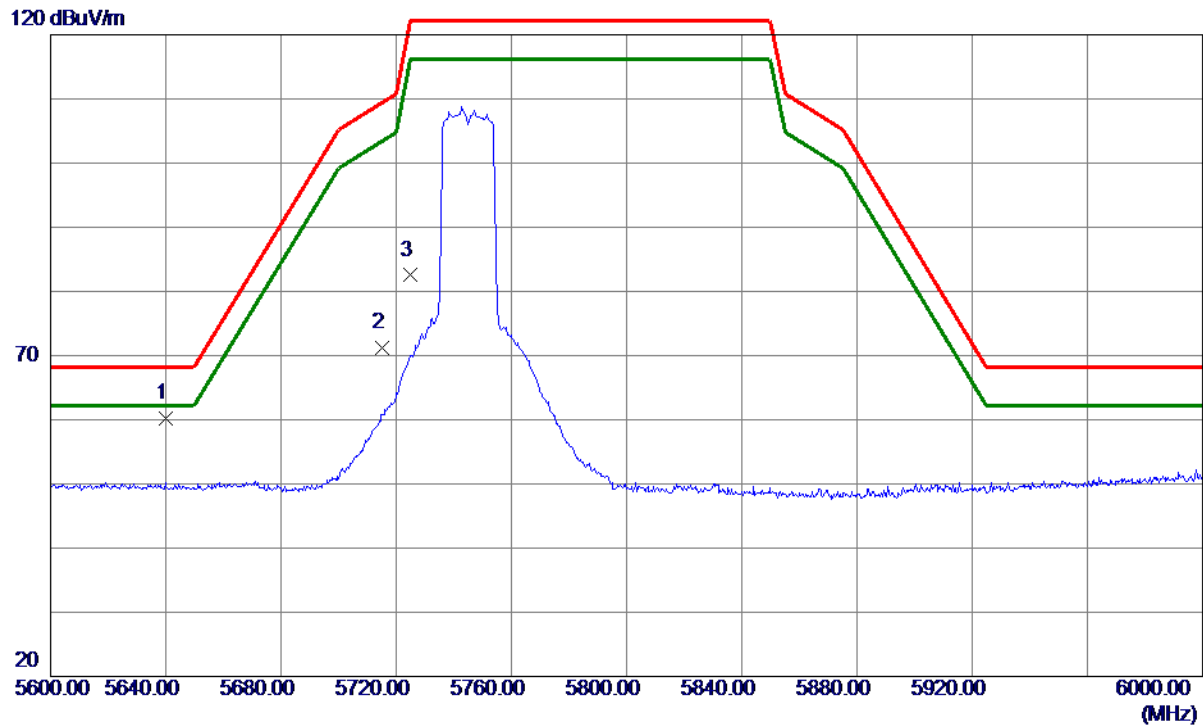

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5639.8000	18.81	41.47	60.28	68.20	-7.92	Peak	
2	5715.0000	29.61	41.59	71.20	109.40	-38.20	Peak	
3	5725.0000	40.90	41.60	82.50	122.20	-39.70	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Vertical

80 dBuV/m

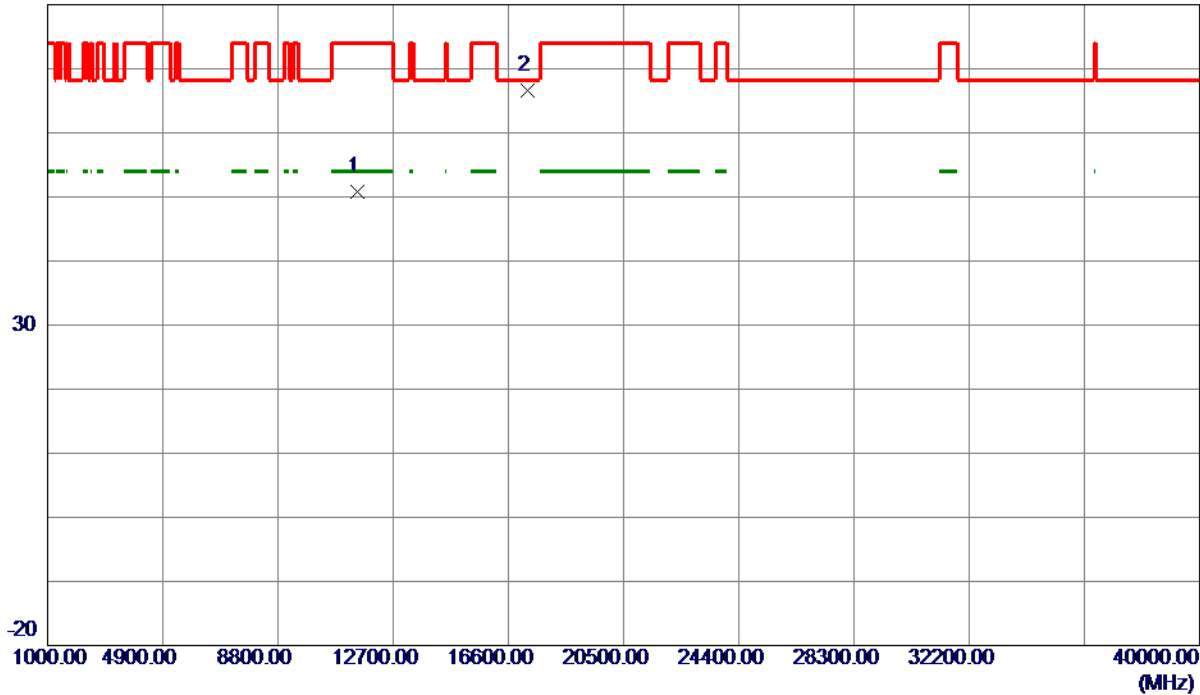


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11490.0000	43.89	6.83	50.72	74.00	-23.28	Peak	
2 *	17235.7000	54.22	12.37	66.59	68.30	-1.71	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Horizontal

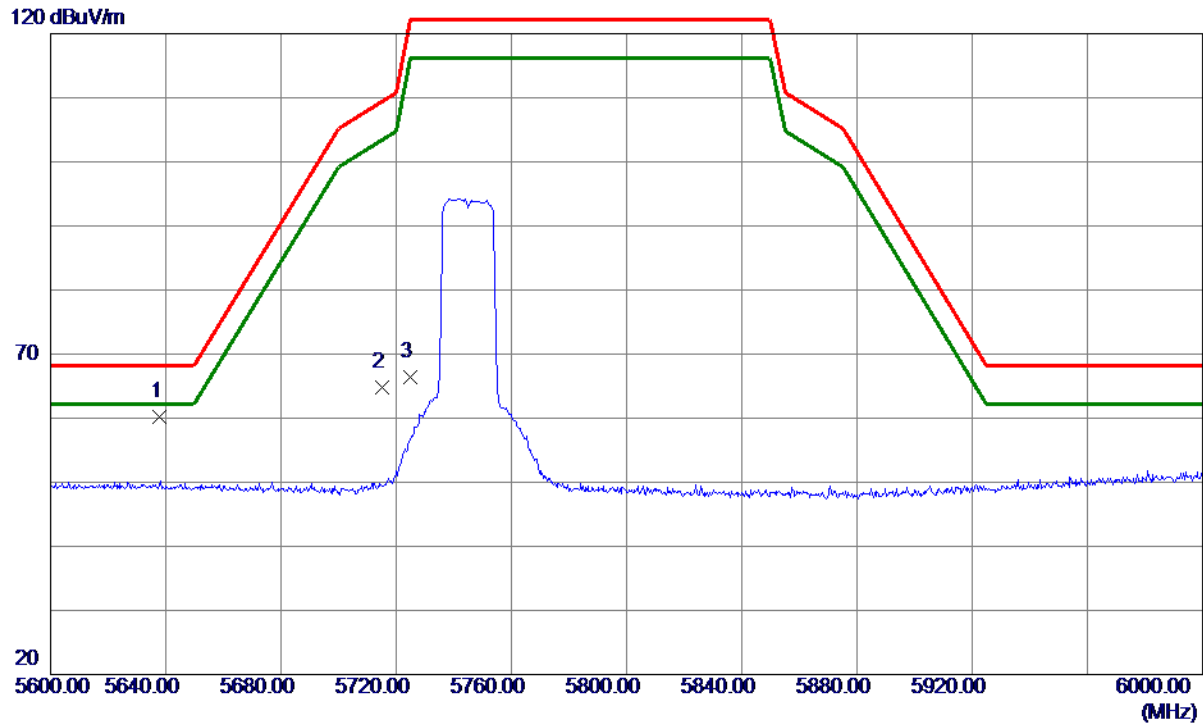

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5638.0000	18.72	41.47	60.19	68.20	-8.01	Peak	
2	5715.0000	23.13	41.59	64.72	109.40	-44.68	Peak	
3	5725.0000	24.86	41.60	66.46	122.20	-55.74	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5745 MHz

Horizontal

80 dBuV/m

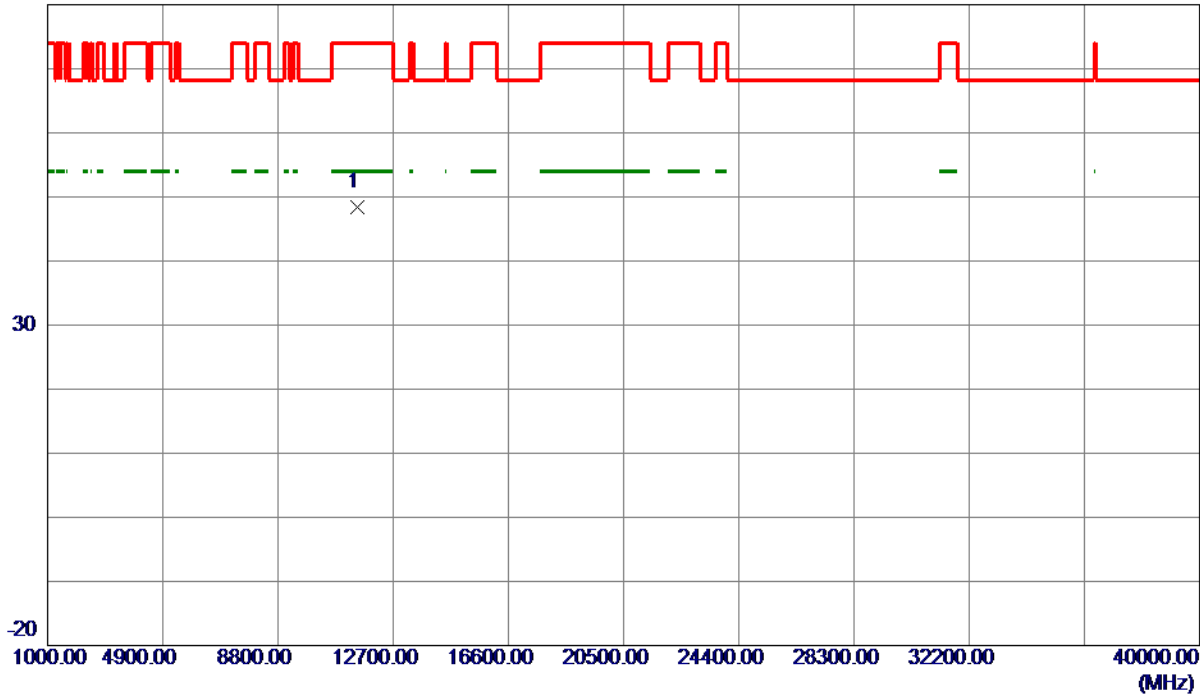


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11490.0000	41.58	6.83	48.41	74.00	-25.59	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Vertical

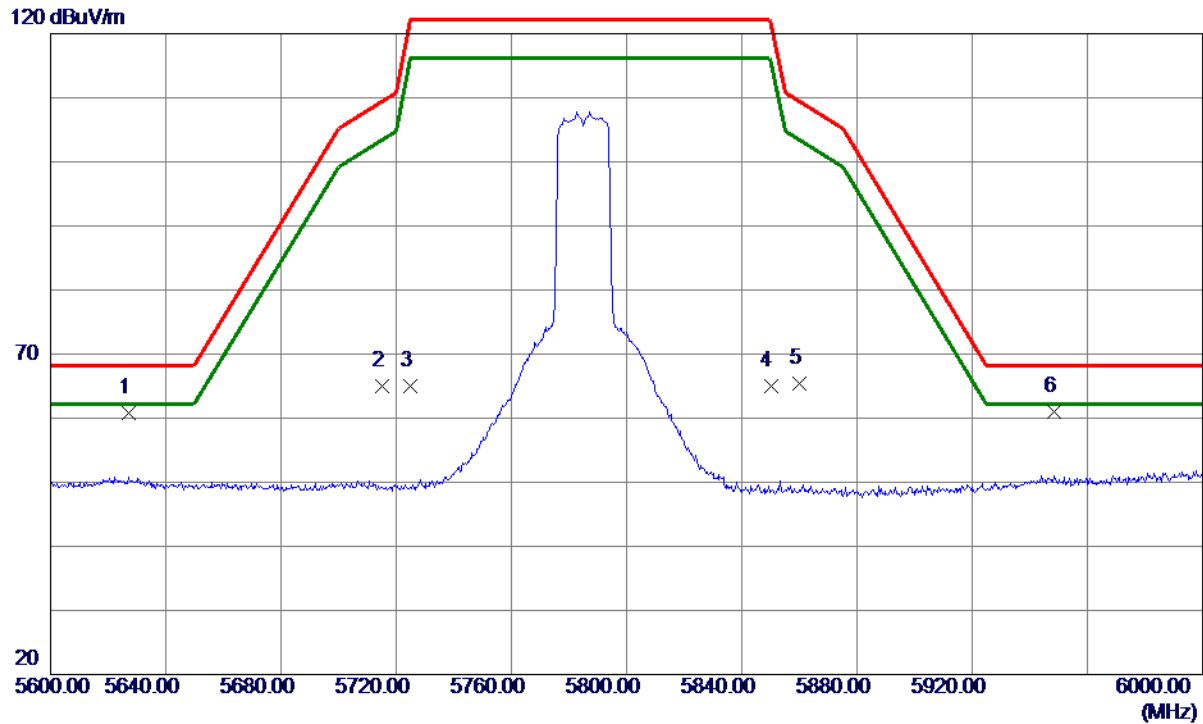

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5627.0000	19.36	41.45	60.81	68.20	-7.39	Peak	
2	5715.0000	23.39	41.59	64.98	109.40	-44.42	Peak	
3	5725.0000	23.31	41.60	64.91	122.20	-57.29	Peak	
4	5850.0000	23.21	41.80	65.01	122.20	-57.19	Peak	
5	5860.0000	23.57	41.81	65.38	109.40	-44.02	Peak	
6 *	5948.6000	19.10	41.95	61.05	68.20	-7.15	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Vertical

80 dBuV/m

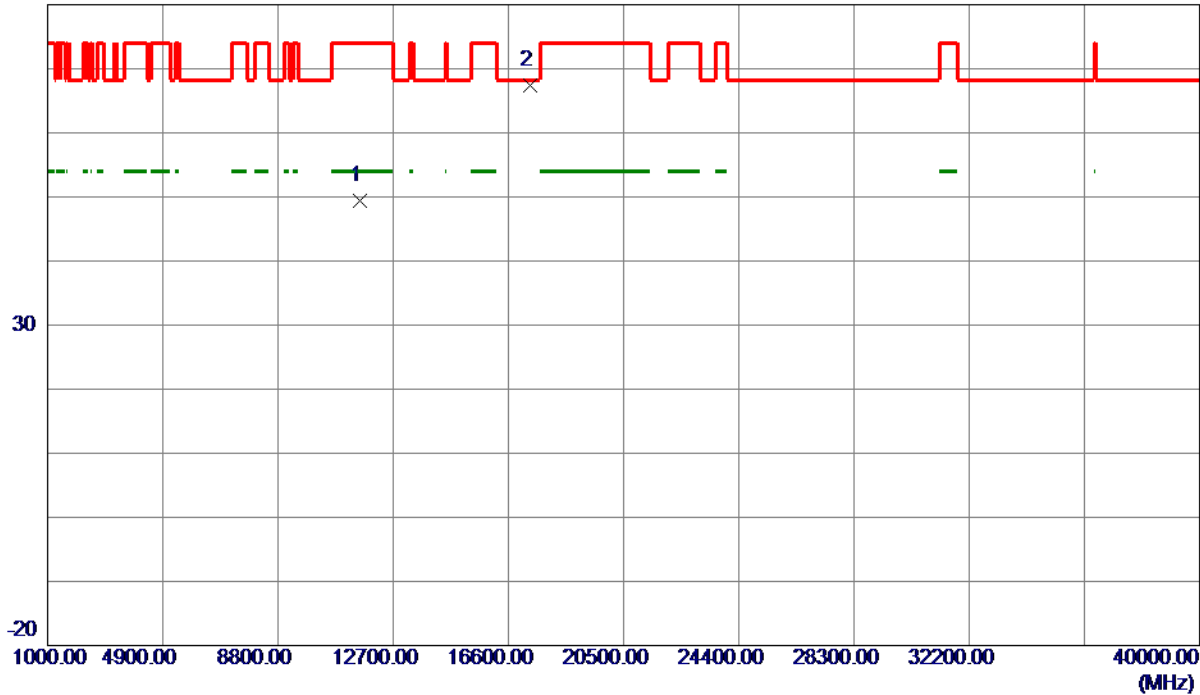


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11570.0000	42.61	6.73	49.34	74.00	-24.66	Peak	
2 *	17352.7000	54.35	12.98	67.33	68.30	-0.97	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Horizontal

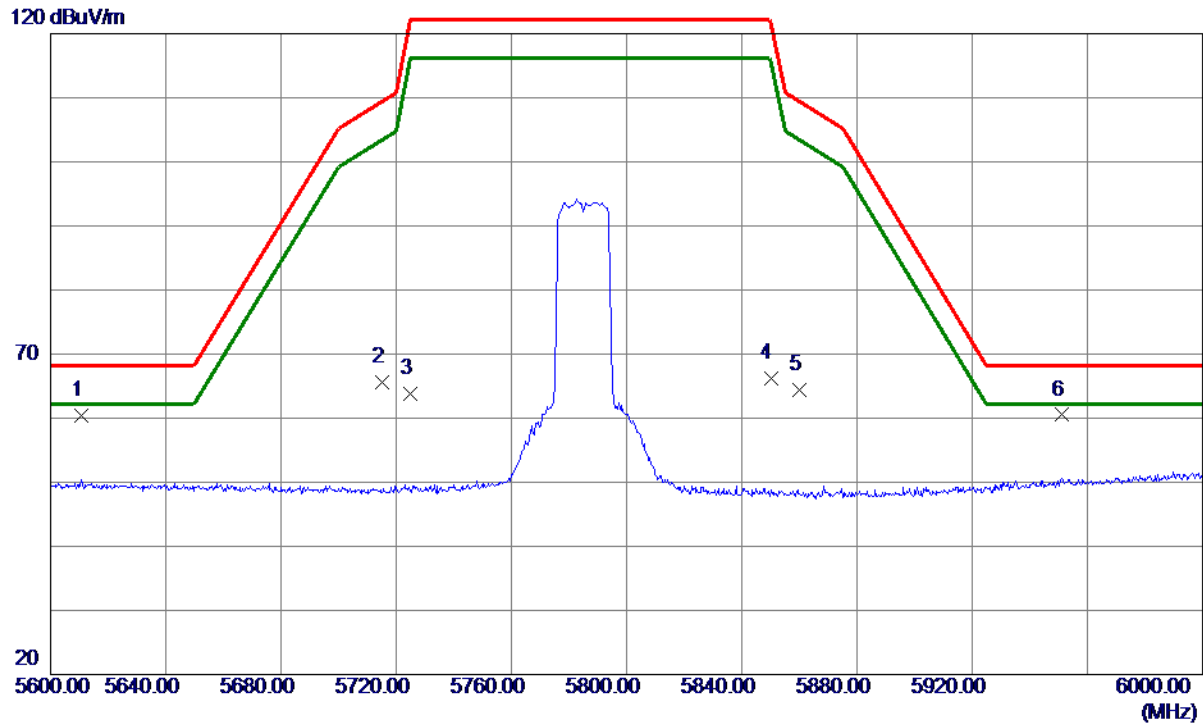

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5610.8000	18.92	41.42	60.34	68.20	-7.86	Peak	
2	5715.0000	23.97	41.59	65.56	109.40	-43.84	Peak	
3	5725.0000	22.25	41.60	63.85	122.20	-58.35	Peak	
4	5850.0000	24.35	41.80	66.15	122.20	-56.05	Peak	
5	5860.0000	22.59	41.81	64.40	109.40	-45.00	Peak	
6 *	5951.0000	18.55	41.95	60.50	68.20	-7.70	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5785 MHz

Horizontal

80 dBuV/m

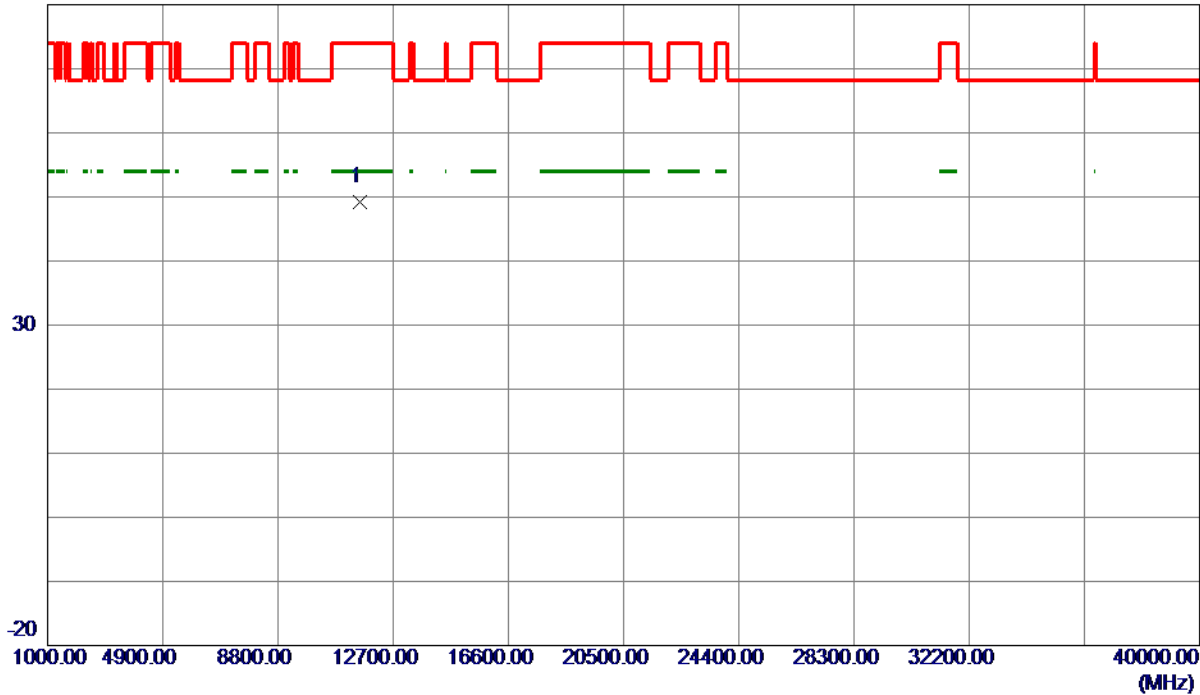


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11570.0000	42.47	6.73	49.20	74.00	-24.80	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Vertical

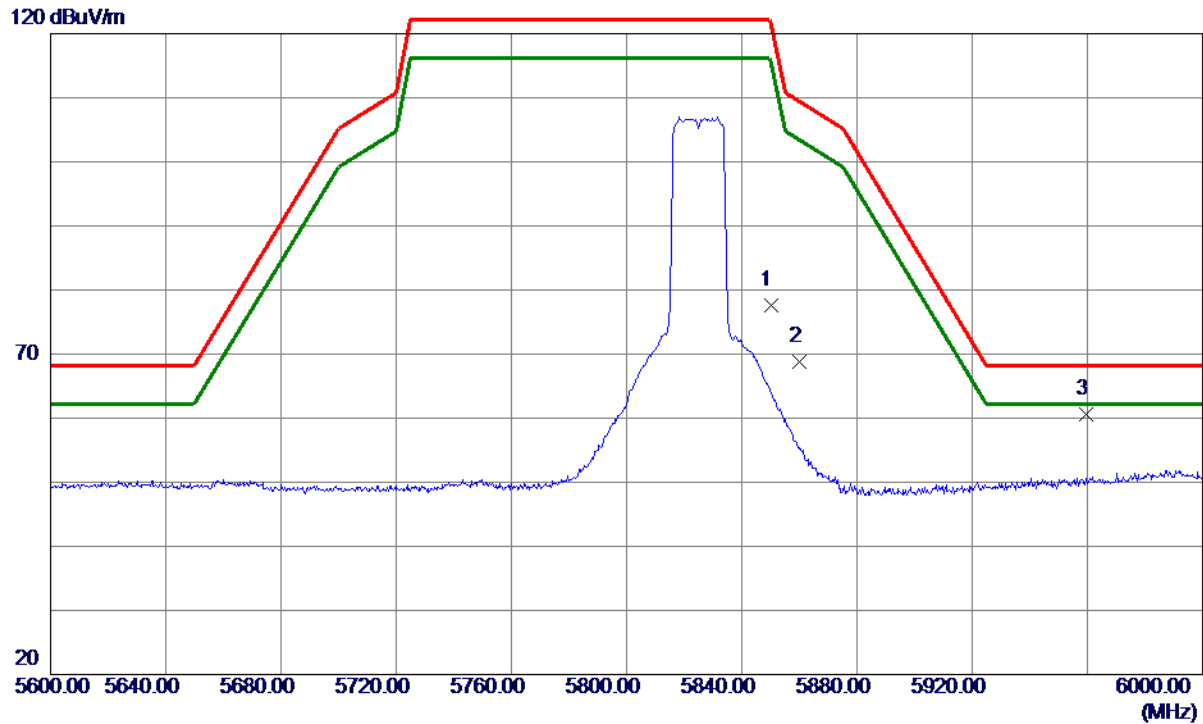

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5850.0000	35.79	41.80	77.59	122.20	-44.61	Peak	
2	5860.0000	27.05	41.81	68.86	109.40	-40.54	Peak	
3 *	5959.6000	18.72	41.97	60.69	68.20	-7.51	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Vertical

80 dBuV/m

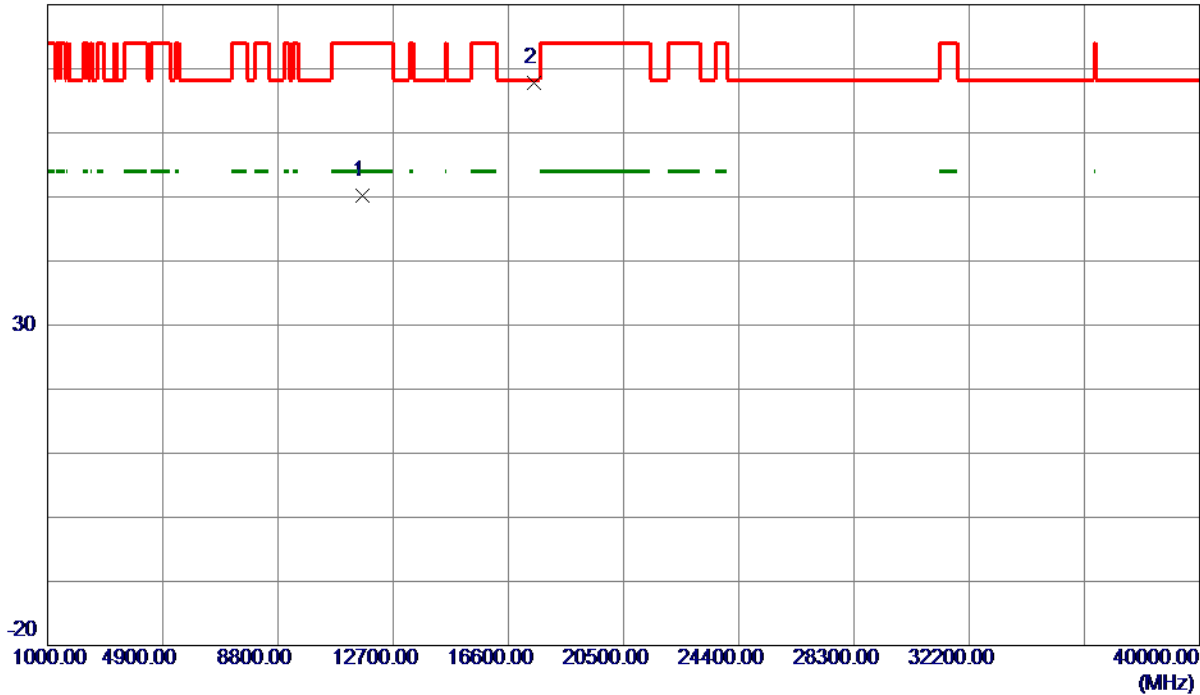


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11650.0000	43.57	6.63	50.20	74.00	-23.80	Peak	
2 *	17477.5000	54.11	13.64	67.75	68.30	-0.55	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Horizontal

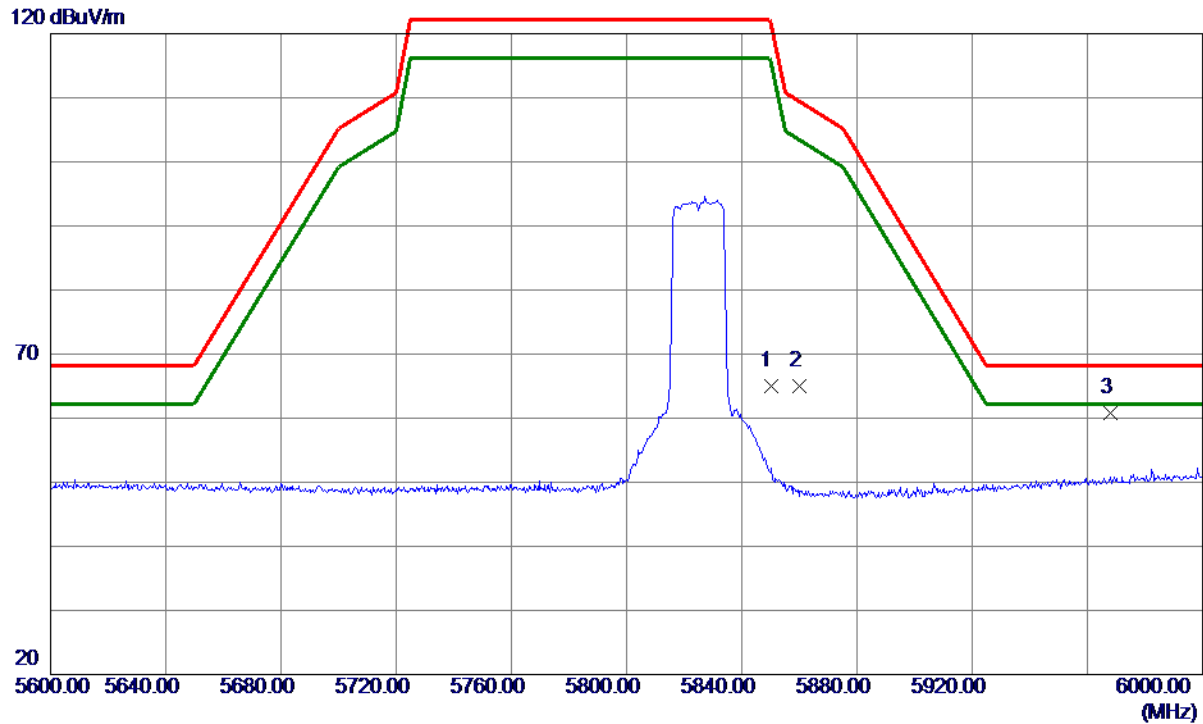

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5850.0000	23.23	41.80	65.03	122.20	-57.17	Peak	
2	5860.0000	23.17	41.81	64.98	109.40	-44.42	Peak	
3 *	5968.0000	18.75	41.98	60.73	68.20	-7.47	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT20) Mode 5825 MHz

Horizontal

80 dBuV/m

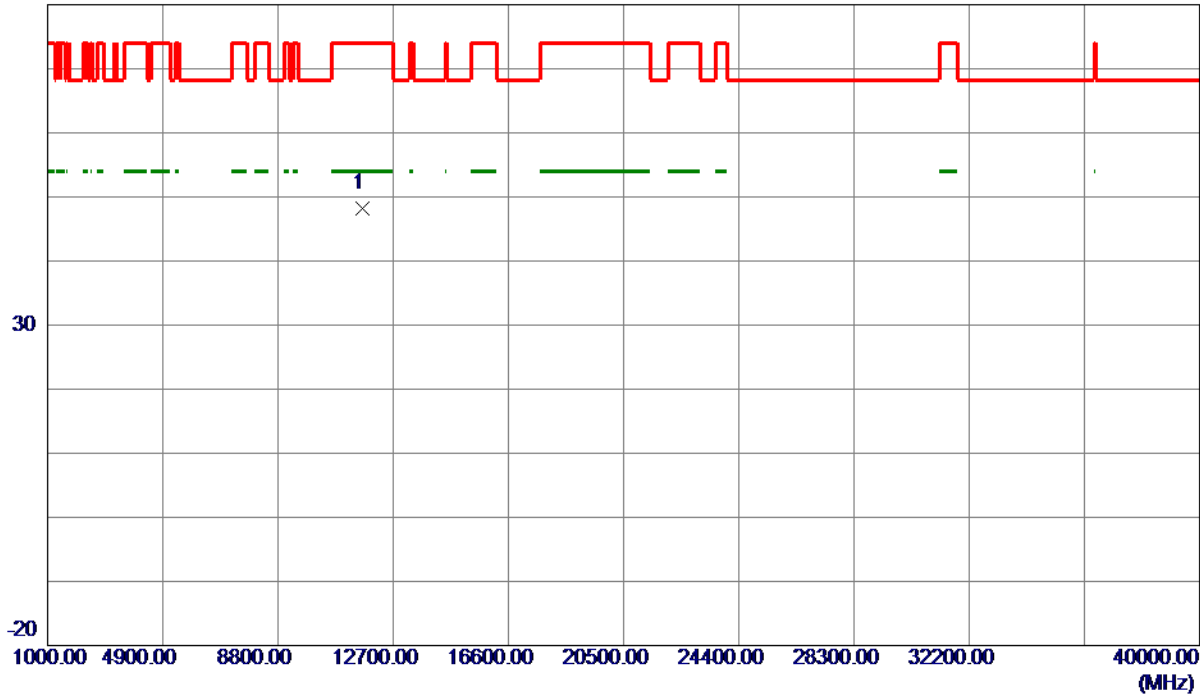


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11650.0000	41.49	6.63	48.12	74.00	-25.88	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Vertical

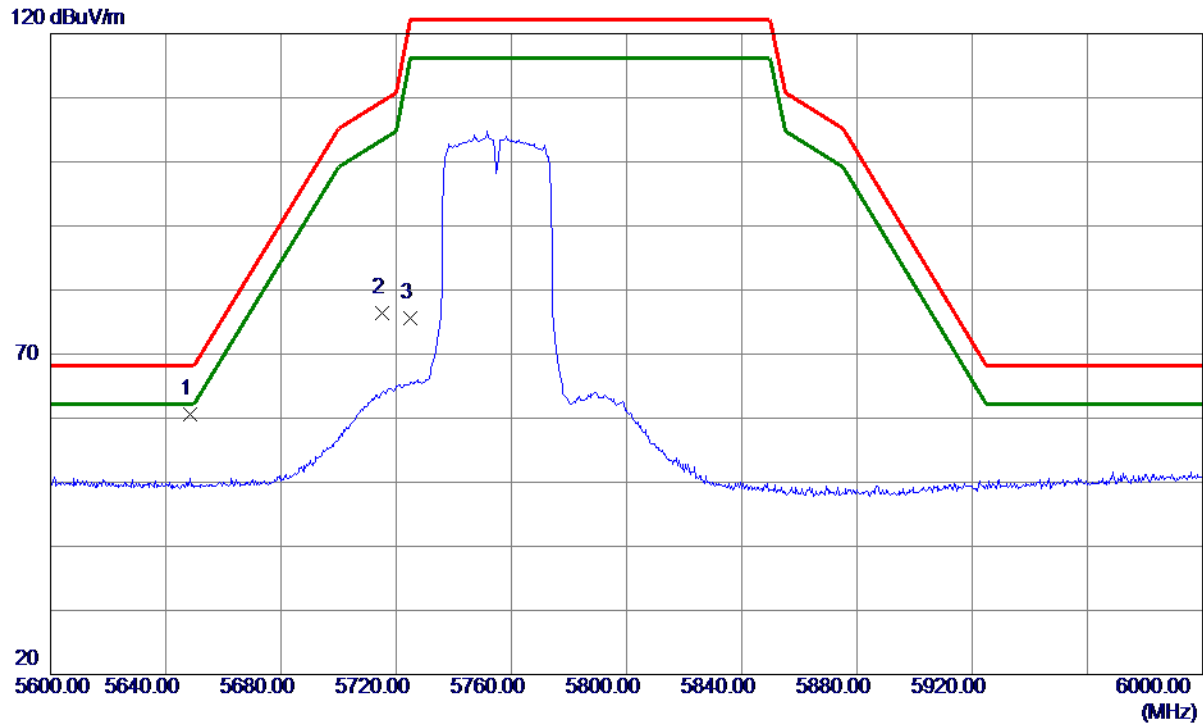

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5648.6000	19.04	41.48	60.52	68.20	-7.68	Peak	
2	5715.0000	34.72	41.59	76.31	109.40	-33.09	Peak	
3	5725.0000	33.96	41.60	75.56	122.20	-46.64	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Vertical

80 dBuV/m

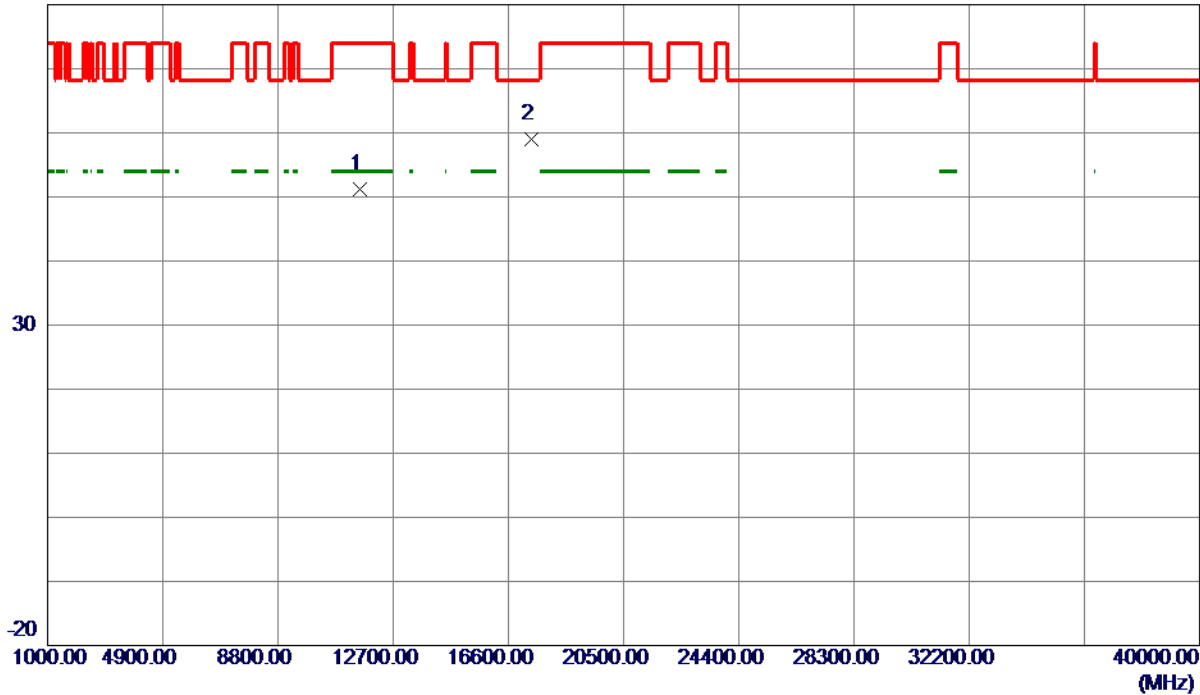

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11590.0000	44.46	6.71	51.17	74.00	-22.83	Peak	
2 *	17380.0000	45.83	13.13	58.96	68.30	-9.34	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Vertical

80 dBuV/m

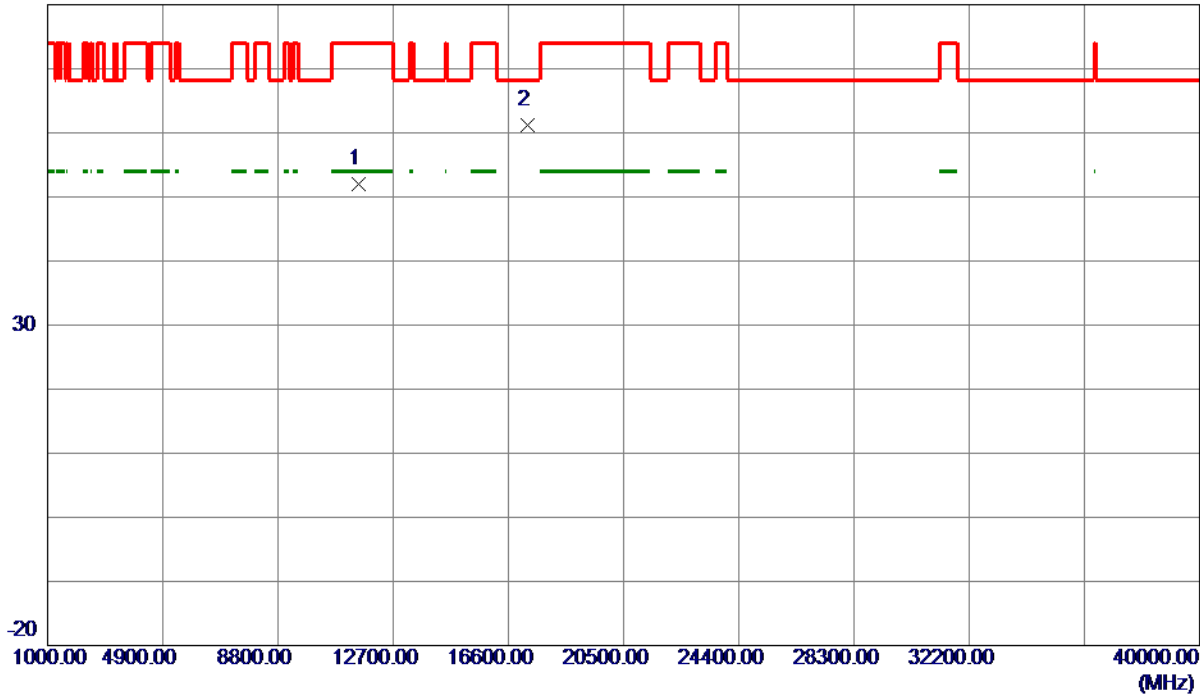


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11522.2000	45.24	6.80	52.04	74.00	-21.96	Peak	
2 *	17266.9000	48.71	12.53	61.24	68.30	-7.06	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Horizontal

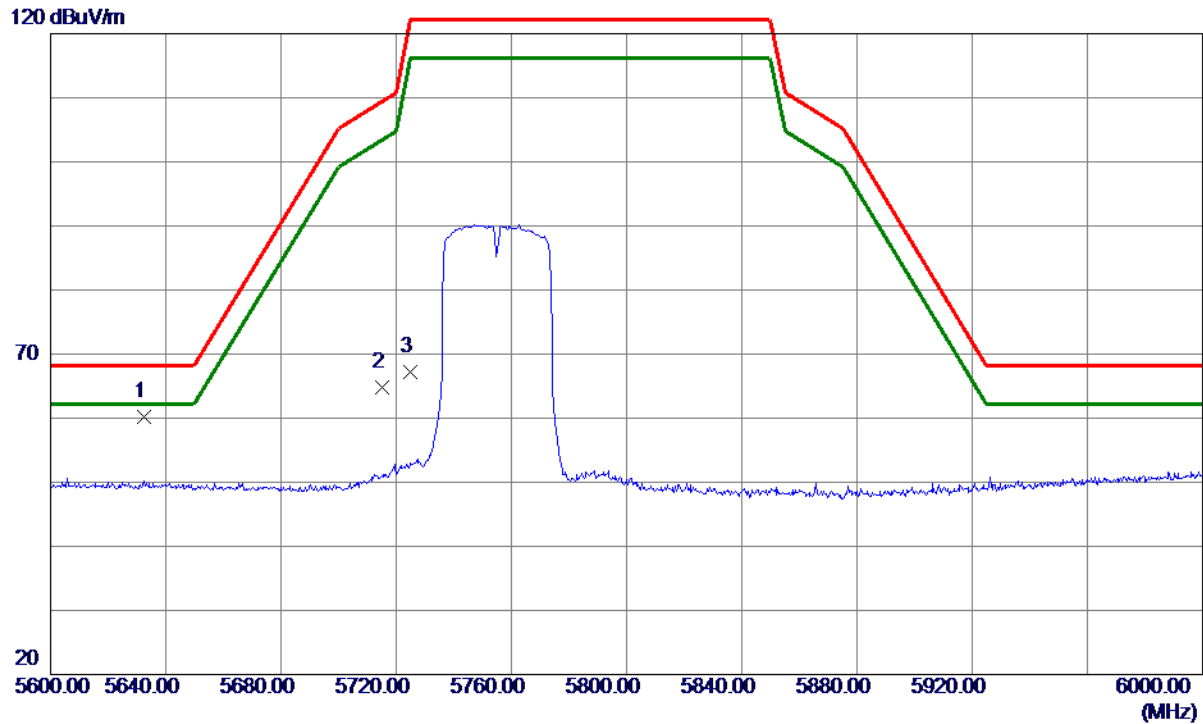

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	5632.6000	18.65	41.46	60.11	68.20	-8.09	Peak	
2	5715.0000	23.18	41.59	64.77	109.40	-44.63	Peak	
3	5725.0000	25.60	41.60	67.20	122.20	-55.00	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Horizontal

80 dBuV/m

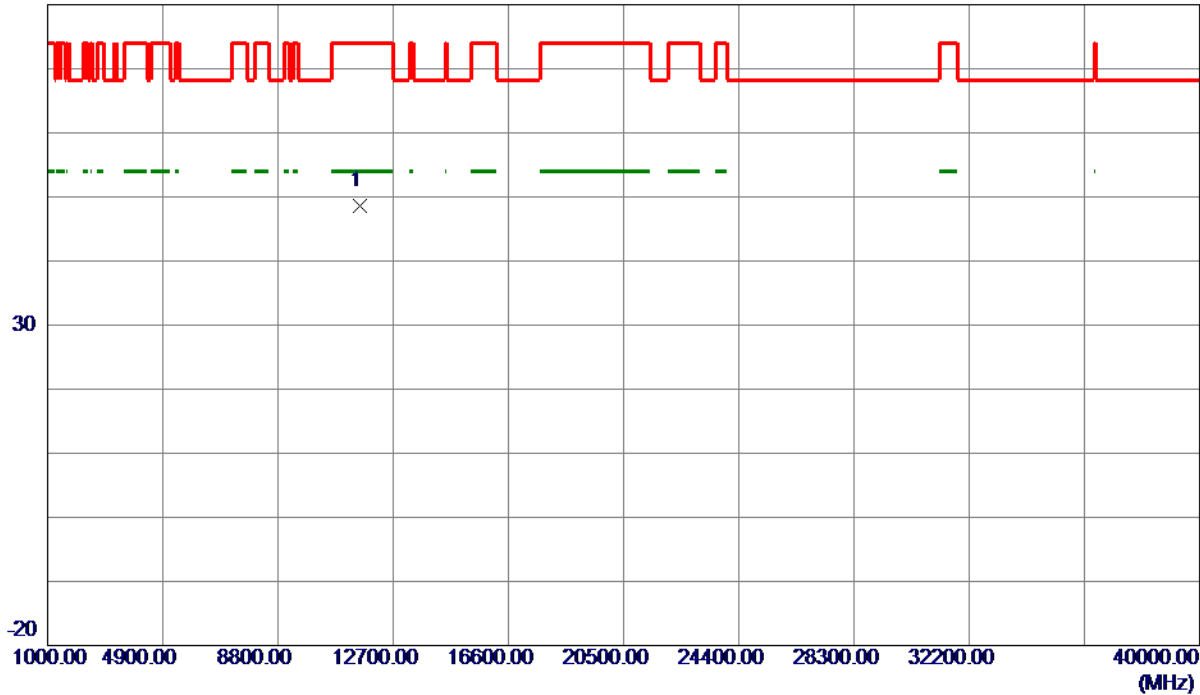

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11590.0000	41.80	6.71	48.51	74.00	-25.49	Peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5755 MHz

Horizontal

80 dBuV/m

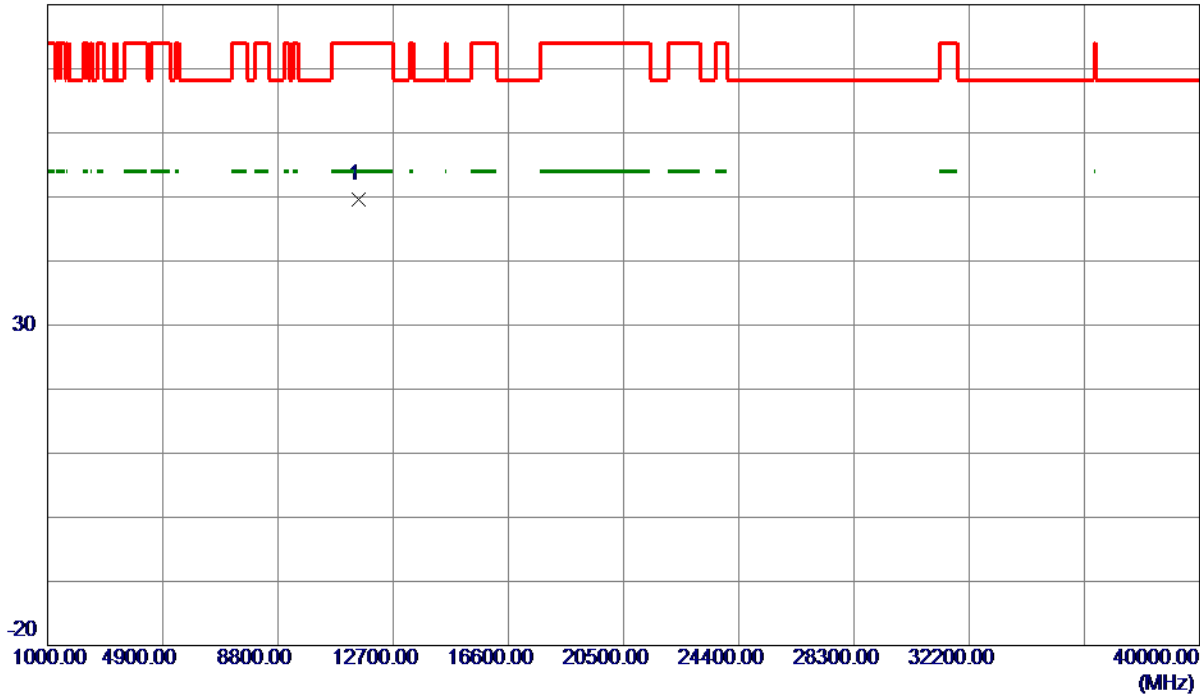


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11510.0000	42.77	6.82	49.59	74.00	-24.41	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Vertical

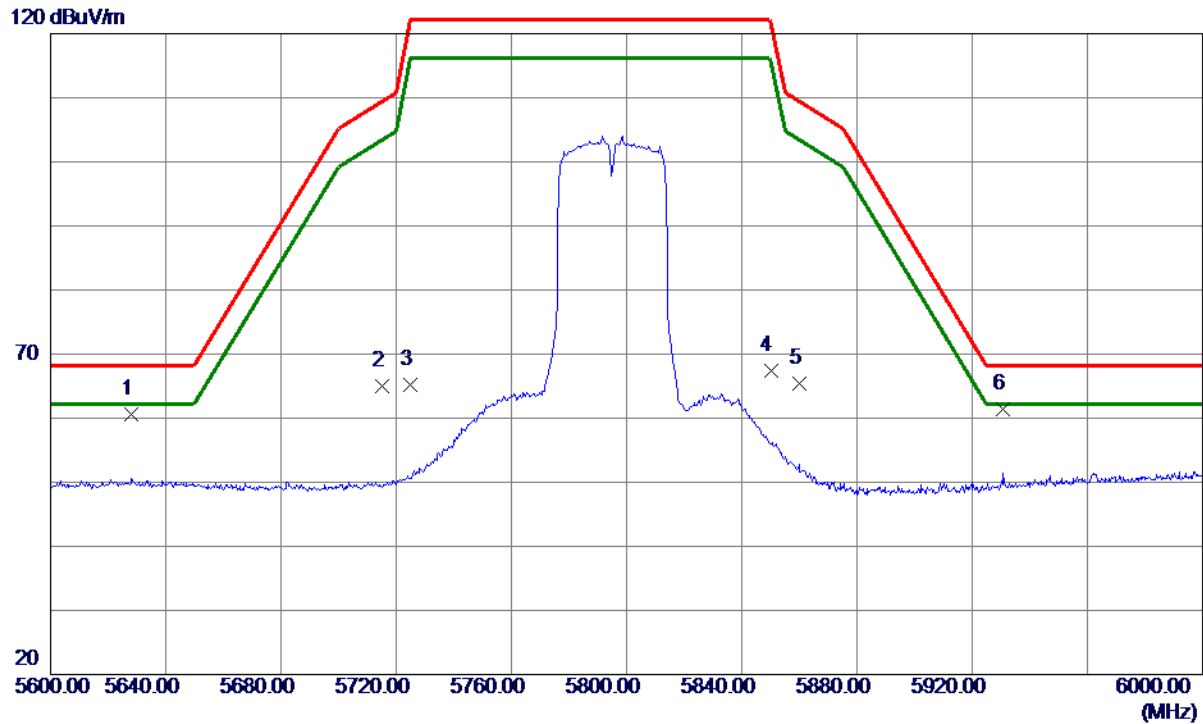


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5628.2000	19.19	41.45	60.64	68.20	-7.56	Peak	
2	5715.0000	23.45	41.59	65.04	109.40	-44.36	Peak	
3	5725.0000	23.51	41.60	65.11	122.20	-57.09	Peak	
4	5850.0000	25.61	41.80	67.41	122.20	-54.79	Peak	
5	5860.0000	23.64	41.81	65.45	109.40	-43.95	Peak	
6 *	5930.8000	19.41	41.92	61.33	68.20	-6.87	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

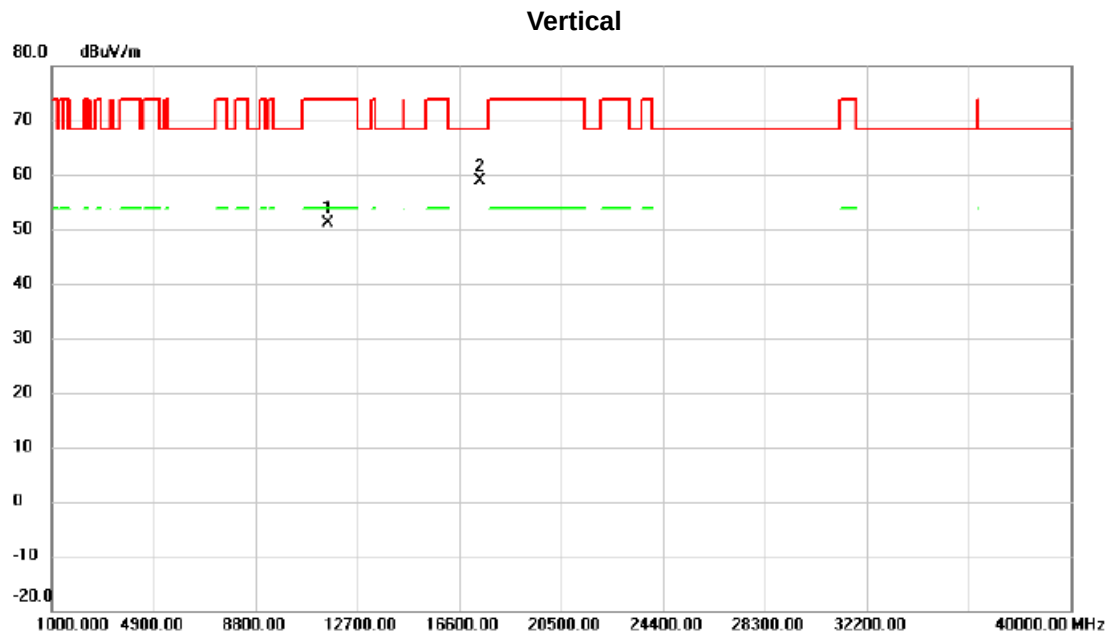


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		11590.00	44.46	6.71	51.17	74.00	-22.83	peak	
2	*	17380.00	45.83	13.13	58.96	68.30	-9.34	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

Horizontal

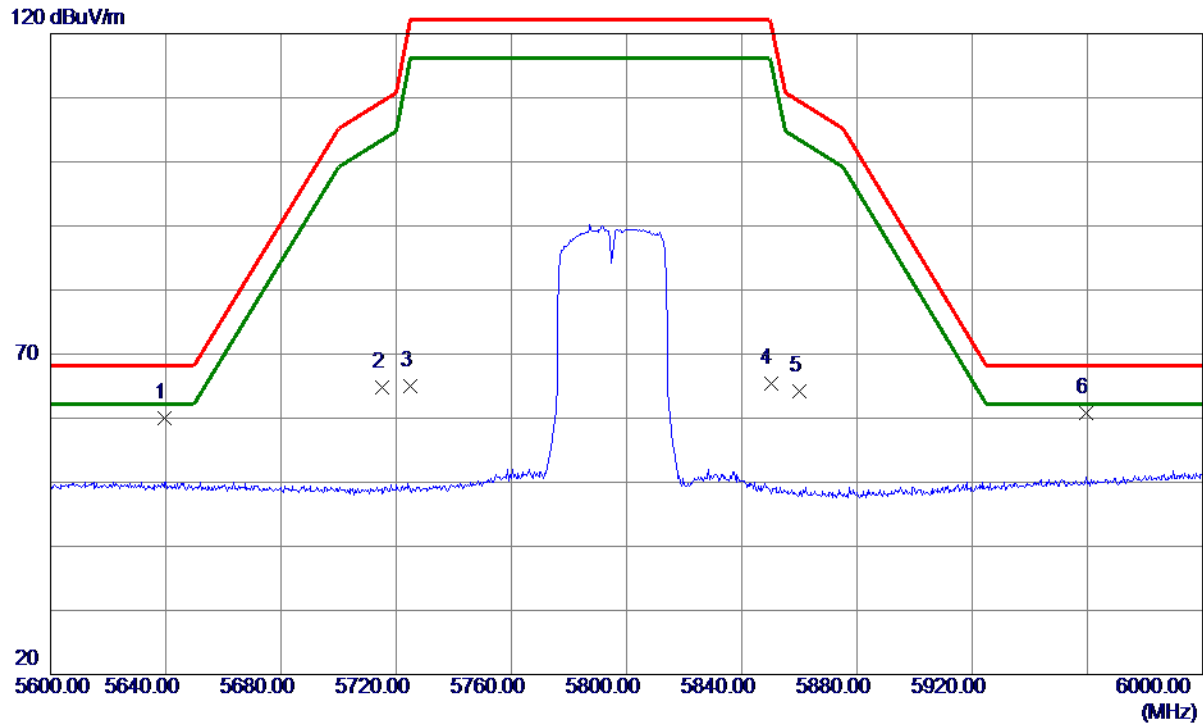


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	5639.6000	18.59	41.47	60.06	68.20	-8.14	Peak	
2	5715.0000	23.16	41.59	64.75	109.40	-44.65	Peak	
3	5725.0000	23.44	41.60	65.04	122.20	-57.16	Peak	
4	5850.0000	23.68	41.80	65.48	122.20	-56.72	Peak	
5	5860.0000	22.41	41.81	64.22	109.40	-45.18	Peak	
6 *	5959.6000	18.90	41.97	60.87	68.20	-7.33	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT40) Mode 5795 MHz

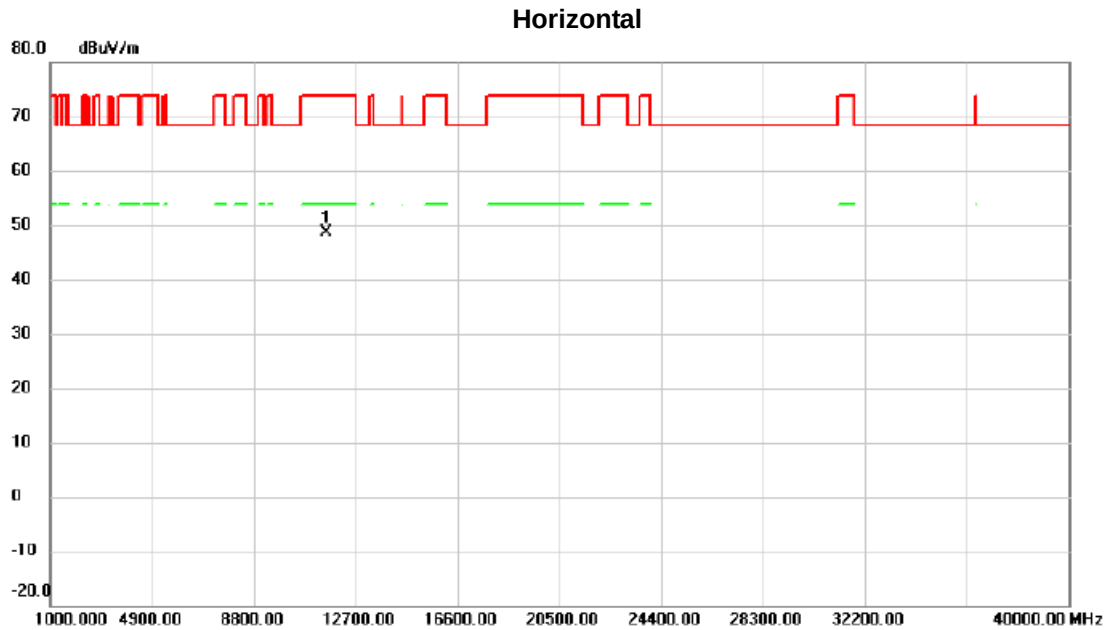


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	11590.00	41.80	6.71	48.51	74.00	-25.49	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

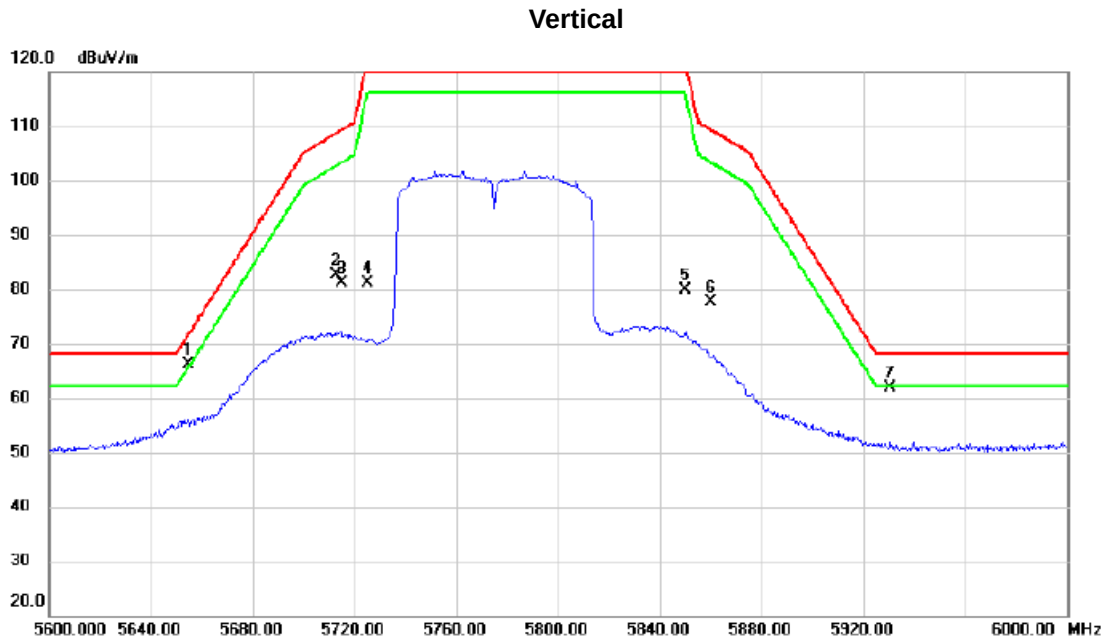

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	5654.800	24.73	41.49	66.22	71.75	-5.53	peak	
2		5712.800	41.02	41.58	82.60	108.78	-26.18	peak	
3		5715.000	39.59	41.58	81.17	109.40	-28.23	peak	
4		5725.000	39.45	41.60	81.05	122.20	-41.15	peak	
5		5850.000	38.14	41.80	79.94	122.20	-42.26	peak	
6		5860.000	35.72	41.81	77.53	109.40	-31.87	peak	
7		5930.600	19.92	41.93	61.85	68.20	-6.35	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Vertical

80 dBuV/m

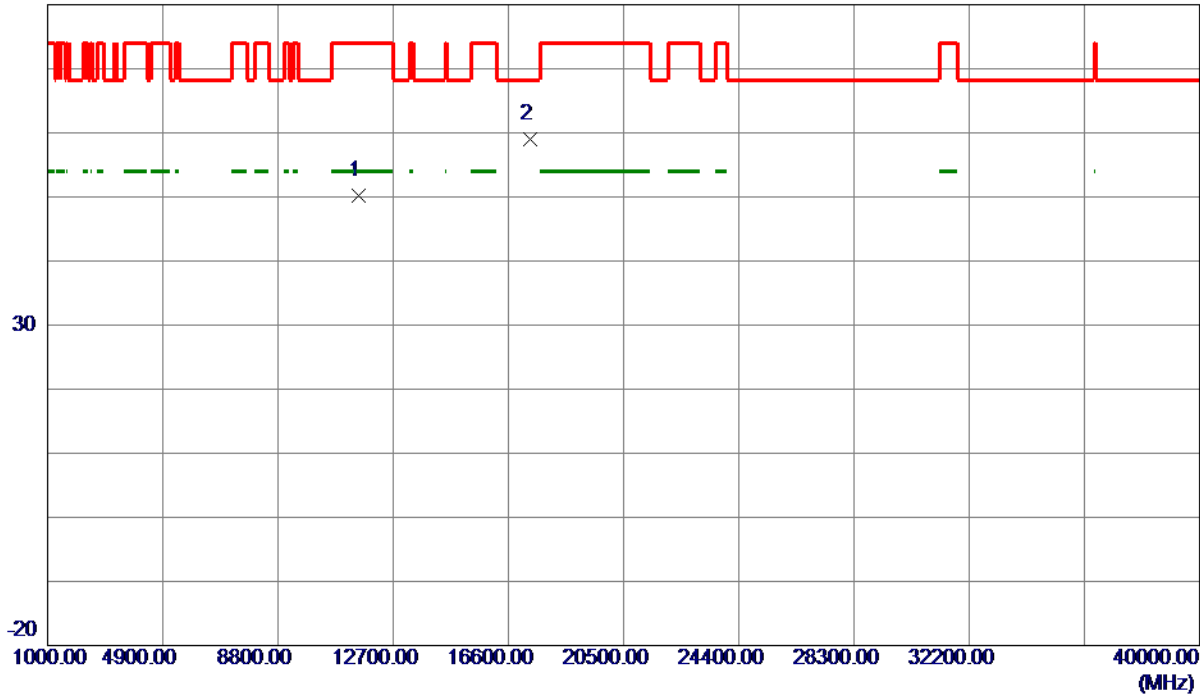


No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	11550.0000	43.41	6.76	50.17	74.00	-23.83	Peak	
2 *	17325.4000	46.24	12.84	59.08	68.30	-9.22	Peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
(2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

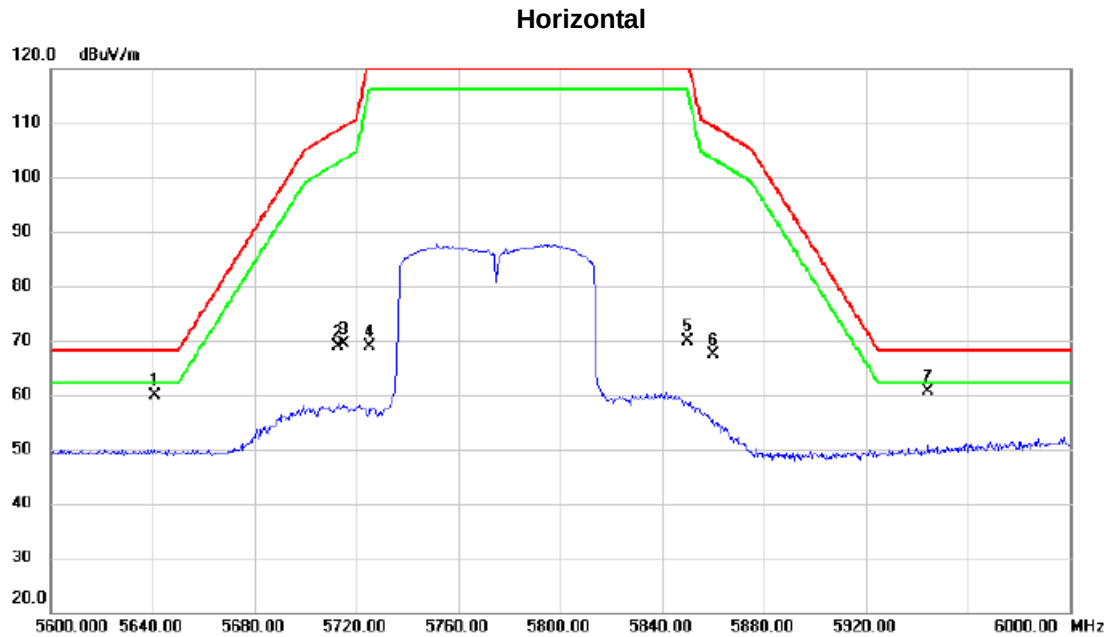

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		5641.000	18.51	41.47	59.98	68.20	-8.22	peak	
2		5713.000	27.36	41.58	68.94	108.84	-39.90	peak	
3		5715.000	27.68	41.58	69.26	109.40	-40.14	peak	
4		5725.000	27.22	41.60	68.82	122.20	-53.38	peak	
5		5850.000	28.07	41.80	69.87	122.20	-52.33	peak	
6		5860.000	25.59	41.81	67.40	109.40	-42.00	peak	
7	*	5944.400	18.80	41.94	60.74	68.20	-7.46	peak	


REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Orthogonal Axis	X
Test Mode	UNII-3_TX AC (VHT80) Mode 5775 MHz

Horizontal

80 dBuV/m

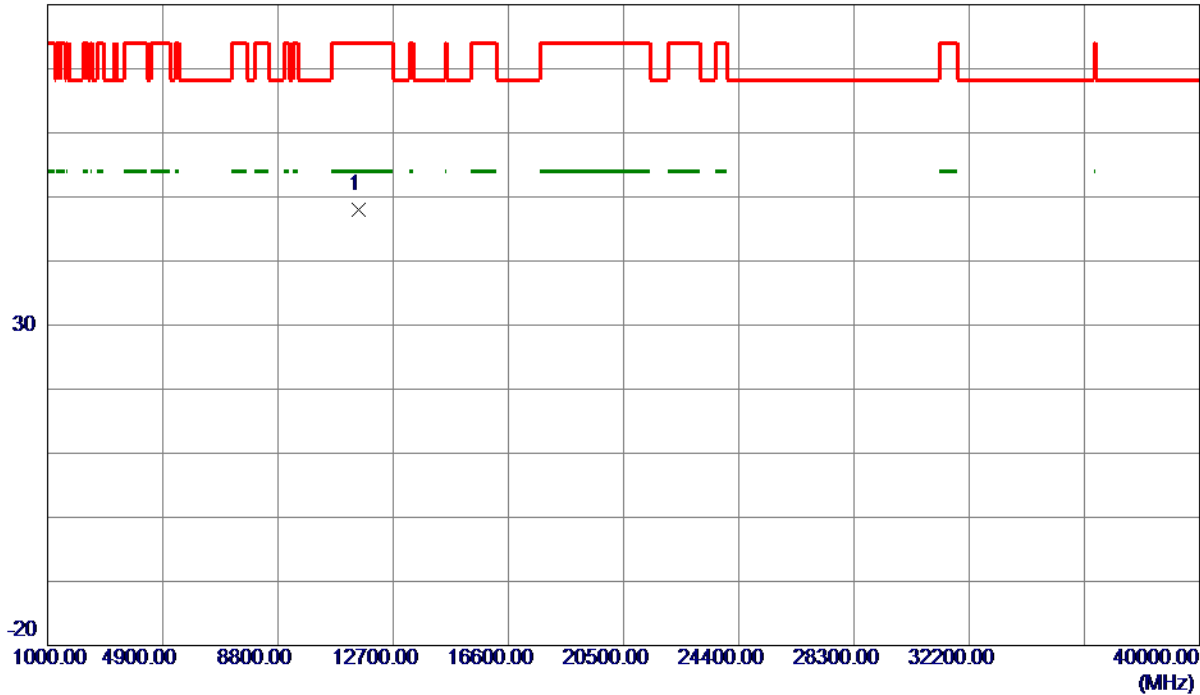

No.	Freq. MHz	Reading Level dBuV/m	Correct Factor dB	Measure ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1 *	11550.0000	41.26	6.76	48.02	74.00	-25.98	Peak	

REMARKS:


- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH


CDD

Test Mode	UNII-1_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	38.09
40	5200	40.00
48	5240	18.65

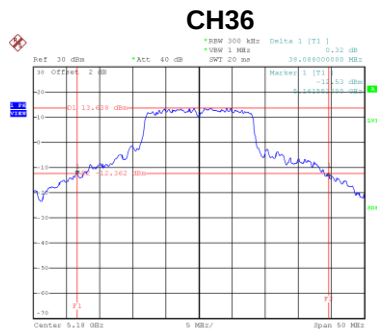

Date: 20 JUN 2020 13:57:38

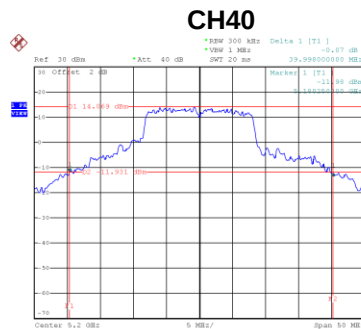


Date: 20 JUN 2020 14:02:14

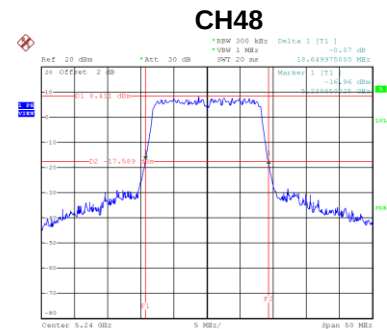


Date: 9 JUL 2020 15:43:08


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
36	5180	22.30
40	5200	25.90
48	5240	16.50

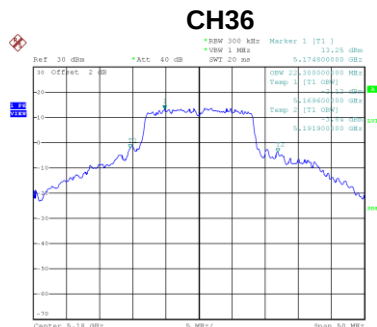

Date: 20 JUN 2020 13:57:21

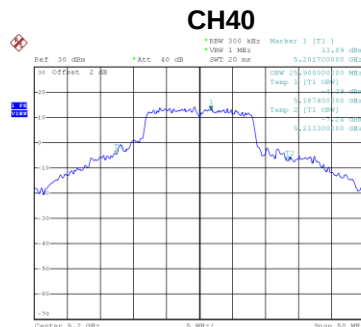


Date: 20 JUN 2020 14:01:49

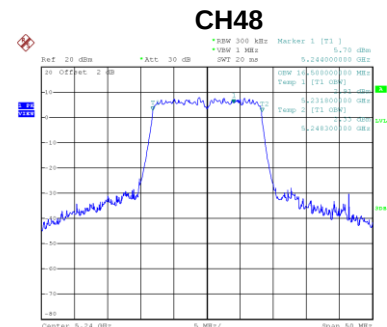


Date: 9 JUL 2020 15:42:35

Test Mode	UNII-3_TX A Mode
-----------	------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
149	5745	16.50	500	Complies
157	5785	16.50	500	Complies
165	5825	16.45	500	Complies

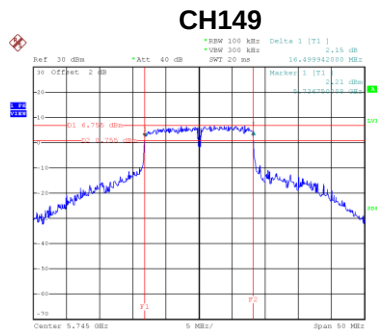

Date: 20 JUN 2020 14:17:24

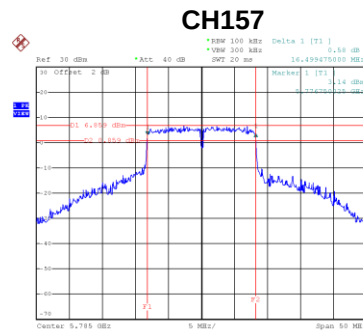


Date: 20 JUN 2020 14:19:07

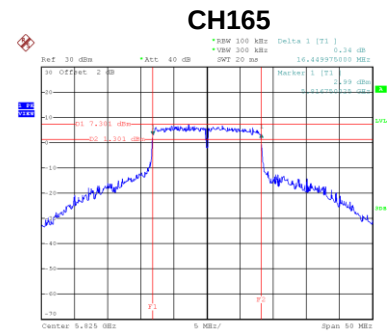

Date: 20 JUN 2020 14:23:51


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
149	5745	21.30
157	5785	20.90
165	5825	19.60

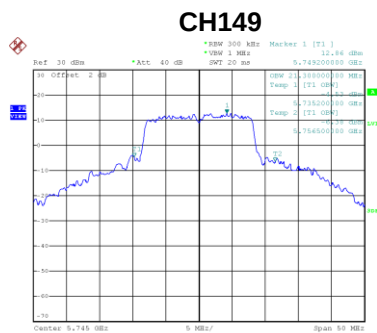

Date: 20 JUN 2020 14:16:51




Date: 20 JUN 2020 14:18:32

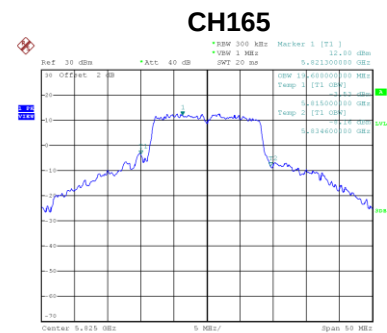


Date: 20 JUN 2020 14:23:16

Test Mode	UNII-1_TX AC (VHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
36	5180	41.79
40	5200	44.69
48	5240	19.55

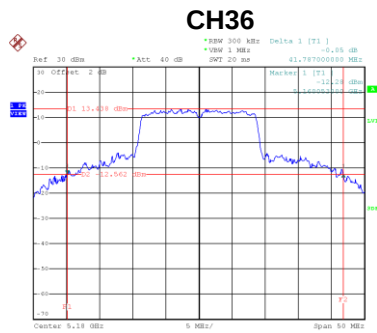

Date: 20.JUN.2020 14:27:149

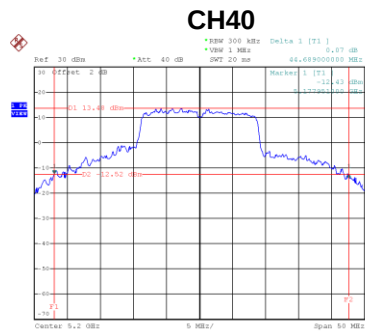


Date: 20.JUN.2020 14:32:144

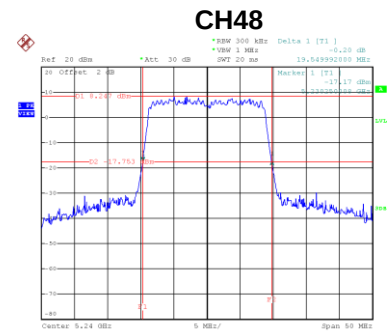


Date: 9.JUL.2020 15:14:127


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
36	5180	24.50
40	5200	27.40
48	5240	17.60

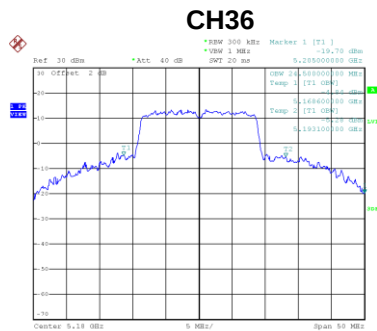

Date: 20.JUN.2020 14:27:128

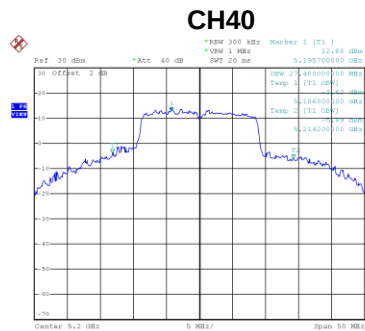


Date: 20.JUN.2020 14:32:133

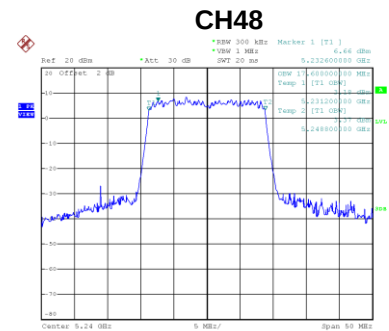


Date: 9.JUL.2020 15:14:156

Test Mode	UNII-1_TX AC (VHT40) Mode
-----------	---------------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
38	5190	67.59
46	5230	56.00

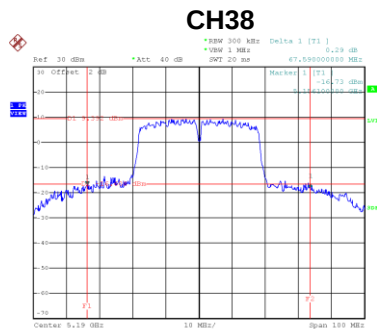


Date: 20.JUN.2020 14:50:05

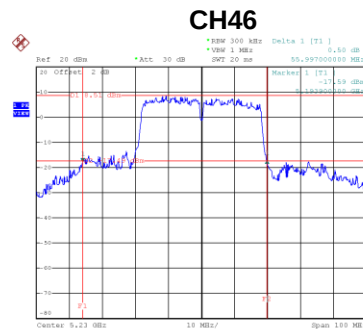


Date: 9.JUL.2020 15:21:21

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
38	5190	37.60
46	5230	37.60

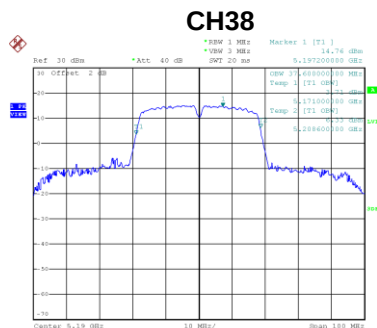

Date: 20.JUN.2020 14:49:17

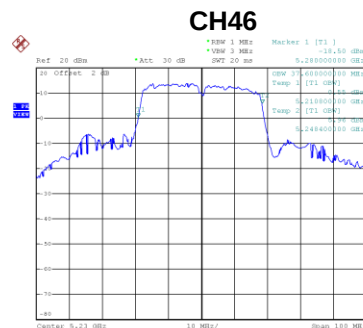


Date: 9.JUL.2020 15:19:32

Test Mode	UNII-1_TX AC (VHT80)
-----------	----------------------

Channel	Frequency (MHz)	26 dB Bandwidth (MHz)
42	5210	81.59


CH42

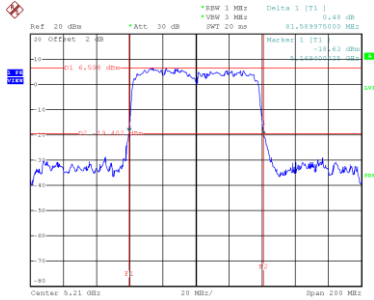

Date: 9_JUL_2020 15:23:41

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
42	5210	75.60


CH42

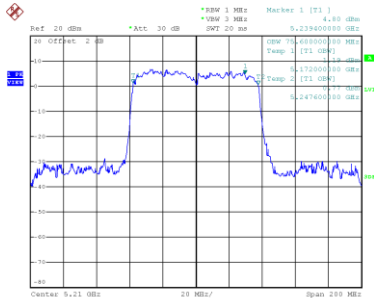


Date: 9_JUL_2020 15:23:02

Test Mode	UNII-3_TX AC (VHT20) Mode
-----------	---------------------------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
149	5745	17.75	500	Complies
157	5785	17.75	500	Complies
165	5825	17.76	500	Complies

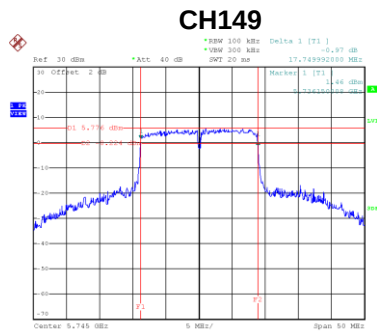

Date: 20 JUN 2020 14:43:20

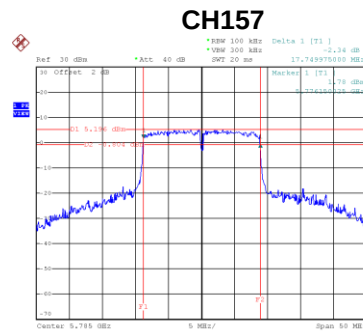


Date: 20 JUN 2020 14:43:20

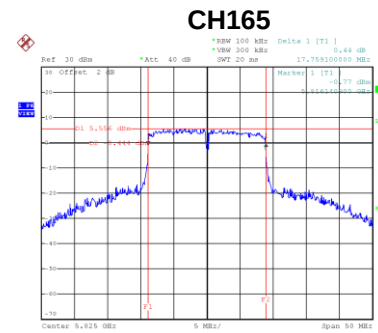


Date: 20 JUN 2020 14:46:32


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
149	5745	18.00
157	5785	17.90
165	5825	18.00

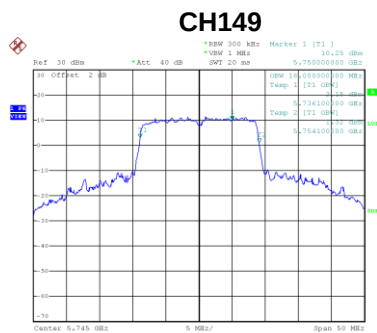

Date: 20 JUN 2020 14:46:17

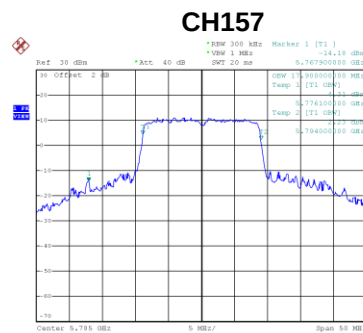


Date: 20 JUN 2020 14:42:46

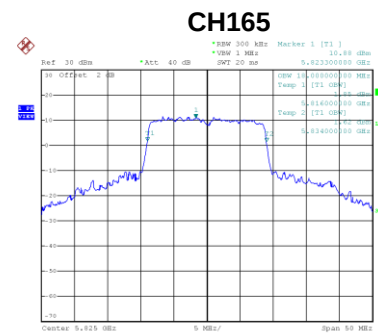


Date: 20 JUN 2020 14:45:59

Test Mode	UNII-3_TX AC (VHT40) Mode
-----------	---------------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
151	5755	36.59	500	Complies
159	5795	36.60	500	Complies

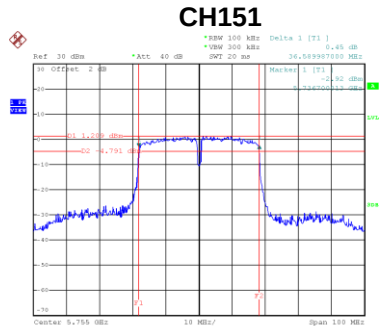


Date: 20 JUN 2020 15:36:56

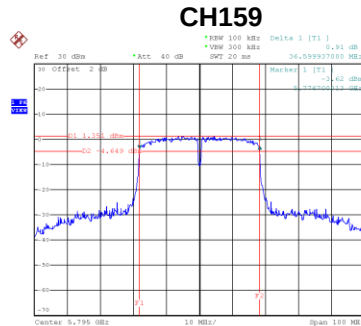


Date: 20 JUN 2020 15:40:40

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
151	5755	37.00
159	5795	37.00

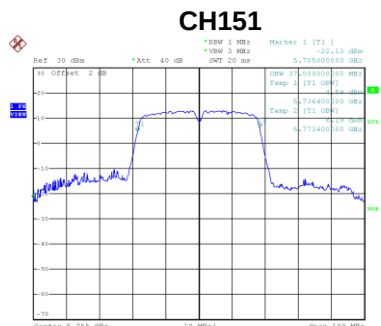

Date: 20 JUN 2020 15:36:11

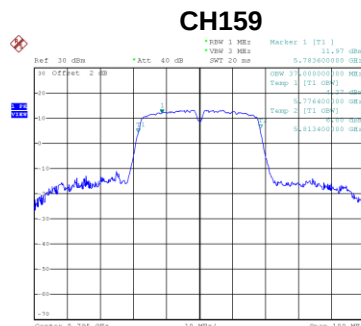


Date: 20 JUN 2020 15:39:53

Test Mode	UNII-3_TX AC (VHT80)
-----------	----------------------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
155	5775	73.99	500	Complies


CH155

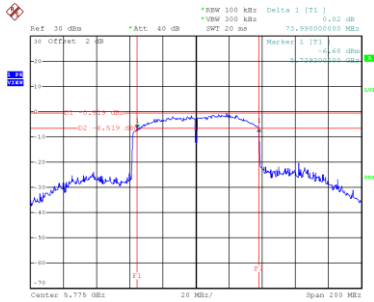

Date: 20 JUN 2020 15:52:21

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
155	5775	81.20

CH155

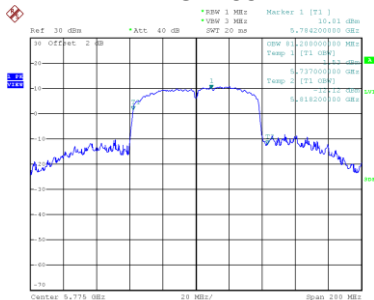

Date: 20 JUN 2020 15:51:36

APPENDIX F - CONDUCTED OUTPUT POWER

**For 2TX
CDD**

Test Mode	UNII-1_TX A Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	17.57	0.00	17.57	30.00	1.00	Complies
40	5200	17.06	0.00	17.06	30.00	1.00	Complies
48	5240	16.96	0.00	16.96	30.00	1.00	Complies

Test Mode	UNII-1_TX A Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	16.33	0.00	16.33	30.00	1.00	Complies
40	5200	16.07	0.00	16.07	30.00	1.00	Complies
48	5240	16.34	0.00	16.34	30.00	1.00	Complies

Test Mode	UNII-1_TX A Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	20.00	30.00	1.00	Complies
40	5200	19.60	30.00	1.00	Complies
48	5240	19.67	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	17.31	0.00	17.31	30.00	1.00	Complies
40	5200	17.28	0.00	17.28	30.00	1.00	Complies
48	5240	17.42	0.00	17.42	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT20) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	16.18	0.00	16.18	30.00	1.00	Complies
40	5200	16.25	0.00	16.25	30.00	1.00	Complies
48	5240	16.24	0.00	16.24	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT20) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	19.79	30.00	1.00	Complies
40	5200	19.81	30.00	1.00	Complies
48	5240	19.88	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	18.01	0.00	18.01	30.00	1.00	Complies
46	5230	20.25	0.00	20.25	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT40) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	17.05	0.00	17.05	30.00	1.00	Complies
46	5230	18.93	0.00	18.93	30.00	1.00	Complies

Test Mode	UNII-1_TX N (HT40) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	20.57	30.00	1.00	Complies
46	5230	22.65	30.00	1.00	Complies

Test Mode	UNII-3_TX A Mode_Ant. 1
-----------	-------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	17.58	0.00	17.58	30.00	1.00	Complies
157	5785	18.32	0.00	18.32	30.00	1.00	Complies
165	5825	17.35	0.00	17.35	30.00	1.00	Complies

Test Mode	UNII-3_TX A Mode_Ant. 2
-----------	-------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	17.54	0.00	17.54	30.00	1.00	Complies
157	5785	17.50	0.00	17.50	30.00	1.00	Complies
165	5825	16.81	0.00	16.81	30.00	1.00	Complies

Test Mode	UNII-3_TX A Mode_Total
-----------	------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	20.57	30.00	1.00	Complies
157	5785	20.94	30.00	1.00	Complies
165	5825	20.10	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT20) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	17.72	0.00	17.72	30.00	1.00	Complies
157	5785	18.51	0.00	18.51	30.00	1.00	Complies
165	5825	17.78	0.00	17.78	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT20) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	17.64	0.00	17.64	30.00	1.00	Complies
157	5785	17.61	0.00	17.61	30.00	1.00	Complies
165	5825	16.82	0.00	16.82	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT20) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	20.69	30.00	1.00	Complies
157	5785	21.09	30.00	1.00	Complies
165	5825	20.34	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT40) Mode_Ant. 1
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	20.34	0.00	20.34	30.00	1.00	Complies
159	5795	20.43	0.00	20.43	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT40) Mode_Ant. 2
-----------	--------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	18.22	0.00	18.22	30.00	1.00	Complies
159	5795	18.22	0.00	18.22	30.00	1.00	Complies

Test Mode	UNII-3_TX N (HT40) Mode_Total
-----------	-------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	22.42	30.00	1.00	Complies
159	5795	22.47	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT20) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	17.37	0.00	17.37	30.00	1.00	Complies
40	5200	17.38	0.00	17.38	30.00	1.00	Complies
48	5240	17.46	0.00	17.46	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT20) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	16.25	0.00	16.25	30.00	1.00	Complies
40	5200	16.41	0.00	16.41	30.00	1.00	Complies
48	5240	16.31	0.00	16.31	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT20) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
36	5180	19.86	30.00	1.00	Complies
40	5200	19.93	30.00	1.00	Complies
48	5240	19.93	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT40) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	18.04	0.00	18.04	30.00	1.00	Complies
46	5230	20.46	0.00	20.46	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT40) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	17.13	0.00	17.13	30.00	1.00	Complies
46	5230	18.98	0.00	18.98	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT40) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
38	5190	20.62	30.00	1.00	Complies
46	5230	22.79	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	15.32	0.00	15.32	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	15.08	0.00	15.08	30.00	1.00	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
42	5210	18.21	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT20) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	17.79	0.00	17.79	30.00	1.00	Complies
157	5785	18.63	0.00	18.63	30.00	1.00	Complies
165	5825	17.81	0.00	17.81	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT20) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	17.76	0.00	17.76	30.00	1.00	Complies
157	5785	17.65	0.00	17.65	30.00	1.00	Complies
165	5825	16.90	0.00	16.90	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT20) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
149	5745	20.79	30.00	1.00	Complies
157	5785	21.18	30.00	1.00	Complies
165	5825	20.39	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT40) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	20.61	0.00	20.61	30.00	1.00	Complies
159	5795	20.53	0.00	20.53	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT40) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	18.28	0.00	18.28	30.00	1.00	Complies
159	5795	18.26	0.00	18.26	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT40) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
151	5755	22.61	30.00	1.00	Complies
159	5795	22.55	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	20.77	0.00	20.77	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Conducted Output Power (dBm)	Duty Factor	Conducted Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	18.81	0.00	18.81	30.00	1.00	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Total
-----------	---------------------------------


Channel	Frequency (MHz)	Conducted Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
155	5775	22.91	30.00	1.00	Complies

APPENDIX G - POWER SPECTRAL DENSITY


For 2TX CDD

Test Mode	UNII-1_TX A Mode_Ant. 1
-----------	-------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	11.06	0.00	11.06	14.99	Complies
40	5200	10.97	0.00	10.97	14.99	Complies
48	5240	11.05	0.00	11.05	14.99	Complies

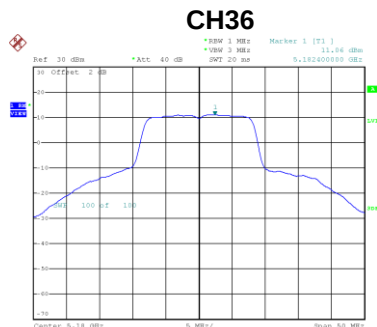

Date: 20 JUN 2020 13:57:52

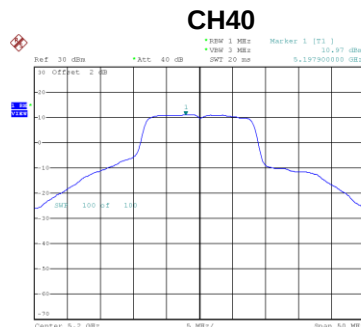


Date: 20 JUN 2020 14:02:27

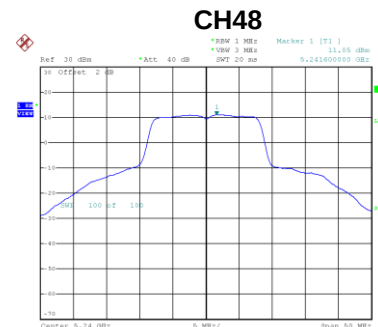


Date: 20 JUN 2020 14:03:55

Test Mode	UNII-1_TX A Mode_Ant. 2
-----------	-------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	9.38	0.00	9.38	14.99	Complies
40	5200	9.76	0.00	9.76	14.99	Complies
48	5240	10.07	0.00	10.07	14.99	Complies

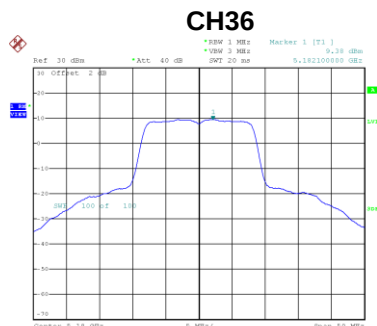

Date: 20 JUN 2020 14:00:48

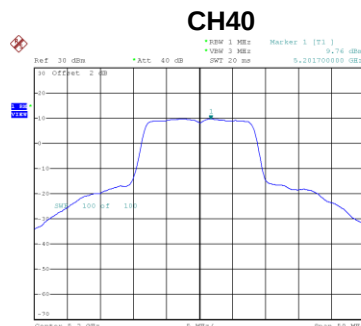

Date: 20 JUN 2020 14:00:02

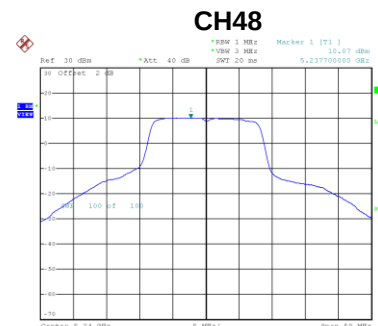


Date: 20 JUN 2020 14:04:49

Test Mode	UNII-1_TX A Mode_Total
-----------	------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	13.31	14.99	Complies
40	5200	13.42	14.99	Complies
48	5240	13.60	14.99	Complies

Test Mode	UNII-3_TX A Mode_Ant. 1
-----------	-------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	7.67	0.00	7.67	27.99	Complies
157	5785	7.58	0.00	7.58	27.99	Complies
165	5825	7.69	0.00	7.69	27.99	Complies

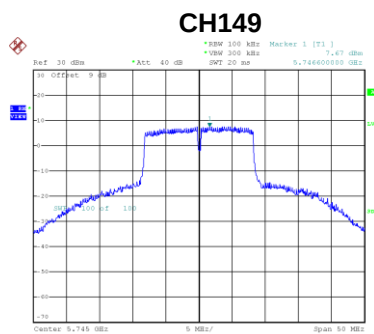

Date: 20 JUN 2020 14:17:38

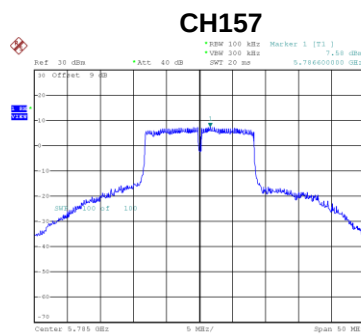


Date: 20 JUN 2020 14:19:21

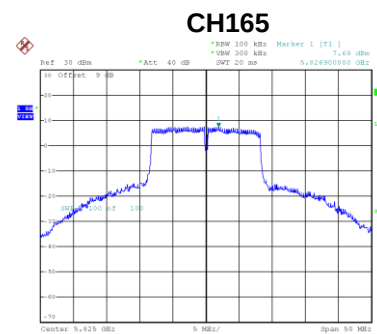


Date: 20 JUN 2020 14:24:04

Test Mode	UNII-3_TX A Mode_Ant. 2
-----------	-------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	7.26	0.00	7.26	27.99	Complies
157	5785	6.35	0.00	6.35	27.99	Complies
165	5825	5.89	0.00	5.89	27.99	Complies

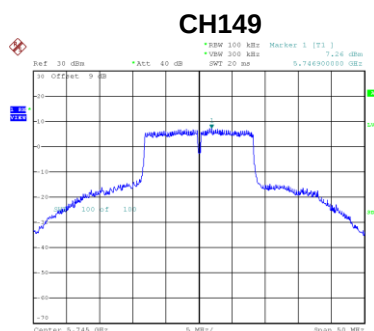

Date: 20 JUN 2020 14:05:44

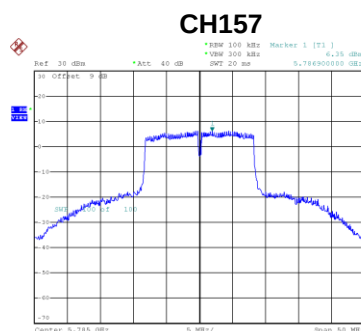

Date: 20 JUN 2020 14:20:22

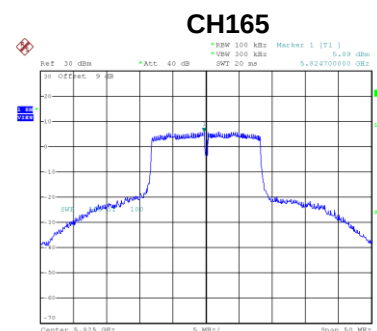


Date: 20 JUN 2020 14:22:20

Test Mode	UNII-3_TX A Mode_Total
-----------	------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	10.48	27.99	Complies
157	5785	10.02	27.99	Complies
165	5825	9.89	27.99	Complies

Test Mode	UNII-1_TX AC (VHT20) Mode_Ant. 1
-----------	----------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	10.58	0.00	10.58	14.99	Complies
40	5200	10.56	0.00	10.56	14.99	Complies
48	5240	10.53	0.00	10.53	14.99	Complies

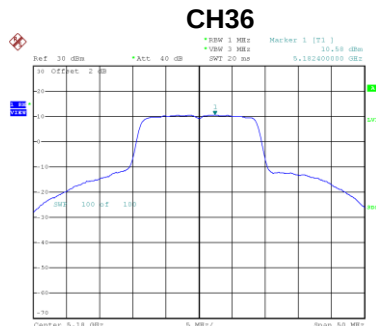

Date: 20 JUN 2020 14:28:02

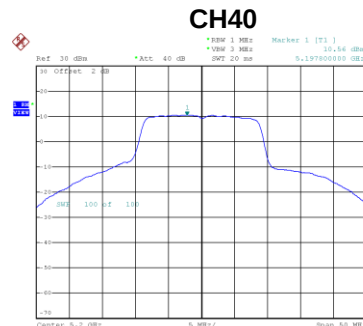


Date: 20 JUN 2020 14:32:58

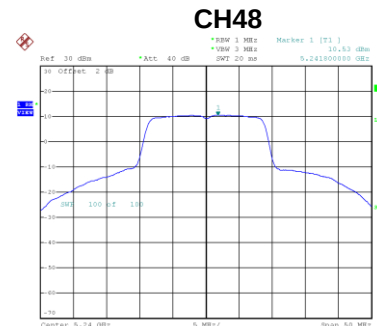


Date: 20 JUN 2020 14:37:46

Test Mode	UNII-1_TX AC (VHT20) Mode_Ant. 2
-----------	----------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	8.71	0.00	8.71	14.99	Complies
40	5200	9.03	0.00	9.03	14.99	Complies
48	5240	9.95	0.00	9.95	14.99	Complies

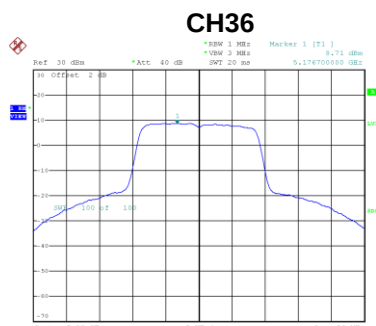

Date: 20 JUN 2020 14:29:41

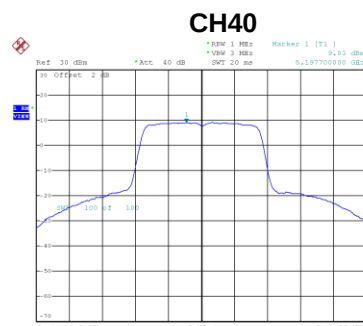

Date: 20 JUN 2020 14:33:32

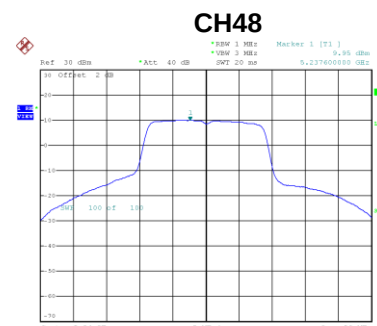


Date: 20 JUN 2020 14:38:36

Test Mode	UNII-1_TX AC (VHT20) Mode_Total
-----------	---------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
36	5180	12.76	14.99	Complies
40	5200	12.87	14.99	Complies
48	5240	13.26	14.99	Complies

Test Mode	UNII-1_TX AC (VHT40) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	6.42	0.00	6.42	14.99	Complies
46	5230	6.86	0.00	6.86	14.99	Complies

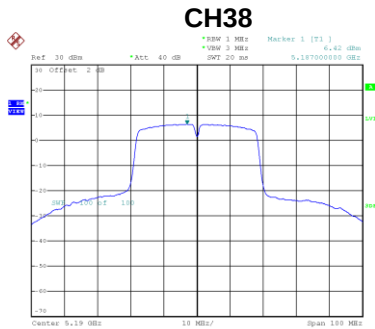


Date: 20 JUN 2020 14:50:25

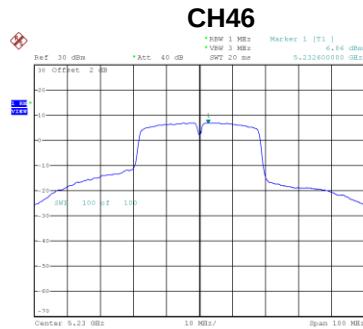


Date: 20 JUN 2020 15:34:52

Test Mode	UNII-1_TX AC (VHT40) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	5.28	0.00	5.28	14.99	Complies
46	5230	5.77	0.00	5.77	14.99	Complies

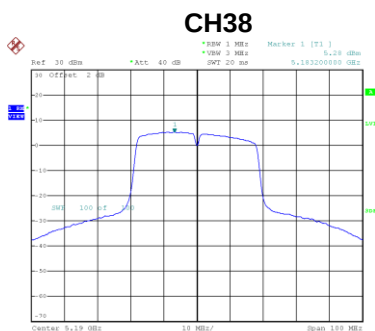

Date: 20 JUN 2020 14:51:21

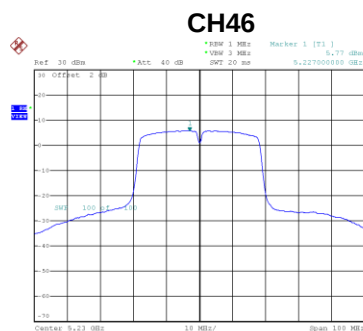

Date: 20 JUN 2020 15:33:39


Test Mode	UNII-1_TX AC (VHT40) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
38	5190	8.90	14.99	Complies
46	5230	9.36	14.99	Complies

Test Mode	UNII-1_TX AC (VHT80) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	3.00	0.00	3.00	14.99	Complies

CH42

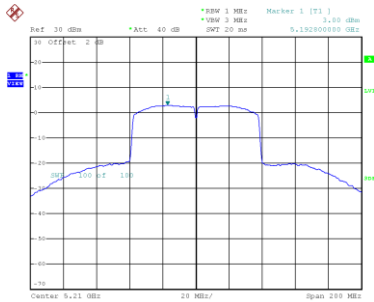


Date: 20 JUN 2020 15:44:55

Test Mode	UNII-1_TX AC (VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	1.96	0.00	1.96	14.99	Complies

CH42

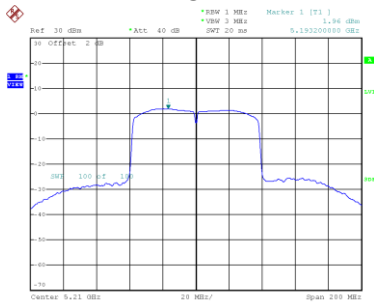


Date: 20 JUN 2020 15:49:56

Test Mode	UNII-1_TX AC (VHT80) Mode_Total
-----------	---------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/MHz)	Max. Limit (dBm/MHz)	Result
42	5210	5.52	14.99	Complies

Test Mode UNII-3_TX AC (VHT20) Mode_Ant. 1


Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	6.55	0.00	6.55	27.99	Complies
157	5785	6.16	0.00	6.16	27.99	Complies
165	5825	6.22	0.00	6.22	27.99	Complies

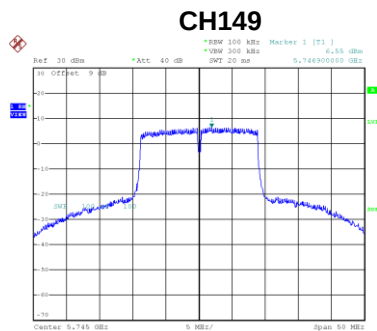

Date: 20 JUN 2020 14:41:34

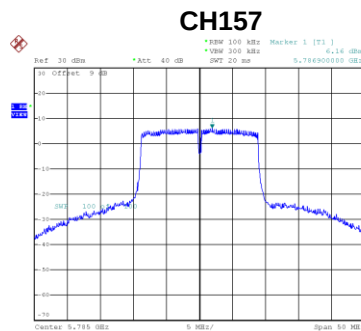


Date: 20 JUN 2020 14:41:33

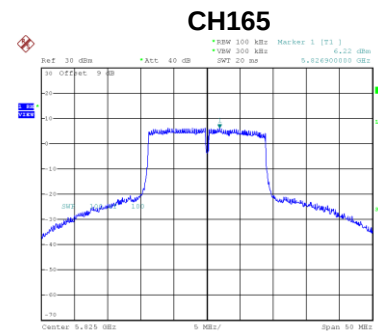


Date: 20 JUN 2020 14:46:46

Test Mode UNII-3_TX AC (VHT20) Mode_Ant. 2


Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	6.58	0.00	6.58	27.99	Complies
157	5785	5.77	0.00	5.77	27.99	Complies
165	5825	5.60	0.00	5.60	27.99	Complies

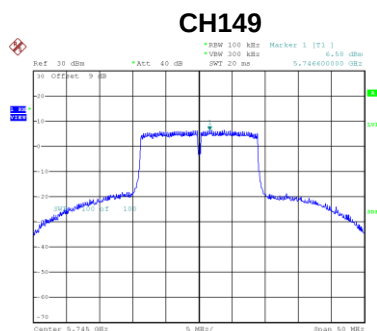

Date: 20 JUN 2020 14:39:31

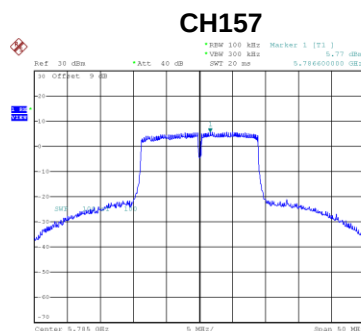

Date: 20 JUN 2020 14:44:17

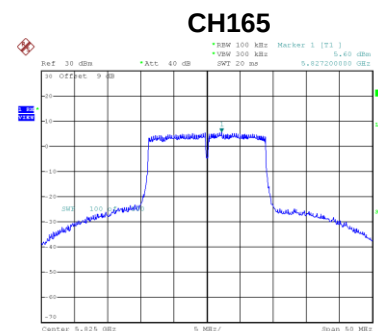



Date: 20 JUN 2020 14:45:28

Test Mode	UNII-3_TX AC (VHT20) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
149	5745	9.58	27.99	Complies
157	5785	8.98	27.99	Complies
165	5825	8.93	27.99	Complies

Test Mode	UNII-3_TX AC (VHT40) Mode_Ant. 1
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	1.71	0.00	1.71	27.99	Complies
159	5795	2.06	0.00	2.06	27.99	Complies

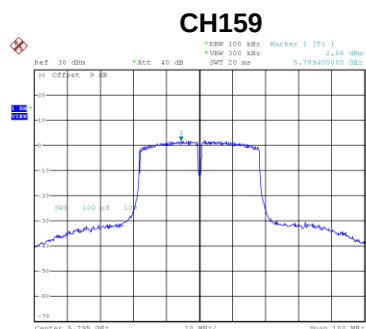
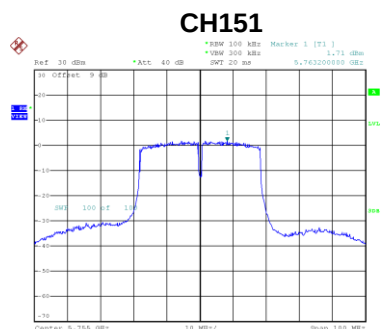


Date: 20 JUN 2020 15:37:16

Date: 20 JUN 2020 15:41:00

Test Mode	UNII-3_TX AC (VHT40) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	1.79	0.00	1.79	27.99	Complies
159	5795	1.07	0.00	1.07	27.99	Complies

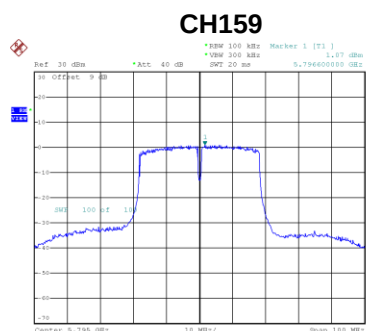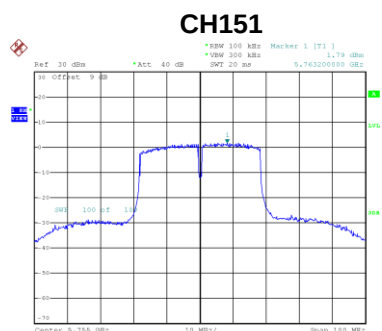

Date: 20 JUN 2020 15:38:16


Date: 20 JUN 2020 15:39:18

Test Mode	UNII-3_TX AC (VHT40) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
151	5755	4.76	27.99	Complies
159	5795	4.60	27.99	Complies

Test Mode	UNII-3_TX AC (VHT80) Mode_Ant. 1
-----------	----------------------------------


Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	-0.76	0.00	-0.76	27.99	Complies

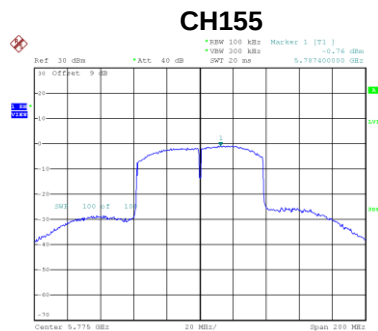

Date: 20 JUN 2020 15:52:41

Test Mode	UNII-3_TX AC (VHT80) Mode_Ant. 2
-----------	----------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Duty Factor	Power Spectral Density + Duty Factor (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	-0.94	0.00	-0.94	27.99	Complies

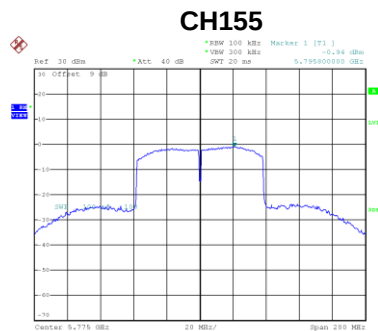

Date: 20 JUN 2020 15:50:59

Test Mode	UNII-3_TX AC (VHT80) Mode_Total
-----------	---------------------------------

Channel	Frequency (MHz)	Power Spectral Density (dBm/500 kHz)	Max. Limit (dBm/500 kHz)	Result
155	5775	2.16	27.99	Complies

End of Test Report