


Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	52/40
------------	----------------------------	------------------	-------

Vertical

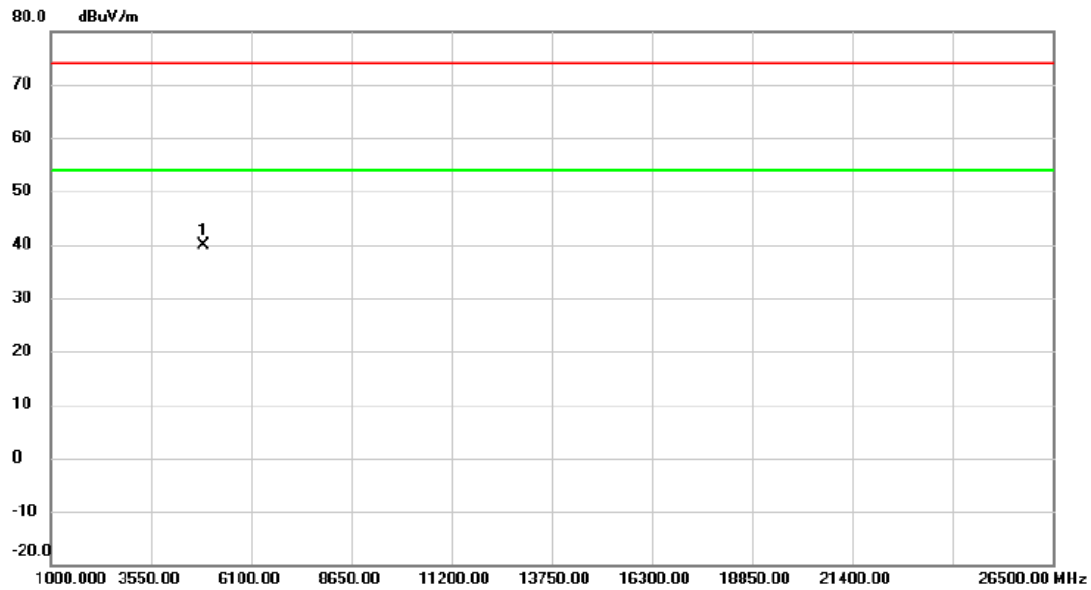


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4904.875	52.63	-12.77	39.86	74.00	-34.14	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	52/40
------------	----------------------------	------------------	-------

Vertical

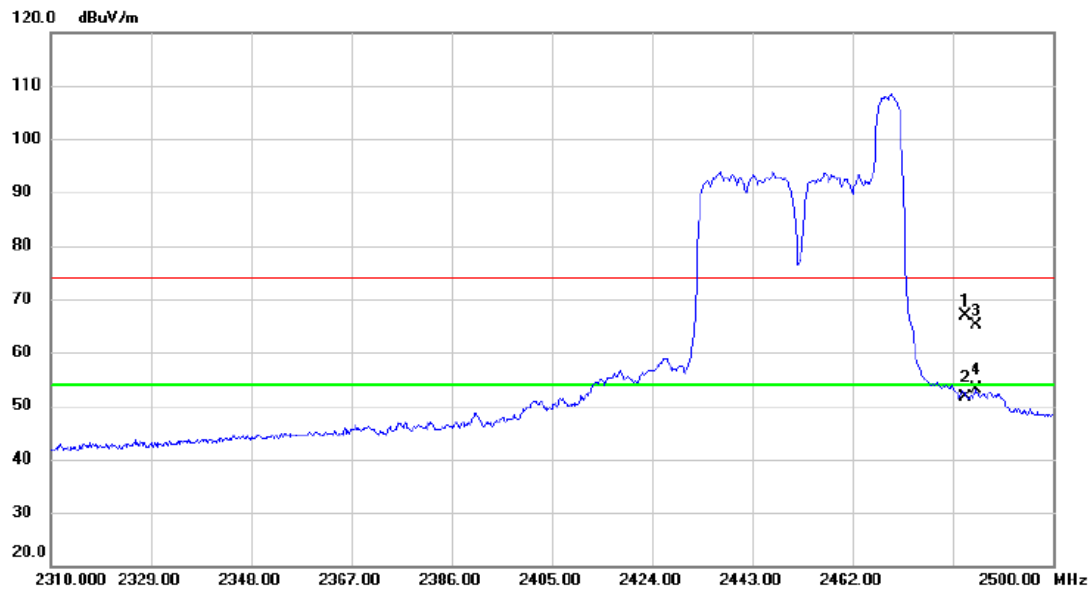


No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2483.500	33.03	33.76	66.79	74.00	-7.21	peak	
2		2483.500	17.88	33.76	51.64	54.00	-2.36	AVG	
3		2485.560	31.31	33.77	65.08	74.00	-8.92	peak	
4	*	2485.560	19.28	33.77	53.05	54.00	-0.95	AVG	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	52/40
------------	----------------------------	------------------	-------

Horizontal

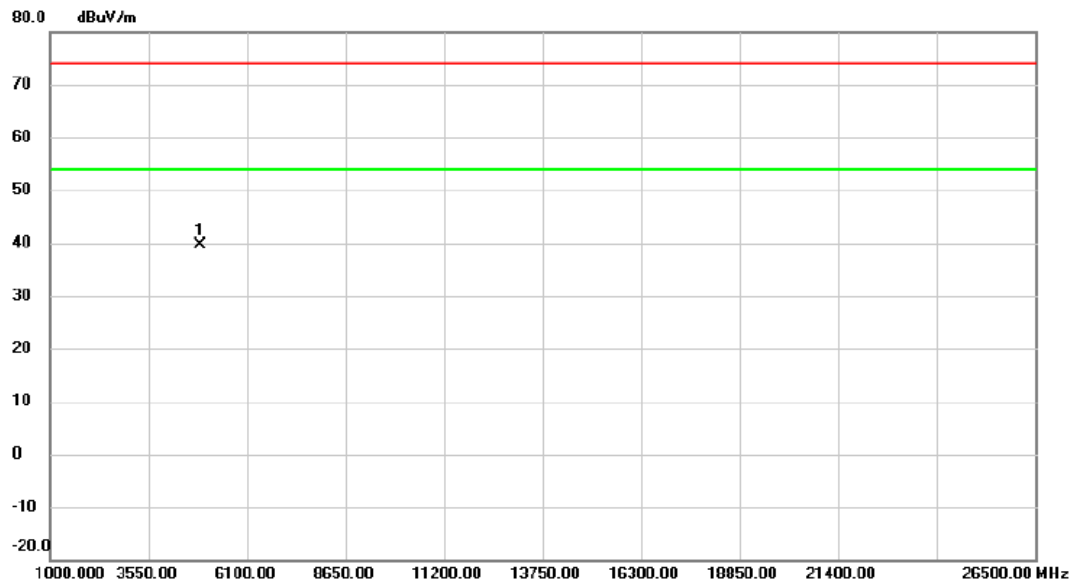


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4904.387	52.52	-12.77	39.75	74.00	-34.25	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	52/40
------------	----------------------------	------------------	-------

Horizontal

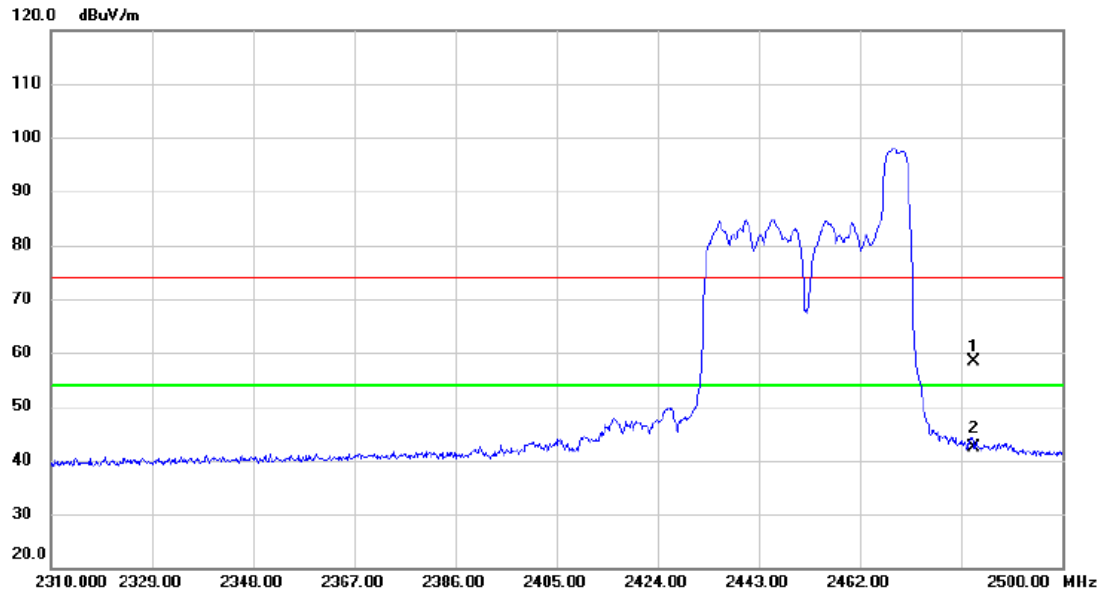

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2483.500	24.70	33.76	58.46	74.00	-15.54	peak	
2	*	2483.500	8.50	33.76	42.26	54.00	-11.74	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	106/54
------------	----------------------------	------------------	--------

Vertical

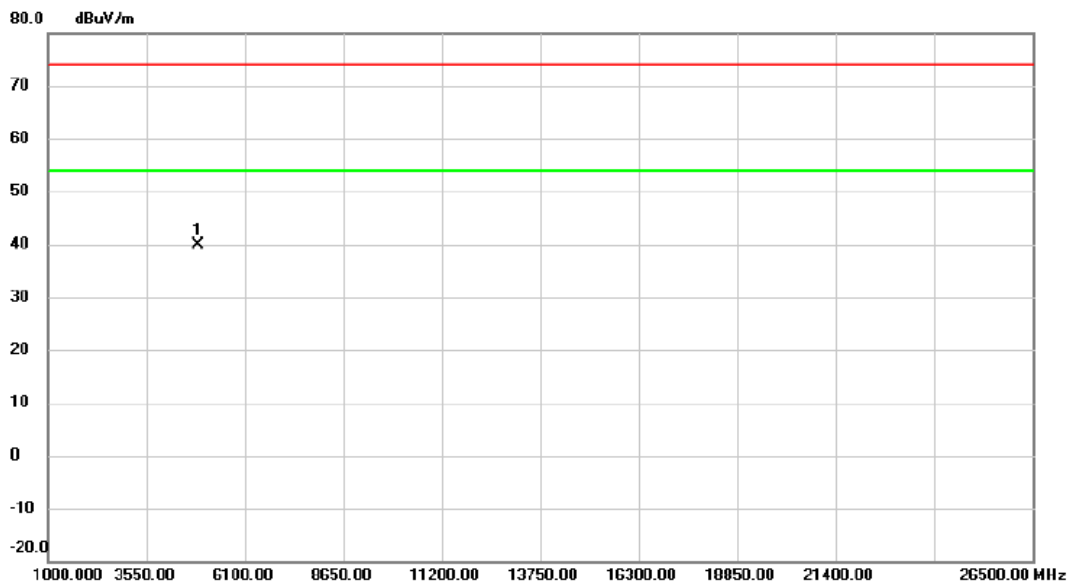


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4901.943	52.66	-12.78	39.88	74.00	-34.12	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	106/54
------------	----------------------------	------------------	--------

Vertical

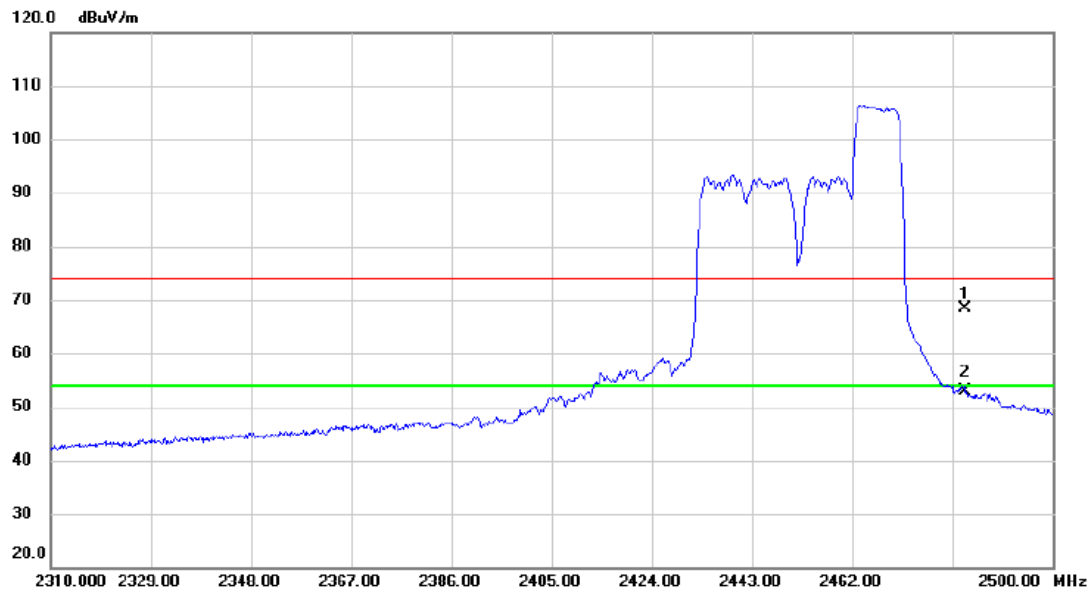

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2483.500	34.65	33.76	68.41	74.00	-5.59	peak	
2	*	2483.500	19.22	33.76	52.98	54.00	-1.02	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	106/54
------------	----------------------------	------------------	--------

Horizontal

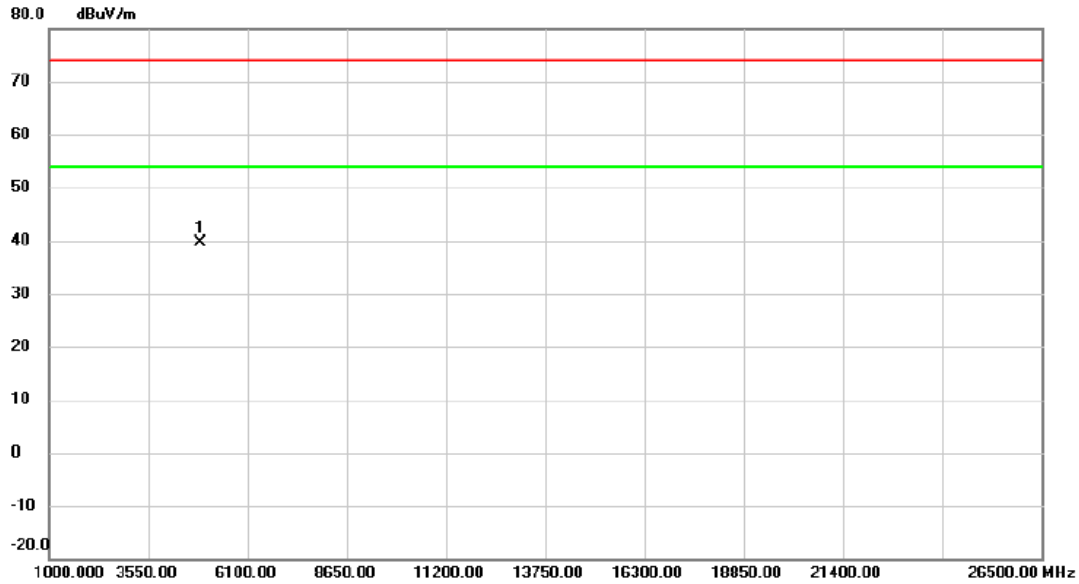


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4902.990	52.50	-12.78	39.72	74.00	-34.28	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	106/54
------------	----------------------------	------------------	--------

Horizontal

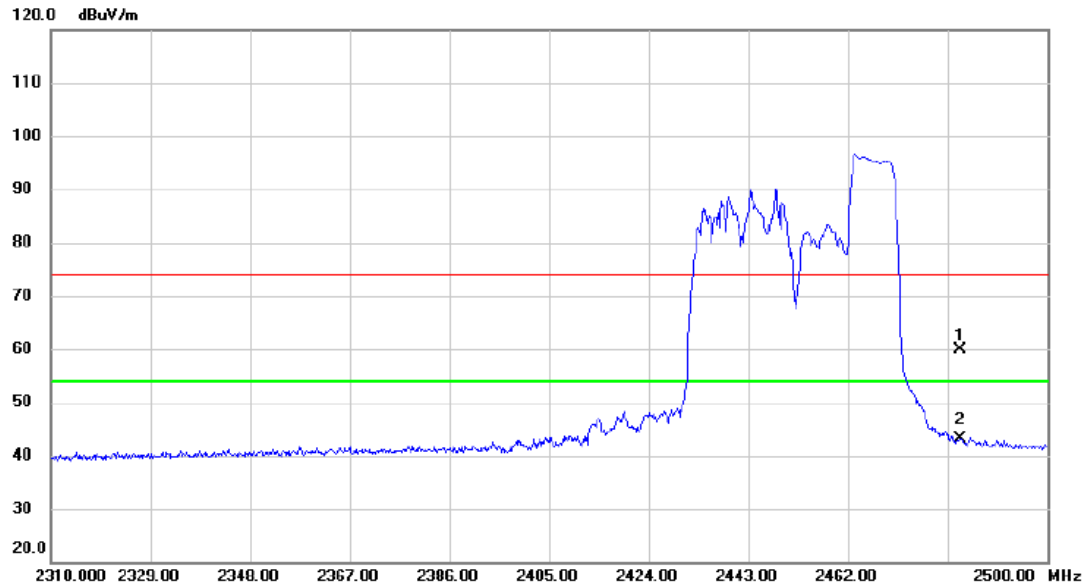

No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1		2483.500	26.19	33.76	59.95	74.00	-14.05	peak	
2	*	2483.500	9.43	33.76	43.19	54.00	-10.81	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	242/62
------------	----------------------------	------------------	--------

Vertical

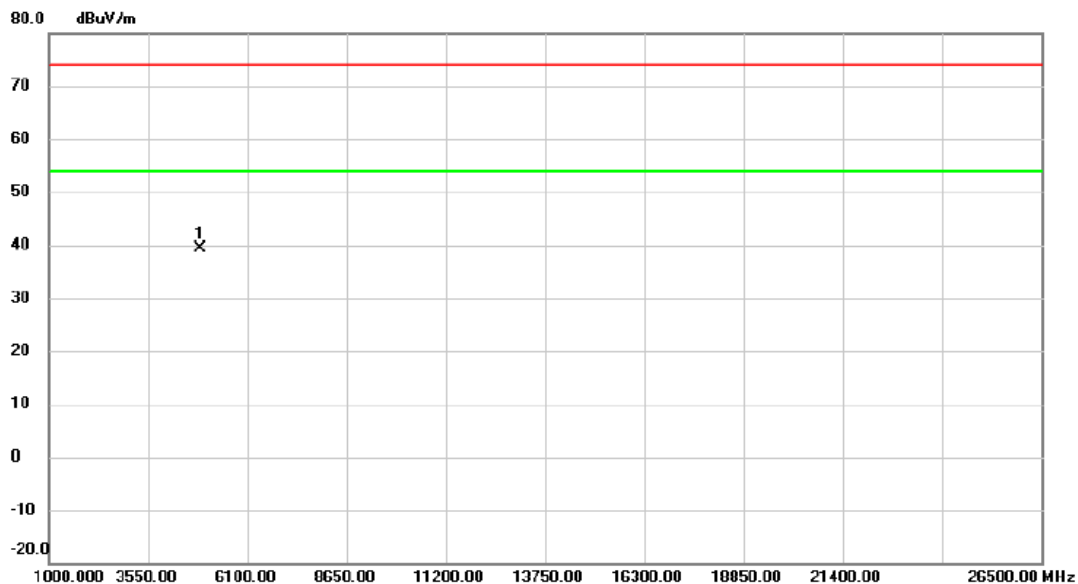


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4906.422	52.16	-12.77	39.39	74.00	-34.61	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	242/62
------------	----------------------------	------------------	--------

Vertical

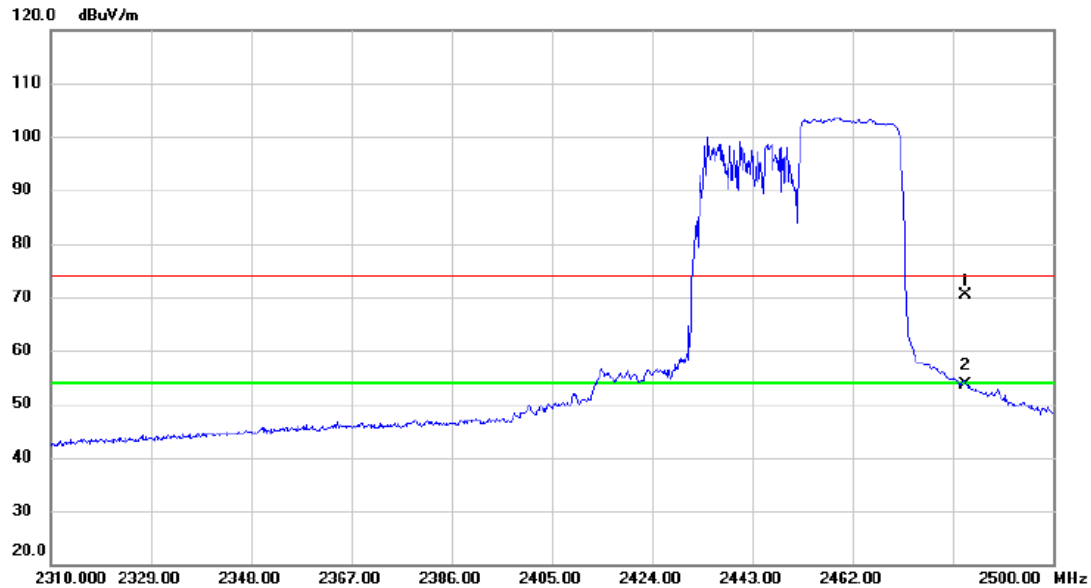

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2483.500	36.63	33.76	70.39	74.00	-3.61	peak	
2	*	2483.500	19.83	33.76	53.59	54.00	-0.41	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	242/62
------------	----------------------------	------------------	--------

Horizontal

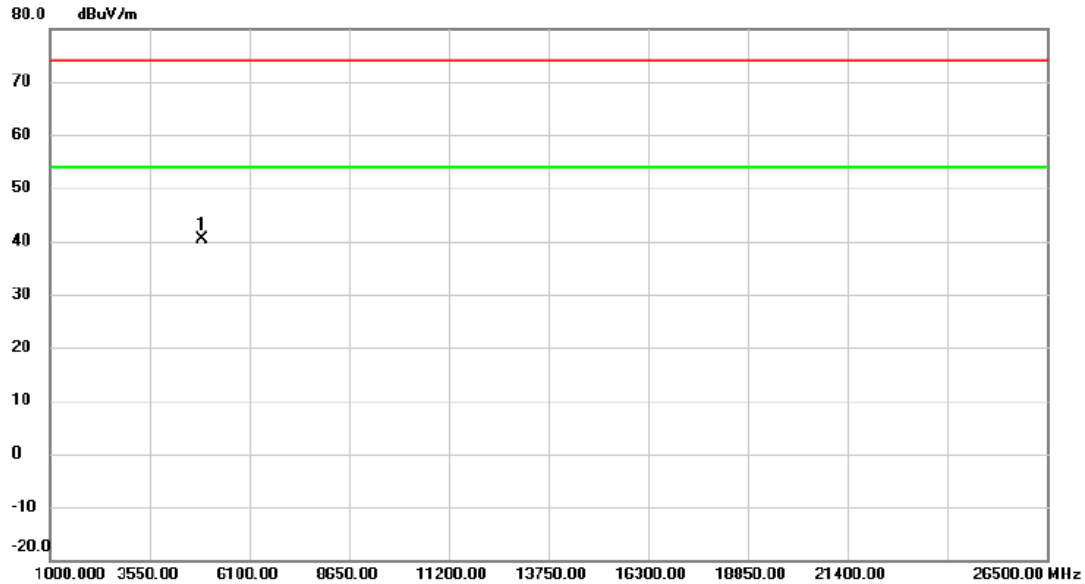

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4903.365	53.27	-12.78	40.49	74.00	-33.51	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	242/62
------------	----------------------------	------------------	--------

Horizontal

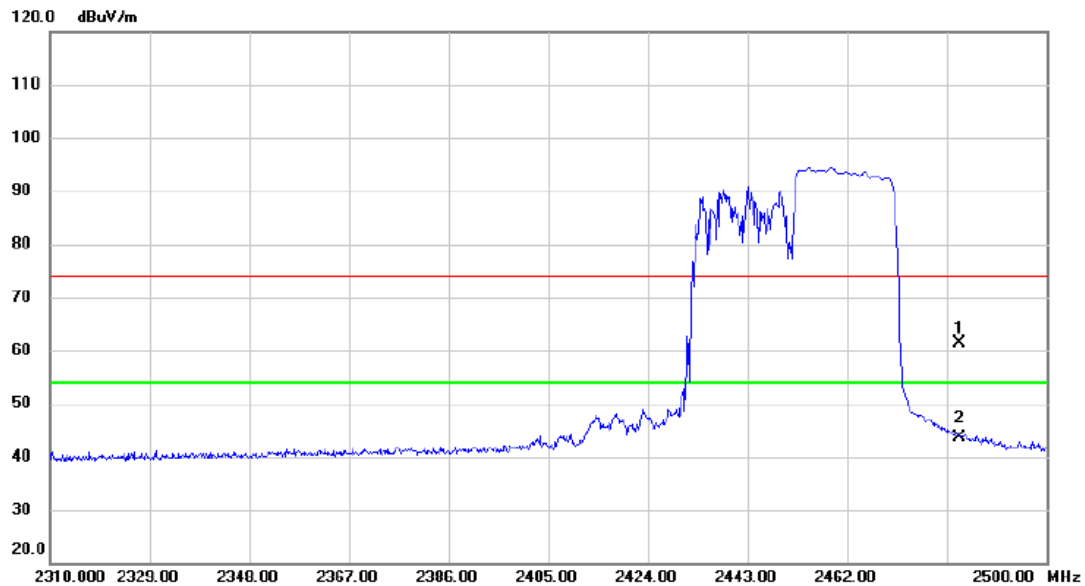

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2483.500	27.67	33.76	61.43	74.00	-12.57	peak	
2	*	2483.500	9.81	33.76	43.57	54.00	-10.43	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	484/65
------------	----------------------------	------------------	--------

Vertical

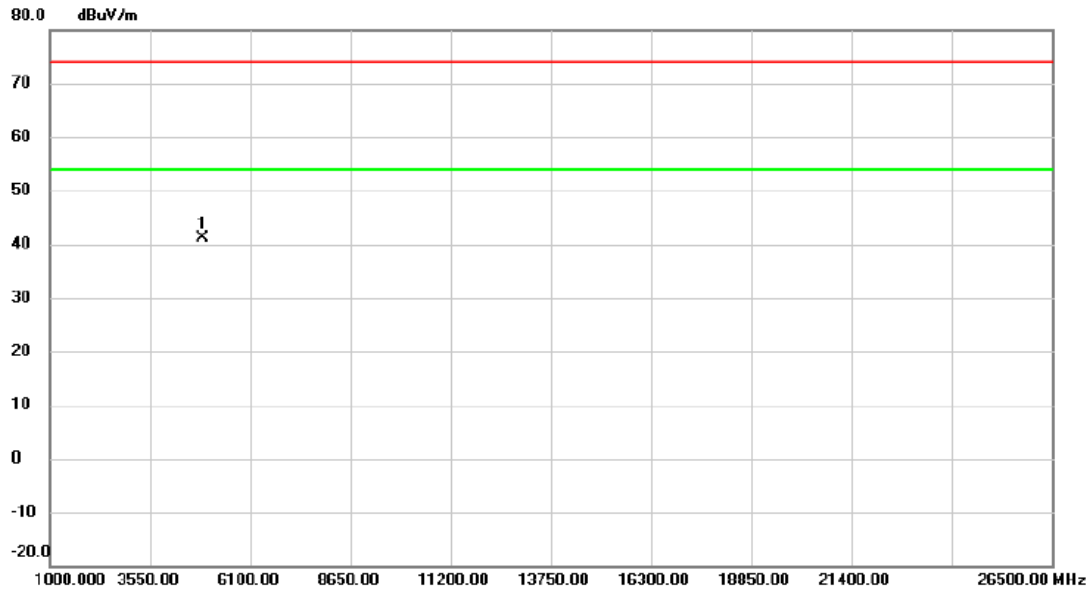


No.	Mk.	Freq.	Reading Level	Correct Factor	Measurement	Limit	Margin		
		MHz	dBuV	dB	dBuV/m	dBuV/m	dB	Detector	Comment
1	*	4901.755	54.02	-12.78	41.24	74.00	-32.76	peak	

REMARKS:

- (1) Measurement Value = Reading Level + Correct Factor.
- (2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	484/65
------------	----------------------------	------------------	--------

Vertical

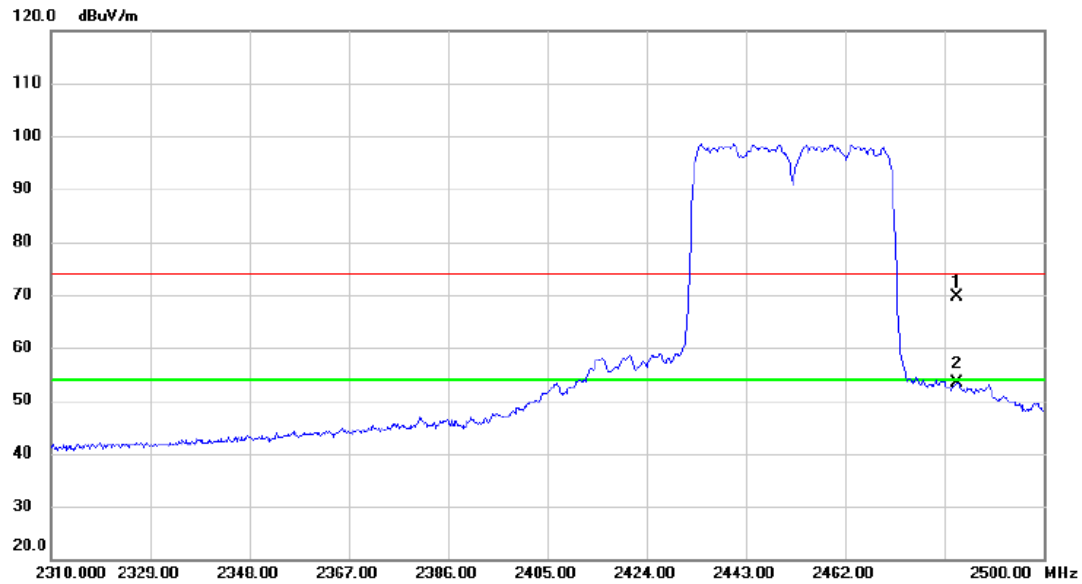

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2483.500	35.99	33.76	69.75	74.00	-4.25	peak	
2	*	2483.500	19.64	33.76	53.40	54.00	-0.60	AVG	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	484/65
------------	----------------------------	------------------	--------

Horizontal

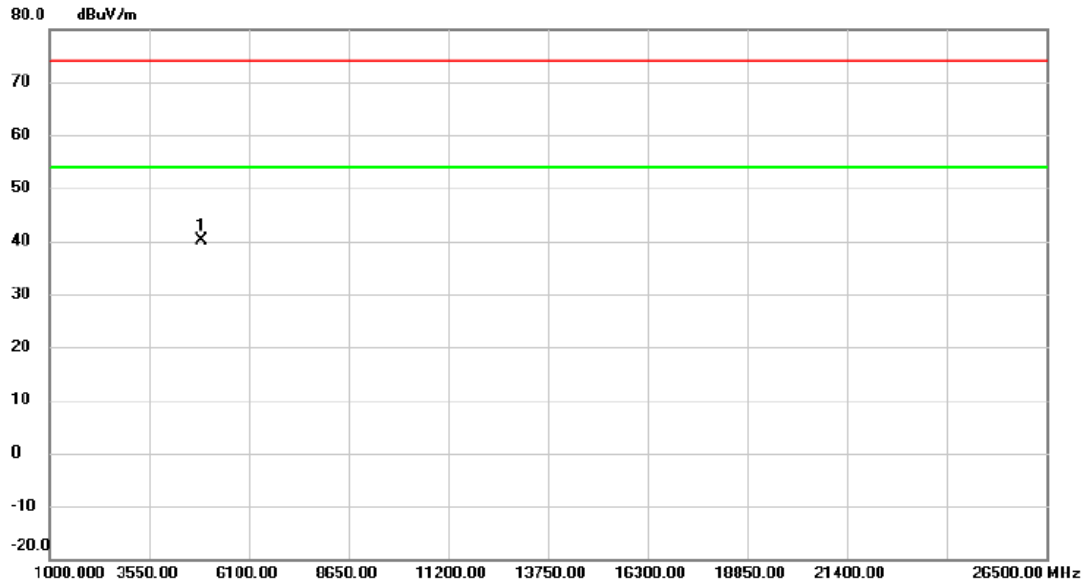

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1	*	4904.735	52.92	-12.77	40.15	74.00	-33.85	peak	


REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.

(2) Margin Level = Measurement Value - Limit Value.

Test Mode:	TX AX (HE40) Mode 2452 MHz	RU configuration	484/65
------------	----------------------------	------------------	--------

Horizontal

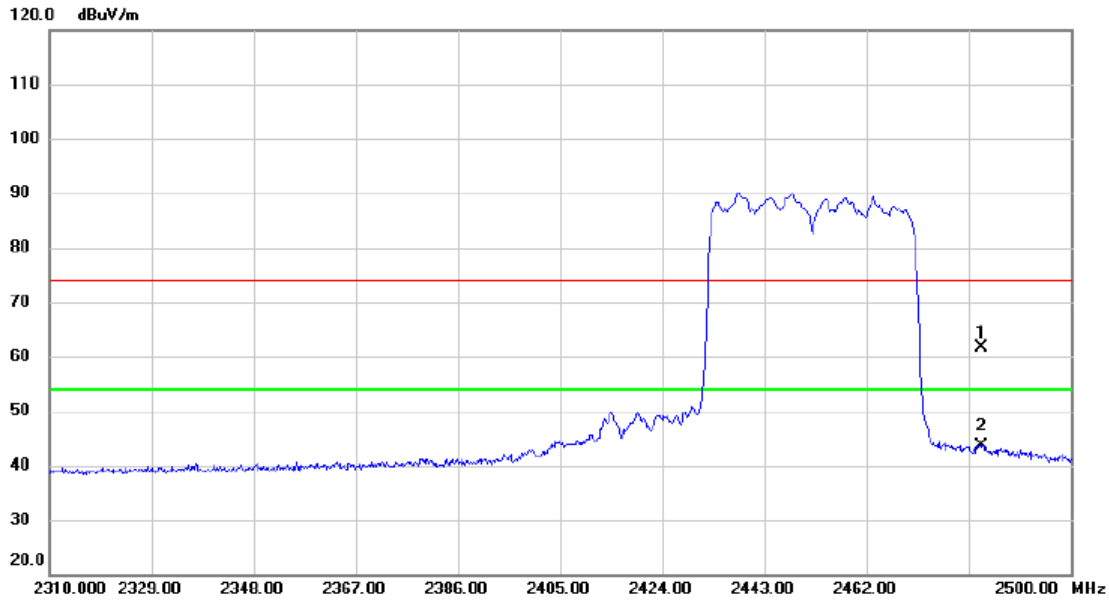

No.	Mk.	Freq. MHz	Reading Level dBuV	Correct Factor dB	Measure- ment dBuV/m	Limit dBuV/m	Margin dB	Detector	Comment
1		2483.500	27.96	33.76	61.72	74.00	-12.28	peak	
2	*	2483.500	9.90	33.76	43.66	54.00	-10.34	AVG	

REMARKS:

(1) Measurement Value = Reading Level + Correct Factor.


(2) Margin Level = Measurement Value - Limit Value.

APPENDIX E - BANDWIDTH


Non-Beamforming

Test Mode	TX AX (HE20) Mode	RU configuration	52/37
-----------	-------------------	------------------	-------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	17.09	500	Complies
06	2437	17.09	500	Complies
11	2462	17.06	500	Complies

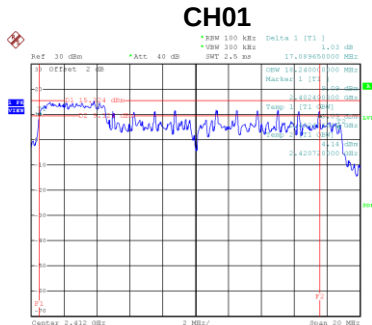

Date: 4.JUN.2020 10:39:38

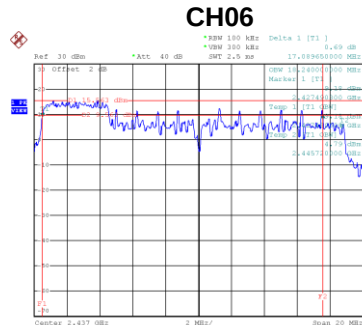


Date: 4.JUN.2020 10:40:56

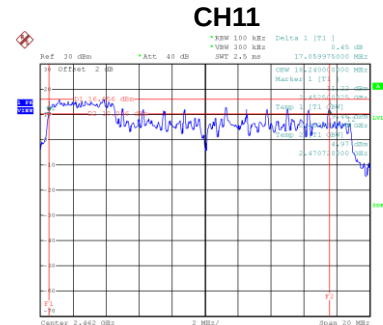


Date: 4.JUN.2020 10:34:55


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
01	2412	18.64
06	2437	18.64
11	2462	18.64

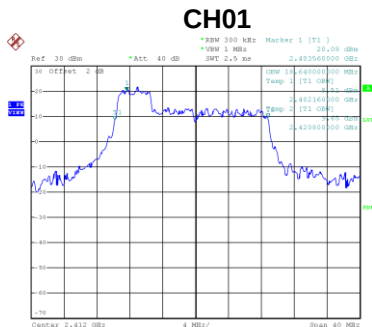

Date: 4.JUN.2020 10:39:45

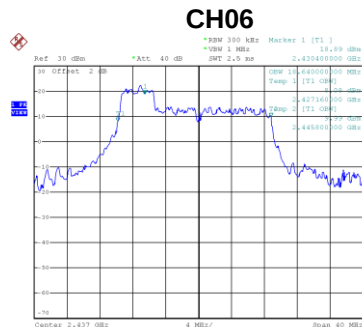


Date: 4.JUN.2020 10:41:03

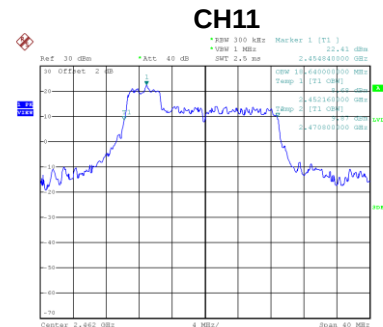


Date: 4.JUN.2020 10:35:02

Test Mode	TX AX (HE20) Mode	RU configuration	106/54
-----------	-------------------	------------------	--------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	17.22	500	Complies
06	2437	17.28	500	Complies
11	2462	17.20	500	Complies

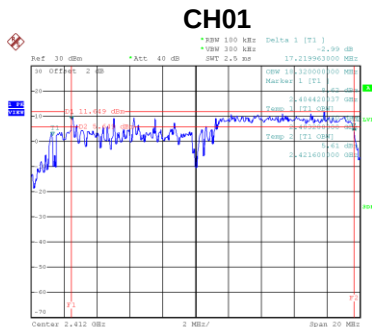

Date: 4.JUN.2020 12:15:48

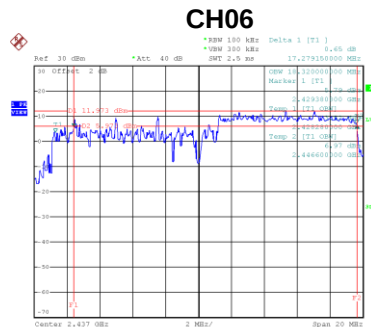


Date: 4.JUN.2020 12:13:02

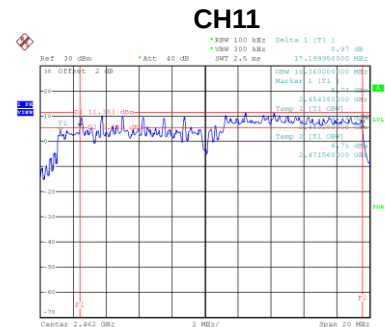


Date: 4.JUN.2020 12:11:43


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
01	2412	18.64
06	2437	18.48
11	2462	18.72

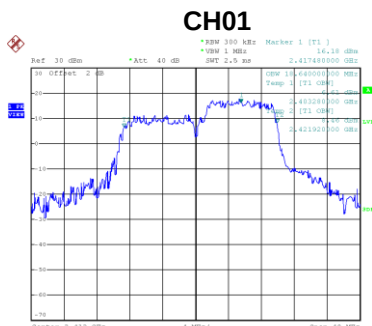

Date: 4.JUN.2020 12:15:55

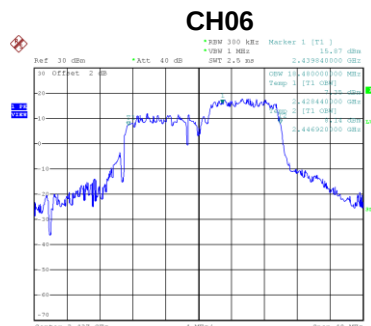

Date: 4.JUN.2020 12:13:09

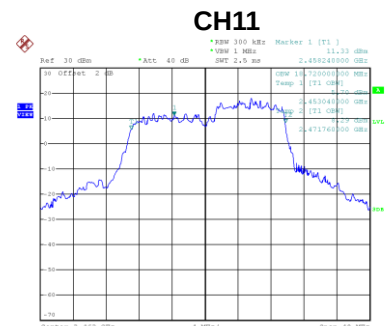

Date: 4.JUN.2020 12:11:50


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
01	2412	18.10	500	Complies
06	2437	18.10	500	Complies
11	2462	18.11	500	Complies



Date: 4.JUN.2020 14:06:01



Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	4.36	500	Complies
06	2437	4.36	500	Complies
09	2452	4.36	500	Complies

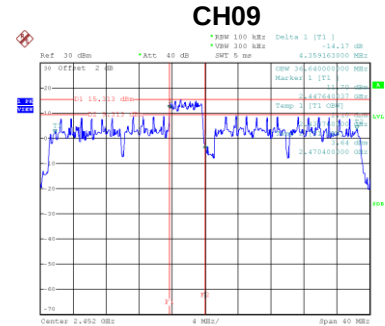

Date: 4.JUN.2020 15:25:24

CH09

*RNM 1 MHz
 *RSM 2 MHz
 SMT 2.5 ns

Marker 1 [T1]
 2.45144000 GHz
 2.451440000 dB

Ref 30 dBm
 Att 40 dB

20 GHz 2 dB
 -10
 -20
 -40
 -60
 -80
 -100


2.4 2.5 GHz
 2.451440000 GHz
 2.451440000 dB
 2.450980000 GHz

Output: 2.4502 GHz
 0.000 V
 Span: 0.000 GHz


Date: 4.JUN.2020 15:25:31

Test Mode	TX AX (HE40) Mode	RU configuration	106/54
-----------	-------------------	------------------	--------


Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	35.16	500	Complies
06	2437	35.16	500	Complies
09	2452	35.16	500	Complies

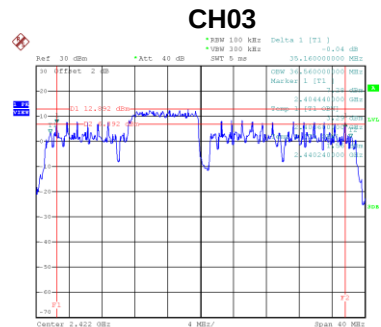

Date: 4.JUN.2020 17:51:06

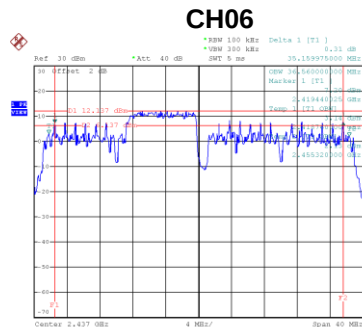


Date: 4.JUN.2020 17:56:03

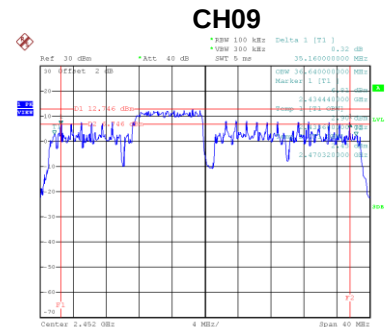


Date: 4.JUN.2020 17:59:14


Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
03	2422	37.28
06	2437	37.28
09	2452	37.28

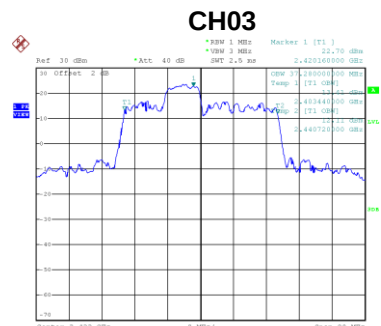

Date: 4.JUN.2020 17:51:13

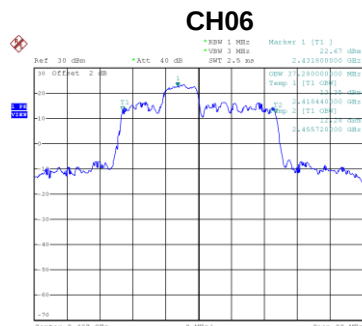




Date: 4.JUN.2020 17:56:10

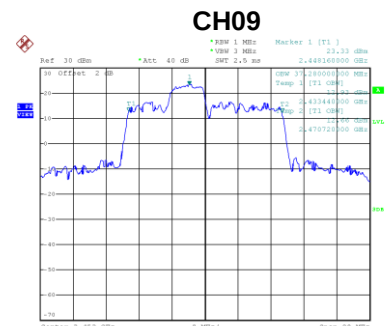




Date: 4.JUN.2020 17:59:21

Test Mode	TX AX (HE40) Mode	RU configuration	242/62
-----------	-------------------	------------------	--------

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	37.35	500	Complies
06	2437	37.40	500	Complies
09	2452	37.40	500	Complies

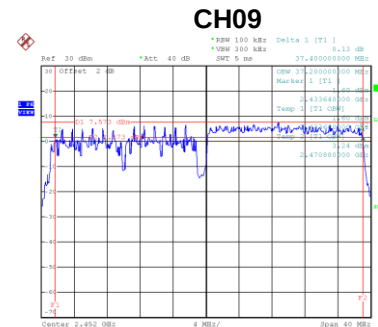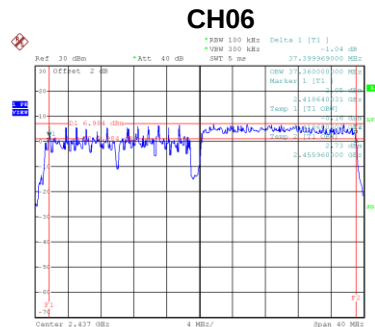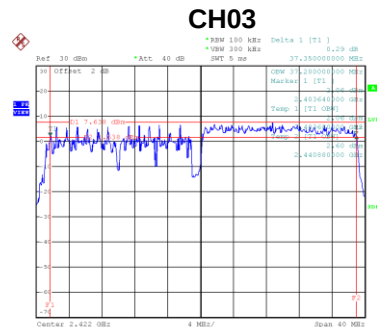

Channel	Frequency (MHz)	99 % Emission Bandwidth (MHz)
03	2422	37.92
06	2437	37.92
09	2452	37.92

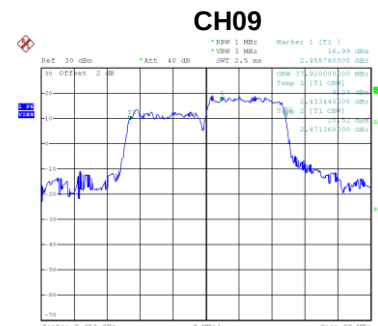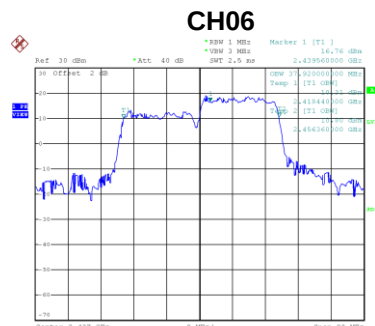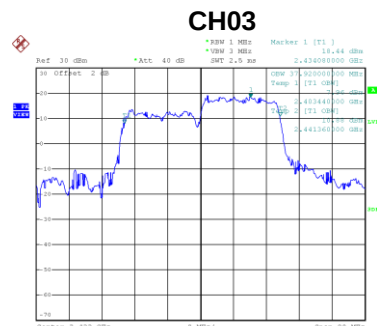

Channel	Frequency (MHz)	6 dB Bandwidth (MHz)	6 dB Bandwidth Min. Limit (kHz)	Result
03	2422	37.11	500	Complies
06	2437	37.52	500	Complies
09	2452	37.52	500	Complies



Date: 5.JUN.2020 11:47:54



APPENDIX F - MAXIMUM OUTPUT POWER

Non-Beamforming

Test Mode	TX AX (HE20) Mode_Ant. 1
-----------	--------------------------

Channel	Frequency (MHz)	RU configuration	Avg Output Power (dBm)	Duty Factor	Avg Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	52/37	17.90	0.51	18.41	29.99	0.9978	Complies
		52/38	18.21	0.51	18.72	29.99	0.9978	Complies
		52/40	17.87	0.51	18.38	29.99	0.9978	Complies
		106/53	18.76	0.51	19.27	29.99	0.9978	Complies
		106/54	18.63	0.51	19.14	29.99	0.9978	Complies
		242/61	17.02	0.51	17.53	29.99	0.9978	Complies
06	2437	52/37	21.70	0.51	22.21	29.99	0.9978	Complies
		52/38	21.63	0.51	22.14	29.99	0.9978	Complies
		52/40	19.30	0.51	19.81	29.99	0.9978	Complies
		106/53	20.02	0.51	20.53	29.99	0.9978	Complies
		106/54	20.51	0.51	21.02	29.99	0.9978	Complies
		242/61	18.33	0.51	18.84	29.99	0.9978	Complies
11	2462	52/37	17.85	0.51	18.36	29.99	0.9978	Complies
		52/38	18.18	0.51	18.69	29.99	0.9978	Complies
		52/40	17.81	0.51	18.32	29.99	0.9978	Complies
		106/53	17.86	0.51	18.37	29.99	0.9978	Complies
		106/54	17.94	0.51	18.45	29.99	0.9978	Complies
		242/61	17.03	0.51	17.54	29.99	0.9978	Complies

Test Mode	TX AX (HE20) Mode_Ant. 2
-----------	--------------------------

Channel	Frequency (MHz)	RU configuration	Avg Output Power (dBm)	Duty Factor	Avg Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	52/37	18.28	0.51	18.79	29.99	0.9978	Complies
		52/38	18.71	0.51	19.22	29.99	0.9978	Complies
		52/40	18.82	0.51	19.33	29.99	0.9978	Complies
		106/53	19.24	0.51	19.75	29.99	0.9978	Complies
		106/54	19.56	0.51	20.07	29.99	0.9978	Complies
		242/61	17.08	0.51	17.59	29.99	0.9978	Complies
06	2437	52/37	22.94	0.51	23.45	29.99	0.9978	Complies
		52/38	22.11	0.51	22.62	29.99	0.9978	Complies
		52/40	19.75	0.51	20.26	29.99	0.9978	Complies
		106/53	19.81	0.51	20.32	29.99	0.9978	Complies
		106/54	21.04	0.51	21.55	29.99	0.9978	Complies
		242/61	18.60	0.51	19.11	29.99	0.9978	Complies
11	2462	52/37	18.46	0.51	18.97	29.99	0.9978	Complies
		52/38	18.52	0.51	19.03	29.99	0.9978	Complies
		52/40	17.61	0.51	18.12	29.99	0.9978	Complies
		106/53	18.43	0.51	18.94	29.99	0.9978	Complies
		106/54	17.32	0.51	17.83	29.99	0.9978	Complies
		242/61	16.97	0.51	17.48	29.99	0.9978	Complies

Test Mode	TX AX (HE20) Mode_Total
-----------	-------------------------

Channel	Frequency (MHz)	RU configuration	Avg Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	52/37	21.61	29.99	0.9978	Complies
		52/38	21.99	29.99	0.9978	Complies
		52/40	21.89	29.99	0.9978	Complies
		106/53	22.52	29.99	0.9978	Complies
		106/54	22.64	29.99	0.9978	Complies
		242/61	20.57	29.99	0.9978	Complies
06	2437	52/37	25.88	29.99	0.9978	Complies
		52/38	25.39	29.99	0.9978	Complies
		52/40	23.05	29.99	0.9978	Complies
		106/53	23.43	29.99	0.9978	Complies
		106/54	24.30	29.99	0.9978	Complies
		242/61	21.99	29.99	0.9978	Complies
11	2462	52/37	21.68	29.99	0.9978	Complies
		52/38	21.87	29.99	0.9978	Complies
		52/40	21.23	29.99	0.9978	Complies
		106/53	21.67	29.99	0.9978	Complies
		106/54	21.16	29.99	0.9978	Complies
		242/61	20.52	29.99	0.9978	Complies

Test Mode	TX AX (HE40) Mode_Ant. 1
-----------	--------------------------

Channel	Frequency (MHz)	RU configuration	Avg Output Power (dBm)	Duty Factor	Avg Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	52/37	14.39	1.32	15.71	29.99	0.9978	Complies
		52/40	15.61	1.32	16.93	29.99	0.9978	Complies
		52/44	14.85	1.32	16.17	29.99	0.9978	Complies
		106/53	14.54	1.32	15.86	29.99	0.9978	Complies
		106/54	15.81	1.32	17.13	29.99	0.9978	Complies
		106/56	15.18	1.32	16.50	29.99	0.9978	Complies
		242/61	16.06	1.32	17.38	29.99	0.9978	Complies
		242/62	15.85	1.32	17.17	29.99	0.9978	Complies
		484/65	13.55	1.32	14.87	29.99	0.9978	Complies
06	2437	52/37	16.65	1.32	17.97	29.99	0.9978	Complies
		52/40	17.87	1.32	19.19	29.99	0.9978	Complies
		52/44	17.12	1.32	18.44	29.99	0.9978	Complies
		106/53	17.17	1.32	18.49	29.99	0.9978	Complies
		106/54	18.02	1.32	19.34	29.99	0.9978	Complies
		106/56	17.59	1.32	18.91	29.99	0.9978	Complies
		242/61	18.48	1.32	19.80	29.99	0.9978	Complies
		242/62	18.44	1.32	19.76	29.99	0.9978	Complies
		484/65	16.35	1.32	17.67	29.99	0.9978	Complies
09	2452	52/37	13.94	1.32	15.26	29.99	0.9978	Complies
		52/40	14.63	1.32	15.95	29.99	0.9978	Complies
		52/44	13.58	1.32	14.90	29.99	0.9978	Complies
		106/53	16.31	1.32	17.63	29.99	0.9978	Complies
		106/54	16.21	1.32	17.53	29.99	0.9978	Complies
		106/56	16.30	1.32	17.62	29.99	0.9978	Complies
		242/61	17.14	1.32	18.46	29.99	0.9978	Complies
		242/62	17.16	1.32	18.48	29.99	0.9978	Complies
		484/65	14.79	1.32	16.11	29.99	0.9978	Complies

Test Mode	TX AX (HE40) Mode_Ant. 2
-----------	--------------------------

Channel	Frequency (MHz)	RU configuration	Avg Output Power (dBm)	Duty Factor	Avg Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	52/37	14.42	1.32	15.74	29.99	0.9978	Complies
		52/40	15.95	1.32	17.27	29.99	0.9978	Complies
		52/44	15.03	1.32	16.35	29.99	0.9978	Complies
		106/53	14.02	1.32	15.34	29.99	0.9978	Complies
		106/54	16.28	1.32	17.60	29.99	0.9978	Complies
		106/56	15.63	1.32	16.95	29.99	0.9978	Complies
		242/61	15.97	1.32	17.29	29.99	0.9978	Complies
		242/62	16.18	1.32	17.50	29.99	0.9978	Complies
		484/65	13.79	1.32	15.11	29.99	0.9978	Complies
06	2437	52/37	16.99	1.32	18.31	29.99	0.9978	Complies
		52/40	18.26	1.32	19.58	29.99	0.9978	Complies
		52/44	17.43	1.32	18.75	29.99	0.9978	Complies
		106/53	17.14	1.32	18.46	29.99	0.9978	Complies
		106/54	18.75	1.32	20.07	29.99	0.9978	Complies
		106/56	17.92	1.32	19.24	29.99	0.9978	Complies
		242/61	17.86	1.32	19.18	29.99	0.9978	Complies
		242/62	19.21	1.32	20.53	29.99	0.9978	Complies
		484/65	16.08	1.32	17.40	29.99	0.9978	Complies
09	2452	52/37	14.22	1.32	15.54	29.99	0.9978	Complies
		52/40	14.87	1.32	16.19	29.99	0.9978	Complies
		52/44	13.50	1.32	14.82	29.99	0.9978	Complies
		106/53	16.03	1.32	17.35	29.99	0.9978	Complies
		106/54	15.96	1.32	17.28	29.99	0.9978	Complies
		106/56	16.05	1.32	17.37	29.99	0.9978	Complies
		242/61	16.97	1.32	18.29	29.99	0.9978	Complies
		242/62	16.88	1.32	18.20	29.99	0.9978	Complies
		484/65	14.97	1.32	16.29	29.99	0.9978	Complies

Test Mode	TX AX (HE40) Mode_Total
-----------	-------------------------

Channel	Frequency (MHz)	RU configuration	Avg Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	52/37	18.74	29.99	0.9978	Complies
		52/40	20.11	29.99	0.9978	Complies
		52/44	19.27	29.99	0.9978	Complies
		106/53	18.62	29.99	0.9978	Complies
		106/54	20.38	29.99	0.9978	Complies
		106/56	19.74	29.99	0.9978	Complies
		242/61	20.35	29.99	0.9978	Complies
		242/62	20.35	29.99	0.9978	Complies
		484/65	18.00	29.99	0.9978	Complies
06	2437	52/37	21.15	29.99	0.9978	Complies
		52/40	22.40	29.99	0.9978	Complies
		52/44	21.61	29.99	0.9978	Complies
		106/53	21.49	29.99	0.9978	Complies
		106/54	22.73	29.99	0.9978	Complies
		106/56	22.09	29.99	0.9978	Complies
		242/61	22.51	29.99	0.9978	Complies
		242/62	23.17	29.99	0.9978	Complies
		484/65	20.55	29.99	0.9978	Complies
09	2452	52/37	18.41	29.99	0.9978	Complies
		52/40	19.08	29.99	0.9978	Complies
		52/44	17.87	29.99	0.9978	Complies
		106/53	20.50	29.99	0.9978	Complies
		106/54	20.42	29.99	0.9978	Complies
		106/56	20.51	29.99	0.9978	Complies
		242/61	21.39	29.99	0.9978	Complies
		242/62	21.35	29.99	0.9978	Complies
		484/65	19.21	29.99	0.9978	Complies

Beamforming

Test Mode	TX AX (HE20) Mode_Ant. 1
-----------	--------------------------

Channel	Frequency (MHz)	RU configuration	Avg Output Power (dBm)	Duty Factor	Avg Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	52/37	17.48	0.51	17.99	29.99	0.9978	Complies
		52/38	17.76	0.51	18.27	29.99	0.9978	Complies
		52/40	17.39	0.51	17.90	29.99	0.9978	Complies
		106/53	18.52	0.51	19.03	29.99	0.9978	Complies
		106/54	18.40	0.51	18.91	29.99	0.9978	Complies
		242/61	16.59	0.51	17.10	29.99	0.9978	Complies
06	2437	52/37	21.46	0.51	21.97	29.99	0.9978	Complies
		52/38	21.21	0.51	21.72	29.99	0.9978	Complies
		52/40	18.89	0.51	19.40	29.99	0.9978	Complies
		106/53	19.66	0.51	20.17	29.99	0.9978	Complies
		106/54	20.17	0.51	20.68	29.99	0.9978	Complies
		242/61	18.12	0.51	18.63	29.99	0.9978	Complies
11	2462	52/37	17.60	0.51	18.11	29.99	0.9978	Complies
		52/38	17.85	0.51	18.36	29.99	0.9978	Complies
		52/40	17.51	0.51	18.02	29.99	0.9978	Complies
		106/53	17.54	0.51	18.05	29.99	0.9978	Complies
		106/54	17.51	0.51	18.02	29.99	0.9978	Complies
		242/61	16.55	0.51	17.06	29.99	0.9978	Complies

Test Mode	TX AX (HE20) Mode_Ant. 2
-----------	--------------------------

Channel	Frequency (MHz)	RU configuration	Avg Output Power (dBm)	Duty Factor	Avg Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	52/37	18.00	0.51	18.51	29.99	0.9978	Complies
		52/38	18.24	0.51	18.75	29.99	0.9978	Complies
		52/40	18.59	0.51	19.10	29.99	0.9978	Complies
		106/53	18.91	0.51	19.42	29.99	0.9978	Complies
		106/54	19.11	0.51	19.62	29.99	0.9978	Complies
		242/61	16.70	0.51	17.21	29.99	0.9978	Complies
06	2437	52/37	22.71	0.51	23.22	29.99	0.9978	Complies
		52/38	21.85	0.51	22.36	29.99	0.9978	Complies
		52/40	19.49	0.51	20.00	29.99	0.9978	Complies
		106/53	19.54	0.51	20.05	29.99	0.9978	Complies
		106/54	20.64	0.51	21.15	29.99	0.9978	Complies
		242/61	18.31	0.51	18.82	29.99	0.9978	Complies
11	2462	52/37	17.97	0.51	18.48	29.99	0.9978	Complies
		52/38	18.08	0.51	18.59	29.99	0.9978	Complies
		52/40	17.38	0.51	17.89	29.99	0.9978	Complies
		106/53	18.19	0.51	18.70	29.99	0.9978	Complies
		106/54	17.09	0.51	17.60	29.99	0.9978	Complies
		242/61	16.48	0.51	16.99	29.99	0.9978	Complies

Test Mode	TX AX (HE20) Mode_Total
-----------	-------------------------

Channel	Frequency (MHz)	RU configuration	Avg Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
01	2412	52/37	21.27	29.99	0.9978	Complies
		52/38	21.52	29.99	0.9978	Complies
		52/40	21.55	29.99	0.9978	Complies
		106/53	22.24	29.99	0.9978	Complies
		106/54	22.29	29.99	0.9978	Complies
		242/61	20.16	29.99	0.9978	Complies
06	2437	52/37	25.65	29.99	0.9978	Complies
		52/38	25.06	29.99	0.9978	Complies
		52/40	22.72	29.99	0.9978	Complies
		106/53	23.12	29.99	0.9978	Complies
		106/54	23.93	29.99	0.9978	Complies
		242/61	21.73	29.99	0.9978	Complies
11	2462	52/37	21.31	29.99	0.9978	Complies
		52/38	21.48	29.99	0.9978	Complies
		52/40	20.96	29.99	0.9978	Complies
		106/53	21.40	29.99	0.9978	Complies
		106/54	20.82	29.99	0.9978	Complies
		242/61	20.03	29.99	0.9978	Complies

Test Mode	TX AX (HE40) Mode_Ant. 1
-----------	--------------------------

Channel	Frequency (MHz)	RU configuration	Avg Output Power (dBm)	Duty Factor	Avg Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	52/37	13.99	1.32	15.31	29.99	0.9978	Complies
		52/40	15.32	1.32	16.64	29.99	0.9978	Complies
		52/44	14.60	1.32	15.92	29.99	0.9978	Complies
		106/53	14.34	1.32	15.66	29.99	0.9978	Complies
		106/54	15.47	1.32	16.79	29.99	0.9978	Complies
		106/56	14.90	1.32	16.22	29.99	0.9978	Complies
		242/61	15.76	1.32	17.08	29.99	0.9978	Complies
		242/62	15.39	1.32	16.71	29.99	0.9978	Complies
		484/65	13.11	1.32	14.43	29.99	0.9978	Complies
06	2437	52/37	16.20	1.32	17.52	29.99	0.9978	Complies
		52/40	17.60	1.32	18.92	29.99	0.9978	Complies
		52/44	16.86	1.32	18.18	29.99	0.9978	Complies
		106/53	16.78	1.32	18.10	29.99	0.9978	Complies
		106/54	17.74	1.32	19.06	29.99	0.9978	Complies
		106/56	17.17	1.32	18.49	29.99	0.9978	Complies
		242/61	18.05	1.32	19.37	29.99	0.9978	Complies
		242/62	18.07	1.32	19.39	29.99	0.9978	Complies
		484/65	16.05	1.32	17.37	29.99	0.9978	Complies
09	2452	52/37	13.69	1.32	15.01	29.99	0.9978	Complies
		52/40	14.15	1.32	15.47	29.99	0.9978	Complies
		52/44	13.31	1.32	14.63	29.99	0.9978	Complies
		106/53	15.85	1.32	17.17	29.99	0.9978	Complies
		106/54	15.88	1.32	17.20	29.99	0.9978	Complies
		106/56	15.87	1.32	17.19	29.99	0.9978	Complies
		242/61	16.80	1.32	18.12	29.99	0.9978	Complies
		242/62	16.69	1.32	18.01	29.99	0.9978	Complies
		484/65	14.45	1.32	15.77	29.99	0.9978	Complies

Test Mode	TX AX (HE40) Mode_Ant. 2
-----------	--------------------------

Channel	Frequency (MHz)	RU configuration	Avg Output Power (dBm)	Duty Factor	Avg Output Power + Duty Factor (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	52/37	14.10	1.32	15.42	29.99	0.9978	Complies
		52/40	15.69	1.32	17.01	29.99	0.9978	Complies
		52/44	14.59	1.32	15.91	29.99	0.9978	Complies
		106/53	13.67	1.32	14.99	29.99	0.9978	Complies
		106/54	15.83	1.32	17.15	29.99	0.9978	Complies
		106/56	15.23	1.32	16.55	29.99	0.9978	Complies
		242/61	15.74	1.32	17.06	29.99	0.9978	Complies
		242/62	15.77	1.32	17.09	29.99	0.9978	Complies
		484/65	13.51	1.32	14.83	29.99	0.9978	Complies
06	2437	52/37	16.52	1.32	17.84	29.99	0.9978	Complies
		52/40	17.87	1.32	19.19	29.99	0.9978	Complies
		52/44	16.97	1.32	18.29	29.99	0.9978	Complies
		106/53	16.66	1.32	17.98	29.99	0.9978	Complies
		106/54	18.29	1.32	19.61	29.99	0.9978	Complies
		106/56	17.45	1.32	18.77	29.99	0.9978	Complies
		242/61	17.37	1.32	18.69	29.99	0.9978	Complies
		242/62	18.81	1.32	20.13	29.99	0.9978	Complies
		484/65	15.59	1.32	16.91	29.99	0.9978	Complies
09	2452	52/37	14.02	1.32	15.34	29.99	0.9978	Complies
		52/40	14.49	1.32	15.81	29.99	0.9978	Complies
		52/44	13.13	1.32	14.45	29.99	0.9978	Complies
		106/53	15.81	1.32	17.13	29.99	0.9978	Complies
		106/54	15.60	1.32	16.92	29.99	0.9978	Complies
		106/56	15.64	1.32	16.96	29.99	0.9978	Complies
		242/61	16.76	1.32	18.08	29.99	0.9978	Complies
		242/62	16.48	1.32	17.80	29.99	0.9978	Complies
		484/65	14.54	1.32	15.86	29.99	0.9978	Complies

Test Mode	TX AX (HE40) Mode_Total
-----------	-------------------------


Channel	Frequency (MHz)	RU configuration	Avg Output Power (dBm)	Max. Limit (dBm)	Max. Limit (W)	Result
03	2422	52/37	18.38	29.99	0.9978	Complies
		52/40	19.84	29.99	0.9978	Complies
		52/44	18.93	29.99	0.9978	Complies
		106/53	18.35	29.99	0.9978	Complies
		106/54	19.99	29.99	0.9978	Complies
		106/56	19.40	29.99	0.9978	Complies
		242/61	20.08	29.99	0.9978	Complies
		242/62	19.92	29.99	0.9978	Complies
		484/65	17.65	29.99	0.9978	Complies
06	2437	52/37	20.69	29.99	0.9978	Complies
		52/40	22.07	29.99	0.9978	Complies
		52/44	21.25	29.99	0.9978	Complies
		106/53	21.05	29.99	0.9978	Complies
		106/54	22.36	29.99	0.9978	Complies
		106/56	21.64	29.99	0.9978	Complies
		242/61	22.05	29.99	0.9978	Complies
		242/62	22.79	29.99	0.9978	Complies
		484/65	20.16	29.99	0.9978	Complies
09	2452	52/37	18.19	29.99	0.9978	Complies
		52/40	18.65	29.99	0.9978	Complies
		52/44	17.55	29.99	0.9978	Complies
		106/53	20.16	29.99	0.9978	Complies
		106/54	20.07	29.99	0.9978	Complies
		106/56	20.09	29.99	0.9978	Complies
		242/61	21.11	29.99	0.9978	Complies
		242/62	20.92	29.99	0.9978	Complies
		484/65	18.83	29.99	0.9978	Complies

APPENDIX G - CONDUCTED SPURIOUS EMISSIONS

Non-Beamforming


Test Mode	TX AX (HE20) Mode_Ant. 1	RU configuration	52/37
-----------	--------------------------	------------------	-------

Bandedge-CH01

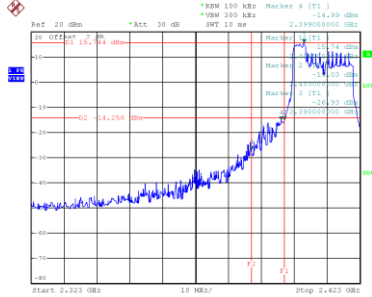


Date: 4.JUN.2020 10:24:57

Bandedge-CH11

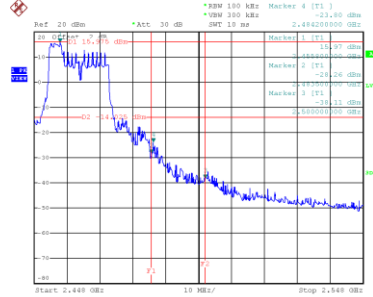


Date: 4.JUN.2020 10:32:21


CH01 – 10th Harmonic of the fundamental frequency

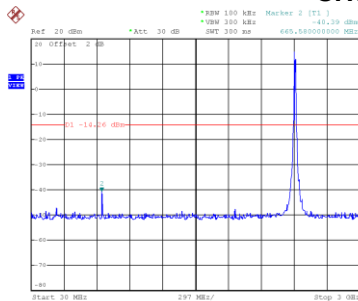

Date: 4.JUN.2020 10:25:10

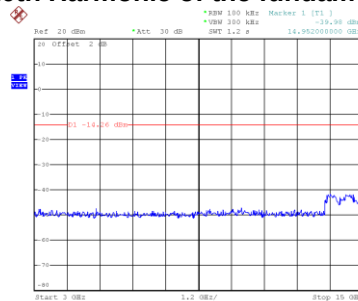


Date: 4.JUN.2020 10:25:17

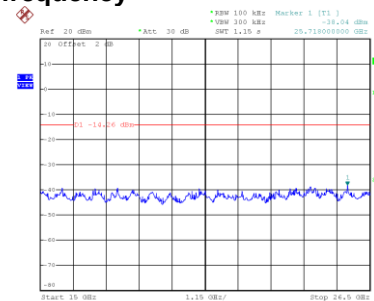


Date: 4.JUN.2020 10:25:24


CH06 – 10th Harmonic of the fundamental frequency

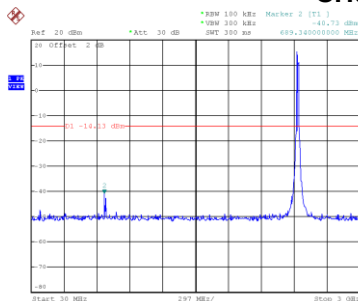

Date: 4.JUN.2020 10:26:58

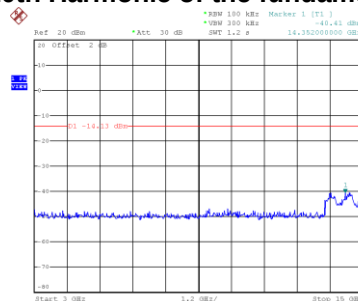


Date: 4.JUN.2020 10:27:05

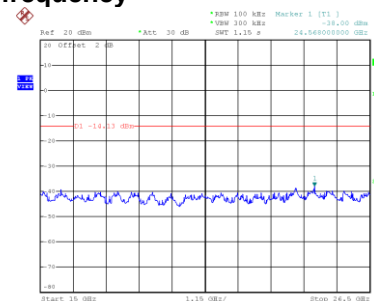


Date: 4.JUN.2020 10:27:12


CH11 – 10th Harmonic of the fundamental frequency

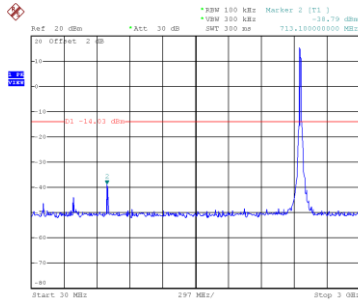

Date: 4.JUN.2020 10:32:34

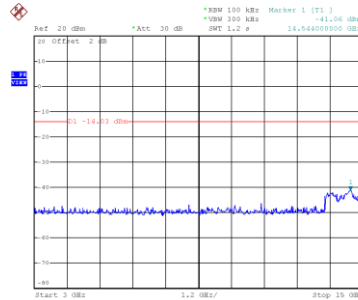


Date: 4.JUN.2020 10:32:41

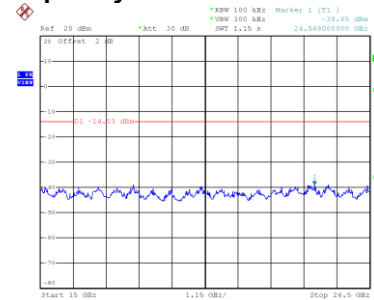

Date: 4.JUN.2020 10:32:48


Test Mode	TX AX (HE20) Mode_Ant. 1	RU configuration	106/54
-----------	--------------------------	------------------	--------

Bandedge-CH01

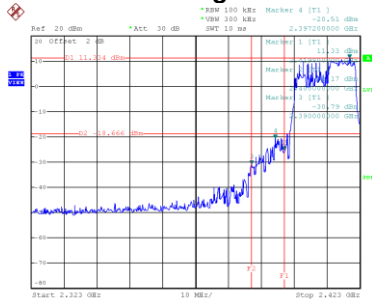


Date: 4.JUN.2020 12:03:52

Bandedge-CH11

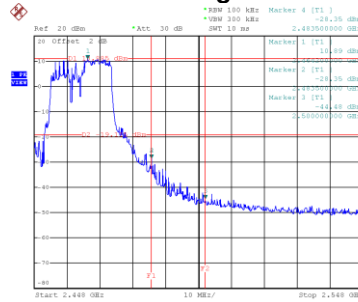


Date: 4.JUN.2020 12:08:06


CH01 – 10th Harmonic of the fundamental frequency

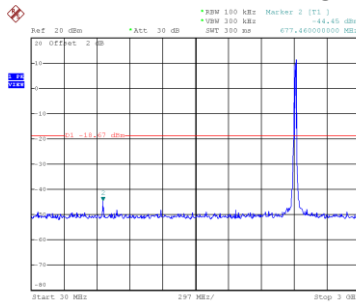

Date: 4.JUN.2020 12:04:05

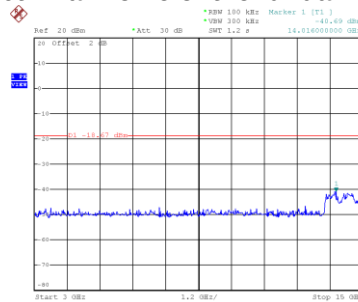


Date: 4.JUN.2020 12:04:12

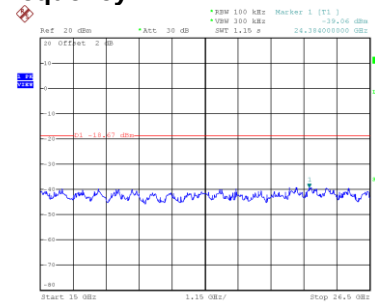


Date: 4.JUN.2020 12:04:19


CH06 – 10th Harmonic of the fundamental frequency

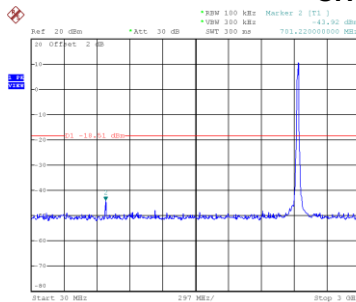

Date: 4.JUN.2020 12:07:06

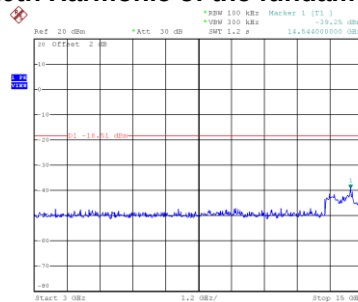


Date: 4.JUN.2020 12:07:13

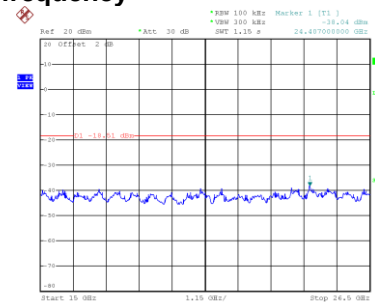


Date: 4.JUN.2020 12:07:20


CH11 – 10th Harmonic of the fundamental frequency

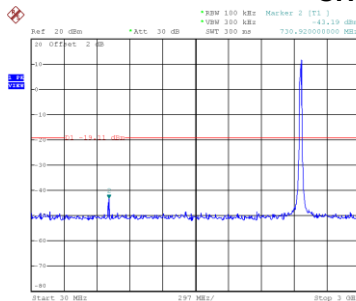

Date: 4.JUN.2020 12:08:19

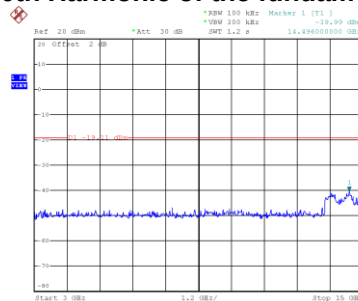


Date: 4.JUN.2020 12:08:26

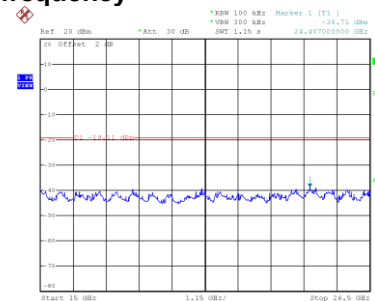

Date: 4.JUN.2020 12:08:33


Test Mode	TX AX (HE20) Mode_Ant. 2	RU configuration	106/54
-----------	--------------------------	------------------	--------

Bandedge-CH01

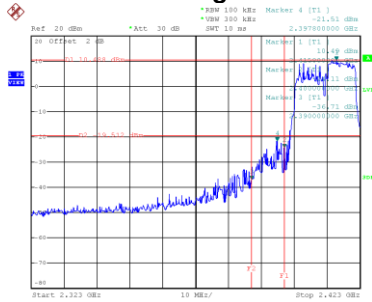


Date: 4.JUN.2020 12:04:40

Bandedge-CH11

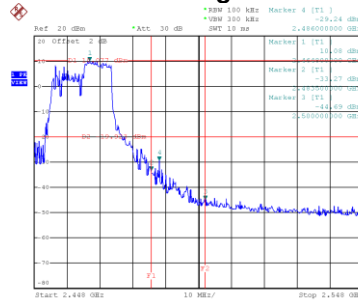


Date: 4.JUN.2020 12:06:55


CH01 – 10th Harmonic of the fundamental frequency

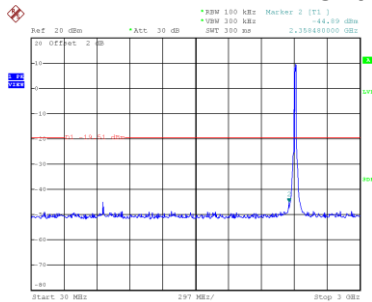

Date: 4.JUN.2020 12:04:53

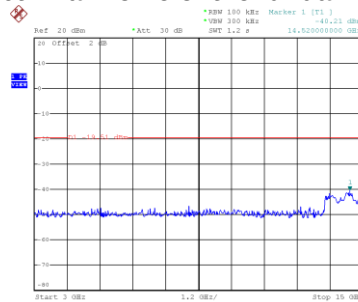


Date: 4.JUN.2020 12:05:00

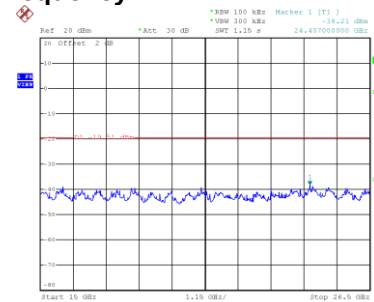


Date: 4.JUN.2020 12:05:07


CH06 – 10th Harmonic of the fundamental frequency

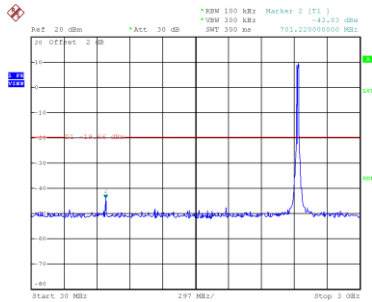

Date: 4.JUN.2020 12:06:14

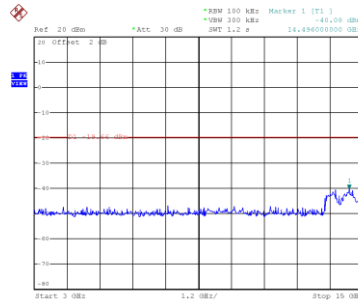


Date: 4.JUN.2020 12:06:21

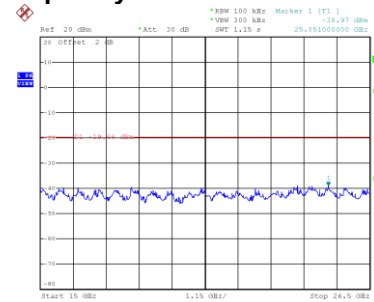


Date: 4.JUN.2020 12:06:28


CH11 – 10th Harmonic of the fundamental frequency

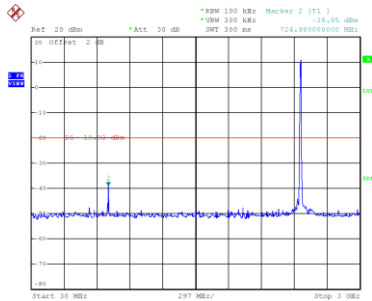

Date: 4.JUN.2020 12:09:08

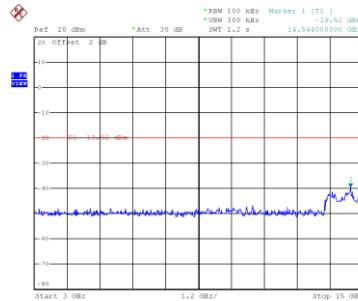


Date: 4.JUN.2020 12:09:15

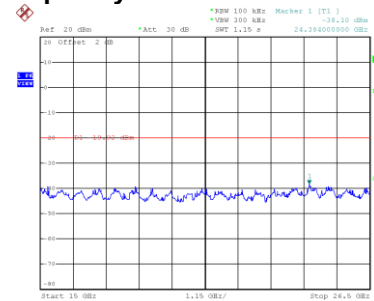

Date: 4.JUN.2020 12:09:22


Test Mode	TX AX (HE20) Mode_Ant. 1	RU configuration	242/61
-----------	--------------------------	------------------	--------

Bandedge-CH01

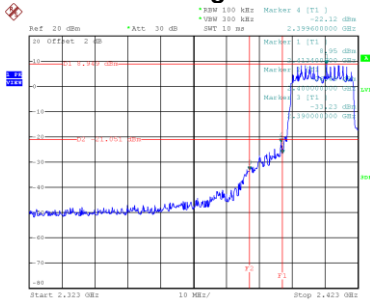


Date: 4.JUN.2020 14:04:45

Bandedge-CH11

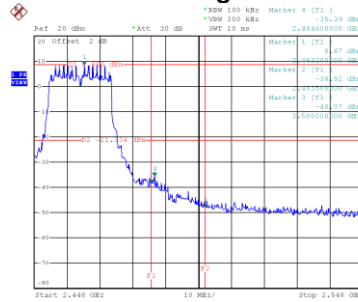


Date: 4.JUN.2020 14:15:26


CH01 – 10th Harmonic of the fundamental frequency

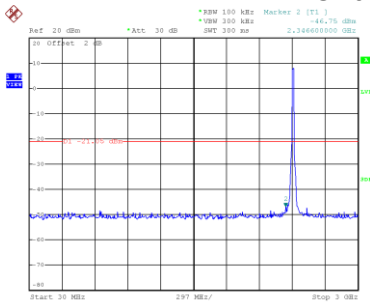

Date: 4.JUN.2020 14:04:58

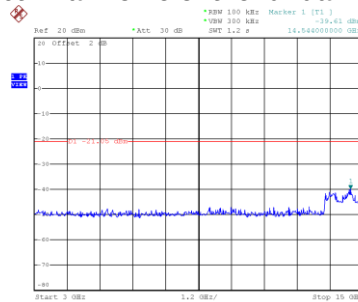


Date: 4.JUN.2020 14:05:06

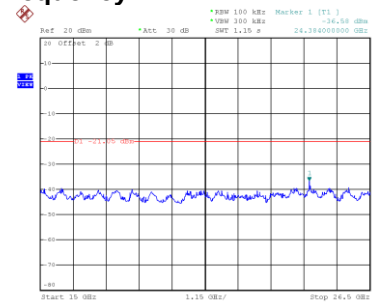


Date: 4.JUN.2020 14:05:13


CH06 – 10th Harmonic of the fundamental frequency

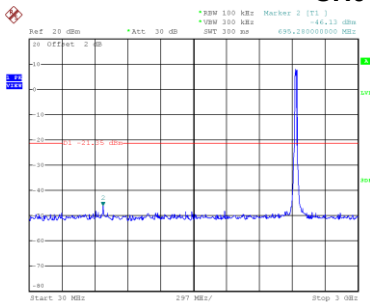

Date: 4.JUN.2020 14:10:42

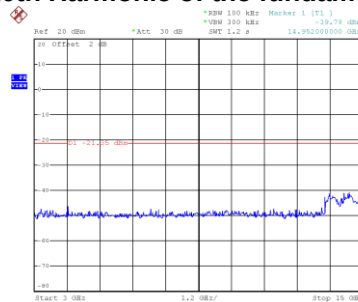


Date: 4.JUN.2020 14:10:49

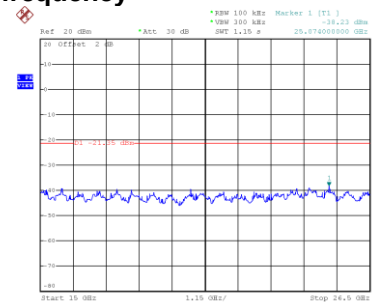


Date: 4.JUN.2020 14:10:56


CH11 – 10th Harmonic of the fundamental frequency

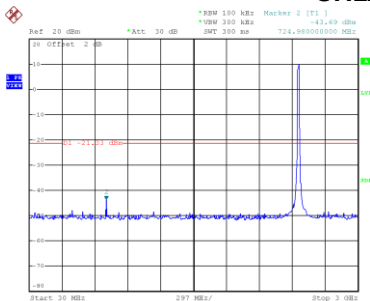

Date: 4.JUN.2020 14:15:39

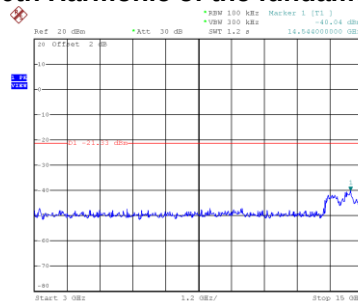


Date: 4.JUN.2020 14:15:46

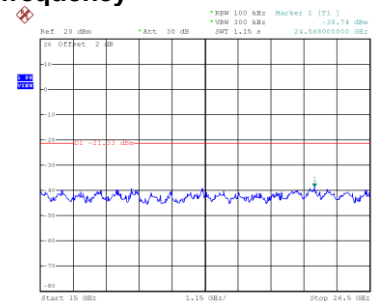

Date: 4.JUN.2020 14:15:53


Test Mode	TX AX (HE20) Mode_Ant. 2	RU configuration	242/61
-----------	--------------------------	------------------	--------

Bandedge-CH01

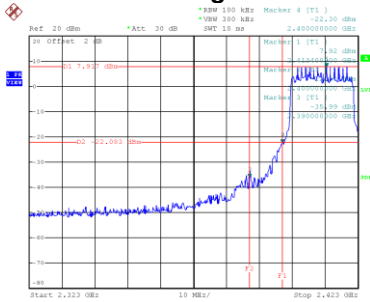


Date: 4.JUN.2020 14:03:53

Bandedge-CH11

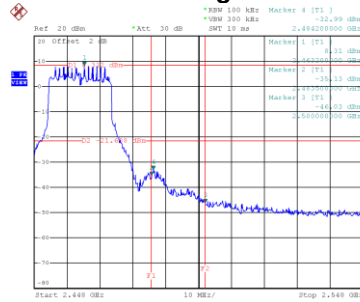


Date: 4.JUN.2020 14:13:31


CH01 – 10th Harmonic of the fundamental frequency

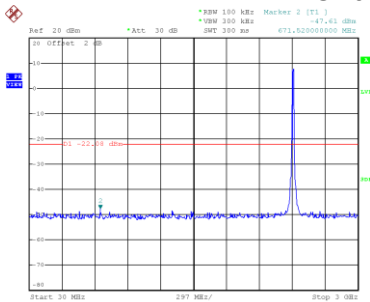

Date: 4.JUN.2020 14:04:06

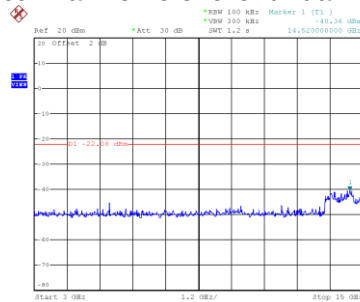


Date: 4.JUN.2020 14:04:13

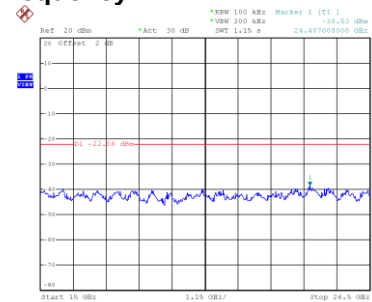


Date: 4.JUN.2020 14:04:20


CH06 – 10th Harmonic of the fundamental frequency

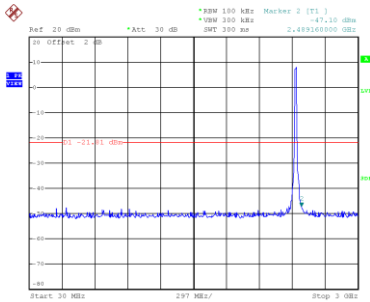

Date: 4.JUN.2020 14:11:47

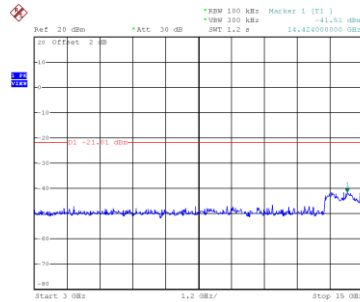


Date: 4.JUN.2020 14:11:54

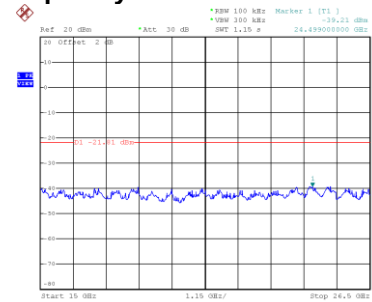


Date: 4.JUN.2020 14:12:01


CH11 – 10th Harmonic of the fundamental frequency

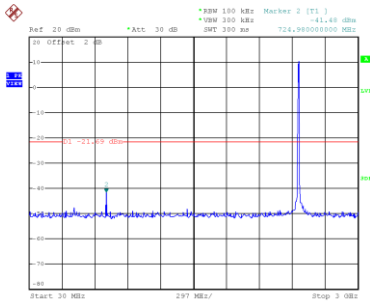

Date: 4.JUN.2020 14:13:44

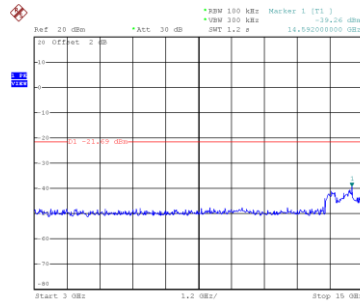


Date: 4.JUN.2020 14:13:51

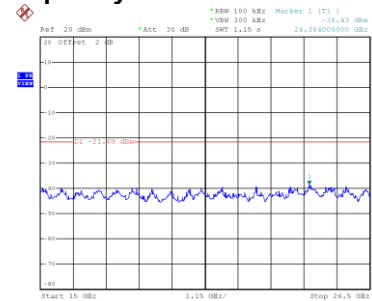

Date: 4.JUN.2020 14:13:58


Test Mode	TX AX (HE40) Mode_Ant. 1	RU configuration	52/40
-----------	--------------------------	------------------	-------

Bandedge-CH03

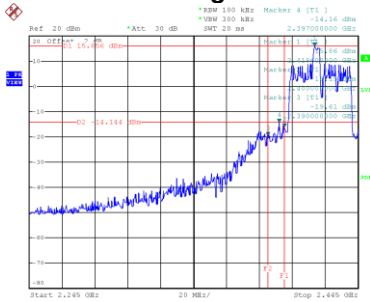


Date: 4.JUN.2020 15:09:41

Bandedge-CH09

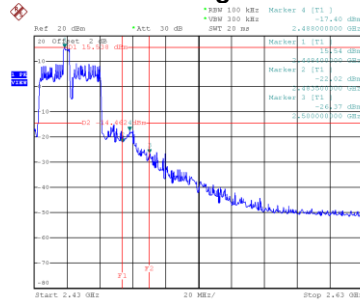


Date: 4.JUN.2020 15:19:15


CH03 – 10th Harmonic of the fundamental frequency

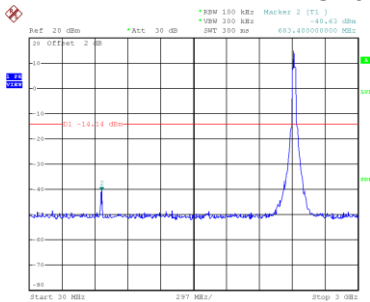

Date: 4.JUN.2020 15:09:54

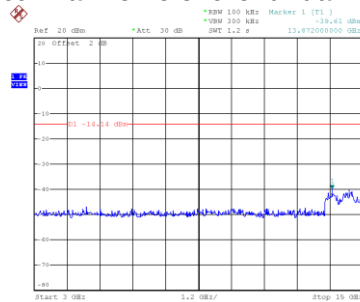


Date: 4.JUN.2020 15:10:01

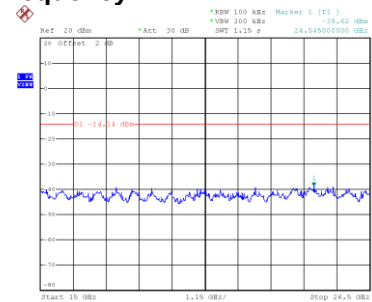


Date: 4.JUN.2020 15:10:08


CH06 – 10th Harmonic of the fundamental frequency

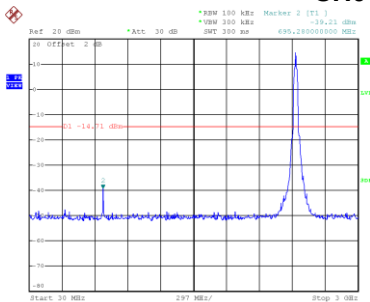

Date: 4.JUN.2020 15:17:53

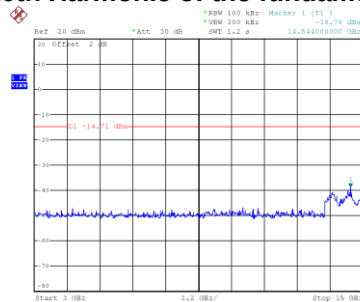


Date: 4.JUN.2020 15:18:00

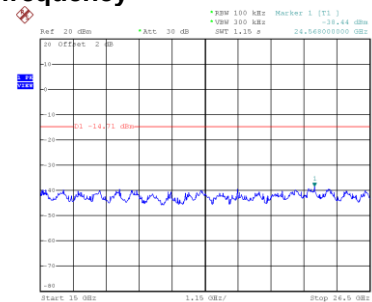


Date: 4.JUN.2020 15:18:07


CH09 – 10th Harmonic of the fundamental frequency

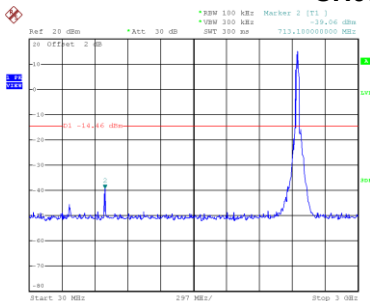

Date: 4.JUN.2020 15:19:29

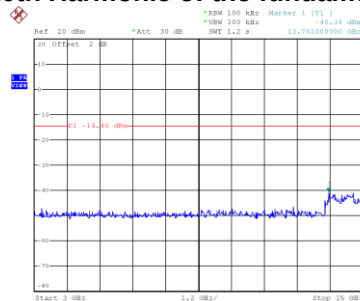


Date: 4.JUN.2020 15:19:36

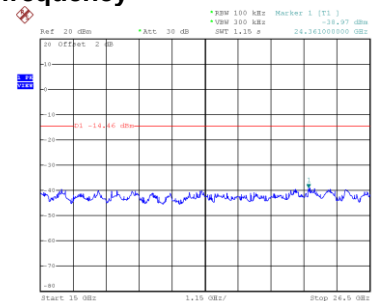

Date: 4.JUN.2020 15:19:43


Test Mode	TX AX (HE40) Mode_Ant. 2	RU configuration	52/40
-----------	--------------------------	------------------	-------

Bandedge-CH03

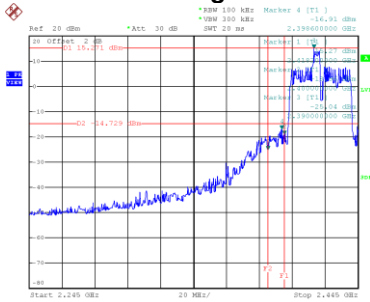


Date: 4.JUN.2020 15:10:44

Bandedge-CH09

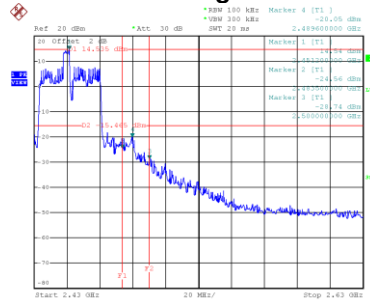


Date: 4.JUN.2020 15:20:18


CH03 – 10th Harmonic of the fundamental frequency

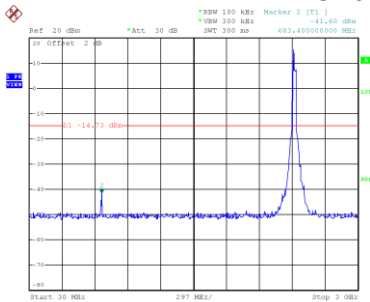

Date: 4.JUN.2020 15:10:57

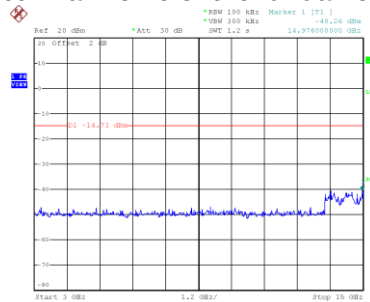


Date: 4.JUN.2020 15:11:04

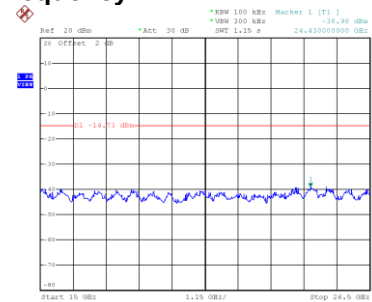


Date: 4.JUN.2020 15:11:11


CH06 – 10th Harmonic of the fundamental frequency

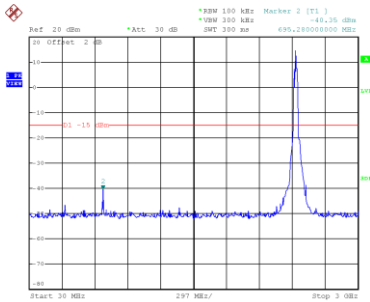

Date: 4.JUN.2020 15:14:53

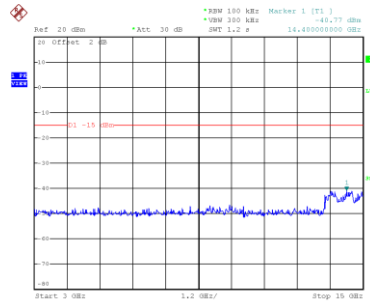


Date: 4.JUN.2020 15:15:00

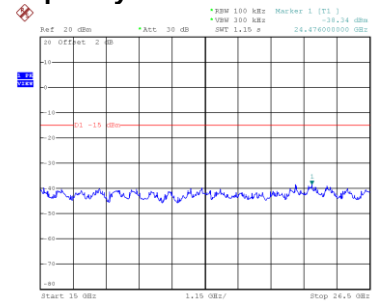


Date: 4.JUN.2020 15:15:07


CH09 – 10th Harmonic of the fundamental frequency

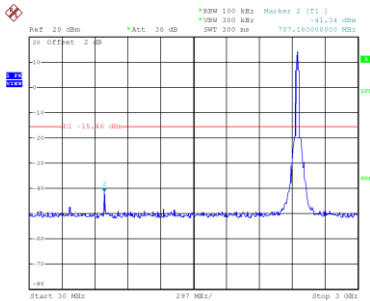

Date: 4.JUN.2020 15:20:31

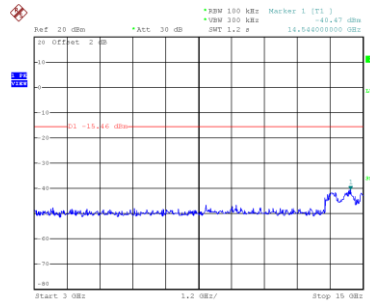


Date: 4.JUN.2020 15:20:38

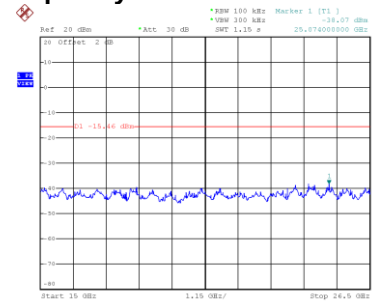

Date: 4.JUN.2020 15:20:45


Test Mode	TX AX (HE40) Mode_Ant. 1	RU configuration	106/54
-----------	--------------------------	------------------	--------

Bandedge-CH03

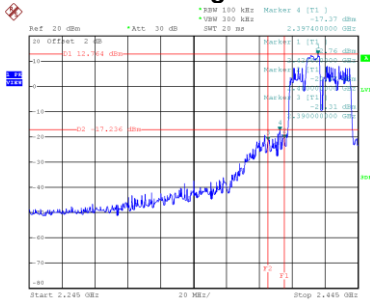


Date: 4.JUN.2020 17:43:43

Bandedge-CH09

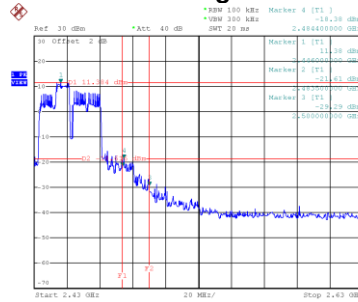


Date: 4.JUN.2020 18:08:53


CH03 – 10th Harmonic of the fundamental frequency

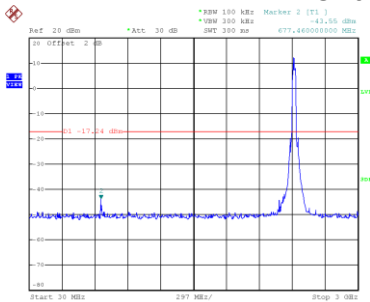

Date: 4.JUN.2020 17:43:56

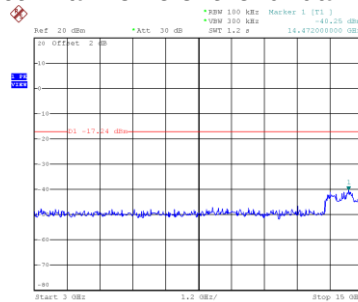


Date: 4.JUN.2020 17:44:03

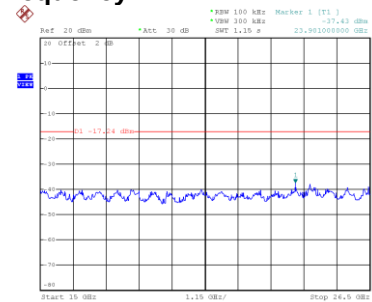


Date: 4.JUN.2020 17:44:10


CH06 – 10th Harmonic of the fundamental frequency

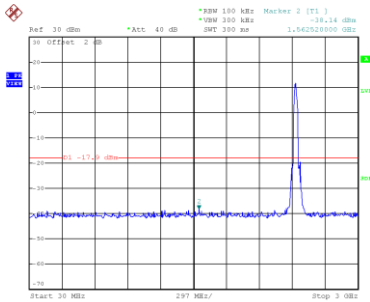

Date: 4.JUN.2020 17:52:42

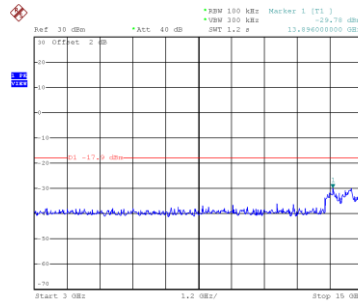


Date: 4.JUN.2020 17:52:49

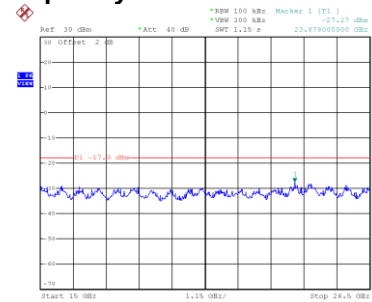


Date: 4.JUN.2020 17:52:56


CH09 – 10th Harmonic of the fundamental frequency

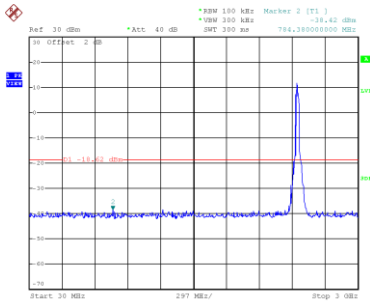

Date: 4.JUN.2020 18:09:06

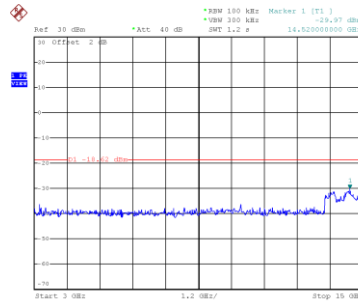


Date: 4.JUN.2020 18:09:13

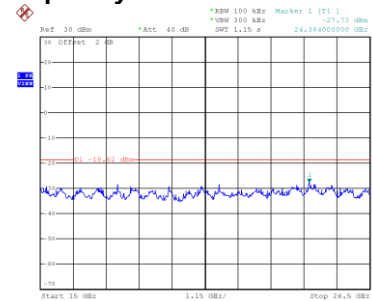

Date: 4.JUN.2020 18:09:20


Test Mode	TX AX (HE40) Mode_Ant. 2	RU configuration	106/54
-----------	--------------------------	------------------	--------

Bandedge-CH03

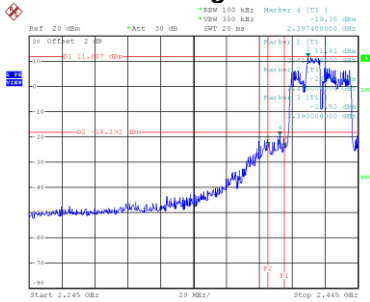


Date: 4.JUN.2020 17:44:33

Bandedge-CH09

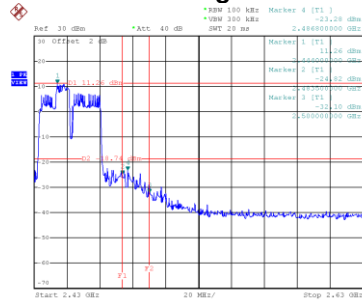


Date: 4.JUN.2020 18:08:04


CH03 – 10th Harmonic of the fundamental frequency

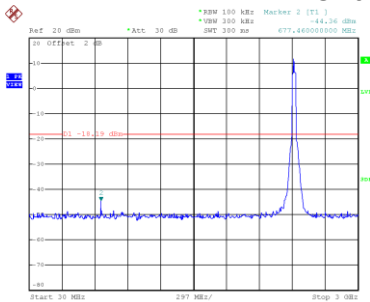

Date: 4.JUN.2020 17:44:46

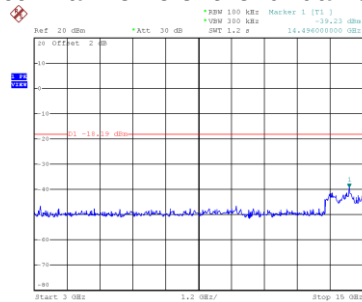


Date: 4.JUN.2020 17:44:53

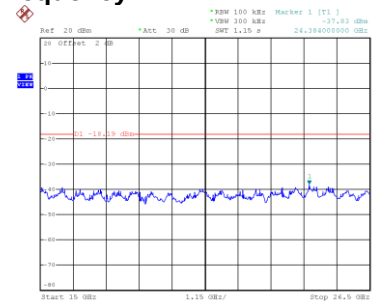


Date: 4.JUN.2020 17:45:00


CH06 – 10th Harmonic of the fundamental frequency

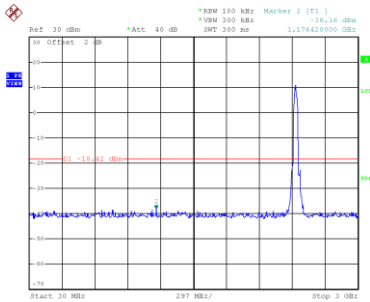

Date: 4.JUN.2020 17:54:02

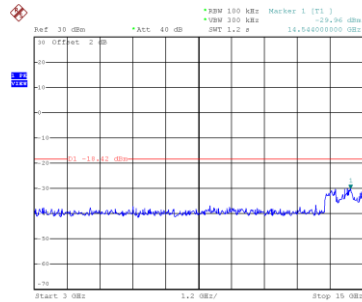


Date: 4.JUN.2020 17:54:09

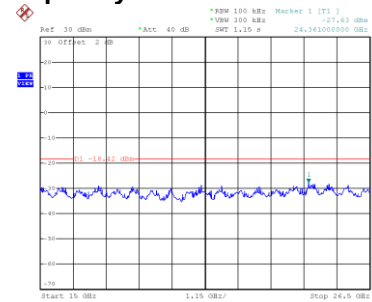


Date: 4.JUN.2020 17:54:16


CH09 – 10th Harmonic of the fundamental frequency

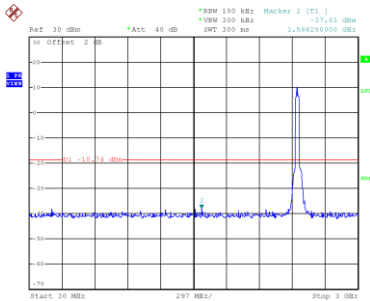

Date: 4.JUN.2020 18:08:17

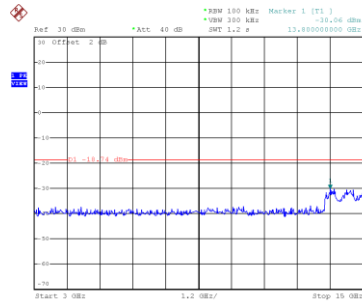


Date: 4.JUN.2020 18:08:24

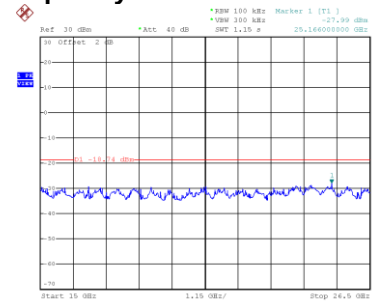

Date: 4.JUN.2020 18:08:31


Test Mode	TX AX (HE40) Mode_Ant. 2	RU configuration	242/62
-----------	--------------------------	------------------	--------

Bandedge-CH03

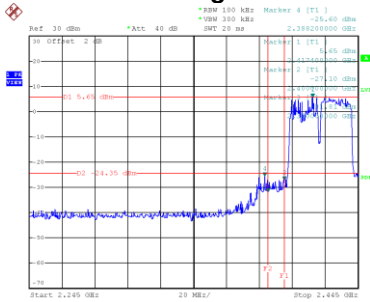


Date: 5.JUN.2020 11:17:50

Bandedge-CH09

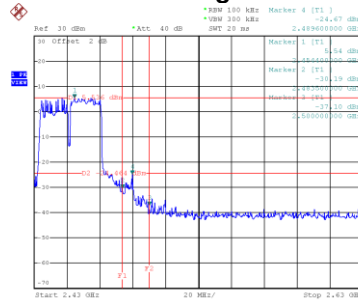


Date: 5.JUN.2020 11:32:00


CH03 – 10th Harmonic of the fundamental frequency

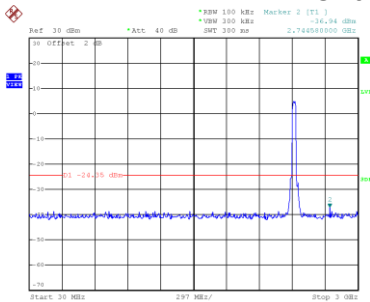

Date: 5.JUN.2020 11:18:02

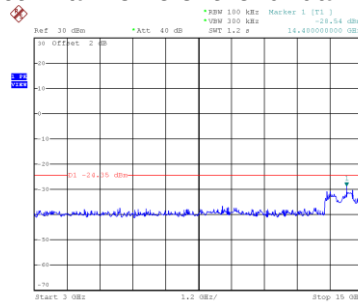


Date: 5.JUN.2020 11:18:09

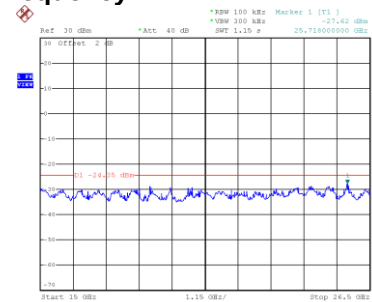


Date: 5.JUN.2020 11:18:16


CH06 – 10th Harmonic of the fundamental frequency

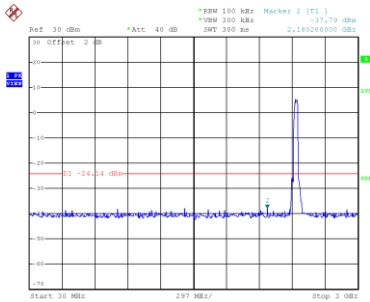

Date: 5.JUN.2020 11:23:34

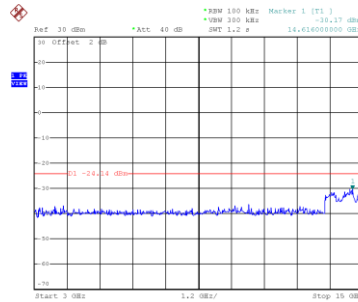


Date: 5.JUN.2020 11:23:41

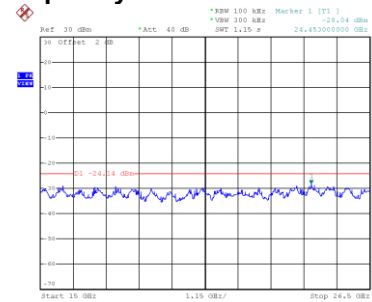


Date: 5.JUN.2020 11:23:48


CH09 – 10th Harmonic of the fundamental frequency

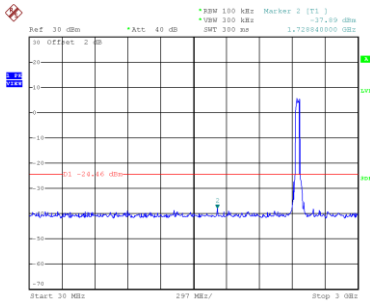

Date: 5.JUN.2020 11:32:13

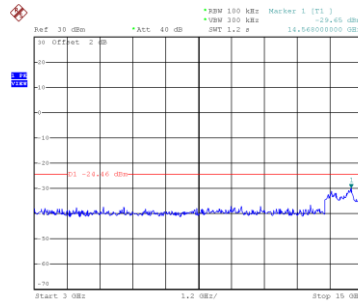

Date: 5.JUN.2020 11:32:20

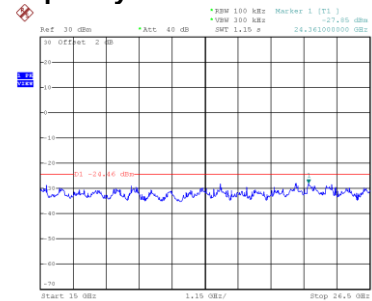


Date: 5.JUN.2020 11:32:27

APPENDIX H - POWER SPECTRAL DENSITY


Non-Beamforming

Test Mode	TX AX (HE20) Mode_Ant. 1	RU configuration	52/37
-----------	--------------------------	------------------	-------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	0.19	7.99	Complies
06	2437	0.71	7.99	Complies
11	2462	0.91	7.99	Complies

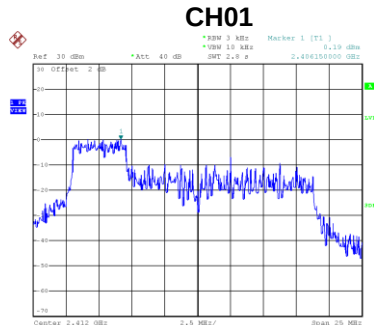

Date: 4 JUN 2020 10:39:23

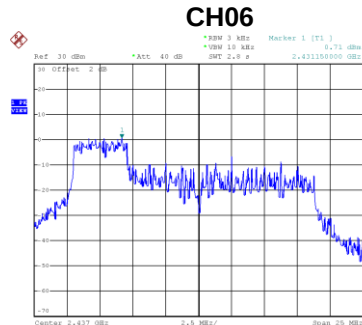


Date: 4 JUN 2020 10:41:11

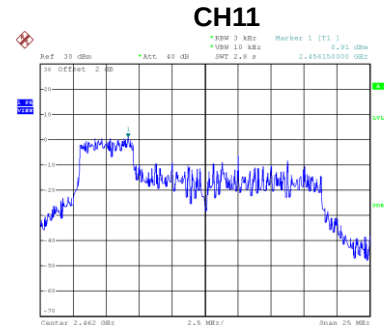


Date: 4 JUN 2020 10:35:11

Test Mode	TX AX (HE20) Mode_Ant. 2	RU configuration	52/37
-----------	--------------------------	------------------	-------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	2.10	7.99	Complies
06	2437	0.85	7.99	Complies
11	2462	1.80	7.99	Complies

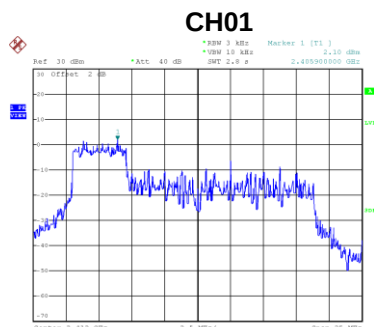

Date: 4 JUN 2020 10:38:46

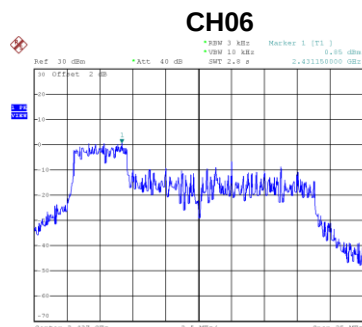

Date: 4 JUN 2020 10:41:32

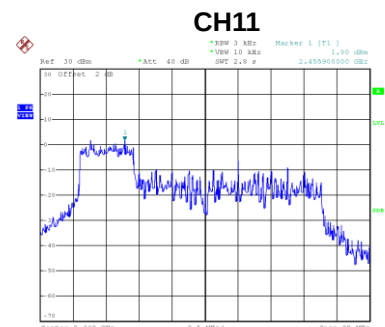


Date: 4 JUN 2020 10:35:41

Test Mode	TX AX (HE20) Mode_Total	RU configuration	52/37
-----------	-------------------------	------------------	-------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	4.77	7.99	Complies
06	2437	4.30	7.99	Complies
11	2462	4.90	7.99	Complies

Test Mode	TX AX (HE20) Mode_Ant. 1	RU configuration	106/54
-----------	--------------------------	------------------	--------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-1.58	7.99	Complies
06	2437	-1.24	7.99	Complies
11	2462	-2.71	7.99	Complies

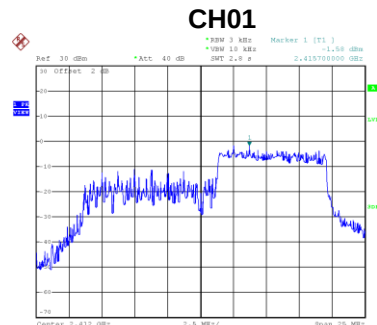

Date: 4-JUN-2020 12:16:04

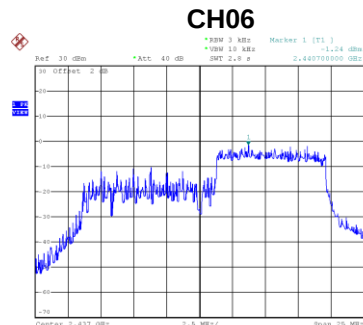


Date: 4-JUN-2020 12:13:18

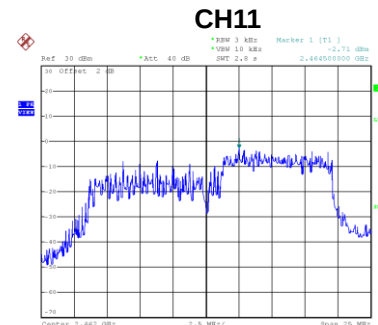


Date: 4-JUN-2020 12:11:59

Test Mode	TX AX (HE20) Mode_Ant. 2	RU configuration	106/54
-----------	--------------------------	------------------	--------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-1.91	7.99	Complies
06	2437	-3.35	7.99	Complies
11	2462	-2.69	7.99	Complies

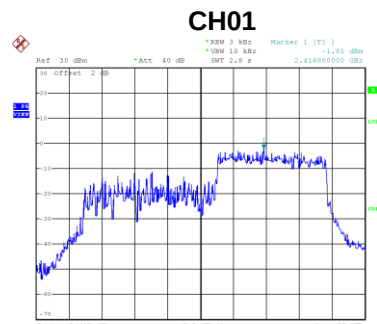

Date: 4-JUN-2020 12:15:18

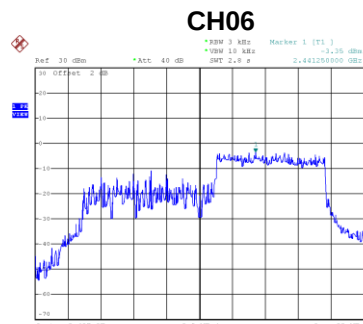

Date: 4-JUN-2020 12:14:05

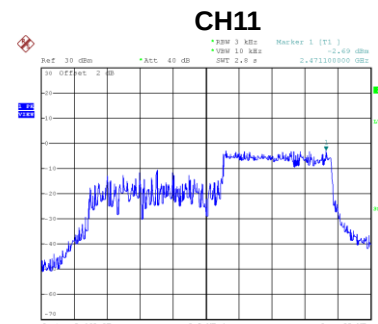


Date: 4-JUN-2020 12:10:40

Test Mode	TX AX (HE20) Mode_Total	RU configuration	106/54
-----------	-------------------------	------------------	--------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	1.78	7.99	Complies
06	2437	1.35	7.99	Complies
11	2462	0.82	7.99	Complies

Test Mode	TX AX (HE20) Mode_Ant. 1	RU configuration	242/61
-----------	--------------------------	------------------	--------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-4.82	7.99	Complies
06	2437	-4.75	7.99	Complies
11	2462	-4.78	7.99	Complies

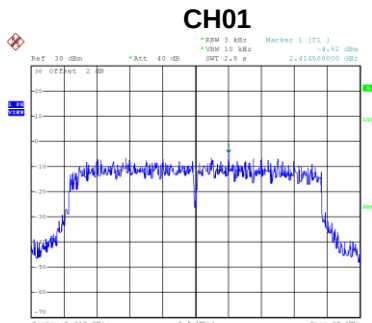

Date: 4 JUN 2020 14:06:09

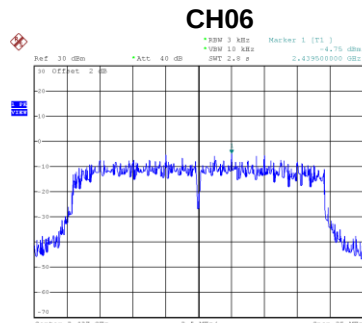


Date: 4 JUN 2020 14:10:01

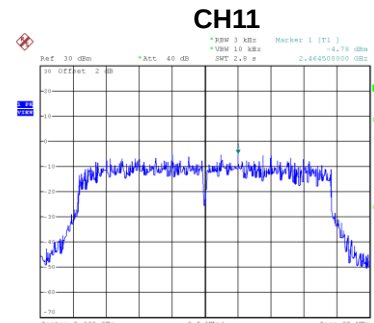


Date: 4 JUN 2020 14:23:00

Test Mode	TX AX (HE20) Mode_Ant. 2	RU configuration	242/61
-----------	--------------------------	------------------	--------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-4.22	7.99	Complies
06	2437	-5.32	7.99	Complies
11	2462	-5.57	7.99	Complies

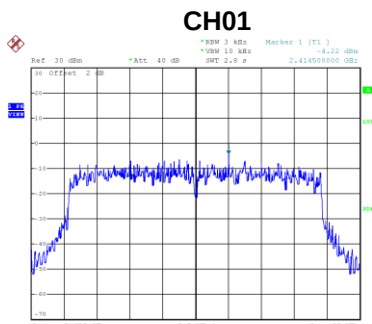

Date: 4 JUN 2020 14:06:53

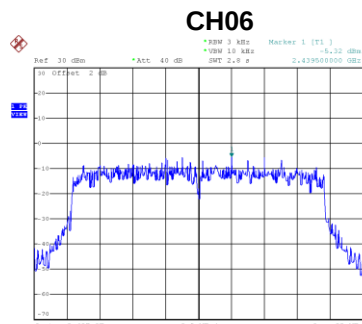

Date: 4 JUN 2020 14:09:17

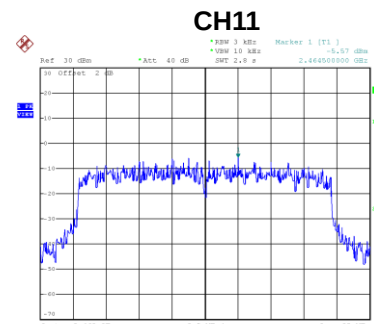


Date: 4 JUN 2020 14:23:56

Test Mode	TX AX (HE20) Mode_Total	RU configuration	242/61
-----------	-------------------------	------------------	--------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
01	2412	-0.99	7.99	Complies
06	2437	-1.51	7.99	Complies
11	2462	-1.64	7.99	Complies

Test Mode	TX AX (HE40) Mode_Ant. 1	RU configuration	52/40
-----------	--------------------------	------------------	-------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	1.15	7.99	Complies
06	2437	0.86	7.99	Complies
09	2452	0.95	7.99	Complies

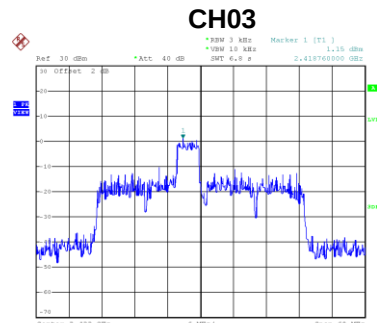

Date: 4 JUN 2020 15:38:24

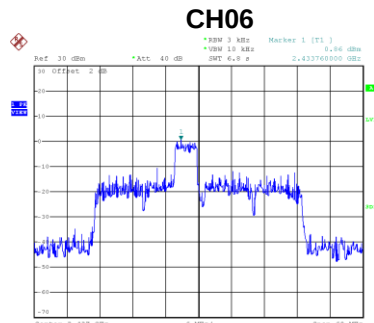


Date: 4 JUN 2020 15:35:50

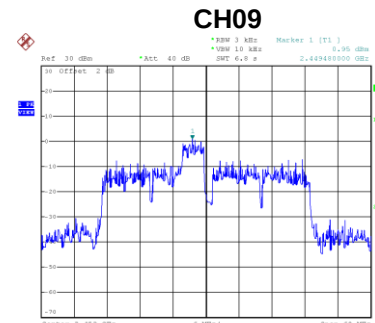


Date: 4 JUN 2020 15:25:42

Test Mode	TX AX (HE40) Mode_Ant. 2	RU configuration	52/40
-----------	--------------------------	------------------	-------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-1.18	7.99	Complies
06	2437	0.69	7.99	Complies
09	2452	-1.61	7.99	Complies

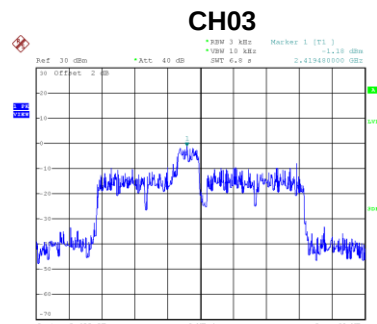

Date: 4 JUN 2020 15:40:03

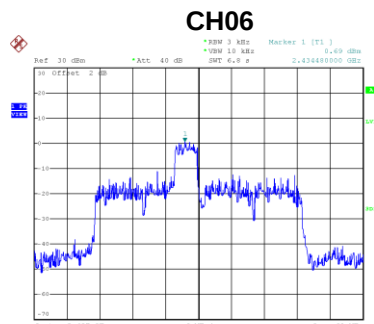

Date: 4 JUN 2020 15:33:25

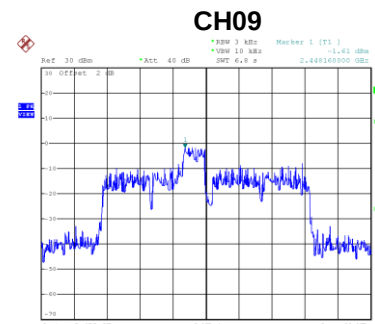


Date: 4 JUN 2020 15:27:25

Test Mode	TX AX (HE40) Mode_Total	RU configuration	52/40
-----------	-------------------------	------------------	-------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	3.66	7.99	Complies
06	2437	4.29	7.99	Complies
09	2452	3.37	7.99	Complies

Test Mode	TX AX (HE40) Mode_Ant. 1	RU configuration	106/54
-----------	--------------------------	------------------	--------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-1.46	7.99	Complies
06	2437	-2.04	7.99	Complies
09	2452	-2.09	7.99	Complies

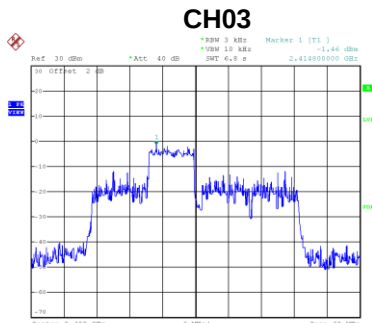

Date: 4.JUN.2020 17:51:24

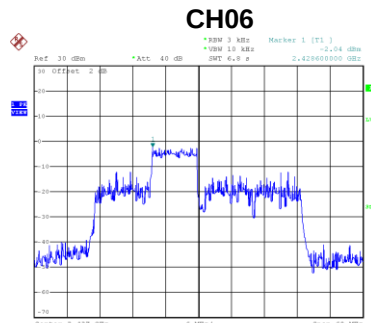


Date: 4.JUN.2020 17:56:22

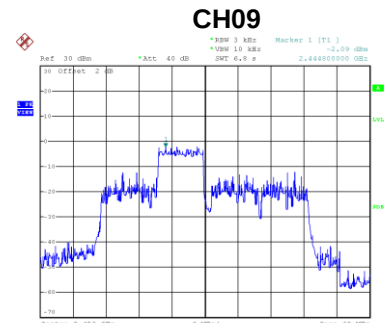


Date: 4.JUN.2020 17:59:33

Test Mode	TX AX (HE40) Mode_Ant. 2	RU configuration	106/54
-----------	--------------------------	------------------	--------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-1.69	7.99	Complies
06	2437	-2.14	7.99	Complies
09	2452	-3.99	7.99	Complies

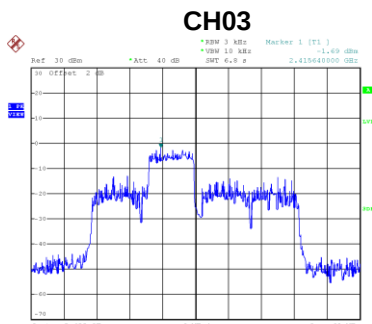

Date: 4.JUN.2020 17:46:55

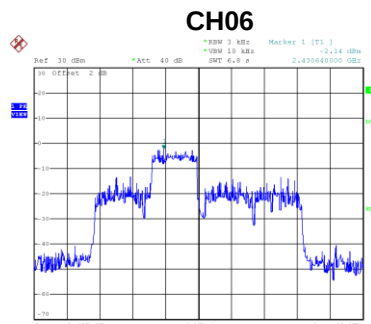

Date: 4.JUN.2020 17:55:30

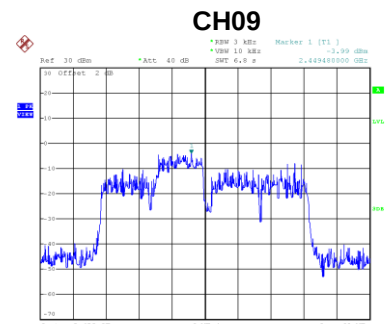


Date: 4.JUN.2020 18:02:32

Test Mode	TX AX (HE40) Mode_Total	RU configuration	106/54
-----------	-------------------------	------------------	--------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	1.94	7.99	Complies
06	2437	1.43	7.99	Complies
09	2452	0.58	7.99	Complies

Test Mode	TX AX (HE40) Mode_Ant. 1	RU configuration	242/62
-----------	--------------------------	------------------	--------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-5.82	7.99	Complies
06	2437	-5.97	7.99	Complies
09	2452	-6.49	7.99	Complies

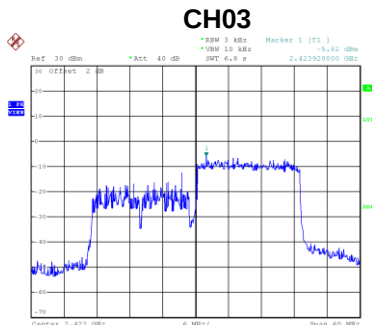

Date: 5 JUN 2020 11:19:48

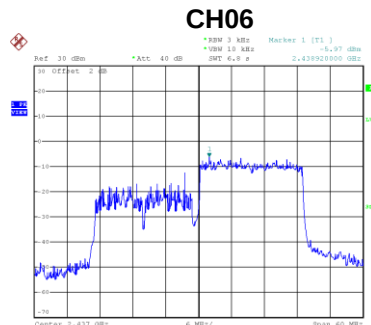


Date: 5 JUN 2020 11:29:11

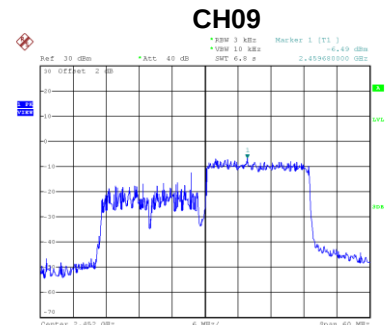


Date: 5 JUN 2020 11:34:14

Test Mode	TX AX (HE40) Mode_Ant. 2	RU configuration	242/62
-----------	--------------------------	------------------	--------


Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-7.56	7.99	Complies
06	2437	-7.06	7.99	Complies
09	2452	-8.17	7.99	Complies

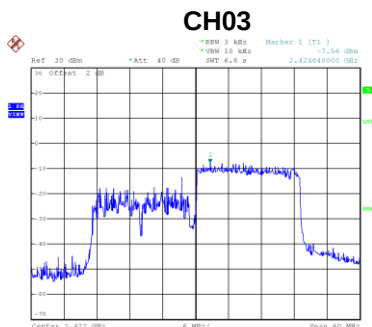

Date: 5 JUN 2020 11:19:06

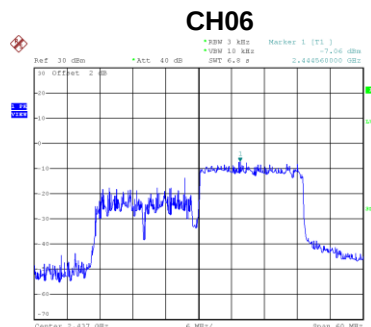

Date: 5 JUN 2020 11:24:33

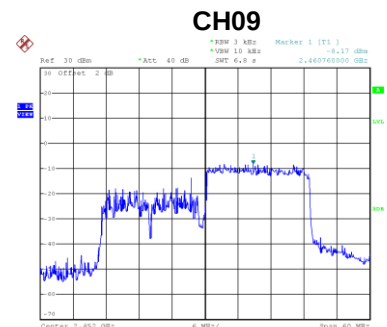




Date: 5 JUN 2020 11:33:25

Test Mode	TX AX (HE40) Mode_Total	RU configuration	242/62
-----------	-------------------------	------------------	--------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-3.09	7.99	Complies
06	2437	-2.96	7.99	Complies
09	2452	-3.73	7.99	Complies




Test Mode	TX AX (HE40) Mode_Ant. 1	RU configuration	484/65
-----------	--------------------------	------------------	--------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-8.34	7.99	Complies
06	2437	-5.99	7.99	Complies
09	2452	-6.70	7.99	Complies

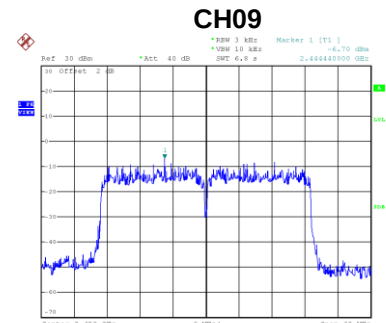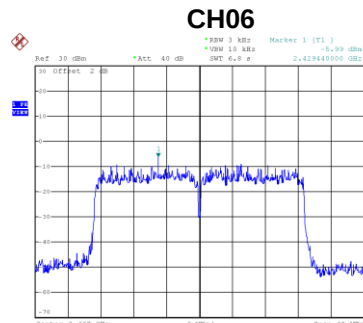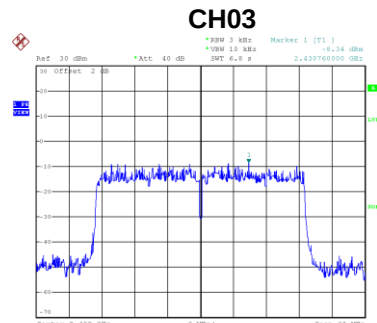

Test Mode	TX AX (HE40) Mode_Ant. 2	RU configuration	484/65
-----------	--------------------------	------------------	--------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-9.54	7.99	Complies
06	2437	-8.40	7.99	Complies
09	2452	-8.65	7.99	Complies

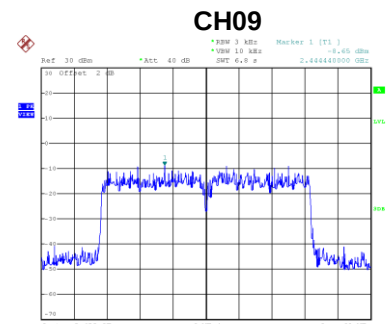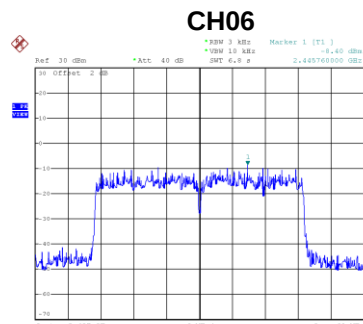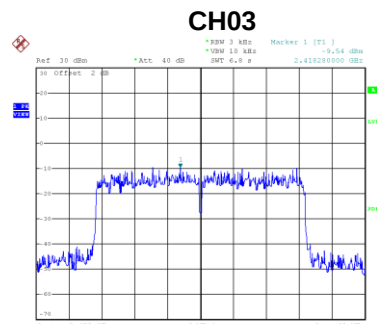

Test Mode	TX AX (HE40) Mode_Total	RU configuration	484/65
-----------	-------------------------	------------------	--------

Channel	Frequency (MHz)	Power Spectral Density (dBm/3kHz)	Max. Limit (dBm/3kHz)	Result
03	2422	-5.38	7.99	Complies
06	2437	-3.51	7.99	Complies
09	2452	-4.05	7.99	Complies

End of Test Report