

# ENGINEERING TEST REPORT



**SkyWay MAX**  
**Model No.: ODB-3537**  
**FCC ID: KA336WAN1**

Applicant: **Solectek Corporation**  
6370 Nancy Ridge Drive, Suite 109  
San Diego, CA  
USA 92121-3212

*Tested in Accordance With*  
**Federal Communications Commission (FCC)**  
**CFR 47, PARTS 2 and 90 (Subpart Z)**  
**Wireless Broadband Services in the 3650-3700 MHz**

**UltraTech's File No.: SOL-009\_FCC90Z**

This Test report is Issued under the Authority of  
Tri M. Luu, Professional Engineer,  
Vice President of Engineering  
UltraTech Group of Labs

Date: May 5, 2010



Report Prepared by: Dharmajit Solanki

Tested by: Wayne Wu, RFI Technician

Issued Date: May 5, 2010

Test Dates: March 19-24 & May 4, 2010

- The results in this Test Report apply only to the sample(s) tested, and the sample tested is randomly selected.*
- This report must not be used by the client to claim product endorsement by NVLAP or any agency of the US Government.*

**UltraTech**

3000 Bristol Circle, Oakville, Ontario, Canada, L6H 6G4

Tel.: (905) 829-1570 Fax.: (905) 829-8050

Website: [www.ultratech-labs.com](http://www.ultratech-labs.com) Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Email: [tri.luu@sympatico.ca](mailto:tri.luu@sympatico.ca)



91038



1309



46390-2049



NVLAP Lab Code 200093-0



SL2-IN-E-1119R



Korea KCC-RRL  
CA2049

## TABLE OF CONTENTS

<b>EXHIBIT 1. INTRODUCTION .....</b>	<b>2</b>
1.1. SCOPE.....	2
1.2. RELATED SUBMITAL(S)/GRANT(S).....	3
1.3. NORMATIVE REFERENCES .....	3
<b>EXHIBIT 2. PERFORMANCE ASSESSMENT .....</b>	<b>4</b>
2.1. CLIENT INFORMATION .....	4
2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION.....	4
2.3. EUT'S TECHNICAL SPECIFICATIONS.....	5
2.4. LIST OF EUT'S PORTS.....	5
2.5. ANCILLARY EQUIPMENT .....	5
2.6. GENERAL TEST SETUP BLOCK DIAGRAM .....	6
<b>EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS .....</b>	<b>7</b>
3.1. CLIMATE TEST CONDITIONS.....	7
3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS.....	7
<b>EXHIBIT 4. SUMMARY OF TEST RESULTS .....</b>	<b>8</b>
4.1. LOCATION OF TESTS .....	8
4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS.....	8
4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES .....	8
4.4. DEVIATION OF STANDARD TEST PROCEDURES .....	8
<b>EXHIBIT 5. MEASUREMENTS, EXAMINATIONS &amp; TEST DATA FOR EMC EMISSIONS.....</b>	<b>9</b>
5.1. TEST PROCEDURES.....	9
5.2. MEASUREMENT UNCERTAINTIES .....	9
5.3. MEASUREMENT EQUIPMENT USED: .....	9
5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:.....	9
5.5. POWER AND ANTENNA LIMITS @ FCC 90.1321 .....	10
5.6. RF EXPOSURE REQUIRMENTS @ SEC. 90.1335, 1.1307(B) & 2.1091 .....	15
5.7. 99% OCCUPIED BANDWIDTH @ FCC 2.1049 .....	17
5.8. CONDUCTED BAND-EDGE & SPURIOUS EMISSIONS @ FCC 90.1323.....	19
5.9. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 90.1323.....	23
5.10. TRANSMITTER CONTENTION BASED PROTOCOL TEST @ FCC 90.203(O) .....	25
<b>EXHIBIT 6. TEST EQUIPMENT LIST .....</b>	<b>27</b>
<b>EXHIBIT 7. MEASUREMENT UNCERTAINTY .....</b>	<b>28</b>
7.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY .....	28
<b>EXHIBIT 8. MEASUREMENT METHODS .....</b>	<b>29</b>
8.1. MEASURING THE EIRP OF SPURIOUS/HARMONIC EMISSIONS USING SUBSTITUTION METHOD: ....	29

## EXHIBIT 1. INTRODUCTION

### 1.1. SCOPE

<b>Reference:</b>	FCC Parts 2 and 90 Subpart Z
<b>Title:</b>	Telecommunication - Code of Federal Regulations, CFR 47, Parts 2 & 90 Subpart Z
<b>Purpose of Test:</b>	To gain FCC Class II Permissive Change acceptance authorization to extend operating frequency range to 3650-3700 MHz for the radio.
<b>Test Procedures:</b>	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 - American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40 GHz.

**§ 90.1305 Permissible operations:-** Use of the 3650-3700 MHz band must be consistent with the allocations for this band as set forth in Part 2 of the Commission's Rules. All stations operating in this band must employ a contention- based protocol (as defined in § 90.7).

**§ 90.1307 Licensing:-** The 3650-3700 MHz band is licensed on the basis of non-exclusive nationwide licenses. Non- exclusive nationwide licenses will serve as a prerequisite for registering individual fixed and base stations. A licensee cannot operate a fixed or base station before registering it under its license and licensees must delete registrations for unused fixed and base stations.

**§ 90.1309 Regulatory status:-** Licensees are permitted to provide services on a non-common carrier and/or on a common carrier basis. A licensee may render any kind of communications service consistent with the regulatory status in its license and with the Commission's rules applicable to that service.

**§ 90.1311 License term:-** The license term is ten years, beginning on the date of the initial authorization (non-exclusive nationwide license) grant. Registering fixed and base stations will not change the overall renewal period of the license.

**§ 90.1312 Assignment and transfer:-** Licensees may assign or transfer their non-exclusive nationwide licenses, and any fixed or base stations registered under those licenses will remain associated with those licenses.

### § 90.1319 Policies governing the use of the 3650-3700 MHz band:-

- (a) Channels in this band are available on a shared basis only and will not be assigned for the exclusive use of any licensee
- (b) Any base, fixed, or mobile station operating in the band must employ a contention-based protocol.
- (c) Equipment incorporating an unrestricted contention-based protocol (i.e. one capable of avoiding co-frequency interference with devices using all other types of contention-based protocols) may operate throughout the 50 megahertz of this frequency band. Equipment incorporating a restricted contention-based protocol (i.e. one that does not qualify as unrestricted) may operate in, and shall only tune over, the lower 25 megahertz of this frequency band.
- (d) All applicants and licensees shall cooperate in the selection and use of frequencies in the 3650-3700 MHz band in order to minimize the potential for interference and make the most effective use of the authorized facilities. A database identifying the locations of registered stations will be available at <http://wireless.fcc.gov/uls>. Licensees should examine this database before seeking station authorization, and make every effort to ensure that their fixed and base stations operate at a location, and with technical parameters, that will minimize the potential to cause and receive interference. Licensees of stations suffering or causing harmful interference are expected to cooperate and resolve this problem by mutually satisfactory arrangements.

## 1.2. RELATED SUBMITAL(S)/GRANT(S)

None

## 1.3. NORMATIVE REFERENCES

Publication	Year	Title
FCC CFR Parts 2 and 90	2009	Code of Federal Regulations – Telecommunication
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 KHz to 40 GHz
CISPR 16-1-1	2006	Specification for Radio Disturbance and Immunity measuring apparatus and methods
TIA/EIA 603, Edition C	2004	Land Mobile FM or PM Communications Equipment Measurement and Performance Standards

## EXHIBIT 2. PERFORMANCE ASSESSMENT

### 2.1. CLIENT INFORMATION

APPLICANT	
<b>Name:</b>	Solectek Corporation
<b>Address:</b>	6370 Nancy Ridge Drive, Suite 109 San Diego, CA USA 92121-3212
<b>Contact Person:</b>	Mr. David Gell Phone #: 858-642-2720 Fax #: 858-457-2681 Email Address: dgell@solectek.com

MANUFACTURER	
<b>Name:</b>	Solectek Corporation
<b>Address:</b>	6370 Nancy Ridge Drive, Suite 109 San Diego, CA USA 92121-3212
<b>Contact Person:</b>	Mr. David Gell Phone #: 858-642-2720 Fax #: 858-457-2681 Email Address: dgell@solectek.com

### 2.2. EQUIPMENT UNDER TEST (EUT) INFORMATION

The following information (with the exception of the Date of Receipt) has been supplied by the applicant.

<b>Brand Name:</b>	Solectek Corporation
<b>Product Name:</b>	SkyWay MAX
<b>Model Name or Number:</b>	ODB-3537
<b>Serial Number:</b>	9807000105
<b>Type of Equipment:</b>	Non-broadcast Radio Communication Equipment
<b>Power Supply:</b>	120V, 60Hz using Astrodyne Power Supply, Model: SPU130-111, Input: 100-240 Vac, Output: 48Vdc
<b>Transmitting/Receiving Antenna Type:</b>	Non-integral

## 2.3. EUT'S TECHNICAL SPECIFICATIONS

TRANSMITTER	
<b>Equipment Type:</b>	Fixed base station
<b>Intended Operating Environment:</b>	Commercial, Light Industry & Heavy Industry
<b>Power Supply Requirement:</b>	120V, 60Hz using Astrodyne Power Supply, Model: SPU130-111, Input: 100-240 Vac, Output: 48Vdc
<b>RF Output Power Rating:</b>	32.83 dBm or 1.92 Watts ( total Peak EIRP)
<b>Operating Frequency Range:</b>	3650-3700MHz
<b>RF Output Impedance:</b>	50 Ohms
<b>Channel Spacing:</b>	7 MHz
<b>Occupied Bandwidth (99%):</b>	6.43 MHz
<b>Modulation:</b>	Auto-select BPSK, QPSK, 16QAM, 64QAM
<b>Emission Designation*:</b>	6M43DXW
<b>Antenna Connector Type:</b>	“N” type connector
<b>Antenna Description:</b>	Manufacturer: Cushcraft Type: Sectoral Model: Custom Frequency Range: 3.3-3.8 GHz Gain: 9-18.5 dBi (selectable)


## 2.4. LIST OF EUT'S PORTS

Port Number	EUT's Port Description	Number of Identical Ports	Connector Type	Cable Type (Shielded/Non-shielded)
1	RF Port	1	N-type	Shield Coax
2	Uplink Cable	1	Circular, 26 pin	Shield, multi-conductor
3	Serial Port	1	BD9	Non shielded, multi-conductor

## 2.5. ANCILLARY EQUIPMENT

Index Number	Ancillary Equipment	Parts Number/ Model Number	Serial Number
1	IBM Personal Computer	300PL	78-YWAHF

## 2.6. GENERAL TEST SETUP BLOCK DIAGRAM

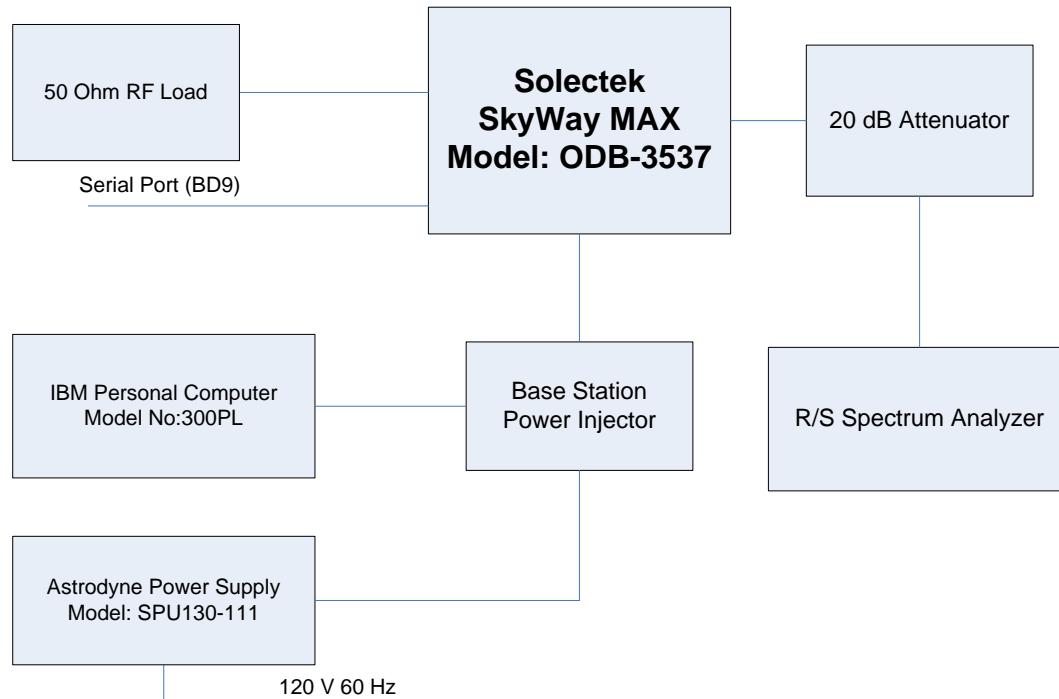

## EXHIBIT 3. EUT OPERATING CONDITIONS AND CONFIGURATIONS DURING TESTS

### 3.1. CLIMATE TEST CONDITIONS

The climate conditions of the test environment are as follows:

<b>Temperature:</b>	22°C
<b>Humidity:</b>	50%
<b>Pressure:</b>	102 kPa
<b>Power input source:</b>	120V, 60Hz using Astrodyne Power Supply, Model: SPU130-111, Input: 100-240 Vac, Output: 48Vdc

### 3.2. OPERATIONAL TEST CONDITIONS & ARRANGEMENT FOR TEST SIGNALS

<b>Operating Modes:</b>	The transmitter was operated in a burst mode with the carrier modulated as specified in the Test Data.
<b>Special Test Software:</b>	Solectek test set-up software used to setup frequency, power level and channel spacing.
<b>Transmitter Test Antenna:</b>	The EUT is tested with the transmitter antenna port terminated to a 50 Ohms RF Load.

<b>Transmitter Test Signals</b>	
<b>Frequency Band(s):</b>	Highest frequency of the extended band that the transmitter covers: <ul style="list-style-type: none"><li>▪ 3675 - 3700 MHz</li><li>▪ 3695.5 MHz</li></ul>
<b>Transmitter Wanted Output Test Signals:</b>	<ul style="list-style-type: none"><li>▪ RF Power Output (measured maximum output power): 32.83 dBm or 1.92 Watts ( total Peak EIRP)</li><li>▪ Normal Test Modulation Auto-select BPSK, QPSK, 16QAM, 64 QAM</li><li>▪ Modulating signal source: Internal</li></ul>

## EXHIBIT 4. SUMMARY OF TEST RESULTS

### 4.1. LOCATION OF TESTS

All of the measurements described in this report were performed at Ultratech Group of Labs located in the city of Oakville, Province of Ontario, Canada.

- Radiated Emissions were performed at the Ultratech's 3-10 TDK Semi-Anechoic Chamber situated in the Town of Oakville, province of Ontario. This test site been calibrated in accordance with ANSI C63.4, and found to be in compliance with the requirements of Sec. 2.948 of the FCC Rules. The descriptions and site measurement data of the Oakville 3-10 TDK Semi-Anechoic Chamber has been filed with FCC office (FCC File No.: 31040/SIT 1300B3) and Industry Canada office (Industry Canada File No.: IC2049A-3). Last Date of Site Calibration: May 1, 2011.

### 4.2. APPLICABILITY & SUMMARY OF EMC EMISSION TEST RESULTS

FCC PARAGRAPH	TEST REQUIREMENTS	APPLICABILITY (Yes/No)
90.1321	Power and Antenna Limits	Yes
90.1355, 1.1307, 1.1310, 2.1091 & 2.1093	RF Exposure Limit	Yes
2.1049	99% Occupied Bandwidth	Yes
2.1055	Frequency Stability	Yes
90.1323	Conducted Emission Limits and Band-edge emissions	Yes
90.1323	Emission Limits - Field Strength of Spurious Emissions	Yes
90.203(O)	Contention Based Protocol	Yes

SkyWay MAX, Model No.: ODB-3537, by Solectek Corporation has also been tested and found to comply with FCC Part 15, Subpart B - Radio Receivers and Class A Digital Device. The engineering test report has been documented and kept in file and it is available anytime upon FCC request.

### 4.3. MODIFICATIONS INCORPORATED IN THE EUT FOR COMPLIANCE PURPOSES

None

### 4.4. DEVIATION OF STANDARD TEST PROCEDURES

None

---

#### ULTRATECH GROUP OF LABS

3000 Bristol Circle, Oakville, Ontario, Canada L6H 6G4  
Tel. #: 905-829-1570, Fax. #: 905-829-8050, Email: [vic@ultratech-labs.com](mailto:vic@ultratech-labs.com), Website: <http://www.ultratech-labs.com>

File #: SOL-009\_FCC90Z  
May 5, 2010

- All test results contained in this engineering test report are traceable to National Institute of Standards and Technology (NIST)

## **EXHIBIT 5. MEASUREMENTS, EXAMINATIONS & TEST DATA FOR EMC EMISSIONS**

### **5.1. TEST PROCEDURES**

This section contains test results only. Details of test methods and procedures can be found in Exhibit 8 of this report

### **5.2. MEASUREMENT UNCERTAINTIES**

The measurement uncertainties stated were calculated in accordance with requirements of UKAS Document NIS 81 with a confidence level of 95%. Please refer to Exhibit 7 for Measurement Uncertainties.

### **5.3. MEASUREMENT EQUIPMENT USED:**

The measurement equipment used complied with the requirements of the Standards referenced in the Methods & Procedures ANSI C63.4 and CISPR 16-1-1

### **5.4. ESSENTIAL/PRIMARY FUNCTIONS AS DECLARED BY THE MANUFACTURER:**

The essential function of the EUT is to correctly communicate data to and from radios over RF link.

## 5.5. POWER AND ANTENNA LIMITS @ FCC 90.1321

### 5.5.1. Limits

#### § 90.1321 Power and antenna limits:


- (a) Base and fixed stations are limited to 25 watts/25 MHz equivalent isotropically radiated power (EIRP). In any event, the peak EIRP power density shall not exceed 1 Watt in any one megahertz slice of spectrum.
- (b) In addition to the provisions in paragraph (a) of this section, transmitters operating in the 3650–3700 MHz band that emit multiple directional beams, simultaneously or sequentially, for the purpose of directing signals to individual receivers or to groups of receivers provided the emissions comply with the following:
  - (1) Different information must be transmitted to each receiver.
  - (2) If the transmitter employs an antenna system that emits multiple directional beams but does not emit multiple directional beams simultaneously, the total output power conducted to the array or arrays that comprise the device, *i.e.*, the sum of the power supplied to all antennas, antenna elements, staves, etc. and summed across all carriers or frequency channels, shall not exceed the limit specified in paragraph (a) of this section, as applicable. The directional antenna gain shall be computed as follows:
    - (i) The directional gain, in dBi, shall be calculated as the sum of  $10 \log$  (number of array elements or staves) plus the directional gain, in dBi, of the individual element or stave having the highest gain.
    - (ii) A lower value for the directional gain than that calculated in paragraph (b)(2)(i) of this section will be accepted if sufficient evidence is presented, *e.g.*, due to shading of the array or coherence loss in the beam-forming.
  - (3) If a transmitter employs an antenna that operates simultaneously on multiple directional beams using the same or different frequency channels and if transmitted beams overlap, the power shall be reduced to ensure that the aggregate power from the overlapping beams does not exceed the limit specified in paragraph (b)(2) of this section. In addition, the aggregate power transmitted simultaneously on all beams shall not exceed the limit specified in paragraph (b)(2) of this section by more than 8 dB.
- (4) Transmitters that emit a single directional beam shall operate under the provisions of paragraph (b)(2) of this section.
- (c) Mobile and portable stations are limited to 1 watt/25 MHz EIRP. In any event, the peak EIRP density shall not exceed 40 milliwatts in any one-megahertz slice of spectrum.

### 5.5.2. Method of Measurements


- The total conducted power was measured using the Peak Power meter
- The peak conducted power density in 1 MHz was measured using an EMI receiver (spectrum analyzer) with  $RBW = 1 \text{ MHz}$ ,  $VBW \geq RBW$ .

### 5.5.3. Test Arrangement

#### 5.5.3.1. *Test Setup for Total Peak Conducted Power Measurements*

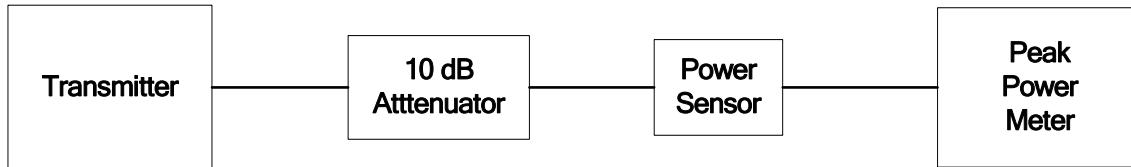

#### 5.5.3.2. *Test Setup for Peak Conducted Power Density Measurements*

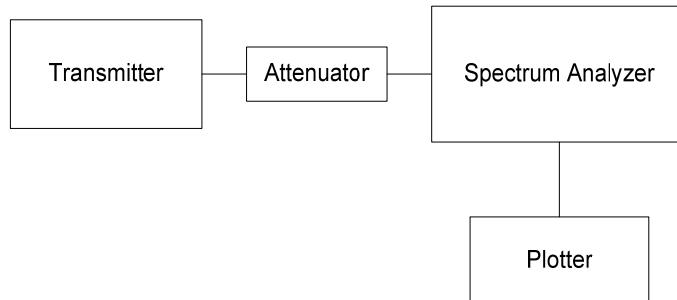

## 5.5.4. Test Data

### Notes:

- (1) Pre-scan show similar results for different modes of modulations (BPSK, QPSK, 16QAM and 64QAM); therefore, test results for 64QAM will be used to represent for all.
- (2) The following tables show the power levels with respect to antenna system assembly to achieve the maximum EIRP or EIRP density. For actual settings of power levels with respect to actual antennas used, please refer to the User's Manual.

### 5.5.4.1. Maximum Total Peak EIRP Power

Fundamental Frequency (MHz)	Measured Peak Conducted Power (dBm)	Antenna System Assembly Gain Range (Ant Gain-Cable Loss) (dBi)	Calculated Maximum Total Peak EIRP (dBm)	Maximum Allowable Total Peak EIRP for fixed station uses (dBm)
<b>Setting for Minimum 9 dBi Antenna Gain Assembly</b>				
3695.50	23.83	9.0	32.83	38.45
<b>Setting for Maximum 18.5 dBi Antenna Gain Assembly</b>				
3695.50	14.29	18.5	32.79	38.45


### 5.5.4.2. Maximum Peak EIRP Power Density

Fundamental Frequency (MHz)	Measured Peak EIRP Density in 1 MHz BW (dBm/MHz)	Antenna System Assembly Gain Range (Ant Gain-Cable Loss) (dBi), See Note (3)	Calculated Maximum Peak EIRP Density in 1 MHz BW (dBm/MHz)	FCC Peak EIRP Density in 1 MHz BW Limits (dBm/MHz)
<b>Setting for Minimum 9 dBi Antenna Gain Assembly</b>				
3695.50	20.34	9.0	29.34	30.0
<b>Setting for Maximum 18.5 dBi Antenna Gain Assembly</b>				
3695.50	10.91	18.5	29.41	30.0


### Notes:

- (1) The rf output power will be varied depending on the antenna system assembly gain employed to ensure that the total peak EIRP less than 30 dBm.
- (2) Refer to Plots # 1(a) & (b) for details of measurements, with the maximum power settings.

Plot # 1(a): Peak Conducted Power Density Measurement wrt. 9 dBi Gain (Minimum) Antenna  
(Maximum Power Setting: 19 dBm)  
Center Freq.: 3695.50 MHz, Ch Spacing: 7 MHz, Modulation: 64QAM

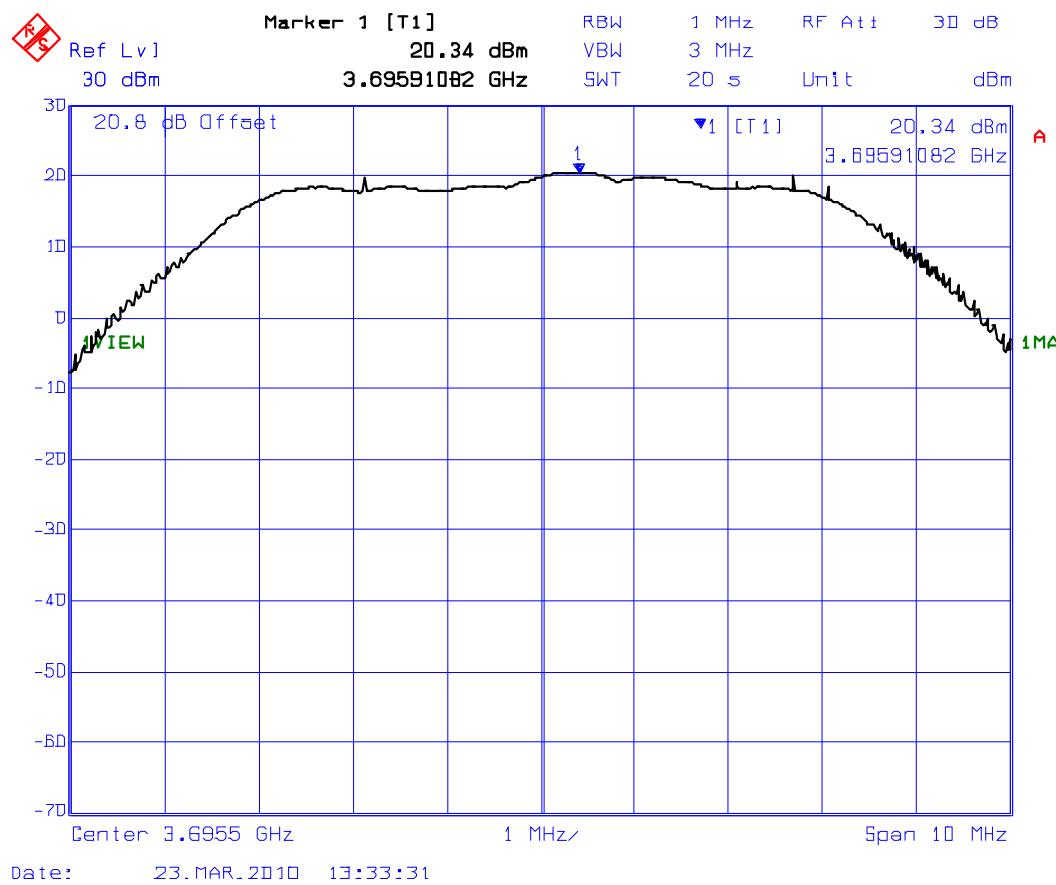

Plot # 1(b): Peak Conducted Power Density Measurement wrt. 18.5 dBi Gain (Minimum) Antenna  
(Maximum Power Setting: 11 dBm)  
Center Freq.: 3695.50 MHz, Ch Spacing: 7 MHz, Modulation: 64QAM

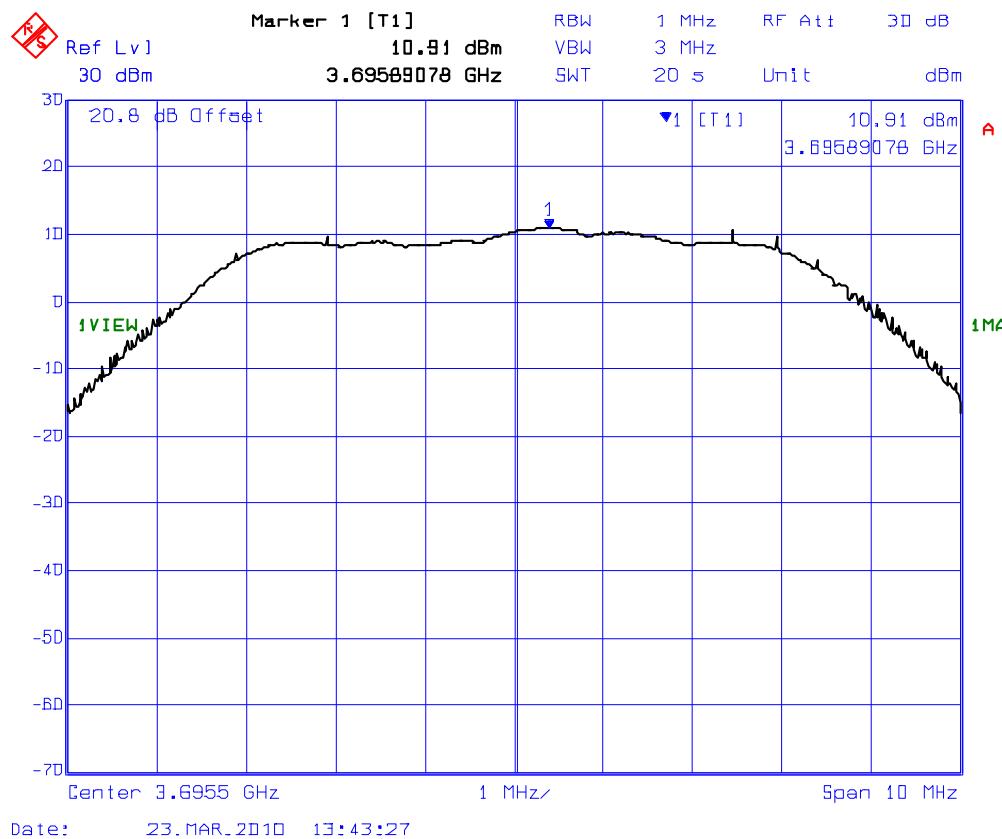

## 5.6. RF EXPOSURE REQUIREMENTS @ SEC. 90.1335, 1.1307(B) & 2.1091

### 5.6.1. Limits

- **FCC 1.1310:-** The criteria listed in the following table shall be used to evaluate the environmental impact of human exposure to radio-frequency (RF) radiation as specified in 1.1307(b).

**LIMITS FOR MAXIMUM PERMISSIBLE EXPOSURE (MPE)**

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm <sup>2</sup> )	Average Time (minutes)
<b>(A) Limits for Occupational/Control Exposures</b>				
1500-100,000	...	...	5	6
<b>(B) Limits for General Population/Uncontrolled Exposure</b>				
1500-100,000	...	...	1.0	30

F = Frequency in MHz

### 5.6.2. Method of Measurements

Refer to FCC @ 1.1307, 1.1310, 2.1091 and 2.1093

- In order to demonstrate compliance with MPE requirements (see Section 2.1091), the following information is typically needed:
  - (1) Calculation that estimates the minimum separation distance (20 cm or more) between an antenna and persons required to satisfy power density limits defined for free space.
  - (2) Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement
  - (3) Any caution statements and/or warning labels that are necessary in order to comply with the exposure limits
  - (4) Any other RF exposure related issues that may affect MPE compliance

**Calculation Method of RF Safety Distance:**

$$S = PG/4\pi r^2 = EIRP/4\pi r^2$$

Where: P: power input to the antenna in mW  
 EIRP: Equivalent (effective) isotropic radiated power.  
 S: power density mW/cm<sup>2</sup>  
 G: numeric gain of antenna relative to isotropic radiator  
 r: distance to centre of radiation in cm

FCC radio frequency exposure limits may be exceeded at distances closer than r cm from the antenna of this device

$$r = \sqrt{\frac{PG/4\pi S}{}}$$

FCC radio frequency exposure limits may not be exceeded at distances closer than r cm from the antenna of this device

**5.6.3. Test Data**

**Antennas Gain Range specified by Manufactuer: 10.5 dBi**

Frequency (MHz)	Channel Spacing (MHz)	Maximum Total Peak EIRP Power (Watts)	Laboratory's Recommended Minimum RF Safety Distance r (cm)
3695.50	7.0	1.92	12.4

**Note 1:** RF EXPOSURE DISTANCE LIMITS:  $r = (PG/4\pi S)^{1/2} = (EIRP/4\pi S)^{1/2}$

$$S = 1.0 \text{ mW/cm}^2$$

$$\begin{aligned} r &= (PG/4\pi S)^{1/2} = (EIRP/4\pi S)^{1/2} \\ &= (1920/(4 \times 3.14 \times 1))^{1/2} \\ &= 12.36 \text{ cm} \end{aligned}$$

Evaluation of RF Exposure Compliance Requirements	
RF Exposure Requirements	Compliance with FCC Rules
Minimum calculated separation distance between antenna and persons required: 12.4 cm	Manufacturer' instruction for separation distance between antenna and persons required: 20 cm.
Antenna installation and device operating instructions for installers (professional/unskilled users), and the parties responsible for ensuring compliance with the RF exposure requirement	Professional Installation only
Caution statements and/or warning labels that are necessary in order to comply with the exposure limits	Please refer 'Regulatory Information' on last page of the User Manual.

## 5.7. 99% OCCUPIED BANDWIDTH @ FCC 2.1049


### 5.7.1. Limits

Not Specified.

### 5.7.2. Method of Measurements

The 99% occupied bandwidth is measured using EMI receiver (spectrum analyzer) with RBW = 1% of 99% OBW, VBW >= RBW.

### 5.7.3. Test Arrangement

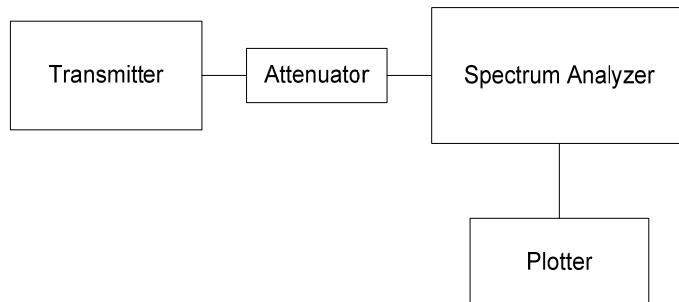


### 5.7.4. Test Data

**Remark:** Since the 99% OBW were pre-scanned and found to be the same with all different modulations, the final 99% OBW measurements with 64QAM

Transmitter Channel	Fundamental Frequency (MHz)	Channel Spacing (MHz)	99% Occupied Bandwidth (MHz)
Highest	3695.50	7.0	6.41

Please refer to Plots # 2 for details of measurements.

**Plot # 2: 99% Occupied Bandwidth**  
**Center Freq.: 3695.50 MHz, Ch Spacing: 7 MHz, Modulation: 64QAM**

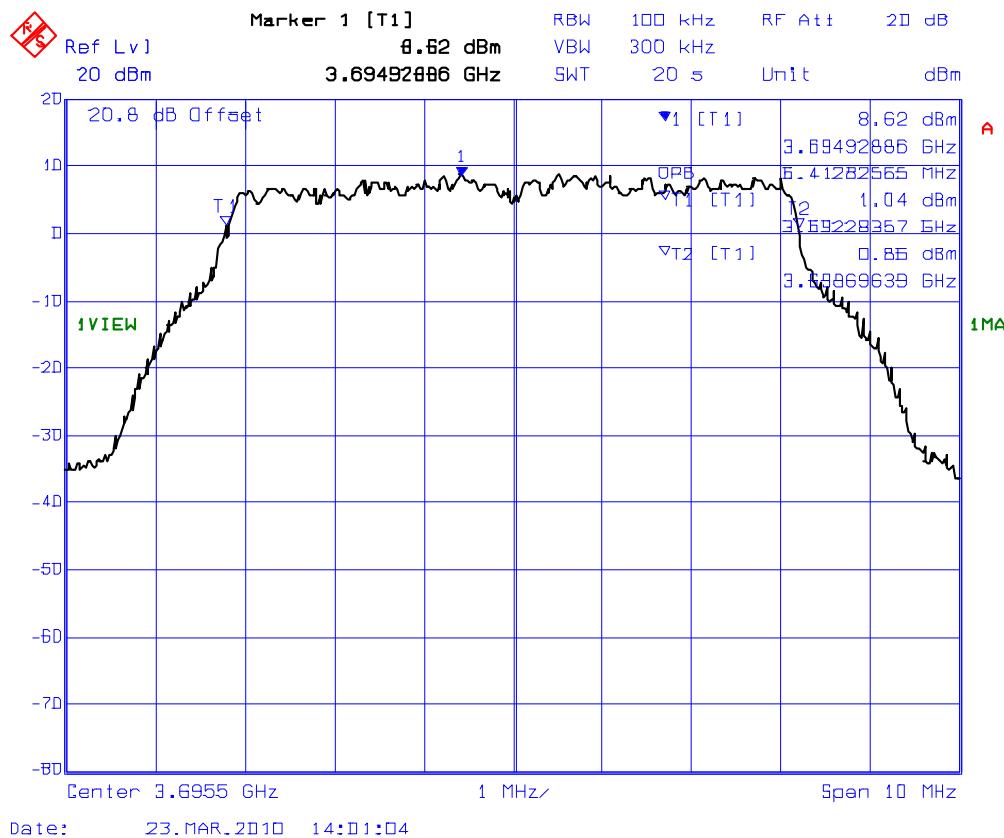

## 5.8. CONDUCTED BAND-EDGE & SPURIOUS EMISSIONS @ FCC 90.1323


### 5.8.1. Limits @ 90.1323

- (a) The power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or less, but at least one percent of the emission bandwidth of the fundamental emission of the transmitter, provided the measured energy is integrated over a 1 MHz bandwidth.
- (b) When an emission outside of the authorized bandwidth causes harmful interference, the Commission may, at its discretion, require greater attenuation than specified in this section.

### 5.8.2. Method of Measurements

With transmitter modulation characteristics described in Out-of-Band Emissions measurements @ 2.1049 and the transmitter was operated in full rated power, the transmitter spurious and harmonic emissions were scanned. The spurious and harmonic emissions were measured with the EMI Receiver controls set as RBW = 1 MHz, VBW  $\geq$  RBW and SWEEP TIME = AUTO).

### 5.8.3. Test Arrangement

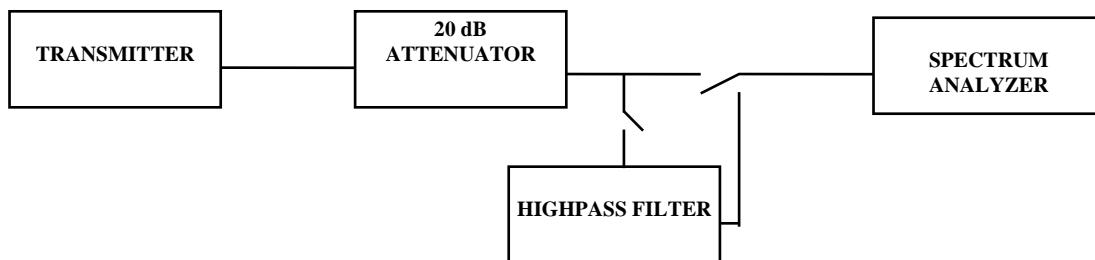


## 5.8.4. Plots


**Remark:** The transmitter setting with maximum conducted rf output (for 9 dBi gain antenna) and 64QAM was selected to test for final since it was found their characteristics are the same with different modulations.

- **Conducted Band-edge Emissions: conforms, please refer to Plots # 3 for details of measurements.**
- **Conducted Spurious Emissions: conforms, please refer to Plots # 4(a) & (b) for details of measurements from 30 MHz to 37 GHz.**


**Plot # 3: Conducted Band-edge Emissions (Upper Band Edge)**  
 Center Freq.: 3695.50 MHz, Power Setting: 19dBm, Ch. Spacing: 7 MHz

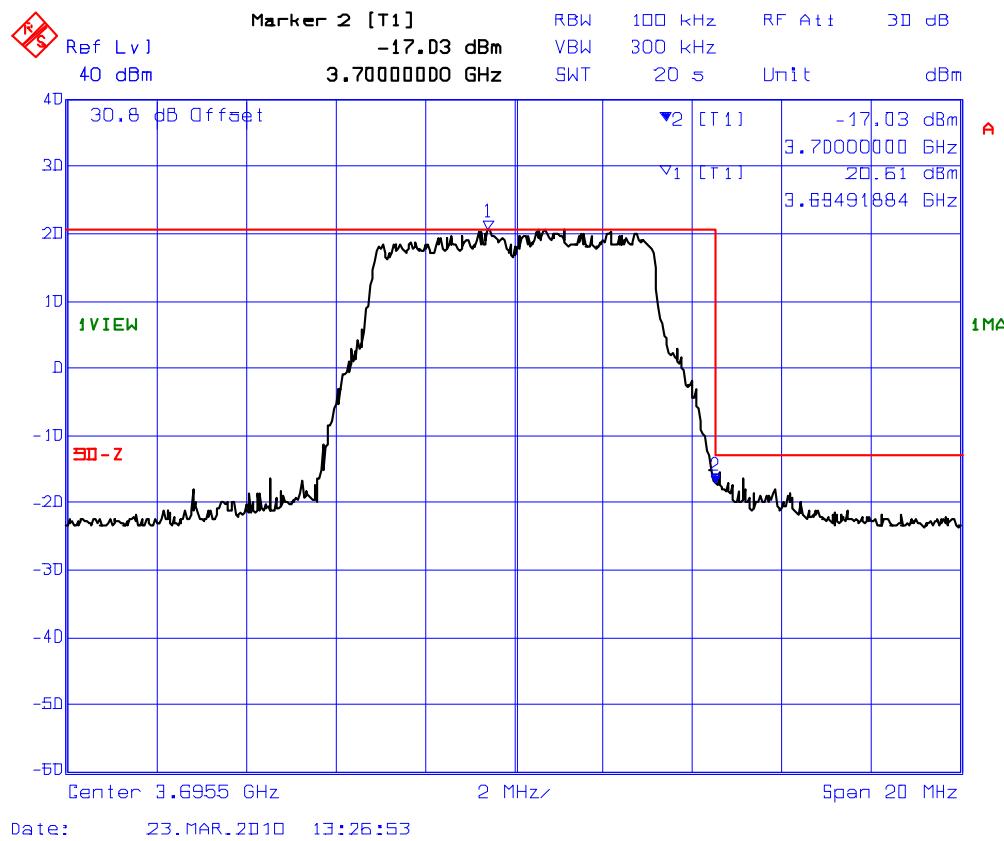

**Plot # 4(a): Transmitter Conducted Spurious Emissions**  
**Center Freq.: 3695.50 MHz, Power Setting: 19dBm, Ch. Spacing: 7 MHz**  
**Modulation: 64QAM**

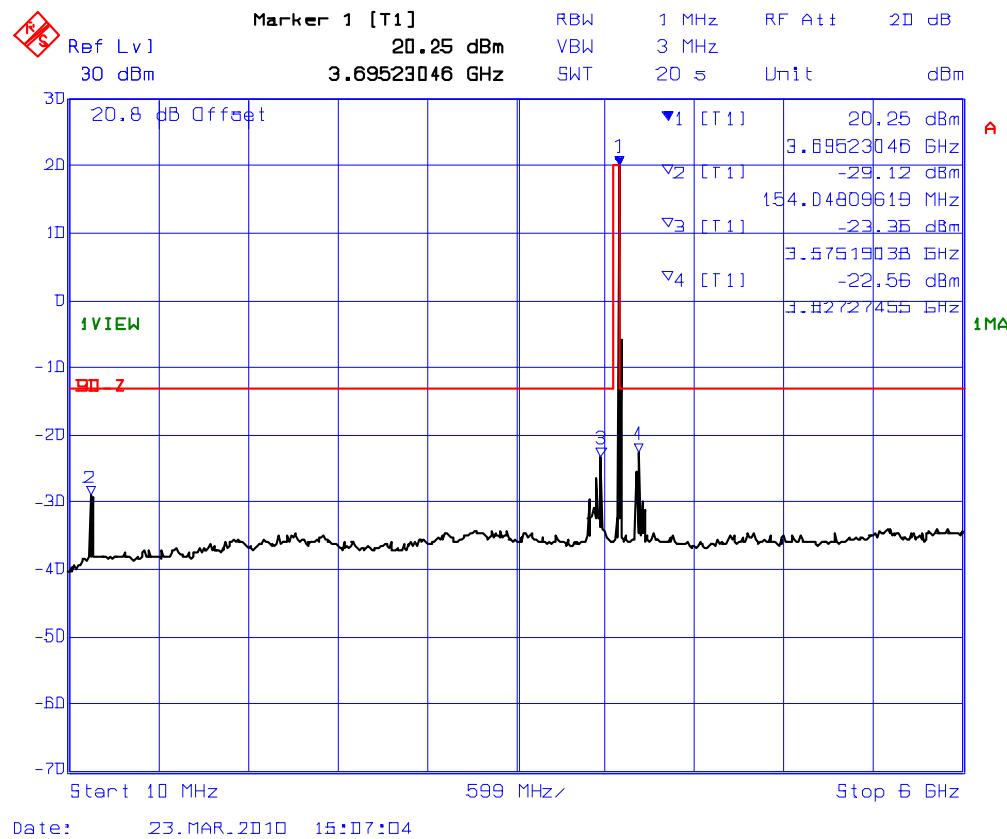

**Plot # 4(b): Transmitter Conducted Spurious Emissions**  
**Center Freq.: 3695.50 MHz, Power Setting: 19dBm, Ch. Spacing: 7 MHz**  
**Modulation: 64QAM**

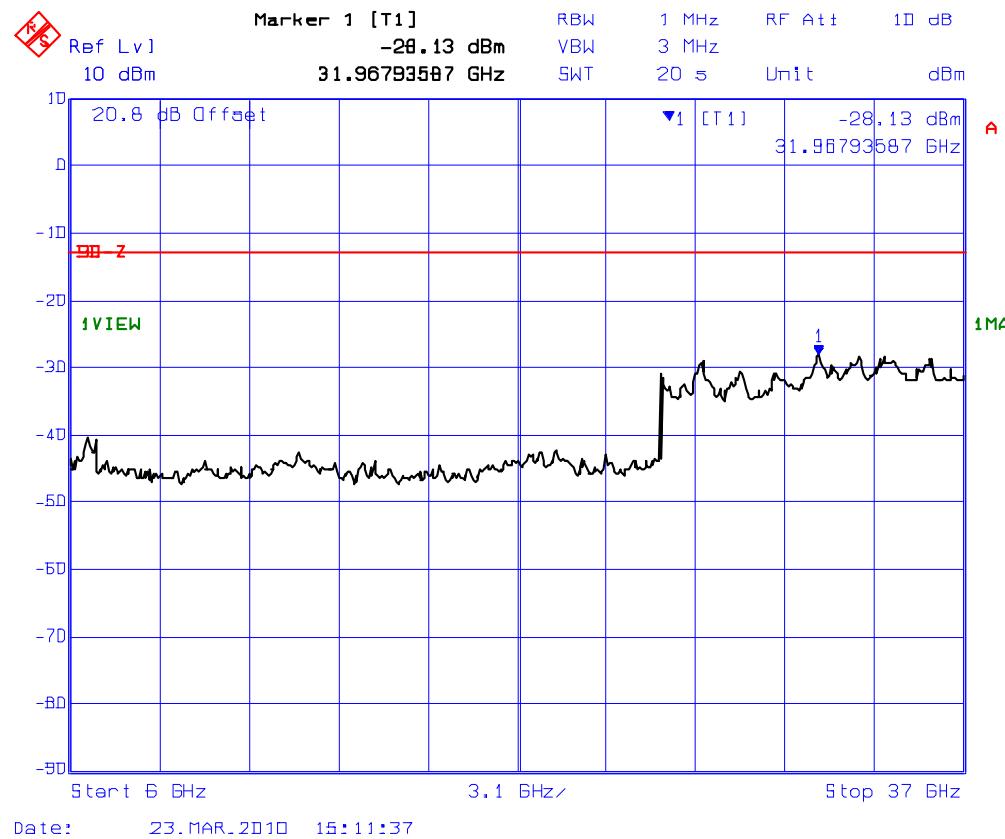

## 5.9. TRANSMITTER SPURIOUS/HARMONIC RADIATED EMISSIONS @ FCC 90.1323

### 5.9.1. Limits @ 90.1323

- (a) The power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 1 MHz or less, but at least one percent of the emission bandwidth of the fundamental emission of the transmitter, provided the measured energy is integrated over a 1 MHz bandwidth.
- (b) When an emission outside of the authorized bandwidth causes harmful interference, the commission may, at its discretion, require greater attenuation than specified in this section.

### 5.9.2. Method of Measurements

The spurious/harmonic ERP measurements are using substitution method specified in Exhibit 7, § 7.1 of this report and its value in dBc is calculated as follows:

1. If the transmitter's antenna is an integral part of the EUT, the ERP is measured using substitution method.
2. If the transmitter's antenna is non-integral and diverse, the lowest ERP of the carrier with 0 dBi antenna gain is used for calculation of the spurious/harmonic emissions in dBc:
3. Lowest ERP of the carrier =  $EIRP - 2.15 \text{ dB} = P_c + G - 2.15 \text{ dB} = \text{xxx dBm (conducted)} + 0 \text{ dBi} - 2.15 \text{ dB}$
4. Spurious /harmonic emissions levels expressed in dBc (dB below carrier) are as follows:

**ERP of spurious/harmonic (dBc) = ERP of carrier (dBm) – ERP of spurious/harmonic emission (dBm)**

### 5.9.3. Test Data

#### 5.9.3.1. Highest Frequency (3695.5 MHz)

Fundamental Frequency:	3695.5 MHz					
Channel Bandwidth:	7 MHz					
Modulation:	64QAM					
RF Output Power:	23.83 dBm (total conducted Peak Power) wrt power setting: 19 dBm					
Test Frequency Range:	30 MHz – 37 GHz					
Frequency (MHz)	E-Field (dB $\mu$ V/m)	EMI Detector (Peak/QP)	Antenna Polarization (H/V)	ERP measured by Substitution Method (dBm)	Limit (dBm)	Margin (dB)
30 – 37000	Note 1	Peak	V	--	-13	< -43
30 – 37000	Note 1	Peak	H	--	-13	< -43

Note 1- All radiated emissions in 30 MHz to 37 GHz are more than 30 dB below the limit.

## 5.10. TRANSMITTER CONTENTION BASED PROTOCOL TEST @ FCC 90.203(O)

### 5.10.1. Requirement of Sec 90.203(O)

(1) Applications for all transmitters must describe the methodology used to meet the requirement that each transmitter employ a contention based protocol and indicate whether it is capable of avoiding co-frequency interference with devices using all other types of contention based protocols.

### 5.10.2. Method of Measurement

The EUT was set to transmit on pre-selected test frequency using 7 MHz channel bandwidth. The EUT RF output was constantly monitored using a spectrum analyzer. A CW interference signal was introduced on a co-channel frequency at desired level so that the Tx turns off. This level of the interference signal was recorded as shown in the table. Once it is confirmed that the EUT ceased transmission, the level of the interference signal was slowly reduced until the Tx turns back on and work as normal. This level of the interference signal also recorded as shown in the table. The tests were repeated with adjacent channel and again with second test frequency to determine levels of the interference signal. The results are recorded as shown in the test data table.


### 5.10.3. Test Data

The following table shows the measurement data.

Test Number	Test Channel Frequency	Channel Bandwidth	Interference Signal	Interference Signal Level	Tx turns Off
			freq relative to EUT freq		
	MHz	MHz	MHz	dBm	(Y/N)
1	3695.5	7.0	0.0	-73.18	Y
2	3695.5	7.0	0.0	-74.22	N
3	3695.5	7.0	-3.5	-73.92	Y
4	3695.5	7.0	-3.5	-74.66	N
5	3695.5	7.0	3.5	-72.80	Y
6	3695.5	7.0	3.5	-73.71	N
7	3654.25	7.0	0.0	-75.56	Y
8	3654.25	7.0	0.0	-76.36	N
9	3654.25	7.0	-3.5	-75.53	Y
10	3654.25	7.0	-3.5	-75.88	N
11	3654.25	7.0	3.5	-74.78	Y
12	3654.25	7.0	3.5	-75.05	N

Note: Tests were performed at co-channel and adjacent channel spacing by applying a carrier wave interference signal. Please refer to Plot # 5 for more details.

**Plot # 5: Contention Based Protocol Test with Interference Signal**

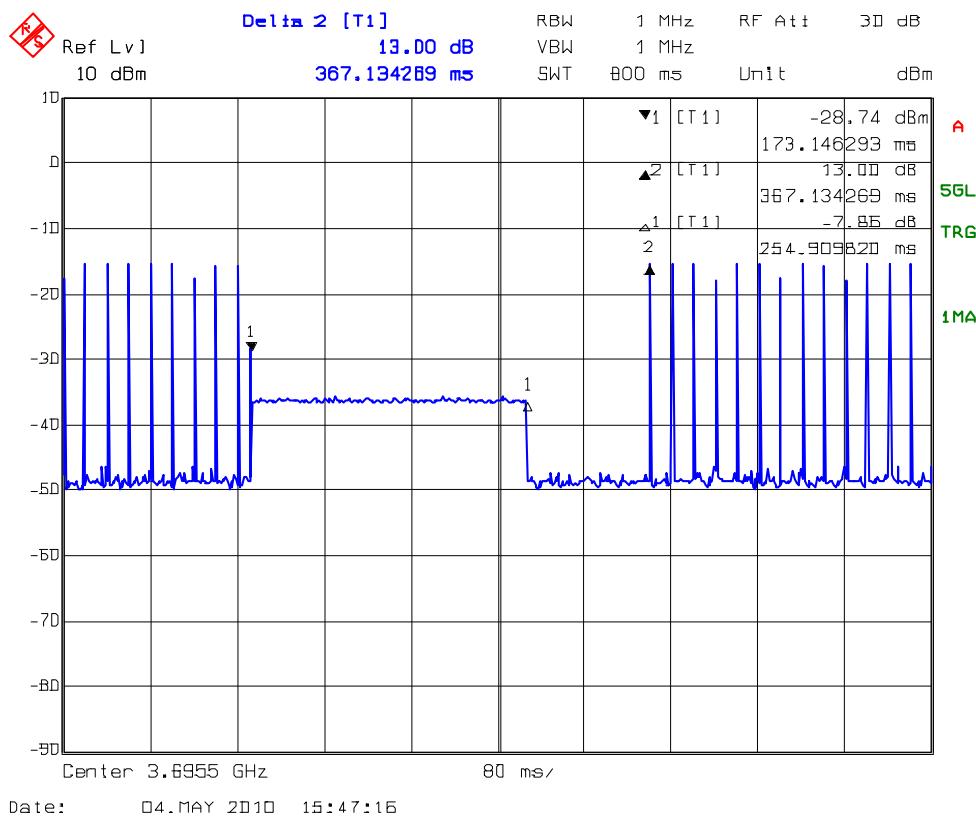

Note: The above plot shows that Tx turns OFF when an interference signal was applied to the EUT and turns ON when the interference signal was removed.

## EXHIBIT 6. TEST EQUIPMENT LIST

Test Instruments	Manufacturer	Model No.	Serial No.	Frequency Range	Calibration Due Date
Spectrum Analyzer	Rohde & Schwarz	FSEK30	834157/005	20 Hz – 40 GHz with external mixer	June 05, 2010
EMI-Test Receiver	Rohde & Schwarz	ESU40	100037	20 Hz – 40 GHz Build in amplifier	February 17, 2010
Pre-Amplifier	Hewlett Packard	8449B	3008A00769	1 – 26.5 GHz	June 01, 2010
Biconilog Antenna	EMCO	3142	1005	26 MHz – 2000 MHz	April 18. 2010
Horn Antenna	EMCO	3115	5061	1 – 18 GHz	September 21, 2010
Peak Power Meter	Hewlett Packard	8900D	2131A01044	0.1 - 18 GHz	May 19, 2010
Power Sensor	Hewlett Packard	84811A	2551A01484	0.1 - 18 GHz	May 19, 2010
High Pass Filter	BSC	MH 3113	2	Cut off 5.8 GHz	N/A*
Dual Directional Coupler	Hewlett Packard	11692D	1212A03520	2-18 GHz	N/A*
Power Divider	Mini Circuit	ZFSC-2-10G	15542	2-10 GHz	N/A*
Attenuator (70dB)	Hewlett Packard	8495B	2551A10452	DC – 18 GHz 10dB step	N/A*
Attenuator (11dB)	Hewlett Packard	8494B	2812A16244	DC - 18 GHz 1 dB step	N/A*

\* Self check and validation before testing

## EXHIBIT 7. MEASUREMENT UNCERTAINTY

The measurement uncertainties stated were calculated in accordance with the requirements of NIST Technical Note 1297 and NIS 81 (1994)

### 7.1. RADIATED EMISSION MEASUREMENT UNCERTAINTY

CONTRIBUTION (Radiated Emissions)	PROBABILITY DISTRIBUTION	UNCERTAINTY ( $\pm$ dB)	
		3 m	10 m
Antenna Factor Calibration	Normal (k=2)	$\pm 1.0$	$\pm 1.0$
Cable Loss Calibration	Normal (k=2)	$\pm 0.3$	$\pm 0.5$
EMI Receiver specification	Rectangular	$\pm 1.5$	$\pm 1.5$
Antenna Directivity	Rectangular	+0.5	+0.5
Antenna factor variation with height	Rectangular	$\pm 2.0$	$\pm 0.5$
Antenna phase center variation	Rectangular	0.0	$\pm 0.2$
Antenna factor frequency interpolation	Rectangular	$\pm 0.25$	$\pm 0.25$
Measurement distance variation	Rectangular	$\pm 0.6$	$\pm 0.4$
Site imperfections	Rectangular	$\pm 2.0$	$\pm 2.0$
Mismatch: Receiver VRC $\Gamma_1 = 0.2$ Antenna VRC $\Gamma_R = 0.67(Bi)$ 0.3 (Lp) Uncertainty limits $20\log(1+\Gamma_1\Gamma_R)$	U-Shaped	+1.1 -1.25	$\pm 0.5$
System repeatability	Std. Deviation	$\pm 0.5$	$\pm 0.5$
Repeatability of EUT		-	-
Combined standard uncertainty	Normal	+2.19 / -2.21	+1.74 / -1.72
Expanded uncertainty U	Normal (k=2)	+4.38 / -4.42	+3.48 / -3.44

Calculation for maximum uncertainty when 3m biconical antenna including a factor of k=2 is used:

$$U = 2u_c(y) = 2x(+2.19) = +4.38 \text{ dB} \quad \text{And} \quad U = 2u_c(y) = 2x(-2.21) = -4.42 \text{ dB}$$

## EXHIBIT 8. MEASUREMENT METHODS

### 8.1. MEASURING THE EIRP OF SPURIOUS/HARMONIC EMISSIONS USING SUBSTITUTION METHOD:

(a) Set the EMI Receiver (for measuring E-Field) and Receiver #2 (for measuring EIRP) as follows:

Center Frequency:	equal to the signal source
Resolution BW:	10 kHz
Video BW:	same
Detector Mode:	positive
Average:	off
Span:	3 x the signal bandwidth

(b) Load an appropriate correction factors file in EMI Receiver for correcting the field strength reading level

Total Correction Factor recorded in the EMI Receiver = Cable Loss + Antenna Factor  
 $E \text{ (dBuV/m)} = \text{Reading (dBuV)} + \text{Total Correction Factor (dB/m)}$

(c) Select the frequency and E-field levels obtained in the Section 7.2.1 for ERP/EIRP measurements.  
(d) Substitute the EUT by a signal generator and one of the following transmitting antenna (substitution antenna):  
◆ DIPOLE antenna for frequency from 30-1000 MHz or  
◆ HORN antenna for frequency above 1 GHz }.  
(e) Mount the transmitting antenna at 1.5 meter high from the ground plane.  
(f) Use one of the following antenna as a receiving antenna:  
◆ DIPOLE antenna for frequency from 30-1000 MHz or  
◆ HORN antenna for frequency above 1 GHz }.  
(g) If the DIPOLE antenna is used, tune it's elements to the frequency as specified in the calibration manual.  
(h) Adjust both transmitting and receiving antenna in a VERTICAL polarization.  
(i) Tune the EMI Receivers to the test frequency.  
(j) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.  
(k) The transmitter was rotated through 360° about a vertical axis until a higher maximum signal was received.  
(l) Lower or raise the test antenna from 1 to 4 meters until the maximum signal level was detected.  
(m) Adjust input signal to the substitution antenna until an equal or a known related level to that detected from the transmitter was obtained in the test receiver.  
(n) Record the power level read from the Average Power Meter and calculate the ERP/EIRP as follows:

$$P = P1 - L1 = (P2 + L2) - L1 = P3 + A + L2 - L1$$

$$EIRP = P + G1 = P3 + L2 - L1 + A + G1$$


$$ERP = EIRP - 2.15 \text{ dB}$$

Total Correction factor in EMI Receiver # 2 = L2 - L1 + G1

Where: P: Actual RF Power fed into the substitution antenna port after corrected.  
P1: Power output from the signal generator  
P2: Power measured at attenuator A input  
P3: Power reading on the Average Power Meter  
EIRP: EIRP after correction  
ERP: ERP after correction

(o) Adjust both transmitting and receiving antenna in a HORIZONTAL polarization, then repeat step (k) to (o)  
(p) Repeat step (d) to (o) for different test frequency  
(q) Repeat steps (c) to (j) with the substitution antenna oriented in horizontal polarization.  
(r) Actual gain of the EUT's antenna is the difference of the measured EIRP and measured RF power at the RF port. Correct the antenna gain if necessary.:

**Figure 1**

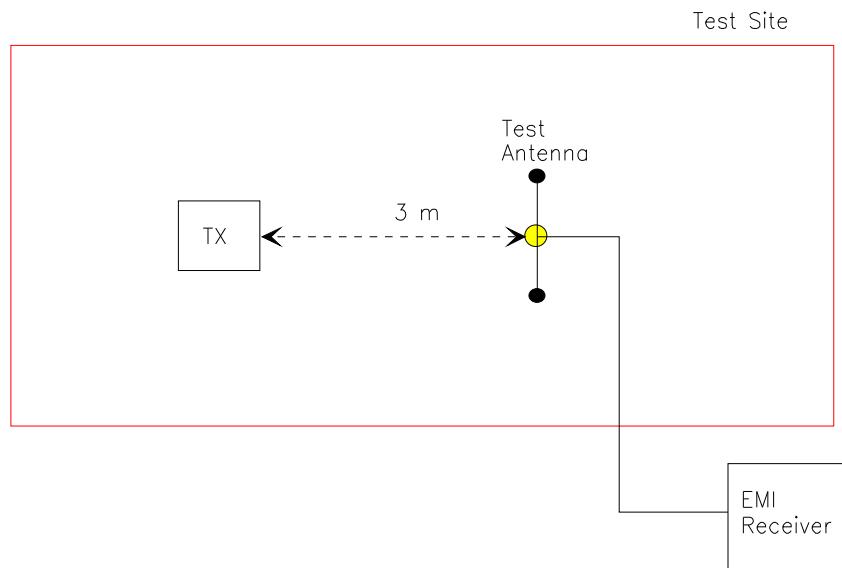

**Figure 2**

