

Invisible Fence[®] Brand

User Guide



GPS Flex™ Fence

Contents

[What you have](#)

[What you need](#)

[Set up your fence](#)

[Fit the collar](#)

[Train your pet](#)

[How it works](#)

[Fence planning tips](#)

[Get to know your system](#)

[Collar front](#)

[Collar back](#)

[Charging base front](#)

[Charging base back](#)

[Plugging in the charging base](#)

[Charging the collar](#)

[Turning the collar on and off](#)

[Understanding the collar LEDs](#)

[Understanding the charging base LED](#)

[Using the test light tool](#)

[Resetting the collar](#)

[Resetting the charging base](#)

What you have



Collar with long contact points




Charging base



USB power cable and adaptor



Test light tool



Short contact points

What you need

- Wireless router (2.4 GHz)
- High-speed internet connection
- Smartphone
- Scissors
- Non-metallic collar and leash (for training)

Important:

- We do not recommend the fence system for dogs with a history of aggressive behavior.
- The collar may be too large for dogs under 10 pounds.

Set up your fence

1



Open the Invisible Fence® GPS Collar app.

Follow the on-screen prompts to create an account and sign into the app. You will need a valid email address.


Once you are signed into the app, tap **Add Product** and then follow the on-screen prompts to set up the base unit, onboard your collar and create your first boundary.

To learn how the fence system works and plan the placement of your boundary, see:

- [How it works](#)
- [Fence planning tips](#)

Fit the collar

2

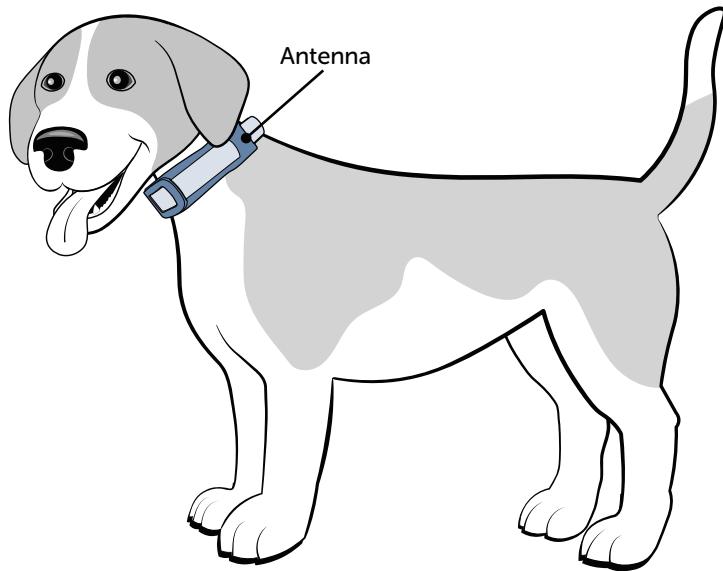

After you have set up and tested your fence using the app, fit the collar to your dog. With the collar turned off and your dog standing comfortably, place the collar high on his neck, just behind his ears. The collar LEDs should point up.

Make sure the contact points are touching your dog's skin. If your dog has long or thick hair, you may need to trim (not shave) the hair around the contact points. If your dog is very short-haired or hairless, you may want to replace the long contact points that came on the collar with the short contact points provided (you can use the provided test light tool as a contact point wrench).


Important: Check the tightness of the collar by inserting one finger between the end of a contact point and your dog's skin. The fit should be snug but not constricting. The antenna may pull away from your dog's neck a little bit even when the collar is fit correctly.

Once you are satisfied with the fit of the collar, remove it from your dog and trim the excess strap, making sure to allow room for growth or a thicker winter coat.

Important: Remove the collar from your dog when he comes inside. Do not leave the collar on your dog for more than 12 hours a day, and never attach a leash or ID tag to it — use a separate collar or harness for that. Please read the customer care guide for more important safety information about how to fit and use the collar.

Train your pet

3

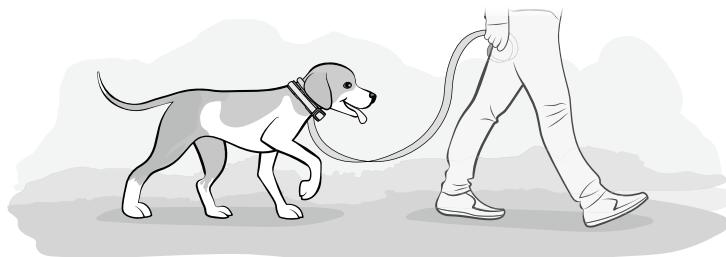


Remove the collar from your dog. With the collar turned on and connected, open your dog's pet profile in the app and choose the desired correction level: tone and vibration only or static correction levels 1 through 10. Take care to choose the best correction level for your dog's temperament.

Follow the steps in the training guide to train your dog to understand and respect the boundary. Your dog should be old enough to recognize basic obedience commands such as "sit" and "stay" (approximately 6 months or older).

Whether your pet loves rolling on his back in the grass or playing a game of fetch, the Invisible Fence® Brand GPS Flex™ Fence will help keep him safe while he enjoys the great outdoors.

How it works

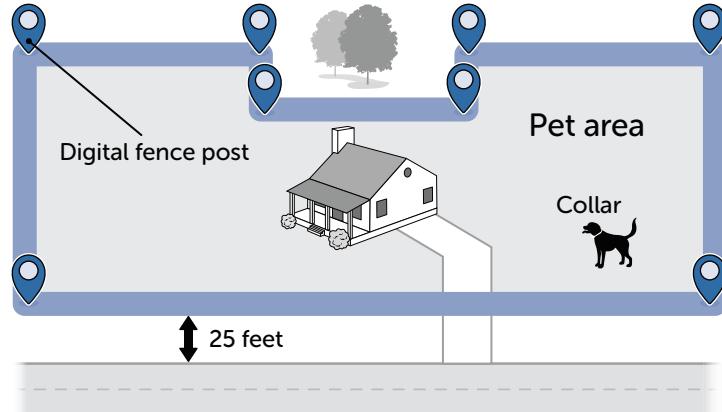

The GPS Flex™ Fence uses GPS technology to keep your dog within a boundary you design. The system consists of three main parts: the Invisible Fence® GPS Collar app, the charging base and the tracking collar.

To set up the system, you will download the Invisible Fence® GPS Collar app on your phone and then follow the steps in the app to connect your system and create your first boundary. As part of this process, you will be required to select a subscription plan.

The boundary will be saved to the collar. Your dog will wear the collar, and once trained, will be allowed to roam freely inside the boundary or pet area. If your dog tries to leave the pet area, the collar will vibrate and sound a warning tone and then deliver a safe static correction through contact points touching your dog's neck. The static correction is designed to get your dog's attention and prompt him to return to the pet area.

The system allows you to save an unlimited number of custom boundaries and switch between them as needed. You can also turn off the boundaries and use the collar as a tracking device only.

Important: Remember to take the collar off your dog any time you take him out of the pet area or transition between boundaries.


If your dog escapes the pet area, the app will notify you and then provide real-time tracking data so you can see where your pet is and take steps to bring him home safely.

CAUTION: App notifications are dependent on cellular connections. Should signals be intermittent or interrupted for any reason, or if your own phone service is not functional for any reason, you will not receive desired notices from the system in a timely manner or at all. Therefore, you should not rely upon phone notifications alone for the safe containment of your pet.

Fence planning tips

Keep the following guidelines in mind as you plan your boundaries:


- If your dog is allowed in the house or garage, the boundary must surround the house or garage.
- Digital fence posts must be placed at least 25 feet *per story* away from any structure. For example, to create a boundary that encloses a one-story detached garage and a two-story house, you would need to place digital fence posts at least 25 feet away from the garage and at least 50 feet away from the house. For reference, 25 feet is a little less than two car lengths, or the length of a standard parking space.

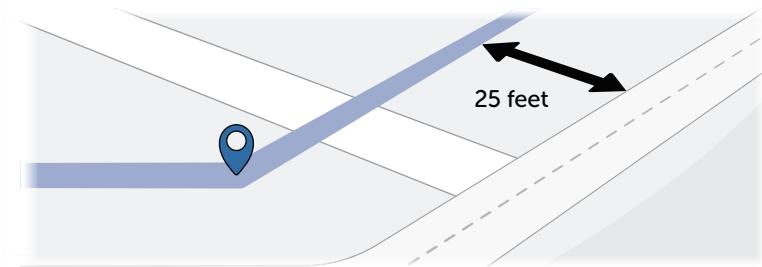

- To ensure your pet's safety, place all digital fence posts at least 25 feet away from any roads or other dangerous areas.




- Opposing lines of digital fence posts must be at least 35 feet away from one another, to avoid creating areas too narrow for your dog to pass through without being corrected.

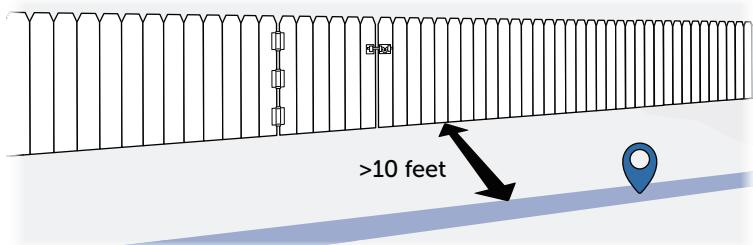


- If a physical fence exists along the desired boundary, place the digital fence posts at least 10 feet outside of the physical fence. This allows your dog the most usable area inside the physical fence.

Get to know your system

Collar front

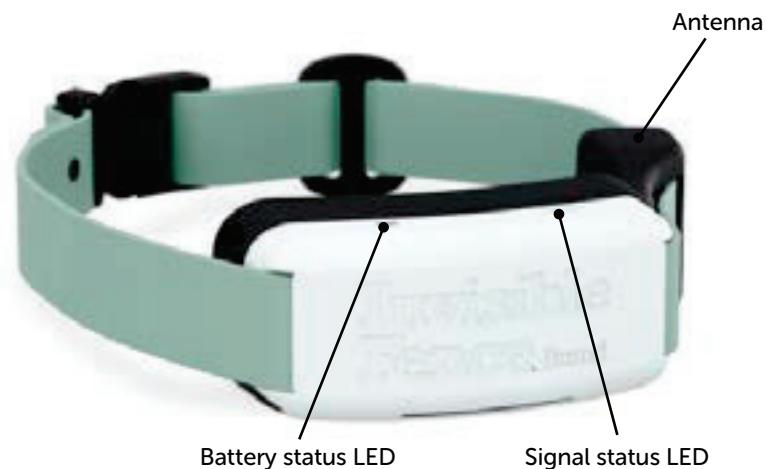


Collar back

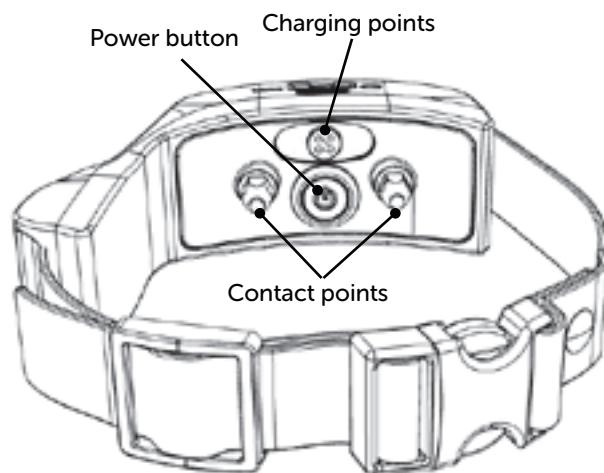

Charging base front

Charging base back

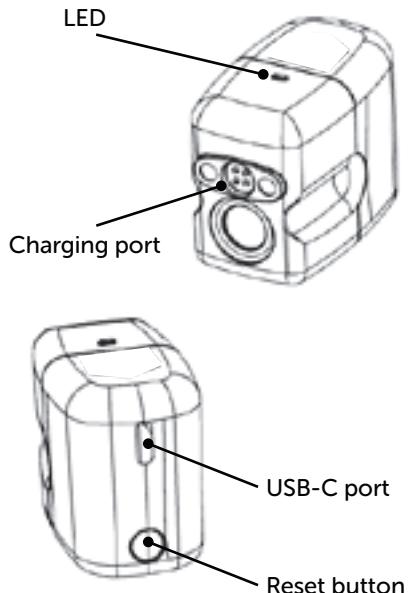

Plugging in the charging base

To plug in the charging base:

1. Connect the USB power cable to the USB-C port on the back of the charging base.
2. Connect the other end of the USB power cable to the provided USB power adaptor.
Using a power adaptor other than the one provided may cause the collar to charge more slowly.
3. Plug the USB power adaptor into a standard electrical outlet indoors.

Charging the collar

To charge the collar:

1. Connect the collar to the charging base, making sure the charging points on the collar (above the power button) match up with the magnetic charging port on the base.

The collar will beep low to high when connected to the charging base. The collar's battery status LED will pulse green when the collar is charging and will glow solid green when charging is complete.

Important: The charging base will apply any firmware updates to the collar while it is charging. Both collar LEDs will slowly pulse white when an update is in progress. **Do not remove the collar from the charging base until the update is complete.**

2. When the collar is fully charged, remove it from the charging base. The collar will beep high to low when removed.

During use, the battery status LED will flash once every 4 seconds (green, yellow, or red) to indicate battery status.

Each charge can last up to 5 days depending on frequency of use.

Turning the collar on and off

To turn the collar on, press and hold the power button for 1 second. The collar will beep low to high and the battery status LED will flash green one time to indicate the collar is turned on.

To turn the collar off, press and hold the power button for 3 seconds. The collar will beep high to low and the battery status LED will glow red. This LED will remain lit until the collar disconnects from LTE and turns off; this can take up to 2 minutes.

Understanding the collar LEDs

During normal operation, the battery status LED flashes once every 4 seconds to indicate the collar's current battery charge:

Battery status LED only		
LED color	Pattern	Meaning
Green	Blip ¹	The battery has sufficient charge.
Yellow	Blip ¹	The battery is low (less than 25% charged).
Red	Blip ¹	The battery is critically low (less than 10% charged); charge immediately.

¹ *Blip: One flash every 4 seconds*

The signal status LED provides information about the collar's connection to GPS and LTE. This LED will only illuminate after you have onboarded the collar and saved your first fence.

Signal status LED only		
LED color	Pattern	Meaning
Green	Pulse ¹	The collar is searching for GPS and LTE.
Red	Slow blink ²	The collar is not receiving GPS or LTE.
Off (after searching for GPS and LTE)	N/A	The collar is connected to GPS and LTE.

¹ *Pulse: One pulse lighting up and turning off every 2 seconds*

² *Slow blink: One blink per second*

The battery status LED and the signal status LED will illuminate simultaneously to provide Bluetooth pairing information or to alert you to a system error:

Both collar LEDs		
LED color	Pattern	Meaning
Blue	Pulse ¹	The collar is in Bluetooth pairing mode.
	Solid	The collar is paired to the phone via Bluetooth.
Red	Solid (with continuous tone)	An error has been detected and the boundary is off. To mute the tone, press the power button. Both collar LEDs will continue glowing red until the error is resolved.

¹ Pulse: One pulse lighting up and turning off every 2 seconds

When the collar is connected to the charging base, the battery status LED and the signal status LED will illuminate simultaneously to provide charging status as well as the status of any firmware updates:

Collar on charging base		
LED color (both collar LEDs)	Pattern	Meaning
Blue	Slow blink ¹	The collar is properly connected to the charging base and is charging.
	Solid ²	The collar is fully charged.
White	Pulse	The collar is receiving a firmware update. Do not remove the collar from the charging base until the update is complete.

¹ Slow blink: One blink per second

² Pulse: One pulse lighting up and turning off every 2 seconds

Understanding the charging base LED

The LED on the charging base provides information about the charging base's connection and update status, as well as any system errors.

LED color	Pattern	Meaning
Blue	Pulse ¹	The charging base is in Bluetooth pairing mode.
	Solid	The phone is connected to the charging base via Bluetooth.
Green	Fast blink ²	The charging base is connected to Wi-Fi but not the internet.
	Pulse ¹	The charging base is provisioned/trying to connect.
	Solid	The charging base is connected to Wi-Fi and the internet.
Red	Fast blink ²	Incorrect password entered.
	Solid	An error has been detected. The charging base LED will remain solid red until the error is resolved or the charging base is unplugged.
White	Pulse ¹	The charging base is receiving a firmware update.

¹ Pulse: One pulse lighting up and turning off every 2 seconds

² Fast blink: Three flashes per second

Using the test light tool

You can use the test light tool to check your collar for correction without touching the contact points yourself.

1. Make sure the collar is fully charged.
2. Set the correction level to 2 or above.
3. Verify the collar is receiving GPS data.

The signal status LED will slowly pulse green when searching for GPS and LTE, and will turn off when the connection is made. If the collar is unable to connect to GPS and LTE, the signal status LED will slowly blink red.

4. Hold the collar contact points against the wires on the test light tool.

5. Holding the collar with the antenna facing the sky, walk toward the boundary zone.

The collar will vibrate and sound a warning tone and then deliver a static correction through the contact points. The test light tool will flash when the static correction is issued.

6. After testing the collar, save the test light for future use.

Resetting the collar

Use the power button on the collar to reset it if needed. There are two types of reset:

Reset type and description	Reset instructions
Bluetooth pairing: Places the collar in Bluetooth pairing mode.	With the collar turned on, press and hold the power button for 1 second. The battery status LED and the signal status LED will slowly pulse blue to indicate that the collar is in Bluetooth pairing mode.
Factory reset: Returns the collar to factory settings.	With the collar turned off, press and hold the power button continuously for 20 seconds. As you hold the button, you will see the battery status LED glow green for 4 seconds, then both collar LEDs slowly pulsing red. Do not release the power button until you see the LEDs change to solid red (not pulsing). The LEDs will continue glowing red until the reset is complete; this can take up to 10 minutes. Important: Do not press the collar power button or connect the collar to the charging base until the collar LEDs blink green three times, indicating the reset is complete.

Resetting the charging base

Use the reset button on the back of the charging base to reset it if needed. There are two types of reset:

Reset type and description	Reset instructions
Wi-Fi reset: Resets the Wi-Fi module and erases your Wi-Fi credentials.	Press and hold the reset button continuously for 5 seconds. You will see the charging base LED pulse green and then start blinking red. Release the button as soon as the LED turns red.
Factory reset: Erases your Wi-Fi credentials, returns the charging base to factory settings, and activates BLE provisioning mode.	Press and hold the reset button continuously until you see the charging base LED pulse green for 5 seconds, blink red for 15 seconds, and then turn off (~20 seconds total). The charging base LED will remain off during the reset. When the reset is complete, the charging base will turn back on and the charging base LED will slowly pulse blue to indicate Bluetooth pairing mode.

GPS Flex™

Fence

1-Year Limited Warranty | ©2025 Radio Systems Corporation
400-XXXX

Invisible Fence® Brand

The Invisible Fence® Brand GPS Flex Fence is NOT a solid barrier. The system is designed to act as a deterrent to remind pets by static correction to remain in the boundary established. It is important that you reinforce training with your pet on a regular basis. Since the tolerance level to static correction varies from pet to pet, Radio Systems Corporation CANNOT guarantee that the system will, in all cases, keep a pet within the established boundary. Not all pets can be trained to avoid crossing the boundary. Therefore, if you have reason to believe that your pet may pose a danger to others or harm himself if he is not kept from crossing the boundaries, you should NOT rely solely upon the system to confine your pet. Radio Systems Corporation shall NOT be liable for any property damage, economic loss or any consequential damages, sustained as a result of any animal crossing the boundary.

WARNING

- 1. RELIANCE ON SYSTEM TO CONTAIN PET:** Sometimes even a properly trained pet may cross the boundary. Therefore, Radio Systems Corporation and Invisible Fence® Brand Dealers cannot guarantee that the system will, in all cases, keep Client's pet within the established boundary. Accordingly, if Client has reason to believe that his or her pet may pose a danger to others or harm itself, whether inside or outside of its boundaries, Client should not rely solely upon this method of containment.
- 2. TRAINING:** Proper training of your pet is essential to successfully using the system. During the first 3 weeks of training, do not use the system without direct supervision of your pet.
- 3. INTRUDERS:** Invisible Fence® Brand Pet Containment will not keep people or other animals from entering your pet's containment area. If you feel your pet will not be safe from outside visitors/intruders (human or animal), you should not rely solely upon the containment system.

- 4. AGGRESSIVE BEHAVIOR:** Client is at all times solely responsible for their pet's behavior. Client should always be alert for growling, snarling, biting, or other aggressive behaviors by any pet using the system, especially during training. If any such behavior is observed, Client should immediately stop using the system, remove the Computer Collar® unit or GPS Mobile Collar unit, unplug the control panel, and contact Invisible Fence Brand. Client should find another method to safely contain their pet.
- 5. SKIN IRRITATION:** A collar worn too long or fitted too tightly on the pet's neck may cause skin damage, and in rare instances a pet is allergic to the collar. This condition may range from redness to pressure ulcers and is known as pressure necrosis (similar to bed sores). Check the tightness of the receiver collar unit on a regular basis. Remove your pet's receiver collar unit each night to decrease irritation the collar may cause to your pet's skin. Check its tightness each time you feed your pet by removing the collar and then placing it back on your pet. Client should never leave the collar on your pet for more than 12 hours at a time.
 - When possible, reposition the collar on the pet's neck every 1-2 hours
 - Never connect a leash to a collar with contact points. It will cause excessive pressure on the contact points
 - When connecting a leash to a separate collar, do not allow it to put pressure on the receiver collar
 - Wash the dog's neck area and the contact points of the collar weekly with a damp cloth
 - Examine the contact area daily for signs of a rash or sore
 - If rash or sore is found, discontinue using this product until the skin has healed
 - If the condition persists beyond 48 hours, see your veterinarian
 - For additional information on bed sores and pressure necrosis, please visit our website

Warranty Information

LIMITED WARRANTY: INVISIBLE FENCE® BRAND warrants that it will repair or replace, at its discretion, Invisible Fence® Brand products which prove defective by reason of improper workmanship and/or material for the period of time specified below. All warranties in this agreement are granted for the sole use of original client and are not transferable. Any modifications or alterations to the system may result in the denial of a warranty claim. Client's sole remedy for any breach of the limited warranties described below shall be to have the defective equipment repaired or replaced with the same model or an upgraded version, at Invisible Fence® Brand's discretion.

1-YEAR LIMITED WARRANTY - Invisible Fence® Brand GPS Containment is warranted for a period of one (1) year from the date of original purchase at retail. Exception - Broken or spun posts are not covered under warranty.

EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, NO OTHER WARRANTIES, WHETHER EXPRESSED OR IMPLIED, OTHER THAN THOSE PROVIDED IN WRITING HEREIN, SHALL APPLY TO THIS SYSTEM. INVISIBLE FENCE® BRAND DEALERS, AND COMPANY SHALL NOT BE LIABLE FOR ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE FOR ANY PERIOD IN EXCESS OF THE PERIODS OF THE EXPRESS WARRANTIES PROVIDED ABOVE. IN ADDITION, UNDER NO CIRCUMSTANCES SHALL INVISIBLE FENCE® BRAND DEALERS, OR INVISIBLE FENCE® BRAND BE LIABLE FOR PROPERTY DAMAGE, ECONOMIC LOSS, OR ANY INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES SUSTAINED IN CONNECTION WITH SAID SYSTEM. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, OR DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS OR EXCLUSIONS MAY NOT APPLY TO YOU.

INVISIBLE FENCE® BRAND NEITHER ASSUMES OR AUTHORIZES ANY REPRESENTATIVE OR OTHER PERSON TO ASSUME FOR IT ANY OBLIGATION OR LIABILITY OTHER THAN SUCH AS IS EXPRESSLY SET FORTH HEREIN. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.



Important Recycling Advice

Please respect the Waste Electrical and Electronic Equipment regulations in your country. This equipment must be recycled. If you no longer require this equipment, do not place it in the normal municipal waste system. Please return it to where it was purchased so it can be placed in our recycling system. If this is not possible, please contact your Invisible Fence® Brand Dealer.

FCC Compliance:

Contains FCC ID: QOQ-GM240S and Contains IC: 5123A-GM240S (mobile collar)

Contains FCC ID: 2AC7Z-ESP32WROVERE and

Contains IC: 21098-ESPWROVERE (Charging block)

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

CAUTION Modification or changes to this equipment not expressly approved by Radio Systems Corporation may void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and Computer Collar® Unit.
- Connect the equipment into an outlet on a circuit different from that to which the Computer Collar® Unit is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. To maintain compliance with FCC's RF exposure guidelines, the distance must be at least 20 cm between the radiator and your body, and fully supported by the operating and installation.

Terms of Use and Limitation of Liability

1. TERMS OF USE

The use of this product is subject to your acceptance without modification of the terms, conditions and notices contained with this product. Use of this product implies acceptance of all such terms, conditions, and notices. If you do not wish to accept these terms, conditions, and notices, please return the product, unused, in its original packaging and at your own cost and risk to the relevant Customer Care location together with proof of purchase for a full refund.

2. PROPER USE

Proper Use includes, without limitation, reviewing the entire Product Manual and any specific safety information statements. The specific temperament or size/weight of your pet may not be suitable for this product. If you are unsure whether this product is appropriate for your pet, please consult your veterinarian or certified trainer prior to use. For products used with pets where training is desired, Radio Systems Corporation recommends that these training products are not used if your pet is aggressive and accepts no liability for determining suitability in individual cases.

3. NO UNLAWFUL OR PROHIBITED USE

This product is designed for use with pets only. This product is not intended to harm, injure or provoke. Using this product in a way that is not intended could result in violation of Federal, State or local laws.

4. LIMITATION OF LIABILITY

In no event shall Radio Systems Corporation or any of its associated companies be liable for (i) any direct, indirect, punitive, incidental, special or consequential damage and/or (ii) any loss or damages whatsoever arising out of or connected with the use or misuse of this product. The Purchaser assumes all risks and liability from the use of this product to the fullest extent permissible by law.

5. MODIFICATION OF TERMS AND CONDITIONS

Radio Systems Corporation reserves the right to change the terms, conditions and notices governing this product from time to time. If such changes have been notified to you prior to your use of this product, they shall be binding on you as if incorporated herein.

- Cela entraîne une pression excessive sur les points de contact.
- Lorsque vous attachez une laisse à un collier distinct, veillez à ce qu'il n'exerce aucune pression sur le collier-récepteur.
- Lavez chaque semaine la zone du cou du chien et les points de contact du collier avec un chiffon humide.
- Vérifiez chaque jour s'il y a des signes de rougeur ou d'irritation à l'endroit où le collier est en contact avec la peau.
- En cas de rougeur ou d'irritation, cessez d'utiliser ce produit jusqu'à ce que la peau soit guérie.
- Si le problème persiste après 48 heures, consultez un vétérinaire.
- Pour plus d'informations sur les escarres et la nécrose de pression, veuillez visiter notre site Web.

Informations sur la garantie

"GARANTIE LIMITÉE" Invisible Fence® Brand garantit qu'il réparera ou remplacera, à sa discréction, les produits de la marque Invisible Fence® qui s'avèrent défectueux en raison d'un mauvais travail ou de matériaux inadéquats pour la période spécifiée ci-dessous. Toutes les garanties de cet accord sont accordées uniquement à l'utilisateur initial et ne sont pas transférables. Toute modification ou altération du système peut entraîner le rejet d'une réclamation au titre de la garantie. Le recours exclusif du client pour toute violation des garanties limitées décrites ci-dessous sera de faire réparer ou remplacer l'équipement défectueux par le même modèle ou une version améliorée, à la discréction de la marque Invisible Fence®. **GARANTIE LIMITÉE D'UN AN** - Le système GPS Containment de la marque Invisible Fence® est garanti pour une durée d'un (1) an à partir de la date d'achat initial au détail. Exception - Les poteaux cassés ou pivotés ne sont pas couverts par la garantie. **SAUF DANS LA MESURE INTERDITE PAR LA LOI APPLICABLE, AUCUNE AUTRE GARANTIE, QU'ELLE SOIT EXPRESSE OU IMPLICITE, AUTRE QUE CELLES FOURNIES PAR ÉCRIT DANS CETTE ENTENTE, NE S'APPLIQUE À CE SYSTÈME. LES REVENDEURS DE LA MARQUE INVISIBLE FENCE® ET LA SOCIÉTÉ NE SONT PAS RESPONSABLES DE TOUTE GARANTIE IMPLICITE DE QUALITÉ MARCHANDE OU D'ADAPTATION À UN USAGE PARTICULIER POUR UNE PÉRIODE DÉPASSANT LES PÉRIODES DE GARANTIES EXPLICITES FOURNIES CI-DESSUS. EN OUTRE, EN AUCUNE CIRCONSTANCE LES REVENDEURS OU LA MARQUE INVISIBLE FENCE® NE SERONT RESPONSABLES DES DOMMAGES MATÉRIELS, DES PERTES ÉCONOMIQUES, OU DE TOUT DOMMAGE INDIRECT, ACCESSOIRE OU CONSÉCUTIF LIÉ À CE SYSTÈME. CERTAINS ÉTATS NE PERMETTENT PAS LES LIMITATIONS DE DURÉE DES GARANTIES IMPLICITES, OU NE PERMETTENT PAS L'EXCLUSION OU LA LIMITATION DES DOMMAGES ACCESSOIRES OU CONSÉCUTIFS, DONC LES LIMITATIONS OU EXCLUSIONS PRÉCÉDENTES PEUVENT NE PAS S'APPLIQUER À VOUS. LA MARQUE INVISIBLE FENCE® N'ASSUME NI N'AUTORISE AUCUN REPRÉSENTANT OU TOUTE AUTRE PERSONNE À ASSUMER POUR ELLE UNE OBLIGATION OU RESPONSABILITÉ AUTRE QUE CELLE EXPRESSEMENT DÉCRITE DANS CETTE ENTENTE. CETTE GARANTIE VOUS CONFÈRE DES DROITS LÉGAUX SPÉCIFIQUES, ET VOUS POUVEZ ÉGALEMENT AVOIR D'AUTRES DROITS QUI VARIENT D'UN ÉTAT À L'AUTRE.**



Conseils importants sur le recyclage

Veuillez respecter les réglementations relatives aux déchets d'équipements électriques et électroniques dans votre pays. Cet équipement doit être recyclé. Si vous n'avez plus besoin de cet équipement, ne le placez pas dans le système de déchets municipaux normal. Veuillez le retourner à l'endroit où il a été acheté afin qu'il puisse être intégré à notre système de recyclage. Si cela n'est pas possible, veuillez contacter votre revendeur de la marque Invisible Fence®.

The Invisible Fence® Brand GPS Flex Fence

Contient ID FCC : QOQ-GM240S et Contient IC : 5123A-GM240S (collier mobile)
Contient ID FCC : 2AC7Z-ESP32WROVERE et
Contient IC : 21098-ESPWROVERE (bloc de charge)

ATTENTION Les modifications ou changements apportés à cet équipement sans l'approbation expresse de Radio Systems Corporation pourraient annuler le droit de l'utilisateur d'utiliser l'équipement.

IC: Canada

Cet appareil contient des émetteurs/récepteurs sans licence qui sont conformes aux normes CNR sans licence d'Innovation, Sciences et Développement économique Canada. Son fonctionnement est soumis aux deux conditions suivantes : (1) l'appareil ne doit pas produire d'interférence, et (2) il doit accepter toute interférence reçue, y compris celle pouvant causer un fonctionnement non désiré de l'appareil.

L'appareil a été évalué pour répondre aux exigences générales en matière d'exposition humaine aux radiofréquences. Pour maintenir la conformité aux directives CNR-102 - Exposition aux radiofréquences (RF), cet équipement doit être installé et utilisé avec une distance minimale de 20 cm entre le radiateur et votre corps.

Conditions d'utilisation et limitation de responsabilité

1. Conditions d'utilisation

L'utilisation de ce produit est sujette à votre acceptation sans modification de l'intégralité des conditions générales et consignes d'utilisation fournies avec ce produit. L'utilisation de ce produit revient à accepter les termes, conditions et consignes d'utilisation. Si vous n'acceptez pas ces conditions générales et consignes d'utilisation, veuillez renvoyer ce produit inutilisé dans son emballage d'origine à vos frais et risques, au service clientèle approprié avec la preuve d'achat, afin d'obtenir un remboursement complet.

2. Utilisation appropriée

Une utilisation appropriée implique, sans s'y limiter, la consultation de l'intégralité du manuel d'utilisation du produit et de toutes les informations spécifiques relatives à la sécurité. Le caractère ou la taille/le poids spécifiques de votre animal ne sont peut-être pas adaptés à ce produit. Si vous n'êtes pas sûr(e) que ce produit est adapté à votre animal de compagnie, veuillez consulter votre vétérinaire ou un éducateur canin certifié avant utilisation. Pour les produits utilisés sur des animaux nécessitant un dressage, Radio Systems Corporation recommande de ne pas les utiliser si votre animal est agressif et ne saurait être tenu pour responsable de leur éventuelle inadéquation selon les cas.

3. Usage illégal ou interdit

Ce produit a été conçu pour les animaux de compagnie uniquement. Ce produit n'est pas destiné à les blesser ni à les provoquer. L'usage de ce produit dans un but autre que celui prévu pourrait entraîner des infractions à la législation nationale.

4. Limitation de responsabilité

Radio Systems Corporation et ses sociétés affiliées ne peuvent en aucun cas être tenus pour responsables (i) des dommages directs, indirects, punitifs, accidentels, spéciaux ou secondaires, ni (ii) des pertes ou dommages consécutifs ou associés à l'usage ou à l'utilisation inappropriée de ce produit. L'acheteur assume tous les risques et responsabilités en rapport avec l'utilisation de ce produit, dans la pleine mesure prévue par la loi.

5. Modification des conditions générales

Radio Systems Corporation se réserve le droit de modifier ponctuellement les termes, les conditions et les consignes applicables à ce produit. Si des modifications ont été effectuées avant votre utilisation de ce produit, celles-ci seront contraignantes pour vous, comme si elles figuraient dans le présent document.

**Invisible
Fence® Brand**

ENGLISH

The Invisible Fence® Brand GPS Flex Fence is NOT a solid barrier. The system is designed to act as a deterrent to remind pets by static correction to remain in the boundary established. It is important that you reinforce training with your pet on a regular basis. Since the tolerance level to static correction varies from pet to pet, Radio Systems Corporation CANNOT guarantee that the system will, in all cases, keep a pet within the established boundary. Not all pets can be trained to avoid crossing the boundary. Therefore, if you have reason to believe that your pet may pose a danger to others or harm himself if he is not kept from crossing the boundaries, you should NOT rely solely upon the system to confine your pet. Radio Systems Corporation shall NOT be liable for any property damage, economic loss or any consequential damages, sustained as a result of any animal crossing the boundary.

⚠️WARNING

1. RELIANCE ON SYSTEM TO CONTAIN PET: Sometimes even a properly trained pet may cross the boundary. Therefore, Radio Systems Corporation and Invisible Fence® Brand Dealers cannot guarantee that the system will, in all cases, keep Client's pet within the established boundary. Accordingly, if Client has reason to believe that his or her pet may pose a danger to others or harm itself, whether inside or outside of its boundaries, Client should not rely solely upon this method of containment.

2. TRAINING: Proper training of your pet is essential to successfully using the system. During the first 3 weeks of training, do not use the system without direct supervision of your pet.

3. INTRUDERS: Invisible Fence® Brand Pet Containment will not keep people or other animals from entering your pet's containment area. If you feel your pet will not be safe from outside visitors/intruders (human or animal), you should not rely solely upon the containment system.

4. AGGRESSIVE BEHAVIOR: Client is at all times solely responsible for their pet's behavior. Client should always be alert for growling, snarling, biting, or other aggressive behaviors by any pet using the system, especially during training. If any such behavior is observed, Client should immediately stop using the system, remove the Computer Collar® unit or GPS Mobile

Collar unit, unplug the control panel, and contact Invisible Fence Brand. Client should find another method to safely contain their pet.

5. SKIN IRRITATION: A collar worn too long or fitted too tightly on the pet's neck may cause skin damage, and in rare instances a pet is allergic to the collar. This condition may range from redness to pressure ulcers and is known as pressure necrosis (similar to bed sores). Check the tightness of the receiver collar unit on a regular basis. Remove your pet's receiver collar unit each night to decrease irritation the collar may cause to your pet's skin. Check its tightness each time you feed your pet by removing the collar and then placing it back on your pet. Client should never leave the collar on your pet for more than 12 hours at a time.

- When possible, reposition the collar on the pet's neck every 1-2 hours
- Never connect a leash to a collar with contact points. It will cause excessive pressure on the contact points
- When connecting a leash to a separate collar, do not allow it to put pressure on the receiver collar
- Wash the dog's neck area and the contact points of the collar weekly with a damp cloth
- Examine the contact area daily for signs of a rash or sore
- If a rash or sore is found, discontinue using this product until the skin has healed
- If the condition persists beyond 48 hours, see your veterinarian
- For additional information on bed sores and pressure necrosis, please visit our website

Warranty Information

LIMITED WARRANTY: INVISIBLE FENCE® BRAND warrants that it will repair or replace, at its discretion, Invisible Fence® Brand products which prove defective by reason of improper workmanship and/or material for the period of time specified below. All warranties in this agreement are granted for the sole use of original client and are not transferable. Any modifications or alterations to the system may result in the denial of a warranty claim. Client's sole remedy for any breach of the limited warranties described below shall be to have the defective equipment repaired or replaced with the same model or an upgraded version, at Invisible Fence® Brand's discretion.

1-YEAR LIMITED WARRANTY - Invisible Fence® Brand GPS Containment is warranted for a period of one (1) year from the date of original purchase at retail. Exception - Broken or spun posts are not covered under warranty.

EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, NO OTHER WARRANTIES, WHETHER EXPRESSED OR IMPLIED, OTHER THAN THOSE PROVIDED IN WRITING HEREIN, SHALL APPLY TO THIS SYSTEM. INVISIBLE FENCE® BRAND DEALERS, AND COMPANY SHALL NOT BE LIABLE FOR ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE FOR ANY PERIOD IN EXCESS OF THE PERIODS OF THE EXPRESS WARRANTIES PROVIDED ABOVE. IN ADDITION, UNDER NO CIRCUMSTANCES SHALL INVISIBLE FENCE® BRAND DEALERS, OR INVISIBLE FENCE® BRAND BE LIABLE FOR PROPERTY DAMAGE, ECONOMIC LOSS, OR ANY INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES SUSTAINED IN CONNECTION WITH SAID SYSTEM. SOME STATES DO NOT ALLOW LIMITATIONS ON HOW LONG AN IMPLIED WARRANTY LASTS, OR DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS OR EXCLUSIONS MAY NOT APPLY TO YOU.

INVISIBLE FENCE® BRAND NEITHER ASSUMES OR AUTHORIZES ANY REPRESENTATIVE OR OTHER PERSON TO ASSUME FOR IT ANY OBLIGATION OR LIABILITY OTHER THAN SUCH AS IS EXPRESSLY SET FORTH HEREIN. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY FROM STATE TO STATE.



Important Recycling Advice

Please respect the Waste Electrical and Electronic Equipment regulations in your country. This equipment must be recycled. If you no longer require this equipment, do not place it in the normal municipal waste system. Please return it to where it was purchased so it can be placed in our recycling system. If this is not possible, please contact your Invisible Fence® Brand Dealer.

The Invisible Fence® Brand GPS Flex Fence

Contains FCC ID: QOQ-GM240S and Contains IC: 5123A-GM240S (mobile collar)

Contains FCC ID: 2AC7Z-ESP32WROVERE and Contains IC: 21098-ESPWROVERE (charging block)

CAUTION Modification or changes to this equipment not expressly approved by Radio Systems Corporation may void the user's authority to operate the equipment.

IC: Canada

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions: (1) This device may not cause interference. (2) This device must accept any interference, including interference that may cause undesired operation of the device.

The device has been evaluated to meet general RF exposure requirement. To maintain compliance with RSS-102 - Radio Frequency (RF) Exposure guidelines, this equipment should be installed and operated with a minimum distance of 20cm between the radiator and your body.

Terms of Use and Limitation of Liability

1. TERMS OF USE

The use of this product is subject to your acceptance without modification of the terms, conditions and notices contained with this product. Use of this product implies acceptance of all such terms, conditions, and notices. If you do not wish to accept these terms, conditions, and notices, please return the product, unused, in its original packaging and at your own cost and risk to the relevant Customer Care location together with proof of purchase for a full refund.

2. PROPER USE

Proper Use includes, without limitation, reviewing the entire Product Manual and any specific safety information statements. The specific temperament or size/weight of your pet may not be suitable for this product. If you are unsure whether this product is appropriate for your pet, please consult your veterinarian or certified trainer prior to use. For products used with pets where training is desired, Radio Systems Corporation recommends that these training products are not used if your pet is aggressive and accepts no liability for determining suitability in individual cases.

3. NO UNLAWFUL OR PROHIBITED USE

This product is designed for use with pets only. This product is not intended to harm, injure or provoke. Using this product in a way that is not intended could result in violation of Federal, State or local laws.

4. LIMITATION OF LIABILITY

In no event shall Radio Systems Corporation or any of its associated companies be liable for (i) any direct, indirect, punitive, incidental, special or consequential damage and/or (ii) any loss or damages whatsoever arising out of or connected with the use or misuse of this product. The Purchaser assumes all risks and liability from the use of this product to the fullest extent permissible by law.

5. MODIFICATION OF TERMS AND CONDITIONS

Radio Systems Corporation reserves the right to change the terms, conditions and notices governing this product from time to time. If such changes have been notified to you prior to your use of this product, they shall be binding on you as if incorporated herein.

FRANÇAIS

The Invisible Fence® Brand GPS Flex Fence n'est PAS une barrière solide. Le dispositif est conçu pour dissuader l'animal de sortir de la zone autorisée à l'aide d'une correction statique. Il est important que vous renforcez régulièrement le dressage de votre animal. Le niveau de tolérance de la correction statique varie d'un animal à l'autre. Ainsi, le Radio Systems Corporation NE PEUT garantir que le système permettra de garder votre animal dans la zone autorisée en toute circonstance. Tous les animaux ne peuvent pas être dressés de manière à rester dans la zone autorisée. Par conséquent, si vous avez des raisons de croire que votre animal peut représenter un danger pour les autres ou se faire du mal s'il n'est pas empêché de franchir la limite, vous ne devez PAS vous fier uniquement à ce système pour confiner votre animal. Radio Systems Corporation ne sera PAS responsable des dommages matériels, des pertes économiques ou des dommages indirects subis à la suite du franchissement de la limite par un animal.

⚠️AVERTISSEMENT

1. CONFIANCE EN LE SYSTÈME POUR CONFINER L'ANIMAL : Parfois, même un animal correctement entraîné peut franchir la limite. Par conséquent, Radio Systems Corporation et les revendeurs de la marque Invisible Fence® ne peuvent garantir que le système, dans tous les cas, maintiendra l'animal du client à l'intérieur de la limite établie. En conséquence, si le client a des raisons de croire que son animal peut représenter un danger pour les autres ou se blesser, que ce soit à l'intérieur ou à l'extérieur des limites, le client ne doit pas se fier uniquement à cette méthode de confinement.

2. DRESSAGE: Fournir un bon dressage à votre animal est essentiel pour utiliser le système avec succès. Pendant les 3 premières semaines d'entraînement, n'utilisez pas le système sans la surveillance directe de votre chien.

3. INTRUS: Le système de confinement d'animaux domestiques de la marque Invisible Fence® ne permettra pas d'empêcher les personnes ou d'autres animaux d'entrer dans la zone de confinement de votre animal. Si vous pensez que votre animal ne sera pas en sécurité face à des visiteurs ou intrus extérieurs (humains ou animaux), vous ne devriez pas vous fier uniquement au système de confinement.

4. COMPORTEMENT AGRESSIF : Le client est à tout moment seul responsable du comportement de son animal. Le client doit toujours être attentif aux comportements agressifs tels que grognements, rugissements, morsures ou tout autre signe par tout animal utilisant le système, surtout pendant l'entraînement. Si de tels comportements sont observés, le client doit immédiatement arrêter d'utiliser le système, retirer le collier Computer Collar® ou GPS Mobile Collar, débrancher le panneau de contrôle et contacter la marque Invisible Fence®. Le client doit trouver une autre méthode pour confiner son animal en toute sécurité.

5. IRRITATION DE LA PEAU : Un collier porté trop longtemps ou trop serré autour du cou de l'animal peut provoquer des lésions cutanées, et dans de rares cas, un animal peut être allergique au collier. Cette condition peut aller de rougeurs à des ulcères de pression et est appelée nécrose de pression (similaire aux escarres). Vérifiez régulièrement le serrage de l'unité de collier récepteur. Retirez l'unité de collier récepteur de votre animal chaque nuit pour réduire les irritations que le collier peut causer à la peau de votre animal. Vérifiez le serrage à chaque fois que vous nourrissez votre animal en retirant le collier, puis en le remettant. Le client ne doit jamais laisser le collier sur son animal pendant plus de 12 heures consécutives.

- Si possible, repositionnez le collier sur le cou du chien toutes les 1 à 2 heures.
- Ne jamais connecter une laisse à un collier avec des points de contact.