


RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 1(23)
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1

Annex B: Probe and dipole descriptions and calibration certificates

B.1 Probe and measurement chain descriptions and specifications

RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW		
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1	FCC ID L6ARBS20CW

DASY Dosimetric Assessment System by Schmid & Partner Engineering AG

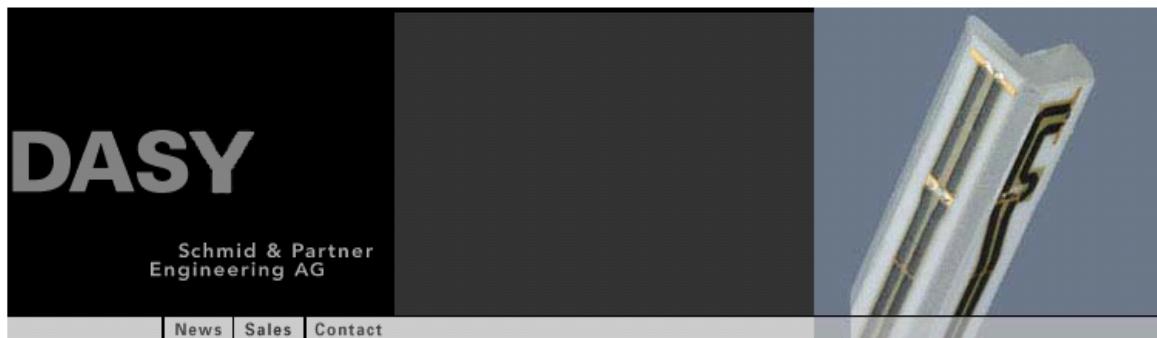

Applications
Support & Downloads
Products
<ul style="list-style-type: none"> ▪ DASY4 Packages ▪ EASY4 ▪ Probes ET3DV6 - Isotropic Dos-Probe ES3DV3 - Isotropic Dos-Probe EX3DV4 - Isotropic Dos-Probe ET1DV3 - D-Probe
<ul style="list-style-type: none"> EUV3 - Universal Vector E-Probe H3DV6 - Isotropic H-Probe HUV4 - Universal Vector H-Probe T1V3 - Temp-Probe DP1 - Dummy-Probe ▪ Data Acquisition System ▪ Software ▪ Phantoms ▪ Robots ▪ Validation Kits & Calibration Dipoles ▪ Hearing Aid Compatibility (HAC) Ext ▪ Tissue Simulating Liquids
SPEAG Home

ER3DV6 ISOTROPIC E-FIELD PROBE FOR GENERAL NEAR-FIELD MEASUREMENTS


[Download Product Flyer \(PDF, 192kB\)](#)

Construction	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycolether)
Calibration	In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$, $k=2$)
Frequency	100 MHz to > 6 GHz; Linearity: ± 0.2 dB (100 MHz to 3 GHz)
Directivity	± 0.2 dB in air (rotation around probe axis) ± 0.4 dB in air (rotation normal to probe axis)
Dynamic Range	2 V/m to > 1000 V/m; Linearity: ± 0.2 dB
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm
Application	General near-field measurements up to 6 GHz Field component measurements Fast automatic scanning in phantoms

<http://www.dasy4.com/er3.htm>

RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW		
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1	FCC ID L6ARBS20CW

DASY Dosimetric Assessment System by Schmid & Partner Engineering AG

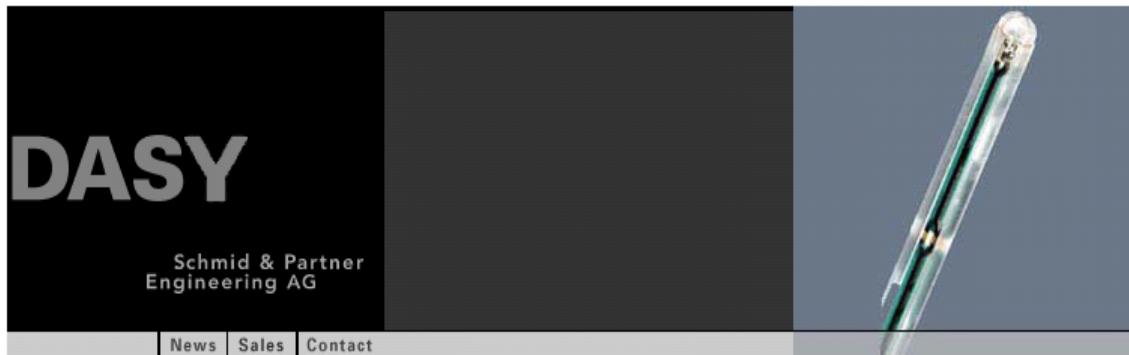

Applications
Support & Downloads
Products
<ul style="list-style-type: none"> ▪ DASY4 Packages ▪ EASY4 ▪ Probes <ul style="list-style-type: none"> ET3DV6 - Isotropic Dos-Probe ES3DV3 - Isotropic Dos-Probe EX3DV4 - Isotropic Dos-Probe ET1DV3 - D-Probe ER3DV6 - Isotropic E-Probe ELUV3 - Universal Vector E-Probe ▪ HUV4 - Universal Vector H-Probe ▪ T1V3 - Temp-Probe ▪ DP1 - Dummy-Probe ▪ Data Acquisition System ▪ Software ▪ Phantoms ▪ Robots ▪ Validation Kits & Calibration Dipoles ▪ Hearing Aid Compatibility (HAC) Ext. ▪ Tissue Simulating Liquids
SPEAG Home

H3DV6 3-DIMENSIONAL H-FIELD PROBE FOR SMALL BAND APPLICATIONS

 [Download Product Flyer \(PDF, 192kB\)](#)

Construction	Three concentric loop sensors with 3.8 mm loop diameters Resistively loaded detector diodes for linear response Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycoether)
Frequency	200 MHz to 3 GHz (absolute accuracy $\pm 6.0\%$, $k=2$); Output linearized
Directivity	± 0.25 dB (spherical isotropy error)
Dynamic Range	10 mA/m to 2 A/m at 1 GHz
E-Field Interference	< 10% at 3 GHz (for plane wave)
Dimensions	Overall length: 330 mm (Tip: 40 mm) Tip diameter: 6 mm (Body: 12 mm) Distance from probe tip to dipole centers: 3 mm
Application	General magnetic near-field measurements up to 3 GHz Field component measurements Surface current measurements Measurements in air or liquids Low interaction with the measured field

<http://www.dasy4.com/h3d.htm>


RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 4(23)	
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1	FCC ID L6ARBS20CW

All measurements were performed to the nearest element point as per the C63.19 standard. Offset distances were entered in the DASY4 software so that the measurement was to the nearest element.



Figures 1 and 2, provided by the manufacturer, illustrate detail of the probe tip and its dimensions.

ER3DV6 E-Field probe: The distances from the probe tip to the closest points on the dipole sensors are 1.45mm for X and Y and 1.25mm for Z. From the probe tip to the center of the sensors is 2.5mm.

H3DV6 H-Field probe: The distance from the probe tip to the closest point of the X, Y and Z loop sensors is 1.1mm. From the probe tip to the center of the sensor is 3.00mm.

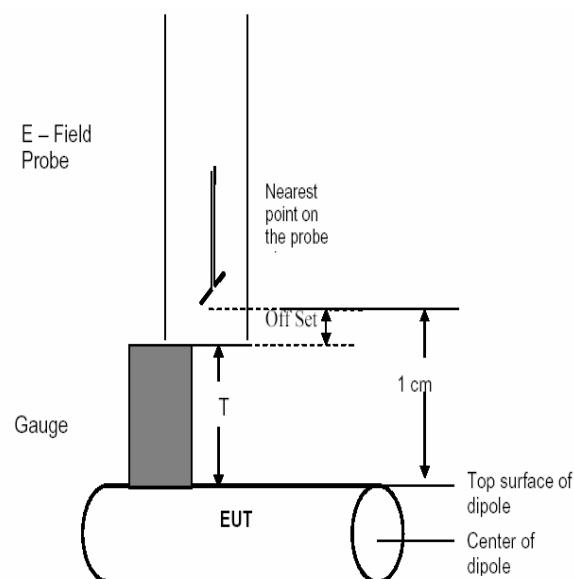

E-Field Probe (ER3DV6)

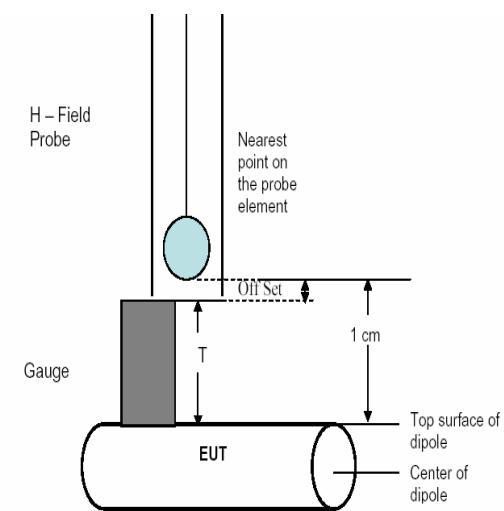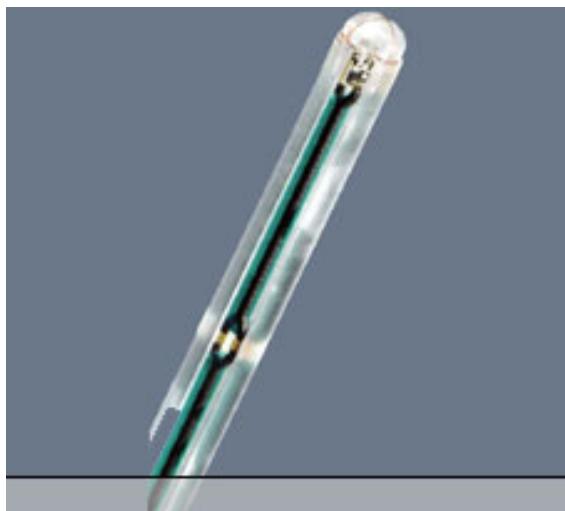

H-Field Probe (H3DV6)

RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 5(23)
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1

The following information is from the system manufacturer user manual describing the process chain:

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i} \quad (20.1)$$

with V_i = compensated signal of channel i $(i = x, y, z)$
 U_i = input signal of channel i $(i = x, y, z)$
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E - fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$\text{H - fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i $(i = x, y, z)$
 $Norm_i$ = sensor sensitivity of channel i $(i = x, y, z)$
 $\mu\text{V}/(\text{V}/\text{m})^2$ for E-field Probes
 $ConvF$ = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2} \quad (20.2)$$

The measurement / integration time per point is > 500 ms, as per the system manufacturer:

The time response of the field probes has been assessed by exposing the probe to a well-controlled field producing signals larger than HAC E- and H-fields of class M4. The signal response time is evaluated as the time required by the system to reach 90% of the expected final value after an on/off switch of the power source with an integration time of 500 ms and a probe response time of < 5 ms. In the current implementation, DASY4 waits longer than 100 ms after having reached the grid point before starting a measurement, i.e., the response time uncertainty is negligible.

If the device under test does not emit a CW signal, the integration time applied to measure the electric field at a specific point may introduce additional uncertainties due to the discretization. The tolerances for the different systems had the worst-case of 2.6%.

RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 6(23)
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1

B.2 Probe and dipole calibration certificates

RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 7(23)
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrerdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RIM**

Certificate No: **ER3-2285_Mar07**

CALIBRATION CERTIFICATE

Object **ER3DV6 - SN:2285**

Calibration procedure(s) **QA CAL-02.v4**
Calibration procedure for E-field probes optimized for close near field evaluations in air

Calibration date: **March 12, 2007**

Condition of the calibrated item **In Tolerance**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41495277	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41498087	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	4-Apr-06 (METAS, No. 251-00558)	Apr-07
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe ER3DV6	SN: 2328	2-Oct-06 (SPEAG, No. ER3-2328_Oct06)	Oct-07
DAE4	SN: 654	21-Jun-06 (SPEAG, No. DAE4-654_Jun06)	Jun-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07
Calibrated by	Name Katja Pokovic	Function Technical Manager	Signature

RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 8(23)
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

NORMx,y,z	sensitivity in free space
DCP	diode compression point
Polarization ϕ	ϕ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- IEEE Std 1309-1996, " IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", 1996.

Methods Applied and Interpretation of Parameters:

- NORM x,y,z** : Assessed for E-field polarization $\vartheta = 0$ for XY sensors and $\vartheta = 90$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide).
- NORM(f) x,y,z = NORM x,y,z * frequency_response** (see Frequency Response Chart).
- DCP x,y,z** : DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency.
- Spherical isotropy (3D deviation from isotropy)**: in a locally homogeneous field realized using an open waveguide setup.
- Sensor Offset**: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- Connector Angle**: The angle is assessed using the information gained by determining the NORM x (no uncertainty required).

RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 9(23)
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1

ER3DV6 SN:2285

March 12, 2007

Probe ER3DV6

SN:2285

Manufactured: September 20, 2002
 Last calibrated: April 27, 2006
 Recalibrated: March 12, 2007

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

 RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 10(23)
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1

ER3DV6 SN:2285

March 12, 2007

DASY - Parameters of Probe: ER3DV6 SN:2285

Sensitivity in Free Space [$\mu\text{V}/(\text{V}/\text{m})^2$] Diode Compression^A

NormX	1.24 \pm 10.1 % (k=2)	DCP X	93 mV
NormY	1.40 \pm 10.1 % (k=2)	DCP Y	93 mV
NormZ	1.58 \pm 10.1 % (k=2)	DCP Z	98 mV

Frequency Correction

X 0.0
Y 0.0
Z 0.0

Sensor Offset (Probe Tip to Sensor Center)

X 2.5 mm
Y 2.5 mm
Z 2.5 mm

Connector Angle -99 °

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor $k=2$, which for a normal distribution corresponds to a coverage probability of approximately 95%.


RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 11(23)
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1

ER3DV6 SN:2285

March 12, 2007

Frequency Response of E-Field

(TEM-Cell:ifi110 EXX, Waveguide R22)

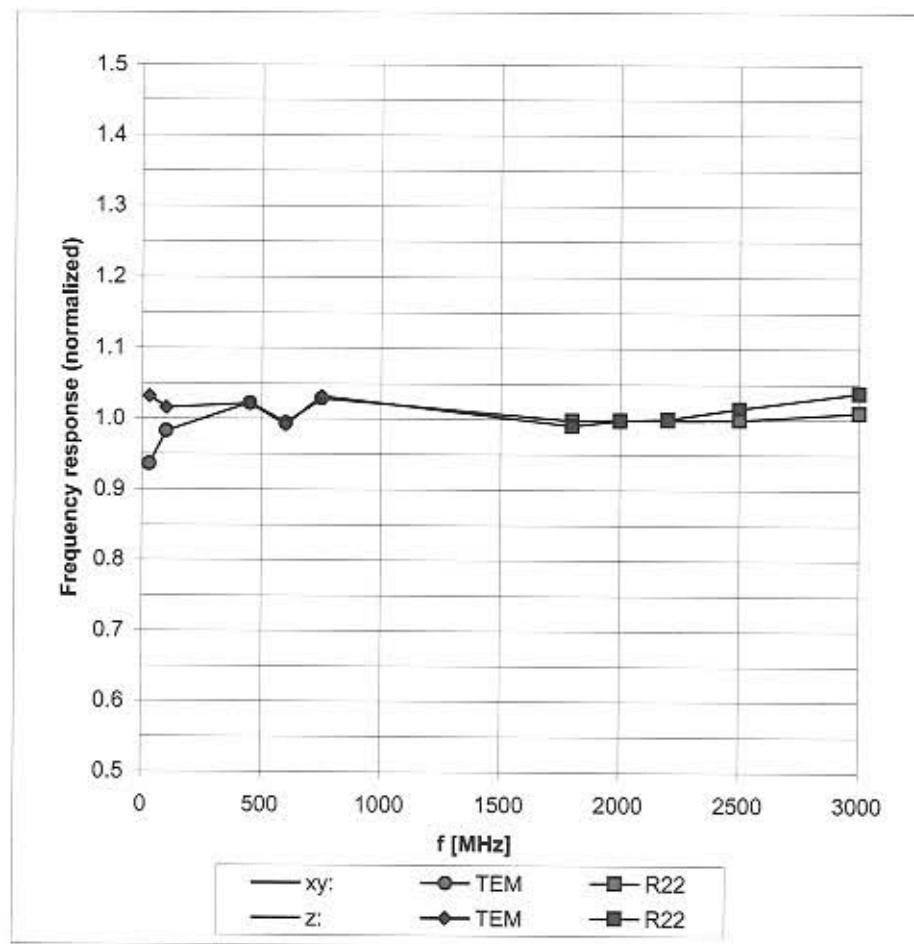

Uncertainty of Frequency Response of E-field: $\pm 6.3\% (k=2)$

Author Data
Daoud Attayi

Dates of Test
21-22 Aug , 2007



Report No
RTS-0736-0708-15 Rev1

FCC ID
L6ARBS20CW



ER3DV6 SN:2285

March 12, 2007

Receiving Pattern (ϕ), $\theta = 0^\circ$

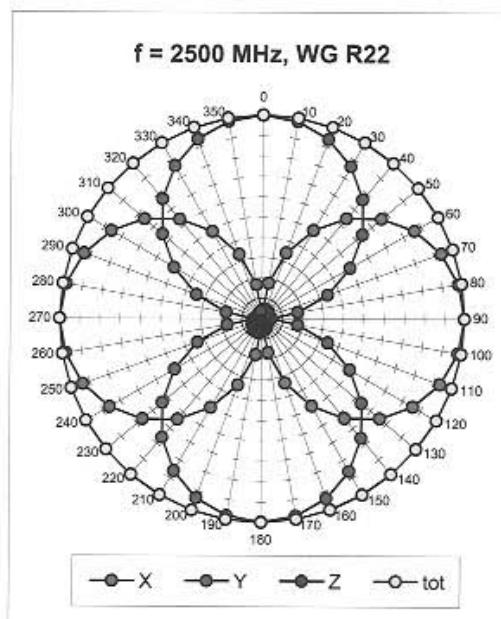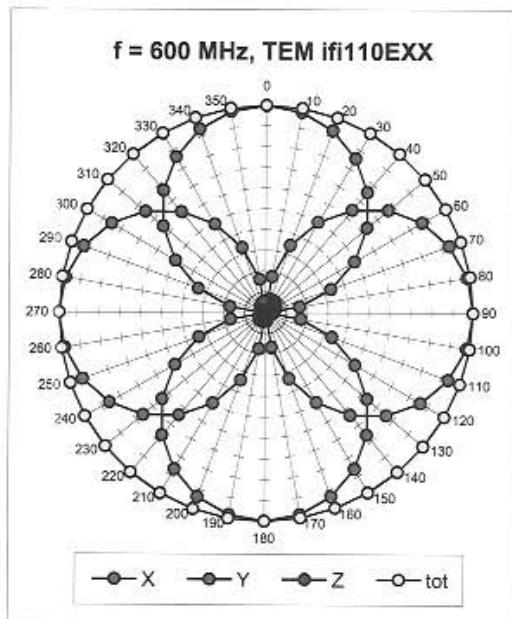

Receiving Pattern (ϕ), $\theta = 90^\circ$

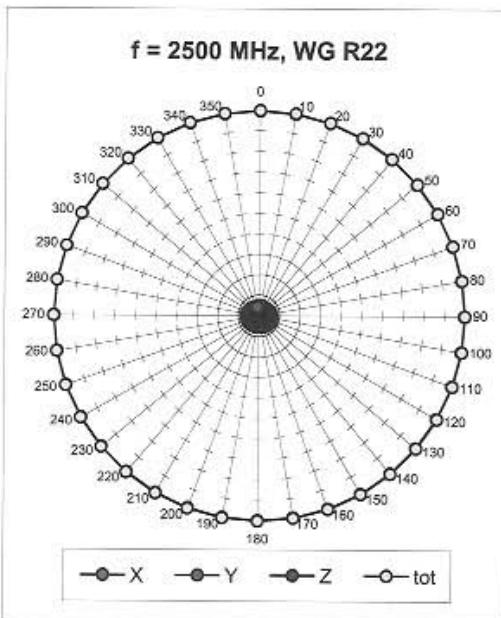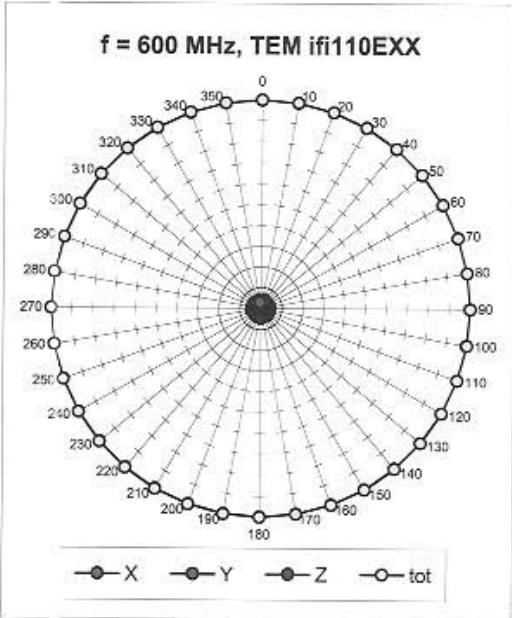


RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 13(23)
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1

ER3DV6 SN:2285


March 12, 2007

Receiving Pattern (ϕ), $\theta = 0^\circ$

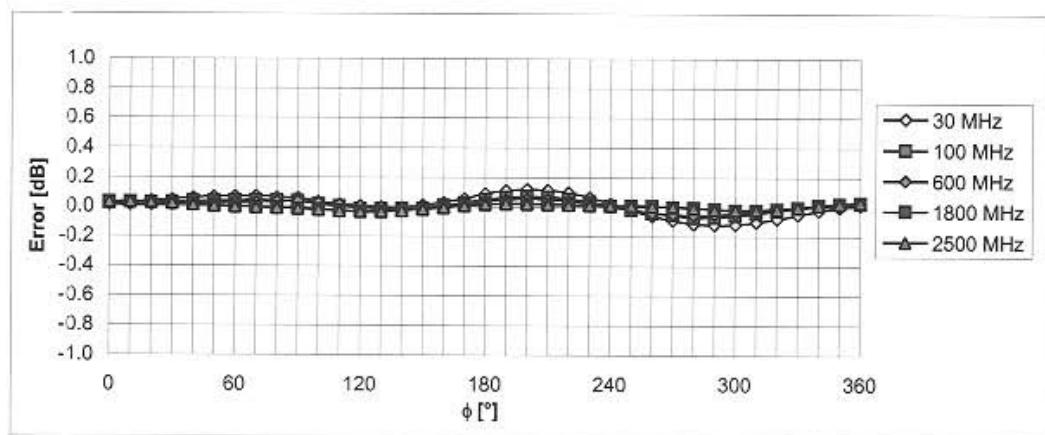

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 90^\circ$

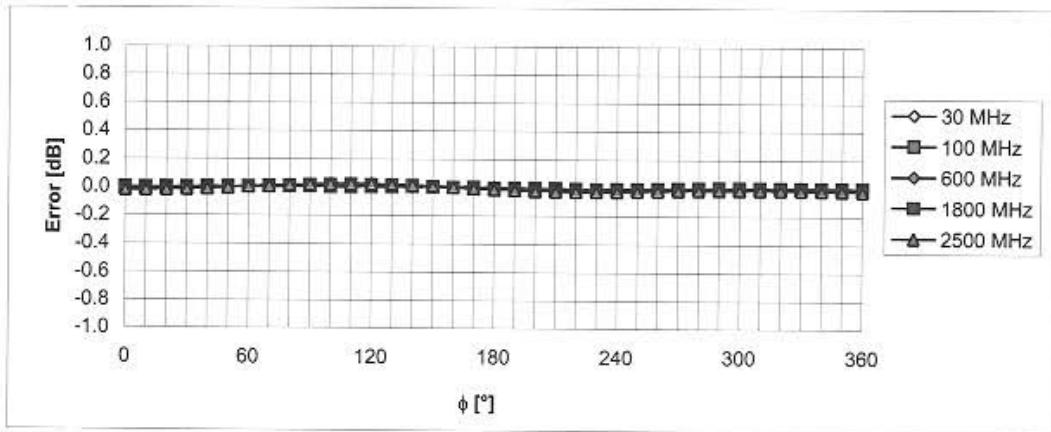

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)



RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 14(23)
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1

ER3DV6 SN:2285

March 12, 2007

Dynamic Range f(E-field)

(Waveguide R22, f = 1800 MHz)

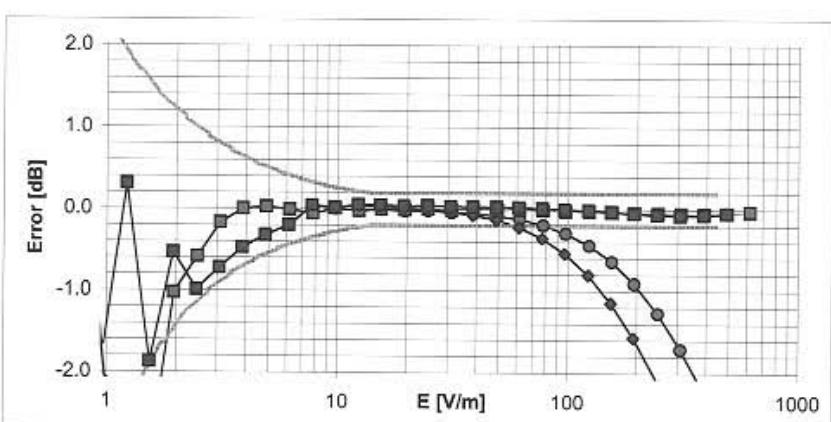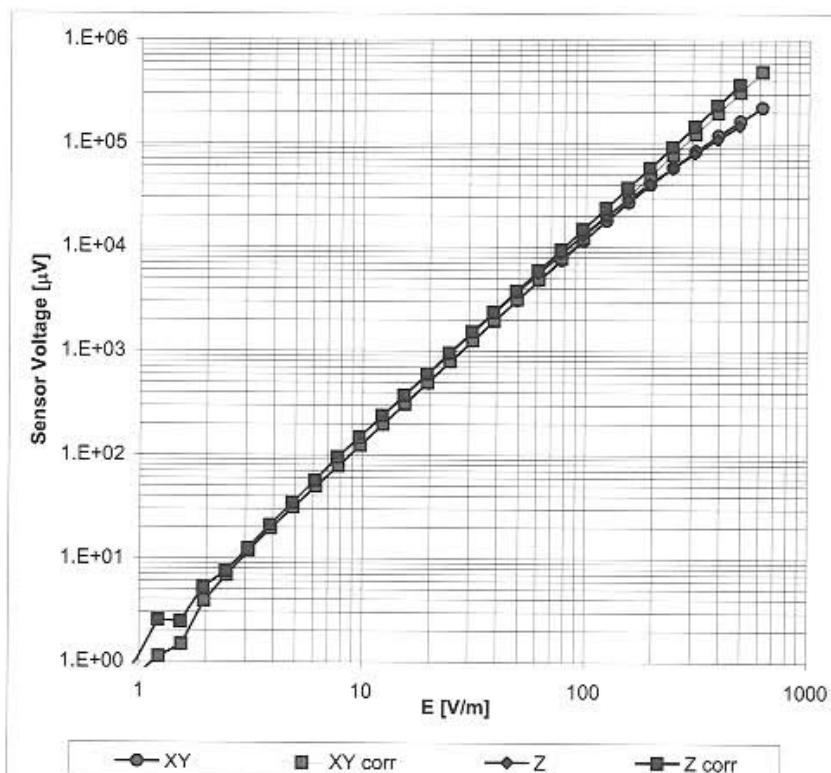


Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 15(23)
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1

ER3DV6 SN:2285

March 12, 2007

Deviation from Isotropy in Air
Error (ϕ, θ) , f = 900 MHz

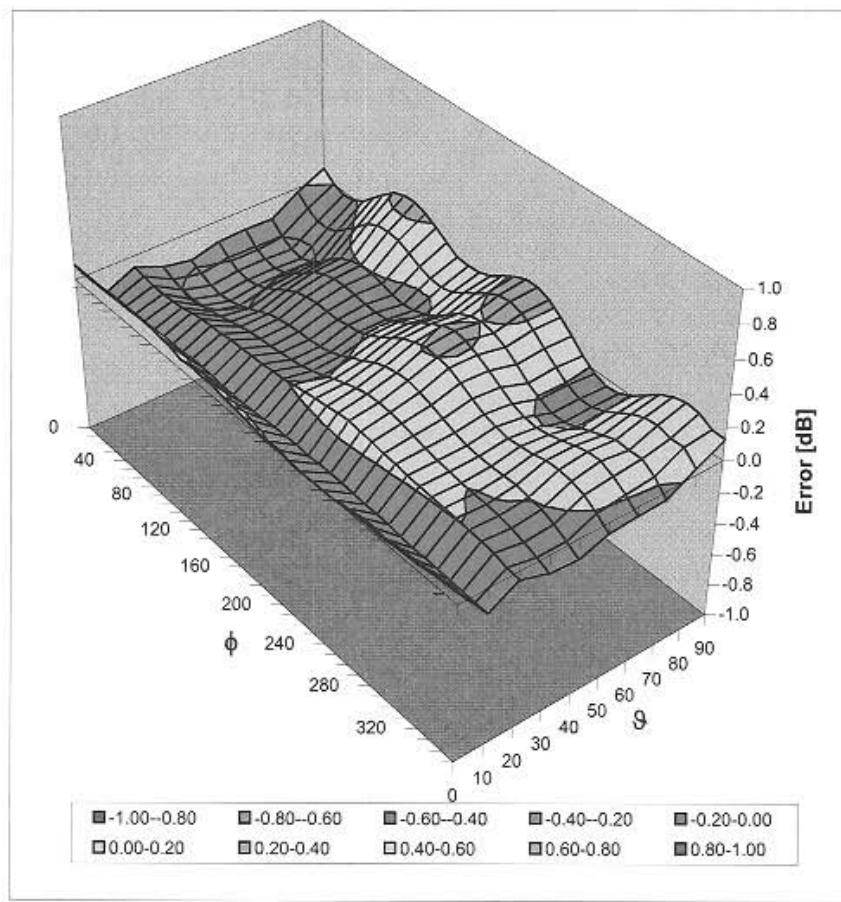

Uncertainty of Spherical Isotropy Assessment: $\pm 2.6\%$ (k=2)

RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW		
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1	FCC ID L6ARBS20CW

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RIM**

Certificate No: **H3-6105_Nov06**

CALIBRATION CERTIFICATE

Object	H3DV6 - SN:6105		
Calibration procedure(s)	QA CAL-03.v4 Calibration procedure for H-field probes optimized for close near field evaluations in air		
Calibration date:	November 15, 2006		
Condition of the calibrated item	In Tolerance		
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.			
All calibrations have been conducted in the closed laboratory facility; environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity $< 70\%$.			
Calibration Equipment used (M&TE critical for calibration)			
Primary Standards	ID #	Cal Date (Calibrated by, Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41495277	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Power sensor E4412A	MY41498087	5-Apr-06 (METAS, No. 251-00557)	Apr-07
Reference 3 dB Attenuator	SN: S5054 (3c)	10-Aug-06 (METAS, No. 217-00592)	Aug-07
Reference 20 dB Attenuator	SN: S5086 (20b)	4-Apr-06 (METAS, No. 251-00558)	Apr-07
Reference 30 dB Attenuator	SN: S5129 (30b)	10-Aug-06 (METAS, No. 217-00593)	Aug-07
Reference Probe H3DV6	SN: 6182	2-Oct-06 (SPEAG, No. H3-6182_Oct06)	Oct-07
DAE4	SN: 654	21-Jun-06 (SPEAG, No. DAE4-654_Jun06)	Jun-07
Secondary Standards	ID #	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-09 (SPEAG, in house check Nov-05)	In house check: Nov-07
Network Analyzer HP 8753E	US37390585	18-Oct-01 (SPEAG, in house check Oct-06)	In house check: Oct-07
Calibrated by:	Name Katja Pokovic	Function Technical Manager	Signature
Approved by:	Niels Kuster	Quality Manager	
Issued: November 15, 2006			
This calibration certificate shall not be reproduced except in full without written approval of the laboratory.			

RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW		
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1	FCC ID L6ARBS20CW

Calibration Laboratory of
Schmid & Partner
Engineering AG
Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
C Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
 The Swiss Accreditation Service is one of the signatories to the EA
 Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Glossary:

NORM _{x,y,z}	sensitivity in free space
DCP	diode compression point
Polarization φ	φ rotation around probe axis
Polarization ϑ	ϑ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

Calibration is Performed According to the Following Standards:

- a) IEEE Std 1309-1996, " IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", 1996.

Methods Applied and Interpretation of Parameters:

- X, Y, Z_a0a1a2 : Assessed for E-field polarization $\vartheta = 90$ for XY sensors and $\vartheta = 0$ for Z sensor ($f \leq 900$ MHz in TEM-cell; $f > 1800$ MHz: R22 waveguide).
- $X, Y, Z(f)_a0a1a2 = X, Y, Z_a0a1a2 * frequency_response$ (see Frequency Response Chart).
- $DCPx, y, z$: DCP are numerical linearization parameters assessed based on the data of power sweep (no uncertainty required). DCP does not depend on frequency.
- *Spherical isotropy (3D deviation from isotropy)*: in a locally homogeneous field realized using an open waveguide setup.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the X_a0a1a2 (no uncertainty required).

RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 18(23)
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1

H3DV6 SN:6105

November 15, 2006

Probe H3DV6

SN:6105

Manufactured: January 4, 2002
 Last calibrated: November 11, 2005
 Recalibrated: November 15, 2006

Calibrated for DASY Systems

(Note: non-compatible with DASY2 system!)

RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 19(23)	
	Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1

H3DV6 SN:6105

November 15, 2006

DASY - Parameters of Probe: H3DV6 SN:6105

Sensitivity in Free Space [A/m / $\sqrt{(\mu V)}$]

	a0	a1	a2
X	2.869E-03	9.376E-5	-2.557E-5 \pm 5.1 % (k=2)
Y	2.559E-03	1.609E-4	-2.972E-5 \pm 5.1 % (k=2)
Z	2.930E-03	1.211E-6	-1.970E-5 \pm 5.1 % (k=2)

Diode Compression¹

DCP X 87 mV
DCP Y 87 mV
DCP Z 87 mV

Sensor Offset (Probe Tip to Sensor Center)

X	3.0 mm
Y	3.0 mm
Z	3.0 mm

Connector Angle -89 °

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

¹ numerical linearization parameter; uncertainty not required


RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 20(23)
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1

H3DV6 SN:6105

November 15, 2006

Frequency Response of H-Field

(TEM-Cell:ifi110, Waveguide R22)

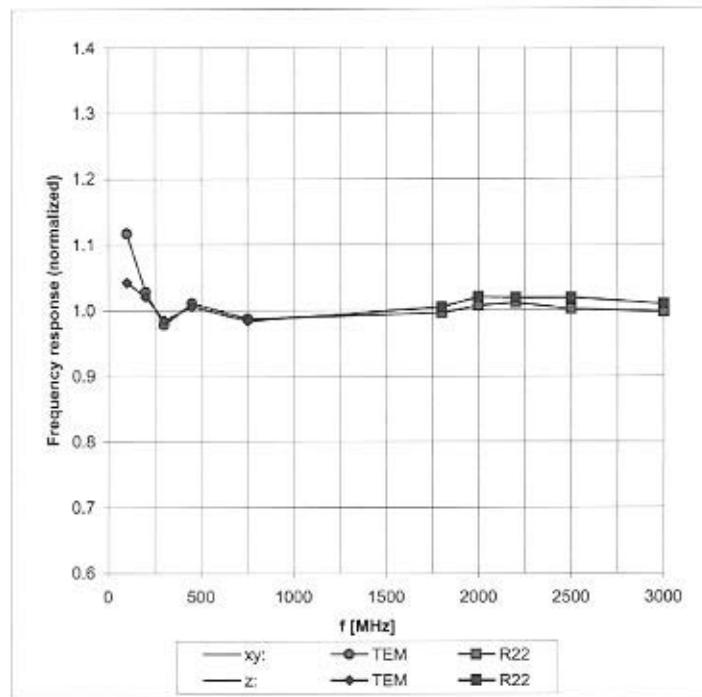


Uncertainty of Frequency Response of E-field: $\pm 6.3\%$ ($k=2$)

RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 21(23)
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1


H3DV6 SN:6105

November 15, 2006

Receiving Pattern (ϕ), $\theta = 90^\circ$

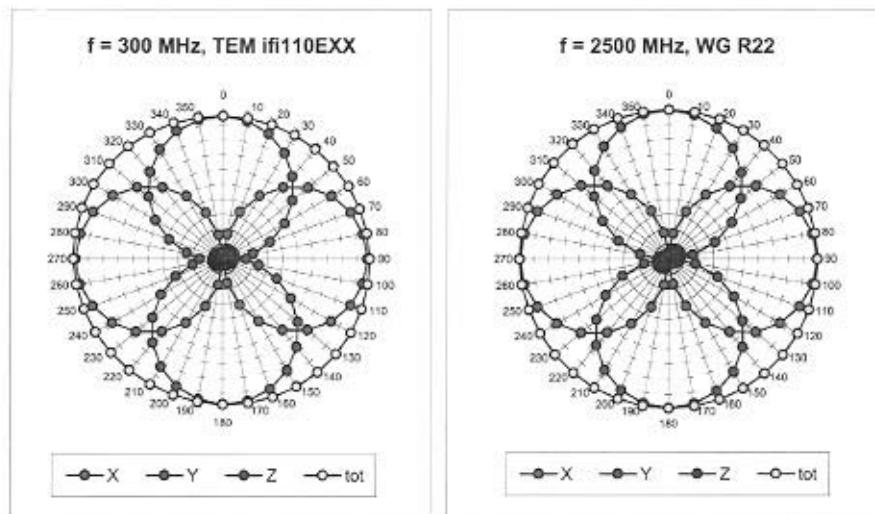

Receiving Pattern (ϕ), $\theta = 0^\circ$

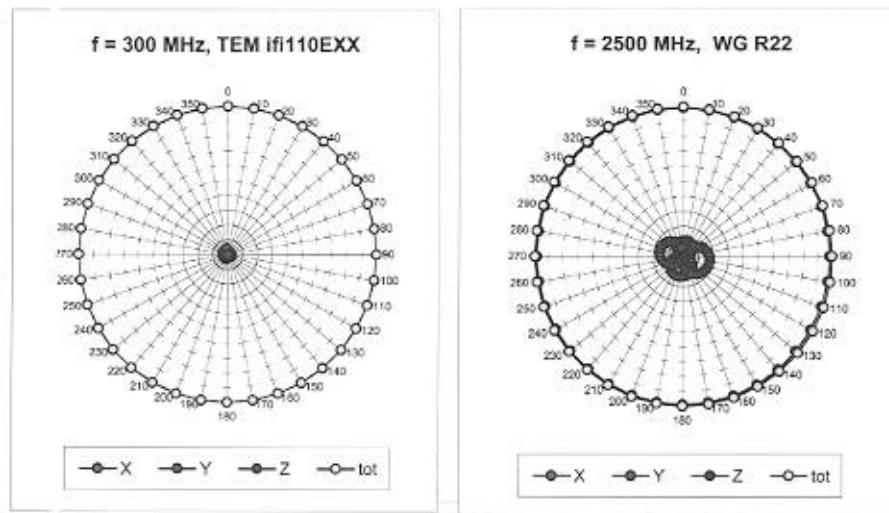


RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 22(23)
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1

H3DV6 SN:6105


November 15, 2006

Receiving Pattern (ϕ), $\theta = 90^\circ$

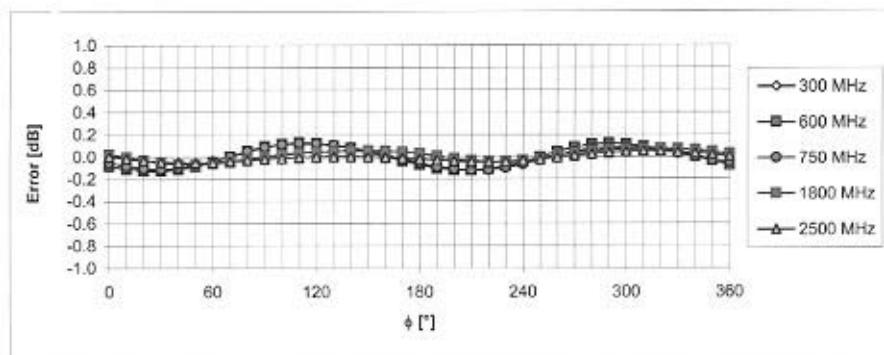

Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

Receiving Pattern (ϕ), $\theta = 0^\circ$

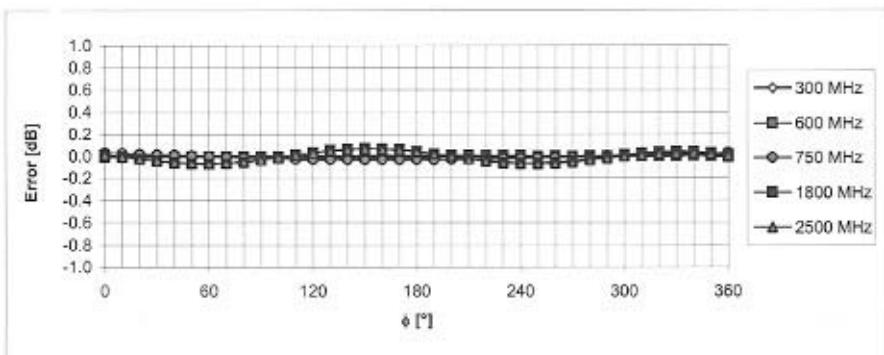



Uncertainty of Axial Isotropy Assessment: $\pm 0.5\%$ ($k=2$)

RTS RIM Testing Services	Document Annex B to Hearing Aid Compatibility RF Emissions Test Report for BlackBerry® Smartphone Model RBS21CW	Page 23(23)
Author Data Daoud Attayi	Dates of Test 21-22 Aug , 2007	Report No RTS-0736-0708-15 Rev1

H3DV6 SN:6105

November 15, 2006

Dynamic Range f(H-field)
(Waveguide R22, f = 1800 MHz)

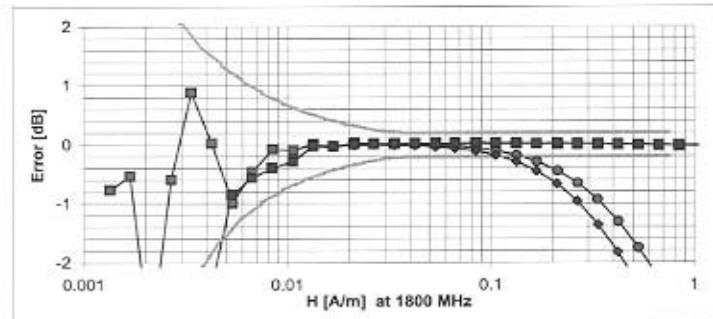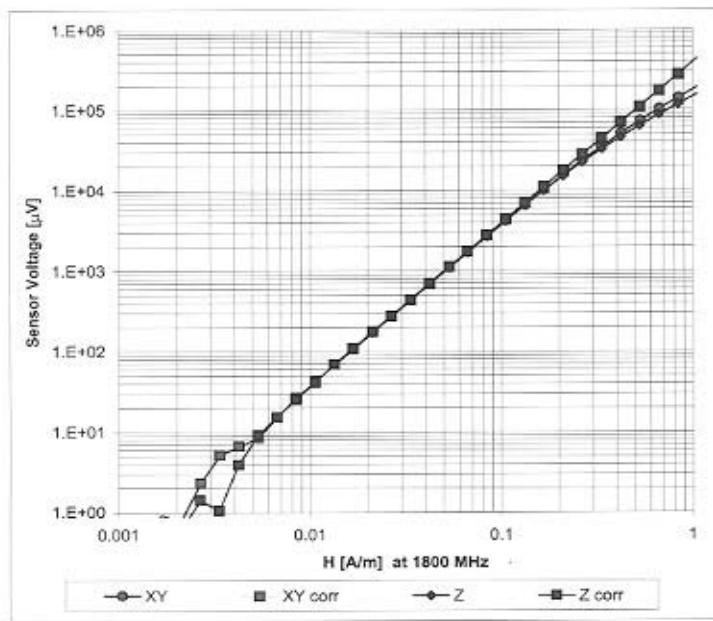

Uncertainty of Linearity Assessment: $\pm 0.6\%$ ($k=2$)

Certificate No: H3-6105_Nov06

Page 8 of 8