


	Document <b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>	Page <b>1(24)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b> FCC ID <b>L6ARDD70UW</b> <b>L6ARDC70UW</b>

## **Annex B: Probe and dipole description and calibration certificates**

### **B.1 Probe, measurement chain description, specification and calibration certificate**

	Document <b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>	Page <b>2(24)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b>

DASY Dosimetric Assessment System by Schmid & Partner Engineering AG

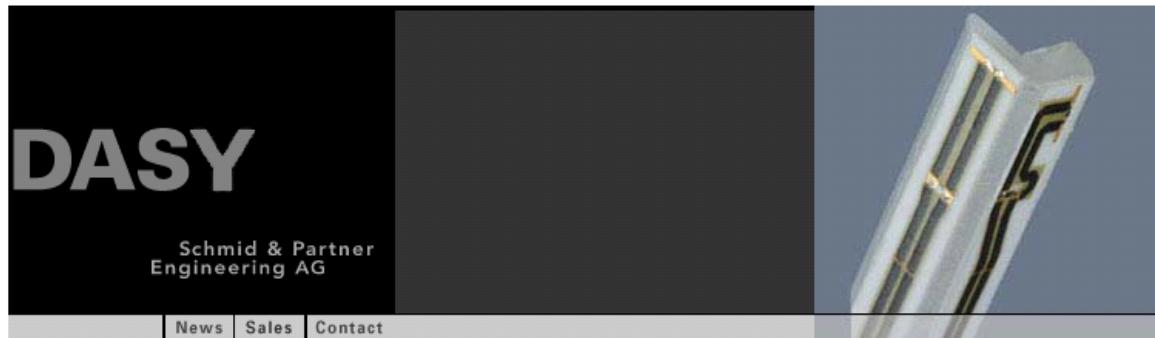

<b>Applications</b>
<b>Support &amp; Downloads</b>
<b>Products</b>
<ul style="list-style-type: none"> <li>▪ <a href="#">DASY4 Packages</a></li> <li>▪ <a href="#">EASY4</a></li> <li>▪ <a href="#">Probes</a> <ul style="list-style-type: none"> <li>ET3DV6 - Isotropic Dos-Probe</li> <li>ES3DV3 - Isotropic Dos-Probe</li> <li>EX3DV4 - Isotropic Dos-Probe</li> <li>ET1DV3 - D-Probe</li> </ul> </li> <li>▪ <a href="#">EUV3 - Universal Vector E-Probe</a></li> <li>▪ <a href="#">H3DV6 - Isotropic H-Probe</a></li> <li>▪ <a href="#">HUV4 - Universal Vector H-Probe</a></li> <li>▪ <a href="#">T1V3 - Temp-Probe</a></li> <li>▪ <a href="#">DP1 - Dummy-Probe</a></li> <li>▪ <a href="#">Data Acquisition System</a></li> <li>▪ <a href="#">Software</a></li> <li>▪ <a href="#">Phantoms</a></li> <li>▪ <a href="#">Robots</a></li> <li>▪ <a href="#">Validation Kits &amp; Calibration Dipoles</a></li> <li>▪ <a href="#">Hearing Aid Compatibility (HAC) Ext</a></li> <li>▪ <a href="#">Tissue Simulating Liquids</a></li> </ul>
<a href="#">SPEAG Home</a>

## ER3DV6 ISOTROPIC E-FIELD PROBE FOR GENERAL NEAR-FIELD MEASUREMENTS


 [Download Product Flyer \(PDF, 192kB\)](#)

<b>Construction</b>	One dipole parallel, two dipoles normal to probe axis Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycoether)
<b>Calibration</b>	In air from 100 MHz to 3.0 GHz (absolute accuracy $\pm 6.0\%$ , $k=2$ )
<b>Frequency</b>	100 MHz to $> 6$ GHz; Linearity: $\pm 0.2$ dB (100 MHz to 3 GHz)
<b>Directivity</b>	$\pm 0.2$ dB in air (rotation around probe axis) $\pm 0.4$ dB in air (rotation normal to probe axis)
<b>Dynamic Range</b>	2 V/m to $> 1000$ V/m; Linearity: $\pm 0.2$ dB
<b>Dimensions</b>	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.5 mm
<b>Application</b>	General near-field measurements up to 6 GHz Field component measurements Fast automatic scanning in phantoms

<http://www.dasy4.com/er3.htm>

	Document	Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW	Page
			3(24)
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b>	FCC ID <b>L6ARDD70UW</b> <b>L6ARDC70UW</b>

DASY Dosimetric Assessment System by Schmid & Partner Engineering AG

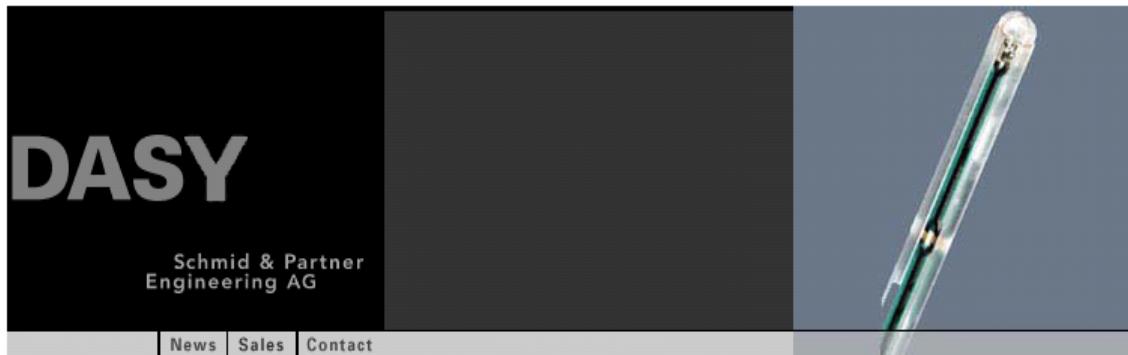

<b>Applications</b>
<b>Support &amp; Downloads</b>
<b>Products</b>
<ul style="list-style-type: none"> <li>▪ DASY4 Packages</li> <li>▪ EASY4</li> <li>▪ Probes <ul style="list-style-type: none"> <li>ET3DV6 - Isotropic Dos-Probe</li> <li>ES3DV3 - Isotropic Dos-Probe</li> <li>EX3DV4 - Isotropic Dos-Probe</li> <li>ET1DV3 - D-Probe</li> <li>ER3DV6 - Isotropic E-Probe</li> <li>EUV3 - Universal Vector E-Probe</li> </ul> </li> <li>▪ HUV4 - Universal Vector H-Probe</li> <li>▪ T1V3 - Temp-Probe</li> <li>▪ DP1 - Dummy-Probe</li> <li>▪ Data Acquisition System</li> <li>▪ Software</li> <li>▪ Phantoms</li> <li>▪ Robots</li> <li>▪ Validation Kits &amp; Calibration Dipoles</li> <li>▪ Hearing Aid Compatibility (HAC) Ext</li> <li>▪ Tissue Simulating Liquids</li> </ul>
<b>SPEAG Home</b>

## H3DV6 3-DIMENSIONAL H-FIELD PROBE FOR SMALL BAND APPLICATIONS

 [Download Product Flyer \(PDF, 192kB\)](#)

<b>Construction</b>	Three concentric loop sensors with 3.8 mm loop diameters Resistively loaded detector diodes for linear response Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., glycoether)
<b>Frequency</b>	200 MHz to 3 GHz (absolute accuracy $\pm 6.0\%$ , $k=2$ ); Output linearized
<b>Directivity</b>	$\pm 0.25$ dB (spherical isotropy error)
<b>Dynamic Range</b>	10 mA/m to 2 A/m at 1 GHz
<b>E-Field Interference</b>	< 10% at 3 GHz (for plane wave)
<b>Dimensions</b>	Overall length: 330 mm (Tip: 40 mm) Tip diameter: 6 mm (Body: 12 mm) Distance from probe tip to dipole centers: 3 mm
<b>Application</b>	General magnetic near-field measurements up to 3 GHz Field component measurements Surface current measurements Measurements in air or liquids Low interaction with the measured field

<http://www.dasy4.com/h3d.htm>





**Author Data**  
**Andrew Becker**
**Dates of Test**
**Feb 28, Mar. 22-23, Apr. 05, May 13-16,  
June 20-21, July 11, 2011**
**Report No**
**RTS-2579-1107-18A**
**FCC ID**
**L6ARDD70UW  
L6ARDC70UW**

All measurements were performed to the nearest element point as per the C63.19 standard. Offset distances were entered in the DASY5 software so that the measurement was to the nearest element.

Figures 1 and 2, provided by the manufacturer, illustrate detail of the probe tip and its dimensions.

**ER3DV6 E-Field probe:** The distances from the probe tip to the closest points on the dipole sensors are 1.45mm for X and Y and 1.25mm for Z. From the probe tip to the center of the sensors is 2.5mm.

**H3DV6 H-Field probe:** The distance from the probe tip to the closest point of the X, Y and Z loop sensors is 1.1mm. From the probe tip to the center of the sensor is 3.00mm.

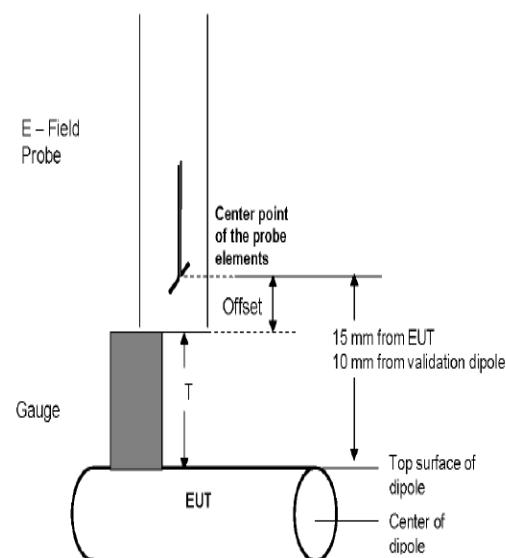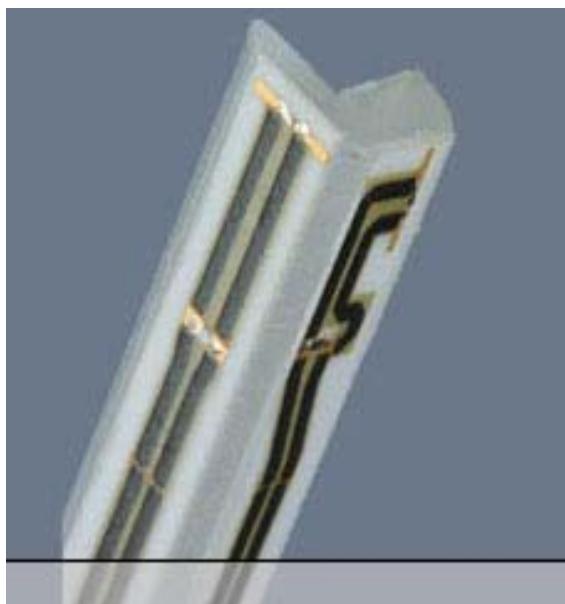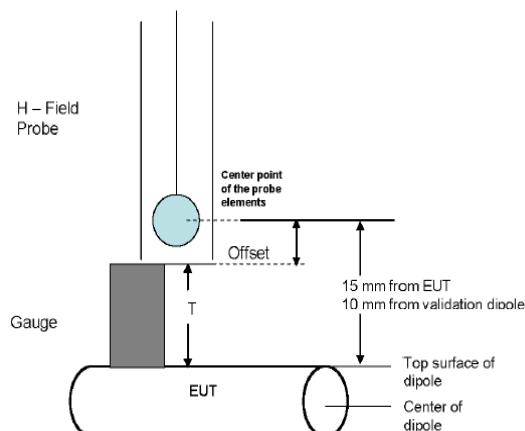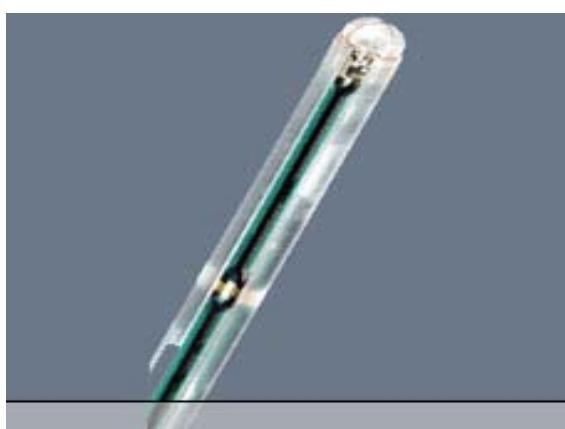
**E-Field Probe (ER3DV6)**

**H-Field Probe (H3DV6)**

 <b>Document</b> <b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>			<b>Page</b> <b>5(24)</b>
<b>Author Data</b> <b>Andrew Becker</b>	<b>Dates of Test</b> <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	<b>Report No</b> <b>RTS-2579-1107-18A</b>	

The following information is from the system manufacturer user manual describing the process chain:

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcpi} \quad (20.1)$$

with  $V_i$  = compensated signal of channel i  $(i = x, y, z)$   
 $U_i$  = input signal of channel i  $(i = x, y, z)$   
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcpi$  = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

$$\text{E - fieldprobes : } E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

$$\text{H - fieldprobes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with  $V_i$  = compensated signal of channel i  $(i = x, y, z)$   
 $Norm_i$  = sensor sensitivity of channel i  $(i = x, y, z)$   
 $ConvF$  =  $\mu\text{V}/(\text{V}/\text{m})^2$  for E-field Probes  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel i in  $\text{V}/\text{m}$   
 $H_i$  = magnetic field strength of channel i in  $\text{A}/\text{m}$

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2} \quad (20.2)$$

The measurement / integration time per point is  $> 500$  ms, as per the system manufacturer:

The time response of the field probes has been assessed by exposing the probe to a well-controlled field producing signals larger than HAC E- and H-fields of class M4. The signal response time is evaluated as the time required by the system to reach 90% of the expected final value after an on/off switch of the power source with an integration time of 500 ms and a probe response time of  $< 5$  ms. In the current implementation, DASY4 waits longer than 100 ms after having reached the grid point before starting a measurement, i.e., the response time uncertainty is negligible.

If the device under test does not emit a CW signal, the integration time applied to measure the electric field at a specific point may introduce additional uncertainties due to the discretization. The tolerances for the different systems had the worst-case of 2.6%.

	Document <b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>	Page <b>6(24)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b>

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

Client **RTS (RIM Testing Services)**

Certificate No: **ER-2286\_Jan11**

## CALIBRATION CERTIFICATE

Object	ER3DV6 - SN:2286
Calibration procedure(s)	QA CAL-02.v6, QA CAL-25.v3 Calibration procedure for E-field probes optimized for close near field evaluations in air
Calibration date:	January 14, 2011
This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.	
All calibrations have been conducted in the closed laboratory facility: environment temperature $(22 \pm 3)^\circ\text{C}$ and humidity < 70%.	
Calibration Equipment used (M&TE critical for calibration)	

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	01-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	01-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe ER3DV6	SN: 2328	4-Oct-10 (No. ER3-2328_Oct10)	Oct-11
DAE4	SN: 789	31-Aug-10 (No. DAE4-789_Aug10)	Aug-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name <b>Marcel Fehr</b>	Function <b>Laboratory Technician</b>	Signature 
Approved by:	Name <b>Katja Pokovic</b>	Function <b>Technical Manager</b>	Signature 

Issued: January 15, 2011

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

Certificate No: ER-2286\_Jan11

Page 1 of 10

	Document <b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>	Page <b>7(24)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b>

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

#### **Glossary:**

NORM <sub>x,y,z</sub>	sensitivity in free space
DCP	diode compression point
CF	crest factor (1/duty_cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\varphi$	$\varphi$ rotation around probe axis
Polarization $\vartheta$	$\vartheta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\vartheta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

#### **Calibration is Performed According to the Following Standards:**

- a) IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

#### **Methods Applied and Interpretation of Parameters:**

- $NORM_{x,y,z}$ : Assessed for E-field polarization  $\vartheta = 0$  for XY sensors and  $\vartheta = 90$  for Z sensor ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).
- $NORM(f)x,y,z = NORM_{x,y,z} * frequency\_response$  (see Frequency Response Chart).
- $DCP_{x,y,z}$ : DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- $A_{x,y,z}; B_{x,y,z}; C_{x,y,z}$ :  $A, B, C$  are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- *Spherical isotropy (3D deviation from isotropy)*: in a locally homogeneous field realized using an open waveguide setup.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the  $NORM_x$  (no uncertainty required).

	Document <b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>	Page <b>8(24)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b>

ER3DV6 – SN:2286

January 14, 2011

# Probe ER3DV6

## SN:2286

Manufactured: September 18, 2002  
 Calibrated: January 14, 2011

Calibrated for DASY/EASY Systems  
 (Note: non-compatible with DASY2 system!)

	Document <b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>	Page <b>9(24)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b>

ER3DV6- SN:2286

January 14, 2011

**DASY/EASY - Parameters of Probe: ER3DV6 - SN:2286****Basic Calibration Parameters**

	Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm ( $\mu$ V/(V/m) <sup>2</sup> )	2.23	1.48	1.51	$\pm$ 10.1 %
DCP (mV) <sup>b</sup>	97.6	98.4	97.6	

**Modulation Calibration Parameters**

UID	Communication System Name	PAR		A dB	B dB	C dB	VR mV	Unc <sup>c</sup> (k=2)
10000	CW	0.00	X	0.00	0.00	1.00	179.3	$\pm$ 3.0 %
			Y	0.00	0.00	1.00	145.0	
			Z	0.00	0.00	1.00	180.1	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.


<sup>b</sup> Numerical linearization parameter: uncertainty not required.<sup>c</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

 <b>Testing Services™</b>	Document <b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>	Page <b>10(24)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b>

ER3DV6-SN:2286

January 14, 2011

## Frequency Response of E-Field

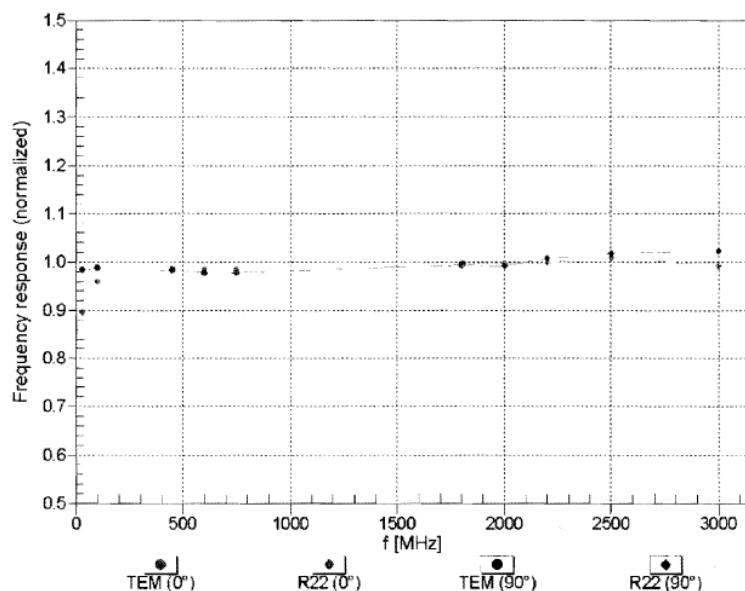

Uncertainty of Frequency Response of E-field:  $\pm 6.3\%$  (k=2)


	Document	Page
	<b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>	<b>11(24)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b>
		FCC ID <b>L6ARDD70UW</b> <b>L6ARDC70UW</b>

ER3DV6- SN:2286


January 14, 2011

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

$f=600$  MHz, TEM,  $0^\circ$

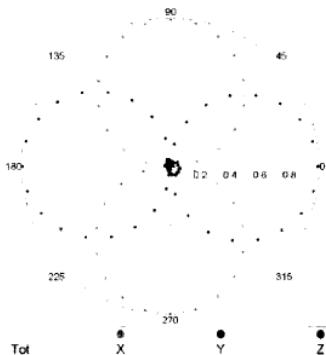


$f=2500$  MHz, R22,  $0^\circ$

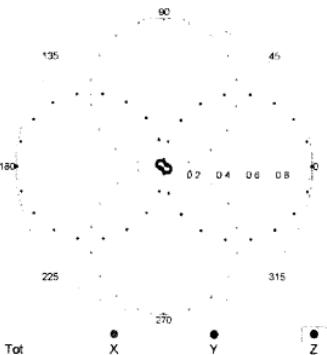


### Receiving Pattern ( $\phi$ ), $\theta = 90^\circ$

$f=600$  MHz, TEM,  $90^\circ$

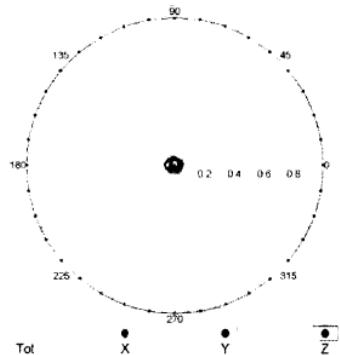

$f=2500$  MHz, R22,  $90^\circ$

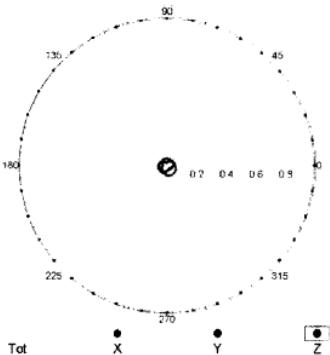


	Document	Page
	<b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>	<b>12(24)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b>
		FCC ID <b>L6ARDD70UW</b> <b>L6ARD70UW</b>

ER3DV6- SN:2286


January 14, 2011

### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

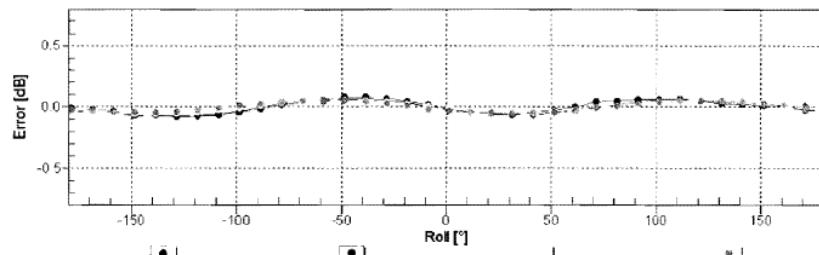

Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

### Receiving Pattern ( $\phi$ ), $\theta = 90^\circ$

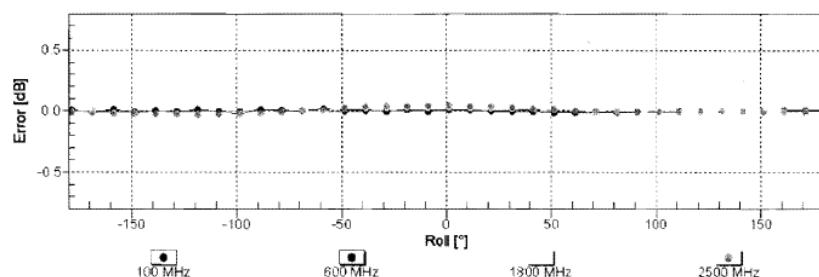



Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  ( $k=2$ )

<b>RIM Testing Services™</b>	Document <b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>	Page <b>13(24)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b>

ER3DV6- SN:2286

January 14, 2011

**Dynamic Range f(E-field)**  
(TEM cell , f = 900 MHz)

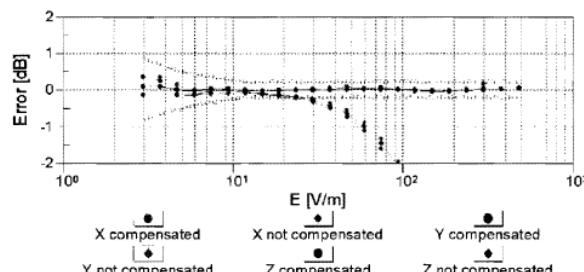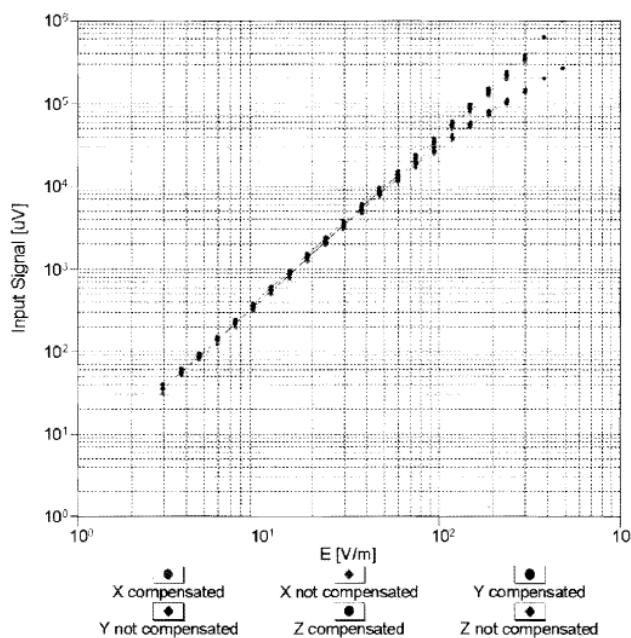


**Uncertainty of Linearity Assessment: ± 0.6% (k=2)**

<b>RIM Testing Services™</b>	Document <b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>	Page <b>14(24)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b>

ER3DV6- SN:2286

January 14, 2011

**Deviation from Isotropy in Air**  
Error ( $\phi, \theta$ ),  $f = 900$  MHz

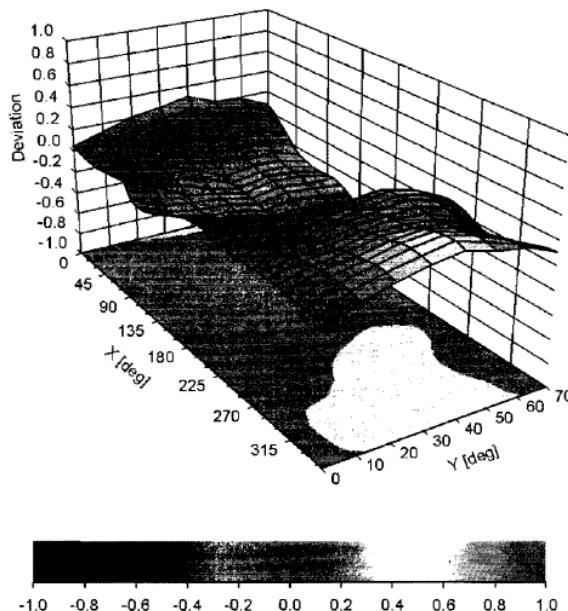



Document

**Annex B to Hearing Aid Compatibility RF Emissions Test  
Report for the BlackBerry® Smartphone model  
RDD711UW/RDC71UW**

Page

15(24)

Author Data  
**Andrew Becker**

Dates of Test

**Feb 28, Mar. 22-23, Apr. 05, May 13-16,  
June 20-21, July 11, 2011**

Report No

**RTS-2579-1107-18A**

FCC ID

**L6ARDD70UW  
L6ARDC70UW**

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**Client **RIM**Certificate No: **H3-6105\_Nov10**

## **CALIBRATION CERTIFICATE**

Object **H3DV6 - SN:6105**

Calibration procedure(s) **QA CAL-03.v5, QA CAL-25.v2**  
**Calibration procedure for H-field probes optimized for close near field evaluations in air**

Calibration date: **November 18, 2010**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature  $(22 \pm 3)^\circ\text{C}$  and humidity  $< 70\%$

Calibration Equipment used (M&amp;TE critical for calibration)

Primary Standards	ID	Cal Date (Certificate No.)	Scheduled Calibration
Power meter E4419B	GB41293874	10-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41495277	10-Apr-10 (No. 217-01136)	Apr-11
Power sensor E4412A	MY41498087	10-Apr-10 (No. 217-01136)	Apr-11
Reference 3 dB Attenuator	SN: S5054 (3c)	30-Mar-10 (No. 217-01159)	Mar-11
Reference 20 dB Attenuator	SN: S5086 (20b)	30-Mar-10 (No. 217-01161)	Mar-11
Reference 30 dB Attenuator	SN: S5129 (30b)	30-Mar-10 (No. 217-01160)	Mar-11
Reference Probe H3OV6	SN: 6182	4-Oct-10 (No. H3-6182_Oct10)	Oct-11
DAE4	SN: 789	31-Aug-10 (No. DAE4-789_Aug10)	Aug-11
Secondary Standards	ID	Check Date (in house)	Scheduled Check
RF generator HP 8648C	US3642U01700	4-Aug-99 (in house check Oct-09)	In house check: Oct-11
Network Analyzer HP 8753E	US37390585	18-Oct-01 (in house check Oct-10)	In house check: Oct-11

Calibrated by:	Name <b>John Kastell</b>	Function <b>Laboratory Technician</b>	Signature 
Approved by:	Name <b>Katja Polovic</b>	Function <b>Technical Manager</b>	Signature 

Issued: November 19, 2010

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

	Document <b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>	Page <b>16(24)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b>

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

#### Glossary:

NORMx,y,z	sensitivity in free space
DCP	diode compression point
CF	crest factor (1/duty cycle) of the RF signal
A, B, C	modulation dependent linearization parameters
Polarization $\phi$	$\phi$ rotation around probe axis
Polarization $\theta$	$\theta$ rotation around an axis that is in the plane normal to probe axis (at measurement center), i.e., $\theta = 0$ is normal to probe axis
Connector Angle	information used in DASY system to align probe sensor X to the robot coordinate system

#### Calibration is Performed According to the Following Standards:

- a) IEEE Std 1309-2005, "IEEE Standard for calibration of electromagnetic field sensors and probes, excluding antennas, from 9 kHz to 40 GHz", December 2005.

#### Methods Applied and Interpretation of Parameters:

- $NORMx,y,z$ : Assessed for E-field polarization  $\theta = 0$  for XY sensors and  $\theta = 90$  for Z sensor ( $f \leq 900$  MHz in TEM-cell;  $f > 1800$  MHz: R22 waveguide).
- $X,Y,Z(f)_a0a1a2 = X,Y,Z_a0a1a2 * frequency\_response$  (see Frequency Response Chart).
- $DCPx,y,z$ : DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- $Ax,y,z; Bx,y,z; Cx,y,z$ ,  $VRx,y,z$ : A, B, C are numerical linearization parameters assessed based on the data of power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the maximum calibration range expressed in RMS voltage across the diode.
- *Spherical isotropy (3D deviation from isotropy)*: in a locally homogeneous field realized using an open waveguide setup.
- *Sensor Offset*: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.
- *Connector Angle*: The angle is assessed using the information gained by determining the  $X_a0a1a2$  (no uncertainty required).

	Document <b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>	Page <b>17(24)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b>

H3DV6 – SN:6105

November 18, 2010

# Probe H3DV6

## SN:6105

Manufactured: January 5, 2002  
 Calibrated: November 18, 2010

Calibrated for DASY/EASY Systems  
 (Note: non-compatible with DASY2 system!)



Document

**Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW**

Page

18(24)

Author Data  
**Andrew Becker**

Dates of Test

**Feb 28, Mar. 22-23, Apr. 05, May 13-16,  
June 20-21, July 11, 2011**

Report No

**RTS-2579-1107-18A**

FCC ID

**L6ARDD70UW  
L6ARDC70UW**

H3DV6- SN:6105

November 18, 2010

**DASY/EASY - Parameters of Probe: H3DV6 - SN:6105****Basic Calibration Parameters**

		Sensor X	Sensor Y	Sensor Z	Unc (k=2)
Norm (A/m / $\sqrt{\text{mV}}$ )	a0	2.94E-003	2.71E-003	3.01E-003	$\pm 5.1\%$
Norm (A/m / $\sqrt{\text{mV}}$ )	a1	2.83E-005	2.25E-005	-8.45E-005	$\pm 5.1\%$
Norm (A/m / $\sqrt{\text{mV}}$ )	a2	-1.08E-005	2.19E-006	5.61E-006	$\pm 5.1\%$
DCP (mV) <sup>B</sup>		90.4	91.6	92.6	

**Modulation Calibration Parameters**

UID	Communication System Name	PAR	A dB	B dB	C dB	VR mV	Unc <sup>E</sup> (k=2)
10000	CW	0.00	X 0.00	0.00	1.00	211.2	$\pm 2.96\%$
			Y 0.00	0.00	1.00	233.0	
			Z 0.00	0.00	1.00	239.4	

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

<sup>B</sup> Numerical linearization parameter: uncertainty not required<sup>E</sup> Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.


 <b>RIM Testing Services™</b>	Document	<b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>	Page
			<b>19(24)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b>	FCC ID <b>L6ARDD70UW</b> <b>L6ARDC70UW</b>

H3DV6- SN:6105

November 18, 2010

## **Frequency Response of H-Field**

**(TEM-Cell:ifi110 EXX, Waveguide: R22)**

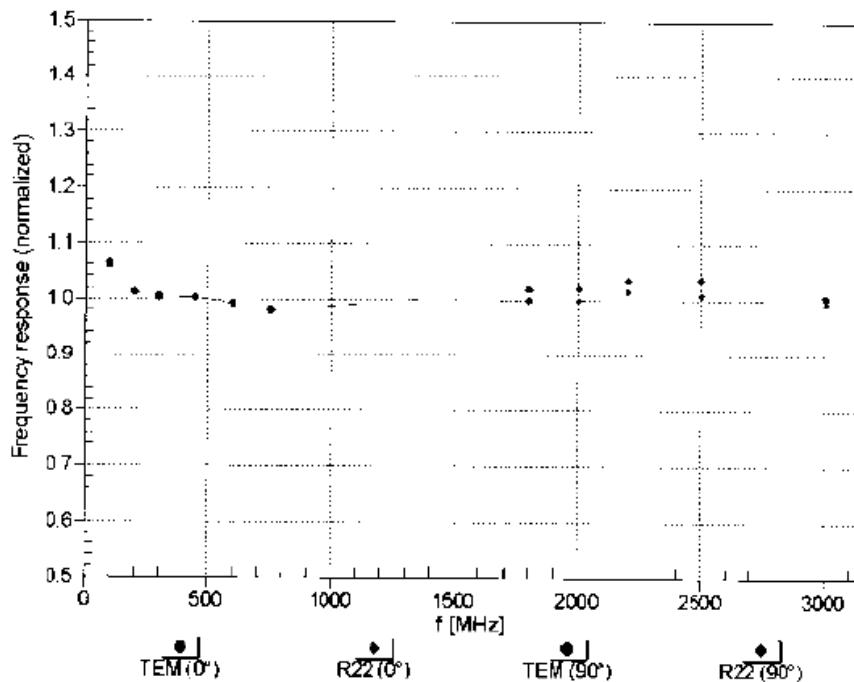

**Uncertainty of Frequency Response of H-field:  $\pm 6.3\% (k=2)$**



Document

**Annex B to Hearing Aid Compatibility RF Emissions Test  
Report for the BlackBerry® Smartphone model  
RDD711UW/RDC71UW**

Page

20(24)

Author Data  
**Andrew Becker**

Dates of Test

**Feb 28, Mar. 22-23, Apr. 05, May 13-16,  
June 20-21, July 11, 2011**

Report No

**RTS-2579-1107-18A**


FCC ID

**L6ARDD70UW  
L6ARD70UW**


H3DV6- SN:6105

November 16, 2010

**Receiving Pattern ( $\phi$ ),  $\theta = 0^\circ$**

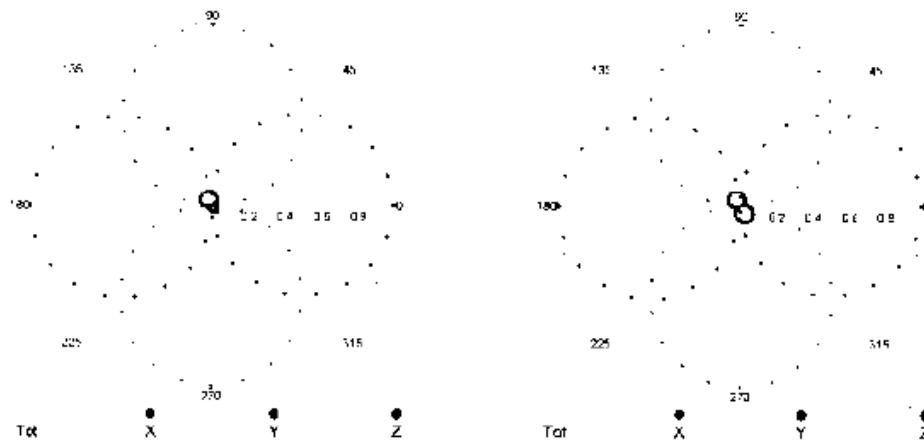**f=600 MHz,TEM,0°****f=2500 MHz,R22,0°**

**Receiving Pattern ( $\phi$ ),  $\theta = 90^\circ$**

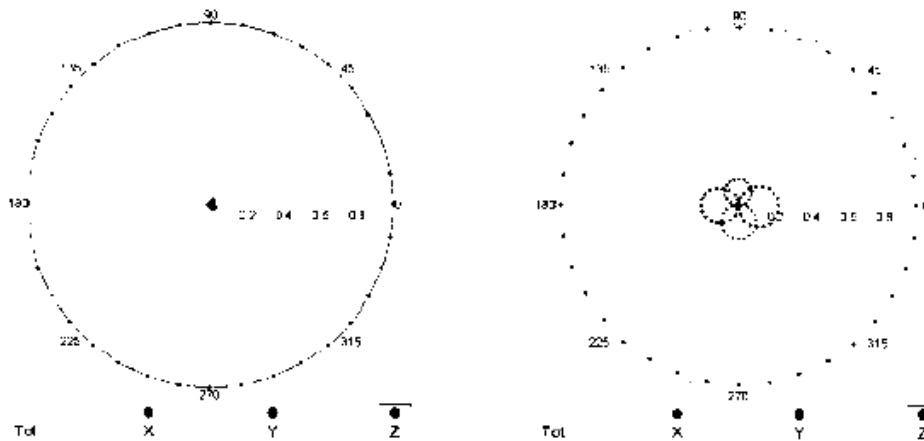**f=600 MHz,TEM,90°****f=2500 MHz,R22,90°**

es



Author Data  
**Andrew Becker**

Dates of Test  
**Feb 28, Mar. 22-23, Apr. 05, May 13-16,  
June 20-21, July 11, 2011**


Report No  
**RTS-2579-1107-18A**

FCC ID  
**L6ARDD70UW  
L6ARD70UW**

H3DV6- SN:6105


November 18, 2010

### **Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$**

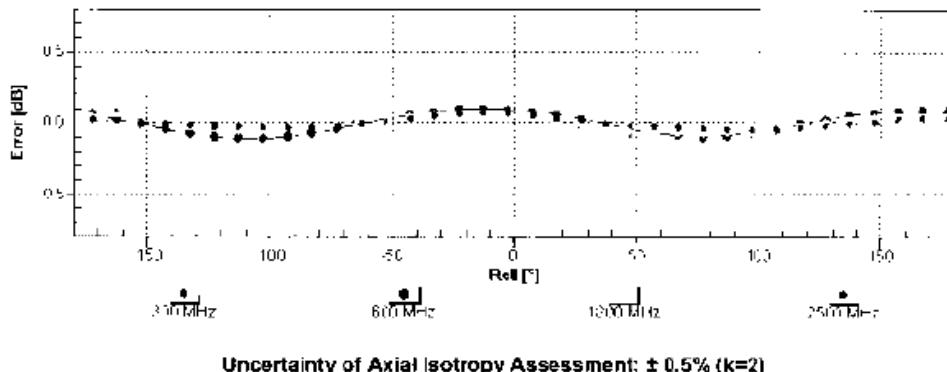

**Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)**

### **Receiving Pattern ( $\phi$ ), $\theta = 90^\circ$**

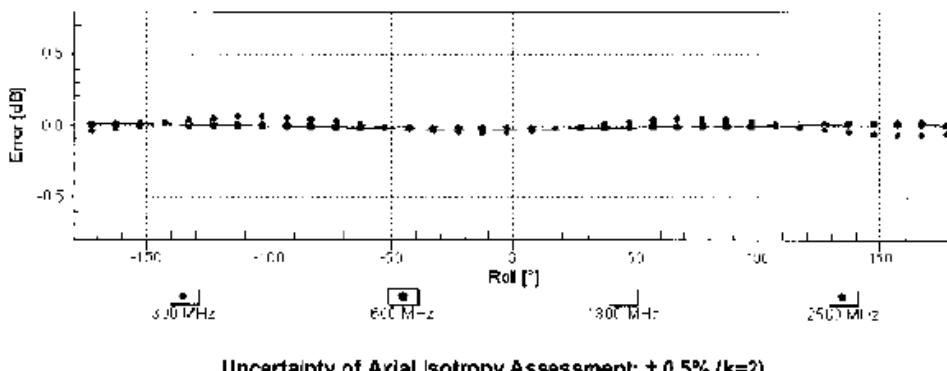

**Uncertainty of Axial Isotropy Assessment:  $\pm 0.5\%$  (k=2)**



Document  
**Annex B to Hearing Aid Compatibility RF Emissions Test  
Report for the BlackBerry® Smartphone model  
RDD711UW/RDC71UW**

Page  
**22(24)**

Author Data  
**Andrew Becker**

Dates of Test  
**Feb 28, Mar. 22-23, Apr. 05, May 13-16,  
June 20-21, July 11, 2011**



Report No  
**RTS-2579-1107-18A**

FCC ID  
**L6ARDD70UW  
L6ARDC70UW**

H3DV8- SN:6105

November 18, 2010

**Dynamic Range f(H-field)**  
(TEM cell,  $f = 900$  MHz)

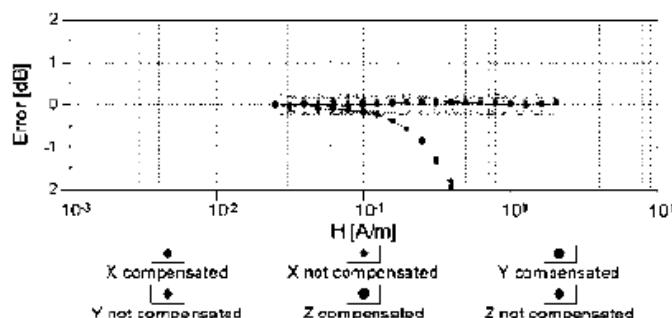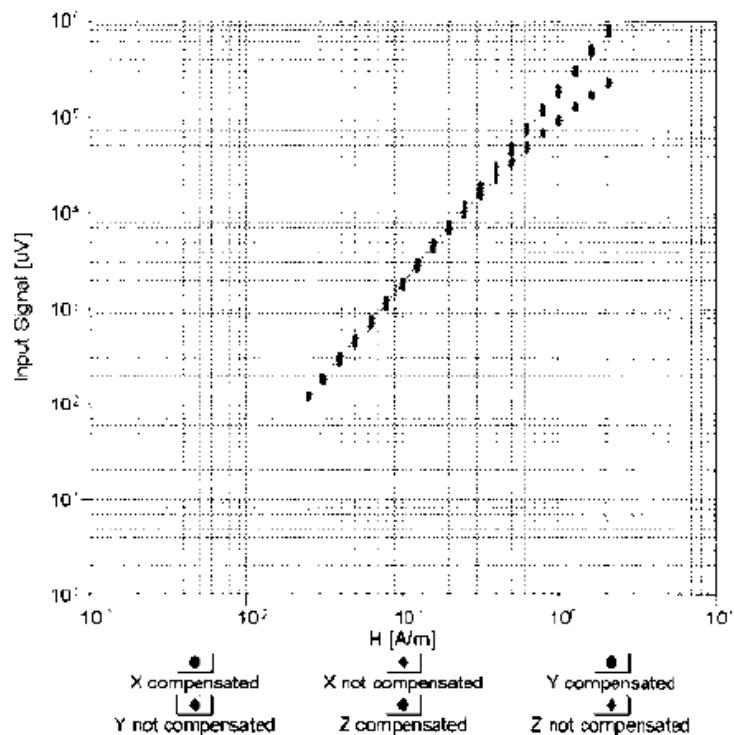

**Uncertainty of Linearity Assessment:  $\pm 0.6\%$  ( $k=2$ )**


<b>RIM Testing Services™</b>	Document <b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>	Page <b>23(24)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b>

H3DV6– SN:6105

November 18, 2010

### Deviation from Isotropy in Air

Error ( $\phi, \theta$ ),  $f = 900$  MHz

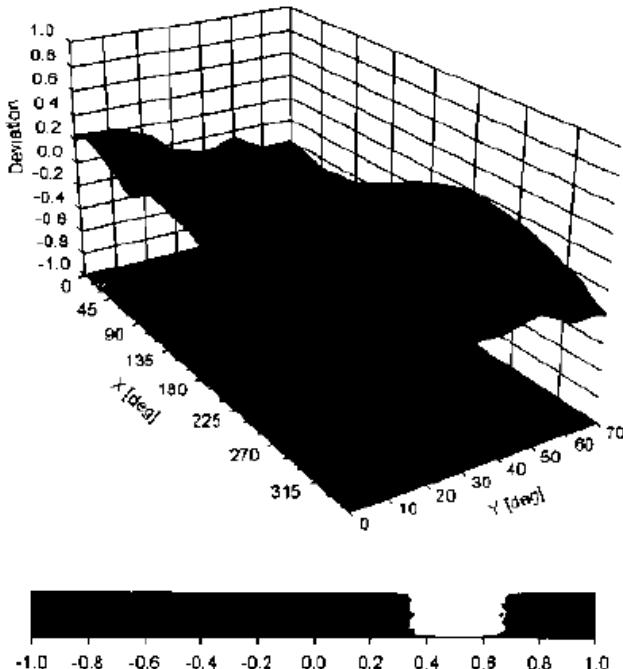

Uncertainty of Spherical Isotropy Assessment:  $\pm 2.6\%$  ( $k=2$ )

	Document <b>Annex B to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RDD711UW/RDC71UW</b>	Page <b>24(24)</b>
Author Data <b>Andrew Becker</b>	Dates of Test <b>Feb 28, Mar. 22-23, Apr. 05, May 13-16, June 20-21, July 11, 2011</b>	Report No <b>RTS-2579-1107-18A</b>

H3DV6- SN:6105

November 18, 2010

## **DASY/EASY - Parameters of Probe: H3DV6 - SN:6105**

### **Other Probe Parameters**

Sensor Arrangement	Rectangular
Connector Angle (°)	-62.8
Mechanical Surface Detection Mode	enabled
Optical Surface Detection Mode	disabled
Probe Overall Length	337 mm
Probe Body Diameter	10 mm
Tip Length	20 mm
Tip Diameter	6 mm
Probe Tip to Sensor X Calibration Point	3 mm
Probe Tip to Sensor Y Calibration Point	3 mm
Probe Tip to Sensor Z Calibration Point	3 mm