

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 1(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report

Testing Lab: RIM Testing Services 440 Phillip Street Waterloo, Ontario Canada N2L 5R9 Phone: 519-888-7465 Fax: 519-746-0189	Applicant: Research In Motion Limited 295 Phillip Street Waterloo, Ontario Canada N2L 3W8 Phone: 519-888-7465 Fax: 519-888-6906 Web site: www.rim.com
---	--

Statement of Compliance: RIM Testing Services declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices.

This Blackberry® Smartphone is a wireless portable device and has been shown to be in compliance with FCC 20.19 (10-1-07 Edition), Hearing Aid-Compatible Mobile Handsets, FCC Public Notice DA 06-1215 (June 6, 2006) and FCC Report and Order, FCC 08-68 (Feb. 28, 2008).


Tested by:
Hang Wang
Compliance Testing Associate

Signatures

Date
12-July-2011



Documented by:
Andrew Becker
SAR & HAC
Compliance Specialist



26-July-2011

Tested and reviewed by:
Daoud Attayi
Team Lead: Safety, SAR & HAC
Compliance



27-July-2011

Approved by:
Masud S. Attayi
Manager, Regulatory Compliance



03-Aug-2011

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 2(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

CONTENTS

1.0 Introduction	3
2.0 Applicable references	4
3.0 Equipment unit tested.....	5
3.1 Picture of device	5
3.2 Device description.....	5
3.3 Antenna description.....	7
3.4 Battery	7
4.0 List of test equipment	7
5.0 DASY4 HAC T-Coil measurement system and setup	7
5.1 Audio signals:	7
5.2 Input level measurement	8
5.3 Bandwidth compensation.....	8
5.4 Phantom	9
5.5 AMCC	9
5.6 AM1D probe	10
5.7 AMMI	12
5.10 Cabling	12
6.0 Measurement procedures	13
6.1 Surface check and probe sensitivity measurements	13
6.2 Audio band magnetic ambient noise measurement	14
6.3 Reference check/system validation using a TMFS.....	14
6.3 ABM1 / ABM2 detailed math and probe factor	15
6.4 Test measurement	16
7.0 Summary of test results.....	19
7.1 Conclusion	24
8.0 Measurement uncertainty.....	25
8.1 Site-Specific Uncertainty.....	26
Annex A: Probe sensitivity and reference signal measurement plots	
Annex B: TMFS system validation and ambient data/plots	
Annex C: Audio Band Magnetic measurement data and plots	
Annex D: Probe/TMFS calibration certificate and equipment spec	
Annex E: HAC T-Coil_Setup_Photos	

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 3(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

1.0 Introduction

This test report demonstrates measurement of the Audio Band Magnetic fields (ABM) generated by a wireless communication device in the region where a hearing aid would be used in the T-Coil mode.

Three quantities are measured and evaluated. The first is the field intensity of the desired signal at the center of the audio band. The second is the frequency response of the desired signal measured across the audio band. The third is the signal quality, which is defined as the ratio between the desired and undesired magnetic field levels.

The SPEAG DASY4 T-Coil extension together with the HAC RF extension allows complete characterization of the emissions of a wireless device (WD). The signals measured during these tests represent the field picked up by the T-Coil of a hearing aid. Using DASY4, three orthogonal axes are scanned with a probe incorporating a sensor coil: one axial (perpendicular), and two radial (transverse and longitudinal) directions with respect to the plane and main axis of the WD.

The WD is mounted on the Test Arch phantom (provided with the HAC RF extension). Its acoustic center is centered and represents the reference for the combination of ABM and RF field evaluation. The ABM fields of the WD (frequency range <20 kHz) are scanned with a fully RF shielded active 1D magnetic probe. The probe axis is oriented in space diagonal to the three orthogonal axes, and its single sensor can be oriented to the axes by 120° rotation. The probe signal is evaluated by an Audio Magnetic Measurement Instrument (AMMI) which is interfaced to the DASY4 computer via USB. The AMMI also provides test and calibration signals and interfaces to the Helmholtz Audio Magnetic Calibration Coil (AMCC).

Predefined or user-definable audio signals for injection into the WD during the test are available at a connector of the AMMI. The DASY4 software allows flexible control of scan, rotation, measurement duration, as well as selection of the measurement mode and signal source for all ABM measurements. Filtering as specified by the standard is applied to the sampled signal resulting in the signal level, (weighted) noise level and a third-octave resolution spectrum for the frequency response. This information is represented numerically and graphically during the scans and graphically evaluated in the postprocessor. The combination of the quantities (signal level, frequency response, signal to noise ratio) leads to an overall classification according to ANSI-C63.19. Coarse, fine and point scan together with user selectable test signals, minimize the time to find the "optimal point" with the highest class for the WD.

For each probe orientation, the background noise is measured for each probe orientation without an active WD in the area of the WD scan and should be < 10 dB than the lowest ABM2 measurement, where applicable.

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 4(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

2.0 Applicable references

- [1] ANSI C63.19-2007, American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids
- [2] FCC 47CFR § 20.19 (10-1-07 Edition), Hearing Aid-Compatible Mobile Handsets
- [3] FCC Public Notice DA 06-1215, June 2006
- [4] SPEAG DASY4 V4.7 user manual, June 2006
- [5] FCC Equipment Authorization Guidance on Hearing Aid Compatibility, Sep/Oct 2008
- [6] FCC Report and Order, FCC 08-68, Feb 2008

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 5(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

3.0 Equipment unit tested

3.1 Picture of device

Please refer to Annex E.

Figure 3.1. BlackBerry smartphone

3.2 Device description

Device Model	RDM71UW				
FCC ID	L6ARDM70UW				
PIN Number	2696B404				
Hardware Version	Rev2				
Software Version	6.1.0.260				
Prototype or Production Unit	Production				
Mode(s) of Operation in North America	GSM 850	GSM 1900	WCDMA Band V	WCDMA Band II	* Bluetooth
Nominal Maximum conducted RF Output Power (dBm)	32.5	30.0	24.0	23.5	10.0
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5	± 0.5	N/A
Duty Cycle	1:8	1:8	1:1	1:1	N/A
Transmitting Frequency Range (MHz)	824.2 – 848.8	1850.2 – 1909.8	826.4 – 846.6	1852.4 – 1907.6	2402-2483
Mode(s) of Operation	** 802.11b	** 802.11g	** 802.11n		
Nominal Maximum conducted RF Output Power (dBm)	18.0	16.0	16.0		
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5		
Duty Cycle	1:1	1:1	1:1		
Transmitting Frequency Range (MHz)	2412-2462	2412-2462	2412-2462		

Table 3.1. RDM71UW Test device characterization

* BT is not activated during test because it is not held-to-ear service.

** Wi-Fi is not activated during test because ANSI C63.19-2007 standard does not cover this technology.

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 6(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

Device Model	REN71UW			
FCC ID	L6AREN70UW			
PIN Number	27B245BB			
Hardware Version	Rev 1			
Software Version	6.1.0.157			
Prototype or Production Unit	Production			
Mode(s) of Operation in North America	GSM 850	GSM 1900	WCDMA Band IV	* Bluetooth
Nominal Maximum conducted RF Output Power (dBm)	32.5	30.0	24.0	10.0
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5	N/A
Duty Cycle	1:8	1:8	1:1	N/A
Transmitting Frequency Range (MHz)	824.2 – 848.8	1850.2 – 1909.8	1712.4 – 1752.6	2402-2483
Mode(s) of Operation	** 802.11b	** 802.11g	** 802.11n	
Nominal Maximum conducted RF Output Power (dBm)	18.0	16.0	16.0	
Tolerance in Power Setting on centre channel (dB)	± 0.5	± 0.5	± 0.5	
Duty Cycle	1:1	1:1	1:1	
Transmitting Frequency Range (MHz)	2412-2462	2412-2462	2412-2462	

Table 3.2. REN71UW Test device characterization

* BT is not activated during test because it is not held-to-ear service.

** Wi-Fi is not activated during test because ANSI C63.19-2007 standard does not cover this technology.

Note: According to manufacturer's hardware similarity declaration document, the two models (RDM71UW/ RDN71UW and REN71UW) have the same PCB/design. Please refer to the declaration for more detail. The difference is model: REN71UW does not support UMTS band II and V, instead it supports UMTS bands IV and VIII.

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 7(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

3.3 Antenna description

Type	Internal fixed antenna
Location	Bottom back centre (main licensed transmitter)
Configuration	Internal fixed antenna

Table 3.3. Antenna description

3.4 Battery

BAT-26483-003

4.0 List of test equipment

Manufacturer	Test Equipment	Model Number	Serial Number	Calibration Due Date (MM/DD/YY)
SCHMID & Partner Engineering AG	Data Acquisition Electronics (DAE3)	DAE4	881	04/19/2011
SCHMID & Partner Engineering AG	Data Acquisition Electronics (DAE3)	DAE3	472	03/07/2012
SCHMID & Partner Engineering AG	Helmholtz Coil AMCC	N/A	1021	CNR
SCHMID & Partner Engineering AG	Audio Band Magnetic Measuring Instrument (AMMI)	N/A	1013	CNR
Rohde & Schwarz	Base Station Simulator	CMU200	109747	12/07/2011
Rohde & Schwarz	Telephone Magnetic Field Simulator	TMFS	1003	01/22/2012
SCHMID & Partner Engineering AG	Audio Band Magnetic Probe	AM1DV3	3062	06/08/2011
SCHMID & Partner Engineering AG	Audio Band Magnetic Probe	AM1DV3	3062	04/07/2012

Table 4.1. List of test equipment

5.0 DASY4 HAC T-Coil measurement system and setup

5.1 Audio signals:

The following audio signal files are used for calibration and measurements:

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 8(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

48k_voice_1kHz_1s: Used according to [1] 6.3.1 step 2, The bandwidth is suited for signal quality or signal level measurements.

Multisine signal 50 Hz – 5 kHz (duration 10 s): Signal with carrier centered in each third-octave band, as used during the calibration.

48k_voice_300-3000 (duration 2 s): The signal is voice like and has been processed to have a duration of 2 seconds for fast measurement. The bandwidth is suited for frequency response measurement.

Signal type	48k_voice_1kHz_1s	48k_voice_300-3000_2s
Measurement Window Start (ms)	300	2000
Measurement Window Length (ms)	2000	4000

Table 5.1. Audio files length and averaging times

5.2 Input level measurement

To determine correct input level, the Encoder / Decoder of a Rohde & Schwarz CMU 200 base station simulator was calibrated for measured full-scale input voltage level. From the measured full-scale voltage level, the equivalent input voltage level of -16 dBm0 was calculated to be - 18.69 dBV (116 mV)

For this particular CMU200 SN: 109747 an input voltage of 116 mV will generate a -16 dBm0 signal.

Time averaging was used with an artificial speech based signal when setting the input reference level. The averaging period was adequate to cover the signal period and the averaging method was the same for setting the reference level and performing the measurement.

5.3 Bandwidth compensation

ABM1 values and deduced quantities (SNR and frequency response scaling) are based on the measured field in the 1 kHz third-octave filter. Bandwidth compensated values are available under the following conditions:

- A reference measurement with the same signal type is available (T-Coil job marked with “use as reference”) before the job to be compensated.
- The reference measurement is taken in the AMCC (z orientation), evaluating the coil signal.
- The reference measurement precedes the job within the same procedure.
- Before displaying the desired value based on the measured ABM1 value, a pop-up window appears, proposing a default value based on the reference measurement.

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 9(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

The proposed value is calculated as the ratio of (power sum of third-octave filters from 100 Hz to 5 kHz) / (ABM1 in 1 kHz third-octave filter). This factor leads to the “ABM1 bandwidth compensated” which is an estimation of the signal level of a narrowband ABM1 signal with the same input amplitude. The estimated value may however differ from a measurement with a narrowband signal due to nonlinearity effects or contribution of noise and interference available during the reference measurement.

If an input signal is completely within the 1 kHz third-octave band is used (narrow band signal), no compensation is required. If the test signal contains spectral components in other third-octave bands, the power in the 1 kHz subband is lower for the same overall power, and the reading from the 1 kHz band is consequently reduced. This reduction shall be compensated to give the equivalent reading as when using a narrowband signal. The reduction - when using a wideband signal with the same overall RMS power - is the ratio between the overall RMS power and the RMS power in the 1 kHz band. For signal with limited bandwidth (e.g. from 300 Hz to 3 kHz), the power is determined by summing up their contribution in all third-octave subbands. The correction is the ratio "sum power / 1 kHz power" (linear) or the equivalent value in dB ($20 \cdot \log(V_{rms\ total} / V_{rms\ 1k})$).

For 1025 Hz, the proposed factor is very close to 0 dB (linear 1), because the signal is completely within the 1 kHz subband. Small deviations may occur due to noise during the reference measurement, or due to other spectral components. Differences between the narrowband and the voice signal test: ABM1 (without BWC) for the same RMS reading is smaller for the wideband (voice) signal compared to the narrowband signal by the BWC. For the “**48k_voice_300-3000 (duration 2 s)**” predefined signals, the difference is provided by SPEAG to be 10.8 dB.

During the reference measurement, the spectral distribution of the input signal is determined. A spectral distribution results which is equivalent to the input distribution plus the response of the WD. To determine the response of the WD, the spectrum from the WD is deducted. The response is then compared to the limits, which are level dependent (based on the ABM1 signal level). For the display, the spectrum is displayed with the BWC applied.

5.4 Phantom

Figure 5.1 shows the phantom setup in a DASY4 system. The AMCC is mounted on the same plane as the HAC Test Arch phantom available from the HAC RF extension.

5.5 AMCC

The Audio Magnetic Calibration Coil is a Helmholtz Coil designed according to [1], section D.9 for calibration of the AM1D probe. The two horizontal coils generate a homogeneous magnetic field in the z direction.

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 10(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

Shunt sensitivity $H_c = 1 \text{ A/m per } 100\text{mV}$ according to formula:

$$H_c = (U / R) * N / r / (1.25 ^ 1.5)$$

Number of turns $N = 20$ per coil
Coil radius $r = 143 \text{ mm}$
Shunt resistance $R = 10.00 \text{ Ohm}$

Please refer to the certificate of conformity doc No 880-SD HAC P02 A-A in Annex D for more detail.

5.6 AM1D probe

The AM1D probe is an active probe with a single sensor according to [1] section D.8. It is fully RF shielded and has a rounded tip of 6 mm diameter incorporating a pickup coil with its center offset 3mm from the tip and the sides.

SPEAG, the manufacturer of the T-Coil system tested the probe frequency response and its dynamic range. Compliance with [1] is stated in the Certificate of conformity document 880-SPAM1001A-A. Also the probe frequency has been verified and the response deviation from the ideal differentiator was within +0.05 and - 0.46 dB in the range 100 Hz to 10 kHz on the center frequencies of the third-octave bands. Note that this verification includes the probe preamplifier and the AMMI internal preamplifiers, filters and processing.

Frequency response:

The frequency response has been tested to be within +/- 0.5 dB of ideal differentiator from 100 Hz to 10 kHz. The test was performed with the real integrator and deducting the ideal integrator values. The reference signal was the Helmholtz calibration coil current which is equivalent to the field. The coil is qualified according to the probe manufacturer certificate.

The test data up to 5 kHz are visible directly in the calibration job result (coil current / shut voltage and probe voltage). Separate measurements were made for a very wide frequency range, including higher frequencies. The third-octave bands up to 5 kHz do not exceed + 0.05 dB and decay by < 0.2 dB to 5 kHz and by < 0.5 dB to 10 kHz , as required.

Dynamic range:

maximum + 21 dB A/m @ 1 kHz
Noise level typically -70 dB A/m @ 1 kHz
ABM2 typically -60 dB A/m

Linearity

Within < 0.1 dB from 5 dB
below limitation to 16 dB above noise level

Linearity has also been tested and is stated in the certificate. Deviation was not measurable from 5 dB below limitation to 26 dB above noise level. For lower levels, the deviation increased to 0.1 dB at 16 dB above noise level, which corresponds to the theoretical value of 0.11 dB expected at that noise suppression level.

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 11(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

Significant noise contribution beyond 10 kHz will be attenuated by the convolution A-filter. Such interferences also contribute to ABM2 represented as numerical value from the integration.

Sensitivity

Typically -24 dBV / A/m @ 1 kHz probe output

For detailed T-Coil probe's dynamic range, linearity and frequency response demonstration, the manufacturer has supplied a report directly to the FCC which is not intended for publication.



Figure 5.1: T-Coil set up with HAC Test Arch with Helmholtz Coil (AMCC)

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 12(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

5.7 AMMI

The Audio Magnetic Measuring Instrument (AMMI) is a desktop 19-inch unit containing a sampling unit, a waveform generator for test and calibration signals and a USB interface.

Audio Out BNC, audio signal to the base station simulator, for > 500 Ohm load

Coil Out BNC, test and calibration signal to the AMCC (top connector), for 50 Ohm load

Coil In XLR, monitor signal from the AMCC BNO connector, 600 Ohm

Probe In XLR, probe signal and phantom supply to the probe connector



Figure 5.2. The Audio band Magnetic field Measuring Instrument (AMMI)

5.10 Cabling

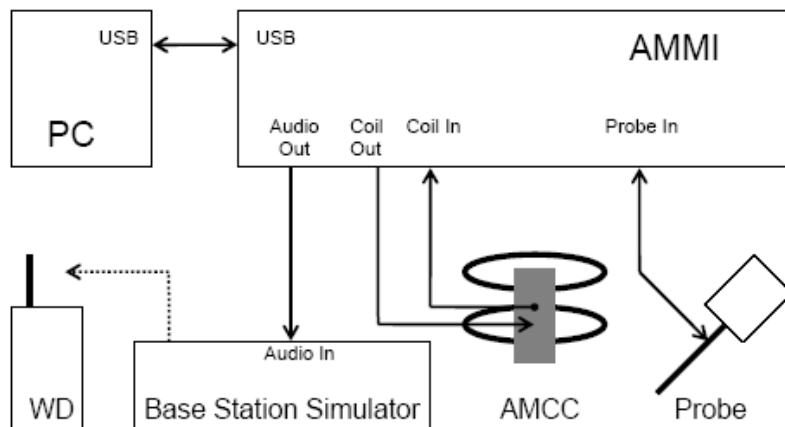


Figure 5.3. T-Coil set up cabling

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 13(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

6.0 Measurement procedures

6.1 Surface check and probe sensitivity measurements

Calibrate HAC phantom: After teaching of the reference points P1, P2 and P3 of the HAC Test Arch and installation of a WD below the Test Arch, the plane defined by the 3 points may correspond to the top plane of the Test Arch. This option of the Surface Check job measures the mechanical surface with the probe in vertical position, using all 4 points and determines the optimal plane for all the following measurements. The coordinate system of the whole setup is adjusted to the resulting plane.

Calibrate AM1D probe: This option allows the adjustment of the sensor center of the AM1D probe accurately at the desired measurement point. In Southwest tilting mode, the probe center should be aligned to the position 3.0mm above point P1 by shifting the x, y and z coordinates. The probe surface is in this situation directly located at the center of point P1. The offset resulting from this teaching process is stored in the installation of the phantom for further use with the same configuration.

Calibration

If the "Calibration" signal is selected in the T-Coil measurement job, a 3-phase calibration is performed.

In phase 1, the audio output is switched off, and a 200 mV_{pp} symmetric rectangular signal of 1 kHz is generated and internally connected directly to both channels of the sampling unit (coil in, probe in).

In phase 2, the audio output is off, and a 20 mV_{pp} symmetric 100 Hz signal is internally connected.

The signals during these phases are available at the output on the rear panel of the AMMI. The output must however not be loaded in order not to influence the calibration. After the first two phases, the two input channels are both calibrated for absolute measurements. The resulting factors are displayed above the multimeter window.

In phase 3, a multisine signal covering each third-octave band from 50 Hz to 5 kHz is generated and applied to both audio outputs. The probe should be positioned in the center of the AMCC (user point "coil center") and aligned in the z-direction, the field orientation of the AMCC. The Coil In channel is measuring the voltage over the AMCC internal shunt, which is proportional to the magnetic field in the AMCC. At the same time, the Probe In channel samples the amplified signal picked up by the probe coil. The ratio of the two voltages – in each third-octave filter

Leads to the calibration factor of the probe over the frequency band of interest for the spectral representation.

The measured probe sensitivity, target and delta values are shown below:

Measured probe sensitivity V / (A/m)	Target manufacturer probe sensitivity V / (A/m)
0.00733	0.00741

Table 6.1. Measured probe sensitivity value

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 14(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

6.2 Audio band magnetic ambient noise measurement

For each probe orientation, the background noise was measured without an active WD in the area of the scan and the noise was determined to be < 10 dB than the lowest ABM2 measurement, where applicable.

6.3 Reference check/system validation using a TMFS

A reference check of the test setup and instrumentation was performed using a reference TMFS (Telephone Magnetic Field Simulator).

The TMFS was positioned into the test setup at the position to be occupied by the WD. The emissions from the TMFS were measured and confirmed to be within tolerance of the expected values.

Distance TMFS top-probe centre	10 mm
Scan resolution dx, dy	2-5 mm
Scan area	50 x 50 mm
Frequency	1 KHz
Signal level to TMFS for field scan	500 mV rms
Signal type for field scan	1 KHz sine
Signal type for frequency reponse	Multisine signal 50-5000 Hz

Table 6.2. Setup and configuration for system validation using TMFS

	Measured Value dB (A/m)	Manufacturer Target Value dB(a/m)	Ambient Noise dB (A/m)
Axial max signal	-20.69	-20.17	-50.69
Radial L max signal	-26.15	-25.77	-50.66
Radial T max signal	-26.19	-25.76	-50.63
Frequency Response	Flat	Flat	N/A

Table 6.3. Maximum measured, target field and delta values for system validation using TMFS

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 15(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

6.3 ABM1 / ABM2 detailed math and probe factor

ABM1 measurement flow chart:

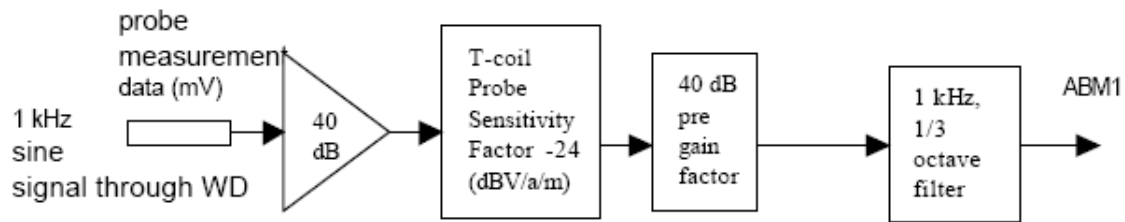


Figure 6.1. ABM1 block diagram

Sine tone:

RTA 1 kHz (data + probe sensitivity of (24.0 dB V/(a/m)) – 40 dB pre-gain) = ABM1 (in dB (A/m))

ABM2 measurement flow chart:

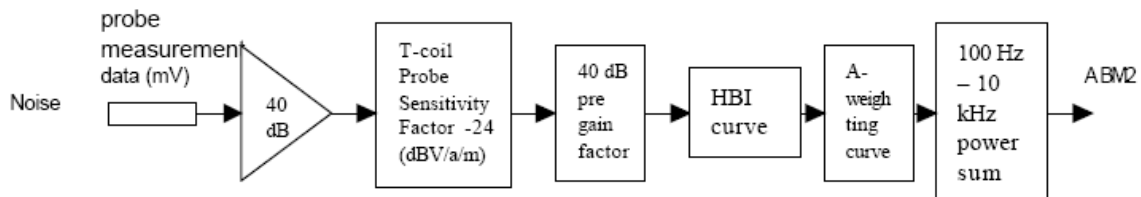


Figure 6.2. ABM2 block diagram

Broadband noise:

Power Sum 1/3 octave, 0.1 - 10 kHz [RTA 0.1 – 10 kHz (data + probe sensitivity of (24.0 dB V/(A/m)) – 40 dB pre-gain)] + HBI curve + A_weighting curve = ABM2 (in dB (A/m))

ABM2 includes HBI as well as A-weighting curves as shown above.

The numerical values (ABM Noise) are the final result of the weighted integral. DASY4 uses filters by applying convolution in the time-domain. Therefore, significant contributions beyond 10 kHz would appear in the ABM2 result, even if they are not directly visible in the visualized spectrum.

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 16(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

6.4 Test measurement

1. Calibrate the AM1D probe using a Helmholtz coil with reference calibration signal as per section 6.1.
2. For each probe orientation, measure ambient noise.
3. A reference check of the test setup and instrumentation may be performed using a TMFS. Position the TMFS into the test setup at the position to be occupied by the WD. Measure the emissions from the TMFS and confirm that they are within tolerance of the expected values.
4. Position the WD in the test setup as shown on Figure 5.1 and connect the WD RF connector to a base station simulator.
5. Set the reference drive level for the system with the maximum volume control setting. The drive level is set such that the reference input level is input to the base station in the 1 kHz, 1/3 octave band. This drive level shall be used for the audio band signal test (ABM1 at fi). Either a sine wave at 1025 Hz or a voice-like signal shall be used for the reference audio signal. If interference is found at 1025 Hz an alternate reference audio signal frequency may be used. The same drive level will be used for the ABM1 frequency response measurements at each 1/3 octave band center frequency.
6. Determine the peak audio magnetic measurement for the WD device by scanning a 50x50 mm coarse (5 mm step) and a fine scan of 8x8 mm (2 mm step) for each probe orientation.
7. At each peak field measurement location measure and record the desired audio band magnetic signals (ABM1 at fi). The desired audio band input frequency (fi) shall be centered in each 1/3 octave band maintaining the same drive level and the reading taken for that band.
8. The separation distance of 1 cm is controlled between the center of the probe sensor and the top highest surface of the WD, throughout the measurement.

The following reference input levels that correlate to a normal speech input level shall be used for the standard transmission protocols.

STANDARD	TECHNOLOGY	INPUT (dBm0)
TIA/EIA/IS-2000	CDMA	-18
TIA/EIA/IS-136	TDMA (50 Hz)	-18
J-STD-007	GSM (217 Hz)	-16
IDEN	TDMA (22 and 11 Hz)	-18
T1/T1P1/3GPP	UMTS (WCDMA)	-16

Table 6.4. Normal speech input levels

8. At each peak field measurement location measure and record the undesired broadband audio magnetic signal (ABM2) with no signal applied (or digital zero applied, if appropriate) using A-weighting, and calculate the ratio of the desired to undesired signal strength (i.e. – signal quality)
9. From the measured signal to noise ratio, classify signal quality as T1 to T4 using the limits from Table 6.5.

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW	Page 17(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B FCC ID L6ARDM70UW L6AREN70UW

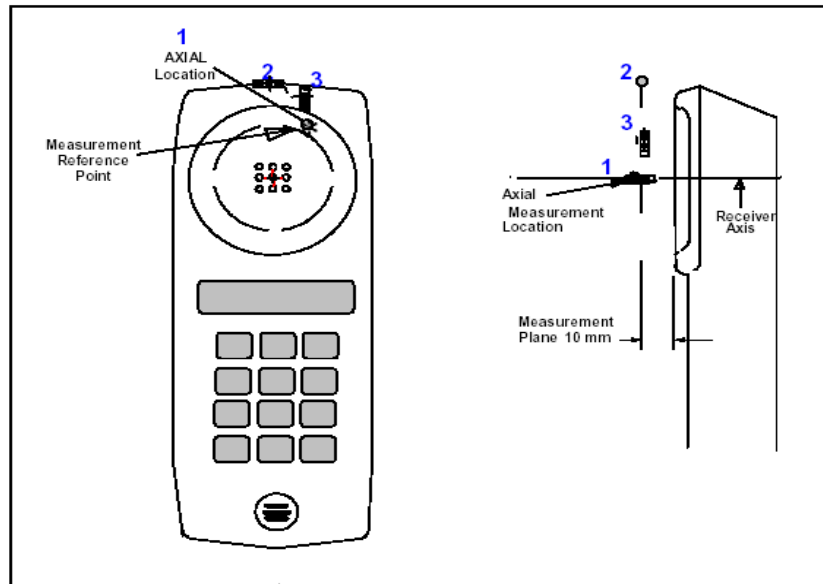


Figure 6.3. Axis & planes for WD audio band magnetic field measurements

Category	Telephone parameters WD signal quality [(signal + noise)-to-noise ratio in decibels]
Category T1	0 dB to 10 dB
Category T2	10 dB to 20 dB
Category T3	20 dB to 30 dB
Category T4	> 30 dB

Table 6.5. T-Coil signal quality categories

Field orientation	At frequency (KHz)	Audio Filter	Limit dB (A/m)
Axial, Radial L, Radial T	1.025	1/3 octave band	≥ -18

Table 6.6. Field Intensity (ABM1 signal) Limit

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 18(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

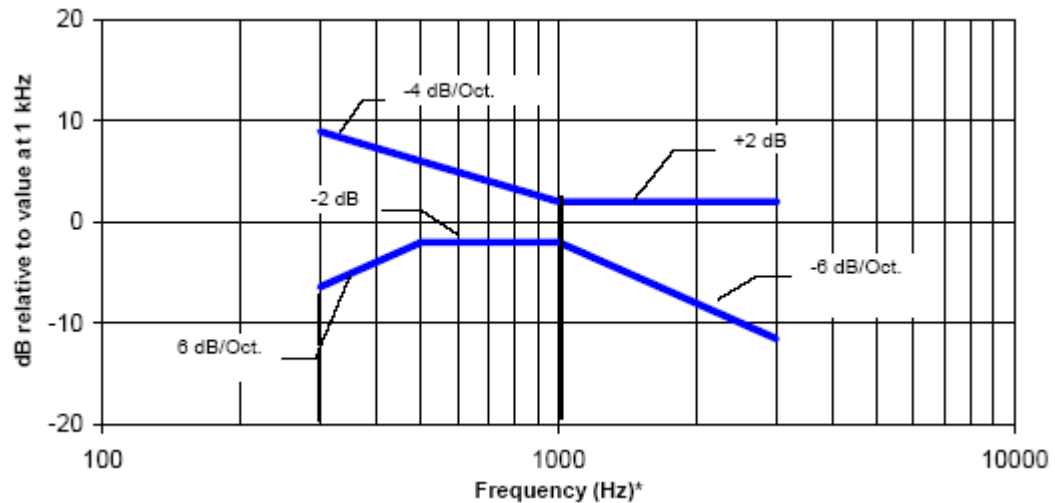


Figure 6.7. Magnetic field frequency response for WDs with a field between 10 dB and -13 dB (A/m) at 1 kHz

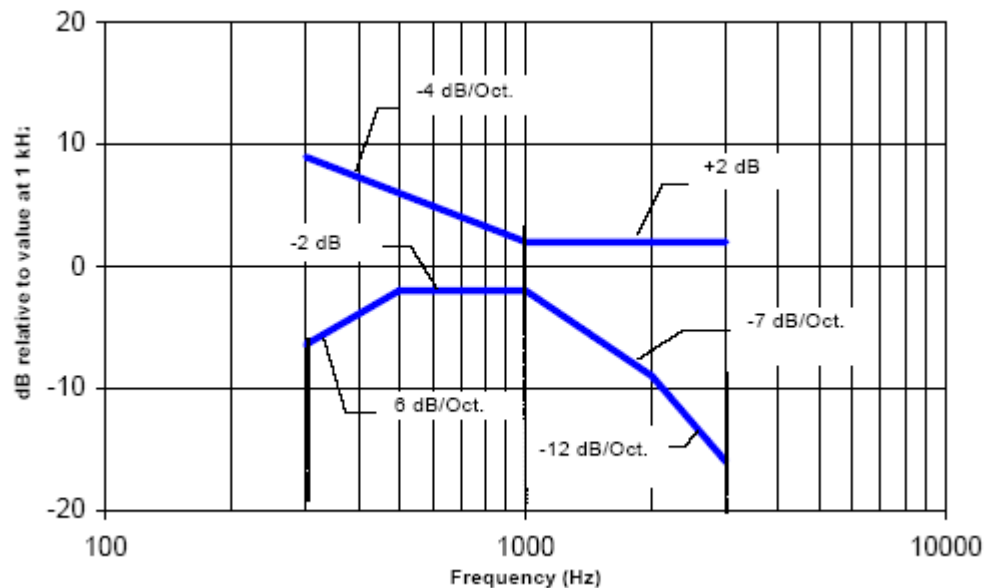


Figure 6.8. Magnetic field frequency response for WDs with a field that exceeds -10 dB(A/m) at 1 kHz

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 19(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

7.0 Summary of test results

Audio Band Magnetic Field Test								
Mode	Probe orient.	f (MHz)	Cond. Pwr. (dBm)	ABM1 dB (A/m)	ABM2 dB (A/m)	ABM1/ABM2 dB	Freq. Resp. Verd.	T-Rating
GSM 850	Axial	824.2	32.8	7.06	-41.65	48.71	P	4
	Radial L	824.2	32.8	8.02	-14.55	22.57	N/A	3
	Radial T	824.2	32.8	7.03	-17.33	24.36	N/A	3
	Axial	836.8	32.6	7.08	-41.84	48.92	P	4
	Radial L	836.8	32.6	7.05	-15.54	22.59	N/A	3
	Radial T	836.8	32.6	7.20	-17.22	24.42	N/A	3
	Axial	848.8	32.8	7.16	-41.53	48.69	P	4
	Radial L	848.8	32.8	6.88	-15.68	22.56	N/A	3
	Radial T	848.8	32.8	7.45	-16.91	24.36	N/A	3
GSM 1900	Axial	1850.2	29.7	16.15	-21.76	37.91	P	4
	Radial L	1850.2	29.7	7.39	-24.33	31.72	N/A	4
	Radial T	1850.2	29.7	7.52	-20.74	28.26	N/A	3
	Axial	1880.0	29.8	15.95	-21.95	37.90	P	4
	Radial L	1880.0	29.8	5.73	-26.32	32.05	N/A	4
	Radial T	1880.0	29.8	6.74	-21.65	28.39	N/A	3
	Axial	1909.8	29.6	16.11	-22.08	38.19	P	4
	Radial L	1909.8	29.6	6.95	-25.05	32.00	N/A	4
	Radial T	1909.8	29.6	7.38	-21.14	28.52	N/A	3
Overall T-Rating							T3	
M-rating							M3	

Table 7.1. RDM71UW ABM test data summary (Slider Closed)

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 20(27)
	Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B FCC ID L6ARDM70UW L6AREN70UW

Audio Band Magnetic Field Test								
Mode	Probe orient.	f (MHz)	Cond. Pwr. (dBm)	ABM1 dB (A/m)	ABM2 dB (A/m)	ABM1/ABM2 dB	Freq. Resp. Verd.	T-Rating
GSM 850	Axial							
	Radial L							
	Radial T							
	Axial	836.8	32.6	17.11	-29.06	46.17	P	4
	Radial L	836.8	32.6	8.50	-32.69	41.19	N/A	4
	Radial T	836.8	32.6	9.44	-27.15	36.59	N/A	4
	Axial							
	Radial L							
	Radial T							
GSM 1900	Axial							
	Radial L							
	Radial T							
	Axial	1880.0	29.8	18.04	-31.44	49.48	P	4
	Radial L	1880.0	29.8	7.53	-42.79	50.32	N/A	4
	Radial T	1880.0	29.8	8.55	-33.50	42.05	N/A	4
	Axial							
	Radial L							
	Radial T							
Overall T-Rating							T4	
M-rating							M3	

Table 7.2. RDM71UW ABM test data summary (Slider Open)

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 21(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

Audio Band Magnetic Field Test								
Mode	Probe orient.	f (MHz)	Cond. Pwr. (dBm)	ABM1 dB (A/m)	ABM2 dB (A/m)	ABM1/ABM2 dB	Freq. Resp. Verd.	T-Rating
WCDMA Band V	Axial	826.4	24.0	16.91	-37.94	54.85	P	4
	Radial L	826.4	24.0	8.03	-44.45	52.48	N/A	4
	Radial T	826.4	24.0	9.06	-43.57	52.63	N/A	4
	Axial	836.4	24.2	15.91	-38.85	54.76	P	4
	Radial L	836.4	24.2	8.20	-44.60	52.80	N/A	4
	Radial T	836.4	24.2	9.20	-43.55	52.75	N/A	4
	Axial	846.4	24.1	15.61	-39.20	54.81	P	4
	Radial L	846.4	24.1	7.78	-44.63	52.41	N/A	4
WCDMA Band II	Radial T	846.4	24.1	8.26	-44.18	52.44	N/A	4
	Axial	1852.4	23.7	16.39	-38.47	54.86	P	4
	Radial L	1852.4	23.7	7.47	-45.09	52.56	N/A	4
	Radial T	1852.4	23.7	7.20	-45.27	52.47	N/A	4
	Axial	1880.0	23.3	16.82	-37.45	54.75	P	4
	Radial L	1880.0	23.3	7.59	-44.94	52.53	N/A	4
	Radial T	1880.0	23.3	7.34	-44.77	52.11	N/A	4
	Axial	1907.7	23.8	16.67	-38.11	54.78	P	4
Overall T-Rating							T4	
M-rating							M4	

Table 7.3. RDM71UW ABM test data summary (Slider Closed)

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 22(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

Audio Band Magnetic Field Test								
Mode	Probe orient.	f (MHz)	Cond. Pwr. (dBm)	ABM1 dB (A/m)	ABM2 dB (A/m)	ABM1/ABM2 dB	Freq. Resp. Verd.	T-Rating
WCDMA Band V	Axial							
	Radial L							
	Radial T							
	Axial	836.4	24.2	17.43	-37.68	55.11	P	4
	Radial L	836.4	24.2	8.76	-44.91	53.67	N/A	4
	Radial T	836.4	24.2	9.22	-44.03	53.25	N/A	4
	Axial							
	Radial L							
	Radial T							
WCDMA Band II	Axial							
	Radial L							
	Radial T							
	Axial	1880.0	23.3	16.70	-38.52	55.22	P	4
	Radial L	1880.0	23.3	8.12	-45.36	53.48	N/A	4
	Radial T	1880.0	23.3	8.51	-44.78	53.29	N/A	4
	Axial							
	Radial L							
	Radial T							
Overall T-Rating							T4	
M-rating							M4	

Table 7.4. RDM71UW ABM test data summary (Slider Open)

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 23(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

Audio Band Magnetic Field Test, Slider Closed								
Mode	Probe orient.	f (MHz)	Cond. Pwr. (dBm)	ABM1 dB (A/m)	ABM2 dB (A/m)	ABM1/ABM2 dB	Freq. Resp. Verd.	T-Rating
WCDMA Band IV	Axial	1712.4	23.8	16.61	-39.54	56.15	P	4
	Radial L	1732.6	24.0	7.67	-46.37	54.04		4
	Radial T	1752.5	23.6	10.06	-44.05	54.11		4
	Axial	1712.4	23.8	16.31	-40.06	56.37	P	4
	Radial L	1732.6	24.0	7.47	-46.27	53.74		4
	Radial T	1752.5	23.6	10.18	-44.05	54.23		4
	Axial	1712.4	23.8	16.74	-39.61	56.35	P	4
	Radial L	1732.6	24.0	7.83	-45.69	53.52		4
	Radial T	1752.5	23.6	10.38	-43.72	54.10		4
Overall T-Rating							T4	
M-rating							M4	

Table 7.5. REN71UW ABM test data summary (Slider Closed)

Audio Band Magnetic Field Test, Slider Open								
Mode	Probe orient.	f (MHz)	Cond. Pwr. (dBm)	ABM1 dB (A/m)	ABM2 dB (A/m)	ABM1/ABM2 dB	Freq. Resp. Verd.	T-Rating
WCDMA Band IV	Axial	1712.4	23.8	17.44	-39.59	57.03	P	4
	Radial L	1732.6	24.0	8.17	-46.48	54.65		4
	Radial T	1752.5	23.6	8.41	-46.13	54.54		4
	Axial	1712.4	23.8	16.66	-39.88	56.54	P	4
	Radial L	1732.6	24.0	8.38	-46.25	54.63		4
	Radial T	1752.5	23.6	8.19	-46.57	54.76		4
	Axial	1712.4	23.8	17.58	-39.09	56.67	P	4
	Radial L	1732.6	24.0	8.71	-46.13	54.84		4
	Radial T	1752.5	23.6	8.70	-46.01	54.71		4
Overall T-Rating							T4	
M-rating							M4	

Table 7.6. REN71UW ABM test data summary (Slider Open)

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 24(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

7.1 Conclusion

The BlackBerry® Smartphone model: RDM71UW/REN71UW is categorized to be M3T3 based on RF Emission and Audio Band Magnetic (ABM) T-Coil performance in accordance with ANSI C63.19-2007: American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids.

Therefore, the device is found to be in compliance with the requirements of FCC 20.19 (10-1-07 Edition) Hearing Aid-Compatible Mobile Handsets as modified by FCC Public Notice DA 06-1215 (Released: June 6, 2006) and FCC Report and Order (Feb. 28, 2008).

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW			Page 25(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW	

8.0 Measurement uncertainty

Error Description	Uncertainty value [%]	Prob. Dist.	Div.	c	c	Std. Unc.	Std. Unc.
				ABM1	ABM2	ABM1	ABM2
PROBE SENSITIVITY							
Reference level	3.0	N	1.0	1	1	3.0	3.0
AMCC geometry	0.4	R	1.7	1	1	0.2	0.2
AMCC current	0.6	R	1.7	1	1	0.4	0.4
Probe positioning during calibration	1.0	R	1.7	1	1	0.6	0.6
Noise contribution	0.7	R	1.7	0.014	1	0.0	0.4
Frequency slope	5.9	R	1.7	0.1	1.0	0.3	3.5
PROBE SYSTEM							
Repeatability / Drift	1.0	R	1.7	1	1	0.6	0.6
Linearity / Dynamic range	0.6	R	1.7	1	1	0.4	0.4
Acoustic noise	1.0	R	1.7	0.1	1	0.1	0.6
Probe angle	2.3	R	1.7	1	1	1.4	1.4
Spectral processing	0.9	R	1.7	1	1	0.5	0.5
Integration time	0.6	N	1.0	1	5	0.6	3.0
Field disturbance	0.2	R	1.7	1	1	0.1	0.1
TEST SIGNAL							
Reference signal spectral response	0.6	R	1.7	0	1	0.0	0.4
POSITIONING							
Probe positioning	1.9	R	1.7	1	1	1.1	1.1
Phantom thickness	0.9	R	1.7	1	1	0.5	0.5
DUT positioning	1.9	R	1.7	1	1	1.1	1.1
EXTERNAL CONTRIBUTIONS							
RF interference	0.0	R	1.7	1	1	0.0	0.0
Test signal variation	2.0	R	1.7	1	1	1.2	1.2
COMBINED UNCERTAINTY							
Combined Std. uncertainty (ABM field)						4.1	6.2
Expanded Std. uncertainty [%]						8.2	12.3

Table 8.1. Worst-Case uncertainty budget for HAC T-Coil assessment according to ANSI C63.19.

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 26(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

8.1 Site-Specific Uncertainty

RF Reflections

ANSI C63.19 requires that any RF reflecting objects are a minimum distance of 2 wavelengths away from the WD under test. For this WD, the longest wavelength occurs when the WD is transmitting at 824.7MHz. The wavelength is:

$$\lambda = \frac{c}{f} = \frac{3 \cdot 10^8 \text{ m/s}}{824.7 \text{ MHz}} = 0.364 \text{ m}$$

Therefore, 2 wavelengths result in a distance of 0.73m. Tests are performed in an RF shielded chamber. The distance to the nearest wall is >1m and the distance to the robot's safety guardrail is > 1.0m, both satisfying the requirement. In addition, RF absorbing cones are placed at the base of the robot to further reduce reflections. The HAC phantom arch is made of low dielectric constant plastic and should not be a source of reflections.

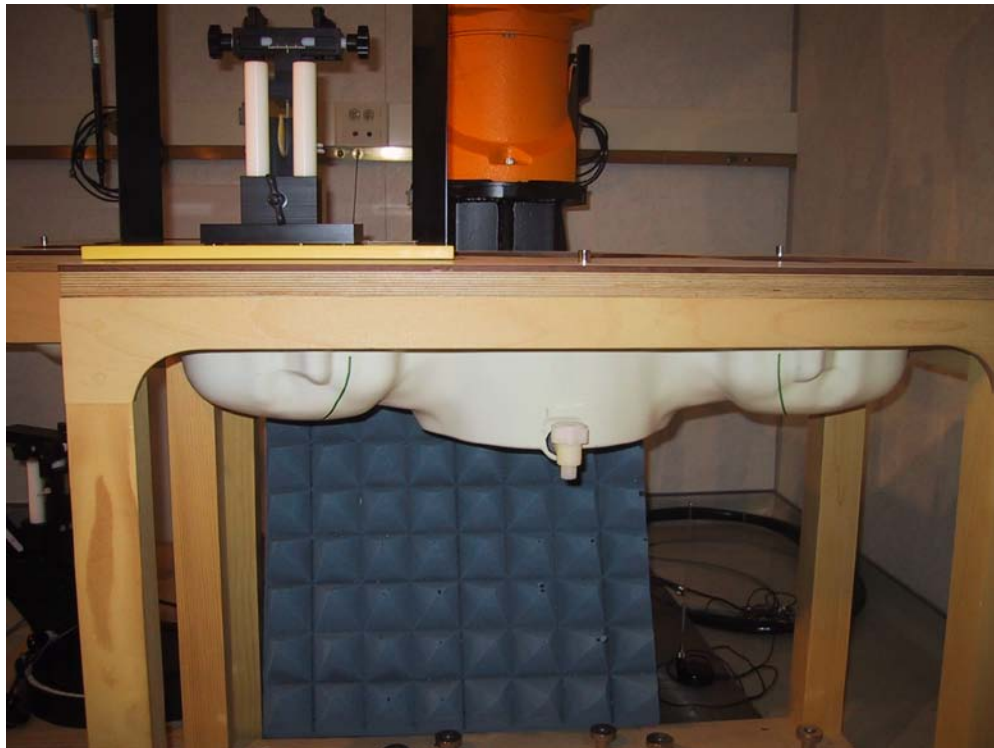


Figure 8.1. DASY4 system with absorbing material

Environmental Conditions

During measurements, the temperature of the test lab was kept between 21°C and 25°C and relative humidity was maintained between 20% and 55%.

	Document Hearing Aid Compatibility Audio Band Magnetic (ABM) T-Coil Test Report for BlackBerry® Smartphone model RDM71UW/REN71UW		Page 27(27)
Author Data Andrew Becker	Dates of Test Mar. 09-10, May 27, July 12, 2011	Report No RTS-3640-1103-10B	FCC ID L6ARDM70UW L6AREN70UW

Ambient Noise

ANSI C63.19 section 6 requires the ambient noise to be at least 10 dB below the measurement level, where applicable. Measurement of the ambient magnetic field was performed for each probe orientation and the levels are shown in the Table 6.3 and Annex B plots to be lower than ABM1 and ABM2 by at least 10 dB.