

 <p>Document  <b>Hearing Aid Compatibility RF Emissions Test Report for  the BlackBerry® Smartphone model RFF91LW, RFK121LW</b></p>			Page <b>1(24)</b>
Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

# Hearing Aid Compatibility RF Emissions Test Report

**Testing Lab:** RIM Testing Services  
440 Phillip Street  
Waterloo, Ontario  
Canada N2L 5R9  
Phone: 519-888-7465  
Fax: 519-746-0189

**Applicant:** Research In Motion Limited  
295 Phillip Street  
Waterloo, Ontario  
Canada N2L 3W8  
Phone: 519-888-7465  
Fax: 519-888-6906  
Web site: [www.rim.com](http://www.rim.com)

**Statement of Compliance:** RIM Testing Services (RTS) declares that the product was tested in accordance with the appropriate measurement standards, guidelines and recommended practices.

This Blackberry® Smartphone is a wireless portable device and has been shown to be in compliance with FCC 20.19 (10-1-07 Edition), Hearing Aid-Compatible Mobile Handsets, FCC Public Notice DA 06-1215 (June 6, 2006) and FCC Report and Order, FCC 08-68 (Feb. 28, 2008).

---

Andrew Becker  
SAR & HAC Compliance Specialist  
(Verification of the Test Report)

---

Daoud Attayi  
Compliance Manager (SAR/HAC)  
(Author of the Test report)

---

Masud S. Attayi  
Manager, Regulatory Compliance  
(Approval for the Test Report)

**RTS is accredited**  
according to  
EN ISO/IEC 17025 by:



**592**

 <p>Document  <b>Hearing Aid Compatibility RF Emissions Test Report for  the BlackBerry® Smartphone model RFF91LW, RFK121LW</b></p>			Page 2(24)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

## CONTENTS

1.0 Introduction .....	3
2.0 Applicable references .....	4
3.0 Equipment unit tested.....	5
3.1 Picture of device .....	5
3.2 Device description .....	5
3.3 Battery .....	10
3.4 Antenna description.....	10
4.0 List of test equipment .....	10
5.0 Measurement procedures .....	11
5.1 System Validation.....	11
5.1.1 Dipole Validation.....	11
5.1.2 RF Field Probe Modulation Factor .....	12
5.2 Near-Field RF Emission .....	15
6.0 Summary of results.....	18
6.1 Conclusion.....	22
7.0 Measurement uncertainty .....	23
7.1 Site-Specific Uncertainty .....	24

### Annex A: Measurement plots and data

- A.1 Spectrum analyser plots: CW, 80% AM and GSM/WDMA signals
- A.2 Dipole validation and probe modulation factor plots
- A.3 RF emission field plots

### Annex B: Probe and dipole descriptions and calibration certificates

- B.1 Probe and measurement chain description and specifications
- B.2 Probe and dipole calibration certificates

### Annex C: Test set up photos

 <p>Document  <b>Hearing Aid Compatibility RF Emissions Test Report for  the BlackBerry® Smartphone model RFF91LW, RFK121LW</b></p>			Page <b>3(24)</b>
Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

## 1.0 Introduction

This test report documents the measurement of the near electric and magnetic fields generated by a wireless communication device in the region where a hearing aid would be used. The measurement procedures of ANSI C63.19-2007 were followed along with the guidance provided by the FCC.

The electric and magnetic fields from a wireless device are scanned using a SPEAG DASY5 automated system with HAC extension and free-space probes (ER3DVx and H3DVx) in a 5cm x 5cm area, 15mm above the wireless device's acoustic output and the centre point of the probe element. The area is divided into 9 sub-grids and the maximum values of the electrical and a magnetic field scans are evaluated automatically according to the rules defined in the standard and the device is assigned a certain category. Should the wireless device's maximum T-Coil output occur in a location other than the centre of acoustic output, then the RF field scans are repeated with the measurement area centered on the maximum T-Coil output location.

The DASY5 HAC Extension consists of the following parts: the Test Arch phantom, three validation dipoles, dipole and DUT holders, magnetic and electric field probes and DASY5 software. The field probes and measurement electronics are described in Annex B.1.

The specially designed Test Arch allows high precision positioning of both the device and any of the validation dipoles. The broadband dipoles are calibrated at a single frequency and are used for system performance checks.

In order to correlate the usability of a hearing aid with a wireless device (WD), the WD's radio frequency (RF) and audio band emissions are measured. ANSI C63.19 requires:

- Radio frequency (RF) measurements of the near-field electric and magnetic fields emitted by a WD in the vicinity of the audio output to categorize these emissions for correlation with the RF immunity of the microphone mode of operation of a hearing aid.
- Audio frequency magnetic field measurements of a WD emitted in the vicinity of the audio output to categorize these emissions for correlation with the T-Coil mode of operation of a hearing aid.

Hence, the following measurements are made for the WDs:

1. RF E-Field emissions.
2. RF H-Field emissions.
3. T-Coil mode, magnetic signal strength in the audio band.
4. T-Coil mode, magnetic signal and noise articulation index.
5. T-Coil mode, magnetic signal frequency response through the audio band.
6. RF T-Coil environment: The worst case M rating from E or H field 5x5 cm scan centered at the axial T-coil highest peak location.

 <p>Document  <b>Hearing Aid Compatibility RF Emissions Test Report for  the BlackBerry® Smartphone model RFF91LW, RFK121LW</b></p>			Page <b>4(24)</b>
Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

## 2.0 Applicable references

- [1] ANSI C63.19-2007, American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids
- [2] FCC 47CFR § 20.19 (10-1-07 Edition), Hearing Aid-Compatible Mobile Handsets
- [3] FCC Public Notice DA 06-1215, June 2006
- [4] SPEAG DASY5 user manual, June 2006
- [5] FCC Equipment Authorization Guidance on Hearing Aid Compatibility, Sep/Oct 2008
- [6] FCC Report and Order, FCC 08-68, Feb 2008



Document

**Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFF91LW, RFK121LW**

Page

5(24)

Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>
------------------------------------	-----------------------------------------------------------------	---------------------------------------	---------------------------------------------------

### 3.0 Equipment unit tested

#### 3.1 Picture of device

Please refer to Annex C.

**Figure 1. BlackBerry® smartphone**

#### 3.2 Device description

<b>Device Model</b>	<b>RFF91LW</b>			
<b>FCC ID</b>	<b>L6ARFF90LW</b>			
<b>PIN</b>	Radiated: 2A20270D, 2A211C01 Conducted: 2A202C27			
<b>Hardware Rev</b>	Rev 1			
<b>Software Version</b>	127.0.1.871; 127.0.1.1192; 10.0.06.219			
<b>Prototype or Production Unit</b>	Production			
<b>Mode(s) of Operation</b>	1-slot GSM 850 GSM 1900	2-slots EDGE/GPRS 850/1900	3-slots EDGE/GPRS 850/1900	4-slots EDGE/GPRS 850/1900
<b>Nominal Maximum conducted RF Output Power (dBm)</b>	33.0 30.0	30.0 28.0	29.5 25.5	27.0 25.0
<b>Tolerance in Power Setting on centre channel (dB)</b>	± 0.5	± 0.5	± 0.5	± 0.5
<b>Duty Cycle</b>	1:8	2:8	3:8	4:8
<b>Transmitting Frequency Range (MHz)</b>	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8
<b>Mode(s) of Operation</b>	HSUPA <sup>+</sup> WCDMA / UMTS FDD V (850)	HSUPA <sup>+</sup> WCDMA / UMTS FDD II (1900)	802.11b	802.11g
<b>Nominal Maximum conducted RF Output Power (dBm)</b>	24.5	23.5	18.50	16.5
<b>Tolerance in Power Setting on centre channel (dB)</b>	± 0.5	± 0.5	± 0.5	± 0.5
<b>Duty Cycle</b>	1:1	1:1	1:1	1:1
<b>Transmitting Frequency Range (MHz)</b>	824.6 – 846.6	1852.4 – 1907.6	2412-2462	2412-2462
<b>Mode(s) of Operation</b>	802.11n	802.11a/n (low band)	802.11a/n (middle band)	802.11a/n (upper band I )
<b>Nominal Maximum conducted RF Output Power (dBm)</b>	16.5	13.0	14.5	14.5
<b>Tolerance in Power Setting on centre channel (dB)</b>	± 0.5	± 0.5	± 0.5	± 0.5
<b>Duty Cycle</b>	1:1	1:1	1:1	1:1
<b>Transmitting Frequency Range (MHz)</b>	2412-2462	5180-5240	5260-5320	5500-5700
<b>Mode(s) of Operation</b>	802.11a/n (upper band II )	Bluetooth	NFC	
<b>Nominal Maximum conducted RF Output Power (dBm)</b>	13.0	8.00	N/A	
<b>Tolerance in Power Setting on</b>	± 0.5	N/A	N/A	



Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>
------------------------------------	-----------------------------------------------------------------	---------------------------------------	---------------------------------------------------

centre channel (dB)				
<b>Duty Cycle</b>	1:1	N/A	N/A	
<b>Transmitting Frequency Range (MHz)</b>	5749-5825	2402-2483	13.56	

**Table 3.1. Test device characterization non-LTE U.S. wireless operating modes/bands**

<b>Device Model</b>	RFK121LW			
<b>FCC ID</b>	L6ARFK120LW			
<b>PIN</b>	Radiated: 2A8C7018 Conducted: 2A8C7031			
<b>Hardware Rev</b>	Rev 2			
<b>Software Version</b>	10.0.9.299; 10.0.9.728; 127.0.1.1845, 127.0.1.1651			
<b>Prototype or Production Unit</b>	Production			
<b>Mode(s) of Operation</b>	1-slot GSM 850 GSM 1900	2-slots EDGE/GPRS 850/1900	3-slots EDGE/GPRS 850/1900	4-slots EDGE/GPRS 850/1900
<b>Nominal Maximum conducted RF Output Power (dBm)</b>	33.0 30.0	30.0 28.0	29.5 25.5	27.0 25.0
<b>Tolerance in Power Setting on centre channel (dB)</b>	± 0.5	± 0.5	± 0.5	± 0.5
<b>Duty Cycle</b>	1:8	2:8	3:8	4:8
<b>Transmitting Frequency Range (MHz)</b>	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8	824.2 – 848.8 1850.2 – 1909.8
<b>Mode(s) of Operation</b>	HSPA <sup>+</sup> WCDMA / UMTS FDD V (850)	HSPA <sup>+</sup> WCDMA / UMTS FDD II (1900)	802.11b	802.11g
<b>Nominal Maximum conducted RF Output Power (dBm)</b>	24.5	23.5	18.50	16.5
<b>Tolerance in Power Setting on centre channel (dB)</b>	± 0.5	± 0.5	± 0.5	± 0.5
<b>Duty Cycle</b>	1:1	1:1	1:1	1:1
<b>Transmitting Frequency Range (MHz)</b>	824.6 – 846.6	1852.4 – 1907.6	2412-2462	2412-2462
<b>Mode(s) of Operation</b>	802.11n	802.11a/n (low band)	802.11a/n (middle band)	802.11a/n (upper band I )
<b>Nominal Maximum conducted RF Output Power (dBm)</b>	16.5	13.0	14.5	14.5
<b>Tolerance in Power Setting on centre channel (dB)</b>	± 0.5	± 0.5	± 0.5	± 0.5
<b>Duty Cycle</b>	1:1	1:1	1:1	1:1
<b>Transmitting Frequency Range (MHz)</b>	2412-2462	5180-5240	5260-5320	5500-5700
<b>Mode(s) of Operation</b>	802.11a/n (upper band II )	Bluetooth	NFC	HSPA+ WCDMA / UMTS FDD IV (1700)
<b>Nominal Maximum conducted RF Output Power (dBm)</b>	13.0	8.00	N/A	23.5
<b>Tolerance in Power Setting on</b>	± 0.5	N/A	N/A	± 0.5



Document

**Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFF91LW, RFK121LW**

Page

7(24)

Author Data  
**Daoud Attayi**

Dates of Test

**Jan. 31, Feb. 17, June 18-Sep. 28, 2012**

Report No

**RTS-6012-1207-39B**

FCC ID

**L6ARFF90LW  
L6ARFK120LW**

<b>centre channel (dB)</b>				
<b>Duty Cycle</b>	1:1	N/A	N/A	1:1
<b>Transmitting Frequency Range (MHz)</b>	5749-5825	2402-2483	13.56	1712.4-1752.6

**Table 3.2. Test device characterization non-LTE U.S. wireless operating modes/bands**

**Note 1:** BlackBerry model: RFK121LW supports additional RF band: HSPA+/WCDMA/UMTS band IV, dual carrier, some minor changes on WiFi and main antenna match.  
Please refer to the manufacturer's hardware similarity declaration document for the two models: RFF91LW and RFK121LW.

<b>Device Model</b>	RFF91LW			
<b>FCC ID</b>	L6ARFF90LW			
<b>PIN</b>	Radiated: 2A20270D, 2A211C01 Conducted: 2A202C27			
<b>Hardware Rev</b>	Rev 1			
<b>Software Version</b>	127.0.1.871; 127.0.1.1192; 10.0.06.219			
<b>Prototype or Production Unit</b>	Production			
<b>Transmission channel bandwidth BW</b>	Band 17: 5 MHz, 10 MHz Band 5: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz Band 4: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz Band 2: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
<b>Transmission channel number and frequencies</b>				
	<b>LTE band 17</b>		<b>LTE band 5</b>	
	<b>Chan.</b>	<b>f (MHz)</b>	<b>Chan.</b>	<b>f (MHz)</b>
<b>L</b>	23730	704	20400	824
<b>L*</b>	23780	709	20450	829
<b>M</b>	23790	710	20525	836.5
<b>H*</b>	23800	711	20600	844.0
<b>H</b>	23849	715.9	20649	848.9
	<b>LTE band 4</b>		<b>LTE band 2</b>	
	<b>Chan.</b>	<b>f (MHz)</b>	<b>Chan.</b>	<b>f (MHz)</b>
<b>L</b>	19950	1710	18600	1850
<b>L*</b>	20050	1720	18700	1960
<b>M</b>	20175	1732.5	18900	1880
<b>H*</b>	20300	1745	19100	1900
<b>H</b>	20399	1754.9	19199	1909.9
<b>UE Category</b>	Category 3			
<b>Modulation supported in uplink</b>	QPSK, 16QAM			
<b>Description of LTE antenna</b>	1 Tx/Rx Ant, Sharing with GSM/UMTS; 1 Rx Diversity			
<b>LTE voice available/supported</b>	VoIP_Third party application possible			
<b>Hotspot with LTE+WiFi</b>	Yes			
<b>Hotspot with LTE+WiFi active with GSM//WCDMA voice</b>	Yes			



Document

**Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFF91LW, RFK121LW**

Page

8(24)

Author Data  
**Daoud Attayi**

Dates of Test

**Jan. 31, Feb. 17, June 18-Sep. 28, 2012**

Report No

**RTS-6012-1207-39B**

FCC ID

**L6ARFF90LW  
L6ARFK120LW**

<b>LTE MPR permanently built-in by design</b>	Yes	
<b>LTE A-MPR</b>	Disabled during SAR testing , by setting NV value to NV_01 on the CMW500	
<b>LTE maximum average power (dBm)</b>	Band 17: 23.0 dBm Band 5: 23.5 dBm Band 4: 23.0 dBm Band 2: 23.0 dBm	
<b>Other non-LTE U.S. wireless operating modes/bands</b>	GSM//WCDMA/HSPA	835 MHz GSM 1900 MHz GSM 835 MHz WCDMA band V 1900 MHz WCDMA band II
	WiFi and BT	2.4 GHz Wi-Fi 5 GHz Wi-Fi 2.4 GHz BT
<b>Simultaneous Tx conditions</b>	N/A for HAC	
<b>Power reduction applied for SAR/HAC compliance</b>	No	

**Table 3.3. Test device characterization all U.S. wireless operating modes/bands**

<b>Device Model</b>	RFK121LW			
<b>FCC ID</b>	L6ARFF90LW			
<b>PIN</b>	Radiated: 2A8C7018 Conducted: 2A8C7031			
<b>Hardware Rev</b>	Rev 2			
<b>Software Version</b>	10.0.9.299; 10.0.9.728; 127.0.1.1845, 127.0.1.1651			
<b>Prototype or Production Unit</b>	Production			
<b>Transmission channel bandwidth BW</b>	Band 17: 5 MHz, 10 MHz Band 5: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz Band 4: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz Band 2: 1.4 MHz, 3 MHz, 5 MHz, 10 MHz, 15 MHz, 20 MHz			
<b>Transmission channel number and frequencies</b>				
<b>L</b>	<b>LTE band 17</b>		<b>LTE band 5</b>	
	<b>Chan.</b>	<b>f (MHz)</b>	<b>Chan.</b>	<b>f (MHz)</b>
	23730	704	20400	824
	23780	709	20450	829
	23790	710	20525	836.5
	23800	711	20600	844.0
<b>M</b>				
<b>H</b>				
<b>L*</b>	<b>LTE band 4</b>		<b>LTE band 2</b>	
	<b>Chan.</b>	<b>f (MHz)</b>	<b>Chan.</b>	<b>f (MHz)</b>
	19950	1710	18600	1850
	20050	1720	18700	1960
	20175	1732.5	18900	1880
	20300	1745	19100	1900
<b>M*</b>				
<b>H*</b>				
<b>H</b>				

Author Data  
**Daoud Attayi**Dates of Test  
**Jan. 31, Feb. 17, June 18-Sep. 28, 2012**Report No  
**RTS-6012-1207-39B**FCC ID  
**L6ARFF90LW**  
**L6ARFK120LW**

<b>UE Category</b>	Category 3	
<b>Modulation supported in uplink</b>	QPSK, 16QAM	
<b>Description of LTE antenna</b>	1 Tx/Rx Ant, Sharing with GSM/UMTS; 1 Rx Diversity	
<b>LTE voice available/supported</b>	VoIP_Third party application possible	
<b>Hotspot with LTE+WiFi</b>	Yes	
<b>Hotspot with LTE+WiFi active with GSM//WCDMA voice</b>	Yes	
<b>LTE MPR permanently built-in by design</b>	Yes	
<b>LTE A-MPR</b>	Disabled during SAR testing , by setting NV value to NV_01 on the CMW500	
	Band 17: 24.5 dBm Band 5: 23.5 dBm Band 4: 23.0 dBm Band 2: 23.0 dBm	
<b>LTE maximum average power (dBm)</b>		
<b>Other non-LTE U.S. wireless operating modes/bands</b>	GSM//WCDMA/HSPA	835 MHz GSM 1900 MHz GSM 835 MHz WCDMA band V 1900 MHz WCDMA band II 1700 MHz WCDMA band IV
	WiFi and BT	2.4 GHz Wi-Fi 5 GHz Wi-Fi 2.4 GHz BT
<b>Simultaneous Tx conditions</b>	N/A for HAC	
<b>Power reduction applied for SAR/HAC compliance</b>	No	

**Table 3.3. Test device characterization all U.S. wireless operating modes/bands****Note 2:** BT and NFC are not activated during test because it is not held-to-ear service.**Note 3:** Wi-Fi and LTE are not activated during test because ANSI C63.19-2007 standard does not cover these technologies.

\* As per 3GPP TS 36.521-1 V10.0.0 (2011-12):

“The channel numbers that designate carrier frequencies so close to the operating band edges that the carrier extends beyond the operating band edge shall not be used. This implies that the first 7, 15, 25, 50, 75 and 100 channel numbers at the lower operating band edge and the last 6, 14, 24, 49, 74 and 99 channel numbers at the upper operating band edge shall not be used for channel bandwidths of 1.4, 3, 5, 10, 15 and 20 MHz respectively.”...5.4.4

Example: Band 4, 20 MHz BW, Low Channel would be  $19950+100=20050$  and High Channel would be  $20399-99 = 20300$ .



Document

**Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFF91LW, RFK121LW**

Page

10(24)

Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>
------------------------------------	-----------------------------------------------------------------	---------------------------------------	---------------------------------------------------

**3.3 Battery**

- 1) BAT-47277-001

**3.4 Antenna description**

<b>Type</b>	Internal fixed antenna
<b>Location</b>	Bottom back centre (main licensed transmitter)
<b>Configuration</b>	Internal fixed antenna

**Table 3.2. Antenna description****4.0 List of test equipment**

Manufacturer	Test Equipment	Model Number	Serial Number	Calibration Due Date (MM/DD/YY)
SCHMID & Partner Engineering AG	Data Acquisition Electronics (DAE3)	DAE3 V1	473	01/13/2013
SCHMID & Partner Engineering AG	3-Dimensional E-Field Probe for Near-Field	ER3DV6	2286	01/09/2013
SCHMID & Partner Engineering AG	3-Dimensional H-Field Probe for Near-Field	H3DV6	6105	11/08/2012
Rohde & Schwarz	Base Station Simulator	CMU200	109747	11/20/2012
Rohde & Schwarz	Spectrum Analyzer	ESP 30	100884	12/02/2013
Agilent Technologies	Signal generator	8648C	4037U03155	09/23/2013
Agilent Technologies	Power meter	E4419B	GB40202821	09/23/2013
Agilent Technologies	Power sensor	8481A	MY41095417	09/27/2012 *
Agilent Technologies	Power meter	N1911A	MY45100905	05/17/2013
Agilent Technologies	Power sensor	N1921A	SG45240281	06/12/2013
Amplifier Research	Amplifier	5S1G4M3	300986	CNR
SCHMID & Partner Engineering AG	Validation Dipole	CD835V3	1011	11/08/2013
SCHMID & Partner Engineering AG	Validation Dipole	CD1880V3	1008	11/08/2013

**Table 4.1. List of test equipment**

\* This equipment was sent out for calibration before due date.

Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>
------------------------------------	-----------------------------------------------------------------	---------------------------------------	---------------------------------------------------

## 5.0 Measurement procedures


### 5.1 System Validation

The test setup should be validated when first configured and verified periodically thereafter to ensure proper function. The procedure consists of two parts: dipole validation and determination of probe modulation factor.

#### 5.1.1 Dipole Validation


The HAC validation dipole antenna serves as a known source for an electrical and magnetic RF output.

1. The dipole antenna was placed in the position normally occupied by the WD.
2. The dipole was energized with a 20 dBm un-modulated continuous-wave signal.
3. The center point of the probe element(s) are 10 mm from the closest surface of the dipole elements.
4. The length of the dipole was scanned with both E-field and H-field probes and the maximum value for each scan was recorded.
5. The readings were compared with the values provided by the probe manufacturer and were found to agree within tolerance of +/- 10%. Please refer to Annex A.2 for Dipole Validation Plots.

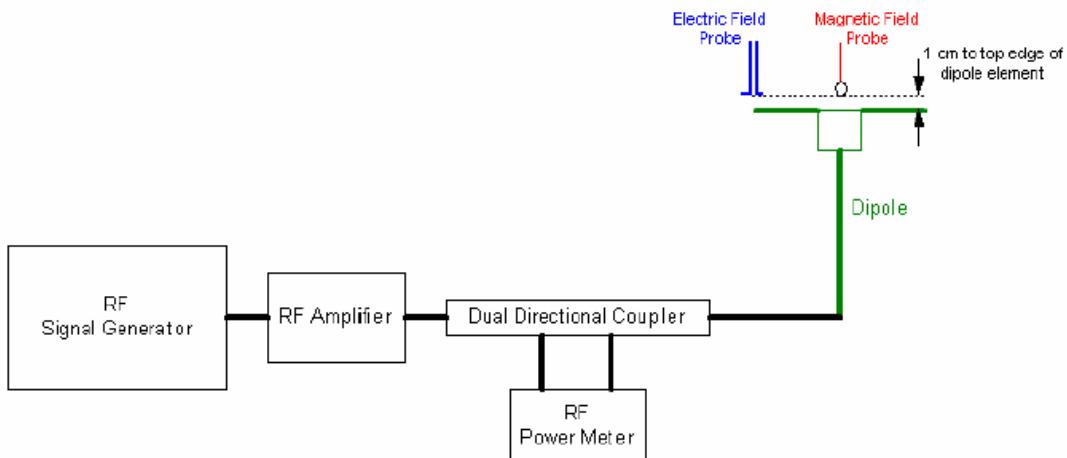

**Figure 5.1: Dipole validation procedure**

Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>
------------------------------------	-----------------------------------------------------------------	---------------------------------------	---------------------------------------------------

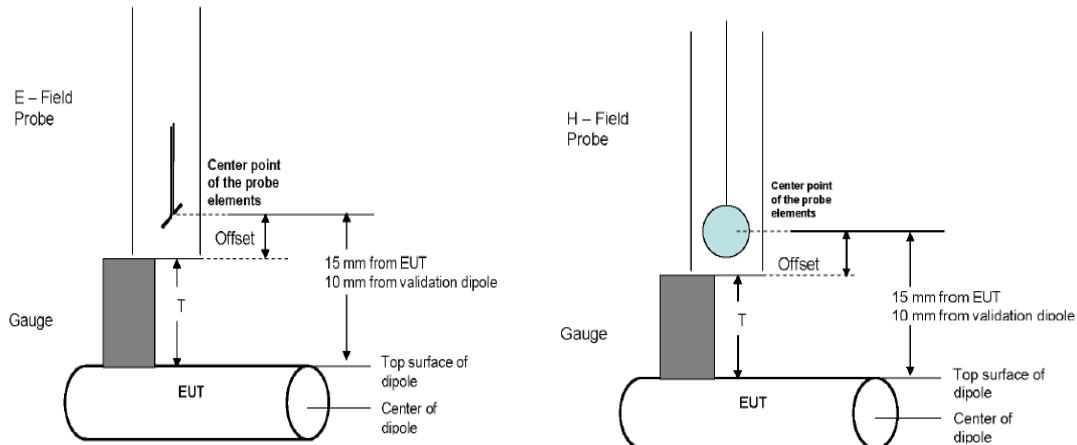

**Figure 5.2: Gauge Block with E-Field & H-Field probes**

### 5.1.2 RF Field Probe Modulation Factor

The Probe Modulation Factor (PMF) characterizes the responses of the E-field and H-field probes and their instrumentation chain to a modulated signal. The PMF is the ratio of the responses to fields produced by CW and modulated signals having equal peak amplitude.

Three test cases are recommended. The real or emulated WD (Wireless device) modulated signal, an unmodulated (CW) and an 80% AM RF signal shall be used for each relevant frequency band. Each of the test cases below shall be measured with both E\_ and H\_Field probe.

**a) Measurement of real and emulated signal**

- Set a WD or emulated signal source to apply full power into the reference dipole.
- Measure both the peak and average input power applied to the antenna and record the values using the following test instructions for measuring the RF interference of a modulated signal.

Spectrum analyzer set up:

RBW  $\geq$  emission bandwidth

Video Bandwidth  $\geq$  20 KHz

Span: Zero

Center Frequency: Nominal center of frequency channel

Amplitude: Linear (logarithmic scale may be used)

Detection: Peak detection

Trigger: Video or IF trigger

 <p>Document  <b>Hearing Aid Compatibility RF Emissions Test Report for  the BlackBerry® Smartphone model RFF91LW, RFK121LW</b></p>			Page <b>13(24)</b>
Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

Sweep rate: sufficiently rapid to permit the complete pulse to be resolved accurately.

- Using near-field measurement system, scan the antenna over the appropriately sized area and record the greatest average power reading observed.

**b) Measurement of CW and AM**

- Set the RF signal generator for CW or 80 % AM and set the output power so the peak power applied to the antenna is equal to that recorded for the real or emulated signal using the WD modulation format.
- Measure both the peak and average input power applied to the antenna and record these values. Calculate the peak to average power ratio (PAR). The PAR for the CW signal should be 0.0 dB and 3.9 dB for the AM signal with 80% modulation depth from each other and the peak should be that amount above the target values.

The PMF was calculated for the following signals: 80% AM and the modulated signal produced by the WD. The PMF measurement was performed with the field probe and instrumentation that will be used together during RF emissions measurements. Once calculated, the PMF was entered into the DASY5 software and applied to the measured modulated fields of the specified type.

ANSI C63.19 outlines the following alternate procedure as one method for determining probe modulation factor:

1. Fix the field probe in a set location relative to a field generating device, such as the reference dipole antenna.
2. Illuminate the probe using the wireless device connected to the reference dipole with a test signal at the intended measurement frequency. Ensure there is sufficient field coupling between the probe and the antenna so the resulting reading is greater than 10 dB above the probe system noise floor but within the systems operating range.
3. Record the amplitude applied to the antenna during transmission and the field strength measured by the E-field probe located near the tip of the dipole antenna.
4. Replace the wireless device with an RF signal generator producing an unmodulated CW signal and set to the wireless device operating frequency.
5. Set the amplitude of the unmodulated signal to equal that recorded from the wireless device.
6. Record the reading of the probe measurement system of the unmodulated signal.
7. The ratio, in linear units, of the probe reading in step 6 to the reading in step 3 is the E-field modulation factor.
- 8 Repeat the above using the H-field probe, except locate the probe at the center of the dipole.

Please refer to Annex A.1 for 0 Hz-span spectrum analyzer plots. The signal generator was used to generate the CW and AM signals. The WD was used to generate the modulated signal.

Please refer to Annex A.2 for probe modulation factor measurement plots.



Document

**Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RFF91LW, RFK121LW**

Page

14(24)

Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>
------------------------------------	-----------------------------------------------------------------	---------------------------------------	---------------------------------------------------

<b>f (MHz)</b>	<b>Signal Type</b>	<b>Peak Power (dBm)</b>	<b>Measured E-Field (V/m)</b>	<b>Target E-Field (V/m)</b>	<b>Delta (%)</b>	<b>PMF</b>
835	CW (Validation)	20.00	171.2	159.7	6.72	
835	CW (Validation)	20.00	160.8	159.7	0.69	
835	<b>GSM 850</b>	20.47	51.25			<b>3.13</b>
835	CW	20.49	160.5			
835	80 % AM	20.52	101.2			
835	<b>WCDMA band V</b>	12.59	64.41			<b>1.07</b>
835	CW	12.60	68.64			
835	80 % AM	12.59	45.21			
1880	CW (Validation)	20.00	130.9	135.3	-3.92	
1880	CW (Validation)	20.00	134.6	135.3	-0.52	
1733	<b>WCDMA band IV</b>	10.32	45.31			<b>1.03</b>
1733	CW	10.39	46.45			
1733	80 % AM	10.32	29.45			
1880	<b>GSM 1900</b>	17.43	30.95			<b>2.92</b>
1880	CW	17.40	90.42			
1880	80 % AM	17.42	58.24			
1880	<b>WCDMA band II</b>	10.60	42.43			<b>1.00</b>
1880	CW	10.61	42.41			
1880	80 % AM	10.63	27.40			
<b>f (MHz)</b>	<b>Signal Type</b>	<b>Peak Power (dBm)</b>	<b>Measured H-Field (A/m)</b>	<b>Target H-Field (A/m)</b>	<b>Delta (%)</b>	<b>PMF</b>
835	CW (Validation)	20.00	0.460	0.462	-0.43	
835	CW (Validation)	20.00	0.470	0.462	1.73	
835	<b>GSM 850</b>	20.47	0.159			<b>2.94</b>
835	CW	20.49	0.468			
835	80 % AM	20.52	0.302			
835	<b>WCDMA band V</b>	12.59	0.181			<b>1.09</b>
835	CW	12.60	0.197			
835	80 % AM	12.59	0.127			
1880	CW (Validation)	20.00	0.450	0.456	-1.32	
1880	CW (Validation)	20.00	0.472	0.456	3.51	
1733	<b>WCDMA band IV</b>	10.32	0.157			<b>1.00</b>
1733	CW	10.39	0.157			
1733	80 % AM	10.32	0.100			
1880	<b>GSM 1900</b>	17.43	0.110			<b>2.97</b>
1880	CW	17.40	0.327			
1880	80 % AM	17.42	0.214			
1880	<b>WCDMA band II</b>	10.60	0.150			<b>1.00</b>
1880	CW	10.61	0.149			
1880	80 % AM	10.63	0.096			

**Table 5.1: Dipole Validation and Modulation Factors**

Probe Modulation Factor = Measured E or H-Field (CW)/Measured E or H-Field (Modulated)

 <p>Document  <b>Hearing Aid Compatibility RF Emissions Test Report for  the BlackBerry® Smartphone model RFF91LW, RFK121LW</b></p>			Page <b>15(24)</b>
Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

## 5.2 Near-Field RF Emission

The following procedure was used to measure RF near E-field and H-field emissions:

1. Proper operation of the field probe, probe measurement system, other instrumentation, and the positioning system was confirmed.
2. The WD was oriented in its intended test position with the reference plane in the horizontal plane and was secured in the device holder to maintain position accuracy.
3. A CMU 200 Base Station Simulator was used to place a normal voice call to the WD on the desired channel and to transmit at maximum power.
4. The DASY5 system measures power drift as part of each scan. If the power during a scan drifted by more than 0.20 dB, the scan was repeated. Power drift measurements for the worst-case scans are included in Annex A.3. A fully charged battery was used for each test.
5. The 5cm x 5cm measurement grid was centered on the center of the acoustic output or the T-Coil output, as appropriate. The field probe was located at the initial position at the center of the measurement grid.
6. A surface verification was performed before each setup change to ensure repeatable spacing and proper maintenance of the measurement plane.
7. The electric field probe, and separately the magnetic field probe, was used to measure the highest field strength in the 5cm x 5cm reference plane. The center point of the probe measurement element(s) shall be held 15 mm from the WD reference plane.
8. The entire 5cm x 5cm region was scanned with a 5mm step size. The reading was recorded at each measurement location. Justification of the step size and interpolation used is provided at the end of Annex A.2.
9. Around the center sub-grid, five contiguous sub-grids were identified with the lowest maximum field strength readings. Please note that a maximum of five sub-grids can be excluded for both E- and H-field measurements.
10. The highest field reading was identified within the non-excluded sub-grids
11. The highest field reading was converted from average to peak V/m or A/m, as appropriate. This conversion was done by the DASY5 SEMCAD processor after entering correct PMF.
12. Once the worst-case configuration was determined, the WD was tested with second source battery.
13. The highest peak reading was compared to the categories defined in C63.19 using the appropriate AWF.

- If a WD has more than one antenna position, it is necessary to test the WD only in the condition of maximum antenna efficiency, i.e. antenna extended.
- The WD's backlight shuts off automatically a short time after a call is established.



Document

**Hearing Aid Compatibility RF Emissions Test Report for  
the BlackBerry® Smartphone model RFF91LW, RFK121LW**

Page

16(24)

Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>
------------------------------------	-----------------------------------------------------------------	---------------------------------------	---------------------------------------------------

Category	Telephone RF Parameters < 960 MHz				
	AWF	E-Field Emissions		H-Field Emissions	
<b>Near Field</b>					
<b>Category M1/T1</b>	0	631.0 to 1122.0	V/m	1.91 to 3.39	A/m
	-5	473.2 to 841.4	V/m	1.43 to 2.54	A/m
<b>Category M2/T2</b>	0	354.8 to 631.0	V/m	1.07 to 1.91	A/m
	-5	266.1 to 473.2	V/m	0.80 to 1.43	A/m
<b>Category M3/T3</b>	0	199.5 to 354.8	V/m	0.60 to 1.07	A/m
	-5	149.6 to 266.1	V/m	0.45 to 0.80	A/m
<b>Category M4/T4</b>	0	< 199.5	V/m	< 0.60	A/m
	-5	< 149.6	V/m	< 0.45	A/m

Category	Telephone RF Parameters > 960 MHz				
	AWF	E-Field Emissions		H-Field Emissions	
<b>Near Field</b>					
<b>Category M1/T1</b>	0	199.5 to 354.8	V/m	0.60 to 1.07	A/m
	-5	149.6 to 266.1	V/m	0.45 to 0.80	A/m
<b>Category M2/T2</b>	0	112.2 to 199.5	V/m	0.34 to 0.60	A/m
	-5	84.1 to 149.6	V/m	0.25 to 0.45	A/m
<b>Category M3/T3</b>	0	63.1 to 112.2	V/m	0.19 to 0.34	A/m
	-5	47.3 to 84.1	V/m	0.14 to 0.25	A/m
<b>Category M4/T4</b>	0	<63.1	V/m	<0.19	A/m
	-5	<47.3	V/m	<0.14	A/m

**Table 5.2: Wireless Device near-field categories**


Standard	Technology	AWF (dB)
TIA/EIA/IS-2000	CDMA	0
TIA/EIA-136	TDMA (50 Hz)	0
J-STD-007	GSM (217)	-5
T1/T1P1/3GPP	UMTS (WCDMA)	0
iDEN™	TDMA (22 and 11 Hz)	0

**Table 5.3: Articulation Weighting Factor (AWF)**

Author Data  
**Daoud Attayi**

 Dates of Test  
**Jan. 31, Feb. 17, June 18-Sep. 28, 2012**

 Report No  
**RTS-6012-1207-39B**

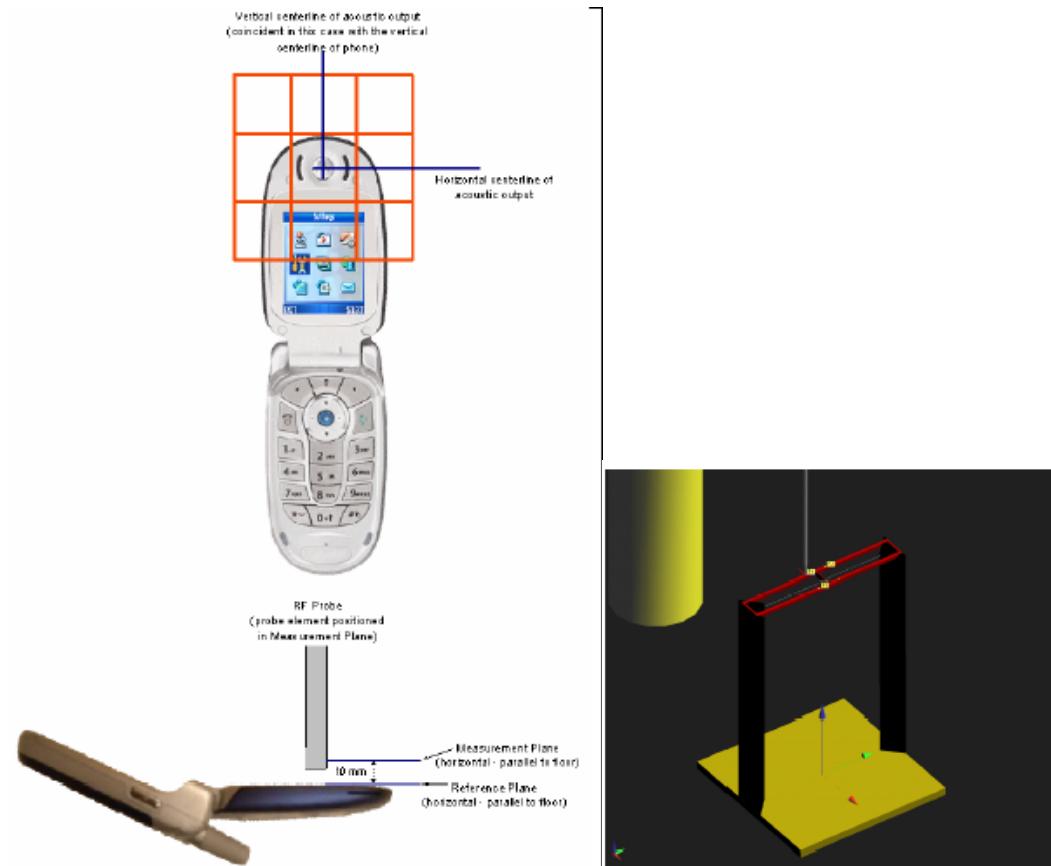 FCC ID  
**L6ARFF90LW**  
**L6ARFK120LW**


**Figure 5.3: WD reference plane for RF emission measurements    Figure 5.4: HAC Phantom/Test Arch**



Document

**Hearing Aid Compatibility RF Emissions Test Report for  
the BlackBerry® Smartphone model RFF91LW, RFK121LW**

Page

18(24)

Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>
------------------------------------	-----------------------------------------------------------------	---------------------------------------	---------------------------------------------------

**6.0 Summary of results**

RF Emissions Test					
Mode	f (MHz)	Cond. Pwr. (dBm)	Peak E-Field (V/m)	Center of Speaker or Telecoil	M-Rating
GSM 850	824.2	33.5	180.0	Speaker	3
	836.8	33.5	190.1	Speaker	3
	848.8	33.1	197.7	Speaker	3
	848.8	33.1	162.3	Telecoil	3
WCDMA band V 850	826.4	24.7	56.37	Speaker	4
	836.4	24.7	55.40	Speaker	4
	846.6	24.1	59.02	Speaker	4
	846.6	24.1	50.84	Telecoil	4
GSM 1900	1850.2	29.8	57.50	Speaker	3
	1880.0	29.8	52.54	Speaker	3
	1909.8	29.8	56.08	Speaker	3
	1850.2	29.8	65.50	Telecoil	3
WCDMA band II 1900	1852.4	23.7	28.41	Speaker	4
	1880.0	23.8	28.66	Speaker	4
	1907.6	23.6	29.11	Speaker	3
	1907.6	23.6	33.17	Telecoil	3
<b>Overall M-Rating:</b>					<b>3</b>

**Table 6.1–E-Field Data Summary**  
**Rev 1**



Document

**Hearing Aid Compatibility RF Emissions Test Report for  
the BlackBerry® Smartphone model RFF91LW, RFK121LW**

Page

19(24)

Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>
------------------------------------	-----------------------------------------------------------------	---------------------------------------	---------------------------------------------------

<b>RF Emissions Test</b>					
<b>Mode</b>	<b>f (MHz)</b>	<b>Cond. Pwr. (dBm)</b>	<b>Peak E-Field (V/m)</b>	<b>Center of Speaker or Telecoil</b>	<b>M-Rating</b>
GSM 850	824.2				
	836.8				
	848.8	33.1	193.4	Speaker	3
	848.8				
WCDMA band V 850	826.4				
	836.4				
	846.6	24.1	66.10	Speaker	4
	846.6				
GSM 1900	1850.2				
	1880.0				
	1909.8				
	1850.2	29.8	66.16	Telecoil	3
WCDMA band II 1900	1852.4				
	1880.0				
	1907.6				
	1907.6	23.6	33.20	Telecoil	4
WCDMA band IV 1800	1712.4	23.8	40.49	Speaker	4
	1732.6	23.8	40.65	Speaker	4
	1752.6	23.8	36.53	Speaker	4
	1732.6	23.8	40.03	Telecoil	4
<b>Overall M-Rating:</b>					<b>3</b>

**Table 6.2–E-Field Data Summary**  
**Rev 2**



Document

**Hearing Aid Compatibility RF Emissions Test Report for  
the BlackBerry® Smartphone model RFF91LW, RFK121LW**

Page

20(24)

Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>
------------------------------------	-----------------------------------------------------------------	---------------------------------------	---------------------------------------------------

RF Emissions Test					
Mode	f (MHz)	Cond. Pwr. (dBm)	Peak H- Field (A/m)	Center of Speaker or Telecoil	M-Rating
GSM 850	824.2	33.5	0.25	Speaker	4
	836.8	33.5	0.27	Speaker	4
	848.8	33.1	0.32	Speaker	4
	848.8	33.1	0.48	Telecoil	3
WCDMA band V 850	826.4	24.7	0.10	Speaker	4
	836.4	24.7	0.10	Speaker	4
	846.6	24.1	0.11	Speaker	4
	846.6	24.1	0.14	Telecoil	4
GSM 1900	1850.2	29.8	0.16	Speaker	3
	1880.0	29.8	0.15	Speaker	3
	1909.8	29.8	0.17	Speaker	3
	1909.8	29.8	0.18	Telecoil	3
WCDMA band II 1900	1852.4	23.7	0.09	Speaker	4
	1880.0	23.8	0.09	Speaker	4
	1907.6	23.6	0.09	Speaker	4
	1907.6	23.6	0.09	Telecoil	4
<b>Overall M-Rating:</b>					<b>3</b>

**Table 6.3– H-Field Data Summary****Rev 1**



Document

**Hearing Aid Compatibility RF Emissions Test Report for  
the BlackBerry® Smartphone model RFF91LW, RFK121LW**

Page

21(24)

Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>
------------------------------------	-----------------------------------------------------------------	---------------------------------------	---------------------------------------------------

<b>RF Emissions Test</b>					
<b>Mode</b>	<b>f (MHz)</b>	<b>Cond. Pwr. (dBm)</b>	<b>Peak H- Field (A/m)</b>	<b>Center of Speaker or Telecoil</b>	<b>M-Rating</b>
GSM 850	824.2			Speaker	
	836.8			Speaker	
	848.8	33.1	0.30	Speaker	4
	848.8			Telecoil	
WCDMA band V 850	826.4			Speaker	
	836.4			Speaker	
	846.6			Speaker	
	846.6	24.1	0.15	Telecoil	4
GSM 1900	1850.2			Speaker	
	1880.0			Speaker	
	1909.8			Speaker	
	1850.2	29.8	0.16	Telecoil	3
WCDMA band II 1900	1852.4			Speaker	
	1880.0			Speaker	
	1907.6			Speaker	
	1907.6	23.6	0.09	Telecoil	4
WCDMA band IV 1800	1712.4	23.8	0.12	Speaker	4
	1732.6	23.8	0.12	Speaker	4
	1752.6	23.8	0.12	Speaker	4
	1732.6	23.8	0.12	Telecoil	4
<b>Overall M-Rating:</b>					

**Table 6.4– H-Field Data Summary****Rev 2**

 <p>Document  <b>Hearing Aid Compatibility RF Emissions Test Report for  the BlackBerry® Smartphone model RFF91LW, RFK121LW</b></p>			Page 22(24)
Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

## 6.1 Conclusion

The BlackBerry® Smartphone Model: **RFF91LW, RFK121LW** is categorized to be **M3T4** based on HAC RF Emission and ABM T-Coil performance in accordance with ANSI C63.19-2007: American National Standard for Methods of Measurement of Compatibility between Wireless Communication Devices and Hearing Aids.

Therefore, the device is found to be in compliance with the requirements of FCC 20.19 (10-1-07 Edition) Hearing Aid-Compatible Mobile Handsets as modified by FCC Public Notice DA 06-1215 (Released: June 6, 2006) and FCC Report and Order, FCC 08-68 (Feb 28, 2008).



Document

**Hearing Aid Compatibility RF Emissions Test Report for  
the BlackBerry® Smartphone model RFF91LW, RFK121LW**

Page

23(24)

Author Data  
**Daoud Attayi**

Dates of Test

**Jan. 31, Feb. 17, June 18-Sep. 28,  
2012**

Report No

**RTS-6012-1207-39B**

FCC ID

**L6ARFF90LW  
L6ARFK120LW****7.0 Measurement uncertainty**

<b>HAC Uncertainty Budget</b> According to ANSI C63.19 [1]							
Error Description	Uncertainty value	Prob. Dist.	Div.	( $c_t$ ) E	( $c_t$ ) H	Std. Unc. E	Std. Unc. H
Measurement System							
Probe Calibration	±5.1 %	N	1	1	1	±5.1 %	±5.1 %
Axial Isotropy	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %
Sensor Displacement	±16.5 %	R	$\sqrt{3}$	1	0.145	±9.5 %	±1.4 %
Boundary Effects	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %
Linearity	±4.7 %	R	$\sqrt{3}$	1	1	±2.7 %	±2.7 %
Scaling to Peak Envelope Power	±2.0 %	R	$\sqrt{3}$	1	1	±1.2 %	±1.2 %
System Detection Limit	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %
Readout Electronics	±0.3 %	N	1	1	1	±0.3 %	±0.3 %
Response Time	±0.8 %	R	$\sqrt{3}$	1	1	±0.5 %	±0.5 %
Integration Time	±2.6 %	R	$\sqrt{3}$	1	1	±1.5 %	±1.5 %
RF Ambient Conditions	±3.0 %	R	$\sqrt{3}$	1	1	±1.7 %	±1.7 %
RF Reflections	±12.0 %	R	$\sqrt{3}$	1	1	±6.9 %	±6.9 %
Probe Positioner	±1.2 %	R	$\sqrt{3}$	1	0.67	±0.7 %	±0.5 %
Probe Positioning	±4.7 %	R	$\sqrt{3}$	1	0.67	±2.7 %	±1.8 %
Extrap. and Interpolation	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %
Test Sample Related							
Device Positioning Vertical	±4.7 %	R	$\sqrt{3}$	1	0.67	±2.7 %	±1.8 %
Device Positioning Lateral	±1.0 %	R	$\sqrt{3}$	1	1	±0.6 %	±0.6 %
Device Holder and Phantom	±2.4 %	R	$\sqrt{3}$	1	1	±1.4 %	±1.4 %
Power Drift	±5.0 %	R	$\sqrt{3}$	1	1	±2.9 %	±2.9 %
Phantom and Setup Related							
Phantom Thickness	±2.4 %	R	$\sqrt{3}$	1	0.67	±1.4 %	±0.9 %
Combined Std. Uncertainty						±14.7 %	±10.9 %
Expanded Std. Uncertainty on Power						±29.4 %	±21.8 %
Expanded Std. Uncertainty on Field						±14.7 %	±10.9 %

**Table 7.1. Worst-Case uncertainty budget for HAC free field assessment according to ANSI C63.19.**

[1] The budget is valid for the frequency range 800 MHz - 3 GHz and represents a worst-case analysis.

 <p>Document  <b>Hearing Aid Compatibility RF Emissions Test Report for  the BlackBerry® Smartphone model RFF91LW, RFK121LW</b></p>			Page <b>24(24)</b>
Author Data <b>Daoud Attayi</b>	Dates of Test <b>Jan. 31, Feb. 17, June 18-Sep. 28, 2012</b>	Report No <b>RTS-6012-1207-39B</b>	FCC ID <b>L6ARFF90LW</b> <b>L6ARFK120LW</b>

## 7.1 Site-Specific Uncertainty

### RF Reflections

Section 4.2 of ANSI C63.19 requires that any RF reflecting objects are a minimum distance of 2 wavelengths away from the WD under test. For this WD, the longest wavelength occurs when the WD is transmitting at 824.7MHz. The wavelength is:

$$\lambda = \frac{c}{f} = \frac{3 \cdot 10^8 \text{ m/s}}{824.7 \text{ MHz}} = 0.364 \text{ m}$$

Therefore, 2 wavelengths result in a distance of 0.73m. Tests are performed in an RF shielded chamber. The distance to the nearest wall is > 1m and the distance to the robot's safety guardrail is ~1.0m, both satisfying the requirement. In addition, RF absorbing cones are placed at the base of the robot to further reduce reflections. The HAC phantom arch is made of low dielectric constant plastic and should not be a source of reflections.

### Environmental Conditions

During measurements, the temperature of the test lab was kept between 21°C and 25°C and relative humidity was maintained between 20% and 55%.

### Ambient Noise

ANSI C63.19 standard requires RF ambient noise to be at least 20dB below the measurement level. Scans of RF ambient noise fields were previously performed for verification and was determined to be < 20 dB than the measured WD RF field levels.