

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 1 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

Annex A: Measurement data and plots

A.1 MIF validation plots

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 2 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

Date/Time: 12:00:00 AM

Test Laboratory: BlackBerry RTS

MIF_measurements_03_18-24_14

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ER3DV6 - SN2286; ; Calibrated: 1/17/2014
- Sensor-Surface: 0mm (Fix Surface), z = 2.5
- Electronics: DAE3 Sn473; Calibrated: 1/15/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.6(1115); SEMCAD X 14.6.9(7117)

Configuration/MIF Measurements/MIF_AM80%_1KHz_Measurement

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-1.29 dB		0.00 dB	Power High
PMF	3.81 dB	1.551	0.00 dB	Power High
Detector Level	10.61 dBm		0.00 dB	Power High
RFAIP	9.32 dBm		0.00 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_AM10%_1KHz_Measurement

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-9.22 dB		0.00 dB	Power OK
PMF	0.78 dB	1.094	0.00 dB	Power OK
Detector Level	10.46 dBm		0.00 dB	Power OK
RFAIP	1.24 dBm		0.00 dB	(MIF+CF+Detector Level)

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 3 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

Configuration/MIF Measurements/MIF_AM1%_1KHz_Measurement

Calibration Factors: 1.090, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-19.18 dB		0.00 dB	Power OK
PMF	0.08 dB	1.010	0.00 dB	Power OK
Detector Level	10.43 dBm		0.00 dB	Power OK
RFAIP	-8.75 dBm		0.00 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_GSM_Measurement

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	3.44 dB		0.00 dB	Power OK
PMF	9.86 dB	3.112	0.01 dB	Power OK
Detector Level	-0.64 dBm		0.00 dB	Power OK
RFAIP	2.80 dBm		0.01 dB	(MIF+CF+Detector Level)

Configuration/MIF

Measurements/MIF_WCDMA_Voice_AMR12_2kps_Measurement

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-25.91 dB		0.18 dB	Power OK
PMF	0.06 dB	1.007	0.00 dB	Power OK
Detector Level	0.11 dBm		0.02 dB	Power OK
RFAIP	-25.80 dBm		0.19 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_802.11b_Rate_1Mbps

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
----------	-------------	----------	-------------	--------

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 4 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

MIF	-12.65 dB		0.02 dB	Power OK
PMF	0.40 dB	1.047	0.03 dB	Power OK
Detector Level	4.02 dBm		0.02 dB	Power OK
RFAIP	-8.63 dBm		0.04 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_802.11b_Rate_2Mbps

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-11.97 dB		0.01 dB	Power OK
PMF	0.45 dB	1.053	0.01 dB	Power OK
Detector Level	4.06 dBm		0.01 dB	Power OK
RFAIP	-7.91 dBm		0.02 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_802.11b_Rate_5.5Mbps

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-9.49 dB		0.00 dB	Power OK
PMF	0.65 dB	1.078	0.02 dB	Power OK
Detector Level	4.08 dBm		0.00 dB	Power OK
RFAIP	-5.41 dBm		0.01 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_802.11b_Rate_11Mbps

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-8.71 dB		0.04 dB	Power OK
PMF	0.78 dB	1.094	0.04 dB	Power OK
Detector Level	3.89 dBm		0.05 dB	Power OK
RFAIP	-4.82 dBm		0.09 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_802.11g_Rate_6Mbps

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
----------	-------------	----------	-------------	--------

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 5 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

MIF	-10.27 dB		0.01 dB	Power OK
PMF	0.81 dB	1.098	0.02 dB	Power OK
Detector Level	4.47 dBm		0.00 dB	Power OK
RFAIP	-5.80 dBm		0.02 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_802.11g_Rate_9Mbps

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-9.52 dB		0.02 dB	Power OK
PMF	0.90 dB	1.109	0.02 dB	Power OK
Detector Level	4.40 dBm		0.01 dB	Power OK
RFAIP	-5.12 dBm		0.03 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_802.11g_Rate_18Mbps

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-8.31 dB		0.01 dB	Power OK
PMF	1.08 dB	1.133	0.05 dB	Power OK
Detector Level	4.16 dBm		0.01 dB	Power OK
RFAIP	-4.15 dBm		0.02 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_802.11g_Rate_54Mbps

Calibration Factors: 1.089, 1.088; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-8.68 dB		0.01 dB	Power OK
PMF	1.91 dB	1.246	0.04 dB	Power OK
Detector Level	3.46 dBm		0.01 dB	Power OK
RFAIP	-5.22 dBm		0.01 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_802.11a_Rate_6Mbps

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
----------	-------------	----------	-------------	--------

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 6 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

MIF	-10.40 dB		0.04 dB	Power OK
PMF	0.82 dB	1.100	0.03 dB	Power OK
Detector Level	0.13 dBm		0.02 dB	Power OK
RFAIP	-10.27 dBm		0.05 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_802.11a_Rate_24Mbps

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-10.43 dB		0.02 dB	Power OK
PMF	0.81 dB	1.098	0.03 dB	Power OK
Detector Level	0.11 dBm		0.01 dB	Power OK
RFAIP	-10.32 dBm		0.03 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_802.11a_Rate_54Mbps

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-10.43 dB		0.02 dB	Power OK
PMF	0.81 dB	1.098	0.03 dB	Power OK
Detector Level	0.09 dBm		0.01 dB	Power OK
RFAIP	-10.34 dBm		0.02 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_802.11n_Rate_6.5Mbps

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-10.40 dB		0.03 dB	Power OK
PMF	0.83 dB	1.100	0.03 dB	Power OK
Detector Level	0.13 dBm		0.03 dB	Power OK
RFAIP	-10.27 dBm		0.06 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_802.11n_Rate_39Mbps

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
----------	-------------	----------	-------------	--------

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 7 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

MIF	-10.43 dB		0.02 dB	Power OK
PMF	0.82 dB	1.099	0.02 dB	Power OK
Detector Level	0.17 dBm		0.01 dB	Power OK
RFAIP	-10.26 dBm		0.03 dB	(MIF+CF+Detector Level)

Configuration/MIF Measurements/MIF_802.11n_Rate_65Mbps

Calibration Factors: 1.089, 1.089; MIF Scale: 0.00 dB; Coupling Factor (CF): 0.00 dB

Quantity	Value [log]	[linear]	Fluctuation	Remark
MIF	-10.43 dB		0.01 dB	Power OK
PMF	0.81 dB	1.098	0.02 dB	Power OK
Detector Level	0.16 dBm		0.00 dB	Power OK
RFAIP	-10.27 dBm		0.02 dB	(MIF+CF+Detector Level)

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 8 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

A.2 Dipole validation

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 9 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

Date/Time: 7/15/2014 9:51:37 AM

Test Laboratory: BlackBerry RTS

HAC RF_E-Field_validation_07_15_14

DUT: HAC-Dipole 835 MHz; Type: CD835V3; Serial: 1089

Communication System: UID 0, CW For MIF; Frequency: 835 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/17/2014;
- Sensor-Surface: (Fix Surface), $z = 9.7$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

CD835 Dipole E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - measurement distance from the probe sensor center to CD835 = 15mm/Hearing Aid Compatibility Test at 15mm distance (41x361x1):

Interpolated grid: $dx=0.5000$ mm, $dy=0.5000$ mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 104.3 V/m; Power Drift = 0.02 dB


PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 110.4 V/m

Near-field category: M4 (AWF 0 dB)

PMF scaled E-field

Grid 1 M4 99.47 V/m	Grid 2 M4 103.8 V/m	Grid 3 M4 103.8 V/m
Grid 4 M4 58.97 V/m	Grid 5 M4 60.73 V/m	Grid 6 M4 60.55 V/m

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 10 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014		Report No RTS-6058-1407-08	FCC ID L6ARHB120LW


Grid 7 M4 104.9 V/m	Grid 8 M4 110.4 V/m	Grid 9 M4 110.1 V/m
--------------------------------------	--------------------------------------	--------------------------------------

Cursor:

Total = 110.4 V/m

E Category: M4

Location: -2, 78, 9.7 mm

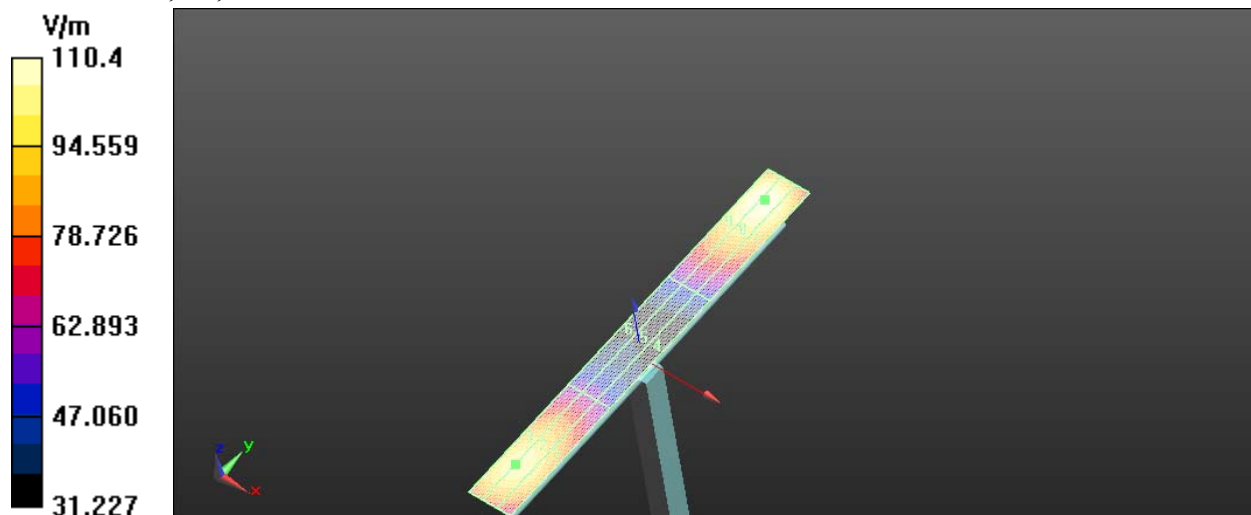

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 11 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

Date/Time: 7/15/2014 10:18:37 AM

Test Laboratory: BlackBerry RTS

HAC RF_E-Field_validation_07_15_14

DUT: HAC Dipole 1880 MHz; Type: CD1880V3; Serial: 1068

Communication System: UID 0, CW For MIF; Frequency: 1880 MHz

Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³

Phantom section: RF Section

Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2007)

DASY Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/17/2014;
- Sensor-Surface: (Fix Surface), $z = 9.7$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

CD1880 Dipole E-Field measurement (E-field scan for ANSI C63.19-2011 compliance)/E Scan - measurement distance from the probe sensor center to CD1880 = 15mm/Hearing Aid Compatibility Test at 15mm distance (41x181x1):

Interpolated grid: $dx=0.5000$ mm, $dy=0.5000$ mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 147.5 V/m; Power Drift = -0.05 dB


PMR not calibrated. PMF = 1.000 is applied.

E-field emissions = 85.14 V/m

Near-field category: M3 (AWF 0 dB)

PMF scaled E-field

Grid 1 M3 80.00 V/m	Grid 2 M3 82.16 V/m	Grid 3 M3 81.30 V/m
Grid 4 M3 65.54 V/m	Grid 5 M3 66.50 V/m	Grid 6 M3 65.53 V/m

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 12 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014		Report No RTS-6058-1407-08	FCC ID L6ARHB120LW


Grid 7 M3 80.34 V/m	Grid 8 M3 85.14 V/m	Grid 9 M3 85.09 V/m
--------------------------------------	--------------------------------------	--------------------------------------


Cursor:


Total = 85.14 V/m

E Category: M3

Location: -3, 37, 9.7 mm

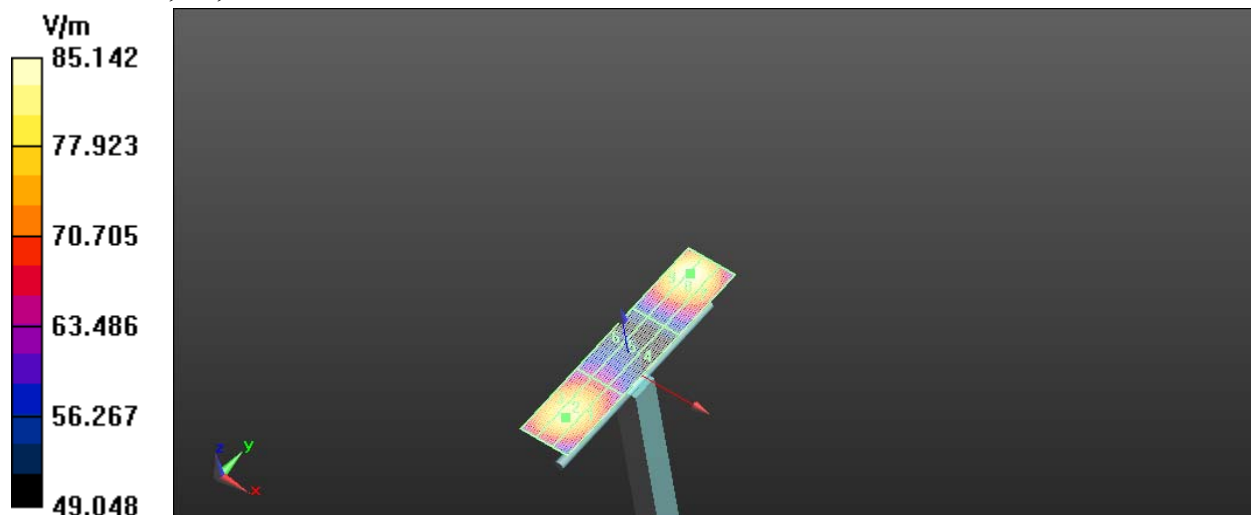

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 13 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014		Report No RTS-6058-1407-08	FCC ID L6ARHB120LW

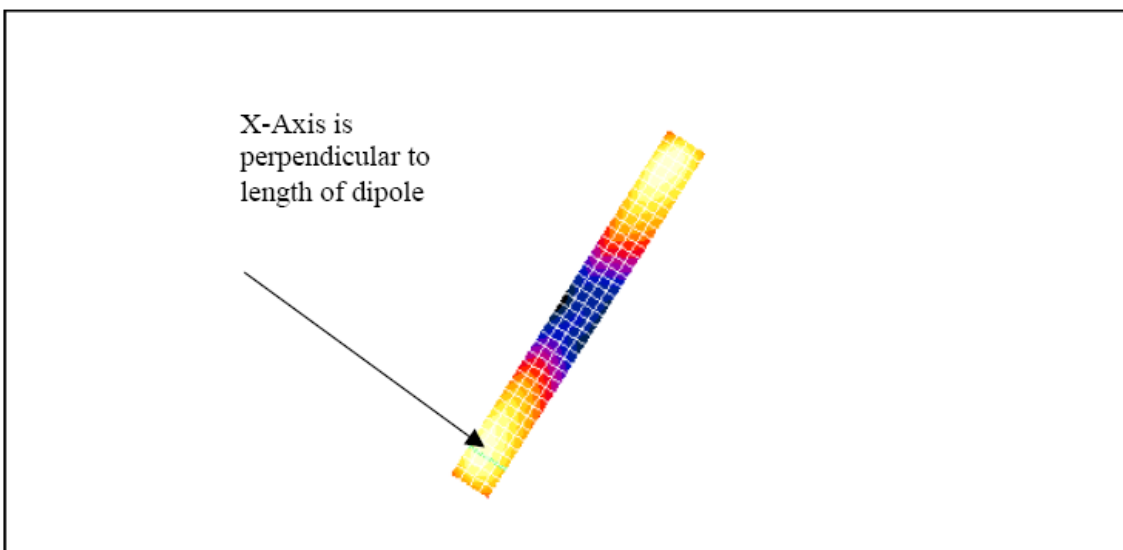

The green line in this figure shows the axis along which the points lie.

Comparison of 5mm and 2mm step sizes

An additional set of measurements was taken: dipole validations were performed using 5mm and 2mm step sizes. The delta between the two readings is insignificant for both field types ($< 0.4\%$ for E and 0% for H), demonstrating that 5mm is sufficient. The plots follow.

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 14 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

Date/Time: 14/07/2005 11:35:24 AM

Page 1 of 2

Date/Time: 14/07/2005 11:35:24 AM

Lab: RIM Testing Services (RTS)

Dipole Validation 1880 MHz_E-Field 07_14_05

DUT: HAC Dipole 1880 MHz; Type: CD1880V3

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³

Phantom section: H Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2285; ConvF(1, 1, 1); Calibrated: 10/12/2004
- Sensor-Surface: 0mm (Fix Surface) Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn472; Calibrated: 03/01/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (5x19x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of Total (measured) = 134.8 V/m

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (41x181x1):

Measurement grid: dx=5mm, dy=5mm

Maximum value of Total field (slot averaged) = 131.0 V/m

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

E in V/m (Time averaged) E in V/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
123.2	138.1	138.4	123.2	138.1	138.4
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
80.9	92.3	92.2	80.9	92.3	92.2
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
119.8	131.0	130.7	119.8	131.0	130.7


Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19

file://C:\Program%20Files\DASY4\Print_Templates\Dipole%20Validation%201880%20... 14/07/2005

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 15 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

Date/Time: 14/07/2005 11:35:24 AM

Page 2 of 2

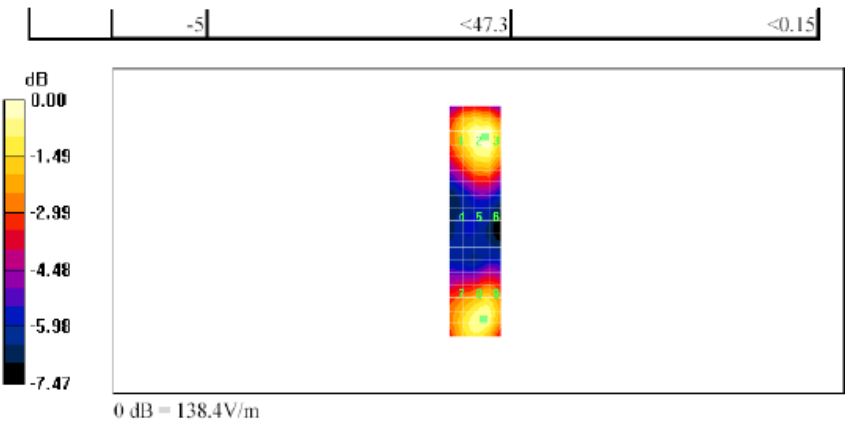

file://C:\Program%20Files\DASY4\Print_Templates\Dipole%20Validation%201880%20... 14/07/2005

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW	Page 16 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW

Date/Time: 14/07/2005 11:44:51 AM

Page 1 of 2

Date/Time: 14/07/2005 11:44:51 AM

Lab: RIM Testing Services (RTS)

Dipole Validation 1880 MHz_2mm step_E-Field 07_14_05

DUT: HAC Dipole 1880 MHz; Type: CD1880V3

Communication System: CW; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: Air Medium parameters used: $\sigma = 0$ mho/m, $\epsilon_r = 1$; $\rho = 1000$ kg/m³
Phantom section: H Device Section

DASY4 Configuration:

- Probe: ER3DV6 - SN2285; ConvF(1, 1, 1); Calibrated: 10/12/2004
- Sensor-Surface: 0mm (Fix Surface) Sensor-Surface: (Fix Surface)
- Electronics: DAE3 Sn472; Calibrated: 03/01/2005
- Phantom: HAC Test Arch; Type: SD HAC P01 BA;
- Measurement SW: DASY4, V4.5 Build 19; Postprocessing SW: SEMCAD, V1.8 Build 146

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (11x46x1):

Measurement grid: dx=2mm, dy=2mm
Maximum value of Total (measured) = 138.0 V/m

E Scan 10mm above CD 1880 MHz/Hearing Aid Compatibility Test (101x451x1):

Measurement grid: dx=2mm, dy=2mm
Maximum value of Total field (slot averaged) = 131.2 V/m

Hearing Aid Near-Field Category: M2 (AWF 0 dB)

E in V/m (Time averaged) E in V/m (Slot averaged)

Grid 1	Grid 2	Grid 3	Grid 1	Grid 2	Grid 3
123.1	138.6	138.6	123.1	138.6	138.6
Grid 4	Grid 5	Grid 6	Grid 4	Grid 5	Grid 6
81.4	92.1	91.6	81.4	92.1	91.6
Grid 7	Grid 8	Grid 9	Grid 7	Grid 8	Grid 9
121.3	131.2	131.0	121.3	131.2	131.0


Category	AWF (dB)	Limits for E-Field Emissions (V/m)	Limits for H-Field Emissions (A/m)
M1	0	199.5 - 354.8	0.6 - 1.07
	-5	149.6 - 266.1	0.45 - 0.8
M2	0	112.2 - 199.5	0.34 - 0.6
	-5	84.1 - 149.6	0.25 - 0.45
M3	0	63.1 - 112.2	0.19 - 0.34
	-5	47.3 - 84.1	0.15 - 0.25
M4	0	<63.1	<0.19

file://C:\Program%20Files\DASY4\Print_Templates\Dipole%20Validation%201880%20... 14/07/2005

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 17 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

Date/Time: 14/07/2005 11:44:51 AM

Page 2 of 2

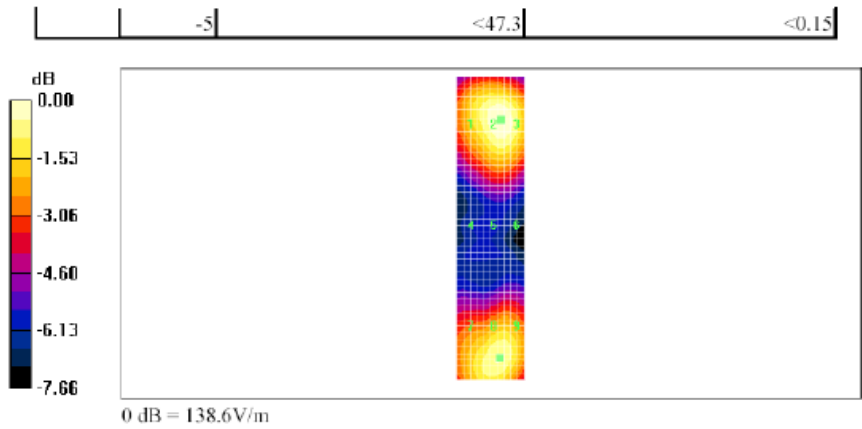

file://C:\Program%20Files\DASY4\Print_Templates\Dipole%20Validation%201880%20... 14/07/2005

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 18 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

A.3 RF emission field plots

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 19 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

Date/Time: 7/15/2014 4:23:54 PM

Test Laboratory: BlackBerry RTS

HAC RF_E-Field

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFEB30D

Communication System: UID 0, GSM 850; Communication System Band: GSM 850;
Frequency: 824.2 MHz, Frequency: 836.8 MHz, Frequency: 848.8 MHz; MIF: 3.44 dB
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section
Measurement Standard: DASYS (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/17/2014;
- Sensor-Surface: (Fix Surface), $z = 8.7$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASYS 52.8.7(1137); SEMCAD X 14.6.10(7164)

Device E-Field GSM850 measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_Low_Chan/Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: $dx=0.5000$ mm, $dy=0.5000$ mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 57.72 V/m; Power Drift = -0.02 dB

Applied MIF = 3.44 dB

RF audio interference level = 36.91 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 35.62 dBV/m	Grid 2 M4 36.78 dBV/m	Grid 3 M4 36.78 dBV/m
Grid 4 M4 35.69 dBV/m	Grid 5 M4 36.91 dBV/m	Grid 6 M4 36.91 dBV/m
Grid 7 M4 35.8 dBV/m	Grid 8 M4 36.85 dBV/m	Grid 9 M4 36.84 dBV/m

Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 36.91 dBV/m

E Category: M4

Location: -8.5, 0.5, 8.7 mm

Device E-Field GSM850 measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_Mid_Chan/Hearing Aid Compatibility

Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 59.53 V/m; Power Drift = -0.02 dB

Applied MIF = 3.44 dB

RF audio interference level = 37.52 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 35.31 dBV/m	Grid 2 M4 37.19 dBV/m	Grid 3 M4 37.19 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 21 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014		Report No RTS-6058-1407-08	FCC ID L6ARHB120LW

35.68 dBV/m	37.52 dBV/m	37.52 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
36.08 dBV/m	37.59 dBV/m	37.59 dBV/m

Cursor:

Total = 37.59 dBV/m

E Category: M4

Location: -7, 22.5, 8.7 mm

Device E-Field GSM850 measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_High_Chan/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 54.38 V/m; Power Drift = 0.03 dB

Applied MIF = 3.44 dB

RF audio interference level = 36.74 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4	Grid 2 M4	Grid 3 M4
34.63 dBV/m	36.4 dBV/m	36.4 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
34.96 dBV/m	36.74 dBV/m	36.74 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
35.27 dBV/m	36.81 dBV/m	36.8 dBV/m

Cursor:

Total = 36.81 dBV/m

E Category: M4

Location: -7, 22.5, 8.7 mm

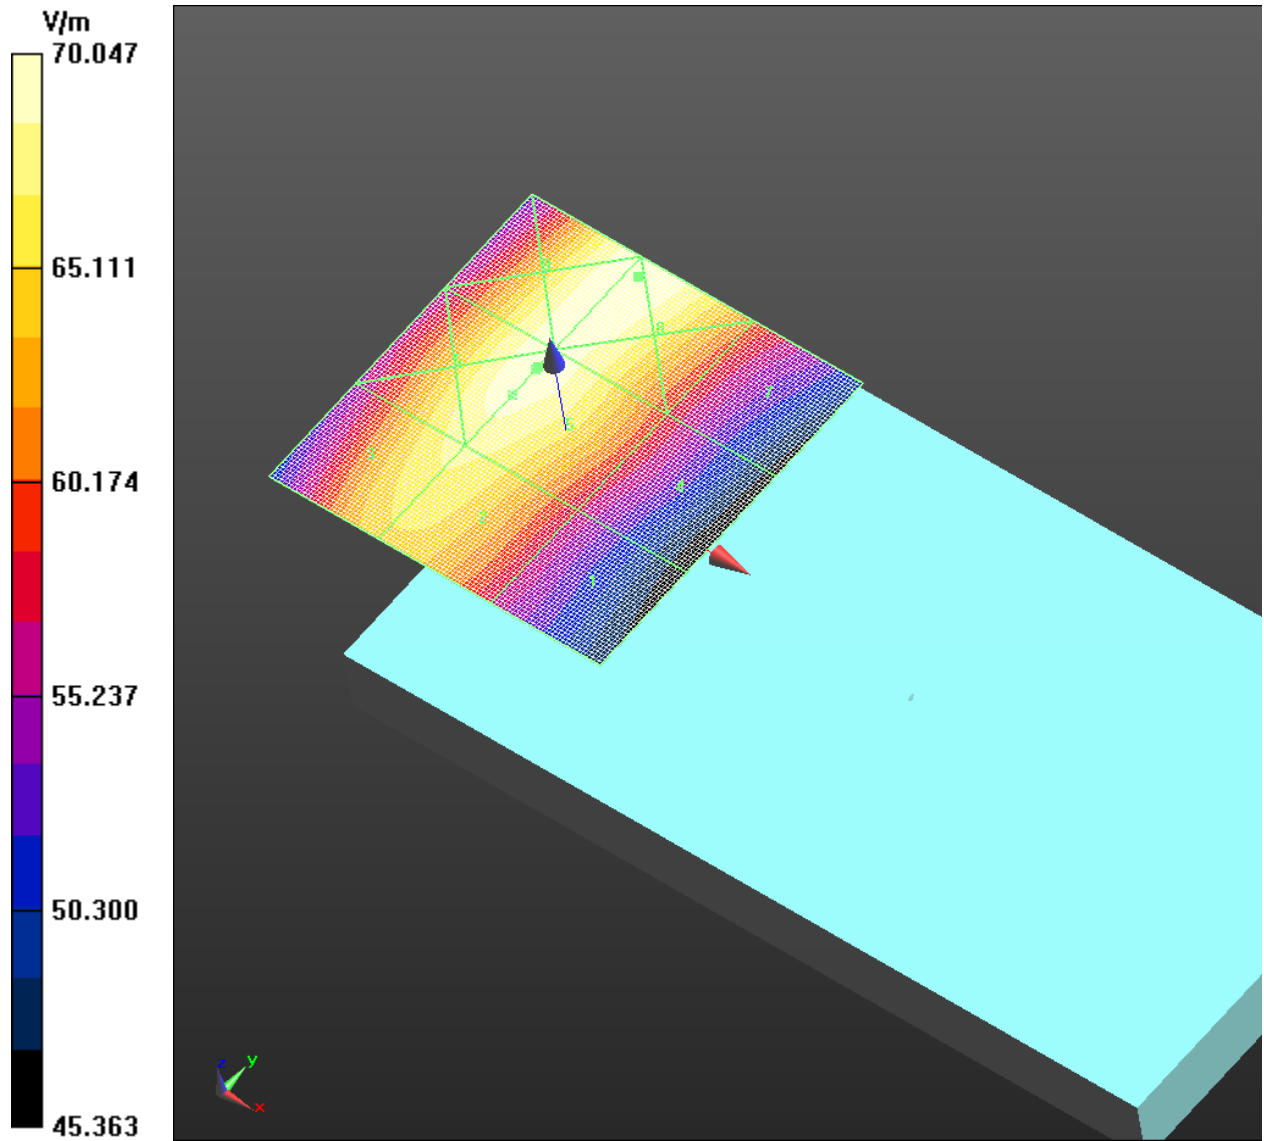

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 23 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

Date/Time: 7/15/2014 5:17:05 PM

Test Laboratory: BlackBerry RTS

HAC RF_E-Field_GSM 1900

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFEB30D

Communication System: UID 0, GSM 1900; Communication System Band: GSM 1900;
Frequency: 1850.2 MHz, Frequency: 1880 MHz, Frequency: 1909.8 MHz; MIF: 3.44 dB
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Sensor-Surface: (Fix Surface), $z = 8.7$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

**Device E-Field GSM 1900 measurement with ER probe/E Scan - ER3D - 2011:
15 mm from Probe Center to the Device_Low_Chan/Hearing Aid Compatibility
Test (101x101x1):** Interpolated grid: $dx=0.5000$ mm, $dy=0.5000$ mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 20.50 V/m; Power Drift = -0.02 dB

Applied MIF = 3.44 dB

RF audio interference level = 29.43 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 29.99 dBV/m	Grid 2 M3 31.57 dBV/m	Grid 3 M3 31.46 dBV/m
Grid 4 M4 27.32 dBV/m	Grid 5 M4 29.43 dBV/m	Grid 6 M4 29.35 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 24 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

23.85 dBV/m	27.81 dBV/m	27.97 dBV/m
--------------------	--------------------	--------------------

Category	Limits for E-Field Emissions < 960MHz	Limits for E-Field Emissions > 960MHz
M1	50 dBV/m - 55 dB V/m	40 dBV/m - 45 dB V/m
M2	45 dBV/m - 50 dB V/m	35 dBV/m - 40 dB V/m
M3	40 dBV/m - 45 dB V/m	30 dBV/m - 35 dB V/m
M4	<40 dBV/m	<30 dBV/m

Cursor:

Total = 31.57 dBV/m

E Category: M3

Location: -4.5, -25, 8.7 mm

**Device E-Field GSM 1900 measurement with ER probe/E Scan - ER3D - 2011:
15 mm from Probe Center to the Device_Mid_Chan/Hearing Aid Compatibility
Test (101x101x1):** Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 20.69 V/m; Power Drift = 0.21 dB

Applied MIF = 3.44 dB

RF audio interference level = 29.72 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 29.19 dBV/m	Grid 2 M3 31.36 dBV/m	Grid 3 M3 31.34 dBV/m
Grid 4 M4 26.77 dBV/m	Grid 5 M4 29.72 dBV/m	Grid 6 M4 29.72 dBV/m
Grid 7 M4 23.6 dBV/m	Grid 8 M4 28.05 dBV/m	Grid 9 M4 28.17 dBV/m

Cursor:

Total = 31.36 dBV/m

E Category: M3

Location: -7, -25, 8.7 mm

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 25 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014		Report No RTS-6058-1407-08	FCC ID L6ARHB120LW

Device E-Field GSM 1900 measurement with ER probe/E Scan - ER3D - 2011:
15 mm from Probe Center to the Device_High_Chan/Hearing Aid Compatibility
Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm
Device Reference Point: 0, 0, -6.3 mm
Reference Value = 21.76 V/m; Power Drift = -0.10 dB
Applied MIF = 3.44 dB
RF audio interference level = 29.62 dBV/m
Emission category: M4

MIF scaled E-field


Grid 1 M4 28.79 dBV/m	Grid 2 M3 30.67 dBV/m	Grid 3 M3 30.64 dBV/m
Grid 4 M4 26.84 dBV/m	Grid 5 M4 29.62 dBV/m	Grid 6 M4 29.62 dBV/m
Grid 7 M4 24.54 dBV/m	Grid 8 M4 29.36 dBV/m	Grid 9 M4 29.47 dBV/m

Cursor:

Total = 30.67 dBV/m

E Category: M3

Location: -6.5, -25, 8.7 mm

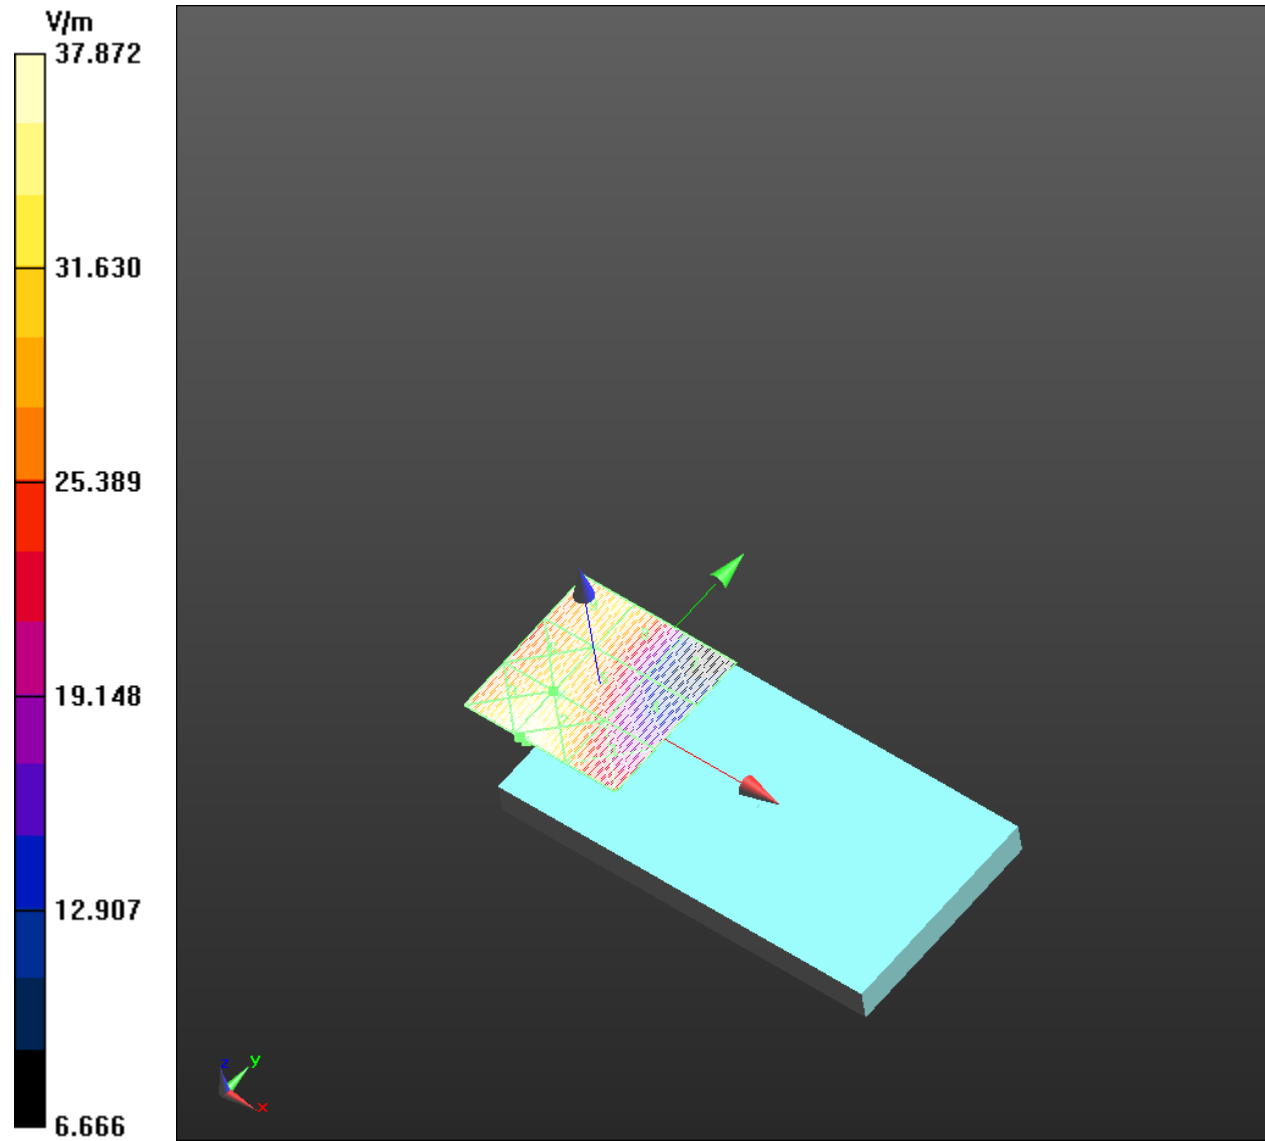

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 27 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

Date/Time: 7/15/2014 5:49:43 PM

Test Laboratory: BlackBerry RTS

HAC RF_E-Field_UMTS V

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFEB30D

Communication System: UID 0, WCDMA FDD V; Communication System Band: UMTS band V; Frequency: 826.4 MHz, Frequency: 836.4 MHz, Frequency: 846.6 MHz; MIF: -25.91 dB
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/17/2014;
 - Modulation Compensation:
- Sensor-Surface: (Fix Surface), $z = 8.7$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Device E-Field UMTS band V measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_Low_Chan/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 71.23 V/m; Power Drift = 0.10 dB

Applied MIF = -25.91 dB

RF audio interference level = 9.60 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 8.13 dBV/m	Grid 2 M4 9.39 dBV/m	Grid 3 M4 9.38 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4

	Document		Page
	Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		28 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW

8.24 dBV/m	9.6 dBV/m	9.59 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
8.31 dBV/m	9.53 dBV/m	9.52 dBV/m

Cursor:

Total = 9.60 dBV/m

E Category: M4

Location: -7.5, 2, 8.7 mm

Device E-Field UMTS band V measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_Mid_Chan/Hearing Aid

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 75.68 V/m; Power Drift = -0.03 dB

Applied MIF = -25.91 dB

RF audio interference level = 10.04 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
8.03 dBV/m	9.94 dBV/m	9.94 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
8.28 dBV/m	10.04 dBV/m	10.04 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
8.47 dBV/m	10.03 dBV/m	10.02 dBV/m


Cursor:

Total = 10.04 dBV/m

E Category: M4

Location: -8.5, 5, 8.7 mm

Device E-Field UMTS band V measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_High_Chan/Hearing Aid

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 29 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014		Report No RTS-6058-1407-08	FCC ID L6ARHB120LW

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 76.76 V/m; Power Drift = 0.06 dB

Applied MIF = -25.91 dB

RF audio interference level = 10.28 dBV/m

Emission category: M4

MIF scaled E-field


Grid 1 M4 8.6 dBV/m	Grid 2 M4 10.07 dBV/m	Grid 3 M4 10.07 dBV/m
Grid 4 M4 8.58 dBV/m	Grid 5 M4 10.28 dBV/m	Grid 6 M4 10.28 dBV/m
Grid 7 M4 8.71 dBV/m	Grid 8 M4 10.17 dBV/m	Grid 9 M4 10.15 dBV/m

Cursor:

Total = 10.28 dBV/m

E Category: M4

Location: -8, 1.5, 8.7 mm

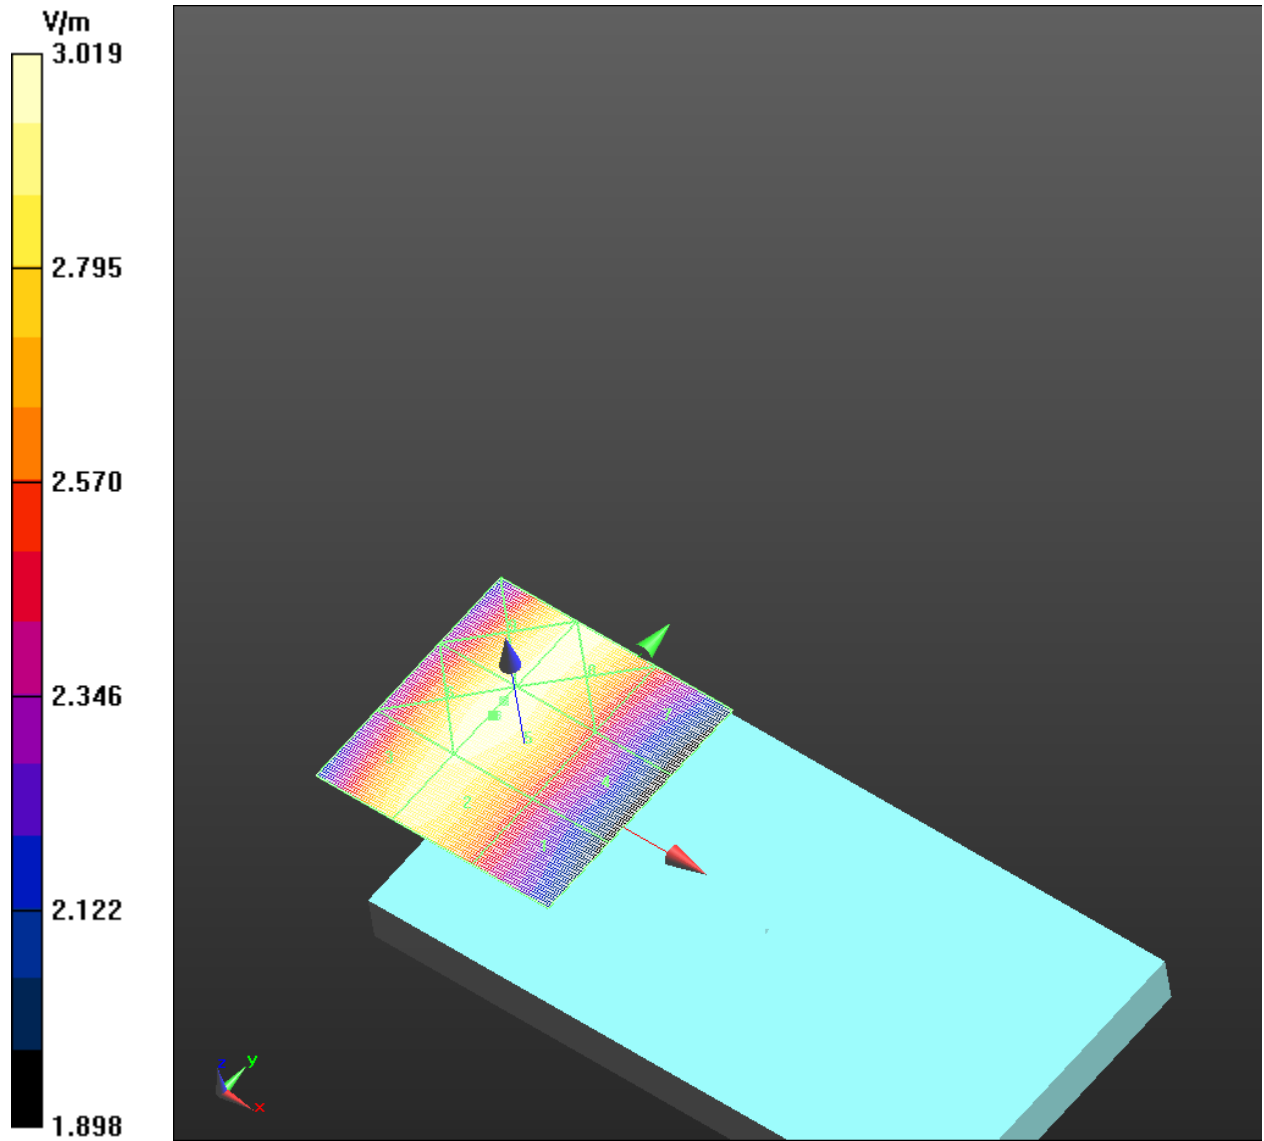

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 31 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW	

Date/Time: 7/15/2014 5:29:08 PM

Test Laboratory: BlackBerry RTS

HAC RF_E-Field_UMTS II

DUT: BlackBerry Smartphone; Type: Sample ; Serial: 2FFEB30D

Communication System: UID 0, WCDMA FDD II; Communication System Band: UMTS FDD II; Frequency: 1852.4 MHz, Frequency: 1880 MHz, Frequency: 1907.6 MHz; MIF: -25.91 dB
Medium parameters used: $\sigma = 0$ S/m, $\epsilon_r = 1$; $\rho = 0$ kg/m³
Phantom section: RF Section
Measurement Standard: DASY5 (IEEE/IEC/ANSI C63.19-2011)

DASY Configuration:

- Probe: ER3DV6 - SN2286; ConvF(1, 1, 1); Calibrated: 1/17/2014;
 - o Modulation Compensation:
- Sensor-Surface: (Fix Surface), $z = 8.7$
- Electronics: DAE3 Sn472; Calibrated: 3/18/2014
- Phantom: HAC RF Test Arch with AMCC; Type: SD HAC P01 BA
- DASY52 52.8.7(1137); SEMCAD X 14.6.10(7164)

Device E-Field UMTS band II measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_Low_Chan/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 32.45 V/m; Power Drift = -0.17 dB

Applied MIF = -25.91 dB

RF audio interference level = 3.87 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 2.43 dBV/m	Grid 2 M4 3.87 dBV/m	Grid 3 M4 3.79 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4

	Document		Page
	Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		32 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014	Report No RTS-6058-1407-08	FCC ID L6ARHB120LW

0.2 dBV/m	3.64 dBV/m	3.72 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
0.77 dBV/m	4.96 dBV/m	4.99 dBV/m

Cursor:

Total = 4.99 dBV/m

E Category: M4

Location: -10, 25, 8.7 mm

Device E-Field UMTS band II measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_Mid_Chan/Hearing Aid Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 27.43 V/m; Power Drift = 0.03 dB

Applied MIF = -25.91 dB

RF audio interference level = 3.76 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4	Grid 2 M4	Grid 3 M4
2.41 dBV/m	3.76 dBV/m	3.58 dBV/m
Grid 4 M4	Grid 5 M4	Grid 6 M4
-0.54 dBV/m	2.87 dBV/m	3.04 dBV/m
Grid 7 M4	Grid 8 M4	Grid 9 M4
0.39 dBV/m	4.81 dBV/m	4.86 dBV/m


Cursor:

Total = 4.86 dBV/m

E Category: M4

Location: -10.5, 25, 8.7 mm

Device E-Field UMTS band II measurement with ER probe/E Scan - ER3D - 2011: 15 mm from Probe Center to the Device_High_Chan/Hearing Aid

		Document Annex A to Hearing Aid Compatibility RF Emissions Test Report for the BlackBerry® Smartphone model RHB121LW		Page 33 (34)
Author Data Daoud Attayi	Dates of Test March 18-24, July 14-15, 2014		Report No RTS-6058-1407-08	FCC ID L6ARHB120LW

Compatibility Test (101x101x1): Interpolated grid: dx=0.5000 mm, dy=0.5000 mm

Device Reference Point: 0, 0, -6.3 mm

Reference Value = 24.58 V/m; Power Drift = 0.02 dB

Applied MIF = -25.91 dB

RF audio interference level = 4.63 dBV/m

Emission category: M4

MIF scaled E-field

Grid 1 M4 3.44 dBV/m	Grid 2 M4 5.05 dBV/m	Grid 3 M4 4.96 dBV/m
Grid 4 M4 -0.05 dBV/m	Grid 5 M4 2.23 dBV/m	Grid 6 M4 2.23 dBV/m
Grid 7 M4 -0.1 dBV/m	Grid 8 M4 4.56 dBV/m	Grid 9 M4 4.63 dBV/m

Cursor:

Total = 5.05 dBV/m

E Category: M4

Location: -5, -25, 8.7 mm

