

Table of Contents

[Data Sheet](#)
[Cisco Aironet Antennas and Accessories—Complete the Wireless Solution](#)
[Cisco Aironet Antennas and Accessories](#)
[Client Adapter Antenna](#)
[Access Point Antennas](#)
[Bridge Antennas](#)
[Low Loss/Ultra Low Loss Cables](#)
[Accessories](#)

Data Sheet

Cisco Aironet Antennas and Accessories—Complete the Wireless Solution

Cisco offers a complete range of antennas for client adapter, access point, and bridge equipment that enable a customized wireless solution for almost any installation.

Cisco Aironet Antennas and Accessories

[View PDF](#)

English

Select

CMC Quick Links

[CMC Home](#)

[CMC Search](#)

[Launch Pad](#)

[Products](#)

[Solutions](#)

[Technologies](#)

Every wireless Local Area Network (LAN) deployment is different. When engineering an in-building solution, varying facility sizes, construction materials, and interior divisions raise a host of transmission and multipath considerations. When implementing a building-to-building solution, distance, physical obstructions between facilities, and number of transmission points must be taken into account.

Cisco is committed to providing not only the best access points, client adapters, and bridges in the industry—it is also committed to providing a complete solution for any wireless LAN deployment. That's why Cisco has the widest range of antennas, cable, and accessories available from any wireless manufacturer.

Figure 1 Cisco offers a complete range of 2.4 GHz antennas for client adapter, access point, and bridge equipment that enable a customized wireless solution for almost any installation.



With the Cisco FCC-approved directional¹ and omnidirectional² antennas, low-loss cable, mounting hardware, and other accessories, installers can customize a wireless solution that meets the requirements of even the most challenging applications.

Client Adapter Antenna

Cisco Aironet wireless client adapters come complete with standard antennas that provide sufficient range³ for most applications at 11 Mbps. To extend the transmission range for a more specialized application when using the LMC adapter, a higher-gain⁴ antenna is offered. (See Table 1.)

Table 1 Cisco Aironet Client Antenna Features

	
--	---

Feature	AIR-ANT3351
Description	POS diversity dipole ¹
Application	Indoor diversity antenna ² to extend the range of Aironet LMC client adapters
Gain	2.2 dBi ³
Approximate Indoor Range at 1 Mbps ⁴	350 ft. (107 m)
Approximate Indoor Range at 11 Mbps ⁴	100 ft. (51 m)
Beam Width	360° H 75° V
Cable Length	5 ft. (1.5 m)
Dimensions	Base: 7 x 2 in. (18 x 5 cm) Height: 8 in. (20 cm)
Weight	9.2 oz. (261 g)

¹ A type of low-gain (2.2 dBi) antenna consisting of two (often internal) elements.

² An intelligent system of two antennas that continually senses incoming radio signals and automatically selects the antenna best positioned to receive it.

³ A ratio of decibels to an isotropic antenna that is commonly used to measure antenna gain. The greater the dBi value, the higher the gain and, as such, the more acute the angle of coverage.

⁴ All range estimations are based on an integrated client adapter antenna associating with an access point under ideal indoor conditions. The distances referenced here are approximations and should be used for estimation purposes only.

Access Point Antennas

Cisco Aironet access point antennas are compatible with all Cisco RP-TNC-equipped access points. The antennas are available with different gain and range capabilities, beam widths⁵, and form factors. Coupling the right antenna with the right access point allows for efficient coverage in any facility, as well as better reliability at higher data rates. (See Table 2.)

Table 2 Cisco Aironet Access Point Antenna Features

				
Feature	AIR-ANT5959	AIR-ANT2012	AIR-ANT3213	AIR-ANT2410Y-R
Description	Diversity omnidirectional ceiling mount	Diversity patch wall mount	Pillar mount diversity omnidirectional	Yagi mast or wall mount
Application	Indoor unobtrusive antenna, best for ceiling mount. Excellent throughput and coverage solution in high multipath cells and dense.	Indoor/Outdoor, unobtrusive medium range antenna	Indoor, unobtrusive medium-range antenna	Indoor/Outdoor directional antenna for use with Access Points or Bridges
Gain	Two separate 2 dBi omnidirectional elements. Minimum gain 2.0. Maximum 2.35 gain.	6.5 dBi with two radiating elements	5.2 dBi with two radiating elements	10 dBi
Approximate Indoor Range at 1 Mbps¹	350 ft. (105 m)	547 ft. (167 m)	497 ft. (151 m)	800 ft. (244 m)
Approximate Indoor Range at 11 Mbps¹	130 ft. (45 m)	167 ft. (51 m)	142 ft. (44 m)	230 ft. (70 m)
Beam Width	360° H 80° V	80° H 55° V	360° H 30° V	47° H 55° V
Cable Length	3 ft. (0.91 m) ²	3 ft. (0.91 m) ²	3 ft. (0.91 m)	3 ft. (0.91 m)
Dimensions	5.3 x 2.8 x 0.9 in. (13.5 x 7.1 x 2.3 cm)	4.78 x 6.66 x .82 in. (12.14 x 16.92 x 2.08 cm)	10 x 1 in. (25.4 x 2.5 cm)	7.25 x 5 in. (18.4 x 12.7 cm)
Weight	0.3 lbs. (0.14 kg)	9.6 oz. (272 g)	1 lb. (460 g)	8 oz.

¹ All range estimations are based on an external antenna associating with an integrated client adapter antenna under ideal indoor conditions. The distances referenced here are approximations and should be used for estimation purposes only.

² The cable provided on noted antennas meets UL 2043 certification for plenum rating requirements set by local fire codes supports installation in environmental air spaces such as areas above suspended ceilings.

Table 2 Cisco Aironet Access Point Antenna Features (continued)

				
Feature	AIR-ANT1728	AIR-ANT4941	AIR-ANT3549	AIR-ANT1729
Description	Omnidirectional ceiling mount	2.2 dBi dipole antenna	Patch wall mount	Patch wall mount
Application	Indoor medium-range antenna, typically hung from crossbars of drop ceilings	Indoor omnidirectional coverage	Indoor, unobtrusive, long-range antenna (may also be used as a medium-range bridge antenna)	Indoor/outdoor, unobtrusive, medium-range antenna (may also be used as a medium-range bridge antenna)
Gain	5.2 dBi	2.2 dBi	9 dBi	6 dBi
Approximate Indoor Range at 1 Mbps¹	497 ft. (151 m)	350 ft. (106 m)	Access Point: 700 ft. (213 m)	Access Point: 542 ft. (165 m)
Approximate Indoor Range at 11 Mbps¹	142 ft. (44 m)	130 ft. (40 m)	Access Point: 200 ft. (61 m) Bridge: 3390 ft. (1032 m)	Access Point: 155 ft. (47 m) Bridge: 1900 ft. (580 m)
Beam Width	360° H 38° V	360° H 65° V	60° H 60° V	75° H 65° V
Cable Length	3 ft. (0.91 m)	N/A	3 ft. (0.91 m)	3 ft. (0.91 m)
Dimensions	Length: 9 in. (22.86 cm) Diameter: 1 in. (2.5 cm)	5.5 in. (14 cm)	5 x 5 in. (12.4 x 12.4 cm)	4 x 5 in. (9.7 x 13 cm)
Weight	4.6 oz. (131 g)	1.1 oz (31 g)	5.3 oz. (150 g)	4.9 oz. (139 g)

Bridge Antennas


Cisco Aironet bridge antennas allow for extraordinary transmission distances between two or more buildings. Available in directional configurations for point-to-point transmission and omnidirectional configuration for point-to-multipoint implementations, Cisco has a bridge antenna for every application. (See Table 3.)

Table 3 Cisco Aironet Bridge Antenna Features

				
Feature	AIR-ANT2506	AIR-ANT24120	AIR-ANT1949	AIR-ANT3338
Description	Omnidirectional mast mount	High-gain omnidirectional mast mount	Yagi mast mount	Solid dish
Application	Outdoor short-range point-to-multipoint applications	Outdoor medium-range point-to-multipoint applications	Outdoor medium-range directional connections	Outdoor long-range directional connections
Gain	5.2 dBi	12 dBi	13.5 dBi	21 dBi
Approximate Range at 2 Mbps¹	5000 ft. (1525 m)	4.6 miles (7.4 km)	6.5 miles (10.5 km)	25 miles (40 km)
Approximate Range at 11 Mbps¹	1580 ft. (480 m)	1.4 miles (2.3 km)	2.0 miles (3.3 km)	11.5 miles (18.5 km)
Beam Width	360° H 38° V	360° H 7° V	30° H 25° V	12.4° H 12.4° V
Cable Length	3 ft. (0.91 m)	1 ft. (0.30 m)	3 ft. (0.91 m)	2 ft. (0.61 m)
Dimensions	Length: 13 in. (33 cm) Diameter: 1 in. (2.5 cm)	Length: 42 in. (103 cm) Diameter: 1.5 in. (3 cm)	Length: 18 in. (46 cm) Diameter: 3 in. (7.6 cm)	Diameter 24 in. (61 cm)
Weight	6 oz. (17 g)	1.5 lb. (0.68 kg)	1.5 lb. (0.68 kg)	11 lb. (5 kg)

¹ All range estimations are based on use of 50 foot (15m) low-loss cable and the same type of antenna at each end of the connection under ideal outdoor conditions. The distances referenced here are approximations and should be used for estimation purposes only.

Figure 2 Optional, higher-gain antennas can be used to extend the range of access points.

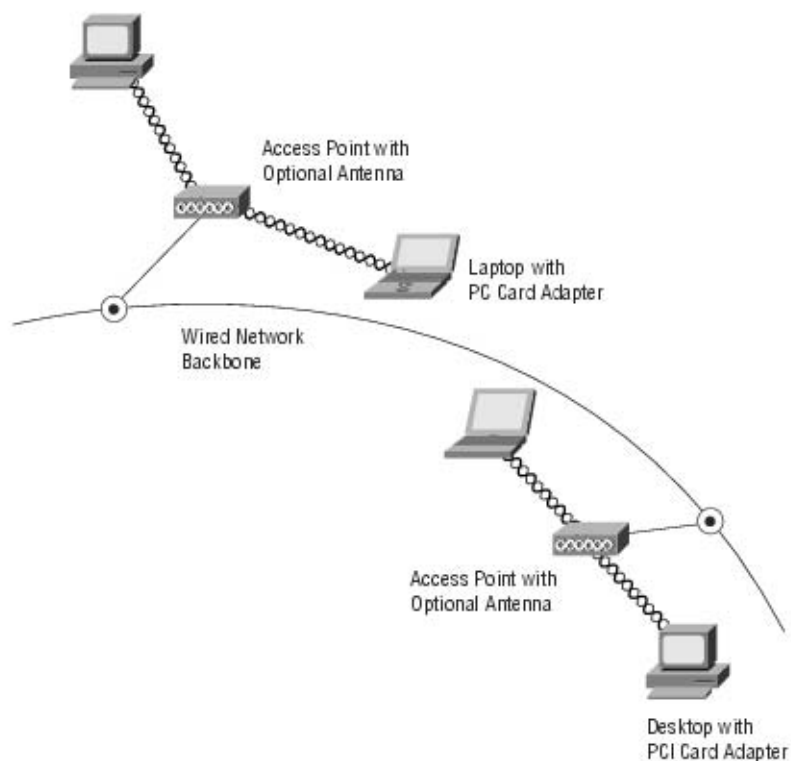


Low Loss/Ultra Low Loss Cables

Low-loss cable extends the length between any Cisco Aironet bridge and the antenna. With a loss of 6.7 dB per 100 feet (30m) for the low-loss cable and 4.4 dB for the ultra low-loss cable, this provides installation flexibility without a significant sacrifice in range. (See Table 4.)

Table 4 Cisco Aironet Low-Loss Antenna Cable Features

Feature	AIR-CAB020LL-R	AIR-CAB050LL-R	AIR-CAB100ULL-R	AIR-CAB150ULL-R
Cable Length	20 ft. (6 m)	50 ft. (15 m)	100 ft. (30 m)	150 ft. (46 m)
Transmission Loss	1.3 dB	3.4 dB	4.4 dB	6.6 dB

Figure 3 With Cisco Aironet bridge antennas, the right mounting hardware, and qualified installation, wireless links over great distances and obstacles are possible.

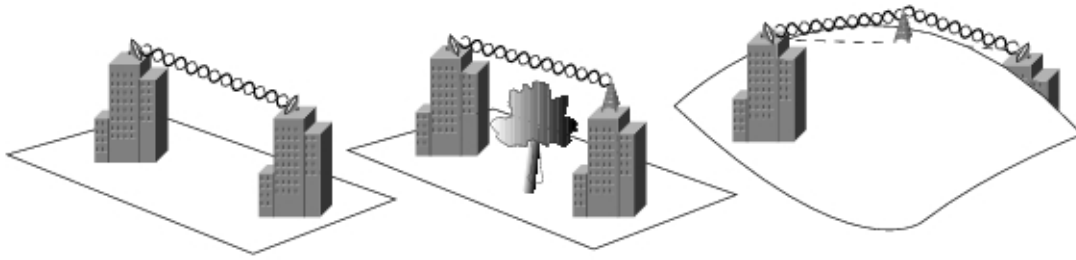

Accessories

To complete an installation, Cisco provides a variety of accessories that offer increased functionality, safety, and convenience. (See Table 5.)

Figure 4 Cisco Aironet Antenna Accessories



Table 5 Cisco Aironet Accessory Features

Feature	AIR-ACC2537-060	AIR-ACC3354	AIR-ACC2662	AIR-420-1625-050
Description	60 in. (152 cm) bulkhead extender	Lightning arrestor	Yagi articulating mount	5 in. (12.7 cm) Antenna converter cable: MMCX to RP-TNC connector
Application	Flexible antenna cable that extends access point cabling typically within an enclosure	Helps prevent damage due to lightning-induced surges or static electricity	Adds swiveling capability to mast-mounted yagi antennas	For use with Aironet LMC client adapters which need high gain antenna options.

¹ An antenna that concentrates transmission power into a direction that increases coverage distance at the expense of coverage angle. Directional antenna types include yagi, patch, and parabolic dish antennas. A yagi is a type of cylindrical directional antenna. A patch antenna is a type of flat antenna

is a concave or dish-shaped object. Often refers to dish antennas. Parabolic dish antennas tend to provide the greatest gain and the narrowest beam width making them ideal for point-to-point transmission over the longest distances.

2 An antenna that provides a 360-degree transmission pattern. These types of antennas are used when coverage in all directions is required.

3 A linear measure of the distance that a transmitter can send a signal.

4 A method of increasing the transmission distance of a radio by the concentration of its signal in a single direction, typically through the use of a directional antenna. Gain does not increase the signal strength of a radio, but simply redirects it. Therefore, as gain increases, the decrease in angle of coverage is inversely proportional

5 The angle of signal coverage provided by a radio; it may be decreased by a directional antenna to increase gain.

Posted: Mon Nov 10 19:24:17 PST 2003

All contents are Copyright © 1992--2003 Cisco Systems, Inc. All rights reserved.

[Important Notices](#) and [Privacy Statement](#).