



## **Test Report**

**AIR-OEAP602I-A-K9**

**Cisco Aironet 802.11n Dual Band Access Point**

**FCC ID: LDK102077, IC: 2461B-102077**

**Also covers**

**AIR-OEAP602I-N-K9 and AIR-OEAP602I-T-K9**

**2400-2483.5 MHz**

**Against the following Specifications:**

**CFR47 Part 15.247**

**RSS210**

**Cisco Systems**

**170 West Tasman Drive**

**San Jose, CA 95134**



This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

|                                                                          |           |
|--------------------------------------------------------------------------|-----------|
| <b>SECTION 1: OVERVIEW .....</b>                                         | <b>3</b>  |
| <b>1.1 TEST SUMMARY .....</b>                                            | <b>3</b>  |
| <b>SECTION 2: ASSESSMENT INFORMATION.....</b>                            | <b>4</b>  |
| <b>2.1 GENERAL .....</b>                                                 | <b>4</b>  |
| <b>2.4 TESTING FACILITIES .....</b>                                      | <b>5</b>  |
| <b>2.6 EUT DESCRIPTION.....</b>                                          | <b>5</b>  |
| <b>SECTION 4: SAMPLE DETAILS.....</b>                                    | <b>6</b>  |
| <b>APPENDIX A: EMISSION TEST RESULTS .....</b>                           | <b>7</b>  |
| <b>APPENDIX B: EMISSION TEST RESULTS .....</b>                           | <b>44</b> |
| <b>MAXIMUM PERMISSIBLE EXPOSURE (MPE) CALCULATIONS .....</b>             | <b>70</b> |
| <b>APPENDIX C: TEST EQUIPMENT/SOFTWARE USED TO PERFORM THE TEST.....</b> | <b>72</b> |

## Section 1: Overview

### 1.1 Test Summary

samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

| Emission                    | Immunity |
|-----------------------------|----------|
| CFR47 Part 15.247<br>RSS210 | N/A      |

The specifications listed above represent actual tests performed to demonstrate compliance against the specifications and basic standards listed on the front cover of this report. This list is not a one to one match to the front cover for one or more of the following reasons.

1. Basic standards call up many different test phenomena specifications such as the 61000-4-X series. The basic standards define which elements and levels shall be applied from these specifications and as such it is not appropriate to list the individual specifications on the front cover.
2. A Standard listed on the front cover may be required in a particular country but is not appropriate for the particular technologies included in the equipment under test. E.g. You cannot test a DC product to the mains Harmonics requirements in EN61000-3-2. See section 3.2.
3. Test results against a particular standard or specification may be included in a different test report. See section 3.2 for an EDCS reference of this data.
4. Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
5. Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.
6. Testing may have been performed to an equivalent test that satisfies the requirements of the standards and specifications listed on the front cover of the report. See section 3.2.
7. Where radiated emissions testing has been performed to EN55022/CISPR22 the additional requirements of VCCI: V- 3/2006.04, EN55022: 1994 +A1/2 and CAN/CSA- CISPR 22-02 have also been evaluated unless otherwise stated.
8. Testing to the requirements of CFR47 Part 15 was performed against the CISPR22 limits. The results are therefore deemed satisfactory evidence of compliance with Industry Canada Interference Causing Equipment Standard ICES-003.
9. Where assessment has been performed to CISPR24, all the applicable test requirements may have not been covered. Refer to the results section for the tests performed.

#### Notes:

- 1) Where a specification listed on the front cover of this report has deviations from the basic standards listed above, the additional technical requirements of the specification were also assessed.
- 2) Where appropriate, Cisco may have substituted a later revision of a basic standard to those referenced in the specification on the front sheet of this test report. This decision was based upon improved test methodology and repeatability and/or where the newer revision represented a more stringent test.
- 3) Where relevant, testing has been carried out to the requirements of both EN and IEC Specifications. This was possible because of the similarities of the test methods involved and the Cisco EMC test procedures.



## Section 2: Assessment Information

### 2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

|                      |                                      |
|----------------------|--------------------------------------|
| Temperature          | 15°C to 35°C (54°F to 95°F)          |
| Atmospheric Pressure | 860mbar to 1060mbar (25.4" to 31.3") |
| Humidity             | 10% to 75*%                          |

\*[Where applicable] For ESD testing the humidity limits used were 30% to 60% and for EFT/B tests the humidity limits used were 25% to 75%.
- e) All AC testing was performed at one or more of the following supply voltages:

|                     |
|---------------------|
| 110V 60 Hz (+/-20%) |
| 220V 50 Hz (+/-20%) |

**This report must not be reproduced except in full, without written approval of Cisco Systems.**



## **2.2 Date of start of testing**

01-Dec-2010

## **2.3 Report Issue Date**

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled

## **2.4 Testing facilities**

This assessment was performed by:

### **Testing Laboratory**

|                         |                       |
|-------------------------|-----------------------|
| Cisco Systems, Inc.,    | Cisco Systems, Inc.   |
| 4125 Highlander Parkway | 170 West Tasman Drive |
| Richfield, OH 44286     | San Jose, CA 95134    |
| USA                     | USA                   |

### **Test Engineers**

James Nicholson

## **2.5 Equipment Assessed (EUT)**

AIR-OEAP602I-A-K9 Cisco Aironet 802.11n Dual Band Access Point

## **2.6 EUT Description**

The AIR-OEAP602I-A-K9 Cisco Aironet 802.11n Dual Band Access Point supports the following modes of operation. The modes are further defined in the radio Theory of Operation. The modes included in this report represent the worst case data for all modes.

- Legacy CCK, Single Antenna, 1 to 1 Mbps
- Legacy OFDM, Non HT-20, Single Antenna, 6 to 6 Mbps
- Legacy OFDM, Non HT-20, Dual Antennas, 6 to 6 Mbps
- HT-20, Single Antenna, M0 to M0
- HT-20, Dual Antennas, M0 to M15
- HT-40, Single Antenna, M0 to M0
- HT-40, Dual Antennas, M0 to M15

The following integral antennas are supported by this product.

- 2.4 GHz 3.5 dBi Omni-directional Antenna
- 5 GHz 4 dBi Omni-directional Antenna



#### Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing. Please also refer to the "Justification for worst Case test Configuration" section of this report for further details on the selection of EUT samples.

##### 4.1 Sample Details (Photographs of the test samples, where appropriate can be found in appendix H)

| Sample No. | Equipment Details | Part Number | Manufacturer  | Hardware Rev. | Firmware Rev. | Software Rev. | Serial Number |
|------------|-------------------|-------------|---------------|---------------|---------------|---------------|---------------|
| S01        | AIR-OEAP602I-A-K9 | 73-11494-01 | Cisco Systems | NA            | NA            | NA            | FHH121700LP   |
| S02        | AIR-PWR-SPLY1     | 341-0211-01 | Cisco Systems | NA            | NA            | NA            | DTH1030902Z   |

##### 4.2 System Details

| System # | Description | Samples  |
|----------|-------------|----------|
| 1        | EUT         | S01, S02 |

##### 4.3 Mode of Operation Details

| Mode# | Description             | Comments                |
|-------|-------------------------|-------------------------|
| 1     | Continuous Transmitting | Continuous Transmitting |

**Appendix A: Emission Test Results**

**Testing Laboratory:** Cisco Systems, Inc., 4125 Highlander Parkway, Richfield, OH, USA

**Average Output Power**

Connect the antenna(s) to the power meter at the average power sensor input. Configure the power meter to measure average power for the transmitter frequencies listed below (enter all losses between the transmitter output and the power meter).

Place the radio in continuous transmit mode and record the reading on the power meter.

| Frequency | Mode                       | Data Rate | Target Power Level |      |       | Actual Power Level |
|-----------|----------------------------|-----------|--------------------|------|-------|--------------------|
|           |                            |           | Tx A               | Tx B | Total | Total              |
| 2412      | Legacy CCK, Single Tx Path | 1         | 20                 | Off  | 20    | <b>20.7</b>        |
| 2412      | Non HT-20, Single Tx Path  | 6         | 17                 | Off  | 17    | <b>16.6</b>        |
| 2412      | HT-20, Dual Tx Path        | M0        | 15                 | 15   | 18    | <b>16.8</b>        |
| 2437      | Legacy CCK, Single Tx Path | 1         | 20                 | Off  | 20    | <b>20.9</b>        |
| 2437      | HT-20, Dual Tx Path        | M0        | 17                 | 17   | 20    | <b>19.4</b>        |
| 2462      | Legacy CCK, Single Tx Path | 1         | 20                 | Off  | 20    | <b>20.7</b>        |
| 2462      | Non HT-20, Single Tx Path  | 6         | 16                 | Off  | 16    | <b>15.4</b>        |
| 2462      | HT-20, Dual Tx Path        | 6         | 14                 | 14   | 17    | <b>16.4</b>        |
| 2412/2432 | HT-40                      | M0        | 12                 | 12   | 15    | <b>14.9</b>        |
| 2427/2447 | HT-40                      | M0        | 17                 | 17   | 20    | <b>20.2</b>        |
| 2442/2462 | HT-40                      | M0        | 12                 | 12   | 15    | <b>15.2</b>        |

## 6dB Bandwidth

15.247: Systems using digital modulation techniques may operate in the 2400-2483.5MHz band. The minimum 6 dB bandwidth shall be at least 500 kHz.


Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

|                       |                                                        |
|-----------------------|--------------------------------------------------------|
| Center Frequency:     | Frequency from table below                             |
| Span:                 | 2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel) |
| Reference Level:      | 20 dBm                                                 |
| Attenuation:          | 10 dB                                                  |
| Sweep Time:           | 5 s                                                    |
| Resolution Bandwidth: | 100 kHz                                                |
| Video Bandwidth:      | 100 kHz                                                |
| X dB Bandwidth:       | 6 dB                                                   |
| Detector:             | Peak                                                   |
| Trace:                | Single                                                 |


Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:

| Frequency (MHz) | Mode                       | Data Rate (Mbps) | 6dB BW (MHz) | Limit (kHz) | Margin (MHz) |
|-----------------|----------------------------|------------------|--------------|-------------|--------------|
| 2412            | Legacy CCK, Single Tx Path | 1                | 8.1          | >500        | 7.6          |
| 2412            | Non HT-20, Single Tx Path  | 6                | 16.4         | >500        | 15.9         |
| 2412            | HT-20, Dual Tx Path        | m0               | 16.1         | >500        | 15.6         |
| 2437            | Legacy CCK, Single Tx Path | 1                | 8.1          | >500        | 7.6          |
| 2437            | HT-20, Dual Tx Path        | m0               | 16.4         | >500        | 15.9         |
| 2462            | Legacy CCK, Single Tx Path | 1                | 8.1          | >500        | 7.6          |
| 2462            | Non HT-20, Single Tx Path  | 6                | 16.4         | >500        | 15.9         |
| 2462            | HT-20, Dual Tx Path        | 6                | 16.4         | >500        | 15.9         |
| 2412/2432       | HT-40                      | m0               | 35.9         | >500        | 35.4         |
| 2427/2447       | HT-40                      | m0               | 35.9         | >500        | 35.4         |
| 2442/2462       | HT-40                      | m0               | 35.9         | >500        | 35.4         |


### 6dB Bandwidth, 2412 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths

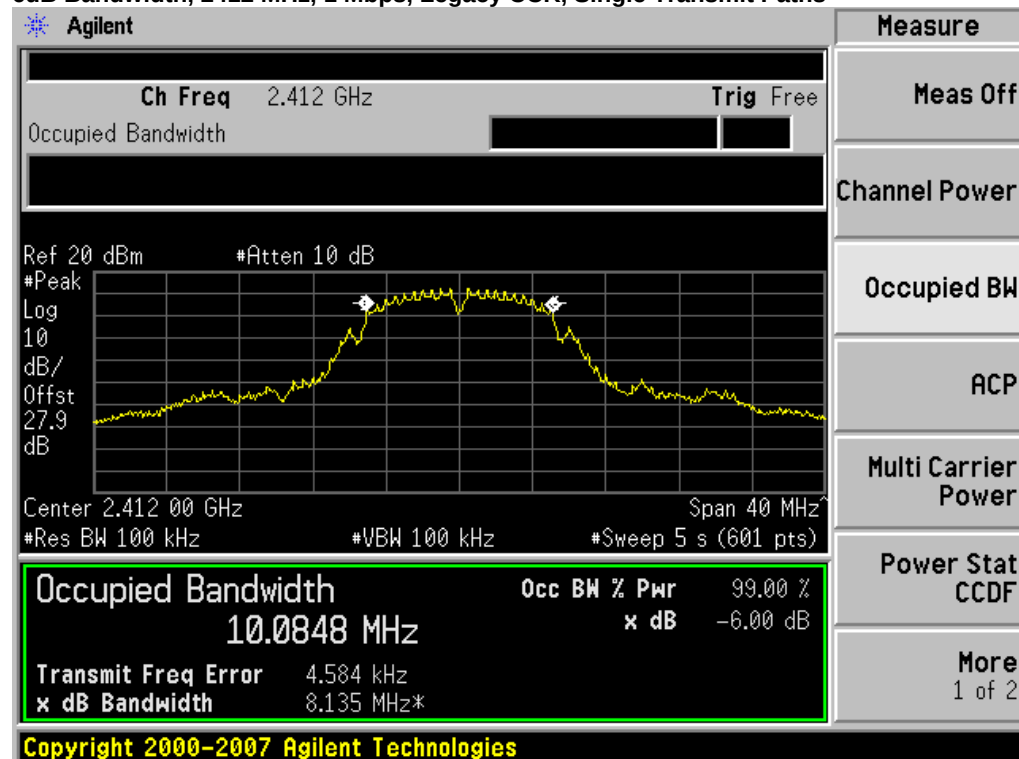


### 6dB Bandwidth, 2412 MHz, 6 Mbps, Non HT-20, Single Transmit Paths

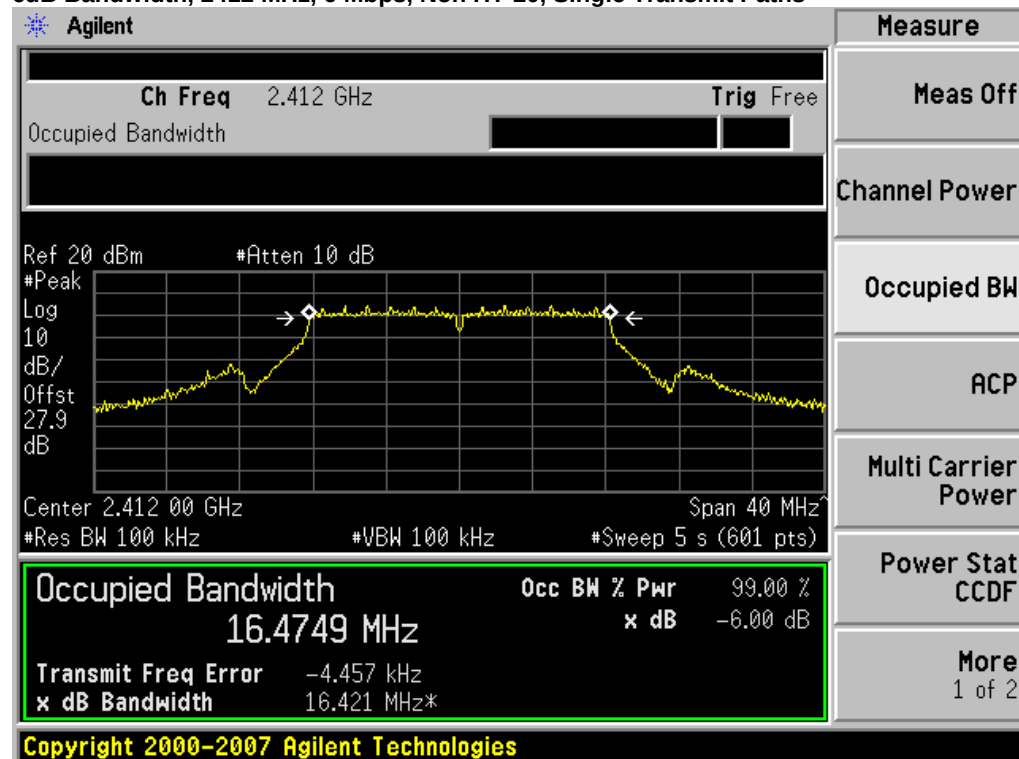


## 6dB Bandwidth, 2412 MHz, m0, HT-20, Dual Transmit Paths

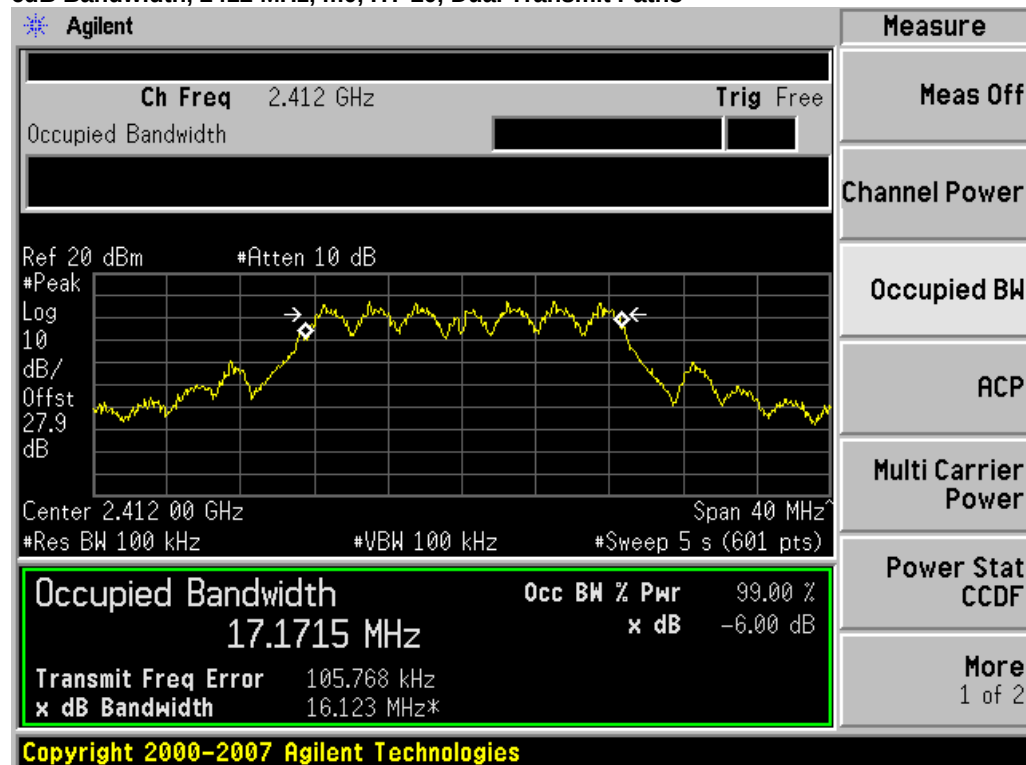


## 6dB Bandwidth, 2437 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths

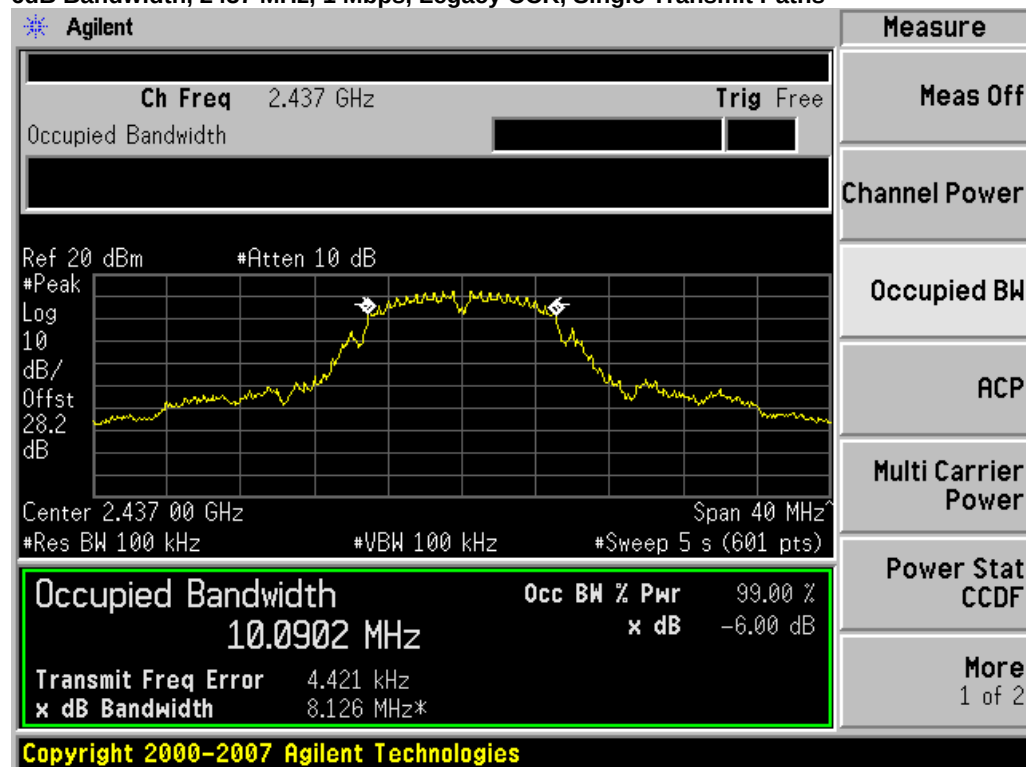


## 6dB Bandwidth, 2437 MHz, m0, HT-20, Dual Transmit Paths

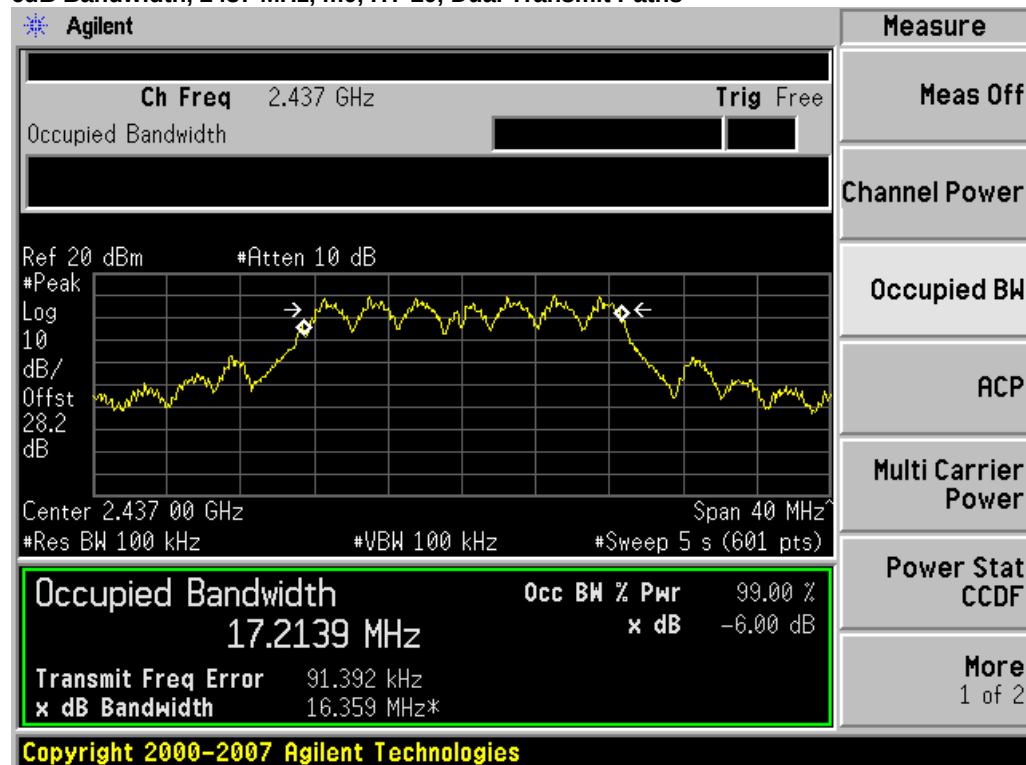


## 6dB Bandwidth, 2462 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths

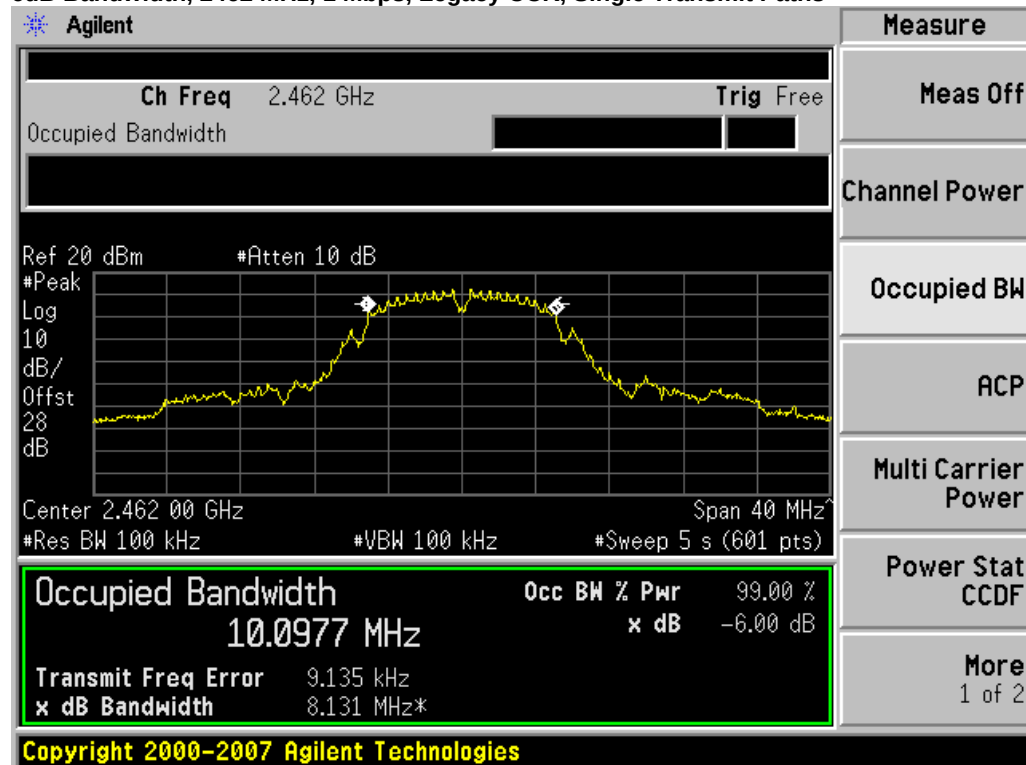


## 6dB Bandwidth, 2462 MHz, 6 Mbps, Non HT-20 , Single Transmit Paths

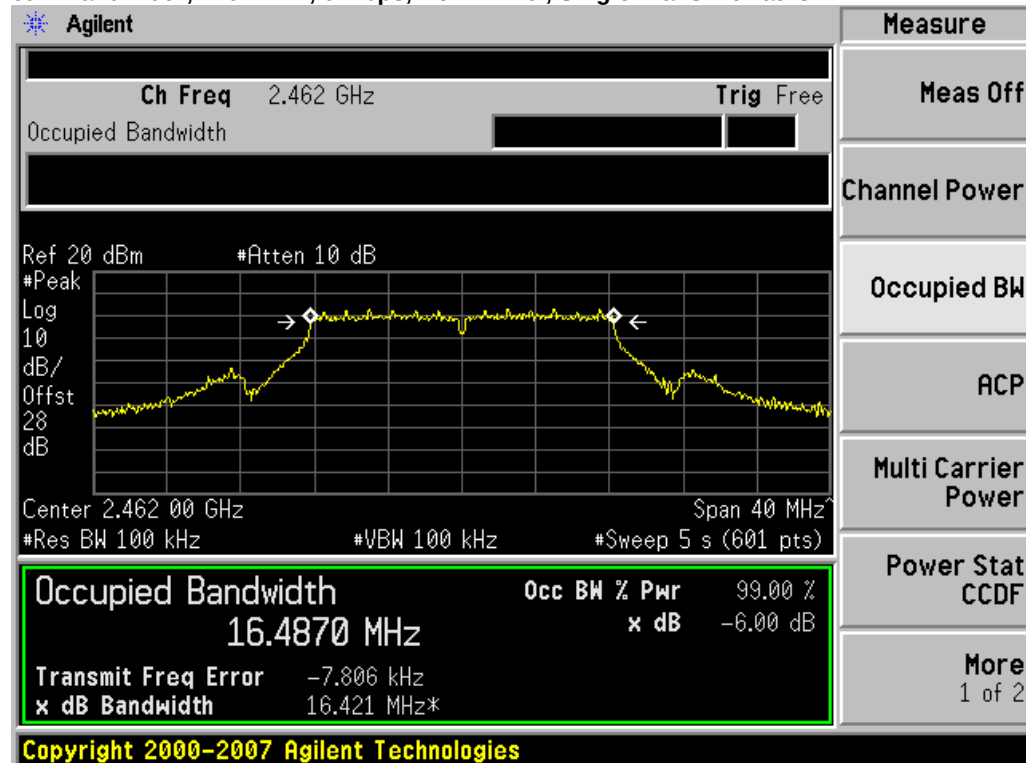


## 6dB Bandwidth, 2462 MHz, m0, HT-20, Dual Transmit Paths

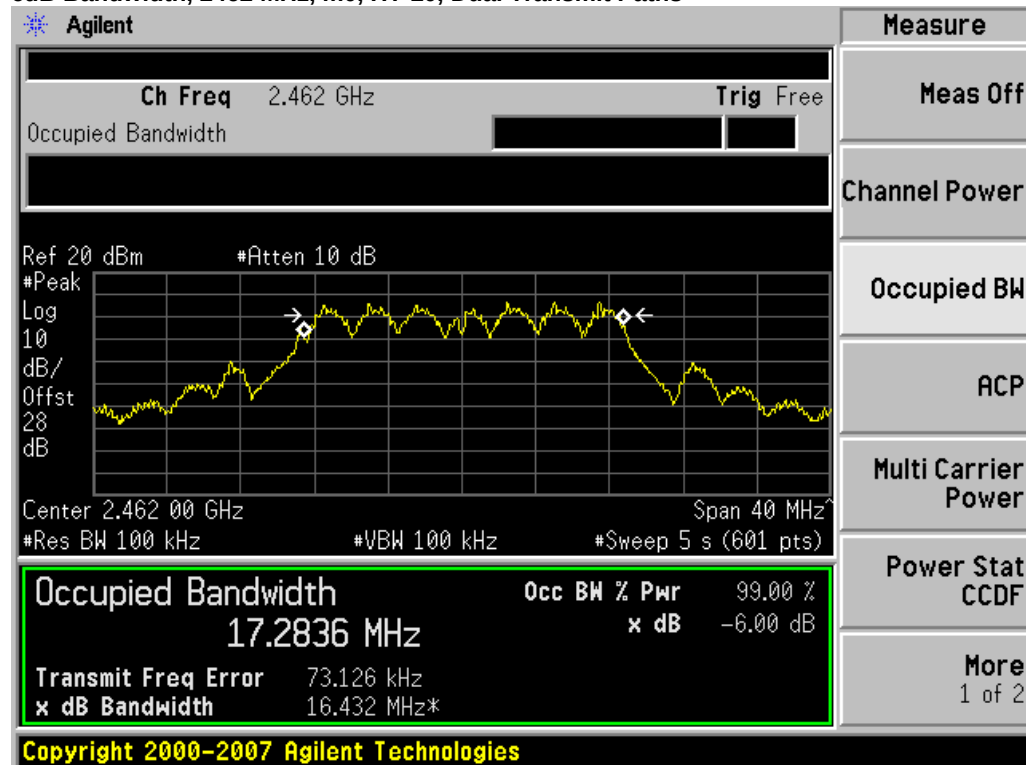


## 6dB Bandwidth, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths

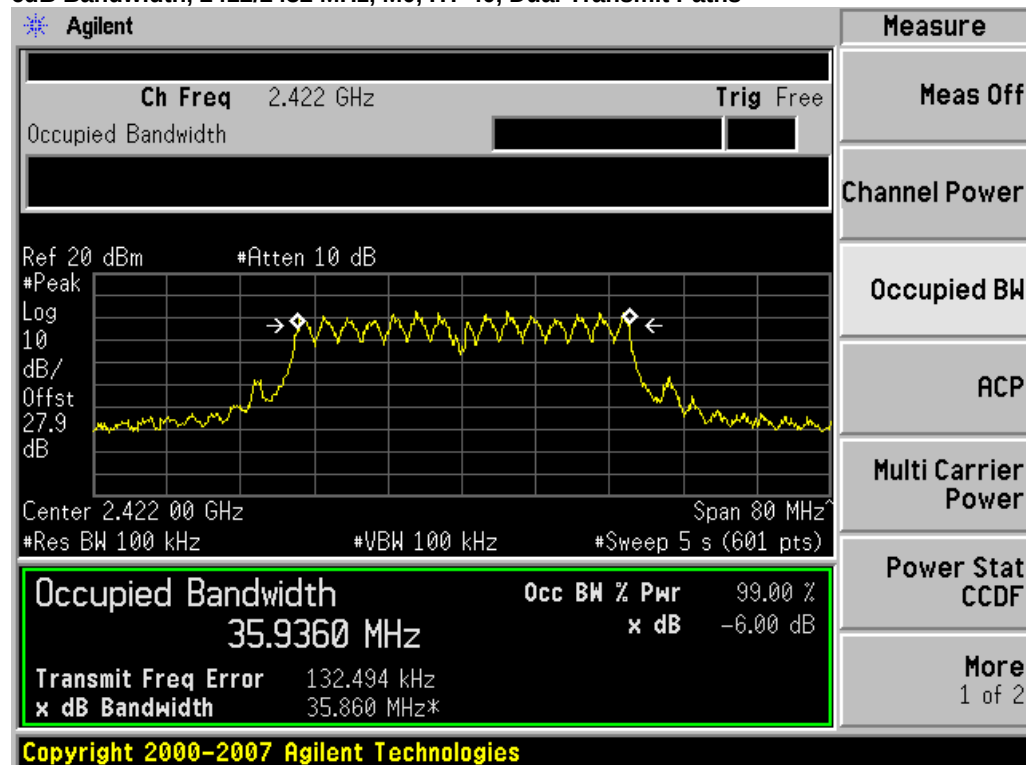

## 6dB Bandwidth, 2427/2447 MHz, M0, HT-40, Dual Transmit Paths

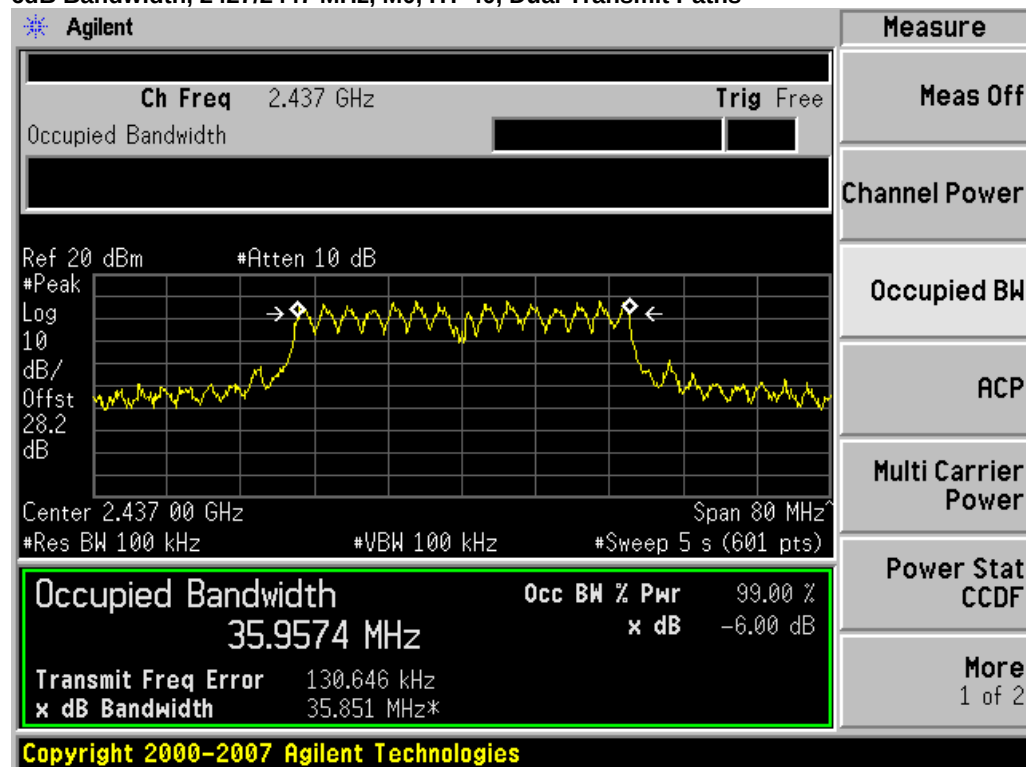

## 6dB Bandwidth, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths

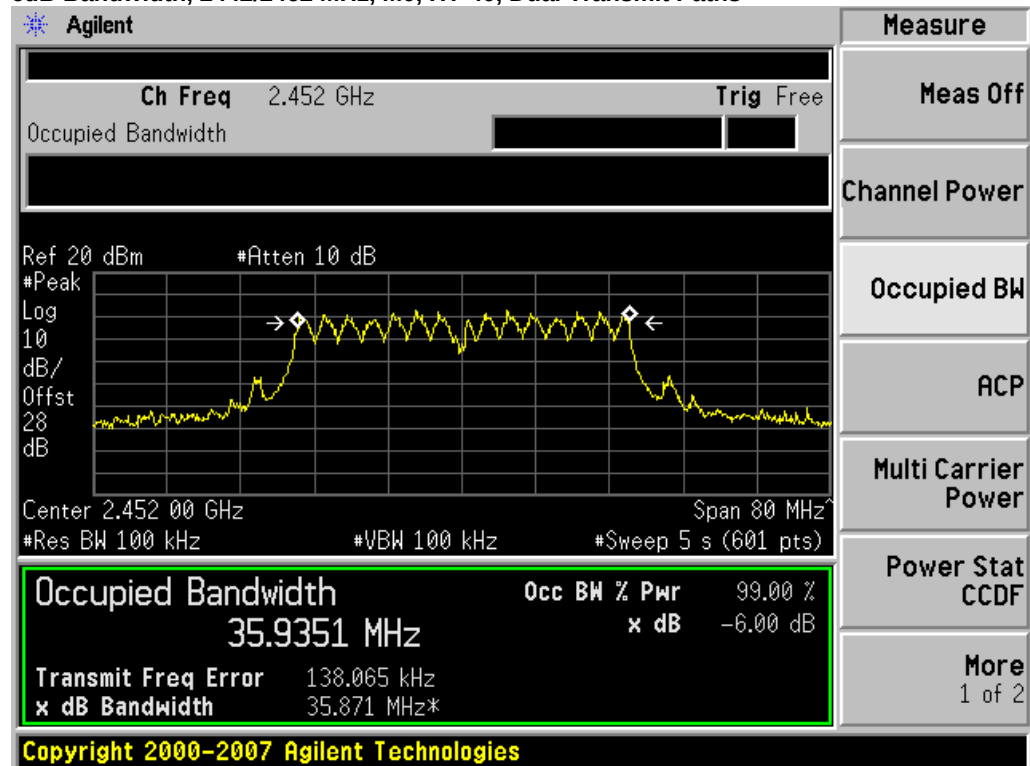



## 99% and 26dB Bandwidth


Connect the antenna port(s) to the spectrum analyzer input. Using the spectrum analyzer Channel Bandwidth mode, configure the spectrum analyzer as shown below (enter all losses between the transmitter output and the spectrum analyzer).

Center Frequency: Frequency from table below  
 Span: 2 x Nominal Bandwidth (e.g. 40MHz for a 20MHz channel)  
 Reference Level: 20 dBm  
 Attenuation: 10 dB  
 Sweep Time: 5 s  
 Resolution Bandwidth: 1%-3% of 26 dB Bandwidth  
 Video Bandwidth: ≥Resolution Bandwidth  
 X dB Bandwidth: 26 dB  
 Detector: Peak  
 Trace: Single


Place the radio in continuous transmit mode. View the transmitter waveform on the spectrum analyzer, and record the pertinent measurements:

| Frequency (MHz) | Mode                       | Data Rate (Mbps) | 26dB BW (MHz) | 99% BW (MHz) |
|-----------------|----------------------------|------------------|---------------|--------------|
| 2412            | Legacy CCK, Single Tx Path | 1                | 13.5          | 10.3         |
| 2412            | Non HT-20, Single Tx Path  | 6                | 21.1          | 17.4         |
| 2412            | HT-20, Dual Tx Path        | M0               | 23.0          | 17.6         |
| 2437            | Legacy CCK, Single Tx Path | 1                | 13.5          | 10.3         |
| 2437            | HT-20, Dual Tx Path        | M0               | 20.8          | 17.6         |
| 2462            | Legacy CCK, Single Tx Path | 1                | 13.5          | 10.3         |
| 2462            | Non HT-20, Single Tx Path  | 6                | 21.2          | 17.4         |
| 2462            | HT-20, Dual Tx Path        | 6                | 20.7          | 17.6         |
| 2412/2432       | HT-40                      | M0               | 40.2          | 36.5         |
| 2427/2447       | HT-40                      | M0               | 40.2          | 36.5         |
| 2442/2462       | HT-40                      | M0               | 40.1          | 36.5         |


## 26dB/99% Bandwidth, 2412 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths

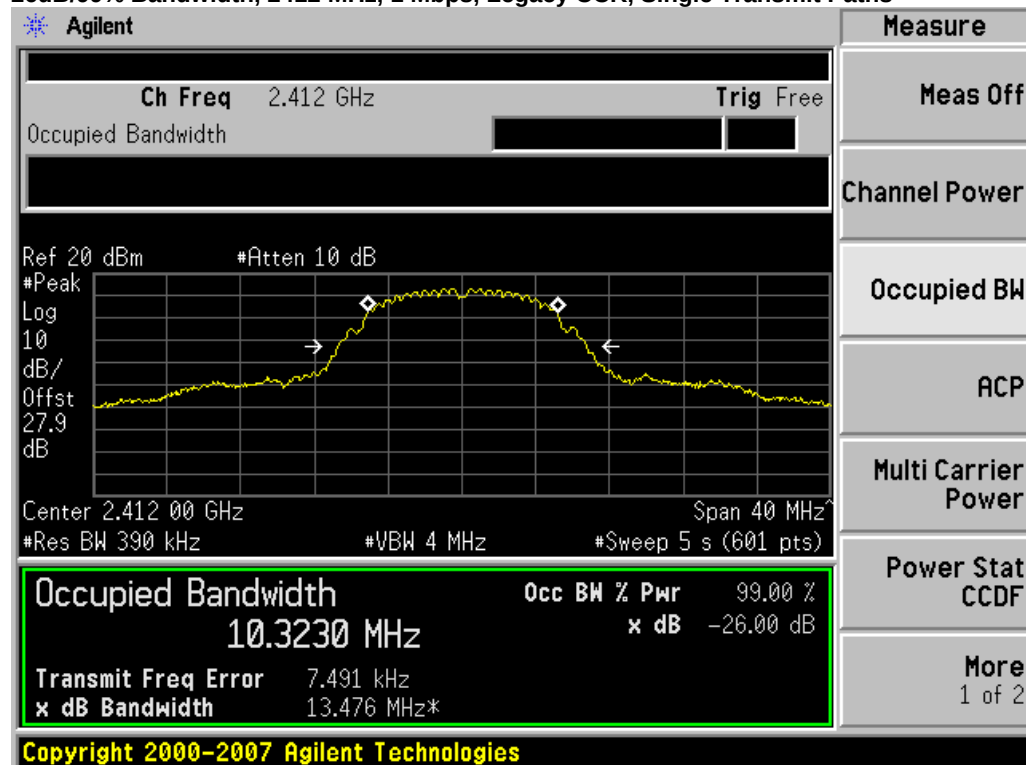


## 26dB/99% Bandwidth, 2412 MHz, 6 Mbps, Non HT-20, Single Transmit Paths

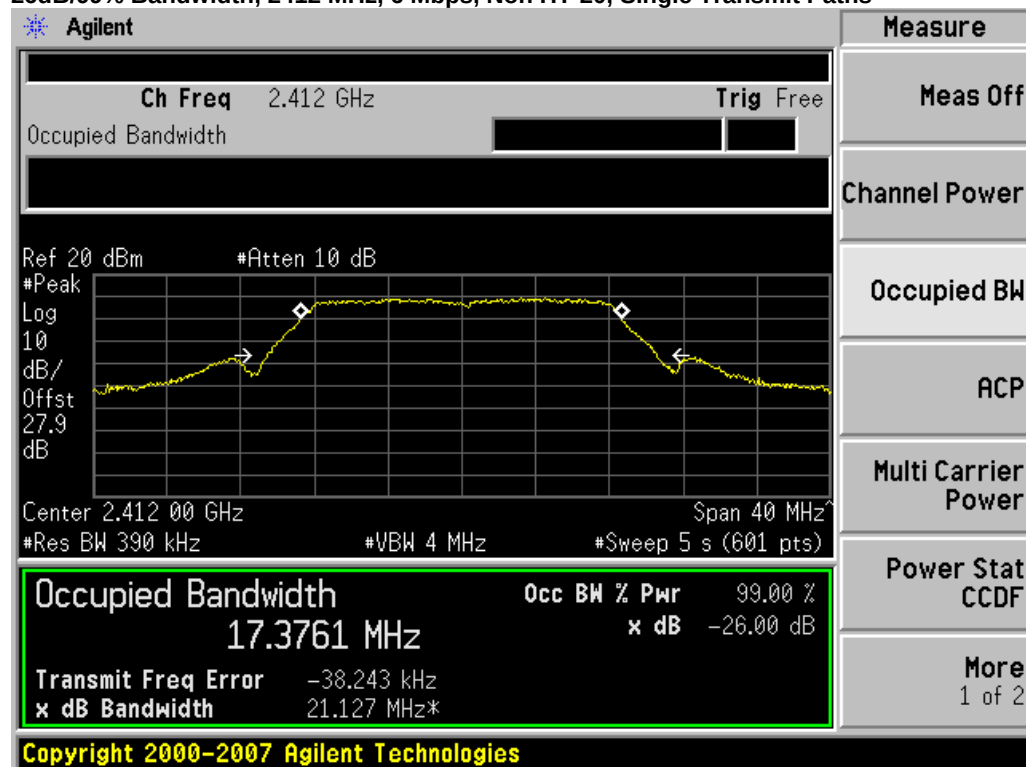


## 26dB/99% Bandwidth, 2412 MHz, m0, HT-20, Dual Transmit Paths

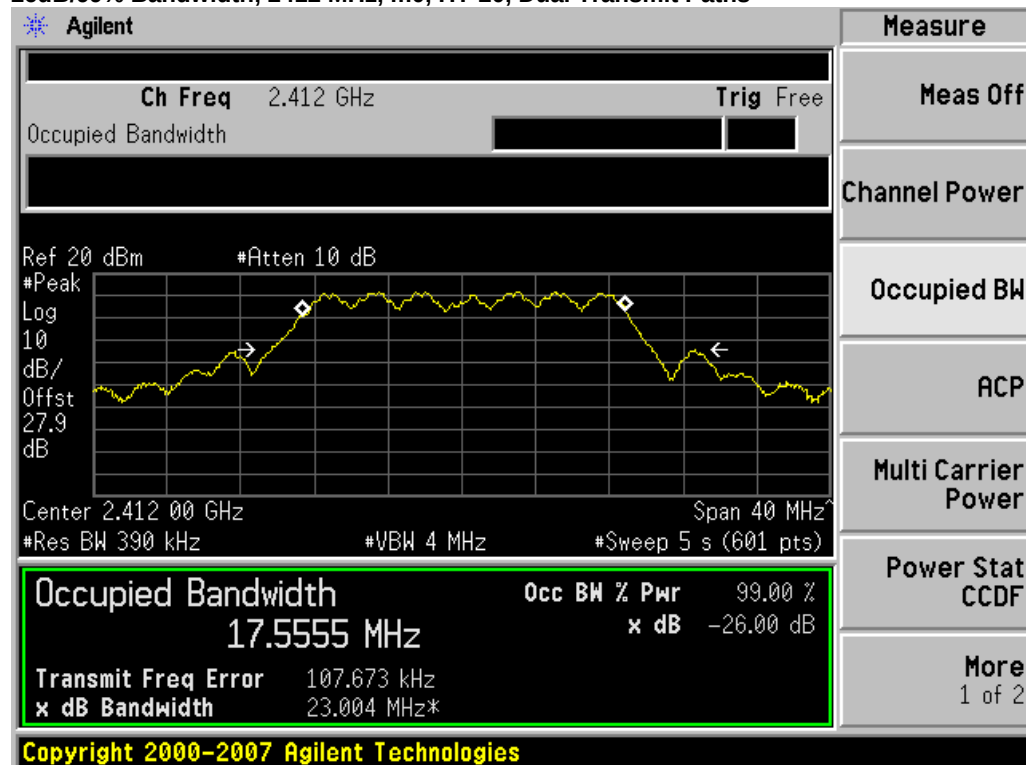


## 26dB/99% Bandwidth, 2437 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths

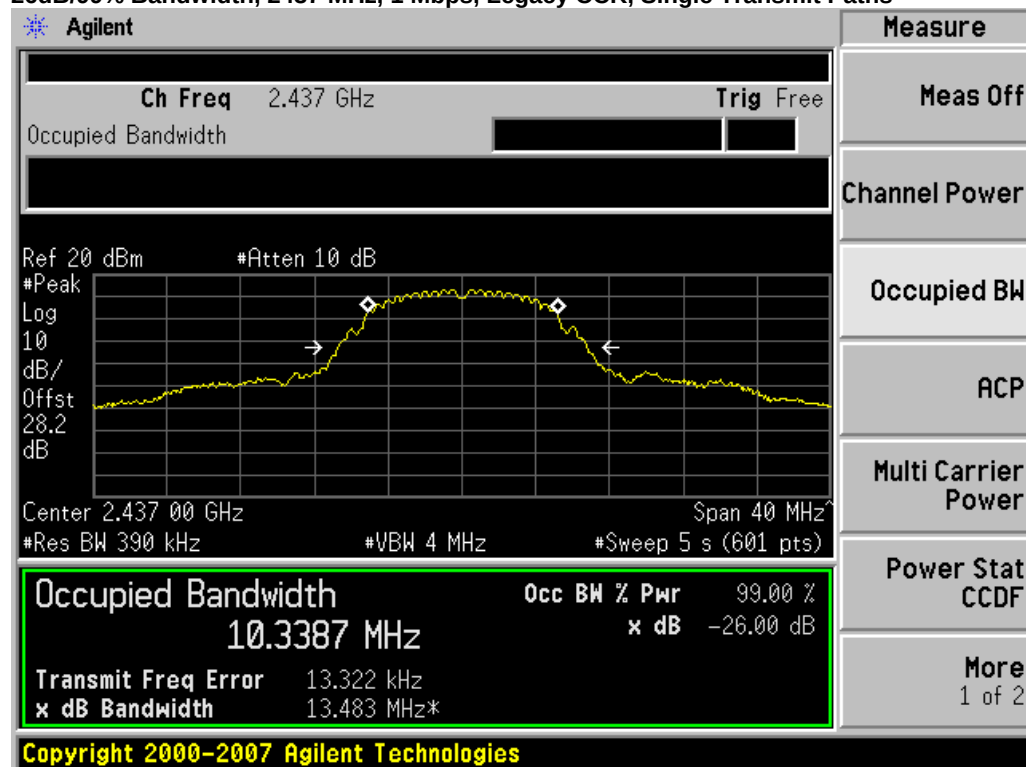


## 26dB/99% Bandwidth, 2437 MHz, m0, HT-20, Dual Transmit Paths

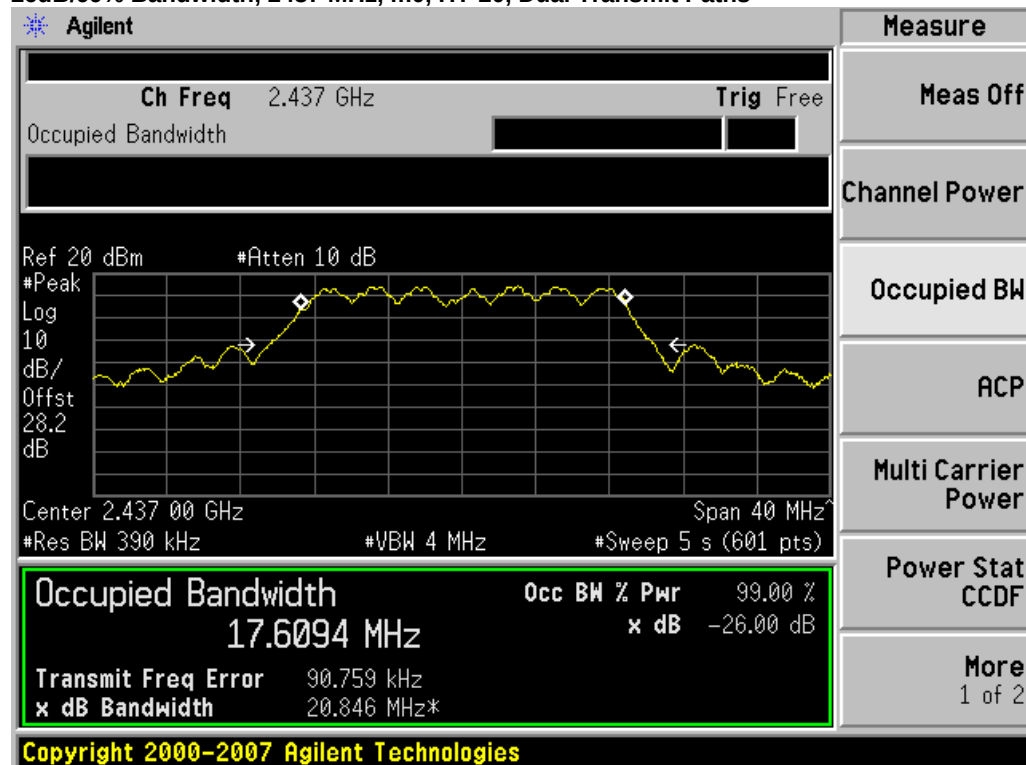


## 26dB/99% Bandwidth, 2462 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths

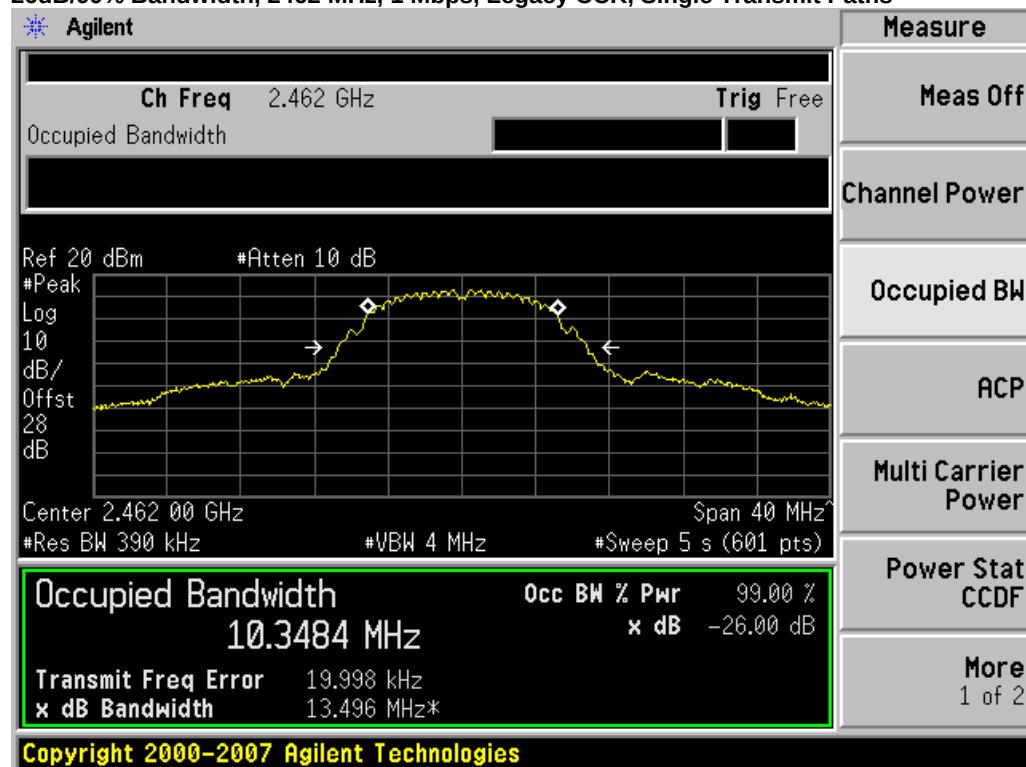


## 26dB/99% Bandwidth, 2462 MHz, 6 Mbps, Non HT-20 , Single Transmit Paths

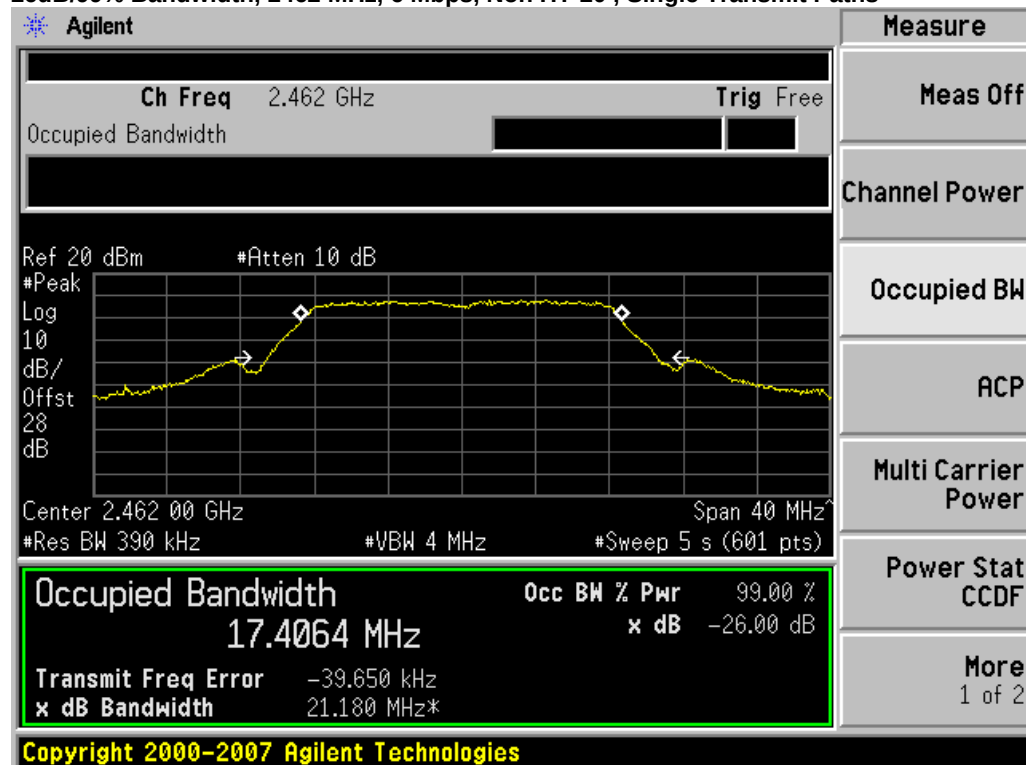


## 26dB/99% Bandwidth, 2462 MHz, m0, HT-20, Dual Transmit Paths

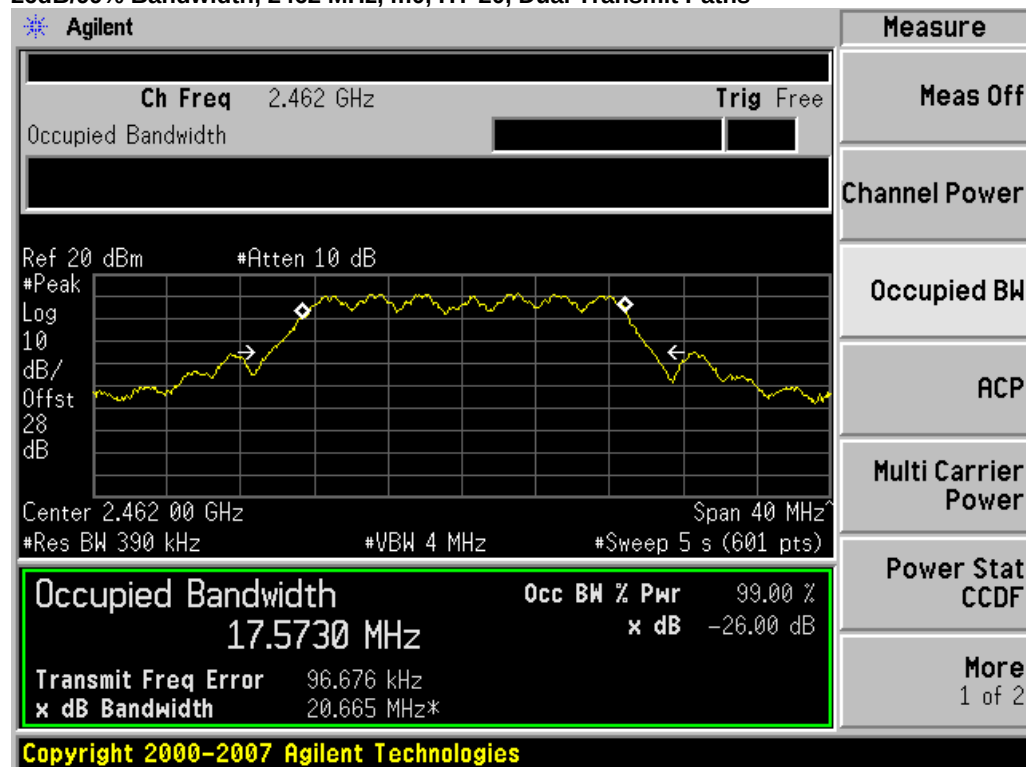


## 26dB/99% Bandwidth, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths

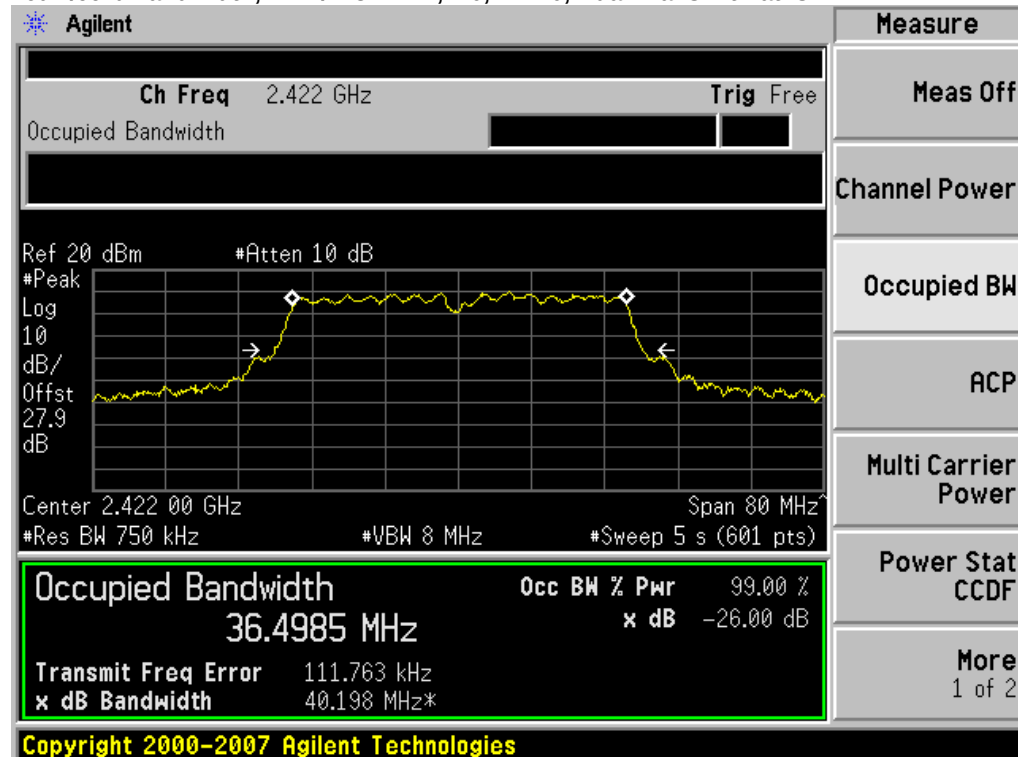

## 26dB/99% Bandwidth, 2427/2447 MHz, M0, HT-40, Dual Transmit Paths

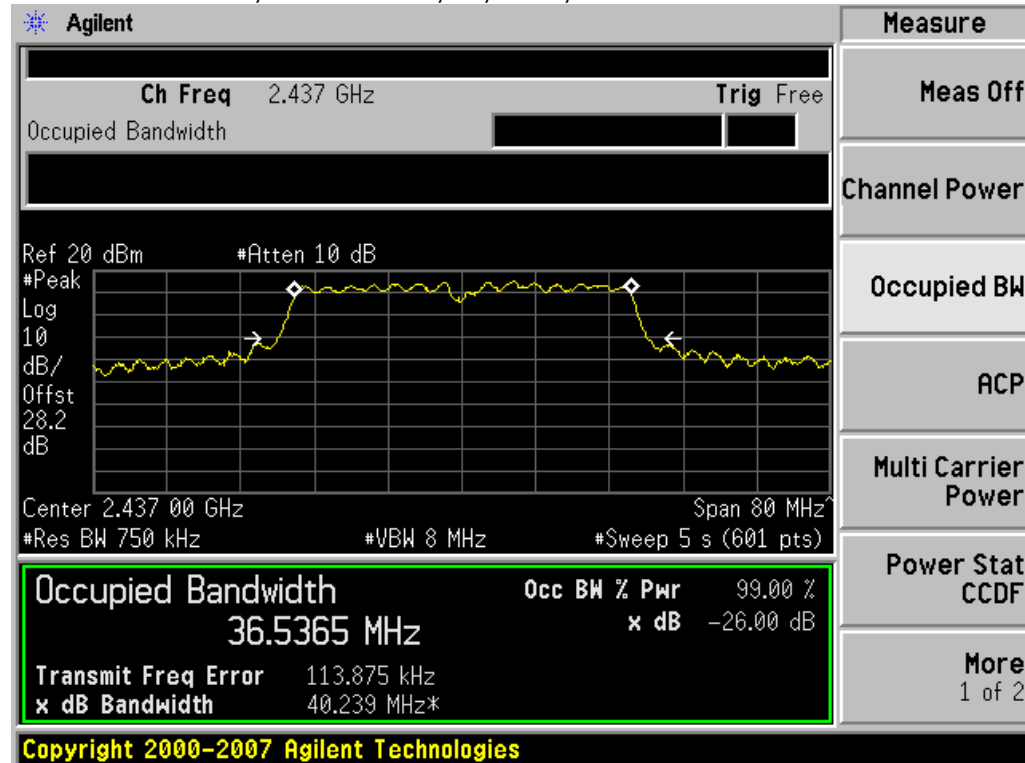

26dB/99% Bandwidth, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths

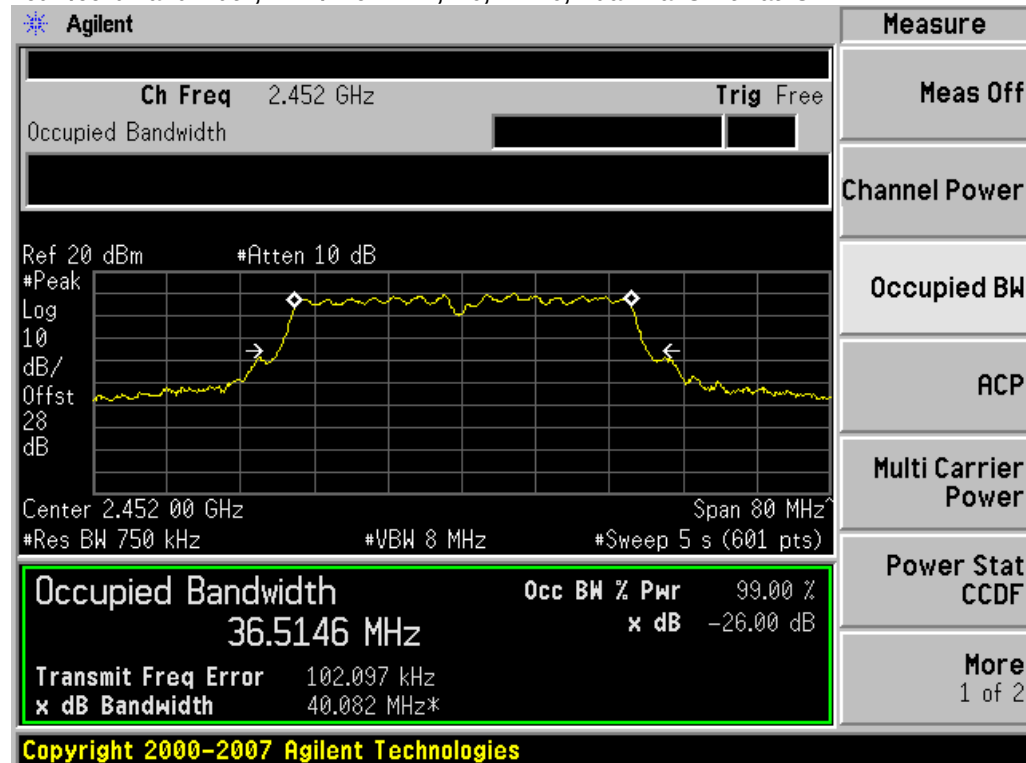

## Peak Output Power

15.247: The maximum conducted output power of the intentional radiator for systems using digital modulation in the 2400-2483.5 MHz band shall not exceed 1 Watt (30dBm). If transmitting antennas of directional gain greater than 6 dBi are used, the maximum conducted output power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

The maximum supported antenna gain is 4dBi. In beamforming mode, the 4dBi behaves as 3dBi+10log(n) (n=2 radiating elements) = 7dBi. Therefore the maximum allowable output power requires 1dB reduction in beam forming mode.

Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

Enable "Channel Power" function of analyzer

Center Frequency: Frequency from table below

Span: 20 MHz (must be greater than 26dB bandwidth, adjust as necessary)

Ref Level Offset: Correct for attenuator and cable loss.

Reference Level: 20 dBm

Attenuation: 20 dB

Sweep Time: 100ms, Single sweep

Resolution Bandwidth: 1 MHz

Video Bandwidth: 3 MHz

Detector: Sample


Trace: Trace Average 100 traces in Power Averaging Mode

Integration BW: =26 dB BW from 26 dB Bandwidth Data


After averaging 100 traces of the transmitter waveform on the spectrum analyzer, record the spectrum analyzer Channel Power.

| Frequency (MHz) | Mode                       | Data Rate (Mbps) | Peak Power (dBm) | Limit (dBm) | Margin (dB) |
|-----------------|----------------------------|------------------|------------------|-------------|-------------|
| 2412            | Legacy CCK, Single Tx Path | 1                | 20.6             | 30          | 9.4         |
| 2412            | Non HT-20, Single Tx Path  | 6                | 16.5             | 30          | 13.5        |
| 2412            | HT-20, Dual Tx Path        | M0               | 16.7             | 30          | 13.3        |
| 2437            | Legacy CCK, Single Tx Path | 1                | 20.8             | 30          | 9.2         |
| 2437            | HT-20, Dual Tx Path        | M0               | 19.3             | 30          | 10.7        |
| 2462            | Legacy CCK, Single Tx Path | 1                | 20.5             | 30          | 9.5         |
| 2462            | Non HT-20, Single Tx Path  | 6                | 15.2             | 30          | 14.8        |
| 2462            | HT-20, Dual Tx Path        | 6                | 16.2             | 30          | 13.8        |
| 2412/2432       | HT-40                      | M0               | 14.7             | 30          | 15.3        |
| 2427/2447       | HT-40                      | M0               | 20.1             | 30          | 9.9         |
| 2442/2462       | HT-40                      | M0               | 14.9             | 30          | 15.1        |


## Peak Power, 2412 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths

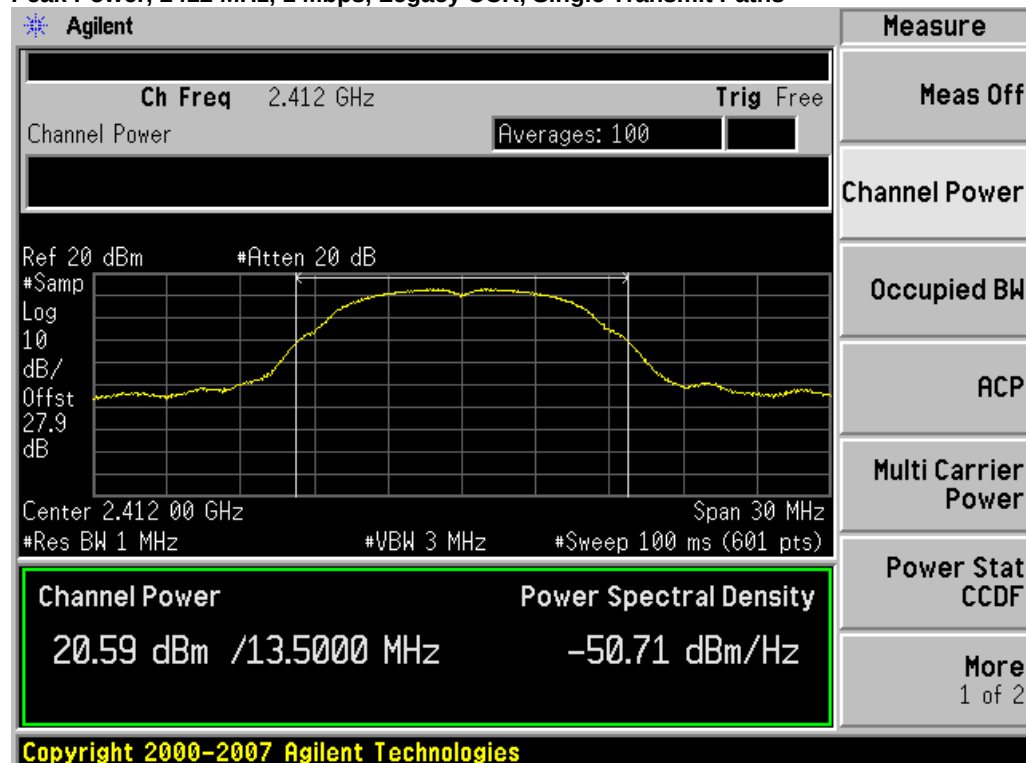


## Peak Power, 2412 MHz, 6 Mbps, Non HT-20, Single Transmit Paths

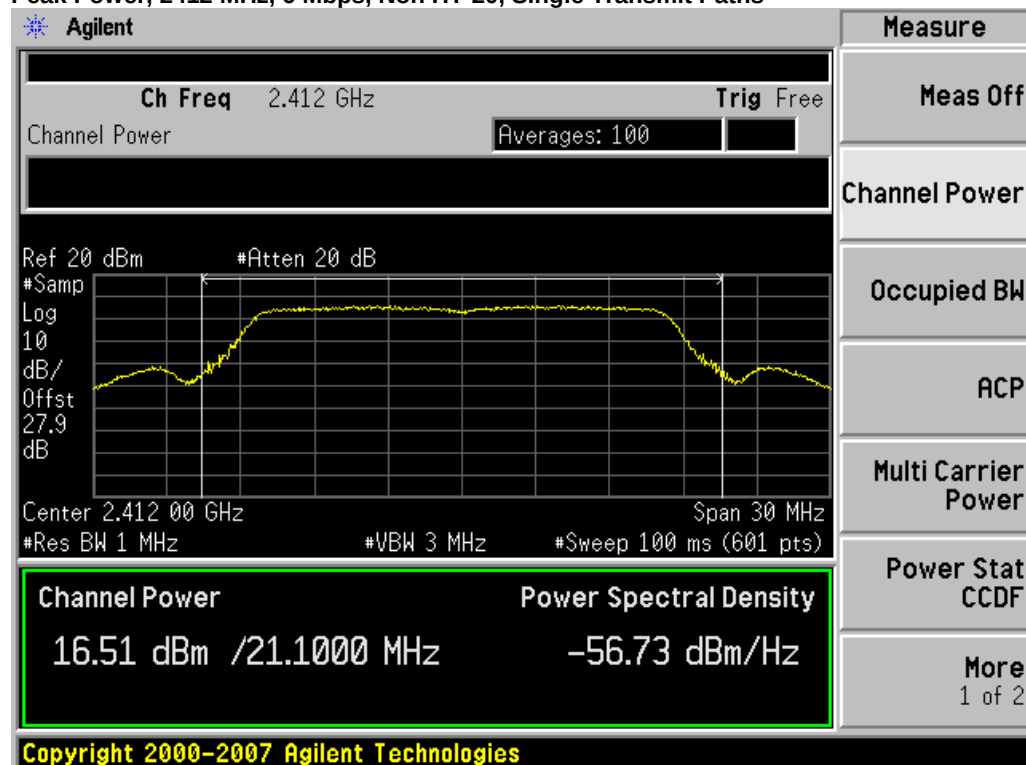


## Peak Power, 2412 MHz, m0, HT-20, Dual Transmit Paths

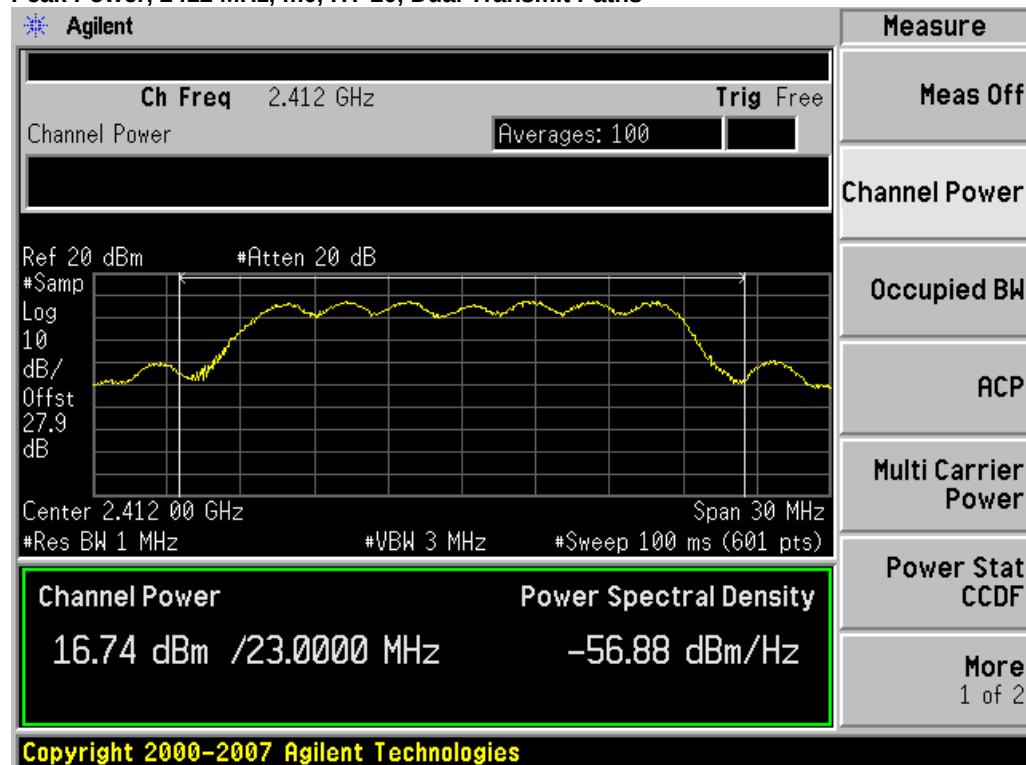


## Peak Power, 2437 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths

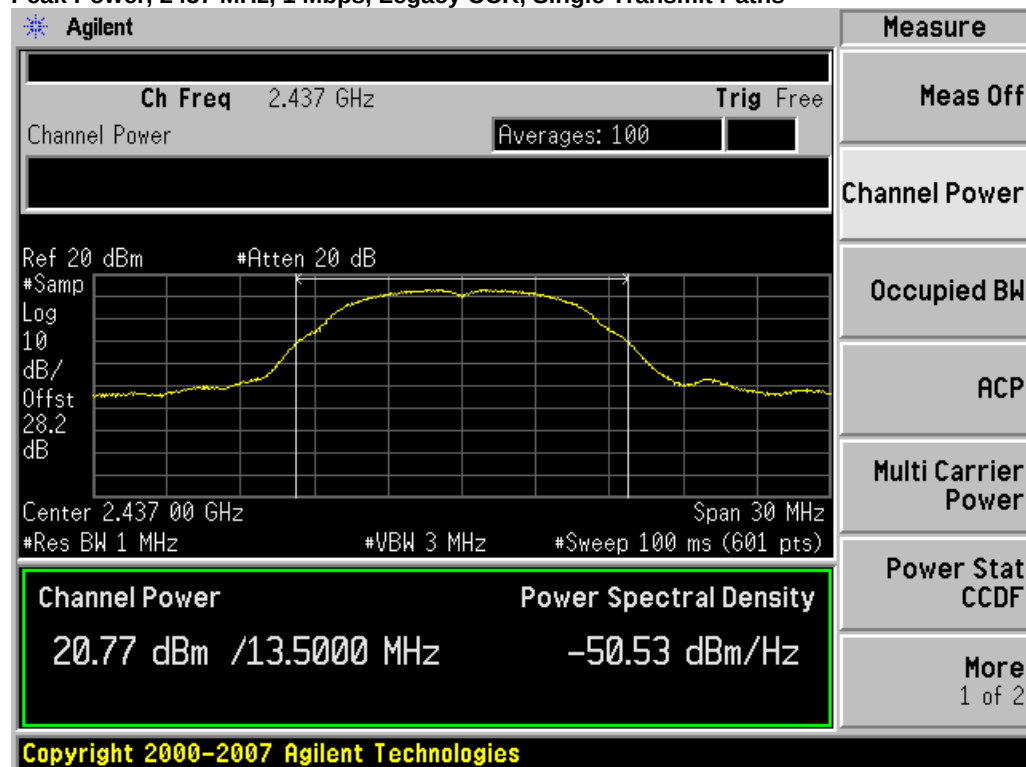


## Peak Power, 2437 MHz, m0, HT-20, Dual Transmit Paths

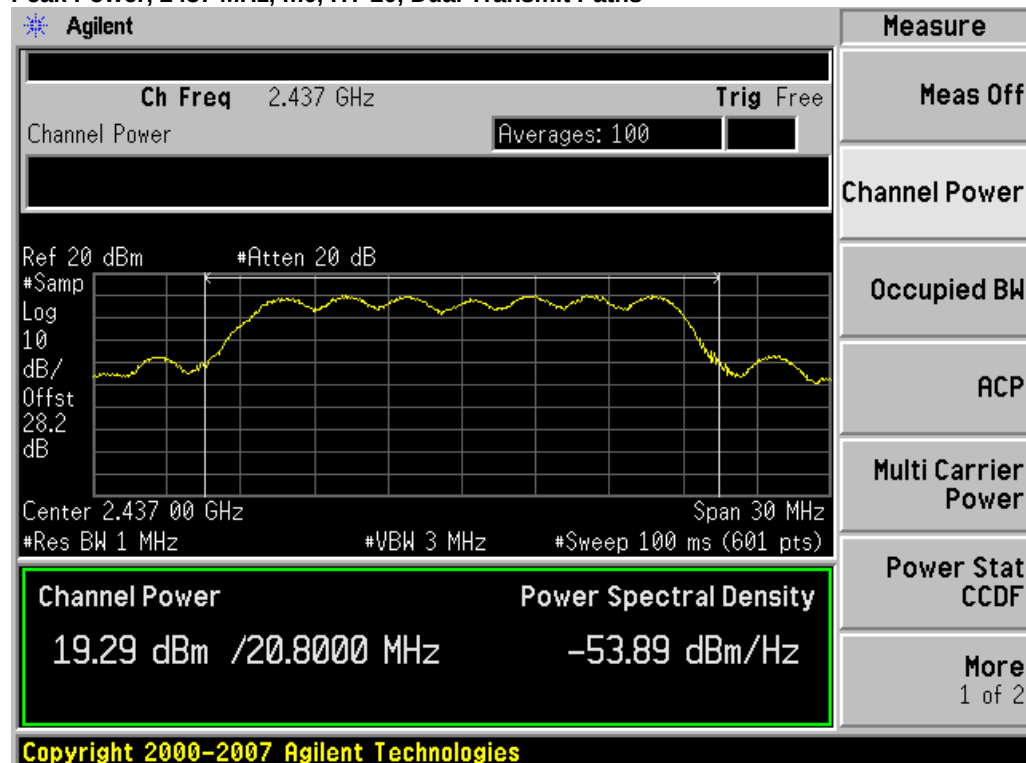


## Peak Power, 2462 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths

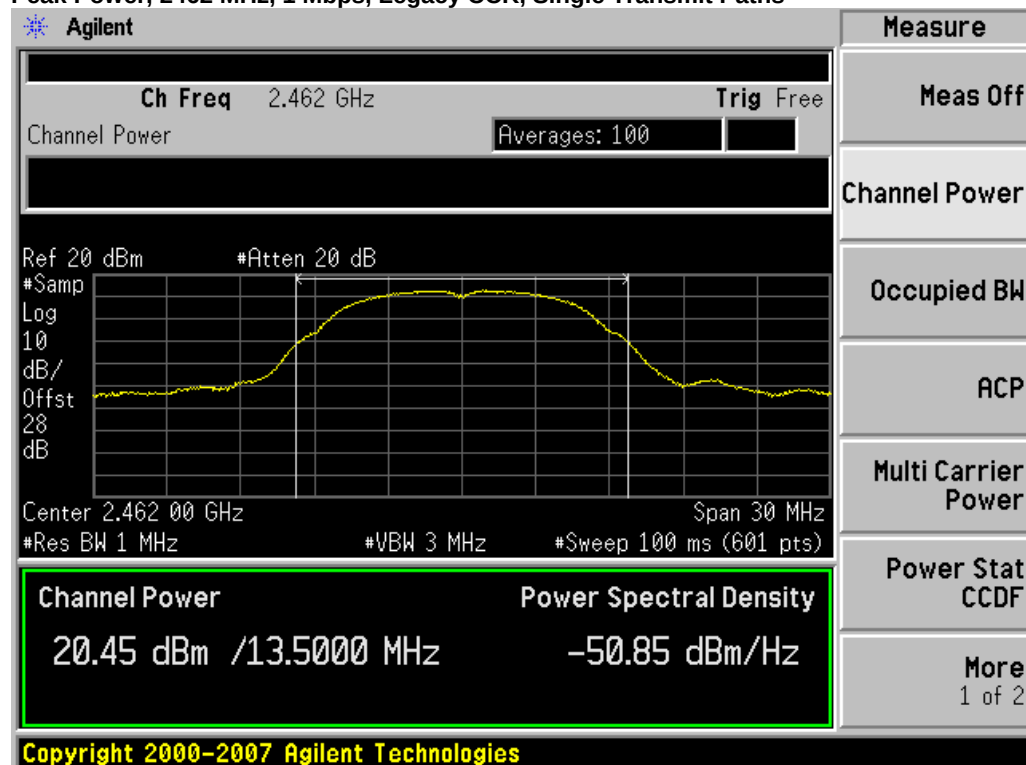


## Peak Power, 2462 MHz, 6 Mbps, Non HT-20 , Single Transmit Paths

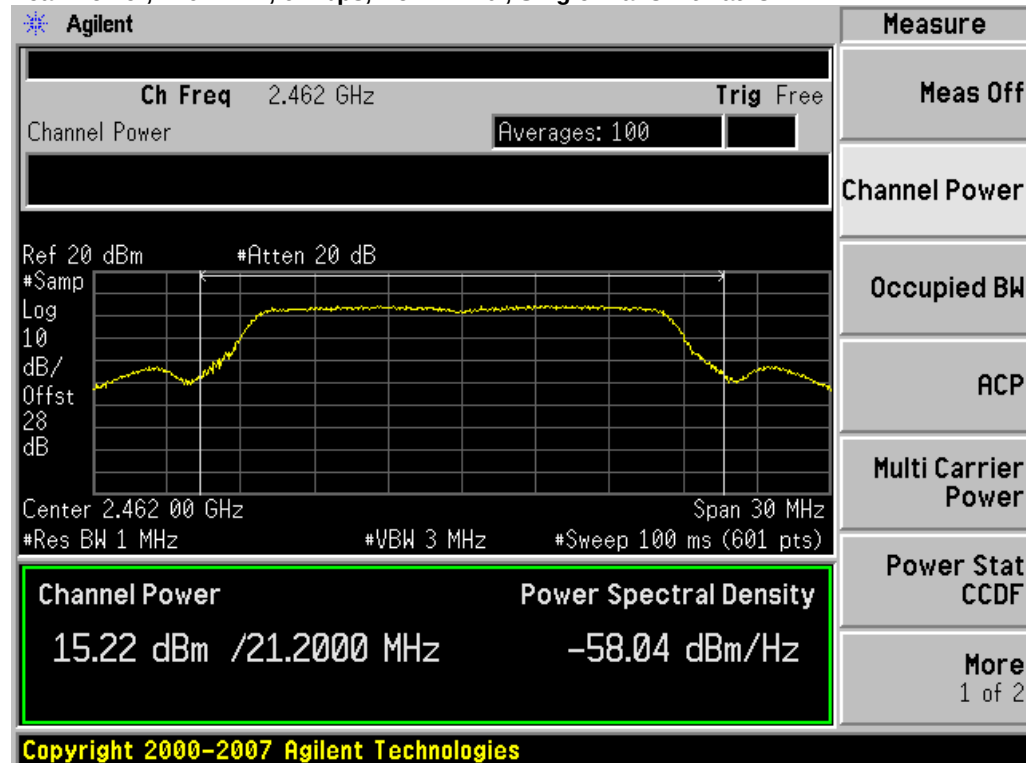


## Peak Power, 2462 MHz, m0, HT-20, Dual Transmit Paths

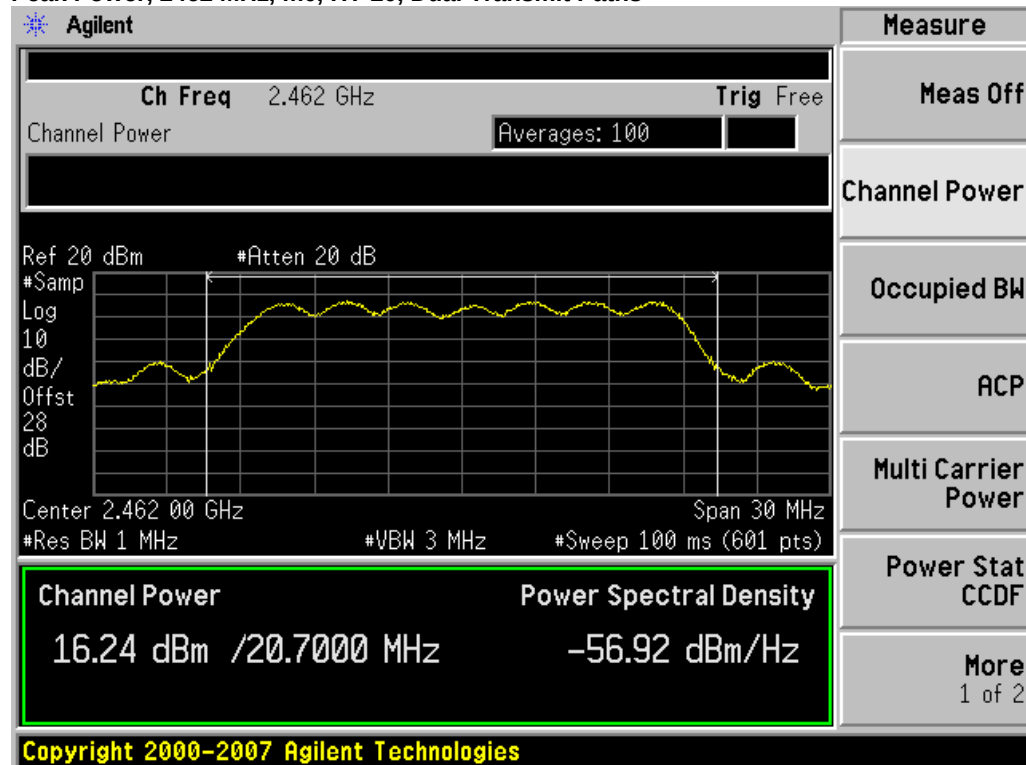


## Peak Power, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths

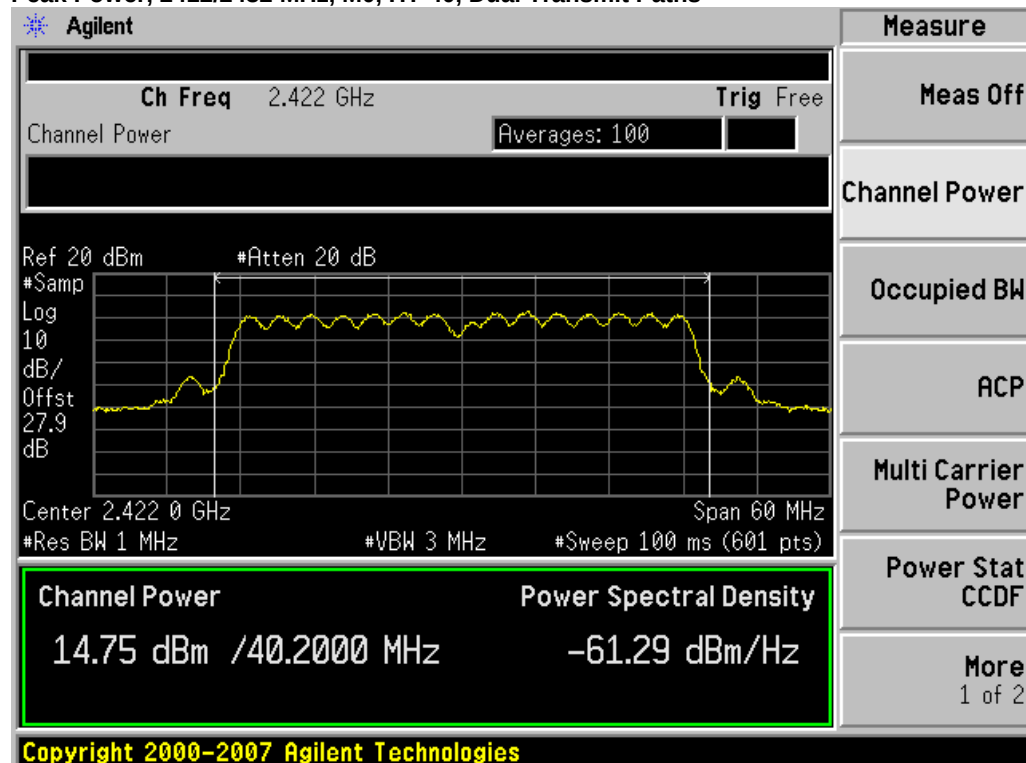

## Peak Power, 2427/2447 MHz, M0, HT-40, Dual Transmit Paths

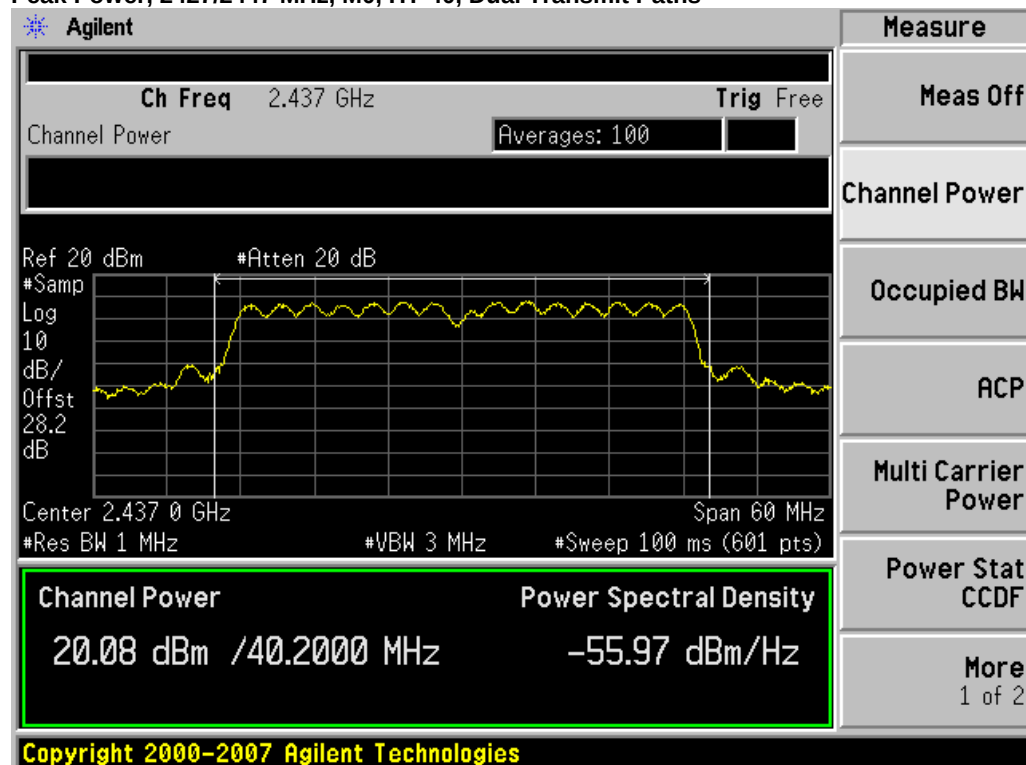

## Peak Power, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths

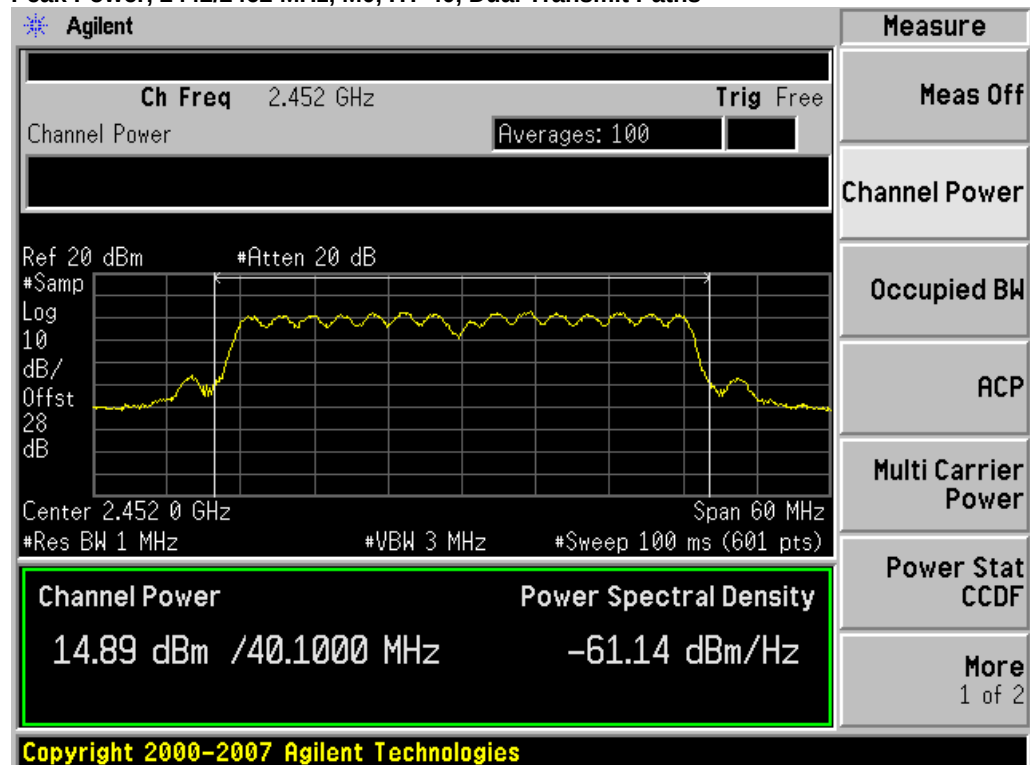

## Power Spectral Density

15.247: For digitally modulated systems, the peak power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission.


Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below.

|                       |                                        |
|-----------------------|----------------------------------------|
| Center Frequency:     | Frequency from table below             |
| Span:                 | 20 MHz                                 |
| Ref Level Offset:     | Correct for attenuator and cable loss. |
| Reference Level:      | 20 dBm                                 |
| Attenuation:          | 20 dB                                  |
| Sweep Time:           | 10s                                    |
| Resolution Bandwidth: | 3 kHz                                  |
| Video Bandwidth:      | 10 kHz                                 |
| Detector:             | Peak                                   |
| Trace:                | Single                                 |
| Marker:               | Peak Search                            |


Record the Marker value.

| Frequency (MHz) | Mode                       | Data Rate (Mbps) | PSD (dBm/3kHz) | Limit (dBm/3kHz) | Margin (dB) |
|-----------------|----------------------------|------------------|----------------|------------------|-------------|
| 2412            | Legacy CCK, Single Tx Path | 1                | 1.8            | 8                | 6.2         |
| 2412            | Non HT-20, Single Tx Path  | 6                | -10.5          | 8                | 18.5        |
| 2412            | HT-20, Dual Tx Path        | M0               | -8.1           | 8                | 16.1        |
| 2437            | Legacy CCK, Single Tx Path | 1                | -4.0           | 8                | 12.0        |
| 2437            | HT-20, Dual Tx Path        | M0               | -5.5           | 8                | 13.5        |
| 2462            | Legacy CCK, Single Tx Path | 1                | -4.5           | 8                | 12.5        |
| 2462            | Non HT-20, Single Tx Path  | 6                | -12.9          | 8                | 20.9        |
| 2462            | HT-20, Dual Tx Path        | 6                | -8.9           | 8                | 16.9        |
| 2412/2432       | HT-40                      | M0               | -12.4          | 8                | 20.4        |
| 2427/2447       | HT-40                      | M0               | -7.8           | 8                | 15.8        |
| 2442/2462       | HT-40                      | M0               | -12.3          | 8                | 20.3        |


## Power Spectral Density, 2412 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths

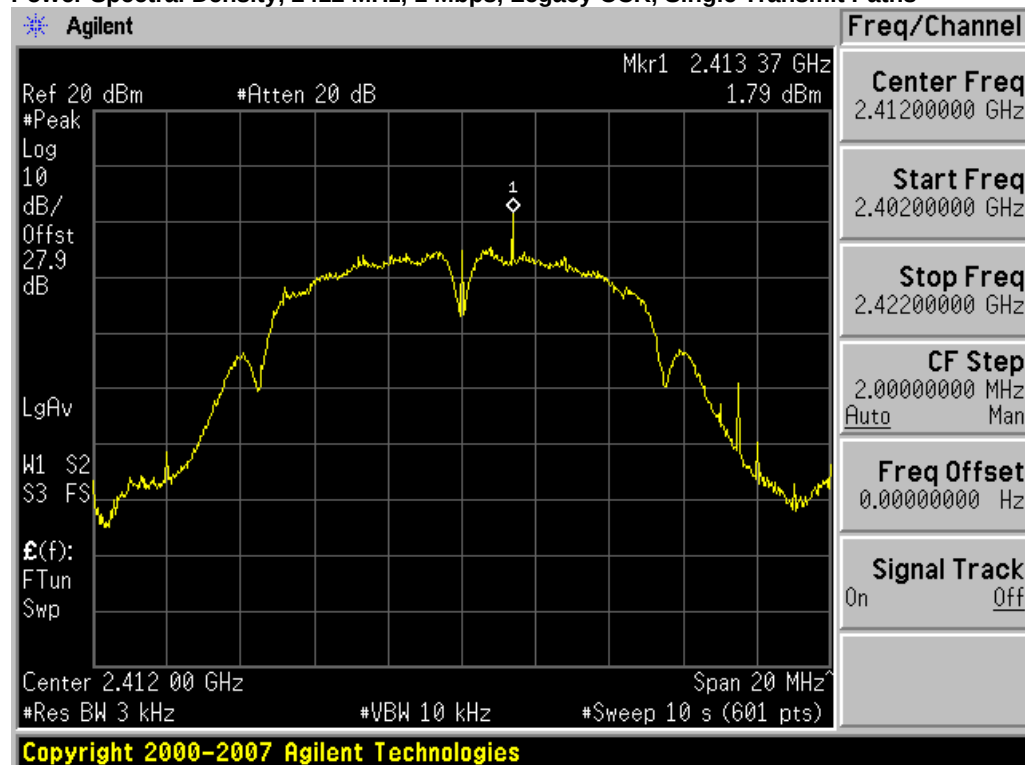


## Power Spectral Density, 2412 MHz, 6 Mbps, Non HT-20, Single Transmit Paths

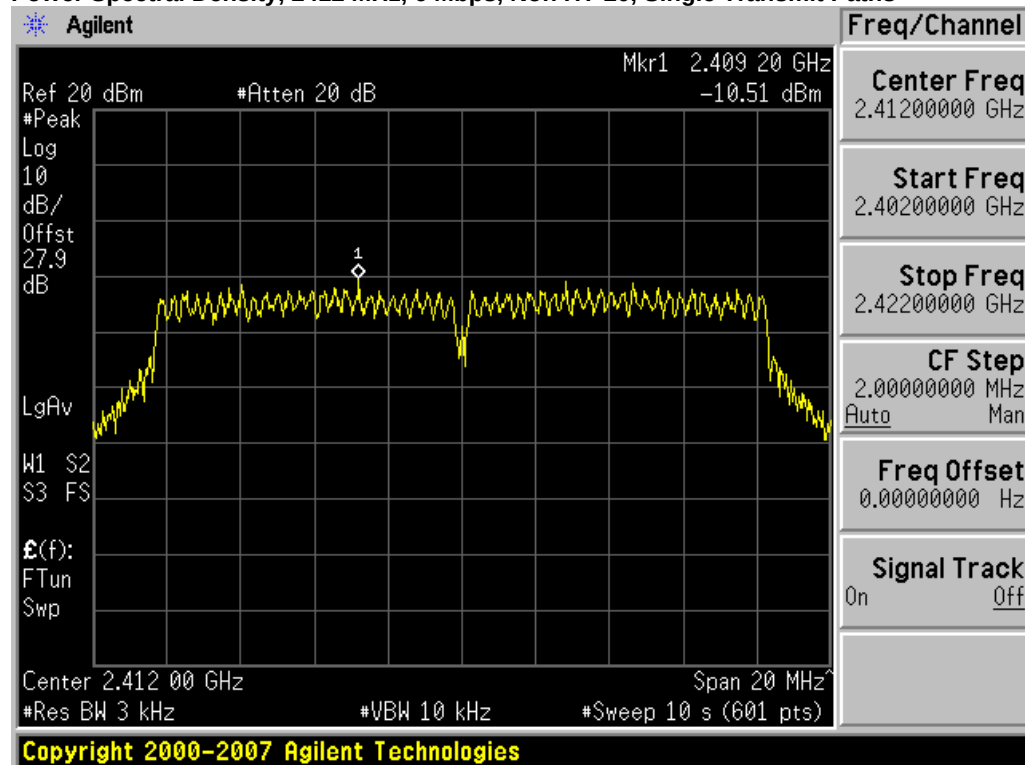


## Power Spectral Density, 2412 MHz, m0, HT-20, Dual Transmit Paths

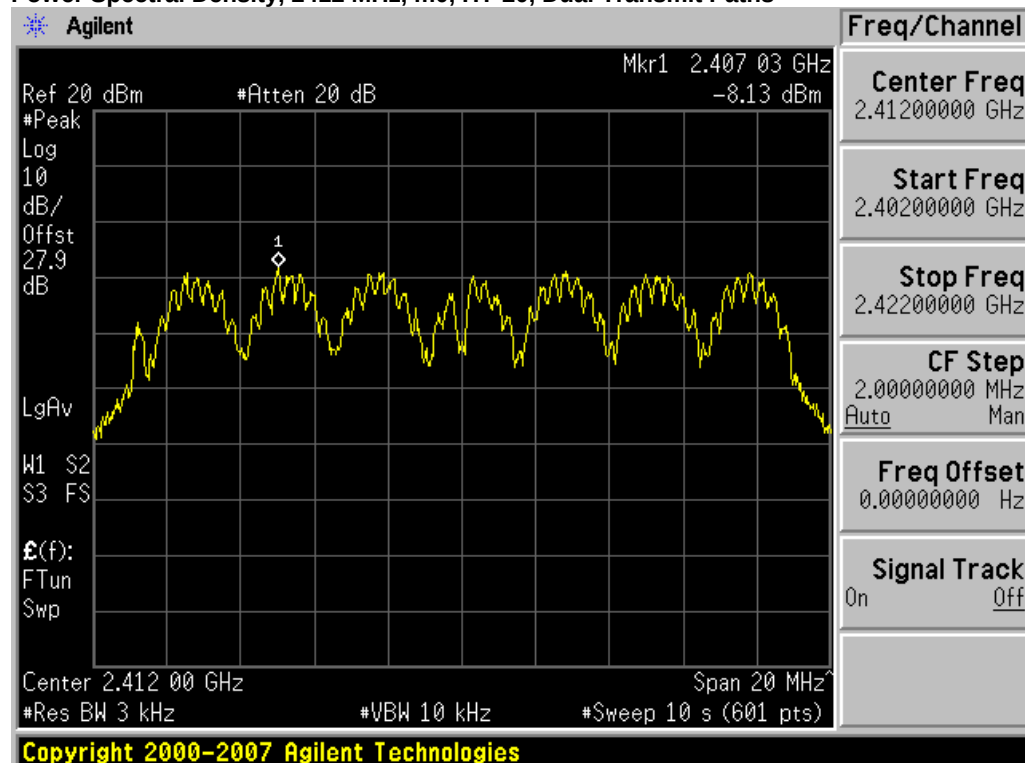


## Power Spectral Density, 2437 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths

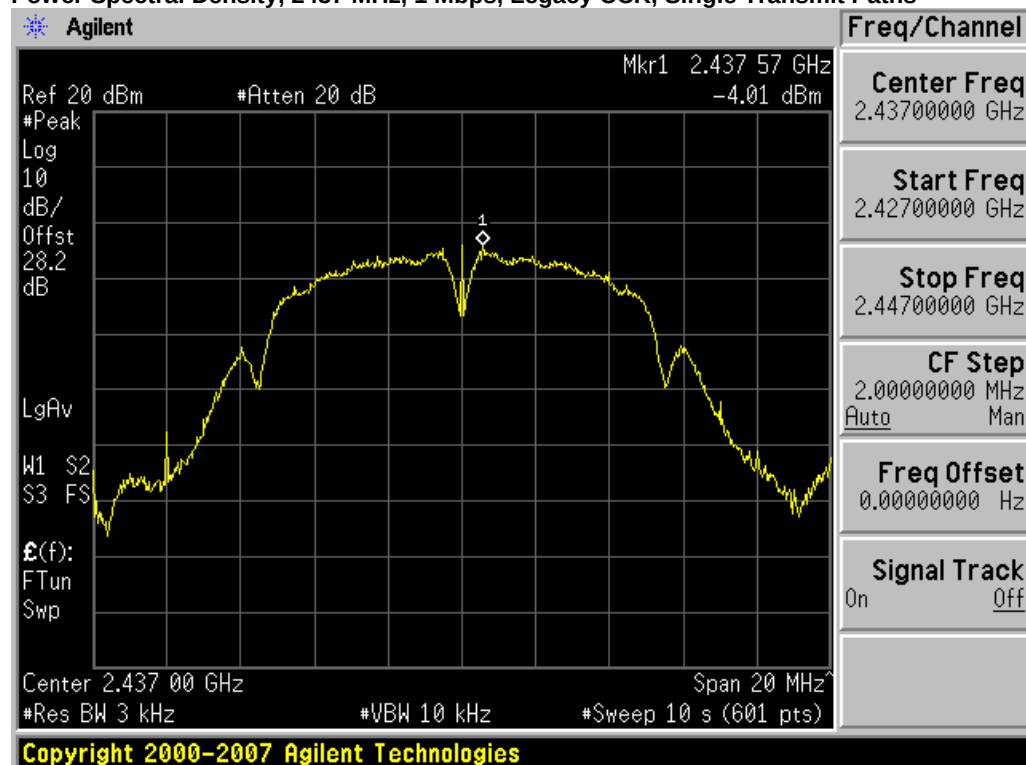


## Power Spectral Density, 2437 MHz, m0, HT-20, Dual Transmit Paths

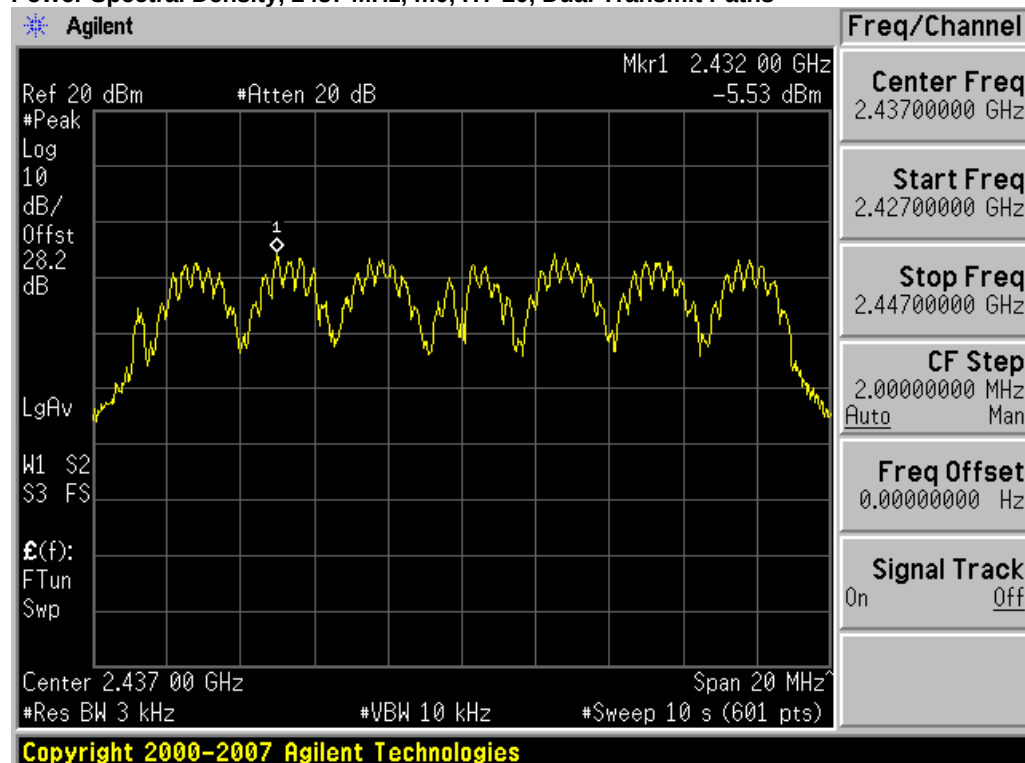


## Power Spectral Density, 2462 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths

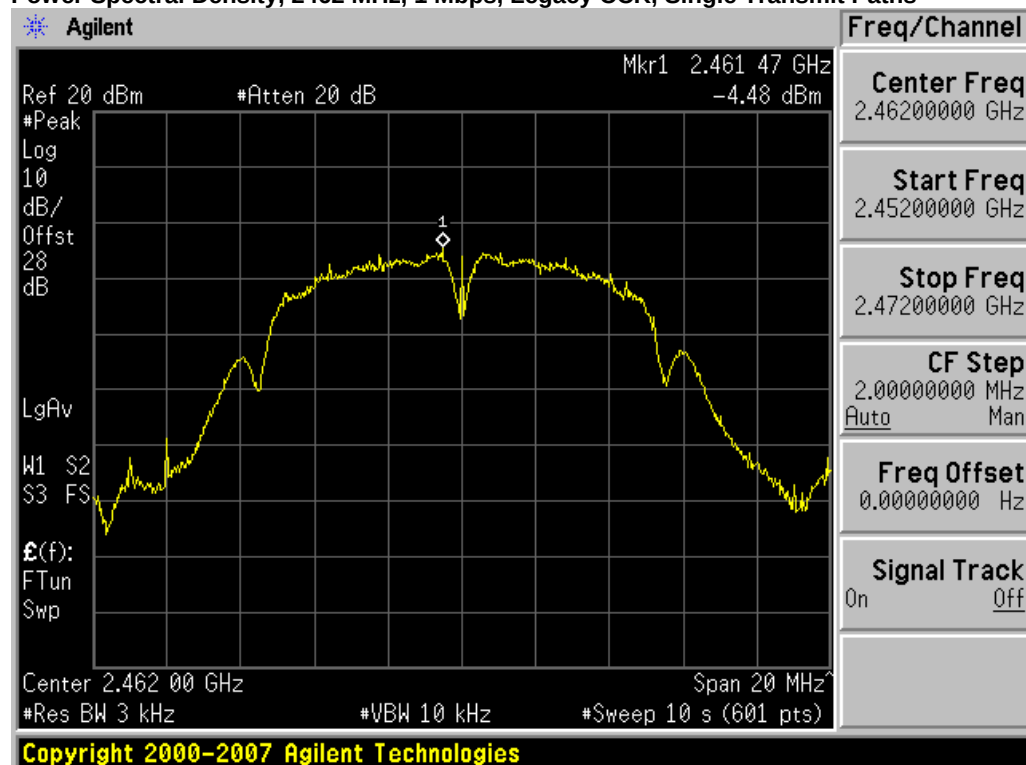


## Power Spectral Density, 2462 MHz, 6 Mbps, Non HT-20 , Single Transmit Paths

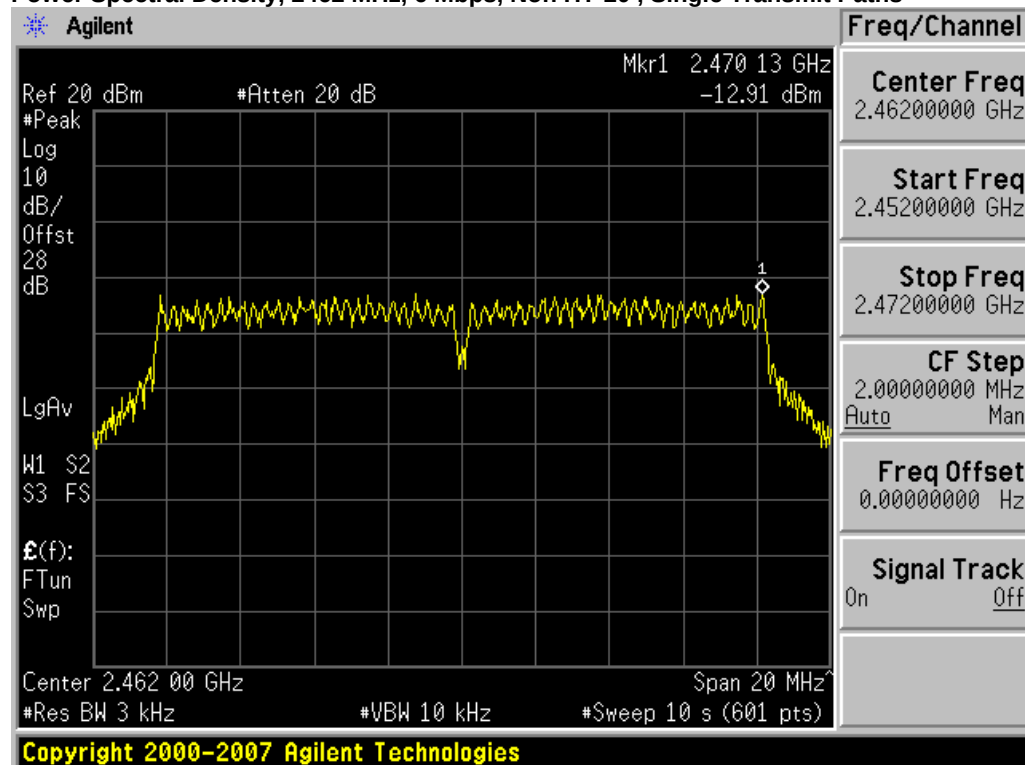


## Power Spectral Density, 2462 MHz, m0, HT-20, Dual Transmit Paths

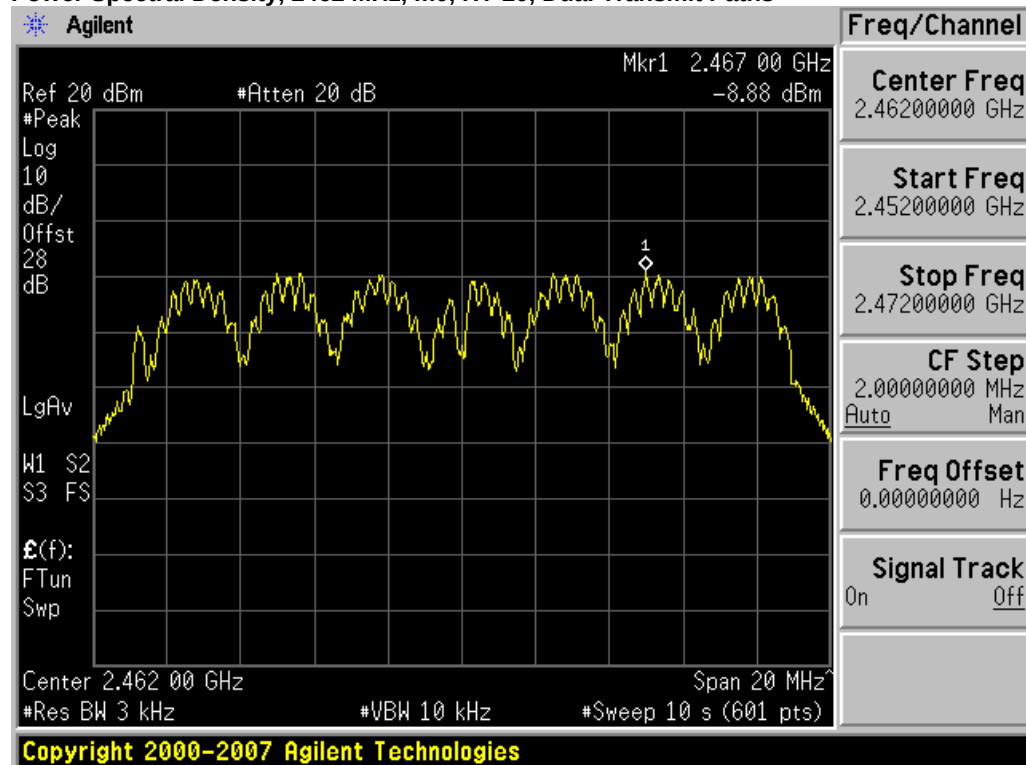


## Power Spectral Density, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths

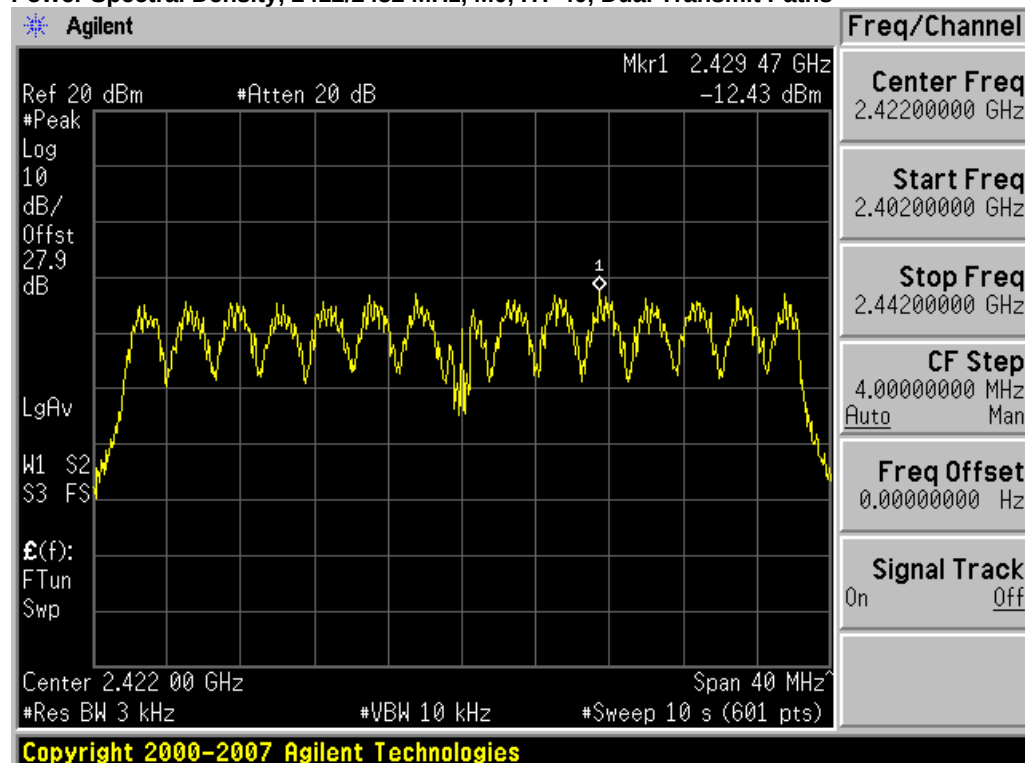

## Power Spectral Density, 2427/2447 MHz, M0, HT-40, Dual Transmit Paths

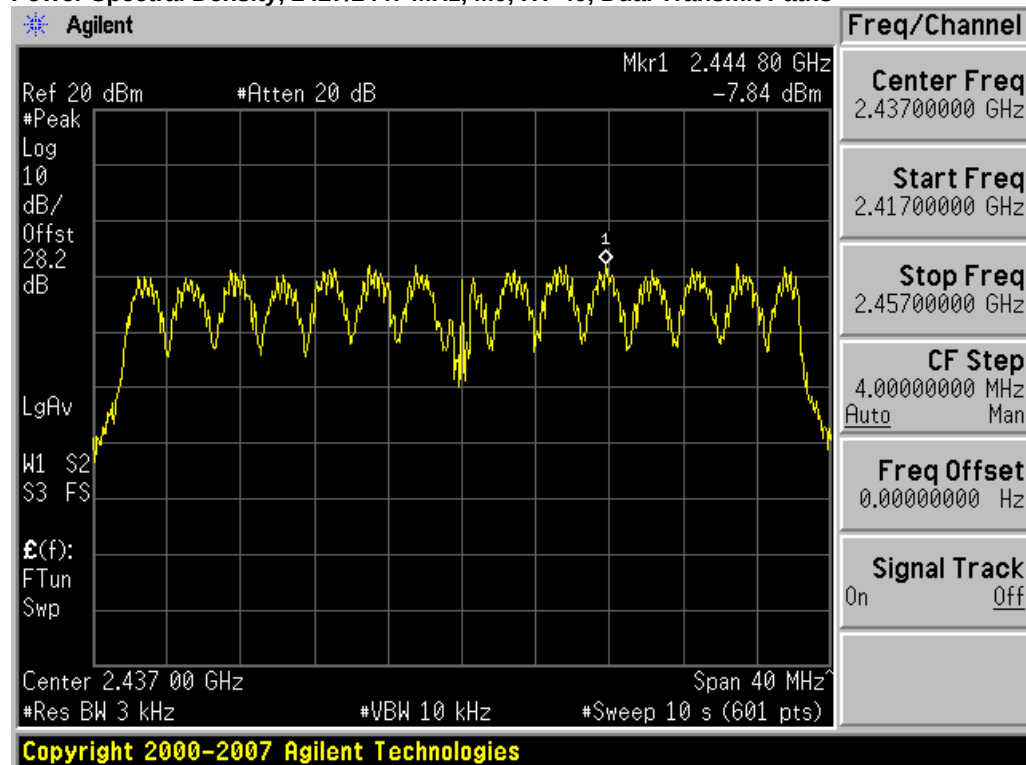

## Power Spectral Density, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths

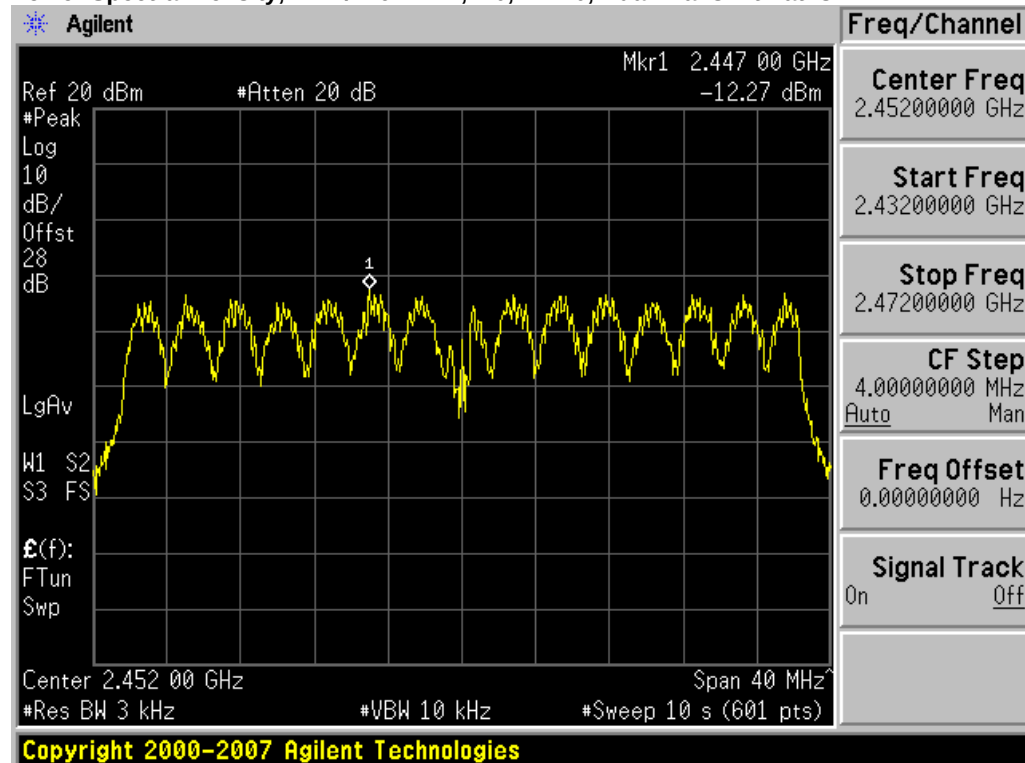



## Conducted Spurious Emissions

15.247: In any 100 kHz bandwidth outside the frequency band in which the digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 30 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.


Connect the antenna port(s) to the spectrum analyzer input. Place the radio in continuous transmit mode. Configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer).

|                       |               |
|-----------------------|---------------|
| Span:                 | 30 MHz-26 GHz |
| Reference Level:      | 20 dBm        |
| Attenuation:          | 10 dB         |
| Sweep Time:           | 5s            |
| Resolution Bandwidth: | 100 kHz       |
| Video Bandwidth:      | 300 kHz       |
| Detector:             | Peak          |
| Trace:                | Single        |
| Marker:               | Peak          |


Record the marker waveform peak to spur difference

| Frequency (MHz) | Mode                       | Data Rate (Mbps) | Conducted Spur Delta (dB) | Limit (dBc) | Margin (dB) |
|-----------------|----------------------------|------------------|---------------------------|-------------|-------------|
| 2412            | Legacy CCK, Single Tx Path | 1                | 58.9                      | 30          | 28.9        |
| 2412            | Non HT-20, Single Tx Path  | 6                | 51.0                      | 30          | 21.0        |
| 2412            | HT-20, Dual Tx Path        | M0               | 54.3                      | 30          | 24.3        |
| 2437            | Legacy CCK, Single Tx Path | 1                | 57.6                      | 30          | 27.6        |
| 2437            | HT-20, Dual Tx Path        | M0               | 55.9                      | 30          | 25.9        |
| 2462            | Legacy CCK, Single Tx Path | 1                | 57.5                      | 30          | 27.5        |
| 2462            | Non HT-20, Single Tx Path  | 6                | 50.9                      | 30          | 20.9        |
| 2462            | HT-20, Dual Tx Path        | 6                | 51.1                      | 30          | 21.1        |
| 2412/2432       | HT-40                      | M0               | 48.1                      | 30          | 18.1        |
| 2427/2447       | HT-40                      | M0               | 55.9                      | 30          | 25.9        |
| 2442/2462       | HT-40                      | M0               | 48.6                      | 30          | 18.6        |


## Conducted Spurs, 2412 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths

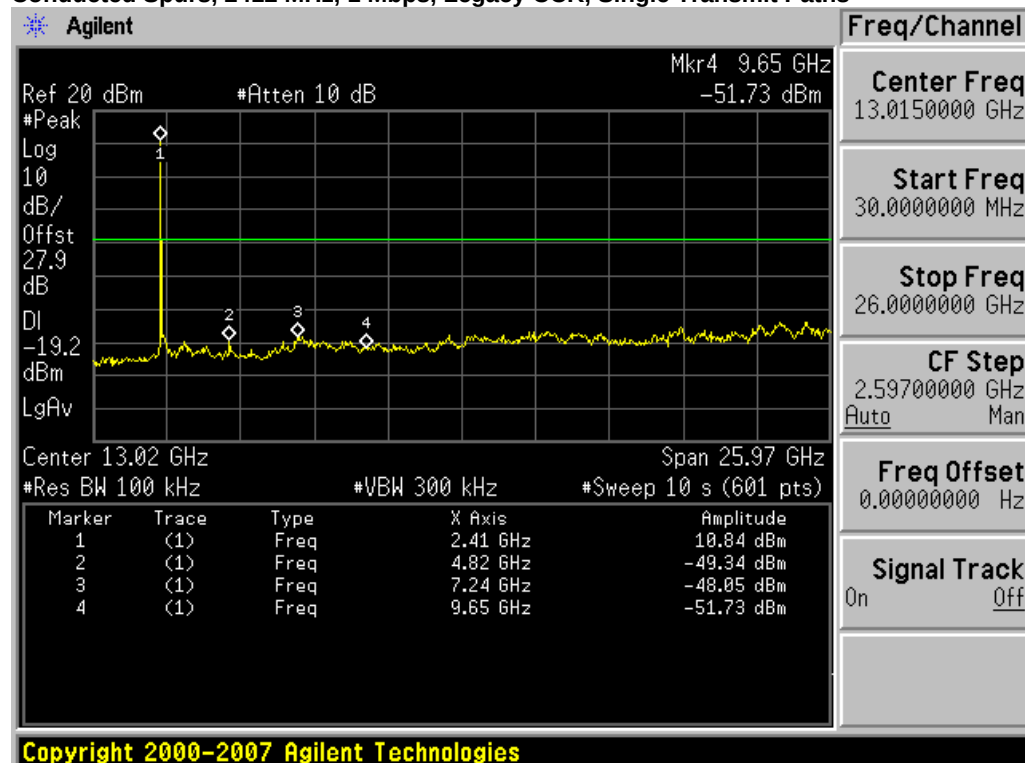


## Conducted Spurs, 2412 MHz, 6 Mbps, Non HT-20, Single Transmit Paths

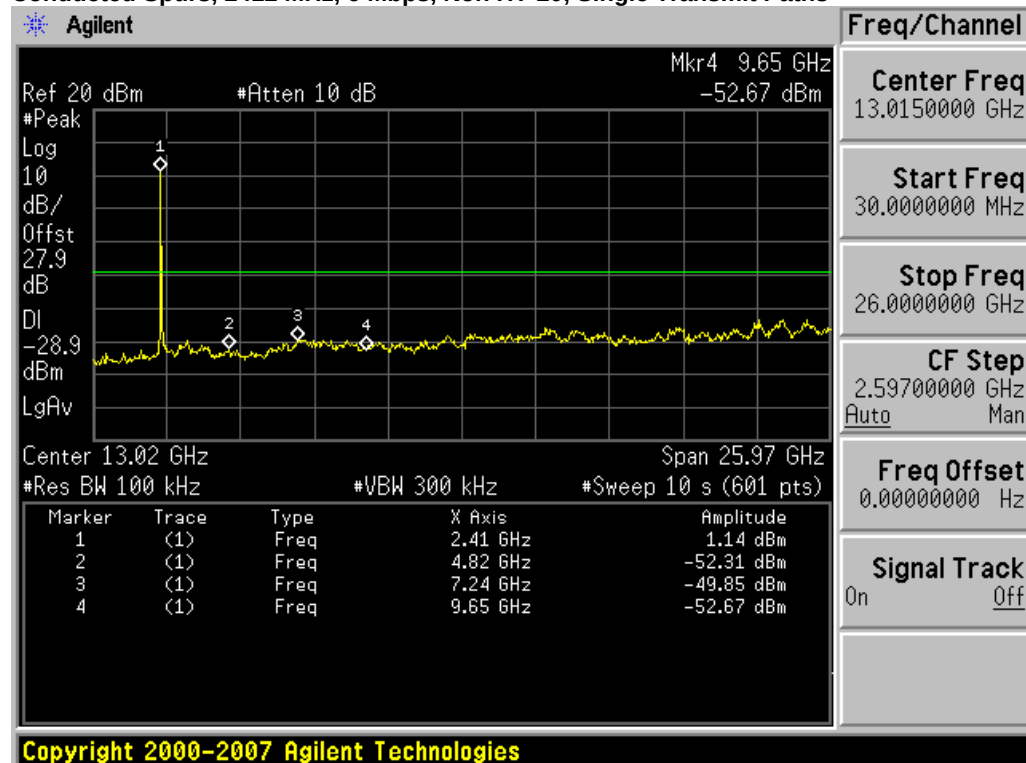


## Conducted Spurs, 2412 MHz, m0, HT-20, Dual Transmit Paths

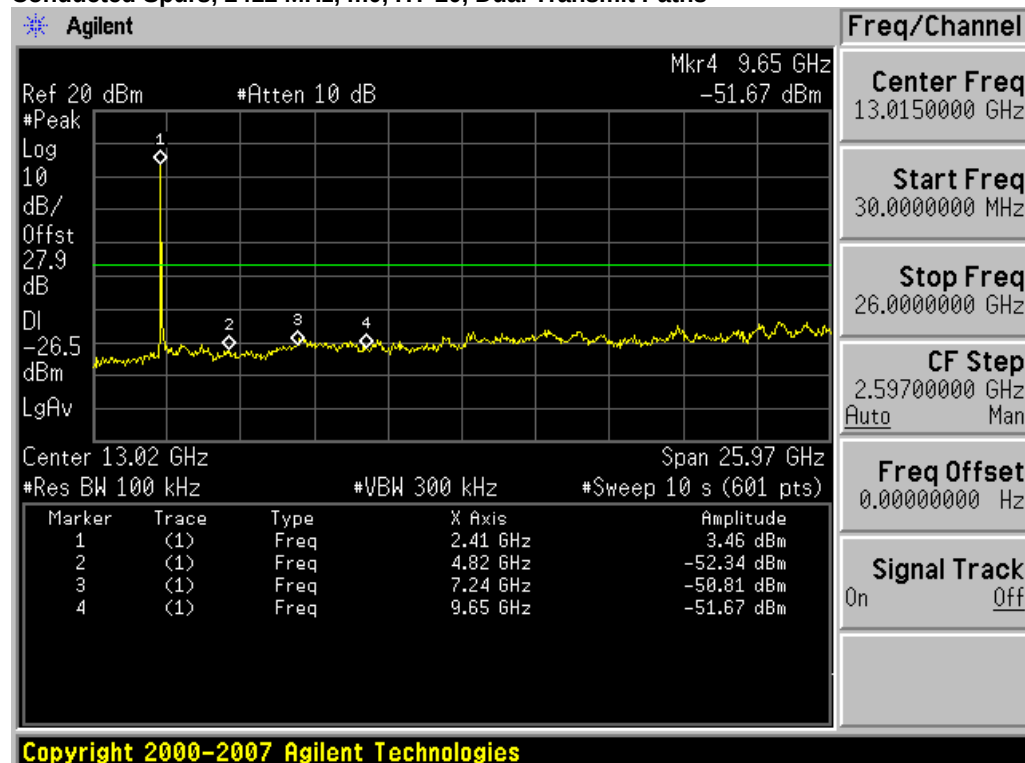


## Conducted Spurs, 2437 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths

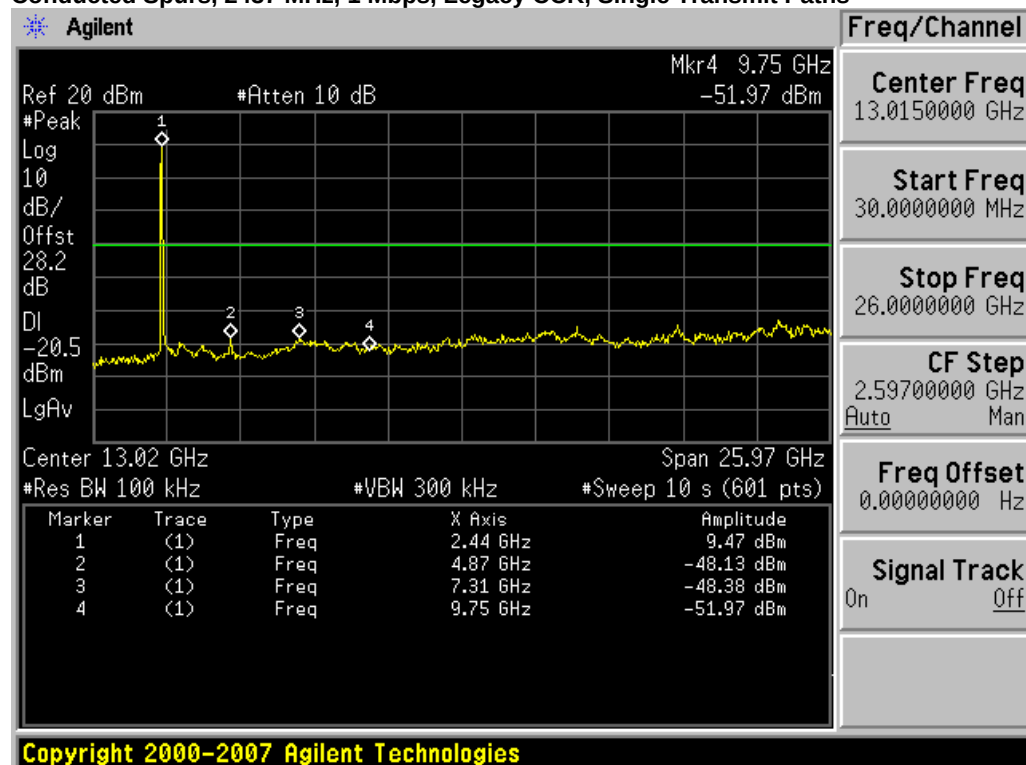


## Conducted Spurs, 2437 MHz, m0, HT-20, Dual Transmit Paths

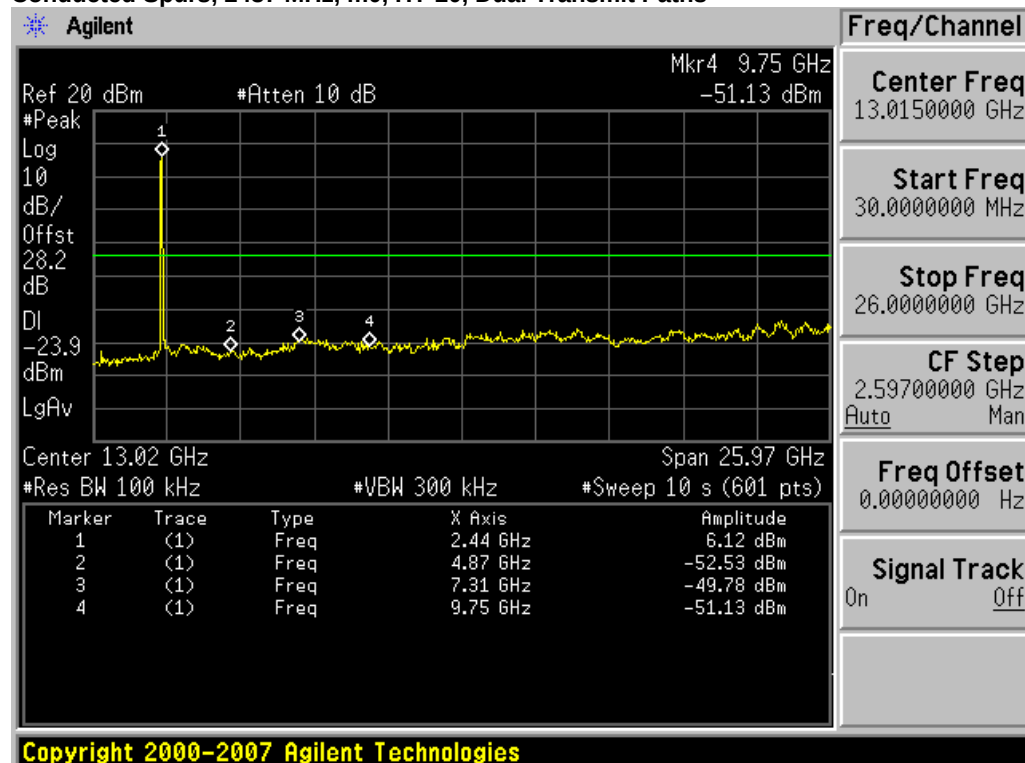


## Conducted Spurs, 2462 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths

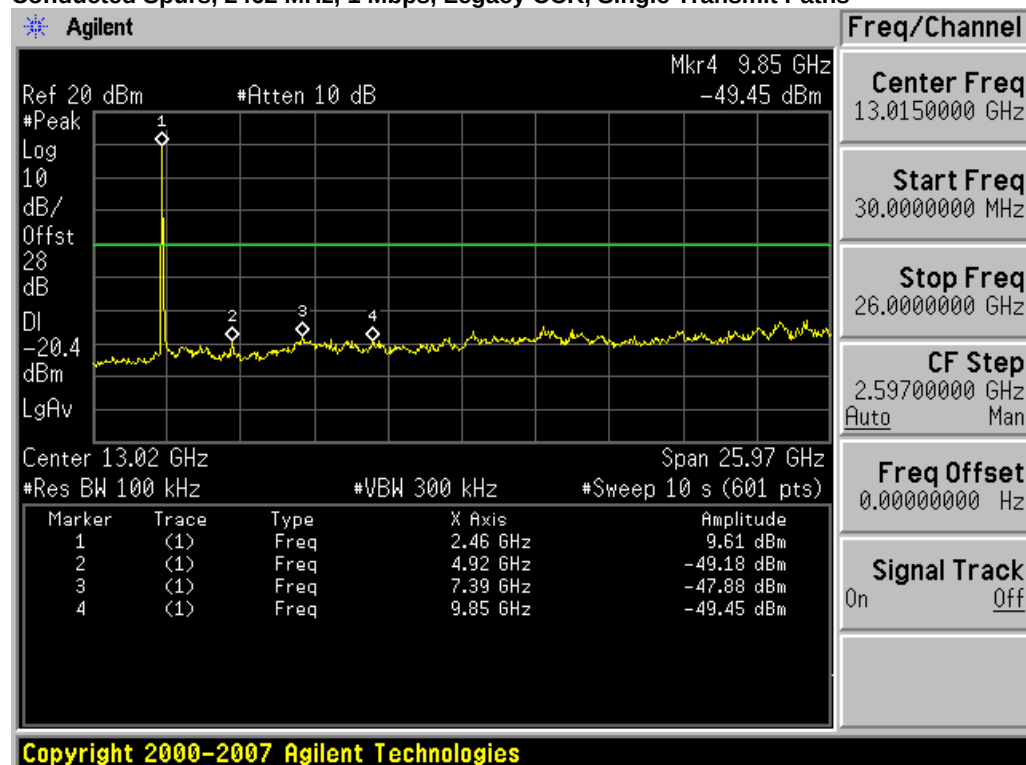


## Conducted Spurs, 2462 MHz, 6 Mbps, Non HT-20 , Single Transmit Paths

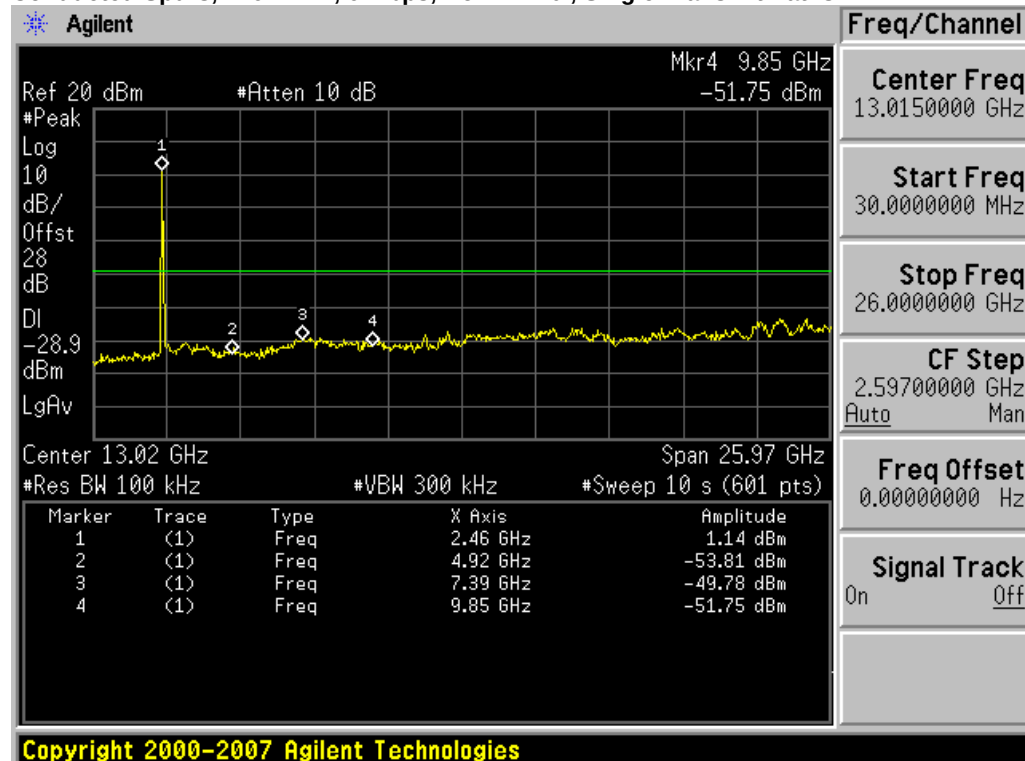


## Conducted Spurs, 2462 MHz, m0, HT-20, Dual Transmit Paths

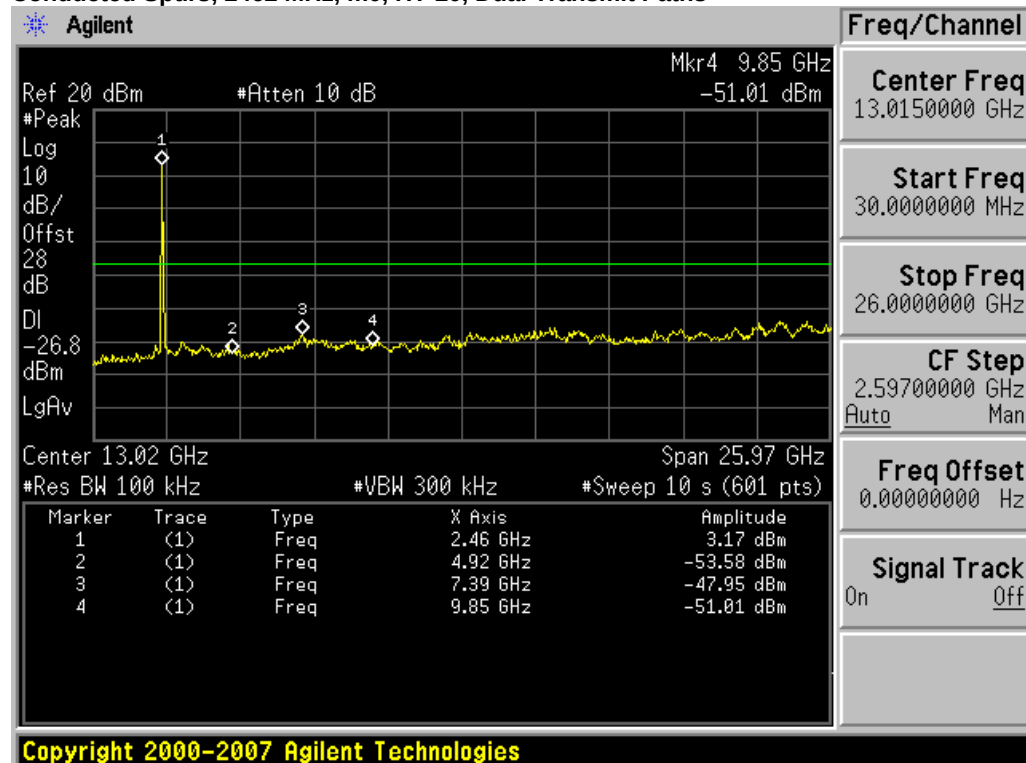


## Conducted Spurs, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths


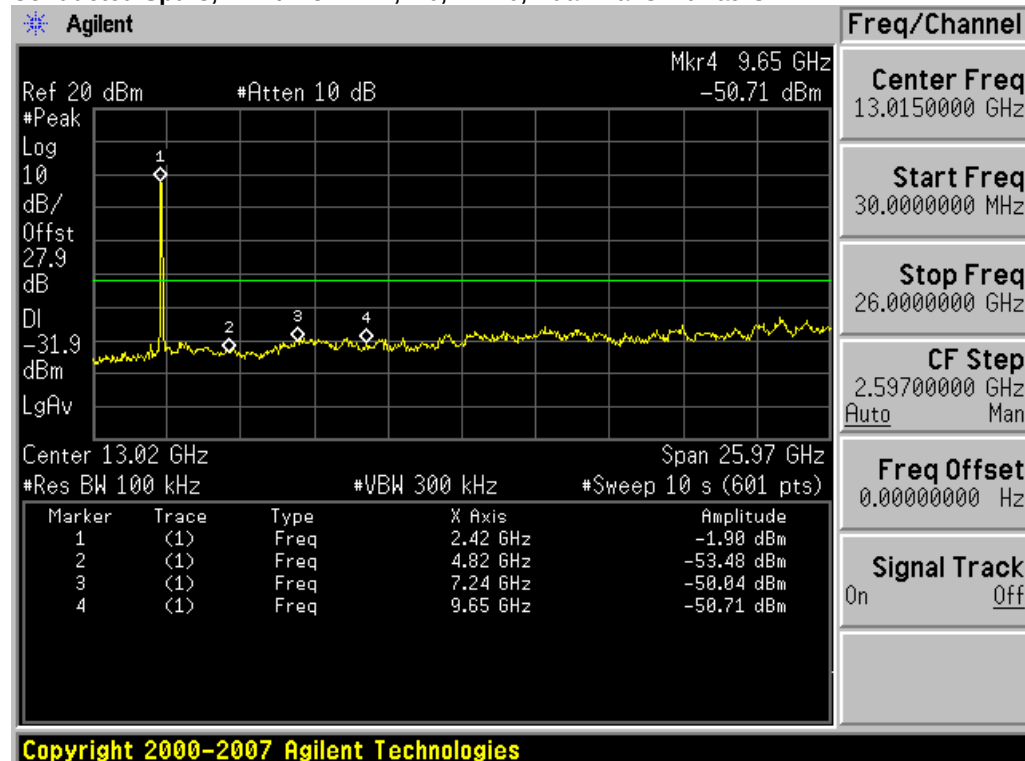


## Conducted Spurs, 2427/2447 MHz, M0, HT-40, Dual Transmit Paths

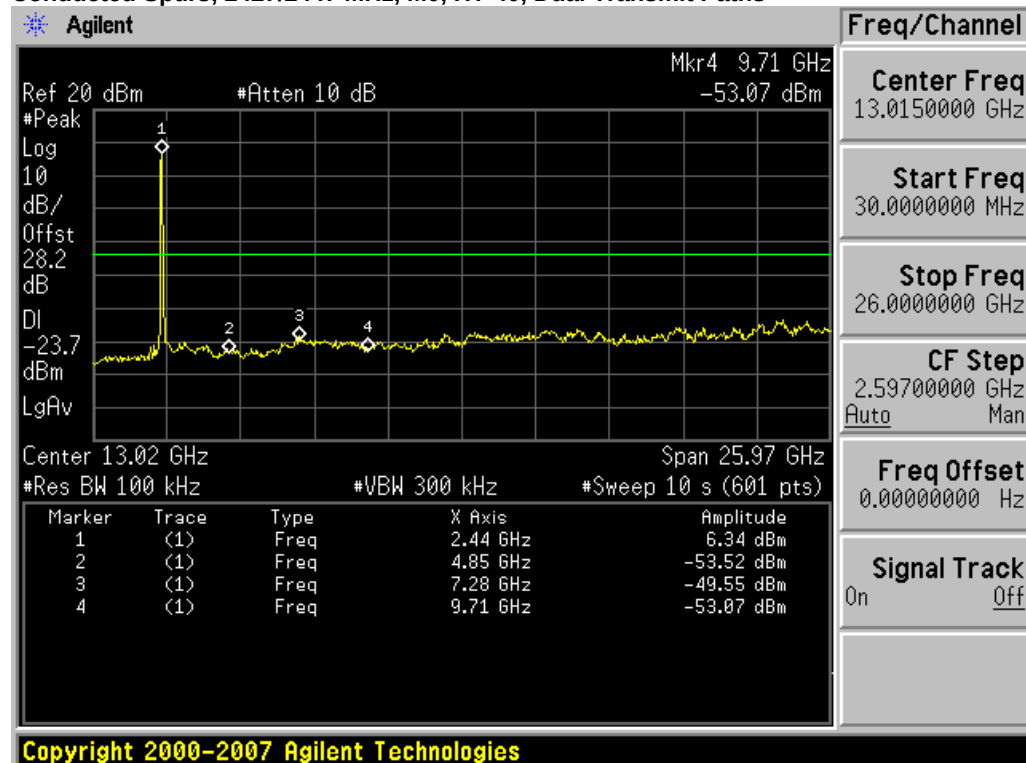

## Conducted Spurs, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths

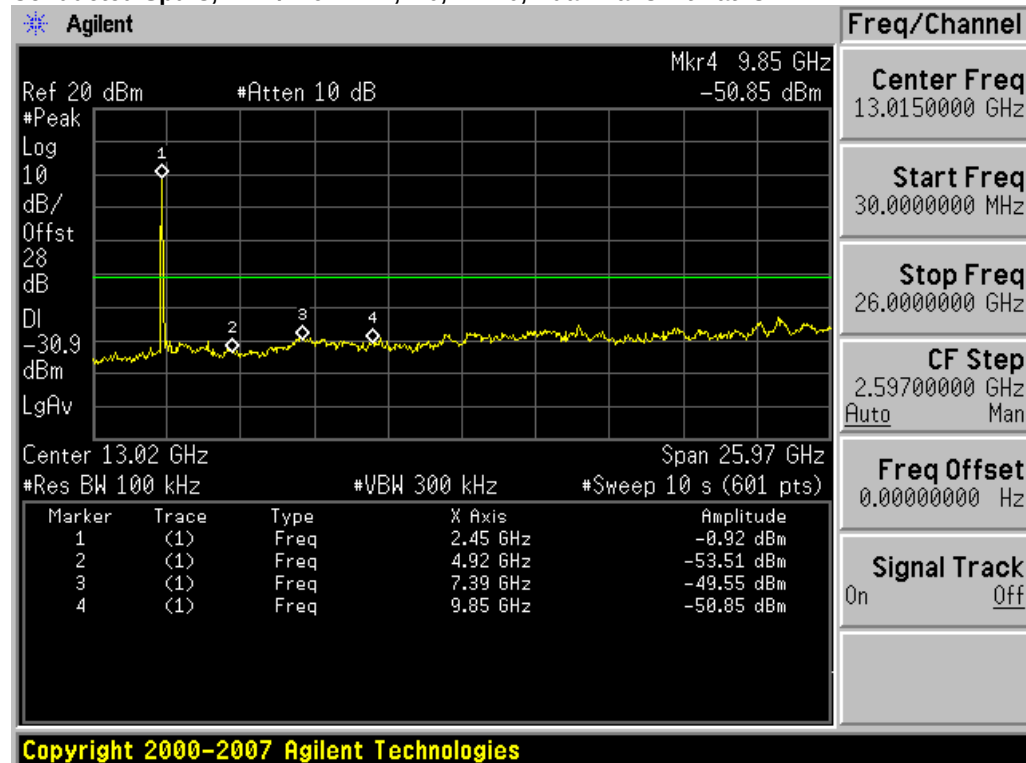

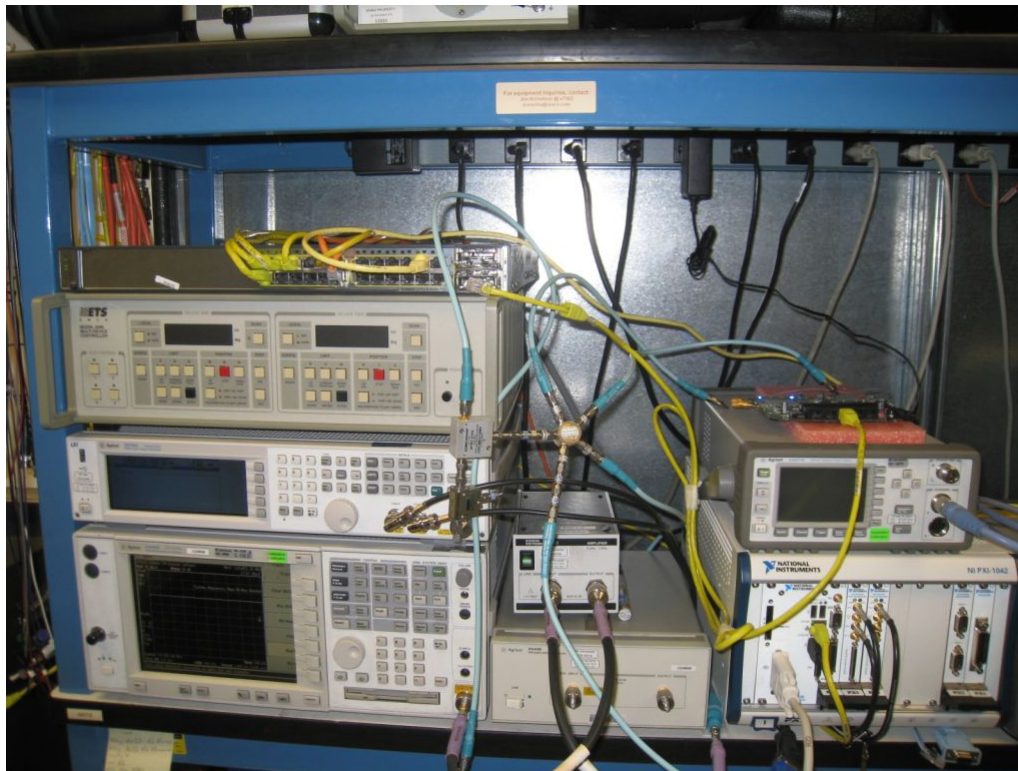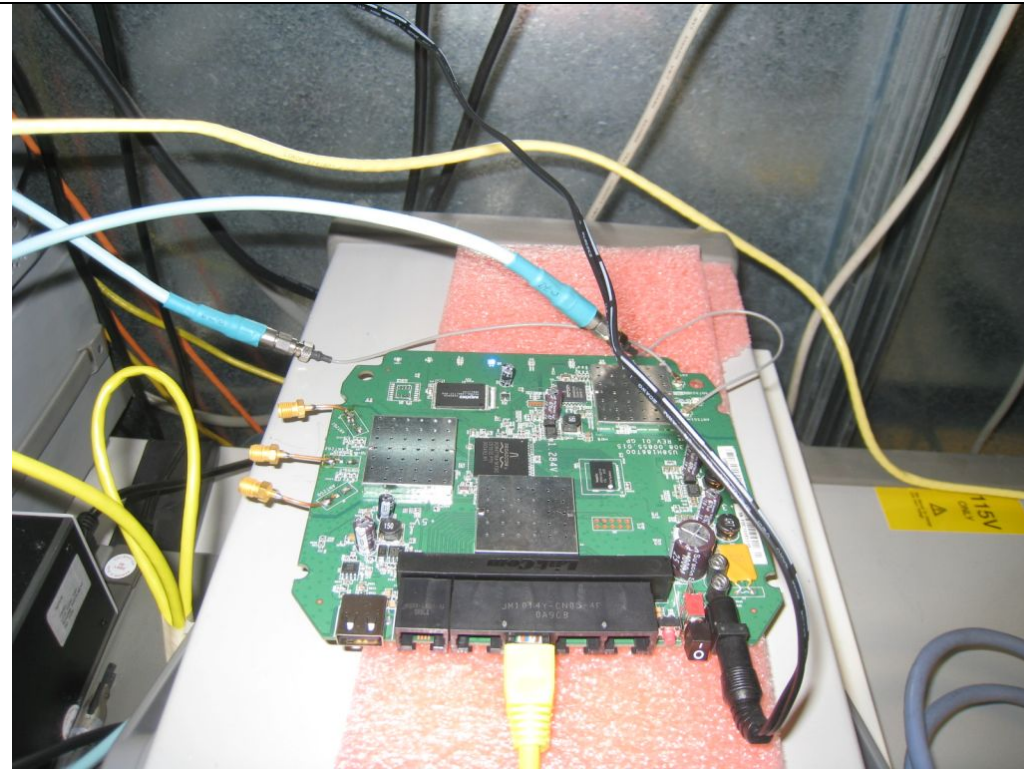

**Title:** Conducted Test Setup



## Appendix B: Emission Test Results

**Testing Laboratory:** Cisco Systems, Inc., 170 West Tasman Drive, San Jose, CA 95134, USA

### Radiated Bandedge

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Reference Level: 110 dBuV  
 Attenuation: 20 dB  
 Sweep Time: Coupled  
 Resolution Bandwidth: 1MHz  
 Video Bandwidth: 1 MHz for peak, 10 Hz for average  
 Detector: Peak

Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV @3m  
 2) Peak plot (Vertical and Horizontal), Limit = 74dBuV @3m


Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.  
 Also measure any emissions in the restricted bands.

| Frequency (MHz) | Mode                       | Data Rate (Mbps) | Radiated Band Edge Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|----------------------------|------------------|-----------------------------------|----------------|-------------|
| 2412            | Legacy CCK, Single Tx Path | 1                | 49.6                              | 54             | 4.4         |
| 2412            | Non HT-20, Single Tx Path  | 6                | 51.8                              | 54             | 2.2         |
| 2412            | HT-20, Dual Tx Path        | M0               | 51.4                              | 54             | 2.6         |
| 2462            | Legacy CCK, Single Tx Path | 1                | 50.7                              | 54             | 3.3         |
| 2462            | Non HT-20, Single Tx Path  | 6                | 52.0                              | 54             | 2.0         |
| 2462            | HT-20, Dual Tx Path        | 6                | 50.7                              | 54             | 3.3         |
| 2412/2432       | HT-40                      | M0               | 51.0                              | 54             | 3.0         |
| 2442/2462       | HT-40                      | M0               | 51.6                              | 54             | 2.4         |


## Radiated Bandedge, 2412 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths, Average




## Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20, Single Transmit Paths, Average

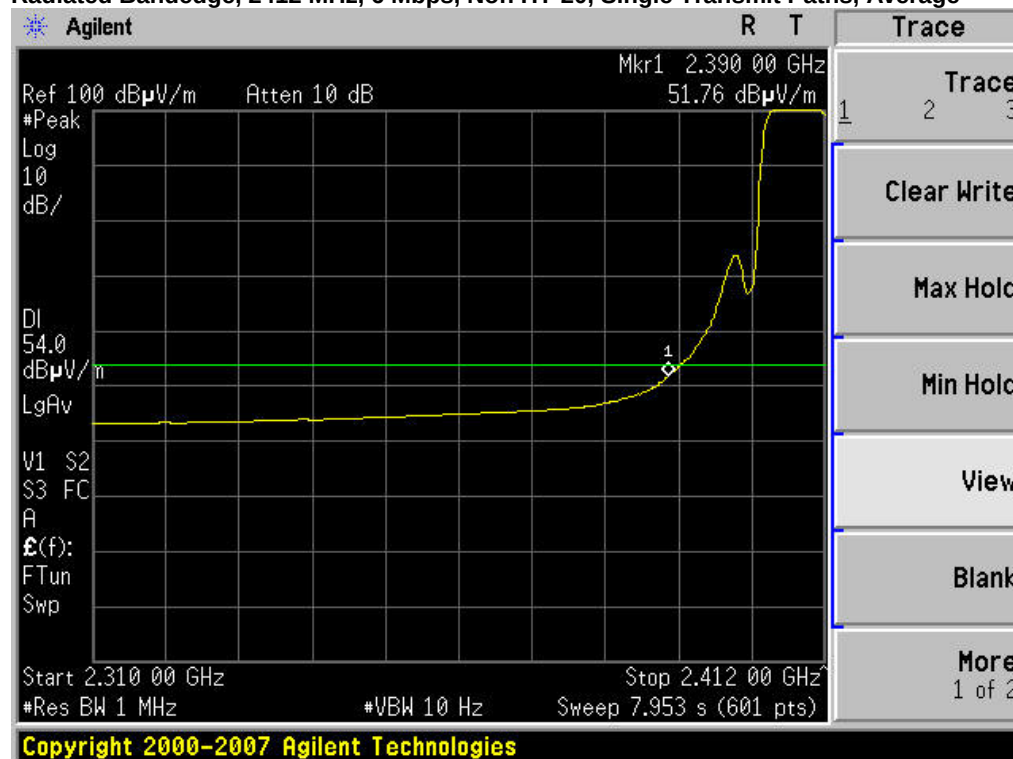


## Radiated Bandedge, 2412 MHz, m0, HT-20, Dual Transmit Paths, Average

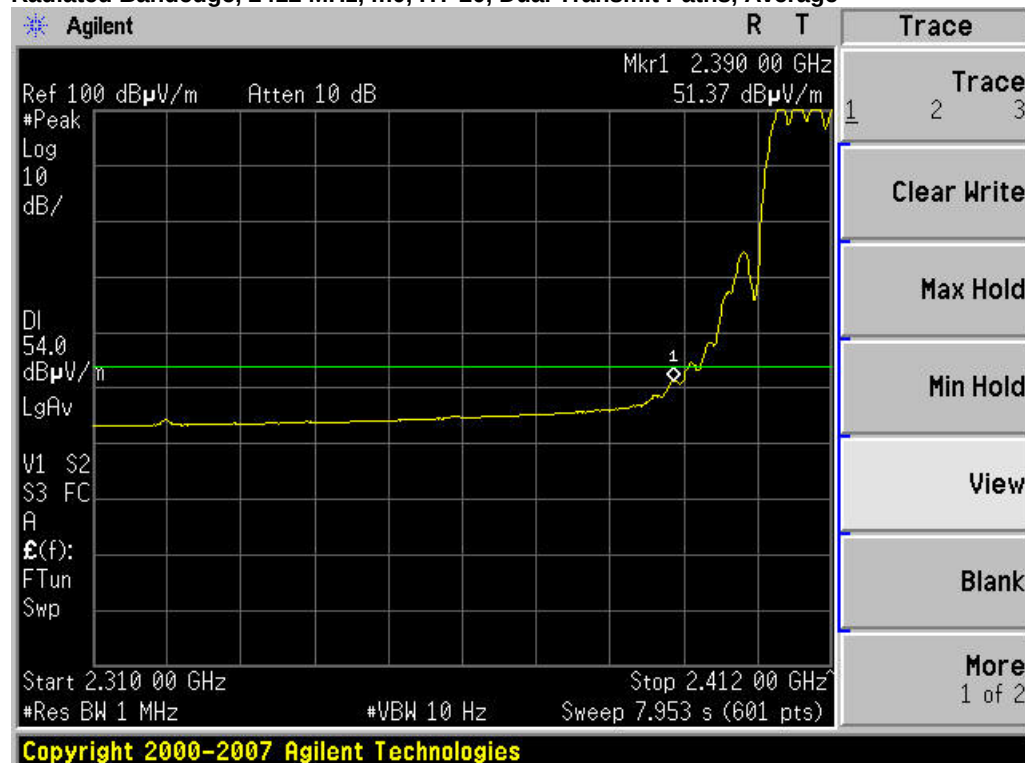


## Radiated Bandedge, 2462 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths, Average

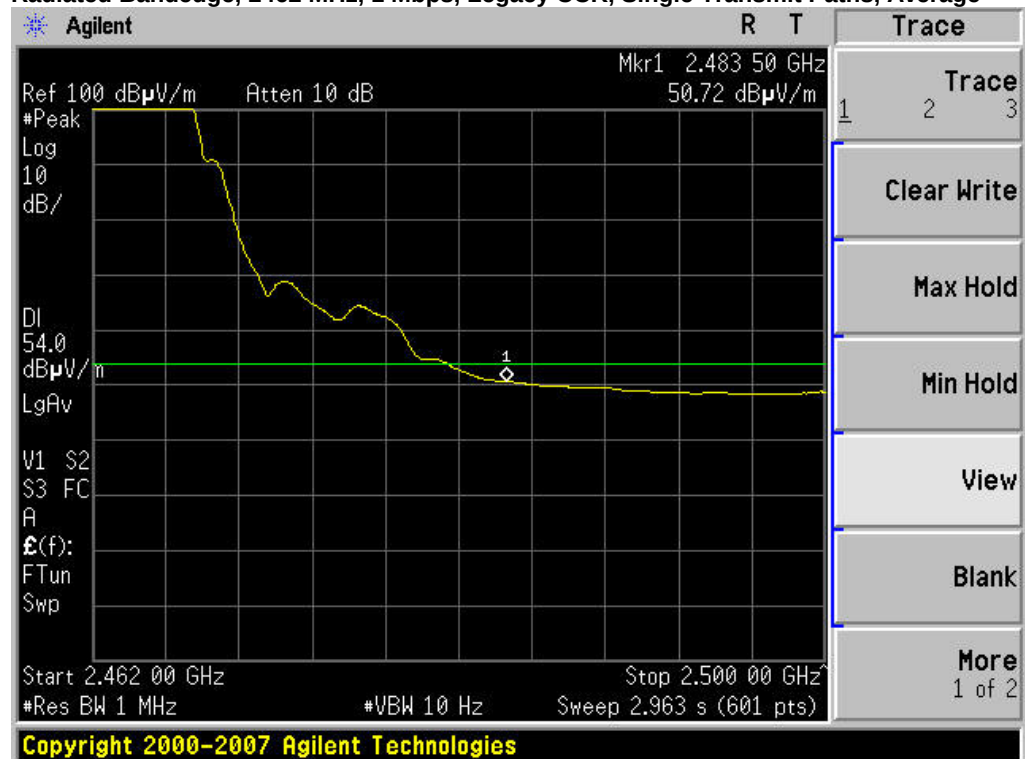


## Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20 , Single Transmit Paths, Average

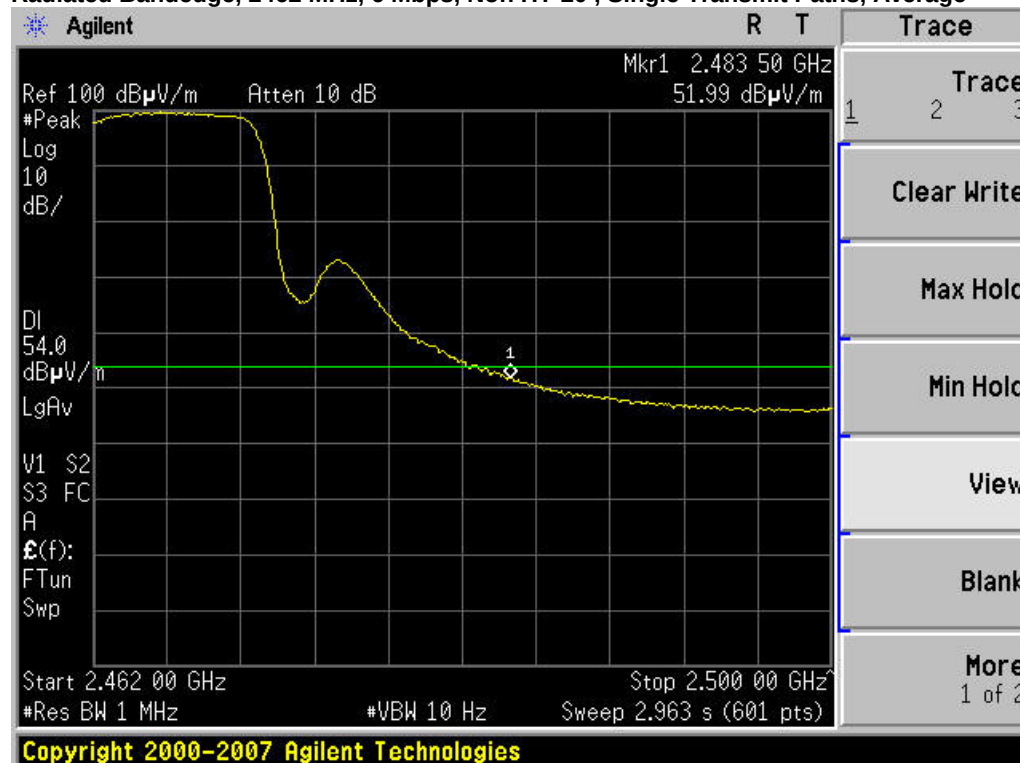


## Radiated Bandedge, 2462 MHz, m0, HT-20, Dual Transmit Paths, Average

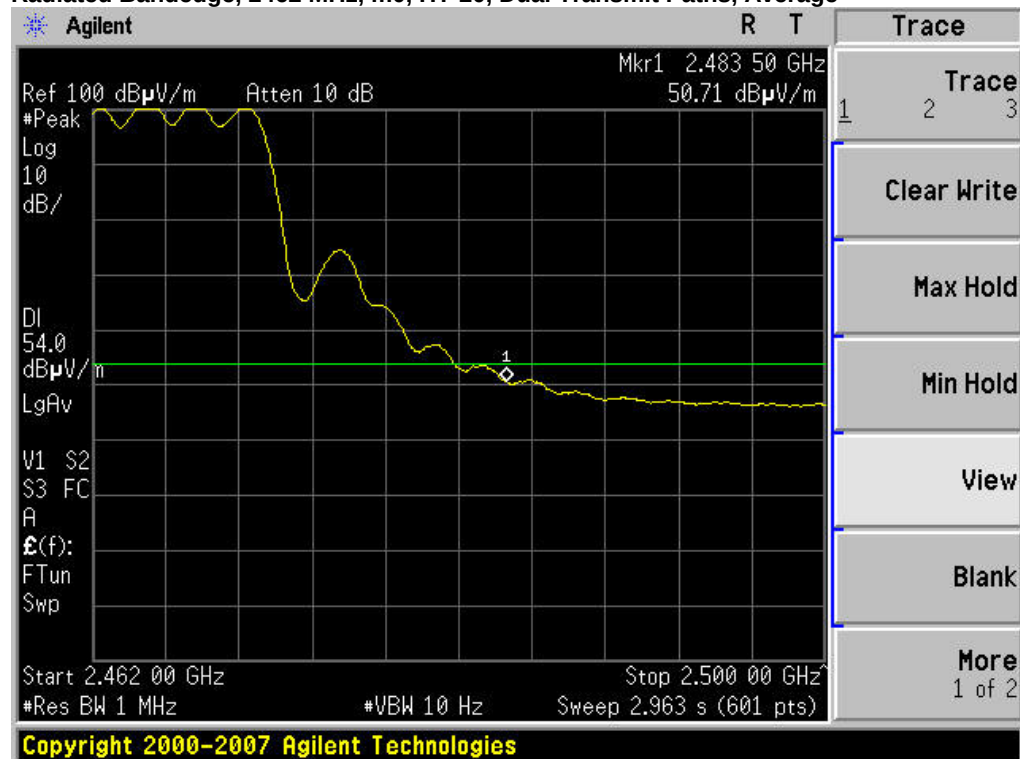


## Radiated Bandedge, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths, Average

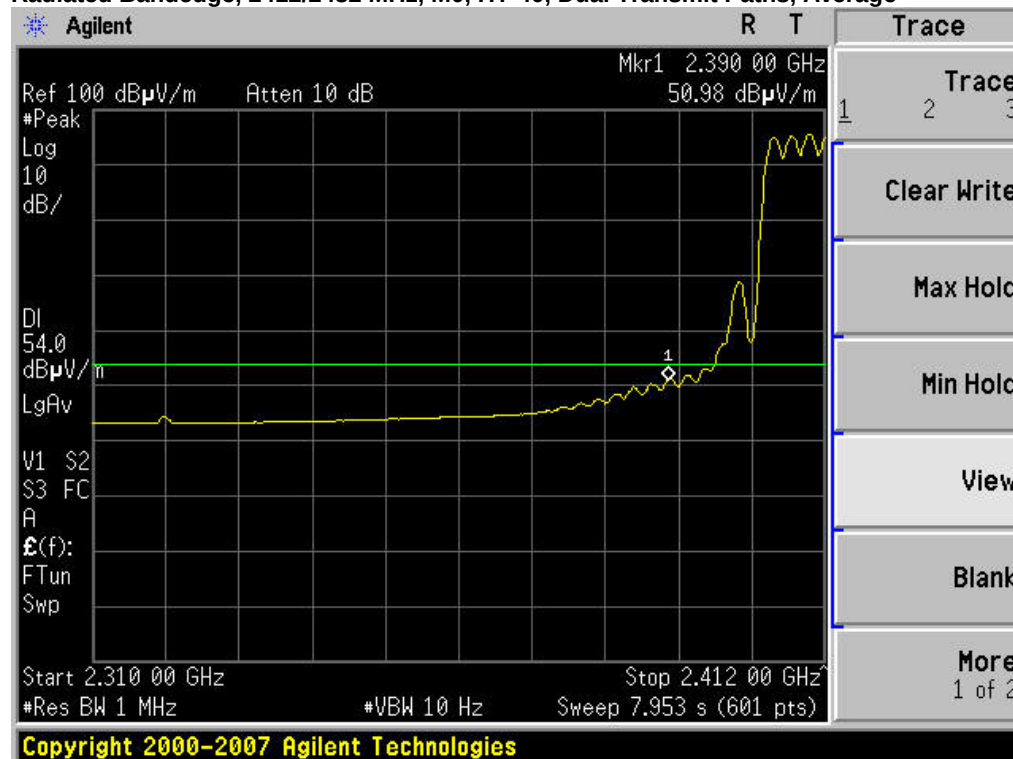


## Radiated Bandedge, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths, Average

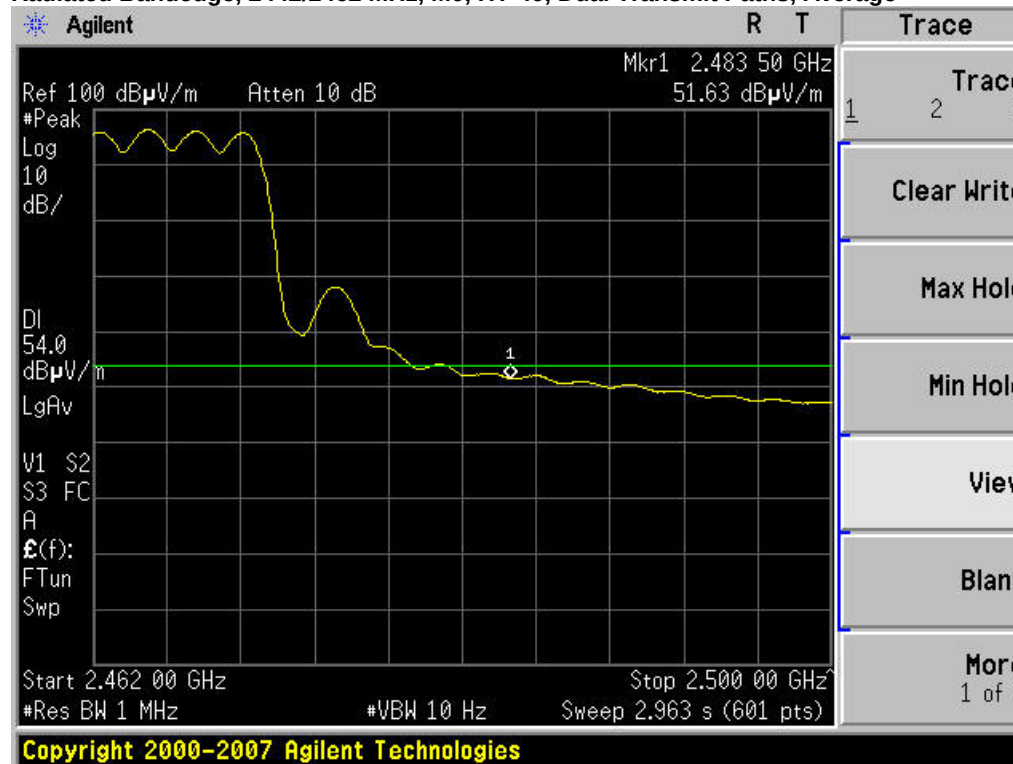


## Radiated Bandedge, 2412 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths, Peak

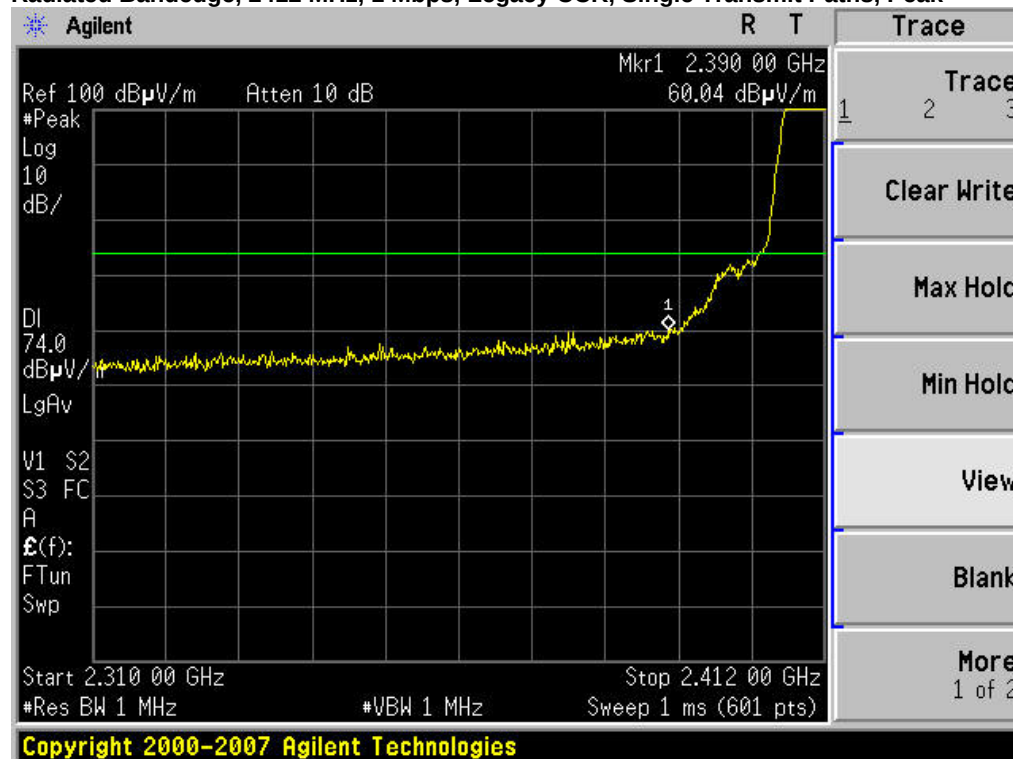


## Radiated Bandedge, 2412 MHz, 6 Mbps, Non HT-20, Single Transmit Paths, Peak

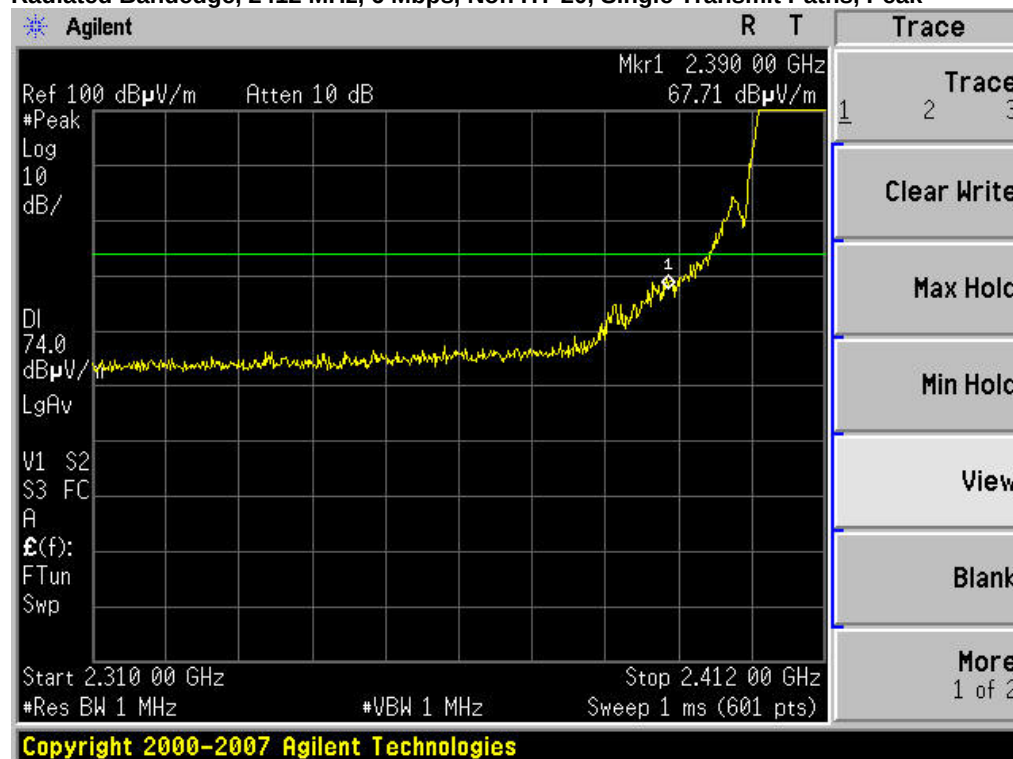


## Radiated Bandedge, 2412 MHz, m0, HT-20, Dual Transmit Paths, Peak

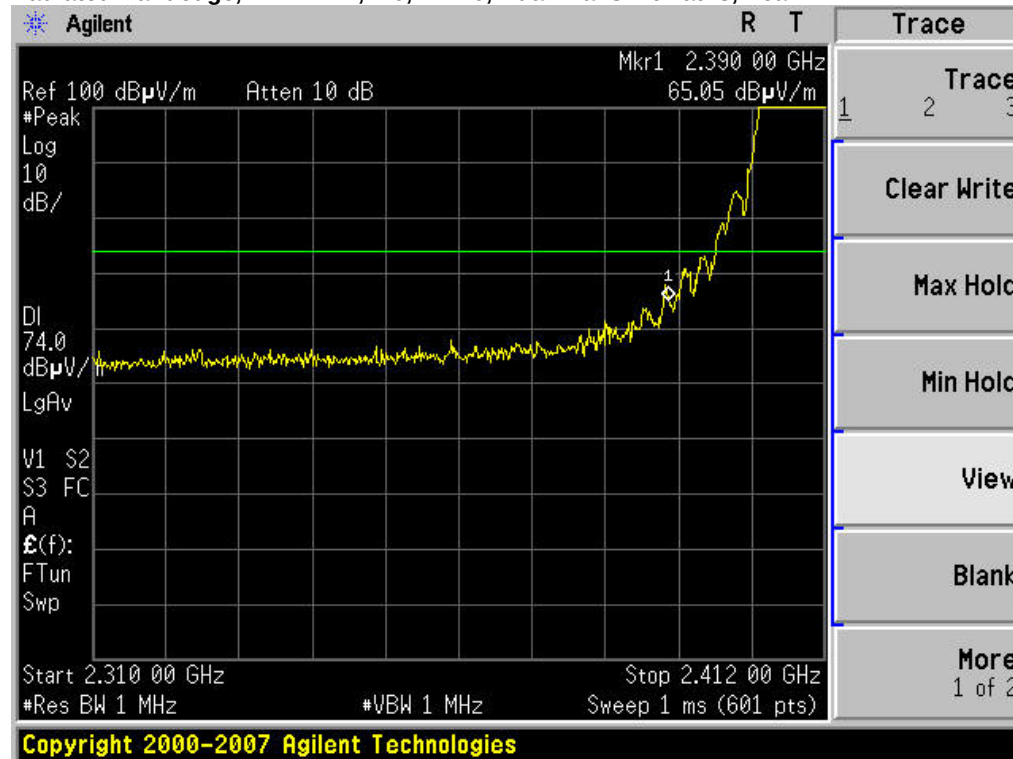


## Radiated Bandedge, 2462 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths, Peak

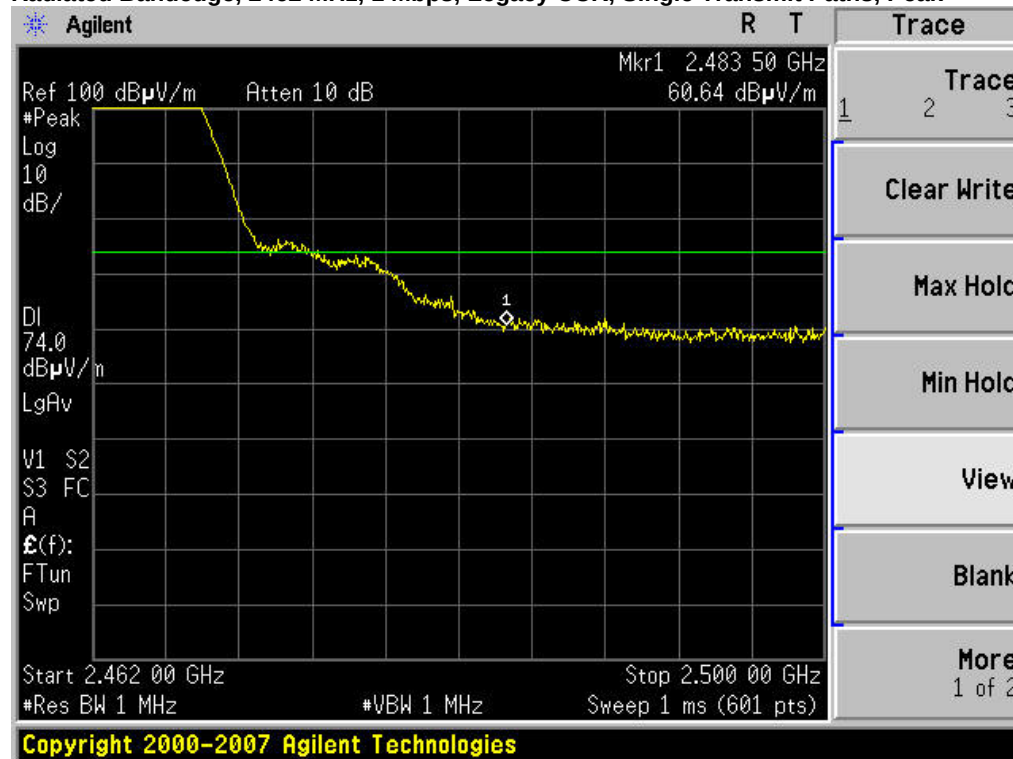


## Radiated Bandedge, 2462 MHz, 6 Mbps, Non HT-20 , Single Transmit Paths, Peak

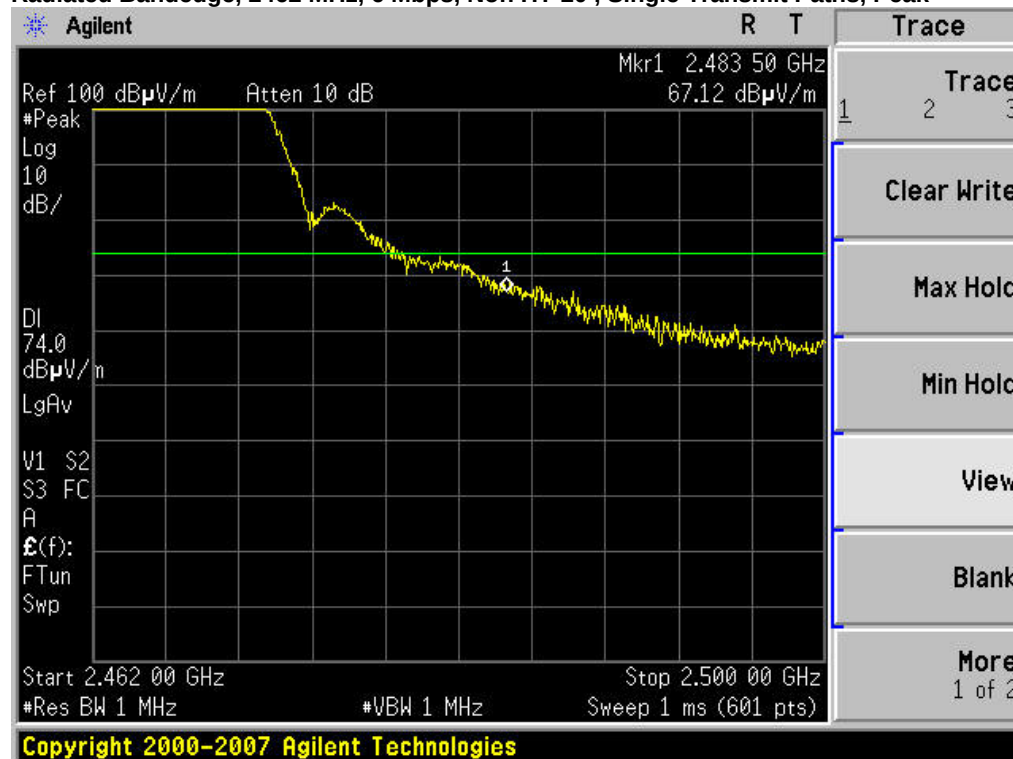


## Radiated Bandedge, 2462 MHz, m0, HT-20, Dual Transmit Paths, Peak

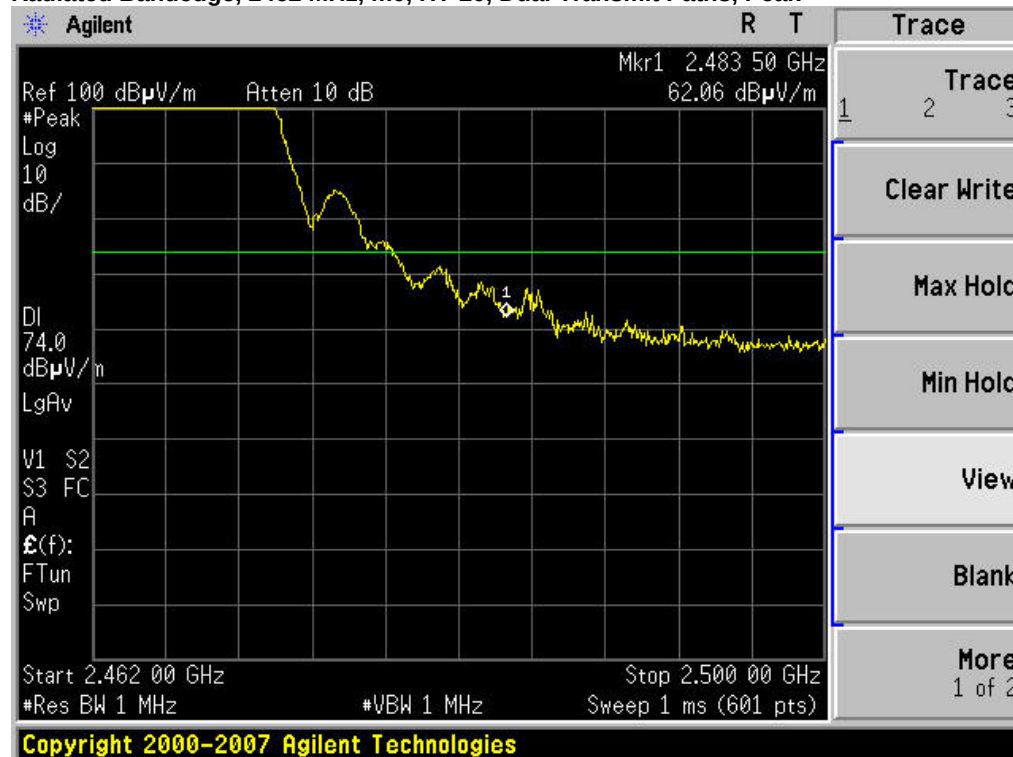

## Radiated Bandedge, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths, Peak

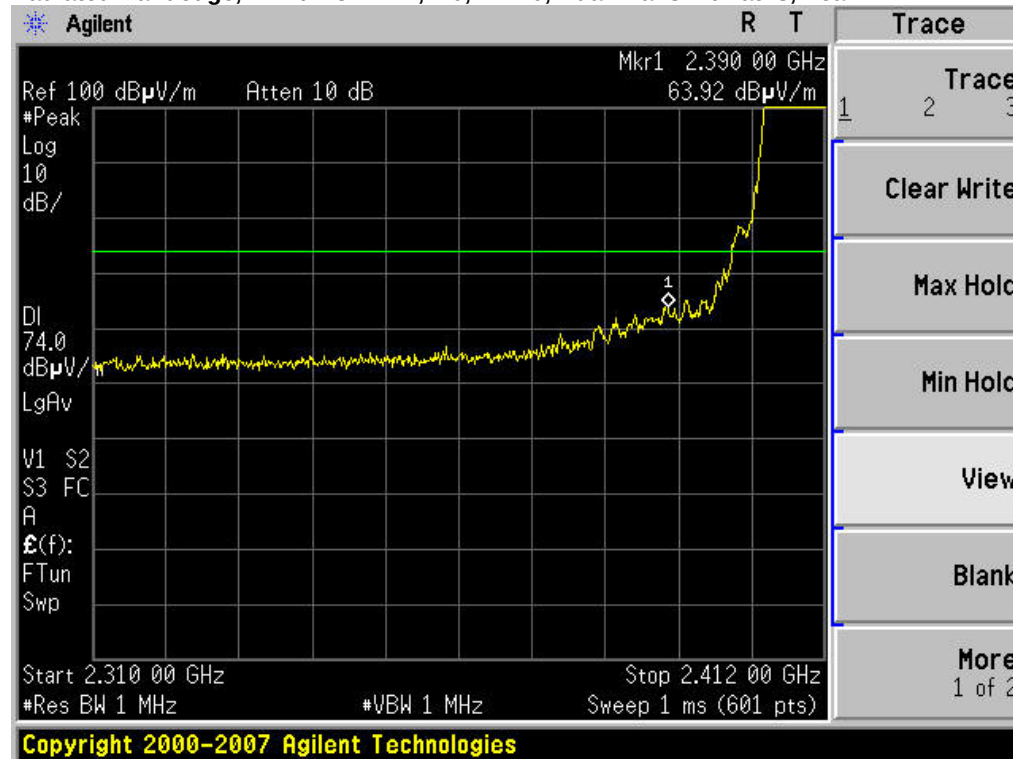

## Radiated Bandedge, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths, Peak

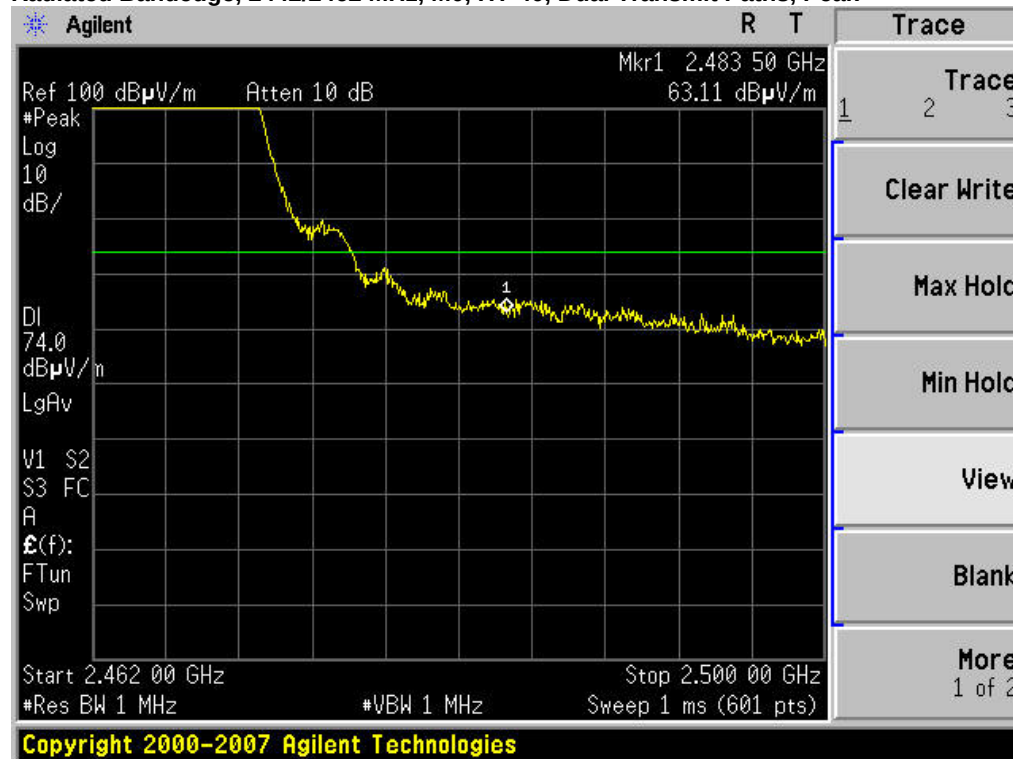



## Radiated Spurious Emissions

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Using Vasona, configure the spectrum analyzer as shown below (be sure to enter all losses between the transmitter output and the spectrum analyzer). Place the radio in continuous transmit mode.

Span: 1GHz – 18 GHz  
 Reference Level: 80 dBuV  
 Attenuation: 10 dB  
 Sweep Time: Coupled  
 Resolution Bandwidth: 1MHz  
 Video Bandwidth: 1 MHz for peak, 10 Hz for average  
 Detector: Peak


Maximize Turntable (find worst case table angle), Maximize Antenna (find worst case height)

Save 2 plots: 1) Average Plot (Vertical and Horizontal), Limit= 54dBuV @3m  
 2) Peak plot (Vertical and Horizontal), Limit = 74dBuV @3m

Place a marker at the end of the restricted band closest to the transmit frequency to show compliance.  
 Also measure any emissions in the restricted bands.

| Frequency (MHz) | Mode                       | Data Rate (Mbps) | Spurious Emission Level (dBuV/m) | Limit (dBuV/m) | Margin (dB) |
|-----------------|----------------------------|------------------|----------------------------------|----------------|-------------|
| 2412            | Legacy CCK, Single Tx Path | 1                | 41.3                             | 54             | 12.7        |
| 2412            | HT-20, Dual Tx Path        | M0               | 40.2                             | 54             | 13.8        |
| 2437            | Legacy CCK, Single Tx Path | 1                | 41.3                             | 54             | 12.7        |
| 2437            | HT-20, Dual Tx Path        | M0               | 38.8                             | 54             | 15.2        |
| 2462            | Legacy CCK, Single Tx Path | 1                | 51.2                             | 54             | 2.8         |
| 2462            | HT-20, Dual Tx Path        | 6                | 38.6                             | 54             | 15.4        |
| 2412/2432       | HT-40                      | M0               | 38.8                             | 54             | 15.2        |
| 2427/2447       | HT-40                      | M0               | 38.6                             | 54             | 15.4        |
| 2442/2462       | HT-40                      | M0               | 39.3                             | 54             | 14.7        |

## Radiated Spurious Emissions, 2412 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths, Average

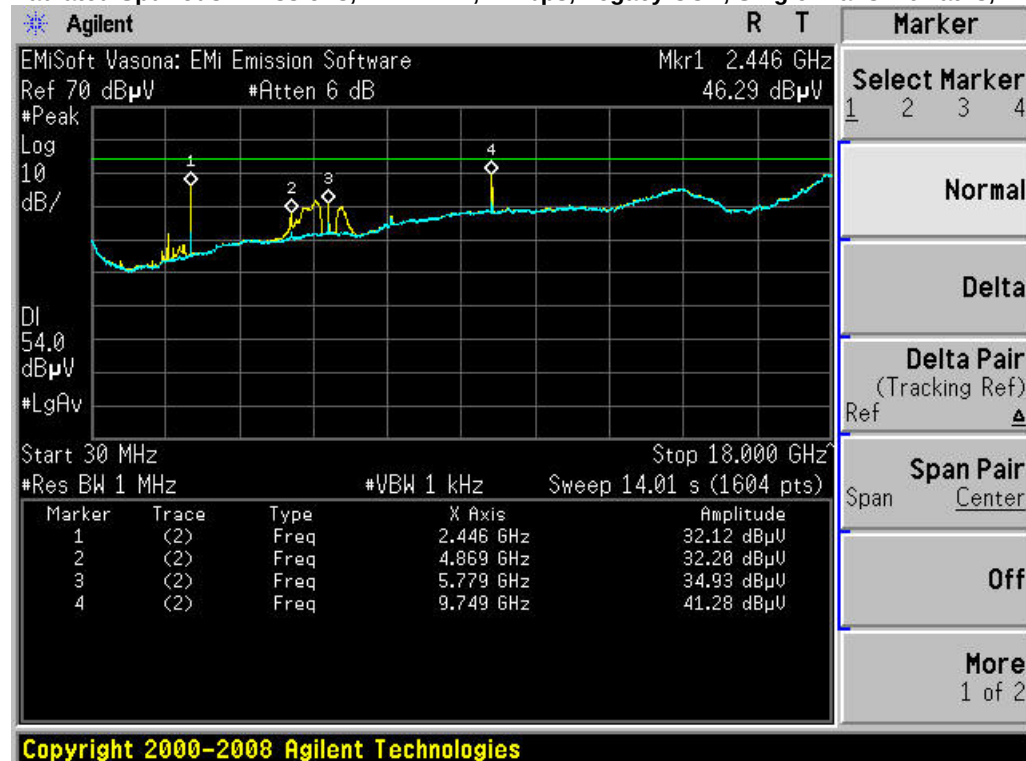

## Radiated Spurious Emissions, 2412 MHz, m0, HT-20, Dual Transmit Paths, Average



## Radiated Spurious Emissions, 2437 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths, Average



## Radiated Spurious Emissions, 2437 MHz, m0, HT-20, Dual Transmit Paths, Average



## Radiated Spurious Emissions, 2462 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths, Average




## Radiated Spurious Emissions, 2462 MHz, m0, HT-20, Dual Transmit Paths, Average



## Radiated Spurious Emissions, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths, Average



## Radiated Spurious Emissions, 2427/2447 MHz, M0, HT-40, Dual Transmit Paths, Average

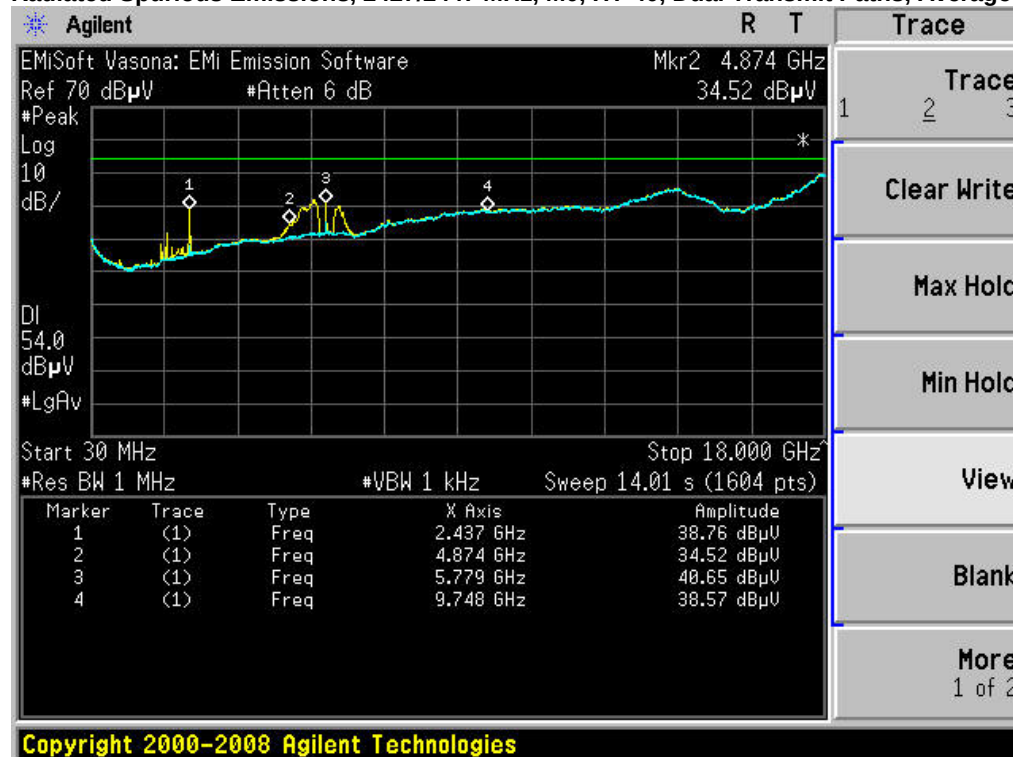


## Radiated Spurious Emissions, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths, Average




## Radiated Spurious Emissions, 2412 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths, Peak




## Radiated Spurious Emissions, 2412 MHz, m0, HT-20, Dual Transmit Paths, Peak

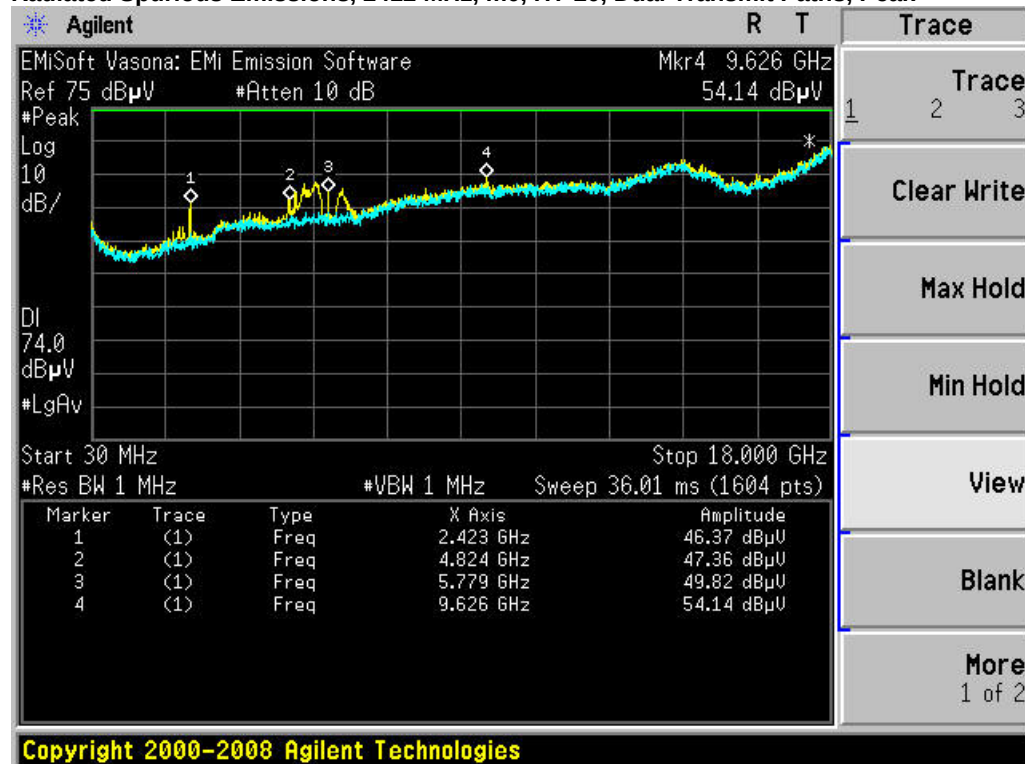


## Radiated Spurious Emissions, 2437 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths, Peak

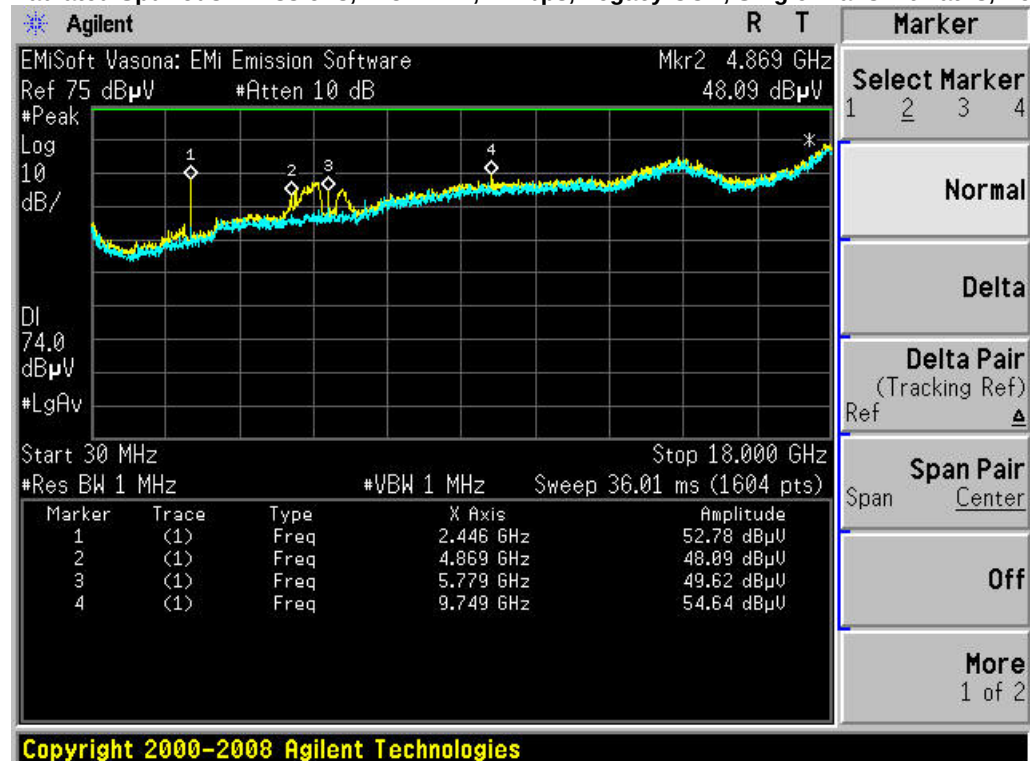


## Radiated Spurious Emissions, 2437 MHz, m0, HT-20, Dual Transmit Paths, Peak

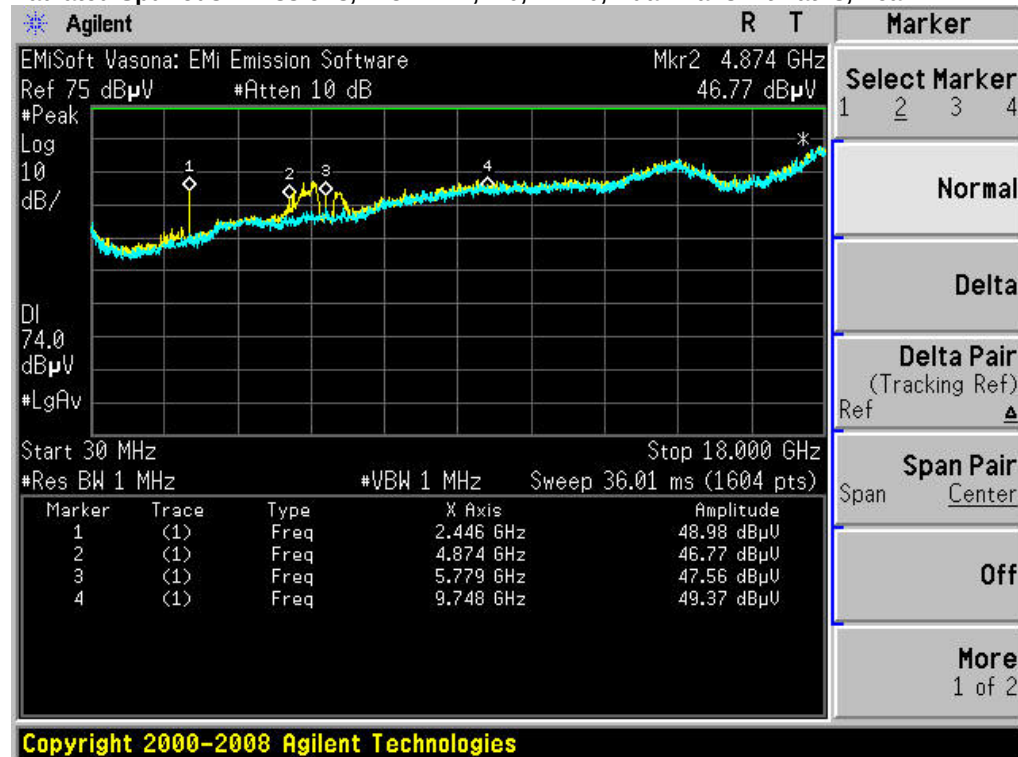


## Radiated Spurious Emissions, 2462 MHz, 1 Mbps, Legacy CCK, Single Transmit Paths, Peak

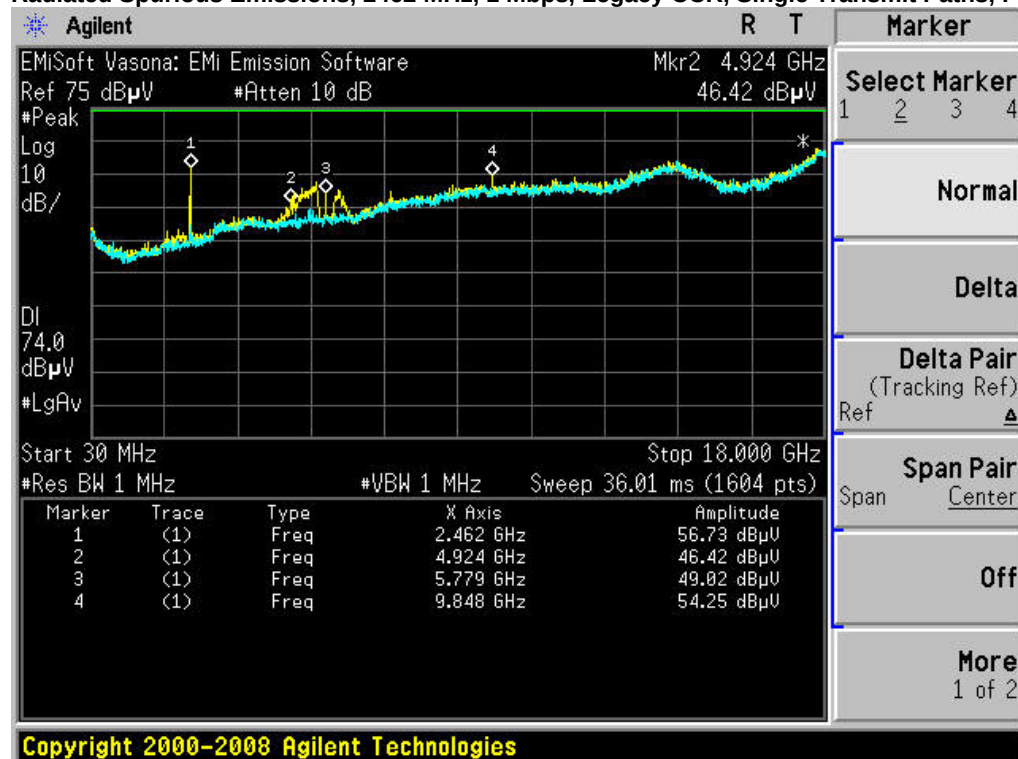


## Radiated Spurious Emissions, 2462 MHz, m0, HT-20, Dual Transmit Paths, Peak

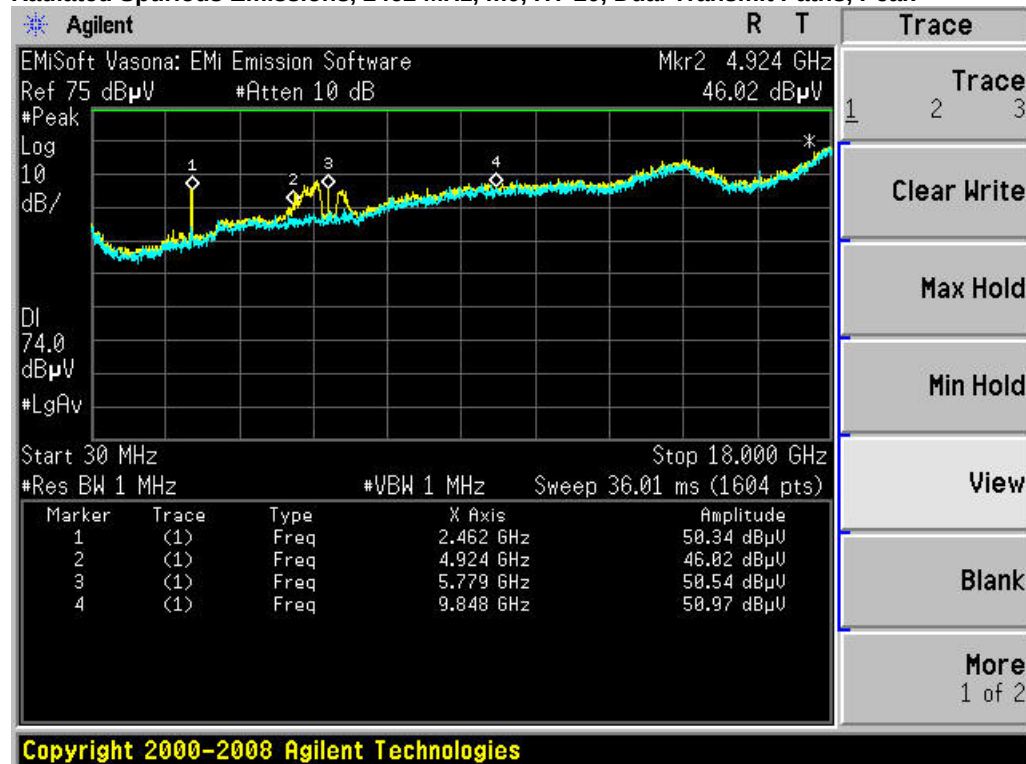


## Radiated Spurious Emissions, 2412/2432 MHz, M0, HT-40, Dual Transmit Paths, Peak


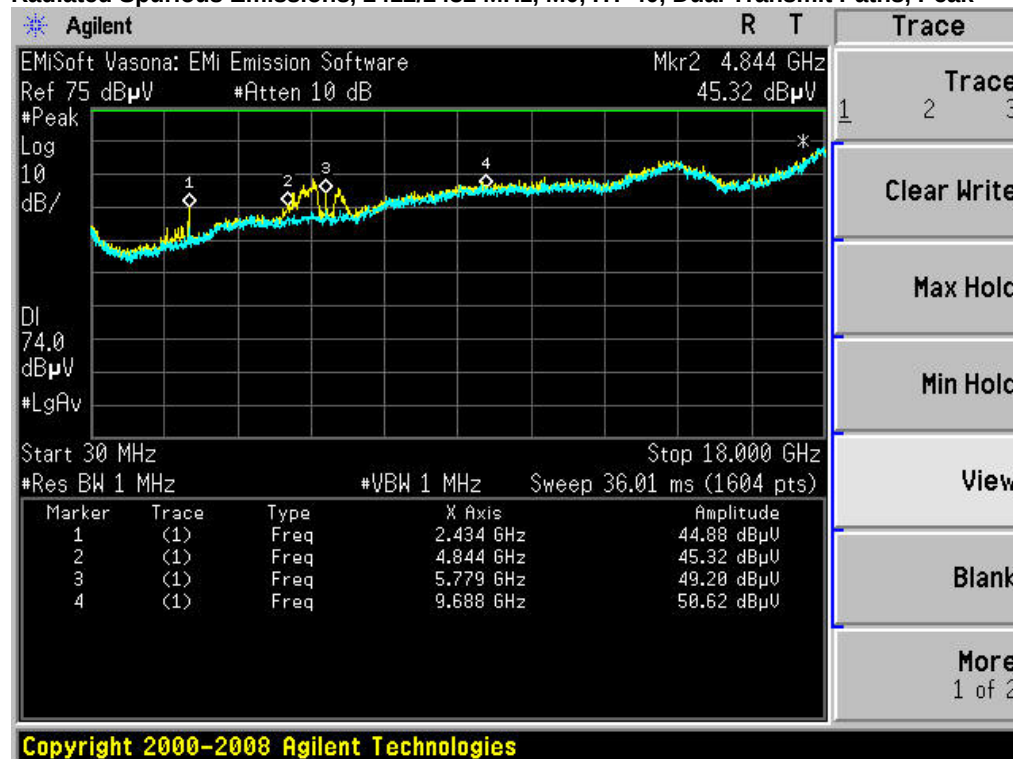



## Radiated Spurious Emissions, 2427/2447 MHz, M0, HT-40, Dual Transmit Paths, Peak

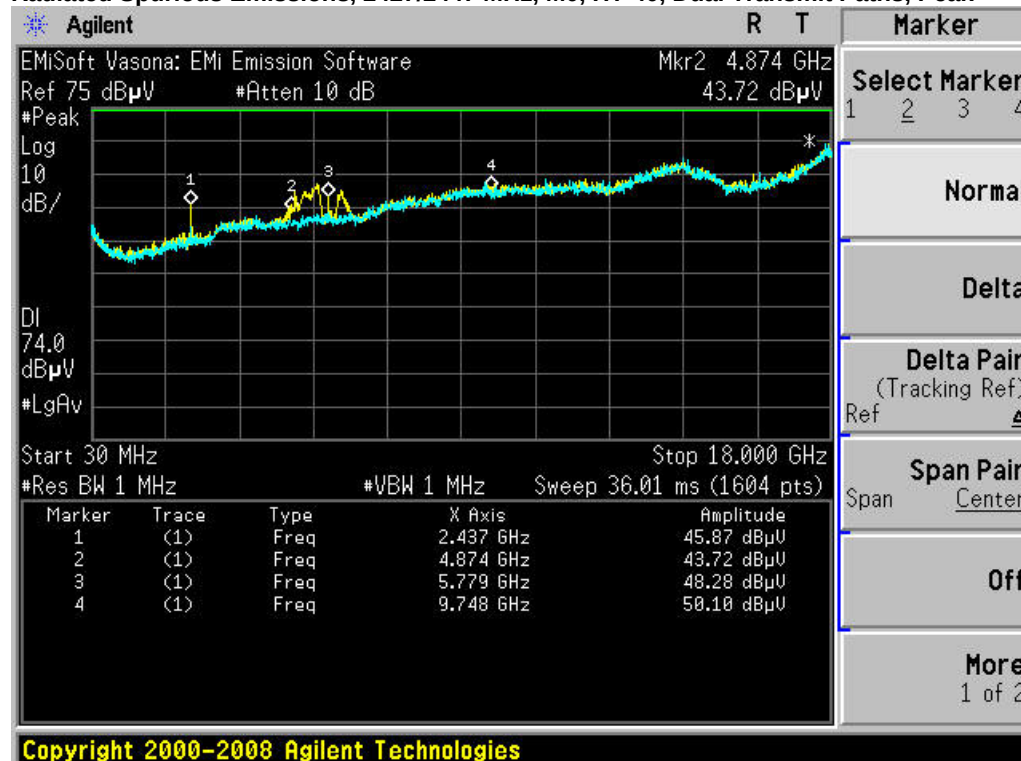

## Radiated Spurious Emissions, 2442/2462 MHz, M0, HT-40, Dual Transmit Paths, Peak

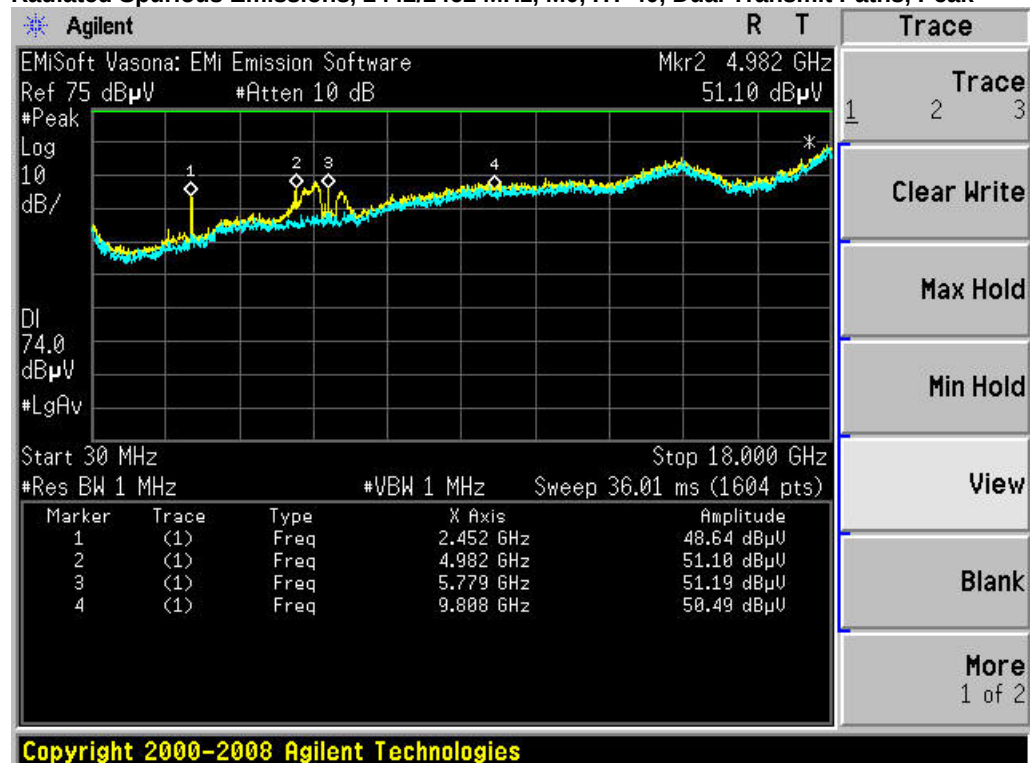


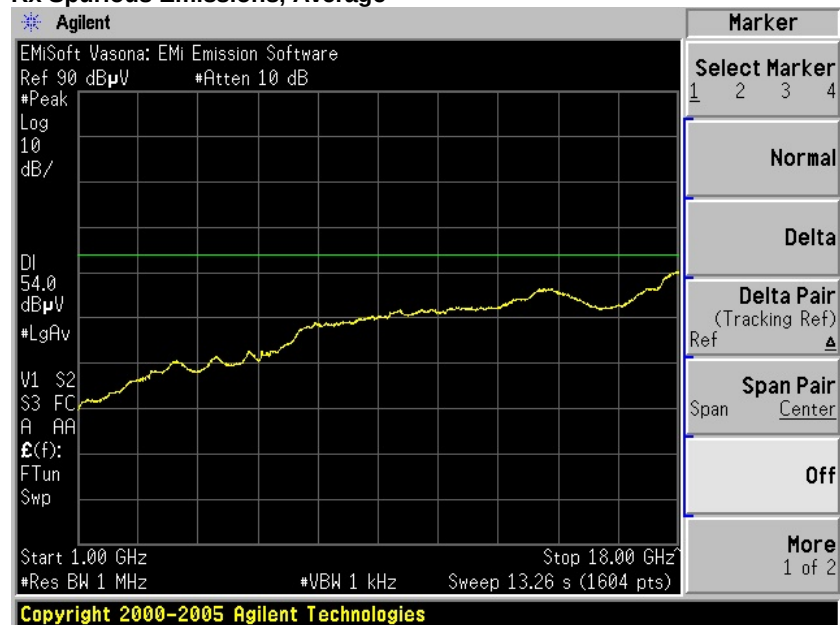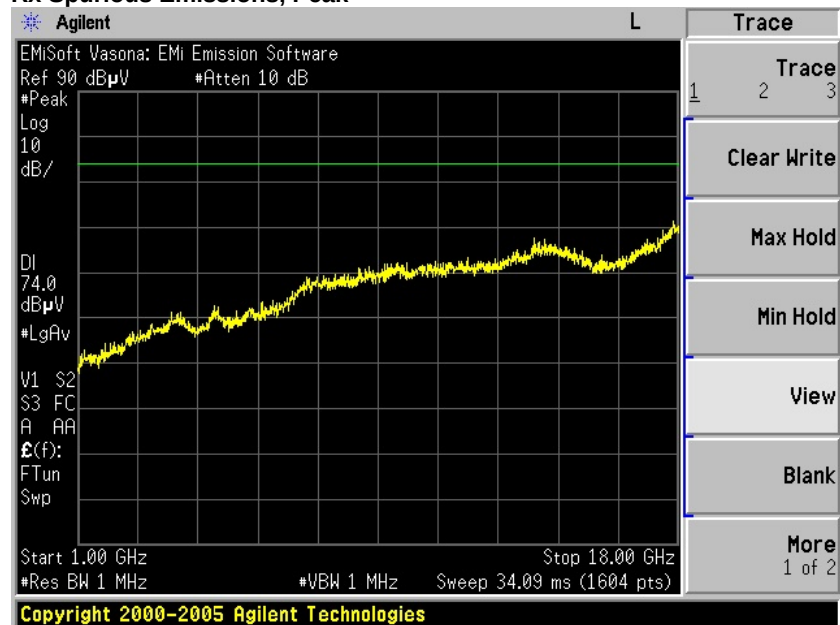**Rx Spurious Emissions, Average****Rx Spurious Emissions, Peak**

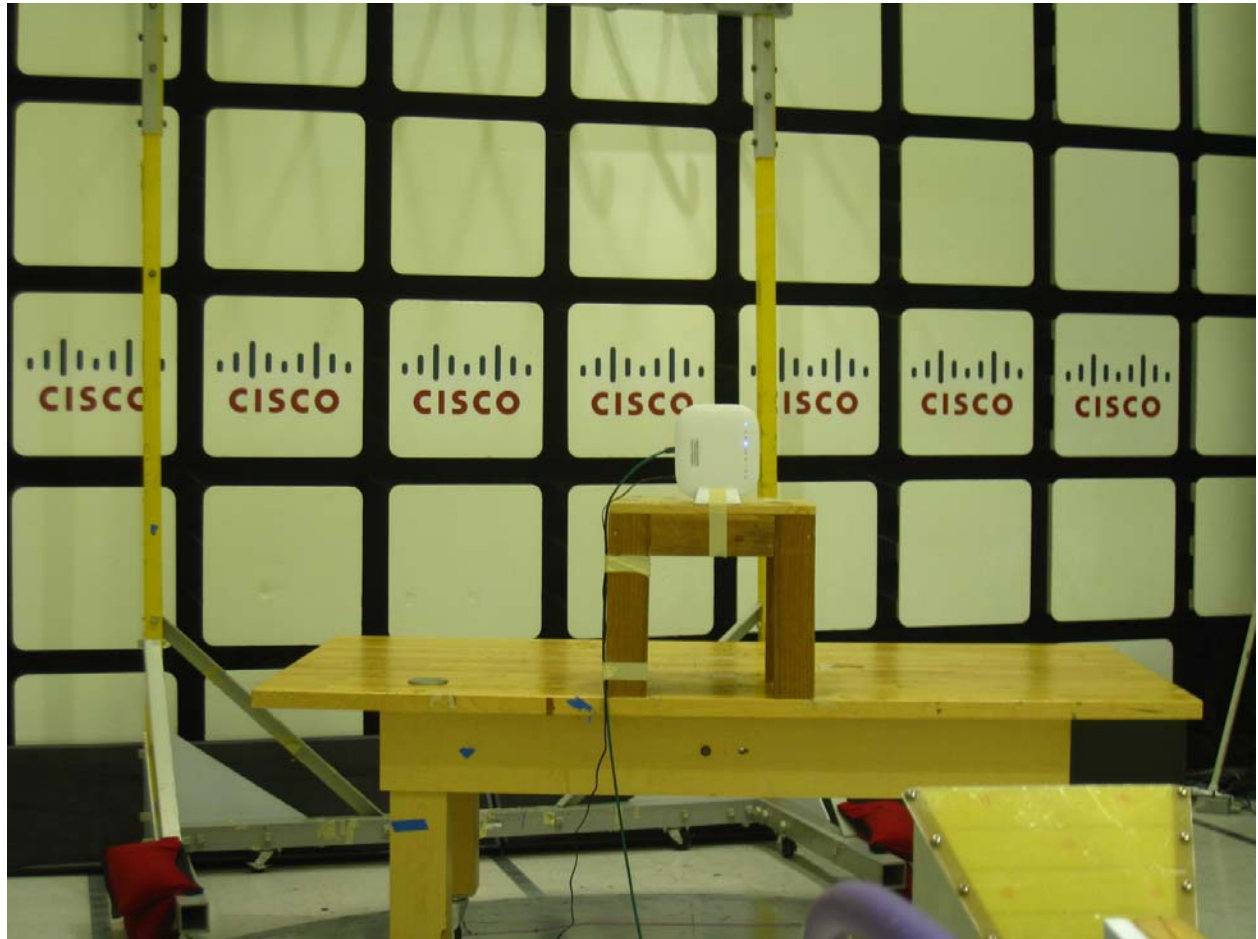

**Title:** Radiated Test Setup

## Conducted emissions

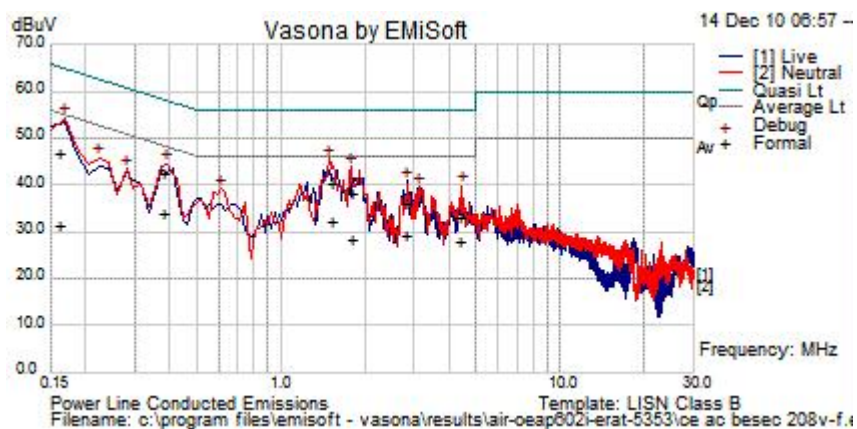


| Frequency MHz | Raw dBuV | Cable Loss | Factors dB | Level dBuV | Measurement Type | Line | Limit dBuV | Margin dB | Pass /Fail |
|---------------|----------|------------|------------|------------|------------------|------|------------|-----------|------------|
| 0.16353       | 25.2     | 21.3       | 0.1        | 46.6       | Qp               | N    | 65.3       | -18.7     | Pass       |
| 0.16353       | 9.8      | 21.3       | 0.1        | 31.2       | Av               | N    | 55.3       | -24.1     | Pass       |
| 0.38513       | 13.7     | 20.3       | 0          | 34.1       | Av               | N    | 48.2       | -14.1     | Pass       |
| 0.38513       | 22.1     | 20.3       | 0          | 42.4       | Qp               | N    | 58.2       | -15.7     | Pass       |
| 1.531         | 12       | 20         | 0          | 32.1       | Av               | N    | 46         | -13.9     | Pass       |
| 1.531         | 20.4     | 20         | 0          | 40.5       | Qp               | N    | 56         | -15.5     | Pass       |
| 1.81          | 18.3     | 20         | 0          | 38.3       | Qp               | N    | 56         | -17.7     | Pass       |
| 1.81          | 8.2      | 20         | 0          | 28.2       | Av               | N    | 46         | -17.8     | Pass       |
| 2.844         | 8.9      | 20         | 0          | 29         | Av               | L    | 46         | -17       | Pass       |
| 2.844         | 16.2     | 20         | 0          | 36.2       | Qp               | L    | 56         | -19.8     | Pass       |
| 4.456         | 7.7      | 20         | 0          | 27.8       | Av               | N    | 46         | -18.2     | Pass       |
| 4.456         | 13       | 20         | 0          | 33.1       | Qp               | N    | 56         | -22.9     | Pass       |



**Title:** Conducted Power Line Emissions

## Radiated emissions

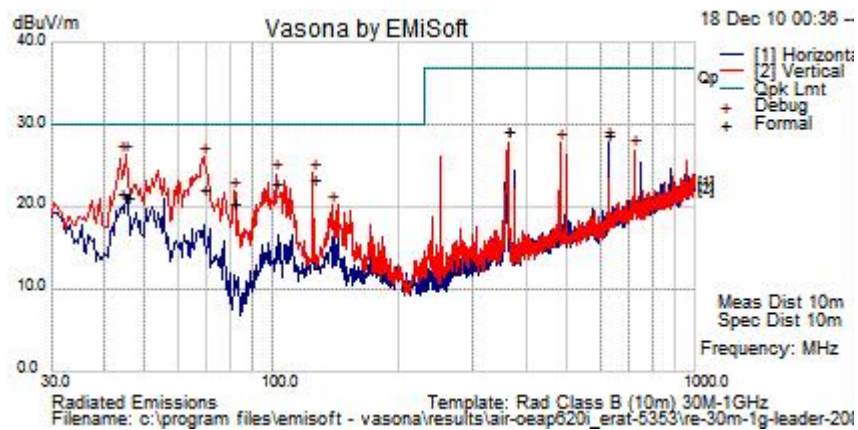

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|------------|------------------|-----|--------|---------|------------|-----------|------------|
| 125.009       | 36       | 1.3        | -13.9 | 23.4       | Qp               | V   | 125    | 35      | 30         | -6.6      | Pass       |
| 101.885       | 38.7     | 1.2        | -17.2 | 22.7       | Qp               | V   | 149    | 314     | 30         | -7.3      | Pass       |
| 69.13         | 41.4     | 1          | -20.2 | 22.2       | Qp               | V   | 186    | 317     | 30         | -7.8      | Pass       |
| 360.001       | 39.8     | 2.2        | -13   | 29.1       | Qp               | V   | 102    | 3       | 37         | -7.9      | Pass       |
| 624.992       | 35.3     | 2.8        | -9.5  | 28.6       | Qp               | H   | 110    | 146     | 37         | -8.4      | Pass       |
| 43.842        | 38.2     | 0.8        | -17.4 | 21.5       | Qp               | V   | 369    | 97      | 30         | -8.5      | Pass       |
| 45.268        | 38.8     | 0.8        | -18.4 | 21.2       | Qp               | V   | 352    | 83      | 30         | -8.8      | Pass       |
| 81.199        | 39.9     | 1          | -20.7 | 20.2       | Qp               | V   | 132    | -1      | 30         | -9.8      | Pass       |



**Title:** Radiated Emissions 30M-1GHz



## Maximum Permissible Exposure (MPE) Calculations

15.247: U-NII devices are subject to the radio frequency radiation exposure requirements specified in Sec. 1.1307(b), Sec. 2.1091 and Sec. 2.1093 of this chapter, as appropriate. All equipment shall be considered to operate in a "general population/uncontrolled" environment. Applications for equipment authorization of devices operating under this section must contain a statement confirming compliance with these requirements for both fundamental emissions and unwanted emissions. Technical information showing the basis for this statement must be submitted to the Commission upon request.

Given

$$E = \sqrt{(30 \cdot P \cdot G)/d} \text{ and } S = E^2/3770$$

where

E=Field Strength in Volts/meter

P=Power in Watts

G=Numeric Antenna Gain

d=Distance in meters

S=Power Density in mW/cm<sup>2</sup>

Combine equations and rearrange the terms to express the distance as a function of the remaining variables:

$$d = \sqrt{((30 \cdot P \cdot G)/(3770 \cdot S))}$$

Changing to units of power in mW and distance in cm, using:

$$P(\text{mW}) = P(\text{W})/1000 \quad d(\text{cm}) = 100 \cdot d(\text{m})$$

yields

$$d = 100 \cdot \sqrt{((30 \cdot (P/1000) \cdot G)/(3770 \cdot S))}$$

$$d = 0.282 \cdot \sqrt{(P \cdot G/S)}$$

where

d=Distance in cm

P=Power in mW

G=Numerica Antenna Gain

S=Power Density in mW/cm<sup>2</sup>

Substituting the logarithmic form of power and gain using:

$$P(\text{mW}) = 10^{(P(\text{dBm})/10)} \quad G(\text{numeric}) = 10^{(G(\text{dBi})/10)}$$

yields

$$d = 0.282 \cdot 10^{((P+G)/20)/\sqrt{S}} \quad \text{Equation (1)}$$

and

$$s = ((0.282 \cdot 10^{((P+G)/20)})/d)^2 \quad \text{Equation (2)}$$

where

d=MPE distance in cm

P=Power in dBm

G=Antenna Gain in dBi

S=Power Density in mW/cm<sup>2</sup>

Equation (1) and the measured peak power are used to calculate the MPE distance. Note that for mobile or fixed location transmitters such as an access point, the minimum separation distance is 20 cm even if the calculations indicate that the MPE distance may be less.

$S=1\text{mW/cm}^2$  maximum. The highest supported antenna gain is 6 dBi (9dBi with beamforming). Using the peak power levels recorded in the test report along with Equation 1 above, the MPE distances are calculated as follows.

| Frequency (MHz) | Power Density (mW/cm <sup>2</sup> ) | Peak Transmit Power (dBm) | Antenna Gain (dBi) | MPE Distance (cm) | Limit (cm) | Margin (cm) |
|-----------------|-------------------------------------|---------------------------|--------------------|-------------------|------------|-------------|
| 2412            | 1                                   | 20.0                      | 3.5                | <b>4.22</b>       | 20         | 15.78       |
| 2437            | 1                                   | 20.0                      | 3.5                | <b>4.22</b>       | 20         | 15.78       |
| 2462            | 1                                   | 20.0                      | 3.5                | <b>4.22</b>       | 20         | 15.78       |

#### MPE Calculations

To maintain compliance, installations will assure a separation distance of at least 20cm.

Using Equation 2, the MPE levels (s) at 20 cm are calculated as follows:

| Frequency (MHz) | MPE Distance (cm) | Peak Transmit Power (dBm) | Antenna Gain (dBi) | Power Density (mW/cm <sup>2</sup> ) | Limit (mW/cm <sup>2</sup> ) | Margin (mW/cm <sup>2</sup> ) |
|-----------------|-------------------|---------------------------|--------------------|-------------------------------------|-----------------------------|------------------------------|
| 2412            | 20                | 20.0                      | 3.5                | <b>0.04</b>                         | 1                           | 0.96                         |
| 2437            | 20                | 20.0                      | 3.5                | <b>0.04</b>                         | 1                           | 0.96                         |
| 2462            | 20                | 20.0                      | 3.5                | <b>0.04</b>                         | 1                           | 0.96                         |

**Appendix C: Test Equipment/Software Used to perform the test**

| Equip #   | Manufacturer      | Model                 | Description                          | Last Cal  | Next Due  |
|-----------|-------------------|-----------------------|--------------------------------------|-----------|-----------|
| CIS002119 | EMC Test Systems  | 3115                  | Double Ridged Guide Horn Antenna     | 30-Jun-10 | 30-Jun-11 |
| CIS005568 | HP                | 8449B                 | Broadband Preamplifier               | 01-Oct-10 | 01-Oct-11 |
| CIS008195 | TTE               | H613-150K-50-21378    | Hi Pass Filter - 150KHz cutoff       | 5-Jan-10  | 5-Jan-11  |
| CIS045995 | Fischer           | F-090527-1009-2       | LISN Adaptor                         | 22-Jun-10 | 22-Jun-11 |
| CIS020975 | Micro-Coax        | UFB311A-0-1344-520520 | RF Coaxial Cable, to 18GHz, 134.4 in | 25-Feb-10 | 25-Feb-11 |
| CIS025662 | Micro-Coax        | UFB311A-1-0840-504504 | RF Coaxial Cable, to 18GHz, 84 in    | 4-Mar-10  | 4-Mar-11  |
| CIS030559 | Micro-Coax        | UFB311A-1-0950-504504 | RF Coaxial Cable, to 18GHz, 95 in    | 25-Feb-10 | 25-Feb-11 |
| CIS030652 | Sunol Sciences    | JB1                   | Combination Antenna, 30MHz-2GHz      | 27-Jul-10 | 27-Jul-11 |
| CIS034972 | Midwest Microwave | ATT-0640-20-29M-02    | Attenuator, <b>20dB</b>              | 14-May-10 | 14-May-11 |
| CIS036716 | Cisco             | RF Coaxial Cable-SMA  | Radio Test Cable, SMA-SMA            | 15-Dec-09 | 15-Dec-10 |
| CIS037581 | ETS-Lindgren      | 3117                  | Double Ridged Waveguide Horn Antenna | 22-Jun-10 | 22-Jun-11 |
| CIS040603 | Agilent           | E4440A                | Spectrum Analyzer                    | 04-Aug-10 | 04-Aug-11 |
| CIS041990 | MegaPhase         | EM18-NKNK-320         | RF 18GHz N-Type cable                | 25-Feb-10 | 25-Feb-11 |
| COM000590 | Agilent           | E4448A                | Spectrum Analyzer                    | 28-May-10 | 28-May-11 |
| COM000601 | Agilent           | E4417A                | EPM-P Series Power Meter             | 6-Oct-10  | 6-Oct-11  |
| COM000602 | Agilent           | E9327A                | Peak and Avg Power Sensor            | 6-Oct-10  | 6-Oct-11  |