

Test Report
Model: C9130AXE-B
Cisco Catalyst C9130AXE Series

FCC ID: LDK948342197

5150-5250 MHz

Against the following Specifications:

CFR47 Part 15.407



Cisco Systems

170 West Tasman Drive

San Jose, CA 95134

	
Author: Chris Blair Tested By: Chris Blair	Approved By: Gez Thorpe Title: Radio Compliance Manager Revision: See EDCS

This report replaces any previously entered test report under EDCS – **18726851**. This test report has been electronically authorized and archived using the CISCO Engineering Document Control system. Test Report Template EDCS# 11644122.

This test report has been electronically authorized and archived using the CISCO Engineering Document Control system.

SECTION 1: OVERVIEW	3
SECTION 2: ASSESSMENT INFORMATION	4
2.1 GENERAL	4
2.2 DATE OF TESTING.....	6
2.3 REPORT ISSUE DATE	6
2.4 TESTING FACILITIES	6
2.5 EQUIPMENT ASSESSED (EUT).....	6
2.6 EUT DESCRIPTION	7
SECTION 3: RESULT SUMMARY	9
3.1 RESULTS SUMMARY TABLE	9
SECTION 4: SAMPLE DETAILS.....	13
4.1 SAMPLE DETAILS	13
4.2 SYSTEM DETAILS	13
4.3 MODE OF OPERATION DETAILS	13
APPENDIX A: RF CONDUCTED EMISSION TEST RESULTS	14
CONDUCTED TEST SETUP DIAGRAM.....	14
A.1 DUTY CYCLE	15
A.2 99% AND 26DB BANDWIDTH	18
A.3 MAXIMUM CONDUCTED OUTPUT POWER	21
A.4 POWER SPECTRAL DENSITY	34
A.5 CONDUCTED SPURIOUS EMISSIONS	47
A.6 CONDUCTED RECEIVER SPURIOUS EMISSIONS	47
A.7 CONDUCTED BAND EDGE	48
APPENDIX B: RADIATED & AC CONDUCTED EMISSION TEST RESULTS.....	63
APPENDIX C: LIST OF TEST EQUIPMENT USED TO PERFORM THE TEST.....	64
APPENDIX D: ABBREVIATION KEY AND DEFINITIONS	65
APPENDIX E: PHOTOGRAPHS OF TEST SETUPS	66
APPENDIX F: SOFTWARE USED TO PERFORM TESTING.....	67
APPENDIX G: TEST PROCEDURES	67
APPENDIX H: SCOPE OF ACCREDITATION (A2LA CERTIFICATE NUMBER 1178-01)	67
APPENDIX I: TEST ASSESSMENT PLAN	67

Section 1: Overview

The samples were assessed against the tests detailed in section 3 under the requirements of the following specifications:

Specifications:
CFR47 Part 15.407

Section 2: Assessment Information

2.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on the samples submitted. The testing was performed by and for the use of Cisco systems Inc:

With regard to this assessment, the following points should be noted:

- a) The results contained in this report relate only to the items tested and were obtained in the period between the date of the initial assessment and the date of issue of the report. Manufactured products will not necessarily give identical results due to production and measurement tolerances.
- b) The apparatus was set up and exercised using the configuration and modes of operation defined in this report only.
- c) Where relevant, the apparatus was only assessed using the susceptibility criteria defined in this report and the Test Assessment Plan (TAP).
- d) All testing was performed under the following environmental conditions:

Temperature	15°C to 35°C (54°F to 95°F)
Atmospheric Pressure	860mbar to 1060mbar (25.4" to 31.3")
Humidity	10% to 75*%

Units of Measurement

The units of measurements defined in the appendices are reported in specific terms, which are test dependent. Where radiated measurements are concerned these are defined at a particular distance. Basic voltage measurements are defined in units of [dBuV]

As an example, the basic calculation for all measurements is as follows:

$$\text{Emission level [dBuV]} = \text{Indicated voltage level [dBuV]} + \text{Cable Loss [dB]} + \text{Other correction factors [dB]}$$

The combinations of correction factors are dependent upon the exact test configurations [see test equipment lists for further details] and may include:-

Antenna Factors, Pre Amplifier Gain, LISN Loss, Pulse Limiter Loss and Filter Insertion Loss..

Note: to convert the results from dBuV/m to uV/m use the following formula:-

$$\text{Level in uV/m} = \text{Common Antilogarithm } [(X \text{ dBuV/m})/20] = Y \text{ uV/m}$$

Measurement Uncertainty Values

voltage and power measurements	± 2 dB
conducted EIRP measurements	± 1.4 dB
radiated measurements	± 3.2 dB
frequency measurements	$\pm 2.4 \cdot 10^{-7}$
temperature measurements	$\pm 0.54^\circ$
humidity measurements	$\pm 2.3\%$
DC and low frequency measurements	$\pm 2.5\%$

Where relevant measurement uncertainty levels have been estimated for tests performed on the apparatus. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Radiated emissions (expanded uncertainty, confidence interval 95%)

30 MHz - 300 MHz	+/- 3.8 dB
300 MHz - 1000 MHz	+/- 4.3 dB
1 GHz - 10 GHz	+/- 4.0 dB
10 GHz - 18GHz	+/- 8.2 dB
18GHz - 26.5GHz	+/- 4.1 dB
26.5GHz - 40GHz	+/- 3.9 dB

Conducted emissions (expanded uncertainty, confidence interval 95%)

30 MHz – 40GHz	+/- 0.38 dB
----------------	-------------

A product is considered to comply with a requirement if the nominal measured value is below the limit line. The product is considered to not be in compliance in case the nominal measured value is above the limit line.

This report must not be reproduced except in full, without written approval of Cisco Systems.

2.2 Date of testing

15-Jan-2020 - 20-Jan-2020

2.3 Report Issue Date

27-Jan-2020

Cisco uses an electronic system to issue, store and control the revision of test reports. This system is called the Engineering Document Control System (EDCS). The actual report issue date is embedded into the original file on EDCS. Any copies of this report, either electronic or paper, that are not on EDCS must be considered uncontrolled.

2.4 Testing facilities

This assessment was performed by:

Testing Laboratory

Cisco Systems, Inc.
125 West Tasman Drive (Building P)
San Jose, CA 95134
USA

Headquarters

Cisco Systems, Inc.,
170 West Tasman Drive
San Jose, CA 95134,
USA

Registration Numbers for Industry Canada

Cisco System Site	Address	Site Identifier
Building P, 10m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-2
Building P, 5m Chamber	125 West Tasman Dr San Jose, CA 95134	Company #: 2461N-1
Building I, 5m Chamber	285 W. Tasman Drive San Jose, California 95134	Company #: 2461M-1
Building 7, 5m Chamber	425 E. Tasman Drive San Jose, California 95134	Company #: 2461N-3

Test Engineers

Chris Blair

2.5 Equipment Assessed (EUT)

C9130AXE-x

2.6 EUT Description

The modes are further defined in the radio Theory of Operation.

The modes included in this report represent the worst case data for all modes.

The following antennas are supported by this product series.

The data included in this report represent the worst case data for the 13dBi antennas.

Table 1 List of External Antennas Supported on C9130AXE

Part Number	Description	Gain
C-ANT9101-	Ceiling Mount Omni Self-Identifying Antenna with Bluetooth, 8-port, with DART connectors.	2 dBi (2.4 GHz) 6 dBi (5 GHz) 3 dBi (BLE)
C-ANT9102-	Pole or Wall Mount Omni Self-Identifying Antenna with Bluetooth, 8-port, with DART connectors.	4 dBi (2.4 GHz) 4 dBi (5 GHz) 4 dBi (BLE)
C-ANT9103-	Pole or Wall mount 75° Directional Self-Identifying Antenna with Bluetooth, 8-port, with DART connectors.	6 dBi (2.4 GHz) 6 dBi (5 GHz) 6 dBi (BLE)
AIR-ANT2513P4M-N-	Patch Antenna, 4-port, with N connectors.  Note Connect to AP using AIR-CAB003-D8-N=.	13 dBi (2.4 GHz) 13 dBi (5 GHz) 13 dBi (BLE)
AIR-ANT2524V4C-R-	Ceiling Mount Omni Antenna, 4-port, with RP-TNC connectors.  Note Connect to AP using AIR-CAB002-D8-R=.	2 dBi (2.4 GHz) 4 dBi (5 GHz)
AIR-ANT2524V4C-RS-	Ceiling Mount Omni Self-Identifying Antenna, 4-port, with RP-TNC connectors.  Note Connect to AP using AIR-CAB002-D8-R=.	2 dBi (2.4 GHz) 4 dBi (5 GHz)
AIR-ANT2544V4M-R-	Wall Mount Omni Antenna, 4-port, with RP-TNC connectors.  Note Connect to AP using AIR-CAB002-D8-R=.	4 dBi (2.4 GHz) 4 dBi (5 GHz)
AIR-ANT2544V4M-RS-	Wall Mount Omni Self-Identifying Antenna, 4-port, with RP-TNC connectors.  Note Connect to AP using AIR-CAB002-D8-R=.	4 dBi (2.4 GHz) 4 dBi (5 GHz)
AIR-ANT2566D4M-R-	60° Patch Antenna, 4-port, with RP-TNC connectors. ¹  Note Connect to AP using AIR-CAB002-D8-R=.	6 dBi (2.4 GHz) 6 dBi (5 GHz)
AIR-ANT2566D4M-RS-	60° Patch Self-Identifying Antenna, 4-port, with RP-TNC connectors.  Note Connect to AP using AIR-CAB002-D8-R=.	6 dBi (2.4 GHz) 6 dBi (5 GHz)

Table 1 *List of External Antennas Supported on C9130AXE*

Part Number	Description	Gain
AIR-ANT2566P4W-R-	Directional Antenna, 4-port, with RP-TNC connectors.  Note <u>Connect to AP using AIR-CAB002-D8-R=.</u>	6 dBi (2.4 GHz) 6 dBi (5 GHz)
AIR-ANT2566P4W-RS-	Directional Self-Identifying Antenna, 4-port, with RP-TNC connectors.  Note <u>Connect to AP using AIR-CAB002-D8-R=.</u>	6 dBi (2.4 GHz) 6 dBi (5 GHz)

1. For the USA, the UNII-1 channels can be used only indoors.

Section 3: Result Summary

3.1 Results Summary Table

Conducted emissions

Basic Standard	Technical Requirements / Details	Result
FCC 15.407	99% & 26 dB Bandwidth: The 99% occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5% of the total mean power of the given emission. There is no limit for 99% OBW. The 26 dB emission is the width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 26 dB relative to the maximum level measured in the fundamental emission.	Pass

FCC 15.407	Output Power: (1) For the band 5.15-5.25 GHz. (i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. ... If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power ... shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm). (ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi. ... If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. ... Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations. (iv) For mobile and portable client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	Pass
------------	--	------

FCC 15.407	Power Spectral Density (i) For an outdoor access point operating in the band 5.15-5.25 GHz...the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm). (ii) For an indoor access point operating in the band 5.15-5.25 GHz... the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. (iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz ...the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the ... maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations. (iv) For mobile and portable client devices in the 5.15-5.25 GHz band...the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used... the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.	Pass
FCC 15.407	Conducted Spurious Emissions / Band-Edge: For transmitters operating in the 5.15-5.25 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of -27dBm/MHz.	Band-Edge: Pass*
FCC 15.407 FCC 15.209 FCC 15.205	Restricted band: Unwanted emissions falling within the restricted bands, as defined in FCC 15.205 (a) must also comply with the radiated emission limits specified in FCC 15.209 (a)	Band-Edge: Pass*

* This report covers Conducted Band-Edge only. CSE calculation is covered in a separate report.

Radiated Emissions (General requirements)

Basic Standard	Technical Requirements / Details	Result
FCC 15.209 FCC 15.205	TX Spurious Emissions: Except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the field strength limits table in this section.	Not covered by this report
FCC 15.207	AC Conducted Emissions: Except when the requirements applicable to a given device state otherwise, for any radio apparatus equipped to operate from the public utility AC power supply, either directly or indirectly (such as with a battery charger), the radio frequency voltage of emissions conducted back onto the AC power lines in the frequency range of 0.15 MHz to 30 MHz shall not exceed the limits shown in the table in these sections. The more stringent limit applies at the frequency range boundaries.	Not covered by this report

Section 4: Sample Details

Note: Each sample was evaluated to ensure that its condition was suitable to be used as a test sample prior to the commencement of testing.

4.1 Sample Details


Sample No.	Equipment Details	Manufacturer	Hardware Rev.	Firmware Rev.	Software Rev.	Serial Number
S01	C9130AXE-x	Cisco	800-106171-01	Radio FW version : QC_IMAGE_VERSION_STRING=WLAN.HK.2.0-01620-QCAHKSWPL_SILICONZ-1 NSS FW version : NSS.HK.J.CS-18-E_custC-sba1-redzone	Cisco AP Software, (ap1g6a), [build-lnx-059:/san2/BUILD/workspace/Nightly-Cheetah-ap1g6a-mfg-c171_throttle] Compiled Wed Nov 13 07:45:59 PST 2019 build-lnx-059/san2/BUILD/workspace/Nightly-Cheetah-ap1g6a-mfg-c171_throttle * (HEAD detached at ff2b0938ed) svn base: ff2b0938eddb0b247d7fdd1754e56eeb27f8c846 commit: ff2b0938eddb0b247d7fdd1754e56eeb27f8c846 tree 96435cbc5cfe09eef8fca23f0a2286f010f8cb14	KWC233200WD

4.2 System Details

System #	Description	Samples
1	EUT for RF conducted measurements	S01

4.3 Mode of Operation Details

Mode#	Description	Comments
1	Continuously Transmitting	Continuously Transmitting ≥ 90% duty cycle

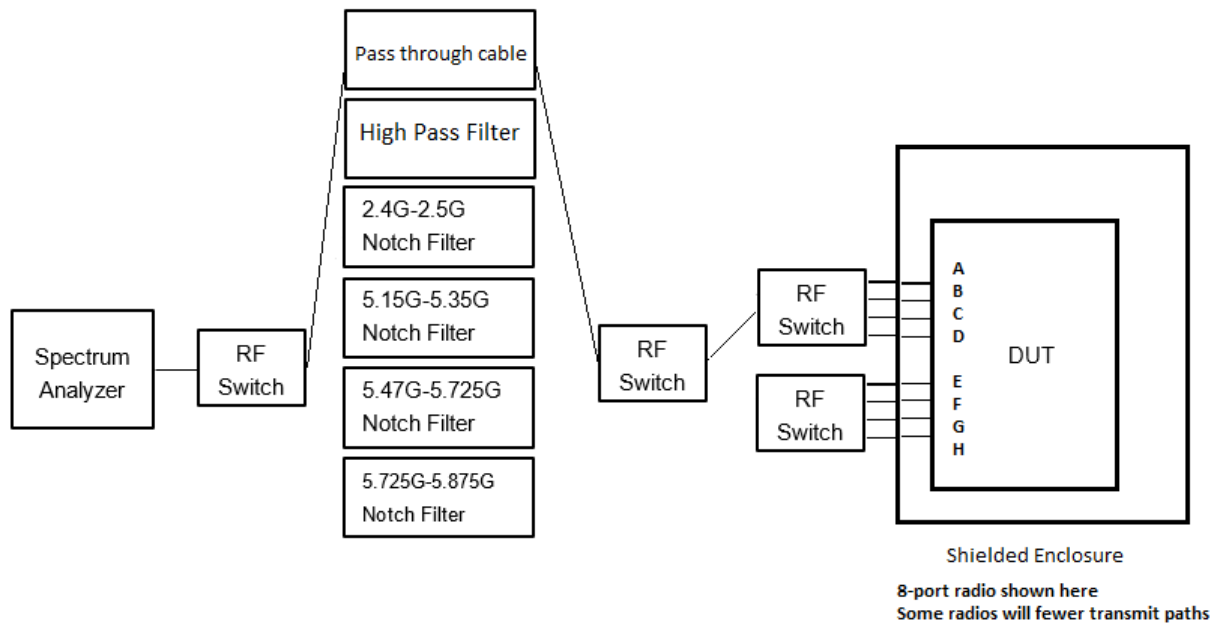Appendix A: RF Conducted Emission Test Results**Conducted Test Setup Diagram**

A.1 Duty Cycle

Duty Cycle Test Requirement

From KDB 789033 D02 General UNII Test Procedures New Rules v02r01

B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

1. All measurements are to be performed with the EUT transmitting at 100 percent duty cycle at its maximum power control level; however, if 100 percent duty cycle cannot be achieved, measurements of duty cycle, x, and maximum-power transmission duration, T, are required for each tested mode of operation.

Duty Cycle Test Method

From KDB 789033 D02 General UNII Test Procedures New Rules v02r01:

B. Duty Cycle (x), Transmission Duration (T), and Maximum Power Control Level

The zero-span mode on a spectrum analyzer or EMI receiver, if the response time and spacing between bins on the sweep are sufficient to permit accurate measurements of the on and off times of the transmitted signal. Set the center frequency of the instrument to the center frequency of the transmission. Set RBW $\geq$ EBW if possible; otherwise, set RBW to the largest available value. Set VBW $\geq$ RBW. Set detector = peak or average. The zero-span measurement method shall not be used unless both RBW and VBW are $> 50/T$, where T is defined in section II.B.1.a), and the number of sweep points across duration T exceeds 100. (For example, if VBW and/or RBW are limited to 3 MHz, then the zero-span method of measuring duty cycle shall not be used if $T \leq 16.7$ microseconds.)

Duty Cycle Test Information

Tested By : Chris Blair	Date of testing: 15-Jan-2020 - 20-Jan-2020

Test Equipment

See Appendix C for list of test equipment


Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☒	☐
	Support		☐	☒

Duty Cycle Data Table

Duty Cycle table and screen captures are shown below for power/psd modes.

Frequency	Mode	Data Rate	Duty Cycle correction (dB)
5180	Non HT20, 6 to 54 Mbps	6	0.3
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	0.2
5190	Non HT40, 6 to 54 Mbps	6	0.3
	HE40, M0 to M9, M0 to M9 1-2ss	m0h1	0.2
5210	Non HT80, 6 to 54 Mbps	6	0.3
	HE80, M0 to M9, M0 to M9 1-2ss	m0h1	0.2
5220	Non HT20, 6 to 54 Mbps	6	0.3
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	0.2
5230	Non HT40, 6 to 54 Mbps	6	0.3
	HE40, M0 to M9, M0 to M9 1-2ss	m0h1	0.2
5240	Non HT20, 6 to 54 Mbps	6	0.3
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	0.2

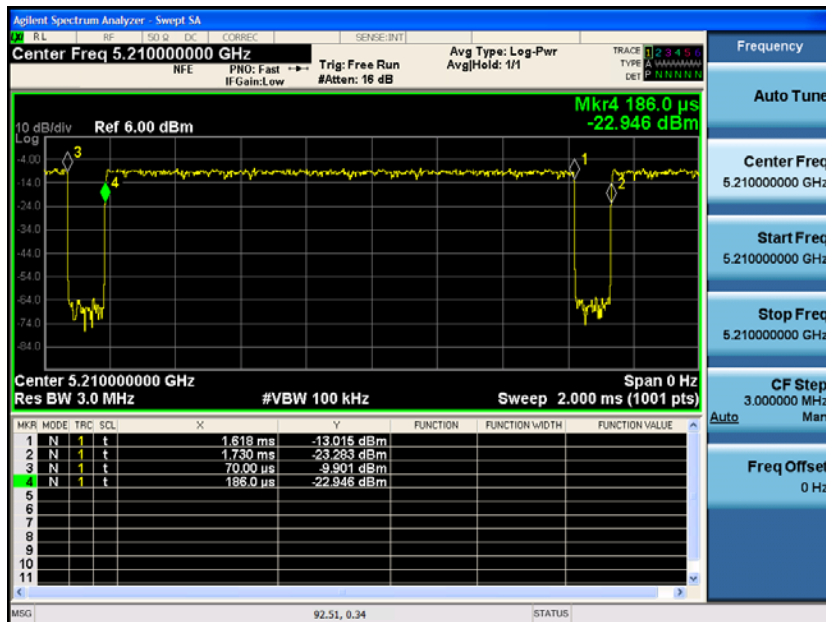Duty Cycle, 5210 MHz, Non HT80, 6 to 54 Mbps

A.2 99% and 26dB Bandwidth

99% and 26dB Bandwidth Test Requirement

For the FCC:

There is no requirement for the value of bandwidth.

Power measurements are made using the 99% Bandwidth as the integration bandwidth.

99% and 26dB Bandwidth Test Procedure

The 99-percent occupied bandwidth is the frequency bandwidth such that, below its lower and above its upper frequency limits, the mean powers are each equal to 0.5 % of the total mean power of the given emission. Measurement of the 99-percent occupied bandwidth is required only as a condition for using the optional band-edge measurement techniques described in section II.G.3.d). Measurements of 99-percent occupied bandwidth may also optionally be used in lieu of the EBW to define the minimum frequency range over which the spectrum is integrated when measuring maximum conducted output power as described in section II.E. However, the EBW must be measured to determine bandwidth dependent limits on maximum conducted output power in accordance with 15.407(a).

Ref. KDB 789033 Section D. 99 Percent Occupied Bandwidth

99% BW

Test Parameters

1. Set center frequency to the nominal EUT channel center frequency.
2. Set span = 1.5 times to 5.0 times the OBW.
3. Set RBW = 1 % to 5 % of the OBW
4. Set VBW $\geq 3 \cdot$ RBW
5. Video averaging is not permitted. Where practical, a sample detection and single sweep mode shall be used. Otherwise, peak detection and max hold mode (until the trace stabilizes) shall be used.
6. Use the 99 % power bandwidth function of the instrument (if available).

Ref KDB 789033 in Section C. Measurement Bandwidth, Section 1

26 BW

Test parameters

X dB BW = -26dB (using the OBW function of the spectrum analyzer)

Emission Bandwidth (EBW)

- a) Set RBW = approximately 1% of the emission bandwidth.
- b) Set the VBW > RBW.
- c) Detector = Peak.
- d) Trace mode = max hold.
- e) Measure the maximum width of the emission that is 26 dB down from the maximum of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☒	☐
	Support		☐	☒

Tested By :

Chris Blair

Date of testing:

15-Jan-2020 - 20-Jan-2020


Test Result : PASS**Test Equipment**

See Appendix C for list of test equipment

99% and 26dB Bandwidth Table

Frequency (MHz)	Mode	Data Rate (Mbps)	26dB BW (MHz)	99% BW (MHz)
5180	Non HT20, 6 to 54 Mbps	6	19.1	16.3
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	21.1	18.9
5190	Non HT40, 6 to 54 Mbps	6	39.1	36.0
	HE40, M0 to M9, M0 to M9 1-2ss	m0h1	40.5	37.7
5210	Non HT80, 6 to 54 Mbps	6	79.7	75.4
	HE80, M0 to M9, M0 to M9 1-2ss	m0h1	80.1	76.9
5220	Non HT20, 6 to 54 Mbps	6	19.5	16.3
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	21.4	18.9
5230	Non HT40, 6 to 54 Mbps	6	39.8	36.0
	HE40, M0 to M9, M0 to M9 1-2ss	m0h1	40.3	37.7
5240	Non HT20, 6 to 54 Mbps	6	19.3	16.3
	HE20, M0 to M9, M0 to M9 1-2ss	m0h1	21.4	18.9

**26dB-99% BW,
5180 MHz, Non HT20, 6 to 54 Mbps**

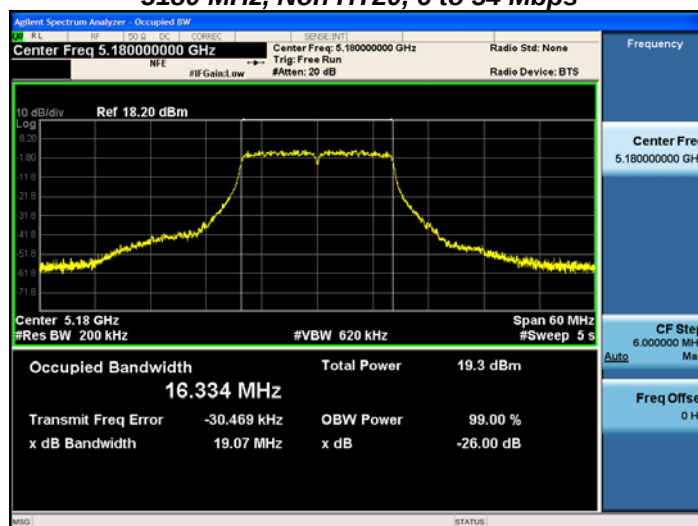

A.3 Maximum Conducted Output Power

Maximum Conducted Output Power Test Requirement

15.407 General technical requirements, (a) Power limits: (1) For the band 5.15-5.25 GHz.

(i) For an outdoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi. The maximum e.i.r.p. at any elevation angle above 30 degrees as measured from the horizon must not exceed 125 mW (21 dBm).

(ii) For an indoor access point operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W provided the maximum antenna gain does not exceed 6 dBi.If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed 1 W. ...Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum conducted output power over the frequency band of operation shall not exceed 250 mW provided the maximum antenna gain does not exceed 6 dBi. In addition, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Maximum Conducted Output Power Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01
ANSI C63.10: 2013

Maximum Conducted Output Power Test Procedure

1. Set the radio in the continuous transmitting mode at full power
2. Compute power by integrating the spectrum across the EBW (or alternatively entire 99% OBW) of the signal using the instrument's band power measurement function. The integration shall be performed using the spectrum analyzer band-power measurement function with band limits set equal to the EBW or the OBW band edges.
3. Capture graphs and record pertinent measurement data.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01
2. Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2

Maximum Conducted Output Power**Test parameters**

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

(i) Measure the duty cycle, x , of the transmitter output signal as described in section II.B.

(ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.

(iii) Set RBW = 1 MHz.

(iv) Set VBW $\geq$ 3 MHz.

(v) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)

(vi) Sweep time = auto.

(vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.

(viii) Do not use sweep triggering. Allow the sweep to “free run”.

(ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.

(x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth)

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. ANSI C63.10 section 14.3.2.2

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☒	☐
	Support		☐	☒

Tested By :

Chris Blair

Date of testing:

15-Jan-2020 - 20-Jan-2020

Test Result : PASS**Test Equipment**

See Appendix C for list of test equipment

Maximum Output Power

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Max Power (dBm)	Tx 2 Max Power (dBm)	Tx 3 Max Power (dBm)	Tx 4 Max Power (dBm)	Tx 5 Max Power (dBm)	Tx 6 Max Power (dBm)	Tx 7 Max Power (dBm)	Tx 8 Max Power (dBm)	Duty Cycle Correction (dB)	Total Tx Channel Power (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	13	11.0								0.3	11.3	23.0	11.68
	Non HT20, 6 to 54 Mbps	2	13	9.9	12.8							0.3	14.9	23.0	8.08
	Non HT20, 6 to 54 Mbps	3	13	7.8	10.9	10.6						0.3	15.1	23.0	7.93
	Non HT20, 6 to 54 Mbps	4	13	4.8	7.8	7.4	7.6					0.3	13.4	23.0	9.60
	Non HT20, 6 to 54 Mbps	6	13	9.1	11.8	11.6	7.5	12.5	12.4			0.3	19.3	23.0	3.73
	Non HT20, 6 to 54 Mbps	8	13	6.9	10.0	9.4	9.7	5.4	10.5	10.3	10.1	0.3	18.7	23.0	4.31
	Non HT20 Beam Forming, 6 to 54 Mbps	2	16	9.9	12.8							0.3	14.9	20.0	5.08
	Non HT20 Beam Forming, 6 to 54 Mbps	3	18	6.9	10.0	9.4						0.3	14.1	18.0	3.95
	Non HT20 Beam Forming, 6 to 54 Mbps	4	19	4.8	7.8	7.4	7.6					0.3	13.4	17.0	3.60
	Non HT20 Beam Forming, 6 to 54 Mbps	6	18	4.8	7.8	7.4	3.5	8.4	8.1			0.3	15.1	18.0	2.88
	Non HT20 Beam Forming, 6 to 54 Mbps	8	19	0.9	4.0	3.7	3.7	-0.5	4.3	4.3	4.1	0.3	12.7	17.0	4.30
	HE20, M0 to M9 1ss	1	13	10.4								0.2	10.6	23.0	12.43
	HE20, M0 to M9 1ss	2	13	10.4	13.2							0.2	15.2	23.0	7.80
	HE20, M0 to M9 2ss	2	13	10.4	13.2							0.2	15.2	23.0	7.80
	HE20, M0 to M9 1ss	3	13	8.2	11.1	10.7						0.2	15.1	23.0	7.88
	HE20, M0 to M9 2ss	3	13	10.4	13.2	13.1						0.2	17.4	23.0	5.64
	HE20, M0 to M9 3ss	3	13	10.4	13.2	13.1						0.2	17.4	23.0	5.64
	HE20, M0 to M9 1ss	4	13	6.3	9.1	8.7	8.7					0.2	14.5	23.0	8.48
	HE20, M0 to M9 2ss	4	13	9.5	12.0	11.8	11.9					0.2	17.6	23.0	5.39
	HE20, M0 to M9 3ss	4	13	9.5	12.0	11.8	11.9					0.2	17.6	23.0	5.39
	HE20, M0 to M9 4ss	4	13	9.5	12.0	11.8	11.9					0.2	17.6	23.0	5.39
	HE20, M0 to M9 1ss	6	13	8.2	11.1	10.7	6.9	11.7	11.8			0.2	18.4	23.0	4.63
	HE20, M0 to M9 2ss	6	13	8.2	11.1	10.7	6.9	11.7	11.8			0.2	18.4	23.0	4.63
	HE20, M0 to M9 3ss	6	13	8.2	11.1	10.7	6.9	11.7	11.8			0.2	18.4	23.0	4.63
	HE20, M0 to M9 4ss	6	13	8.2	11.1	10.7	6.9	11.7	11.8			0.2	18.4	23.0	4.63
	HE20, M0 to M9 5ss	6	13	8.2	11.1	10.7	6.9	11.7	11.8			0.2	18.4	23.0	4.63
	HE20, M0 to M9 6ss	6	13	8.2	11.1	10.7	6.9	11.7	11.8			0.2	18.4	23.0	4.63
	HE20, M0 to M9 1ss	8	13	7.1	10.1	9.7	10.0	5.7	10.7	10.5	10.3	0.2	18.8	23.0	4.25
	HE20, M0 to M9 2ss	8	13	7.1	10.1	9.7	10.0	5.7	10.7	10.5	10.3	0.2	18.8	23.0	4.25
	HE20, M0 to M9 3ss	8	13	7.1	10.1	9.7	10.0	5.7	10.7	10.5	10.3	0.2	18.8	23.0	4.25
	HE20, M0 to M9 4ss	8	13	7.1	10.1	9.7	10.0	5.7	10.7	10.5	10.3	0.2	18.8	23.0	4.25

HE20, M0 to M9 5ss	8	13	7.1	10.1	9.7	10.0	5.7	10.7	10.5	10.3	0.2	18.8	23.0	4.25
HE20, M0 to M9 6ss	8	13	7.1	10.1	9.7	10.0	5.7	10.7	10.5	10.3	0.2	18.8	23.0	4.25
HE20, M0 to M9 7ss	8	13	7.1	10.1	9.7	10.0	5.7	10.7	10.5	10.3	0.2	18.8	23.0	4.25
HE20, M0 to M9 8ss	8	13	7.1	10.1	9.7	10.0	5.7	10.7	10.5	10.3	0.2	18.8	23.0	4.25
HE20 Beam Forming, M0 to M9 1ss	2	16	9.5	12.0							0.2	14.1	20.0	5.89
HE20 Beam Forming, M0 to M9 2ss	2	13	10.4	13.2							0.2	15.2	23.0	7.80
HE20 Beam Forming, M0 to M9 1ss	3	18	7.1	10.1	9.7						0.2	14.1	18.0	3.90
HE20 Beam Forming, M0 to M9 2ss	3	15	9.5	12.0	11.8						0.2	16.2	21.0	4.82
HE20 Beam Forming, M0 to M9 3ss	3	13	10.4	13.2	13.1						0.2	17.4	23.0	5.64
HE20 Beam Forming, M0 to M9 1ss	4	19	6.3	9.1	8.7	8.7					0.2	14.5	17.0	2.48
HE20 Beam Forming, M0 to M9 2ss	4	16	7.1	10.1	9.7	10.0					0.2	15.6	20.0	4.43
HE20 Beam Forming, M0 to M9 3ss	4	14	9.5	12.0	11.8	11.9					0.2	17.6	22.0	4.39
HE20 Beam Forming, M0 to M9 4ss	4	13	9.5	12.0	11.8	11.9					0.2	17.6	23.0	5.39
HE20 Beam Forming, M0 to M9 1ss	6	18	5.3	8.0	7.8	3.9	8.8	8.4			0.2	15.3	18.0	2.68
HE20 Beam Forming, M0 to M9 2ss	6	15	7.1	10.1	9.7	5.7	10.7	10.5			0.2	17.3	21.0	3.72
HE20 Beam Forming, M0 to M9 3ss	6	13	8.2	11.1	10.7	6.9	11.7	11.8			0.2	18.4	23.0	4.63
HE20 Beam Forming, M0 to M9 4ss	6	13	8.2	11.1	10.7	6.9	11.7	11.8			0.2	18.4	23.0	4.63
HE20 Beam Forming, M0 to M9 5ss	6	13	8.2	11.1	10.7	6.9	11.7	11.8			0.2	18.4	23.0	4.63
HE20 Beam Forming, M0 to M9 6ss	6	13	8.2	11.1	10.7	6.9	11.7	11.8			0.2	18.4	23.0	4.63
HE20 Beam Forming, M0 to M9 1ss	8	19	1.2	4.3	4.1	4.2	-0.2	4.7	4.6	4.3	0.2	12.9	17.0	4.11
HE20 Beam Forming, M0 to M9 2ss	8	16	5.3	8.0	7.8	7.9	3.9	8.8	8.4	8.3	0.2	16.8	20.0	3.24
HE20 Beam Forming, M0 to M9 3ss	8	14	6.3	9.1	8.7	8.7	4.6	9.6	9.4	9.3	0.2	17.7	22.0	4.31
HE20 Beam Forming, M0 to M9 4ss	8	13	7.1	10.1	9.7	10.0	5.7	10.7	10.5	10.3	0.2	18.8	23.0	4.25
HE20 Beam Forming, M0 to M9 5ss	8	13	7.1	10.1	9.7	10.0	5.7	10.7	10.5	10.3	0.2	18.8	23.0	4.25
HE20 Beam Forming, M0 to M9 6ss	8	13	7.1	10.1	9.7	10.0	5.7	10.7	10.5	10.3	0.2	18.8	23.0	4.25
HE20 Beam Forming, M0 to M9 7ss	8	13	7.1	10.1	9.7	10.0	5.7	10.7	10.5	10.3	0.2	18.8	23.0	4.25
HE20 Beam Forming, M0 to M9 8ss	8	13	7.1	10.1	9.7	10.0	5.7	10.7	10.5	10.3	0.2	18.8	23.0	4.25
HE20 STBC, M0 to M9 2ss	2	13	10.4	13.2							0.2	15.2	23.0	7.80
HE20 STBC, M0 to M9 2ss	3	13	10.4	13.2	13.1						0.2	17.4	23.0	5.64
HE20 STBC, M0 to M9 2ss	4	13	9.5	12.0	11.8	11.9					0.2	17.6	23.0	5.39
HE20 STBC, M0 to M9 2ss	6	13	8.2	11.1	10.7	6.9	11.7	11.8			0.2	18.4	23.0	4.63
HE20 STBC, M0 to M9 2ss	8	13	7.1	10.1	9.7	10.0	5.7	10.7	10.5	10.3	0.2	18.8	23.0	4.25

Non HT40, 6 to 54 Mbps	1	13	7.5								0.3	7.8	23.0	15.18
Non HT40, 6 to 54 Mbps	2	13	5.6	8.6							0.3	10.7	23.0	12.31
Non HT40, 6 to 54 Mbps	3	13	5.6	8.6	8.2						0.3	12.7	23.0	10.25
Non HT40, 6 to 54 Mbps	4	13	5.6	8.6	8.2	8.5					0.3	14.2	23.0	8.77
Non HT40, 6 to 54 Mbps	6	13	4.8	7.7	7.4	3.3	8.3	8.0			0.3	15.0	23.0	7.96
Non HT40, 6 to 54 Mbps	8	13	3.5	6.7	6.4	6.6	2.3	7.3	7.2	7.1	0.3	15.5	23.0	7.45
HE40, M0 to M9 1ss	1	13	7.1								0.2	7.3	23.0	15.71
HE40, M0 to M9 1ss	2	13	5.3	8.2							0.2	10.2	23.0	12.81
HE40, M0 to M9 2ss	2	13	5.3	8.2							0.2	10.2	23.0	12.81
HE40, M0 to M9 1ss	3	13	5.3	8.2	8.0						0.2	12.3	23.0	10.69

HE40, M0 to M9 2ss	3	13	5.3	8.2	8.0						0.2	12.3	23.0	10.69
HE40, M0 to M9 3ss	3	13	5.3	8.2	8.0						0.2	12.3	23.0	10.69
HE40, M0 to M9 1ss	4	13	5.3	8.2	8.0	8.0					0.2	13.7	23.0	9.27
HE40, M0 to M9 2ss	4	13	5.3	8.2	8.0	8.0					0.2	13.7	23.0	9.27
HE40, M0 to M9 3ss	4	13	5.3	8.2	8.0	8.0					0.2	13.7	23.0	9.27
HE40, M0 to M9 4ss	4	13	5.3	8.2	8.0	8.0					0.2	13.7	23.0	9.27
HE40, M0 to M9 1ss	6	13	4.1	7.2	6.7	3.0	7.7	7.7			0.2	14.4	23.0	8.62
HE40, M0 to M9 2ss	6	13	4.1	7.2	6.7	3.0	7.7	7.7			0.2	14.4	23.0	8.62
HE40, M0 to M9 3ss	6	13	4.1	7.2	6.7	3.0	7.7	7.7			0.2	14.4	23.0	8.62
HE40, M0 to M9 4ss	6	13	4.1	7.2	6.7	3.0	7.7	7.7			0.2	14.4	23.0	8.62
HE40, M0 to M9 5ss	6	13	4.1	7.2	6.7	3.0	7.7	7.7			0.2	14.4	23.0	8.62
HE40, M0 to M9 6ss	6	13	4.1	7.2	6.7	3.0	7.7	7.7			0.2	14.4	23.0	8.62
HE40, M0 to M9 1ss	8	13	2.8	6.2	5.7	6.1	2.3	6.8	6.6	6.3	0.2	14.8	23.0	8.16
HE40, M0 to M9 2ss	8	13	2.8	6.2	5.7	6.1	2.3	6.8	6.6	6.3	0.2	14.8	23.0	8.16
HE40, M0 to M9 3ss	8	13	2.8	6.2	5.7	6.1	2.3	6.8	6.6	6.3	0.2	14.8	23.0	8.16
HE40, M0 to M9 4ss	8	13	2.8	6.2	5.7	6.1	2.3	6.8	6.6	6.3	0.2	14.8	23.0	8.16
HE40, M0 to M9 5ss	8	13	2.8	6.2	5.7	6.1	2.3	6.8	6.6	6.3	0.2	14.8	23.0	8.16
HE40, M0 to M9 6ss	8	13	2.8	6.2	5.7	6.1	2.3	6.8	6.6	6.3	0.2	14.8	23.0	8.16
HE40, M0 to M9 7ss	8	13	2.8	6.2	5.7	6.1	2.3	6.8	6.6	6.3	0.2	14.8	23.0	8.16
HE40, M0 to M9 8ss	8	13	2.8	6.2	5.7	6.1	2.3	6.8	6.6	6.3	0.2	14.8	23.0	8.16
HE40 Beam Forming, M0 to M9 1ss	2	16	4.1	7.2							0.2	9.1	20.0	10.88
HE40 Beam Forming, M0 to M9 2ss	2	13	5.3	8.2							0.2	10.2	23.0	12.81
HE40 Beam Forming, M0 to M9 1ss	3	18	2.2	5.3	5.1						0.2	9.4	18.0	8.63
HE40 Beam Forming, M0 to M9 2ss	3	15	4.1	7.2	6.7						0.2	11.2	21.0	9.84
HE40 Beam Forming, M0 to M9 3ss	3	13	5.3	8.2	8.0						0.2	12.3	23.0	10.69
HE40 Beam Forming, M0 to M9 1ss	4	19	1.3	4.3	4.0	4.2					0.2	9.8	17.0	7.18
HE40 Beam Forming, M0 to M9 2ss	4	16	2.8	6.2	5.7	6.1					0.2	11.6	20.0	8.39
HE40 Beam Forming, M0 to M9 3ss	4	14	4.1	7.2	6.7	7.0					0.2	12.6	22.0	9.38
HE40 Beam Forming, M0 to M9 4ss	4	13	5.3	8.2	8.0	8.0					0.2	13.7	23.0	9.27
HE40 Beam Forming, M0 to M9 1ss	6	18	1.3	4.3	4.0	0.0	5.1	4.9			0.2	11.6	18.0	6.39
HE40 Beam Forming, M0 to M9 2ss	6	15	2.2	5.3	5.1	1.1	5.4	5.9			0.2	12.5	21.0	8.52
HE40 Beam Forming, M0 to M9 3ss	6	13	4.1	7.2	6.7	3.0	7.7	7.7			0.2	14.4	23.0	8.62
HE40 Beam Forming, M0 to M9 4ss	6	13	4.1	7.2	6.7	3.0	7.7	7.7			0.2	14.4	23.0	8.62
HE40 Beam Forming, M0 to M9 5ss	6	13	4.1	7.2	6.7	3.0	7.7	7.7			0.2	14.4	23.0	8.62
HE40 Beam Forming, M0 to M9 6ss	6	13	4.1	7.2	6.7	3.0	7.7	7.7			0.2	14.4	23.0	8.62
HE40 Beam Forming, M0 to M9 1ss	8	19	-2.7	0.8	0.2	0.2	-3.9	0.6	0.6	0.9	0.2	9.1	17.0	7.91
HE40 Beam Forming, M0 to M9 2ss	8	16	1.3	4.3	4.0	4.2	0.0	5.1	4.9	4.4	0.2	13.0	20.0	6.96
HE40 Beam Forming, M0 to M9 3ss	8	14	2.2	5.3	5.1	5.2	1.1	5.4	5.9	5.3	0.2	13.9	22.0	8.08
HE40 Beam Forming, M0 to M9 4ss	8	13	2.8	6.2	5.7	6.1	2.3	6.8	6.6	6.3	0.2	14.8	23.0	8.16
HE40 Beam Forming, M0 to M9 5ss	8	13	2.8	6.2	5.7	6.1	2.3	6.8	6.6	6.3	0.2	14.8	23.0	8.16
HE40 Beam Forming, M0 to M9 6ss	8	13	2.8	6.2	5.7	6.1	2.3	6.8	6.6	6.3	0.2	14.8	23.0	8.16
HE40 Beam Forming, M0 to M9 7ss	8	13	2.8	6.2	5.7	6.1	2.3	6.8	6.6	6.3	0.2	14.8	23.0	8.16
HE40 Beam Forming, M0 to M9 8ss	8	13	2.8	6.2	5.7	6.1	2.3	6.8	6.6	6.3	0.2	14.8	23.0	8.16

	HE40 STBC, M0 to M9 2ss	2	13	5.3	8.2							0.2	10.2	23.0	12.81
	HE40 STBC, M0 to M9 2ss	3	13	5.3	8.2	8.0						0.2	12.3	23.0	10.69
	HE40 STBC, M0 to M9 2ss	4	13	5.3	8.2	8.0	8.0					0.2	13.7	23.0	9.27
	HE40 STBC, M0 to M9 2ss	6	13	4.1	7.2	6.7	3.0	7.7	7.7			0.2	14.4	23.0	8.62
	HE40 STBC, M0 to M9 2ss	8	13	2.8	6.2	5.7	6.1	2.3	6.8	6.6	6.3	0.2	14.8	23.0	8.16
5210	Non HT80, 6 to 54 Mbps	1	13	5.3								0.3	5.6	23.0	17.36
	Non HT80, 6 to 54 Mbps	2	13	3.5	6.5							0.3	8.6	23.0	14.40
	Non HT80, 6 to 54 Mbps	3	13	3.5	6.5	6.6						0.3	10.9	23.0	12.14
	Non HT80, 6 to 54 Mbps	4	13	1.5	4.6	4.5	4.8					0.3	10.4	23.0	12.60
	Non HT80, 6 to 54 Mbps	6	13	1.5	4.6	4.5	0.3	5.2	4.8			0.3	12.0	23.0	11.04
	Non HT80, 6 to 54 Mbps	8	13	0.6	3.5	3.4	3.6	-0.9	4.5	4.2	3.8	0.3	12.5	23.0	10.48
	HE80, M0 to M9 1ss	1	13	5.0								0.2	5.2	23.0	17.75
	HE80, M0 to M9 1ss	2	13	3.8	7.1							0.2	9.0	23.0	13.99
	HE80, M0 to M9 2ss	2	13	3.8	7.1							0.2	9.0	23.0	13.99
	HE80, M0 to M9 1ss	3	13	2.7	6.1	6.0						0.2	10.2	23.0	12.79
	HE80, M0 to M9 2ss	3	13	2.7	6.1	6.0						0.2	10.2	23.0	12.79
	HE80, M0 to M9 3ss	3	13	2.7	6.1	6.0						0.2	10.2	23.0	12.79
	HE80, M0 to M9 1ss	4	13	2.1	5.0	5.1	5.3					0.2	10.8	23.0	12.18
	HE80, M0 to M9 2ss	4	13	2.1	5.0	5.1	5.3					0.2	10.8	23.0	12.18
	HE80, M0 to M9 3ss	4	13	2.1	5.0	5.1	5.3					0.2	10.8	23.0	12.18
	HE80, M0 to M9 4ss	4	13	2.1	5.0	5.1	5.3					0.2	10.8	23.0	12.18
	HE80, M0 to M9 1ss	6	13	0.8	4.0	4.0	-0.2	5.1	4.7			0.2	11.5	23.0	11.49
	HE80, M0 to M9 2ss	6	13	0.8	4.0	4.0	-0.2	5.1	4.7			0.2	11.5	23.0	11.49
	HE80, M0 to M9 3ss	6	13	0.8	4.0	4.0	-0.2	5.1	4.7			0.2	11.5	23.0	11.49
	HE80, M0 to M9 4ss	6	13	0.8	4.0	4.0	-0.2	5.1	4.7			0.2	11.5	23.0	11.49
	HE80, M0 to M9 5ss	6	13	0.8	4.0	4.0	-0.2	5.1	4.7			0.2	11.5	23.0	11.49
	HE80, M0 to M9 6ss	6	13	0.8	4.0	4.0	-0.2	5.1	4.7			0.2	11.5	23.0	11.49
	HE80, M0 to M9 1ss	8	13	0.8	4.0	4.0	4.2	-0.2	5.1	4.7	4.3	0.2	13.0	23.0	10.04
	HE80, M0 to M9 2ss	8	13	0.8	4.0	4.0	4.2	-0.2	5.1	4.7	4.3	0.2	13.0	23.0	10.04
	HE80, M0 to M9 3ss	8	13	0.8	4.0	4.0	4.2	-0.2	5.1	4.7	4.3	0.2	13.0	23.0	10.04
	HE80, M0 to M9 4ss	8	13	0.8	4.0	4.0	4.2	-0.2	5.1	4.7	4.3	0.2	13.0	23.0	10.04
	HE80, M0 to M9 5ss	8	13	0.8	4.0	4.0	4.2	-0.2	5.1	4.7	4.3	0.2	13.0	23.0	10.04
	HE80, M0 to M9 6ss	8	13	0.8	4.0	4.0	4.2	-0.2	5.1	4.7	4.3	0.2	13.0	23.0	10.04
	HE80, M0 to M9 7ss	8	13	0.8	4.0	4.0	4.2	-0.2	5.1	4.7	4.3	0.2	13.0	23.0	10.04
	HE80, M0 to M9 8ss	8	13	0.8	4.0	4.0	4.2	-0.2	5.1	4.7	4.3	0.2	13.0	23.0	10.04
	HE80 Beam Forming, M0 to M9 1ss	2	16	2.1	5.0							0.2	7.0	20.0	12.95
	HE80 Beam Forming, M0 to M9 2ss	2	13	3.8	7.1							0.2	9.0	23.0	13.99
	HE80 Beam Forming, M0 to M9 1ss	3	18	-0.2	3.2	3.1						0.2	7.3	18.0	10.69
	HE80 Beam Forming, M0 to M9 2ss	3	15	2.1	5.0	5.1						0.2	9.3	21.0	11.71
	HE80 Beam Forming, M0 to M9 3ss	3	13	2.7	6.1	6.0						0.2	10.2	23.0	12.79
	HE80 Beam Forming, M0 to M9 1ss	4	19	-0.2	3.2	3.1	2.8					0.2	8.7	17.0	8.31
	HE80 Beam Forming, M0 to M9 2ss	4	16	0.8	4.0	4.0	4.2					0.2	9.7	20.0	10.28

HE80 Beam Forming, M0 to M9 3ss	4	14	2.1	5.0	5.1	5.3					0.2	10.8	22.0	11.18
HE80 Beam Forming, M0 to M9 4ss	4	13	2.1	5.0	5.1	5.3					0.2	10.8	23.0	12.18
HE80 Beam Forming, M0 to M9 1ss	6	18	-1.9	1.3	1.0	-3.2	2.0	1.7			0.2	8.6	18.0	9.43
HE80 Beam Forming, M0 to M9 2ss	6	15	-0.2	3.2	3.1	-1.2	4.1	3.8			0.2	10.6	21.0	10.41
HE80 Beam Forming, M0 to M9 3ss	6	13	0.8	4.0	4.0	-0.2	5.1	4.7			0.2	11.5	23.0	11.49
HE80 Beam Forming, M0 to M9 4ss	6	13	0.8	4.0	4.0	-0.2	5.1	4.7			0.2	11.5	23.0	11.49
HE80 Beam Forming, M0 to M9 5ss	6	13	0.8	4.0	4.0	-0.2	5.1	4.7			0.2	11.5	23.0	11.49
HE80 Beam Forming, M0 to M9 6ss	6	13	0.8	4.0	4.0	-0.2	5.1	4.7			0.2	11.5	23.0	11.49
HE80 Beam Forming, M0 to M9 1ss	8	19	-4.2	-1.0	-1.4	-1.1	-5.4	-0.2	-0.8	-0.3	0.2	7.8	17.0	9.21
HE80 Beam Forming, M0 to M9 2ss	8	16	-1.0	2.1	2.3	2.3	-2.3	3.1	2.8	2.5	0.2	11.1	20.0	8.92
HE80 Beam Forming, M0 to M9 3ss	8	14	-0.2	3.2	3.1	2.8	-1.2	4.1	3.8	3.4	0.2	12.0	22.0	10.02
HE80 Beam Forming, M0 to M9 4ss	8	13	0.8	4.0	4.0	4.2	-0.2	5.1	4.7	4.3	0.2	13.0	23.0	10.04
HE80 Beam Forming, M0 to M9 5ss	8	13	0.8	4.0	4.0	4.2	-0.2	5.1	4.7	4.3	0.2	13.0	23.0	10.04
HE80 Beam Forming, M0 to M9 6ss	8	13	0.8	4.0	4.0	4.2	-0.2	5.1	4.7	4.3	0.2	13.0	23.0	10.04
HE80 Beam Forming, M0 to M9 7ss	8	13	0.8	4.0	4.0	4.2	-0.2	5.1	4.7	4.3	0.2	13.0	23.0	10.04
HE80 Beam Forming, M0 to M9 8ss	8	13	0.8	4.0	4.0	4.2	-0.2	5.1	4.7	4.3	0.2	13.0	23.0	10.04
HE80 STBC, M0 to M9 1ss	2	13	3.8	7.1							0.2	9.0	23.0	13.99
HE80 STBC, M0 to M9 1ss	3	13	2.7	6.1	6.0						0.2	10.2	23.0	12.79
HE80 STBC, M0 to M9 1ss	4	13	2.1	5.0	5.1	5.3					0.2	10.8	23.0	12.18
HE80 STBC, M0 to M9 1ss	6	13	0.8	4.0	4.0	-0.2	5.1	4.7			0.2	11.5	23.0	11.49
HE80 STBC, M0 to M9 1ss	8	13	0.8	4.0	4.0	4.2	-0.2	5.1	4.7	4.3	0.2	13.0	23.0	10.04

5220

Non HT20, 6 to 54 Mbps	1	13	11.5								0.3	11.8	23.0	11.18
Non HT20, 6 to 54 Mbps	2	13	11.5	14.7							0.3	16.7	23.0	6.28
Non HT20, 6 to 54 Mbps	3	13	7.4	10.7	10.6						0.3	14.9	23.0	8.09
Non HT20, 6 to 54 Mbps	4	13	5.4	8.7	8.6	8.6					0.3	14.4	23.0	8.63
Non HT20, 6 to 54 Mbps	6	13	9.6	12.7	12.8	8.5	13.5	13.4			0.3	20.2	23.0	2.76
Non HT20, 6 to 54 Mbps	8	13	7.4	10.7	10.6	10.7	6.4	11.5	11.5	10.9	0.3	19.6	23.0	3.36
Non HT20 Beam Forming, 6 to 54 Mbps	2	16	11.5	14.7							0.3	16.7	20.0	3.28
Non HT20 Beam Forming, 6 to 54 Mbps	3	18	7.4	10.7	10.6						0.3	14.9	18.0	3.09
Non HT20 Beam Forming, 6 to 54 Mbps	4	19	5.4	8.7	8.6	8.6					0.3	14.4	17.0	2.63
Non HT20 Beam Forming, 6 to 54 Mbps	6	18	4.5	7.7	7.7	3.4	8.6	8.7			0.3	15.3	18.0	2.70
Non HT20 Beam Forming, 6 to 54 Mbps	8	19	1.6	4.7	4.8	5.0	0.5	5.4	5.1	5.2	0.3	13.7	17.0	3.31
HE20, M0 to M9 1ss	1	13	12.0								0.2	12.2	23.0	10.83
HE20, M0 to M9 1ss	2	13	12.0	14.9							0.2	16.9	23.0	6.13
HE20, M0 to M9 2ss	2	13	12.0	14.9							0.2	16.9	23.0	6.13
HE20, M0 to M9 1ss	3	13	7.8	10.8	10.8						0.2	15.0	23.0	8.05
HE20, M0 to M9 2ss	3	13	10.9	14.1	14.1						0.2	18.2	23.0	4.79
HE20, M0 to M9 3ss	3	13	12.0	14.9	15.2						0.2	19.2	23.0	3.80
HE20, M0 to M9 1ss	4	13	5.7	8.9	8.7	8.8					0.2	14.4	23.0	8.60
HE20, M0 to M9 2ss	4	13	8.7	11.9	11.8	11.8					0.2	17.4	23.0	5.57
HE20, M0 to M9 3ss	4	13	10.9	14.1	14.1	14.1					0.2	19.7	23.0	3.31
HE20, M0 to M9 4ss	4	13	12.0	14.9	15.2	14.9					0.2	20.6	23.0	2.38

HE20, M0 to M9 1ss	6	13	9.8	12.9	13.0	8.7	13.7	13.6			0.2	20.3	23.0	2.71
HE20, M0 to M9 2ss	6	13	9.8	12.9	13.0	8.7	13.7	13.6			0.2	20.3	23.0	2.71
HE20, M0 to M9 3ss	6	13	9.8	12.9	13.0	8.7	13.7	13.6			0.2	20.3	23.0	2.71
HE20, M0 to M9 4ss	6	13	9.8	12.9	13.0	8.7	13.7	13.6			0.2	20.3	23.0	2.71
HE20, M0 to M9 5ss	6	13	9.8	12.9	13.0	8.7	13.7	13.6			0.2	20.3	23.0	2.71
HE20, M0 to M9 6ss	6	13	9.8	12.9	13.0	8.7	13.7	13.6			0.2	20.3	23.0	2.71
HE20, M0 to M9 1ss	8	13	8.7	11.9	11.8	11.8	7.7	12.6	12.6	12.1	0.2	20.7	23.0	2.35
HE20, M0 to M9 2ss	8	13	8.7	11.9	11.8	11.8	7.7	12.6	12.6	12.1	0.2	20.7	23.0	2.35
HE20, M0 to M9 3ss	8	13	8.7	11.9	11.8	11.8	7.7	12.6	12.6	12.1	0.2	20.7	23.0	2.35
HE20, M0 to M9 4ss	8	13	8.7	11.9	11.8	11.8	7.7	12.6	12.6	12.1	0.2	20.7	23.0	2.35
HE20, M0 to M9 5ss	8	13	8.7	11.9	11.8	11.8	7.7	12.6	12.6	12.1	0.2	20.7	23.0	2.35
HE20, M0 to M9 6ss	8	13	8.7	11.9	11.8	11.8	7.7	12.6	12.6	12.1	0.2	20.7	23.0	2.35
HE20, M0 to M9 7ss	8	13	8.7	11.9	11.8	11.8	7.7	12.6	12.6	12.1	0.2	20.7	23.0	2.35
HE20, M0 to M9 8ss	8	13	8.7	11.9	11.8	11.8	7.7	12.6	12.6	12.1	0.2	20.7	23.0	2.35
HE20 Beam Forming, M0 to M9 1ss	2	16	12.0	14.9							0.2	16.9	20.0	3.13
HE20 Beam Forming, M0 to M9 2ss	2	13	12.0	14.9							0.2	16.9	23.0	6.13
HE20 Beam Forming, M0 to M9 1ss	3	18	7.8	10.8	10.8						0.2	15.0	18.0	3.05
HE20 Beam Forming, M0 to M9 2ss	3	15	10.9	14.1	14.1						0.2	18.2	21.0	2.79
HE20 Beam Forming, M0 to M9 3ss	3	13	12.0	14.9	15.2						0.2	19.2	23.0	3.80
HE20 Beam Forming, M0 to M9 1ss	4	19	5.7	8.9	8.7	8.8					0.2	14.4	17.0	2.60
HE20 Beam Forming, M0 to M9 2ss	4	16	8.7	11.9	11.8	11.8					0.2	17.4	20.0	2.57
HE20 Beam Forming, M0 to M9 3ss	4	14	10.9	14.1	14.1	14.1					0.2	19.7	22.0	2.31
HE20 Beam Forming, M0 to M9 4ss	4	13	12.0	14.9	15.2	14.9					0.2	20.6	23.0	2.38
HE20 Beam Forming, M0 to M9 1ss	6	18	4.6	7.9	8.1	3.7	9.0	8.9			0.2	15.4	18.0	2.57
HE20 Beam Forming, M0 to M9 2ss	6	15	7.8	10.8	10.8	6.6	11.9	11.6			0.2	18.3	21.0	2.73
HE20 Beam Forming, M0 to M9 3ss	6	13	9.8	12.9	13.0	8.7	13.7	13.6			0.2	20.3	23.0	2.71
HE20 Beam Forming, M0 to M9 4ss	6	13	9.8	12.9	13.0	8.7	13.7	13.6			0.2	20.3	23.0	2.71
HE20 Beam Forming, M0 to M9 5ss	6	13	9.8	12.9	13.0	8.7	13.7	13.6			0.2	20.3	23.0	2.71
HE20 Beam Forming, M0 to M9 6ss	6	13	9.8	12.9	13.0	8.7	13.7	13.6			0.2	20.3	23.0	2.71
HE20 Beam Forming, M0 to M9 1ss	8	19	2.8	5.9	6.0	5.7	1.4	6.8	6.6	6.4	0.2	14.7	17.0	2.26
HE20 Beam Forming, M0 to M9 2ss	8	16	5.7	8.9	8.7	8.8	4.7	9.8	9.8	9.1	0.2	17.7	20.0	2.30
HE20 Beam Forming, M0 to M9 3ss	8	14	7.8	10.8	10.8	11.1	6.6	11.9	11.6	11.2	0.2	19.7	22.0	2.25
HE20 Beam Forming, M0 to M9 4ss	8	13	8.7	11.9	11.8	11.8	7.7	12.6	12.6	12.1	0.2	20.7	23.0	2.35
HE20 Beam Forming, M0 to M9 5ss	8	13	8.7	11.9	11.8	11.8	7.7	12.6	12.6	12.1	0.2	20.7	23.0	2.35
HE20 Beam Forming, M0 to M9 6ss	8	13	8.7	11.9	11.8	11.8	7.7	12.6	12.6	12.1	0.2	20.7	23.0	2.35
HE20 Beam Forming, M0 to M9 7ss	8	13	8.7	11.9	11.8	11.8	7.7	12.6	12.6	12.1	0.2	20.7	23.0	2.35
HE20 Beam Forming, M0 to M9 8ss	8	13	8.7	11.9	11.8	11.8	7.7	12.6	12.6	12.1	0.2	20.7	23.0	2.35
HE20 STBC, M0 to M9 2ss	2	13	12.0	14.9							0.2	16.9	23.0	6.13
HE20 STBC, M0 to M9 2ss	3	13	10.9	14.1	14.1						0.2	18.2	23.0	4.79
HE20 STBC, M0 to M9 2ss	4	13	8.7	11.9	11.8	11.8					0.2	17.4	23.0	5.57
HE20 STBC, M0 to M9 2ss	6	13	9.8	12.9	13.0	8.7	13.7	13.6			0.2	20.3	23.0	2.71
HE20 STBC, M0 to M9 2ss	8	13	8.7	11.9	11.8	11.8	7.7	12.6	12.6	12.1	0.2	20.7	23.0	2.35


5230


Non HT40, 6 to 54 Mbps	1	13	11.4									0.3	11.7	23.0	11.28
Non HT40, 6 to 54 Mbps	2	13	11.4	14.4								0.3	16.5	23.0	6.51
Non HT40, 6 to 54 Mbps	3	13	10.4	13.5	13.6							0.3	17.8	23.0	5.17
Non HT40, 6 to 54 Mbps	4	13	8.4	11.5	11.5	11.5						0.3	17.3	23.0	5.75
Non HT40, 6 to 54 Mbps	6	13	11.4	14.4	14.6	10.2	15.1	15.3				0.3	22.0	23.0	1.01
Non HT40, 6 to 54 Mbps	8	13	10.4	13.5	13.6	13.4	9.2	14.1	14.6	13.8		0.3	22.5	23.0	0.50
HE40, M0 to M9 1ss	1	13	11.9									0.2	12.1	23.0	10.91
HE40, M0 to M9 1ss	2	13	11.9	14.9								0.2	16.9	23.0	6.15
HE40, M0 to M9 2ss	2	13	11.9	14.9								0.2	16.9	23.0	6.15
HE40, M0 to M9 1ss	3	13	11.0	14.0	14.0							0.2	18.2	23.0	4.83
HE40, M0 to M9 2ss	3	13	11.9	14.9	15.1							0.2	19.2	23.0	3.85
HE40, M0 to M9 3ss	3	13	11.9	14.9	15.1							0.2	19.2	23.0	3.85
HE40, M0 to M9 1ss	4	13	8.9	11.9	11.9	11.9						0.2	17.5	23.0	5.47
HE40, M0 to M9 2ss	4	13	11.9	14.9	15.1	14.9						0.2	20.6	23.0	2.41
HE40, M0 to M9 3ss	4	13	11.9	14.9	15.1	14.9						0.2	20.6	23.0	2.41
HE40, M0 to M9 4ss	4	13	11.9	14.9	15.1	14.9						0.2	20.6	23.0	2.41
HE40, M0 to M9 1ss	6	13	11.9	14.9	15.1	10.9	15.8	16.2				0.2	22.5	23.0	0.49
HE40, M0 to M9 2ss	6	13	11.9	14.9	15.1	10.9	15.8	16.2				0.2	22.5	23.0	0.49
HE40, M0 to M9 3ss	6	13	11.9	14.9	15.1	10.9	15.8	16.2				0.2	22.5	23.0	0.49
HE40, M0 to M9 4ss	6	13	11.9	14.9	15.1	10.9	15.8	16.2				0.2	22.5	23.0	0.49
HE40, M0 to M9 5ss	6	13	11.9	14.9	15.1	10.9	15.8	16.2				0.2	22.5	23.0	0.49
HE40, M0 to M9 6ss	6	13	11.9	14.9	15.1	10.9	15.8	16.2				0.2	22.5	23.0	0.49
HE40, M0 to M9 1ss	8	13	11.0	14.0	14.0	13.9	9.6	14.7	15.0	14.1		0.2	22.8	23.0	0.18
HE40, M0 to M9 2ss	8	13	11.0	14.0	14.0	13.9	9.6	14.7	15.0	14.1		0.2	22.8	23.0	0.18
HE40, M0 to M9 3ss	8	13	11.0	14.0	14.0	13.9	9.6	14.7	15.0	14.1		0.2	22.8	23.0	0.18
HE40, M0 to M9 4ss	8	13	11.0	14.0	14.0	13.9	9.6	14.7	15.0	14.1		0.2	22.8	23.0	0.18
HE40, M0 to M9 5ss	8	13	11.0	14.0	14.0	13.9	9.6	14.7	15.0	14.1		0.2	22.8	23.0	0.18
HE40, M0 to M9 6ss	8	13	11.0	14.0	14.0	13.9	9.6	14.7	15.0	14.1		0.2	22.8	23.0	0.18
HE40, M0 to M9 7ss	8	13	11.0	14.0	14.0	13.9	9.6	14.7	15.0	14.1		0.2	22.8	23.0	0.18
HE40, M0 to M9 8ss	8	13	11.0	14.0	14.0	13.9	9.6	14.7	15.0	14.1		0.2	22.8	23.0	0.18
HE40 Beam Forming, M0 to M9 1ss	2	16	11.9	14.9								0.2	16.9	20.0	3.15
HE40 Beam Forming, M0 to M9 2ss	2	13	11.9	14.9								0.2	16.9	23.0	6.15
HE40 Beam Forming, M0 to M9 1ss	3	18	9.8	12.9	13.1							0.2	17.1	18.0	0.87
HE40 Beam Forming, M0 to M9 2ss	3	15	11.9	14.9	15.1							0.2	19.2	21.0	1.85
HE40 Beam Forming, M0 to M9 3ss	3	13	11.9	14.9	15.1							0.2	19.2	23.0	3.85
HE40 Beam Forming, M0 to M9 1ss	4	19	7.5	10.8	10.8	10.8						0.2	16.4	17.0	0.61
HE40 Beam Forming, M0 to M9 2ss	4	16	11.0	14.0	14.0	13.9						0.2	19.6	20.0	0.40
HE40 Beam Forming, M0 to M9 3ss	4	14	11.9	14.9	15.1	14.9						0.2	20.6	22.0	1.41
HE40 Beam Forming, M0 to M9 4ss	4	13	11.9	14.9	15.1	14.9						0.2	20.6	23.0	2.41
HE40 Beam Forming, M0 to M9 1ss	6	18	6.7	9.9	9.8	5.7	10.6	11.1				0.2	17.4	18.0	0.64
HE40 Beam Forming, M0 to M9 2ss	6	15	9.8	12.9	13.1	9.0	13.7	13.9				0.2	20.4	21.0	0.58
HE40 Beam Forming, M0 to M9 3ss	6	13	11.9	14.9	15.1	10.9	15.8	16.2				0.2	22.5	23.0	0.49

	HE40 Beam Forming, M0 to M9 4ss	6	13	11.9	14.9	15.1	10.9	15.8	16.2			0.2	22.5	23.0	0.49
	HE40 Beam Forming, M0 to M9 5ss	6	13	11.9	14.9	15.1	10.9	15.8	16.2			0.2	22.5	23.0	0.49
	HE40 Beam Forming, M0 to M9 6ss	6	13	11.9	14.9	15.1	10.9	15.8	16.2			0.2	22.5	23.0	0.49
	HE40 Beam Forming, M0 to M9 1ss	8	19	4.6	7.9	7.9	7.8	3.6	8.8	9.2	8.4	0.2	16.9	17.0	0.15
	HE40 Beam Forming, M0 to M9 2ss	8	16	7.5	10.8	10.8	10.8	6.3	11.8	11.9	11.2	0.2	19.7	20.0	0.28
	HE40 Beam Forming, M0 to M9 3ss	8	14	9.8	12.9	13.1	12.9	9.0	13.7	13.9	13.3	0.2	21.8	22.0	0.16
	HE40 Beam Forming, M0 to M9 4ss	8	13	11.0	14.0	14.0	13.9	9.6	14.7	15.0	14.1	0.2	22.8	23.0	0.18
	HE40 Beam Forming, M0 to M9 5ss	8	13	11.0	14.0	14.0	13.9	9.6	14.7	15.0	14.1	0.2	22.8	23.0	0.18
	HE40 Beam Forming, M0 to M9 6ss	8	13	11.0	14.0	14.0	13.9	9.6	14.7	15.0	14.1	0.2	22.8	23.0	0.18
	HE40 Beam Forming, M0 to M9 7ss	8	13	11.0	14.0	14.0	13.9	9.6	14.7	15.0	14.1	0.2	22.8	23.0	0.18
	HE40 Beam Forming, M0 to M9 8ss	8	13	11.0	14.0	14.0	13.9	9.6	14.7	15.0	14.1	0.2	22.8	23.0	0.18
	HE40 STBC, M0 to M9 2ss	2	13	11.9	14.9							0.2	16.9	23.0	6.15
	HE40 STBC, M0 to M9 2ss	3	13	11.9	14.9	15.1						0.2	19.2	23.0	3.85
	HE40 STBC, M0 to M9 2ss	4	13	11.9	14.9	15.1	14.9					0.2	20.6	23.0	2.41
	HE40 STBC, M0 to M9 2ss	6	13	11.9	14.9	15.1	10.9	15.8	16.2			0.2	22.5	23.0	0.49
	HE40 STBC, M0 to M9 2ss	8	13	11.0	14.0	14.0	13.9	9.6	14.7	15.0	14.1	0.2	22.8	23.0	0.18
5240	Non HT20, 6 to 54 Mbps	1	13	11.5								0.3	11.8	23.0	11.18
	Non HT20, 6 to 54 Mbps	2	13	11.5	14.5							0.3	16.6	23.0	6.41
	Non HT20, 6 to 54 Mbps	3	13	7.4	10.6	10.4						0.3	14.8	23.0	8.21
	Non HT20, 6 to 54 Mbps	4	13	5.4	8.5	8.4	8.5					0.3	14.2	23.0	8.78
	Non HT20, 6 to 54 Mbps	6	13	9.4	12.6	12.5	8.2	13.1	13.7			0.3	20.1	23.0	2.89
	Non HT20, 6 to 54 Mbps	8	13	7.4	10.6	10.4	10.4	6.1	11.1	11.8	10.7	0.3	19.5	23.0	3.50
	Non HT20 Beam Forming, 6 to 54 Mbps	2	16	11.5	14.5							0.3	16.6	20.0	3.41
	Non HT20 Beam Forming, 6 to 54 Mbps	3	18	7.4	10.6	10.4						0.3	14.8	18.0	3.21
	Non HT20 Beam Forming, 6 to 54 Mbps	4	19	5.4	8.5	8.4	8.5					0.3	14.2	17.0	2.78
	Non HT20 Beam Forming, 6 to 54 Mbps	6	18	4.4	7.4	7.3	3.1	8.1	8.5			0.3	15.0	18.0	3.02
	Non HT20 Beam Forming, 6 to 54 Mbps	8	19	1.5	4.7	4.7	4.6	0.3	5.4	5.8	4.8	0.3	13.7	17.0	3.34
	HE20, M0 to M9 1ss	1	13	11.8								0.2	12.0	23.0	11.03
	HE20, M0 to M9 1ss	2	13	11.8	14.5							0.2	16.5	23.0	6.46
	HE20, M0 to M9 2ss	2	13	11.8	14.5							0.2	16.5	23.0	6.46
	HE20, M0 to M9 1ss	3	13	8.6	11.8	11.6						0.2	15.8	23.0	7.17
	HE20, M0 to M9 2ss	3	13	10.8	13.6	13.8						0.2	17.9	23.0	5.13
	HE20, M0 to M9 3ss	3	13	11.8	14.5	15.0						0.2	18.9	23.0	4.08
	HE20, M0 to M9 1ss	4	13	5.5	8.7	8.6	8.6					0.2	14.2	23.0	8.77
	HE20, M0 to M9 2ss	4	13	8.6	11.8	11.6	11.8					0.2	17.3	23.0	5.67
	HE20, M0 to M9 3ss	4	13	10.8	13.6	13.8	13.8					0.2	19.4	23.0	3.64
	HE20, M0 to M9 4ss	4	13	11.8	14.5	15.0	14.7					0.2	20.4	23.0	2.64
	HE20, M0 to M9 1ss	6	13	9.7	12.8	12.7	8.4	13.5	14.0			0.2	20.2	23.0	2.77
	HE20, M0 to M9 2ss	6	13	9.7	12.8	12.7	8.4	13.5	14.0			0.2	20.2	23.0	2.77
	HE20, M0 to M9 3ss	6	13	9.7	12.8	12.7	8.4	13.5	14.0			0.2	20.2	23.0	2.77
	HE20, M0 to M9 4ss	6	13	9.7	12.8	12.7	8.4	13.5	14.0			0.2	20.2	23.0	2.77
	HE20, M0 to M9 5ss	6	13	9.7	12.8	12.7	8.4	13.5	14.0			0.2	20.2	23.0	2.77

HE20, M0 to M9 6ss	6	13	9.7	12.8	12.7	8.4	13.5	14.0			0.2	20.2	23.0	2.77
HE20, M0 to M9 1ss	8	13	8.6	11.8	11.6	11.8	7.3	12.4	12.8	12.1	0.2	20.6	23.0	2.41
HE20, M0 to M9 2ss	8	13	8.6	11.8	11.6	11.8	7.3	12.4	12.8	12.1	0.2	20.6	23.0	2.41
HE20, M0 to M9 3ss	8	13	8.6	11.8	11.6	11.8	7.3	12.4	12.8	12.1	0.2	20.6	23.0	2.41
HE20, M0 to M9 4ss	8	13	8.6	11.8	11.6	11.8	7.3	12.4	12.8	12.1	0.2	20.6	23.0	2.41
HE20, M0 to M9 5ss	8	13	8.6	11.8	11.6	11.8	7.3	12.4	12.8	12.1	0.2	20.6	23.0	2.41
HE20, M0 to M9 6ss	8	13	8.6	11.8	11.6	11.8	7.3	12.4	12.8	12.1	0.2	20.6	23.0	2.41
HE20, M0 to M9 7ss	8	13	8.6	11.8	11.6	11.8	7.3	12.4	12.8	12.1	0.2	20.6	23.0	2.41
HE20, M0 to M9 8ss	8	13	8.6	11.8	11.6	11.8	7.3	12.4	12.8	12.1	0.2	20.6	23.0	2.41
HE20 Beam Forming, M0 to M9 1ss	2	16	11.8	14.5							0.2	16.5	20.0	3.46
HE20 Beam Forming, M0 to M9 2ss	2	13	11.8	14.5							0.2	16.5	23.0	6.46
HE20 Beam Forming, M0 to M9 1ss	3	18	8.6	11.8	11.6						0.2	15.8	18.0	2.17
HE20 Beam Forming, M0 to M9 2ss	3	15	10.8	13.6	13.8						0.2	17.9	21.0	3.13
HE20 Beam Forming, M0 to M9 3ss	3	13	11.8	14.5	15.0						0.2	18.9	23.0	4.08
HE20 Beam Forming, M0 to M9 1ss	4	19	5.5	8.7	8.6	8.6					0.2	14.2	17.0	2.77
HE20 Beam Forming, M0 to M9 2ss	4	16	8.6	11.8	11.6	11.8					0.2	17.3	20.0	2.67
HE20 Beam Forming, M0 to M9 3ss	4	14	10.8	13.6	13.8	13.8					0.2	19.4	22.0	2.64
HE20 Beam Forming, M0 to M9 4ss	4	13	11.8	14.5	15.0	14.7					0.2	20.4	23.0	2.64
HE20 Beam Forming, M0 to M9 1ss	6	18	4.5	7.8	7.5	3.3	8.2	8.7			0.2	15.0	18.0	2.97
HE20 Beam Forming, M0 to M9 2ss	6	15	7.6	10.8	10.7	6.4	11.3	11.9			0.2	18.2	21.0	2.84
HE20 Beam Forming, M0 to M9 3ss	6	13	9.7	12.8	12.7	8.4	13.5	14.0			0.2	20.2	23.0	2.77
HE20 Beam Forming, M0 to M9 4ss	6	13	9.7	12.8	12.7	8.4	13.5	14.0			0.2	20.2	23.0	2.77
HE20 Beam Forming, M0 to M9 5ss	6	13	9.7	12.8	12.7	8.4	13.5	14.0			0.2	20.2	23.0	2.77
HE20 Beam Forming, M0 to M9 6ss	6	13	9.7	12.8	12.7	8.4	13.5	14.0			0.2	20.2	23.0	2.77
HE20 Beam Forming, M0 to M9 1ss	8	19	2.2	5.7	5.8	5.9	1.2	6.5	6.7	5.9	0.2	14.6	17.0	2.45
HE20 Beam Forming, M0 to M9 2ss	8	16	5.5	8.7	8.6	8.6	4.3	9.2	9.7	8.9	0.2	17.5	20.0	2.54
HE20 Beam Forming, M0 to M9 3ss	8	14	7.6	10.8	10.7	10.6	6.4	11.3	11.9	11.1	0.2	19.6	22.0	2.42
HE20 Beam Forming, M0 to M9 4ss	8	13	8.6	11.8	11.6	11.8	7.3	12.4	12.8	12.1	0.2	20.6	23.0	2.41
HE20 Beam Forming, M0 to M9 5ss	8	13	8.6	11.8	11.6	11.8	7.3	12.4	12.8	12.1	0.2	20.6	23.0	2.41
HE20 Beam Forming, M0 to M9 6ss	8	13	8.6	11.8	11.6	11.8	7.3	12.4	12.8	12.1	0.2	20.6	23.0	2.41
HE20 Beam Forming, M0 to M9 7ss	8	13	8.6	11.8	11.6	11.8	7.3	12.4	12.8	12.1	0.2	20.6	23.0	2.41
HE20 Beam Forming, M0 to M9 8ss	8	13	8.6	11.8	11.6	11.8	7.3	12.4	12.8	12.1	0.2	20.6	23.0	2.41
HE20 STBC, M0 to M9 2ss	2	13	11.8	14.5							0.2	16.5	23.0	6.46
HE20 STBC, M0 to M9 2ss	3	13	10.8	13.6	13.8						0.2	17.9	23.0	5.13
HE20 STBC, M0 to M9 2ss	4	13	8.6	11.8	11.6	11.8					0.2	17.3	23.0	5.67
HE20 STBC, M0 to M9 2ss	6	13	9.7	12.8	12.7	8.4	13.5	14.0			0.2	20.2	23.0	2.77
HE20 STBC, M0 to M9 2ss	8	13	8.6	11.8	11.6	11.8	7.3	12.4	12.8	12.1	0.2	20.6	23.0	2.41

**Maximum Transmit Power,
5230 MHz, HE40 Beam Forming, M0 to M9 1ss**

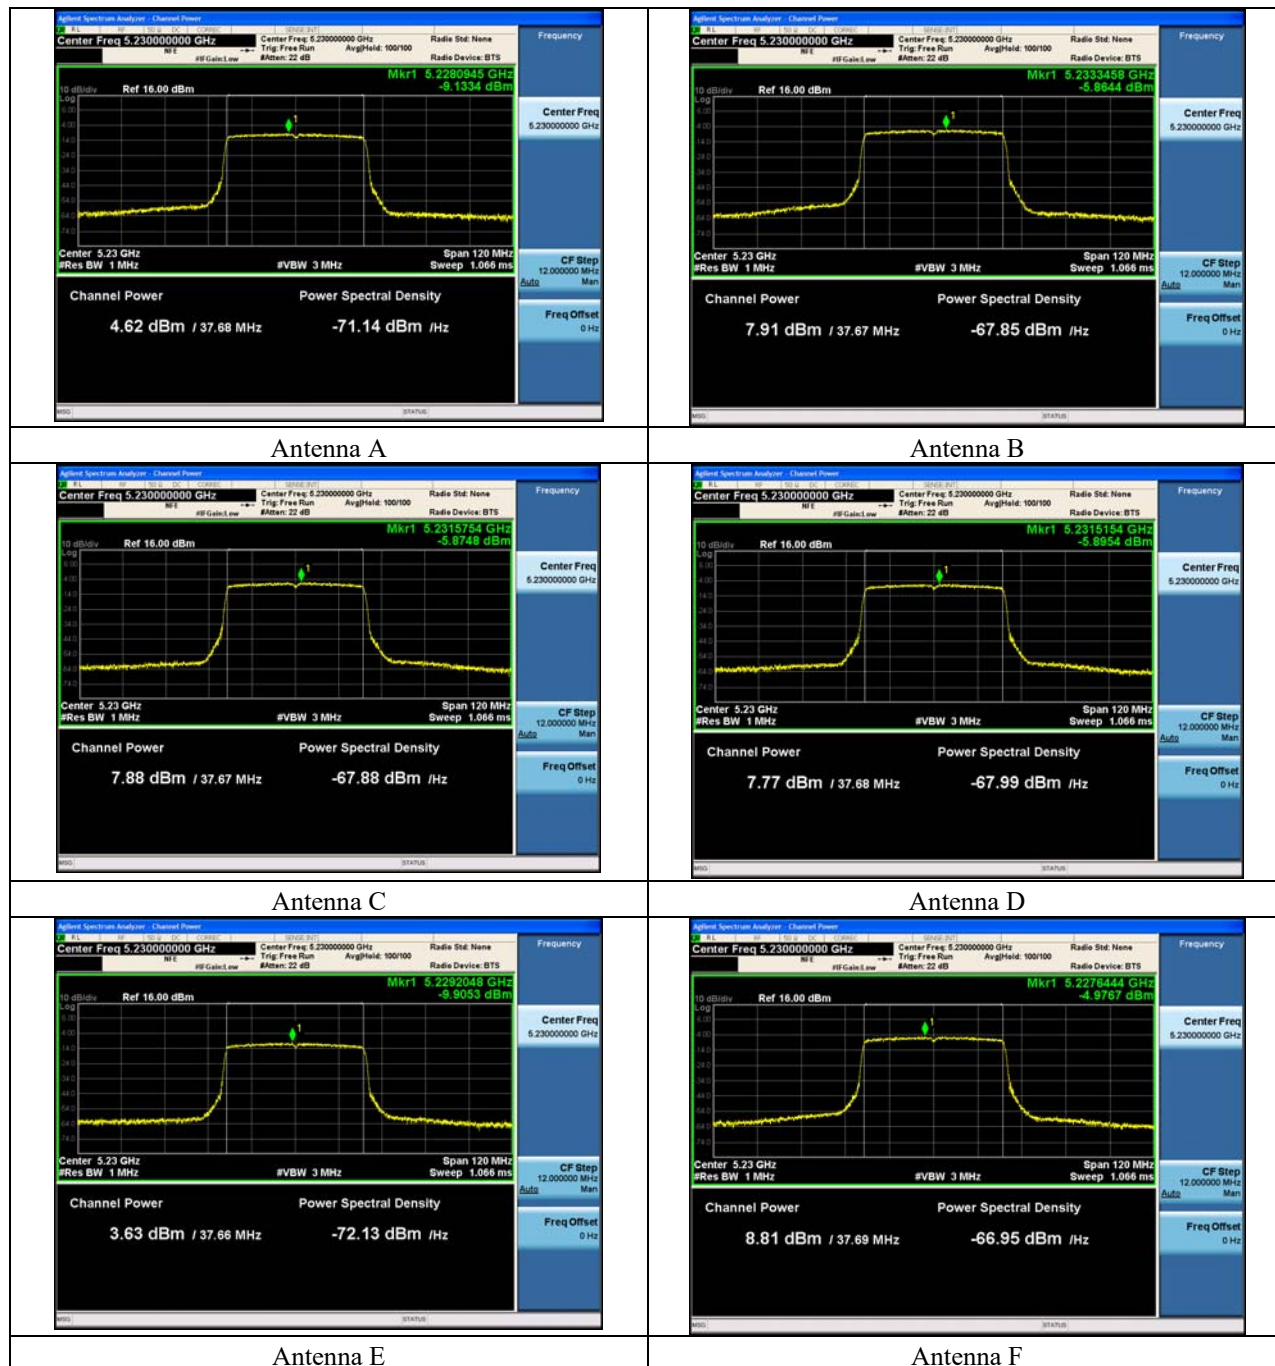

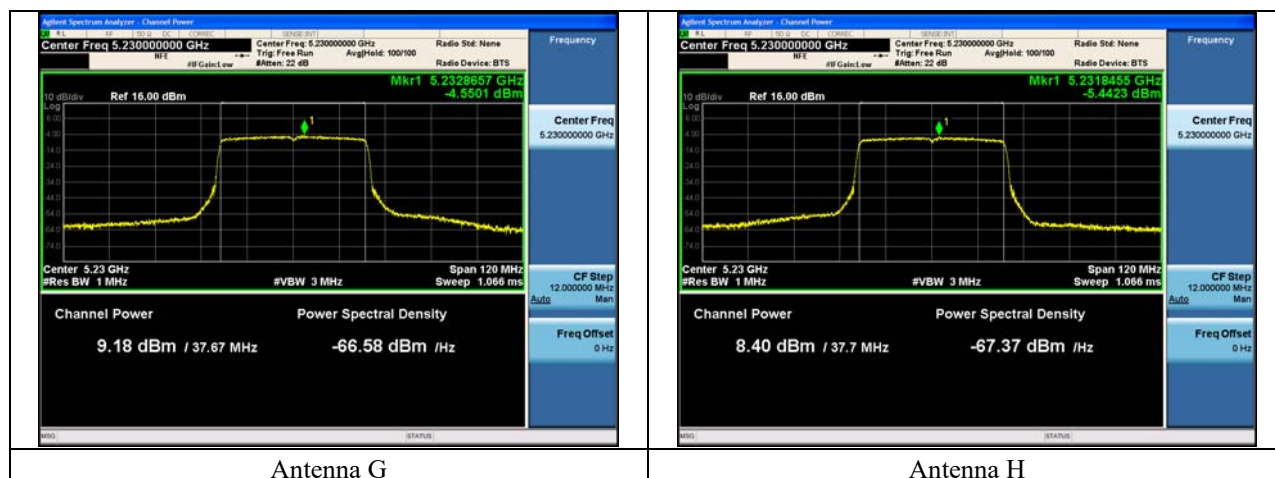

A.4 Power Spectral Density

Power Spectral Density Test Requirement

15.407 General technical requirements, (a) *Power limits: (1) For the band 5.15-5.25 GHz.*

(i) For an outdoor access point operating in the band 5.15-5.25 GHz ... the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(ii) For an indoor access point operating in the band 5.15-5.25 GHz... the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

(iii) For fixed point-to-point access points operating in the band 5.15-5.25 GHz...the maximum power spectral density shall not exceed 17 dBm in any 1 megahertz band. Fixed point-to-point U-NII devices may employ antennas with directional gain up to 23 dBi without any corresponding reduction in the maximum conducted output power or maximum power spectral density. For fixed point-to-point transmitters that employ a directional antenna gain greater than 23 dBi, a 1 dB reduction in maximum conducted output power and maximum power spectral density is required for each 1 dB of antenna gain in excess of 23 dBi. Fixed, point-to-point operations exclude the use of point-to-multipoint systems, omnidirectional applications, and multiple collocated transmitters transmitting the same information. The operator of the U-NII device, or if the equipment is professionally installed, the installer, is responsible for ensuring that systems employing high gain directional antennas are used exclusively for fixed, point-to-point operations.

(iv) For client devices in the 5.15-5.25 GHz band, the maximum power spectral density shall not exceed 11 dBm in any 1 megahertz band. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the maximum power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Power Spectral Density Test Procedure

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01

F. Maximum Power Spectral Density (PSD)

Power Spectral Density

Test Procedure

The rules requires “maximum power spectral density” measurements where the intent is to measure the maximum value of the time average of the power spectral density measured during a period of continuous transmission.

1. Create an average power spectrum for the EUT operating mode being tested by following the instructions in section II.E.2. for measuring maximum conducted output power using a spectrum analyzer or EMI receiver: select the appropriate test method (SA-1, SA-2, SA-3, or alternatives to each) and apply it up to, but not including, the step labeled, “Compute power...”. (This procedure is required even if the maximum conducted output power measurement was performed using a power meter, method PM.)

2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.

3. Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

b) If Method SA-3 Alternative was used and the linear mode was used in step II.E.2.g)(viii), add 1 dB to the final result to compensate for the difference between linear averaging and power averaging.

4. The result is the Maximum PSD over 1 MHz reference bandwidth.

Ref. KDB 789033 D02 General UNII Test Procedures New Rules v02r01**2. Measurement using a Spectrum Analyzer or EMI Receiver (SA), (d) Method SA-2****Power Spectral Density****Test parameters**

Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).

- (i) Measure the duty cycle, x , of the transmitter output signal as described in section II.B.
- (ii) Set span to encompass the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal.
- (iii) Set RBW = 1 MHz.
- (iv) Set VBW $\geq$ 3 MHz.
- (v) Number of points in sweep $\geq$ 2 Span / RBW. (This ensures that bin-to-bin spacing is $\leq$ RBW/2, so that narrowband signals are not lost between frequency bins.)
- (vi) Sweep time = auto.
- (vii) Detector = RMS (i.e., power averaging), if available. Otherwise, use sample detector mode.
- (viii) Do not use sweep triggering. Allow the sweep to “free run”.
- (ix) Trace average at least 100 traces in power averaging (i.e., RMS) mode; however, the number of traces to be averaged shall be increased above 100 as needed to ensure that the average accurately represents the true average over the on and off periods of the transmitter.
- (x) Compute power by integrating the spectrum across the EBW (or, alternatively, the entire 99% occupied bandwidth) of the signal using the instrument’s band power measurement function with band limits set equal to the EBW (or occupied bandwidth)

F. Maximum Power Spectral Density (PSD)

- 2. Use the peak search function on the instrument to find the peak of the spectrum and record its value.
- 3. Make the following adjustments to the peak value of the spectrum, if applicable: a) If Method SA-2 or SA-2 Alternative was used, add $10 \log(1/x)$, where x is the duty cycle, to the peak of the spectrum.

The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. ANSI C63.10 section 14.3.2.2

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☒	☐
	Support		☐	☒

Tested By :

Chris Blair

Date of testing:

15-Jan-2020 - 20-Jan-2020

Test Result : PASS**Test Equipment**

See Appendix C for list of test equipment

Power Spectral Density

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 PSD (dBm/MHz)	Tx 2 PSD (dBm/MHz)	Tx 3 PSD (dBm/MHz)	Tx 4 PSD (dBm/MHz)	Tx 5 PSD (dBm/MHz)	Tx 6 PSD (dBm/MHz)	Tx 7 PSD (dBm/MHz)	Tx 8 PSD (dBm/MHz)	Duty Cycle Correction (dB)	Total PSD (dBm/MHz)	Limit (dBm/MHz)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	13	0.7								0.3	1.0	10.0	8.98
	Non HT20, 6 to 54 Mbps	2	16	-0.3	2.2							0.3	4.5	7.0	2.54
	Non HT20, 6 to 54 Mbps	3	18	-2.7	0.8	0.1						0.3	4.7	5.0	0.26
	Non HT20, 6 to 54 Mbps	4	19	-5.5	-2.5	-3.0	-2.8					0.3	3.0	4.0	0.96
	Non HT20, 6 to 54 Mbps	6	13	-1.3	1.4	1.2	-3.0	2.1	2.1			0.3	8.9	10.0	1.11
	Non HT20, 6 to 54 Mbps	8	13	-3.6	-0.3	-0.9	-0.9	-5.2	0.1	-0.3	-0.4	0.3	8.2	10.0	1.78
	Non HT20 Beam Forming, 6 to 54 Mbps	2	16	-0.3	2.2							0.3	4.5	7.0	2.54
	Non HT20 Beam Forming, 6 to 54 Mbps	3	18	-3.6	-0.3	-0.9						0.3	3.7	5.0	1.29
	Non HT20 Beam Forming, 6 to 54 Mbps	4	19	-5.5	-2.5	-3.0	-2.8					0.3	3.0	4.0	0.96
	Non HT20 Beam Forming, 6 to 54 Mbps	6	18	-5.5	-2.5	-3.0	-6.9	-2.2	-2.2			0.3	4.7	5.0	0.28
	Non HT20 Beam Forming, 6 to 54 Mbps	8	19	-9.2	-6.4	-6.4	-6.4	-11.0	-6.2	-6.2	-6.2	0.3	2.4	4.0	1.62
	HE20, M0 to M9 1ss	1	13	-0.3								0.2	-0.1	10.0	10.13
	HE20, M0 to M9 1ss	2	16	-0.3	2.5							0.2	4.5	7.0	2.50
	HE20, M0 to M9 2ss	2	13	-0.3	2.5							0.2	4.5	10.0	5.50
	HE20, M0 to M9 1ss	3	18	-2.7	0.1	-0.1						0.2	4.2	5.0	0.78
	HE20, M0 to M9 2ss	3	15	-0.3	2.5	2.5						0.2	6.7	8.0	1.31
	HE20, M0 to M9 3ss	3	13	-0.3	2.5	2.5						0.2	6.7	10.0	3.31
	HE20, M0 to M9 1ss	4	19	-4.4	-1.5	-2.3	-2.3					0.2	3.7	4.0	0.31
	HE20, M0 to M9 2ss	4	16	-1.3	1.2	0.9	0.9					0.2	6.7	7.0	0.28
	HE20, M0 to M9 3ss	4	14	-1.3	1.2	0.9	0.9					0.2	6.7	9.0	2.28
	HE20, M0 to M9 4ss	4	13	-1.3	1.2	0.9	0.9					0.2	6.7	10.0	3.28
	HE20, M0 to M9 1ss	6	13	-2.7	0.1	-0.1	-4.1	0.8	0.8			0.2	7.4	10.0	2.56
	HE20, M0 to M9 2ss	6	13	-2.7	0.1	-0.1	-4.1	0.8	0.8			0.2	7.4	10.0	2.56
	HE20, M0 to M9 3ss	6	13	-2.7	0.1	-0.1	-4.1	0.8	0.8			0.2	7.4	10.0	2.56
	HE20, M0 to M9 4ss	6	13	-2.7	0.1	-0.1	-4.1	0.8	0.8			0.2	7.4	10.0	2.56
	HE20, M0 to M9 5ss	6	13	-2.7	0.1	-0.1	-4.1	0.8	0.8			0.2	7.4	10.0	2.56
	HE20, M0 to M9 6ss	6	13	-2.7	0.1	-0.1	-4.1	0.8	0.8			0.2	7.4	10.0	2.56
	HE20, M0 to M9 1ss	8	13	-4.0	-0.8	-1.1	-1.0	-5.2	-0.3	-0.4	-0.5	0.2	7.8	10.0	2.16
	HE20, M0 to M9 2ss	8	13	-4.0	-0.8	-1.1	-1.0	-5.2	-0.3	-0.4	-0.5	0.2	7.8	10.0	2.16
	HE20, M0 to M9 3ss	8	13	-4.0	-0.8	-1.1	-1.0	-5.2	-0.3	-0.4	-0.5	0.2	7.8	10.0	2.16
	HE20, M0 to M9 4ss	8	13	-4.0	-0.8	-1.1	-1.0	-5.2	-0.3	-0.4	-0.5	0.2	7.8	10.0	2.16

	HE20, M0 to M9 5ss	8	13	-4.0	-0.8	-1.1	-1.0	-5.2	-0.3	-0.4	-0.5	0.2	7.8	10.0	2.16
	HE20, M0 to M9 6ss	8	13	-4.0	-0.8	-1.1	-1.0	-5.2	-0.3	-0.4	-0.5	0.2	7.8	10.0	2.16
	HE20, M0 to M9 7ss	8	13	-4.0	-0.8	-1.1	-1.0	-5.2	-0.3	-0.4	-0.5	0.2	7.8	10.0	2.16
	HE20, M0 to M9 8ss	8	13	-4.0	-0.8	-1.1	-1.0	-5.2	-0.3	-0.4	-0.5	0.2	7.8	10.0	2.16
	HE20 Beam Forming, M0 to M9 1ss	2	16	-1.3	1.2							0.2	3.3	7.0	3.69
	HE20 Beam Forming, M0 to M9 2ss	2	13	-0.3	2.5							0.2	4.5	10.0	5.50
	HE20 Beam Forming, M0 to M9 1ss	3	18	-4.0	-0.8	-1.1						0.2	3.2	5.0	1.80
	HE20 Beam Forming, M0 to M9 2ss	3	15	-1.3	1.2	0.9						0.2	5.3	8.0	2.66
	HE20 Beam Forming, M0 to M9 3ss	3	13	-0.3	2.5	2.5						0.2	6.7	10.0	3.31
	HE20 Beam Forming, M0 to M9 1ss	4	19	-4.4	-1.5	-2.3	-2.3					0.2	3.7	4.0	0.31
	HE20 Beam Forming, M0 to M9 2ss	4	16	-4.0	-0.8	-1.1	-1.0					0.2	4.6	7.0	2.36
	HE20 Beam Forming, M0 to M9 3ss	4	14	-1.3	1.2	0.9	0.9					0.2	6.7	9.0	2.28
	HE20 Beam Forming, M0 to M9 4ss	4	13	-1.3	1.2	0.9	0.9					0.2	6.7	10.0	3.28
	HE20 Beam Forming, M0 to M9 1ss	6	18	-5.2	-3.0	-3.2	-6.8	-2.1	-2.2			0.2	4.5	5.0	0.50
	HE20 Beam Forming, M0 to M9 2ss	6	15	-4.0	-0.8	-1.1	-5.2	-0.3	-0.4			0.2	6.4	8.0	1.64
	HE20 Beam Forming, M0 to M9 3ss	6	13	-2.7	0.1	-0.1	-4.1	0.8	0.8			0.2	7.4	10.0	2.56
	HE20 Beam Forming, M0 to M9 4ss	6	13	-2.7	0.1	-0.1	-4.1	0.8	0.8			0.2	7.4	10.0	2.56
	HE20 Beam Forming, M0 to M9 5ss	6	13	-2.7	0.1	-0.1	-4.1	0.8	0.8			0.2	7.4	10.0	2.56
	HE20 Beam Forming, M0 to M9 6ss	6	13	-2.7	0.1	-0.1	-4.1	0.8	0.8			0.2	7.4	10.0	2.56
	HE20 Beam Forming, M0 to M9 1ss	8	19	-10.0	-6.4	-7.0	-6.9	-11.1	-6.2	-6.1	-6.5	0.2	2.0	4.0	2.01
	HE20 Beam Forming, M0 to M9 2ss	8	16	-5.2	-3.0	-3.2	-3.1	-6.8	-2.1	-2.2	-2.6	0.2	5.9	7.0	1.09
	HE20 Beam Forming, M0 to M9 3ss	8	14	-4.4	-1.5	-2.3	-2.3	-6.0	-1.4	-1.6	-1.8	0.2	6.8	9.0	2.22
	HE20 Beam Forming, M0 to M9 4ss	8	13	-4.0	-0.8	-1.1	-1.0	-5.2	-0.3	-0.4	-0.5	0.2	7.8	10.0	2.16
	HE20 Beam Forming, M0 to M9 5ss	8	13	-4.0	-0.8	-1.1	-1.0	-5.2	-0.3	-0.4	-0.5	0.2	7.8	10.0	2.16
	HE20 Beam Forming, M0 to M9 6ss	8	13	-4.0	-0.8	-1.1	-1.0	-5.2	-0.3	-0.4	-0.5	0.2	7.8	10.0	2.16
	HE20 Beam Forming, M0 to M9 7ss	8	13	-4.0	-0.8	-1.1	-1.0	-5.2	-0.3	-0.4	-0.5	0.2	7.8	10.0	2.16
	HE20 Beam Forming, M0 to M9 8ss	8	13	-4.0	-0.8	-1.1	-1.0	-5.2	-0.3	-0.4	-0.5	0.2	7.8	10.0	2.16
	HE20 STBC, M0 to M9 2ss	2	13	-0.3	2.5							0.2	4.5	10.0	5.50
	HE20 STBC, M0 to M9 2ss	3	15	-0.3	2.5	2.5						0.2	6.7	8.0	1.31
	HE20 STBC, M0 to M9 2ss	4	16	-1.3	1.2	0.9	0.9					0.2	6.7	7.0	0.28
	HE20 STBC, M0 to M9 2ss	6	13	-2.7	0.1	-0.1	-4.1	0.8	0.8			0.2	7.4	10.0	2.56
	HE20 STBC, M0 to M9 2ss	8	13	-4.0	-0.8	-1.1	-1.0	-5.2	-0.3	-0.4	-0.5	0.2	7.8	10.0	2.16
5190	Non HT40, 6 to 54 Mbps	1	13	-5.9								0.3	-5.6	10.0	15.58
	Non HT40, 6 to 54 Mbps	2	16	-7.5	-4.9							0.3	-2.7	7.0	9.67
	Non HT40, 6 to 54 Mbps	3	18	-7.5	-4.9	-5.1						0.3	-0.6	5.0	5.59
	Non HT40, 6 to 54 Mbps	4	19	-7.5	-4.9	-5.1	-4.8					0.3	0.9	4.0	3.10
	Non HT40, 6 to 54 Mbps	6	13	-8.5	-5.7	-5.8	-10.1	-5.1	-4.8			0.3	1.8	10.0	8.18
	Non HT40, 6 to 54 Mbps	8	13	-9.5	-6.6	-7.1	-6.8	-10.8	-5.8	-6.1	-6.4	0.3	2.2	10.0	7.76
	HE40, M0 to M9 1ss	1	13	-6.7								0.2	-6.5	10.0	16.51
	HE40, M0 to M9 1ss	2	16	-8.5	-5.2							0.2	-3.3	7.0	10.34
	HE40, M0 to M9 2ss	2	13	-8.5	-5.2							0.2	-3.3	10.0	13.34
	HE40, M0 to M9 1ss	3	18	-8.5	-5.2	-5.7						0.2	-1.3	5.0	6.28

HE40, M0 to M9 2ss	3	15	-8.5	-5.2	-5.7						0.2	-1.3	8.0	9.28
HE40, M0 to M9 3ss	3	13	-8.5	-5.2	-5.7						0.2	-1.3	10.0	11.28
HE40, M0 to M9 1ss	4	19	-8.5	-5.2	-5.7	-5.7					0.2	0.1	4.0	3.89
HE40, M0 to M9 2ss	4	16	-8.5	-5.2	-5.7	-5.7					0.2	0.1	7.0	6.89
HE40, M0 to M9 3ss	4	14	-8.5	-5.2	-5.7	-5.7					0.2	0.1	9.0	8.89
HE40, M0 to M9 4ss	4	13	-8.5	-5.2	-5.7	-5.7					0.2	0.1	10.0	9.89
HE40, M0 to M9 1ss	6	13	-9.7	-6.7	-7.1	-10.4	-5.8	-6.4			0.2	0.6	10.0	9.40
HE40, M0 to M9 2ss	6	13	-9.7	-6.7	-7.1	-10.4	-5.8	-6.4			0.2	0.6	10.0	9.40
HE40, M0 to M9 3ss	6	13	-9.7	-6.7	-7.1	-10.4	-5.8	-6.4			0.2	0.6	10.0	9.40
HE40, M0 to M9 4ss	6	13	-9.7	-6.7	-7.1	-10.4	-5.8	-6.4			0.2	0.6	10.0	9.40
HE40, M0 to M9 5ss	6	13	-9.7	-6.7	-7.1	-10.4	-5.8	-6.4			0.2	0.6	10.0	9.40
HE40, M0 to M9 6ss	6	13	-9.7	-6.7	-7.1	-10.4	-5.8	-6.4			0.2	0.6	10.0	9.40
HE40, M0 to M9 1ss	8	13	-10.8	-7.7	-7.7	-7.7	-11.6	-7.0	-7.0	-7.7	0.2	1.1	10.0	8.91
HE40, M0 to M9 2ss	8	13	-10.8	-7.7	-7.7	-7.7	-11.6	-7.0	-7.0	-7.7	0.2	1.1	10.0	8.91
HE40, M0 to M9 3ss	8	13	-10.8	-7.7	-7.7	-7.7	-11.6	-7.0	-7.0	-7.7	0.2	1.1	10.0	8.91
HE40, M0 to M9 4ss	8	13	-10.8	-7.7	-7.7	-7.7	-11.6	-7.0	-7.0	-7.7	0.2	1.1	10.0	8.91
HE40, M0 to M9 5ss	8	13	-10.8	-7.7	-7.7	-7.7	-11.6	-7.0	-7.0	-7.7	0.2	1.1	10.0	8.91
HE40, M0 to M9 6ss	8	13	-10.8	-7.7	-7.7	-7.7	-11.6	-7.0	-7.0	-7.7	0.2	1.1	10.0	8.91
HE40, M0 to M9 7ss	8	13	-10.8	-7.7	-7.7	-7.7	-11.6	-7.0	-7.0	-7.7	0.2	1.1	10.0	8.91
HE40, M0 to M9 8ss	8	13	-10.8	-7.7	-7.7	-7.7	-11.6	-7.0	-7.0	-7.7	0.2	1.1	10.0	8.91
HE40 Beam Forming, M0 to M9 1ss	2	16	-9.7	-6.7							0.2	-4.7	7.0	11.75
HE40 Beam Forming, M0 to M9 2ss	2	13	-8.5	-5.2							0.2	-3.3	10.0	13.34
HE40 Beam Forming, M0 to M9 1ss	3	18	-11.6	-8.4	-8.7						0.2	-4.4	5.0	9.39
HE40 Beam Forming, M0 to M9 2ss	3	15	-9.7	-6.7	-7.1						0.2	-2.7	8.0	10.68
HE40 Beam Forming, M0 to M9 3ss	3	13	-8.5	-5.2	-5.7						0.2	-1.3	10.0	11.28
HE40 Beam Forming, M0 to M9 1ss	4	19	-12.4	-9.5	-9.4	-9.6					0.2	-3.9	4.0	7.85
HE40 Beam Forming, M0 to M9 2ss	4	16	-10.8	-7.7	-7.7	-7.7					0.2	-2.1	7.0	9.08
HE40 Beam Forming, M0 to M9 3ss	4	14	-9.7	-6.7	-7.1	-6.6					0.2	-1.1	9.0	10.15
HE40 Beam Forming, M0 to M9 4ss	4	13	-8.5	-5.2	-5.7	-5.7					0.2	0.1	10.0	9.89
HE40 Beam Forming, M0 to M9 1ss	6	18	-12.4	-9.5	-9.4	-13.3	-8.5	-8.7			0.2	-2.0	5.0	6.98
HE40 Beam Forming, M0 to M9 2ss	6	15	-11.6	-8.4	-8.7	-12.8	-8.6	-7.8			0.2	-1.3	8.0	9.33
HE40 Beam Forming, M0 to M9 3ss	6	13	-9.7	-6.7	-7.1	-10.4	-5.8	-6.4			0.2	0.6	10.0	9.40
HE40 Beam Forming, M0 to M9 4ss	6	13	-9.7	-6.7	-7.1	-10.4	-5.8	-6.4			0.2	0.6	10.0	9.40
HE40 Beam Forming, M0 to M9 5ss	6	13	-9.7	-6.7	-7.1	-10.4	-5.8	-6.4			0.2	0.6	10.0	9.40
HE40 Beam Forming, M0 to M9 6ss	6	13	-9.7	-6.7	-7.1	-10.4	-5.8	-6.4			0.2	0.6	10.0	9.40
HE40 Beam Forming, M0 to M9 1ss	8	19	-16.4	-13.1	-13.7	-13.7	-17.6	-13.1	-13.5	-12.8	0.2	-4.7	4.0	8.75
HE40 Beam Forming, M0 to M9 2ss	8	16	-12.4	-9.5	-9.4	-9.6	-13.3	-8.5	-8.7	-9.5	0.2	-0.6	7.0	7.62
HE40 Beam Forming, M0 to M9 3ss	8	14	-11.6	-8.4	-8.7	-8.6	-12.8	-8.6	-7.8	-8.2	0.2	0.2	9.0	8.83
HE40 Beam Forming, M0 to M9 4ss	8	13	-10.8	-7.7	-7.7	-7.7	-11.6	-7.0	-7.0	-7.7	0.2	1.1	10.0	8.91
HE40 Beam Forming, M0 to M9 5ss	8	13	-10.8	-7.7	-7.7	-7.7	-11.6	-7.0	-7.0	-7.7	0.2	1.1	10.0	8.91
HE40 Beam Forming, M0 to M9 6ss	8	13	-10.8	-7.7	-7.7	-7.7	-11.6	-7.0	-7.0	-7.7	0.2	1.1	10.0	8.91
HE40 Beam Forming, M0 to M9 7ss	8	13	-10.8	-7.7	-7.7	-7.7	-11.6	-7.0	-7.0	-7.7	0.2	1.1	10.0	8.91
HE40 Beam Forming, M0 to M9 8ss	8	13	-10.8	-7.7	-7.7	-7.7	-11.6	-7.0	-7.0	-7.7	0.2	1.1	10.0	8.91

	HE40 STBC, M0 to M9 2ss	2	13	-8.5	-5.2							0.2	-3.3	10.0	13.34
	HE40 STBC, M0 to M9 2ss	3	15	-8.5	-5.2	-5.7						0.2	-1.3	8.0	9.28
	HE40 STBC, M0 to M9 2ss	4	16	-8.5	-5.2	-5.7	-5.7					0.2	0.1	7.0	6.89
	HE40 STBC, M0 to M9 2ss	6	13	-9.7	-6.7	-7.1	-10.4	-5.8	-6.4			0.2	0.6	10.0	9.40
	HE40 STBC, M0 to M9 2ss	8	13	-10.8	-7.7	-7.7	-7.7	-11.6	-7.0	-7.0	-7.7	0.2	1.1	10.0	8.91
5210	Non HT80, 6 to 54 Mbps	1	13	-10.7								0.3	-10.4	10.0	20.36
	Non HT80, 6 to 54 Mbps	2	16	-12.5	-9.7							0.3	-7.5	7.0	14.53
	Non HT80, 6 to 54 Mbps	3	18	-12.5	-9.7	-9.7						0.3	-5.3	5.0	10.34
	Non HT80, 6 to 54 Mbps	4	19	-14.7	-11.4	-11.5	-10.9					0.3	-5.5	4.0	9.54
	Non HT80, 6 to 54 Mbps	6	13	-14.7	-11.4	-11.5	-15.8	-10.6	-11.3			0.3	-4.0	10.0	14.04
	Non HT80, 6 to 54 Mbps	8	13	-15.5	-12.7	-12.5	-12.7	-16.8	-11.4	-12.1	-12.1	0.3	-3.6	10.0	13.55
	HE80, M0 to M9 1ss	1	13	-11.9								0.2	-11.7	10.0	21.65
	HE80, M0 to M9 1ss	2	16	-12.5	-9.3							0.2	-7.4	7.0	14.35
	HE80, M0 to M9 2ss	2	13	-12.5	-9.3							0.2	-7.4	10.0	17.35
	HE80, M0 to M9 1ss	3	18	-14.2	-10.5	-10.9						0.2	-6.6	5.0	11.56
	HE80, M0 to M9 2ss	3	15	-14.2	-10.5	-10.9						0.2	-6.6	8.0	14.56
	HE80, M0 to M9 3ss	3	13	-14.2	-10.5	-10.9						0.2	-6.6	10.0	16.56
	HE80, M0 to M9 1ss	4	19	-15.0	-11.8	-11.3	-11.4					0.2	-5.9	4.0	9.87
	HE80, M0 to M9 2ss	4	16	-15.0	-11.8	-11.3	-11.4					0.2	-5.9	7.0	12.87
	HE80, M0 to M9 3ss	4	14	-15.0	-11.8	-11.3	-11.4					0.2	-5.9	9.0	14.87
	HE80, M0 to M9 4ss	4	13	-15.0	-11.8	-11.3	-11.4					0.2	-5.9	10.0	15.87
	HE80, M0 to M9 1ss	6	13	-16.1	-12.6	-12.8	-16.9	-11.8	-12.2			0.2	-5.3	10.0	15.30
	HE80, M0 to M9 2ss	6	13	-16.1	-12.6	-12.8	-16.9	-11.8	-12.2			0.2	-5.3	10.0	15.30
	HE80, M0 to M9 3ss	6	13	-16.1	-12.6	-12.8	-16.9	-11.8	-12.2			0.2	-5.3	10.0	15.30
	HE80, M0 to M9 4ss	6	13	-16.1	-12.6	-12.8	-16.9	-11.8	-12.2			0.2	-5.3	10.0	15.30
	HE80, M0 to M9 5ss	6	13	-16.1	-12.6	-12.8	-16.9	-11.8	-12.2			0.2	-5.3	10.0	15.30
	HE80, M0 to M9 6ss	6	13	-16.1	-12.6	-12.8	-16.9	-11.8	-12.2			0.2	-5.3	10.0	15.30
	HE80, M0 to M9 1ss	8	13	-16.1	-12.6	-12.8	-12.4	-16.9	-11.8	-12.2	-12.4	0.2	-3.8	10.0	13.80
	HE80, M0 to M9 2ss	8	13	-16.1	-12.6	-12.8	-12.4	-16.9	-11.8	-12.2	-12.4	0.2	-3.8	10.0	13.80
	HE80, M0 to M9 3ss	8	13	-16.1	-12.6	-12.8	-12.4	-16.9	-11.8	-12.2	-12.4	0.2	-3.8	10.0	13.80
	HE80, M0 to M9 4ss	8	13	-16.1	-12.6	-12.8	-12.4	-16.9	-11.8	-12.2	-12.4	0.2	-3.8	10.0	13.80
	HE80, M0 to M9 5ss	8	13	-16.1	-12.6	-12.8	-12.4	-16.9	-11.8	-12.2	-12.4	0.2	-3.8	10.0	13.80
	HE80, M0 to M9 6ss	8	13	-16.1	-12.6	-12.8	-12.4	-16.9	-11.8	-12.2	-12.4	0.2	-3.8	10.0	13.80
	HE80, M0 to M9 7ss	8	13	-16.1	-12.6	-12.8	-12.4	-16.9	-11.8	-12.2	-12.4	0.2	-3.8	10.0	13.80
	HE80, M0 to M9 8ss	8	13	-16.1	-12.6	-12.8	-12.4	-16.9	-11.8	-12.2	-12.4	0.2	-3.8	10.0	13.80
	HE80 Beam Forming, M0 to M9 1ss	2	16	-15.0	-11.8							0.2	-9.9	7.0	16.85
	HE80 Beam Forming, M0 to M9 2ss	2	13	-12.5	-9.3							0.2	-7.4	10.0	17.35
	HE80 Beam Forming, M0 to M9 1ss	3	18	-17.0	-13.5	-13.7						0.2	-9.4	5.0	14.45
	HE80 Beam Forming, M0 to M9 2ss	3	15	-15.0	-11.8	-11.3						0.2	-7.4	8.0	15.40
	HE80 Beam Forming, M0 to M9 3ss	3	13	-14.2	-10.5	-10.9						0.2	-6.6	10.0	16.56
	HE80 Beam Forming, M0 to M9 1ss	4	19	-17.0	-13.5	-13.7	-14.1					0.2	-8.1	4.0	12.10
	HE80 Beam Forming, M0 to M9 2ss	4	16	-16.1	-12.6	-12.8	-12.4					0.2	-7.0	7.0	13.98

	HE80 Beam Forming, M0 to M9 3ss	4	14	-15.0	-11.8	-11.3	-11.4					0.2	-5.9	9.0	14.87
	HE80 Beam Forming, M0 to M9 4ss	4	13	-15.0	-11.8	-11.3	-11.4					0.2	-5.9	10.0	15.87
	HE80 Beam Forming, M0 to M9 1ss	6	18	-19.0	-15.4	-15.9	-20.0	-14.8	-14.9			0.2	-8.2	5.0	13.21
	HE80 Beam Forming, M0 to M9 2ss	6	15	-17.0	-13.5	-13.7	-17.9	-12.6	-12.9			0.2	-6.1	8.0	14.14
	HE80 Beam Forming, M0 to M9 3ss	6	13	-16.1	-12.6	-12.8	-16.9	-11.8	-12.2			0.2	-5.3	10.0	15.30
	HE80 Beam Forming, M0 to M9 4ss	6	13	-16.1	-12.6	-12.8	-16.9	-11.8	-12.2			0.2	-5.3	10.0	15.30
	HE80 Beam Forming, M0 to M9 5ss	6	13	-16.1	-12.6	-12.8	-16.9	-11.8	-12.2			0.2	-5.3	10.0	15.30
	HE80 Beam Forming, M0 to M9 6ss	6	13	-16.1	-12.6	-12.8	-16.9	-11.8	-12.2			0.2	-5.3	10.0	15.30
	HE80 Beam Forming, M0 to M9 1ss	8	19	-20.8	-17.9	-18.3	-17.8	-22.0	-17.1	-17.7	-16.8	0.2	-9.0	4.0	12.98
	HE80 Beam Forming, M0 to M9 2ss	8	16	-17.7	-14.4	-14.6	-14.3	-19.0	-13.5	-13.7	-14.3	0.2	-5.6	7.0	12.57
	HE80 Beam Forming, M0 to M9 3ss	8	14	-17.0	-13.5	-13.7	-14.1	-17.9	-12.6	-12.9	-13.3	0.2	-4.8	9.0	13.76
	HE80 Beam Forming, M0 to M9 4ss	8	13	-16.1	-12.6	-12.8	-12.4	-16.9	-11.8	-12.2	-12.4	0.2	-3.8	10.0	13.80
	HE80 Beam Forming, M0 to M9 5ss	8	13	-16.1	-12.6	-12.8	-12.4	-16.9	-11.8	-12.2	-12.4	0.2	-3.8	10.0	13.80
	HE80 Beam Forming, M0 to M9 6ss	8	13	-16.1	-12.6	-12.8	-12.4	-16.9	-11.8	-12.2	-12.4	0.2	-3.8	10.0	13.80
	HE80 Beam Forming, M0 to M9 7ss	8	13	-16.1	-12.6	-12.8	-12.4	-16.9	-11.8	-12.2	-12.4	0.2	-3.8	10.0	13.80
	HE80 Beam Forming, M0 to M9 8ss	8	13	-16.1	-12.6	-12.8	-12.4	-16.9	-11.8	-12.2	-12.4	0.2	-3.8	10.0	13.80
	HE80 STBC, M0 to M9 1ss	2	13	-12.5	-9.3							0.2	-7.4	10.0	17.35
	HE80 STBC, M0 to M9 1ss	3	13	-14.2	-10.5	-10.9						0.2	-6.6	10.0	16.56
	HE80 STBC, M0 to M9 1ss	4	13	-15.0	-11.8	-11.3	-11.4					0.2	-5.9	10.0	15.87
	HE80 STBC, M0 to M9 1ss	6	13	-16.1	-12.6	-12.8	-16.9	-11.8	-12.2			0.2	-5.3	10.0	15.30
	HE80 STBC, M0 to M9 1ss	8	13	-16.1	-12.6	-12.8	-12.4	-16.9	-11.8	-12.2	-12.4	0.2	-3.8	10.0	13.80
5220	Non HT20, 6 to 54 Mbps	1	13	1.2								0.3	1.5	10.0	8.48
	Non HT20, 6 to 54 Mbps	2	16	1.2	4.3							0.3	6.4	7.0	0.65
	Non HT20, 6 to 54 Mbps	3	18	-3.0	0.1	0.4						0.3	4.5	5.0	0.49
	Non HT20, 6 to 54 Mbps	4	19	-5.2	-1.8	-1.9	-1.8					0.3	3.9	4.0	0.12
	Non HT20, 6 to 54 Mbps	6	13	-0.8	2.3	2.5	-2.0	3.1	2.9			0.3	9.8	10.0	0.17
	Non HT20, 6 to 54 Mbps	8	13	-3.0	0.1	0.4	0.4	-4.0	1.0	1.2	0.5	0.3	9.3	10.0	0.75
	Non HT20 Beam Forming, 6 to 54 Mbps	2	16	1.2	4.3							0.3	6.4	7.0	0.65
	Non HT20 Beam Forming, 6 to 54 Mbps	3	18	-3.0	0.1	0.4						0.3	4.5	5.0	0.49
	Non HT20 Beam Forming, 6 to 54 Mbps	4	19	-5.2	-1.8	-1.9	-1.8					0.3	3.9	4.0	0.12
	Non HT20 Beam Forming, 6 to 54 Mbps	6	18	-5.9	-2.7	-2.6	-7.0	-1.7	-1.8			0.3	4.9	5.0	0.08
	Non HT20 Beam Forming, 6 to 54 Mbps	8	19	-8.9	-5.8	-5.4	-5.5	-9.9	-5.1	-5.4	-5.3	0.3	3.2	4.0	0.76
	HE20, M0 to M9 1ss	1	13	1.0								0.2	1.2	10.0	8.83
	HE20, M0 to M9 1ss	2	16	1.0	4.1							0.2	6.0	7.0	1.00
	HE20, M0 to M9 2ss	2	13	1.0	4.1							0.2	6.0	10.0	4.00
	HE20, M0 to M9 1ss	3	18	-3.1	0.0	-0.3						0.2	4.0	5.0	0.98
	HE20, M0 to M9 2ss	3	15	0.1	3.1	3.3						0.2	7.3	8.0	0.67
	HE20, M0 to M9 3ss	3	13	1.0	4.1	4.3						0.2	8.3	10.0	1.68
	HE20, M0 to M9 1ss	4	19	-5.4	-2.0	-2.0	-2.3					0.2	3.5	4.0	0.53
	HE20, M0 to M9 2ss	4	16	-2.3	1.0	0.9	1.0					0.2	6.5	7.0	0.46
	HE20, M0 to M9 3ss	4	14	0.1	3.1	3.3	3.3					0.2	8.8	9.0	0.17
	HE20, M0 to M9 4ss	4	13	1.0	4.1	4.3	4.3					0.2	9.8	10.0	0.18


HE20, M0 to M9 1ss	6	13	-1.1	2.1	2.2	-1.9	2.8	2.7			0.2	9.5	10.0	0.55
HE20, M0 to M9 2ss	6	13	-1.1	2.1	2.2	-1.9	2.8	2.7			0.2	9.5	10.0	0.55
HE20, M0 to M9 3ss	6	13	-1.1	2.1	2.2	-1.9	2.8	2.7			0.2	9.5	10.0	0.55
HE20, M0 to M9 4ss	6	13	-1.1	2.1	2.2	-1.9	2.8	2.7			0.2	9.5	10.0	0.55
HE20, M0 to M9 5ss	6	13	-1.1	2.1	2.2	-1.9	2.8	2.7			0.2	9.5	10.0	0.55
HE20, M0 to M9 6ss	6	13	-1.1	2.1	2.2	-1.9	2.8	2.7			0.2	9.5	10.0	0.55
HE20, M0 to M9 1ss	8	13	-2.3	1.0	0.9	1.0	-3.1	2.1	1.7	1.4	0.2	9.9	10.0	0.14
HE20, M0 to M9 2ss	8	13	-2.3	1.0	0.9	1.0	-3.1	2.1	1.7	1.4	0.2	9.9	10.0	0.14
HE20, M0 to M9 3ss	8	13	-2.3	1.0	0.9	1.0	-3.1	2.1	1.7	1.4	0.2	9.9	10.0	0.14
HE20, M0 to M9 4ss	8	13	-2.3	1.0	0.9	1.0	-3.1	2.1	1.7	1.4	0.2	9.9	10.0	0.14
HE20, M0 to M9 5ss	8	13	-2.3	1.0	0.9	1.0	-3.1	2.1	1.7	1.4	0.2	9.9	10.0	0.14
HE20, M0 to M9 6ss	8	13	-2.3	1.0	0.9	1.0	-3.1	2.1	1.7	1.4	0.2	9.9	10.0	0.14
HE20, M0 to M9 7ss	8	13	-2.3	1.0	0.9	1.0	-3.1	2.1	1.7	1.4	0.2	9.9	10.0	0.14
HE20, M0 to M9 8ss	8	13	-2.3	1.0	0.9	1.0	-3.1	2.1	1.7	1.4	0.2	9.9	10.0	0.14
HE20 Beam Forming, M0 to M9 1ss	2	16	1.0	4.1							0.2	6.0	7.0	1.00
HE20 Beam Forming, M0 to M9 2ss	2	13	1.0	4.1							0.2	6.0	10.0	4.00
HE20 Beam Forming, M0 to M9 1ss	3	18	-3.1	0.0	-0.3						0.2	4.0	5.0	0.98
HE20 Beam Forming, M0 to M9 2ss	3	15	0.1	3.1	3.3						0.2	7.3	8.0	0.67
HE20 Beam Forming, M0 to M9 3ss	3	13	1.0	4.1	4.3						0.2	8.3	10.0	1.68
HE20 Beam Forming, M0 to M9 1ss	4	19	-5.4	-2.0	-2.0	-2.3					0.2	3.5	4.0	0.53
HE20 Beam Forming, M0 to M9 2ss	4	16	-2.3	1.0	0.9	1.0					0.2	6.5	7.0	0.46
HE20 Beam Forming, M0 to M9 3ss	4	14	0.1	3.1	3.3	3.3					0.2	8.8	9.0	0.17
HE20 Beam Forming, M0 to M9 4ss	4	13	1.0	4.1	4.3	4.3					0.2	9.8	10.0	0.18
HE20 Beam Forming, M0 to M9 1ss	6	18	-6.2	-2.9	-2.8	-7.2	-1.8	-2.1			0.2	4.6	5.0	0.44
HE20 Beam Forming, M0 to M9 2ss	6	15	-3.1	0.0	-0.3	-4.0	1.1	0.9			0.2	7.4	8.0	0.55
HE20 Beam Forming, M0 to M9 3ss	6	13	-1.1	2.1	2.2	-1.9	2.8	2.7			0.2	9.5	10.0	0.55
HE20 Beam Forming, M0 to M9 4ss	6	13	-1.1	2.1	2.2	-1.9	2.8	2.7			0.2	9.5	10.0	0.55
HE20 Beam Forming, M0 to M9 5ss	6	13	-1.1	2.1	2.2	-1.9	2.8	2.7			0.2	9.5	10.0	0.55
HE20 Beam Forming, M0 to M9 6ss	6	13	-1.1	2.1	2.2	-1.9	2.8	2.7			0.2	9.5	10.0	0.55
HE20 Beam Forming, M0 to M9 1ss	8	19	-8.0	-5.0	-4.5	-5.2	-9.2	-4.0	-4.3	-4.5	0.2	3.9	4.0	0.07
HE20 Beam Forming, M0 to M9 2ss	8	16	-5.4	-2.0	-2.0	-2.3	-6.3	-1.0	-0.9	-1.6	0.2	6.9	7.0	0.13
HE20 Beam Forming, M0 to M9 3ss	8	14	-3.1	0.0	-0.3	0.3	-4.0	1.1	0.9	0.2	0.2	8.9	9.0	0.10
HE20 Beam Forming, M0 to M9 4ss	8	13	-2.3	1.0	0.9	1.0	-3.1	2.1	1.7	1.4	0.2	9.9	10.0	0.14
HE20 Beam Forming, M0 to M9 5ss	8	13	-2.3	1.0	0.9	1.0	-3.1	2.1	1.7	1.4	0.2	9.9	10.0	0.14
HE20 Beam Forming, M0 to M9 6ss	8	13	-2.3	1.0	0.9	1.0	-3.1	2.1	1.7	1.4	0.2	9.9	10.0	0.14
HE20 Beam Forming, M0 to M9 7ss	8	13	-2.3	1.0	0.9	1.0	-3.1	2.1	1.7	1.4	0.2	9.9	10.0	0.14
HE20 Beam Forming, M0 to M9 8ss	8	13	-2.3	1.0	0.9	1.0	-3.1	2.1	1.7	1.4	0.2	9.9	10.0	0.14
HE20 STBC, M0 to M9 2ss	2	13	1.0	4.1							0.2	6.0	10.0	4.00
HE20 STBC, M0 to M9 2ss	3	15	0.1	3.1	3.3						0.2	7.3	8.0	0.67
HE20 STBC, M0 to M9 2ss	4	16	-2.3	1.0	0.9	1.0					0.2	6.5	7.0	0.46
HE20 STBC, M0 to M9 2ss	6	13	-1.1	2.1	2.2	-1.9	2.8	2.7			0.2	9.5	10.0	0.55
HE20 STBC, M0 to M9 2ss	8	13	-2.3	1.0	0.9	1.0	-3.1	2.1	1.7	1.4	0.2	9.9	10.0	0.14


5230	Non HT40, 6 to 54 Mbps	1	13	-2.0								0.3	-1.7	10.0	11.68
	Non HT40, 6 to 54 Mbps	2	16	-2.0	1.2							0.3	3.2	7.0	3.78
	Non HT40, 6 to 54 Mbps	3	18	-3.2	0.1	0.2						0.3	4.4	5.0	0.61
	Non HT40, 6 to 54 Mbps	4	19	-5.1	-1.7	-1.9	-1.9					0.3	3.9	4.0	0.10
	Non HT40, 6 to 54 Mbps	6	13	-2.0	1.2	1.2	-3.0	1.7	2.2			0.3	8.7	10.0	1.28
	Non HT40, 6 to 54 Mbps	8	13	-3.2	0.1	0.2	0.0	-4.3	0.8	1.2	0.3	0.3	9.1	10.0	0.92
	HE40, M0 to M9 1ss	1	13	-2.1								0.2	-1.9	10.0	11.91
	HE40, M0 to M9 1ss	2	16	-2.1	1.0							0.2	2.9	7.0	4.08
	HE40, M0 to M9 2ss	2	13	-2.1	1.0							0.2	2.9	10.0	7.08
	HE40, M0 to M9 1ss	3	18	-2.9	0.2	0.1						0.2	4.3	5.0	0.69
	HE40, M0 to M9 2ss	3	15	-2.1	1.0	1.5						0.2	5.4	8.0	2.64
	HE40, M0 to M9 3ss	3	13	-2.1	1.0	1.5						0.2	5.4	10.0	4.64
	HE40, M0 to M9 1ss	4	19	-4.7	-2.1	-1.4	-1.9					0.2	3.9	4.0	0.15
	HE40, M0 to M9 2ss	4	16	-2.1	1.0	1.5	1.0					0.2	6.8	7.0	0.23
	HE40, M0 to M9 3ss	4	14	-2.1	1.0	1.5	1.0					0.2	6.8	9.0	2.23
	HE40, M0 to M9 4ss	4	13	-2.1	1.0	1.5	1.0					0.2	6.8	10.0	3.23
	HE40, M0 to M9 1ss	6	13	-2.1	1.0	1.5	-3.0	2.1	2.4			0.2	8.7	10.0	1.27
	HE40, M0 to M9 2ss	6	13	-2.1	1.0	1.5	-3.0	2.1	2.4			0.2	8.7	10.0	1.27
	HE40, M0 to M9 3ss	6	13	-2.1	1.0	1.5	-3.0	2.1	2.4			0.2	8.7	10.0	1.27
	HE40, M0 to M9 4ss	6	13	-2.1	1.0	1.5	-3.0	2.1	2.4			0.2	8.7	10.0	1.27
	HE40, M0 to M9 5ss	6	13	-2.1	1.0	1.5	-3.0	2.1	2.4			0.2	8.7	10.0	1.27
	HE40, M0 to M9 6ss	6	13	-2.1	1.0	1.5	-3.0	2.1	2.4			0.2	8.7	10.0	1.27
	HE40, M0 to M9 1ss	8	13	-2.9	0.2	0.1	0.1	-3.8	0.9	1.4	0.0	0.2	9.0	10.0	0.98
	HE40, M0 to M9 2ss	8	13	-2.9	0.2	0.1	0.1	-3.8	0.9	1.4	0.0	0.2	9.0	10.0	0.98
	HE40, M0 to M9 3ss	8	13	-2.9	0.2	0.1	0.1	-3.8	0.9	1.4	0.0	0.2	9.0	10.0	0.98
	HE40, M0 to M9 4ss	8	13	-2.9	0.2	0.1	0.1	-3.8	0.9	1.4	0.0	0.2	9.0	10.0	0.98
	HE40, M0 to M9 5ss	8	13	-2.9	0.2	0.1	0.1	-3.8	0.9	1.4	0.0	0.2	9.0	10.0	0.98
	HE40, M0 to M9 6ss	8	13	-2.9	0.2	0.1	0.1	-3.8	0.9	1.4	0.0	0.2	9.0	10.0	0.98
	HE40, M0 to M9 7ss	8	13	-2.9	0.2	0.1	0.1	-3.8	0.9	1.4	0.0	0.2	9.0	10.0	0.98
	HE40, M0 to M9 8ss	8	13	-2.9	0.2	0.1	0.1	-3.8	0.9	1.4	0.0	0.2	9.0	10.0	0.98
	HE40 Beam Forming, M0 to M9 1ss	2	16	-2.1	1.0							0.2	2.9	7.0	4.08
	HE40 Beam Forming, M0 to M9 2ss	2	13	-2.1	1.0							0.2	2.9	10.0	7.08
	HE40 Beam Forming, M0 to M9 1ss	3	18	-3.8	-1.0	-0.8						0.2	3.3	5.0	1.71
	HE40 Beam Forming, M0 to M9 2ss	3	15	-2.1	1.0	1.5						0.2	5.4	8.0	2.64
	HE40 Beam Forming, M0 to M9 3ss	3	13	-2.1	1.0	1.5						0.2	5.4	10.0	4.64
	HE40 Beam Forming, M0 to M9 1ss	4	19	-5.9	-2.9	-2.9	-3.1					0.2	2.7	4.0	1.32
	HE40 Beam Forming, M0 to M9 2ss	4	16	-2.9	0.2	0.1	0.1					0.2	5.8	7.0	1.24
	HE40 Beam Forming, M0 to M9 3ss	4	14	-2.1	1.0	1.5	1.0					0.2	6.8	9.0	2.23
	HE40 Beam Forming, M0 to M9 4ss	4	13	-2.1	1.0	1.5	1.0					0.2	6.8	10.0	3.23
	HE40 Beam Forming, M0 to M9 1ss	6	18	-7.1	-3.9	-4.2	-8.0	-3.1	-2.8			0.2	3.5	5.0	1.47
	HE40 Beam Forming, M0 to M9 2ss	6	15	-3.8	-1.0	-0.8	-4.9	-0.1	0.0			0.2	6.6	8.0	1.43
	HE40 Beam Forming, M0 to M9 3ss	6	13	-2.1	1.0	1.5	-3.0	2.1	2.4			0.2	8.7	10.0	1.27

	HE40 Beam Forming, M0 to M9 4ss	6	13	-2.1	1.0	1.5	-3.0	2.1	2.4			0.2	8.7	10.0	1.27
	HE40 Beam Forming, M0 to M9 5ss	6	13	-2.1	1.0	1.5	-3.0	2.1	2.4			0.2	8.7	10.0	1.27
	HE40 Beam Forming, M0 to M9 6ss	6	13	-2.1	1.0	1.5	-3.0	2.1	2.4			0.2	8.7	10.0	1.27
	HE40 Beam Forming, M0 to M9 1ss	8	19	-9.1	-5.9	-5.9	-5.9	-9.9	-5.0	-4.6	-5.4	0.2	3.1	4.0	0.91
	HE40 Beam Forming, M0 to M9 2ss	8	16	-5.9	-2.9	-2.9	-3.1	-7.5	-1.9	-1.7	-2.2	0.2	6.1	7.0	0.93
	HE40 Beam Forming, M0 to M9 3ss	8	14	-3.8	-1.0	-0.8	-0.8	-4.9	-0.1	0.0	-0.4	0.2	8.0	9.0	0.97
	HE40 Beam Forming, M0 to M9 4ss	8	13	-2.9	0.2	0.1	0.1	-3.8	0.9	1.4	0.0	0.2	9.0	10.0	0.98
	HE40 Beam Forming, M0 to M9 5ss	8	13	-2.9	0.2	0.1	0.1	-3.8	0.9	1.4	0.0	0.2	9.0	10.0	0.98
	HE40 Beam Forming, M0 to M9 6ss	8	13	-2.9	0.2	0.1	0.1	-3.8	0.9	1.4	0.0	0.2	9.0	10.0	0.98
	HE40 Beam Forming, M0 to M9 7ss	8	13	-2.9	0.2	0.1	0.1	-3.8	0.9	1.4	0.0	0.2	9.0	10.0	0.98
	HE40 Beam Forming, M0 to M9 8ss	8	13	-2.9	0.2	0.1	0.1	-3.8	0.9	1.4	0.0	0.2	9.0	10.0	0.98
	HE40 STBC, M0 to M9 2ss	2	13	-2.1	1.0							0.2	2.9	10.0	7.08
	HE40 STBC, M0 to M9 2ss	3	15	-2.1	1.0	1.5						0.2	5.4	8.0	2.64
	HE40 STBC, M0 to M9 2ss	4	16	-2.1	1.0	1.5	1.0					0.2	6.8	7.0	0.23
	HE40 STBC, M0 to M9 2ss	6	13	-2.1	1.0	1.5	-3.0	2.1	2.4			0.2	8.7	10.0	1.27
	HE40 STBC, M0 to M9 2ss	8	13	-2.9	0.2	0.1	0.1	-3.8	0.9	1.4	0.0	0.2	9.0	10.0	0.98
5240	Non HT20, 6 to 54 Mbps	1	13	1.0								0.3	1.3	10.0	8.68
	Non HT20, 6 to 54 Mbps	2	16	1.0	3.9							0.3	6.0	7.0	0.98
	Non HT20, 6 to 54 Mbps	3	18	-3.2	0.2	-0.2						0.3	4.3	5.0	0.73
	Non HT20, 6 to 54 Mbps	4	19	-5.1	-1.9	-1.9	-1.9					0.3	3.8	4.0	0.16
	Non HT20, 6 to 54 Mbps	6	13	-1.0	2.3	2.0	-2.1	2.5	3.3			0.3	9.7	10.0	0.33
	Non HT20, 6 to 54 Mbps	8	13	-3.2	0.2	-0.2	-0.1	-4.4	0.8	1.3	0.3	0.3	9.0	10.0	0.96
	Non HT20 Beam Forming, 6 to 54 Mbps	2	16	1.0	3.9							0.3	6.0	7.0	0.98
	Non HT20 Beam Forming, 6 to 54 Mbps	3	18	-3.2	0.2	-0.2						0.3	4.3	5.0	0.73
	Non HT20 Beam Forming, 6 to 54 Mbps	4	19	-5.1	-1.9	-1.9	-1.9					0.3	3.8	4.0	0.16
	Non HT20 Beam Forming, 6 to 54 Mbps	6	18	-6.0	-2.9	-3.2	-7.2	-2.3	-2.1			0.3	4.5	5.0	0.46
	Non HT20 Beam Forming, 6 to 54 Mbps	8	19	-9.0	-5.8	-5.7	-5.9	-10.2	-4.6	-4.7	-5.6	0.3	3.3	4.0	0.73
	HE20, M0 to M9 1ss	1	13	0.9								0.2	1.1	10.0	8.93
	HE20, M0 to M9 1ss	2	16	0.9	3.6							0.2	5.6	7.0	1.36
	HE20, M0 to M9 2ss	2	13	0.9	3.6							0.2	5.6	10.0	4.36
	HE20, M0 to M9 1ss	3	18	-2.2	0.8	0.7						0.2	4.9	5.0	0.09
	HE20, M0 to M9 2ss	3	15	-0.1	2.7	2.9						0.2	7.0	8.0	1.03
	HE20, M0 to M9 3ss	3	13	0.9	3.6	4.3						0.2	8.1	10.0	1.89
	HE20, M0 to M9 1ss	4	19	-5.1	-2.0	-2.6	-2.3					0.2	3.3	4.0	0.65
	HE20, M0 to M9 2ss	4	16	-2.2	0.8	0.7	0.9					0.2	6.4	7.0	0.58
	HE20, M0 to M9 3ss	4	14	-0.1	2.7	2.9	3.0					0.2	8.5	9.0	0.51
	HE20, M0 to M9 4ss	4	13	0.9	3.6	4.3	3.9					0.2	9.6	10.0	0.45
	HE20, M0 to M9 1ss	6	13	-1.4	2.2	1.8	-2.3	2.6	3.2			0.2	9.4	10.0	0.59
	HE20, M0 to M9 2ss	6	13	-1.4	2.2	1.8	-2.3	2.6	3.2			0.2	9.4	10.0	0.59
	HE20, M0 to M9 3ss	6	13	-1.4	2.2	1.8	-2.3	2.6	3.2			0.2	9.4	10.0	0.59
	HE20, M0 to M9 4ss	6	13	-1.4	2.2	1.8	-2.3	2.6	3.2			0.2	9.4	10.0	0.59
	HE20, M0 to M9 5ss	6	13	-1.4	2.2	1.8	-2.3	2.6	3.2			0.2	9.4	10.0	0.59

HE20, M0 to M9 6ss	6	13	-1.4	2.2	1.8	-2.3	2.6	3.2			0.2	9.4	10.0	0.59
HE20, M0 to M9 1ss	8	13	-2.2	0.8	0.7	0.9	-3.2	1.5	2.0	1.4	0.2	9.7	10.0	0.25
HE20, M0 to M9 2ss	8	13	-2.2	0.8	0.7	0.9	-3.2	1.5	2.0	1.4	0.2	9.7	10.0	0.25
HE20, M0 to M9 3ss	8	13	-2.2	0.8	0.7	0.9	-3.2	1.5	2.0	1.4	0.2	9.7	10.0	0.25
HE20, M0 to M9 4ss	8	13	-2.2	0.8	0.7	0.9	-3.2	1.5	2.0	1.4	0.2	9.7	10.0	0.25
HE20, M0 to M9 5ss	8	13	-2.2	0.8	0.7	0.9	-3.2	1.5	2.0	1.4	0.2	9.7	10.0	0.25
HE20, M0 to M9 6ss	8	13	-2.2	0.8	0.7	0.9	-3.2	1.5	2.0	1.4	0.2	9.7	10.0	0.25
HE20, M0 to M9 7ss	8	13	-2.2	0.8	0.7	0.9	-3.2	1.5	2.0	1.4	0.2	9.7	10.0	0.25
HE20, M0 to M9 8ss	8	13	-2.2	0.8	0.7	0.9	-3.2	1.5	2.0	1.4	0.2	9.7	10.0	0.25
HE20 Beam Forming, M0 to M9 1ss	2	16	0.9	3.6							0.2	5.6	7.0	1.36
HE20 Beam Forming, M0 to M9 2ss	2	13	0.9	3.6							0.2	5.6	10.0	4.36
HE20 Beam Forming, M0 to M9 1ss	3	18	-2.2	0.8	0.7						0.2	4.9	5.0	0.09
HE20 Beam Forming, M0 to M9 2ss	3	15	-0.1	2.7	2.9						0.2	7.0	8.0	1.03
HE20 Beam Forming, M0 to M9 3ss	3	13	0.9	3.6	4.3						0.2	8.1	10.0	1.89
HE20 Beam Forming, M0 to M9 1ss	4	19	-5.1	-2.0	-2.6	-2.3					0.2	3.3	4.0	0.65
HE20 Beam Forming, M0 to M9 2ss	4	16	-2.2	0.8	0.7	0.9					0.2	6.4	7.0	0.58
HE20 Beam Forming, M0 to M9 3ss	4	14	-0.1	2.7	2.9	3.0					0.2	8.5	9.0	0.51
HE20 Beam Forming, M0 to M9 4ss	4	13	0.9	3.6	4.3	3.9					0.2	9.6	10.0	0.45
HE20 Beam Forming, M0 to M9 1ss	6	18	-6.3	-3.2	-3.1	-7.7	-2.7	-2.2			0.2	4.2	5.0	0.83
HE20 Beam Forming, M0 to M9 2ss	6	15	-3.4	-0.2	-0.2	-4.5	0.3	0.9			0.2	7.2	8.0	0.82
HE20 Beam Forming, M0 to M9 3ss	6	13	-1.4	2.2	1.8	-2.3	2.6	3.2			0.2	9.4	10.0	0.59
HE20 Beam Forming, M0 to M9 4ss	6	13	-1.4	2.2	1.8	-2.3	2.6	3.2			0.2	9.4	10.0	0.59
HE20 Beam Forming, M0 to M9 5ss	6	13	-1.4	2.2	1.8	-2.3	2.6	3.2			0.2	9.4	10.0	0.59
HE20 Beam Forming, M0 to M9 6ss	6	13	-1.4	2.2	1.8	-2.3	2.6	3.2			0.2	9.4	10.0	0.59
HE20 Beam Forming, M0 to M9 1ss	8	19	-8.8	-5.1	-5.1	-5.1	-9.8	-4.4	-4.1	-4.9	0.2	3.7	4.0	0.33
HE20 Beam Forming, M0 to M9 2ss	8	16	-5.1	-2.0	-2.6	-2.3	-6.5	-1.7	-1.1	-2.0	0.2	6.6	7.0	0.41
HE20 Beam Forming, M0 to M9 3ss	8	14	-3.4	-0.2	-0.2	-0.5	-4.5	0.3	0.9	0.1	0.2	8.6	9.0	0.42
HE20 Beam Forming, M0 to M9 4ss	8	13	-2.2	0.8	0.7	0.9	-3.2	1.5	2.0	1.4	0.2	9.7	10.0	0.25
HE20 Beam Forming, M0 to M9 5ss	8	13	-2.2	0.8	0.7	0.9	-3.2	1.5	2.0	1.4	0.2	9.7	10.0	0.25
HE20 Beam Forming, M0 to M9 6ss	8	13	-2.2	0.8	0.7	0.9	-3.2	1.5	2.0	1.4	0.2	9.7	10.0	0.25
HE20 Beam Forming, M0 to M9 7ss	8	13	-2.2	0.8	0.7	0.9	-3.2	1.5	2.0	1.4	0.2	9.7	10.0	0.25
HE20 Beam Forming, M0 to M9 8ss	8	13	-2.2	0.8	0.7	0.9	-3.2	1.5	2.0	1.4	0.2	9.7	10.0	0.25
HE20 STBC, M0 to M9 2ss	2	13	0.9	3.6							0.2	5.6	10.0	4.36
HE20 STBC, M0 to M9 2ss	3	15	-0.1	2.7	2.9						0.2	7.0	8.0	1.03
HE20 STBC, M0 to M9 2ss	4	16	-2.2	0.8	0.7	0.9					0.2	6.4	7.0	0.58
HE20 STBC, M0 to M9 2ss	6	13	-1.4	2.2	1.8	-2.3	2.6	3.2			0.2	9.4	10.0	0.59
HE20 STBC, M0 to M9 2ss	8	13	-2.2	0.8	0.7	0.9	-3.2	1.5	2.0	1.4	0.2	9.7	10.0	0.25

Power Spectral Density 15.407
5220 MHz, HE20 Beam Forming, M0 to M9 1ss

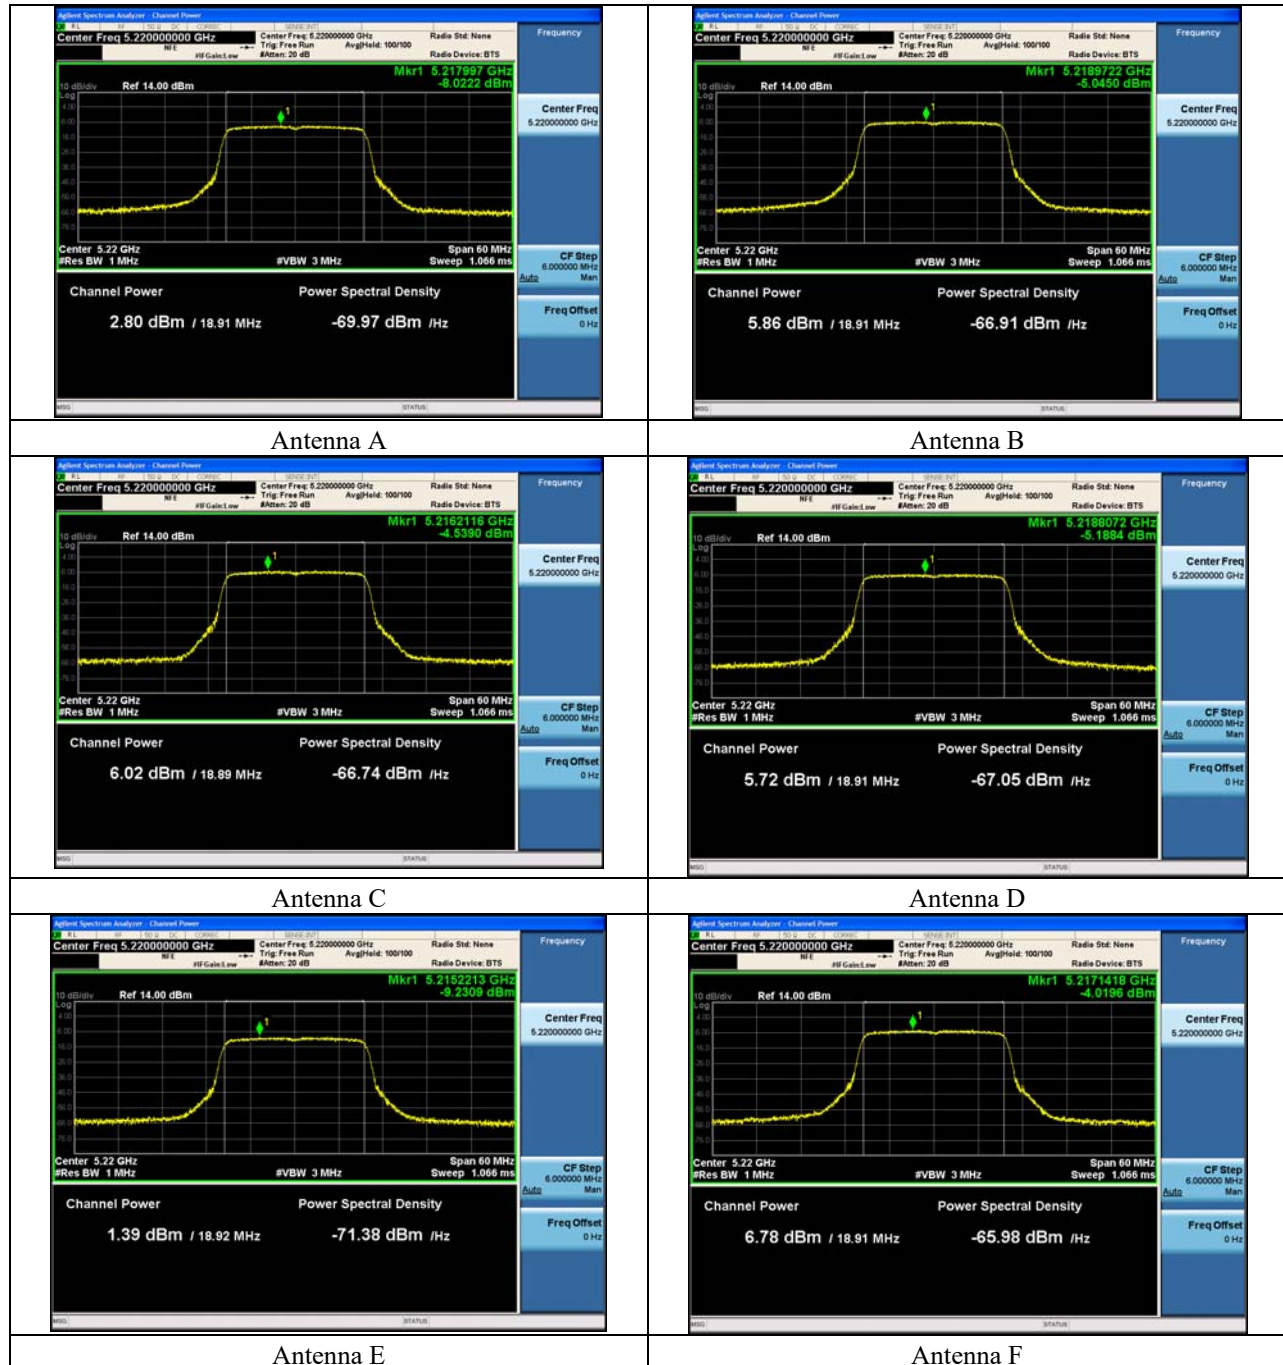

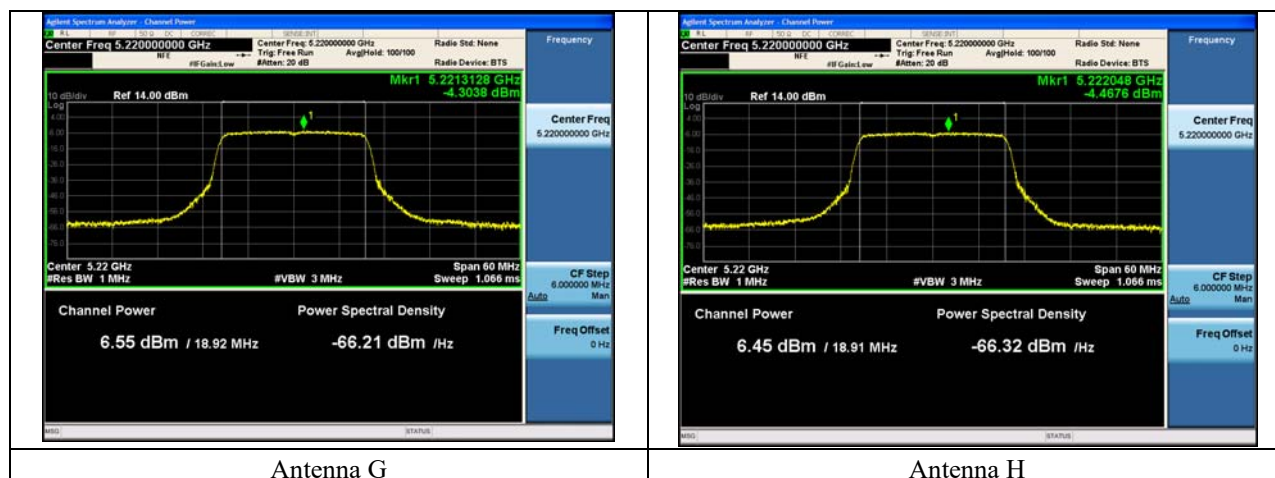

A.5 Conducted Spurious Emissions

Not covered by this report.

A.6 Conducted Receiver Spurious Emissions

Not covered by this report.

A.7 Conducted Band Edge

Conducted Band Edge Test Requirement

15.407(b) Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (5) The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.
- (6) Unwanted emissions below 1 GHz must comply with the general field strength limits set forth in §15.209.
- (7) The provisions of §15.205 apply to intentional radiators operating under this section.
- (8) When measuring the emission limits, the nominal carrier frequency shall be adjusted as close to the upper and lower frequency band edges as the design of the equipment permits.

Radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

Use formula below to substitute conducted measurements in place of radiated measurements

$$E[\text{dB}\mu\text{V/m}] = \text{EIRP}[\text{dBm}] - 20 \log(d[\text{meters}]) + 104.77, \text{ where } E = \text{field strength and } d = 3 \text{ meter}$$

- 1) Average Plot, Limit= -41.25 dBm eirp
- 2) Peak plot, Limit = -21.25 dBm eirp

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

2. Unwanted Emissions that fall Outside of the Restricted Bands

- a) For all measurements, follow the requirements in II.G.3. “General Requirements for Unwanted Emissions Measurements.”
- b) At frequencies below 1000 MHz, use the procedure described in II.G.4. “Procedure for Unwanted Emissions Measurements Below 1000 MHz.”
- c) At frequencies above 1000 MHz, use the procedure for maximum emissions described in II.G.5., “Procedure for Unwanted Emissions Measurements Above 1000 MHz.”
- (i) Sections 15.407(b)(1-3) specifies the unwanted emissions limit for the U-NII-1 and U-NII-2 bands. As specified, emissions above 1000 MHz that are outside of the restricted bands are subject to a peak emission limit of -27 dBm/MHz.³

Conducted Band Edge Test Procedure

KDB 789033 D02 General UNII Test Procedures New Rules v02r01

Ref. ANSI C63.10: 2013

Conducted Spurious Emissions

Test Procedure

1. Connect the antenna port(s) to the spectrum analyzer input.
2. Place the radio in continuous transmit mode
3. Configure Spectrum analyzer as per test parameters below (be sure to enter all losses between the transmitter output and the spectrum analyzer).
4. Use the peak marker function to determine the maximum spurs amplitude level.

5. The “measure-and-sum technique” is used for measuring in-band transmit power of a device. In the measure-and-sum approach, the conducted emission level is measured at each antenna port. The measured results at the various antenna ports are then summed mathematically to determine the total emission level from the device. Summing is performed in linear power units. The worst case output is recorded. (see ANSI C63.10:2013 section 14.3.2.2)

6. Capture graphs and record pertinent measurement data.

Ref. ANSI C63.10: 2013 section 12.7.6 (Peak) and 12.7.7.2 (Average)

KDB 789033 D02 General UNII Test Procedures New Rules v02r01, Sec. 5 (Peak), Sec. 6 (Average Method AD)

Conducted Spurious Emissions

Test parameters

Peak

RBW = 1 MHz

VBW $\geq$ 3 MHz

Sweep = Auto

Detector = Peak

Trace = Max Hold.

Average

RBW = 1 MHz

VBW $\geq$ 3 MHz

Sweep = Auto

Detector = RMS

Power Averaging

Samples, Systems, and Modes

System Number	Description	Samples	System under test	Support equipment
1	EUT	S01	☒	☐
	Support		☐	☒

Tested By :

Chris Blair

Date of testing:

15-Jan-2020 - 20-Jan-2020

Test Result : PASS

Test Equipment

See Appendix C for list of test equipment

Conducted Bandedge Average Table

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Tx 5 Bandedge Level (dBm)	Tx 6 Bandedge Level (dBm)	Tx 7 Bandedge Level (dBm)	Tx 8 Bandedge Level (dBm)	Duty Cycle Correction (dB)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	13	-55.2								0.3	-41.9	-41.25	0.63
	Non HT20, 6 to 54 Mbps	2	13	-60.9	-61.2							0.3	-44.7	-41.25	3.46
	Non HT20, 6 to 54 Mbps	3	13	-65.3	-61.7	-64.4						0.3	-45.4	-41.25	4.17
	Non HT20, 6 to 54 Mbps	4	13	-70.0	-67.0	-69.0	-68.1					0.3	-49.0	-41.25	7.79
	Non HT20, 6 to 54 Mbps	6	13	-63.5	-62.0	-63.6	-65.7	-60.8	-61.1			0.3	-41.4	-41.25	0.12
	Non HT20, 6 to 54 Mbps	8	13	-67.1	-65.9	-64.8	-66.4	-67.8	-65.8	-63.6	-63.0	0.3	-42.9	-41.25	1.66
	Non HT20 Beam Forming, 6 to 54 Mbps	2	16	-60.9	-61.2							0.3	-41.7	-41.25	0.46
	Non HT20 Beam Forming, 6 to 54 Mbps	3	18	-67.1	-65.9	-64.8						0.3	-42.7	-41.25	1.49
	Non HT20 Beam Forming, 6 to 54 Mbps	4	19	-70.0	-67.0	-69.0	-68.1					0.3	-43.0	-41.25	1.79
	Non HT20 Beam Forming, 6 to 54 Mbps	6	18	-70.0	-67.0	-69.0	-68.9	-66.2	-67.0			0.3	-41.7	-41.25	0.45
	Non HT20 Beam Forming, 6 to 54 Mbps	8	19	-74.1	-71.1	-71.5	-68.4	-74.4	-71.3	-71.6	-65.1	0.3	-41.5	-41.25	0.29
	HE20, M0 to M9 1ss	1	13	-60.4								0.2	-47.2	-41.25	5.98
	HE20, M0 to M9 1ss	2	13	-60.4	-59.6							0.2	-43.8	-41.25	2.55
	HE20, M0 to M9 2ss	2	13	-60.4	-59.6							0.2	-43.8	-41.25	2.55
	HE20, M0 to M9 1ss	3	13	-64.0	-62.1	-64.7						0.2	-45.5	-41.25	4.26
	HE20, M0 to M9 2ss	3	13	-60.4	-59.6	-61.4						0.2	-42.5	-41.25	1.21
	HE20, M0 to M9 3ss	3	13	-60.4	-59.6	-61.4						0.2	-42.5	-41.25	1.21
	HE20, M0 to M9 1ss	4	13	-68.6	-65.1	-66.5	-67.0					0.2	-47.4	-41.25	6.18
	HE20, M0 to M9 2ss	4	13	-63.5	-61.2	-63.5	-61.8					0.2	-43.2	-41.25	1.94
	HE20, M0 to M9 3ss	4	13	-63.5	-61.2	-63.5	-61.8					0.2	-43.2	-41.25	1.94
	HE20, M0 to M9 4ss	4	13	-63.5	-61.2	-63.5	-61.8					0.2	-43.2	-41.25	1.94
	HE20, M0 to M9 1ss	6	13	-64.0	-62.1	-64.7	-64.6	-62.0	-60.9			0.2	-41.9	-41.25	0.60
	HE20, M0 to M9 2ss	6	13	-64.0	-62.1	-64.7	-64.6	-62.0	-60.9			0.2	-41.9	-41.25	0.60
	HE20, M0 to M9 3ss	6	13	-64.0	-62.1	-64.7	-64.6	-62.0	-60.9			0.2	-41.9	-41.25	0.60
	HE20, M0 to M9 4ss	6	13	-64.0	-62.1	-64.7	-64.6	-62.0	-60.9			0.2	-41.9	-41.25	0.60
	HE20, M0 to M9 5ss	6	13	-64.0	-62.1	-64.7	-64.6	-62.0	-60.9			0.2	-41.9	-41.25	0.60
	HE20, M0 to M9 6ss	6	13	-64.0	-62.1	-64.7	-64.6	-62.0	-60.9			0.2	-41.9	-41.25	0.60
	HE20, M0 to M9 1ss	8	13	-65.8	-65.1	-64.9	-65.2	-66.9	-64.9	-62.0	-60.6	0.2	-41.7	-41.25	0.49
	HE20, M0 to M9 2ss	8	13	-65.8	-65.1	-64.9	-65.2	-66.9	-64.9	-62.0	-60.6	0.2	-41.7	-41.25	0.49


5190	HE20, M0 to M9 3ss	8	13	-65.8	-65.1	-64.9	-65.2	-66.9	-64.9	-62.0	-60.6	0.2	-41.7	-41.25	0.49
	HE20, M0 to M9 4ss	8	13	-65.8	-65.1	-64.9	-65.2	-66.9	-64.9	-62.0	-60.6	0.2	-41.7	-41.25	0.49
	HE20, M0 to M9 5ss	8	13	-65.8	-65.1	-64.9	-65.2	-66.9	-64.9	-62.0	-60.6	0.2	-41.7	-41.25	0.49
	HE20, M0 to M9 6ss	8	13	-65.8	-65.1	-64.9	-65.2	-66.9	-64.9	-62.0	-60.6	0.2	-41.7	-41.25	0.49
	HE20, M0 to M9 7ss	8	13	-65.8	-65.1	-64.9	-65.2	-66.9	-64.9	-62.0	-60.6	0.2	-41.7	-41.25	0.49
	HE20, M0 to M9 8ss	8	13	-65.8	-65.1	-64.9	-65.2	-66.9	-64.9	-62.0	-60.6	0.2	-41.7	-41.25	0.49
	HE20 Beam Forming, M0 to M9 1ss	2	16	-63.5	-61.2							0.2	-43.0	-41.25	1.77
	HE20 Beam Forming, M0 to M9 2ss	2	13	-60.4	-59.6							0.2	-43.8	-41.25	2.55
	HE20 Beam Forming, M0 to M9 1ss	3	18	-65.8	-65.1	-64.9						0.2	-42.3	-41.25	1.06
	HE20 Beam Forming, M0 to M9 2ss	3	15	-63.5	-61.2	-63.5						0.2	-42.6	-41.25	1.40
	HE20 Beam Forming, M0 to M9 3ss	3	13	-60.4	-59.6	-61.4						0.2	-42.5	-41.25	1.21
	HE20 Beam Forming, M0 to M9 1ss	4	19	-68.6	-65.1	-66.5	-67.0					0.2	-41.4	-41.25	0.18
	HE20 Beam Forming, M0 to M9 2ss	4	16	-65.8	-65.1	-64.9	-65.2					0.2	-43.0	-41.25	1.79
	HE20 Beam Forming, M0 to M9 3ss	4	14	-63.5	-61.2	-63.5	-61.8					0.2	-42.2	-41.25	0.94
	HE20 Beam Forming, M0 to M9 4ss	4	13	-63.5	-61.2	-63.5	-61.8					0.2	-43.2	-41.25	1.94
	HE20 Beam Forming, M0 to M9 1ss	6	18	-68.6	-67.4	-68.5	-68.7	-66.9	-66.3			0.2	-41.7	-41.25	0.43
	HE20 Beam Forming, M0 to M9 2ss	6	15	-65.8	-65.1	-64.9	-66.9	-64.9	-62.0			0.2	-41.7	-41.25	0.45
	HE20 Beam Forming, M0 to M9 3ss	6	13	-64.0	-62.1	-64.7	-64.6	-62.0	-60.9			0.2	-41.9	-41.25	0.60
	HE20 Beam Forming, M0 to M9 4ss	6	13	-64.0	-62.1	-64.7	-64.6	-62.0	-60.9			0.2	-41.9	-41.25	0.60
	HE20 Beam Forming, M0 to M9 5ss	6	13	-64.0	-62.1	-64.7	-64.6	-62.0	-60.9			0.2	-41.9	-41.25	0.60
	HE20 Beam Forming, M0 to M9 6ss	6	13	-64.0	-62.1	-64.7	-64.6	-62.0	-60.9			0.2	-41.9	-41.25	0.60
	HE20 Beam Forming, M0 to M9 1ss	8	19	-72.3	-71.3	-71.4	-68.6	-73.8	-71.6	-71.3	-64.7	0.2	-41.4	-41.25	0.20
	HE20 Beam Forming, M0 to M9 2ss	8	16	-68.6	-67.4	-68.5	-67.3	-68.7	-66.9	-66.3	-62.6	0.2	-41.3	-41.25	0.10
	HE20 Beam Forming, M0 to M9 3ss	8	14	-68.6	-65.1	-66.5	-67.0	-68.3	-64.9	-65.2	-62.6	0.2	-42.4	-41.25	1.17
	HE20 Beam Forming, M0 to M9 4ss	8	13	-65.8	-65.1	-64.9	-65.2	-66.9	-64.9	-62.0	-60.6	0.2	-41.7	-41.25	0.49
	HE20 Beam Forming, M0 to M9 5ss	8	13	-65.8	-65.1	-64.9	-65.2	-66.9	-64.9	-62.0	-60.6	0.2	-41.7	-41.25	0.49
	HE20 Beam Forming, M0 to M9 6ss	8	13	-65.8	-65.1	-64.9	-65.2	-66.9	-64.9	-62.0	-60.6	0.2	-41.7	-41.25	0.49
	HE20 Beam Forming, M0 to M9 7ss	8	13	-65.8	-65.1	-64.9	-65.2	-66.9	-64.9	-62.0	-60.6	0.2	-41.7	-41.25	0.49
	HE20 Beam Forming, M0 to M9 8ss	8	13	-65.8	-65.1	-64.9	-65.2	-66.9	-64.9	-62.0	-60.6	0.2	-41.7	-41.25	0.49
	HE20 STBC, M0 to M9 2ss	2	13	-60.4	-59.6							0.2	-43.8	-41.25	2.55
	HE20 STBC, M0 to M9 2ss	3	13	-60.4	-59.6	-61.4						0.2	-42.5	-41.25	1.21
	HE20 STBC, M0 to M9 2ss	4	13	-63.5	-61.2	-63.5	-61.8					0.2	-43.2	-41.25	1.94
	HE20 STBC, M0 to M9 2ss	6	13	-64.0	-62.1	-64.7	-64.6	-62.0	-60.9			0.2	-41.9	-41.25	0.60
	HE20 STBC, M0 to M9 2ss	8	13	-65.8	-65.1	-64.9	-65.2	-66.9	-64.9	-62.0	-60.6	0.2	-41.7	-41.25	0.49
5190	Non HT40, 6 to 54 Mbps	1	13	-55.6								0.3	-42.3	-41.25	1.03
	Non HT40, 6 to 54 Mbps	2	13	-60.1	-60.6							0.3	-44.0	-41.25	2.76
	Non HT40, 6 to 54 Mbps	3	13	-60.1	-60.6	-63.3						0.3	-43.0	-41.25	1.78
	Non HT40, 6 to 54 Mbps	4	13	-60.1	-60.6	-63.3	-62.1					0.3	-42.0	-41.25	0.75
	Non HT40, 6 to 54 Mbps	6	13	-62.7	-62.9	-66.3	-68.3	-62.2	-64.6			0.3	-42.9	-41.25	1.66
	Non HT40, 6 to 54 Mbps	8	13	-65.2	-64.1	-66.6	-65.9	-69.9	-64.2	-65.6	-62.9	0.3	-42.8	-41.25	1.56
	HE40, M0 to M9 1ss	1	13	-55.7								0.2	-42.5	-41.25	1.26
	HE40, M0 to M9 1ss	2	13	-60.8	-59.3							0.2	-43.8	-41.25	2.54

HE40, M0 to M9 2ss	2	13	-60.8	-59.3							0.2	-43.8	-41.25	2.54
HE40, M0 to M9 1ss	3	13	-60.8	-59.3	-63.1						0.2	-42.8	-41.25	1.59
HE40, M0 to M9 2ss	3	13	-60.8	-59.3	-63.1						0.2	-42.8	-41.25	1.59
HE40, M0 to M9 3ss	3	13	-60.8	-59.3	-63.1						0.2	-42.8	-41.25	1.59
HE40, M0 to M9 1ss	4	13	-60.8	-59.3	-63.1	-61.4					0.2	-41.7	-41.25	0.48
HE40, M0 to M9 2ss	4	13	-60.8	-59.3	-63.1	-61.4					0.2	-41.7	-41.25	0.48
HE40, M0 to M9 3ss	4	13	-60.8	-59.3	-63.1	-61.4					0.2	-41.7	-41.25	0.48
HE40, M0 to M9 4ss	4	13	-60.8	-59.3	-63.1	-61.4					0.2	-41.7	-41.25	0.48
HE40, M0 to M9 1ss	6	13	-63.6	-60.9	-64.8	-67.7	-61.1	-62.2			0.2	-41.9	-41.25	0.61
HE40, M0 to M9 2ss	6	13	-63.6	-60.9	-64.8	-67.7	-61.1	-62.2			0.2	-41.9	-41.25	0.61
HE40, M0 to M9 3ss	6	13	-63.6	-60.9	-64.8	-67.7	-61.1	-62.2			0.2	-41.9	-41.25	0.61
HE40, M0 to M9 4ss	6	13	-63.6	-60.9	-64.8	-67.7	-61.1	-62.2			0.2	-41.9	-41.25	0.61
HE40, M0 to M9 5ss	6	13	-63.6	-60.9	-64.8	-67.7	-61.1	-62.2			0.2	-41.9	-41.25	0.61
HE40, M0 to M9 6ss	6	13	-63.6	-60.9	-64.8	-67.7	-61.1	-62.2			0.2	-41.9	-41.25	0.61
HE40, M0 to M9 1ss	8	13	-64.6	-62.0	-67.5	-65.1	-68.6	-61.1	-63.9	-62.6	0.2	-41.6	-41.25	0.33
HE40, M0 to M9 2ss	8	13	-64.6	-62.0	-67.5	-65.1	-68.6	-61.1	-63.9	-62.6	0.2	-41.6	-41.25	0.33
HE40, M0 to M9 3ss	8	13	-64.6	-62.0	-67.5	-65.1	-68.6	-61.1	-63.9	-62.6	0.2	-41.6	-41.25	0.33
HE40, M0 to M9 4ss	8	13	-64.6	-62.0	-67.5	-65.1	-68.6	-61.1	-63.9	-62.6	0.2	-41.6	-41.25	0.33
HE40, M0 to M9 5ss	8	13	-64.6	-62.0	-67.5	-65.1	-68.6	-61.1	-63.9	-62.6	0.2	-41.6	-41.25	0.33
HE40, M0 to M9 6ss	8	13	-64.6	-62.0	-67.5	-65.1	-68.6	-61.1	-63.9	-62.6	0.2	-41.6	-41.25	0.33
HE40, M0 to M9 7ss	8	13	-64.6	-62.0	-67.5	-65.1	-68.6	-61.1	-63.9	-62.6	0.2	-41.6	-41.25	0.33
HE40, M0 to M9 8ss	8	13	-64.6	-62.0	-67.5	-65.1	-68.6	-61.1	-63.9	-62.6	0.2	-41.6	-41.25	0.33
HE40 Beam Forming, M0 to M9 1ss	2	16	-63.6	-60.9							0.2	-42.8	-41.25	1.59
HE40 Beam Forming, M0 to M9 2ss	2	13	-60.8	-59.3							0.2	-43.8	-41.25	2.54
HE40 Beam Forming, M0 to M9 1ss	3	18	-65.8	-63.7	-67.6						0.2	-42.4	-41.25	1.20
HE40 Beam Forming, M0 to M9 2ss	3	15	-63.6	-60.9	-64.8						0.2	-42.8	-41.25	1.57
HE40 Beam Forming, M0 to M9 3ss	3	13	-60.8	-59.3	-63.1						0.2	-42.8	-41.25	1.59
HE40 Beam Forming, M0 to M9 1ss	4	19	-68.1	-65.7	-69.0	-67.2					0.2	-42.1	-41.25	0.87
HE40 Beam Forming, M0 to M9 2ss	4	16	-64.6	-62.0	-67.5	-65.1					0.2	-42.2	-41.25	0.90
HE40 Beam Forming, M0 to M9 3ss	4	14	-63.6	-60.9	-64.8	-64.0					0.2	-42.8	-41.25	1.60
HE40 Beam Forming, M0 to M9 4ss	4	13	-60.8	-59.3	-63.1	-61.4					0.2	-41.7	-41.25	0.48
HE40 Beam Forming, M0 to M9 1ss	6	18	-68.1	-65.7	-69.0	-70.7	-66.0	-66.1			0.2	-41.3	-41.25	0.02
HE40 Beam Forming, M0 to M9 2ss	6	15	-65.8	-63.7	-67.6	-69.4	-64.5	-62.8			0.2	-42.1	-41.25	0.87
HE40 Beam Forming, M0 to M9 3ss	6	13	-63.6	-60.9	-64.8	-67.7	-61.1	-62.2			0.2	-41.9	-41.25	0.61
HE40 Beam Forming, M0 to M9 4ss	6	13	-63.6	-60.9	-64.8	-67.7	-61.1	-62.2			0.2	-41.9	-41.25	0.61
HE40 Beam Forming, M0 to M9 5ss	6	13	-63.6	-60.9	-64.8	-67.7	-61.1	-62.2			0.2	-41.9	-41.25	0.61
HE40 Beam Forming, M0 to M9 6ss	6	13	-63.6	-60.9	-64.8	-67.7	-61.1	-62.2			0.2	-41.9	-41.25	0.61
HE40 Beam Forming, M0 to M9 1ss	8	19	-73.6	-70.9	-73.3	-68.6	-75.1	-71.1	-70.8	-65.9	0.2	-42.0	-41.25	0.76
HE40 Beam Forming, M0 to M9 2ss	8	16	-68.1	-65.7	-69.0	-67.2	-70.7	-66.0	-66.1	-64.4	0.2	-41.5	-41.25	0.29
HE40 Beam Forming, M0 to M9 3ss	8	14	-65.8	-63.7	-67.6	-66.5	-69.4	-64.5	-62.8	-64.4	0.2	-41.9	-41.25	0.68
HE40 Beam Forming, M0 to M9 4ss	8	13	-64.6	-62.0	-67.5	-65.1	-68.6	-61.1	-63.9	-62.6	0.2	-41.6	-41.25	0.33
HE40 Beam Forming, M0 to M9 5ss	8	13	-64.6	-62.0	-67.5	-65.1	-68.6	-61.1	-63.9	-62.6	0.2	-41.6	-41.25	0.33
HE40 Beam Forming, M0 to M9 6ss	8	13	-64.6	-62.0	-67.5	-65.1	-68.6	-61.1	-63.9	-62.6	0.2	-41.6	-41.25	0.33

HE40 Beam Forming, M0 to M9 7ss	8	13	-64.6	-62.0	-67.5	-65.1	-68.6	-61.1	-63.9	-62.6	0.2	-41.6	-41.25	0.33
HE40 Beam Forming, M0 to M9 8ss	8	13	-64.6	-62.0	-67.5	-65.1	-68.6	-61.1	-63.9	-62.6	0.2	-41.6	-41.25	0.33
HE40 STBC, M0 to M9 2ss	2	13	-60.8	-59.3							0.2	-43.8	-41.25	2.54
HE40 STBC, M0 to M9 2ss	3	13	-60.8	-59.3	-63.1						0.2	-42.8	-41.25	1.59
HE40 STBC, M0 to M9 2ss	4	13	-60.8	-59.3	-63.1	-61.4					0.2	-41.7	-41.25	0.48
HE40 STBC, M0 to M9 2ss	6	13	-63.6	-60.9	-64.8	-67.7	-61.1	-62.2			0.2	-41.9	-41.25	0.61
HE40 STBC, M0 to M9 2ss	8	13	-64.6	-62.0	-67.5	-65.1	-68.6	-61.1	-63.9	-62.6	0.2	-41.6	-41.25	0.33

Non HT80, 6 to 54 Mbps	1	13	-55.2								0.3	-41.9	-41.25	0.61
Non HT80, 6 to 54 Mbps	2	13	-59.2	-58.5							0.3	-42.5	-41.25	1.24
Non HT80, 6 to 54 Mbps	3	13	-59.2	-58.5	-61.1						0.3	-41.4	-41.25	0.11
Non HT80, 6 to 54 Mbps	4	13	-62.5	-61.9	-64.7	-61.3					0.3	-43.1	-41.25	1.82
Non HT80, 6 to 54 Mbps	6	13	-62.5	-61.9	-64.7	-68.3	-60.7	-61.1			0.3	-41.4	-41.25	0.20
Non HT80, 6 to 54 Mbps	8	13	-65.3	-64.6	-66.8	-63.9	-71.0	-62.5	-62.9	-63.9	0.3	-42.2	-41.25	0.91
HE80, M0 to M9 1ss	1	13	-57.3								0.2	-44.1	-41.25	2.80
HE80, M0 to M9 1ss	2	13	-59.1	-57.6							0.2	-42.0	-41.25	0.78
HE80, M0 to M9 2ss	2	13	-59.1	-57.6							0.2	-42.0	-41.25	0.78
HE80, M0 to M9 1ss	3	13	-59.5	-59.7	-63.6						0.2	-42.6	-41.25	1.30
HE80, M0 to M9 2ss	3	13	-59.5	-59.7	-63.6						0.2	-42.6	-41.25	1.30
HE80, M0 to M9 3ss	3	13	-59.5	-59.7	-63.6						0.2	-42.6	-41.25	1.30
HE80, M0 to M9 1ss	4	13	-62.7	-60.1	-62.9	-61.7					0.2	-42.4	-41.25	1.18
HE80, M0 to M9 2ss	4	13	-62.7	-60.1	-62.9	-61.7					0.2	-42.4	-41.25	1.18
HE80, M0 to M9 3ss	4	13	-62.7	-60.1	-62.9	-61.7					0.2	-42.4	-41.25	1.18
HE80, M0 to M9 4ss	4	13	-62.7	-60.1	-62.9	-61.7					0.2	-42.4	-41.25	1.18
HE80, M0 to M9 1ss	6	13	-65.1	-62.5	-65.8	-69.3	-62.1	-61.9			0.2	-42.7	-41.25	1.50
HE80, M0 to M9 2ss	6	13	-65.1	-62.5	-65.8	-69.3	-62.1	-61.9			0.2	-42.7	-41.25	1.50
HE80, M0 to M9 3ss	6	13	-65.1	-62.5	-65.8	-69.3	-62.1	-61.9			0.2	-42.7	-41.25	1.50
HE80, M0 to M9 4ss	6	13	-65.1	-62.5	-65.8	-69.3	-62.1	-61.9			0.2	-42.7	-41.25	1.50
HE80, M0 to M9 5ss	6	13	-65.1	-62.5	-65.8	-69.3	-62.1	-61.9			0.2	-42.7	-41.25	1.50
HE80, M0 to M9 6ss	6	13	-65.1	-62.5	-65.8	-69.3	-62.1	-61.9			0.2	-42.7	-41.25	1.50
HE80, M0 to M9 1ss	8	13	-65.1	-62.5	-65.8	-65.0	-69.3	-62.1	-61.9	-63.6	0.2	-41.6	-41.25	0.36
HE80, M0 to M9 2ss	8	13	-65.1	-62.5	-65.8	-65.0	-69.3	-62.1	-61.9	-63.6	0.2	-41.6	-41.25	0.36
HE80, M0 to M9 3ss	8	13	-65.1	-62.5	-65.8	-65.0	-69.3	-62.1	-61.9	-63.6	0.2	-41.6	-41.25	0.36
HE80, M0 to M9 4ss	8	13	-65.1	-62.5	-65.8	-65.0	-69.3	-62.1	-61.9	-63.6	0.2	-41.6	-41.25	0.36
HE80, M0 to M9 5ss	8	13	-65.1	-62.5	-65.8	-65.0	-69.3	-62.1	-61.9	-63.6	0.2	-41.6	-41.25	0.36
HE80, M0 to M9 6ss	8	13	-65.1	-62.5	-65.8	-65.0	-69.3	-62.1	-61.9	-63.6	0.2	-41.6	-41.25	0.36
HE80, M0 to M9 7ss	8	13	-65.1	-62.5	-65.8	-65.0	-69.3	-62.1	-61.9	-63.6	0.2	-41.6	-41.25	0.36
HE80, M0 to M9 8ss	8	13	-65.1	-62.5	-65.8	-65.0	-69.3	-62.1	-61.9	-63.6	0.2	-41.6	-41.25	0.36
HE80 Beam Forming, M0 to M9 1ss	2	16	-62.7	-60.1							0.2	-42.0	-41.25	0.70
HE80 Beam Forming, M0 to M9 2ss	2	13	-59.1	-57.6							0.2	-42.0	-41.25	0.78
HE80 Beam Forming, M0 to M9 1ss	3	18	-67.0	-64.8	-68.4						0.2	-43.5	-41.25	2.21
HE80 Beam Forming, M0 to M9 2ss	3	15	-62.7	-60.1	-62.9						0.2	-41.7	-41.25	0.43
HE80 Beam Forming, M0 to M9 3ss	3	13	-59.5	-59.7	-63.6						0.2	-42.6	-41.25	1.30

HE80 Beam Forming, M0 to M9 1ss	4	19	-67.0	-64.8	-68.4	-67.1					0.2	-41.4	-41.25	0.11
HE80 Beam Forming, M0 to M9 2ss	4	16	-65.1	-62.5	-65.8	-65.0					0.2	-42.1	-41.25	0.89
HE80 Beam Forming, M0 to M9 3ss	4	14	-62.7	-60.1	-62.9	-61.7					0.2	-41.4	-41.25	0.18
HE80 Beam Forming, M0 to M9 4ss	4	13	-62.7	-60.1	-62.9	-61.7					0.2	-42.4	-41.25	1.18
HE80 Beam Forming, M0 to M9 1ss	6	18	-69.6	-66.0	-69.7	-72.0	-67.0	-64.9			0.2	-41.5	-41.25	0.27
HE80 Beam Forming, M0 to M9 2ss	6	15	-67.0	-64.8	-68.4	-70.7	-64.5	-65.1			0.2	-43.2	-41.25	1.97
HE80 Beam Forming, M0 to M9 3ss	6	13	-65.1	-62.5	-65.8	-69.3	-62.1	-61.9			0.2	-42.7	-41.25	1.50
HE80 Beam Forming, M0 to M9 4ss	6	13	-65.1	-62.5	-65.8	-69.3	-62.1	-61.9			0.2	-42.7	-41.25	1.50
HE80 Beam Forming, M0 to M9 5ss	6	13	-65.1	-62.5	-65.8	-69.3	-62.1	-61.9			0.2	-42.7	-41.25	1.50
HE80 Beam Forming, M0 to M9 6ss	6	13	-65.1	-62.5	-65.8	-69.3	-62.1	-61.9			0.2	-42.7	-41.25	1.50
HE80 Beam Forming, M0 to M9 1ss	8	19	-74.1	-71.6	-73.5	-68.5	-75.3	-71.1	-71.8	-66.1	0.2	-42.2	-41.25	0.97
HE80 Beam Forming, M0 to M9 2ss	8	16	-66.9	-66.9	-69.9	-68.2	-72.9	-63.9	-66.4	-64.7	0.2	-41.5	-41.25	0.23
HE80 Beam Forming, M0 to M9 3ss	8	14	-67.0	-64.8	-68.4	-67.1	-70.7	-64.5	-65.1	-64.4	0.2	-42.8	-41.25	1.53
HE80 Beam Forming, M0 to M9 4ss	8	13	-65.1	-62.5	-65.8	-65.0	-69.3	-62.1	-61.9	-63.6	0.2	-41.6	-41.25	0.36
HE80 Beam Forming, M0 to M9 5ss	8	13	-65.1	-62.5	-65.8	-65.0	-69.3	-62.1	-61.9	-63.6	0.2	-41.6	-41.25	0.36
HE80 Beam Forming, M0 to M9 6ss	8	13	-65.1	-62.5	-65.8	-65.0	-69.3	-62.1	-61.9	-63.6	0.2	-41.6	-41.25	0.36
HE80 Beam Forming, M0 to M9 7ss	8	13	-65.1	-62.5	-65.8	-65.0	-69.3	-62.1	-61.9	-63.6	0.2	-41.6	-41.25	0.36
HE80 Beam Forming, M0 to M9 8ss	8	13	-65.1	-62.5	-65.8	-65.0	-69.3	-62.1	-61.9	-63.6	0.2	-41.6	-41.25	0.36
HE80 STBC, M0 to M9 1ss	2	13	-59.1	-57.6							0.2	-42.0	-41.25	0.78
HE80 STBC, M0 to M9 1ss	3	13	-59.5	-59.7	-63.6						0.2	-42.6	-41.25	1.30
HE80 STBC, M0 to M9 1ss	4	13	-62.7	-60.1	-62.9	-61.7					0.2	-42.4	-41.25	1.18
HE80 STBC, M0 to M9 1ss	6	13	-65.1	-62.5	-65.8	-69.3	-62.1	-61.9			0.2	-42.7	-41.25	1.50
HE80 STBC, M0 to M9 1ss	8	13	-65.1	-62.5	-65.8	-65.0	-69.3	-62.1	-61.9	-63.6	0.2	-41.6	-41.25	0.36

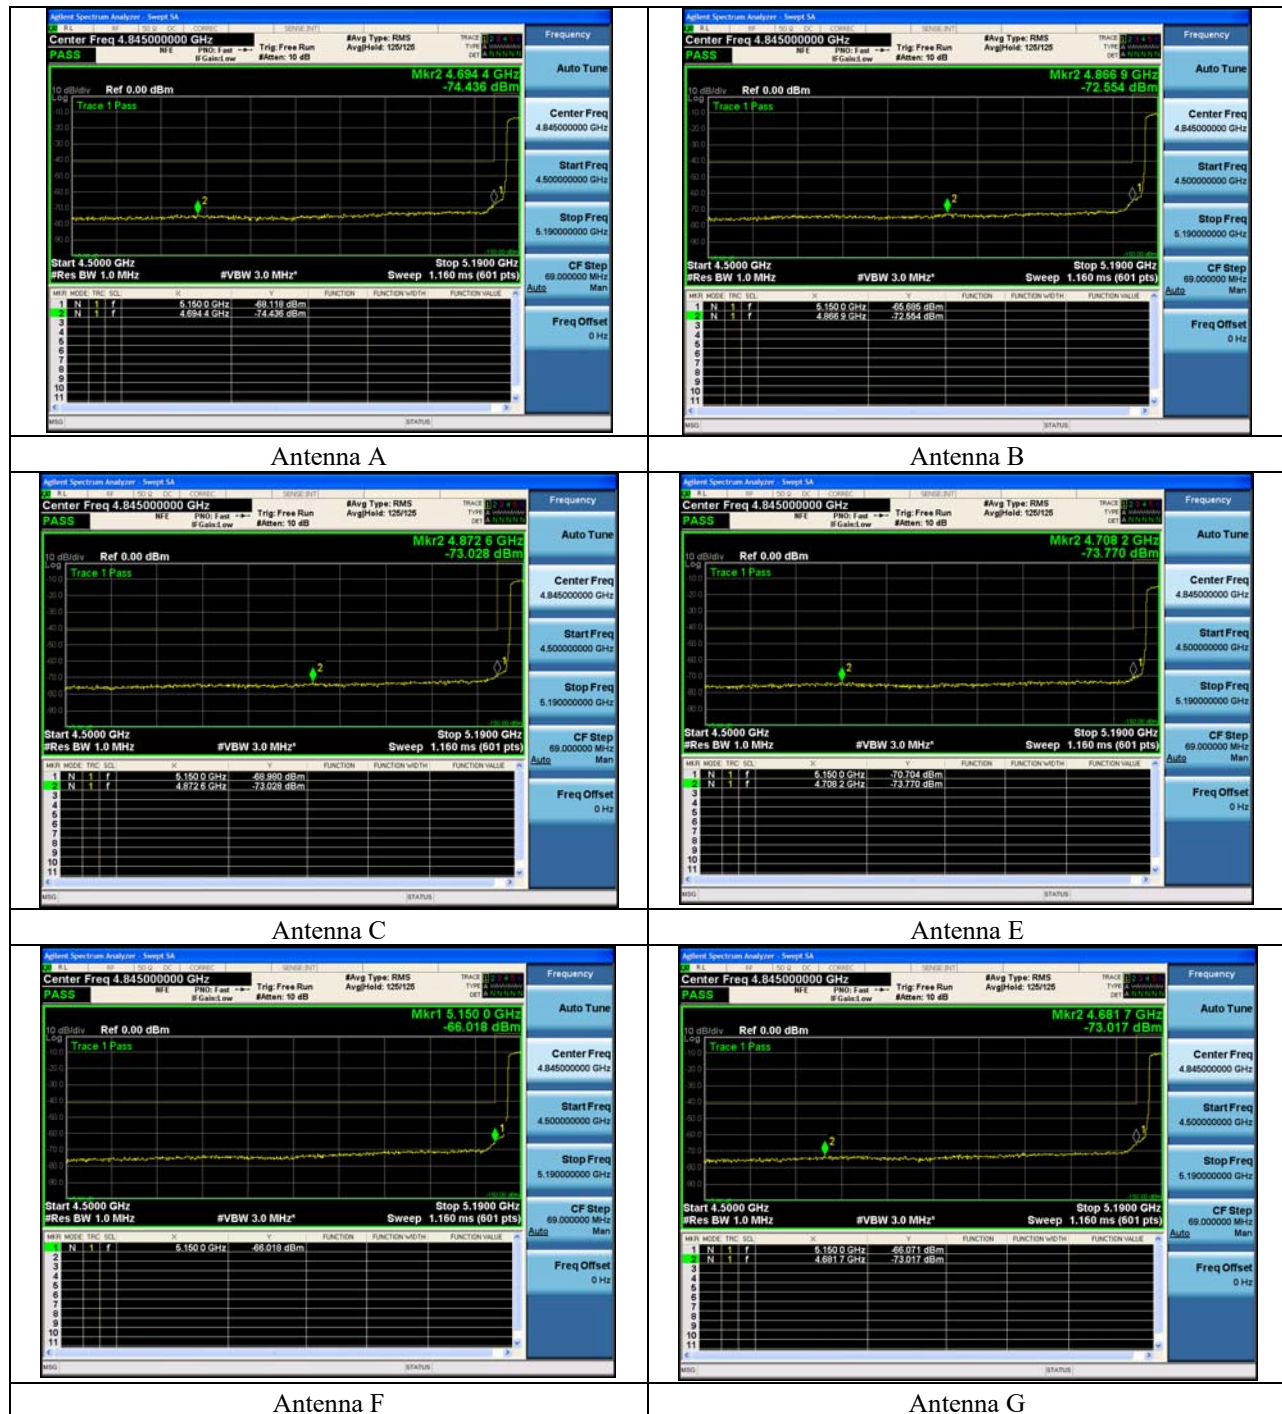Conducted Bandedge Average, 5190 MHz, HE40 Beam Forming, M0 to M9 1ss

Conducted Bandedge Peak Table

Frequency (MHz)	Mode	Tx Paths	Correlated Antenna Gain (dBi)	Tx 1 Bandedge Level (dBm)	Tx 2 Bandedge Level (dBm)	Tx 3 Bandedge Level (dBm)	Tx 4 Bandedge Level (dBm)	Tx 5 Bandedge Level (dBm)	Tx 6 Bandedge Level (dBm)	Tx 7 Bandedge Level (dBm)	Tx 8 Bandedge Level (dBm)	Total Tx Bandedge Level (dBm)	Limit (dBm)	Margin (dB)
5180	Non HT20, 6 to 54 Mbps	1	13	-43.8								-30.5	-21.25	9.23
	Non HT20, 6 to 54 Mbps	2	13	-47.9	-48.4							-31.8	-21.25	10.56
	Non HT20, 6 to 54 Mbps	3	13	-49.5	-50.0	-51.1						-32.1	-21.25	10.81
	Non HT20, 6 to 54 Mbps	4	13	-53.8	-53.9	-54.7	-53.3					-34.6	-21.25	13.30
	Non HT20, 6 to 54 Mbps	6	13	-50.1	-50.1	-50.7	-50.5	-49.0	-48.9			-28.7	-21.25	7.47
	Non HT20, 6 to 54 Mbps	8	13	-52.4	-51.4	-52.0	-51.9	-52.2	-51.2	-51.2	-51.9	-29.4	-21.25	8.15
	Non HT20 Beam Forming, 6 to 54 Mbps	2	16	-47.9	-48.4							-28.8	-21.25	7.56
	Non HT20 Beam Forming, 6 to 54 Mbps	3	18	-52.4	-51.4	-52.0						-28.8	-21.25	7.57
	Non HT20 Beam Forming, 6 to 54 Mbps	4	19	-53.8	-53.9	-54.7	-53.3					-28.6	-21.25	7.30
	Non HT20 Beam Forming, 6 to 54 Mbps	6	18	-53.8	-53.9	-54.7	-54.3	-53.3	-53.3			-27.7	-21.25	6.50
	Non HT20 Beam Forming, 6 to 54 Mbps	8	19	-57.8	-57.8	-58.2	-57.1	-57.3	-58.5	-56.5	-56.1	-29.0	-21.25	7.74
	HE20, M0 to M9 1ss	1	13	-46.5								-33.3	-21.25	12.08
	HE20, M0 to M9 1ss	2	13	-46.5	-48.0							-31.0	-21.25	9.75
	HE20, M0 to M9 2ss	2	13	-46.5	-48.0							-31.0	-21.25	9.75
	HE20, M0 to M9 1ss	3	13	-50.6	-49.8	-50.6						-32.4	-21.25	11.12
	HE20, M0 to M9 2ss	3	13	-46.5	-48.0	-48.5						-29.6	-21.25	8.39
	HE20, M0 to M9 3ss	3	13	-46.5	-48.0	-48.5						-29.6	-21.25	8.39
	HE20, M0 to M9 1ss	4	13	-51.8	-52.3	-53.0	-52.3					-33.1	-21.25	11.89
	HE20, M0 to M9 2ss	4	13	-49.7	-50.5	-50.5	-48.9					-30.7	-21.25	9.41
	HE20, M0 to M9 3ss	4	13	-49.7	-50.5	-50.5	-48.9					-30.7	-21.25	9.41
	HE20, M0 to M9 4ss	4	13	-49.7	-50.5	-50.5	-48.9					-30.7	-21.25	9.41
	HE20, M0 to M9 1ss	6	13	-50.6	-49.8	-50.6	-50.1	-49.2	-49.6			-29.0	-21.25	7.75
	HE20, M0 to M9 2ss	6	13	-50.6	-49.8	-50.6	-50.1	-49.2	-49.6			-29.0	-21.25	7.75
	HE20, M0 to M9 3ss	6	13	-50.6	-49.8	-50.6	-50.1	-49.2	-49.6			-29.0	-21.25	7.75
	HE20, M0 to M9 4ss	6	13	-50.6	-49.8	-50.6	-50.1	-49.2	-49.6			-29.0	-21.25	7.75
	HE20, M0 to M9 5ss	6	13	-50.6	-49.8	-50.6	-50.1	-49.2	-49.6			-29.0	-21.25	7.75
	HE20, M0 to M9 6ss	6	13	-50.6	-49.8	-50.6	-50.1	-49.2	-49.6			-29.0	-21.25	7.75
	HE20, M0 to M9 1ss	8	13	-51.3	-52.7	-52.2	-52.0	-52.1	-52.1	-49.9	-50.6	-29.3	-21.25	8.07


	HE20, M0 to M9 2ss	8	13	-51.3	-52.7	-52.2	-52.0	-52.1	-52.1	-49.9	-50.6	-29.3	-21.25	8.07
	HE20, M0 to M9 3ss	8	13	-51.3	-52.7	-52.2	-52.0	-52.1	-52.1	-49.9	-50.6	-29.3	-21.25	8.07
	HE20, M0 to M9 4ss	8	13	-51.3	-52.7	-52.2	-52.0	-52.1	-52.1	-49.9	-50.6	-29.3	-21.25	8.07
	HE20, M0 to M9 5ss	8	13	-51.3	-52.7	-52.2	-52.0	-52.1	-52.1	-49.9	-50.6	-29.3	-21.25	8.07
	HE20, M0 to M9 6ss	8	13	-51.3	-52.7	-52.2	-52.0	-52.1	-52.1	-49.9	-50.6	-29.3	-21.25	8.07
	HE20, M0 to M9 7ss	8	13	-51.3	-52.7	-52.2	-52.0	-52.1	-52.1	-49.9	-50.6	-29.3	-21.25	8.07
	HE20, M0 to M9 8ss	8	13	-51.3	-52.7	-52.2	-52.0	-52.1	-52.1	-49.9	-50.6	-29.3	-21.25	8.07
	HE20 Beam Forming, M0 to M9 1ss	2	16	-49.7	-50.5							-30.9	-21.25	9.65
	HE20 Beam Forming, M0 to M9 2ss	2	13	-46.5	-48.0							-31.0	-21.25	9.75
	HE20 Beam Forming, M0 to M9 1ss	3	18	-51.3	-52.7	-52.2						-29.1	-21.25	7.83
	HE20 Beam Forming, M0 to M9 2ss	3	15	-49.7	-50.5	-50.5						-30.3	-21.25	9.02
	HE20 Beam Forming, M0 to M9 3ss	3	13	-46.5	-48.0	-48.5						-29.6	-21.25	8.39
	HE20 Beam Forming, M0 to M9 1ss	4	19	-51.8	-52.3	-53.0	-52.3					-27.1	-21.25	5.89
	HE20 Beam Forming, M0 to M9 2ss	4	16	-51.3	-52.7	-52.2	-52.0					-29.8	-21.25	8.58
	HE20 Beam Forming, M0 to M9 3ss	4	14	-49.7	-50.5	-50.5	-48.9					-29.7	-21.25	8.41
	HE20 Beam Forming, M0 to M9 4ss	4	13	-49.7	-50.5	-50.5	-48.9					-30.7	-21.25	9.41
	HE20 Beam Forming, M0 to M9 1ss	6	18	-54.0	-53.6	-54.2	-54.6	-52.9	-52.8			-27.7	-21.25	6.43
	HE20 Beam Forming, M0 to M9 2ss	6	15	-51.3	-52.7	-52.2	-52.1	-52.1	-49.9			-28.7	-21.25	7.41
	HE20 Beam Forming, M0 to M9 3ss	6	13	-50.6	-49.8	-50.6	-50.1	-49.2	-49.6			-29.0	-21.25	7.75
	HE20 Beam Forming, M0 to M9 4ss	6	13	-50.6	-49.8	-50.6	-50.1	-49.2	-49.6			-29.0	-21.25	7.75
	HE20 Beam Forming, M0 to M9 5ss	6	13	-50.6	-49.8	-50.6	-50.1	-49.2	-49.6			-29.0	-21.25	7.75
	HE20 Beam Forming, M0 to M9 6ss	6	13	-50.6	-49.8	-50.6	-50.1	-49.2	-49.6			-29.0	-21.25	7.75
	HE20 Beam Forming, M0 to M9 1ss	8	19	-58.1	-57.3	-58.3	-57.1	-58.3	-56.7	-56.8	-56.5	-29.1	-21.25	7.88
	HE20 Beam Forming, M0 to M9 2ss	8	16	-54.0	-53.6	-54.2	-52.9	-54.6	-52.9	-52.8	-52.9	-28.2	-21.25	6.98
	HE20 Beam Forming, M0 to M9 3ss	8	14	-51.8	-52.3	-53.0	-52.3	-52.7	-52.4	-51.5	-51.3	-28.9	-21.25	7.67
	HE20 Beam Forming, M0 to M9 4ss	8	13	-51.3	-52.7	-52.2	-52.0	-52.1	-52.1	-49.9	-50.6	-29.3	-21.25	8.07
	HE20 Beam Forming, M0 to M9 5ss	8	13	-51.3	-52.7	-52.2	-52.0	-52.1	-52.1	-49.9	-50.6	-29.3	-21.25	8.07
	HE20 Beam Forming, M0 to M9 6ss	8	13	-51.3	-52.7	-52.2	-52.0	-52.1	-52.1	-49.9	-50.6	-29.3	-21.25	8.07
	HE20 Beam Forming, M0 to M9 7ss	8	13	-51.3	-52.7	-52.2	-52.0	-52.1	-52.1	-49.9	-50.6	-29.3	-21.25	8.07
	HE20 Beam Forming, M0 to M9 8ss	8	13	-51.3	-52.7	-52.2	-52.0	-52.1	-52.1	-49.9	-50.6	-29.3	-21.25	8.07
	HE20 STBC, M0 to M9 2ss	2	13	-46.5	-48.0							-31.0	-21.25	9.75
	HE20 STBC, M0 to M9 2ss	3	13	-46.5	-48.0	-48.5						-29.6	-21.25	8.39
	HE20 STBC, M0 to M9 2ss	4	13	-49.7	-50.5	-50.5	-48.9					-30.7	-21.25	9.41
	HE20 STBC, M0 to M9 2ss	6	13	-50.6	-49.8	-50.6	-50.1	-49.2	-49.6			-29.0	-21.25	7.75
	HE20 STBC, M0 to M9 2ss	8	13	-51.3	-52.7	-52.2	-52.0	-52.1	-52.1	-49.9	-50.6	-29.3	-21.25	8.07
5190	Non HT40, 6 to 54 Mbps	1	13	-46.3								-33.0	-21.25	11.73
	Non HT40, 6 to 54 Mbps	2	13	-47.0	-50.8							-32.2	-21.25	10.91
	Non HT40, 6 to 54 Mbps	3	13	-47.0	-50.8	-51.5						-31.2	-21.25	9.94
	Non HT40, 6 to 54 Mbps	4	13	-47.0	-50.8	-51.5	-49.5					-30.0	-21.25	8.75
	Non HT40, 6 to 54 Mbps	6	13	-52.5	-52.3	-53.7	-53.0	-51.5	-53.0			-31.5	-21.25	10.26
	Non HT40, 6 to 54 Mbps	8	13	-54.4	-53.8	-53.3	-53.6	-54.5	-53.0	-52.5	-52.2	-31.0	-21.25	9.74
	HE40, M0 to M9 1ss	1	13	-45.3								-32.1	-21.25	10.86

HE40, M0 to M9 1ss	2	13	-48.9	-49.9								-33.2	-21.25	11.92
HE40, M0 to M9 2ss	2	13	-48.9	-49.9								-33.2	-21.25	11.92
HE40, M0 to M9 1ss	3	13	-48.9	-49.9	-52.4							-32.2	-21.25	10.96
HE40, M0 to M9 2ss	3	13	-48.9	-49.9	-52.4							-32.2	-21.25	10.96
HE40, M0 to M9 3ss	3	13	-48.9	-49.9	-52.4							-32.2	-21.25	10.96
HE40, M0 to M9 1ss	4	13	-48.9	-49.9	-52.4	-50.7						-31.1	-21.25	9.83
HE40, M0 to M9 2ss	4	13	-48.9	-49.9	-52.4	-50.7						-31.1	-21.25	9.83
HE40, M0 to M9 3ss	4	13	-48.9	-49.9	-52.4	-50.7						-31.1	-21.25	9.83
HE40, M0 to M9 4ss	4	13	-48.9	-49.9	-52.4	-50.7						-31.1	-21.25	9.83
HE40, M0 to M9 1ss	6	13	-52.5	-49.5	-53.6	-54.3	-51.0	-51.0				-30.7	-21.25	9.45
HE40, M0 to M9 2ss	6	13	-52.5	-49.5	-53.6	-54.3	-51.0	-51.0				-30.7	-21.25	9.45
HE40, M0 to M9 3ss	6	13	-52.5	-49.5	-53.6	-54.3	-51.0	-51.0				-30.7	-21.25	9.45
HE40, M0 to M9 4ss	6	13	-52.5	-49.5	-53.6	-54.3	-51.0	-51.0				-30.7	-21.25	9.45
HE40, M0 to M9 5ss	6	13	-52.5	-49.5	-53.6	-54.3	-51.0	-51.0				-30.7	-21.25	9.45
HE40, M0 to M9 6ss	6	13	-52.5	-49.5	-53.6	-54.3	-51.0	-51.0				-30.7	-21.25	9.45
HE40, M0 to M9 1ss	8	13	-54.2	-52.8	-56.1	-54.1	-54.0	-50.8	-53.4	-51.8		-30.9	-21.25	9.66
HE40, M0 to M9 2ss	8	13	-54.2	-52.8	-56.1	-54.1	-54.0	-50.8	-53.4	-51.8		-30.9	-21.25	9.66
HE40, M0 to M9 3ss	8	13	-54.2	-52.8	-56.1	-54.1	-54.0	-50.8	-53.4	-51.8		-30.9	-21.25	9.66
HE40, M0 to M9 4ss	8	13	-54.2	-52.8	-56.1	-54.1	-54.0	-50.8	-53.4	-51.8		-30.9	-21.25	9.66
HE40, M0 to M9 5ss	8	13	-54.2	-52.8	-56.1	-54.1	-54.0	-50.8	-53.4	-51.8		-30.9	-21.25	9.66
HE40, M0 to M9 6ss	8	13	-54.2	-52.8	-56.1	-54.1	-54.0	-50.8	-53.4	-51.8		-30.9	-21.25	9.66
HE40, M0 to M9 7ss	8	13	-54.2	-52.8	-56.1	-54.1	-54.0	-50.8	-53.4	-51.8		-30.9	-21.25	9.66
HE40, M0 to M9 8ss	8	13	-54.2	-52.8	-56.1	-54.1	-54.0	-50.8	-53.4	-51.8		-30.9	-21.25	9.66
HE40 Beam Forming, M0 to M9 1ss	2	16	-52.5	-49.5								-31.5	-21.25	10.30
HE40 Beam Forming, M0 to M9 2ss	2	13	-48.9	-49.9								-33.2	-21.25	11.92
HE40 Beam Forming, M0 to M9 1ss	3	18	-55.6	-53.5	-56.2							-32.0	-21.25	10.73
HE40 Beam Forming, M0 to M9 2ss	3	15	-52.5	-49.5	-53.6							-31.5	-21.25	10.30
HE40 Beam Forming, M0 to M9 3ss	3	13	-48.9	-49.9	-52.4							-32.2	-21.25	10.96
HE40 Beam Forming, M0 to M9 1ss	4	19	-55.8	-56.7	-58.1	-57.1						-31.6	-21.25	10.39
HE40 Beam Forming, M0 to M9 2ss	4	16	-54.2	-52.8	-56.1	-54.1						-31.9	-21.25	10.69
HE40 Beam Forming, M0 to M9 3ss	4	14	-52.5	-49.5	-53.6	-53.0						-31.6	-21.25	10.37
HE40 Beam Forming, M0 to M9 4ss	4	13	-48.9	-49.9	-52.4	-50.7						-31.1	-21.25	9.83
HE40 Beam Forming, M0 to M9 1ss	6	18	-55.8	-56.7	-58.1	-58.0	-55.4	-54.1				-30.1	-21.25	8.89
HE40 Beam Forming, M0 to M9 2ss	6	15	-55.6	-53.5	-56.2	-56.1	-54.9	-50.6				-31.0	-21.25	9.75
HE40 Beam Forming, M0 to M9 3ss	6	13	-52.5	-49.5	-53.6	-54.3	-51.0	-51.0				-30.7	-21.25	9.45
HE40 Beam Forming, M0 to M9 4ss	6	13	-52.5	-49.5	-53.6	-54.3	-51.0	-51.0				-30.7	-21.25	9.45
HE40 Beam Forming, M0 to M9 5ss	6	13	-52.5	-49.5	-53.6	-54.3	-51.0	-51.0				-30.7	-21.25	9.45
HE40 Beam Forming, M0 to M9 6ss	6	13	-52.5	-49.5	-53.6	-54.3	-51.0	-51.0				-30.7	-21.25	9.45
HE40 Beam Forming, M0 to M9 1ss	8	19	-60.3	-59.7	-61.1	-59.0	-60.8	-60.4	-61.0	-58.7		-31.8	-21.25	10.57
HE40 Beam Forming, M0 to M9 2ss	8	16	-55.8	-56.7	-58.1	-57.1	-58.0	-55.4	-54.1	-56.2		-31.0	-21.25	9.77
HE40 Beam Forming, M0 to M9 3ss	8	14	-55.6	-53.5	-56.2	-53.3	-56.1	-54.9	-50.6	-54.7		-30.7	-21.25	9.50
HE40 Beam Forming, M0 to M9 4ss	8	13	-54.2	-52.8	-56.1	-54.1	-54.0	-50.8	-53.4	-51.8		-30.9	-21.25	9.66
HE40 Beam Forming, M0 to M9 5ss	8	13	-54.2	-52.8	-56.1	-54.1	-54.0	-50.8	-53.4	-51.8		-30.9	-21.25	9.66


	HE40 Beam Forming, M0 to M9 6ss	8	13	-54.2	-52.8	-56.1	-54.1	-54.0	-50.8	-53.4	-51.8	-30.9	-21.25	9.66
	HE40 Beam Forming, M0 to M9 7ss	8	13	-54.2	-52.8	-56.1	-54.1	-54.0	-50.8	-53.4	-51.8	-30.9	-21.25	9.66
	HE40 Beam Forming, M0 to M9 8ss	8	13	-54.2	-52.8	-56.1	-54.1	-54.0	-50.8	-53.4	-51.8	-30.9	-21.25	9.66
	HE40 STBC, M0 to M9 2ss	2	13	-48.9	-49.9							-33.2	-21.25	11.92
	HE40 STBC, M0 to M9 2ss	3	13	-48.9	-49.9	-52.4						-32.2	-21.25	10.96
	HE40 STBC, M0 to M9 2ss	4	13	-48.9	-49.9	-52.4	-50.7					-31.1	-21.25	9.83
	HE40 STBC, M0 to M9 2ss	6	13	-52.5	-49.5	-53.6	-54.3	-51.0	-51.0			-30.7	-21.25	9.45
	HE40 STBC, M0 to M9 2ss	8	13	-54.2	-52.8	-56.1	-54.1	-54.0	-50.8	-53.4	-51.8	-30.9	-21.25	9.66
5210	Non HT80, 6 to 54 Mbps	1	13	-43.9								-30.6	-21.25	9.31
	Non HT80, 6 to 54 Mbps	2	13	-48.2	-48.1							-31.8	-21.25	10.55
	Non HT80, 6 to 54 Mbps	3	13	-48.2	-48.1	-49.8						-30.5	-21.25	9.27
	Non HT80, 6 to 54 Mbps	4	13	-51.1	-46.9	-51.0	-49.5					-29.9	-21.25	8.66
	Non HT80, 6 to 54 Mbps	6	13	-51.1	-46.9	-51.0	-51.8	-50.1	-47.1			-28.1	-21.25	6.84
	Non HT80, 6 to 54 Mbps	8	13	-51.8	-51.8	-57.9	-53.6	-57.2	-55.4	-50.9	-53.6	-31.0	-21.25	9.79
	HE80, M0 to M9 1ss	1	13	-45.2								-32.0	-21.25	10.70
	HE80, M0 to M9 1ss	2	13	-48.0	-48.9							-32.2	-21.25	10.92
	HE80, M0 to M9 2ss	2	13	-48.0	-48.9							-32.2	-21.25	10.92
	HE80, M0 to M9 1ss	3	13	-47.7	-47.4	-52.7						-30.7	-21.25	9.42
	HE80, M0 to M9 2ss	3	13	-47.7	-47.4	-52.7						-30.7	-21.25	9.42
	HE80, M0 to M9 3ss	3	13	-47.7	-47.4	-52.7						-30.7	-21.25	9.42
	HE80, M0 to M9 1ss	4	13	-47.7	-47.4	-52.6	-51.9					-30.0	-21.25	8.77
	HE80, M0 to M9 2ss	4	13	-47.7	-47.4	-52.6	-51.9					-30.0	-21.25	8.77
	HE80, M0 to M9 3ss	4	13	-47.7	-47.4	-52.6	-51.9					-30.0	-21.25	8.77
	HE80, M0 to M9 4ss	4	13	-47.7	-47.4	-52.6	-51.9					-30.0	-21.25	8.77
	HE80, M0 to M9 1ss	6	13	-54.1	-53.0	-54.0	-57.4	-53.2	-46.5			-30.5	-21.25	9.28
	HE80, M0 to M9 2ss	6	13	-54.1	-53.0	-54.0	-57.4	-53.2	-46.5			-30.5	-21.25	9.28
	HE80, M0 to M9 3ss	6	13	-54.1	-53.0	-54.0	-57.4	-53.2	-46.5			-30.5	-21.25	9.28
	HE80, M0 to M9 4ss	6	13	-54.1	-53.0	-54.0	-57.4	-53.2	-46.5			-30.5	-21.25	9.28
	HE80, M0 to M9 5ss	6	13	-54.1	-53.0	-54.0	-57.4	-53.2	-46.5			-30.5	-21.25	9.28
	HE80, M0 to M9 6ss	6	13	-54.1	-53.0	-54.0	-57.4	-53.2	-46.5			-30.5	-21.25	9.28
	HE80, M0 to M9 1ss	8	13	-54.1	-53.0	-54.0	-54.5	-57.4	-53.2	-46.5	-51.9	-29.6	-21.25	8.35
	HE80, M0 to M9 2ss	8	13	-54.1	-53.0	-54.0	-54.5	-57.4	-53.2	-46.5	-51.9	-29.6	-21.25	8.35
	HE80, M0 to M9 3ss	8	13	-54.1	-53.0	-54.0	-54.5	-57.4	-53.2	-46.5	-51.9	-29.6	-21.25	8.35
	HE80, M0 to M9 4ss	8	13	-54.1	-53.0	-54.0	-54.5	-57.4	-53.2	-46.5	-51.9	-29.6	-21.25	8.35
	HE80, M0 to M9 5ss	8	13	-54.1	-53.0	-54.0	-54.5	-57.4	-53.2	-46.5	-51.9	-29.6	-21.25	8.35
	HE80, M0 to M9 6ss	8	13	-54.1	-53.0	-54.0	-54.5	-57.4	-53.2	-46.5	-51.9	-29.6	-21.25	8.35
	HE80, M0 to M9 7ss	8	13	-54.1	-53.0	-54.0	-54.5	-57.4	-53.2	-46.5	-51.9	-29.6	-21.25	8.35
	HE80, M0 to M9 8ss	8	13	-54.1	-53.0	-54.0	-54.5	-57.4	-53.2	-46.5	-51.9	-29.6	-21.25	8.35
	HE80 Beam Forming, M0 to M9 1ss	2	16	-47.7	-47.4							-28.3	-21.25	7.04
	HE80 Beam Forming, M0 to M9 2ss	2	13	-48.0	-48.9							-32.2	-21.25	10.92
	HE80 Beam Forming, M0 to M9 1ss	3	18	-56.6	-55.2	-58.4						-33.5	-21.25	12.27
	HE80 Beam Forming, M0 to M9 2ss	3	15	-47.7	-47.4	-52.6						-28.7	-21.25	7.41

HE80 Beam Forming, M0 to M9 3ss	3	13	-47.7	-47.4	-52.7							-30.7	-21.25	9.42
HE80 Beam Forming, M0 to M9 1ss	4	19	-56.6	-55.2	-58.4	-56.7						-31.3	-21.25	10.06
HE80 Beam Forming, M0 to M9 2ss	4	16	-54.1	-53.0	-54.0	-54.5						-31.6	-21.25	10.35
HE80 Beam Forming, M0 to M9 3ss	4	14	-47.7	-47.4	-52.6	-51.9						-29.0	-21.25	7.77
HE80 Beam Forming, M0 to M9 4ss	4	13	-47.7	-47.4	-52.6	-51.9						-30.0	-21.25	8.77
HE80 Beam Forming, M0 to M9 1ss	6	18	-58.2	-51.1	-59.0	-59.3	-56.5	-49.5				-27.7	-21.25	6.49
HE80 Beam Forming, M0 to M9 2ss	6	15	-56.6	-55.2	-58.4	-52.1	-54.9	-54.0				-31.7	-21.25	10.48
HE80 Beam Forming, M0 to M9 3ss	6	13	-54.1	-53.0	-54.0	-57.4	-53.2	-46.5				-30.5	-21.25	9.28
HE80 Beam Forming, M0 to M9 4ss	6	13	-54.1	-53.0	-54.0	-57.4	-53.2	-46.5				-30.5	-21.25	9.28
HE80 Beam Forming, M0 to M9 5ss	6	13	-54.1	-53.0	-54.0	-57.4	-53.2	-46.5				-30.5	-21.25	9.28
HE80 Beam Forming, M0 to M9 6ss	6	13	-54.1	-53.0	-54.0	-57.4	-53.2	-46.5				-30.5	-21.25	9.28
HE80 Beam Forming, M0 to M9 1ss	8	19	-60.3	-58.4	-61.4	-59.6	-62.2	-59.6	-58.5	-58.9		-31.4	-21.25	10.16
HE80 Beam Forming, M0 to M9 2ss	8	16	-55.8	-54.6	-57.5	-57.9	-53.8	-54.1	-54.3	-55.9		-30.0	-21.25	8.73
HE80 Beam Forming, M0 to M9 3ss	8	14	-56.6	-55.2	-58.4	-56.7	-52.1	-54.9	-54.0	-55.1		-31.7	-21.25	10.48
HE80 Beam Forming, M0 to M9 4ss	8	13	-54.1	-53.0	-54.0	-54.5	-57.4	-53.2	-46.5	-51.9		-29.6	-21.25	8.35
HE80 Beam Forming, M0 to M9 5ss	8	13	-54.1	-53.0	-54.0	-54.5	-57.4	-53.2	-46.5	-51.9		-29.6	-21.25	8.35
HE80 Beam Forming, M0 to M9 6ss	8	13	-54.1	-53.0	-54.0	-54.5	-57.4	-53.2	-46.5	-51.9		-29.6	-21.25	8.35
HE80 Beam Forming, M0 to M9 7ss	8	13	-54.1	-53.0	-54.0	-54.5	-57.4	-53.2	-46.5	-51.9		-29.6	-21.25	8.35
HE80 Beam Forming, M0 to M9 8ss	8	13	-54.1	-53.0	-54.0	-54.5	-57.4	-53.2	-46.5	-51.9		-29.6	-21.25	8.35
HE80 STBC, M0 to M9 1ss	2	13	-48.0	-48.9								-32.2	-21.25	10.92
HE80 STBC, M0 to M9 1ss	3	13	-47.7	-47.4	-52.7							-30.7	-21.25	9.42
HE80 STBC, M0 to M9 1ss	4	13	-47.7	-47.4	-52.6	-51.9						-30.0	-21.25	8.77
HE80 STBC, M0 to M9 1ss	6	13	-54.1	-53.0	-54.0	-57.4	-53.2	-46.5				-30.5	-21.25	9.28
HE80 STBC, M0 to M9 1ss	8	13	-54.1	-53.0	-54.0	-54.5	-57.4	-53.2	-46.5	-51.9		-29.6	-21.25	8.35


**Conducted Bandedge Peak,
5180 MHz, HE20 Beam Forming, M0 to M9 1ss**

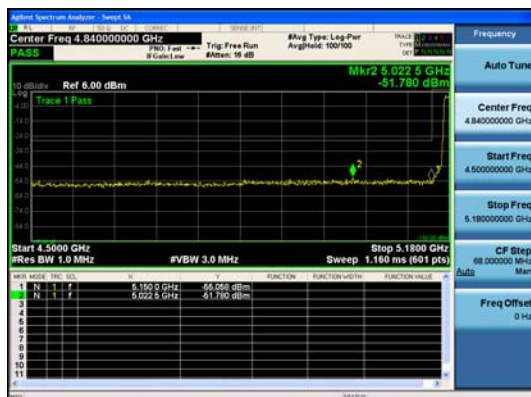


Antenna A

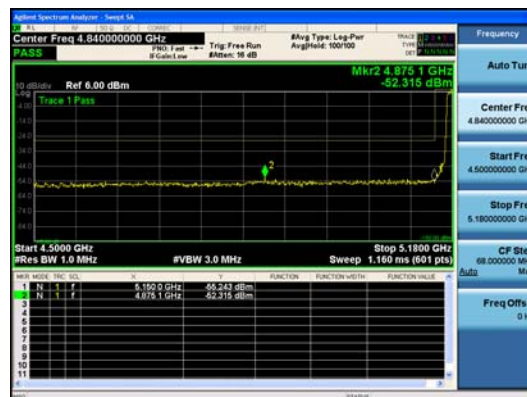


Antenna B

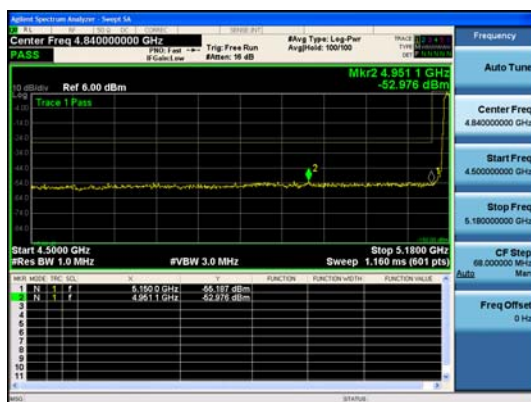

Antenna C

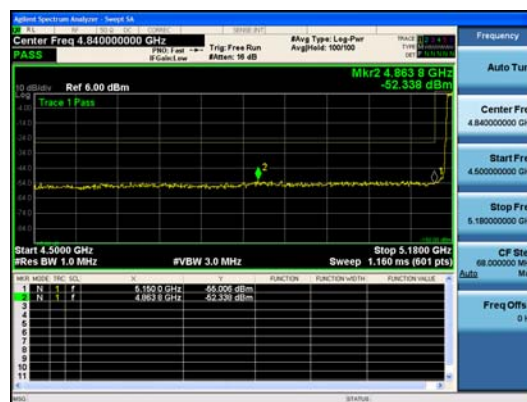

Antenna D

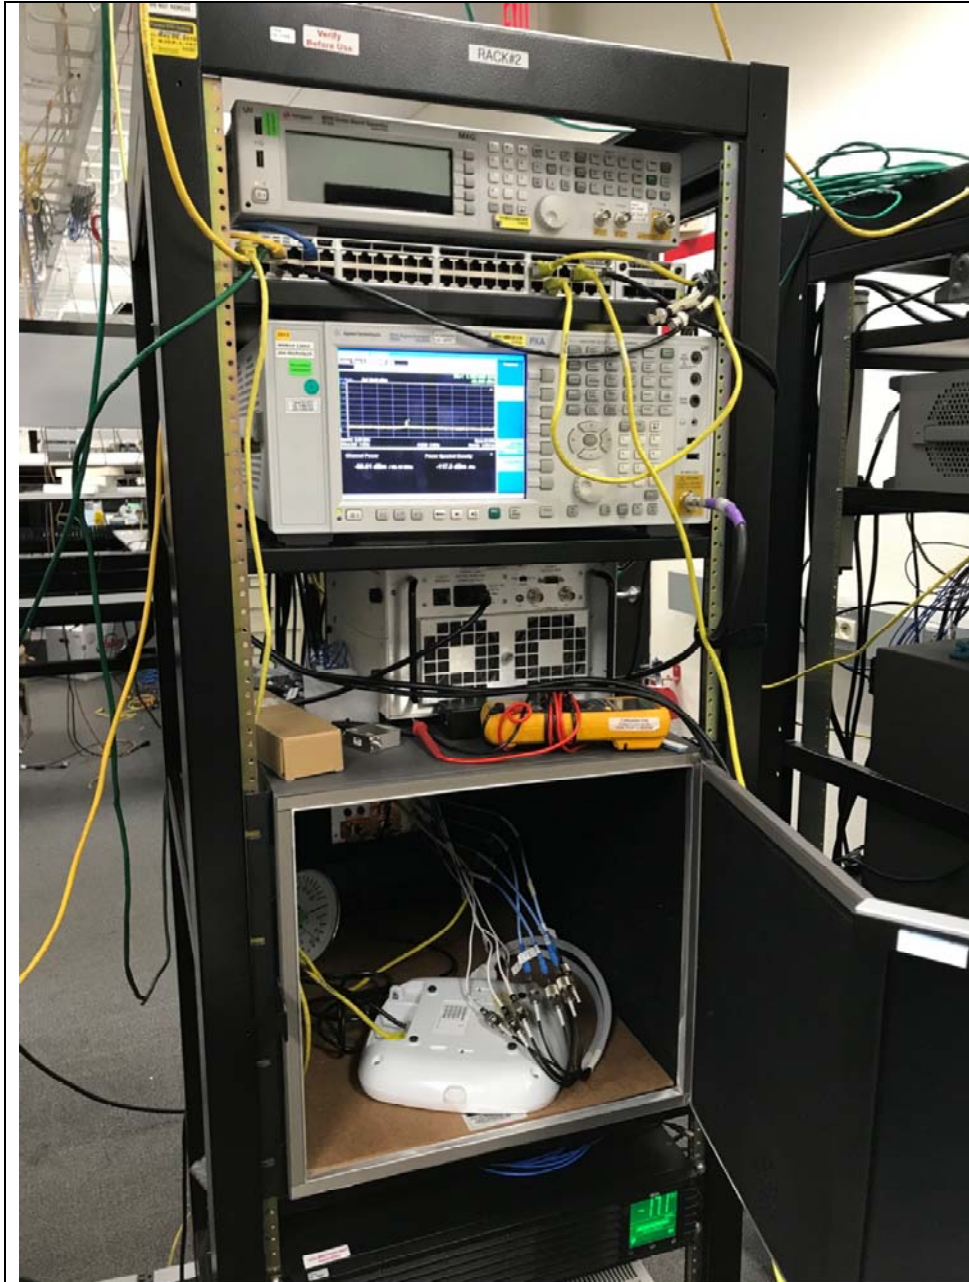

Title: Physical Test Arrangement Photograph

This is a dual band 2.4GHz / 5GHz device. All ports in this test set up photo are connected as all testing is automated. Section 2.6 of this test report given an overview of the different Tx antenna combinations used by this device.

Appendix B: Radiated & AC Conducted Emission Test Results

Not covered by this report.

Appendix C: List of Test Equipment Used to perform the test

Equip#	Manufacturer/ Model	Description	Last Cal	Next Cal	Test Item
57476	Cisco	Automation Test Insertion Loss	NA	NA	A1-A7
50721	Keysight N9030A-550	PXA Signal Analyzer, 3Hz to 50GHz	15 Mar 2019	15 Mar 2020	A1-A7
55094	NI PXI-1042	CHASSIS, PXI	NA	NA	A1-A7
57237	NI PXI-8115	Embedded Controller	NA	NA	A1-A7
54686	NI PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	NA	NA	A1-A7
57245	NI PXI-2799	Switch 1x1	NA	NA	A1-A7
56091	NI PXI-2796	40 GHz Dual 6x1 Multiplexer (SP6T)	NA	NA	A1-A7
56328	Pasternack PE5019-1	Torque wrench	14 Feb 2019	14 Feb 2020	A1-A7
6695	Lufft 5063-33W	Dial hygrometer	06 Nov 2019	06 Nov 2020	A1-A7

Appendix D: Abbreviation Key and Definitions

The following table defines abbreviations used within this test report.

Abbreviation	Description	Abbreviation	Description
EMC	Electro Magnetic Compatibility	°F	Degrees Fahrenheit
EMI	Electro Magnetic Interference	°C	Degrees Celsius
EUT	Equipment Under Test	Temp	Temperature
ITE	Information Technology Equipment	S/N	Serial Number
TAP	Test Assessment Schedule	Qty	Quantity
ESD	Electro Static Discharge	emf	Electromotive force
EFT	Electric Fast Transient	RMS	Root mean square
EDCS	Engineering Document Control System	Qp	Quasi Peak
Config	Configuration	Av	Average
CIS#	Cisco Number (unique identification number for Cisco test equipment)	Pk	Peak
Cal	Calibration	kHz	Kilohertz (1x10 ³)
EN	European Norm	MHz	MegaHertz (1x10 ⁶)
IEC	International Electro technical Commission	GHz	Gigahertz (1x10 ⁹)
CISPR	International Special Committee on Radio Interference	H	Horizontal
CDN	Coupling/Decoupling Network	V	Vertical
LISN	Line Impedance Stabilization Network	dB	decibel
PE	Protective Earth	V	Volt
GND	Ground	kV	Kilovolt (1x10 ³)
L1	Line 1	μV	Microvolt (1x10 ⁻⁶)
L2	Line2	A	Amp
L3	Line 3	μA	Micro Amp (1x10 ⁻⁶)
DC	Direct Current	mS	Milli Second (1x10 ⁻³)
RAW	Uncorrected measurement value, as indicated by the measuring device	μS	Micro Second (1x10 ⁻⁶)
RF	Radio Frequency	μS	Micro Second (1x10 ⁻⁶)
SLCE	Signal Line Conducted Emissions	m	Meter
Meas dist	Measurement distance	Spec dist	Specification distance
N/A or NA	Not Applicable	SL	Signal Line (or Telecom Line)
P	Power Line	L	Live Line
N	Neutral Line	R	Return
S	Supply	AC	Alternating Current

Appendix E: Photographs of Test Setups

Please refer to the attachment

Appendix F: Software Used to Perform Testing

Cisco Internal LabView Radio Test Automation Software rev 130

Appendix G: Test Procedures

Measurements were made in accordance with

- KDB 789033 - D02 General UNII Test Procedures New Rules v02r01
- KDB 662911 - MIMO
- ANSI C63.4 2014 Unintentional Radiators
- ANSI C63.10 2013 Intentional Radiators

Test procedures are summarized below:

FCC 5GHz Test Procedures	EDCS # 1445048
FCC 5GHz RSE Test Procedures	EDCS # 1511600

Appendix H: Scope of Accreditation (A2LA certificate number 1178-01)

The scope of accreditation of Cisco Systems, Inc. can be found on the A2LA web page at:

<http://www.a2la.org/scopepdf/1178-01.pdf>

Appendix I: Test Assessment Plan

Compliance Test Plan (Excel) EDCS# 18216607

Radio Test Plan: EDCS# 18486508

End