



样品承认书

Version : V1.0

Supplier sample production confirmation: (stamp required)

Formulate	Confirm	Approve	Quality	Stamp
代庆蓉	龙超群	傅梁成	曹光平	

Customer approval:

Project confirmation	Project approval	Quality confirmation	Quality approval	Confirmation date



Graphic for reference

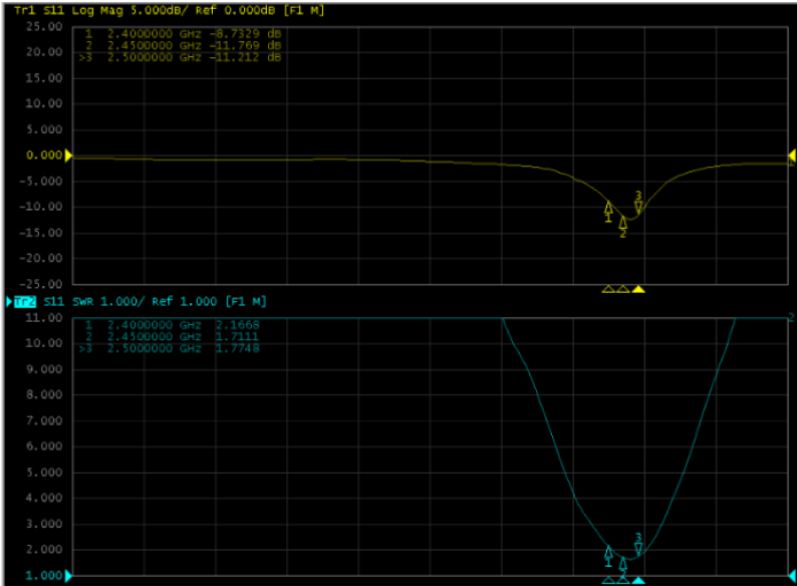


Figure 2 0.8*20mmBT

Name	ANTENNA
Model	LT13
Frequency	2.4Ghz
Input impedance	50Ω
Allowed power	5mW
Working temp.	-25 ~ +65 °C
Storage temp.	-40 ~ +85 °C
Weight	0.25g
Antenna gain天线增益	2.21dBi



Appendix B S11/VSWR



Frequency (MHz)	2400	2450	2500
Return Loss	-8.73	-11.76	-11.21
VSWR	2.16	1.71	1.77








Appendix C Gain and Efficiency


Frequency (MHz)	Efficiency(%)	Gain (dBi)
2400	32.36%	2.11
2410	32.3%	2.18
2420	32.1%	2.21
2430	32.4%	2.06
2440	32.9%	2.07
2450	30.9%	1.91
2460	30.8%	2.04
2470	30.7%	2.09
2480	31.6%	1.98
2490	30.6%	1.91
2500	30.5%	1.03



Appendix D Radiation Pattern(1D and 3D)

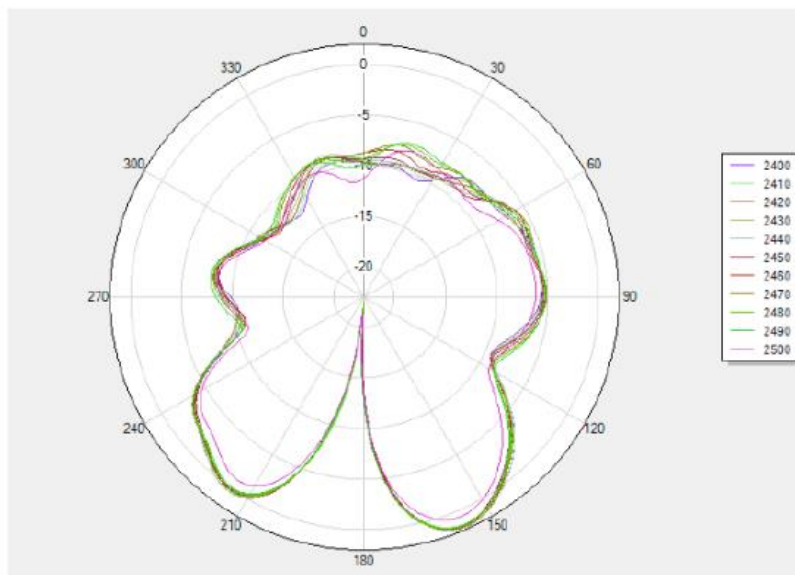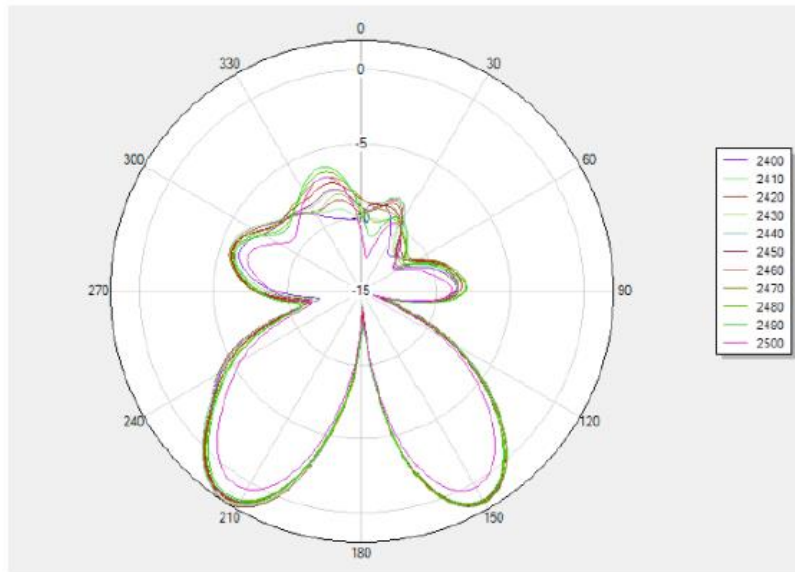

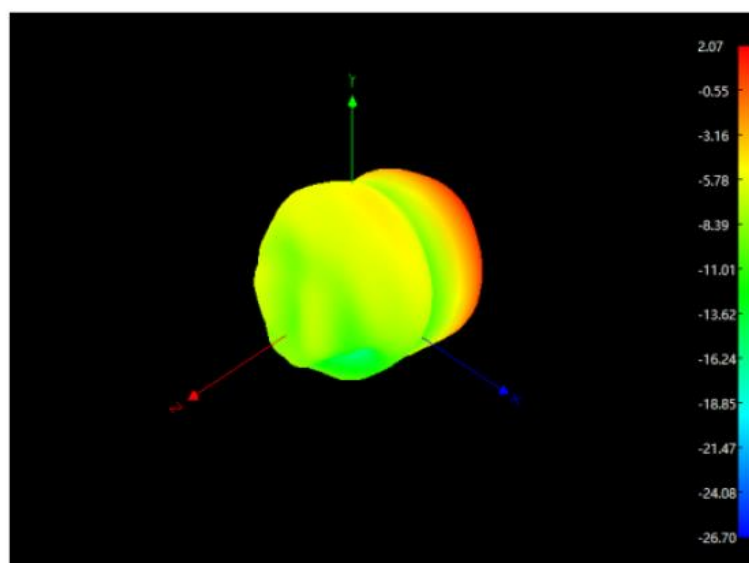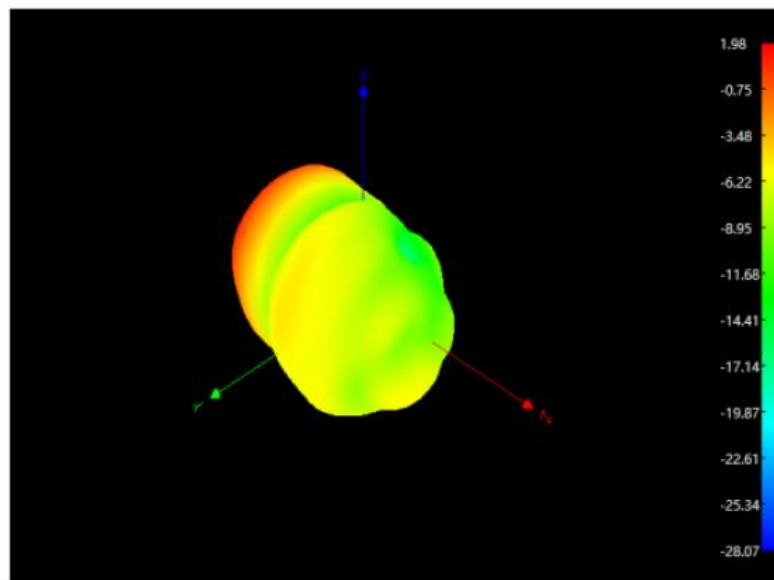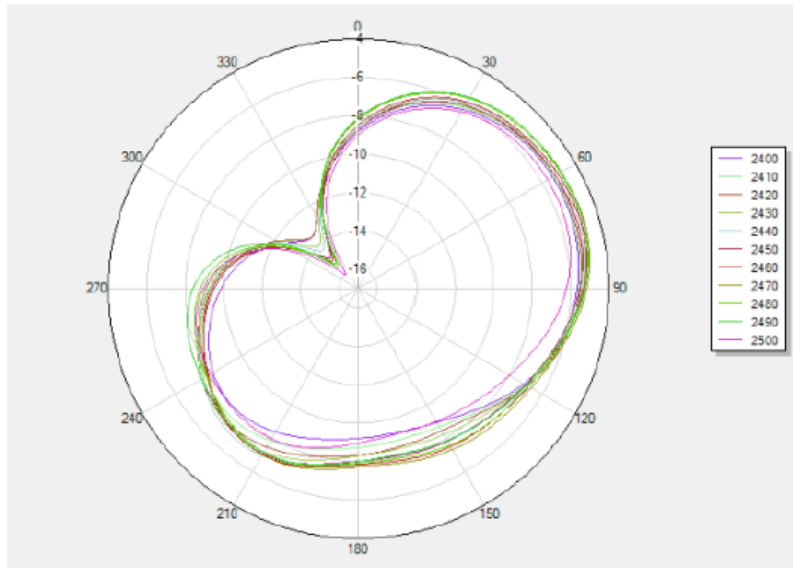

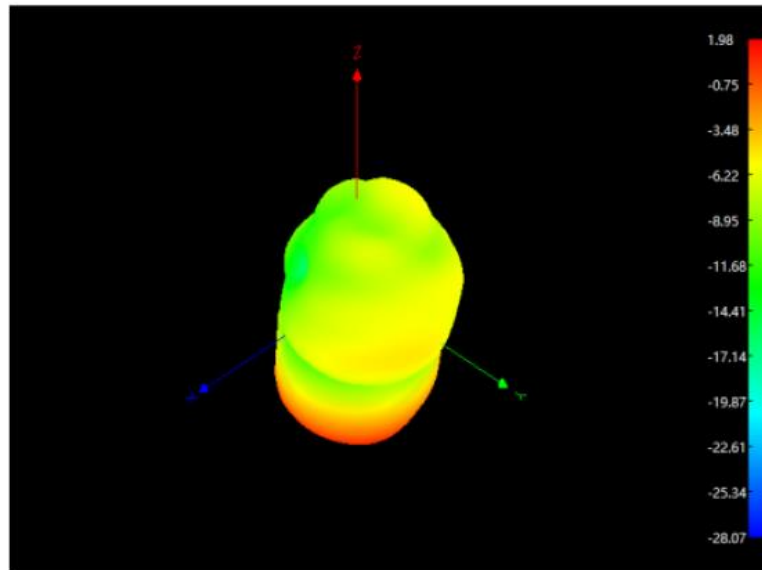

Appendix E Test Setup Photo

