



849 NW STATE ROAD 45
NEWBERRY, FL 32669 USA

PH: 888.472.2424 OR
352.472.5500

FAX: 352.472.2030

EMAIL: INFO@TIMCOENGR.COM

[HTTP://WWW.TIMCOENGR.COM](http://WWW.TIMCOENGR.COM)

FCC PART 90

700 / 800 MHz

TEST REPORT

APPLICANT	UNICATION CO., LTD.
ADDRESS	5F, NO.6, WU-KUNG 5 RD. HSINCHUANG CITY, TAIPEI TAIWAN
FCC ID	LEA-U3-700-800
MODEL NUMBER	U3-700-800
PRODUCT DESCRIPTION	UHF 700/800 PTT RADIO W/GPS & BT
DATE SAMPLE RECEIVED	7/29/2015
FINAL TEST DATE	8/24/2015
TESTED BY	Cory Leverett
APPROVED BY	Sid Sanders
TEST RESULTS	☒ PASS ☐ FAIL

Report Number	Version Number	Description	Issue Date
1272AUT15TestReport	Rev1	Initial Issue	8/25/2015

THE ATTACHED REPORT SHALL NOT BE REPRODUCED EXCEPT IN FULL WITHOUT THE WRITTEN APPROVAL OF TIMCO ENGINEERING, INC.

TABLE OF CONTENTS

GENERAL REMARKS.....	5
GENERAL INFORMATION	6
TEST RESULTS SUMMARY	7
RF POWER OUTPUT	8
MODULATION CHARACTERISTICS	9
BANDWIDTH CALCULATION	9
AUDIO FREQUENCY RESPONSE – 12.5 kHz	10
AUDIO FREQUENCY RESPONSE – 20 kHz	11
AUDIO FREQUENCY RESPONSE – 25 kHz	12
AUDIO LOW PASS FILTER 12.5 kHz	13
AUDIO LOW PASS FILTER 20 kHz	14
AUDIO LOW PASS FILTER 25 kHz	15
MODULATION LIMITING 12.5 kHz	16
MODULATION LIMITING 20 kHz	17
MODULATION LIMITING 25 kHz	18
OCCUPIED BANDWIDTH	19
TEST FREQ. 806.05 MHz–16k0F3E	20
TEST FREQ. 806.05 MHz–14k0F3E	21
TEST FREQ. 806.05 MHz–11k0F3E	22
TEST FREQ. 806.05 MHz–8K17F1E/8K17F1D.....	23
TEST FREQ. 806.05 MHz–7K80FXE/FXD/FXW	24
TEST FREQ. 806.05 MHz–8K87F2E.....	25
TEST FREQ. 806.05 MHz–5K41F2E.....	26
TEST FREQ. 815.05 MHz–16k0F3E	27
TEST FREQ. 815.05 MHz–14k0F3E	28
TEST FREQ. 815.05 MHz–11k0F3E	29
TEST FREQ. 815.05 MHz–8K17F1E/8K17F1D.....	30
TEST FREQ. 815.05 MHz–7K80FXE/7K80FXD/7K80FXW	31
TEST FREQ. 815.05 MHz–8K87F2E.....	32
TEST FREQ. 815.05 MHz–5K41F2E.....	33
TEST FREQ. 823.95 MHz–16k0F3E	34
TEST FREQ. 823.95 MHz–14k0F3E	35
TEST FREQ. 823.95 MHz–11k0F3E	36
TEST FREQ. 823.95 MHz–8K17F1E/8K17F1D.....	37
TEST FREQ. 823.95 MHz–7K80FXE/7K80FXD/7K80FXW	38

TEST FREQ. 823.95 MHz-8K87F2E.....	39
TEST FREQ. 823.95 MHz-5K41F2E.....	40
TEST FREQ. 851.05 MHz-16k0F3E.....	41
TEST FREQ. 851.05 MHz-14k0F3E.....	42
TEST FREQ. 851.05 MHz-11k0F3E.....	43
TEST FREQ. 851.05 MHz-8K17F1E/8K17F1D.....	44
TEST FREQ. 851.05 MHz-7K80FXE/7K80FXD/7K80FXW	45
TEST FREQ. 851.05 MHz-8K87F2E.....	46
TEST FREQ. 851.05 MHz-5K41F2E.....	47
TEST FREQ. 860.05 MHz-16k0F3E.....	48
TEST FREQ. 860.05 MHz-14k0F3E.....	49
TEST FREQ. 860.05 MHz-11k0F3E.....	50
TEST FREQ. 860.05 MHz-8K17F1E/8K17F1D.....	51
TEST FREQ. 860.05 MHz-7K80FXE/7K80FXD/7K80FXW	52
TEST FREQ. 860.05 MHz-8K87F2E.....	53
TEST FREQ. 860.05 MHz-5K41F2E.....	54
TEST FREQ. 868.95 MHz-16k0F3E.....	55
TEST FREQ. 868.95 MHz-14k0F3E.....	56
TEST FREQ. 868.95 MHz-11k0F3E.....	57
TEST FREQ. 868.95 MHz-8K17F1E/8K17F1D.....	58
TEST FREQ. 868.95 MHz-7K80FXE/7K80FXD/7K80FXW	59
TEST FREQ. 868.95 MHz-8K87F2E.....	60
TEST FREQ. 868.95 MHz-5K41F2E.....	61
ADJACENT CHANNEL POWER (ACP).....	62
TEST FREQ. 769.05 MHz-16K0F3E	64
TEST FREQ. 769.05 MHz-11K0F3E	67
TEST FREQ. 769.05 MHz-8K87F2E	70
TEST FREQ. 769.05 MHz-8K17F1E/8K17F1D	73
TEST FREQ. 769.05 MHz-7K80FXE/7K80FXD/7K80FXW	76
TEST FREQ. 769.05 MHz-5K41F2E	79
TEST FREQ. 772.05 MHz-16K0F3E	82
TEST FREQ. 772.05 MHz-11K0F3E Error! Bookmark not defined.	
TEST FREQ. 772.05 MHz-8K87F2E	88
TEST FREQ. 772.05 MHz-8K17F1E/8K17F1D	91
TEST FREQ. 772.05 MHz-7K80FXE/7K80FXD/7K80FXW	94
TEST FREQ. 772.05 MHz-5K41F2E	97
TEST FREQ. 774.95 MHz-16K0F3E	100
TEST FREQ. 774.95 MHz-11K0F3E	103
TEST FREQ. 774.95 MHz-8K87F2E	106
TEST FREQ. 774.95 MHz-8K17F1E/8K17F1D	109
TEST FREQ. 774.95 MHz-7K80FXE/7K80FXD/7K80FXW	112
TEST FREQ. 774.95 MHz-5K41F2E	115

TEST FREQ. 799.05 MHz-16K0F3E	118
TEST FREQ. 799.05 MHz-11K0F3E	121
TEST FREQ. 799.05 MHz-8K87F2E	124
TEST FREQ. 799.05 MHz-8K17F1E / 8K17F1D	127
TEST FREQ. 799.05 MHz-7K80FXE / 7K80FXD / 7K80FXW	130
TEST FREQ. 799.05 MHz-5K41F2E	133
TEST FREQ. 802.05 MHz-16K0F3E	136
TEST FREQ. 802.05 MHz-11K0F3E	139
TEST FREQ. 802.05 MHz-8K87F2E	142
TEST FREQ. 802.05 MHz-8K17F1E / 8K17F1D	145
TEST FREQ. 802.05 MHz-7K80FXE / 7K80FXD / 7K80FXW	148
TEST FREQ. 802.05 MHz-5K41F2E	151
TEST FREQ. 804.95 MHz-16K0F3E	154
TEST FREQ. 804.95 MHz-11K0F3E	157
TEST FREQ. 804.95 MHz-8K87F2E	160
TEST FREQ. 804.95 MHz-8K17F1E / 8K17F1D	163
TEST FREQ. 804.95 MHz-7K80FXE / 7K80FXD / 7K80FXW	166
TEST FREQ. 804.95 MHz-5K41F2E	169
SPURIOUS EMISSIONS AT ANTENNA TERMINALS (CONDUCTED)	172
Test Data: High Power 769.05 MHz	172
Test Data: High Power 772.05 MHz	173
Test Data: High Power 774.95 MHz	174
Test Data: High Power 799.05 MHz	175
Test Data: High Power 802.05 MHz	176
Test Data: High Power 804.95 MHz	177
Test Data: High Power 806.05 MHz	178
Test Data: High Power 815.05 MHz	179
Test Data: High Power 823.95 MHz	180
Test Data: High Power 851.05 MHz	181
Test Data: High Power 860.05 MHz	182
Test Data: High Power 868.95 MHz	183
FIELD STRENGTH OF SPURIOUS RADIATION EMISSIONS	184
Test Data: High Power 772.05 MHz	185
Test Data: High Power 802.05 MHz	186
Test Data: High Power 815.05 MHz	187
Test Data: High Power 860.05 MHz	187
FREQUENCY STABILITY	188
Test Data: 815.05 MHz 12.5 KHz	188
EQUIPMENT LIST.....	189

GENERAL REMARKS

The attached report shall not be reproduced except in full without the written permission of Timco Engineering Inc.

Summary

The device under test does:

- ☒ Fulfill the general approval requirements as identified in this test report
☐ Not fulfill the general approval requirements as identified in this test report

Attestations

This equipment has been tested in accordance with the standards identified in this test report. To the best of my knowledge and belief, these tests were performed using the measurement procedures described in this report.

All instrumentation and accessories used to test products for compliance to the indicated standards are calibrated regularly in accordance with ISO 17025 requirements.

I attest that the necessary measurements were made, under my supervision, at:

Timco Engineering Inc.
849 NW State Road 45
Newberry, FL 32669



Authorized Signatory Name: _____

Project Manager/Testing Technician

Date: 8/25/2015

[Table of Contents](#)

GENERAL INFORMATION

EUT Specification

EUT Description	700-800 MHZ PORTABLE TRANSCEIVER
FCC ID	LEA-U3-700-800
Model Number	U3-700-800
Operating Frequency	769-775, 799-805, 806-824, 851-869 MHz
Test Frequencies	769.05, 772.05, 774.95, 799.05, 802.05, 804.95, 806.05, 815.05, 823.95, 851.05, 860.05, 868.95 MHz
Type of Emission	16K0F3E, 14K0F3E, 11K0F3E, 8K17F1E, 8K17F1D, 8K87F2E, 7K80FXE, 7K80FXD, 7K80FXW, 5K41F2E
Modulation	FM
EUT Power Source	☐ 110-120Vac/50- 60Hz
	☐ DC Power 12V
	☒ Battery Operated Exclusively
Test Item	☐ Prototype
	☒ Pre-Production
	☐ Production
Type of Equipment	☐ Fixed
	☐ Mobile
	☒ Portable
Test Conditions	Temperature: 24-26°C Relative Humidity: 50 - 65%.
Modification to the EUT	None
Test Exercise	The EUT was operated in a normal mode.
Regulatory Standard	FCC CFR 47 Part 90, 90R, 90S
Measurement Standard	ANSI/TIA 603-D:2010
Test Facility	Timco Engineering Inc. at 849 NW State Road 45 Newberry, FL 32669 USA.

[Table of Contents](#)

TEST RESULTS SUMMARY

Test Description	FCC RULE PART NO.	RESULT
Modulation Characteristics	2.1047(a)(b)	Pass
RF Power Output	2.1046(a), 90.541(d), 90.542(a)(7), 90.635(b)	Pass
Occupied Bandwidth	2.1049(c)(h), 90.210(b)(g)(h), 90.691	Pass
Adjacent Channel Power	90.543(a)	Pass
Spurious Emissions at Antenna Terminal	2.1051(a), 90.210(b)(g)(h), 90.691, 90.543(c)	Pass
Field Strength of Spurious Radiation	2.1053, 90.210(b)(g)(h), 90.691, 90.543(c)	Pass
Frequency Stability	2.1055, 90.213, 90.539(c)	Pass

RF POWER OUTPUT

Rule Part No.: Part 2.1046(a), Part 90.541(d), 90.635(b)


Test Requirements:

769-775 MHz and 799-805 MHz frequency bands
The transmitting power of a portable (hand-held) unit must not exceed 3 watts ERP.

806-824 and 851-869 MHz frequency bands.
The maximum output power of the transmitter for mobile stations is 100 watts

Method of Measurement: RF power is measured by using a 50-ohm, resistive wattmeter to the RF output connector. With a nominal battery voltage (if battery operated), or a properly adjusted power supply (if not battery operated), and the transmitter properly adjusted the RF output measures:

Test Setup Diagram:



Test Data:

Tuned Frequency (MHz)	RF POWER (dBm)	
	HI	LOW
769.05	34.7	-
772.05	34.7	-
774.95	34.7	-
799.05	34.7	-
802.05	34.7	-
804.95	34.7	-
806.05	35.5	-
815.05	35.5	-
823.95	35.5	-
851.05	35.5	-
860.05	35.5	-
868.95	35.5	-

Part 2.1033 (C) (8) DC Input into the final amplifier

FOR HIGH POWER SETTING INPUT POWER: (7.2V) (1.3A) = 9.36Watts

[Table of Contents](#)

MODULATION CHARACTERISTICS

Part 2.1033(c)

Part 2.1033(c) (4) Type of Emission: 11K2F1D, 11K2F2D, and 11K2F3E

FCC Part 90.209

FCC Part 90.207

DMR TDMA

BANDWIDTH CALCULATION

Type of Emission: 11K2F3E

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 2100$$

$$K=1$$

$$B_n = 2(3000) + 2(2100) = 10.2k$$

Type of Emission: 16K0F3E

$$B_n = 2M + 2DK$$

$$M = 3000$$

$$D = 4700$$

$$K=1$$

$$B_n = 2(3000) + 2(4700) = 15.4k$$

And

Type of Emission: 11K2F1D

$$B_n = 2(DR/2) + 2DK$$

$$M = 9600$$

$$D = 4700$$

$$K=1$$

$$B_n = 2(9600/2) + 2(700) = 11.2k$$

Type of Emission: 11K2F2D

$$B_n = 2(DR/2) + 2DK$$

$$M = 9600$$

$$D = 800$$

$$K=1$$

$$B_n = 2(9600/2) + 2(700) = 9600 + 1600 = 11.2k$$

APCO 25 modulation phase 1 as defined in ANSI/ TIA-102.BABA.

[Table of Contents](#)

MODULATION CHARACTERISTICS

AUDIO FREQUENCY RESPONSE


Rule Part No.: Part 2.1047(a) (b)

Test Requirements: Reporting Only

Method of Measurement: ANSI/TIA-603 § 2.2.6 Audio Frequency Response

TEST DATA:


AUDIO FREQUENCY RESPONSE – 12.5 kHz

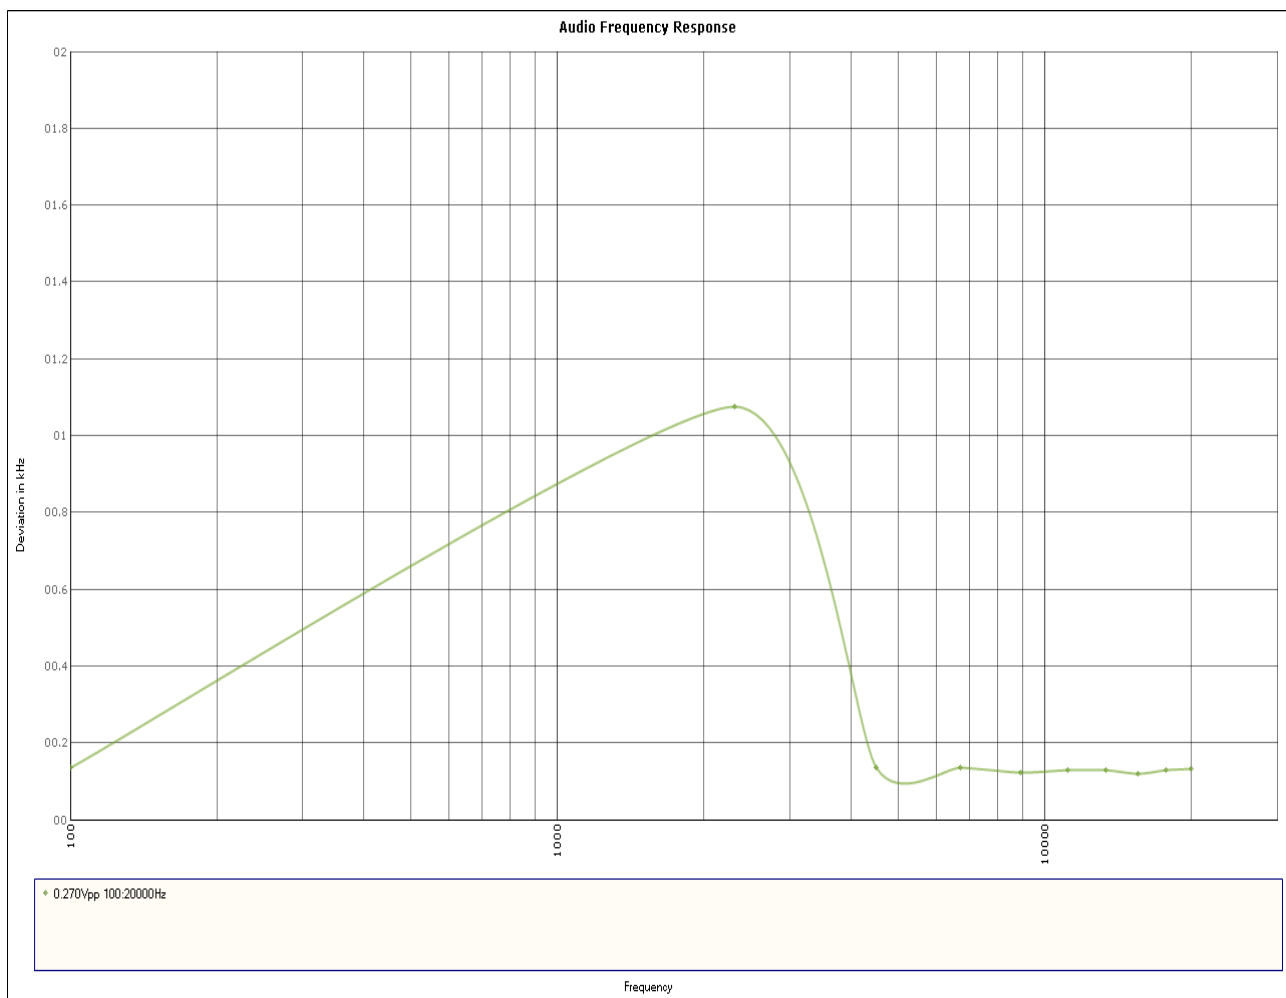

MODULATION CHARACTERISTICS

AUDIO FREQUENCY RESPONSE

AUDIO FREQUENCY RESPONSE – 20 kHz

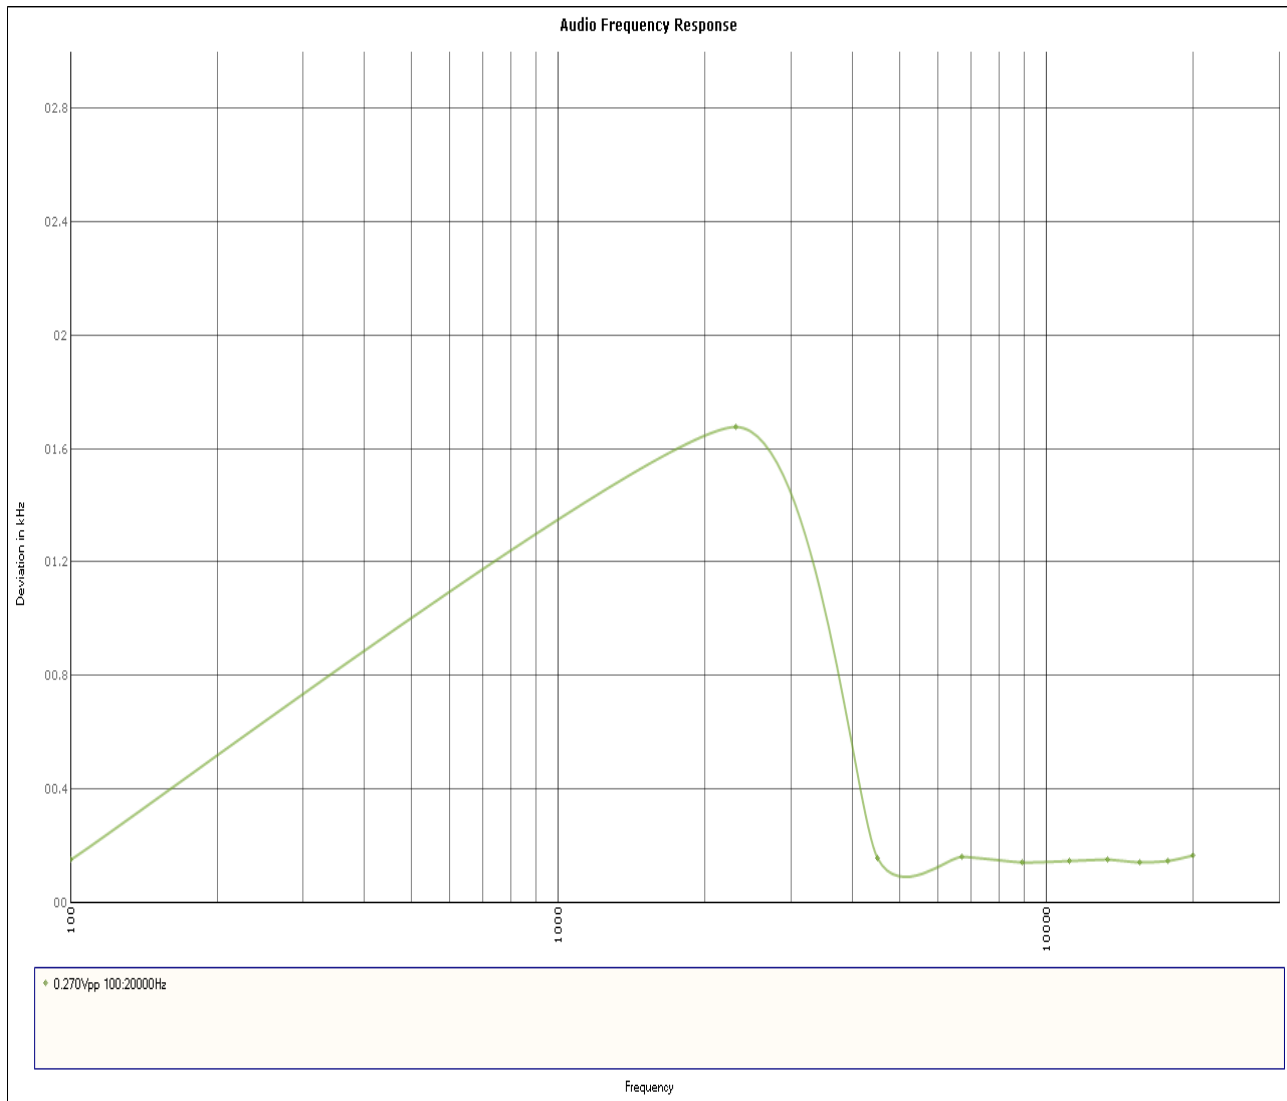


[Table of Contents](#)

MODULATION CHARACTERISTICS

AUDIO FREQUENCY RESPONSE

AUDIO FREQUENCY RESPONSE – 25 kHz

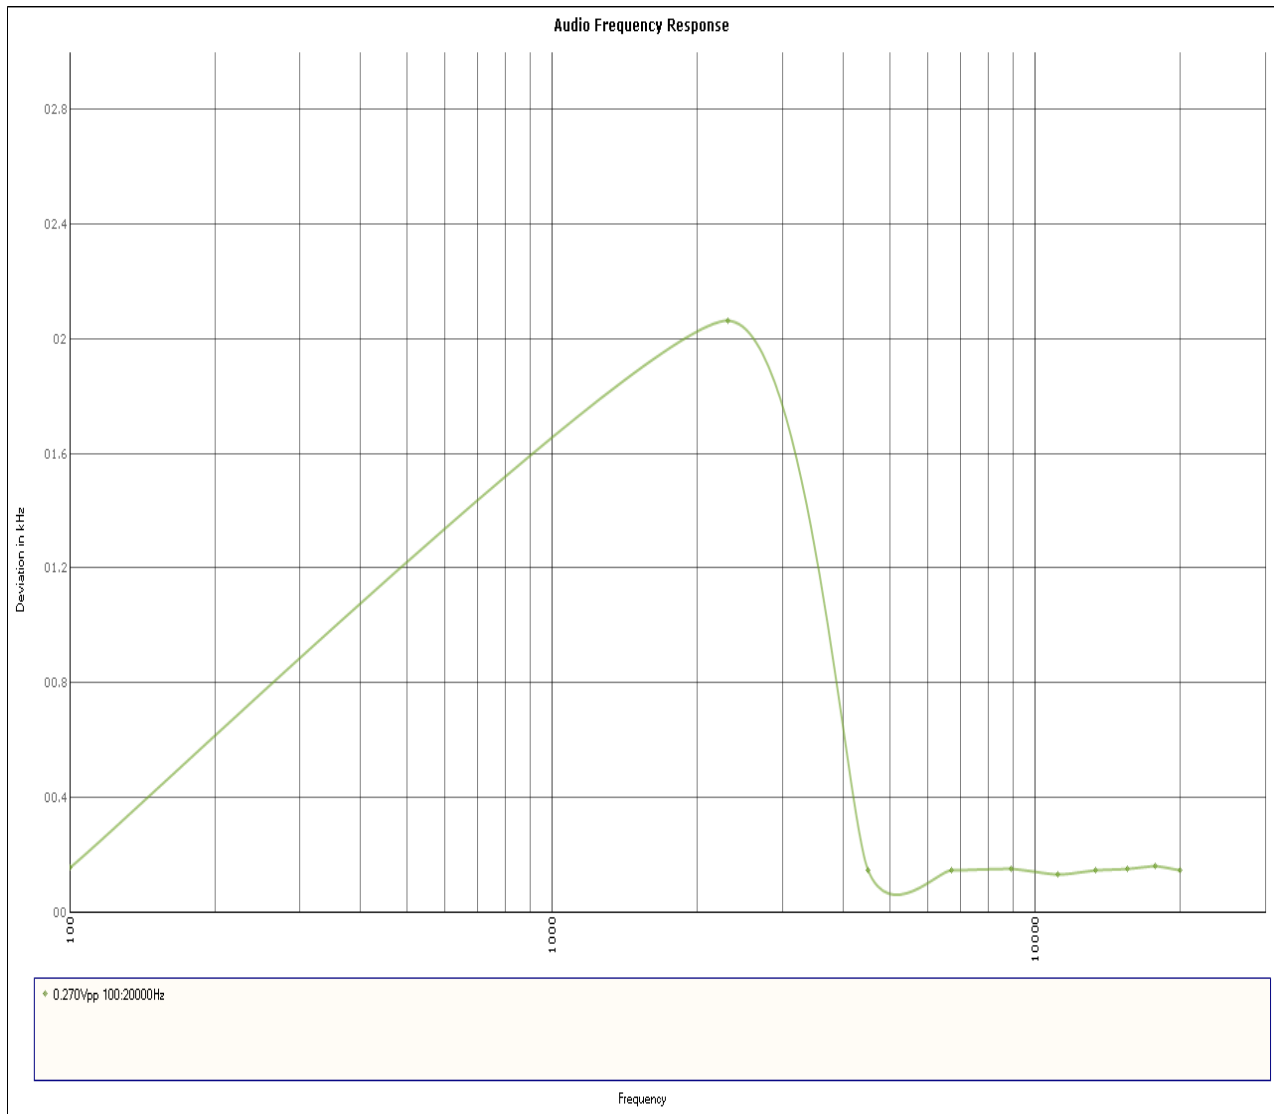

[Table of Contents](#)

MODULATION CHARACTERISTICS

AUDIO LOW PASS FILTER


Rule Part No.: Part 2.1047(a) (b)

Test Requirements: For equipment required to have an audio low-pass filter, a curve showing the frequency response of the filter or of all the circuitry installed between the modulation limiter and the modulated stage shall be submitted.

Method of Measurement: ANSI/TIA-603 § 2.2.15 Audio Low pass filter Response


TEST DATA:

AUDIO LOW PASS FILTER 12.5 kHz

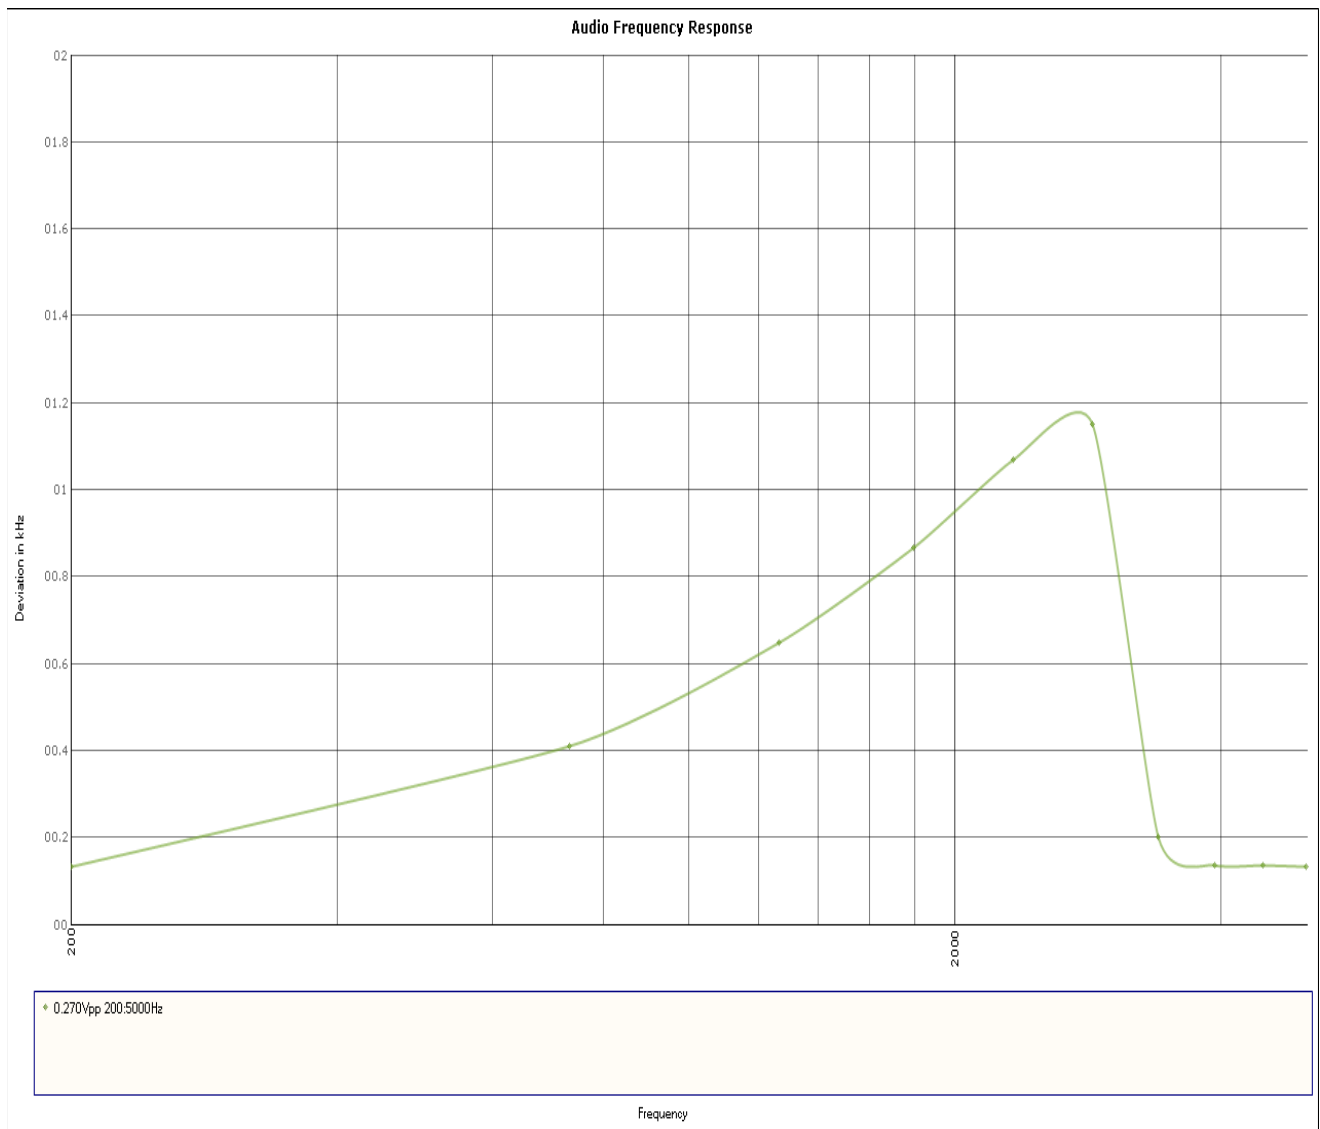

MODULATION CHARACTERISTICS


AUDIO LOW PASS FILTER 20 kHz

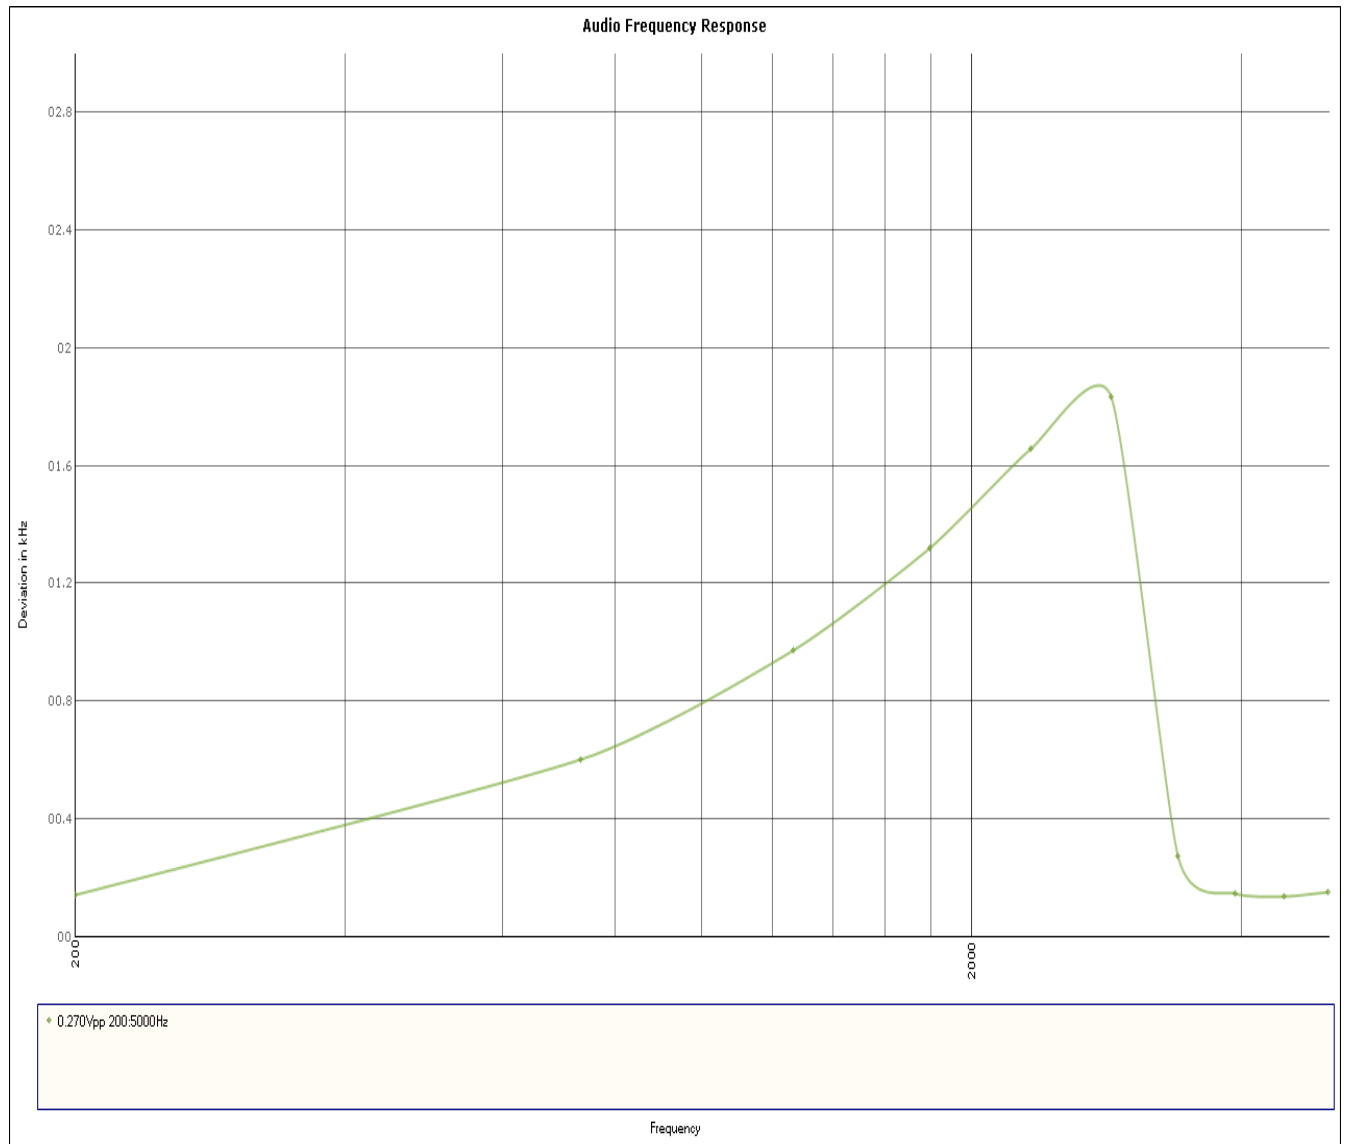

[Table of Contents](#)

MODULATION CHARACTERISTICS

AUDIO LOW PASS FILTER 25 kHz

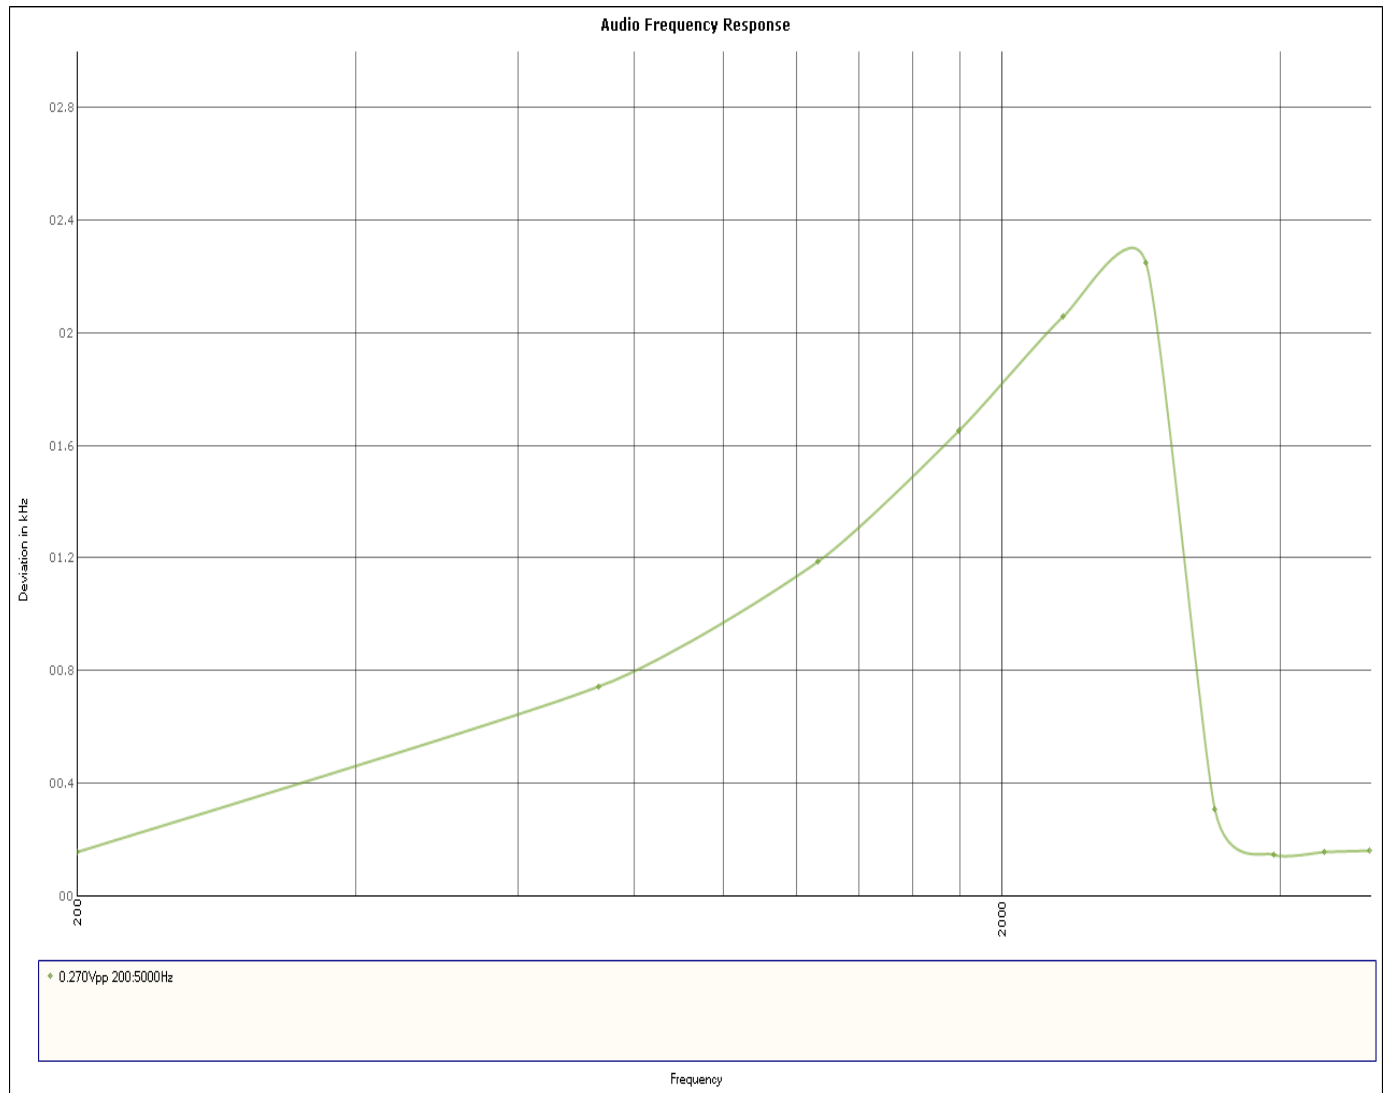

[Table of Contents](#)

MODULATION CHARACTERISTICS -

AUDIO INPUT VERSUS MODULATION


RULE PART NO: Part 2.1047(b) & 90

REQUIREMENT Modulation cannot exceed 100% of the rated FM deviation.

Method of Measurement: ANSI/TIA-603 § 2.2.3

Test data:


MODULATION LIMITING 12.5 kHz

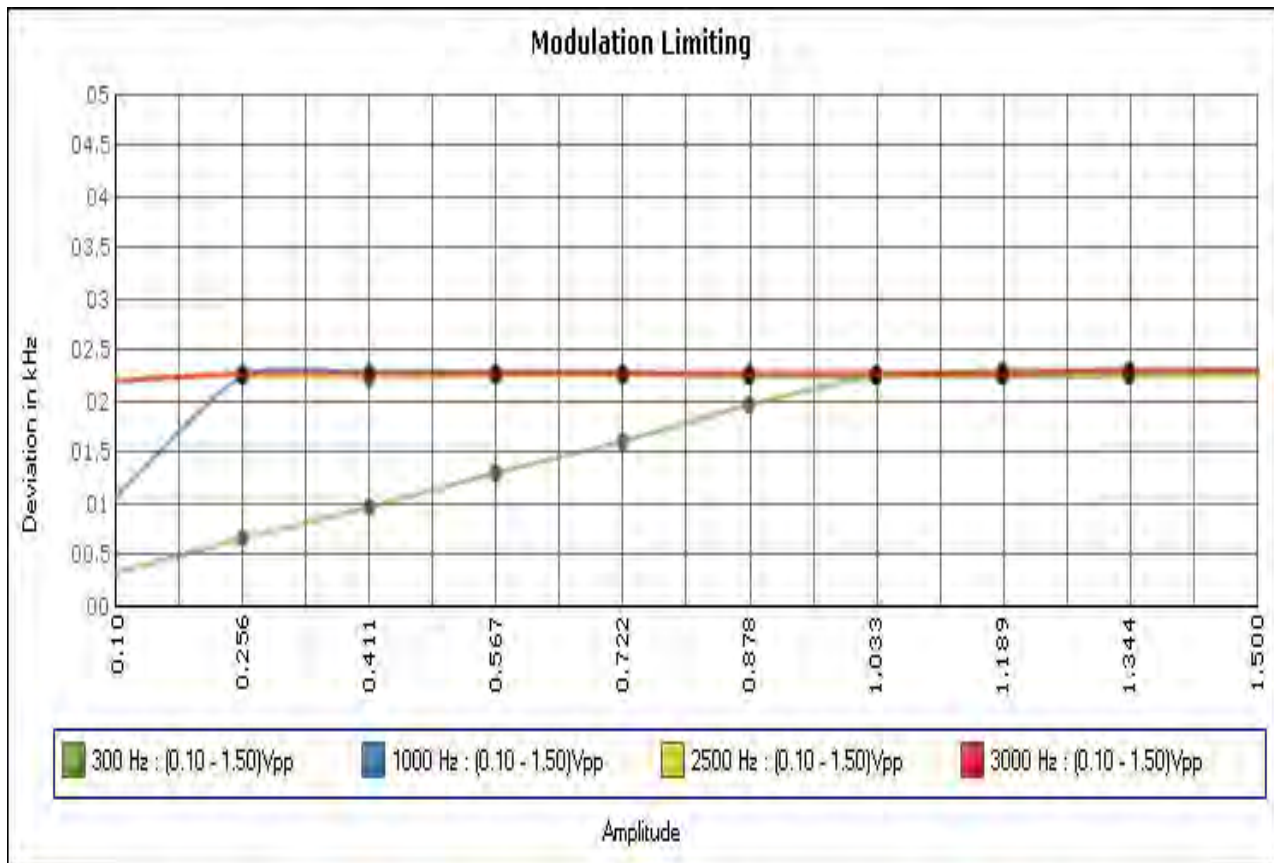

MODULATION CHARACTERISTICS

AUDIO INPUT VERSUS MODULATION

MODULATION LIMITING 20 kHz

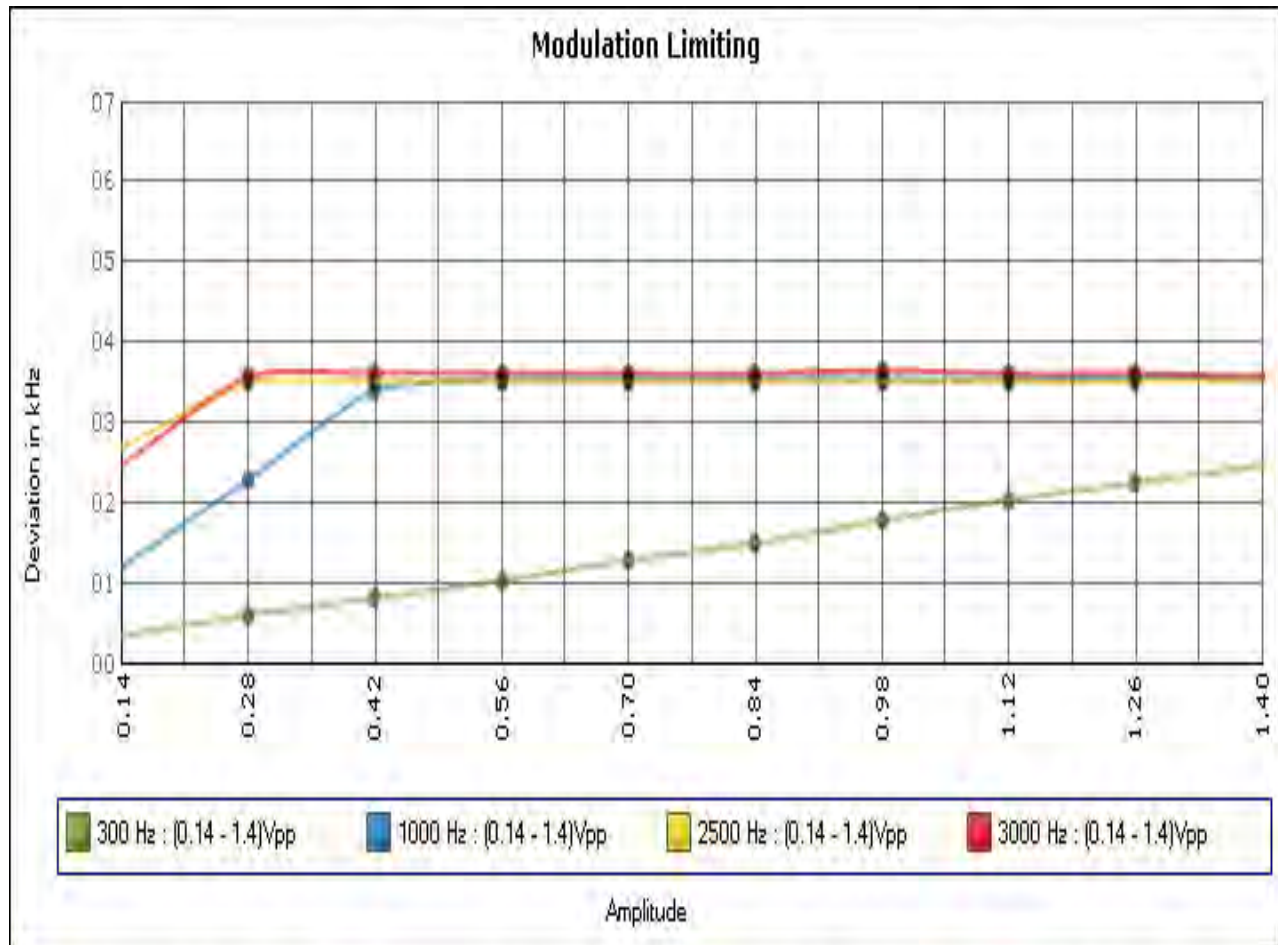


[Table of Contents](#)

MODULATION CHARACTERISTICS

AUDIO INPUT VERSUS MODULATION

MODULATION LIMITING 25 kHz

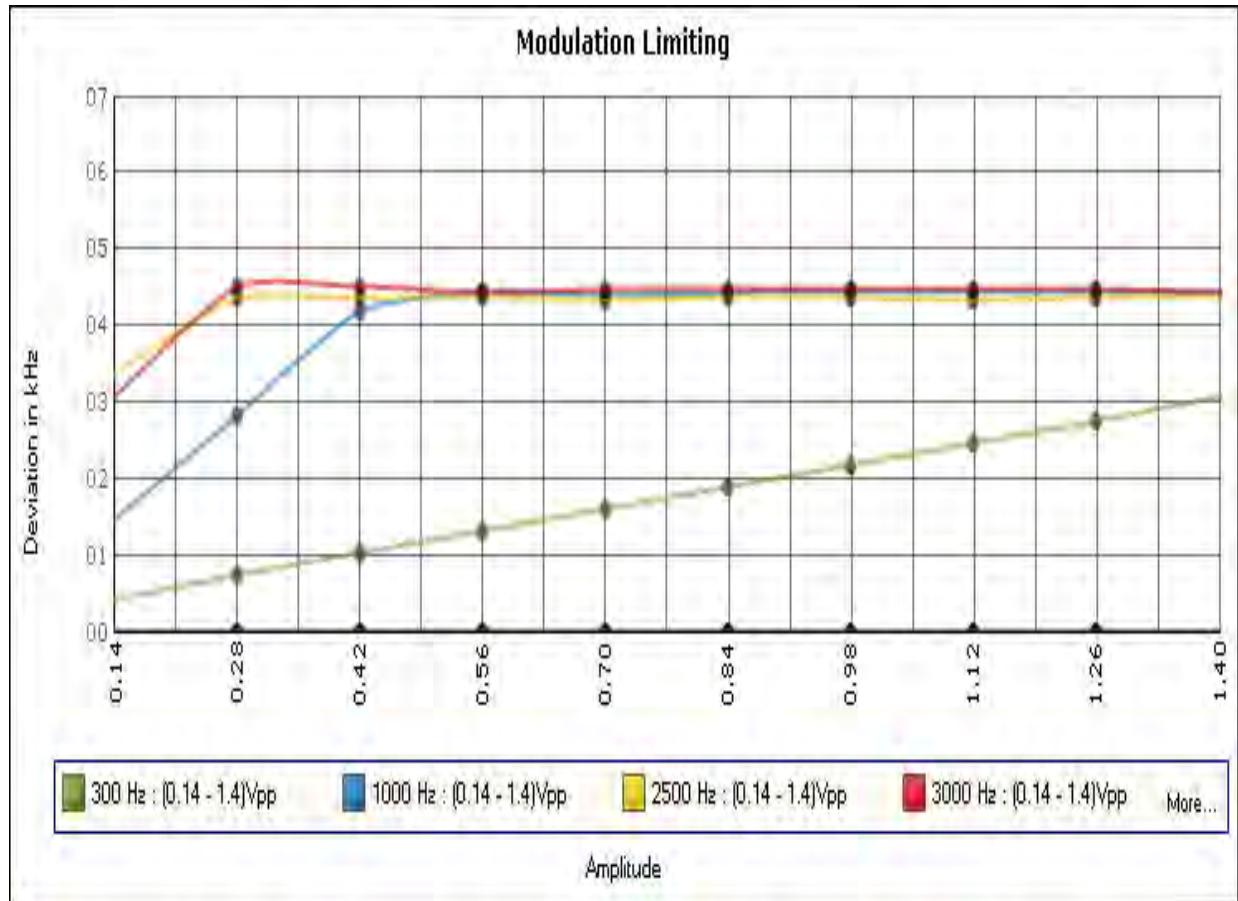

[Table of Contents](#)

OCCUPIED BANDWIDTH

RULE PART NO.: 2.1049(c) & 90.210

REQUIREMENTS: Applicable Emission Masks


Frequency band (MHz)	Mask for equipment with audio low pass filter	Mask for equipment without audio low pass filter
806-809/851-854	B	H
809-824/854-869 ^{3 5}	B	G

³Equipment used in this licensed to EA or non-EA systems shall comply with the emission mask provisions of §90.691 of this chapter.

⁵Equipment may alternatively meet the Adjacent Channel Power limits of §90.221.

METHOD OF MEASUREMENT: ANSI/TIA-603 § 2.2.11 Sideband Spectrum

SETUP DIAGRAM:

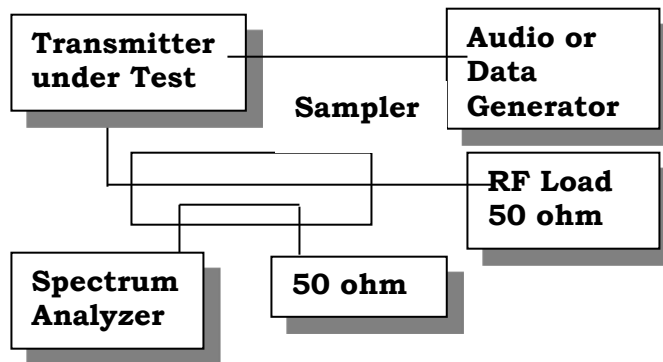


TEST DATA: See the plots on following pages.

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 806.05 MHz-16k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter

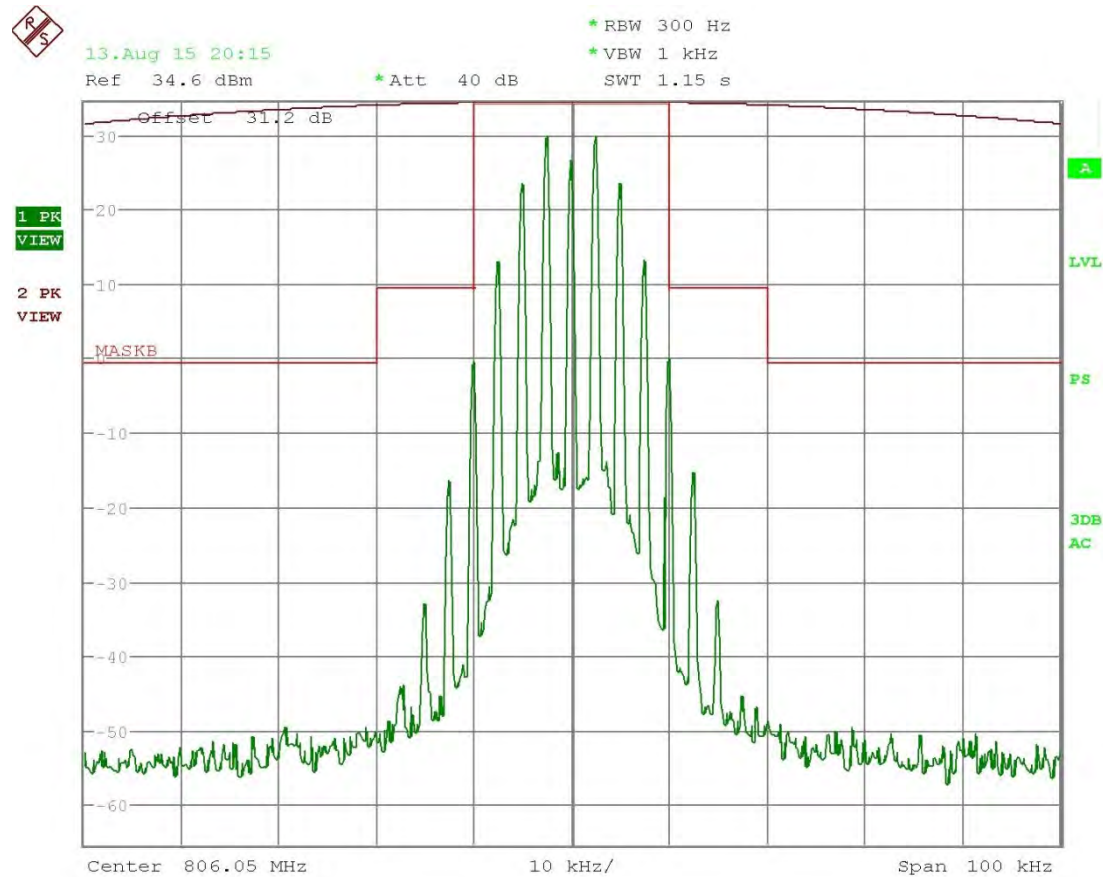


Date: 13.AUG.2015 20:15:39

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 806.05 MHz-14k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter

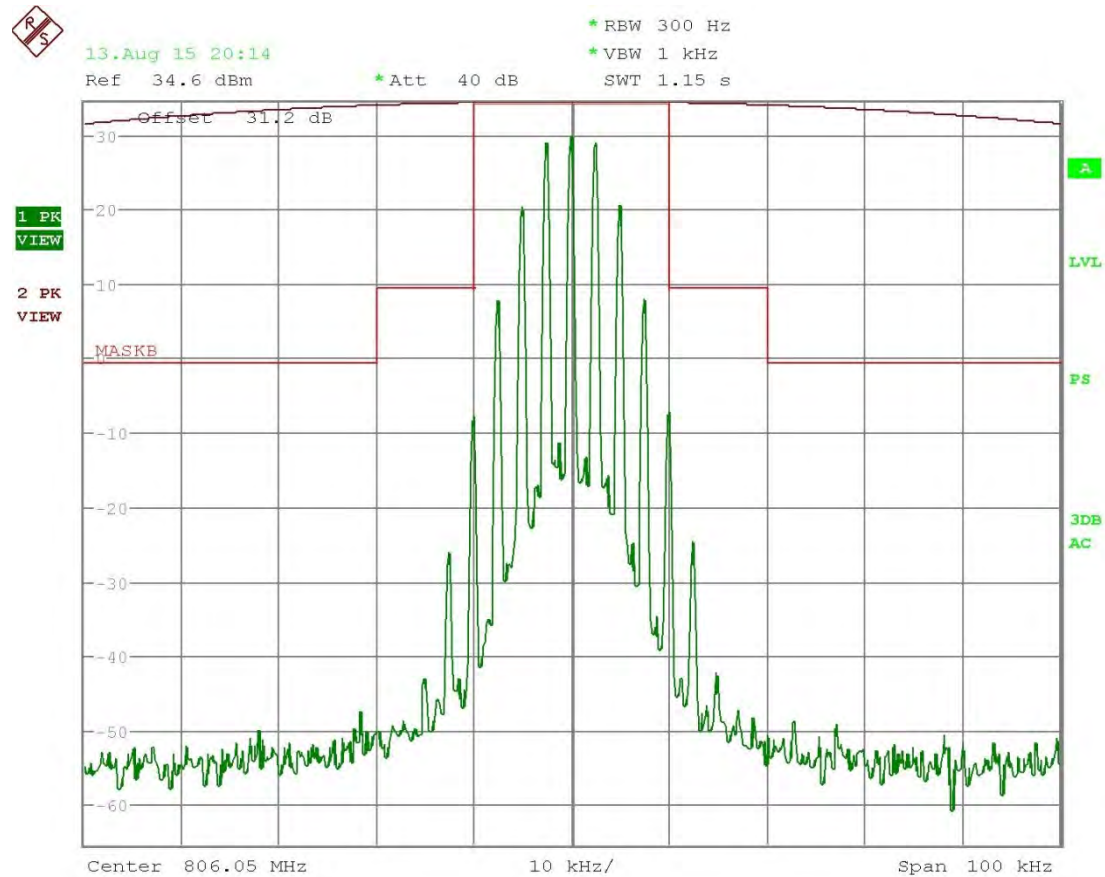


Date: 13.AUG.2015 20:14:09

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 806.05 MHz-11k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter

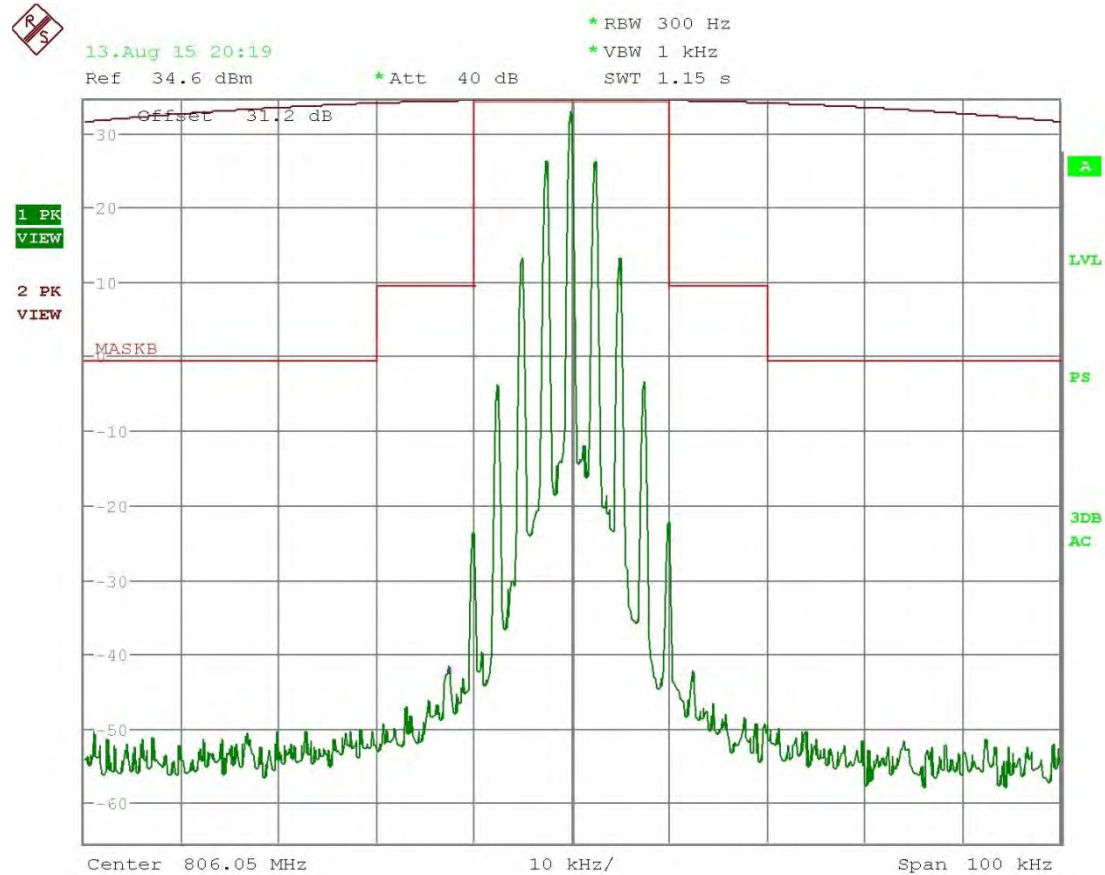


Date: 13.AUG.2015 20:19:35

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 806.05 MHz-8K17F1E/8K17F1D

Part 90.210(h) Emission Mask H – Equipment without Low pass filter

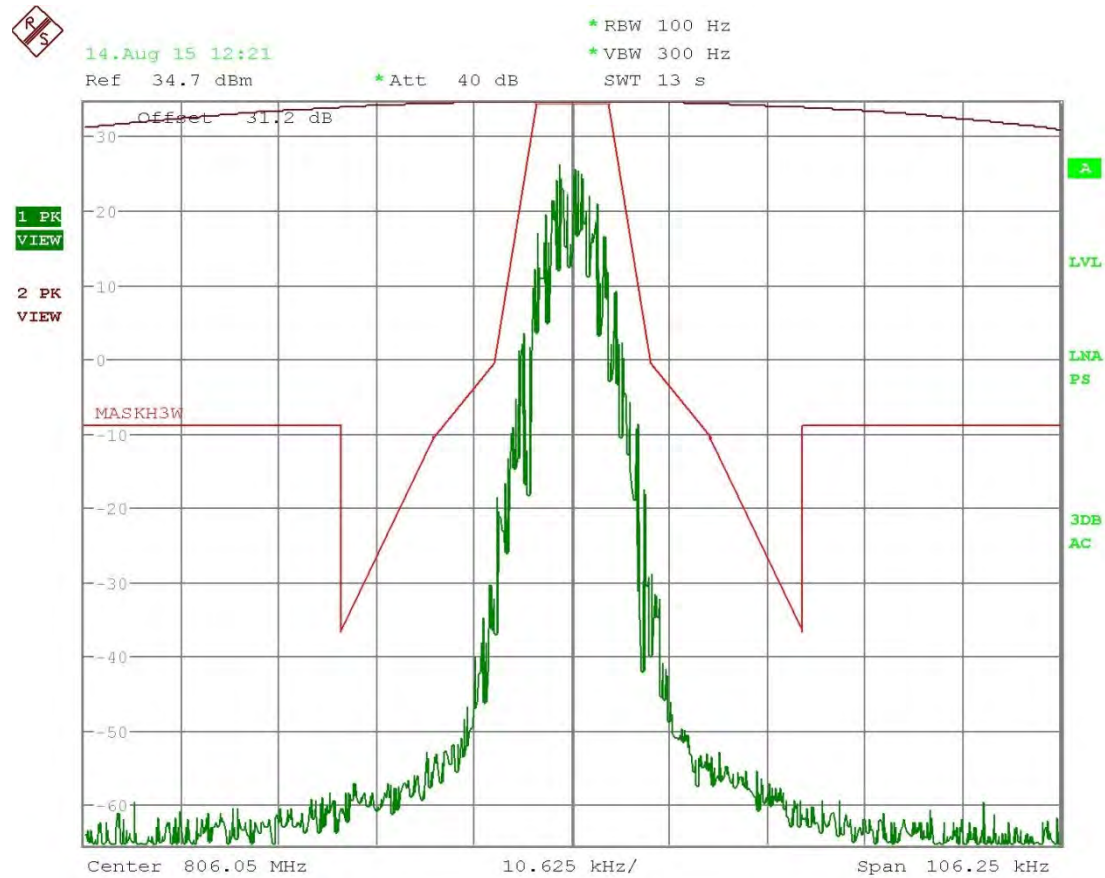


Date: 14.AUG.2015 12:21:54

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 806.05 MHz-7K80FXE/FXD/FXW

Part 90.210(h) Emission Mask H – Equipment without Low pass filter

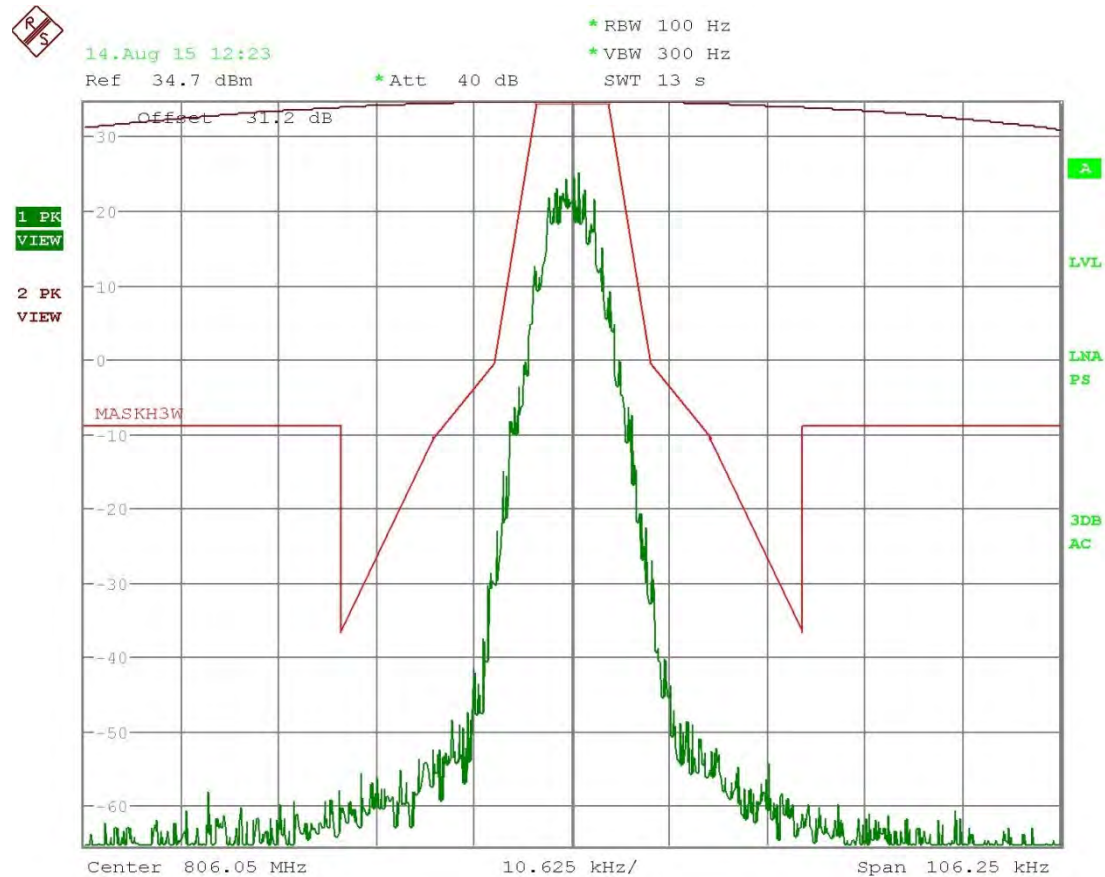


Date: 14.AUG.2015 12:23:26

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 806.05 MHz-8K87F2E

Part 90.210(h) Emission Mask H – Equipment without Low pass filter

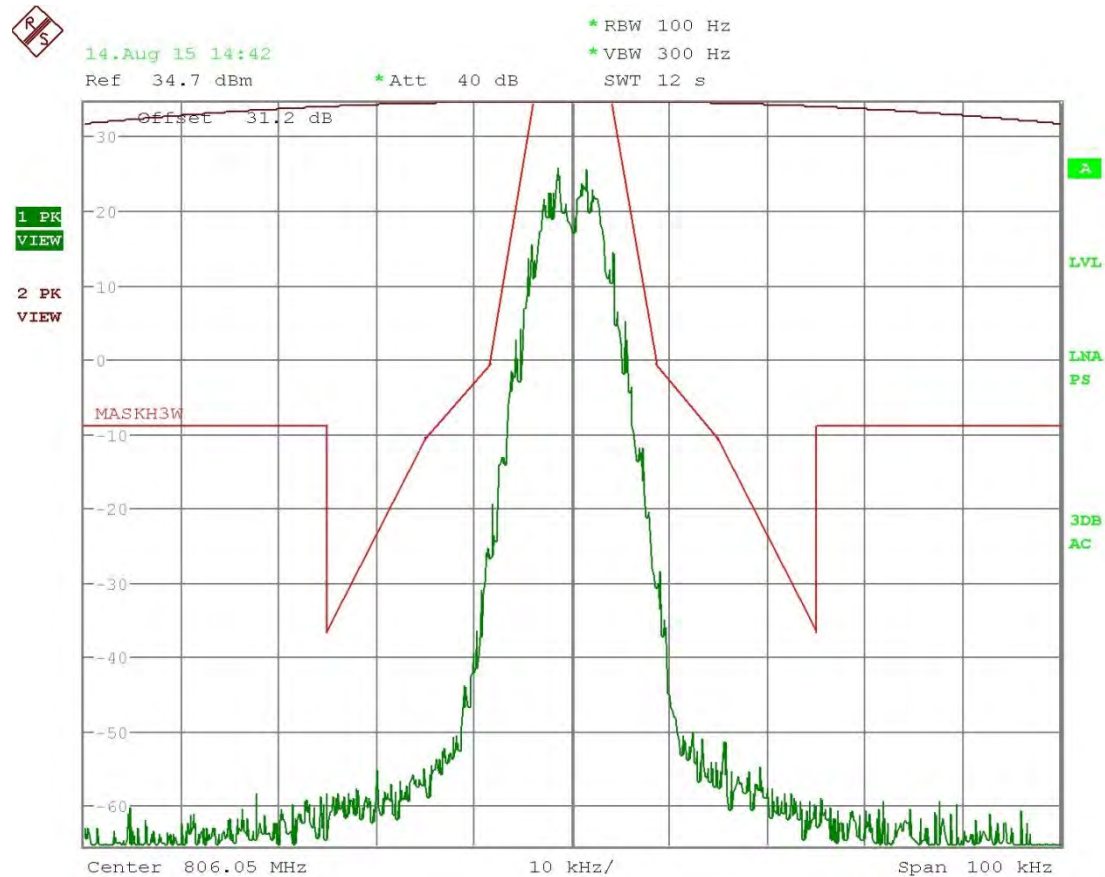


Date: 14.AUG.2015 14:42:58

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 806.05 MHz-5K41F2E

Part 90.210(h) Emission Mask H – Equipment without Low pass filter

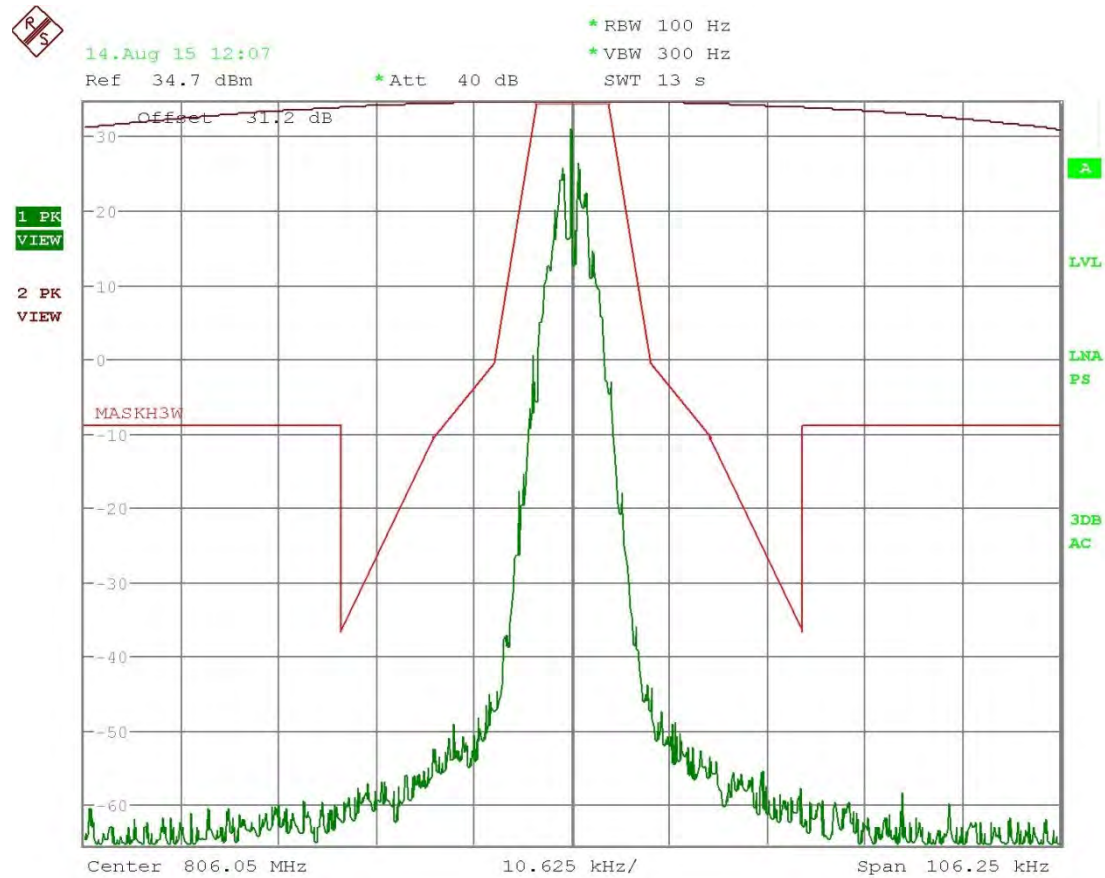


Date: 14.AUG.2015 12:07:10

[Table of Contents](#)

TEST FREQ. 815.05 MHz-16k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter

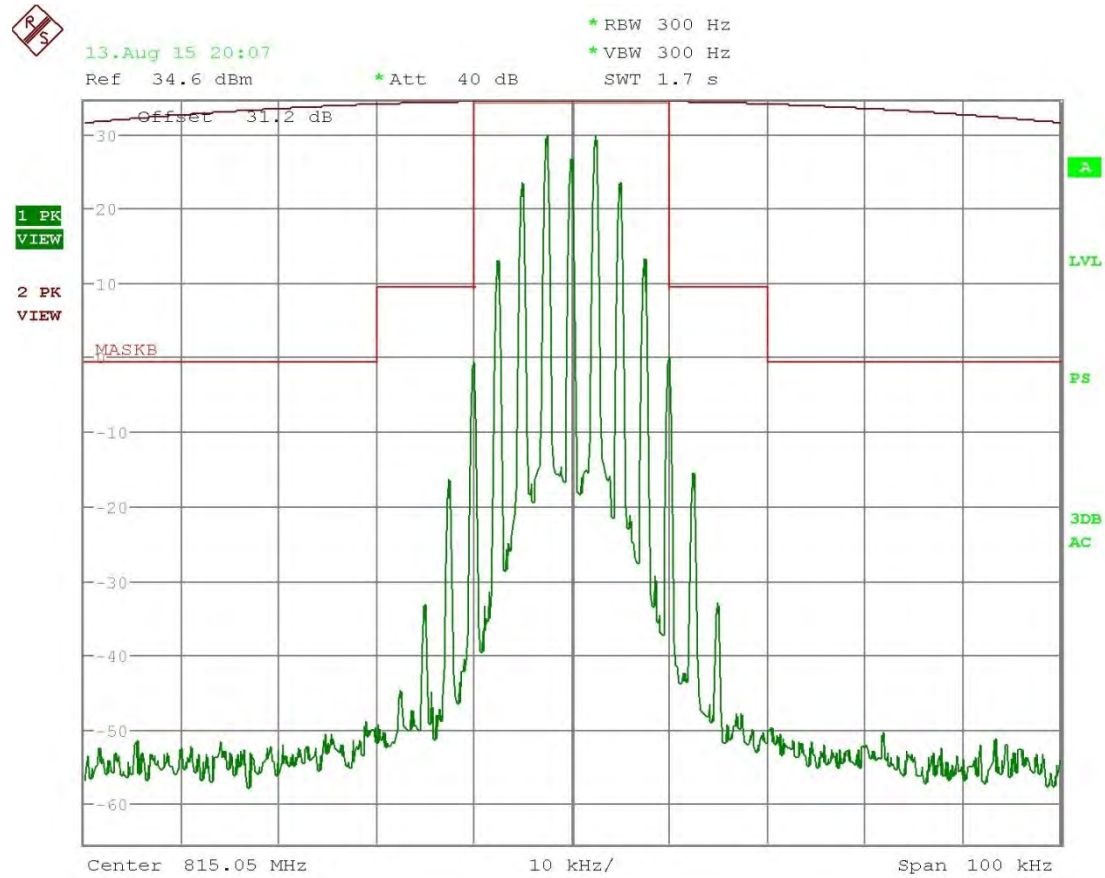


Date: 13.AUG.2015 20:07:05

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 815.05 MHz-14k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter

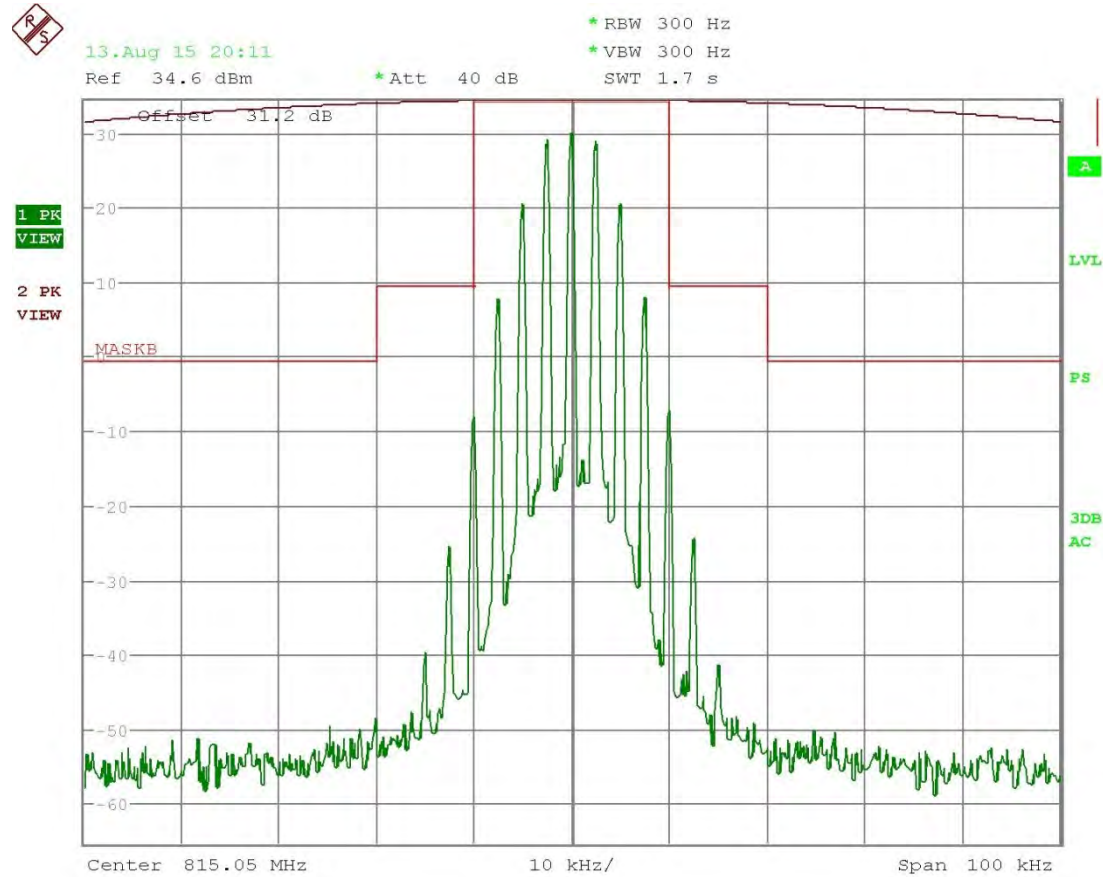


Date: 13.AUG.2015 20:11:20

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 815.05 MHz-11k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter

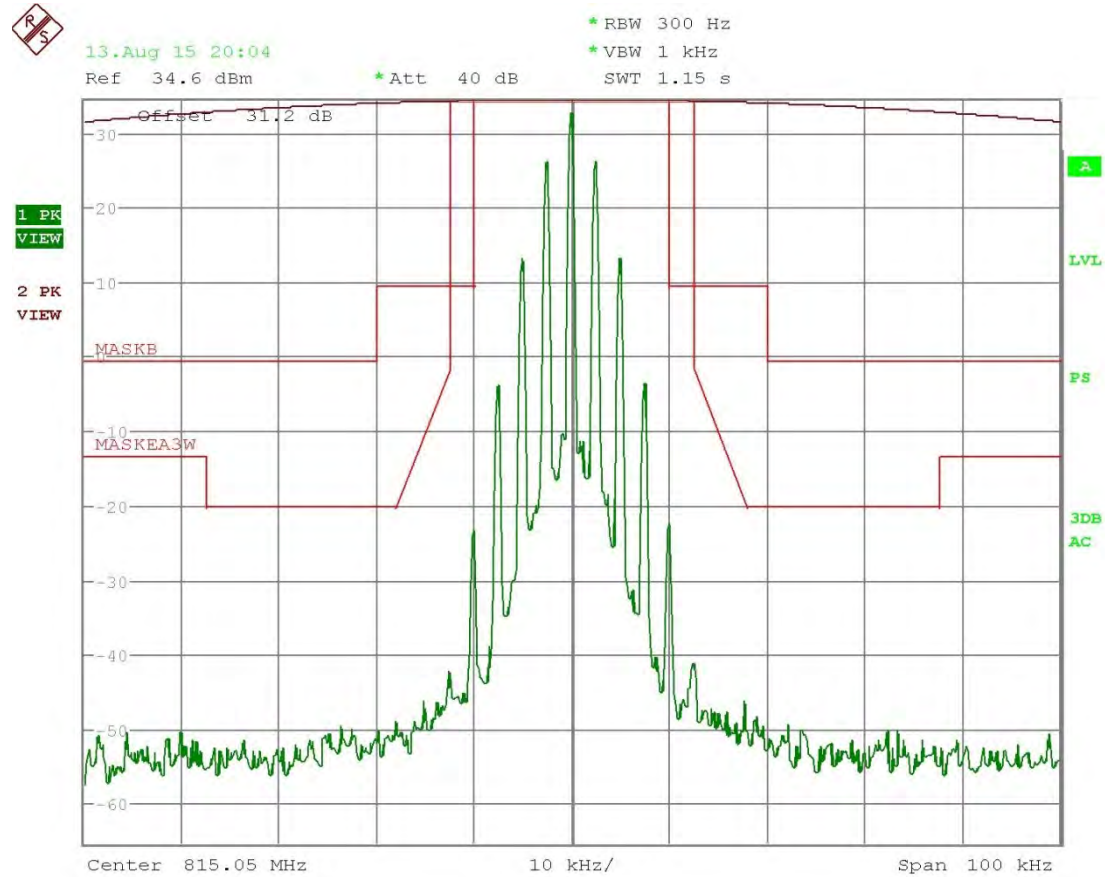


Date: 13.AUG.2015 20:04:05

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 815.05 MHz-8K17F1E/8K17F1D

Part 90.210(g) Emission Mask G – Equipment without Low pass filter

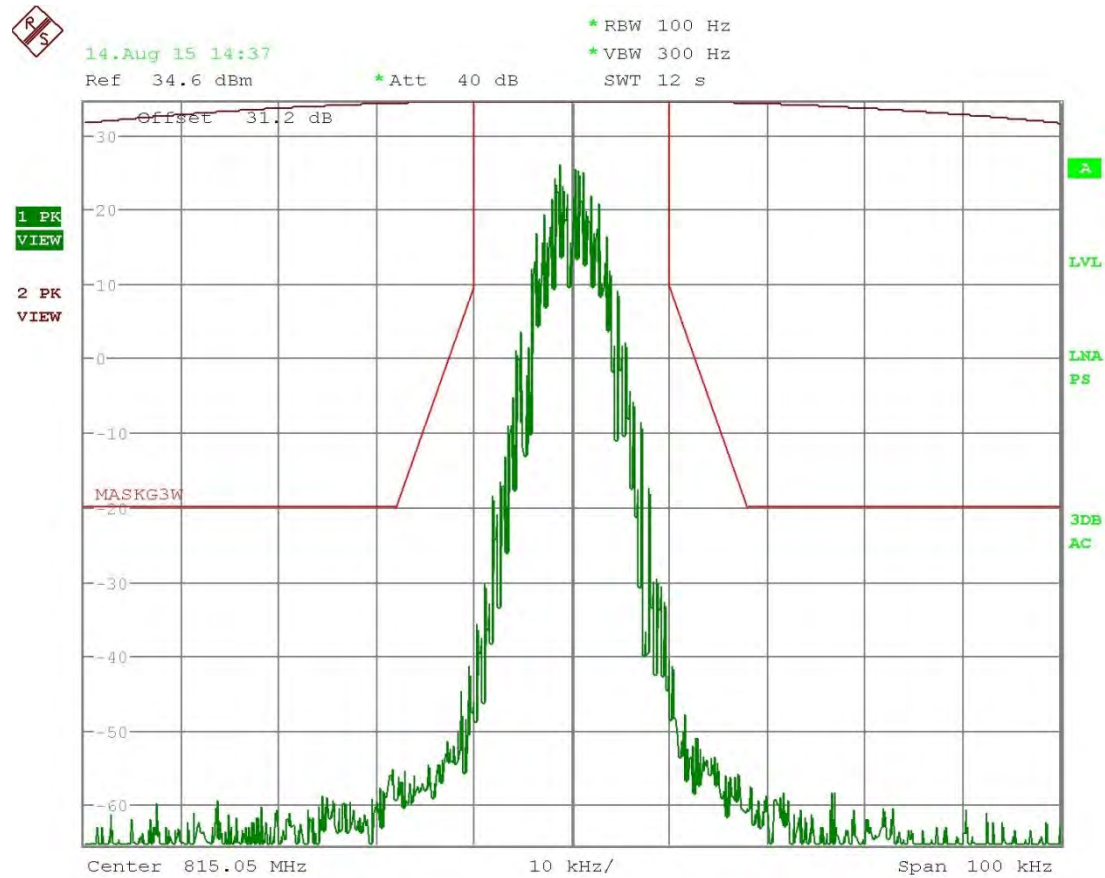


Date: 14.AUG.2015 14:37:52

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 815.05 MHz-7K80FXE/7K80FXD/7K80FXW

Part 90.210(g) Emission Mask G – Equipment without Low pass filter

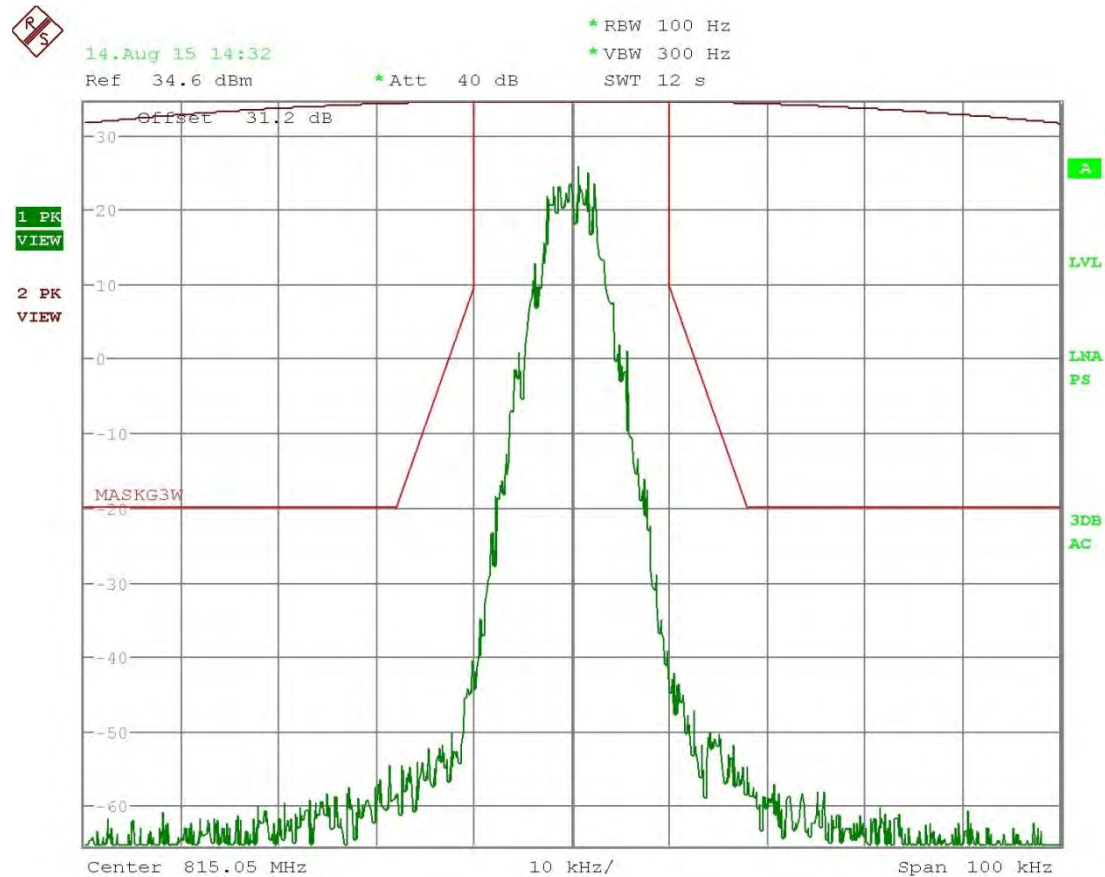


Date: 14.AUG.2015 14:32:11

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 815.05 MHz-8K87F2E

Part 90.210(g) Emission Mask G – Equipment without Low pass filter

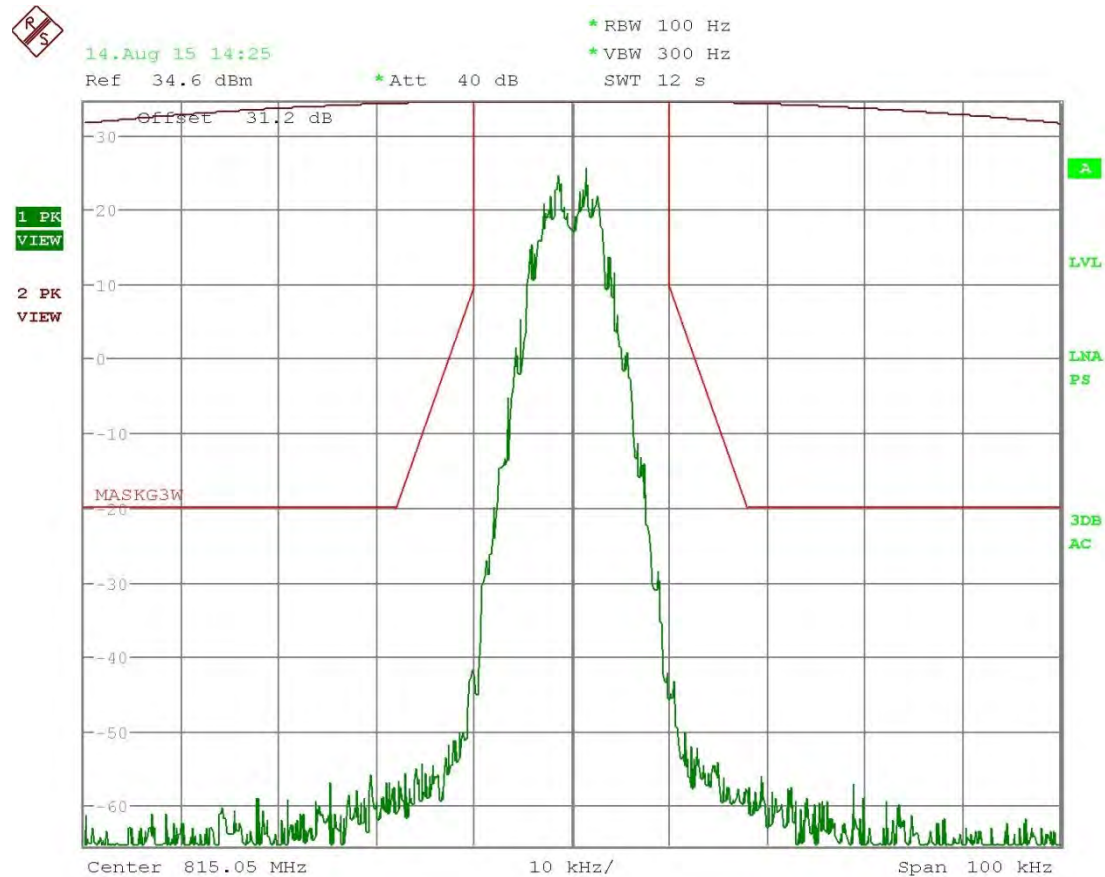


Date: 14.AUG.2015 14:25:45

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 815.05 MHz-5K41F2E

Part 90.210(g) Emission Mask G – Equipment without Low pass filter

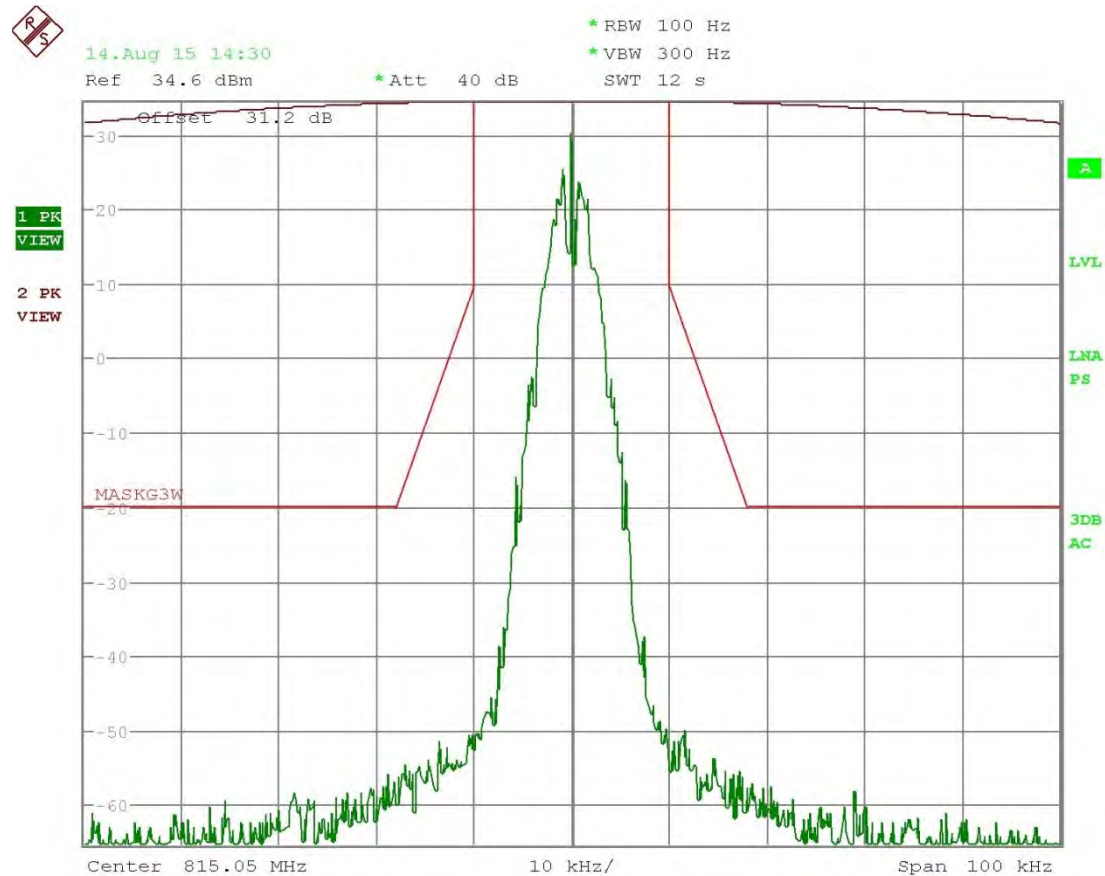


Date: 14.AUG.2015 14:30:22

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 823.95 MHz-16k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter
Part 90.691(a) Emission Mask EA – EA-based systems

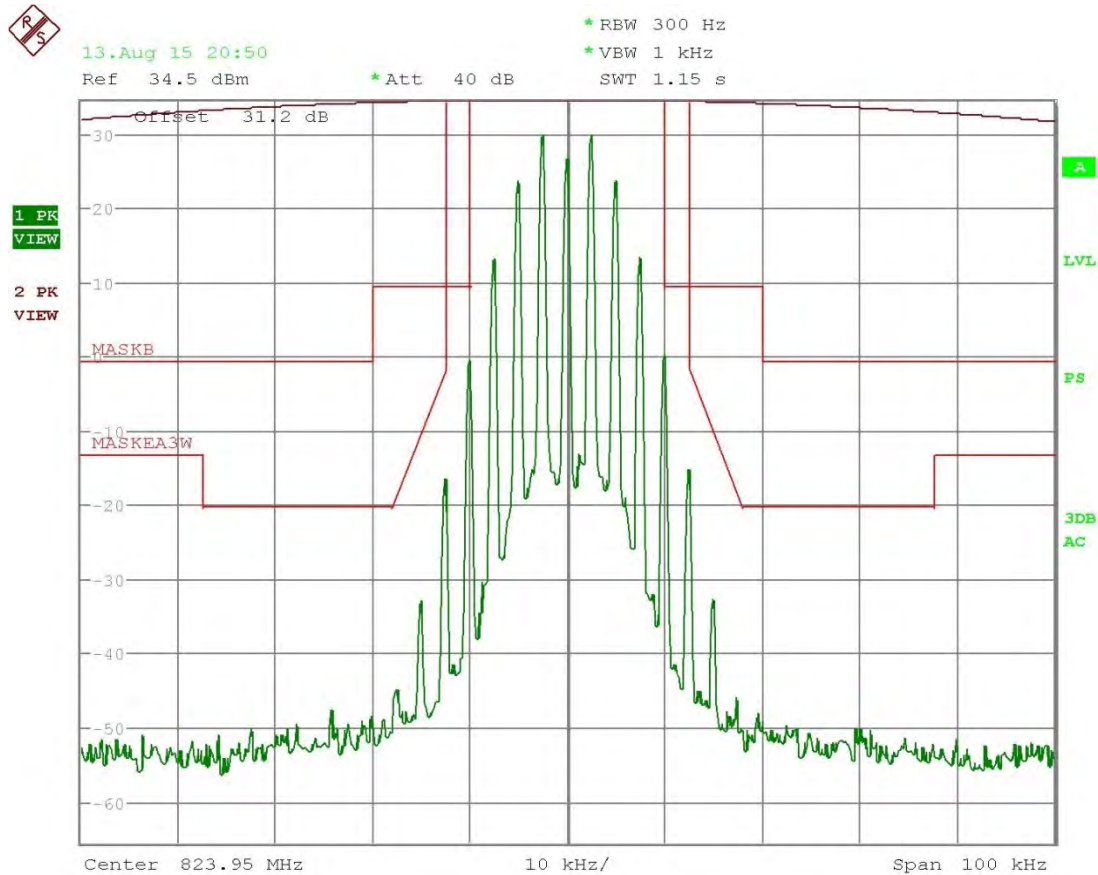


Date: 13.AUG.2015 20:50:46

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 823.95 MHz-14k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter
Part 90.691(a) Emission Mask EA – EA-based systems

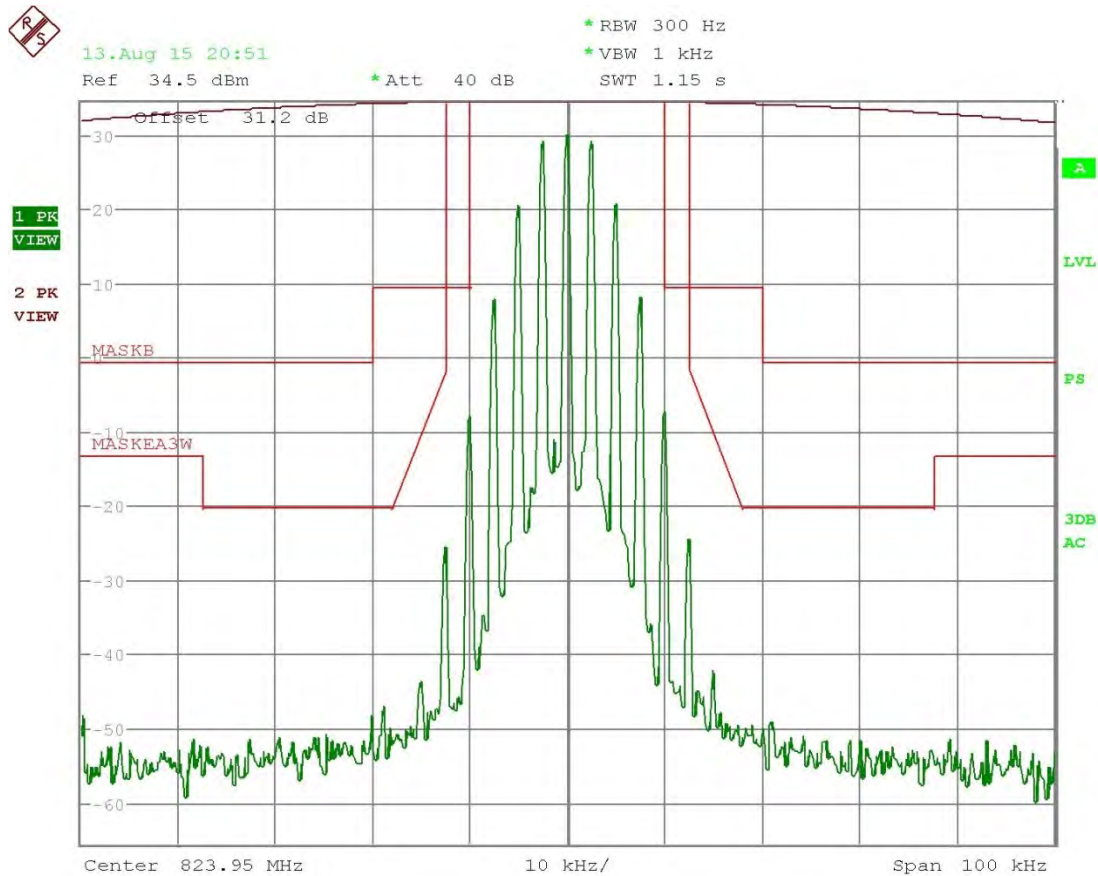


Date: 13.AUG.2015 20:51:34

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 823.95 MHz-11k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter
Part 90.691(a) Emission Mask EA – EA-based systems

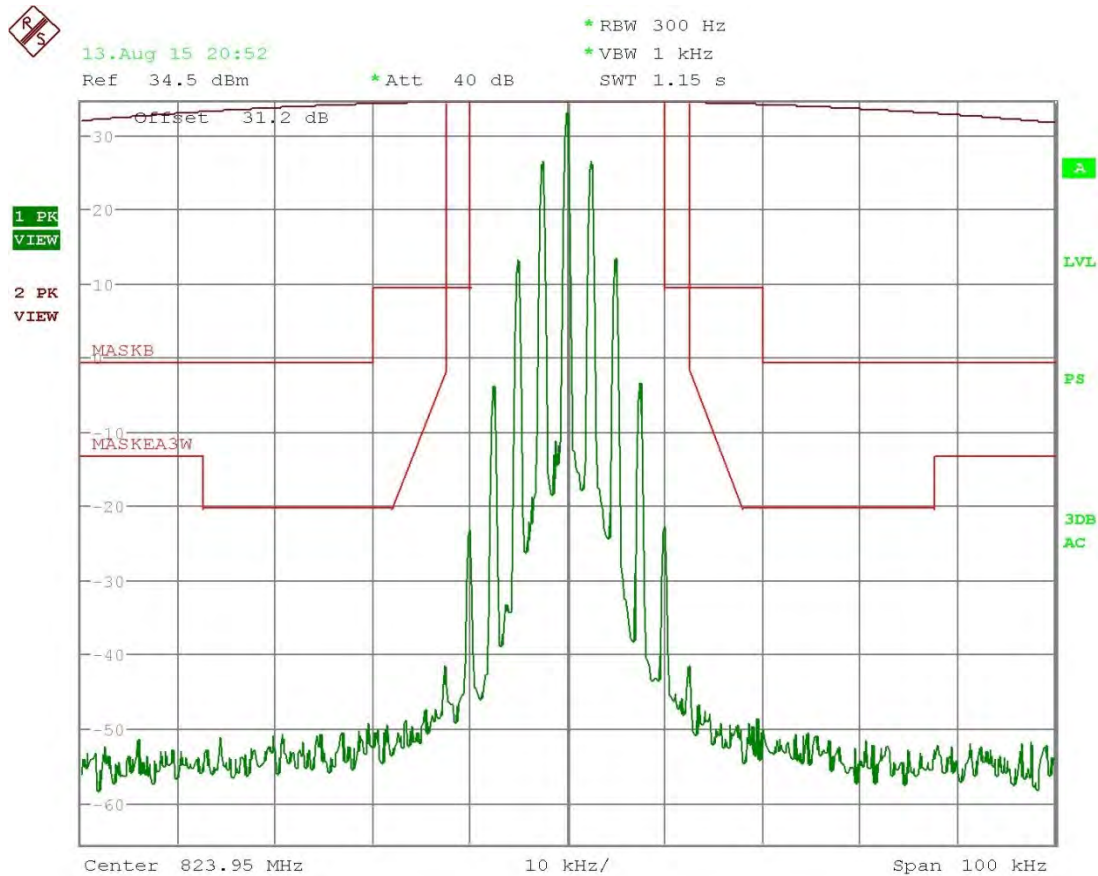


Date: 13.AUG.2015 20:52:30

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 823.95 MHz-8K17F1E/8K17F1D

Part 90.210(g) Emission Mask G – Equipment without Low pass filter
Part 90.691(a) Emission Mask EA – EA-based systems

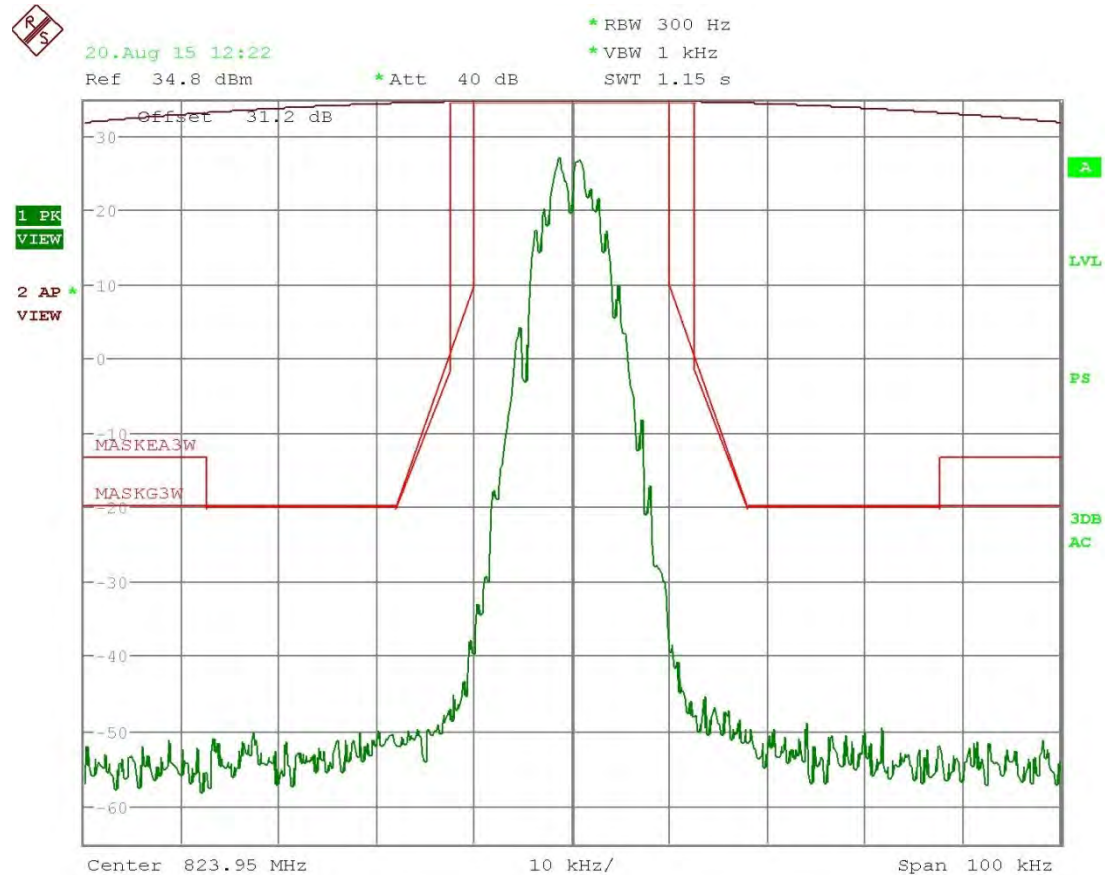


Date: 20.AUG.2015 12:22:17

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 823.95 MHz-7K80FXE/7K80FXD/7K80FXW

Part 90.210(g) Emission Mask G – Equipment without Low pass filter
Part 90.691(a) Emission Mask EA – EA-based systems

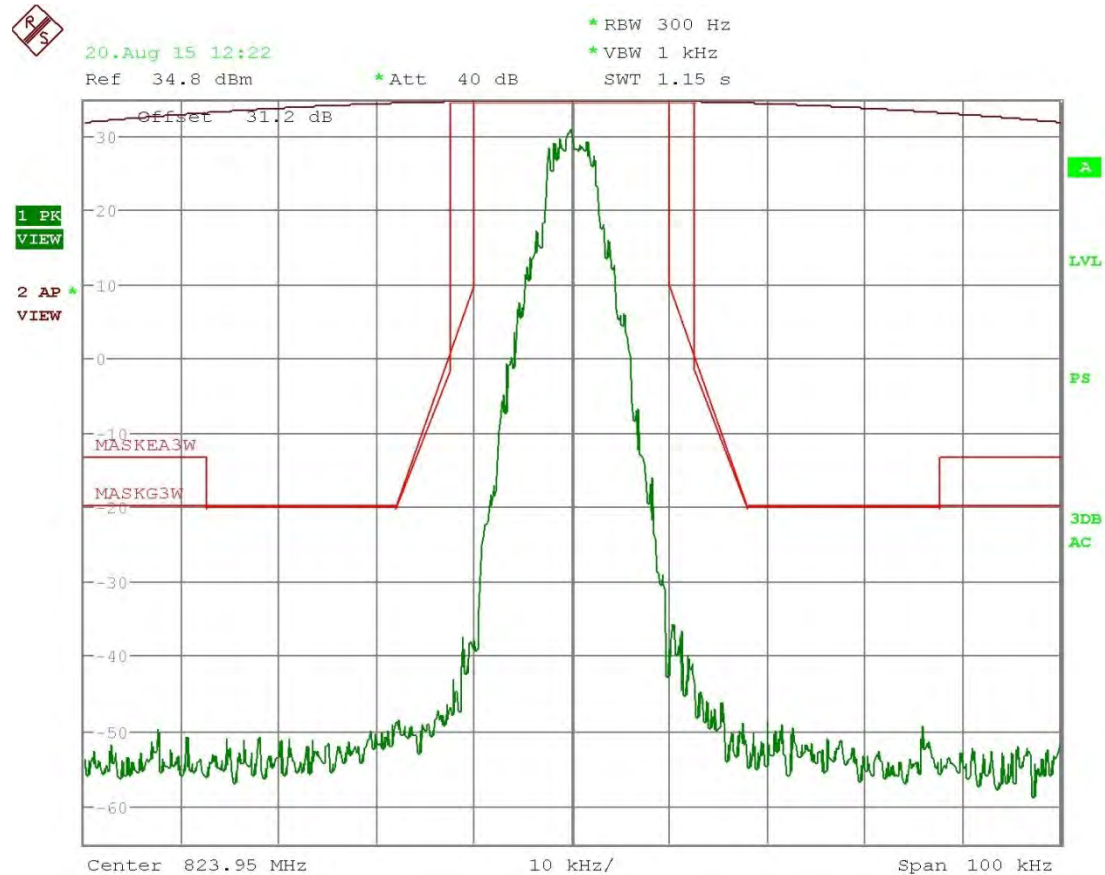


Date: 20.AUG.2015 12:22:52

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 823.95 MHz-8K87F2E

Part 90.210(g) Emission Mask G – Equipment without Low pass filter
Part 90.691(a) Emission Mask EA – EA-based systems

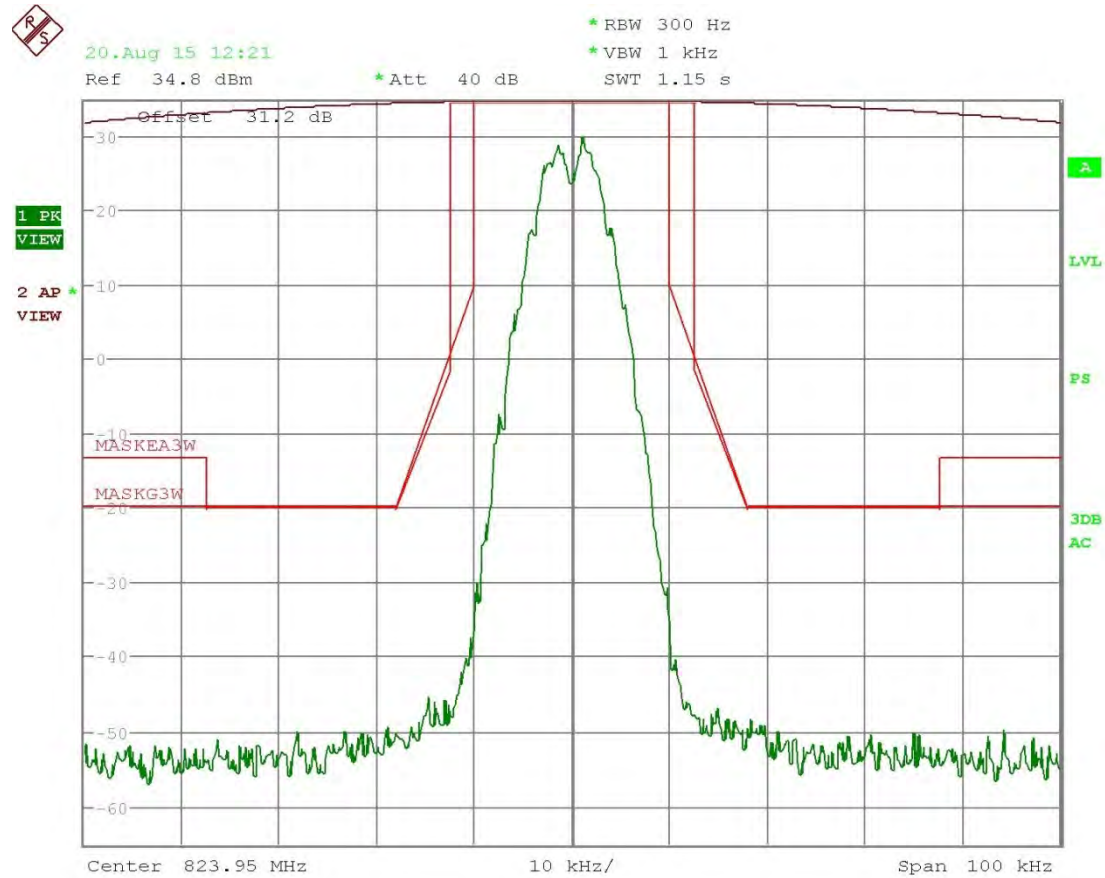


Date: 20.AUG.2015 12:21:14

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 823.95 MHz-5K41F2E

Part 90.210(g) Emission Mask G – Equipment without Low pass filter
Part 90.691(a) Emission Mask EA – EA-based systems

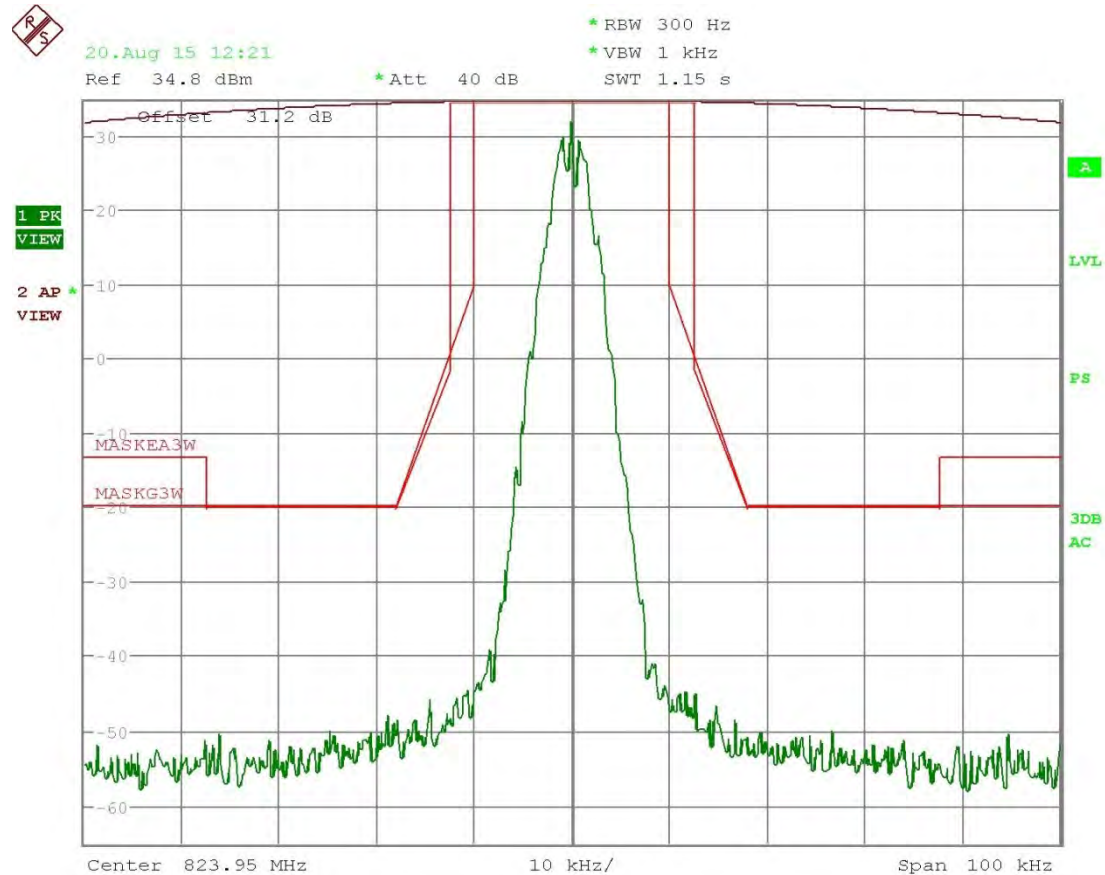


Date: 20.AUG.2015 12:21:45

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 851.05 MHz-16k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter

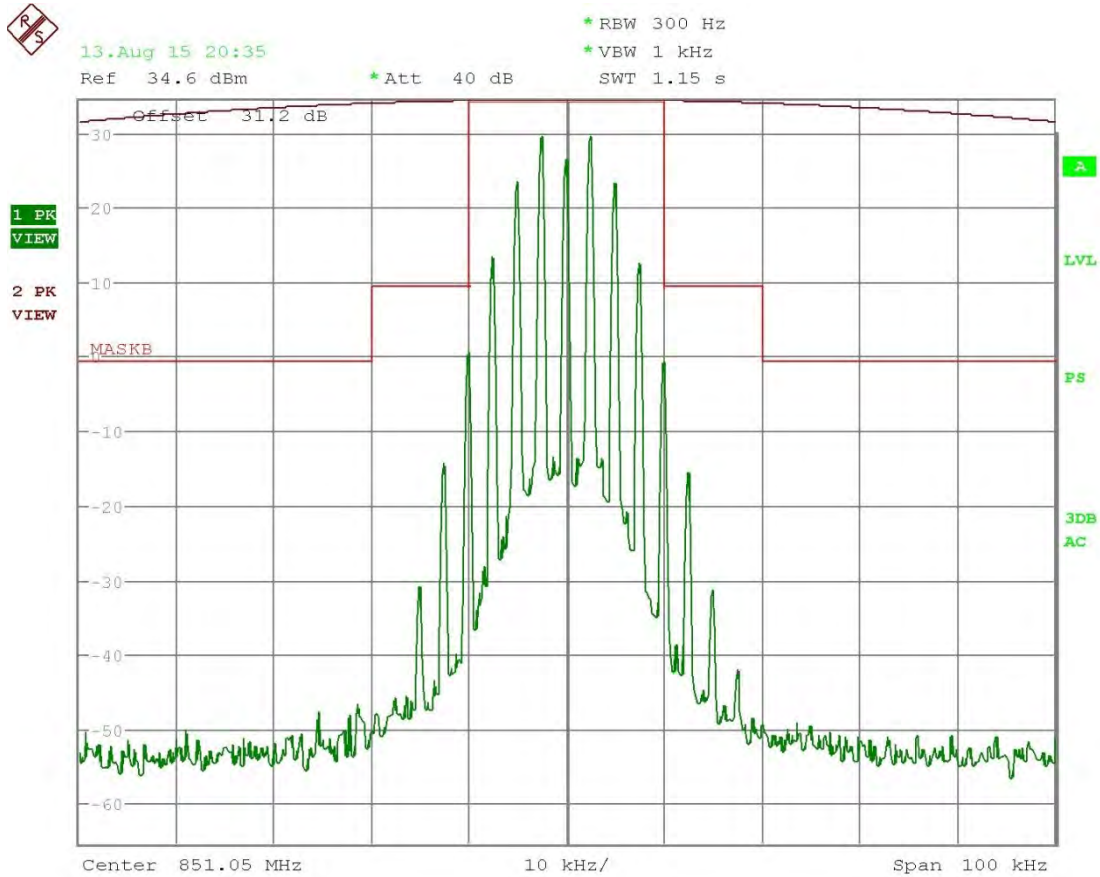


Date: 13.AUG.2015 20:35:14

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 851.05 MHz-14k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter

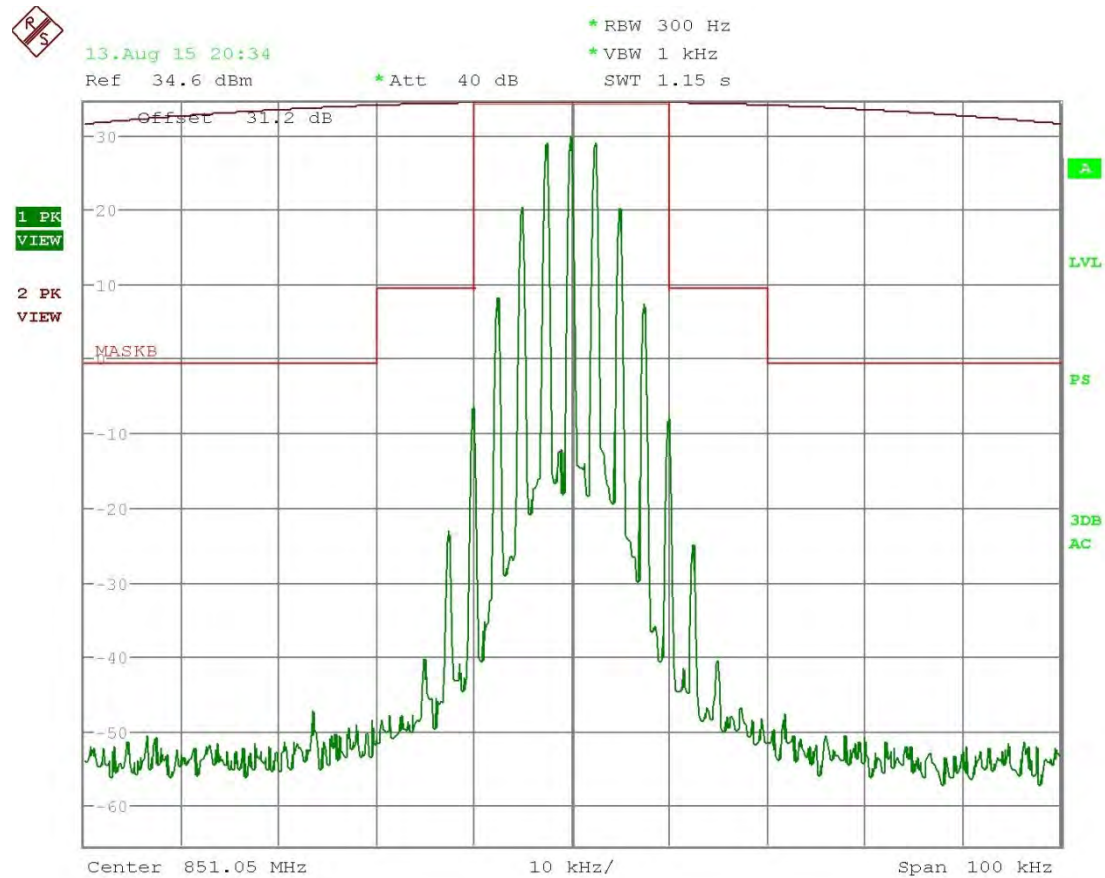


Date: 13.AUG.2015 20:34:11

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 851.05 MHz-11k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter

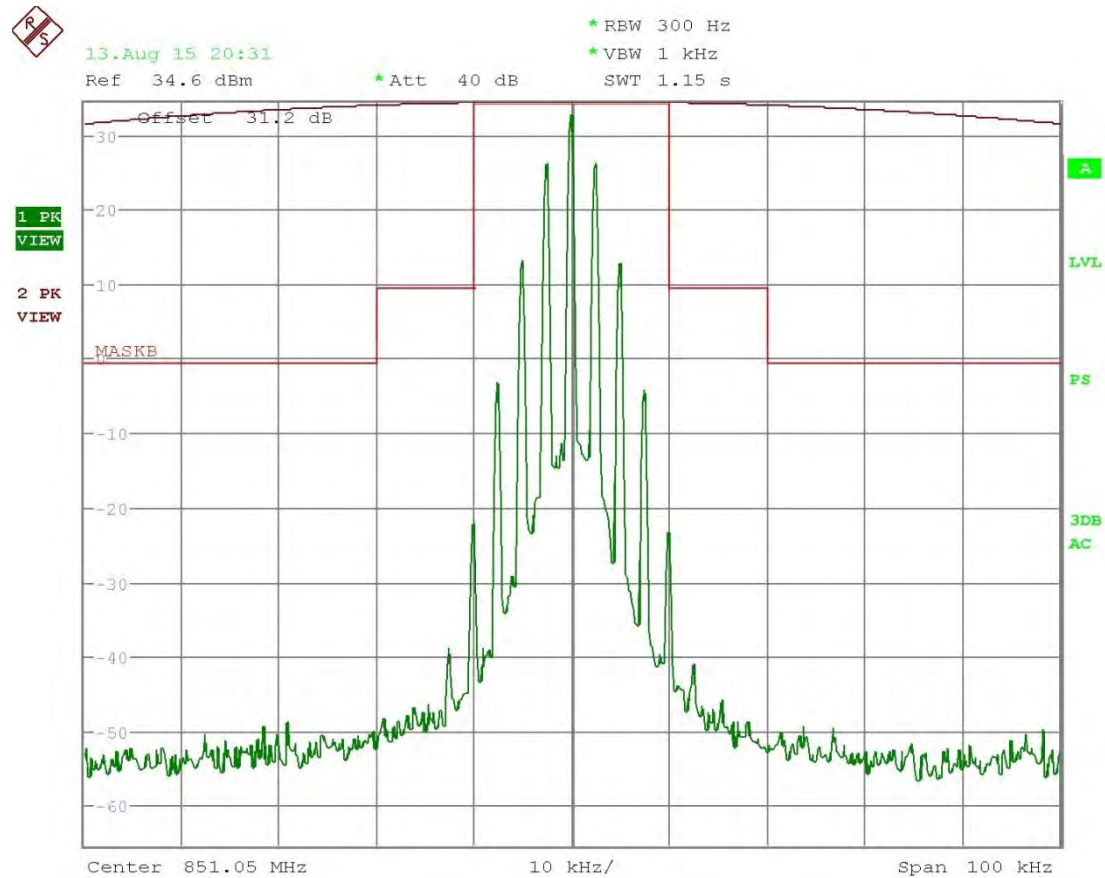


Date: 13.AUG.2015 20:31:15

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 851.05 MHz-8K17F1E/8K17F1D

Part 90.210(g) Emission Mask G – Equipment without Low pass filter

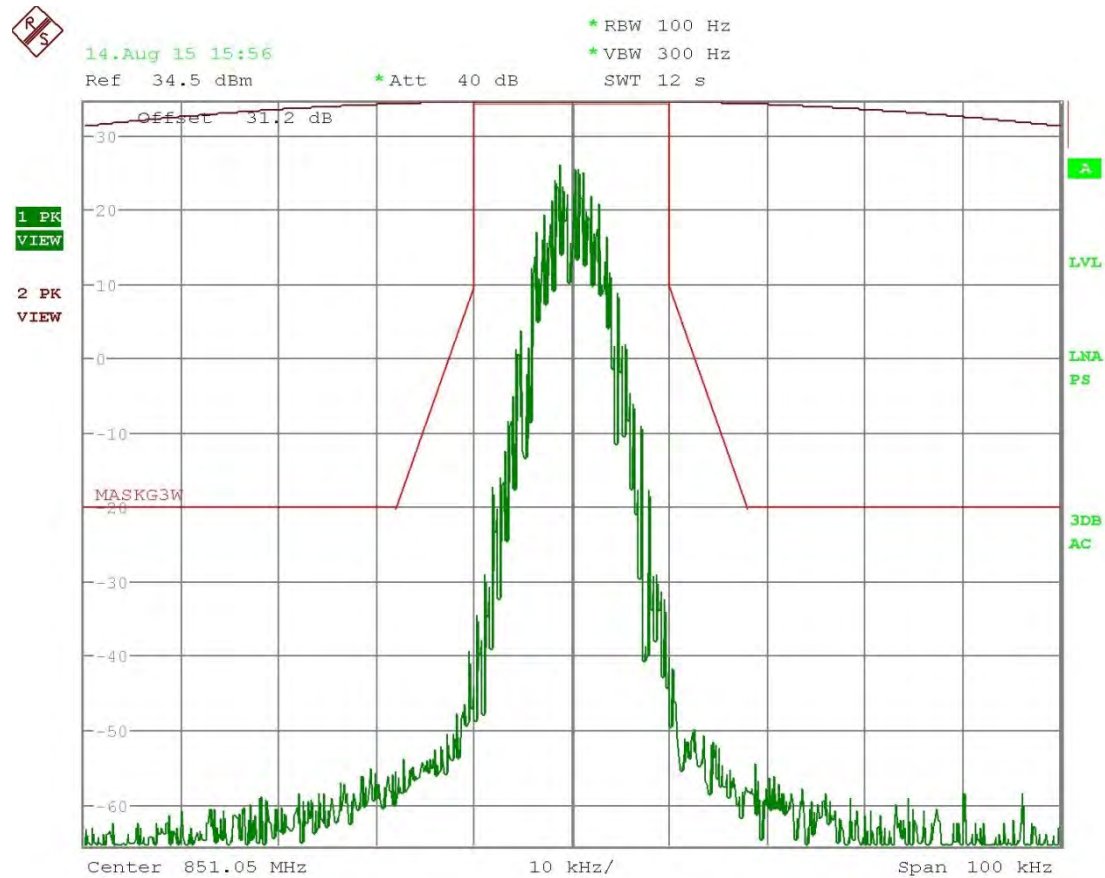


Date: 14.AUG.2015 15:57:00

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 851.05 MHz-7K80FXE/7K80FXD/7K80FXW

Part 90.210(g) Emission Mask G – Equipment without Low pass filter

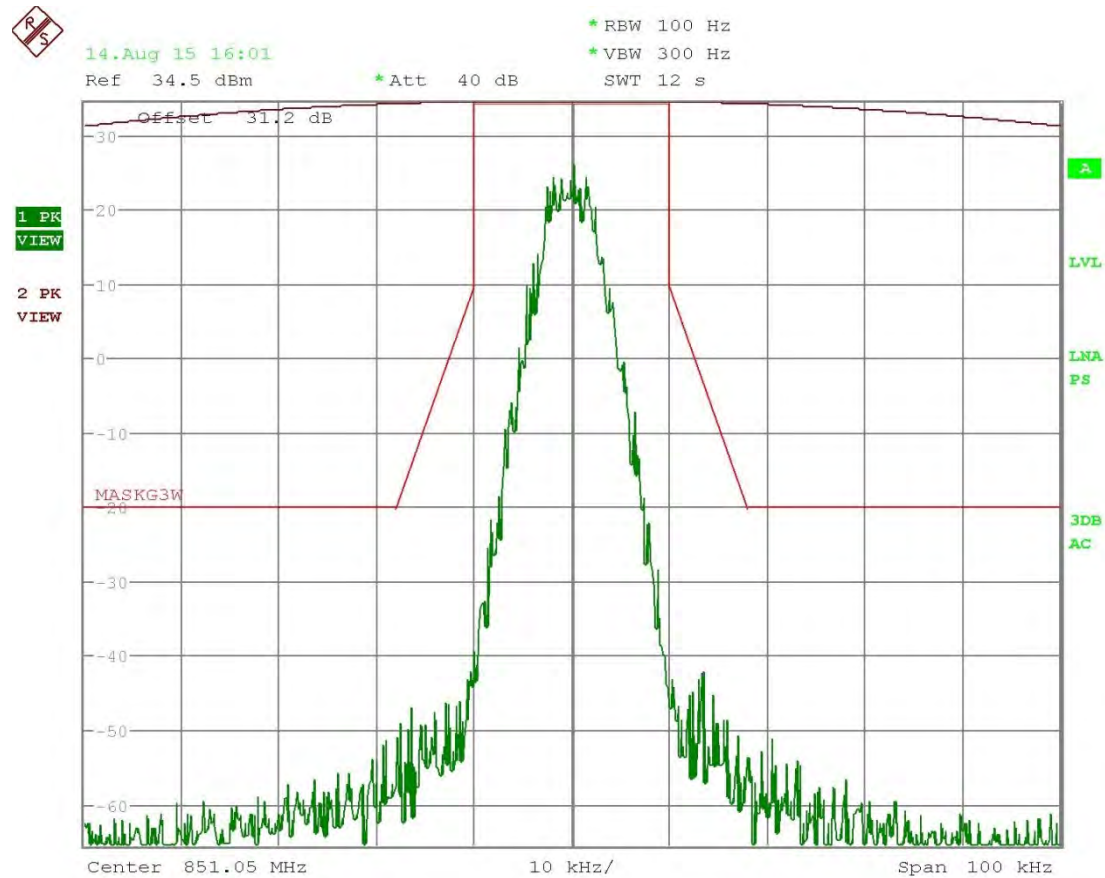


Date: 14.AUG.2015 16:01:47

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 851.05 MHz-8K87F2E

Part 90.210(g) Emission Mask G – Equipment without Low pass filter

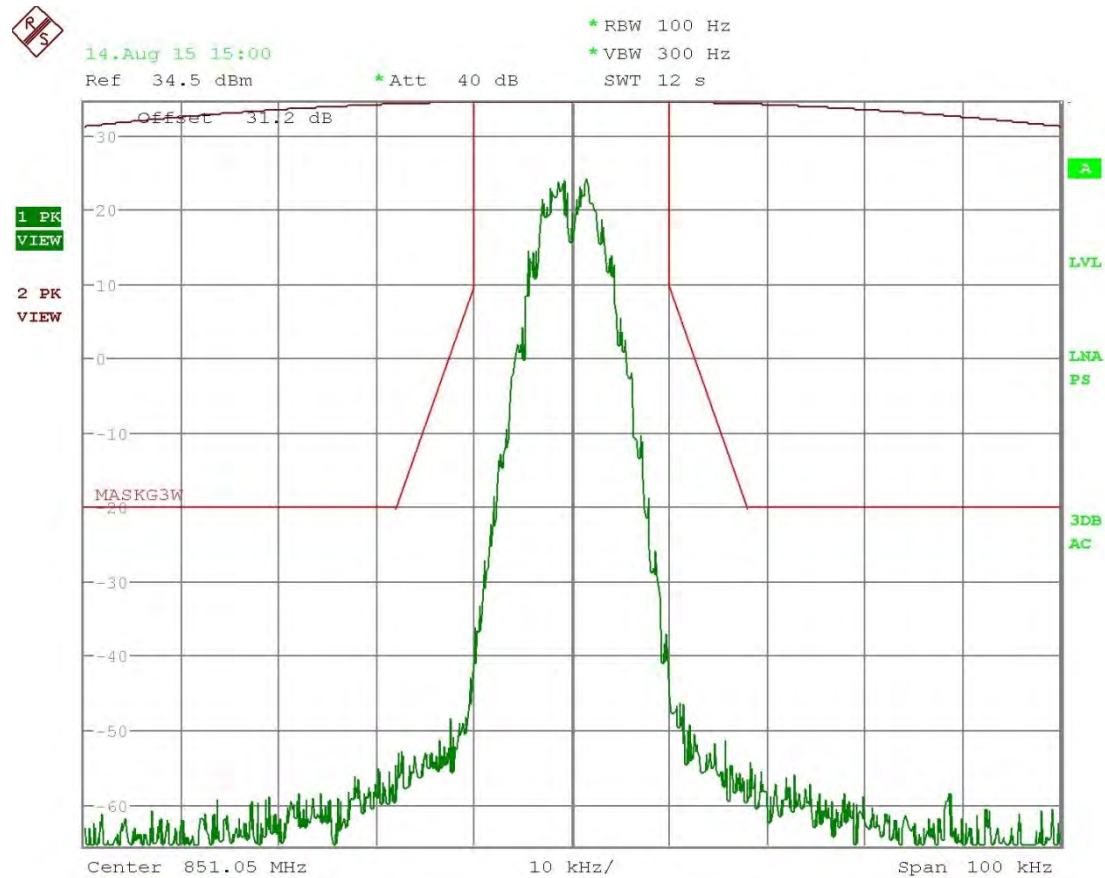


Date: 14.AUG.2015 15:00:07

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 851.05 MHz-5K41F2E

Part 90.210(g) Emission Mask G – Equipment without Low pass filter

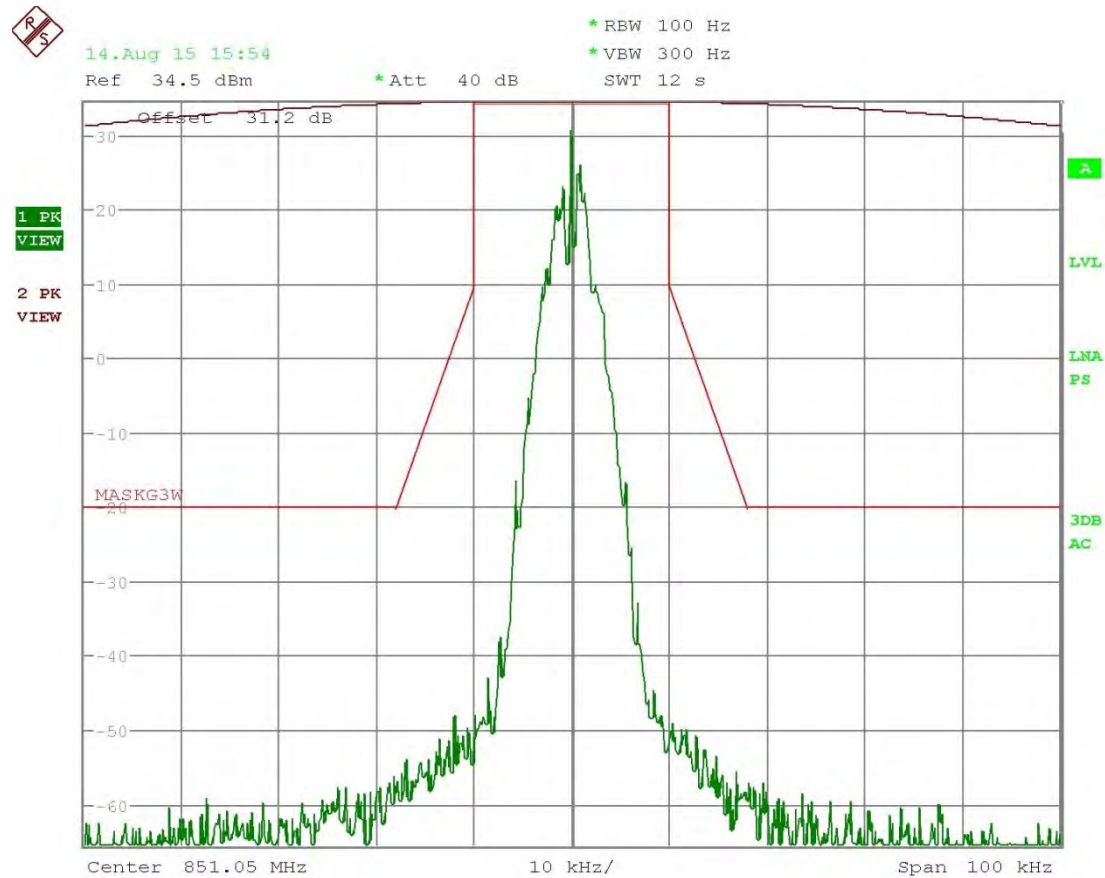


Date: 14.AUG.2015 15:54:33

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 860.05 MHz-16k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter

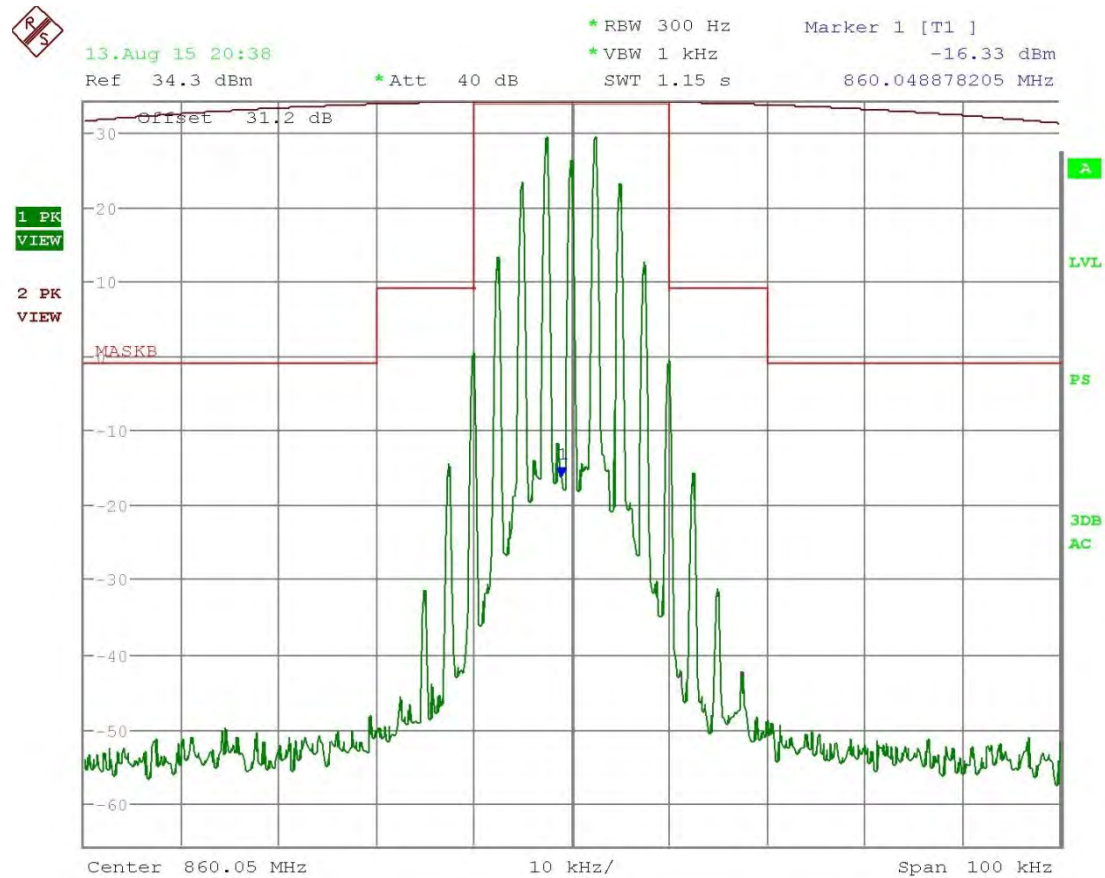


Date: 13.AUG.2015 20:38:24

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 860.05 MHz-14k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter

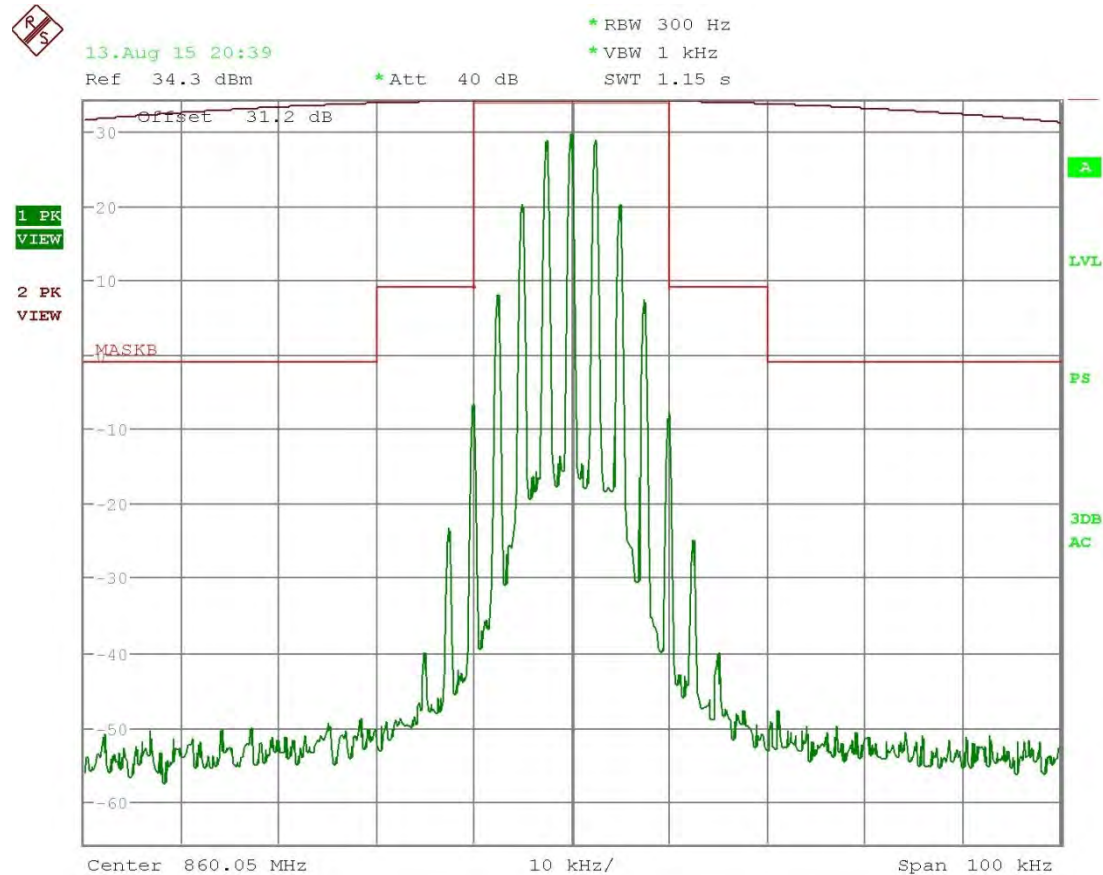


Date: 13.AUG.2015 20:39:22

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 860.05 MHz-11k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter

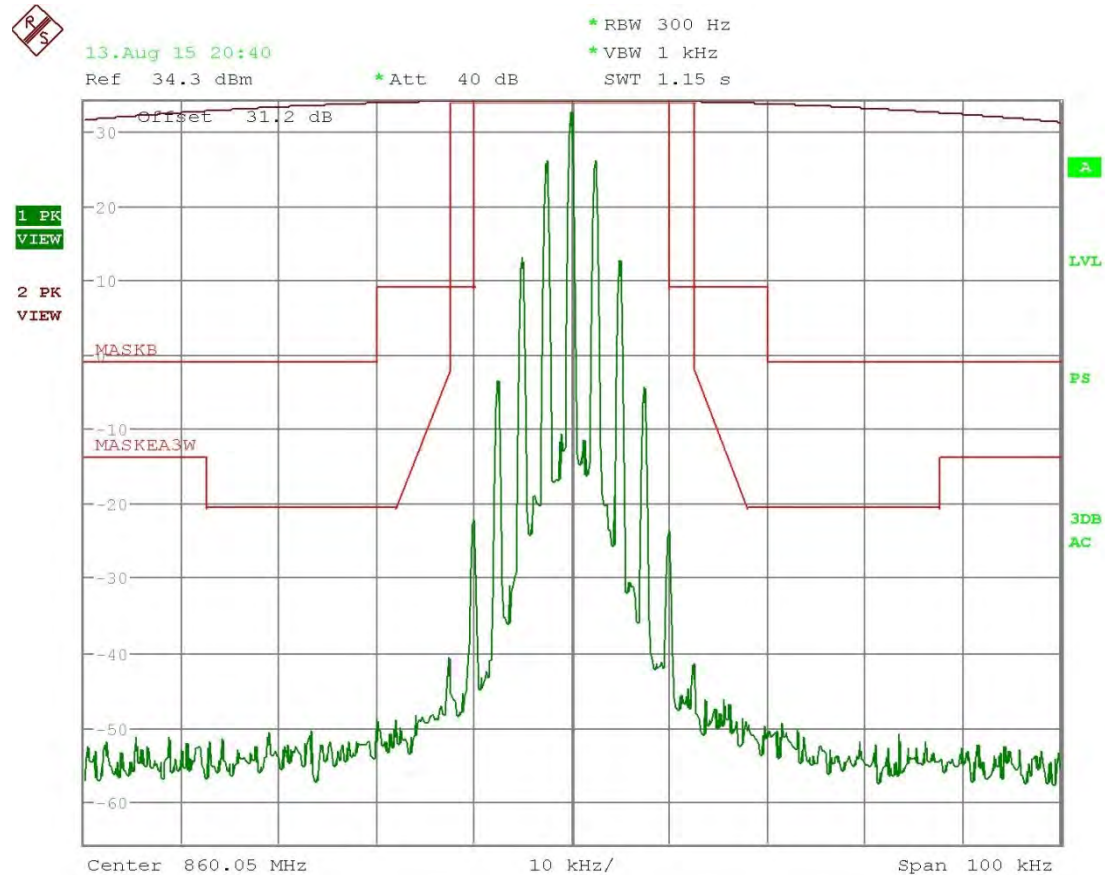


Date: 13.AUG.2015 20:40:41

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 860.05 MHz-8K17F1E/8K17F1D

Part 90.210(g) Emission Mask G – Equipment without Low pass filter

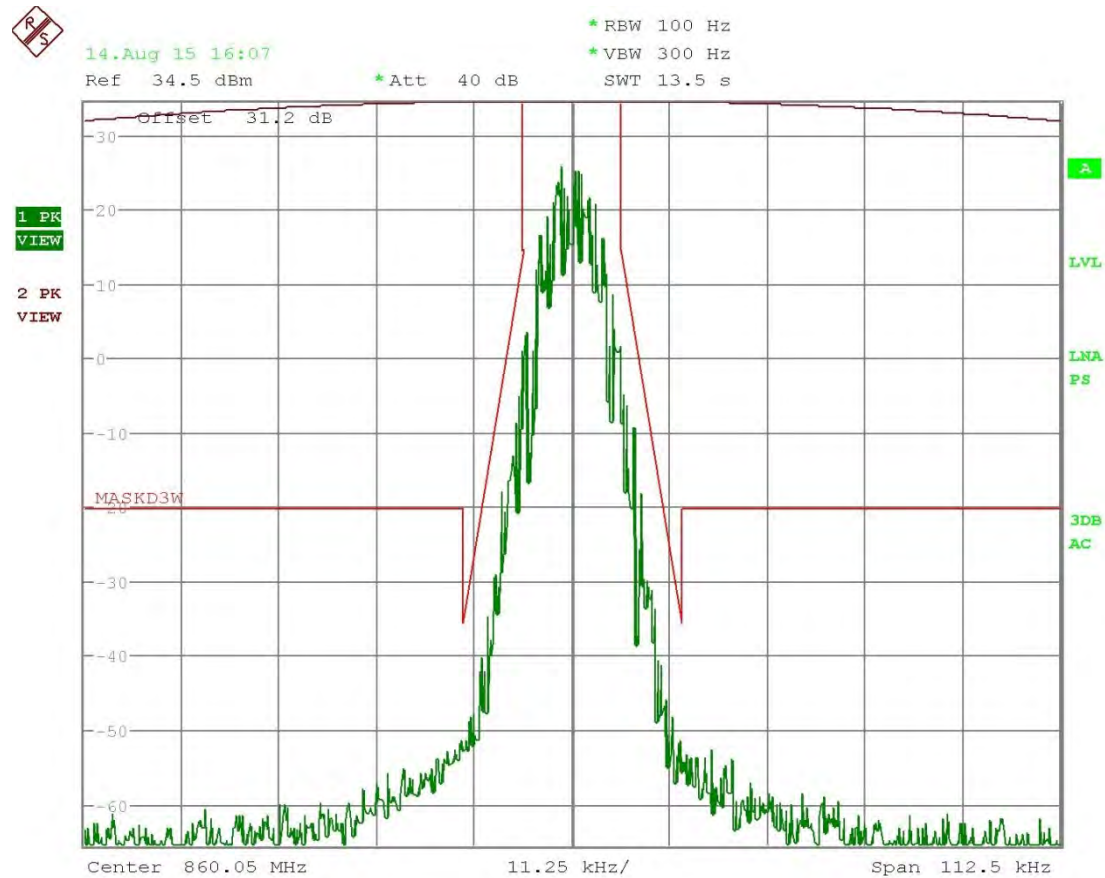


Date: 14.AUG.2015 16:07:43

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 860.05 MHz-7K80FXE/7K80FXD/7K80FXW

Part 90.210(g) Emission Mask G – Equipment without Low pass filter

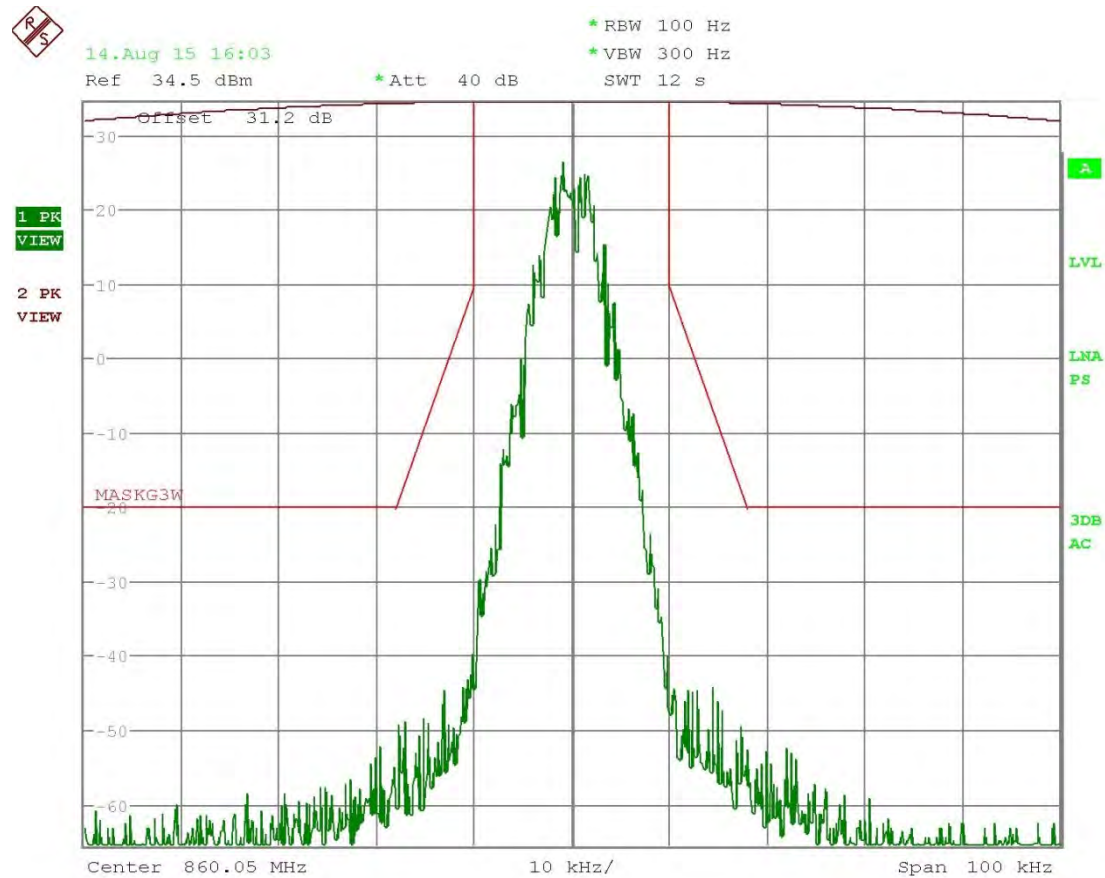


Date: 14.AUG.2015 16:03:57

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 860.05 MHz-8K87F2E

Part 90.210(g) Emission Mask G – Equipment without Low pass filter

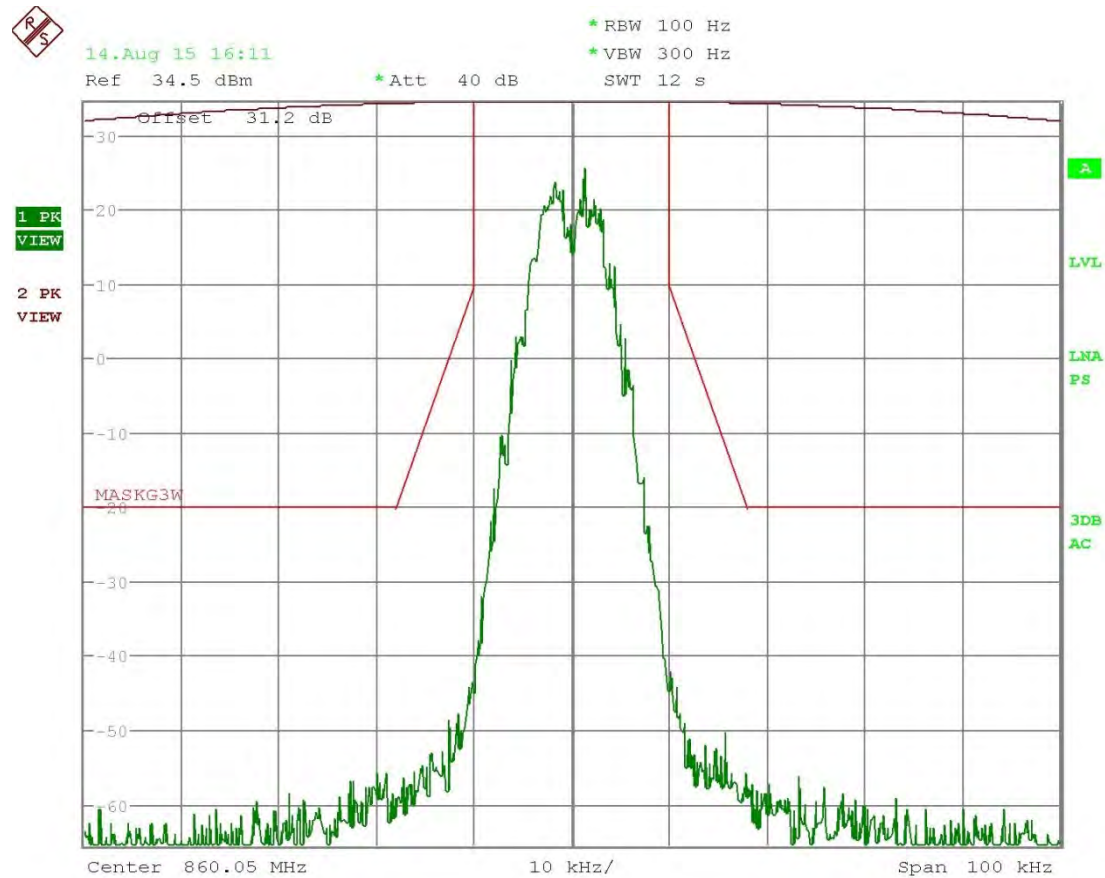


Date: 14.AUG.2015 16:11:58

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 860.05 MHz-5K41F2E

Part 90.210(g) Emission Mask G – Equipment without Low pass filter

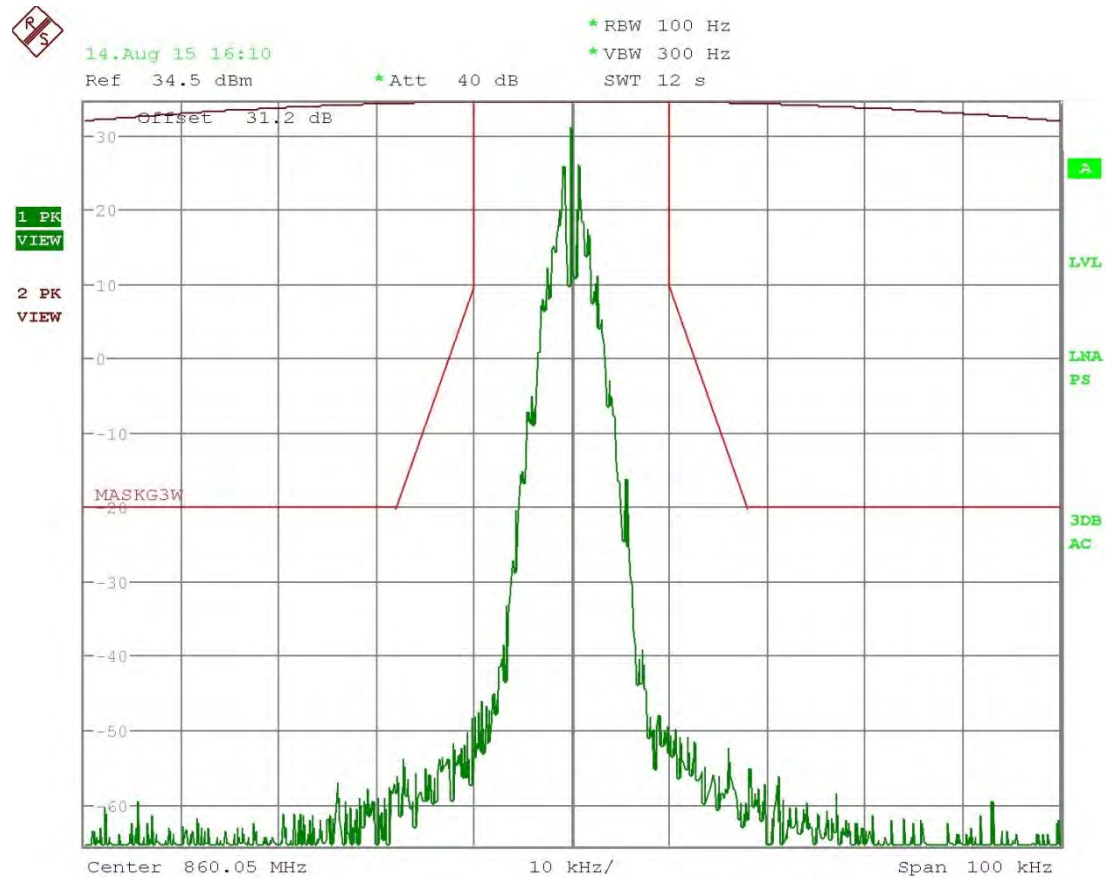


Date: 14.AUG.2015 16:10:53

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 868.95 MHz-16k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter
Part 90.691(a) Emission Mask EA – EA-based systems

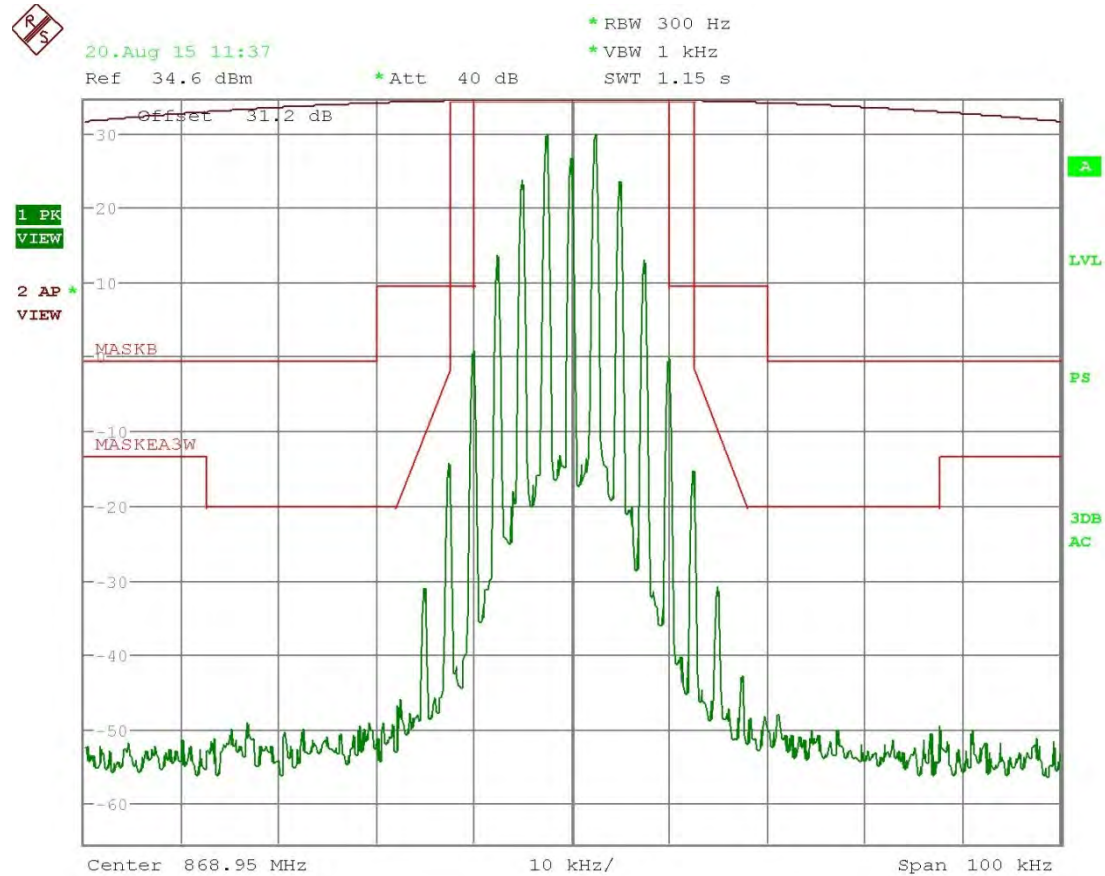


Date: 20.AUG.2015 11:37:33

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 868.95 MHz-14k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter
Part 90.691(a) Emission Mask EA – EA-based systems

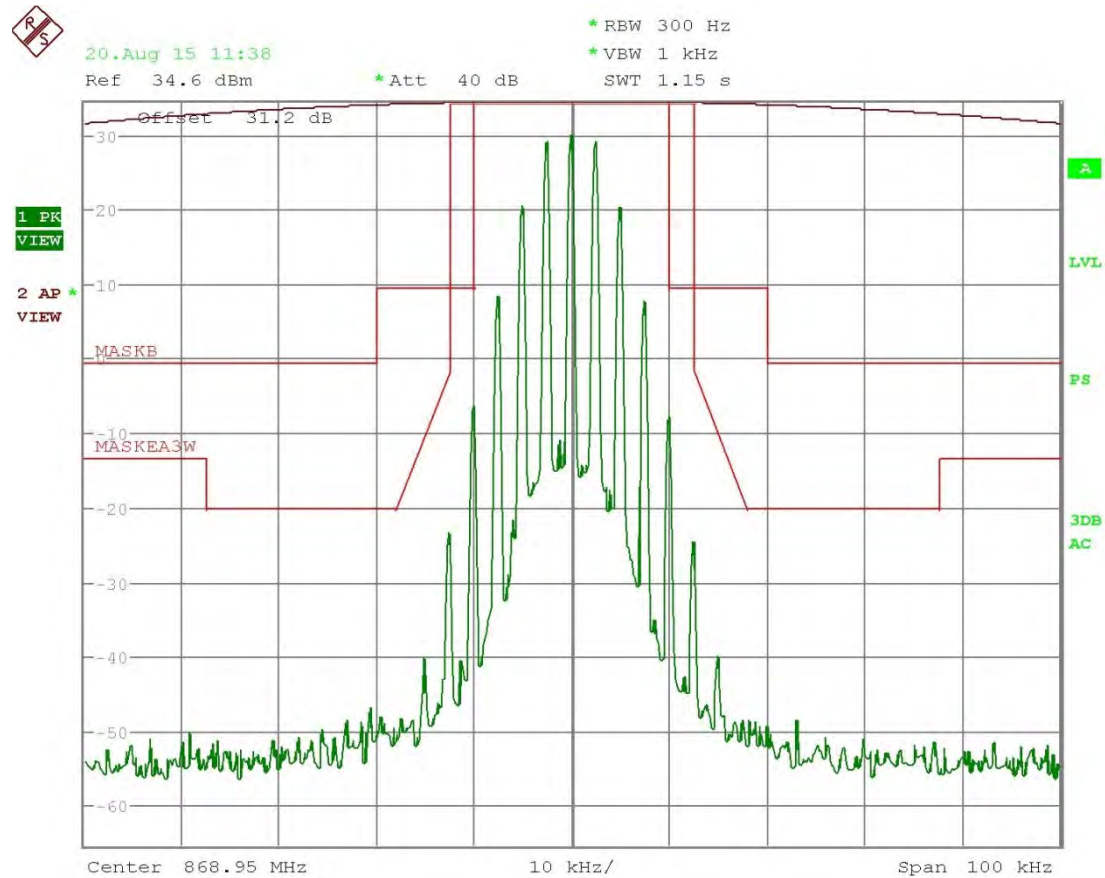


Date: 20.AUG.2015 11:38:16

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 868.95 MHz-11k0F3E

Part 90.210(b) Emission Mask B – Equipment with audio Low pass filter
Part 90.691(a) Emission Mask EA – EA-based systems

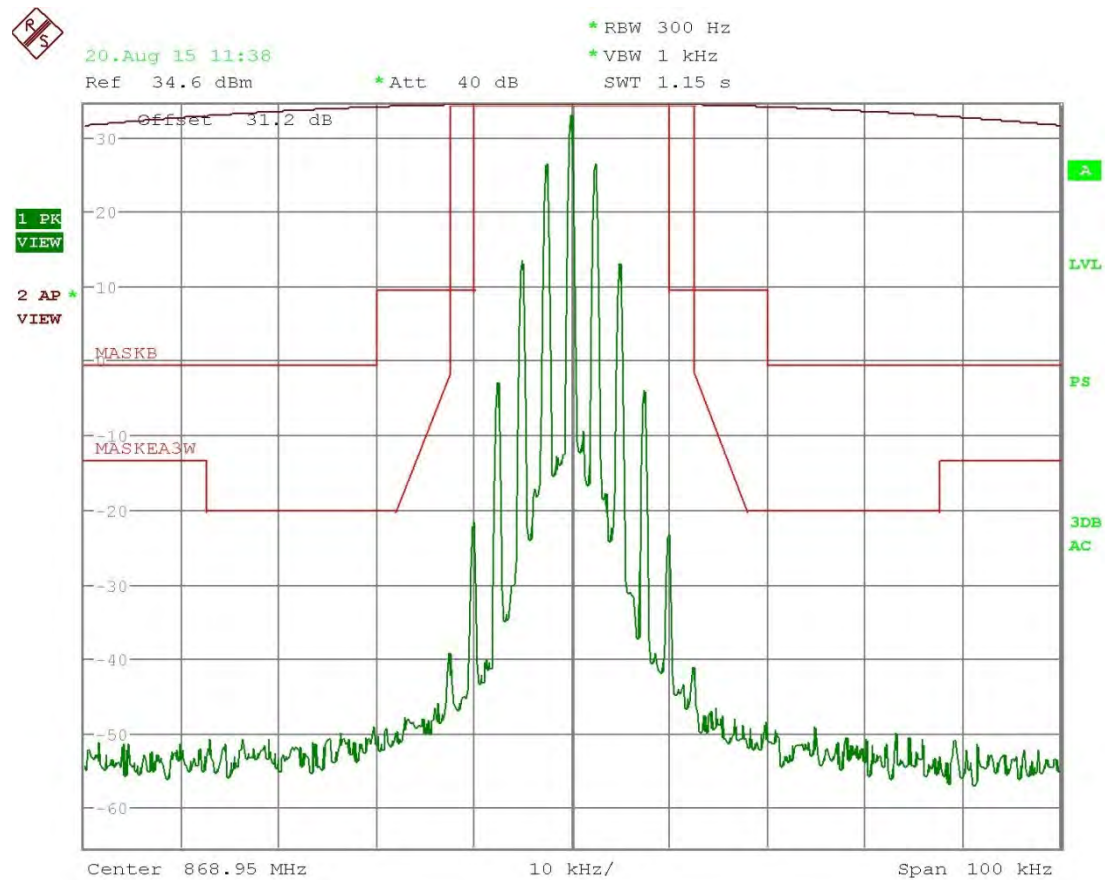


Date: 20.AUG.2015 11:38:58

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 868.95 MHz-8K17F1E/8K17F1D

Part 90.210(g) Emission Mask G – Equipment without Low pass filter
Part 90.691(a) Emission Mask EA – EA-based systems

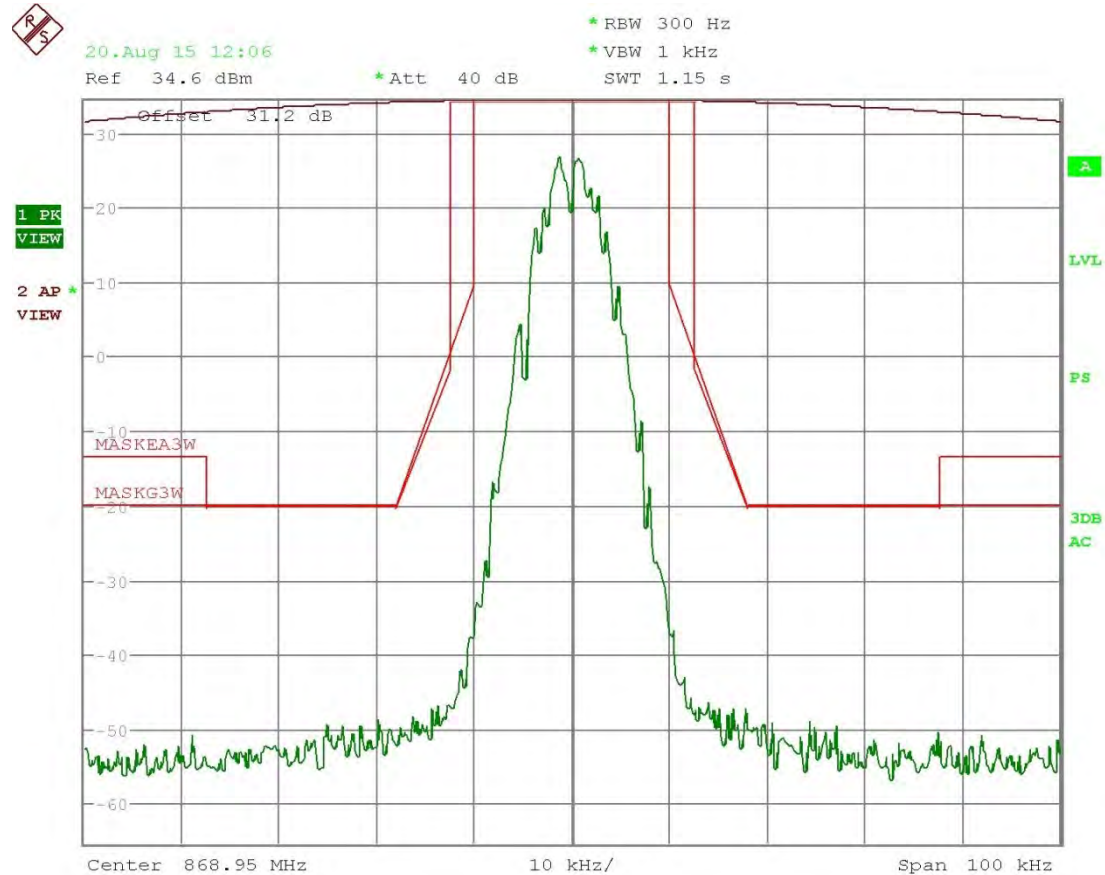


Date: 20.AUG.2015 12:06:55

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 868.95 MHz-7K80FXE/7K80FXD/7K80FXW

Part 90.210(g) Emission Mask G – Equipment without Low pass filter
Part 90.691(a) Emission Mask EA – EA-based systems

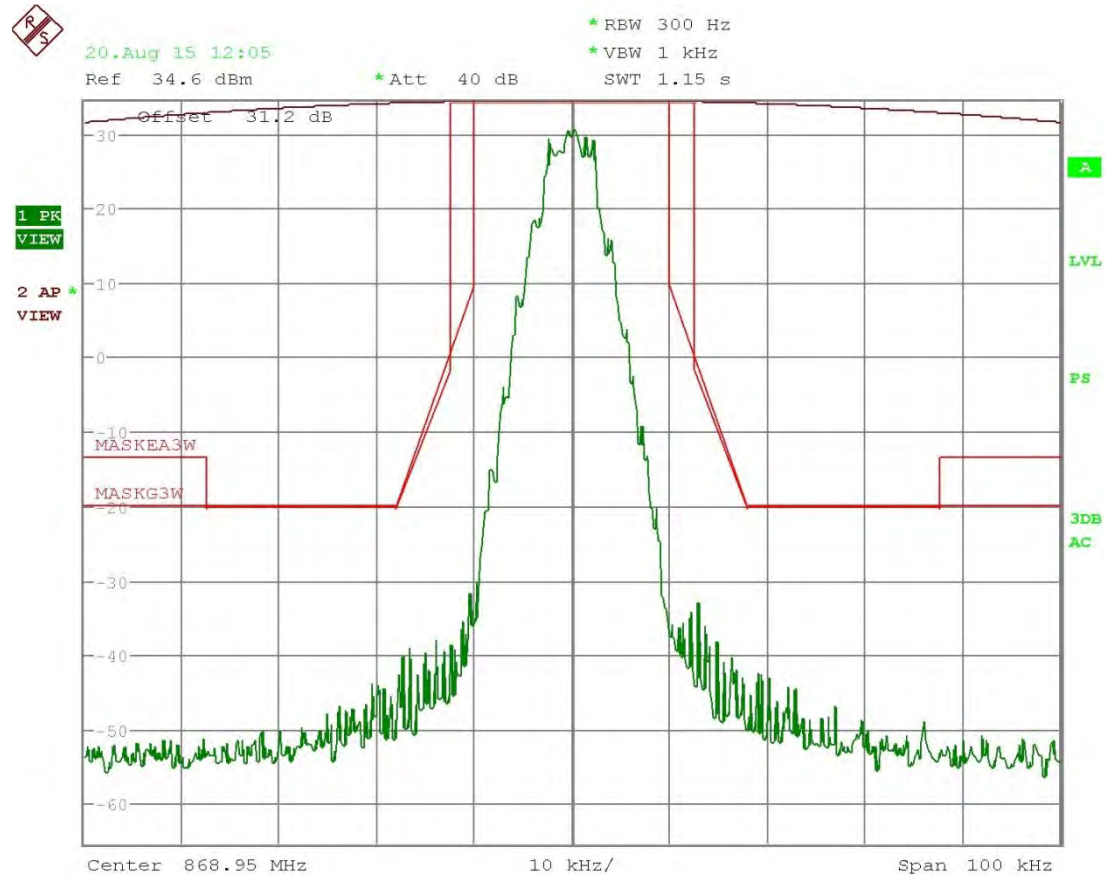


Date: 20.AUG.2015 12:05:59

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 868.95 MHz-8K87F2E

Part 90.210(g) Emission Mask G – Equipment without Low pass filter
Part 90.691(a) Emission Mask EA – EA-based systems

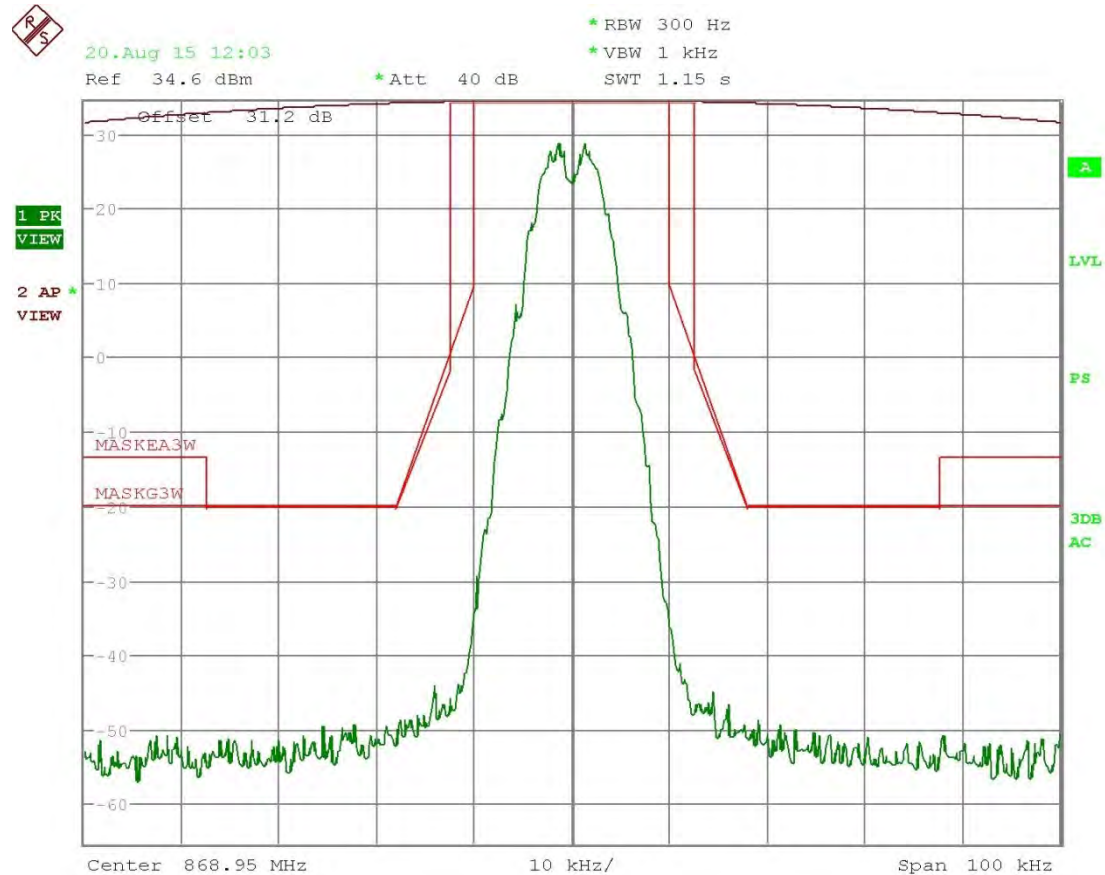


Date: 20.AUG.2015 12:03:58

[Table of Contents](#)

OCCUPIED BANDWIDTH

TEST FREQ. 868.95 MHz-5K41F2E

Part 90.210(g) Emission Mask G – Equipment without Low pass filter
Part 90.691(a) Emission Mask EA – EA-based systems

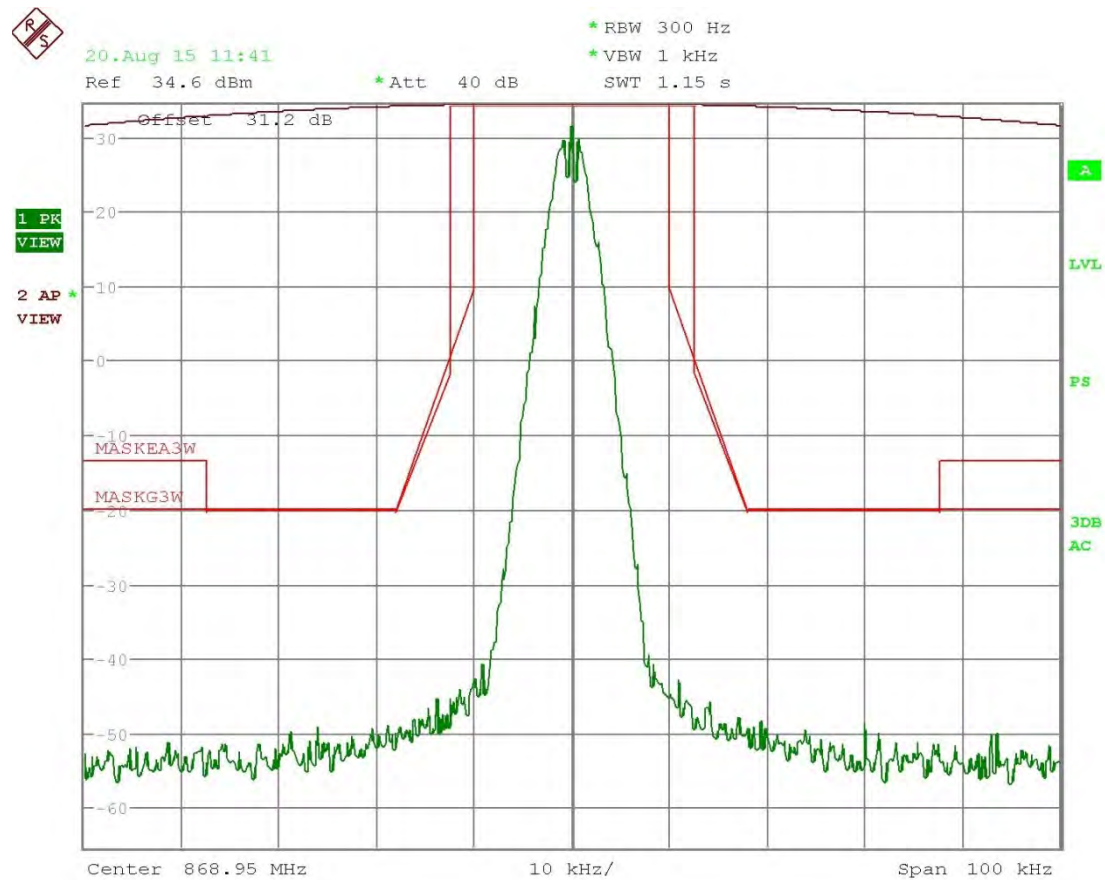

Date: 20.AUG.2015 11:41:21

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

RULE PARTS. NO.: 90.543(a)

REQUIREMENTS: Transmitters designed to operate in the 769-775 MHz and 799-805 MHz frequency bands must meet the emission limitations.

12.5 kHz Mobile Transmitter ACP Requirements		
Offset from center frequency	Measurement bandwidth	Maximum ACP relative
(kHz)	(kHz)	(dBc)
9.375	6.25	-40
15.625	6.25	-60
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100	-65
>400 to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100

25 kHz Mobile Transmitter ACP Requirements		
Offset from center frequency	Measurement bandwidth	Maximum ACP relative
(kHz)	(kHz)	(dBc)
15.625	6.25	-40
21.875	6.25	-60
37.5	25	-60
62.5	25	-65
87.5	25	-65
150	100	-65
250	100	-65
350	100	-65
>400 kHz to 12 MHz	30 (s)	-75
12 MHz to paired receive band	30 (s)	-75
In the paired receive band	30 (s)	-100


(s) Indicates that a swept measurement may be used.

ADJACENT CHANNEL POWER (ACP)

TEST PROCEEDURE: ANSI/TIA-603 § 2.2.14 Adjacent Channel Power Ratio
FCC Part 90.543(b) ACP Measurement Procedure

1. All the measurement are made at the transmitter's antenna port.
2. The ACP was made with the EMI receiver which has a direct ACP function.
3. The Nominal RBW was less than 2% of the measurement BW

TEST SETUP DIAGRAM:

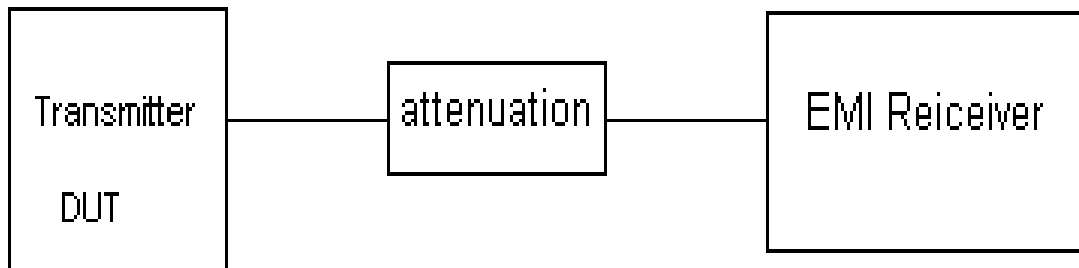


TEST DATA: See the plots on the following pages

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-16K0F3E

6.25 KHz Measurement Bandwidth

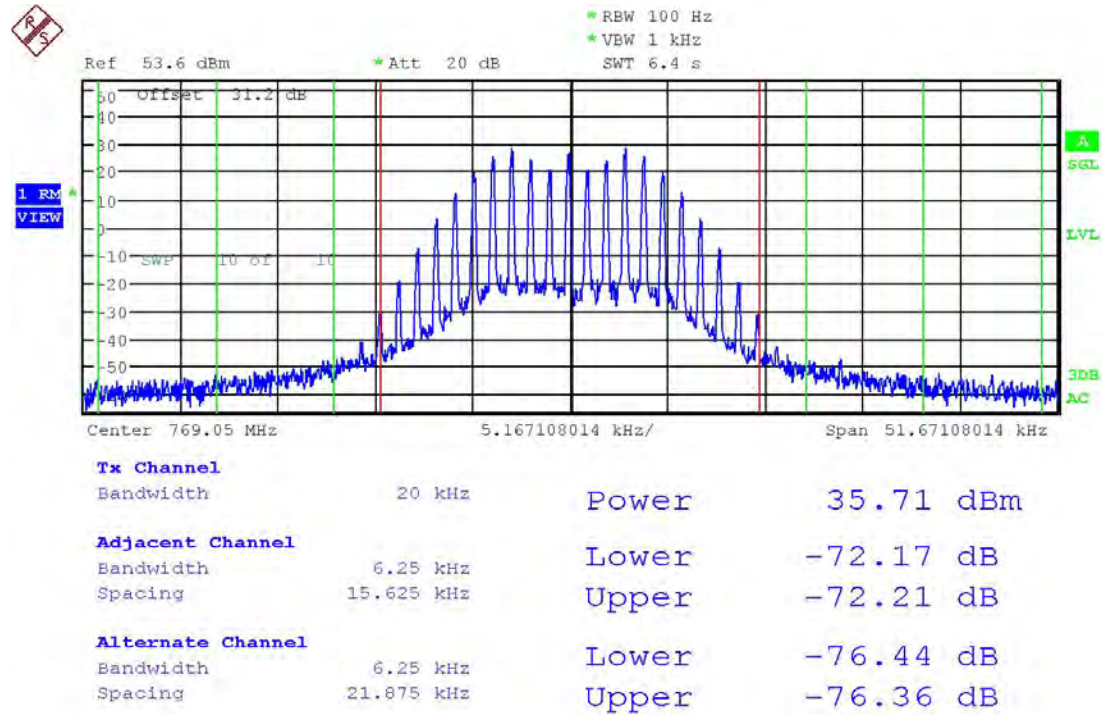


Date: 17.AUG.2015 16:27:04

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-16K0F3E

25 KHz Measurement Bandwidth

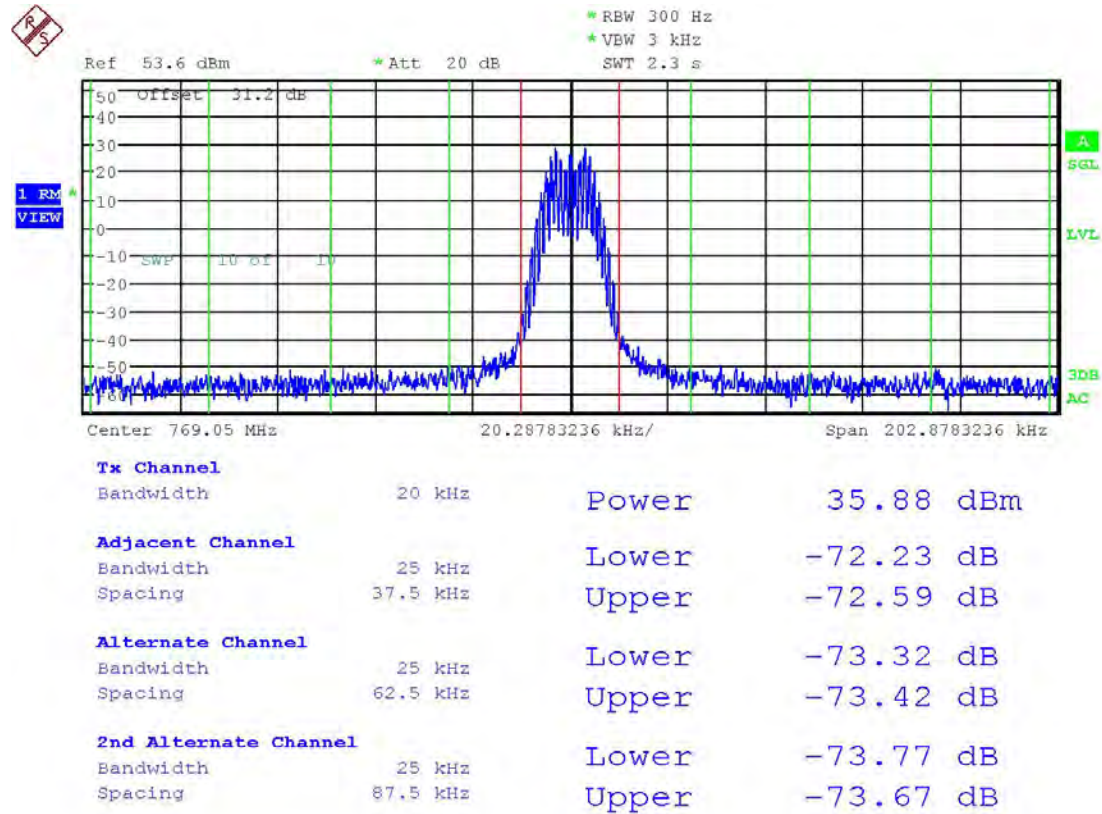


Date: 17.AUG.2015 16:36:08

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-16K0F3E

100 KHz Measurement Bandwidth

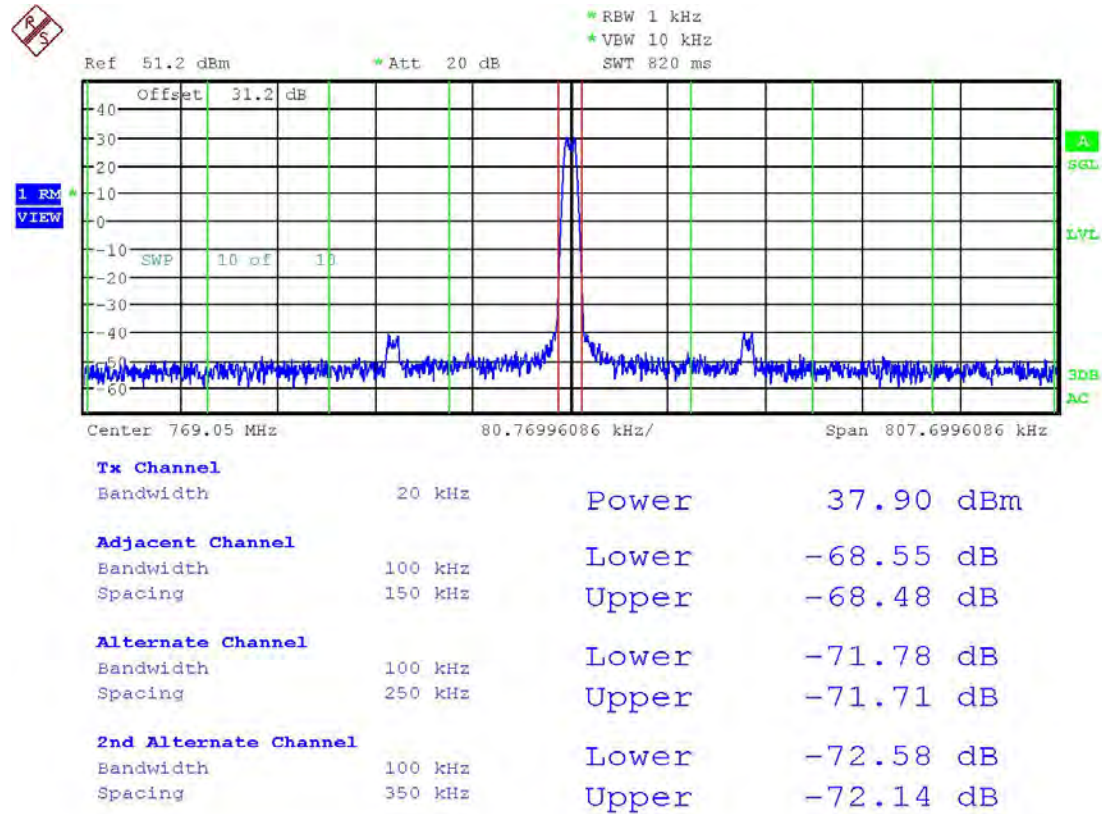

Date: 17.AUG.2015 16:34:46

Swept 30 KHz Bandwidth Measurement


Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper	-80.5	5.5
		Lower	-79.6	4.6
12 MHz to paired rx band	-75	-83.11		8.1
In the paired rx band	-100	-103.49		3.5

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-11K0F3E

6.25 KHz Measurement Bandwidth

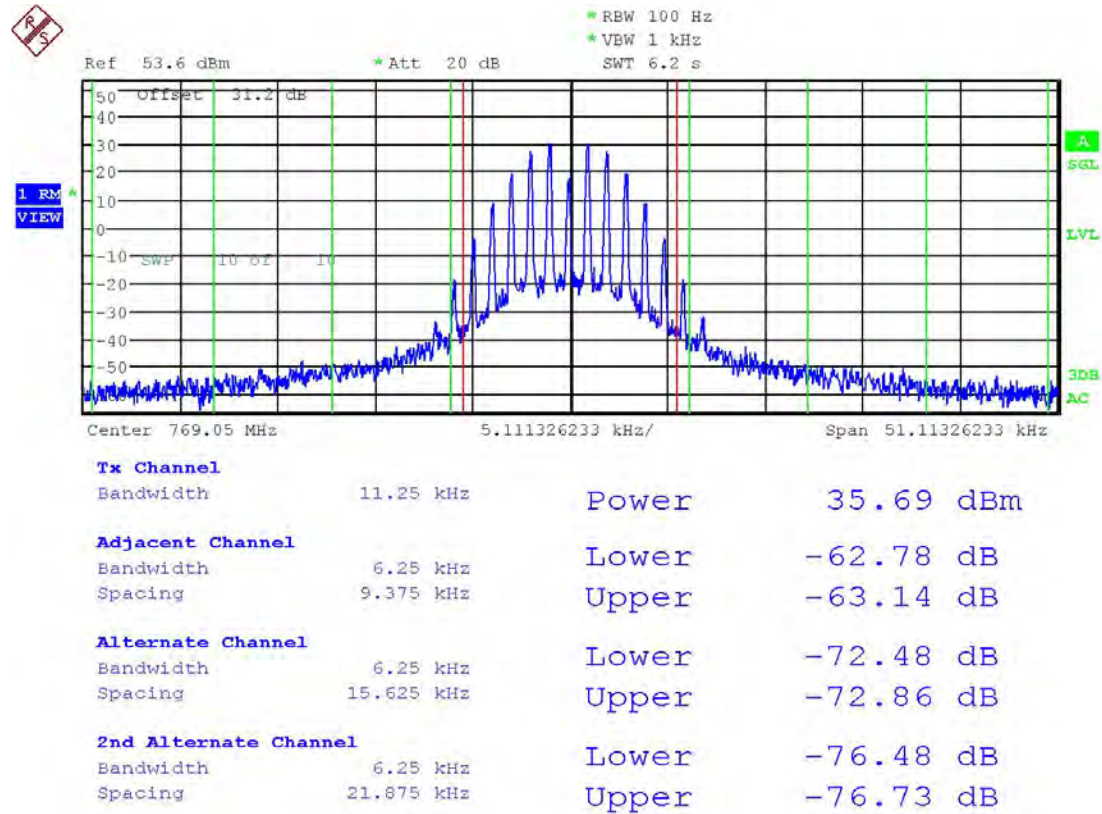


Date: 17.AUG.2015 15:41:27

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-11K0F3E

25 KHz Measurement Bandwidth

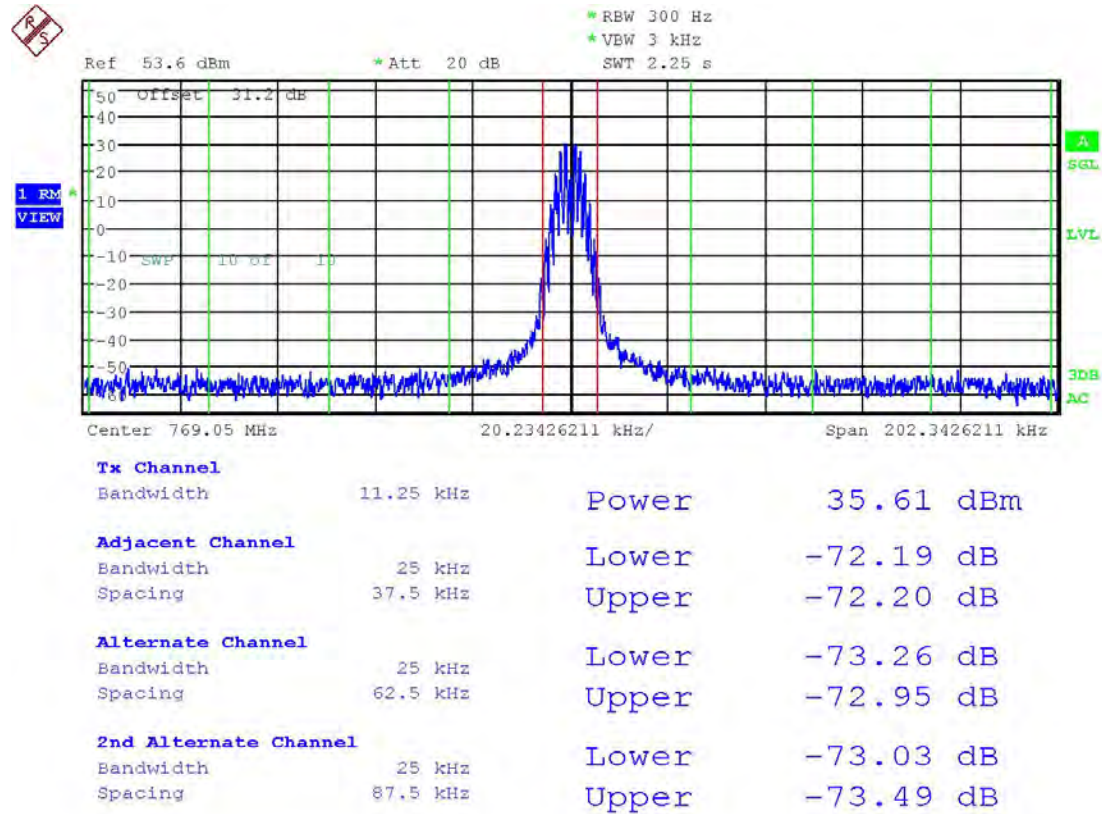


Date: 17.AUG.2015 15:56:02

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-11K0F3E

100 KHz Measurement Bandwidth

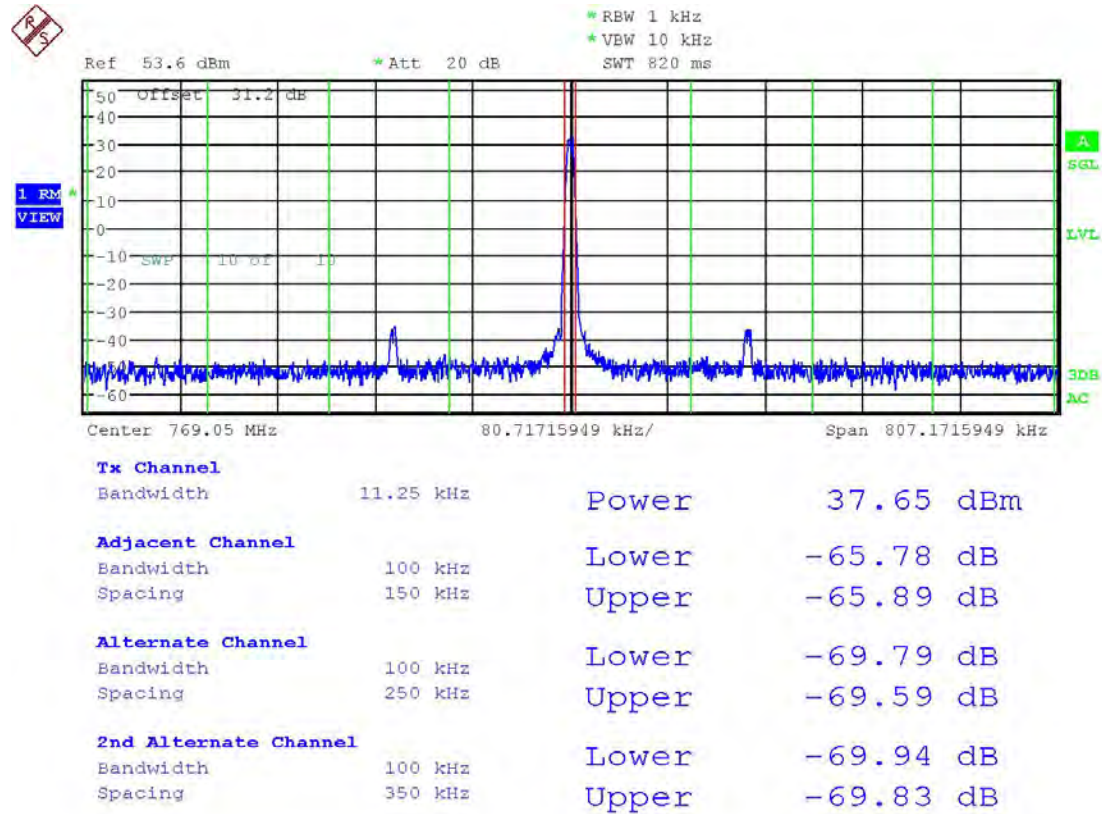

Date: 17.AUG.2015 16:50:54

Swept 30 KHz Bandwidth Measurement


Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper	-79.11	4.1
		Lower	-78.97	4.0
12 MHz to paired rx band	-75	-83.15		8.2
In the paired rx band	-100	-104.12		4.1

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-8K87F2E

6.25 KHz Measurement Bandwidth

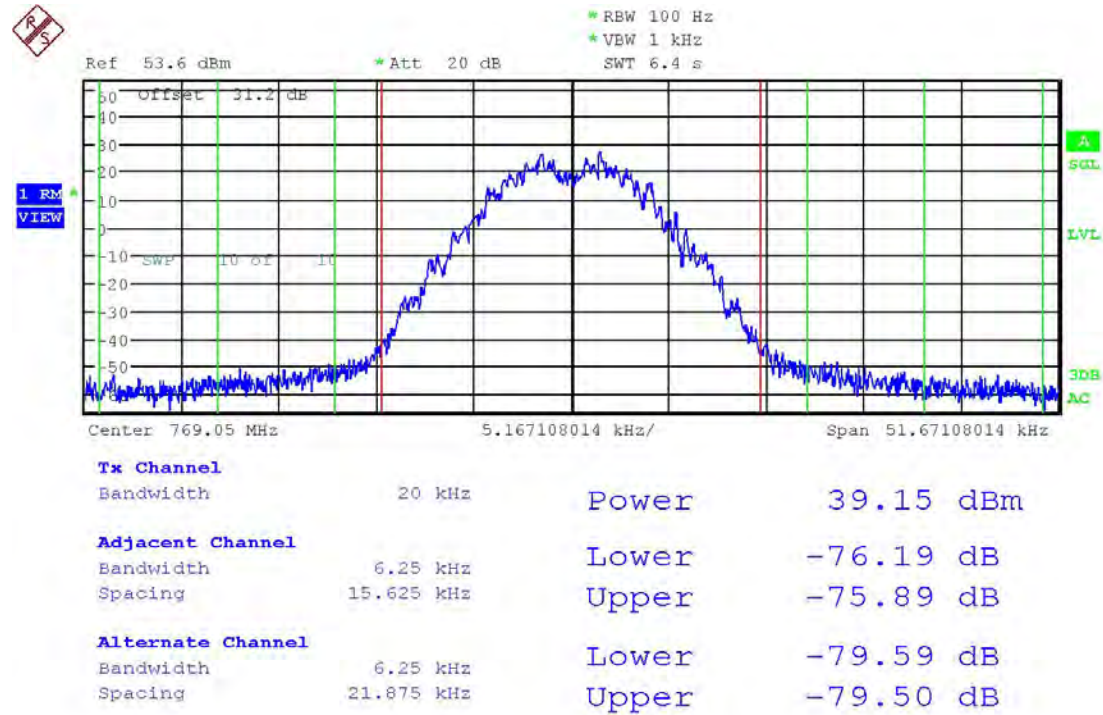


Date: 17.AUG.2015 17:27:05

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-8K87F2E

25 KHz Measurement Bandwidth

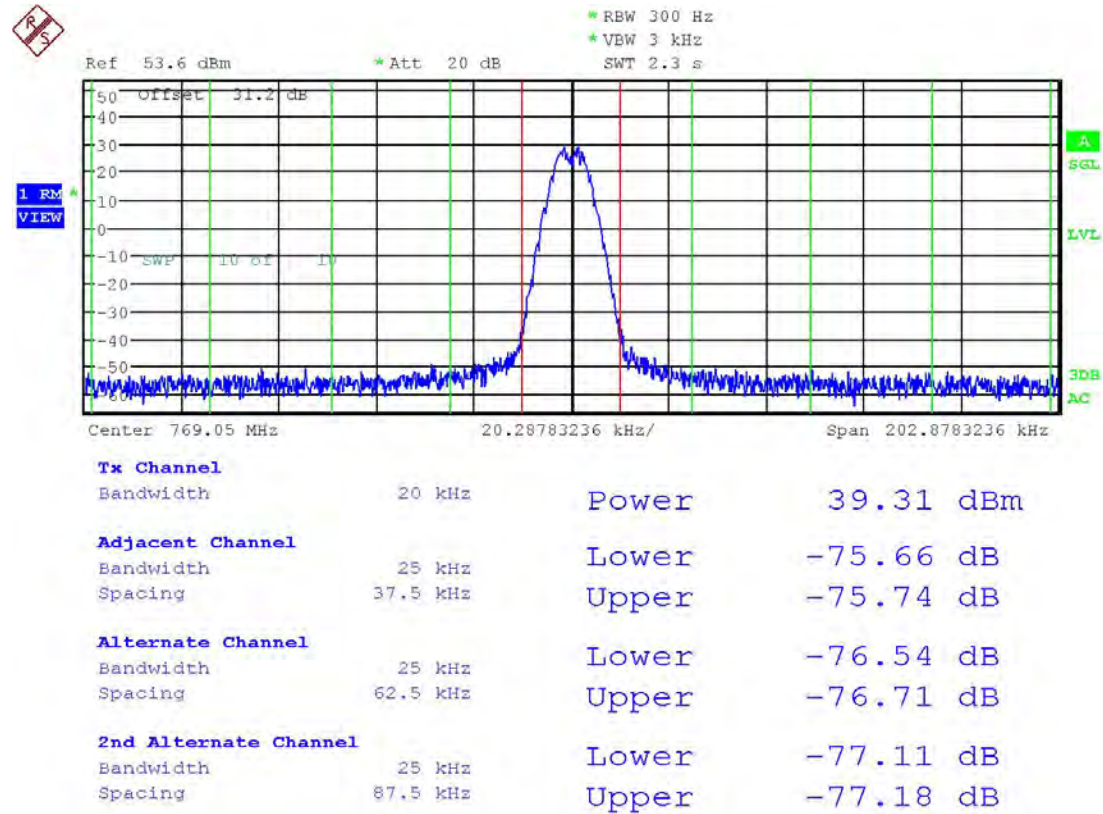


Date: 17.AUG.2015 17:28:37

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-8K87F2E

100 KHz Measurement Bandwidth

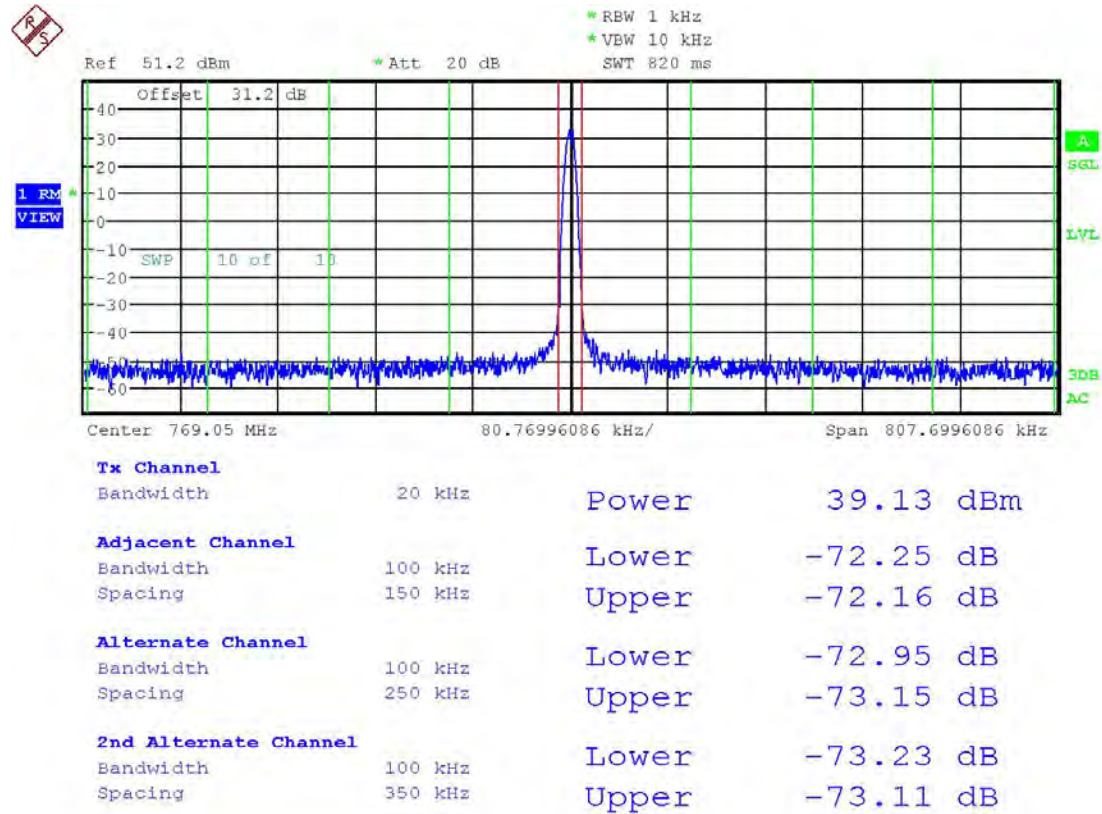

Date: 17.AUG.2015 17:30:09

Swept 30 KHz Bandwidth Measurement


Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper	-78.61	3.6
		Lower	-79.12	4.1
12 MHz to paired rx band	-75	-84.56		9.6
In the paired rx band	-100	-103.96		4.0

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-8K17F1E/8K17F1D

6.25 KHz Measurement Bandwidth

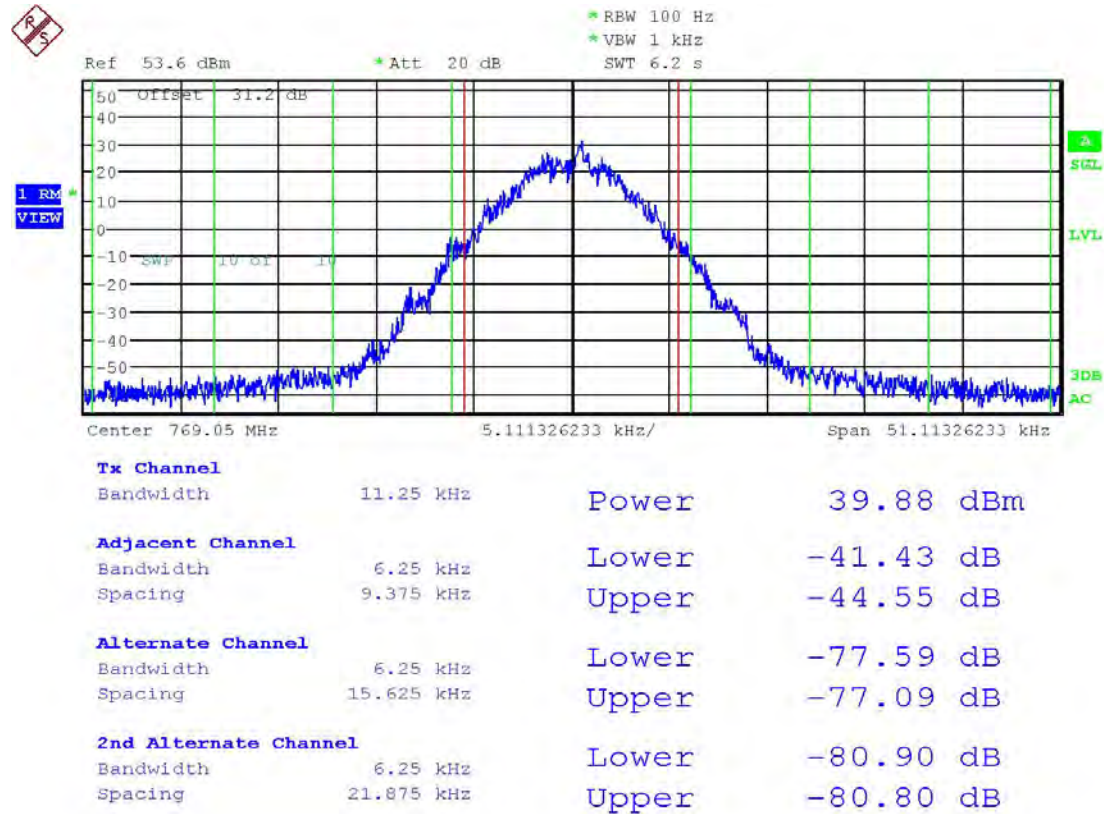


Date: 24.AUG.2015 14:12:46

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-8K17F1E/8K17F1D

25 KHz Measurement Bandwidth

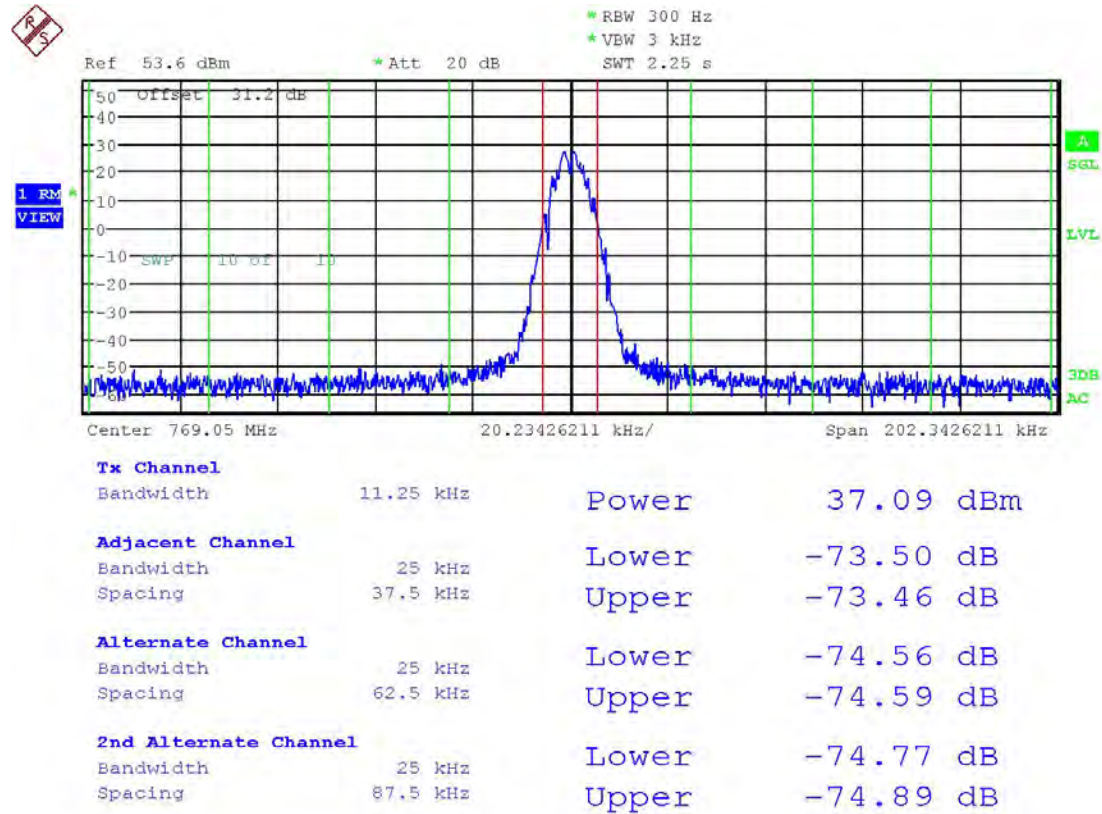


Date: 17.AUG.2015 17:22:50

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-8K17F1E/8K17F1D

100 KHz Measurement Bandwidth

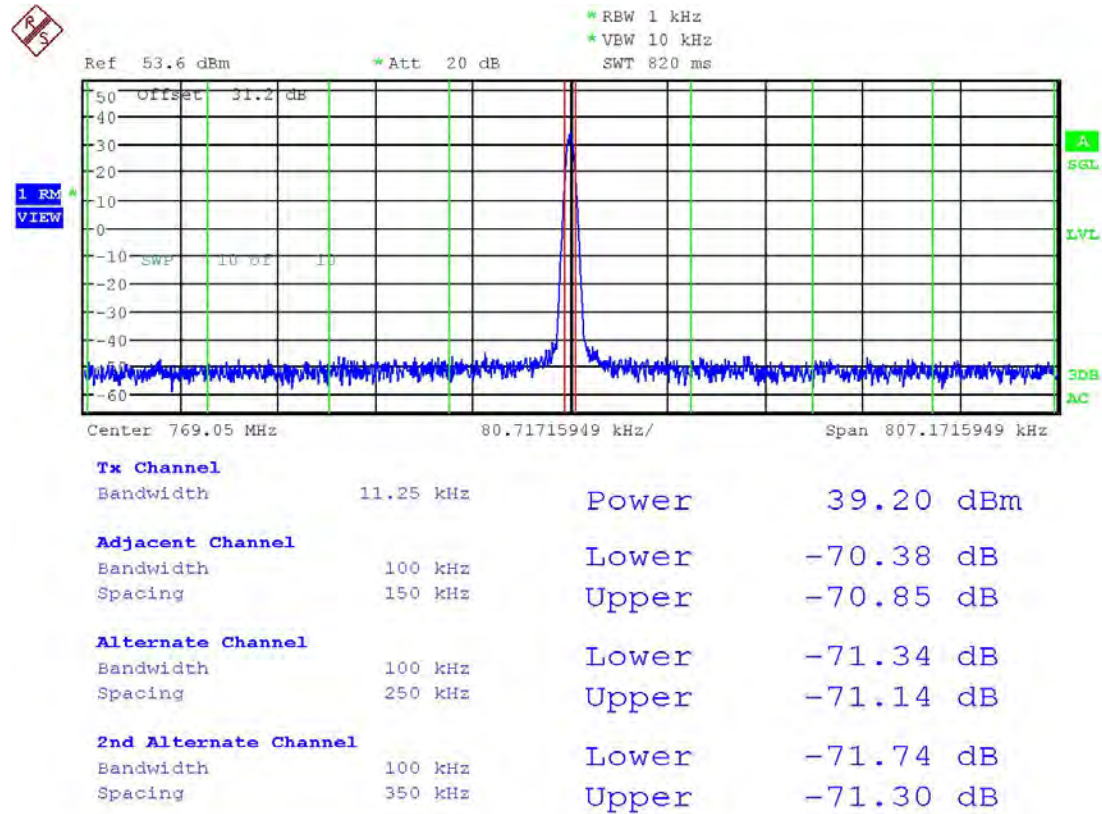

Date: 17.AUG.2015 17:23:27

Swept 30 KHz Bandwidth Measurement


Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper	-79.65	4.7
		Lower	-79.12	4.1
12 MHz to paired rx band	-75	-84.6		9.6
In the paired rx band	-100	-104.21		4.2

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-7K80FXE/7K80FXD/7K80FXW

6.25 KHz Measurement Bandwidth

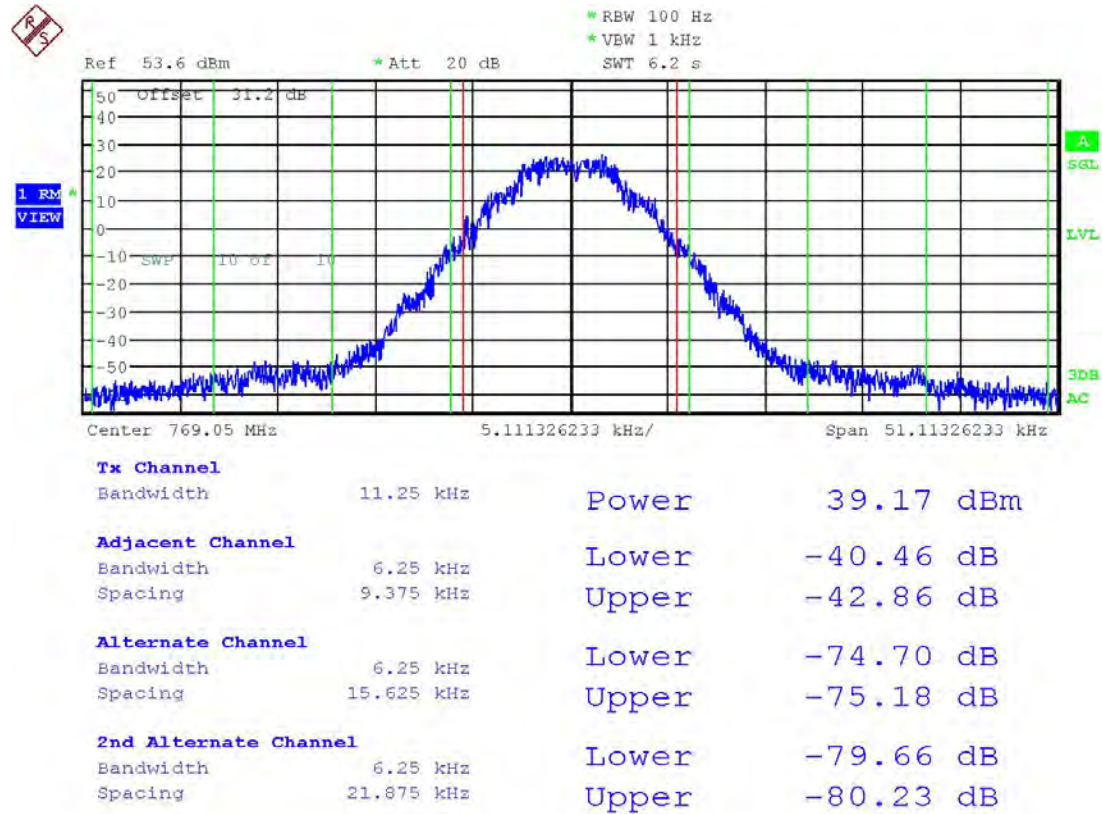


Date: 17.AUG.2015 16:59:23

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-7K80FXE/7K80FXD/7K80FXW

25 KHz Measurement Bandwidth

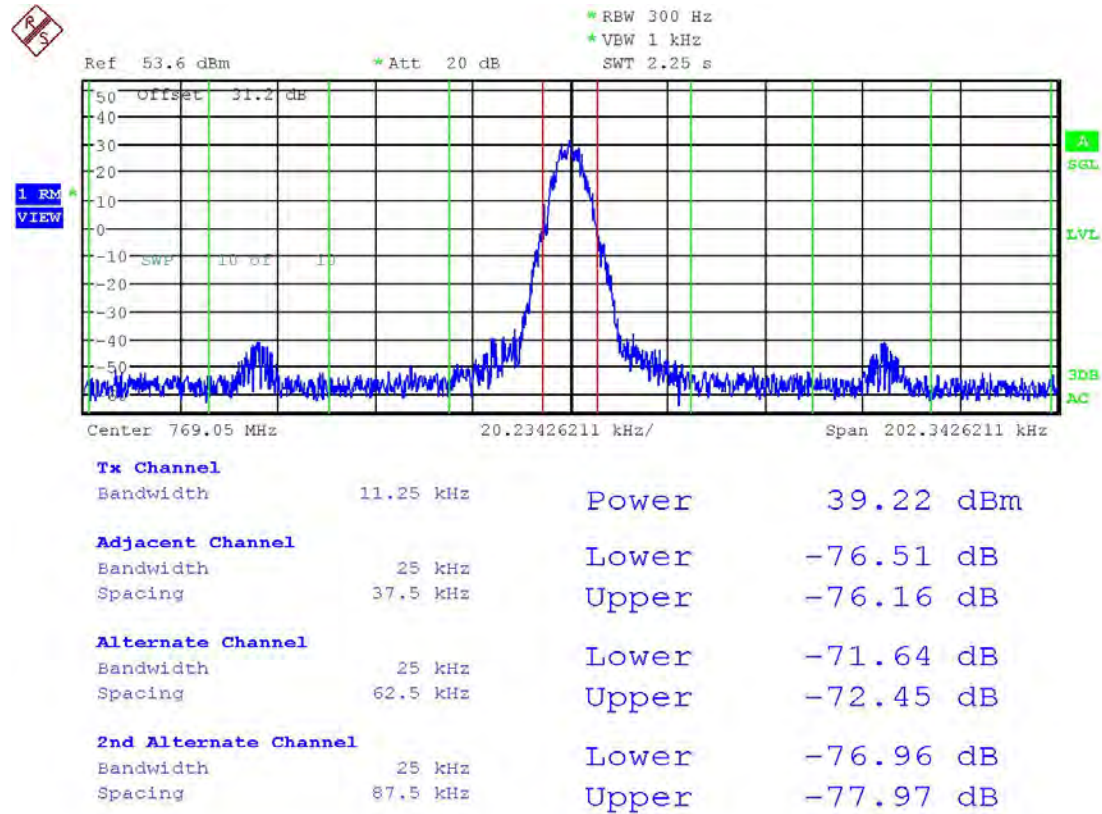


Date: 17.AUG.2015 17:01:53

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-7K80FXE/7K80FXD/7K80FXW

100 KHz Measurement Bandwidth

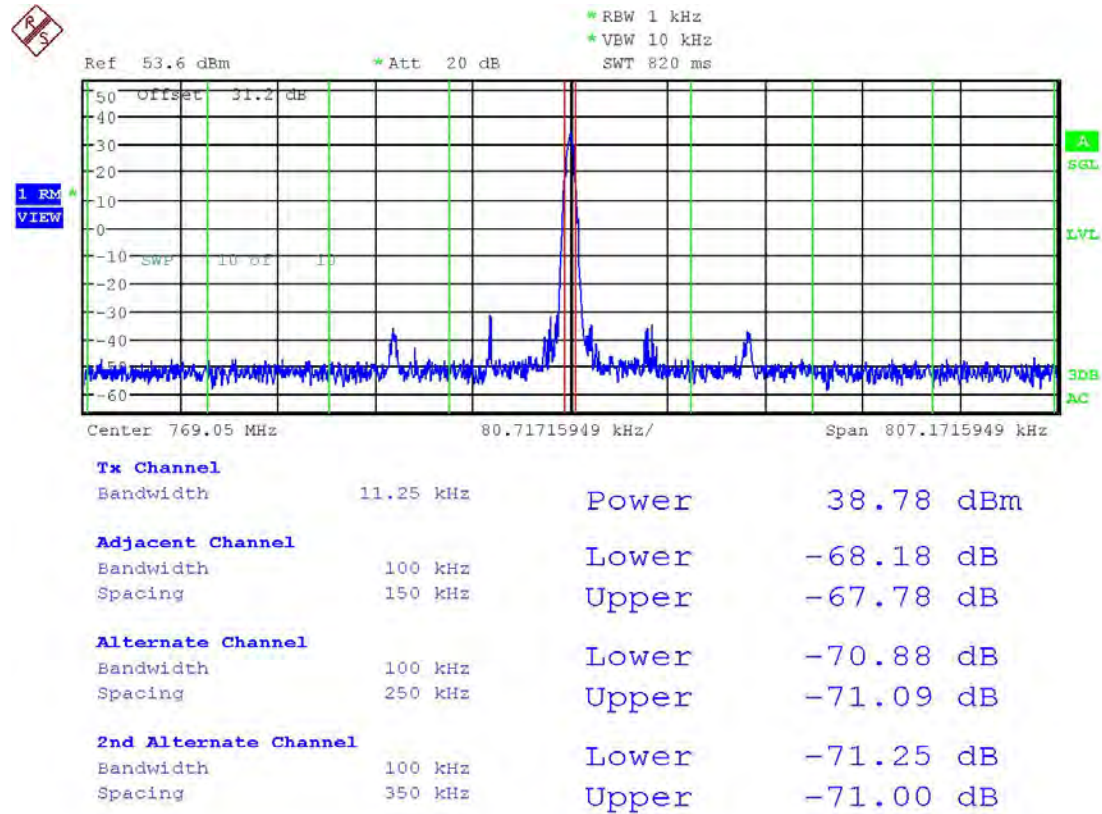

Date: 17.AUG.2015 17:02:37

Swept 30 KHz Bandwidth Measurement


Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper	-79.71	4.7
		Lower	-80.35	5.3
12 MHz to paired rx band	-75	-82.6		7.6
In the paired rx band	-100	-103.79		3.8

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-5K41F2E

6.25 KHz Measurement Bandwidth

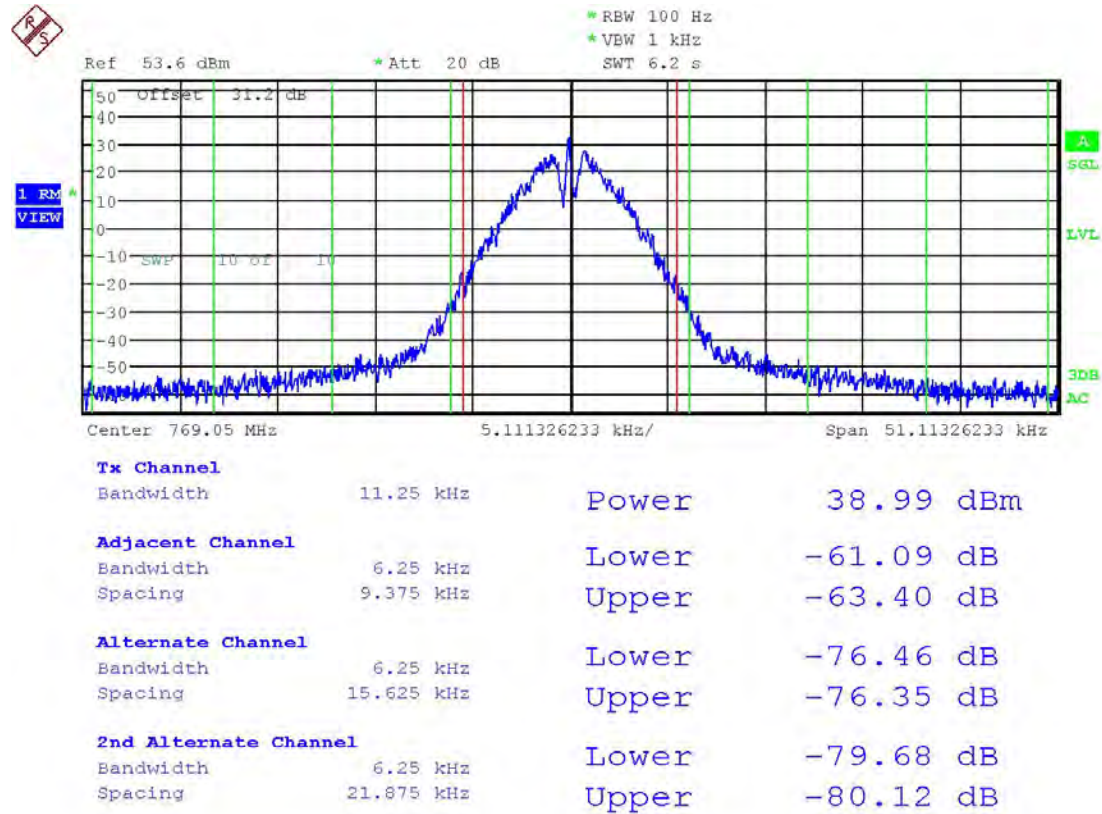


Date: 17.AUG.2015 17:11:14

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 769.05 MHz-5K41F2E

25 KHz Measurement Bandwidth

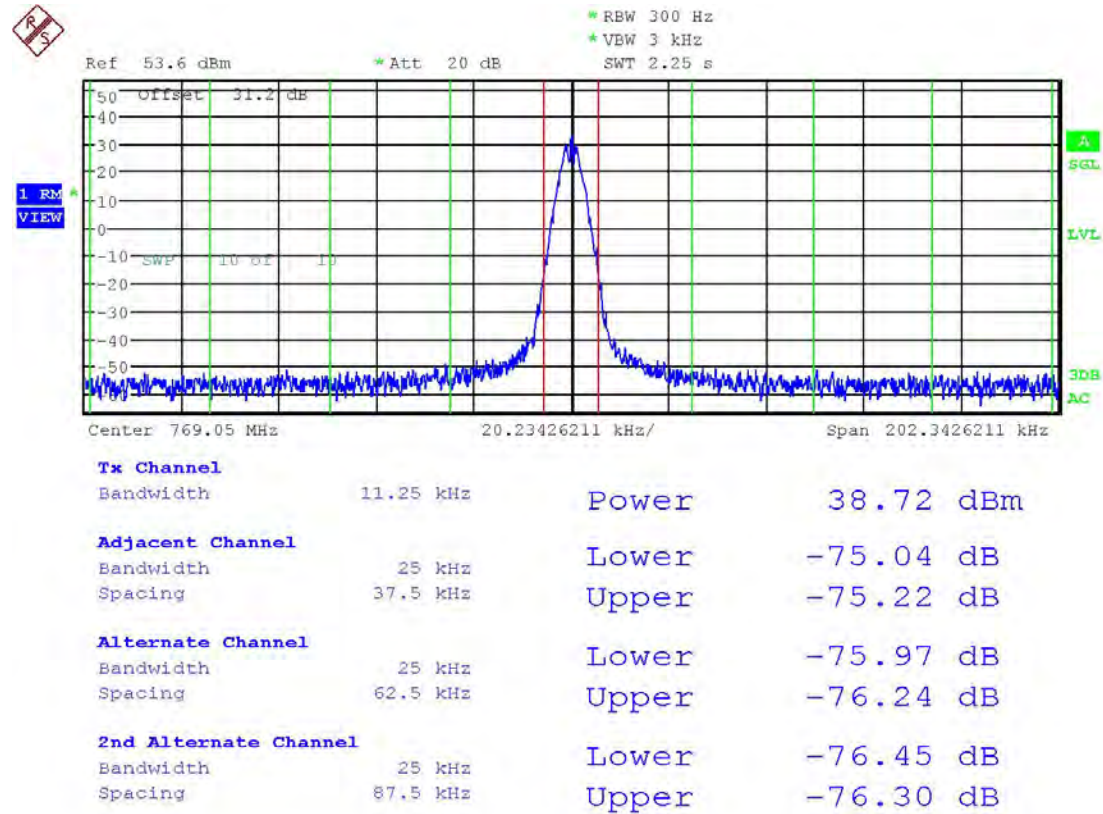


Date: 17.AUG.2015 17:13:58

[Table of Contents](#)

TEST FREQ. 772.05 MHz-16K0F3E

6.25 KHz Measurement Bandwidth

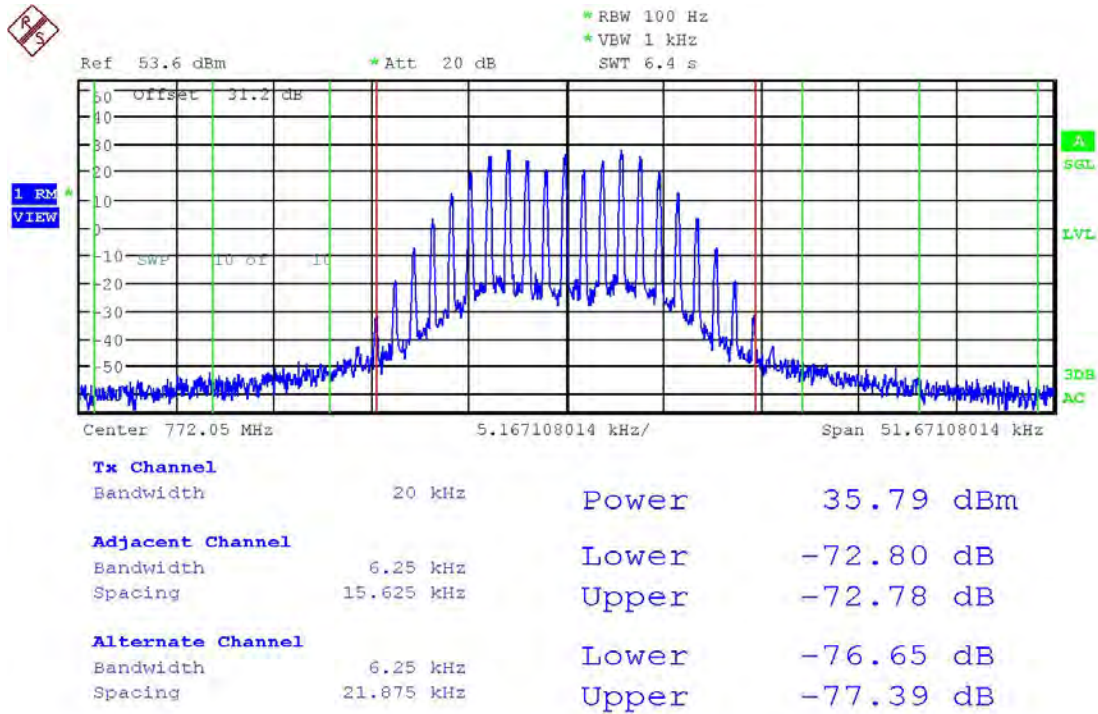


Date: 18.AUG.2015 14:31:06

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 772.05 MHz-16K0F3E

25 KHz Measurement Bandwidth

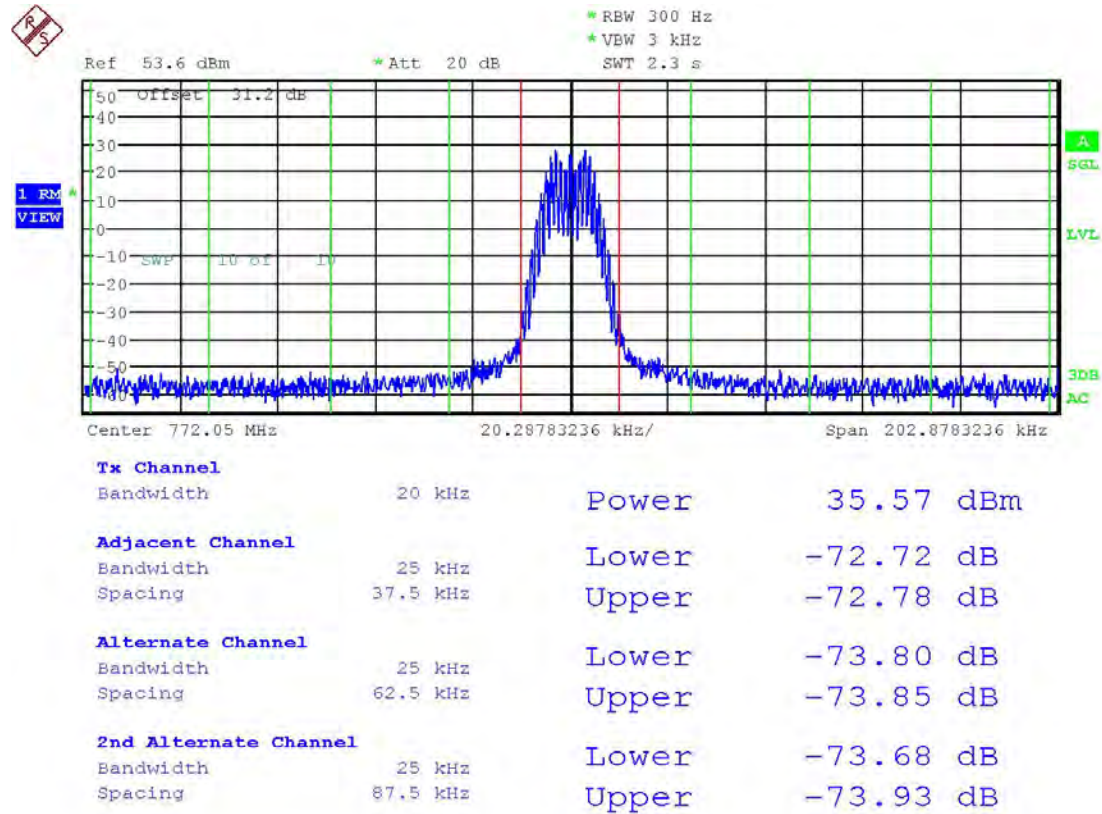


Date: 18.AUG.2015 14:32:10

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 772.05 MHz-16K0F3E

100 KHz Measurement Bandwidth

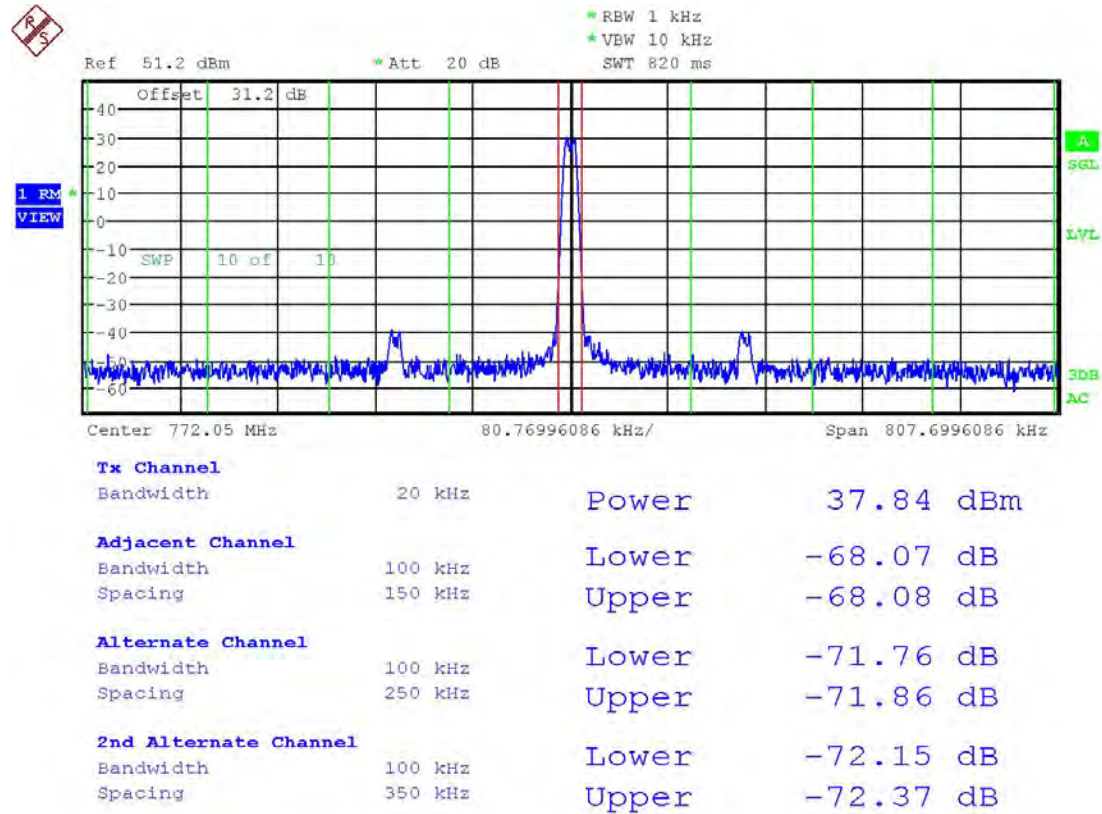

Date: 18.AUG.2015 14:32:52

Swept 30 KHz Bandwidth Measurement


Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper	-78.69	3.7
		Lower	-79.63	4.6
12 MHz to paired rx band	-75	-84.21		9.2
In the paired rx band	-100	-104.6		4.6

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 772.05 MHz-11K0F3E

6.25 KHz Measurement Bandwidth

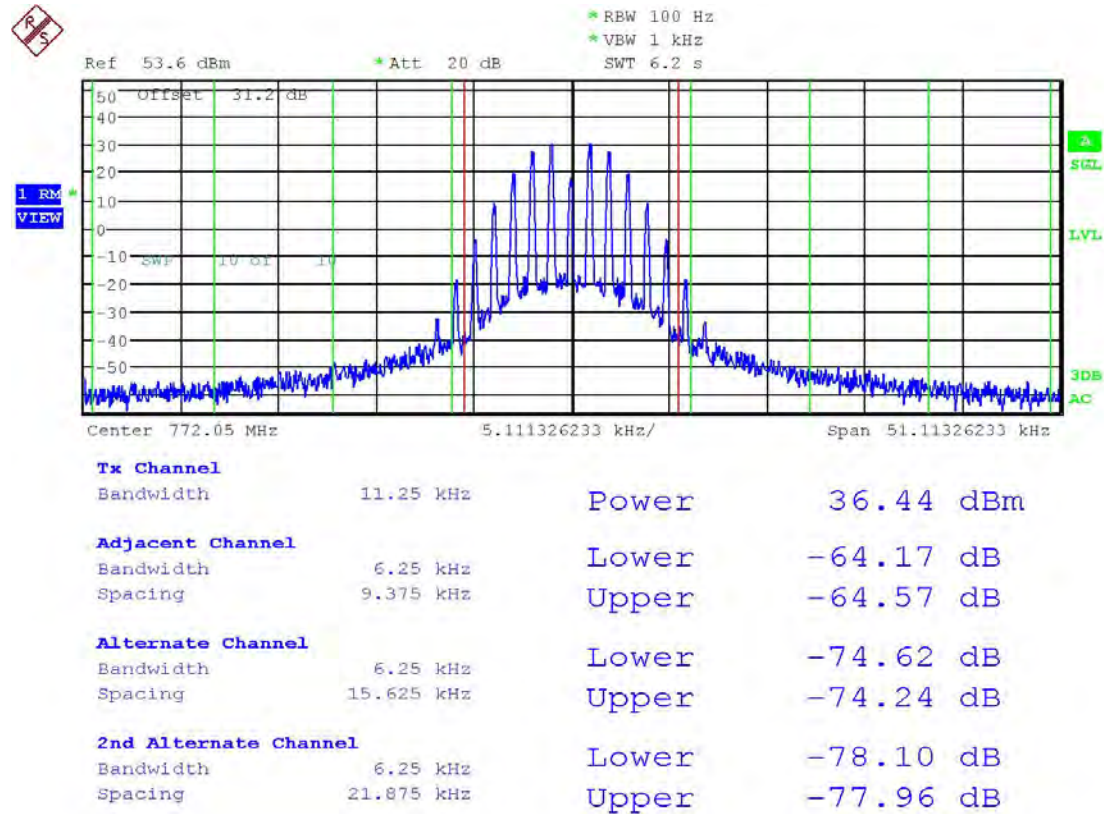


Date: 18.AUG.2015 14:27:01

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 772.05 MHz-11K0F3E

25 KHz Measurement Bandwidth

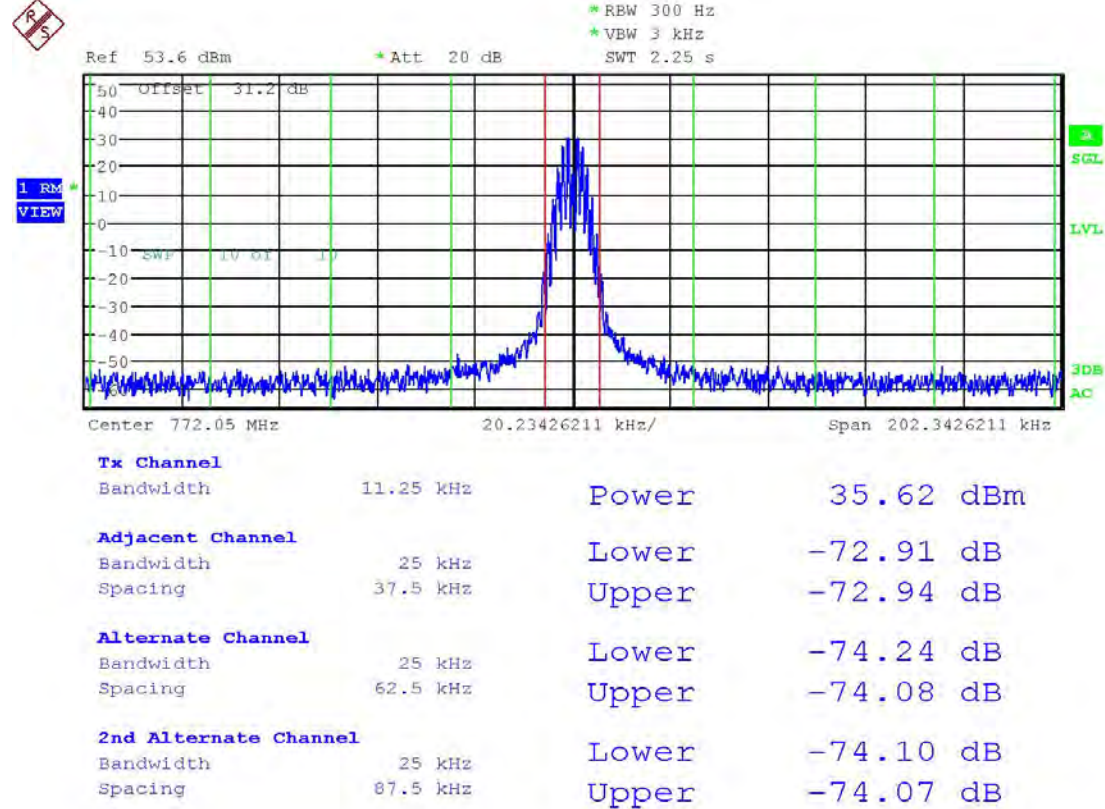


Date: 18.AUG.2015 14:27:59

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 772.05 MHz-11K0F3E

100 KHz Measurement Bandwidth

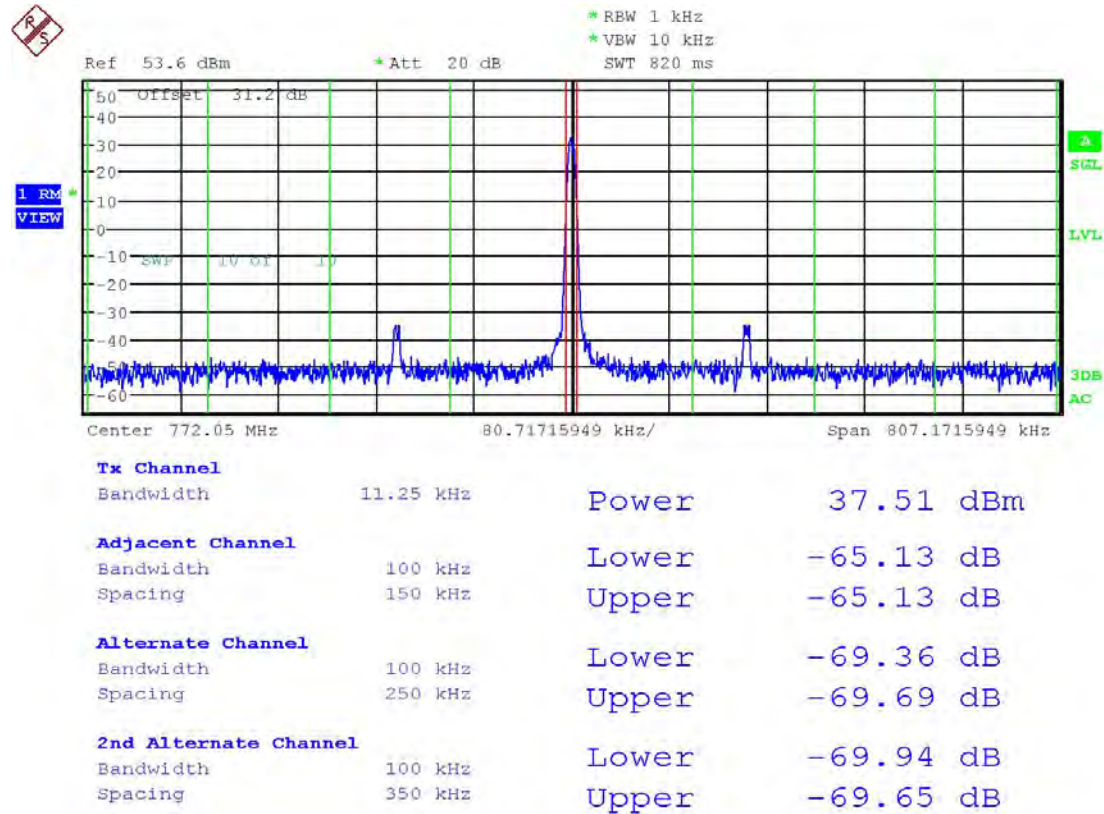

Date: 18.AUG.2015 14:29:07

Swept 30 KHz Bandwidth Measurement


Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper	-78.9	3.9
		Lower	-79.2	4.2
12 MHz to paired rx band	-75	-83.6		8.6
In the paired rx band	-100	-104.1		4.1

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 772.05 MHz-8K87F2E

6.25 KHz Measurement Bandwidth

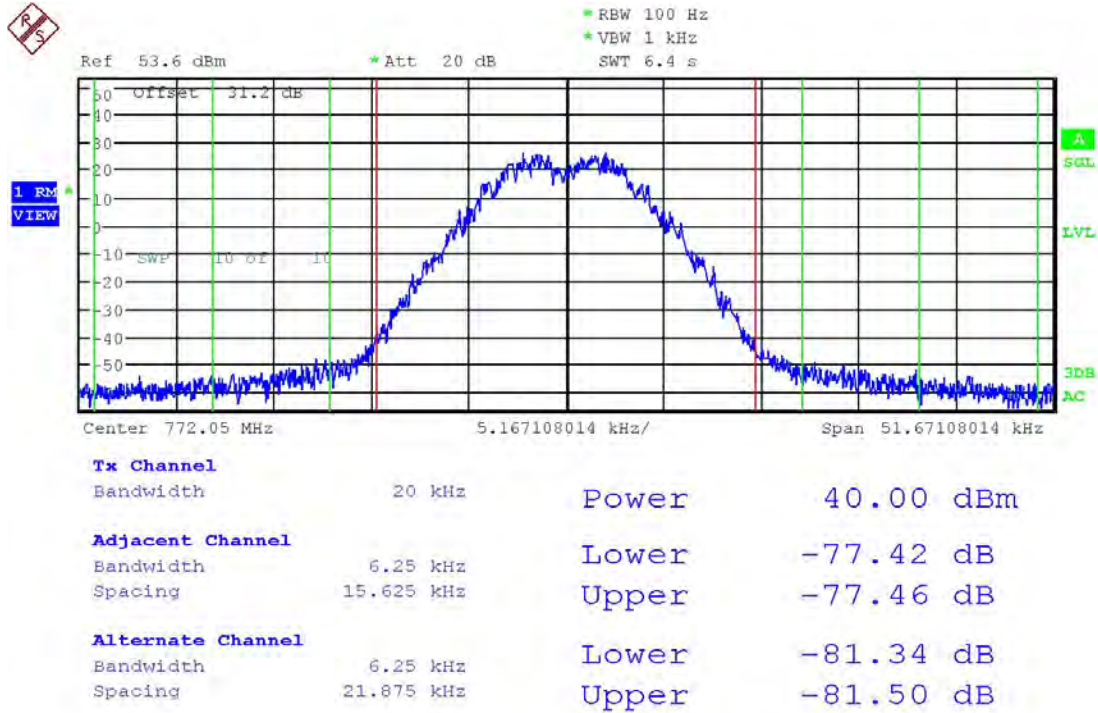


Date: 18.AUG.2015 14:34:49

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 772.05 MHz-8K87F2E

100 KHz Measurement Bandwidth

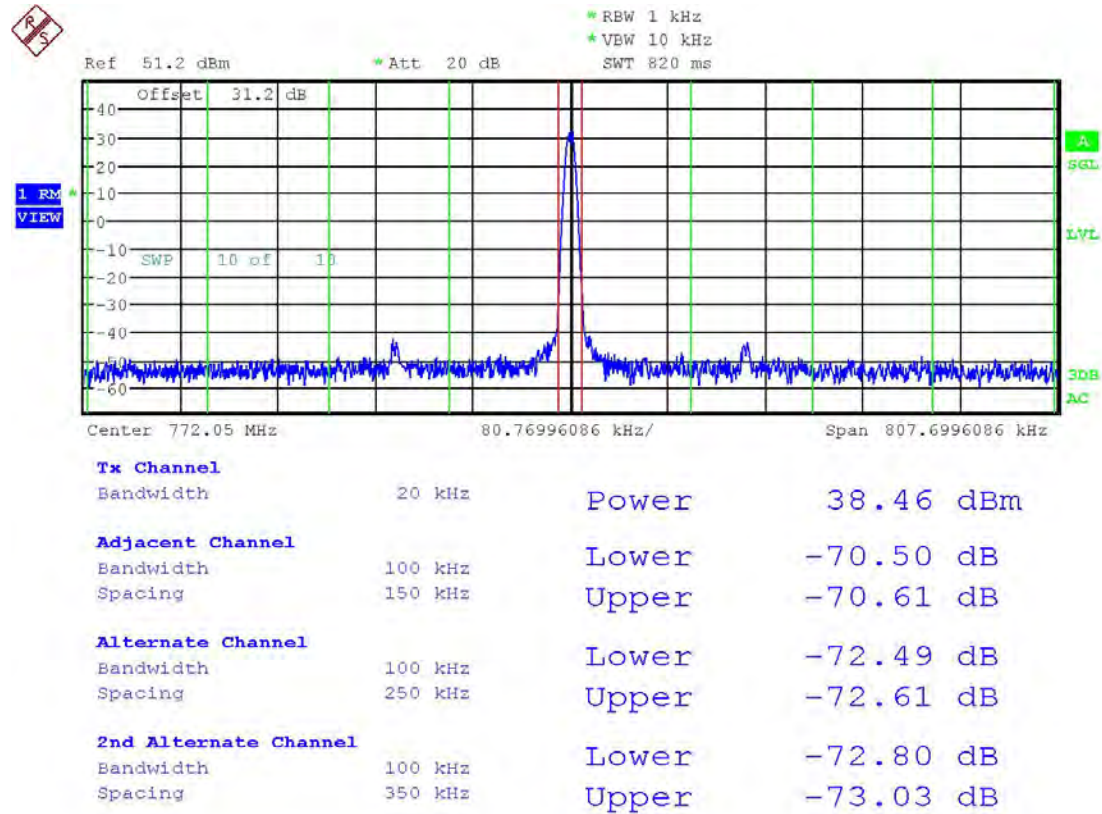

Date: 18.AUG.2015 14:36:28

Swept 30 KHz Bandwidth Measurement


Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper	-79.1	4.1
		Lower	-79.6	4.6
12 MHz to paired rx band	-75	-83.9		8.9
In the paired rx band	-100	-103.7		3.7

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 772.05 MHz-8K17F1E/8K17F1D

6.25 KHz Measurement Bandwidth

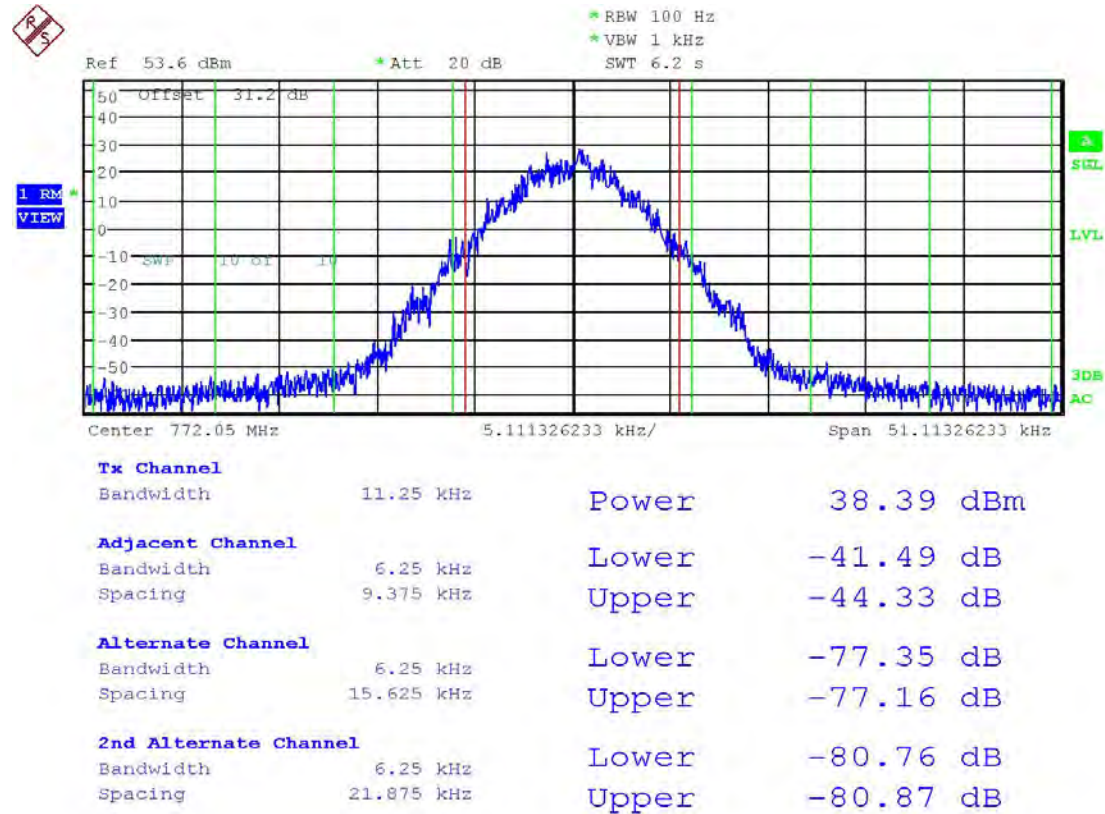


Date: 24.AUG.2015 14:20:53

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 772.05 MHz-8K17F1E/8K17F1D

25 KHz Measurement Bandwidth

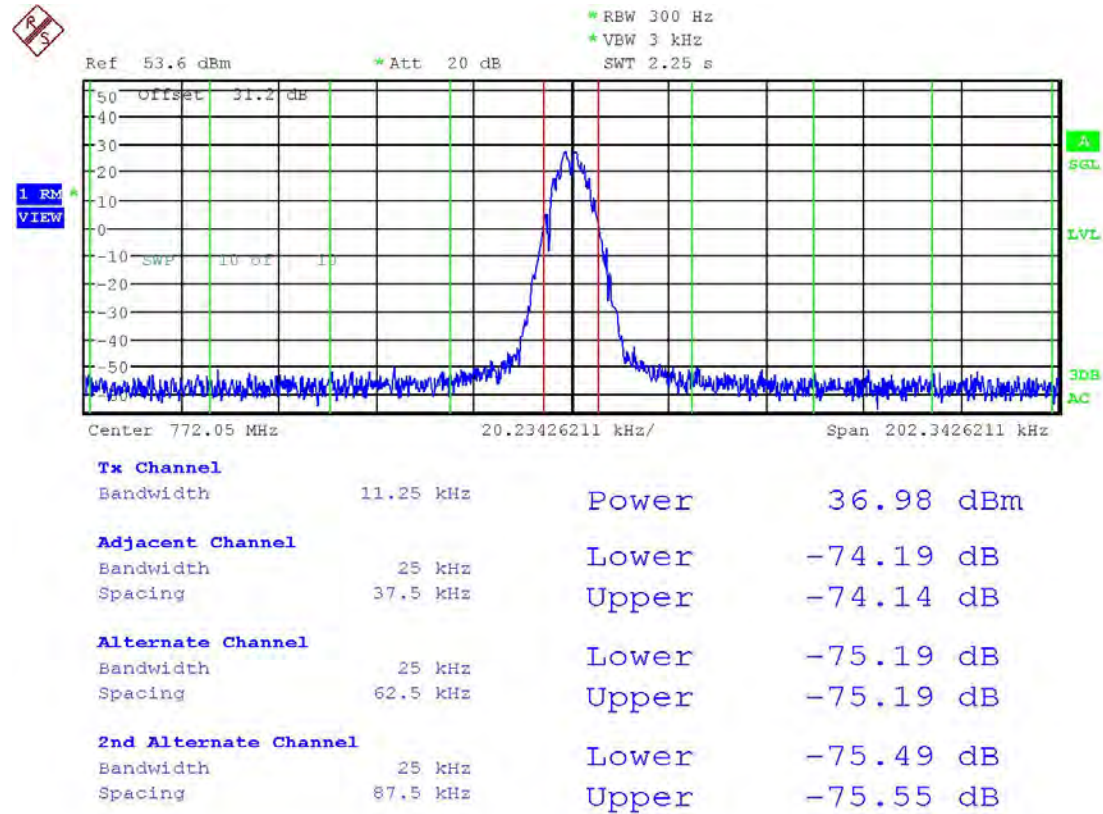


Date: 18.AUG.2015 14:44:40

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 772.05 MHz-8K17F1E/8K17F1D

100 KHz Measurement Bandwidth

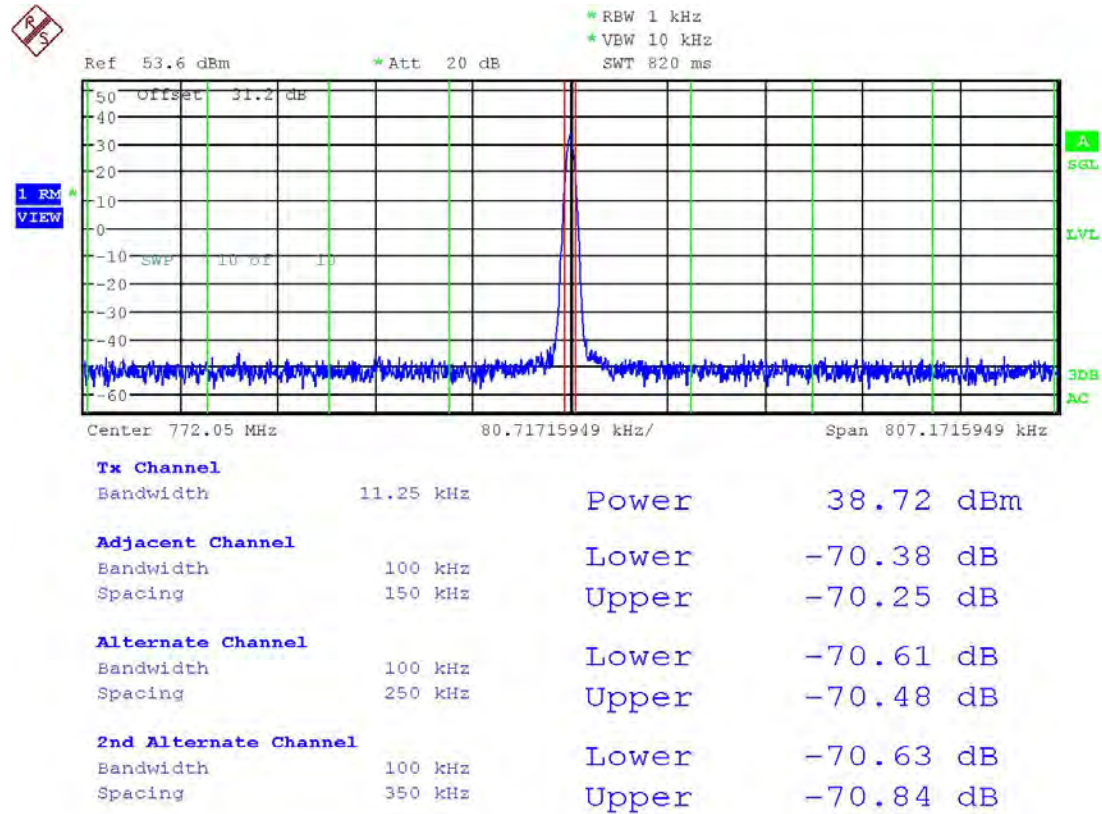

Date: 18.AUG.2015 14:45:16

Swept 30 KHz Bandwidth Measurement


Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper	80.2	-155.2
		Lower	-79.8	4.8
12 MHz to paired rx band	-75	-83.2		8.2
In the paired rx band	-100	-104.8		4.8

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 772.05 MHz-7K80FXE/7K80FXD/7K80FXW

6.25 KHz Measurement Bandwidth

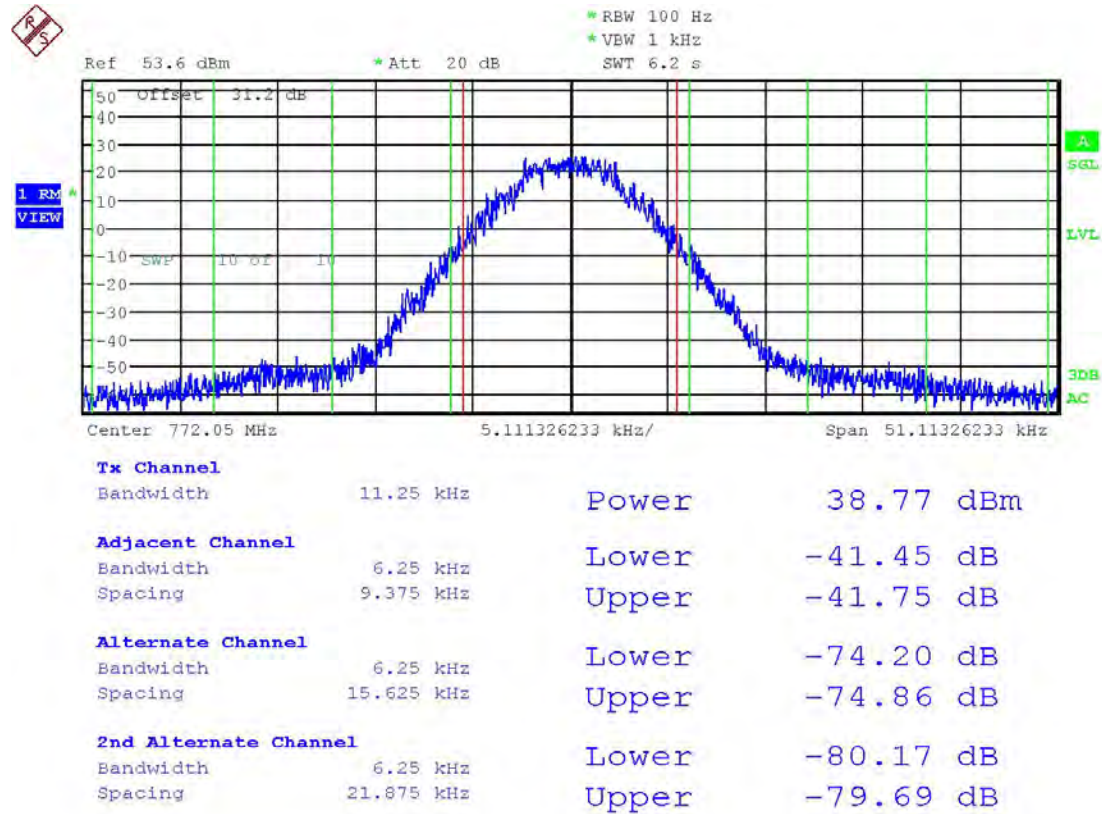


Date: 18.AUG.2015 14:46:59

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 772.05 MHz-7K80FXE/7K80FXD/7K80FXW

25 KHz Measurement Bandwidth

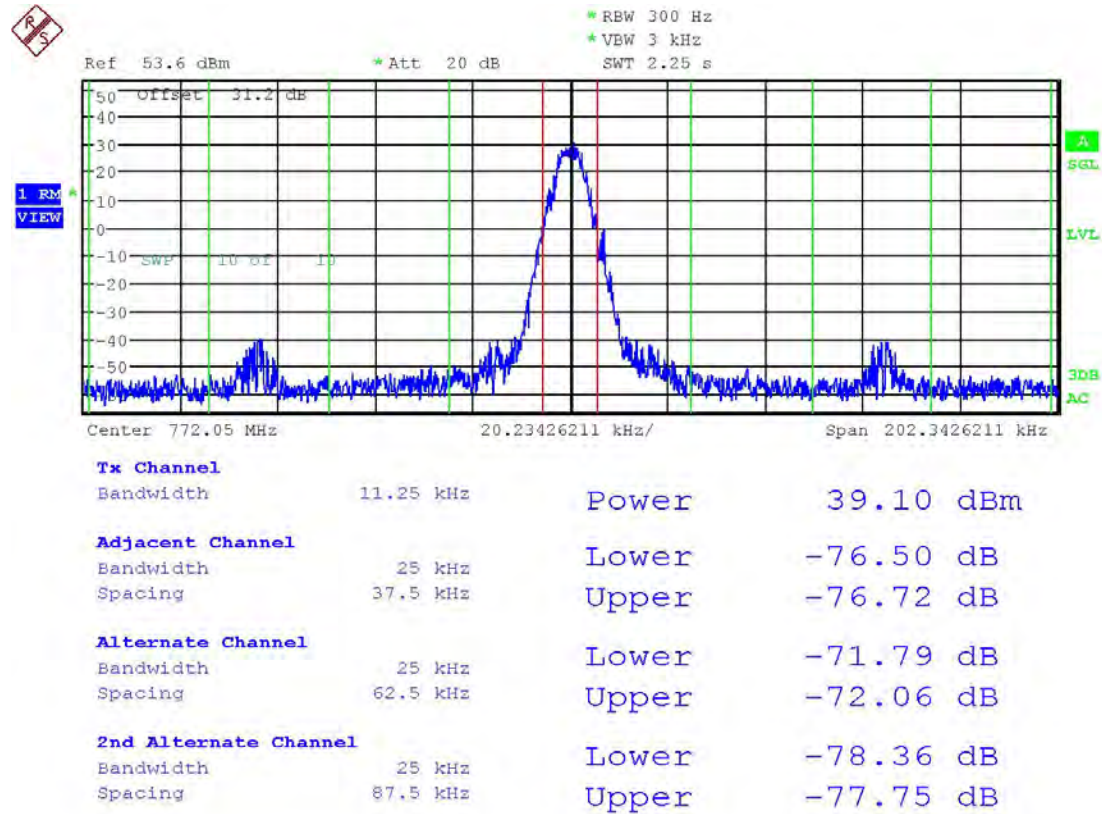


Date: 18.AUG.2015 14:47:40

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 772.05 MHz-7K80FXE/7K80FXD/7K80FXW

100 KHz Measurement Bandwidth

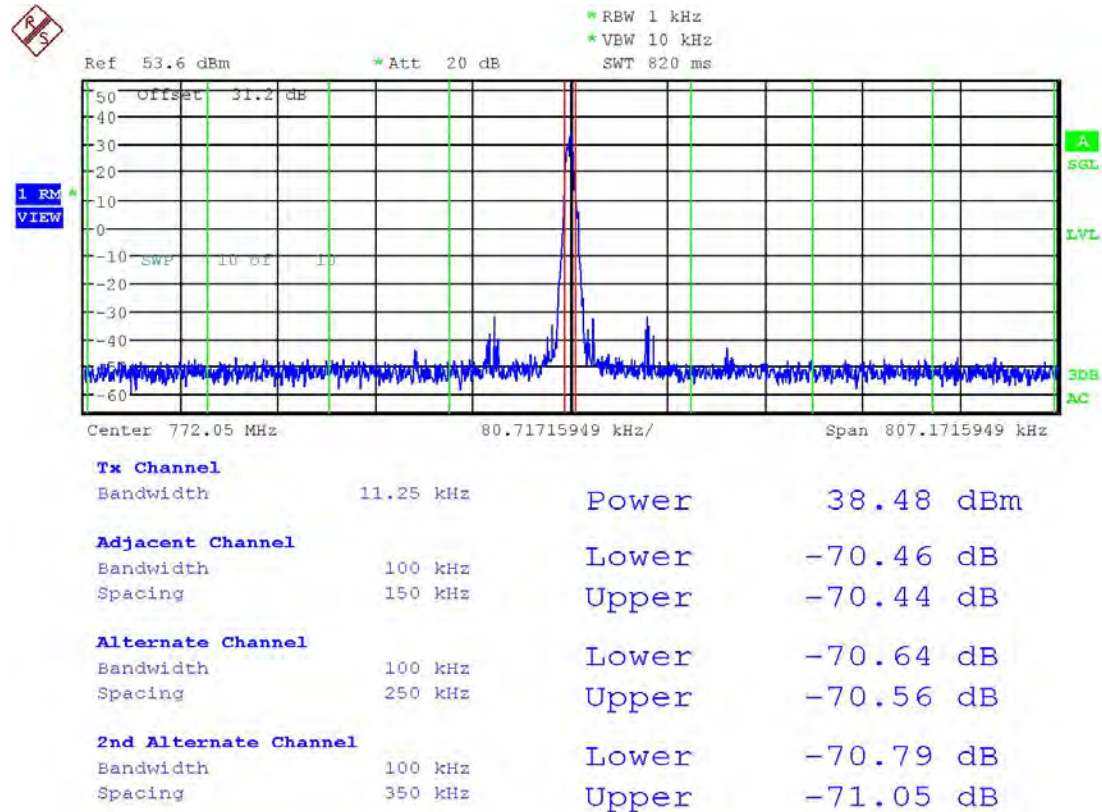

Date: 18.AUG.2015 14:48:32

Swept 30 KHz Bandwidth Measurement


Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper		-75.0
		Lower		-75.0
12 MHz to paired rx band	-75			-75.0
In the paired rx band	-100			-100.0

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 772.05 MHz-5K41F2E

6.25 KHz Measurement Bandwidth

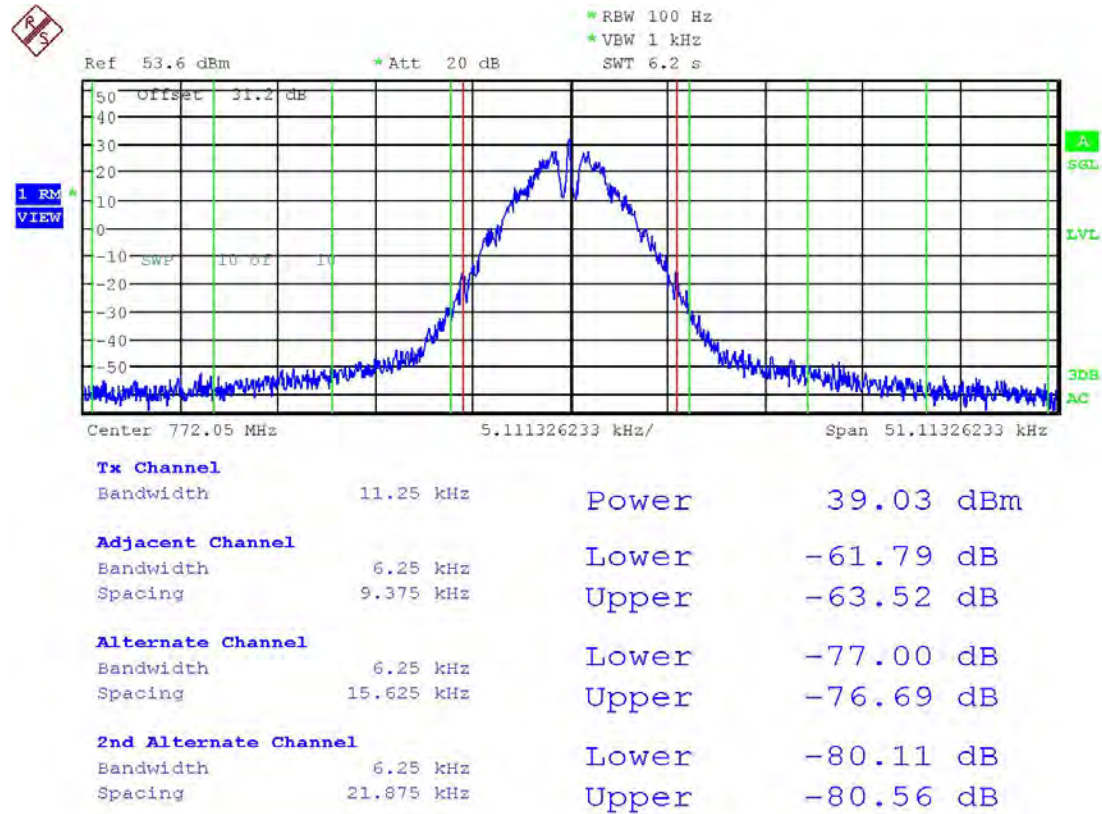


Date: 18.AUG.2015 14:51:23

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 772.05 MHz-5K41F2E

25 KHz Measurement Bandwidth

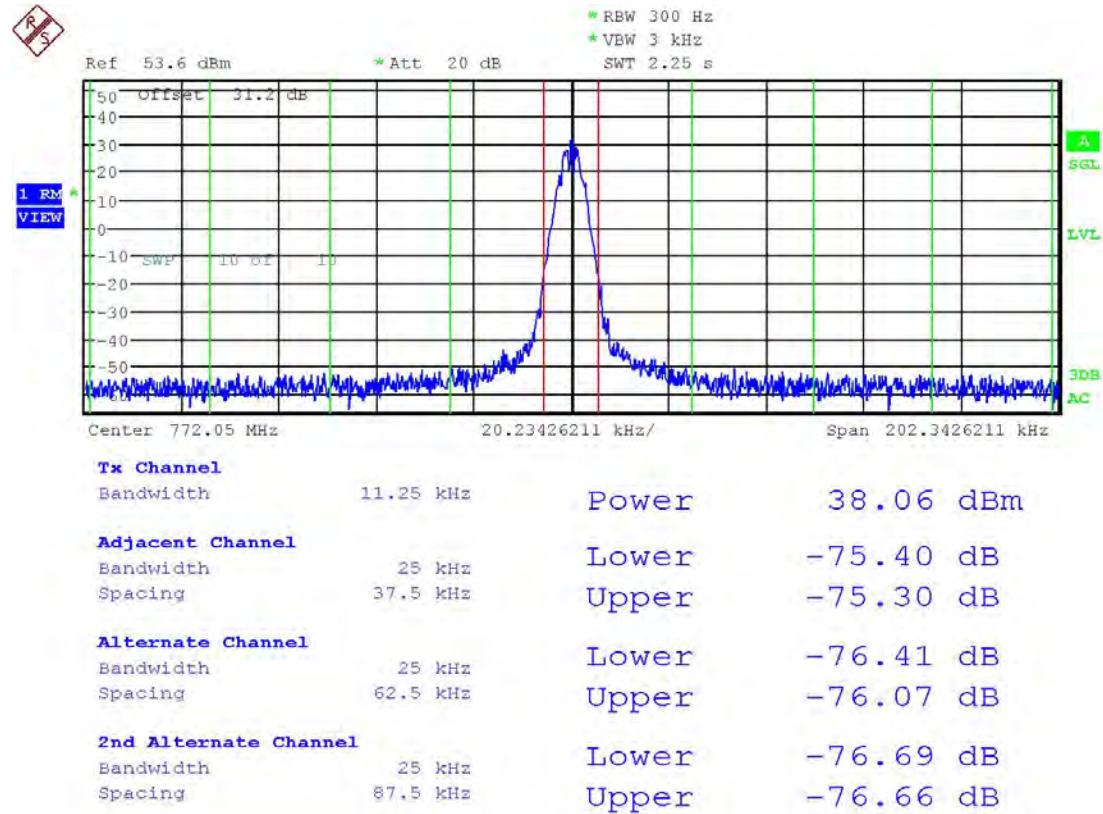


Date: 18.AUG.2015 14:52:06

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 772.05 MHz-5K41F2E

100 KHz Measurement Bandwidth

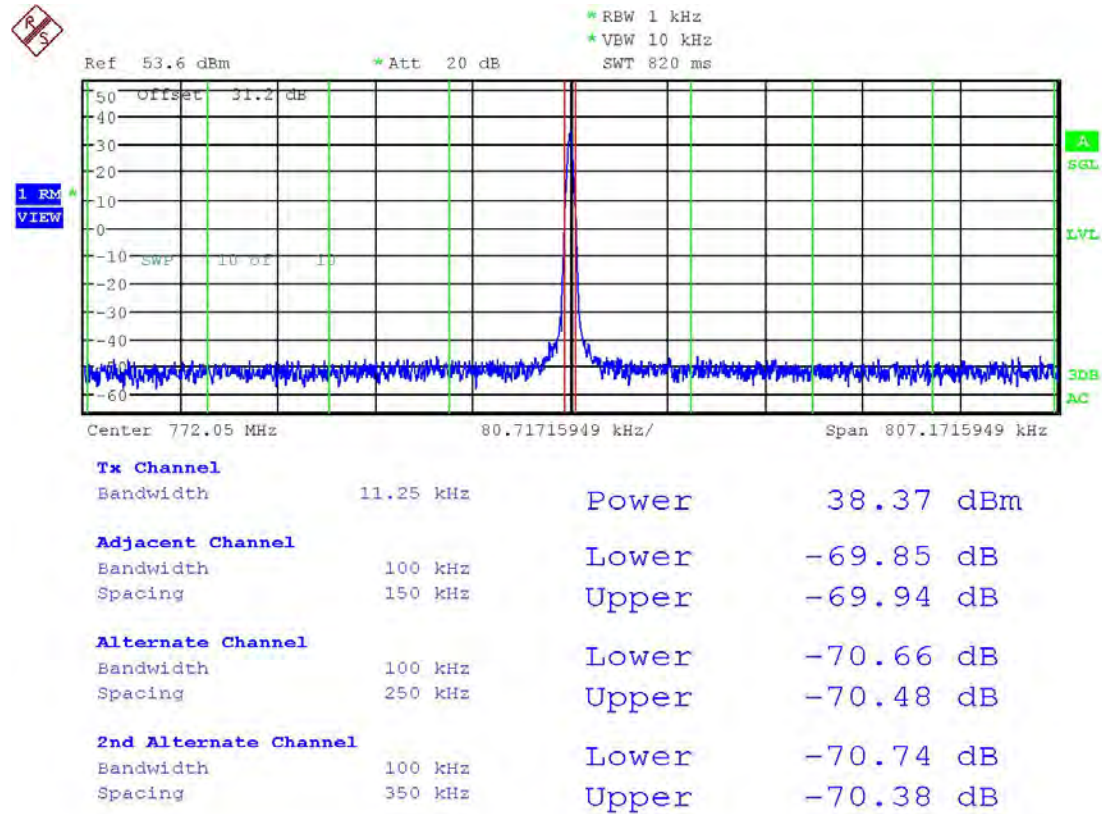

Date: 18.AUG.2015 14:52:36


Swept 30 KHz Bandwidth Measurement

Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper	-79.8	4.8
		Lower	-79.6	4.6
12 MHz to paired rx band	-75	-82.5		7.5
In the paired rx band	-100	-103.6		3.6

[Table of Contents](#)

TEST FREQ. 774.95 MHz-16K0F3E

6.25 KHz Measurement Bandwidth

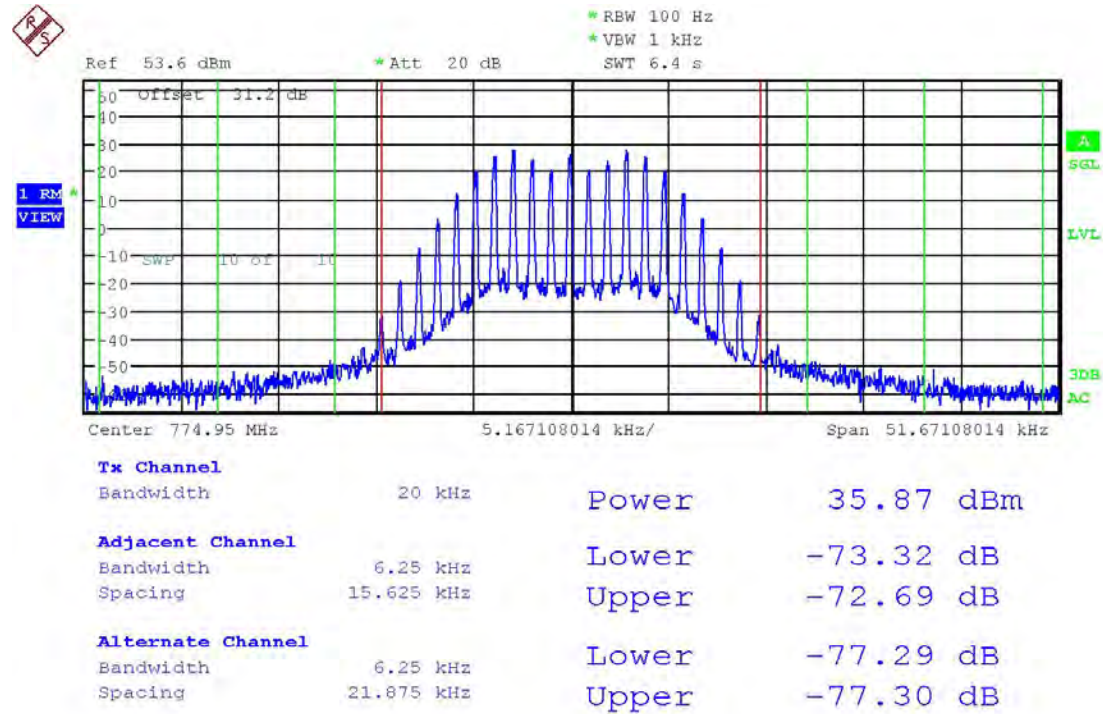


Date: 18.AUG.2015 09:23:07

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-16K0F3E

25 KHz Measurement Bandwidth

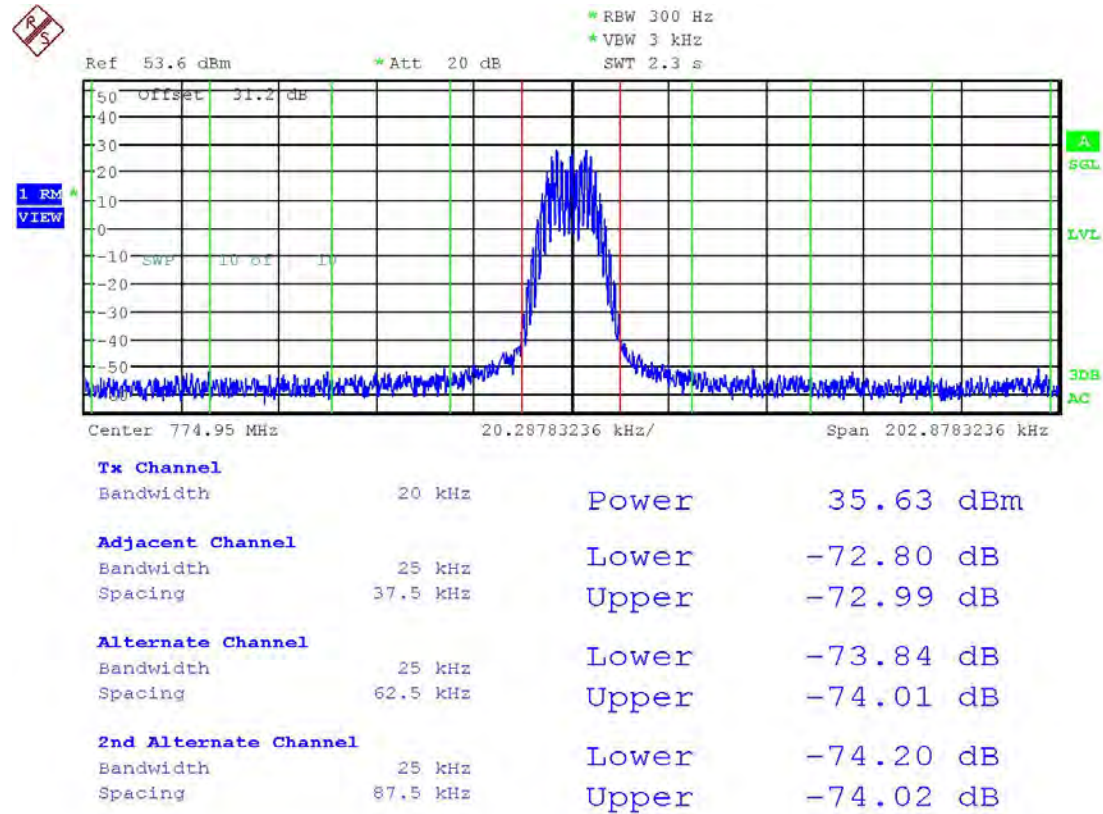


Date: 18.AUG.2015 09:24:09

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-16K0F3E

100 KHz Measurement Bandwidth

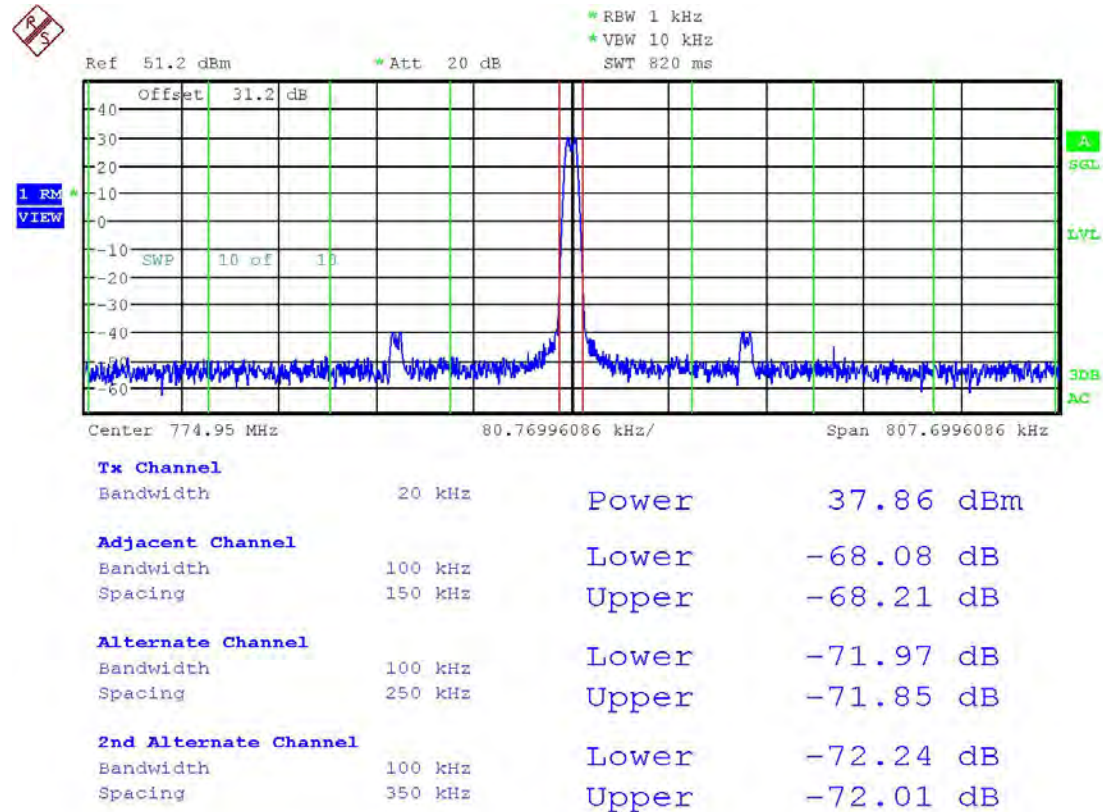

Date: 18.AUG.2015 09:24:52

Swept 30 KHz Bandwidth Measurement


Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper	-79.9	4.9
		Lower	-79.8	4.8
12 MHz to paired rx band	-75	-83.1		8.1
In the paired rx band	-100	-104.2		4.2

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-11K0F3E

6.25 KHz Measurement Bandwidth

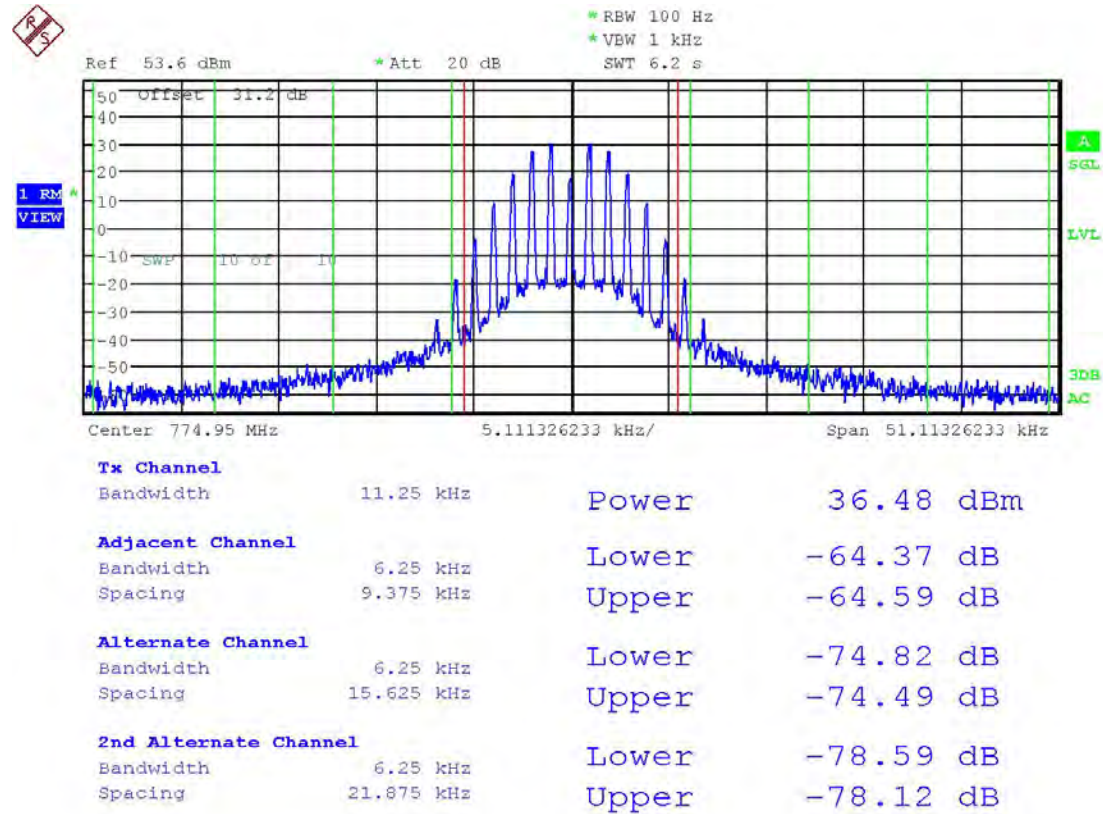


Date: 18.AUG.2015 09:18:36

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-11K0F3E

25 KHz Measurement Bandwidth

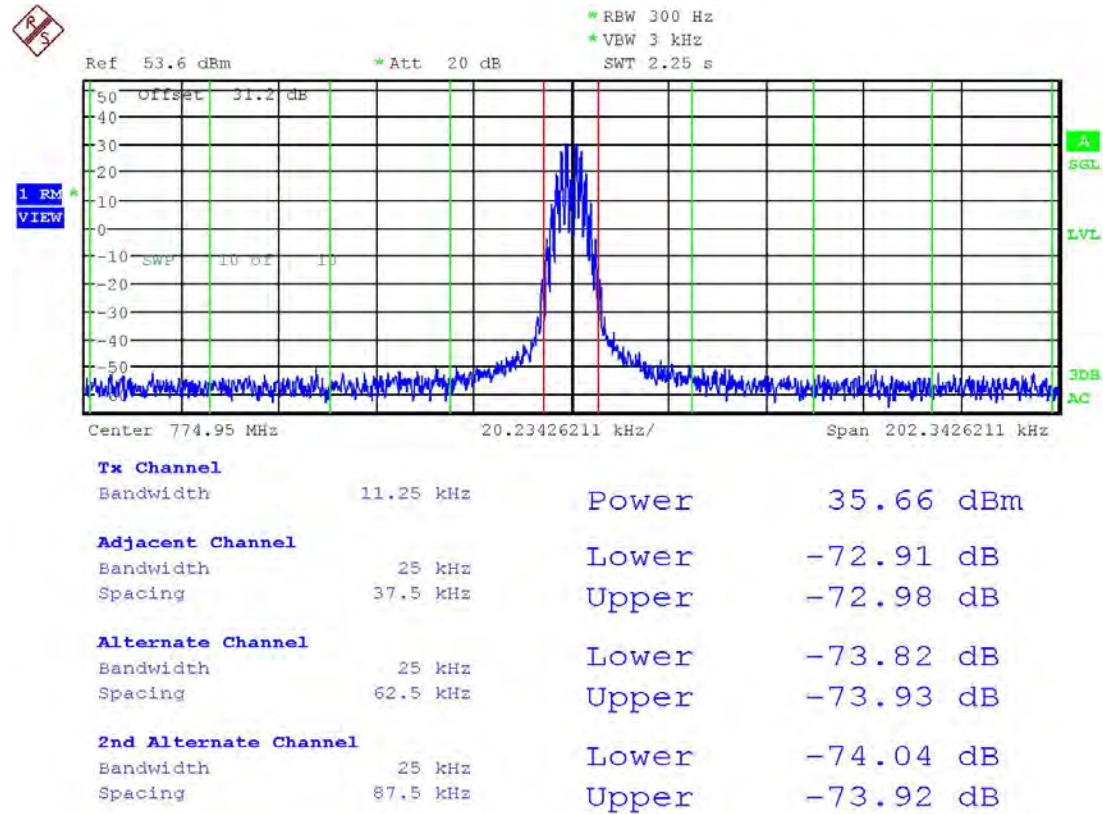


Date: 18.AUG.2015 09:20:04

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-11K0F3E

100 KHz Measurement Bandwidth

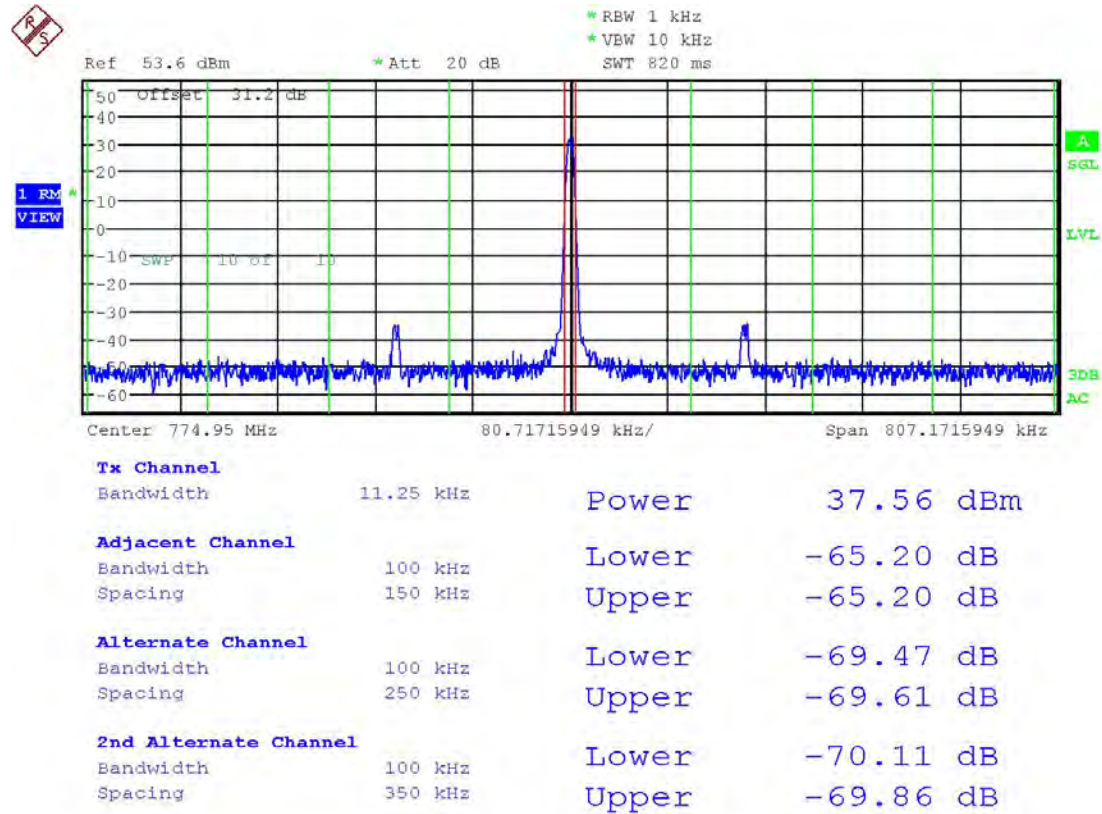

Date: 18.AUG.2015 09:21:08

Swept 30 KHz Bandwidth Measurement


Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper	-79.6	4.6
		Lower	-79.9	4.9
12 MHz to paired rx band	-75	-83.1		8.1
In the paired rx band	-100	-104.6		4.6

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-8K87F2E

6.25 KHz Measurement Bandwidth

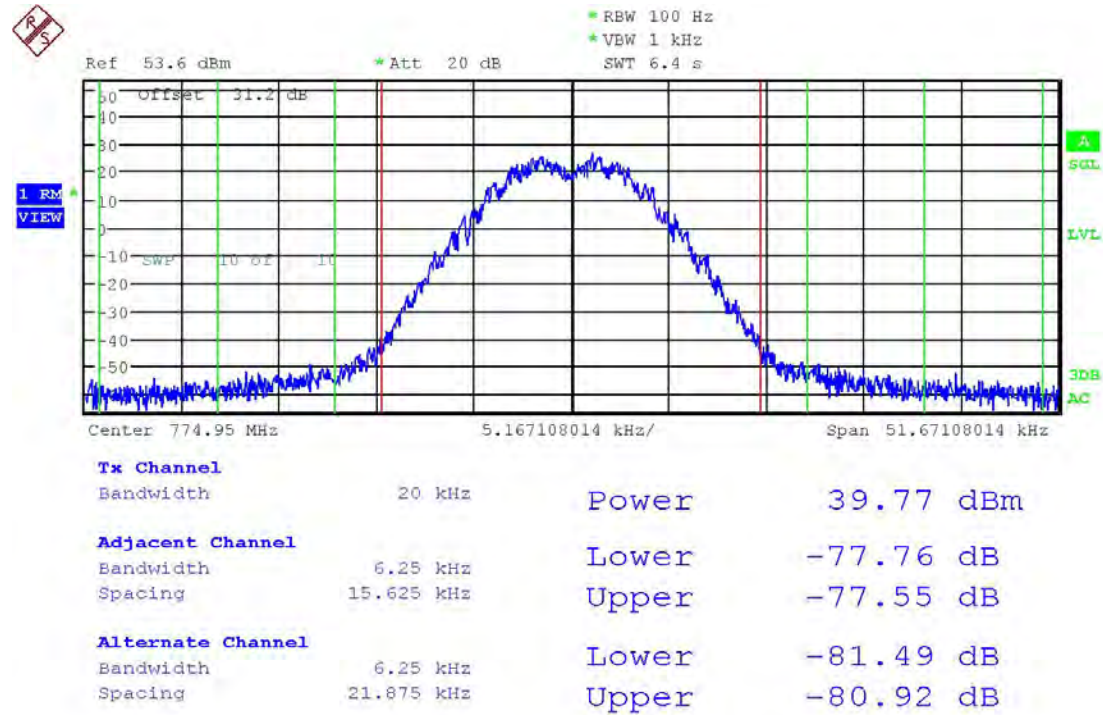


Date: 18.AUG.2015 09:29:13

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-8K87F2E

25 KHz Measurement Bandwidth

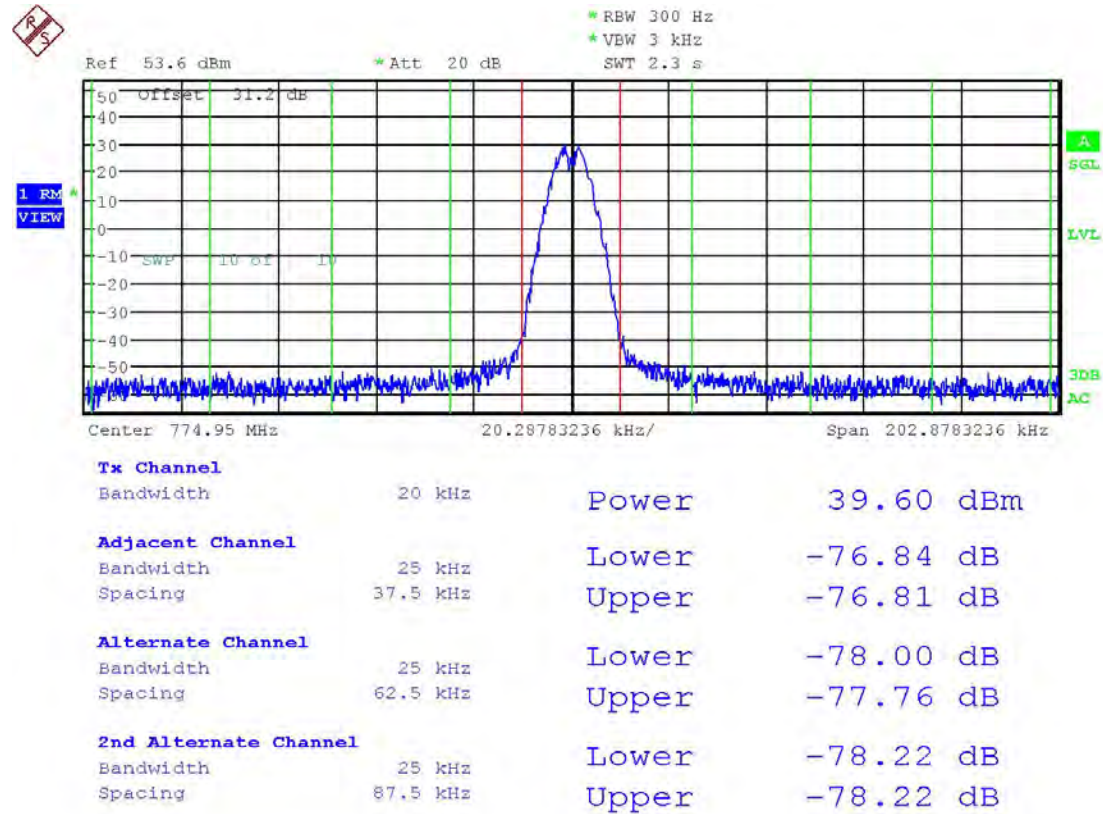


Date: 18.AUG.2015 09:30:27

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-8K87F2E

100 KHz Measurement Bandwidth

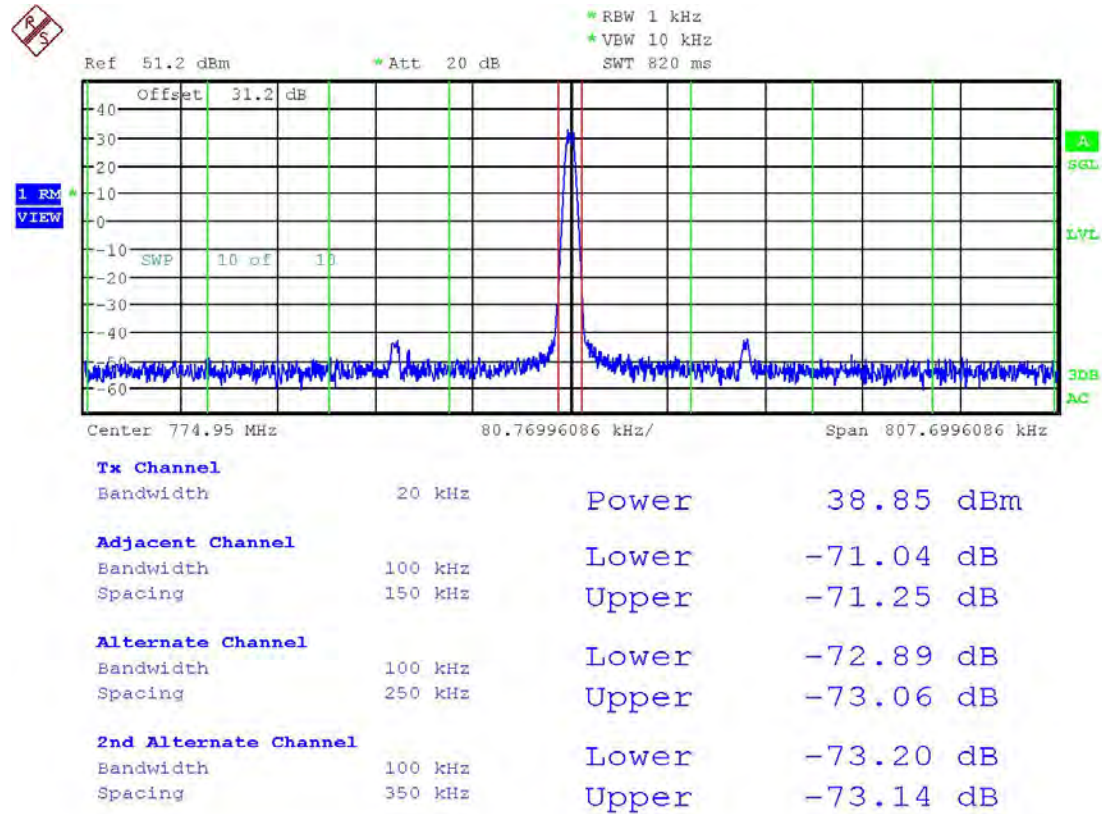

Date: 18.AUG.2015 09:31:00

Swept 30 KHz Bandwidth Measurement


Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper	-79.5	4.5
		Lower	-79.8	4.8
12 MHz to paired rx band	-75	-83.9		8.9
In the paired rx band	-100	-104.3		4.3

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-8K17F1E/8K17F1D

6.25 KHz Measurement Bandwidth

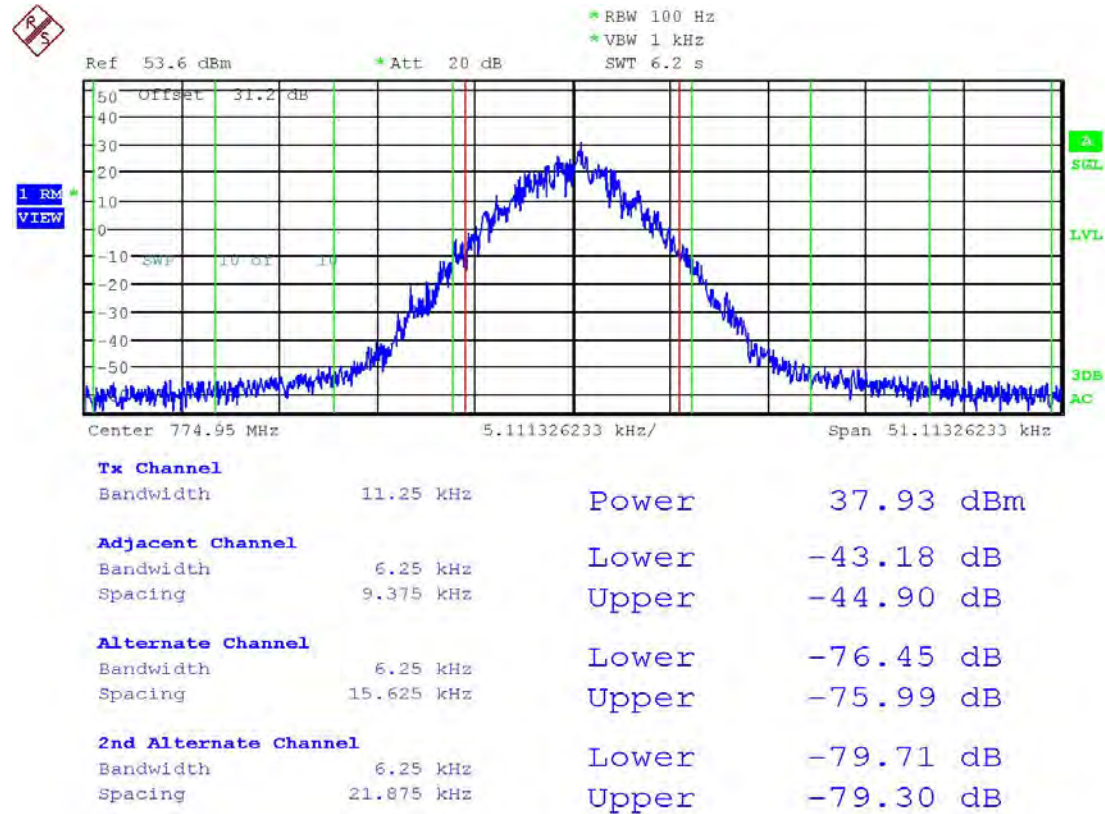


Date: 24.AUG.2015 14:25:48

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-8K17F1E/8K17F1D

25 KHz Measurement Bandwidth

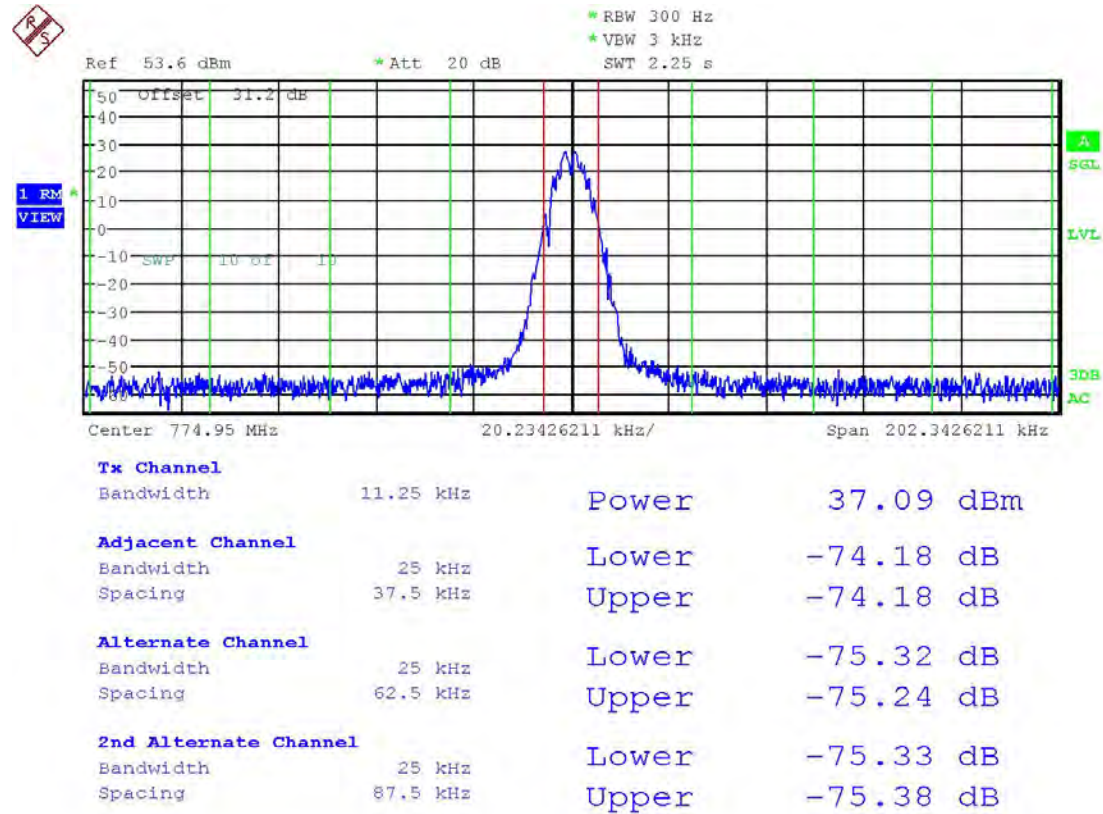


Date: 18.AUG.2015 10:05:48

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-8K17F1E/8K17F1D

100 KHz Measurement Bandwidth

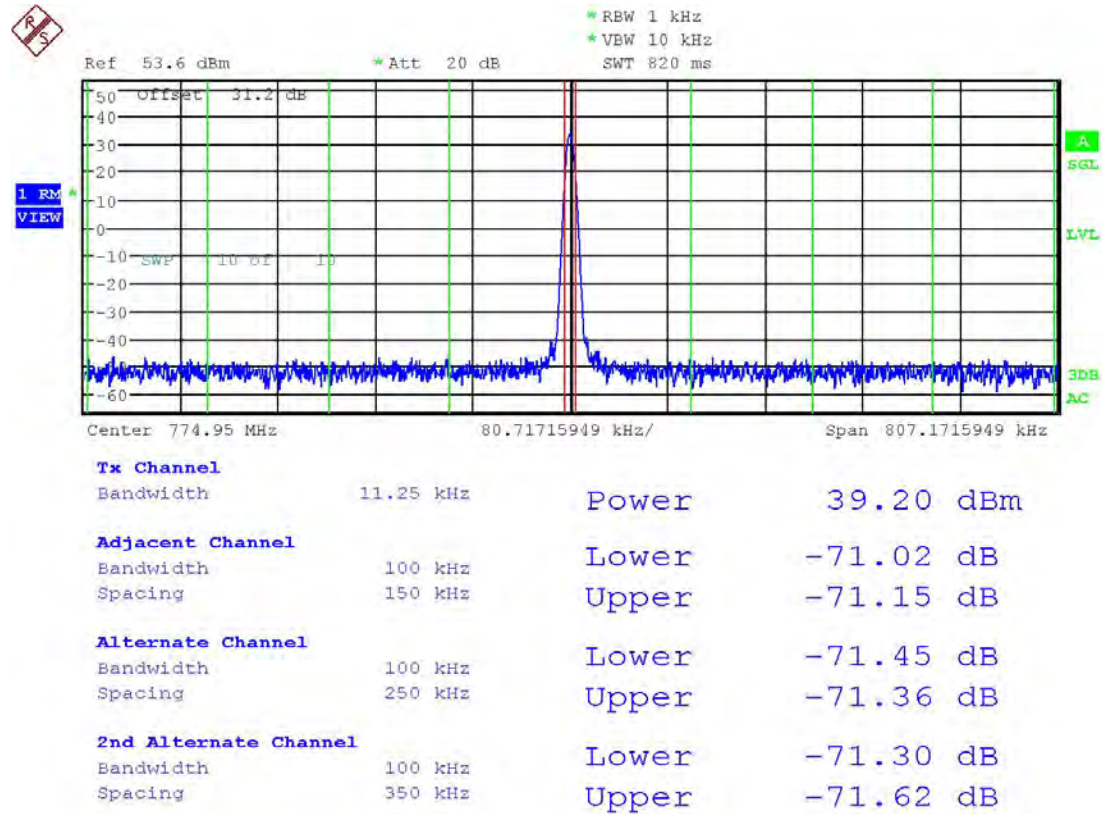

Date: 18.AUG.2015 10:08:10

Swept 30 KHz Bandwidth Measurement


Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper	-79.6	4.6
		Lower	-79.8	4.8
12 MHz to paired rx band	-75	-83.5		8.5
In the paired rx band	-100	-103.9		3.9

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-7K80FXE/7K80FXD/7K80FXW

6.25 KHz Measurement Bandwidth

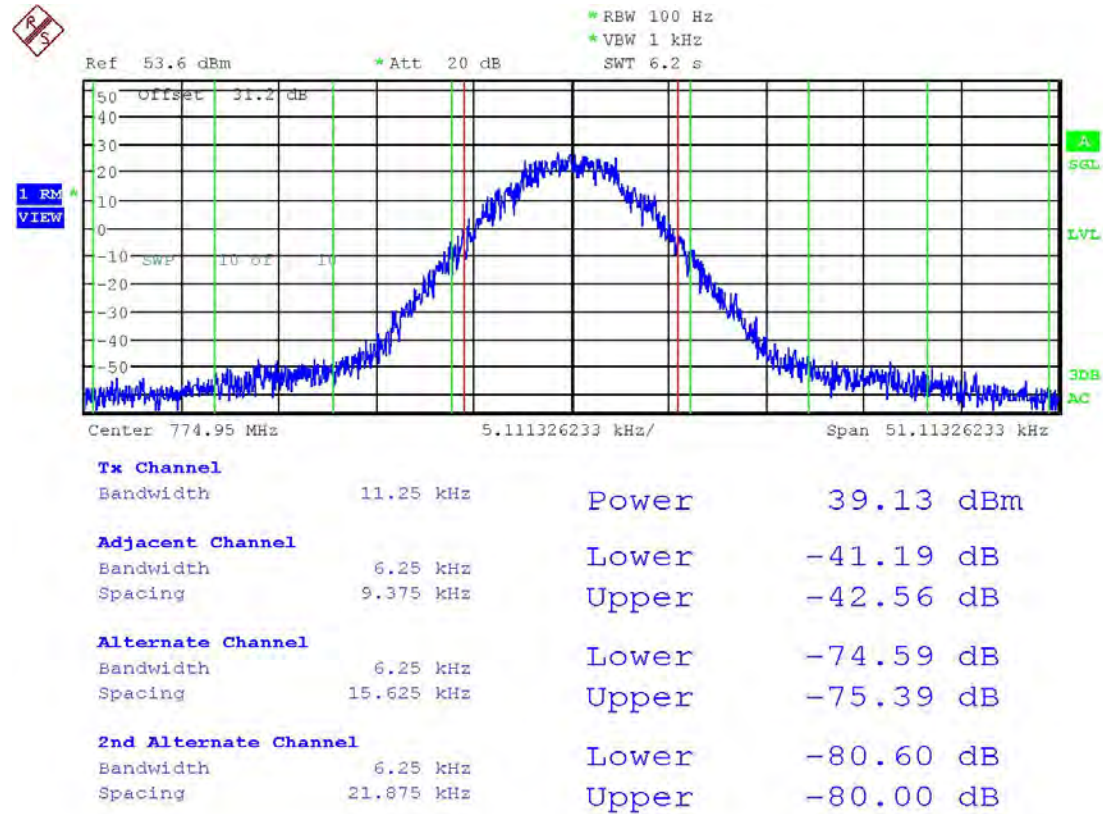


Date: 18.AUG.2015 10:11:05

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-7K80FXE/7K80FXD/7K80FXW

25 KHz Measurement Bandwidth

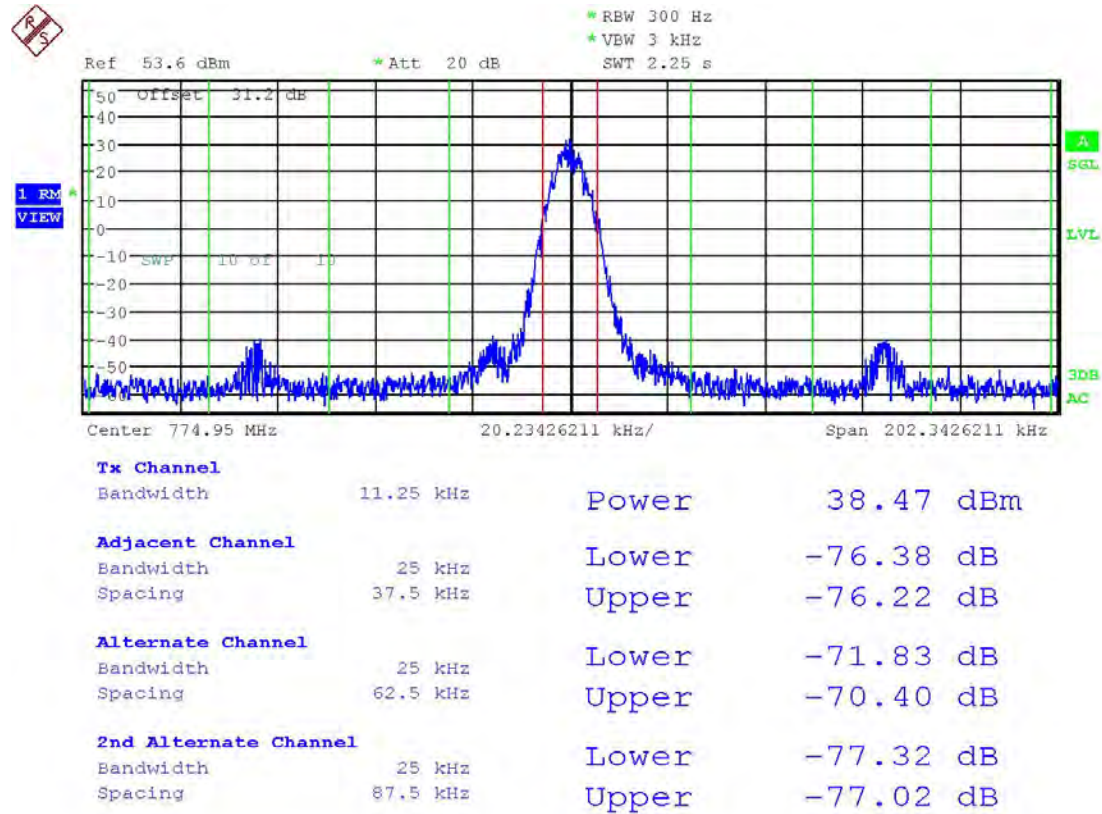


Date: 18.AUG.2015 10:12:03

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-7K80FXE/7K80FXD/7K80FXW

100 KHz Measurement Bandwidth

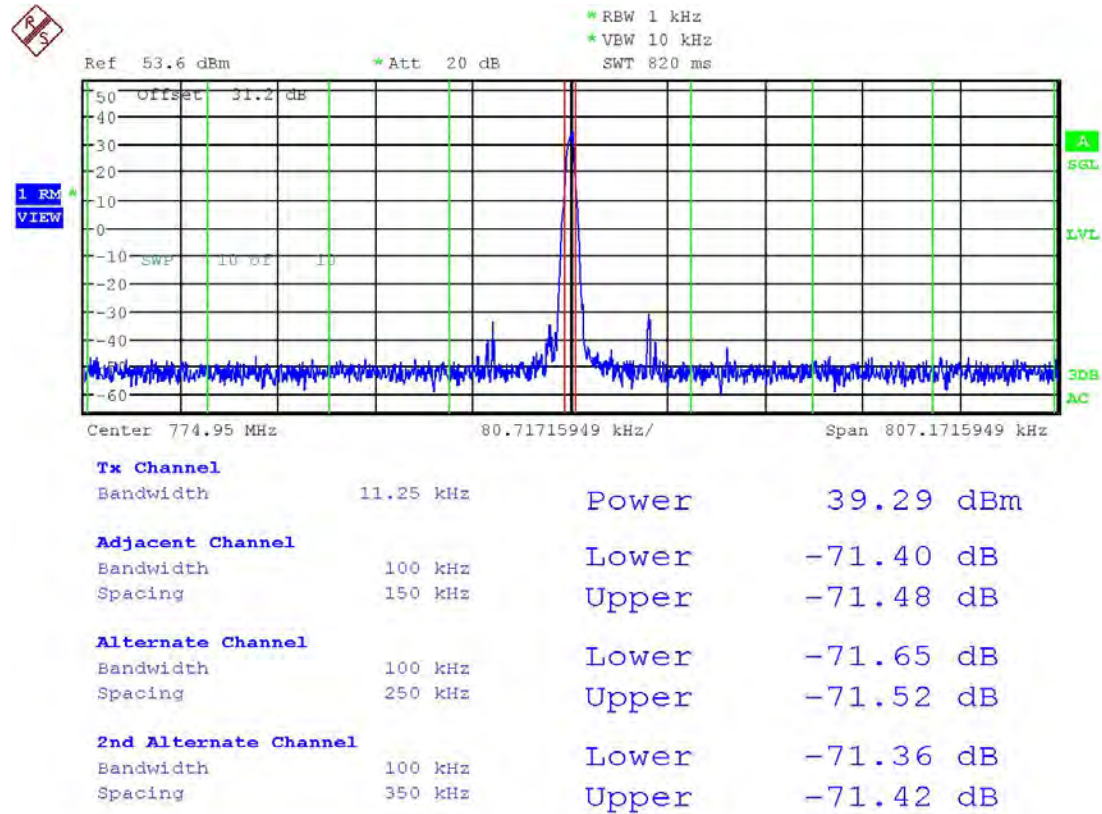

Date: 18.AUG.2015 10:12:35

Swept 30 KHz Bandwidth Measurement


Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper	-79.6	4.6
		Lower	-79.7	4.7
12 MHz to paired rx band	-75	-83.1		8.1
In the paired rx band	-100	-104.9		4.9

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-5K41F2E

6.25 KHz Measurement Bandwidth

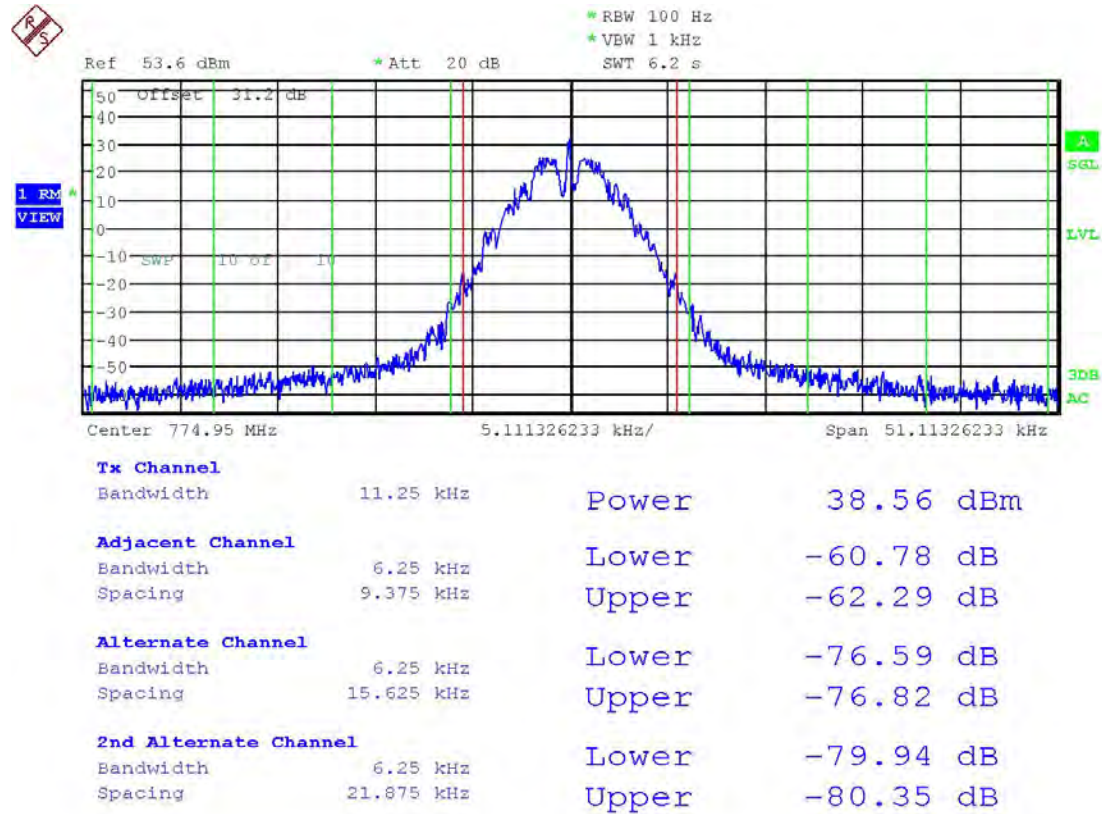


Date: 18.AUG.2015 09:32:59

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-5K41F2E

25 KHz Measurement Bandwidth

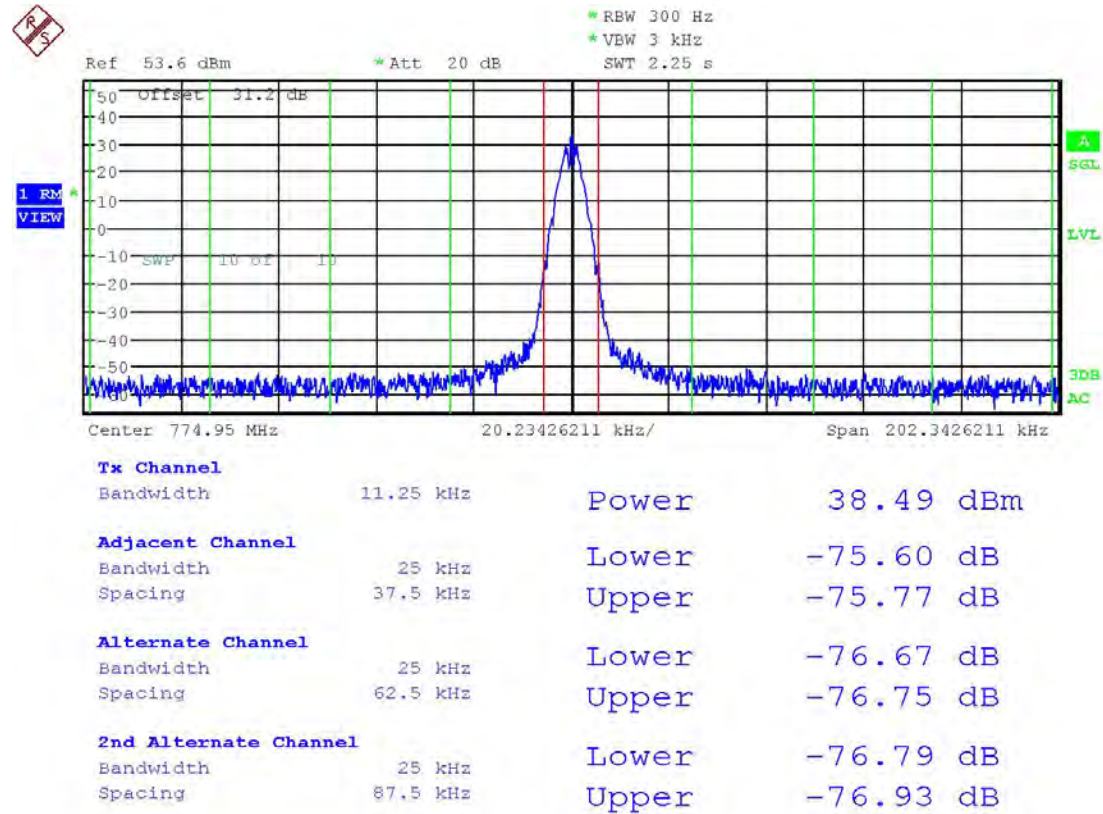


Date: 18.AUG.2015 09:33:55

[Table of Contents](#)

ADJACENT CHANNEL POWER (ACP)

TEST FREQ. 774.95 MHz-5K41F2E

100 KHz Measurement Bandwidth

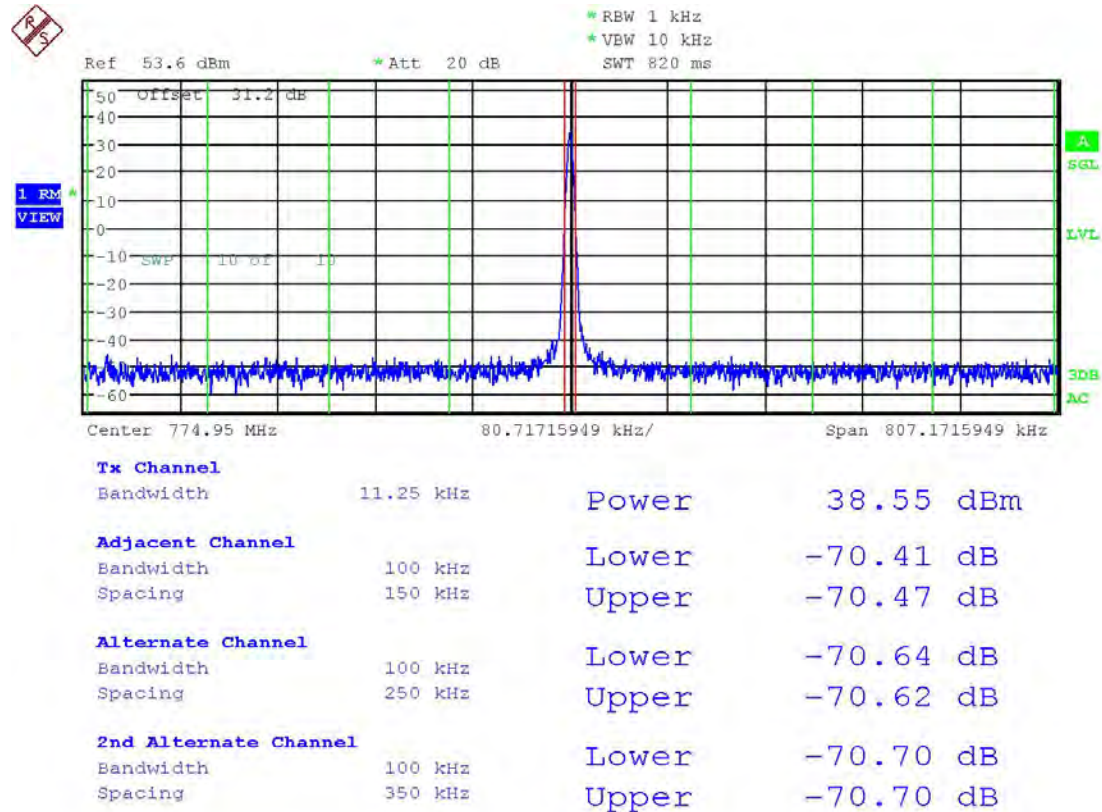

Date: 18.AUG.2015 09:34:22

Swept 30 KHz Bandwidth Measurement

Offset from center frequency	ACP Limit (dBc)	ACP Level (dBc)		Margin (dB)
>400 KHz to 12 MHz	-75	Upper	-79.8	4.8
		Lower	-79.6	4.6
12 MHz to paired rx band	-75	-83.2		8.2
In the paired rx band	-100	-103.9		3.9

[Table of Contents](#)