

A. ADDRESS SETTING

PORT A	PORT B	378	278	3BC	208	218	228	238	248	258	268	318	338	358	398
JP2	JP11	1-2	1-2	1-2	1-2	1-2	1-2	2-3	2-3	2-3	2-3	2-3	2-3	2-3	2-3
JP3	JP12	1-2	1-2	1-2	2-3	2-3	2-3	1-2	1-2	1-2	2-3	2-3	2-3	2-3	2-3
JP4	JP13	1-2	1-2	2-3	1-2	1-2	2-3	1-2	2-3	2-3	2-3	1-2	1-2	2-3	2-3
JP5	JP14	1-2	2-3	1-2	1-2	2-3	1-2	1-2	2-3	1-2	2-3	1-2	2-3	1-2	2-3

B. PRINT MODE

PROT A	JP6	JP7	
PROT B	JP15	JP16	
	2-3	2-3	ECP
	2-3	1-2	EPP
	1-2	2-3	PS2
	1-2	1-2	SPP

C. IRQ SETTING


IRQ : 3,4,5,6,7,9,10,11,12,15

D. DMA CHANNEL (FOR ECP MODE ONLY)

PORT A	JP8		
PORT B	JP17		
	1-2	3-4	DMA CHANNEL 1
	5-6	7-8	DMA CHANNEL 2
	9-10	11-12	DMA CHANNEL 3

Megapower International Corp.

Room 403, No. 24, Wu-Chung 2nd Rd., Hsing Chium,
Taipei, Taiwan, R.O.C. Tel:886-2-22995172~4 Fax:886-2-22995134

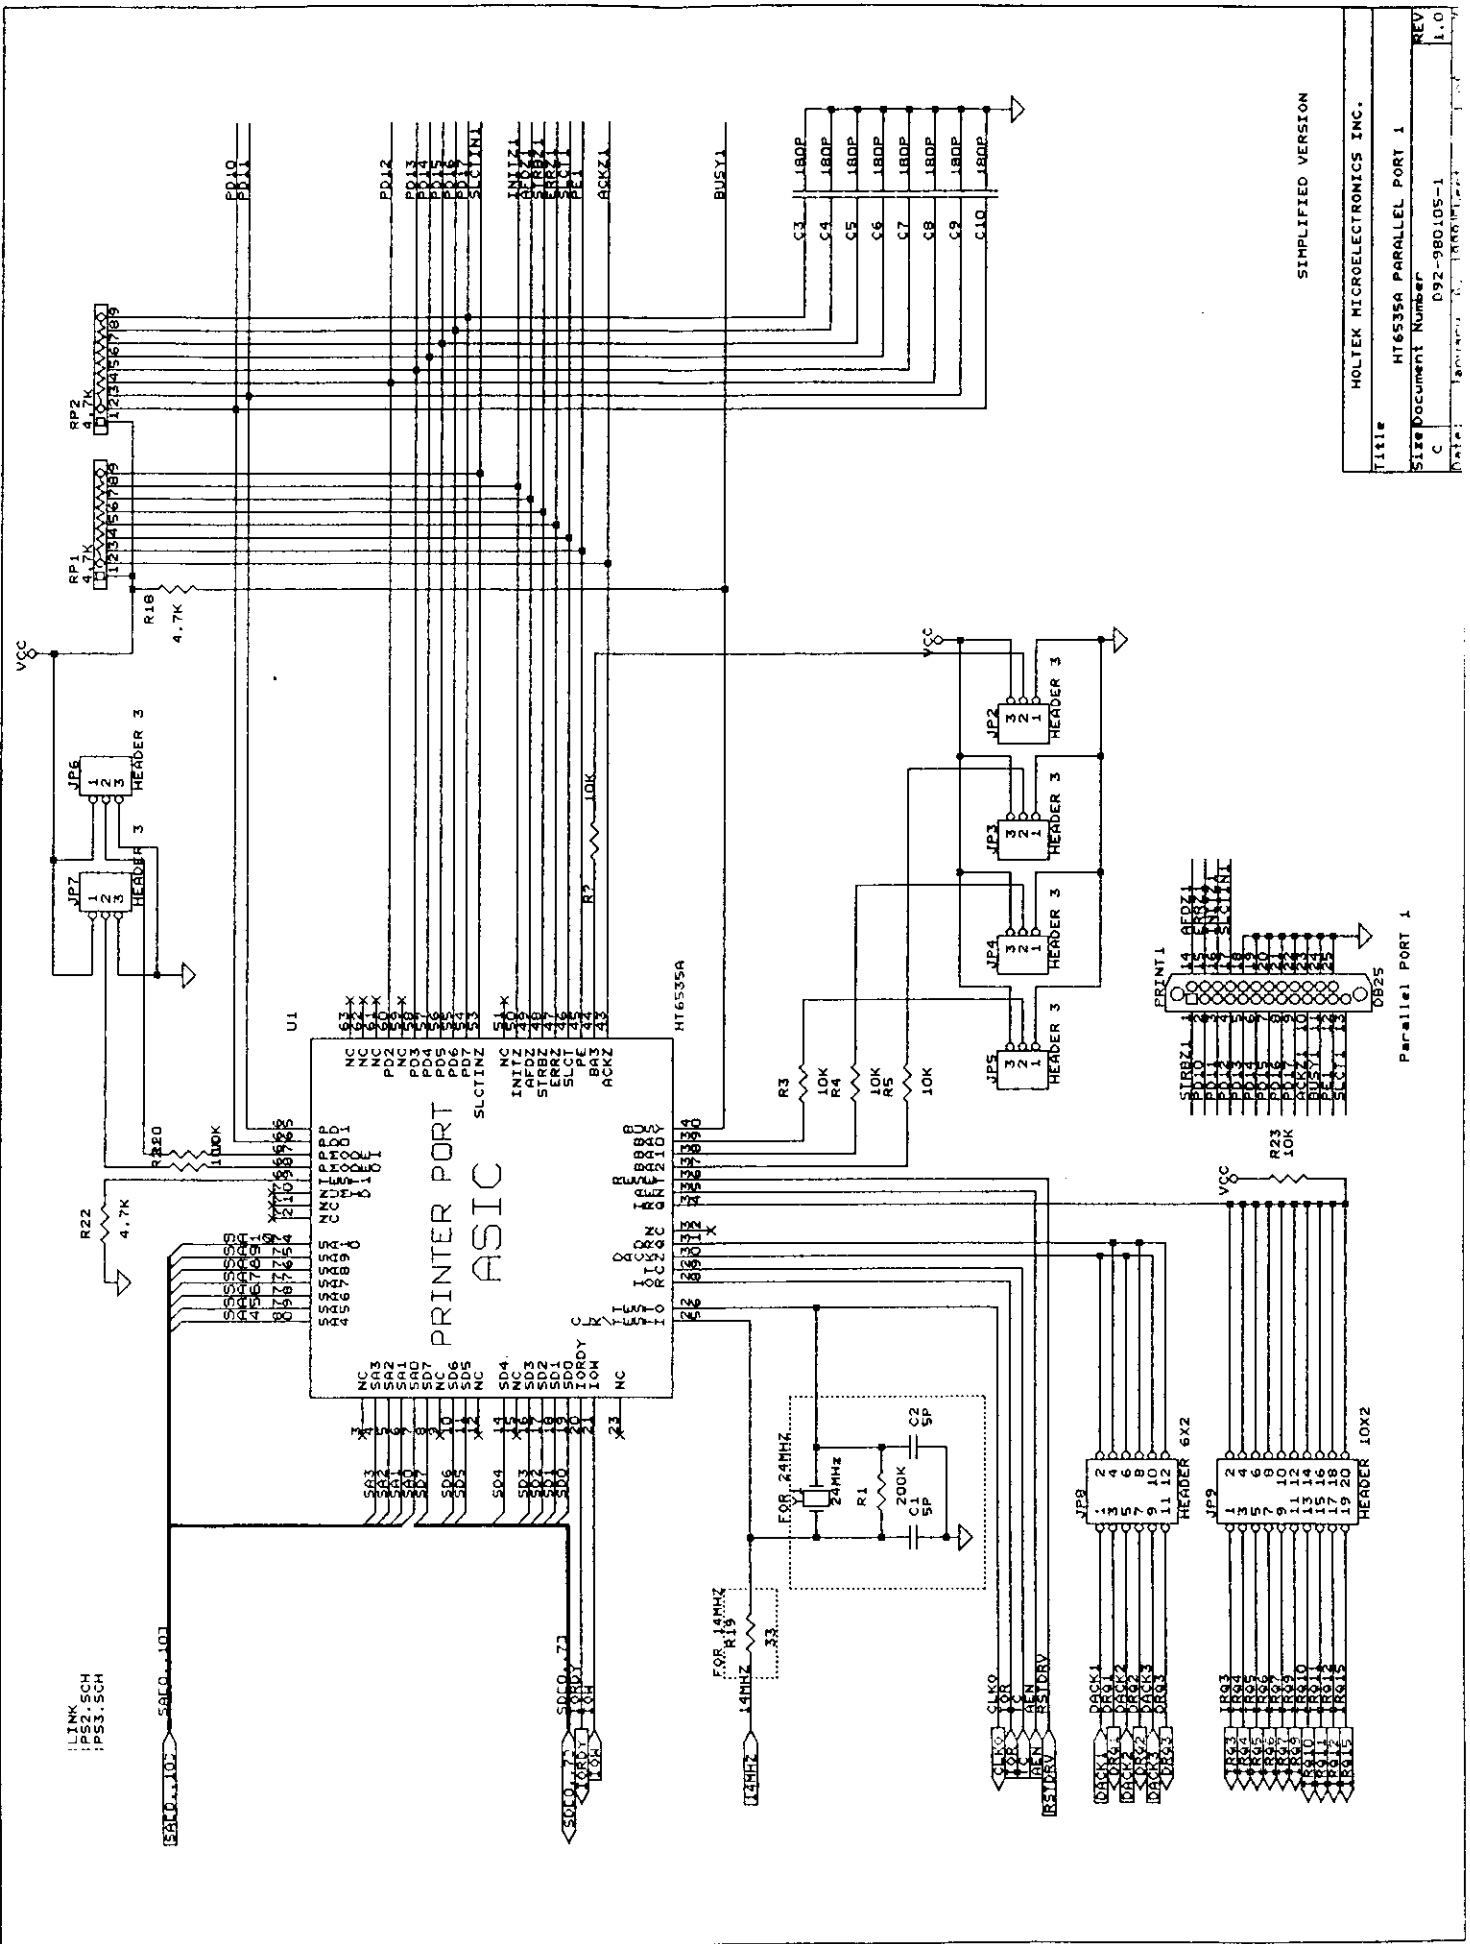

SIMPLIFIED VERSION

Title		HOLTEK MICROELECTRONICS INC.
HT6535A PARALLEL PORT 1		
Size Document Number		D92-980105-1
REV		1.0
C		
Date		1992/01/01

PRINTER PORT 1 JUMPER SETTINGS

JP8 : 3-4 DMA CHANNEL 1
1-2 7-8 DMA CHANNEL 2
5-6 11-12 DMA CHANNEL 3

JP9 : IRQ 3
2-4 IRQ 4
5-6 IRQ 5
7-8 IRQ 6
9-10 IRQ 7
11-12 IRQ 8
13-14 IRQ 9
15-16 IRQ 10
17-18 IRQ 11
19-20 IRQ 12

JP10 : 3 378
2-4 288
5-6 200
7-8 218
9-10 228
11-12 238
13-14 248
15-16 258
17-18 318
19-20 328
328
338

JP11 : SPB
2-4 SPB/2
5-6 ECP
7-8 ECP


PRINTER PORT 2 JUMPER SETTINGS

JP17 : 3-4 DMA CHANNEL 1
1-2 7-8 DMA CHANNEL 2
5-6 11-12 DMA CHANNEL 3


JP18 : IRQ 3
2-4 IRQ 4
5-6 IRQ 5
7-8 IRQ 6
9-10 IRQ 7
11-12 IRQ 8
13-14 IRQ 9
15-16 IRQ 10
17-18 IRQ 11
19-20 IRQ 12

JP19 : 3 378
2-4 288
5-6 200
7-8 218
9-10 228
11-12 238
13-14 248
15-16 258
17-18 318
19-20 328
328
338

JP20 : SPB
2-4 SPB/2
5-6 ECP
7-8 ECP

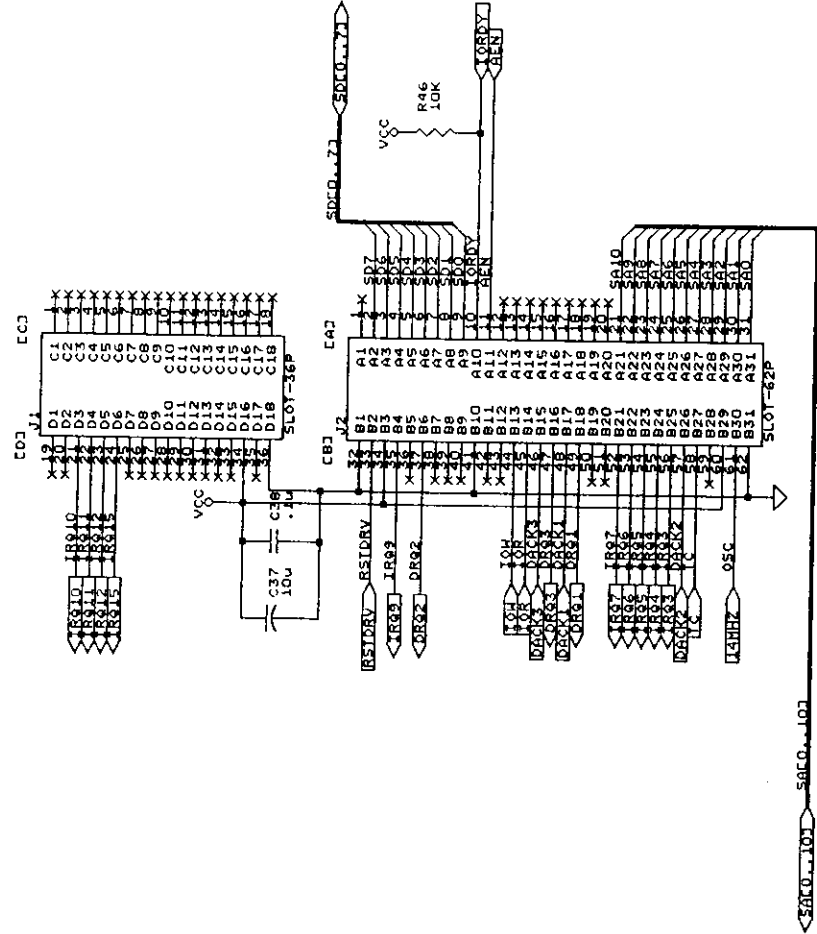

SIMPLIFIED VERSION

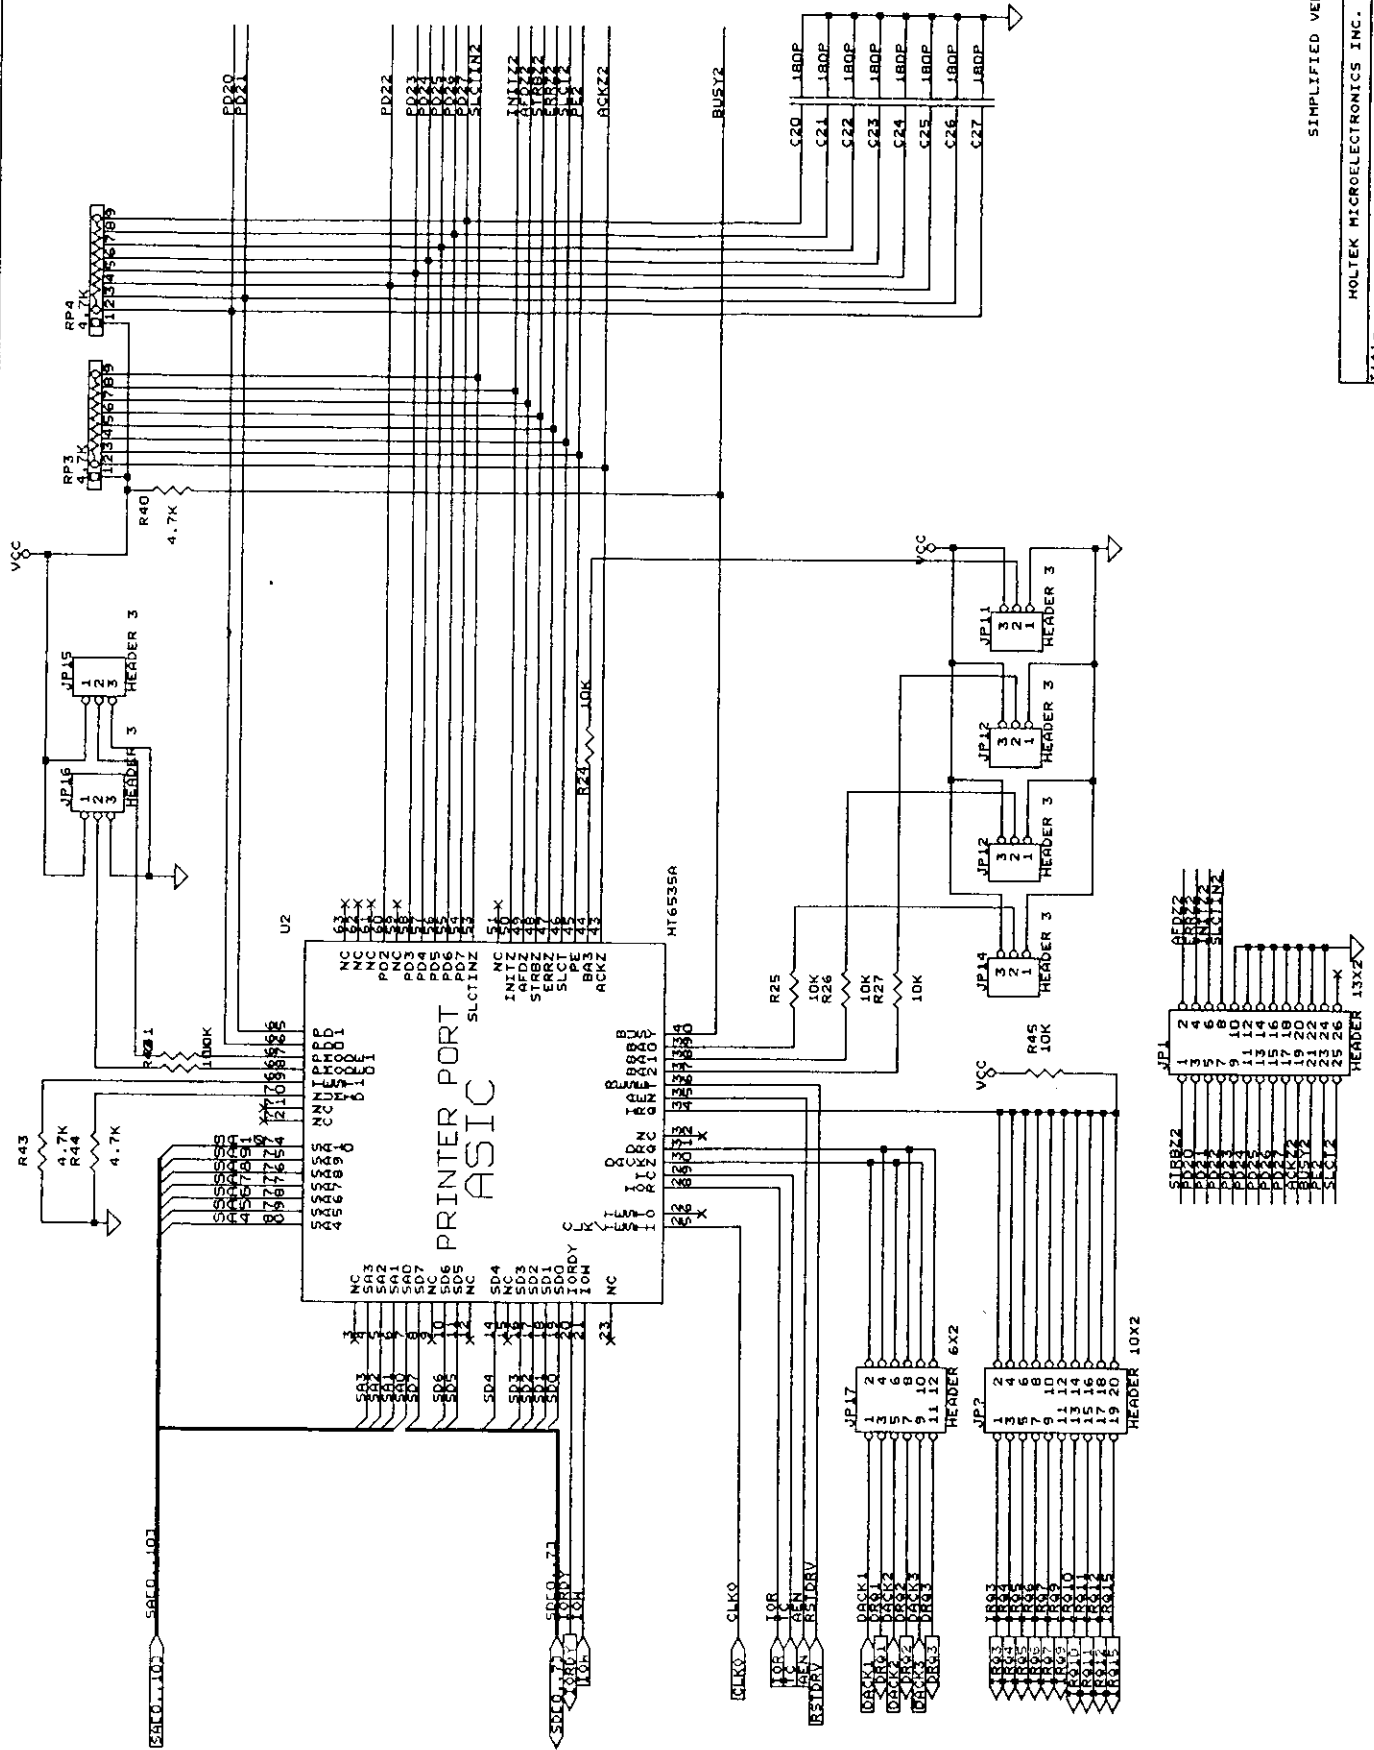

SIMPLIFIED VERSION

Part	HT6535A PARALLEL PORT 2
Size	Document Number
REV	D92-980105-1
	1.0

Parallel Port 2