



DFS MEASUREMENT REPORT

FCC ID: LNQ-WF709F2

Applicant: Actiontec Electronics Inc.

Product: Tri-band Wi-Fi 7 Mesh AP

Model No.: WF-709F2, WF-709F

Brand Name: Actiontec

FCC Classification: Unlicensed National Information Infrastructure (NII)

FCC Rule Part(s): Part 15 Subpart E (Section 15.407)

Type of Device: Master

Result: Complies

Received Date: 2025-04-08

Test Date: 2025-04-08 ~ 2025-04-28

Reviewed By:

Kevin Guo

Approved By:

Robin Wu



The test results relate only to the samples tested.

This equipment has been shown to be capable of compliance with the applicable technical standards as indicated in the measurement report and was tested in accordance with the measurement procedures specified in KDB 905462. Test results reported herein relate only to the item(s) tested.

The test report shall not be reproduced except in full without the written approval of MRT Technology (Suzhou) Co., Ltd.

Revision History

Report No.	Version	Description	Issue Date	Note
R25S1052018-U204	V01	Initial Report	2025-05-14	Valid

CONTENTS

Description	Page
1. General Information	5
1.1. Applicant	5
1.2. Manufacturer	5
1.3. Testing Facility	5
1.4. Product Information.....	6
1.5. Radio Specification under Test	7
1.6. Working Frequencies	8
1.7. Antenna Details.....	9
2. Test Configuration	10
2.1. Test Mode.....	10
2.2. Test Channel	10
2.3. Applied Standards.....	10
2.4. Test Environment Condition	10
3. DFS Detection Thresholds and Radar Test Waveforms	11
3.1. Applicability	11
3.2. DFS Devices Requirements.....	12
3.3. DFS Detection Threshold Values.....	14
3.4. Parameters of DFS Test Signals.....	15
3.5. Conducted Test Setup.....	18
4. Measuring Instrument	19
5. Test Result.....	20
5.1. Summary.....	20
5.2. Radar Waveform Calibration Measurement.....	21
5.2.1. Calibration Setup	21
5.2.2. Calibration Procedure	21
5.2.3. Calibration & Channel Loading Result.....	21
5.3. NII Detection Bandwidth Measurement	22
5.3.1. Test Limit	22
5.3.2. Test Procedure	22
5.3.3. Test Result	23
5.4. Initial Channel Availability Check Time Measurement	24
5.4.1. Test Limit	24
5.4.2. Test Procedure	24
5.4.3. Test Result	24
5.5. Radar Burst at the Beginning of the Channel Availability Check Time Measurement	25

5.5.1.	Test Limit	25
5.5.2.	Test Procedure	25
5.5.3.	Test Result	25
5.6.	Radar Burst at the End of the Channel Availability Check Time Measurement	26
5.6.1.	Test Limit	26
5.6.2.	Test Procedure	26
5.6.3.	Test Result	26
5.7.	In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Measurement	27
5.7.1.	Test Limit	27
5.7.2.	Test Procedure	27
5.7.3.	Test Result	27
5.8.	Statistical Performance Check Measurement	28
5.8.1.	Test Limit	28
5.8.2.	Test Procedure	28
5.8.3.	Test Result	28
Appendix A	- Test Result	29
A.1	Calibration Test Result	29
A.2	Channel Loading Test Result	33
A.3	NII Detection Bandwidth Test Result	35
A.4	Initial Channel Availability Check Time Test Result	42
A.5	Radar Burst at the Beginning of the Channel Availability Check Time Test Result	43
A.6	Radar Burst at the End of the Channel Availability Check Time Test Result	44
A.7	In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Test Result	45
A.8	Statistical Performance Check	47
Appendix B	- Test Setup Photograph	242
Appendix C	- EUT Photograph	243

1. General Information

1.1. Applicant

Actiontec Electronics Inc.

2445 Augustine Drive Suite 501, Santa Clara, California 95054, United States

1.2. Manufacturer

Actiontec Electronics Inc.

2445 Augustine Drive Suite 501, Santa Clara, California 95054, United States

1.3. Testing Facility

☒	Test Site – MRT Suzhou Laboratory Laboratory Location (Suzhou - Wuzhong) D8 Building, No.2 Tian'edang Rd., Wuzhong Economic Development Zone, Suzhou, China Laboratory Location (Suzhou - SIP) 4b Building, Liando U Valley, No.200 Xingpu Rd., Shengpu Town, Suzhou Industrial Park, China Laboratory Location (Suzhou - Wujiang) Building 1, No.1 Xingdong Road, Wujiang, Suzhou, Jiangsu, People's Republic of China Laboratory Accreditations <table border="0"> <tr> <td>A2LA: 3628.01</td> <td>CNAS: L10551</td> </tr> <tr> <td>FCC: CN1166</td> <td>ISED: CN0001</td> </tr> <tr> <td>VCCI:</td> <td> ☐R-20025 ☐G-20034 ☐C-20020 ☐T-20020 ☐R-20141 ☐G-20134 ☐C-20103 ☐T-20104 </td> </tr> </table>	A2LA: 3628.01	CNAS: L10551	FCC: CN1166	ISED: CN0001	VCCI:	☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104
A2LA: 3628.01	CNAS: L10551						
FCC: CN1166	ISED: CN0001						
VCCI:	☐ R-20025 ☐ G-20034 ☐ C-20020 ☐ T-20020 ☐ R-20141 ☐ G-20134 ☐ C-20103 ☐ T-20104						
☐	Test Site – MRT Shenzhen Laboratory Laboratory Location (Shenzhen) 1G, Building A, Junxiangda Building, Zhongshanyuan Road West, Nanshan District, Shenzhen, China Laboratory Accreditations <table border="0"> <tr> <td>A2LA: 3628.02</td> <td>CNAS: L10551</td> </tr> <tr> <td>FCC: CN1284</td> <td>ISED: CN0105</td> </tr> </table>	A2LA: 3628.02	CNAS: L10551	FCC: CN1284	ISED: CN0105		
A2LA: 3628.02	CNAS: L10551						
FCC: CN1284	ISED: CN0105						
☐	Test Site – MRT Taiwan Laboratory Laboratory Location (Taiwan) No. 38, Fuxing 2nd Rd., Guishan Dist., Taoyuan City 333, Taiwan (R.O.C.) Laboratory Accreditations <table border="0"> <tr> <td>TAF: 3261</td> <td></td> </tr> <tr> <td>FCC: 291082, TW3261</td> <td>ISED: TW3261</td> </tr> </table>	TAF: 3261		FCC: 291082, TW3261	ISED: TW3261		
TAF: 3261							
FCC: 291082, TW3261	ISED: TW3261						

1.4. Product Information

Product Name	Tri-band Wi-Fi 7 Mesh AP
Model No.	WF-709F2, WF-709F
Brand Name	Actiontec
EUT Identification No.	20250408Sample#02 & 20250408Sample#03
Bluetooth Specification	Bluetooth_LE
Wi-Fi Specification	802.11a/b/g/n/ac/ax/be
Antenna Specification	Refer to clause 1.7
Operating Temp.	0 ~ 40 °C
Power Type	AC/DC Adapter
Accessories	
AC/DC Adapter #1	Model No.: MS-V1500R120-018H0-US Input: 100-240V ~ 50/60Hz, 0.6A max Output: 12.0V = 1.5A
AC/DC Adapter #2	Model No.: KL-WA120150-E2 Input: 100-240V ~ 50/60Hz, 0.6A Output: 12.0V = 1.5A
Notes:	
- The information about EUT was provided by the manufacturer, and the accuracy of the information should be the responsibility of the manufacturer. - There are not any hardware or software differences between WF-709F2 and WF-709F. WF-709F2 is selected for all tests.	

1.5. Radio Specification under Test

Frequency Range	802.11a/n-HT20/ac-VHT20/ax-HE20/be-EHT20: 5260 ~ 5320MHz, 5500 ~ 5720MHz 802.11n-HT40/ac-VHT40/ax-HE40/be-EHT40: 5270 ~ 5310MHz, 5510 ~ 5710MHz 802.11ac-VHT80/ax-HE80/be-EHT80: 5290MHz, 5530MHz, 5610MHz, 5690MHz 802.11ac-VHT160/ax-HE160/be-EHT160: 5250MHz, 5570MHz
Type of Modulation	802.11a/n/ac: OFDM 802.11ax/be: OFDMA
Data Rate	802.11a: 6/9/12/18/24/36/48/54Mbps 802.11n: up to 600Mbps 802.11ac: up to 3466.7Mbps 802.11ax: up to 4804Mbps 802.11be: up to 5764Mbps
Power-on cycle	Requires 79.6 seconds to complete its power-on cycle
Uniform Spreading (For DFS Frequency Band)	For the 5250-5350MHz, 5470-5725 MHz bands, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

1.6. Working Frequencies

802.11a/n-HT20/ac-VHT20/ax-HE20/be-EHT20

Channel	Frequency	Channel	Frequency	Channel	Frequency
52	5260 MHz	56	5280 MHz	60	5300 MHz
64	5320 MHz	100	5500 MHz	104	5520 MHz
108	5540 MHz	112	5560 MHz	116	5580 MHz
120	5600 MHz	124	5620 MHz	128	5640 MHz
132	5660 MHz	136	5680 MHz	140	5700 MHz
144	5720 MHz	--	--	--	--

802.11n-HT40/ac-VHT40/ax-HE40/be-EHT40

Channel	Frequency	Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz	102	5510 MHz
110	5550 MHz	118	5590 MHz	126	5630 MHz
134	5670 MHz	142	5710 MHz	--	--

802.11ac-VHT80/ax-HE80/be-EHT80

Channel	Frequency	Channel	Frequency	Channel	Frequency
58	5290 MHz	106	5530 MHz	122	5610 MHz
138	5690 MHz	--	--	--	--

802.11ac-VHT160/ax-HE160/be-EHT160

Channel	Frequency	Channel	Frequency	Channel	Frequency
50	5250 MHz	114	5570 MHz	--	--

1.7. Antenna Details

Antenna Type	Frequency Band (MHz)	Nss		Antenna Gain (dBi)				STBC Directional Gain (dBi)	CDD Directional Gain (dBi)	
		STBC	CDD	Ant 0	Ant 1	Ant 2	Ant 3		For Power	For PSD
PCB	2400 ~ 2483.5	2	1	5.11	4.31	--	--	3.28	3.28	6.10
	5150 ~ 5850	4	1	5.61	5.54	5.53	5.40	3.39	3.39	9.36

Notes:

1. EUT supports CDD mode for 802.11a/b/g.
2. EUT supports STBC mode for 802.11n/ac/ax/be.
3. All antenna information is provided by the manufacturer.

2. Test Configuration

2.1. Test Mode

Mode 1: Operating under AP mode
Mode 2: Operating under Mesh mode

2.2. Test Channel

Test Mode	Test Channel	Test Frequency
802.11be-EHT20	100	5500 MHz
802.11be-EHT40	102	5510 MHz
802.11be-EHT80	106	5530 MHz
802.11be-EHT160	50	5250 MHz
802.11be-EHT160	114	5570 MHz

2.3. Applied Standards

According to the specifications of the manufacturer, the EUT must comply with the requirements of the following standards:

- FCC Part 15.407 Section (h)(2)
- KDB 905462 D02v02
- KDB 905462 D04v01

2.4. Test Environment Condition

Ambient Temperature	15 ~ 35°C
Relative Humidity	20 ~ 75%RH

3. DFS Detection Thresholds and Radar Test Waveforms

3.1. Applicability

The following table from FCC KDB 905462 D02 NII DFS Compliance Procedures New Rules v02 lists the applicable requirements for the DFS testing.

Requirement	Operational Mode		
	Master	Client Without Radar Detection	Client With Radar Detection
Non-Occupancy Period	Yes	Not required	Yes
DFS Detection Threshold	Yes	Not required	Yes
Channel Availability Check Time	Yes	Not required	Not required
U-NII Detection Bandwidth	Yes	Not required	Yes

Table 3-1: Applicability of DFS Requirements Prior to Use of a Channel

Requirement	Operational Mode	
	Master Device or Client With Radar Detection	Client Without Radar Detection
DFS Detection Threshold	Yes	Not required
Channel Closing Transmission Time	Yes	Yes
Channel Move Time	Yes	Yes
U-NII Detection Bandwidth	Yes	Not required

Additional requirements for devices with multiple bandwidth modes	Master Device or Client with Radar Detection	Client Without Radar Detection
U-NII Detection Bandwidth and Statistical Performance Check	All BW modes must be tested	Not required
Channel Move Time and Channel Closing Transmission Time	Test using widest BW mode available	Test using the widest BW mode available for the link
All other tests	Any single BW mode	Not required

Note: Frequencies selected for statistical performance check should include several frequencies within the radar detection bandwidth and frequencies near the edge of the radar detection bandwidth. For 802.11 devices it is suggested to select frequencies in each of the bonded 20 MHz channels and the channel center frequency.

Table 3-2: Applicability of DFS Requirements during normal operation

3.2. DFS Devices Requirements

Per FCC KDB 905462 D02 NII DFS Compliance Procedures New Rules v02 the following are the requirements for Master Devices:

- (a) The Master Device will use DFS in order to detect Radar Waveforms with received signal strength above the DFS Detection Threshold in the 5250 ~ 5350 MHz and 5470 ~ 5725 MHz bands. DFS is not required in the 5150 ~ 5250 MHz or 5725 ~ 5825 MHz bands.
- (b) Before initiating a network on a Channel, the Master Device will perform a Channel Availability Check for a specified time duration (Channel Availability Check Time) to ensure that there is no radar system operating on the Channel, using DFS described under subsection a) above.
- (c) The Master Device initiates a U-NII network by transmitting control signals that will enable other U-NII devices to Associate with the Master Device.
- (d) During normal operation, the Master Device will monitor the Channel (In-Service Monitoring) to ensure that there is no radar system operating on the Channel, using DFS described under a).
- (e) If the Master Device has detected a Radar Waveform during In-Service Monitoring as described under d), the Operating Channel of the U-NII network is no longer an Available Channel. The Master Device will instruct all associated Client Device(s) to stop transmitting on this Channel within the Channel Move Time. The transmissions during the Channel Move Time will be limited to the Channel Closing Transmission Time.
- (f) Once the Master Device has detected a Radar Waveform it will not utilize the Channel for the duration of the Non-Occupancy Period.
- (g) If the Master Device delegates the In-Service Monitoring to a Client Device, then the combination will be tested to the requirements described under d) through f) above.

Channel Move Time and Channel Closing Transmission Time requirements are listed in the following table.

Parameter	Value
Non-occupancy period	Minimum 30 minutes
Channel Availability Check Time	60 seconds
Channel Move Time	10 seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + an aggregate of 60 milliseconds over remaining 10 second period. See Notes 1 and 2.
U-NII Detection Bandwidth	Minimum 100% of the U-NII 99% transmission power bandwidth. See Note 3.
Note 1: Channel Move Time and the Channel Closing Transmission Time should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst. Note 2: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions. Note 3: During the U-NII Detection Bandwidth detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.	

Table 3-3: DFS Response Requirements

3.3. DFS Detection Threshold Values

The DFS detection thresholds are defined for Master devices and Client Devices with In-service monitoring.

These detection thresholds are listed in the following table.

Maximum Transmit Power	Value (See Notes 1, 2, and 3)
EIRP $\geq$ 200 milliwatt	-64 dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62 dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64 dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

Table 3-4: Detection Thresholds for Master Devices and Client Devices with Radar Detection

3.4. Parameters of DFS Test Signals

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 3-6	$\text{Roundup} \left\{ \left(\frac{1}{360} \right) \cdot \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

Table 3-5: Parameters for Short Pulse Radar Waveforms

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms.

Pulse Repetition Frequency Number	Pulse Repetition Frequency (Pulses Per Second)	Pulse Repetition Interval (Microseconds)
1	1930.5	518
2	1858.7	538
3	1792.1	558
4	1730.1	578
5	1672.2	598
6	1618.1	618
7	1567.4	638
8	1519.8	658
9	1474.9	678
10	1432.7	698
11	1392.8	718
12	1355	738
13	1319.3	758
14	1285.3	778
15	1253.1	798
16	1222.5	818
17	1193.3	838
18	1165.6	858
19	1139	878
20	1113.6	898
21	1089.3	918
22	1066.1	938
23	326.2	3066

Table 3-6: Pulse Repetition Intervals Values for Test A

Long Pulse Radar Test Waveform

Radar Type	Pulse Width (μsec)	Chirp Width (MHz)	PRI (μsec)	Number of Pulses per Burst	Number of Bursts	Minimum Percentage of Successful Detection	Minimum Number of Trials
5	50 - 100	5 - 20	1000 - 2000	1 - 3	8 - 20	80%	30

Table 3-7: Parameters for Long Pulse Radar Waveforms

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the Long Pulse Radar Type waveforms. If more than 30 waveforms are used for the Long Pulse Radar Type waveforms, then each additional waveform must also be unique and not repeated from the previous waveforms.

Frequency Hopping Radar Test Waveform

Radar Type	Pulse Width (μsec)	PRI (μsec)	Pulses Per Hop	Hopping Rate (kHz)	Hopping Sequence Length (msec)	Minimum Percentage of Successful Detection	Minimum Number of Trials
6	1	333	9	0.333	300	70%	30

Table 3-8: Parameters for Frequency Hopping Radar Waveforms

For the Frequency Hopping Radar Type, the same Burst parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:

The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

3.5. Conducted Test Setup

The FCC KDB 905462 D02 NII DFS Compliance Procedures New Rules v02 describes a radiated test setup and a conducted test setup. The conducted test setup was used for this testing. Figure 3-1 shows the typical test setup.

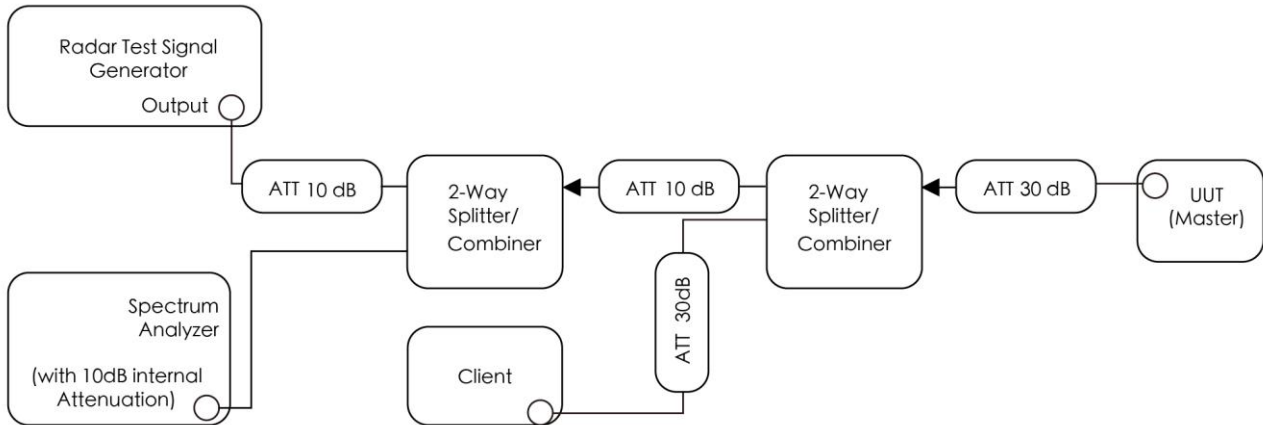


Figure 3-1: Conducted Test Setup where UUT is a Master and Radar Test Waveforms are injected into the Masters

4. Measuring Instrument

Instrument	Manufacturer	Model No.	Asset No.	Cali. Interval	Cali. Due Date	Test Site
Shielding Room	HUAMING	WZ-SR4	MRTSUE06441	N/A	N/A	WZ-SR4
Signal Generator	Keysight	N5182B	MRTSUE06451	1 year	2025-06-03	WZ-SR4
Frequency extender for EXG or MXG	Keysight	N5182BX07	MRTSUE06984	1 year	2026-01-21	WZ-SR4
Thermohygrometer	testo	608-H1	MRTSUE11256	1 year	2025-10-16	WZ-SR4
Signal Analyzer	Agilent	N9020A	MRTSUE06106	1 year	2026-03-31	WZ-SR4

Client Information

Instrument	Manufacturer	Type No.	Certification Number
Wi-Fi Module	Intel	BE200NGW	FCC ID: PD9BE200NG

Software	Version	Manufacturer	Function
Signal Studio	V 2.4.0.0	Keysight	DFS Test Software

5. Test Result

5.1. Summary

Parameter	Verdict	Reference
NII Detection Bandwidth Measurement	Pass	Section 5.3
Initial Channel Availability Check Time	Pass	Section 5.4
Radar Burst at the Beginning of the Channel Availability Check Time	Pass	Section 5.5
Radar Burst at the End of the Channel Availability Check Time	Pass	Section 5.6
In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time	Pass	Section 5.7
Non-Occupancy Period	Pass	Section 5.7
Statistical Performance Check	Pass	Section 5.8

5.2. Radar Waveform Calibration Measurement

5.2.1. Calibration Setup

The conducted test setup was used for this calibration testing. Figure 3-2 shows the typical test setup.

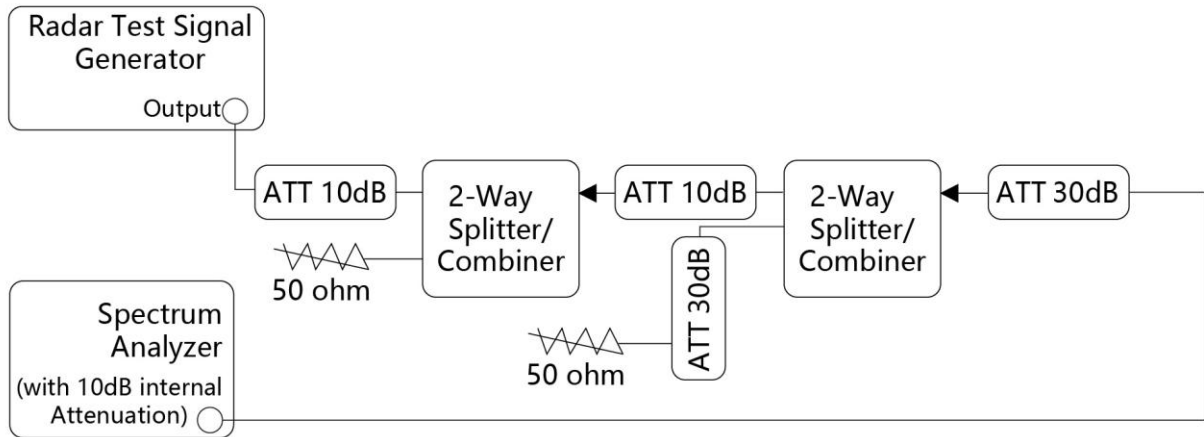


Figure 3-2: Conducted Test Setup

5.2.2. Calibration Procedure

The Interference Radar Detection Threshold Level is $(-64\text{dBm}) + (0) [\text{dBi}] + 1 \text{ dB} = -63 \text{ dBm}$ that had been taken into account the output power range and antenna gain. The above equipment setup was used to calibrate the conducted Radar Waveform. A vector signal generator was utilized to establish the test signal level for each radar type. During this process there were replace 50ohm terminal form Master and Client device and no transmissions by either the Master or Client Device. The spectrum analyzer was switched to the zero span (Time Domain) at the frequency of the Radar Waveform generator. Peak detection was used. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to at least 3MHz. The vector signal generator amplitude was set so that the power level measured at the spectrum analyzer was $(-64\text{dBm}) + (0) [\text{dBi}] + 1 \text{ dB} = -63\text{dBm}$. Capture the spectrum analyzer plots on short pulse radar types, long pulse radar type and hopping radar waveform.

5.2.3. Calibration & Channel Loading Result

Refer to Appendix A.1&A.2.

5.3. NII Detection Bandwidth Measurement

5.3.1. Test Limit

Minimum 100% of the NII 99% transmission power bandwidth. During the U-NII Detection Bandwidth detection test, each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

5.3.2. Test Procedure

1. Adjust the equipment to produce a single Burst of any one of the Short Pulse Radar Types 0-4 in Table 3-5 at the center frequency of the EUT Operating Channel at the specified DFS Detection Threshold level.
2. The generating equipment is configured as shown in the Conducted Test Setup above section 3.5.
3. The EUT is set up as a stand-alone device (no associated Client or Master, as appropriate) and no traffic. Frame based systems will be set to a talk/listen ratio reflecting the worst case (maximum) that is user configurable during this test.
4. Generate a single radar Burst, and note the response of the EUT. Repeat for a minimum of 10 trials. The EUT must detect the Radar Waveform using the specified U-NII Detection Bandwidth criterion shown in Table 3-5. In cases where the channel bandwidth may exceed past the DFS band edge on specific channels (i.e., 802.11ac or wideband frame based systems) select a channel that has the entire emission bandwidth within the DFS band. If this is not possible, test the detection BW to the DFS band edge.
5. Starting at the center frequency of the UUT operating Channel, increase the radar frequency in 5 MHz steps, repeating the above test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion specified in Table 3-3. Repeat this measurement in 1MHz steps at frequencies 5 MHz below where the detection rate begins to fall. Record the highest frequency (denote as F_H) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies above F_H is not required to demonstrate compliance.
6. Starting at the center frequency of the EUT operating Channel, decrease the radar frequency in 1 MHz steps, repeating the above item 4 test sequence, until the detection rate falls below the U-NII Detection Bandwidth criterion. Record the lowest frequency (denote as F_L) at which detection is greater than or equal to the U-NII Detection Bandwidth criterion. Recording the detection rate at frequencies below F_L is not required to demonstrate compliance.
7. The U-NII Detection Bandwidth is calculated as follows: $\text{U-NII Detection Bandwidth} = F_H - F_L$
8. The U-NII Detection Bandwidth must be at least 100% of the EUT transmitter 99% power, otherwise, the

EUT does not comply with DFS requirements.

5.3.3. Test Result

Refer to Appendix A.3.

5.4. Initial Channel Availability Check Time Measurement

5.4.1. Test Limit

The EUT shall perform a Channel Availability Check to ensure that there is no radar operating on the channel. After power-up sequence, receive at least 1 minute on the intended operating frequency.

5.4.2. Test Procedure

1. The U-NII devices will be powered on and be instructed to operate on the appropriate U-NII Channel that must incorporate DFS functions. At the same time the EUT is powered on, the spectrum analyzer will be set to zero span mode with a 3 MHz RBW and 3 MHz VBW on the Channel occupied by the radar (Chr) with a 2.5 minute sweep time. The spectrum analyzer's sweep will be started at the same time power is applied to the U-NII device.
2. The EUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.
3. Confirm that the EUT initiates transmission on the channel. Measurement system showing its nominal noise floor is marker1.

5.4.3. Test Result

Refer to Appendix A.4.

5.5. Radar Burst at the Beginning of the Channel Availability Check Time Measurement

5.5.1. Test Limit

In beginning of the Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC on that channel.

5.5.2. Test Procedure

1. The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time.
2. The EUT is in completion power-up cycle (from T0 to T1). T1 denotes the instant when the EUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds. A single Burst of one of Short Pulse Radar Types 0-4 at DFS Detection Threshold + 1 dB will commence within a 6 second window starting at T1.
3. Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions will continue for 2.5 minutes after the radar Burst has been generated. Verify that during the 2.5 minutes measurement window no EUT transmissions occurred.

5.5.3. Test Result

Refer to Appendix A.5.

5.6. Radar Burst at the End of the Channel Availability Check Time Measurement

5.6.1. Test Limit

In the end of Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC on that channel.

5.6.2. Test Procedure

1. The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB occurs at the beginning of the Channel Availability Check Time.
2. The EUT is powered on at T0. T1 denotes the instant when the EUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds. A single Burst of one of Short Pulse Radar Types 0-4 at DFS Detection Threshold + 1 dB will commence within a 6 second window starting at T1+ 54 seconds.
3. Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions will continue for 2.5 minutes after the radar Burst has been generated. Verify that during the 2.5 minutes measurement window no EUT transmissions occurred.

5.6.3. Test Result

Refer to Appendix A.6.

5.7. In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Measurement

5.7.1. Test Limit

The EUT has In-Service Monitoring function to continuously monitor the radar signals. If the radar is detected, must leave the channel (Shutdown). The Channel Move Time to cease all transmissions on the current channel upon detection of a Radar Waveform above the DFS Detection Threshold within 10 sec. The total duration of Channel Closing Transmission Time is 260ms, consisting of data signals and the aggregate of control signals, by a U-NII device during the Channel Move Time. The Non-Occupancy Period time is 30 minute during which a Channel will not be utilized after a Radar Waveform is detected on that Channel.

5.7.2. Test Procedure

1. The test should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0.
2. When the radar burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating Channel of the U-NII device. A U-NII device operating as a Master Device will associate with the Client Device at Channel. Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test. At time T0 the Radar Waveform generator sends a Burst of pulses for each of the radar types at Detection Threshold + 1dB.
3. Observe the transmissions of the EUT at the end of the radar Burst on the Operating Channel. Measure and record the transmissions from the EUT during the observation time (Channel Move Time).
4. Measurement of the aggregate duration of the Channel Closing Transmission Time method. With the spectrum analyzer set to zero span tuned to the center frequency of the EUT operating channel at the radar simulated frequency, peak detection, and max hold, the dwell time per bin is given by: $Dwell (1.5ms) = S (12 \text{ sec}) / B (8000)$; where Dwell is the dwell time per spectrum analyzer sampling bin, S is the sweep time and B is the number of spectrum analyzer sampling bins. An upper bound of the aggregate duration of the intermittent control signals of Channel Closing Transmission Time is calculated by: $C = N \times Dwell$; where C is the Closing Time, N is the number of spectrum analyzer sampling bins showing a U-NII transmission and Dwell is the dwell time per bin.
5. Measure the EUT for more than 30 minutes following the channel close/move time to verify that the EUT does not resume any transmissions on this Channel.

5.7.3. Test Result

Refer to Appendix A.7.

5.8. Statistical Performance Check Measurement

5.8.1. Test Limit

The minimum percentage of successful detection requirements found in below table when a radar burst with a level equal to the DFS Detection Threshold + 1dB is generated on the Operating Channel of the U-NII device (In- Service Monitoring).

Radar Type	Minimum Number of Trails	Detection Probability
0	30	$P_d \geq 60\%$
1	30(15 of test A and 15 of test B)	$P_d \geq 60\%$
2	30	$P_d \geq 60\%$
3	30	$P_d \geq 60\%$
4	30	$P_d \geq 60\%$
Aggregate (Radar Types 1-4)	120	$P_d \geq 80\%$
5	30	$P_d \geq 80\%$
6	30	$P_d \geq 70\%$

Note: The percentage of successful detection is calculated by:
 $(\text{Total Waveform Detections} / \text{Total Waveform Trails}) * 100 = \text{Probability of Detection Radar Waveform}$
 In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows: $(P_{d1} + P_{d2} + P_{d3} + P_{d4}) / 4$.

5.8.2. Test Procedure

1. Stream the MPEG test file from the Master Device to the Client Device on the test Channel for the entire period of the test.
2. At time T0 the Radar Waveform generator sends the individual waveform for each of the Radar Types 1-6, at levels equal to the DFS Detection Threshold + 1dB, on the Operating Channel.
3. Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 10 seconds for Short Pulse Radar Types 0 to ensure detection occurs.
4. Observe the transmissions of the EUT at the end of the Burst on the Operating Channel for duration greater than 22 seconds for Long Pulse Radar Type 5 to ensure detection occurs.
5. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs.
6. The Minimum number of trails, minimum percentage of successful detection and the average minimum percentage of successful detection are found in below table


5.8.3. Test Result

Refer to Appendix A.8.

Appendix A – Test Result


A.1 Calibration Test Result

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-08	Test Item	Radar Waveform Calibration
Test Mode	AP Mode		

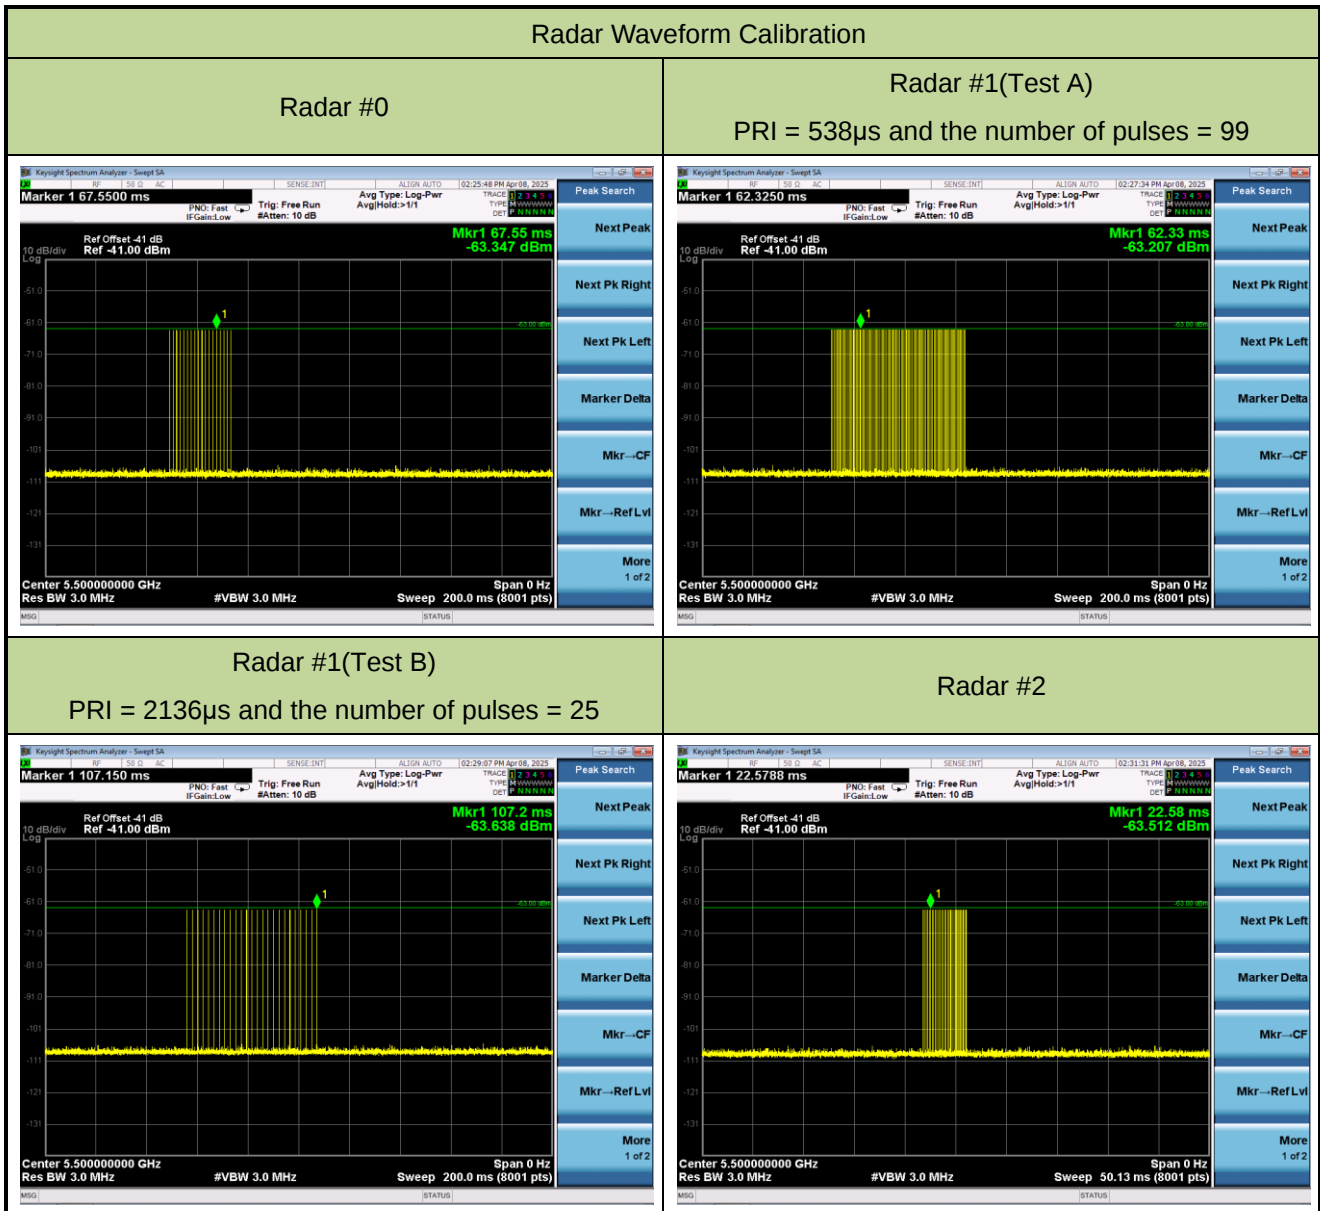


Radars Waveform Calibration


Radars #3

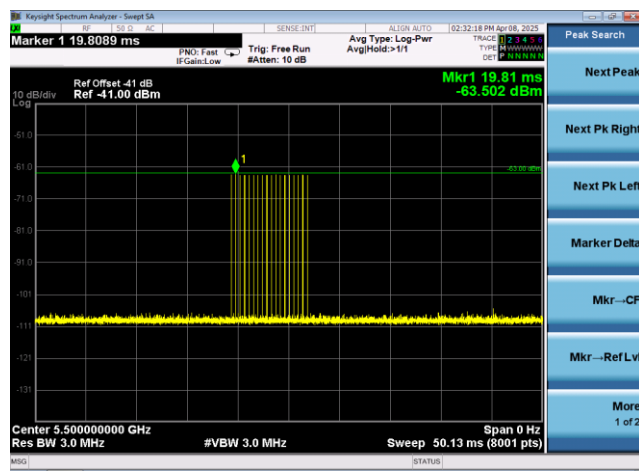


Radars #4

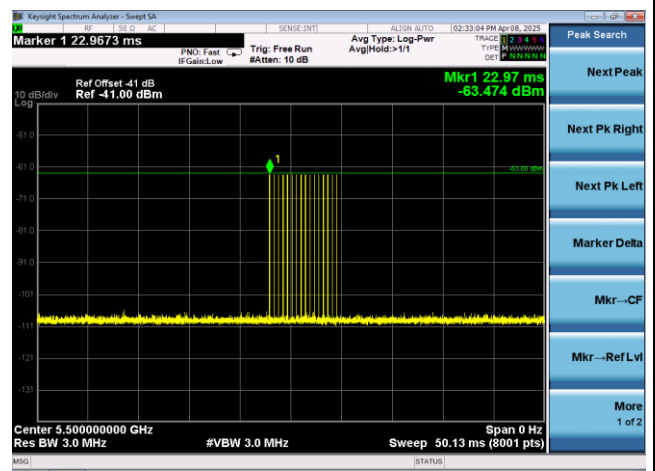


Radars #5

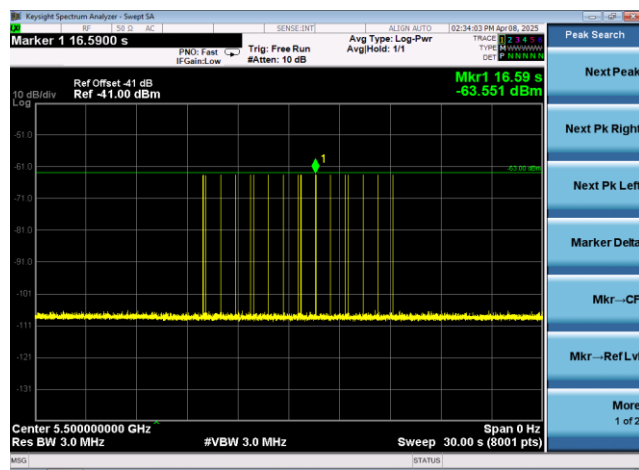

Radars #6

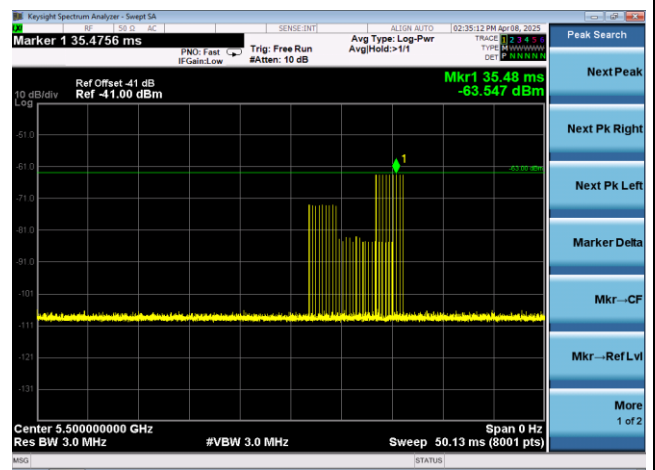


Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-27	Test Item	Radar Waveform Calibration
Test Mode	Mesh Mode		

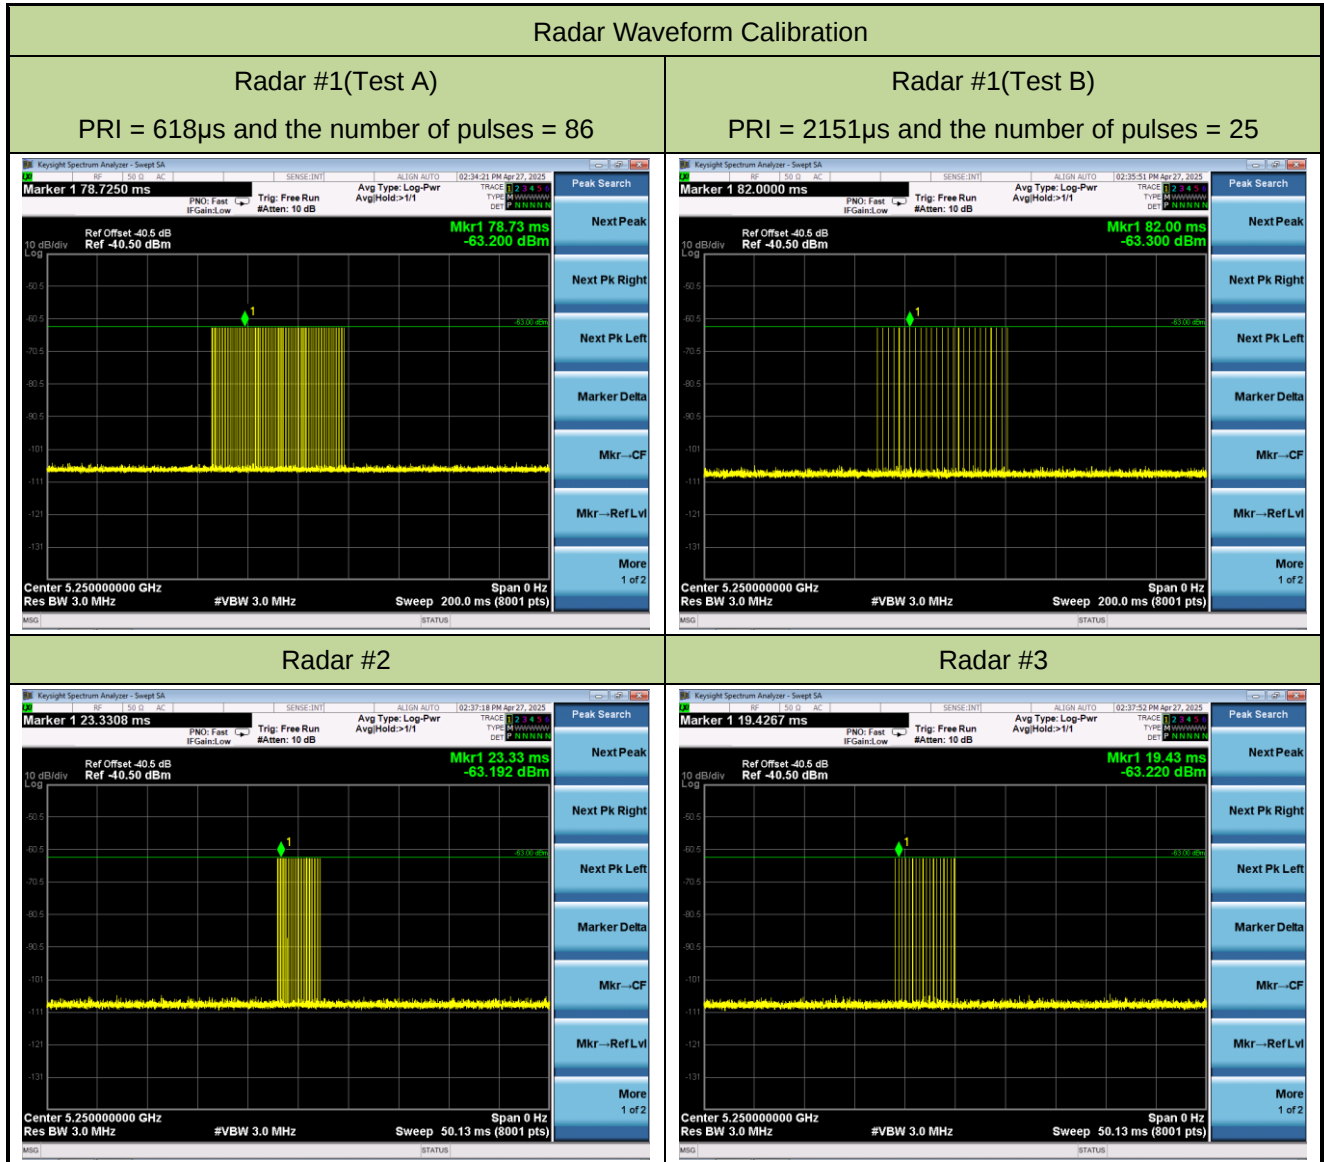


Radars Waveform Calibration


Radars #4

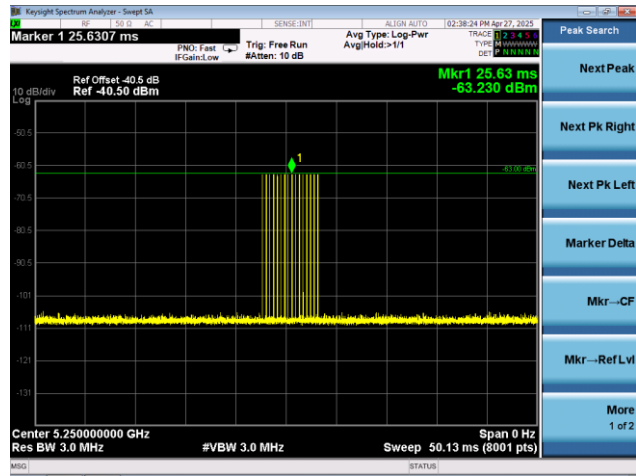

Radars #5

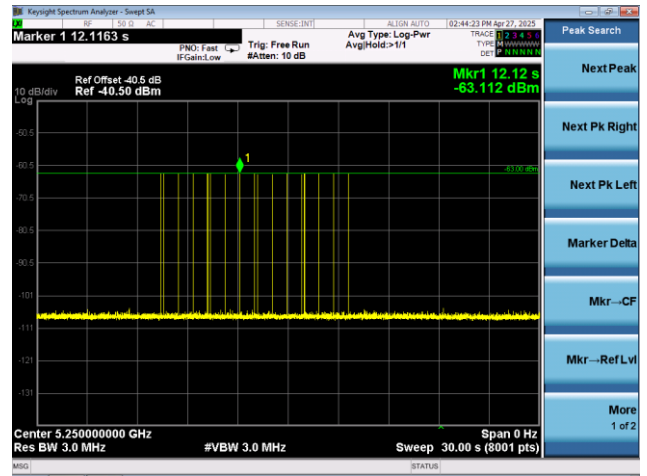

Radars #6

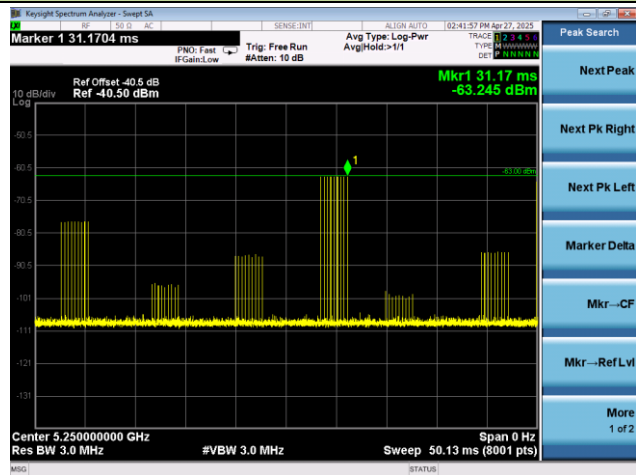

A.2 Channel Loading Test Result

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-08 ~ 2025-04-10	Test Item	Channel Loading
Test Mode	AP Mode		




Test Mode	Test Frequency	Packet ratio	Requirement ratio	Test Result
802.11be-EHT20	5500MHz	18.02%	$\geq 17\%$	Pass
802.11be-EHT40	5510MHz	17.43%	$\geq 17\%$	Pass
802.11be-EHT80	5530MHz	18.48%	$\geq 17\%$	Pass
802.11be-EHT160	5250MHz	17.25%	$\geq 17\%$	Pass
802.11be-EHT160	5570MHz	17.77%	$\geq 17\%$	Pass

Note: System testing was performed with the designated iperf test file. This file is used by IP and Frame based systems for loading the test channel during the In-service compliance testing of the U-NII device.

Packet ratio = Time On / (Time On + Off Time).

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-27	Test Item	Channel Loading
Test Mode	Mesh Mode		

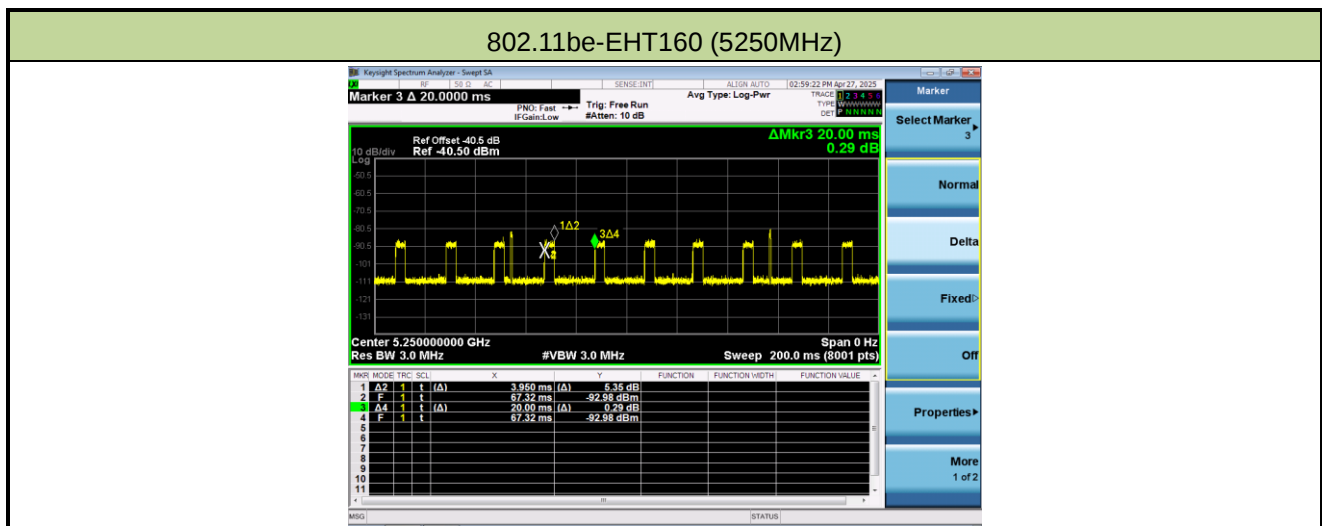

Test Mode	Test Frequency	Packet ratio	Requirement ratio	Test Result
802.11be-EHT160	5250MHz	19.75%	$\geq 17\%$	Pass

Note: System testing was performed with the designated iperf test file. This file is used by IP and Frame based systems for loading the test channel during the In-service compliance testing of the U-NII device.

Packet ratio = Time On / (Time On + Off Time).

A.3 NII Detection Bandwidth Test Result

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-09		
Test Item	Detection Bandwidth (802.11be-EHT20 mode - 5500MHz) - AP Mode		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490 F _L	1	1	1	1	1	1	1	1	1	1	100%
5495	1	1	1	1	1	1	1	1	1	1	100%
5500	1	1	1	1	1	1	1	1	1	1	100%
5505	1	1	1	1	1	1	1	1	1	1	100%
5510 F _H	1	1	1	1	1	1	1	1	1	1	100%

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5500MHz. The 99% channel bandwidth is 19.073MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5510\text{MHz} - 5490\text{MHz} = 20\text{MHz}$

Note 3: NII Detection Bandwidth Min. Limit (MHz): $19.073\text{MHz} \times 100\% = 19.073\text{MHz}$.

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-09		
Test Item	Detection Bandwidth (802.11be-EHT40 mode - 5510MHz) - AP Mode		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490F _L	1	1	1	1	1	1	1	1	1	1	100%
5495	1	1	1	1	1	1	1	1	1	1	100%
5500	1	1	1	1	1	1	1	1	1	1	100%
5505	1	1	1	1	1	1	1	1	1	1	100%
5510	1	1	1	1	1	1	1	1	1	1	100%
5515	1	1	1	1	1	1	1	1	1	1	100%
5520	1	1	1	1	1	1	1	1	1	1	100%
5525	1	1	1	1	1	1	1	1	1	1	100%
5530 F _H	1	1	1	1	1	1	1	1	1	1	100%

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5510MHz. The 99% channel bandwidth is 38.046MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5530\text{MHz} - 5490\text{MHz} = 40\text{MHz}$.

Note 3: NII Detection Bandwidth Min. Limit (MHz): $38.046\text{MHz} \times 100\% = 38.046\text{MHz}$.

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-09		
Test Item	Detection Bandwidth (802.11be-EHT80 mode - 5530MHz) - AP Mode		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490 F _L	1	1	1	1	1	1	1	1	1	1	100%
5495	1	1	1	1	1	1	1	1	1	1	100%
5500	1	1	1	1	1	1	1	1	1	1	100%
5505	1	1	1	1	1	1	1	1	1	1	100%
5510	1	1	1	1	1	1	1	1	1	1	100%
5515	1	1	1	1	1	1	1	1	1	1	100%
5520	1	1	1	1	1	1	1	1	1	1	100%
5525	1	1	1	1	1	1	1	1	1	1	100%
5530	1	1	1	1	1	1	1	1	1	1	100%
5535	1	1	1	1	1	1	1	1	1	1	100%
5540	1	1	1	1	1	1	1	1	1	1	100%
5545	1	1	1	1	1	1	1	1	1	1	100%
5550	1	1	1	1	1	1	1	1	1	1	100%
5555	1	1	1	1	1	1	1	1	1	1	100%
5560	1	1	1	1	1	1	1	1	1	1	100%
5565	1	1	1	1	1	1	1	1	1	1	100%
5570 F _H	1	1	1	1	1	1	1	1	1	1	100%

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5530MHz. The 99% channel bandwidth is 77.763MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = F_H - F_L = 5570MHz - 5490MHz = 80MHz.

Note 3: NII Detection Bandwidth Min. Limit (MHz): 77.763MHz x 100% = 77.763MHz.

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-09		
Test Item	Detection Bandwidth (802.11be-EHT160 mode - 5250MHz) - AP Mode		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5250 F _L	1	1	1	1	1	1	1	1	1	1	100%
5255	1	1	1	1	1	1	1	1	1	1	100%
5260	1	1	1	1	1	1	1	1	1	1	100%
5265	1	1	1	1	1	1	1	1	1	1	100%
5270	1	1	1	1	1	1	1	1	1	1	100%
5275	1	1	1	1	1	1	1	1	1	1	100%
5280	1	1	1	1	1	1	1	1	1	1	100%
5285	1	1	1	1	1	1	1	1	1	1	100%
5290	1	1	1	1	1	1	1	1	1	1	100%
5295	1	1	1	1	1	1	1	1	1	1	100%
5300	1	1	1	1	1	1	1	1	1	1	100%
5305	1	1	1	1	1	1	1	1	1	1	100%
5310	1	1	1	1	1	1	1	1	1	1	100%
5315	1	1	1	1	1	1	1	1	1	1	100%
5320	1	1	1	1	1	1	1	1	1	1	100%
5325	1	1	1	1	1	1	1	1	1	1	100%
5330 F _H	1	1	1	1	1	1	1	1	1	1	100%

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5250MHz. The 99% channel bandwidth within U-NII Band-2A is 78.50MHz ($99\% \text{ BW} / 2 = 157.00\text{MHz} / 2 = 78.50\text{MHz}$). (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5330\text{MHz} - 5250\text{MHz} = 80\text{MHz}$.

Note 3: NII Detection Bandwidth Min. Limit (MHz): $78.50\text{MHz} \times 100\% = 78.50\text{MHz}$.

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-09		
Test Item	Detection Bandwidth (802.11be-EHT160 mode - 5570MHz) - AP Mode		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490 F _L	1	1	1	1	1	1	1	1	1	1	100%
5495	1	1	1	1	1	1	1	1	1	1	100%
5505	1	1	1	1	1	1	1	1	1	1	100%
5510	1	1	1	1	1	1	1	1	1	1	100%
5515	1	1	1	1	1	1	1	1	1	1	100%
5520	1	1	1	1	1	1	1	1	1	1	100%
5525	1	1	1	1	1	1	1	1	1	1	100%
5530	1	1	1	1	1	1	1	1	1	1	100%
5535	1	1	1	1	1	1	1	1	1	1	100%
5540	1	1	1	1	1	1	1	1	1	1	100%
5545	1	1	1	1	1	1	1	1	1	1	100%
5550	1	1	1	1	1	1	1	1	1	1	100%
5555	1	1	1	1	1	1	1	1	1	1	100%
5560	1	1	1	1	1	1	1	1	1	1	100%
5565	1	1	1	1	1	1	1	1	1	1	100%
5570	1	1	1	1	1	1	1	1	1	1	100%
5575	1	1	1	1	1	1	1	1	1	1	100%
5580	1	1	1	1	1	1	1	1	1	1	100%
5585	1	1	1	1	1	1	1	1	1	1	100%
5590	1	1	1	1	1	1	1	1	1	1	100%
5595	1	1	1	1	1	1	1	1	1	1	100%
5600	1	1	1	1	1	1	1	1	1	1	100%
5605	1	1	1	1	1	1	1	1	1	1	100%
5610	1	1	1	1	1	1	1	1	1	1	100%
5615	1	1	1	1	1	1	1	1	1	1	100%
5620	1	1	1	1	1	1	1	1	1	1	100%
5625	1	1	1	1	1	1	1	1	1	1	100%
5630	1	1	1	1	1	1	1	1	1	1	100%
5635	1	1	1	1	1	1	1	1	1	1	100%
5640	1	1	1	1	1	1	1	1	1	1	100%
5645	1	1	1	1	1	1	1	1	1	1	100%
5650 F _H	1	1	1	1	1	1	1	1	1	1	100%

Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5570MHz. The 99% channel bandwidth is 156.90MHz. (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5650\text{MHz} - 5490\text{MHz} = 160\text{MHz}$

Note 3: NII Detection Bandwidth Min. Limit (MHz): $156.90\text{MHz} \times 100\% = 156.90\text{MHz}$.

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-25		
Test Item	Detection Bandwidth (802.11be-EHT160 mode - 5250MHz) - Mesh Mode		

Radar Frequency (MHz)	DFS Detection Trials (1=Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5250 F _L	1	1	1	1	1	1	1	1	1	1	100%
5255	1	1	1	1	1	1	1	1	1	1	100%
5260	1	1	1	1	1	1	1	1	1	1	100%
5265	1	1	1	1	1	1	1	1	1	1	100%
5270	1	1	1	1	1	1	1	1	1	1	100%
5275	1	1	1	1	1	1	1	1	1	1	100%
5280	1	1	1	1	1	1	1	1	1	1	100%
5285	1	1	1	1	1	1	1	1	1	1	100%
5290	1	1	1	1	1	1	1	1	1	1	100%
5295	1	1	1	1	1	1	1	1	1	1	100%
5300	1	1	1	1	1	1	1	1	1	1	100%
5305	1	1	1	1	1	1	1	1	1	1	100%
5310	1	1	1	1	1	1	1	1	1	1	100%
5315	1	1	1	1	1	1	1	1	1	1	100%
5320	1	1	1	1	1	1	1	1	1	1	100%
5325	1	1	1	1	1	1	1	1	1	1	100%
5330 F _H	1	1	1	1	1	1	1	1	1	1	100%


Note 1: All NII channels for this device have identical Channel bandwidths. Therefore, all DFS testing was done at 5250MHz. The 99% channel bandwidth within U-NII Band-2A is 78.50MHz ($99\% \text{ BW} / 2 = 157.00\text{MHz} / 2 = 78.50\text{MHz}$). (See the 99% BW section of the RF report for further measurement details).

Note 2: Detection Bandwidth = $F_H - F_L = 5330\text{MHz} - 5250\text{MHz} = 80\text{MHz}$.

Note 3: NII Detection Bandwidth Min. Limit (MHz): $78.50\text{MHz} \times 100\% = 78.50\text{MHz}$.


A.4 Initial Channel Availability Check Time Test Result

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-08		
Test Item	Initial Channel Availability Check Time (802.11be-EHT20 mode - 5500MHz) - AP Mode		

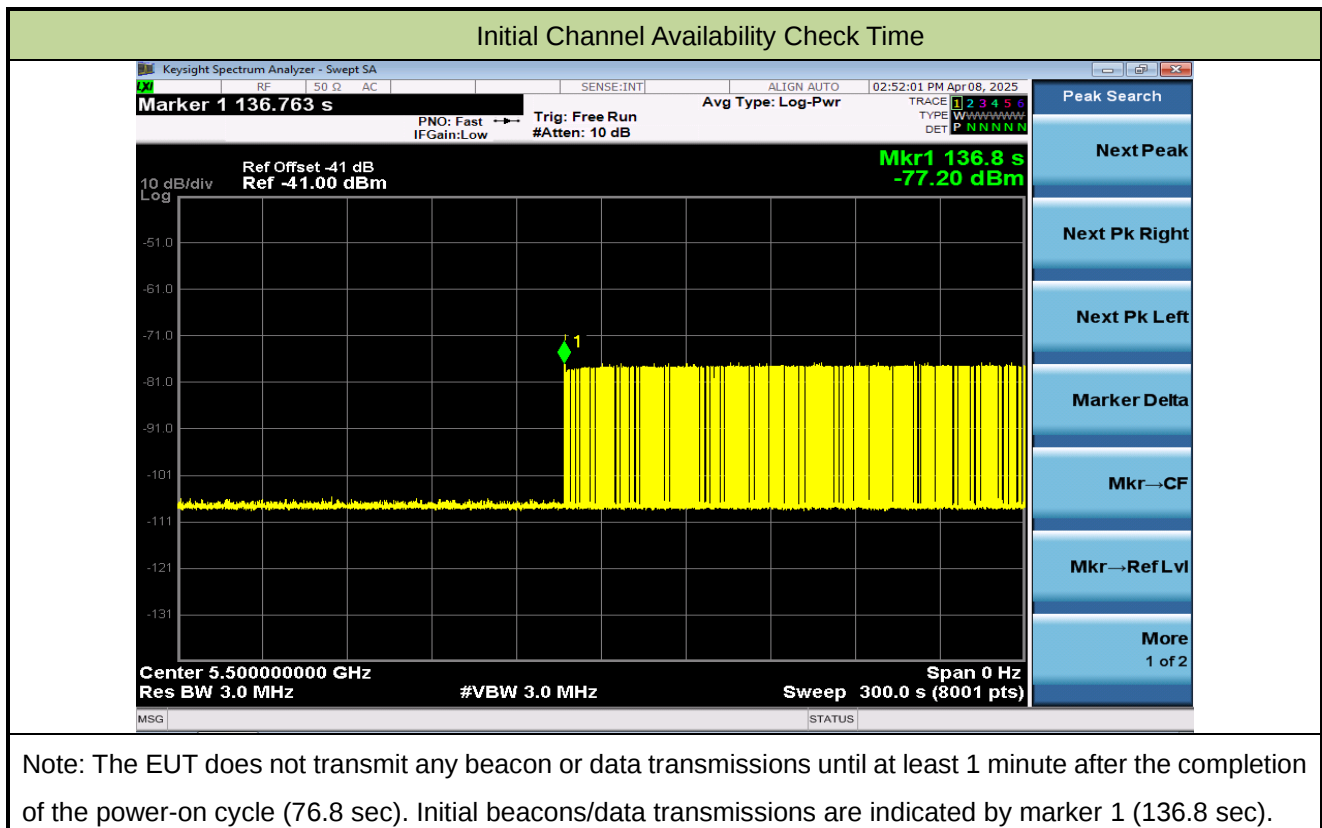


A.5 Radar Burst at the Beginning of the Channel Availability Check Time Test Result

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-08		
Test Item	Beginning of the Channel Availability Check Time (802.11be-EHT20 mode - 5500MHz) - AP Mode		

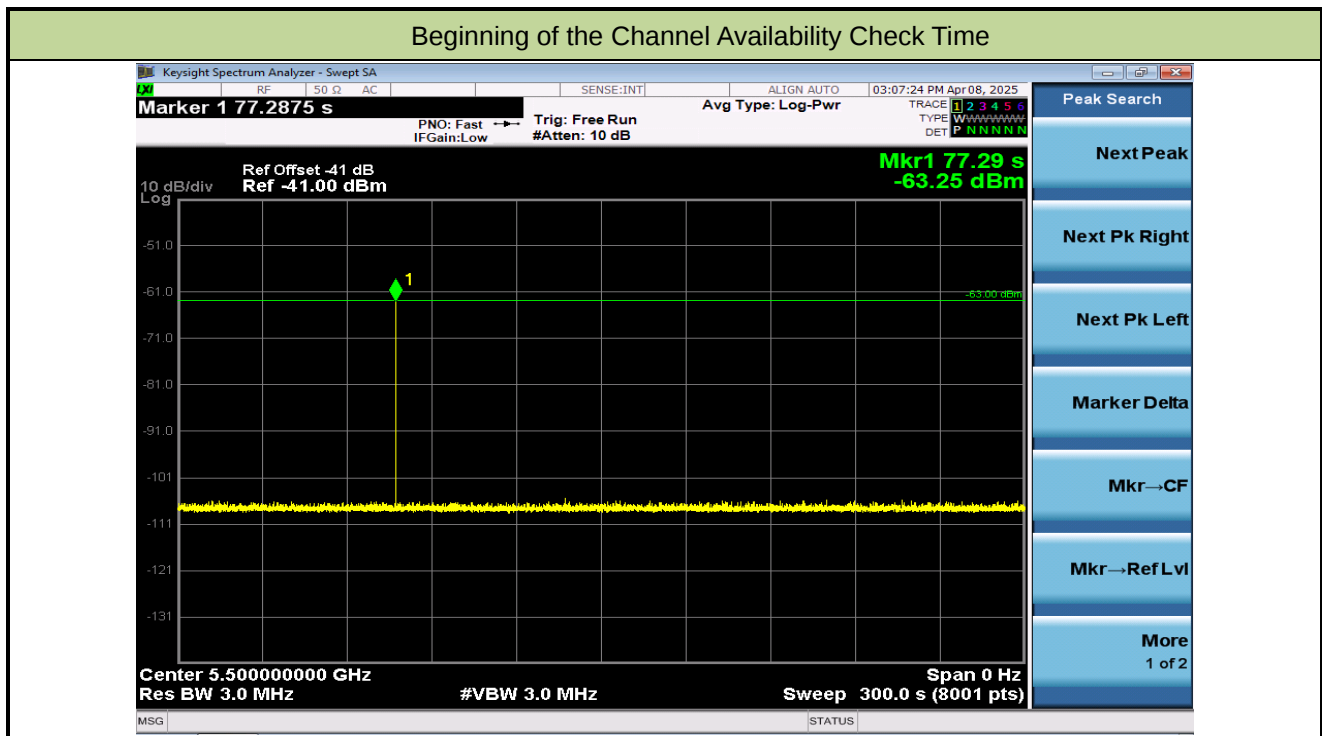



A.6 Radar Burst at the End of the Channel Availability Check Time Test Result

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-08		
Test Item	End of the Channel Availability Check Time (802.11be-EHT20 mode - 5500MHz) - AP Mode		

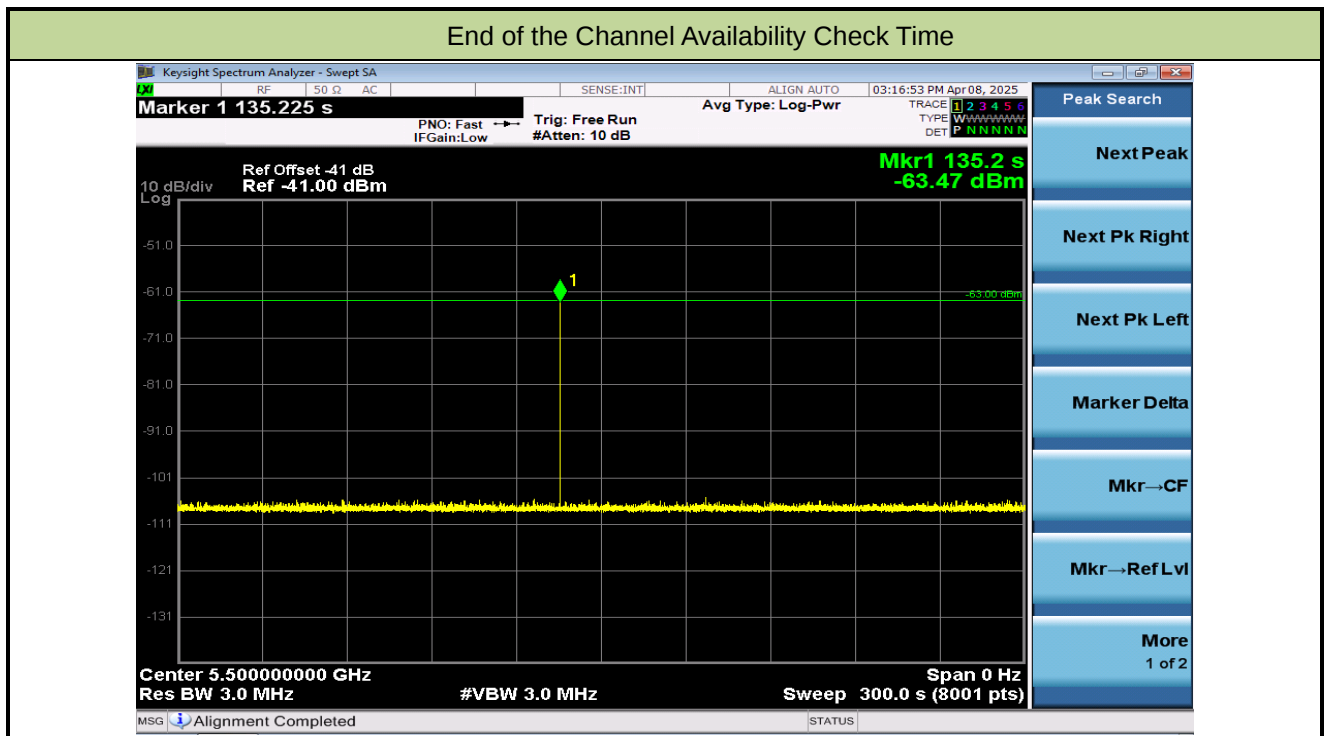

A.7 In-Service Monitoring for Channel Move Time, Channel Closing Transmission Time and Non-Occupancy Period Test Result



Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-09 ~ 2025-04-10		
Test Item	Channel Move Time and Channel Closing Transmission Time (802.11be-EHT160 mode - 5250MHz) - AP Mode		

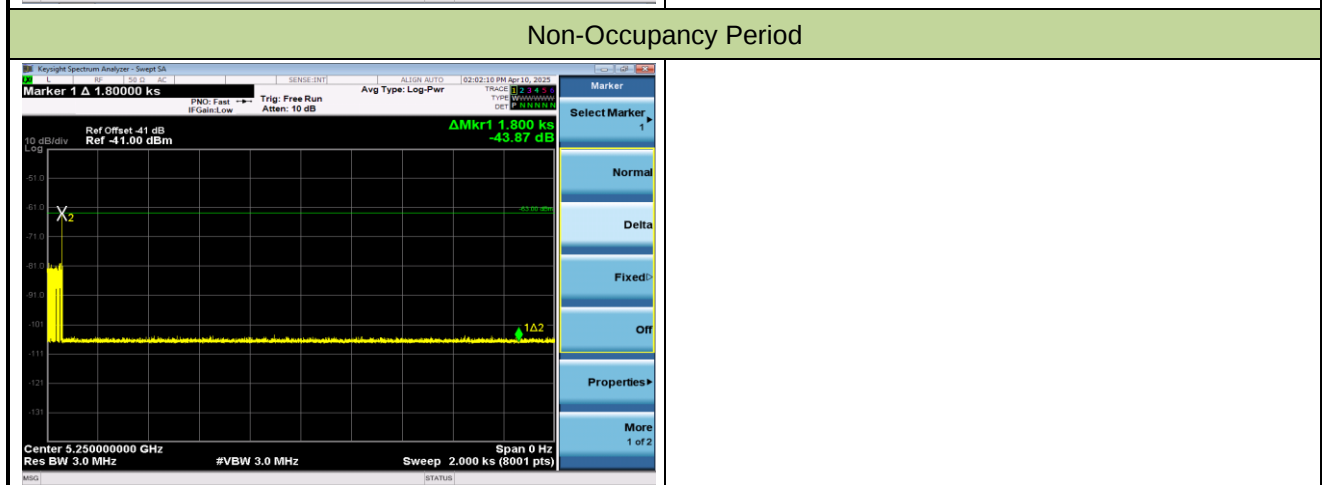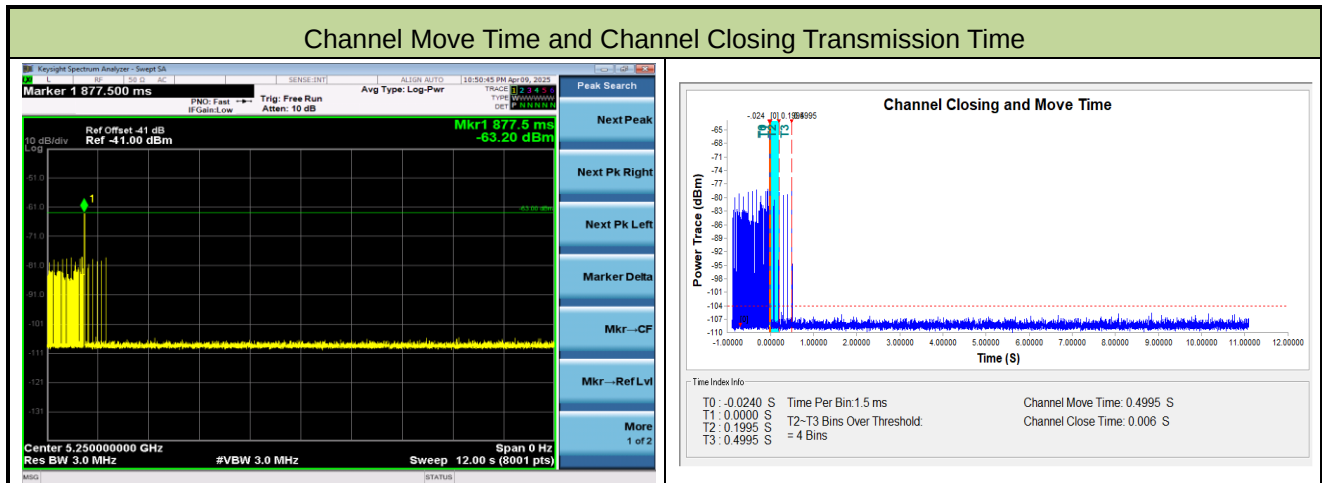

Parameter	Test Result	Limit
Channel Move Time (s)	0.4995s	< 10s
Channel Closing Transmission Time (ms) (Note)	6.0ms	< 60ms
Non-Occupancy Period (min)	≥ 30min	≥ 30min

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-09		
Test Item	Channel Move Time and Channel Closing Transmission Time (802.11be-EHT160 mode - 5570MHz) - AP Mode		

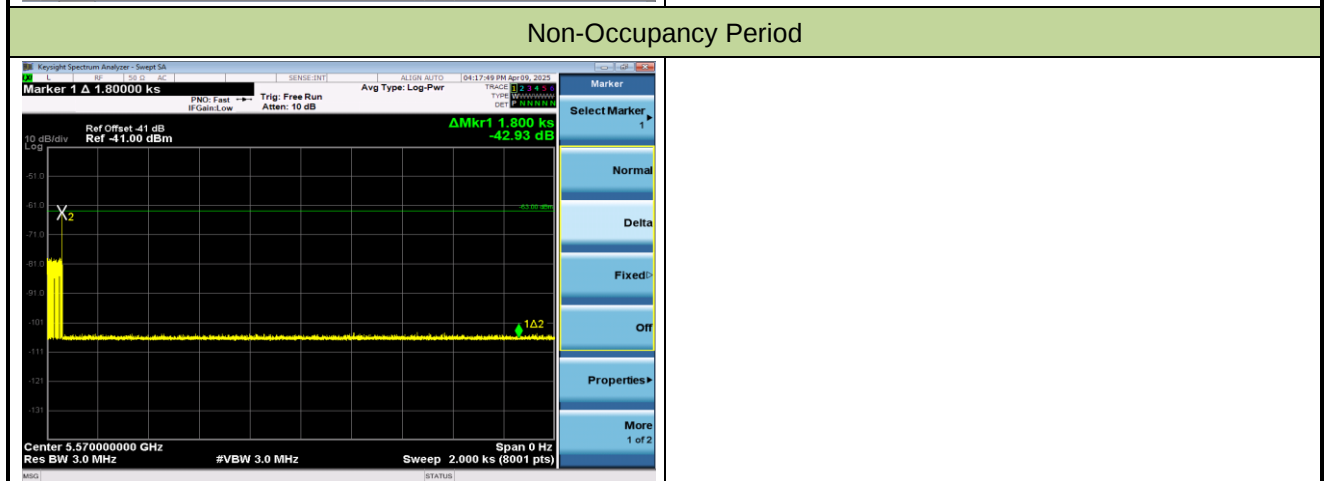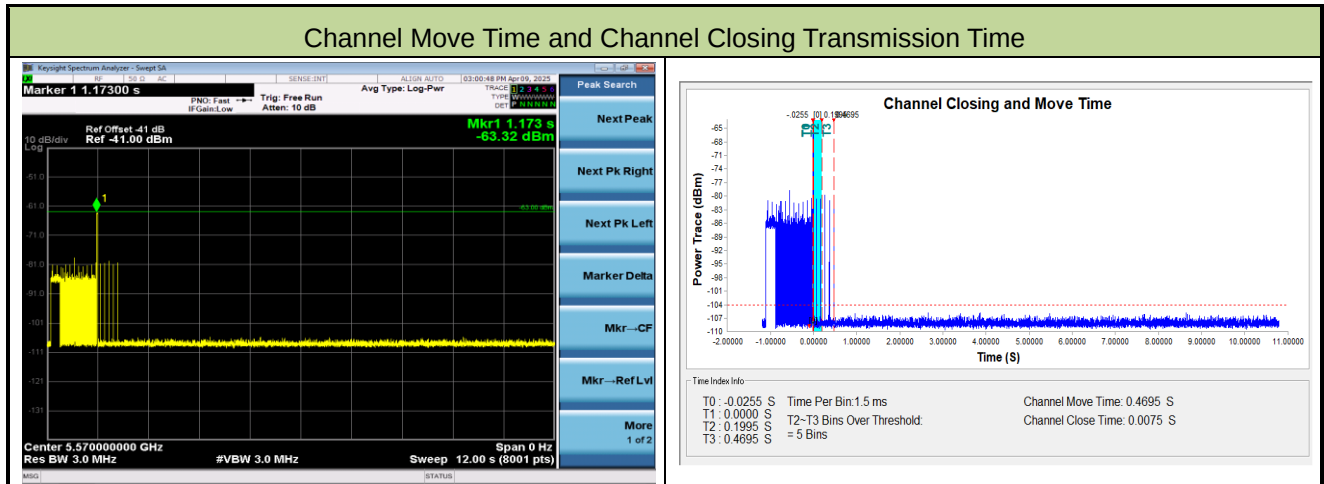

Parameter	Test Result	Limit
Channel Move Time (s)	0.4695s	< 10s
Channel Closing Transmission Time (ms) (Note)	7.5ms	< 60ms
Non-Occupancy Period (min)	≥ 30min	≥ 30min

Note: The Channel Closing Transmission Time is comprised of 200 milliseconds starting at the beginning of the Channel Move Time plus any additional intermittent control signals required to facilitate a Channel move (an aggregate of 60 milliseconds) during the remainder of the 10 seconds period. The aggregate duration of control signals will not count quiet periods in between transmissions.

A.8 Statistical Performance Check

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-09 ~ 2025-04-10		
Test Item	Radar Statistical Performance Check (802.11be-EHT20 – 5500MHz) - AP Mode		

Radar Type 1-4 - Radar Statistical Performance								
Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
0	5509	1	5500	1	5499	0	5492	0
1	5495	1	5505	1	5498	1	5507	1
2	5498	1	5501	1	5491	1	5500	1
3	5492	1	5507	1	5506	1	5491	1
4	5506	1	5506	1	5508	1	5505	1
5	5502	1	5496	1	5500	1	5506	1
6	5505	1	5492	1	5496	1	5502	1
7	5507	1	5495	1	5509	1	5494	1
8	5500	1	5498	1	5497	0	5509	1
9	5491	1	5497	1	5492	1	5498	1
10	5496	1	5494	1	5507	1	5503	0
11	5501	1	5509	1	5495	1	5497	1
12	5508	1	5503	1	5510	1	5510	1
13	5510	1	5502	1	5505	1	5501	1
14	5493	1	5508	1	5502	1	5504	1
15	5499	1	5510	1	5504	1	5508	0
16	5504	1	5493	1	5493	1	5499	1
17	5497	1	5491	1	5494	1	5495	1
18	5494	1	5504	1	5503	1	5493	0
19	5503	1	5499	1	5501	0	5496	0
20	5507	1	5501	1	5490	0	5491	1
21	5496	1	5494	1	5506	1	5505	1
22	5492	1	5500	1	5507	1	5504	1
23	5507	1	5501	1	5498	0	5495	0
24	5504	1	5491	1	5504	1	5508	0
25	5507	1	5502	1	5495	0	5504	1
26	5495	1	5493	1	5497	0	5500	1
27	5508	1	5492	1	5499	1	5507	1

Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency	1=detect	Frequency	1=detect	Frequency	1=detect	Frequency	1=detect
	(MHz)	0=no detect	(MHz)	0=no detect	(MHz)	0=no detect	(MHz)	0=no detect
28	5495	1	5491	1	5492	1	5497	1
29	5490	1	5490	1	5490	0	5490	1
Probability:	100.0%		100.0%		73.3%		76.7%	
Aggregate:	87.5% (>80%)							

Radar Type 1 - Radar Waveform							Radar Type 2 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 1	1.0	838.0	63	52794.0	Download	0	Type 2	1.7	153.0	24	3672.0
Download	1	Type 1	1.0	898.0	59	52982.0	Download	1	Type 2	2.4	176.0	25	4400.0
Download	2	Type 1	1.0	818.0	65	53170.0	Download	2	Type 2	1.7	218.0	24	5232.0
Download	3	Type 1	1.0	938.0	57	53466.0	Download	3	Type 2	3.8	171.0	27	4617.0
Download	4	Type 1	1.0	3066.0	18	55188.0	Download	4	Type 2	1.6	207.0	24	4968.0
Download	5	Type 1	1.0	558.0	95	53010.0	Download	5	Type 2	4.1	172.0	28	4816.0
Download	6	Type 1	1.0	678.0	78	52884.0	Download	6	Type 2	1.4	189.0	23	4347.0
Download	7	Type 1	1.0	618.0	86	53148.0	Download	7	Type 2	5.0	213.0	29	6177.0
Download	8	Type 1	1.0	798.0	67	53466.0	Download	8	Type 2	1.7	184.0	24	4416.0
Download	9	Type 1	1.0	738.0	72	53136.0	Download	9	Type 2	3.9	200.0	28	5600.0
Download	10	Type 1	1.0	598.0	89	53222.0	Download	10	Type 2	1.1	163.0	23	3749.0
Download	11	Type 1	1.0	878.0	61	53658.0	Download	11	Type 2	4.1	220.0	28	6180.0
Download	12	Type 1	1.0	698.0	76	53048.0	Download	12	Type 2	2.9	168.0	26	4368.0
Download	13	Type 1	1.0	638.0	83	52954.0	Download	13	Type 2	4.6	216.0	29	6264.0
Download	14	Type 1	1.0	718.0	74	53132.0	Download	14	Type 2	4.8	182.0	29	5278.0
Download	15	Type 1	1.0	1136.0	47	53392.0	Download	15	Type 2	4.3	204.0	28	5712.0
Download	16	Type 1	1.0	1489.0	36	53604.0	Download	16	Type 2	2.1	150.0	24	3600.0
Download	17	Type 1	1.0	1655.0	32	52960.0	Download	17	Type 2	3.8	206.0	27	5562.0
Download	18	Type 1	1.0	2250.0	24	54000.0	Download	18	Type 2	3.8	219.0	27	5913.0
Download	19	Type 1	1.0	1395.0	38	53010.0	Download	19	Type 2	2.8	209.0	26	5434.0
Download	20	Type 1	1.0	912.0	58	52896.0	Download	20	Type 2	1.5	154.0	23	3542.0
Download	21	Type 1	1.0	2975.0	18	53550.0	Download	21	Type 2	2.9	166.0	26	4316.0
Download	22	Type 1	1.0	1252.0	43	53836.0	Download	22	Type 2	2.9	227.0	26	5902.0
Download	23	Type 1	1.0	1635.0	33	53955.0	Download	23	Type 2	3.8	178.0	27	4806.0
Download	24	Type 1	1.0	1792.0	30	53760.0	Download	24	Type 2	1.1	214.0	23	4922.0
Download	25	Type 1	1.0	1463.0	37	54131.0	Download	25	Type 2	1.9	177.0	24	4248.0
Download	26	Type 1	1.0	1294.0	41	53054.0	Download	26	Type 2	3.8	211.0	27	5697.0
Download	27	Type 1	1.0	1497.0	36	53892.0	Download	27	Type 2	1.2	161.0	23	3703.0
Download	28	Type 1	1.0	2253.0	24	54072.0	Download	28	Type 2	3.5	226.0	27	6102.0
Download	29	Type 1	1.0	2605.0	21	54705.0	Download	29	Type 2	1.3	212.0	23	4876.0

Radar Type 3 - Radar Waveform							Radar Type 4 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 3	6.7	327.0	16	5232.0	Download	0	Type 4	12.6	327.0	12	3924.0
Download	1	Type 3	7.4	254.0	17	4318.0	Download	1	Type 4	14.2	254.0	13	3302.0
Download	2	Type 3	6.7	405.0	16	6480.0	Download	2	Type 4	12.6	405.0	12	4860.0
Download	3	Type 3	8.8	205.0	18	3690.0	Download	3	Type 4	17.2	205.0	15	3075.0
Download	4	Type 3	6.6	438.0	16	7008.0	Download	4	Type 4	12.4	438.0	12	5256.0
Download	5	Type 3	9.1	324.0	18	5832.0	Download	5	Type 4	18.0	324.0	15	4860.0
Download	6	Type 3	6.4	446.0	16	7136.0	Download	6	Type 4	11.9	446.0	12	5352.0
Download	7	Type 3	10.0	404.0	18	7272.0	Download	7	Type 4	19.9	404.0	16	6464.0
Download	8	Type 3	6.7	261.0	16	4176.0	Download	8	Type 4	12.6	261.0	12	3132.0
Download	9	Type 3	8.9	360.0	18	6480.0	Download	9	Type 4	17.5	360.0	15	5400.0
Download	10	Type 3	6.1	484.0	16	7744.0	Download	10	Type 4	11.3	484.0	12	5808.0
Download	11	Type 3	9.1	384.0	18	6912.0	Download	11	Type 4	17.9	384.0	15	5760.0
Download	12	Type 3	7.9	309.0	17	5253.0	Download	12	Type 4	15.2	309.0	14	4326.0
Download	13	Type 3	9.6	363.0	18	6534.0	Download	13	Type 4	19.0	363.0	16	5808.0
Download	14	Type 3	9.8	295.0	18	5310.0	Download	14	Type 4	19.5	295.0	16	4720.0
Download	15	Type 3	9.3	338.0	18	6084.0	Download	15	Type 4	18.5	338.0	16	5408.0
Download	16	Type 3	7.1	221.0	16	3536.0	Download	16	Type 4	13.4	221.0	13	2873.0
Download	17	Type 3	8.8	209.0	18	3762.0	Download	17	Type 4	17.2	209.0	15	3135.0
Download	18	Type 3	8.8	266.0	18	4788.0	Download	18	Type 4	17.4	266.0	15	3990.0
Download	19	Type 3	7.8	421.0	17	7157.0	Download	19	Type 4	15.1	421.0	14	5894.0
Download	20	Type 3	6.5	418.0	16	6688.0	Download	20	Type 4	12.2	418.0	12	5016.0
Download	21	Type 3	7.9	462.0	17	7854.0	Download	21	Type 4	15.2	462.0	14	6468.0
Download	22	Type 3	7.9	437.0	17	7429.0	Download	22	Type 4	15.3	437.0	14	6118.0
Download	23	Type 3	8.8	296.0	18	5328.0	Download	23	Type 4	17.2	296.0	15	4440.0
Download	24	Type 3	6.1	218.0	16	3488.0	Download	24	Type 4	11.3	218.0	12	2616.0
Download	25	Type 3	6.9	235.0	16	3760.0	Download	25	Type 4	13.1	235.0	13	3055.0
Download	26	Type 3	8.8	256.0	18	4608.0	Download	26	Type 4	17.2	256.0	15	3840.0
Download	27	Type 3	6.2	464.0	16	7424.0	Download	27	Type 4	11.5	464.0	12	5568.0
Download	28	Type 3	8.5	383.0	17	6511.0	Download	28	Type 4	16.7	383.0	15	5745.0
Download	29	Type 3	6.3	219.0	16	3504.0	Download	29	Type 4	11.6	219.0	12	2628.0

Radar Type 5 - Radar Statistical Performance					
Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
0	5500	1	15	5497.2	1
1	5500	1	16	5493.6	1
2	5500	1	17	5496	1
3	5500	1	18	5496.4	1
4	5500	1	19	5494.8	1
5	5500	1	20	5507.2	1
6	5500	1	21	5505.2	1
7	5500	1	22	5505.2	1
8	5500	1	23	5504	1
9	5500	1	24	5508	0
10	5492	0	25	5506.8	0
11	5496.8	1	26	5503.6	1
12	5494.8	1	27	5508	0
13	5497.6	1	28	5504	0
14	5497.6	1	29	5507.6	1
Detection Percentage (%)			83.3%		

Type 5 Radar Waveform_0								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	507621.0	59.0	7	1	1309.0	—	—
	1	797082.0	67.6	7	2	1374.0	1827.0	—
	2	1089101.0	59.0	7	1	1267.0	—	—
	3	180705.0	84.4	7	3	1084.0	1658.0	1126.0
	4	471548.0	57.9	7	1	1978.0	—	—
	5	760555.0	89.0	7	3	1409.0	1182.0	1826.0
	6	1052925.0	55.1	7	1	1682.0	—	—
	7	144958.0	99.4	7	3	1333.0	1621.0	1023.0
	8	435824.0	59.2	7	1	1798.0	—	—
	9	724843.0	86.1	7	3	1833.0	1441.0	1134.0
Type 5 Radar Waveform_1								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	847561.0	51.9	10	1	1453.0	—	—
	1	90839.0	88.3	10	3	1636.0	1932.0	1763.0
	2	333040.0	73.3	10	2	1292.0	1156.0	—
	3	573538.0	94.4	10	3	1687.0	1364.0	1894.0
	4	814453.0	96.9	10	3	1773.0	1825.0	1856.0
	5	61216.0	91.4	10	3	1172.0	1000.0	1654.0
	6	303547.0	63.6	10	1	1433.0	—	—
	7	543989.0	84.3	10	3	1542.0	1792.0	1287.0
	8	785131.0	85.2	10	3	2000.0	1365.0	1596.0
	9	31489.0	72.7	10	2	1519.0	1249.0	—
	10	273702.0	56.7	10	1	1482.0	—	—
	11	515341.0	73.4	10	2	1122.0	1392.0	—

Type 5 Radar Waveform_2

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	908130.0	73.9	7	2	1910.0	1878.0	-
1	2034.0	84.2	7	3	1898.0	1918.0	1384.0
2	292775.0	52.0	7	1	1253.0	-	-
3	583592.0	61.7	7	1	1081.0	-	-
4	871302.0	84.6	7	3	1632.0	1866.0	1788.0
5	1165114.0	52.8	7	1	1111.0	-	-
6	256600.0	81.5	7	2	1652.0	1294.0	-
7	547706.0	53.7	7	1	1234.0	-	-
8	837355.0	75.9	7	2	1205.0	1586.0	-
9	1126498.0	89.3	7	3	1351.0	1223.0	1510.0

Type 5 Radar Waveform_3

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	137614.0	84.8	16	3	1220.0	1592.0	1256.0
1	319285.0	75.7	16	2	1154.0	1136.0	-
2	499621.0	94.6	16	3	1341.0	1040.0	1413.0
3	679845.0	86.5	16	3	1514.0	1812.0	1295.0
4	115498.0	72.9	16	2	1709.0	1269.0	-
5	295856.0	89.7	16	3	1942.0	1929.0	1168.0
6	478814.0	63.4	16	1	1472.0	-	-
7	659058.0	82.5	16	2	1921.0	1022.0	-
8	93200.0	82.9	16	2	1822.0	1007.0	-
9	274834.0	54.3	16	1	1681.0	-	-
10	456197.0	52.1	16	1	1890.0	-	-
11	636830.0	73.0	16	2	1706.0	1131.0	-
12	70991.0	63.1	16	1	1644.0	-	-
13	252004.0	69.8	16	2	1186.0	1900.0	-
14	434214.0	58.6	16	1	1259.0	-	-
15	613046.0	88.4	16	3	1614.0	1059.0	1943.0

Type 5 Radar Waveform_4

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	77679.0	84.0	7	3	1286.0	1577.0	1857.0
1	368019.0	75.5	7	2	1764.0	1501.0	-
2	659420.0	52.2	7	1	1165.0	-	-
3	948237.0	95.9	7	3	1041.0	1219.0	1352.0
4	42089.0	50.0	7	1	1357.0	-	-
5	332325.0	81.3	7	2	1840.0	1218.0	-
6	622691.0	77.9	7	2	1265.0	1659.0	-
7	912176.0	85.6	7	3	1436.0	1004.0	1591.0
8	6264.0	93.7	7	3	1667.0	1198.0	1502.0
9	296611.0	74.8	7	2	1615.0	1266.0	-

Type 5 Radar Waveform_5

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	325449.0	82.4	17	2	1685.0	1210.0	-
1	484892.0	96.3	17	3	1651.0	1480.0	1869.0
2	648729.0	54.4	17	1	1553.0	-	-
3	144900.0	52.2	17	1	1675.0	-	-
4	305453.0	67.9	17	2	1489.0	1768.0	-
5	467771.0	55.4	17	1	1236.0	-	-
6	628798.0	60.2	17	1	1618.0	-	-
7	125099.0	62.6	17	1	1325.0	-	-
8	286431.0	53.5	17	1	1406.0	-	-
9	446200.0	97.7	17	3	1224.0	1056.0	1470.0
10	606122.0	99.8	17	3	1031.0	1786.0	1868.0
11	105248.0	60.3	17	1	1166.0	-	-
12	265955.0	68.5	17	2	1379.0	1529.0	-
13	426733.0	74.0	17	2	1717.0	1508.0	-
14	587267.0	70.9	17	2	1647.0	1998.0	-
15	85354.0	52.6	17	1	1263.0	-	-
16	245695.0	89.9	17	3	1328.0	1242.0	1498.0
17	407776.0	52.3	17	1	1818.0	-	-

Type 5 Radar Waveform_6

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	1137776.0	71.3	6	2	1957.0	1994.0	-
1	131053.0	50.9	6	1	1485.0	-	-
2	453523.0	71.1	6	2	1678.0	1404.0	-
3	776233.0	82.3	6	2	1870.0	1072.0	-
4	1100305.0	53.0	6	1	1235.0	-	-
5	91057.0	96.3	6	3	1902.0	1587.0	1030.0
6	413849.0	68.9	6	2	1033.0	1837.0	-
7	737267.0	56.0	6	1	1536.0	-	-
8	1060382.0	51.5	6	1	1395.0	-	-

Type 5 Radar Waveform_7

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	23064.0	80.0	20	2	1555.0	1724.0	-
1	167215.0	89.3	20	3	1760.0	1735.0	1819.0
2	313549.0	53.4	20	1	1297.0	-	-
3	456773.0	97.8	20	3	1525.0	1204.0	1152.0
4	5255.0	59.0	20	1	1298.0	-	-
5	149346.0	92.8	20	3	1905.0	1844.0	1975.0
6	294558.0	98.1	20	3	1290.0	1083.0	1161.0
7	440786.0	57.2	20	1	1408.0	-	-
8	584360.0	67.1	20	2	1305.0	1741.0	-
9	132350.0	78.1	20	2	1064.0	1238.0	-
10	276917.0	80.6	20	2	1355.0	1796.0	-
11	420114.0	86.5	20	3	1933.0	1479.0	1944.0
12	564393.0	96.8	20	3	1728.0	1603.0	1963.0
13	114628.0	62.7	20	1	1606.0	-	-
14	259810.0	50.5	20	1	1484.0	-	-
15	405286.0	66.3	20	1	1016.0	-	-
16	549654.0	61.0	20	1	2000.0	-	-
17	96272.0	88.6	20	3	1660.0	1120.0	1790.0
18	241161.0	73.6	20	2	1633.0	1754.0	-
19	387222.0	56.9	20	1	1279.0	-	-

Type 5 Radar Waveform_8								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	1064630.0	78.2	7	2	1302.0	1515.0	-
	1	157762.0	75.0	7	2	1612.0	1504.0	-
	2	447355.0	97.4	7	3	1627.0	1532.0	1797.0
	3	737614.0	91.5	7	3	1331.0	1570.0	1369.0
	4	1029066.0	75.6	7	2	1307.0	1276.0	-
	5	122184.0	64.3	7	1	1366.0	-	-
	6	411974.0	92.8	7	3	1046.0	1262.0	1720.0
	7	703540.0	53.7	7	1	1464.0	-	-
	8	993999.0	50.1	7	1	1733.0	-	-
	9	86177.0	93.3	7	3	1422.0	1012.0	1686.0
Type 5 Radar Waveform_9								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	221562.0	58.1	16	1	1601.0	-	-
	1	390380.0	83.4	16	3	1398.0	1874.0	1907.0
	2	562883.0	61.9	16	1	1977.0	-	-
	3	29710.0	53.8	16	1	1639.0	-	-
	4	200005.0	80.3	16	2	1747.0	1671.0	-
	5	370704.0	73.4	16	2	1693.0	1101.0	-
	6	541905.0	50.0	16	1	1911.0	-	-
	7	8637.0	99.9	16	3	1569.0	1393.0	1490.0
	8	178882.0	90.8	16	3	1430.0	1199.0	1327.0
	9	349676.0	67.5	16	2	1781.0	1061.0	-
	10	519563.0	70.5	16	2	1801.0	1882.0	-
	11	690852.0	66.8	16	2	1503.0	1179.0	-
	12	158358.0	53.7	16	1	1979.0	-	-
	13	328920.0	74.6	16	2	1138.0	1176.0	-
	14	500451.0	59.3	16	1	1055.0	-	-
	15	671275.0	65.9	16	1	1180.0	-	-
	16	137036.0	74.6	16	2	1531.0	1950.0	-

Type 5 Radar Waveform_10								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	654300.0	88.2	5	3	1824.0	1904.0	1164.0	
1	1018471.0	70.6	5	2	1150.0	1449.0	-	
2	1382721.0	66.0	5	1	1424.0	-	-	
3	247116.0	92.1	5	3	1547.0	1750.0	1039.0	
4	611154.0	57.6	5	1	1187.0	-	-	
5	972743.0	95.3	5	3	1917.0	1091.0	1118.0	
6	1335298.0	99.1	5	3	1421.0	1092.0	1885.0	
7	202659.0	73.4	5	2	1024.0	1646.0	-	
Type 5 Radar Waveform_11								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	266087.0	54.9	17	1	1723.0	-	-	
1	435087.0	91.9	17	3	1730.0	1845.0	1019.0	
2	607887.0	62.0	17	1	1447.0	-	-	
3	74162.0	72.2	17	2	1599.0	1148.0	-	
4	244079.0	94.7	17	3	1959.0	1217.0	1339.0	
5	415823.0	50.0	17	1	1737.0	-	-	
6	583593.0	94.3	17	3	1985.0	1631.0	1732.0	
7	53233.0	57.1	17	1	1734.0	-	-	
8	223428.0	73.9	17	2	1780.0	1787.0	-	
9	394268.0	70.0	17	2	1534.0	1130.0	-	
10	563388.0	97.2	17	3	1440.0	1342.0	1666.0	
11	32129.0	74.6	17	2	1784.0	1429.0	-	
12	202326.0	92.9	17	3	1397.0	1096.0	1492.0	
13	373148.0	82.4	17	2	1044.0	1830.0	-	
14	543869.0	77.1	17	2	1456.0	1135.0	-	
15	11172.0	66.2	17	1	1043.0	-	-	
16	181982.0	61.1	17	1	1567.0	-	-	

Type 5 Radar Waveform_12								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	427208.0	97.9	12	3	1015.0	1669.0	1600.0	
1	636390.0	56.1	12	1	1141.0	-	-	
2	840404.0	86.5	12	3	1679.0	1783.0	1323.0	
3	195426.0	61.4	12	1	1912.0	-	-	
4	402178.0	71.2	12	2	1925.0	1407.0	-	
5	609701.0	72.8	12	2	1500.0	1206.0	-	
6	816960.0	82.2	12	2	1117.0	1556.0	-	
7	169961.0	59.6	12	1	1487.0	-	-	
8	376169.0	89.8	12	3	1891.0	1347.0	1232.0	
9	584988.0	54.6	12	1	1516.0	-	-	
10	791296.0	83.2	12	2	1561.0	1260.0	-	
11	143991.0	84.2	12	3	1139.0	1739.0	1027.0	
12	352028.0	51.1	12	1	1231.0	-	-	
13	559279.0	50.4	12	1	1743.0	-	-	
Type 5 Radar Waveform_13								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	561350.0	88.2	19	3	1758.0	1762.0	1799.0	
1	87544.0	62.8	19	1	1241.0	-	-	
2	239764.0	80.5	19	2	1208.0	1756.0	-	
3	391794.0	75.3	19	2	1711.0	1939.0	-	
4	544769.0	81.5	19	2	1742.0	1121.0	-	
5	68388.0	88.1	19	3	1417.0	1583.0	1227.0	
6	220923.0	77.7	19	2	1581.0	1558.0	-	
7	372131.0	96.1	19	3	1420.0	1967.0	1785.0	
8	525160.0	67.5	19	2	1968.0	1883.0	-	
9	49739.0	76.2	19	2	1793.0	1252.0	-	
10	202613.0	59.6	19	1	1694.0	-	-	
11	354688.0	79.9	19	2	1162.0	1759.0	-	
12	507968.0	54.5	19	1	1916.0	-	-	
13	31045.0	62.1	19	1	1361.0	-	-	
14	182710.0	91.3	19	3	1887.0	1683.0	1846.0	
15	335501.0	81.7	19	2	1839.0	1843.0	-	
16	489757.0	55.7	19	1	1144.0	-	-	
17	12161.0	93.5	19	3	1322.0	1802.0	1203.0	
18	164335.0	99.8	19	3	1181.0	1691.0	1278.0	

Type 5 Radar Waveform_14

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	300894.0	81.0	19	2	1940.0	1580.0	-
1	447273.0	59.8	19	1	1226.0	-	-
2	589112.0	89.2	19	3	1609.0	1507.0	1528.0
3	138771.0	62.5	19	1	1965.0	-	-
4	284053.0	62.0	19	1	1459.0	-	-
5	427061.0	83.8	19	3	1353.0	1859.0	1255.0
6	572623.0	69.0	19	2	1313.0	1980.0	-
7	120745.0	79.8	19	2	1629.0	1124.0	-
8	266133.0	62.5	19	1	1546.0	-	-
9	411645.0	54.9	19	1	1011.0	-	-
10	553305.0	95.5	19	3	1401.0	1899.0	1597.0
11	103034.0	61.0	19	1	1993.0	-	-
12	247719.0	73.0	19	2	1700.0	1137.0	-
13	392458.0	72.7	19	2	1589.0	1388.0	-
14	537472.0	69.5	19	2	1356.0	1380.0	-
15	85184.0	59.0	19	1	1888.0	-	-
16	230426.0	61.7	19	1	1418.0	-	-
17	375508.0	62.3	19	1	1566.0	-	-
18	520281.0	57.1	19	1	1987.0	-	-
19	66973.0	95.6	19	3	1721.0	1851.0	1359.0

Type 5 Radar Waveform_15

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	235517.0	78.2	18	2	1974.0	1410.0	-
1	396143.0	83.5	18	3	1412.0	1371.0	1005.0
2	558890.0	51.7	18	1	1434.0	-	-
3	54789.0	88.6	18	3	1383.0	1045.0	1512.0
4	216275.0	60.3	18	1	1624.0	-	-
5	377827.0	51.7	18	1	1189.0	-	-
6	536665.0	91.4	18	3	1715.0	1488.0	1133.0
7	35038.0	68.2	18	2	1708.0	1330.0	-
8	195821.0	70.0	18	2	1983.0	1626.0	-
9	356679.0	68.4	18	2	1795.0	1729.0	-
10	519097.0	58.0	18	1	1493.0	-	-
11	15171.0	98.9	18	3	1820.0	1132.0	1893.0
12	175888.0	89.8	18	3	1197.0	1073.0	1806.0
13	336557.0	84.4	18	3	1100.0	1230.0	1805.0
14	498368.0	70.2	18	2	1526.0	1109.0	-
15	657237.0	90.7	18	3	1699.0	1245.0	1886.0
16	156281.0	99.0	18	3	1009.0	1090.0	1184.0
17	317963.0	50.2	18	1	1628.0	-	-

Type 5 Radar Waveform_16

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	783793.0	68.5	9	2	1319.0	1962.0	-
1	1047175.0	91.6	9	3	1075.0	1585.0	1038.0
2	224095.0	62.4	9	1	1518.0	-	-
3	468491.0	58.2	9	1	1106.0	-	-
4	752219.0	65.1	9	1	1952.0	-	-
5	1014481.0	91.2	9	3	1175.0	1405.0	1348.0
6	191318.0	72.1	9	2	1811.0	1028.0	-
7	455951.0	65.1	9	1	1066.0	-	-
8	718159.0	86.7	9	3	1069.0	1988.0	1207.0
9	984519.0	57.1	9	1	1149.0	-	-
10	158518.0	85.1	9	3	1877.0	1300.0	1677.0

Type 5 Radar Waveform_17

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	290901.0	53.1	15	1	1200.0	—	—
1	471695.0	79.5	15	2	1127.0	1362.0	—
2	652778.0	69.4	15	2	1494.0	1237.0	—
3	86565.0	98.7	15	3	1425.0	1157.0	1705.0
4	267236.0	97.9	15	3	1853.0	1185.0	1772.0
5	448947.0	71.6	15	2	1334.0	1848.0	—
6	628508.0	97.5	15	3	1861.0	1937.0	1240.0
7	64506.0	58.0	15	1	1745.0	—	—
8	246132.0	50.5	15	1	1289.0	—	—
9	427500.0	52.2	15	1	1670.0	—	—
10	608804.0	60.2	15	1	1903.0	—	—
11	42016.0	92.4	15	3	1082.0	1335.0	1765.0
12	223768.0	50.8	15	1	1277.0	—	—
13	405265.0	59.8	15	1	1446.0	—	—
14	584546.0	94.2	15	3	1473.0	1607.0	1258.0
15	19696.0	96.9	15	3	1680.0	1964.0	1999.0

Type 5 Radar Waveform_18

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	188638.0	96.6	16	3	1748.0	1416.0	1443.0
1	359538.0	71.3	16	2	1284.0	1722.0	—
2	529291.0	88.6	16	3	1385.0	1020.0	1552.0
3	702417.0	52.5	16	1	1060.0	—	—
4	168023.0	78.8	16	2	1465.0	1740.0	—
5	339465.0	60.0	16	1	1085.0	—	—
6	509805.0	61.5	16	1	1908.0	—	—
7	677644.0	93.9	16	3	1961.0	1191.0	1753.0
8	147474.0	65.5	16	1	1087.0	—	—
9	317224.0	83.1	16	2	1776.0	1935.0	—
10	487815.0	69.9	16	2	1448.0	1842.0	—
11	658706.0	68.3	16	2	1068.0	1698.0	—
12	126258.0	60.6	16	1	1982.0	—	—
13	297308.0	66.5	16	1	1195.0	—	—
14	466258.0	95.2	16	3	1034.0	1920.0	1189.0
15	638895.0	65.0	16	1	1450.0	—	—
16	104762.0	84.2	16	3	1641.0	1863.0	1608.0

Type 5 Radar Waveform_19

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	361024.0	83.2	12	2	1129.0	1029.0	—
1	583871.0	66.9	12	2	1635.0	1318.0	—
2	805459.0	88.9	12	3	1650.0	1098.0	1997.0
3	109895.0	88.7	12	3	1051.0	1778.0	1550.0
4	333664.0	50.1	12	1	1738.0	—	—
5	556012.0	91.9	12	3	1187.0	1326.0	1054.0
6	780970.0	62.8	12	1	1268.0	—	—
7	82539.0	72.7	12	2	1986.0	1399.0	—
8	305780.0	82.7	12	2	1662.0	1158.0	—
9	528086.0	98.5	12	3	1285.0	1282.0	1794.0
10	750472.0	98.1	12	3	1804.0	1895.0	1190.0
11	55203.0	58.2	12	1	1058.0	—	—
12	277891.0	99.2	12	3	1177.0	1123.0	1834.0

Type 5 Radar Waveform_20								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	725869.0	61.6	7	1	1303.0	–	–	
1	1045834.0	98.5	7	3	1813.0	1832.0	1588.0	
2	39913.0	71.0	7	2	1146.0	1620.0	–	
3	362163.0	94.3	7	3	1638.0	1078.0	1719.0	
4	685447.0	75.5	7	2	1216.0	1308.0	–	
5	1006484.0	93.8	7	3	1749.0	1684.0	1370.0	
6	163.0	98.2	7	3	1317.0	1914.0	1537.0	
7	323176.0	54.6	7	1	1495.0	–	–	
8	646142.0	56.2	7	1	1593.0	–	–	
Type 5 Radar Waveform_21								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	620778.0	93.1	12	3	1559.0	1225.0	1310.0	
1	829198.0	68.0	12	2	1336.0	1183.0	–	
2	181696.0	75.5	12	2	1522.0	1707.0	–	
3	388918.0	83.2	12	2	1071.0	1892.0	–	
4	596786.0	64.8	12	1	1956.0	–	–	
5	804856.0	51.6	12	1	1254.0	–	–	
6	156093.0	79.2	12	2	1849.0	1889.0	–	
7	362414.0	97.4	12	3	1989.0	1928.0	1363.0	
8	569903.0	84.1	12	3	1439.0	1301.0	1214.0	
9	778622.0	57.1	12	1	1984.0	–	–	
10	130430.0	95.3	12	3	1221.0	1922.0	1690.0	
11	338319.0	58.2	12	1	1858.0	–	–	
12	545388.0	67.6	12	2	1343.0	1086.0	–	
13	750778.0	92.9	12	3	1936.0	1160.0	1496.0	

Type 5 Radar Waveform_22

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	105426.0	55.3	12	1	1116.0	—	—
1	312797.0	58.2	12	1	1779.0	—	—
2	518250.0	96.4	12	3	1346.0	1767.0	1953.0
3	727130.0	79.5	12	2	1097.0	1354.0	—
4	79658.0	75.8	12	2	1538.0	1668.0	—
5	286977.0	79.8	12	2	1565.0	1006.0	—
6	493078.0	96.1	12	3	1803.0	1378.0	1396.0
7	702612.0	61.5	12	1	1215.0	—	—
8	54276.0	63.4	12	1	1174.0	—	—
9	260646.0	85.6	12	3	1458.0	1828.0	1906.0
10	469283.0	66.3	12	1	1523.0	—	—
11	675191.0	71.4	12	2	1584.0	1970.0	—
12	28644.0	71.5	12	2	1530.0	1427.0	—
13	235401.0	97.4	12	3	1575.0	1491.0	1376.0

Type 5 Radar Waveform_23

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	388388.0	66.3	15	1	1080.0	—	—
1	567277.0	91.0	15	3	1275.0	1640.0	1775.0
2	2739.0	51.3	15	1	1573.0	—	—
3	183903.0	66.9	15	2	1850.0	1159.0	—
4	364744.0	79.6	15	2	1755.0	1924.0	—
5	546322.0	76.9	15	2	1032.0	1865.0	—
6	727481.0	73.8	15	2	1554.0	1381.0	—
7	161492.0	70.8	15	2	1867.0	1582.0	—
8	343392.0	63.1	15	1	1622.0	—	—
9	523700.0	67.0	15	2	1727.0	1602.0	—
10	705267.0	77.1	15	2	1815.0	1010.0	—
11	139631.0	61.1	15	1	1077.0	—	—
12	319822.0	93.6	15	3	1270.0	1233.0	1945.0
13	500755.0	85.3	15	3	1474.0	1469.0	1337.0
14	684575.0	64.4	15	1	1042.0	—	—
15	116679.0	91.0	15	3	1211.0	1731.0	1831.0

Type 5 Radar Waveform_24

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	597901.0	62.9	5	1	1876.0	—	—
1	959508.0	91.0	5	3	1315.0	1954.0	1312.0
2	1322769.0	94.0	5	3	1590.0	1304.0	1037.0
3	189795.0	55.5	5	1	1938.0	—	—
4	553159.0	65.6	5	1	1838.0	—	—
5	914689.0	86.1	5	3	1377.0	1896.0	1543.0
6	1278411.0	79.2	5	2	1966.0	1571.0	—
7	145089.0	64.3	5	1	1442.0	—	—

Type 5 Radar Waveform_25								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	369071.0	72.3	8	2	1791.0	1540.0	-	
1	632811.0	74.8	8	2	1563.0	1823.0	-	
2	897794.0	60.1	8	1	1901.0	-	-	
3	72859.0	81.5	8	2	1455.0	1110.0	-	
4	337086.0	54.5	8	1	1695.0	-	-	
5	599497.0	90.0	8	3	1426.0	1689.0	1766.0	
6	864781.0	66.8	8	2	1052.0	1452.0	-	
7	40270.0	93.4	8	3	1435.0	1324.0	1841.0	
8	304398.0	80.2	8	2	1088.0	1140.0	-	
9	567879.0	81.8	8	2	1468.0	1829.0	-	
10	832534.0	81.0	8	2	1104.0	1050.0	-	
Type 5 Radar Waveform_26								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	5363.0	93.1	16	3	1527.0	1273.0	1931.0	
1	186950.0	55.7	16	1	1386.0	-	-	
2	367582.0	78.4	16	2	1800.0	1475.0	-	
3	548311.0	78.6	16	2	1972.0	1814.0	-	
4	729142.0	90.8	16	3	1076.0	1299.0	1564.0	
5	164245.0	69.0	16	2	1915.0	1018.0	-	
6	344970.0	84.6	16	3	1718.0	1103.0	1112.0	
7	525701.0	95.1	16	3	1257.0	1549.0	1431.0	
8	707298.0	79.3	16	2	1653.0	1817.0	-	
9	142272.0	52.3	16	1	1119.0	-	-	
10	323530.0	64.7	16	1	1973.0	-	-	
11	503625.0	86.3	16	3	1517.0	1089.0	1329.0	
12	687255.0	60.8	16	1	1008.0	-	-	
13	119309.0	97.2	16	3	1947.0	1761.0	1102.0	
14	300736.0	72.5	16	2	1419.0	1663.0	-	
15	481588.0	72.6	16	2	1673.0	1873.0	-	

Type 5 Radar Waveform_27

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	1328722.0	75.3	5	2	1574.0	1611.0	—
1	194926.0	77.5	5	2	1271.0	1949.0	—
2	558401.0	65.9	5	1	1992.0	—	—
3	921212.0	81.7	5	2	1311.0	1499.0	—
4	1283807.0	80.2	5	2	1595.0	1821.0	—
5	150430.0	61.7	5	1	1035.0	—	—
6	513012.0	87.0	5	3	1752.0	1047.0	1049.0
7	875304.0	94.6	5	3	1810.0	1736.0	1280.0

Type 5 Radar Waveform_28

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	619546.0	54.8	15	1	1712.0	—	—
1	52618.0	66.7	15	2	1981.0	1481.0	—
2	233288.0	92.4	15	3	1423.0	1746.0	1535.0
3	415942.0	66.2	15	1	1291.0	—	—
4	596351.0	73.2	15	2	1432.0	1332.0	—
5	30377.0	50.2	15	1	1934.0	—	—
6	211153.0	83.8	15	3	1350.0	1524.0	1368.0
7	392642.0	81.0	15	2	1864.0	1201.0	—
8	574838.0	61.7	15	1	1710.0	—	—
9	8038.0	54.3	15	1	1147.0	—	—
10	189048.0	71.3	15	2	1674.0	1884.0	—
11	369954.0	85.2	15	3	1222.0	1358.0	1239.0
12	550163.0	84.6	15	3	1454.0	1927.0	1471.0
13	734056.0	62.4	15	1	1619.0	—	—
14	167199.0	53.2	15	1	1541.0	—	—
15	347888.0	86.6	15	3	1171.0	1057.0	1107.0

Type 5 Radar Waveform_29

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	1060739.0	81.1	6	2	1594.0	1145.0	—
1	1422227.0	91.1	6	3	1444.0	1400.0	1625.0
2	289402.0	99.9	6	3	1533.0	1115.0	1860.0
3	653455.0	62.0	6	1	1414.0	—	—
4	1016916.0	57.6	6	1	1403.0	—	—
5	1377753.0	88.6	6	3	1544.0	1125.0	1579.0
6	244652.0	99.4	6	3	1880.0	1560.0	1513.0
7	607485.0	84.4	6	3	1105.0	1789.0	1476.0

Radar Type 6 - Radar Statistical Performance			
Trail #	1=Detection 0=No Detection	Trail #	1=Detection 0=No Detection
0	1	15	1
1	1	16	1
2	1	17	0
3	1	18	1
4	1	19	1
5	0	20	0
6	0	21	1
7	1	22	1
8	1	23	0
9	0	24	1
10	1	25	1
11	1	26	1
12	1	27	1
13	1	28	0
14	0	29	0
Detection Percentage (%)		70.0%	

Type 6 Radar Waveform_0

Frequency List (MHz)	0	1	2	3	4
0	5398	5625	5295	5387	5455
5	5626	5609	5289	5633	5616
10	5604	5404	5327	5251	5724
15	5427	5589	5593	5310	5707
20	5466	5711	5392	5488	5430
25	5417	5446	5269	5677	5298
30	5605	5271	5662	5304	5401
35	5500	5583	5655	5556	5279
40	5383	5538	5290	5509	5706
45	5560	5623	5342	5700	5384
50	5378	5313	5533	5613	5580
55	5629	5682	5385	5590	5337
60	5585	5261	5680	5467	5370
65	5672	5474	5569	5281	5287
70	5671	5653	5608	5507	5692
75	5519	5451	5391	5543	5645
80	5464	5683	5379	5513	5617
85	5267	5301	5698	5518	5574
90	5548	5527	5498	5276	5343
95	5600	5492	5476	5540	5444

Type 6 Radar Waveform_1

Frequency List (MHz)	0	1	2	3	4
0	5653	5389	5706	5548	5297
5	5668	5631	5267	5321	5348
10	5535	5368	5349	5270	5418
15	5716	5696	5355	5424	5474
20	5402	5333	5480	5403	5305
25	5298	5472	5306	5332	5647
30	5635	5619	5519	5553	5698
35	5722	5271	5449	5432	5470
40	5447	5471	5557	5552	5322
45	5308	5442	5431	5278	5664
50	5709	5598	5573	5395	5717
55	5620	5409	5714	5426	5396
60	5671	5618	5518	5317	5594
65	5648	5347	5657	5708	5356
70	5478	5323	5511	5686	5723
75	5580	5302	5642	5496	5457
80	5537	5613	5416	5481	5571
85	5508	5703	5429	5358	5649
90	5461	5506	5363	5582	5666
95	5420	5467	5549	5586	5644

Type 6 Radar Waveform_2					
Frequency List (MHz)	0	1	2	3	4
0	5433	5628	5642	5709	5517
5	5710	5556	5342	5484	5555
10	5466	5457	5409	5544	5291
15	5506	5368	5702	5303	5616
20	5482	5471	5371	5569	5376
25	5571	5722	5675	5410	5366
30	5311	5524	5576	5637	5327
35	5518	5289	5362	5720	5585
40	5686	5313	5553	5385	5711
45	5554	5481	5680	5391	5403
50	5640	5540	5715	5687	5604
55	5420	5583	5671	5335	5703
60	5279	5591	5667	5497	5564
65	5498	5467	5256	5329	5443
70	5655	5419	5265	5644	5437
75	5292	5631	5257	5704	5493
80	5331	5416	5269	5365	5639
85	5691	5601	5299	5597	5330
90	5381	5435	5519	5294	5673
95	5463	5618	5283	5478	5561
Type 6 Radar Waveform_3					
Frequency List (MHz)	0	1	2	3	4
0	5688	5392	5578	5298	5359
5	5374	5417	5647	5384	5300
10	5721	5450	5264	5312	5594
15	5495	5330	5348	5333	5393
20	5637	5561	5446	5459	5574
25	5403	5611	5400	5353	5510
30	5533	5377	5479	5716	5428
35	5453	5516	5360	5697	5627
40	5636	5323	5379	5648	5313
45	5660	5474	5461	5537	5430
50	5416	5586	5291	5301	5427
55	5364	5674	5625	5525	5522
60	5628	5497	5281	5612	5535
65	5420	5321	5292	5335	5458
70	5588	5251	5336	5432	5523
75	5396	5639	5654	5685	5441
80	5672	5433	5411	5504	5616
85	5560	5724	5486	5589	5363
90	5715	5500	5295	5592	5378
95	5397	5438	5657	5498	5593

Type 6 Radar Waveform_4					
Frequency List (MHz)	0	1	2	3	4
0	5371	5631	5514	5459	5579
5	5416	5503	5492	5713	5591
10	5706	5607	5588	5333	5682
15	5525	5433	5393	5622	5401
20	5253	5650	5419	5347	5426
25	5606	5715	5434	5395	5399
30	5490	5592	5536	5567	5544
35	5312	5513	5611	5466	5341
40	5261	5619	5645	5717	5640
45	5557	5519	5590	5317	5670
50	5287	5342	5487	5250	5686
55	5387	5719	5599	5626	5446
60	5367	5721	5553	5522	5365
65	5605	5660	5712	5339	5281
70	5499	5355	5608	5299	5543
75	5666	5425	5454	5453	5597
80	5491	5633	5504	5555	5620
85	5617	5689	5440	5540	5528
90	5285	5404	5609	5671	5412
95	5276	5407	5500	5636	5655
Type 6 Radar Waveform_5					
Frequency List (MHz)	0	1	2	3	4
0	5626	5395	5450	5620	5421
5	5458	5525	5567	5401	5323
10	5637	5396	5629	5654	5354
15	5673	5652	5536	5341	5339
20	5409	5397	5291	5642	5392
25	5613	5375	5712	5344	5468
30	5534	5385	5447	5332	5405
35	5356	5706	5257	5680	5666
40	5402	5424	5577	5384	5549
45	5640	5480	5643	5582	5546
50	5463	5393	5576	5451	5630
55	5575	5533	5430	5538	5570
60	5658	5611	5599	5296	5547
65	5499	5723	5314	5267	5678
70	5400	5539	5698	5439	5605
75	5475	5419	5589	5647	5677
80	5564	5331	5664	5651	5423
85	5407	5583	5334	5557	5491
90	5313	5607	5693	5252	5371
95	5513	5251	5649	5386	5603

Type 6 Radar Waveform_6

Frequency List (MHz)	0	1	2	3	4
0	5406	5256	5386	5306	5641
5	5500	5547	5642	5564	5627
10	5471	5660	5670	5277	5375
15	5286	5304	5639	5531	5320
20	5466	5707	5365	5501	5702
25	5440	5448	5502	5576	5274
30	5404	5450	5654	5554	5273
35	5348	5476	5441	5536	5716
40	5507	5515	5624	5478	5600
45	5723	5538	5599	5469	5422
50	5444	5665	5477	5288	5487
55	5620	5357	5541	5312	5301
60	5544	5603	5470	5445	5546
65	5263	5303	5413	5292	5342
70	5426	5442	5454	5451	5449
75	5539	5257	5628	5674	5587
80	5353	5714	5618	5310	5643
85	5526	5522	5464	5330	5383
90	5355	5405	5524	5525	5644
95	5268	5706	5370	5659	5421

Type 6 Radar Waveform_7

Frequency List (MHz)	0	1	2	3	4
0	5661	5495	5322	5467	5483
5	5639	5472	5717	5252	5359
10	5402	5449	5711	5396	5374
15	5431	5645	5723	5328	5632
20	5648	5338	5292	5651	5643
25	5649	5536	5618	5638	5361
30	5665	5331	5412	5439	5272
35	5594	5450	5555	5590	5453
40	5636	5407	5580	5596	5652
45	5259	5298	5340	5279	5572
50	5421	5476	5441	5713	5554
55	5415	5466	5489	5435	5296
60	5488	5687	5720	5562	5523
65	5595	5542	5303	5427	5707
70	5321	5659	5609	5706	5368
75	5517	5302	5527	5310	5653
80	5606	5621	5390	5496	5712
85	5625	5548	5309	5634	5282
90	5461	5722	5334	5377	5459
95	5642	5557	5582	5414	5601

Type 6 Radar Waveform_8

Frequency List (MHz)	0	1	2	3	4
0	5441	5259	5258	5628	5703
5	5681	5494	5317	5318	5566
10	5333	5713	5277	5667	5417
15	5462	5558	5273	5476	5440
20	5336	5701	5686	5337	5311
25	5655	5503	5371	5278	5570
30	5660	5624	5405	5580	5572
35	5551	5530	5640	5272	5364
40	5394	5295	5391	5532	5255
45	5714	5463	5414	5557	5705
50	5621	5552	5516	5546	5465
55	5395	5268	5664	5428	5373
60	5386	5631	5434	5267	5694
65	5636	5455	5454	5326	5545
70	5306	5666	5290	5682	5446
75	5590	5322	5524	5533	5688
80	5495	5338	5355	5450	5485
85	5348	5367	5376	5646	5299
90	5416	5445	5604	5437	5575
95	5608	5287	5459	5263	5319

Type 6 Radar Waveform_9

Frequency List (MHz)	0	1	2	3	4
0	5599	5498	5669	5314	5545
5	5723	5419	5392	5481	5395
10	5642	5502	5318	5387	5438
15	5453	5588	5376	5424	5632
20	5722	5627	5329	5284	5446
25	5355	5574	5382	5604	5324
30	5513	5275	5620	5257	5593
35	5621	5436	5522	5375	5708
40	5378	5297	5252	5643	5443
45	5497	5615	5283	5411	5428
50	5692	5597	5554	5596	5687
55	5280	5349	5618	5667	5357
60	5699	5321	5476	5520	5380
65	5296	5585	5287	5724	5264
70	5548	5379	5282	5625	5259
75	5327	5492	5571	5638	5335
80	5405	5273	5525	5521	5253
85	5591	5337	5629	5433	5698
90	5501	5258	5403	5373	5410
95	5451	5316	5471	5429	5338

Type 6 Radar Waveform_10					
Frequency List (MHz)	0	1	2	3	4
0	5379	5262	5605	5378	5290
5	5441	5467	5644	5602	5573
10	5388	5359	5582	5459	5541
15	5715	5479	5469	5349	5255
20	5461	5568	5418	5257	5334
25	5304	5680	5486	5638	5366
30	5402	5707	5263	5506	5590
35	5675	5289	5267	5537	5724
40	5475	5423	5580	5673	5336
45	5298	5393	5648	5643	5419
50	5534	5468	5303	5333	5328
55	5353	5421	5503	5346	5326
60	5594	5631	5253	5497	5616
65	5407	5433	5347	5703	5258
70	5584	5606	5447	5635	5649
75	5415	5445	5661	5437	5588
80	5518	5545	5591	5276	5689
85	5625	5663	5455	5389	5526
90	5510	5711	5465	5593	5653
95	5557	5444	5452	5701	5567
Type 6 Radar Waveform_11					
Frequency List (MHz)	0	1	2	3	4
0	5634	5501	5541	5539	5607
5	5429	5366	5542	5332	5334
10	5407	5652	5400	5680	5480
15	5629	5367	5582	5514	5263
20	5627	5509	5410	5705	5697
25	5631	5408	5590	5672	5388
30	5664	5478	5658	5396	5425
35	5503	5353	5678	5483	5641
40	5721	5404	5403	5663	5389
45	5563	5655	5472	5699	5257
50	5717	5656	5523	5683	5677
55	5385	5651	5335	5269	5369
60	5320	5580	5289	5329	5411
65	5685	5505	5333	5552	5709
70	5543	5575	5567	5303	5630
75	5667	5555	5442	5601	5515
80	5265	5494	5593	5342	5531
85	5506	5279	5661	5258	5482
90	5381	5690	5401	5350	5581
95	5609	5444	5271	5316	5294

Type 6 Radar Waveform_12					
Frequency List (MHz)	0	1	2	3	4
0	5414	5265	5477	5700	5352
5	5471	5388	5617	5398	5638
10	5338	5441	5538	5400	5501
15	5717	5494	5588	5559	5355
20	5649	5318	5547	5499	5678
25	5488	5580	5611	5316	5706
30	5277	5621	5693	5432	5705
35	5535	5516	5396	5603	5689
40	5322	5724	5521	5445	5718
45	5333	5383	5271	5692	5442
50	5353	5434	5648	5275	5443
55	5540	5325	5369	5686	5713
60	5502	5514	5341	5311	5642
65	5570	5315	5529	5703	5539
70	5681	5391	5674	5319	5276
75	5304	5685	5447	5590	5349
80	5444	5568	5698	5290	5336
85	5415	5460	5397	5532	5615
90	5437	5399	5527	5384	5423
95	5475	5510	5464	5636	5478
Type 6 Radar Waveform_13					
Frequency List (MHz)	0	1	2	3	4
0	5572	5504	5413	5386	5669
5	5513	5313	5692	5561	5370
10	5269	5705	5579	5595	5522
15	5708	5621	5691	5507	5547
20	5657	5387	5488	5491	5651
25	5376	5432	5339	5420	5265
30	5589	5641	5578	5433	5584
35	5428	5577	5607	5667	5281
40	5603	5636	5332	5459	5685
45	5337	5640	5363	5354	5275
50	5398	5715	5310	5349	5326
55	5532	5266	5557	5543	5321
60	5619	5643	5506	5353	5474
65	5396	5261	5344	5478	5264
70	5371	5573	5271	5402	5279
75	5628	5661	5461	5416	5710
80	5492	5592	5599	5678	5479
85	5357	5399	5412	5655	5397
90	5374	5675	5629	5364	5511
95	5582	5588	5494	5352	5481

Type 6 Radar Waveform_14

Frequency List (MHz)	0	1	2	3	4
0	5352	5268	5349	5547	5414
5	5555	5335	5292	5724	5577
10	5578	5494	5620	5315	5543
15	5321	5651	5319	5552	5264
20	5665	5553	5429	5580	5624
25	5642	5284	5542	5524	5299
30	5631	5627	5535	5551	5358
35	5723	5716	5698	5463	5434
40	5517	5572	5415	5397	5353
45	5334	5569	5343	5437	5711
50	5451	5505	5661	5525	5377
55	5621	5564	5591	5270	5497
60	5521	5518	5590	5297	5671
65	5298	5306	5304	5545	5427
70	5300	5581	5368	5472	5440
75	5388	5379	5477	5540	5420
80	5288	5355	5538	5573	5376
85	5313	5260	5462	5409	5691
90	5638	5707	5465	5402	5278
95	5500	5289	5617	5498	5271

Type 6 Radar Waveform_15

Frequency List (MHz)	0	1	2	3	4
0	5607	5507	5285	5708	5256
5	5694	5260	5367	5412	5309
10	5509	5380	5661	5510	5564
15	5409	5303	5422	5597	5456
20	5576	5622	5467	5572	5530
25	5270	5628	5333	5295	5516
30	5395	5291	5446	5314	5356
35	5684	5528	5411	5595	5335
40	5593	5331	5401	5701	5520
45	5294	5504	5392	5440	5428
50	5710	5387	5535	5458	5451
55	5711	5337	5464	5426	5361
60	5718	5620	5250	5368	5376
65	5714	5413	5275	5512	5374
70	5382	5326	5379	5257	5475
75	5681	5554	5685	5406	5667
80	5678	5630	5698	5441	5672
85	5419	5699	5600	5443	5603
90	5323	5499	5265	5515	5527
95	5298	5641	5683	5255	5459

Type 6 Radar Waveform_16

Frequency List (MHz)	0	1	2	3	4
0	5387	5271	5696	5394	5476
5	5261	5282	5442	5575	5613
10	5440	5644	5702	5608	5585
15	5497	5430	5525	5545	5648
20	5584	5313	5408	5661	5570
25	5321	5560	5376	5354	5367
30	5337	5502	5352	5506	5284
35	5266	5519	5627	5362	5250
40	5678	5273	5358	5328	5330
45	5681	5603	5557	5657	5316
50	5402	5479	5324	5685	5382
55	5549	5405	5426	5631	5435
60	5458	5526	5285	5542	5543
65	5671	5569	5325	5275	5623
70	5530	5553	5360	5482	5650
75	5492	5338	5701	5595	5252
80	5535	5436	5297	5374	5403
85	5472	5633	5540	5470	5420
90	5609	5357	5629	5381	5620
95	5311	5550	5554	5404	5414

Type 6 Radar Waveform_17

Frequency List (MHz)	0	1	2	3	4
0	5642	5510	5632	5555	5318
5	5303	5682	5517	5641	5345
10	5274	5433	5268	5328	5606
15	5585	5557	5531	5590	5365
20	5592	5382	5349	5653	5543
25	5684	5509	5579	5458	5401
30	5379	5391	5309	5721	5436
35	5464	5561	5593	5423	5515
40	5356	5564	5286	5686	5598
45	5325	5637	5661	5410	5610
50	5544	5667	5578	5530	5411
55	5326	5262	5359	5616	5450
60	5406	5587	5691	5705	5374
65	5369	5617	5392	5689	5455
70	5259	5278	5443	5485	5402
75	5468	5297	5573	5618	5395
80	5516	5657	5449	5553	5441
85	5273	5582	5581	5314	5253
90	5505	5424	5720	5298	5615
95	5294	5386	5646	5569	5502

Type 6 Radar Waveform_18					
Frequency List (MHz)	0	1	2	3	4
0	5325	5274	5665	5619	5538
5	5345	5704	5592	5329	5552
10	5680	5697	5309	5523	5627
15	5576	5684	5634	5635	5557
20	5503	5548	5387	5267	5516
25	5475	5361	5307	5562	5338
30	5518	5280	5266	5364	5685
35	5284	5700	5694	5290	5367
40	5403	5369	5624	5419	5566
45	5641	5294	5371	5663	5334
50	5543	5279	5581	5599	5709
55	5648	5450	5313	5331	5647
60	5377	5716	5381	5650	5681
65	5670	5660	5593	5698	5250
70	5692	5537	5447	5429	5488
75	5251	5444	5256	5542	5263
80	5441	5497	5434	5559	5605
85	5336	5300	5302	5484	5253
90	5445	5373	5493	5438	5463
95	5621	5328	5495	5491	5564
Type 6 Radar Waveform_19					
Frequency List (MHz)	0	1	2	3	4
0	5580	5513	5601	5305	5380
5	5484	5629	5667	5492	5381
10	5514	5486	5350	5718	5648
15	5664	5714	5262	5680	5274
20	5511	5617	5328	5259	5489
25	5363	5688	5510	5666	5372
30	5560	5266	5698	5579	5362
35	5364	5300	5587	5443	5281
40	5339	5549	5562	5506	5416
45	5495	5621	5377	5429	5619
50	5696	5322	5455	5632	5532
55	5592	5638	5267	5521	5466
60	5251	5370	5546	5595	5593
65	5606	5647	5286	5497	5487
70	5340	5519	5415	5588	5575
75	5420	5690	5414	5383	5584
80	5589	5669	5590	5294	5496
85	5297	5594	5570	5269	5540
90	5338	5636	5628	5627	5265
95	5308	5604	5657	5462	5523

Type 6 Radar Waveform_20					
Frequency List (MHz)	0	1	2	3	4
0	5360	5277	5537	5466	5600
5	5526	5651	5267	5655	5588
10	5445	5372	5488	5438	5669
15	5366	5365	5628	5563	5519
20	5308	5269	5348	5462	5251
25	5637	5713	5392	5406	5602
30	5630	5319	5611	5302	5391
35	5383	5596	5670	5653	5632
40	5403	5271	5413	5327	5601
45	5460	5487	5672	5486	5673
50	5631	5683	5355	5439	5351
55	5696	5711	5285	5697	5499
60	5442	5419	5552	5617	5700
65	5707	5379	5618	5591	5401
70	5424	5299	5649	5503	5252
75	5556	5682	5371	5458	5559
80	5294	5314	5387	5509	5257
85	5681	5480	5514	5456	5318
90	5255	5665	5616	5641	5342
95	5626	5489	5362	5394	5578
Type 6 Radar Waveform_21					
Frequency List (MHz)	0	1	2	3	4
0	5615	5613	5473	5627	5442
5	5568	5576	5342	5721	5320
10	5376	5636	5529	5536	5690
15	5365	5493	5468	5673	5280
20	5430	5474	5307	5340	5435
25	5517	5489	5344	5496	5440
30	5644	5519	5612	5534	5288
35	5597	5545	5579	5654	5371
40	5681	5492	5715	5341	5511
45	5410	5256	5484	5543	5448
50	5250	5373	5549	5332	5259
55	5488	5556	5383	5539	5650
60	5329	5482	5668	5628	5401
65	5582	5274	5720	5595	5343
70	5261	5649	5421	5285	5691
75	5651	5275	5608	5255	5623
80	5298	5537	5618	5317	5525
85	5622	5291	5509	5290	5351
90	5292	5449	5646	5434	5665
95	5483	5711	5450	5336	5656

Type 6 Radar Waveform_22

Frequency List (MHz)	0	1	2	3	4
0	5298	5377	5409	5313	5662
5	5610	5598	5417	5624	5685
10	5425	5570	5256	5711	5356
15	5620	5474	5718	5472	5438
20	5543	5723	5429	5408	5405
25	5547	5600	5308	5505	5569
30	5652	5537	5320	5684	5670
35	5524	5595	5331	5420	5279
40	5654	5407	5563	5464	5626
45	5506	5303	5638	5508	5310
50	5577	5379	5705	5630	5604
55	5519	5301	5639	5660	5566
60	5527	5581	5643	5541	5641
65	5494	5675	5274	5444	5602
70	5357	5470	5694	5500	5251
75	5567	5699	5646	5441	5518
80	5395	5427	5689	5666	5704
85	5290	5668	5255	5544	5514
90	5485	5648	5267	5270	5332
95	5262	5353	5706	5631	5678

Type 6 Radar Waveform_23

Frequency List (MHz)	0	1	2	3	4
0	5553	5616	5345	5474	5407
5	5274	5523	5492	5572	5356
10	5689	5611	5451	5257	5444
15	5272	5577	5288	5664	5446
20	5709	5421	5381	5671	5290
25	5275	5704	5508	5350	5394
30	5526	5392	5615	5348	5286
35	5343	5677	5509	5267	5503
40	5692	5419	5501	5564	5525
45	5679	5684	5361	5666	5649
50	5558	5595	5513	5314	5256
55	5472	5413	5469	5487	5367
60	5443	5711	5581	5336	5405
65	5456	5319	5349	5702	5571
70	5291	5499	5647	5440	5378
75	5370	5663	5424	5668	5607
80	5315	5261	5479	5439	5686
85	5672	5338	5273	5682	5371
90	5690	5529	5657	5460	5705
95	5550	5463	5282	5388	5554

Type 6 Radar Waveform_24

Frequency List (MHz)	0	1	2	3	4
0	5333	5380	5281	5635	5724
5	5316	5545	5567	5260	5563
10	5547	5478	5652	5646	5278
15	5532	5302	5680	5711	5381
20	5357	5303	5605	5510	5354
25	5559	5617	5430	5542	5392
30	5283	5483	5607	5463	5338
35	5390	5377	5614	5452	5520
40	5581	5586	5630	5659	5498
45	5421	5424	5317	5525	5409
50	5315	5555	5385	5412	5280
55	5500	5496	5531	5512	5414
60	5484	5443	5514	5342	5433
65	5665	5272	5606	5683	5598
70	5539	5322	5673	5678	5485
75	5540	5411	5480	5327	5550
80	5445	5660	5716	5668	5449
85	5356	5347	5490	5459	5492
90	5503	5376	5474	5387	5346
95	5674	5427	5428	5645	5675

Type 6 Radar Waveform_25

Frequency List (MHz)	0	1	2	3	4
0	5588	5619	5692	5699	5469
5	5358	5470	5642	5326	5392
10	5381	5364	5693	5366	5299
15	5620	5429	5308	5281	5573
20	5365	5643	5502	5327	5350
25	5566	5681	5534	5576	5531
30	5269	5440	5347	5615	5633
35	5529	5468	5410	5605	5434
40	5420	5669	5568	5495	5253
45	5404	5400	5583	5677	5431
50	5561	5463	5466	5323	5719
55	5369	5614	5611	5455	5572
60	5586	5459	5649	5476	5391
65	5341	5686	5623	5498	5486
70	5292	5525	5422	5522	5654
75	5444	5509	5676	5461	5579
80	5660	5701	5609	5496	5657
85	5436	5571	5291	5338	5548
90	5312	5707	5690	5668	5382
95	5275	5356	5492	5501	5401

Type 6 Radar Waveform_26					
Frequency List (MHz)	0	1	2	3	4
0	5271	5383	5628	5385	5311
5	5497	5492	5717	5489	5599
10	5312	5259	5464	5320	5611
15	5556	5411	5326	5290	5373
20	5538	5584	5591	5300	5713
25	5418	5638	5610	5573	5633
30	5397	5465	5389	5453	5668
35	5656	5303	5283	5348	5374
40	5506	5567	5657	5384	5483
45	5641	5467	5307	5262	5514
50	5555	5524	5287	5432	5323
55	5329	5430	5426	5701	5276
60	5404	5481	5519	5422	5689
65	5722	5358	5293	5289	5364
70	5511	5425	5274	5533	5403
75	5381	5554	5344	5442	5356
80	5673	5482	5298	5654	5631
85	5474	5705	5301	5265	5655
90	5495	5480	5413	5388	5687
95	5616	5601	5518	5359	5264
Type 6 Radar Waveform_27					
Frequency List (MHz)	0	1	2	3	4
0	5526	5622	5564	5546	5531
5	5539	5417	5317	5652	5331
10	5718	5300	5659	5341	5699
15	5683	5274	5579	5284	5704
20	5525	5583	5273	5601	5367
25	5515	5267	5644	5615	5619
30	5354	5680	5541	5651	5710
35	5272	5574	5533	5359	5573
40	5457	5347	5332	5489	5364
45	5566	5602	5471	5561	5438
50	5565	5706	5620	5277	5519
55	5724	5258	5441	5349	5313
60	5442	5368	5415	5714	5283
65	5665	5563	5470	5497	5428
70	5598	5509	5362	5350	5674
75	5390	5423	5608	5308	5263
80	5462	5719	5351	5474	5547
85	5264	5360	5449	5253	5708
90	5523	5394	5721	5498	5535
95	5414	5723	5693	5379	5397

Type 6 Radar Waveform_28					
Frequency List (MHz)	0	1	2	3	4
0	5306	5386	5500	5707	5373
5	5581	5439	5392	5340	5635
10	5552	5681	5438	5379	5362
15	5312	5335	5520	5319	5296
20	5292	5298	5563	5672	5721
25	5694	5718	5468	5678	5279
30	5508	5311	5420	5315	5471
35	5374	5363	5370	5686	5273
40	5509	5540	5285	5572	5583
45	5418	5722	5649	5660	5524
50	5619	5437	5614	5616	5258
55	5645	5553	5333	5706	5612
60	5446	5271	5387	5606	5391
65	5620	5268	5411	5663	5697
70	5400	5455	5605	5580	5528
75	5447	5485	5321	5533	5404
80	5385	5519	5626	5307	5551
85	5643	5377	5486	5324	5488
90	5431	5688	5658	5380	5469
95	5329	5591	5261	5367	5453
Type 6 Radar Waveform_29					
Frequency List (MHz)	0	1	2	3	4
0	5561	5625	5436	5393	5593
5	5623	5364	5467	5406	5367
10	5483	5470	5479	5574	5383
15	5400	5365	5488	5300	5464
20	5504	5286	5694	5280	5546
25	5446	5572	5712	5321	5397
30	5268	5635	5669	5513	5454
35	5263	5662	5348	5720	5698
40	5715	5580	5347	5702	5257
45	5718	5577	5506	5313	5315
50	5667	5468	5497	5424	5660
55	5327	5265	5717	5516	5296
60	5336	5549	5569	5357	5439
65	5612	5258	5707	5250	5551
70	5677	5566	5531	5461	5666
75	5676	5482	5637	5431	5693
80	5370	5548	5363	5328	5287
85	5269	5453	5652	5251	5378
90	5503	5692	5640	5356	5524
95	5489	5603	5451	5310	5252

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-10		
Test Item	Radar Statistical Performance Check (802.11be-EHT40 – 5510MHz) - AP Mode		

Radar Type 1-4 - Radar Statistical Performance								
Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
0	5521	1	5506	1	5519	1	5496	1
1	5515	1	5497	1	5512	0	5511	0
2	5524	1	5491	0	5522	1	5520	1
3	5498	1	5516	1	5513	1	5518	1
4	5500	1	5501	1	5509	1	5503	1
5	5490	0	5495	1	5525	1	5492	1
6	5520	1	5493	1	5515	1	5507	0
7	5505	1	5519	1	5500	1	5499	1
8	5493	1	5504	1	5490	1	5521	1
9	5508	1	5507	1	5523	1	5522	1
10	5527	1	5514	1	5524	1	5525	1
11	5507	1	5521	1	5492	1	5510	0
12	5525	1	5526	1	5503	1	5494	1
13	5506	1	5520	1	5526	1	5523	1
14	5495	1	5510	1	5527	1	5501	1
15	5503	1	5515	1	5528	1	5519	1
16	5516	1	5496	1	5520	1	5530	1
17	5530	1	5508	1	5529	1	5493	1
18	5501	1	5490	1	5497	1	5505	1
19	5529	1	5509	1	5510	1	5497	1
20	5512	1	5523	0	5511	1	5504	0
21	5518	1	5522	1	5521	1	5498	1
22	5514	1	5524	1	5499	0	5506	1
23	5519	1	5525	1	5516	1	5526	1
24	5523	1	5492	1	5498	1	5514	1
25	5510	1	5500	1	5518	1	5491	1
26	5502	1	5503	1	5514	1	5502	1
27	5517	1	5517	1	5501	1	5524	1

Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency	1=detect	Frequency	1=detect	Frequency	1=detect	Frequency	1=detect
	(MHz)	0=no detect	(MHz)	0=no detect	(MHz)	0=no detect	(MHz)	0=no detect
28	5509	1	5530	1	5530	1	5490	0
29	5528	1	5512	1	5504	1	5516	1
Probability:	96.7%		93.3%		93.3%		83.3%	
Aggregate:	91.7% (>80%)							

Radar Type 1 - Radar Waveform							Radar Type 2 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 1	1.0	758.0	70	53080.0	Download	0	Type 2	3.5	167.0	27	4509.0
Download	1	Type 1	1.0	578.0	92	53176.0	Download	1	Type 2	1.4	196.0	23	4508.0
Download	2	Type 1	1.0	858.0	62	53196.0	Download	2	Type 2	4.1	168.0	28	4704.0
Download	3	Type 1	1.0	678.0	78	52884.0	Download	3	Type 2	3.7	210.0	27	5670.0
Download	4	Type 1	1.0	698.0	76	53048.0	Download	4	Type 2	3.1	226.0	26	5876.0
Download	5	Type 1	1.0	3066.0	18	55188.0	Download	5	Type 2	2.9	164.0	26	4264.0
Download	6	Type 1	1.0	798.0	67	53466.0	Download	6	Type 2	3.7	192.0	27	5184.0
Download	7	Type 1	1.0	658.0	81	53298.0	Download	7	Type 2	1.9	172.0	24	4128.0
Download	8	Type 1	1.0	898.0	59	52982.0	Download	8	Type 2	2.9	156.0	26	4056.0
Download	9	Type 1	1.0	718.0	74	53132.0	Download	9	Type 2	1.4	177.0	23	4071.0
Download	10	Type 1	1.0	878.0	61	53558.0	Download	10	Type 2	2.4	220.0	25	5500.0
Download	11	Type 1	1.0	818.0	65	53170.0	Download	11	Type 2	4.6	154.0	29	4466.0
Download	12	Type 1	1.0	918.0	58	53244.0	Download	12	Type 2	4.9	190.0	29	5510.0
Download	13	Type 1	1.0	618.0	86	53148.0	Download	13	Type 2	3.2	211.0	26	5486.0
Download	14	Type 1	1.0	598.0	89	53222.0	Download	14	Type 2	1.2	194.0	23	4462.0
Download	15	Type 1	1.0	1595.0	34	54230.0	Download	15	Type 2	4.2	170.0	28	4760.0
Download	16	Type 1	1.0	1640.0	33	54120.0	Download	16	Type 2	2.1	200.0	25	5000.0
Download	17	Type 1	1.0	2899.0	19	55081.0	Download	17	Type 2	1.7	161.0	24	3864.0
Download	18	Type 1	1.0	935.0	57	53295.0	Download	18	Type 2	2.3	227.0	25	5675.0
Download	19	Type 1	1.0	944.0	56	52864.0	Download	19	Type 2	4.1	186.0	28	5208.0
Download	20	Type 1	1.0	1660.0	32	53120.0	Download	20	Type 2	3.5	157.0	27	4239.0
Download	21	Type 1	1.0	1551.0	35	54285.0	Download	21	Type 2	1.3	205.0	23	4715.0
Download	22	Type 1	1.0	2272.0	24	54528.0	Download	22	Type 2	2.4	189.0	25	4725.0
Download	23	Type 1	1.0	1109.0	48	53232.0	Download	23	Type 2	4.4	193.0	28	5404.0
Download	24	Type 1	1.0	967.0	55	53185.0	Download	24	Type 2	3.3	188.0	26	4888.0
Download	25	Type 1	1.0	2612.0	21	54852.0	Download	25	Type 2	1.3	166.0	23	3818.0
Download	26	Type 1	1.0	1811.0	30	54330.0	Download	26	Type 2	2.1	215.0	25	5375.0
Download	27	Type 1	1.0	1345.0	40	53800.0	Download	27	Type 2	3.5	191.0	27	5157.0
Download	28	Type 1	1.0	3010.0	18	54180.0	Download	28	Type 2	1.2	153.0	23	3519.0
Download	29	Type 1	1.0	559.0	95	53105.0	Download	29	Type 2	2.3	204.0	25	5100.0

Radar Type 3 - Radar Waveform							Radar Type 4 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 3	8.5	305.0	17	5185.0	Download	0	Type 4	16.6	305.0	15	4575.0
Download	1	Type 3	6.4	383.0	16	6128.0	Download	1	Type 4	11.8	383.0	12	4596.0
Download	2	Type 3	9.1	356.0	18	6408.0	Download	2	Type 4	18.0	356.0	15	5340.0
Download	3	Type 3	8.7	473.0	18	8514.0	Download	3	Type 4	17.2	473.0	15	7095.0
Download	4	Type 3	8.1	212.0	17	3604.0	Download	4	Type 4	15.8	212.0	14	2968.0
Download	5	Type 3	7.9	266.0	17	4522.0	Download	5	Type 4	15.4	266.0	14	3724.0
Download	6	Type 3	8.7	217.0	18	3906.0	Download	6	Type 4	17.1	217.0	15	3255.0
Download	7	Type 3	6.9	340.0	16	5440.0	Download	7	Type 4	13.1	340.0	13	4420.0
Download	8	Type 3	7.9	384.0	17	6528.0	Download	8	Type 4	15.3	384.0	14	5376.0
Download	9	Type 3	6.4	235.0	16	3760.0	Download	9	Type 4	11.9	235.0	12	2820.0
Download	10	Type 3	7.4	423.0	17	7191.0	Download	10	Type 4	14.2	423.0	13	5499.0
Download	11	Type 3	9.6	357.0	18	6426.0	Download	11	Type 4	19.1	357.0	16	5712.0
Download	12	Type 3	9.9	208.0	18	3744.0	Download	12	Type 4	19.8	208.0	16	3328.0
Download	13	Type 3	8.2	451.0	17	7667.0	Download	13	Type 4	15.9	451.0	14	6314.0
Download	14	Type 3	6.2	485.0	16	7760.0	Download	14	Type 4	11.5	485.0	12	5820.0
Download	15	Type 3	9.2	209.0	18	3762.0	Download	15	Type 4	18.2	209.0	16	3344.0
Download	16	Type 3	7.1	366.0	16	5856.0	Download	16	Type 4	13.6	366.0	13	4758.0
Download	17	Type 3	6.7	362.0	16	5792.0	Download	17	Type 4	12.6	362.0	12	4344.0
Download	18	Type 3	7.3	281.0	16	4496.0	Download	18	Type 4	14.0	281.0	13	3653.0
Download	19	Type 3	9.1	459.0	18	8262.0	Download	19	Type 4	18.0	459.0	15	6885.0
Download	20	Type 3	8.5	236.0	17	4012.0	Download	20	Type 4	16.5	236.0	15	3540.0
Download	21	Type 3	6.3	265.0	16	4240.0	Download	21	Type 4	11.7	265.0	12	3180.0
Download	22	Type 3	7.4	200.0	17	3400.0	Download	22	Type 4	14.1	200.0	13	2600.0
Download	23	Type 3	9.4	294.0	18	5292.0	Download	23	Type 4	18.5	294.0	16	4704.0
Download	24	Type 3	8.3	442.0	17	7514.0	Download	24	Type 4	16.1	442.0	14	6188.0
Download	25	Type 3	6.3	252.0	16	4032.0	Download	25	Type 4	11.8	252.0	12	3024.0
Download	26	Type 3	7.1	437.0	16	6992.0	Download	26	Type 4	13.6	437.0	13	5681.0
Download	27	Type 3	8.5	242.0	17	4114.0	Download	27	Type 4	16.6	242.0	15	3630.0
Download	28	Type 3	6.2	460.0	16	7360.0	Download	28	Type 4	11.4	460.0	12	5520.0
Download	29	Type 3	7.3	426.0	16	6816.0	Download	29	Type 4	13.9	426.0	13	5538.0

Radar Type 5 - Radar Statistical Performance					
Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
0	5510	1	15	5496.8	1
1	5510	0	16	5493.6	1
2	5510	1	17	5492.8	1
3	5510	1	18	5494	0
4	5510	1	19	5496.8	1
5	5510	1	20	5524.4	1
6	5510	1	21	5527.6	0
7	5510	1	22	5526	1
8	5510	1	23	5522.8	0
9	5510	1	24	5524.4	1
10	5494	1	25	5527.6	1
11	5497.6	1	26	5526.4	1
12	5498	1	27	5524.4	1
13	5495.2	1	28	5528	1
14	5492.4	0	29	5526	1
Detection Percentage (%)			83.3%		

Type 5 Radar Waveform_0								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	642144.0	80.9	14	2	1449.0	1451.0	-	
1	76392.0	54.9	14	1	1402.0	-	-	
2	256714.0	88.8	14	3	1621.0	1406.0	1962.0	
3	437982.0	84.1	14	3	1561.0	1088.0	1354.0	
4	619677.0	76.7	14	2	1087.0	1991.0	-	
5	53877.0	74.3	14	2	1901.0	1596.0	-	
6	234779.0	83.7	14	3	1061.0	1463.0	1443.0	
7	417164.0	62.0	14	1	1368.0	-	-	
8	597246.0	74.1	14	2	1482.0	1743.0	-	
9	31643.0	55.0	14	1	1911.0	-	-	
10	212932.0	68.0	14	2	1062.0	1359.0	-	
11	393257.0	95.0	14	3	1096.0	1556.0	1640.0	
12	573265.0	98.8	14	3	1984.0	1859.0	1553.0	
13	9282.0	77.2	14	2	1622.0	1270.0	-	
14	190846.0	53.1	14	1	1454.0	-	-	
15	371263.0	90.1	14	3	1206.0	1502.0	1014.0	
Type 5 Radar Waveform_1								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	985887.0	64.5	6	1	1086.0	-	-	
1	1308759.0	59.0	6	1	1330.0	-	-	
2	299837.0	66.5	6	1	1200.0	-	-	
3	621129.0	88.6	6	3	1273.0	1818.0	1942.0	
4	944743.0	80.8	6	2	1887.0	1092.0	-	
5	1268795.0	54.1	6	1	1510.0	-	-	
6	259750.0	67.1	6	2	1204.0	1485.0	-	
7	582014.0	91.6	6	3	1552.0	1112.0	1073.0	
8	905593.0	78.3	6	2	1057.0	1049.0	-	
Type 5 Radar Waveform_2								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	614257.0	54.6	17	1	1023.0	-	-	
1	109988.0	64.3	17	1	1414.0	-	-	
2	270619.0	81.1	17	2	1180.0	1983.0	-	
3	432888.0	52.5	17	1	1090.0	-	-	
4	593849.0	66.1	17	1	1608.0	-	-	
5	90156.0	58.5	17	1	1099.0	-	-	
6	250657.0	85.1	17	3	1424.0	1103.0	1008.0	
7	412770.0	55.8	17	1	1468.0	-	-	
8	571909.0	92.9	17	3	1084.0	1888.0	1036.0	
9	70074.0	83.0	17	2	1399.0	1582.0	-	
10	230734.0	95.2	17	3	1228.0	1386.0	1243.0	
11	391216.0	83.5	17	3	1095.0	1292.0	1927.0	
12	553810.0	62.3	17	1	1971.0	-	-	
13	50129.0	92.2	17	3	1430.0	1520.0	1588.0	
14	211730.0	53.3	17	1	1352.0	-	-	
15	373201.0	59.3	17	1	1155.0	-	-	
16	531387.0	97.8	17	3	1685.0	2000.0	1480.0	
17	30489.0	57.5	17	1	1474.0	-	-	

Type 5 Radar Waveform_3								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	215789.0	60.6	15	1	1684.0	—	—	
1	397618.0	60.3	15	1	1045.0	—	—	
2	578854.0	64.3	15	1	1575.0	—	—	
3	11954.0	62.8	15	1	1033.0	—	—	
4	192907.0	67.9	15	2	1998.0	1724.0	—	
5	375257.0	65.2	15	1	1019.0	—	—	
6	556203.0	62.1	15	1	1968.0	—	—	
7	735015.0	91.1	15	3	1934.0	1419.0	1261.0	
8	170709.0	66.9	15	2	1877.0	1421.0	—	
9	351266.0	94.7	15	3	1339.0	1972.0	1137.0	
10	531363.0	99.7	15	3	1689.0	1816.0	1956.0	
11	714078.0	76.0	15	2	1733.0	1489.0	—	
12	148458.0	76.7	15	2	1211.0	1806.0	—	
13	328929.0	87.8	15	3	1825.0	1020.0	1749.0	
14	509825.0	97.3	15	3	1079.0	1994.0	1358.0	
15	693101.0	55.8	15	1	1783.0	—	—	
Type 5 Radar Waveform_4								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	144108.0	72.1	13	2	1905.0	1865.0	—	
1	352117.0	59.9	13	1	1244.0	—	—	
2	559319.0	52.5	13	1	1826.0	—	—	
3	766782.0	59.5	13	1	1802.0	—	—	
4	118967.0	57.9	13	1	1232.0	—	—	
5	325549.0	96.6	13	3	1664.0	1142.0	1056.0	
6	533196.0	82.9	13	2	1526.0	1212.0	—	
7	739486.0	89.2	13	3	1037.0	1264.0	1512.0	
8	93317.0	55.8	13	1	1966.0	—	—	
9	299757.0	94.3	13	3	1933.0	1069.0	1715.0	
10	508193.0	58.0	13	1	1863.0	—	—	
11	715684.0	56.5	13	1	1793.0	—	—	
12	67846.0	52.1	13	1	1002.0	—	—	
13	274610.0	66.8	13	2	1773.0	1953.0	—	

Type 5 Radar Waveform_5								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	482814.0	63.2	12	1	1558.0	—	—	
1	689122.0	79.3	12	2	1617.0	1426.0	—	
2	42142.0	83.0	12	2	1957.0	1607.0	—	
3	248931.0	96.6	12	3	1466.0	1280.0	1610.0	
4	457336.0	56.4	12	1	1404.0	—	—	
5	663707.0	81.3	12	2	1516.0	1398.0	—	
6	16679.0	64.0	12	1	1673.0	—	—	
7	223456.0	91.9	12	3	1768.0	1423.0	1158.0	
8	430646.0	96.5	12	3	1025.0	1151.0	1460.0	
9	639410.0	65.9	12	1	1277.0	—	—	
10	843510.0	90.4	12	3	1427.0	1795.0	1566.0	
11	198451.0	75.0	12	2	1309.0	1010.0	—	
12	404370.0	91.7	12	3	1532.0	1750.0	1992.0	
13	611885.0	90.5	12	3	1154.0	1345.0	1506.0	
Type 5 Radar Waveform_6								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	718191.0	56.1	15	1	1688.0	—	—	
1	151147.0	66.9	15	2	1462.0	1320.0	—	
2	332804.0	56.2	15	1	1808.0	—	—	
3	514277.0	57.3	15	1	1790.0	—	—	
4	693040.0	86.3	15	3	1592.0	1246.0	1857.0	
5	129022.0	56.5	15	1	1635.0	—	—	
6	310204.0	70.1	15	2	1114.0	1293.0	—	
7	489427.0	93.4	15	3	1756.0	1958.0	1875.0	
8	673656.0	56.7	15	1	1493.0	—	—	
9	106266.0	88.3	15	3	1534.0	1113.0	1791.0	
10	287209.0	99.7	15	3	1456.0	1001.0	1667.0	
11	469682.0	64.1	15	1	1615.0	—	—	
12	650222.0	77.4	15	2	1306.0	1420.0	—	
13	84121.0	75.2	15	2	1744.0	1559.0	—	
14	265923.0	56.9	15	1	1318.0	—	—	
15	446582.0	73.7	15	2	1390.0	1467.0	—	

Type 5 Radar Waveform_7								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	915231.0	57.1	8	1	1675.0	-	-	
1	90160.0	55.5	8	1	1794.0	-	-	
2	353658.0	88.9	8	3	1452.0	1016.0	1315.0	
3	618498.0	50.0	8	1	1709.0	-	-	
4	882051.0	81.5	8	2	1240.0	1224.0	-	
5	57583.0	70.4	8	2	1077.0	1472.0	-	
6	321026.0	93.1	8	3	1266.0	1407.0	1633.0	
7	585123.0	80.2	8	2	1948.0	1314.0	-	
8	849010.0	81.3	8	2	2000.0	1136.0	-	
9	25093.0	65.9	8	1	1498.0	-	-	
10	288534.0	91.8	8	3	1221.0	1388.0	1810.0	
Type 5 Radar Waveform_8								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	434425.0	80.2	12	2	1126.0	1012.0	-	
1	641895.0	63.5	12	1	1999.0	-	-	
2	846813.0	86.6	12	3	1189.0	1606.0	1703.0	
3	201281.0	69.1	12	2	1279.0	1861.0	-	
4	408087.0	83.0	12	2	1904.0	1897.0	-	
5	616591.0	54.8	12	1	1663.0	-	-	
6	820494.0	92.5	12	3	1885.0	1729.0	1763.0	
7	175826.0	83.0	12	2	1321.0	1538.0	-	
8	382072.0	88.9	12	3	1836.0	1590.0	1540.0	
9	588987.0	88.0	12	3	1725.0	1257.0	1644.0	
10	798500.0	50.7	12	1	1678.0	-	-	
11	150195.0	70.3	12	2	1573.0	1912.0	-	
12	356952.0	95.7	12	3	1143.0	1303.0	1712.0	
13	563922.0	96.8	12	3	1051.0	1441.0	1523.0	

Type 5 Radar Waveform_9

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	1202042.0	69.8	6	2	1411.0	1548.0	-
1	194303.0	72.5	6	2	1370.0	1738.0	-
2	516543.0	94.7	6	3	1431.0	1272.0	1389.0
3	838544.0	97.0	6	3	1990.0	1676.0	1031.0
4	1160469.0	92.3	6	3	1852.0	1227.0	1974.0
5	154727.0	53.9	6	1	1699.0	-	-
6	476596.0	88.8	6	3	1551.0	1891.0	1310.0
7	798971.0	84.9	6	3	1930.0	1331.0	1238.0
8	1122164.0	72.7	6	2	1742.0	1679.0	-

Type 5 Radar Waveform_10

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	86222.0	58.8	10	1	1133.0	-	-
1	327291.0	84.9	10	3	1922.0	1654.0	1167.0
2	569478.0	86.1	10	3	1042.0	1170.0	1121.0
3	810260.0	91.7	10	3	1828.0	1372.0	1289.0
4	56375.0	58.9	10	1	1234.0	-	-
5	297659.0	85.8	10	3	1313.0	1923.0	1171.0
6	539811.0	73.9	10	2	1881.0	1253.0	-
7	781822.0	76.1	10	2	1587.0	1241.0	-
8	26475.0	76.0	10	2	1841.0	1775.0	-
9	268146.0	70.3	10	2	1932.0	1620.0	-
10	511102.0	64.7	10	1	1039.0	-	-
11	750231.0	89.9	10	3	1500.0	1772.0	1944.0

Type 5 Radar Waveform_11

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	626377.0	79.8	19	2	1848.0	1278.0	-
1	150396.0	70.1	19	2	1796.0	1111.0	-
2	303182.0	69.2	19	2	1198.0	1058.0	-
3	456376.0	66.6	19	1	1479.0	-	-
4	609337.0	59.3	19	1	1332.0	-	-
5	131406.0	84.9	19	3	1124.0	1179.0	1602.0
6	283772.0	92.3	19	3	1329.0	1178.0	1098.0
7	436238.0	68.0	19	2	1571.0	1800.0	-
8	587692.0	85.7	19	3	1378.0	1894.0	1066.0
9	113133.0	56.3	19	1	1237.0	-	-
10	264671.0	85.2	19	3	1677.0	1131.0	1604.0
11	416437.0	93.3	19	3	1779.0	1939.0	1209.0
12	571332.0	53.2	19	1	1716.0	-	-
13	94321.0	61.6	19	1	1115.0	-	-
14	245870.0	98.0	19	3	1366.0	1499.0	1713.0
15	398180.0	98.4	19	3	1361.0	1662.0	1173.0
16	550905.0	83.2	19	2	1603.0	1949.0	-
17	75075.0	89.0	19	3	1503.0	1674.0	1373.0
18	228418.0	62.0	19	1	1048.0	-	-

Type 5 Radar Waveform_12								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	361726.0	53.0	20	1	1902.0	—	—	
1	504602.0	95.3	20	3	1268.0	1385.0	1823.0	
2	53437.0	90.9	20	3	1739.0	1655.0	1918.0	
3	198663.0	77.8	20	2	1210.0	1107.0	—	
4	342218.0	84.2	20	3	1316.0	1981.0	1458.0	
5	486287.0	96.9	20	3	1554.0	1579.0	1985.0	
6	35890.0	63.1	20	1	1659.0	—	—	
7	179920.0	83.6	20	3	1636.0	1730.0	1883.0	
8	324236.0	97.3	20	3	1766.0	1731.0	1624.0	
9	471117.0	65.0	20	1	1814.0	—	—	
10	18014.0	61.8	20	1	1669.0	—	—	
11	162641.0	74.7	20	2	1732.0	1726.0	—	
12	306904.0	100.0	20	3	1545.0	1541.0	1181.0	
13	452935.0	80.9	20	2	1219.0	1007.0	—	
14	140.0	56.8	20	1	1483.0	—	—	
15	144443.0	90.1	20	3	1396.0	1695.0	1917.0	
16	290609.0	52.3	20	1	1172.0	—	—	
17	434689.0	75.5	20	2	1187.0	1572.0	—	
18	578914.0	80.3	20	2	1476.0	1926.0	—	
19	127179.0	83.0	20	2	1294.0	1317.0	—	
Type 5 Radar Waveform_13								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	362815.0	69.0	13	2	1651.0	1693.0	—	
1	554867.0	96.6	13	3	1586.0	1508.0	1915.0	
2	749997.0	66.9	13	2	1013.0	1530.0	—	
3	145616.0	87.0	13	3	1648.0	1055.0	1652.0	
4	339703.0	52.4	13	1	1728.0	—	—	
5	531530.0	99.7	13	3	1740.0	1161.0	1490.0	
6	724635.0	92.8	13	3	1102.0	1235.0	1895.0	
7	121890.0	88.4	13	3	1544.0	1004.0	1521.0	
8	315047.0	97.4	13	3	1305.0	1383.0	1083.0	
9	507682.0	87.9	13	3	1216.0	1594.0	1705.0	
10	701785.0	75.6	13	2	1928.0	1255.0	—	
11	98093.0	93.0	13	3	1736.0	1461.0	1034.0	
12	291055.0	87.1	13	3	1043.0	1627.0	1661.0	
13	485513.0	58.2	13	1	1893.0	—	—	
14	679194.0	61.7	13	1	1758.0	—	—	
Type 5 Radar Waveform_14								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	139724.0	94.6	6	3	1149.0	1557.0	1208.0	
1	502588.0	89.0	6	3	1262.0	1569.0	1035.0	
2	864718.0	92.4	6	3	1849.0	1501.0	1778.0	
3	1227871.0	85.0	6	3	1343.0	1577.0	1478.0	
4	95070.0	69.8	6	2	1896.0	1371.0	—	
5	457618.0	96.2	6	3	1394.0	1528.0	1838.0	
6	821880.0	51.3	6	1	1809.0	—	—	
7	1182651.0	95.1	6	3	1599.0	1700.0	1781.0	

Type 5 Radar Waveform_15								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	22373.0	53.0	17	1	1698.0	—	—
	1	183304.0	73.9	17	2	1762.0	1184.0	—
	2	344521.0	81.7	17	2	1047.0	1429.0	—
	3	504047.0	85.3	17	3	1513.0	1780.0	1233.0
	4	2510.0	62.3	17	1	1059.0	—	—
	5	162872.0	96.4	17	3	1907.0	1786.0	1702.0
	6	324463.0	71.6	17	2	1105.0	1812.0	—
	7	484032.0	95.6	17	3	1428.0	1704.0	1714.0
	8	646227.0	72.8	17	2	1481.0	1638.0	—
	9	144054.0	52.8	17	1	1067.0	—	—
	10	305182.0	56.0	17	1	1722.0	—	—
	11	464889.0	93.1	17	3	1295.0	1333.0	1323.0
	12	628245.0	56.4	17	1	1168.0	—	—
	13	123774.0	78.4	17	2	1470.0	1720.0	—
	14	285264.0	53.8	17	1	1846.0	—	—
	15	445268.0	75.3	17	2	1829.0	1858.0	—
	16	604804.0	84.6	17	3	1947.0	1921.0	1194.0
	17	104203.0	54.0	17	1	1593.0	—	—
Type 5 Radar Waveform_16								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	434437.0	74.8	9	2	1334.0	1335.0	—
	1	697025.0	86.2	9	3	1782.0	1723.0	1259.0
	2	963645.0	59.3	9	1	1150.0	—	—
	3	137895.0	89.5	9	3	1177.0	1128.0	1141.0
	4	401469.0	68.9	9	2	1960.0	1946.0	—
	5	664921.0	87.7	9	3	1164.0	1937.0	1101.0
	6	928212.0	91.8	9	3	1862.0	1207.0	1448.0
	7	105366.0	69.1	9	2	1935.0	1943.0	—
	8	369667.0	62.3	9	1	1929.0	—	—
	9	633963.0	51.0	9	1	1612.0	—	—
	10	898467.0	60.0	9	1	1230.0	—	—
Type 5 Radar Waveform_17								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	80209.0	90.5	7	3	1570.0	1265.0	1006.0
	1	371190.0	60.5	7	1	1015.0	—	—
	2	659773.0	86.8	7	3	1964.0	1605.0	1447.0
	3	951849.0	67.7	7	2	1078.0	1100.0	—
	4	44560.0	51.5	7	1	1535.0	—	—
	5	335181.0	63.9	7	1	1696.0	—	—
	6	625706.0	63.1	7	1	1889.0	—	—
	7	915157.0	70.8	7	2	1952.0	1413.0	—
	8	8754.0	64.4	7	1	1878.0	—	—
	9	298913.0	80.5	7	2	1945.0	1628.0	—

Type 5 Radar Waveform_18

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	490030.0	92.0	10	3	1439.0	1753.0	1560.0
1	732197.0	75.8	10	2	1721.0	1959.0	-
2	971856.0	92.3	10	3	1871.0	1979.0	1855.0
3	219688.0	52.7	10	1	1254.0	-	-
4	460617.0	90.1	10	3	1108.0	1080.0	1873.0
5	702482.0	81.0	10	2	1798.0	1811.0	-
6	946551.0	65.2	10	1	1063.0	-	-
7	189803.0	55.3	10	1	1507.0	-	-
8	431797.0	66.2	10	1	1906.0	-	-
9	672083.0	85.2	10	3	1746.0	1217.0	1583.0
10	914802.0	67.0	10	2	1377.0	1764.0	-
11	159896.0	50.4	10	1	1995.0	-	-

Type 5 Radar Waveform_19

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	267723.0	65.7	17	1	1925.0	-	-
1	428399.0	71.4	17	2	1260.0	1509.0	-
2	590664.0	65.1	17	1	1362.0	-	-
3	86361.0	85.7	17	3	1157.0	1585.0	1348.0
4	247963.0	63.5	17	1	1660.0	-	-
5	409050.0	54.9	17	1	1982.0	-	-
6	568496.0	94.0	17	3	1346.0	1125.0	1564.0
7	66432.0	93.6	17	3	1718.0	1955.0	1757.0
8	226815.0	93.3	17	3	1834.0	1880.0	1682.0
9	387803.0	84.1	17	3	1129.0	1975.0	1251.0
10	549549.0	70.5	17	2	1584.0	1425.0	-
11	46773.0	85.6	17	3	1018.0	1708.0	1360.0
12	207819.0	82.3	17	2	1690.0	1282.0	-
13	368160.0	92.4	17	3	1104.0	1687.0	1308.0
14	529621.0	69.2	17	2	1284.0	1853.0	-
15	27028.0	75.3	17	2	1578.0	1297.0	-
16	188444.0	54.8	17	1	1375.0	-	-
17	349643.0	64.5	17	1	1670.0	-	-

Type 5 Radar Waveform_20

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	611659.0	90.7	14	3	1165.0	1701.0	1028.0
1	8663.0	54.5	14	1	1153.0	-	-
2	201721.0	70.1	14	2	1867.0	1997.0	-
3	394911.0	73.6	14	2	1967.0	1691.0	-
4	589198.0	82.8	14	2	1032.0	1071.0	-
5	783465.0	60.4	14	1	1336.0	-	-
6	178126.0	67.1	14	2	1130.0	1890.0	-
7	370681.0	86.8	14	3	1797.0	1646.0	1160.0
8	564440.0	78.9	14	2	1529.0	1874.0	-
9	759277.0	56.7	14	1	1681.0	-	-
10	154405.0	76.5	14	2	1242.0	1324.0	-
11	348120.0	63.8	14	1	1850.0	-	-
12	539739.0	96.1	14	3	1197.0	1686.0	1851.0
13	735810.0	65.9	14	1	1267.0	-	-
14	130280.0	93.0	14	3	1819.0	1403.0	1188.0

Type 5 Radar Waveform_21								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	539681.0	90.1	6	3	1771.0	1637.0	1591.0
	1	862546.0	94.9	6	3	1376.0	1434.0	1106.0
	2	1187525.0	65.4	6	1	1052.0	-	-
	3	178241.0	52.5	6	1	1961.0	-	-
	4	501372.0	65.9	6	1	1347.0	-	-
	5	824434.0	50.3	6	1	1326.0	-	-
	6	1147053.0	58.2	6	1	1831.0	-	-
	7	138410.0	76.9	6	2	1298.0	1215.0	-
	8	461042.0	70.9	6	2	1464.0	1435.0	-
Type 5 Radar Waveform_22								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	587042.0	87.3	10	3	1148.0	1000.0	1288.0
	1	830073.0	57.9	10	1	1833.0	-	-
	2	74008.0	55.2	10	1	1631.0	-	-
	3	316091.0	56.7	10	1	1799.0	-	-
	4	557403.0	70.4	10	2	1213.0	1987.0	-
	5	797912.0	97.7	10	3	1755.0	1135.0	1864.0
	6	44176.0	61.7	10	1	1776.0	-	-
	7	285624.0	90.0	10	3	1618.0	1068.0	1367.0
	8	528717.0	50.4	10	1	1134.0	-	-
	9	770500.0	51.6	10	1	1748.0	-	-
	10	14318.0	94.5	10	3	1082.0	1898.0	1382.0
	11	256553.0	62.5	10	1	1397.0	-	-
Type 5 Radar Waveform_23								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	331572.0	80.3	18	2	1639.0	1146.0	-
	1	491466.0	92.1	18	3	1694.0	1022.0	1576.0
	2	651007.0	88.7	18	3	1752.0	1824.0	1839.0
	3	151049.0	54.7	18	1	1364.0	-	-
	4	311791.0	68.5	18	2	1387.0	1287.0	-
	5	472386.0	76.8	18	2	1924.0	1374.0	-
	6	633104.0	76.0	18	2	1989.0	1486.0	-
	7	130480.0	87.3	18	3	1747.0	1248.0	1886.0
	8	292010.0	67.0	18	2	1365.0	1182.0	-
	9	452818.0	79.4	18	2	1527.0	1405.0	-
	10	612537.0	88.0	18	3	1910.0	1290.0	1091.0
	11	111317.0	54.6	18	1	1250.0	-	-
	12	271772.0	92.6	18	3	1202.0	1041.0	1276.0
	13	432284.0	92.3	18	3	1475.0	1422.0	1116.0
	14	592816.0	97.6	18	3	1065.0	1174.0	1978.0
	15	91417.0	53.8	18	1	1401.0	-	-
	16	252400.0	72.8	18	2	1236.0	1127.0	-
	17	411802.0	89.0	18	3	1822.0	1642.0	1650.0

Type 5 Radar Waveform_24

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	691065.0	64.2	14	1	1089.0	—	—
1	85735.0	82.5	14	2	1598.0	1163.0	—
2	279261.0	77.7	14	2	1050.0	1225.0	—
3	471901.0	99.2	14	3	1040.0	1614.0	1027.0
4	664355.0	86.4	14	3	1788.0	1132.0	1574.0
5	61870.0	74.8	14	2	1920.0	1465.0	—
6	255739.0	55.1	14	1	1311.0	—	—
7	449190.0	60.3	14	1	1765.0	—	—
8	642698.0	66.4	14	1	1876.0	—	—
9	38101.0	81.2	14	2	1632.0	1138.0	—
10	231213.0	95.0	14	3	1070.0	1494.0	1038.0
11	423813.0	86.6	14	3	1192.0	1734.0	1711.0
12	619284.0	63.3	14	1	1322.0	—	—
13	14260.0	94.5	14	3	1835.0	1201.0	1094.0
14	207755.0	71.4	14	2	1046.0	1275.0	—

Type 5 Radar Waveform_25

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	669318.0	80.5	6	2	1613.0	1017.0	—
1	992823.0	59.7	6	1	1600.0	—	—
2	1315483.0	52.7	6	1	1931.0	—	—
3	306824.0	76.7	6	2	1205.0	1436.0	—
4	629004.0	97.8	6	3	1119.0	1175.0	1519.0
5	951596.0	97.4	6	3	1307.0	1283.0	1026.0
6	1274306.0	73.5	6	2	1977.0	1418.0	—
7	266861.0	82.2	6	2	1879.0	1805.0	—
8	588791.0	89.6	6	3	1555.0	1941.0	1433.0

Type 5 Radar Waveform_26

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	746793.0	53.8	9	1	1914.0	—	—
1	1011069.0	57.8	9	1	1741.0	—	—
2	185843.0	69.9	9	2	1484.0	1514.0	—
3	450112.0	50.6	9	1	1993.0	—	—
4	714787.0	64.1	9	1	1110.0	—	—
5	977441.0	78.1	9	2	1770.0	1185.0	—
6	153513.0	50.1	9	1	1787.0	—	—
7	417668.0	57.9	9	1	1767.0	—	—
8	680743.0	67.1	9	2	1803.0	1683.0	—
9	946321.0	61.5	9	1	1363.0	—	—
10	120662.0	87.5	9	3	1299.0	1913.0	1412.0

Type 5 Radar Waveform_27

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	264637.0	62.0	14	1	1611.0	-	-
1	444483.0	84.9	14	3	1827.0	1380.0	1191.0
2	626490.0	81.2	14	2	1341.0	1656.0	-
3	60746.0	55.6	14	1	1919.0	-	-
4	242305.0	63.8	14	1	1531.0	-	-
5	421680.0	99.7	14	3	1813.0	1565.0	1954.0
6	605097.0	58.1	14	1	1856.0	-	-
7	38441.0	60.4	14	1	1072.0	-	-
8	219072.0	94.9	14	3	1965.0	1256.0	1281.0
9	399625.0	92.4	14	3	1120.0	1868.0	1988.0
10	581404.0	80.5	14	2	1641.0	1938.0	-
11	16059.0	66.0	14	1	1495.0	-	-
12	197061.0	93.6	14	3	1021.0	1442.0	1054.0
13	378601.0	83.3	14	2	1271.0	1269.0	-
14	560634.0	62.1	14	1	1539.0	-	-
15	740444.0	82.5	14	2	1400.0	1869.0	-

Type 5 Radar Waveform_28

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	350105.0	94.8	5	3	1645.0	1263.0	1626.0
1	713145.0	77.2	5	2	1980.0	1837.0	-
2	1076230.0	75.0	5	2	1550.0	1969.0	-
3	1438535.0	91.6	5	3	1144.0	1496.0	1543.0
4	305411.0	90.7	5	3	1156.0	1517.0	1950.0
5	669523.0	50.2	5	1	1410.0	-	-
6	1030538.0	88.1	5	3	1302.0	1847.0	1801.0
7	1393433.0	95.4	5	3	1817.0	1325.0	1488.0

Type 5 Radar Waveform_29

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	173889.0	78.6	10	2	1044.0	1671.0	-
1	416282.0	54.9	10	1	1469.0	-	-
2	658731.0	54.5	10	1	1053.0	-	-
3	898101.0	96.3	10	3	1643.0	1393.0	1239.0
4	143722.0	88.3	10	3	1727.0	1760.0	1820.0
5	385914.0	81.1	10	2	1505.0	1353.0	-
6	627052.0	87.1	10	3	1455.0	1369.0	1147.0
7	868904.0	69.4	10	2	1973.0	1672.0	-
8	114450.0	51.8	10	1	1432.0	-	-
9	356603.0	56.9	10	1	1518.0	-	-
10	598486.0	59.3	10	1	1986.0	-	-
11	838862.0	95.7	10	3	1190.0	1471.0	1312.0

Radar Type 6 - Radar Statistical Performance			
Trail #	1=Detection 0=No Detection	Trail #	1=Detection 0=No Detection
0	0	15	1
1	1	16	1
2	0	17	1
3	1	18	1
4	1	19	1
5	1	20	0
6	1	21	1
7	1	22	1
8	1	23	0
9	0	24	0
10	1	25	1
11	1	26	0
12	1	27	1
13	1	28	0
14	1	29	1
Detection Percentage (%)		73.3%	

Type 6 Radar Waveform_0					
Frequency List (MHz)	0	1	2	3	4
0	5606	5322	5693	5401	5624
5	5513	5533	5399	5501	5359
10	5519	5581	5668	5507	5290
15	5373	5453	5532	5611	5630
20	5413	5454	5299	5664	5626
25	5484	5537	5655	5570	5557
30	5377	5568	5289	5550	5456
35	5621	5278	5432	5337	5549
40	5271	5707	5416	5374	5434
45	5258	5261	5422	5472	5273
50	5694	5402	5370	5376	5500
55	5390	5701	5603	5554	5669
60	5329	5298	5542	5304	5656
65	5477	5425	5423	5681	5448
70	5252	5682	5460	5510	5471
75	5659	5643	5302	5443	5363
80	5612	5398	5336	5592	5503
85	5316	5301	5508	5702	5281
90	5696	5687	5417	5506	5561
95	5724	5516	5618	5497	5342
Type 6 Radar Waveform_1					
Frequency List (MHz)	0	1	2	3	4
0	5386	5561	5629	5562	5369
5	5555	5458	5474	5664	5663
10	5450	5370	5709	5702	5311
15	5364	5580	5635	5656	5347
20	5421	5620	5715	5599	5372
25	5486	5383	5296	5591	5516
30	5457	5721	5699	5654	5285
35	5252	5430	5443	5651	5254
40	5684	5472	5413	5703	5354
45	5517	5316	5314	5309	5251
50	5352	5270	5491	5668	5698
55	5688	5344	5416	5422	5525
60	5323	5494	5718	5374	5260
65	5250	5479	5426	5461	5255
70	5573	5495	5713	5378	5531
75	5436	5382	5705	5624	5456
80	5619	5301	5558	5333	5312
85	5503	5633	5264	5271	5376
90	5537	5315	5451	5385	5615
95	5578	5304	5500	5448	5600

Type 6 Radar Waveform_2

Frequency List (MHz)	0	1	2	3	4
0	5544	5422	5565	5723	5686
5	5694	5480	5549	5352	5395
10	5284	5634	5275	5332	5452
15	5707	5263	5701	5539	5311
20	5278	5270	5572	5260	5338
25	5489	5400	5625	5558	5443
30	5678	5439	5476	5474	5327
35	5557	5523	5583	5357	5490
40	5337	5622	5712	5507	5535
45	5334	5600	5374	5574	5602
50	5528	5321	5580	5394	5642
55	5401	5298	5606	5716	5496
60	5659	5663	5681	5561	5671
65	5680	5375	5497	5465	5368
70	5529	5664	5699	5381	5283
75	5412	5450	5351	5711	5373
80	5605	5709	5566	5621	5330
85	5406	5324	5463	5341	5610
90	5310	5299	5551	5388	5267
95	5724	5595	5359	5581	5346

Type 6 Radar Waveform_3

Frequency List (MHz)	0	1	2	3	4
0	5324	5661	5501	5312	5431
5	5261	5405	5624	5418	5602
10	5690	5423	5316	5520	5353
15	5540	5359	5366	5649	5256
20	5340	5380	5694	5262	5545
25	5526	5665	5692	5504	5659
30	5600	5332	5635	5654	5628
35	5672	5466	5648	5416	5271
40	5329	5420	5560	5464	5314
45	5683	5335	5323	5461	5478
50	5704	5372	5291	5489	5589
55	5252	5321	5535	5467	5581
60	5349	5705	5513	5484	5617
65	5503	5436	5297	5638	5710
70	5685	5481	5607	5388	5409
75	5698	5356	5419	5586	5486
80	5676	5656	5532	5684	5327
85	5702	5309	5414	5287	5558
90	5497	5716	5422	5527	5612
95	5565	5341	5361	5331	5548

Type 6 Radar Waveform_4

Frequency List (MHz)	0	1	2	3	4
0	5579	5425	5437	5473	5273
5	5303	5427	5699	5581	5431
10	5621	5687	5357	5715	5374
15	5628	5389	5469	5694	5448
20	5348	5546	5635	5351	5518
25	5414	5614	5420	5608	5693
30	5264	5696	5592	5394	5402
35	5492	5605	5511	5282	5643
40	5503	5498	5620	5501	5393
45	5294	5291	5376	5251	5354
50	5405	5423	5380	5515	5433
55	5302	5681	5257	5341	5710
60	5514	5650	5442	5310	5660
65	5704	5370	5472	5507	5530
70	5513	5430	5293	5484	5456
75	5364	5368	5667	5379	5562
80	5567	5263	5689	5272	5324
85	5519	5309	5353	5250	5275
90	5649	5615	5331	5317	5406
95	5333	5359	5409	5549	5714

Type 6 Radar Waveform_5

Frequency List (MHz)	0	1	2	3	4
0	5359	5664	5373	5634	5493
5	5345	5352	5299	5269	5638
10	5455	5573	5398	5435	5395
15	5619	5516	5475	5264	5640
20	5259	5615	5673	5343	5491
25	5680	5466	5623	5334	5252
30	5306	5682	5549	5512	5554
35	5690	5647	5355	5483	5671
40	5579	5683	5436	5385	5498
45	5700	5652	5374	5451	5429
50	5613	5608	5581	5474	5469
55	5338	5280	5490	5635	5701
60	5551	5312	5267	5679	5595
65	5274	5611	5606	5527	5319
70	5508	5339	5325	5316	5502
75	5279	5584	5305	5718	5327
80	5539	5499	5645	5515	5324
85	5693	5432	5699	5714	5687
90	5670	5310	5370	5517	5666
95	5571	5393	5669	5479	5268

Type 6 Radar Waveform_6

Frequency List (MHz)	0	1	2	3	4
0	5614	5428	5309	5320	5335
5	5484	5374	5432	5370	5386
10	5362	5439	5630	5416	5707
15	5643	5578	5357	5267	5306
20	5464	5568	5415	5351	5438
25	5286	5348	5571	5506	5252
30	5328	5510	5311	5446	5279
35	5342	5585	5418	5291	5277
40	5625	5495	5629	5632	5457
45	5412	5482	5403	5282	5525
50	5558	5539	5699	5581	5589
55	5319	5283	5396	5369	5540
60	5534	5552	5253	5268	5447
65	5549	5692	5594	5671	5265
70	5587	5694	5664	5508	5619
75	5276	5626	5292	5337	5474
80	5696	5434	5590	5512	5273
85	5562	5620	5255	5261	5442
90	5330	5551	5491	5285	5579
95	5676	5640	5299	5417	5709

Type 6 Radar Waveform_7

Frequency List (MHz)	0	1	2	3	4
0	5297	5667	5720	5481	5555
5	5526	5299	5449	5498	5674
10	5317	5626	5480	5350	5437
15	5320	5295	5681	5257	5646
20	5275	5375	5424	5359	5267
25	5554	5542	5390	5460	5463
30	5467	5330	5450	5634	5647
35	5592	5596	5374	5690	5293
40	5589	5461	5612	5540	5470
45	5535	5290	5360	5458	5576
50	5269	5362	5546	5294	5446
55	5509	5567	5254	5525	5534
60	5582	5413	5595	5454	5692
65	5483	5381	5487	5397	5268
70	5251	5590	5670	5623	5380
75	5264	5419	5607	5447	5255
80	5616	5558	5693	5629	5451
85	5333	5279	5671	5503	5533
90	5426	5448	5364	5336	5600
95	5302	5598	5408	5497	5415

Type 6 Radar Waveform_8					
Frequency List (MHz)	0	1	2	3	4
0	5552	5431	5656	5642	5397
5	5568	5321	5524	5661	5406
10	5626	5415	5618	5448	5458
15	5408	5422	5309	5302	5363
20	5541	5593	5513	5410	5722
25	5594	5660	5646	5354	5529
30	5446	5420	5682	5254	5528
35	5589	5250	5443	5270	5510
40	5571	5554	5628	5533	5586
45	5390	5592	5623	5491	5555
50	5614	5634	5627	5358	5490
55	5482	5400	5699	5386	5603
60	5654	5527	5720	5277	5641
65	5591	5282	5578	5340	5334
70	5690	5705	5582	5349	5287
75	5465	5588	5557	5608	5305
80	5718	5493	5293	5296	5374
85	5315	5625	5276	5353	5454
90	5301	5693	5709	5416	5689
95	5306	5537	5371	5695	5658
Type 6 Radar Waveform_9					
Frequency List (MHz)	0	1	2	3	4
0	5332	5670	5592	5328	5617
5	5610	5343	5599	5349	5613
10	5557	5679	5659	5643	5479
15	5399	5452	5412	5347	5555
20	5669	5534	5505	5383	5543
25	5388	5372	5571	5335	5377
30	5325	5406	5348	5631	5341
35	5714	5423	5424	5507	5637
40	5566	5298	5583	5319	5572
45	5706	5489	5544	5442	5490
50	5678	5447	5483	5337	5354
55	5414	5680	5574	5308	5389
60	5472	5649	5584	5487	5478
65	5590	5458	5381	5509	5320
70	5693	5554	5622	5541	5318
75	5407	5608	5569	5476	5570
80	5469	5306	5687	5641	5396
85	5356	5658	5676	5524	5551
90	5281	5460	5575	5721	5433
95	5269	5663	5301	5516	5474

Type 6 Radar Waveform_10					
Frequency List (MHz)	0	1	2	3	4
0	5587	5434	5528	5392	5459
5	5274	5268	5674	5512	5442
10	5391	5565	5700	5363	5500
15	5487	5579	5418	5295	5272
20	5677	5301	5475	5594	5356
25	5401	5395	5591	5476	5422
30	5613	5699	5334	5540	5655
35	5546	5432	5607	5673	5435
40	5346	5720	5504	5538	5580
45	5626	5552	5314	5547	5597
50	5707	5366	5511	5254	5536
55	5684	5281	5383	5308	5604
60	5499	5545	5437	5554	5514
65	5481	5410	5530	5539	5494
70	5633	5444	5659	5581	5306
75	5318	5403	5501	5665	5527
80	5654	5550	5253	5680	5645
85	5369	5361	5396	5549	5319
90	5661	5526	5630	5297	5371
95	5446	5563	5360	5355	5450
Type 6 Radar Waveform_11					
Frequency List (MHz)	0	1	2	3	4
0	5270	5673	5464	5553	5679
5	5316	5290	5274	5578	5649
10	5322	5354	5266	5558	5521
15	5575	5706	5340	5588	5370
20	5513	5586	5329	5289	5344
25	5319	5580	5456	5277	5685
30	5291	5280	5332	5366	5434
35	5523	5403	5351	5349	5660
40	5328	5442	5681	5577	5555
45	5435	5397	5605	5650	5594
50	5717	5687	5305	5625	5507
55	5603	5571	5262	5696	5516
60	5469	5719	5459	5313	5333
65	5476	5502	5488	5433	5465
70	5336	5462	5275	5389	5321
75	5630	5477	5634	5647	5531
80	5505	5315	5426	5700	5432
85	5584	5556	5299	5391	5379
90	5378	5491	5545	5569	5611
95	5306	5367	5467	5631	5572

Type 6 Radar Waveform_12					
Frequency List (MHz)	0	1	2	3	4
0	5525	5437	5400	5714	5521
5	5358	5690	5349	5266	5381
10	5253	5618	5307	5278	5542
15	5663	5624	5385	5656	5596
20	5536	5454	5675	5302	5555
25	5671	5522	5684	5490	5319
30	5574	5723	5495	5581	5564
35	5476	5614	5674	5504	5263
40	5499	5508	5380	5446	5387
45	5415	5480	5566	5703	5384
50	5496	5388	5356	5336	5330
55	5547	5284	5691	5509	5515
60	5390	5598	5409	5404	5620
65	5634	5422	5325	5469	5606
70	5265	5347	5375	5421	5479
75	5453	5418	5506	5292	5368
80	5512	5660	5328	5682	5389
85	5592	5276	5677	5342	5570
90	5359	5635	5318	5301	5575
95	5340	5502	5484	5434	5712
Type 6 Radar Waveform_13					
Frequency List (MHz)	0	1	2	3	4
0	5305	5676	5336	5400	5266
5	5712	5424	5429	5588	5562
10	5407	5348	5376	5563	5276
15	5485	5252	5430	5373	5604
20	5702	5395	5667	5275	5443
25	5523	5628	5410	5427	5361
30	5560	5680	5613	5258	5384
35	5615	5327	5470	5279	5274
40	5338	5591	5318	5686	5668
45	5316	5624	5281	5271	5372
50	5564	5425	5394	5375	5645
55	5602	5334	5574	5349	5549
60	5460	5368	5526	5386	5408
65	5507	5498	5446	5516	5328
70	5377	5475	5315	5511	5493
75	5437	5438	5463	5553	5655
80	5578	5568	5677	5647	5402
85	5665	5324	5469	5587	5466
90	5581	5277	5585	5598	5489
95	5696	5713	5314	5454	5413

Type 6 Radar Waveform_14					
Frequency List (MHz)	0	1	2	3	4
0	5560	5440	5272	5561	5583
5	5539	5637	5499	5592	5417
10	5493	5671	5389	5571	5584
15	5267	5515	5355	5378	5662
20	5296	5336	5281	5723	5709
25	5472	5356	5514	5461	5500
30	5449	5353	5507	5679	5279
35	5418	5363	5432	5663	5274
40	5674	5634	5354	5665	5720
45	5375	5268	5682	5712	5536
50	5265	5458	5338	5563	5599
55	5317	5531	5332	5381	5264
60	5391	5383	5411	5252	5335
65	5444	5717	5293	5724	5588
70	5347	5524	5652	5405	5435
75	5654	5689	5548	5719	5718
80	5575	5288	5580	5489	5365
85	5382	5667	5640	5310	5631
90	5587	5311	5266	5597	5615
95	5544	5680	5595	5505	5513
Type 6 Radar Waveform_15					
Frequency List (MHz)	0	1	2	3	4
0	5340	5679	5683	5722	5328
5	5581	5659	5574	5658	5624
10	5424	5460	5430	5291	5605
15	5355	5642	5361	5423	5379
20	5523	5462	5374	5273	5696
25	5597	5324	5559	5618	5495
30	5542	5338	5594	5568	5402
35	5418	5509	5634	5585	5577
40	5588	5572	5662	5552	5351
45	5643	5290	5599	5441	5603
50	5652	5660	5276	5553	5507
55	5350	5681	5510	5429	5336
60	5688	5684	5357	5550	5284
65	5480	5549	5563	5527	5282
70	5501	5381	5295	5316	5555
75	5700	5466	5561	5500	5309
80	5403	5483	5428	5425	5477
85	5632	5490	5321	5690	5723
90	5526	5706	5286	5639	5520
95	5472	5506	5717	5508	5538

Type 6 Radar Waveform_16

Frequency List (MHz)	0	1	2	3	4
0	5498	5443	5619	5408	5645
5	5623	5584	5649	5346	5356
10	5258	5568	5486	5626	5294
15	5464	5468	5571	5531	5315
20	5362	5669	5388	5273	5287
25	5722	5529	5324	5551	5308
30	5433	5697	5460	5600	5430
35	5360	5491	5427	5462	5510
40	5359	5659	5481	5335	5434
45	5701	5343	5688	5378	5617
50	5560	5314	5475	5604	5507
55	5644	5652	5542	5594	5281
60	5520	5303	5276	5708	5419
65	5284	5455	5330	5354	5416
70	5530	5253	5260	5254	5285
75	5675	5368	5533	5718	5671
80	5473	5466	5472	5678	5483
85	5270	5500	5263	5328	5696
90	5282	5340	5654	5634	5456
95	5670	5601	5454	5503	5316

Type 6 Radar Waveform_17

Frequency List (MHz)	0	1	2	3	4
0	5278	5304	5555	5569	5390
5	5665	5606	5724	5509	5660
10	5664	5610	5609	5681	5647
15	5531	5421	5567	5513	5288
20	5442	5697	5256	5354	5642
25	5276	5600	5490	5351	5563
30	5723	5688	5508	5426	5585
35	5420	5599	5691	5323	5502
40	5266	5545	5448	5313	5693
45	5517	5284	5396	5575	5254
50	5318	5611	5403	5298	5451
55	5652	5461	5412	5463	5623
60	5671	5701	5352	5433	5346
65	5574	5657	5455	5591	5250
70	5608	5402	5630	5577	5711
75	5632	5698	5414	5514	5495
80	5684	5537	5637	5529	5469
85	5398	5386	5587	5465	5511
90	5651	5702	5694	5668	5709
95	5532	5435	5251	5393	5696

Type 6 Radar Waveform_18					
Frequency List (MHz)	0	1	2	3	4
0	5533	5543	5491	5633	5707
5	5329	5531	5324	5672	5392
10	5595	5399	5650	5304	5668
15	5522	5548	5670	5461	5480
20	5450	5291	5294	5443	5615
25	5639	5452	5596	5552	5597
30	5290	5577	5465	5641	5359
35	5715	5263	5404	5594	5666
40	5416	5677	5628	5386	5267
45	5275	5717	5673	5600	5720
50	5449	5365	5605	5494	5662
55	5492	5499	5395	5415	5602
60	5660	5325	5268	5281	5259
65	5292	5300	5606	5394	5326
70	5617	5314	5388	5426	5687
75	5647	5601	5343	5557	5495
80	5319	5318	5592	5466	5690
85	5289	5526	5411	5481	5333
90	5284	5346	5341	5708	5253
95	5550	5305	5335	5430	5414
Type 6 Radar Waveform_19					
Frequency List (MHz)	0	1	2	3	4
0	5313	5307	5427	5319	5452
5	5371	5553	5399	5360	5599
10	5429	5663	5691	5499	5689
15	5610	5578	5298	5506	5672
20	5458	5457	5710	5435	5588
25	5430	5401	5324	5656	5631
30	5332	5563	5422	5381	5511
35	5438	5305	5495	5390	5441
40	5330	5516	5333	5507	5272
45	5646	5653	5683	5303	5502
50	5252	5481	5670	5713	5581
55	5322	5717	5456	5317	5479
60	5468	5454	5614	5688	5657
65	5598	5555	5633	5412	5592
70	5667	5471	5258	5275	5606
75	5473	5463	5603	5476	5574
80	5393	5277	5410	5289	5368
85	5374	5673	5604	5532	5641
90	5336	5287	5432	5570	5344
95	5328	5296	5411	5314	5615

Type 6 Radar Waveform_20					
Frequency List (MHz)	0	1	2	3	4
0	5471	5546	5363	5480	5294
5	5413	5478	5474	5426	5428
10	5360	5452	5257	5694	5710
15	5698	5705	5304	5551	5389
20	5369	5526	5651	5524	5561
25	5318	5253	5527	5285	5665
30	5374	5379	5596	5258	5444
35	5586	5661	5594	5341	5355
40	5416	5262	5272	5269	5633
45	5291	5361	5458	5517	5260
50	5371	5289	5292	5620	5644
55	5701	5410	5298	5439	5583
60	5420	5483	5659	5324	5504
65	5466	5368	5682	5395	5457
70	5261	5502	5639	5565	5442
75	5271	5679	5557	5340	5460
80	5605	5667	5307	5434	5390
85	5641	5655	5683	5364	5671
90	5342	5699	5692	5582	5339
95	5399	5303	5275	5560	5609
Type 6 Radar Waveform_21					
Frequency List (MHz)	0	1	2	3	4
0	5251	5310	5299	5641	5514
5	5455	5500	5549	5589	5635
10	5669	5338	5298	5414	5256
15	5311	5357	5407	5499	5581
20	5377	5692	5689	5516	5534
25	5584	5677	5255	5389	5699
30	5513	5341	5336	5714	5456
35	5583	5554	5272	5675	5512
40	5266	5613	5374	5419	5511
45	5404	5611	5547	5340	5381
50	5443	5508	5655	5600	5495
55	5410	5615	5469	5578	5252
60	5309	5702	5525	5453	5405
65	5574	5673	5433	5361	5351
70	5524	5314	5703	5317	5438
75	5552	5721	5403	5360	5325
80	5570	5624	5397	5485	5606
85	5609	5659	5348	5258	5691
90	5356	5454	5384	5599	5632
95	5663	5332	5564	5478	5633

Type 6 Radar Waveform_22

Frequency List (MHz)	0	1	2	3	4
0	5506	5549	5710	5327	5356
5	5594	5425	5624	5277	5367
10	5600	5602	5339	5512	5302
15	5484	5510	5544	5395	5385
20	5286	5630	5605	5507	5472
25	5529	5458	5590	5258	5555
30	5293	5454	5686	5276	5722
35	5350	5522	5644	5508	5582
40	5516	5655	5263	5714	5593
45	5457	5380	5564	5669	5487
50	5723	5391	5470	5452	5545
55	5609	5315	5314	5381	5269
60	5634	5620	5559	5707	5648
65	5348	5402	5441	5410	5369
70	5476	5429	5364	5675	5494
75	5483	5283	5251	5460	5419
80	5708	5662	5392	5563	5357
85	5520	5570	5466	5677	5474
90	5660	5704	5382	5526	5354
95	5670	5359	5703	5509	5368

Type 6 Radar Waveform_23

Frequency List (MHz)	0	1	2	3	4
0	5286	5313	5646	5488	5576
5	5636	5447	5699	5440	5671
10	5531	5391	5380	5707	5298
15	5390	5611	5613	5589	5587
20	5296	5452	5571	5597	5480
25	5263	5381	5564	5694	5292
30	5691	5250	5669	5460	5289
35	5481	5621	5675	5655	5444
40	5287	5454	5420	5357	5643
45	5573	5540	5438	5617	5556
50	5266	5424	5442	5559	5467
55	5299	5258	5563	5505	5608
60	5255	5398	5324	5565	5533
65	5594	5549	5351	5477	5717
70	5261	5657	5674	5512	5464
75	5524	5470	5630	5371	5603
80	5400	5388	5648	5626	5354
85	5337	5473	5405	5297	5439
90	5614	5677	5360	5704	5716
95	5487	5352	5492	5493	5394

Type 6 Radar Waveform_24

Frequency List (MHz)	0	1	2	3	4
0	5541	5552	5582	5649	5418
5	5678	5372	5299	5506	5403
10	5365	5655	5518	5427	5319
15	5478	5641	5716	5634	5304
20	5618	5609	5686	5453	5626
25	5330	5292	5323	5326	5261
30	5677	5682	5409	5612	5294
35	5428	5572	5514	5353	5569
40	5283	5370	5392	5660	5354
45	5456	5623	5496	5670	5346
50	5617	5600	5493	5648	5290
55	5718	5446	5517	5695	5701
60	5527	5489	5510	5320	5359
65	5637	5300	5416	5452	5531
70	5460	5368	5498	5467	5373
75	5401	5599	5491	5640	5310
80	5429	5689	5351	5532	5473
85	5722	5480	5307	5665	5250
90	5400	5381	5463	5598	5504
95	5619	5433	5390	5472	5497

Type 6 Radar Waveform_25

Frequency List (MHz)	0	1	2	3	4
0	5699	5316	5518	5713	5638
5	5342	5394	5374	5669	5610
10	5296	5444	5559	5622	5340
15	5566	5293	5722	5582	5496
20	5312	5687	5550	5678	5426
25	5514	5657	5495	5427	5360
30	5303	5639	5527	5386	5589
35	5567	5663	5310	5506	5483
40	5597	5453	5330	5328	5351
45	5404	5436	5706	5457	5723
50	5611	5493	5301	5544	5359
55	5588	5565	5634	5471	5410
60	5624	5672	5656	5654	5552
65	5627	5282	5583	5573	5724
70	5452	5284	5326	5263	5440
75	5484	5470	5600	5422	5568
80	5317	5459	5417	5420	5685
85	5277	5348	5252	5376	5564
90	5443	5681	5272	5619	5498
95	5598	5449	5469	5675	5383

Type 6 Radar Waveform_26					
Frequency List (MHz)	0	1	2	3	4
0	5479	5555	5454	5399	5480
5	5384	5319	5449	5357	5439
10	5702	5330	5600	5342	5361
15	5557	5420	5350	5627	5688
20	5698	5378	5491	5292	5305
25	5606	5628	5394	5345	5455
30	5596	5267	5538	5312	5609
35	5279	5581	5281	5494	5436
40	5633	5268	5568	5348	5333
45	5416	5314	5515	5679	5498
50	5369	5477	5595	5448	5509
55	5250	5425	5443	5643	5310
60	5344	5497	5459	5583	5529
65	5396	5673	5391	5693	5541
70	5567	5570	5398	5440	5634
75	5363	5669	5433	5466	5437
80	5723	5447	5503	5301	5615
85	5670	5271	5418	5614	5475
90	5612	5265	5635	5254	5401
95	5661	5703	5566	5674	5453
Type 6 Radar Waveform_27					
Frequency List (MHz)	0	1	2	3	4
0	5259	5319	5390	5560	5700
5	5426	5341	5524	5520	5646
10	5536	5594	5641	5440	5382
15	5645	5547	5453	5672	5405
20	5706	5447	5529	5284	5372
25	5668	5458	5257	5428	5484
30	5441	5553	5482	5312	5607
35	5273	5370	5377	5434	5408
40	5716	5681	5333	5345	5640
45	5396	5397	5573	5288	5623
50	5653	5537	5612	5356	5438
55	5379	5693	5262	5517	5342
60	5509	5442	5291	5506	5475
65	5597	5622	5427	5326	5488
70	5344	5298	5374	5278	5409
75	5279	5421	5446	5543	5722
80	5561	5500	5720	5264	5466
85	5493	5580	5624	5519	5616
90	5304	5481	5525	5676	5652
95	5309	5559	5690	5331	5289

Type 6 Radar Waveform_28					
Frequency List (MHz)	0	1	2	3	4
0	5514	5558	5326	5721	5542
5	5468	5266	5599	5586	5378
10	5467	5383	5682	5635	5403
15	5258	5674	5556	5717	5597
20	5714	5613	5470	5373	5345
25	5459	5310	5532	5361	5462
30	5526	5330	5510	5697	5464
35	5412	5461	5270	5587	5322
40	5686	5324	5619	5573	5439
45	5569	5376	5480	5534	5650
50	5499	5257	5626	5435	5300
55	5333	5408	5488	5471	5387
60	5695	5332	5518	5323	5571
65	5463	5633	5380	5525	5278
70	5539	5673	5622	5253	5712
75	5281	5399	5552	5402	5601
80	5503	5250	5563	5657	5662
85	5588	5448	5578	5670	5436
90	5469	5584	5680	5407	5688
95	5669	5364	5466	5554	5434

Type 6 Radar Waveform_29					
Frequency List (MHz)	0	1	2	3	4
0	5672	5322	5262	5407	5287
5	5607	5288	5674	5274	5585
10	5301	5647	5723	5355	5424
15	5346	5704	5659	5665	5314
20	5625	5682	5411	5365	5415
25	5347	5259	5260	5465	5496
30	5568	5694	5467	5340	5713
35	5551	5649	5541	5362	5333
40	5525	5460	5716	5436	5498
45	5356	5563	5592	5363	5440
50	5375	5433	5273	5337	5258
55	5622	5339	5598	5278	5459
60	5600	5364	5429	5527	5633
65	5464	5621	5520	5402	5368
70	5650	5328	5447	5676	5374
75	5671	5250	5519	5695	5383
80	5378	5666	5284	5414	5626
85	5714	5654	5560	5601	5489
90	5305	5413	5629	5443	5634
95	5590	5617	5667	5686	5419

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-10		
Test Item	Radar Statistical Performance Check (802.11be-EHT80 – 5530MHz) - AP Mode		

Radar Type 1-4 - Radar Statistical Performance								
Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
0	5551	1	5500	0	5533	1	5555	1
1	5530	1	5555	1	5500	1	5570	0
2	5529	1	5568	1	5558	1	5554	1
3	5538	1	5561	0	5570	1	5530	1
4	5542	1	5564	1	5495	1	5524	1
5	5570	1	5521	0	5535	1	5566	0
6	5539	1	5507	1	5498	1	5505	1
7	5550	1	5511	0	5549	1	5548	1
8	5560	1	5560	1	5514	1	5546	0
9	5500	1	5508	1	5546	0	5539	1
10	5557	1	5497	1	5490	0	5556	0
11	5549	1	5524	1	5560	1	5491	1
12	5505	1	5490	1	5540	1	5541	1
13	5525	1	5544	1	5505	1	5553	1
14	5524	1	5535	1	5551	1	5551	1
15	5520	1	5550	1	5555	1	5558	1
16	5503	1	5536	0	5530	1	5521	1
17	5555	1	5545	1	5543	1	5519	1
18	5490	1	5502	0	5554	1	5564	0
19	5515	1	5512	1	5524	1	5490	1
20	5540	1	5504	1	5538	1	5532	1
21	5553	1	5570	0	5510	1	5510	0
22	5564	1	5519	1	5511	1	5537	1
23	5510	1	5565	1	5504	1	5538	1
24	5523	1	5499	1	5544	1	5493	0
25	5536	1	5491	1	5568	1	5494	0
26	5513	1	5530	0	5559	1	5540	1
27	5509	1	5518	1	5567	1	5544	0

Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency	1=detect	Frequency	1=detect	Frequency	1=detect	Frequency	1=detect
	(MHz)	0=no detect	(MHz)	0=no detect	(MHz)	0=no detect	(MHz)	0=no detect
28	5496	1	5566	0	5492	1	5500	1
29	5547	0	5515	1	5536	1	5529	1
Probability:	96.7%		70.0%		93.3%		70.0%	
Aggregate:	82.5% (>80%)							

Radar Type 1 - Radar Waveform							Radar Type 2 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 1	1.0	738.0	72	53136.0	Download	0	Type 2	3.7	205.0	27	5535.0
Download	1	Type 1	1.0	698.0	76	53048.0	Download	1	Type 2	3.7	174.0	27	4698.0
Download	2	Type 1	1.0	798.0	67	53466.0	Download	2	Type 2	4.4	222.0	28	6216.0
Download	3	Type 1	1.0	558.0	95	53010.0	Download	3	Type 2	3.9	158.0	28	4424.0
Download	4	Type 1	1.0	718.0	74	53132.0	Download	4	Type 2	3.9	204.0	28	5712.0
Download	5	Type 1	1.0	918.0	58	53244.0	Download	5	Type 2	3.9	209.0	28	5852.0
Download	6	Type 1	1.0	938.0	57	53466.0	Download	6	Type 2	2.2	164.0	25	4100.0
Download	7	Type 1	1.0	878.0	61	53558.0	Download	7	Type 2	4.2	207.0	28	5796.0
Download	8	Type 1	1.0	598.0	89	53222.0	Download	8	Type 2	1.6	190.0	24	4560.0
Download	9	Type 1	1.0	678.0	78	52884.0	Download	9	Type 2	5.0	152.0	29	4408.0
Download	10	Type 1	1.0	778.0	68	52904.0	Download	10	Type 2	3.5	185.0	27	4455.0
Download	11	Type 1	1.0	618.0	86	53148.0	Download	11	Type 2	1.1	213.0	23	4899.0
Download	12	Type 1	1.0	538.0	99	53282.0	Download	12	Type 2	2.7	229.0	26	5954.0
Download	13	Type 1	1.0	3066.0	18	55188.0	Download	13	Type 2	1.2	214.0	23	4922.0
Download	14	Type 1	1.0	758.0	70	53080.0	Download	14	Type 2	1.6	170.0	24	4080.0
Download	15	Type 1	1.0	665.0	80	53200.0	Download	15	Type 2	4.0	196.0	28	5488.0
Download	16	Type 1	1.0	2947.0	18	53046.0	Download	16	Type 2	3.6	230.0	27	6210.0
Download	17	Type 1	1.0	1679.0	32	53728.0	Download	17	Type 2	4.0	180.0	28	5040.0
Download	18	Type 1	1.0	2909.0	19	55271.0	Download	18	Type 2	1.5	199.0	23	4577.0
Download	19	Type 1	1.0	2674.0	20	53480.0	Download	19	Type 2	4.1	200.0	28	5600.0
Download	20	Type 1	1.0	1295.0	41	53095.0	Download	20	Type 2	4.4	171.0	28	4788.0
Download	21	Type 1	1.0	1640.0	33	54120.0	Download	21	Type 2	2.8	187.0	26	4862.0
Download	22	Type 1	1.0	2997.0	18	53946.0	Download	22	Type 2	2.0	218.0	24	5232.0
Download	23	Type 1	1.0	2562.0	21	53802.0	Download	23	Type 2	4.2	208.0	28	5824.0
Download	24	Type 1	1.0	2158.0	25	53950.0	Download	24	Type 2	1.7	161.0	24	3864.0
Download	25	Type 1	1.0	997.0	53	52841.0	Download	25	Type 2	3.6	169.0	27	4563.0
Download	26	Type 1	1.0	2629.0	21	55209.0	Download	26	Type 2	2.4	216.0	25	5400.0
Download	27	Type 1	1.0	1629.0	33	53757.0	Download	27	Type 2	2.6	226.0	25	5650.0
Download	28	Type 1	1.0	788.0	67	52796.0	Download	28	Type 2	2.8	172.0	26	4472.0
Download	29	Type 1	1.0	1614.0	33	53282.0	Download	29	Type 2	4.6	156.0	29	4524.0

Radar Type 3 - Radar Waveform							Radar Type 4 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 3	8.7	310.0	17	5270.0	Download	0	Type 4	17.0	310.0	15	4650.0
Download	1	Type 3	8.7	440.0	18	7920.0	Download	1	Type 4	17.2	440.0	15	6600.0
Download	2	Type 3	9.4	495.0	18	8910.0	Download	2	Type 4	18.5	495.0	16	7920.0
Download	3	Type 3	8.9	460.0	18	8280.0	Download	3	Type 4	17.5	460.0	15	6900.0
Download	4	Type 3	8.9	457.0	18	8226.0	Download	4	Type 4	17.5	457.0	15	6855.0
Download	5	Type 3	8.9	477.0	18	8596.0	Download	5	Type 4	17.5	477.0	15	7155.0
Download	6	Type 3	7.2	494.0	16	7904.0	Download	6	Type 4	13.8	494.0	13	6422.0
Download	7	Type 3	9.2	311.0	18	5598.0	Download	7	Type 4	18.2	311.0	15	4665.0
Download	8	Type 3	6.6	302.0	16	4832.0	Download	8	Type 4	12.5	302.0	12	3624.0
Download	9	Type 3	10.0	360.0	18	6480.0	Download	9	Type 4	20.0	360.0	16	5760.0
Download	10	Type 3	8.5	455.0	17	7735.0	Download	10	Type 4	16.5	455.0	15	6825.0
Download	11	Type 3	6.1	233.0	16	3728.0	Download	11	Type 4	11.3	233.0	12	2796.0
Download	12	Type 3	7.7	271.0	17	4607.0	Download	12	Type 4	14.9	271.0	14	3794.0
Download	13	Type 3	6.2	357.0	16	5712.0	Download	13	Type 4	11.4	357.0	12	4284.0
Download	14	Type 3	6.6	404.0	16	6464.0	Download	14	Type 4	12.4	404.0	12	4848.0
Download	15	Type 3	9.0	450.0	18	8100.0	Download	15	Type 4	17.7	450.0	15	6750.0
Download	16	Type 3	8.6	322.0	17	5474.0	Download	16	Type 4	16.8	322.0	15	4830.0
Download	17	Type 3	9.0	367.0	18	6606.0	Download	17	Type 4	17.8	367.0	15	5505.0
Download	18	Type 3	8.5	312.0	16	4992.0	Download	18	Type 4	12.1	312.0	12	3744.0
Download	19	Type 3	9.1	323.0	18	5814.0	Download	19	Type 4	18.0	323.0	15	4845.0
Download	20	Type 3	9.4	369.0	18	6642.0	Download	20	Type 4	18.6	369.0	16	5904.0
Download	21	Type 3	7.8	278.0	17	4726.0	Download	21	Type 4	15.0	278.0	14	3892.0
Download	22	Type 3	7.0	448.0	16	7168.0	Download	22	Type 4	13.2	448.0	13	5824.0
Download	23	Type 3	9.2	281.0	18	5058.0	Download	23	Type 4	18.2	281.0	15	4215.0
Download	24	Type 3	6.7	247.0	16	3952.0	Download	24	Type 4	12.7	247.0	12	2964.0
Download	25	Type 3	8.6	368.0	17	6256.0	Download	25	Type 4	16.8	368.0	15	5520.0
Download	26	Type 3	7.4	348.0	17	5916.0	Download	26	Type 4	14.1	348.0	13	4524.0
Download	27	Type 3	7.6	232.0	17	3944.0	Download	27	Type 4	14.6	232.0	13	3016.0
Download	28	Type 3	7.8	428.0	17	7276.0	Download	28	Type 4	15.1	428.0	14	5992.0
Download	29	Type 3	9.6	415.0	18	7470.0	Download	29	Type 4	19.1	415.0	16	6640.0

Radar Type 5 - Radar Statistical Performance					
Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
0	5530	1	15	5496.4	1
1	5530	1	16	5496	1
2	5530	1	17	5496.8	1
3	5530	1	18	5492.8	1
4	5530	1	19	5496.8	1
5	5530	1	20	5562.8	1
6	5530	1	21	5565.2	1
7	5530	1	22	5566.8	1
8	5530	1	23	5563.2	1
9	5530	1	24	5566.8	1
10	5495.6	0	25	5564	1
11	5492	0	26	5566	1
12	5494.4	1	27	5565.6	1
13	5492	1	28	5565.2	1
14	5492.8	1	29	5562.4	1
Detection Percentage (%)			93.3%		

Type 5 Radar Waveform_0								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	674118.0	83.0	15	2	1328.0	1594.0	-	
1	107945.0	84.1	15	3	1321.0	1656.0	1909.0	
2	288966.0	91.6	15	3	1197.0	1626.0	1270.0	
3	469546.0	86.0	15	3	1043.0	1956.0	1612.0	
4	650148.0	86.0	15	3	1267.0	1797.0	1751.0	
5	85788.0	86.0	15	3	1229.0	1552.0	1218.0	
6	267509.0	65.6	15	1	1782.0	-	-	
7	446879.0	90.0	15	3	1517.0	1812.0	1947.0	
8	630496.0	58.4	15	1	1717.0	-	-	
9	63424.0	99.6	15	3	1286.0	1734.0	1887.0	
10	244836.0	80.7	15	2	1323.0	1438.0	-	
11	426711.0	51.6	15	1	1628.0	-	-	
12	606671.0	71.8	15	2	1889.0	1638.0	-	
13	41340.0	52.5	15	1	1736.0	-	-	
14	222819.0	58.1	15	1	1731.0	-	-	
15	402388.0	87.3	15	3	1928.0	1822.0	1516.0	
Type 5 Radar Waveform_1								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	584296.0	82.1	15	2	1939.0	1683.0	-	
1	18909.0	87.8	15	3	1511.0	1895.0	1388.0	
2	200602.0	56.4	15	1	1219.0	-	-	
3	380745.0	88.6	15	3	1060.0	1591.0	1429.0	
4	561257.0	91.8	15	3	1586.0	1069.0	1953.0	
5	742928.0	72.4	15	2	1739.0	1974.0	-	
6	178193.0	62.5	15	1	1387.0	-	-	
7	357855.0	90.0	15	3	1858.0	1769.0	1713.0	
8	541316.0	59.5	15	1	1389.0	-	-	
9	721398.0	82.0	15	2	1613.0	1308.0	-	
10	155418.0	67.2	15	2	1589.0	1771.0	-	
11	336658.0	69.8	15	2	1761.0	1251.0	-	
12	517805.0	72.9	15	2	1383.0	1660.0	-	
13	697059.0	94.6	15	3	1220.0	1883.0	1977.0	
14	133446.0	55.7	15	1	1488.0	-	-	
15	314594.0	71.6	15	2	1292.0	1122.0	-	

Type 5 Radar Waveform_2								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	439424.0	96.1	18	3	1709.0	1140.0	1382.0	
1	601444.0	66.9	18	2	1593.0	1138.0	-	
2	98607.0	71.5	18	2	1126.0	1110.0	-	
3	260177.0	57.9	18	1	1148.0	-	-	
4	419183.0	91.2	18	3	1625.0	1954.0	1364.0	
5	582322.0	54.8	18	1	1917.0	-	-	
6	78544.0	91.8	18	3	1131.0	1215.0	1686.0	
7	238947.0	98.5	18	3	1905.0	1884.0	1094.0	
8	401194.0	56.0	18	1	1995.0	-	-	
9	560566.0	94.9	18	3	1309.0	1629.0	1221.0	
10	58957.0	57.4	18	1	1679.0	-	-	
11	219917.0	67.7	18	2	1184.0	1462.0	-	
12	379521.0	84.4	18	3	1705.0	1477.0	1978.0	
13	541041.0	89.4	18	3	1504.0	1225.0	1103.0	
14	38895.0	95.0	18	3	1680.0	1971.0	1373.0	
15	199916.0	75.5	18	2	1740.0	1451.0	-	
16	360058.0	84.7	18	3	1694.0	1702.0	1214.0	
17	521792.0	72.1	18	2	1468.0	1662.0	-	
Type 5 Radar Waveform_3								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	20320.0	77.5	16	2	1089.0	1921.0	-	
1	190314.0	95.1	16	3	1632.0	1544.0	1585.0	
2	360410.0	87.6	16	3	1663.0	1028.0	1969.0	
3	531856.0	73.7	16	2	1833.0	1006.0	-	
4	701178.0	98.2	16	3	1372.0	1461.0	1195.0	
5	170120.0	60.6	16	1	1650.0	-	-	
6	340001.0	71.6	16	2	1698.0	1847.0	-	
7	511534.0	51.6	16	1	1902.0	-	-	
8	681360.0	76.5	16	2	1703.0	1139.0	-	
9	149205.0	54.0	16	1	1065.0	-	-	
10	319272.0	68.8	16	2	1573.0	1415.0	-	
11	488790.0	95.8	16	3	1830.0	1095.0	1435.0	
12	660349.0	67.0	16	2	1418.0	1433.0	-	
13	128042.0	63.9	16	1	1655.0	-	-	
14	297654.0	93.8	16	3	1293.0	1569.0	1587.0	
15	469933.0	59.1	16	1	1211.0	-	-	
16	640323.0	55.6	16	1	1777.0	-	-	

Type 5 Radar Waveform_4

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	106984.0	54.9	16	1	1786.0	—	—
1	277271.0	81.1	16	2	1434.0	1564.0	—
2	448968.0	50.1	16	1	1075.0	—	—
3	617027.0	96.2	16	3	1966.0	1381.0	1001.0
4	85759.0	77.2	16	2	1545.0	1803.0	—
5	255662.0	96.0	16	3	1998.0	1108.0	1567.0
6	427502.0	57.9	16	1	1750.0	—	—
7	597413.0	82.5	16	2	1676.0	1091.0	—
8	64728.0	97.0	16	3	1537.0	1109.0	1167.0
9	235867.0	64.9	16	1	1230.0	—	—
10	404898.0	94.8	16	3	1991.0	1439.0	1038.0
11	577651.0	55.5	16	1	1250.0	—	—
12	43808.0	70.1	16	2	1673.0	1277.0	—
13	213758.0	87.0	16	3	1914.0	1000.0	1784.0
14	383581.0	91.7	16	3	1992.0	1609.0	1530.0
15	553834.0	85.2	16	3	1449.0	1645.0	1659.0
16	22866.0	50.8	16	1	1185.0	—	—

Type 5 Radar Waveform_5

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	193264.0	67.0	16	2	1210.0	1839.0	—
1	364365.0	60.6	16	1	1810.0	—	—
2	532253.0	84.1	16	3	1688.0	1952.0	1948.0
3	1808.0	72.4	16	2	1563.0	1578.0	—
4	172258.0	68.7	16	2	1754.0	1334.0	—
5	343461.0	60.9	16	1	1543.0	—	—
6	512375.0	86.4	16	3	1149.0	1216.0	1795.0
7	682486.0	89.5	16	3	1125.0	1779.0	1337.0
8	151343.0	78.3	16	2	1361.0	1352.0	—
9	321148.0	87.8	16	3	1173.0	1666.0	1482.0
10	492371.0	79.6	16	2	1146.0	1644.0	—
11	663925.0	60.3	16	1	1696.0	—	—
12	130281.0	77.8	16	2	1719.0	1294.0	—
13	300193.0	93.6	16	3	1600.0	1222.0	1491.0
14	471126.0	73.9	16	2	1454.0	1695.0	—
15	641410.0	75.3	16	2	1987.0	1327.0	—
16	108888.0	83.8	16	3	1968.0	1692.0	1692.0

Type 5 Radar Waveform_6

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	396292.0	90.1	9	3	1030.0	1496.0	1796.0
1	637548.0	94.4	9	3	1319.0	1507.0	1852.0
2	879601.0	84.5	9	3	1254.0	1106.0	1575.0
3	125292.0	75.9	9	2	1077.0	1431.0	—
4	367624.0	50.2	9	1	1397.0	—	—
5	608034.0	99.2	9	3	1206.0	1806.0	1304.0
6	850019.0	79.6	9	2	1869.0	1861.0	—
7	95326.0	91.3	9	3	1460.0	1480.0	1305.0
8	337607.0	51.2	9	1	1943.0	—	—
9	578142.0	95.7	9	3	1764.0	1353.0	1452.0
10	820614.0	76.9	9	2	1371.0	1924.0	—
11	65572.0	96.1	9	3	1800.0	1123.0	1416.0

Type 5 Radar Waveform_7

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	205279.0	56.4	17	1	1018.0	—	—
1	365653.0	67.0	17	2	1390.0	1565.0	—
2	526461.0	77.1	17	2	1747.0	1414.0	—
3	23950.0	60.6	17	1	1100.0	—	—
4	185179.0	66.2	17	1	1790.0	—	—
5	344835.0	96.9	17	3	1298.0	1781.0	1776.0
6	506872.0	83.2	17	2	1825.0	1031.0	—
7	4059.0	75.1	17	2	1013.0	1316.0	—
8	165020.0	83.2	17	2	1440.0	1541.0	—
9	325244.0	86.2	17	3	1369.0	1752.0	1367.0
10	487220.0	70.2	17	2	1204.0	1408.0	—
11	649278.0	63.8	17	1	1584.0	—	—
12	145573.0	56.6	17	1	1240.0	—	—
13	305630.0	99.0	17	3	1527.0	1039.0	1557.0
14	468344.0	58.2	17	1	1245.0	—	—
15	628389.0	78.3	17	2	1420.0	1242.0	—
16	125210.0	72.2	17	2	1893.0	1913.0	—
17	286604.0	69.1	17	2	1119.0	1227.0	—

Type 5 Radar Waveform_8

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	806734.0	71.3	7	2	1055.0	1931.0	—
1	1097652.0	70.8	7	2	1099.0	1228.0	—
2	190229.0	80.3	7	2	1919.0	1809.0	—
3	479919.0	86.3	7	3	1402.0	1580.0	1851.0
4	770485.0	96.9	7	3	1196.0	1370.0	1179.0
5	1060532.0	97.3	7	3	1259.0	1061.0	1518.0
6	154840.0	50.6	7	1	1024.0	—	—
7	444799.0	74.9	7	2	1737.0	1521.0	—
8	735096.0	66.7	7	2	1405.0	1773.0	—
9	1026814.0	61.5	7	1	1485.0	—	—

Type 5 Radar Waveform_9

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	59425.0	54.4	20	1	1376.0	—	—
1	204031.0	81.2	20	2	1675.0	1395.0	—
2	348303.0	67.5	20	2	1950.0	1980.0	—
3	494636.0	65.2	20	1	1793.0	—	—
4	41543.0	59.4	20	1	1356.0	—	—
5	185538.0	93.4	20	3	1720.0	1896.0	1571.0
6	331361.0	71.8	20	2	1128.0	1241.0	—
7	475974.0	70.7	20	2	1151.0	1634.0	—
8	23649.0	52.4	20	1	1603.0	—	—
9	167939.0	99.7	20	3	1426.0	1194.0	1961.0
10	314186.0	61.6	20	1	1076.0	—	—
11	457660.0	96.8	20	3	1324.0	1026.0	1051.0
12	5750.0	90.8	20	3	1176.0	1422.0	1366.0
13	150923.0	50.1	20	1	1523.0	—	—
14	296251.0	50.5	20	1	1162.0	—	—
15	441195.0	53.9	20	1	1559.0	—	—
16	585293.0	74.2	20	2	1348.0	1276.0	—
17	132806.0	70.6	20	2	1432.0	1160.0	—
18	277489.0	69.2	20	2	1164.0	1875.0	—
19	423465.0	51.3	20	1	1350.0	—	—

Type 5 Radar Waveform_10								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	755450.0	90.9	14	3	1997.0	1072.0	1636.0	
1	153743.0	51.2	14	1	1042.0	—	—	
2	346790.0	69.0	14	2	1533.0	1177.0	—	
3	539782.0	82.2	14	2	1396.0	1870.0	—	
4	733012.0	74.3	14	2	1560.0	1708.0	—	
5	129754.0	56.0	14	1	1787.0	—	—	
6	323285.0	65.8	14	1	1937.0	—	—	
7	516116.0	70.2	14	2	1582.0	1474.0	—	
8	709049.0	70.1	14	2	1920.0	1529.0	—	
9	105686.0	79.9	14	2	1926.0	1526.0	—	
10	299688.0	60.0	14	1	1284.0	—	—	
11	491532.0	91.3	14	3	1374.0	1104.0	1834.0	
12	685601.0	80.1	14	2	1505.0	1539.0	—	
13	81937.0	71.6	14	2	1835.0	1159.0	—	
14	275258.0	70.6	14	2	1375.0	1556.0	—	
Type 5 Radar Waveform_11								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	880706.0	52.0	5	1	1868.0	—	—	
1	1243409.0	68.7	5	2	1037.0	1602.0	—	
2	109291.0	55.0	5	1	1458.0	—	—	
3	472849.0	54.3	5	1	1096.0	—	—	
4	836385.0	63.3	5	1	1088.0	—	—	
5	1197952.0	77.1	5	2	1912.0	1633.0	—	
6	64403.0	87.6	5	3	1515.0	1058.0	1669.0	
7	427304.0	75.8	5	2	1874.0	1906.0	—	

Type 5 Radar Waveform_12								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	486064.0	72.5	11	2	1169.0	1542.0	—	
1	710376.0	57.4	11	1	1291.0	—	—	
2	12127.0	74.6	11	2	1981.0	1203.0	—	
3	235344.0	80.1	11	2	1205.0	1534.0	—	
4	458463.0	80.1	11	2	1716.0	1207.0	—	
5	680198.0	85.7	11	3	1311.0	1799.0	1745.0	
6	902890.0	93.0	11	3	1818.0	1317.0	1726.0	
7	207793.0	73.1	11	2	1811.0	1180.0	—	
8	431099.0	80.0	11	2	1646.0	1010.0	—	
9	655044.0	55.6	11	1	1652.0	—	—	
10	878905.0	65.4	11	1	1247.0	—	—	
11	180240.0	70.6	11	2	1326.0	2000.0	—	
12	403944.0	53.1	11	1	1876.0	—	—	
Type 5 Radar Waveform_13								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	1020689.0	62.1	5	1	1255.0	—	—	
1	1380851.0	85.3	5	3	1885.0	1631.0	1346.0	
2	248372.0	90.9	5	3	1143.0	1823.0	1640.0	
3	612193.0	53.4	5	1	1815.0	—	—	
4	975159.0	77.5	5	2	1023.0	1393.0	—	
5	1339586.0	51.6	5	1	1056.0	—	—	
6	204175.0	50.5	5	1	1105.0	—	—	
7	566822.0	72.6	5	2	1615.0	1820.0	—	

Type 5 Radar Waveform_14								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	743104.0	89.7	7	3	1170.0	1604.0	1141.0
	1	1033937.0	70.4	7	2	1553.0	1501.0	—
	2	127307.0	66.7	7	2	1802.0	1064.0	—
	3	417637.0	69.1	7	2	1156.0	1746.0	—
	4	708014.0	79.5	7	2	1274.0	1555.0	—
	5	996989.0	98.6	7	3	1941.0	1134.0	1406.0
	6	91404.0	85.3	7	3	1682.0	1568.0	1437.0
	7	381892.0	69.1	7	2	1142.0	1706.0	—
	8	673213.0	66.3	7	1	1112.0	—	—
	9	963295.0	55.9	7	1	1965.0	—	—
Type 5 Radar Waveform_15								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	32732.0	74.3	16	2	1647.0	1743.0	—
	1	203794.0	53.3	16	1	1021.0	—	—
	2	373473.0	75.4	16	2	1576.0	1837.0	—
	3	543298.0	96.6	16	3	1279.0	1033.0	1807.0
	4	11759.0	74.7	16	2	1166.0	1419.0	—
	5	181741.0	99.8	16	3	1484.0	1384.0	1994.0
	6	352461.0	76.0	16	2	1976.0	1490.0	—
	7	522066.0	85.8	16	3	1085.0	1520.0	1873.0
	8	692001.0	84.5	16	3	1186.0	1848.0	1624.0
	9	161207.0	77.2	16	2	1171.0	1910.0	—
	10	332481.0	56.7	16	1	1338.0	—	—
	11	502204.0	80.0	16	2	1492.0	1457.0	—
	12	671020.0	85.6	16	3	1824.0	1597.0	1271.0
	13	140566.0	64.7	16	1	1303.0	—	—
	14	311353.0	51.0	16	1	1519.0	—	—
	15	480925.0	67.4	16	2	1967.0	1391.0	—
	16	650597.0	90.0	16	3	1728.0	1223.0	1175.0

Type 5 Radar Waveform_16								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	126378.0	83.4	15	3	1711.0	1428.0	1831.0
	1	308334.0	64.1	15	1	1907.0	-	-
	2	490175.0	50.9	15	1	1288.0	-	-
	3	669632.0	85.8	15	3	1036.0	1258.0	1145.0
	4	104386.0	75.5	15	2	1201.0	1877.0	-
	5	285035.0	87.0	15	3	1925.0	1224.0	1243.0
	6	467709.0	53.2	15	1	1446.0	-	-
	7	648136.0	82.9	15	2	1540.0	1199.0	-
	8	81930.0	87.1	15	3	1574.0	1494.0	1299.0
	9	263856.0	57.8	15	1	1285.0	-	-
	10	445592.0	60.9	15	1	1034.0	-	-
	11	626461.0	50.5	15	1	1964.0	-	-
	12	59665.0	87.2	15	3	1447.0	1158.0	1630.0
	13	241301.0	57.7	15	1	1866.0	-	-
	14	422678.0	53.9	15	1	1988.0	-	-
	15	604783.0	63.7	15	1	1136.0	-	-
Type 5 Radar Waveform_17								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	35177.0	99.7	17	3	1266.0	1757.0	1157.0
	1	205053.0	91.2	17	3	1486.0	1766.0	1984.0
	2	375857.0	67.3	17	2	1678.0	1923.0	-
	3	547233.0	77.8	17	2	1004.0	1246.0	-
	4	14264.0	65.6	17	1	1732.0	-	-
	5	185206.0	60.5	17	1	1111.0	-	-
	6	354430.0	91.2	17	3	1579.0	1611.0	1295.0
	7	525976.0	77.4	17	2	1257.0	1310.0	-
	8	694504.0	91.8	17	3	1444.0	1417.0	1774.0
	9	163798.0	67.1	17	2	1510.0	1120.0	-
	10	334072.0	73.4	17	2	1302.0	1930.0	-
	11	505756.0	65.8	17	1	1465.0	-	-
	12	676348.0	59.7	17	1	1727.0	-	-
	13	142275.0	84.8	17	3	1741.0	1455.0	1962.0
	14	314025.0	52.0	17	1	1113.0	-	-
	15	483836.0	68.1	17	2	1053.0	1685.0	-
	16	655591.0	62.0	17	1	1427.0	-	-

Type 5 Radar Waveform_18

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	230553.0	58.6	7	1	1929.0	—	—
1	553811.0	51.8	7	1	1086.0	—	—
2	876926.0	55.0	7	1	1082.0	—	—
3	1199694.0	65.3	7	1	1464.0	—	—
4	190633.0	70.2	7	2	1927.0	1017.0	—
5	512618.0	98.8	7	3	1232.0	1610.0	1854.0
6	836661.0	66.4	7	1	1821.0	—	—
7	1158969.0	72.2	7	2	1411.0	1129.0	—
8	151071.0	63.7	7	1	1335.0	—	—

Type 5 Radar Waveform_19

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	235317.0	87.7	17	3	1753.0	1880.0	1935.0
1	396016.0	91.9	17	3	1677.0	1614.0	1672.0
2	559516.0	65.0	17	1	1377.0	—	—
3	55348.0	85.2	17	3	1193.0	1144.0	1814.0
4	216274.0	97.4	17	3	1093.0	1260.0	1047.0
5	377506.0	69.4	17	2	1562.0	1189.0	—
6	539176.0	52.8	17	1	1951.0	—	—
7	35722.0	66.2	17	1	1052.0	—	—
8	196045.0	86.0	17	3	1249.0	1901.0	1648.0
9	357566.0	73.5	17	2	1441.0	1508.0	—
10	516957.0	83.7	17	3	1618.0	1483.0	1872.0
11	15784.0	89.7	17	3	1080.0	1032.0	1172.0
12	176798.0	74.4	17	2	1742.0	1083.0	—
13	337840.0	72.8	17	2	1651.0	1097.0	—
14	498542.0	73.0	17	2	1596.0	1577.0	—
15	659189.0	73.5	17	2	1898.0	1547.0	—
16	156459.0	94.0	17	3	1767.0	1945.0	1256.0
17	318615.0	58.3	17	1	1476.0	—	—

Type 5 Radar Waveform_20

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	480277.0	63.5	18	1	1015.0	—	—
1	638584.0	87.4	18	3	1098.0	1699.0	1470.0
2	137131.0	73.1	18	2	1687.0	1152.0	—
3	298680.0	52.2	18	1	1616.0	—	—
4	460370.0	55.8	18	1	1046.0	—	—
5	619418.0	92.8	18	3	1357.0	1078.0	1165.0
6	117143.0	88.5	18	3	1041.0	1238.0	1448.0
7	278161.0	78.5	18	2	1318.0	1850.0	—
8	440382.0	55.9	18	1	1202.0	—	—
9	598379.0	98.9	18	3	1606.0	1993.0	1362.0
10	97315.0	98.5	18	3	1253.0	1621.0	1011.0
11	258282.0	79.5	18	2	1649.0	1667.0	—
12	417991.0	92.4	18	3	1503.0	1738.0	1933.0
13	581215.0	50.9	18	1	1982.0	—	—
14	77819.0	55.5	18	1	1280.0	—	—
15	239189.0	51.8	18	1	1301.0	—	—
16	399450.0	72.9	18	2	1269.0	1878.0	—
17	559411.0	99.3	18	3	1285.0	1619.0	1404.0

Type 5 Radar Waveform_21								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	80250.0	62.3	12	1	1500.0	–	–
	1	303663.0	56.5	12	1	1798.0	–	–
	2	526101.0	69.7	12	2	1879.0	1670.0	–
	3	750612.0	54.0	12	1	1712.0	–	–
	4	52743.0	63.0	12	1	1068.0	–	–
	5	275223.0	93.5	12	3	1605.0	1407.0	1849.0
	6	498356.0	98.9	12	3	1865.0	1150.0	1040.0
	7	721442.0	78.5	12	2	1900.0	1908.0	–
	8	25111.0	84.4	12	3	1237.0	1783.0	1252.0
	9	248365.0	72.4	12	2	1661.0	1074.0	–
	10	470735.0	84.2	12	3	1345.0	1300.0	1733.0
	11	694957.0	79.0	12	2	1198.0	1314.0	–
	12	918194.0	82.1	12	2	1349.0	1192.0	–
Type 5 Radar Waveform_22								
	Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
	0	260639.0	91.8	8	3	1946.0	1531.0	1380.0
	1	524841.0	76.3	8	2	1903.0	1296.0	–
	2	787739.0	90.5	8	3	1287.0	1899.0	1263.0
	3	1054358.0	52.8	8	1	1226.0	–	–
	4	228362.0	84.8	8	3	1512.0	1424.0	1121.0
	5	491482.0	90.6	8	3	1654.0	1990.0	1466.0
	6	755942.0	85.5	8	3	1027.0	1453.0	1019.0
	7	1018976.0	86.1	8	3	1209.0	1399.0	1635.0
	8	196215.0	72.3	8	2	1154.0	1118.0	–
	9	458851.0	96.8	8	3	1890.0	1886.0	1791.0
	10	723896.0	68.8	8	2	1817.0	1022.0	–

Type 5 Radar Waveform_23

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	604149.0	63.5	17	1	1183.0	—	—
1	99944.0	53.9	17	1	1989.0	—	—
2	260813.0	67.8	17	2	1637.0	1208.0	—
3	422733.0	56.4	17	1	1394.0	—	—
4	582610.0	81.2	17	2	1306.0	1765.0	—
5	80044.0	82.8	17	2	1341.0	1007.0	—
6	240393.0	84.1	17	3	1714.0	1273.0	1481.0
7	402017.0	72.5	17	2	1472.0	1312.0	—
8	561493.0	100.0	17	3	1888.0	1572.0	1135.0
9	60162.0	73.8	17	2	1087.0	1658.0	—
10	221764.0	61.2	17	1	1003.0	—	—
11	381309.0	87.4	17	3	1379.0	1008.0	1916.0
12	541938.0	88.6	17	3	1409.0	1599.0	1313.0
13	40388.0	59.5	17	1	1755.0	—	—
14	201236.0	74.4	17	2	1804.0	1315.0	—
15	361853.0	79.7	17	2	1710.0	1985.0	—
16	523984.0	53.4	17	1	1996.0	—	—
17	20508.0	77.3	17	2	1262.0	1014.0	—

Type 5 Radar Waveform_24

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	327665.0	58.3	8	1	1513.0	—	—
1	618491.0	66.1	8	1	1213.0	—	—
2	907043.0	94.4	8	3	1236.0	1808.0	1059.0
3	1189.0	76.9	8	2	1261.0	1358.0	—
4	291603.0	66.8	8	2	1073.0	1498.0	—
5	582572.0	56.6	8	1	1430.0	—	—
6	873573.0	53.2	8	1	1005.0	—	—
7	1163767.0	51.8	8	1	1622.0	—	—
8	255462.0	98.1	8	3	1020.0	1657.0	1620.0
9	545999.0	70.8	8	2	1412.0	1697.0	—

Type 5 Radar Waveform_25

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	522739.0	61.3	15	1	1855.0	—	—
1	701389.0	87.5	15	3	1668.0	1853.0	1307.0
2	137634.0	63.1	15	1	1079.0	—	—
3	317832.0	90.1	15	3	1322.0	1442.0	1690.0
4	500321.0	59.8	15	1	1955.0	—	—
5	681792.0	50.9	15	1	1904.0	—	—
6	114654.0	90.5	15	3	1756.0	1459.0	1801.0
7	296755.0	59.0	15	1	1436.0	—	—
8	477490.0	75.7	15	2	1070.0	1642.0	—
9	657228.0	92.4	15	3	1443.0	1290.0	1684.0
10	92469.0	97.3	15	3	1190.0	1386.0	1871.0
11	274337.0	51.6	15	1	1588.0	—	—
12	454692.0	88.3	15	3	1342.0	1081.0	1067.0
13	637275.0	61.7	15	1	1693.0	—	—
14	70323.0	79.1	15	2	1514.0	1581.0	—
15	251920.0	58.3	15	1	1763.0	—	—

Type 5 Radar Waveform_26								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	577508.0	80.6	10	2	1009.0	1940.0	—	
1	817728.0	88.9	10	3	1421.0	1700.0	1770.0	
2	64154.0	51.8	10	1	1938.0	—	—	
3	305130.0	93.3	10	3	1829.0	1915.0	1730.0	
4	548502.0	60.3	10	1	1528.0	—	—	
5	790481.0	60.8	10	1	1758.0	—	—	
6	34294.0	82.0	10	2	1592.0	1623.0	—	
7	276532.0	58.7	10	1	1456.0	—	—	
8	518510.0	63.9	10	1	1844.0	—	—	
9	759568.0	80.6	10	2	1845.0	1344.0	—	
10	4519.0	74.5	10	2	1231.0	1114.0	—	
11	246033.0	86.7	10	3	1297.0	1617.0	1248.0	
Type 5 Radar Waveform_27								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	450050.0	87.2	11	3	1489.0	1191.0	1163.0	
1	674952.0	61.1	11	1	1168.0	—	—	
2	897923.0	53.2	11	1	1805.0	—	—	
3	199726.0	79.4	11	2	1744.0	1729.0	—	
4	422419.0	84.7	11	3	1071.0	1859.0	1283.0	
5	647002.0	63.3	11	1	1749.0	—	—	
6	870956.0	61.1	11	1	1217.0	—	—	
7	172681.0	62.5	11	1	1188.0	—	—	
8	396112.0	60.6	11	1	1551.0	—	—	
9	618792.0	71.1	11	2	1707.0	1063.0	—	
10	841449.0	77.6	11	2	1944.0	1423.0	—	
11	144495.0	87.7	11	3	1862.0	1561.0	1864.0	
12	367662.0	69.0	11	2	1867.0	1986.0	—	

Type 5 Radar Waveform_28

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	592210.0	65.4	12	1	1351.0	—	—
1	815310.0	54.0	12	1	1857.0	—	—
2	117580.0	61.0	12	1	1347.0	—	—
3	340416.0	80.1	12	2	1330.0	1942.0	—
4	564287.0	56.7	12	1	1983.0	—	—
5	786721.0	77.9	12	2	1107.0	1999.0	—
6	89899.0	82.6	12	2	1639.0	1187.0	—
7	312762.0	97.8	12	3	1212.0	1244.0	1331.0
8	537267.0	58.5	12	1	1130.0	—	—
9	759860.0	76.1	12	2	1016.0	1336.0	—
10	62507.0	64.4	12	1	1359.0	—	—
11	285051.0	100.0	12	3	1463.0	1329.0	1792.0
12	509265.0	54.7	12	1	1960.0	—	—

Type 5 Radar Waveform_29

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	501344.0	60.4	19	1	1282.0	—	—
1	23896.0	50.4	19	1	1772.0	—	—
2	176626.0	55.4	19	1	1836.0	—	—
3	329355.0	54.3	19	1	1843.0	—	—
4	480772.0	76.2	19	2	1963.0	1595.0	—
5	5071.0	79.3	19	2	1398.0	1570.0	—
6	157528.0	76.4	19	2	1469.0	1502.0	—
7	310901.0	53.8	19	1	1115.0	—	—
8	461991.0	71.9	19	2	1722.0	1863.0	—
9	616594.0	64.5	19	1	1239.0	—	—
10	138284.0	89.1	19	3	1473.0	1828.0	1778.0
11	291354.0	67.9	19	2	1550.0	1102.0	—
12	443178.0	66.9	19	2	1826.0	1832.0	—
13	595373.0	74.9	19	2	1780.0	1979.0	—
14	120265.0	50.5	19	1	1425.0	—	—
15	272899.0	66.5	19	1	1882.0	—	—
16	423973.0	97.7	19	3	1062.0	1532.0	1725.0
17	578723.0	59.5	19	1	1467.0	—	—
18	101392.0	61.2	19	1	1721.0	—	—

Radar Type 6 - Radar Statistical Performance			
Trail #	1=Detection 0=No Detection	Trail #	1=Detection 0=No Detection
0	1	15	1
1	0	16	1
2	1	17	1
3	0	18	1
4	1	19	1
5	1	20	1
6	1	21	1
7	0	22	1
8	1	23	1
9	0	24	1
10	1	25	1
11	0	26	1
12	1	27	1
13	1	28	1
14	0	29	1
Detection Percentage (%)		80.0%	

Type 6 Radar Waveform_0					
Frequency List (MHz)	0	1	2	3	4
0	5297	5394	5566	5262	5357
5	5422	5261	5631	5278	5619
10	5690	5537	5397	5404	5438
15	5644	5366	5540	5376	5573
20	5388	5636	5618	5659	5410
25	5569	5477	5437	5429	5711
30	5448	5638	5551	5382	5331
35	5552	5612	5643	5250	5621
40	5411	5698	5670	5564	5361
45	5547	5462	5693	5413	5342
50	5320	5503	5608	5561	5386
55	5501	5632	5577	5513	5646
60	5452	5389	5421	5302	5333
65	5265	5420	5611	5379	5637
70	5567	5677	5324	5663	5295
75	5345	5396	5369	5362	5266
80	5475	5482	5668	5398	5705
85	5686	5322	5684	5656	5596
90	5512	5532	5332	5381	5505
95	5661	5487	5545	5553	5634
Type 6 Radar Waveform_1					
Frequency List (MHz)	0	1	2	3	4
0	5552	5633	5502	5423	5577
5	5464	5283	5706	5441	5351
10	5621	5438	5599	5459	5257
15	5493	5643	5421	5290	5299
20	5327	5656	5651	5383	5360
25	5426	5640	5533	5270	5587
30	5527	5508	5597	5580	5372
35	5654	5356	5521	5309	5632
40	5250	5403	5608	5329	5358
45	5379	5442	5301	5471	5395
50	5585	5282	5612	5572	5324
55	5576	5467	5385	5368	5518
60	5586	5344	5262	5663	5366
65	5434	5328	5484	5480	5396
70	5649	5298	5669	5709	5686
75	5409	5600	5252	5495	5449
80	5332	5355	5425	5316	5304
85	5514	5610	5369	5710	5443
90	5538	5326	5592	5490	5258
95	5463	5645	5466	5648	5276

Type 6 Radar Waveform_2

Frequency List (MHz)	0	1	2	3	4
0	5710	5397	5438	5584	5419
5	5506	5683	5306	5604	5558
10	5455	5687	5479	5319	5480
15	5723	5523	5649	5466	5482
20	5307	5396	5597	5265	5356
25	5278	5368	5259	5304	5629
30	5513	5465	5337	5257	5570
35	5318	5447	5317	5462	5546
40	5564	5486	5472	5355	5308
45	5422	5384	5432	5448	5633
50	5485	5663	5661	5622	5423
55	5478	5421	5575	5662	5394
60	5647	5276	5289	5569	5489
65	5312	5635	5277	5679	5254
70	5468	5301	5518	5348	5287
75	5678	5709	5552	5581	5504
80	5605	5705	5496	5418	5295
85	5620	5316	5621	5706	5517
90	5617	5530	5608	5544	5360
95	5474	5502	5275	5251	5549

Type 6 Radar Waveform_3

Frequency List (MHz)	0	1	2	3	4
0	5490	5636	5374	5648	5639
5	5645	5705	5381	5292	5290
10	5386	5476	5520	5514	5501
15	5336	5650	5277	5511	5674
20	5315	5562	5538	5257	5329
25	5611	5605	5571	5363	5716
30	5671	5402	5422	5455	5506
35	5390	5457	5685	5615	5460
40	5403	5569	5484	5712	5352
45	5467	5404	5262	5509	5661
50	5714	5275	5348	5367	5666
55	5375	5481	5268	5301	5441
60	5709	5401	5412	5355	5458
65	5701	5459	5414	5621	5464
70	5637	5718	5324	5721	5550
75	5354	5598	5281	5715	5486
80	5563	5340	5694	5560	5672
85	5326	5385	5253	5298	5297
90	5356	5573	5710	5447	5327
95	5282	5294	5347	5592	5465

Type 6 Radar Waveform_4

Frequency List (MHz)	0	1	2	3	4
0	5270	5400	5310	5334	5481
5	5687	5630	5456	5358	5594
10	5695	5265	5658	5709	5522
15	5424	5302	5380	5459	5391
20	5701	5631	5479	5346	5402
25	5554	5677	5467	5275	5335
30	5388	5282	5670	5685	5596
35	5629	5390	5471	5717	5652
40	5422	5477	5349	5544	5285
45	5550	5548	5457	5624	5385
50	5362	5290	5364	5646	5689
55	5329	5480	5678	5714	5333
60	5606	5654	5708	5713	5301
65	5659	5650	5398	5721	5416
70	5267	5704	5404	5691	5680
75	5519	5474	5266	5640	5533
80	5253	5252	5289	5632	5597
85	5257	5518	5350	5569	5541
90	5463	5653	5331	5616	5720
95	5309	5628	5694	5345	5306

Type 6 Radar Waveform_5

Frequency List (MHz)	0	1	2	3	4
0	5525	5639	5721	5495	5701
5	5254	5652	5531	5521	5326
10	5626	5529	5699	5332	5543
15	5512	5429	5483	5504	5583
20	5709	5322	5517	5338	5275
25	5290	5406	5405	5571	5309
30	5377	5277	5714	5410	5432
35	5408	5638	5720	5385	5653
40	5357	5263	5620	5443	5473
45	5265	5633	5509	5510	5414
50	5538	5341	5453	5469	5470
55	5283	5573	5497	5685	5462
60	5296	5696	5540	5539	5722
65	5482	5599	5434	5456	5686
70	5545	5403	5312	5654	5391
75	5594	5621	5688	5363	5523
80	5416	5704	5286	5352	5597
85	5695	5613	5693	5314	5271
90	5628	5659	5268	5498	5257
95	5423	5683	5300	5718	5663

Type 6 Radar Waveform_6					
Frequency List (MHz)	0	1	2	3	4
0	5683	5403	5657	5656	5543
5	5296	5577	5606	5684	5533
10	5557	5415	5265	5527	5564
15	5503	5556	5586	5549	5300
20	5717	5391	5458	5427	5723
25	5355	5608	5675	5343	5419
30	5641	5671	5625	5584	5703
35	5302	5433	5548	5696	5299
40	5492	5440	5676	5385	5305
45	5720	5716	5567	5563	5301
50	5515	5714	5392	5639	5292
55	5480	5658	5712	5288	5316
60	5591	5461	5469	5462	5290
65	5470	5578	5348	5475	5298
70	5507	5630	5598	5360	5617
75	5455	5602	5465	5473	5304
80	5580	5283	5547	5500	5280
85	5330	5574	5562	5566	5318
90	5665	5366	5263	5284	5713
95	5642	5510	5535	5278	5275
Type 6 Radar Waveform_7					
Frequency List (MHz)	0	1	2	3	4
0	5463	5642	5593	5342	5288
5	5435	5599	5681	5372	5362
10	5391	5679	5306	5722	5585
15	5591	5586	5592	5497	5589
20	5628	5557	5399	5419	5696
25	5444	5682	5336	5401	5377
30	5558	5627	5268	5358	5426
35	5441	5524	5471	5310	5331
40	5523	5614	5625	5437	5709
45	5700	5324	5616	5566	5415
50	5443	5253	5493	5424	5371
55	5666	5478	5610	5530	5720
60	5626	5301	5711	5506	5409
65	5498	5373	5529	5644	5284
70	5607	5606	5329	5262	5501
75	5583	5717	5486	5560	5647
80	5355	5658	5267	5403	5500
85	5718	5522	5526	5335	5289
90	5483	5671	5714	5640	5378
95	5457	5318	5611	5694	5708

Type 6 Radar Waveform_8

Frequency List (MHz)	0	1	2	3	4
0	5718	5406	5529	5503	5605
5	5477	5524	5281	5438	5569
10	5322	5468	5347	5442	5606
15	5679	5713	5695	5542	5306
20	5636	5626	5437	5508	5669
25	5710	5534	5539	5505	5411
30	5600	5516	5585	5483	5510
35	5721	5615	5712	5624	5699
40	5645	5703	5552	5390	5434
45	5541	5680	5407	5586	5453
50	5267	5591	5494	5342	5316
55	5271	5559	5620	5668	5332
60	5501	5374	5531	5608	5589
65	5657	5707	5446	5445	5330
70	5265	5716	5270	5610	5465
75	5582	5676	5382	5644	5564
80	5596	5341	5336	5515	5655
85	5462	5403	5439	5303	5617
90	5491	5579	5583	5584	5648
95	5677	5273	5522	5487	5474

Type 6 Radar Waveform_9

Frequency List (MHz)	0	1	2	3	4
0	5498	5645	5465	5664	5350
5	5519	5546	5356	5601	5301
10	5253	5257	5388	5637	5627
15	5292	5365	5323	5587	5644
20	5317	5378	5500	5642	5598
25	5483	5609	5445	5405	5542
30	5698	5284	5444	5622	5706
35	5508	5302	5613	5581	5311
40	5490	5533	5431	5470	5660
45	5625	5718	5521	5545	5614
50	5690	5272	5574	5383	5626
55	5472	5503	5481	5573	5440
60	5512	5603	5433	5395	5384
65	5540	5535	5610	5410	5353
70	5710	5692	5558	5502	5312
75	5271	5597	5578	5652	5279
80	5306	5281	5266	5334	5359
85	5630	5307	5338	5305	5596
90	5588	5428	5333	5407	5385
95	5425	5251	5723	5536	5446

Type 6 Radar Waveform_10					
Frequency List (MHz)	0	1	2	3	4
0	5278	5409	5401	5253	5667
5	5561	5471	5431	5289	5605
10	5562	5521	5429	5260	5648
15	5283	5492	5426	5632	5690
20	5555	5483	5319	5589	5712
25	5486	5335	5373	5713	5479
30	5684	5391	5499	5438	5436
35	5264	5286	5322	5552	5624
40	5420	5394	5428	5298	5525
45	5399	5543	5573	5702	5678
50	5397	5468	5596	5617	5437
55	5634	5363	5528	5445	5443
60	5535	5646	5518	5369	5338
65	5256	5344	5372	5330	5413
70	5482	5339	5541	5337	5517
75	5622	5358	5526	5719	5378
80	5664	5641	5649	5474	5598
85	5326	5324	5584	5604	5602
90	5503	5311	5608	5317	5305
95	5364	5449	5343	5273	5441
Type 6 Radar Waveform_11					
Frequency List (MHz)	0	1	2	3	4
0	5436	5270	5337	5414	5412
5	5700	5493	5506	5452	5407
10	5470	5455	5669	5371	5619
15	5529	5580	5563	5552	5357
20	5581	5685	5277	5284	5576
25	5439	5513	5348	5280	5456
30	5556	5559	5425	5413	5672
35	5705	5538	5259	5477	5366
40	5522	5706	5523	5656	5285
45	5256	5395	5273	5644	5647
50	5638	5481	5551	5482	5288
55	5642	5317	5664	5336	5463
60	5676	5261	5592	5457	5293
65	5582	5697	5691	5651	5325
70	5716	5390	5296	5486	5645
75	5501	5507	5678	5354	5634
80	5704	5646	5684	5537	5289
85	5621	5667	5635	5377	5668
90	5278	5449	5717	5622	5301
95	5343	5631	5438	5485	5527

Type 6 Radar Waveform_12					
Frequency List (MHz)	0	1	2	3	4
0	5691	5509	5273	5575	5254
5	5267	5418	5484	5518	5544
10	5327	5671	5608	5650	5690
15	5459	5649	5535	5625	5599
20	5571	5718	5298	5670	5658
25	5640	5611	5304	5543	5547
30	5390	5644	5413	5296	5362
35	5282	5467	5601	5468	5383
40	5452	5573	5657	5303	5519
45	5635	5503	5264	5721	5309
50	5624	5345	5698	5320	5461
55	5425	5339	5381	5288	5318
60	5501	5505	5508	5562	5538
65	5280	5717	5395	5414	5492
70	5494	5723	5311	5341	5714
75	5389	5255	5358	5290	5488
80	5455	5367	5415	5420	5643
85	5587	5379	5252	5338	5632
90	5589	5528	5620	5323	5331
95	5351	5639	5593	5382	5673
Type 6 Radar Waveform_13					
Frequency List (MHz)	0	1	2	3	4
0	5471	5273	5684	5261	5474
5	5309	5440	5559	5681	5373
10	5258	5460	5649	5370	5711
15	5547	5301	5638	5670	5316
20	5482	5312	5714	5662	5631
25	5431	5463	5507	5647	5581
30	5432	5630	5511	5611	5577
35	5606	5692	5264	5633	5412
40	5265	5620	5446	5516	5467
45	5483	5347	5304	5362	5403
50	5521	5274	5409	5284	5272
55	5452	5293	5571	5280	5259
60	5447	5666	5450	5340	5388
65	5481	5624	5384	5675	5320
70	5394	5344	5563	5365	5689
75	5327	5410	5690	5566	5707
80	5477	5671	5584	5543	5490
85	5318	5433	5500	5640	5343
90	5523	5426	5724	5591	5363
95	5656	5648	5366	5679	5665

Type 6 Radar Waveform_14					
Frequency List (MHz)	0	1	2	3	4
0	5251	5512	5620	5422	5316
5	5351	5365	5634	5369	5580
10	5664	5724	5690	5565	5257
15	5538	5428	5266	5715	5605
20	5490	5478	5277	5276	5604
25	5319	5412	5613	5615	5571
30	5519	5327	5288	5300	5270
35	5308	5632	5311	5377	5348
40	5558	5686	5513	5396	5463
45	5430	5362	5415	5337	5279
50	5697	5325	5498	5582	5691
55	5640	5722	5286	5574	5705
60	5576	5356	5395	5647	5527
65	5304	5467	5456	5654	5489
70	5380	5444	5315	5341	5648
75	5674	5530	5261	5547	5484
80	5587	5452	5273	5515	5540
85	5401	5635	5275	5625	5465
90	5594	5549	5541	5688	5432
95	5661	5473	5472	5295	5703
Type 6 Radar Waveform_15					
Frequency List (MHz)	0	1	2	3	4
0	5409	5276	5556	5583	5536
5	5490	5387	5709	5532	5312
10	5498	5513	5256	5663	5278
15	5626	5555	5369	5322	5547
20	5693	5268	5577	5585	5264
25	5341	5477	5649	5613	5505
30	5284	5537	5595	5399	5428
35	5464	5291	5662	5528	5496
40	5451	5607	5325	5443	5323
45	5468	5699	5630	5301	5376
50	5684	5308	5538	5353	5676
55	5476	5296	5579	5608	5521
60	5340	5576	5612	5473	5564
65	5406	5666	5449	5281	5561
70	5366	5447	5639	5695	5643
75	5650	5404	5261	5600	5708
80	5578	5596	5393	5335	5720
85	5333	5645	5361	5378	5438
90	5355	5581	5283	5431	5367
95	5540	5568	5683	5624	5383

Type 6 Radar Waveform_16					
Frequency List (MHz)	0	1	2	3	4
0	5664	5515	5492	5269	5378
5	5532	5312	5309	5695	5616
10	5429	5399	5297	5383	5299
15	5714	5682	5472	5708	5514
20	5409	5713	5634	5357	5550
25	5473	5688	5544	5581	5683
30	5655	5394	5716	5584	5689
35	5318	5451	5490	5699	5302
40	5501	5611	5434	5594	5604
45	5632	5326	5596	5381	5424
50	5489	5477	5330	5298	5606
55	5482	5444	5630	5666	5590
60	5262	5686	5382	5408	5438
65	5516	5706	5513	5442	5498
70	5341	5559	5255	5352	5547
75	5488	5671	5566	5612	5673
80	5450	5509	5416	5710	5504
85	5263	5534	5316	5296	5437
90	5599	5570	5446	5615	5593
95	5329	5338	5415	5265	5422
Type 6 Radar Waveform_17					
Frequency List (MHz)	0	1	2	3	4
0	5444	5279	5428	5333	5598
5	5574	5334	5384	5286	5348
10	5360	5663	5338	5578	5320
15	5327	5712	5478	5278	5706
20	5417	5307	5672	5349	5523
25	5361	5540	5272	5685	5717
30	5319	5283	5673	5324	5463
35	5613	5590	5678	5592	5392
40	5691	5340	5694	5372	5359
45	5601	5561	5306	5679	5439
50	5477	5376	5285	5653	5381
55	5387	5429	5329	5632	5584
60	5409	5521	5391	5715	5462
65	5529	5708	5611	5362	5435
70	5550	5337	5647	5525	5484
75	5318	5593	5490	5668	5345
80	5270	5326	5531	5511	5296
85	5258	5358	5629	5641	5553
90	5343	5379	5450	5666	5497
95	5702	5346	5393	5399	5638

Type 6 Radar Waveform_18

Frequency List (MHz)	0	1	2	3	4
0	5699	5518	5364	5494	5440
5	5616	5356	5459	5449	5555
10	5669	5452	5379	5298	5341
15	5318	5581	5701	5423	5425
20	5473	5613	5438	5496	5627
25	5392	5475	5314	5276	5361
30	5269	5630	5539	5615	5433
35	5254	5294	5388	5545	5605
40	5302	5310	5599	5598	5393
45	5286	5287	5400	5530	5641
50	5636	5354	5432	5476	5252
55	5273	5345	5538	5571	5606
60	5492	5520	5541	5272	5547
65	5662	5408	5255	5411	5417
70	5540	5503	5543	5421	5650
75	5564	5623	5484	5453	5261
80	5471	5445	5358	5526	5357
85	5389	5431	5328	5674	5575
90	5321	5724	5604	5591	5577
95	5301	5553	5700	5282	5336

Type 6 Radar Waveform_19

Frequency List (MHz)	0	1	2	3	4
0	5479	5282	5300	5655	5660
5	5280	5281	5534	5612	5287
10	5600	5716	5420	5493	5362
15	5406	5491	5684	5271	5615
20	5336	5542	5554	5430	5469
25	5515	5341	5581	5310	5403
30	5633	5587	5657	5389	5631
35	5296	5385	5659	5320	5616
40	5590	5482	5723	5364	5595
45	5322	5266	5370	5458	5583
50	5528	5512	5530	5483	5662
55	5453	5533	5492	5664	5425
60	5366	5649	5706	5692	5379
65	5585	5354	5553	5360	5275
70	5298	5346	5568	5407	5653
75	5413	5599	5443	5325	5558
80	5307	5452	5697	5468	5424
85	5549	5428	5523	5577	5514
90	5381	5441	5474	5267	5397
95	5466	5559	5637	5639	5348

Type 6 Radar Waveform_20					
Frequency List (MHz)	0	1	2	3	4
0	5637	5521	5711	5341	5405
5	5322	5303	5609	5300	5591
10	5531	5505	5558	5383	5494
15	5618	5312	5316	5332	5344
20	5708	5495	5519	5442	5306
25	5668	5309	5619	5542	5522
30	5544	5397	5541	5451	5435
35	5476	5455	5473	5530	5429
40	5565	5661	5507	5689	5251
45	5721	5453	5516	5636	5318
50	5291	5706	5534	5276	5539
55	5446	5379	5719	5337	5396
60	5259	5308	5411	5279	5392
65	5582	5568	5624	5262	5490
70	5656	5575	5402	5294	5581
75	5450	5433	5474	5481	5563
80	5588	5612	5425	5718	5577
85	5356	5536	5342	5515	5595
90	5631	5671	5457	5448	5608
95	5345	5527	5493	5432	5388
Type 6 Radar Waveform_21					
Frequency List (MHz)	0	1	2	3	4
0	5417	5285	5647	5502	5722
5	5364	5703	5684	5366	5323
10	5365	5391	5599	5311	5404
15	5582	5270	5415	5361	5524
20	5352	5399	5533	5511	5669
25	5617	5512	5723	5281	5584
30	5508	5501	5612	5315	5649
35	5574	5567	5348	5626	5444
40	5268	5648	5272	5686	5558
45	5701	5536	5477	5689	5680
50	5642	5407	5585	5386	5434
55	5400	5569	5538	5308	5335
60	5561	5679	5615	5712	5343
65	5577	5258	5428	5317	5460
70	5427	5334	5476	5586	5454
75	5641	5496	5414	5629	5591
80	5344	5277	5675	5422	5438
85	5480	5295	5253	5307	5563
90	5288	5321	5571	5608	5306
95	5469	5613	5529	5327	5598

Type 6 Radar Waveform_22					
Frequency List (MHz)	0	1	2	3	4
0	5672	5524	5583	5663	5467
5	5503	5250	5284	5529	5530
10	5296	5655	5640	5506	5425
15	5573	5300	5421	5309	5338
20	5263	5468	5474	5600	5388
25	5460	5469	5715	5352	5315
30	5626	5397	5458	5616	5658
35	5619	5401	5358	5582	5256
40	5440	5512	5683	5487	5681
45	5535	5645	5470	5518	5636
50	5454	5330	5622	5354	5260
55	5279	5464	5251	5624	5447
60	5635	5289	5303	5682	5367
65	5255	5705	5406	5462	5435
70	5430	5320	5610	5346	5639
75	5492	5701	5441	5419	5633
80	5383	5612	5445	5650	5614
85	5536	5613	5486	5674	5642
90	5578	5528	5668	5513	5700
95	5577	5339	5363	5717	5442
Type 6 Radar Waveform_23					
Frequency List (MHz)	0	1	2	3	4
0	5452	5288	5519	5349	5309
5	5545	5650	5359	5692	5605
10	5444	5681	5701	5446	5661
15	5427	5524	5354	5530	5271
20	5634	5415	5592	5361	5348
25	5321	5443	5553	5668	5286
30	5470	5716	5667	5280	5371
35	5554	5369	5518	5436	5378
40	5277	5680	5319	5564	5702
45	5593	5698	5357	5394	5284
50	5687	5640	5598	5652	5713
55	5308	5474	5628	5416	5569
60	5279	5461	5332	5504	5631
65	5403	5622	5411	5575	5448
70	5384	5662	5406	5579	5466
75	5685	5473	5658	5714	5381
80	5508	5423	5450	5383	5454
85	5540	5615	5568	5433	5651
90	5642	5723	5497	5459	5442
95	5561	5715	5654	5717	5435

Type 6 Radar Waveform_24					
Frequency List (MHz)	0	1	2	3	4
0	5610	5527	5455	5510	5529
5	5587	5672	5434	5380	5566
10	5536	5708	5722	5421	5467
15	5274	5554	5627	5399	5279
20	5703	5453	5681	5334	5614
25	5270	5549	5657	5383	5332
30	5272	5372	5685	5393	5487
35	5419	5462	5308	5707	5283
40	5357	5519	5316	5420	5677
45	5723	5544	5310	5276	5622
50	5648	5460	5263	5254	5596
55	5426	5640	5664	5373	5599
60	5581	5611	5683	5287	5278
65	5327	5580	5439	5666	5417
70	5689	5647	5531	5387	5511
75	5382	5713	5451	5586	5353
80	5454	5435	5349	5637	5486
85	5645	5286	5390	5257	5483
90	5619	5557	5631	5341	5686
95	5613	5330	5699	5659	5303
Type 6 Radar Waveform_25					
Frequency List (MHz)	0	1	2	3	4
0	5390	5291	5391	5574	5371
5	5629	5597	5509	5446	5298
10	5467	5497	5288	5519	5488
15	5362	5681	5255	5444	5439
20	5665	5394	5673	5307	5502
25	5277	5286	5417	5374	5636
30	5329	5425	5642	5558	5553
35	5579	5482	5672	5671	5602
40	5254	5660	5296	5652	5524
45	5393	5612	5314	5343	5719
50	5443	5614	5594	5379	5570
55	5376	5271	5556	5515	5685
60	5699	5528	5626	5378	5401
65	5309	5492	5341	5517	5487
70	5360	5358	5420	5609	5399
75	5435	5687	5459	5418	5361
80	5549	5313	5365	5664	5710
85	5353	5352	5448	5573	5330
90	5451	5506	5692	5550	5333
95	5676	5562	5491	5320	5648

Type 6 Radar Waveform_26					
Frequency List (MHz)	0	1	2	3	4
0	5645	5627	5327	5260	5591
5	5293	5619	5584	5609	5602
10	5301	5286	5329	5714	5509
15	5353	5333	5358	5392	5631
20	5673	5463	5335	5287	5280
25	5390	5546	5480	5451	5416
30	5622	5640	5319	5505	5600
35	5644	5375	5635	5683	5510
40	5307	5667	5425	5484	5504
45	5476	5670	5382	5299	5400
50	5337	5365	5432	5542	5387
55	5548	5472	5389	5541	5408
60	5436	5501	5347	5511	5351
65	5575	5414	5708	5579	5295
70	5413	5503	5490	5684	5334
75	5292	5254	5367	5674	5525
80	5709	5310	5560	5664	5552
85	5544	5316	5624	5481	5649
90	5671	5698	5442	5693	5276
95	5302	5428	5340	5264	5527
Type 6 Radar Waveform_27					
Frequency List (MHz)	0	1	2	3	4
0	5425	5391	5263	5421	5433
5	5335	5544	5659	5297	5334
10	5707	5647	5370	5434	5530
15	5441	5363	5364	5437	5348
20	5681	5629	5373	5279	5253
25	5656	5398	5683	5494	5485
30	5555	5511	5718	5283	5568
35	5325	5264	5260	5646	5313
40	5597	5446	5390	5605	5290
45	5413	5484	5559	5631	5435
50	5661	5276	5513	5416	5521
55	5268	5709	5515	5502	5662
60	5415	5537	5601	5543	5654
65	5688	5552	5524	5353	5443
70	5374	5573	5582	5489	5590
75	5436	5261	5685	5397	5619
80	5455	5592	5307	5280	5567
85	5491	5376	5281	5578	5254
90	5372	5361	5326	5618	5354
95	5454	5332	5468	5627	5287

Type 6 Radar Waveform_28					
Frequency List (MHz)	0	1	2	3	4
0	5680	5630	5674	5582	5653
5	5377	5566	5259	5460	5541
10	5638	5436	5508	5629	5551
15	5529	5490	5467	5482	5540
20	5592	5698	5314	5368	5701
25	5544	5250	5411	5695	5519
30	5597	5400	5675	5498	5720
35	5523	5403	5448	5539	5563
40	5511	5285	5473	5446	5333
45	5287	5464	5642	5689	5391
50	5451	5530	5707	5703	5456
55	5502	5386	5666	5291	5488
60	5486	5260	5634	5375	5389
65	5275	5266	5279	5654	5572
70	5593	5664	5549	5608	5494
75	5256	5378	5396	5692	5281
80	5360	5682	5470	5356	5624
85	5667	5526	5332	5555	5614
90	5349	5611	5660	5635	5385
95	5320	5618	5289	5254	5258

Type 6 Radar Waveform_29					
Frequency List (MHz)	0	1	2	3	4
0	5363	5394	5610	5268	5495
5	5419	5491	5334	5526	5370
10	5472	5700	5549	5349	5572
15	5617	5570	5527	5257	5600
20	5389	5255	5360	5674	5335
25	5517	5324	5553	5639	5386
30	5632	5713	5494	5343	5445
35	5539	5716	5522	5599	5556
40	5384	5573	5284	5649	5347
45	5250	5272	5444	5338	5406
50	5390	5518	5321	5500	5319
55	5410	5567	5699	5357	5320
60	5456	5433	5415	5561	5580
65	5576	5422	5425	5485	5536
70	5557	5348	5558	5596	5609
75	5640	5508	5577	5399	5359
80	5648	5705	5589	5423	5679
85	5292	5470	5650	5548	5583
90	5275	5691	5496	5672	5366
95	5578	5595	5488	5501	5724

Test Site	WZ-SR4	Test Engineer	Ant Wang
Test Date	2025-04-09 ~ 2025-04-10		
Test Item	Radar Statistical Performance Check (802.11be-EHT160 – 5250MHz) - AP Mode		

Radar Type 1-4 - Radar Statistical Performance								
Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect	Frequency (MHz)	1=detect 0=no detect
0	5316	1	5267	1	5329	1	5328	1
1	5250	1	5250	1	5330	0	5326	1
2	5271	1	5323	1	5260	1	5275	1
3	5255	1	5263	1	5283	1	5306	1
4	5311	1	5268	1	5250	1	5289	1
5	5330	1	5259	1	5326	1	5258	1
6	5302	1	5301	1	5288	1	5267	1
7	5294	1	5257	1	5277	1	5313	0
8	5286	1	5276	0	5315	0	5287	1
9	5322	1	5316	1	5328	0	5250	1
10	5290	1	5290	1	5264	1	5269	0
11	5307	1	5255	1	5284	1	5288	1
12	5264	1	5310	0	5322	1	5280	0
13	5277	1	5320	1	5313	1	5264	1
14	5253	1	5318	1	5316	1	5319	0
15	5312	1	5260	1	5281	0	5270	1
16	5300	1	5312	1	5300	0	5330	0
17	5328	0	5291	1	5320	1	5302	1
18	5303	1	5275	0	5258	1	5321	1
19	5280	1	5327	1	5280	1	5290	1
20	5295	1	5309	1	5290	1	5304	1
21	5282	1	5287	1	5323	1	5299	0
22	5313	1	5304	1	5266	0	5320	1
23	5273	1	5279	1	5302	0	5317	1
24	5298	1	5322	1	5324	1	5263	0
25	5296	1	5330	1	5295	0	5265	1
26	5299	1	5315	1	5255	0	5291	1
27	5283	1	5252	1	5310	1	5300	1
28	5325	1	5278	1	5259	1	5262	1

Trial	Radar Type 1		Radar Type 2		Radar Type 3		Radar Type 4	
	Frequency	1=detect	Frequency	1=detect	Frequency	1=detect	Frequency	1=detect
	(MHz)	0=no detect	(MHz)	0=no detect	(MHz)	0=no detect	(MHz)	0=no detect
29	5315	0	5253	1	5306	0	5301	0
Probability:	93.3%		90.0%		66.7%		73.3%	
Aggregate:	80.8% (>80%)							

Radar Type 1 - Radar Waveform							Radar Type 2 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 1	1.0	878.0	61	53558.0	Download	0	Type 2	5.0	230.0	29	6670.0
Download	1	Type 1	1.0	938.0	57	53466.0	Download	1	Type 2	2.6	218.0	25	5450.0
Download	2	Type 1	1.0	718.0	74	53132.0	Download	2	Type 2	2.2	193.0	25	4825.0
Download	3	Type 1	1.0	578.0	92	53176.0	Download	3	Type 2	4.8	206.0	29	5974.0
Download	4	Type 1	1.0	798.0	67	53466.0	Download	4	Type 2	4.9	165.0	29	4785.0
Download	5	Type 1	1.0	738.0	72	53136.0	Download	5	Type 2	4.8	156.0	29	4524.0
Download	6	Type 1	1.0	618.0	86	53148.0	Download	6	Type 2	4.1	209.0	28	5852.0
Download	7	Type 1	1.0	518.0	102	52836.0	Download	7	Type 2	2.9	172.0	26	4472.0
Download	8	Type 1	1.0	558.0	95	53010.0	Download	8	Type 2	2.5	224.0	25	5600.0
Download	9	Type 1	1.0	858.0	62	53196.0	Download	9	Type 2	4.2	227.0	28	6356.0
Download	10	Type 1	1.0	658.0	81	53298.0	Download	10	Type 2	4.3	166.0	28	4648.0
Download	11	Type 1	1.0	898.0	59	52982.0	Download	11	Type 2	3.0	196.0	26	5096.0
Download	12	Type 1	1.0	918.0	58	53244.0	Download	12	Type 2	1.0	168.0	23	3864.0
Download	13	Type 1	1.0	3066.0	18	55188.0	Download	13	Type 2	3.6	229.0	27	6183.0
Download	14	Type 1	1.0	818.0	65	53170.0	Download	14	Type 2	3.5	225.0	27	6075.0
Download	15	Type 1	1.0	751.0	71	53321.0	Download	15	Type 2	5.0	199.0	29	5771.0
Download	16	Type 1	1.0	1148.0	46	52808.0	Download	16	Type 2	2.8	220.0	26	5720.0
Download	17	Type 1	1.0	561.0	95	53295.0	Download	17	Type 2	4.8	201.0	29	5829.0
Download	18	Type 1	1.0	670.0	79	52930.0	Download	18	Type 2	3.4	213.0	27	5751.0
Download	19	Type 1	1.0	2186.0	25	54050.0	Download	19	Type 2	4.7	176.0	29	5104.0
Download	20	Type 1	1.0	1215.0	44	53460.0	Download	20	Type 2	2.1	190.0	25	4750.0
Download	21	Type 1	1.0	1624.0	33	53592.0	Download	21	Type 2	3.8	212.0	27	5724.0
Download	22	Type 1	1.0	1579.0	34	53686.0	Download	22	Type 2	2.9	180.0	26	4680.0
Download	23	Type 1	1.0	749.0	71	53179.0	Download	23	Type 2	4.5	221.0	29	6409.0
Download	24	Type 1	1.0	1141.0	47	53627.0	Download	24	Type 2	1.3	182.0	23	4186.0
Download	25	Type 1	1.0	630.0	84	52920.0	Download	25	Type 2	2.4	178.0	25	4450.0
Download	26	Type 1	1.0	2532.0	21	53172.0	Download	26	Type 2	1.7	197.0	24	4728.0
Download	27	Type 1	1.0	2223.0	24	53352.0	Download	27	Type 2	1.9	195.0	24	4680.0
Download	28	Type 1	1.0	2746.0	20	54920.0	Download	28	Type 2	3.7	198.0	27	5346.0
Download	29	Type 1	1.0	2164.0	25	54100.0	Download	29	Type 2	4.1	164.0	28	4592.0

Radar Type 3 - Radar Waveform							Radar Type 4 - Radar Waveform						
	Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)		Trial Id	Radar Type	Pulse Width (us)	PRI (us)	Number of Pulses	Waveform Length (us)
Download	0	Type 3	10.0	496.0	18	8928.0	Download	0	Type 4	19.9	496.0	16	7936.0
Download	1	Type 3	7.6	251.0	17	4267.0	Download	1	Type 4	14.6	251.0	14	3514.0
Download	2	Type 3	7.2	417.0	16	6672.0	Download	2	Type 4	13.6	417.0	13	5421.0
Download	3	Type 3	9.8	375.0	18	6750.0	Download	3	Type 4	19.5	375.0	16	6000.0
Download	4	Type 3	9.9	435.0	18	7830.0	Download	4	Type 4	19.7	435.0	16	6960.0
Download	5	Type 3	9.8	312.0	18	5616.0	Download	5	Type 4	19.4	312.0	16	4992.0
Download	6	Type 3	9.1	217.0	18	3906.0	Download	6	Type 4	17.8	217.0	15	3255.0
Download	7	Type 3	7.9	481.0	17	8177.0	Download	7	Type 4	15.3	481.0	14	6734.0
Download	8	Type 3	7.5	497.0	17	8449.0	Download	8	Type 4	14.4	497.0	13	6461.0
Download	9	Type 3	9.2	331.0	18	5958.0	Download	9	Type 4	18.1	331.0	15	4965.0
Download	10	Type 3	9.3	313.0	18	5634.0	Download	10	Type 4	18.4	313.0	16	5008.0
Download	11	Type 3	8.0	261.0	17	4437.0	Download	11	Type 4	15.5	261.0	14	3654.0
Download	12	Type 3	6.0	264.0	16	4224.0	Download	12	Type 4	11.1	264.0	12	3168.0
Download	13	Type 3	8.6	282.0	17	4794.0	Download	13	Type 4	16.9	282.0	15	4230.0
Download	14	Type 3	8.5	383.0	17	6511.0	Download	14	Type 4	16.5	383.0	15	5745.0
Download	15	Type 3	10.0	260.0	18	4680.0	Download	15	Type 4	20.0	260.0	16	4160.0
Download	16	Type 3	7.8	378.0	17	6426.0	Download	16	Type 4	15.1	378.0	14	5292.0
Download	17	Type 3	9.8	390.0	18	7020.0	Download	17	Type 4	19.4	390.0	16	6240.0
Download	18	Type 3	8.4	318.0	17	5406.0	Download	18	Type 4	16.4	318.0	15	4770.0
Download	19	Type 3	9.7	310.0	18	5580.0	Download	19	Type 4	19.3	310.0	16	4960.0
Download	20	Type 3	7.1	433.0	16	6928.0	Download	20	Type 4	13.6	433.0	13	5629.0
Download	21	Type 3	8.8	425.0	18	7650.0	Download	21	Type 4	17.3	425.0	15	6375.0
Download	22	Type 3	7.9	387.0	17	6579.0	Download	22	Type 4	15.3	387.0	14	5418.0
Download	23	Type 3	9.5	209.0	18	3762.0	Download	23	Type 4	18.9	209.0	16	3344.0
Download	24	Type 3	6.3	454.0	16	7264.0	Download	24	Type 4	11.8	454.0	12	5448.0
Download	25	Type 3	7.4	392.0	17	6664.0	Download	25	Type 4	14.1	392.0	13	5096.0
Download	26	Type 3	6.7	274.0	16	4384.0	Download	26	Type 4	12.5	274.0	12	3288.0
Download	27	Type 3	6.9	410.0	16	6560.0	Download	27	Type 4	13.0	410.0	13	5330.0
Download	28	Type 3	8.7	298.0	18	5364.0	Download	28	Type 4	17.2	298.0	15	4470.0
Download	29	Type 3	9.1	451.0	18	8118.0	Download	29	Type 4	18.0	451.0	15	6765.0

Radar Type 5 - Radar Statistical Performance					
Trail #	Test Freq. (MHz)	1=Detection 0=No Detection	Trail #	Test Freq. (MHz)	1=Detection 0=No Detection
0	5290	1	15	5258	1
1	5290	1	16	5254.8	1
2	5290	1	17	5257.6	0
3	5290	1	18	5255.6	0
4	5290	0	19	5257.6	1
5	5290	1	20	5326.4	1
6	5290	1	21	5323.6	1
7	5290	1	22	5325.2	1
8	5290	1	23	5322.8	1
9	5290	1	24	5327.6	1
10	5257.2	1	25	5326	1
11	5255.2	1	26	5327.2	1
12	5252	0	27	5326.8	0
13	5256	1	28	5324	1
14	5255.6	0	29	5323.2	1
Detection Percentage (%)			80.0%		

Type 5 Radar Waveform_0

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	133968.0	99.2	20	3	1974.0	1245.0	1343.0
1	279328.0	70.0	20	2	1071.0	1465.0	-
2	424943.0	64.7	20	1	1534.0	-	-
3	567031.0	97.2	20	3	1971.0	1271.0	1503.0
4	116116.0	98.2	20	3	1479.0	1691.0	1721.0
5	260812.0	96.5	20	3	1576.0	1268.0	1217.0
6	404919.0	87.9	20	3	1474.0	1898.0	1316.0
7	550892.0	73.6	20	2	1312.0	1652.0	-
8	98615.0	68.9	20	2	1813.0	1401.0	-
9	243190.0	89.1	20	3	1289.0	1263.0	1063.0
10	387260.0	90.7	20	3	1492.0	1300.0	1704.0
11	533117.0	75.0	20	2	1866.0	1030.0	-
12	81036.0	50.5	20	1	1364.0	-	-
13	225595.0	82.9	20	2	1678.0	1351.0	-
14	370109.0	80.6	20	2	1890.0	1575.0	-
15	513633.0	100.0	20	3	1072.0	1970.0	1761.0
16	63010.0	72.7	20	2	1709.0	1005.0	-
17	207329.0	96.7	20	3	1201.0	1176.0	1893.0
18	352443.0	80.0	20	2	1799.0	1403.0	-
19	496009.0	95.9	20	3	1085.0	1983.0	1546.0

Type 5 Radar Waveform_1

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	69681.0	64.3	11	1	1616.0	-	-
1	292431.0	85.1	11	3	1061.0	1755.0	1104.0
2	515479.0	73.9	11	2	1730.0	1969.0	-
3	738123.0	93.8	11	3	1573.0	1209.0	1333.0
4	42180.0	54.4	11	1	1008.0	-	-
5	265177.0	67.2	11	2	1975.0	1234.0	-
6	489304.0	58.6	11	1	1267.0	-	-
7	712568.0	61.5	11	1	1660.0	-	-
8	14578.0	84.1	11	3	1726.0	1368.0	1446.0
9	237452.0	88.8	11	3	1296.0	1478.0	1380.0
10	460283.0	99.1	11	3	1644.0	1402.0	1181.0
11	682512.0	84.9	11	3	1557.0	1605.0	1900.0
12	907354.0	75.1	11	2	1612.0	1225.0	-

Type 5 Radar Waveform_2

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	248591.0	69.0	9	2	1651.0	1466.0	-
1	512319.0	69.9	9	2	1915.0	1407.0	-
2	777342.0	50.1	9	1	1572.0	-	-
3	1039063.0	86.5	9	3	1158.0	1611.0	1394.0
4	215805.0	84.5	9	3	1637.0	1317.0	1619.0
5	479201.0	84.8	9	3	1741.0	1213.0	1788.0
6	744692.0	56.5	9	1	1728.0	-	-
7	1005599.0	99.1	9	3	1740.0	1796.0	1705.0
8	183866.0	57.9	9	1	1525.0	-	-
9	448146.0	55.8	9	1	1353.0	-	-
10	710128.0	90.0	9	3	1360.0	1862.0	1603.0

Type 5 Radar Waveform_3

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	535701.0	81.0	20	2	1155.0	1214.0	-
1	83019.0	72.5	20	2	1133.0	1198.0	-
2	228290.0	56.8	20	1	1501.0	-	-
3	372858.0	82.4	20	2	1083.0	1357.0	-
4	518513.0	57.1	20	1	1601.0	-	-
5	64925.0	97.8	20	3	1560.0	1869.0	1095.0
6	209411.0	88.2	20	3	1568.0	1664.0	1109.0
7	354725.0	73.1	20	2	1157.0	1757.0	-
8	497870.0	92.0	20	3	1759.0	1305.0	1843.0
9	47261.0	81.0	20	2	1025.0	1916.0	-
10	191446.0	88.2	20	3	1221.0	1771.0	1879.0
11	337877.0	64.0	20	1	1160.0	-	-
12	481052.0	96.1	20	3	1069.0	1522.0	1126.0
13	29425.0	71.0	20	2	1366.0	1555.0	-
14	173879.0	92.7	20	3	1800.0	1256.0	1089.0
15	318840.0	80.9	20	2	1413.0	1895.0	-
16	462611.0	87.8	20	3	1118.0	1533.0	1874.0
17	11596.0	76.4	20	2	1473.0	1064.0	-
18	156040.0	89.6	20	3	1631.0	1639.0	1019.0
19	301516.0	80.1	20	2	1048.0	1265.0	-

Type 5 Radar Waveform_4

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	445047.0	90.0	20	3	1540.0	1130.0	1553.0
1	591826.0	55.7	20	1	1914.0	-	-
2	138084.0	100.0	20	3	1429.0	1624.0	1925.0
3	283515.0	81.6	20	2	1541.0	1079.0	-
4	429067.0	63.0	20	1	1687.0	-	-
5	572631.0	80.4	20	2	1756.0	1542.0	-
6	121108.0	63.4	20	1	1021.0	-	-
7	264756.0	88.2	20	3	1695.0	1106.0	1870.0
8	411206.0	61.8	20	1	1668.0	-	-
9	554836.0	73.5	20	2	1599.0	1665.0	-
10	102677.0	96.9	20	3	1230.0	1563.0	1347.0
11	248092.0	56.3	20	1	1968.0	-	-
12	393018.0	79.2	20	2	1042.0	1103.0	-
13	536214.0	83.9	20	3	1551.0	1066.0	1531.0
14	85261.0	62.7	20	1	1432.0	-	-
15	229871.0	82.0	20	2	1574.0	1318.0	-
16	375535.0	60.4	20	1	1543.0	-	-
17	519007.0	76.3	20	2	1781.0	1684.0	-
18	67317.0	54.4	20	1	1991.0	-	-
19	211422.0	86.3	20	3	1430.0	1986.0	1195.0

Type 5 Radar Waveform_5

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	357387.0	50.6	19	1	1994.0	—	—
1	501770.0	75.9	19	2	1143.0	1627.0	—
2	49225.0	92.9	19	3	1371.0	1578.0	1778.0
3	193558.0	94.1	19	3	1535.0	1675.0	1638.0
4	339095.0	80.9	19	2	1288.0	1458.0	—
5	485024.0	55.9	19	1	1417.0	—	—
6	31598.0	54.0	19	1	1764.0	—	—
7	176897.0	65.5	19	1	1062.0	—	—
8	320261.0	91.9	19	3	1131.0	1811.0	1647.0
9	467072.0	53.9	19	1	1507.0	—	—
10	13702.0	68.8	19	2	1580.0	1252.0	—
11	158620.0	72.6	19	2	1242.0	1264.0	—
12	303223.0	68.4	19	2	1982.0	1132.0	—
13	447992.0	75.7	19	2	1491.0	1615.0	—
14	594815.0	50.0	19	1	1035.0	—	—
15	140588.0	75.2	19	2	1824.0	1457.0	—
16	285439.0	72.6	19	2	1341.0	1673.0	—
17	430324.0	75.3	19	2	1780.0	1099.0	—
18	574681.0	69.4	19	2	1697.0	1663.0	—
19	122825.0	76.7	19	2	1292.0	1682.0	—

Type 5 Radar Waveform_6

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	314534.0	84.4	17	3	1255.0	1238.0	1711.0
1	484165.0	100.0	17	3	1480.0	1715.0	1803.0
2	657756.0	61.2	17	1	1136.0	—	—
3	123558.0	68.5	17	2	1935.0	1326.0	—
4	293488.0	84.1	17	3	1463.0	1049.0	1892.0
5	464804.0	81.8	17	2	1297.0	1313.0	—
6	633309.0	84.9	17	3	1497.0	1506.0	1889.0
7	102850.0	62.2	17	1	1329.0	—	—
8	273819.0	58.2	17	1	1091.0	—	—
9	444631.0	60.7	17	1	1284.0	—	—
10	614545.0	70.5	17	2	1032.0	1367.0	—
11	81736.0	61.5	17	1	1894.0	—	—
12	252109.0	72.0	17	2	1448.0	1468.0	—
13	423747.0	53.2	17	1	1009.0	—	—
14	592877.0	79.5	17	2	1250.0	1921.0	—
15	60758.0	64.0	17	1	1279.0	—	—
16	231523.0	62.8	17	1	1654.0	—	—

Type 5 Radar Waveform_7								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	489038.0	55.8	12	1	1123.0	—	—	
1	696336.0	50.7	12	1	1509.0	—	—	
2	48196.0	57.0	12	1	1934.0	—	—	
3	255140.0	76.4	12	2	1688.0	1821.0	—	
4	461506.0	98.0	12	3	1294.0	1993.0	1454.0	
5	668571.0	96.4	12	3	1337.0	1959.0	1024.0	
6	22646.0	57.9	12	1	1997.0	—	—	
7	230196.0	54.7	12	1	1438.0	—	—	
8	437090.0	74.2	12	2	1002.0	1689.0	—	
9	642938.0	88.0	12	3	1249.0	1635.0	1642.0	
10	853155.0	53.4	12	1	1084.0	—	—	
11	204119.0	83.9	12	3	1074.0	1348.0	1162.0	
12	410794.0	87.6	12	3	1690.0	1423.0	1177.0	
13	619443.0	59.3	12	1	1797.0	—	—	
Type 5 Radar Waveform_8								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	962807.0	85.1	11	3	1081.0	1174.0	1806.0	
1	208937.0	56.8	11	1	1565.0	—	—	
2	450541.0	77.8	11	2	1676.0	1100.0	—	
3	693182.0	51.9	11	1	1649.0	—	—	
4	935745.0	50.7	11	1	1188.0	—	—	
5	179089.0	64.7	11	1	1677.0	—	—	
6	420604.0	74.4	11	2	1232.0	1891.0	—	
7	663762.0	60.0	11	1	1039.0	—	—	
8	903209.0	99.1	11	3	1586.0	1325.0	1251.0	
9	149147.0	71.0	11	2	1398.0	1067.0	—	
10	390361.0	91.8	11	3	1378.0	1094.0	1828.0	
11	633563.0	57.2	11	1	1600.0	—	—	

Type 5 Radar Waveform_9								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	582066.0	81.1	17	2	1795.0	1254.0	-	
1	79172.0	83.5	17	3	1680.0	1976.0	1266.0	
2	240742.0	57.3	17	1	1952.0	-	-	
3	402448.0	50.5	17	1	1139.0	-	-	
4	563463.0	65.2	17	1	1606.0	-	-	
5	59515.0	96.3	17	3	1304.0	1142.0	1226.0	
6	220014.0	86.0	17	3	1388.0	1981.0	1200.0	
7	382529.0	62.3	17	1	1203.0	-	-	
8	543019.0	66.7	17	2	1278.0	1033.0	-	
9	39720.0	74.6	17	2	1707.0	1776.0	-	
10	201179.0	62.3	17	1	1447.0	-	-	
11	362377.0	50.2	17	1	1700.0	-	-	
12	521795.0	86.4	17	3	1022.0	1746.0	1291.0	
13	19961.0	53.5	17	1	1725.0	-	-	
14	181417.0	53.3	17	1	1038.0	-	-	
15	342738.0	63.8	17	1	1261.0	-	-	
16	503570.0	59.8	17	1	1987.0	-	-	
17	95.0	93.9	17	3	1750.0	1550.0	1205.0	
Type 5 Radar Waveform_10								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	160872.0	81.4	18	2	1815.0	1941.0	-	
1	321965.0	78.3	18	2	1958.0	1147.0	-	
2	482925.0	70.7	18	2	1532.0	1538.0	-	
3	645438.0	51.3	18	1	1452.0	-	-	
4	140904.0	85.4	18	3	1762.0	1549.0	1218.0	
5	302928.0	54.6	18	1	1377.0	-	-	
6	462336.0	94.3	18	3	1947.0	1159.0	1059.0	
7	625192.0	51.2	18	1	1849.0	-	-	
8	121409.0	78.8	18	2	1853.0	1110.0	-	
9	281554.0	99.4	18	3	1966.0	1102.0	1832.0	
10	442231.0	88.5	18	3	1653.0	1410.0	1571.0	
11	602587.0	95.9	18	3	1745.0	1208.0	1909.0	
12	101868.0	51.6	18	1	1092.0	-	-	
13	262051.0	86.1	18	3	1216.0	1863.0	1148.0	
14	422564.0	84.6	18	3	1056.0	1712.0	1692.0	
15	583270.0	90.7	18	3	1591.0	1436.0	1320.0	
16	81968.0	65.2	18	1	1224.0	-	-	
17	242713.0	74.5	18	2	1801.0	1190.0	-	

Type 5 Radar Waveform_11								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	518614.0	97.4	13	3	1392.0	1354.0	1752.0	
1	726298.0	73.6	13	2	1842.0	1608.0	-	
2	79647.0	72.7	13	2	1569.0	1942.0	-	
3	287519.0	57.1	13	1	1012.0	-	-	
4	493353.0	98.0	13	3	1793.0	1112.0	1227.0	
5	701606.0	75.2	13	2	1240.0	1222.0	-	
6	54074.0	92.6	13	3	1610.0	1850.0	1172.0	
7	261773.0	60.5	13	1	1567.0	-	-	
8	467982.0	94.5	13	3	1029.0	1270.0	1628.0	
9	675897.0	77.5	13	2	1370.0	1315.0	-	
10	28696.0	65.6	13	1	1938.0	-	-	
11	235513.0	97.2	13	3	1293.0	1026.0	1784.0	
12	443752.0	61.3	13	1	1500.0	-	-	
13	651361.0	60.6	13	1	1383.0	-	-	
Type 5 Radar Waveform_12								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	5516.0	50.1	5	1	1308.0	-	-	
1	368986.0	55.2	5	1	1349.0	-	-	
2	730318.0	89.7	5	3	1951.0	1924.0	1848.0	
3	1095691.0	63.5	5	1	1671.0	-	-	
4	1456969.0	86.6	5	3	1521.0	1125.0	1196.0	
5	323765.0	79.8	5	2	1461.0	1965.0	-	
6	686715.0	98.1	5	3	1204.0	1220.0	1040.0	
7	1051378.0	52.6	5	1	1031.0	-	-	
Type 5 Radar Waveform_13								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	706564.0	56.3	15	1	1467.0	-	-	
1	139479.0	63.9	15	1	1978.0	-	-	
2	320449.0	67.5	15	2	1257.0	1767.0	-	
3	500824.0	86.6	15	3	1013.0	1445.0	1742.0	
4	682372.0	73.9	15	2	1841.0	1629.0	-	
5	117020.0	70.9	15	2	1544.0	1149.0	-	
6	298164.0	72.9	15	2	1520.0	1427.0	-	
7	479292.0	76.3	15	2	1107.0	1927.0	-	
8	661951.0	65.6	15	1	1342.0	-	-	
9	94474.0	95.7	15	3	1487.0	1662.0	1285.0	
10	275070.0	88.4	15	3	1713.0	1670.0	1667.0	
11	457018.0	78.8	15	2	1961.0	1007.0	-	
12	639488.0	66.4	15	1	1456.0	-	-	
13	72223.0	86.3	15	3	1622.0	1421.0	1166.0	
14	253655.0	71.1	15	2	1352.0	1223.0	-	
15	434332.0	74.2	15	2	1724.0	1878.0	-	

Type 5 Radar Waveform_14								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	657338.0	80.4	14	2	1282.0	1400.0	—	
1	53300.0	95.6	14	3	1051.0	1885.0	1134.0	
2	247071.0	58.8	14	1	1703.0	—	—	
3	439939.0	74.9	14	2	1469.0	1582.0	—	
4	634380.0	60.1	14	1	1598.0	—	—	
5	29554.0	66.7	14	2	1248.0	1973.0	—	
6	222256.0	85.7	14	3	1483.0	1911.0	1765.0	
7	416657.0	81.6	14	2	1037.0	1006.0	—	
8	608563.0	88.0	14	3	1488.0	1346.0	1332.0	
9	5752.0	77.9	14	2	1443.0	1661.0	—	
10	198644.0	95.8	14	3	1489.0	1493.0	1643.0	
11	391551.0	96.5	14	3	1847.0	1486.0	1287.0	
12	584655.0	96.4	14	3	1708.0	1093.0	1547.0	
13	779036.0	71.1	14	2	1246.0	1658.0	—	
14	175619.0	54.1	14	1	1280.0	—	—	
Type 5 Radar Waveform_15								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	274979.0	85.5	20	3	1648.0	1779.0	1904.0	
1	420690.0	76.5	20	2	1859.0	1365.0	—	
2	564773.0	94.8	20	3	1772.0	1044.0	1098.0	
3	113455.0	67.3	20	2	1356.0	1514.0	—	
4	259013.0	58.8	20	1	1171.0	—	—	
5	401706.0	89.7	20	3	1556.0	1679.0	1701.0	
6	548807.0	61.3	20	1	1907.0	—	—	
7	95897.0	51.2	20	1	1117.0	—	—	
8	240645.0	71.7	20	2	1028.0	1331.0	—	
9	384320.0	87.6	20	3	1774.0	1170.0	1385.0	
10	530220.0	68.2	20	2	1596.0	1122.0	—	
11	77962.0	61.9	20	1	1449.0	—	—	
12	222835.0	69.9	20	2	1096.0	1144.0	—	
13	368444.0	58.7	20	1	1210.0	—	—	
14	511566.0	82.6	20	2	1835.0	1827.0	—	
15	59722.0	94.2	20	3	1120.0	2000.0	1902.0	
16	205323.0	63.9	20	1	1233.0	—	—	
17	348640.0	84.1	20	3	1666.0	1314.0	1502.0	
18	495757.0	65.4	20	1	1239.0	—	—	
19	42046.0	83.2	20	2	1897.0	1739.0	—	

Type 5 Radar Waveform_16

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	287507.0	91.1	12	3	1399.0	1636.0	1589.0
1	511344.0	71.0	12	2	1439.0	1235.0	-
2	733797.0	73.2	12	2	1655.0	1989.0	-
3	37365.0	92.5	12	3	1150.0	1119.0	1137.0
4	259906.0	89.6	12	3	1955.0	1872.0	1372.0
5	483741.0	78.2	12	2	1453.0	1424.0	-
6	705810.0	85.9	12	3	1183.0	1262.0	1875.0
7	9884.0	98.6	12	3	1020.0	1587.0	1428.0
8	232392.0	96.1	12	3	1714.0	1931.0	1923.0
9	456139.0	75.2	12	2	1247.0	1855.0	-
10	678872.0	76.5	12	2	1802.0	1829.0	-
11	902341.0	79.9	12	2	1620.0	1527.0	-
12	205365.0	94.5	12	3	1418.0	1362.0	1075.0

Type 5 Radar Waveform_17

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	277319.0	91.6	19	3	1617.0	1964.0	1241.0
1	423811.0	52.8	19	1	1798.0	-	-
2	568991.0	52.3	19	1	1696.0	-	-
3	115409.0	71.7	19	2	1899.0	1785.0	-
4	259973.0	68.9	19	2	1880.0	1946.0	-
5	406192.0	62.3	19	1	1426.0	-	-
6	548228.0	84.6	19	3	1338.0	1702.0	1792.0
7	97635.0	69.0	19	2	1903.0	1536.0	-
8	241624.0	94.3	19	3	1960.0	1632.0	1561.0
9	385937.0	87.1	19	3	2000.0	1917.0	1168.0
10	529902.0	87.3	19	3	1873.0	1888.0	1683.0
11	79635.0	92.0	19	3	1744.0	1290.0	1738.0
12	225308.0	54.8	19	1	1286.0	-	-
13	370111.0	65.8	19	1	1939.0	-	-
14	514073.0	72.8	19	2	1831.0	1369.0	-
15	62245.0	55.4	19	1	1001.0	-	-
16	206297.0	83.7	19	3	1515.0	1830.0	1189.0
17	351428.0	81.8	19	2	1548.0	1777.0	-
18	497707.0	62.3	19	1	1441.0	-	-
19	44204.0	80.9	19	2	1390.0	1581.0	-

Type 5 Radar Waveform_18

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	251757.0	88.0	14	3	1945.0	1269.0	1524.0
1	446233.0	63.1	14	1	1877.0	-	-
2	640183.0	64.5	14	1	1404.0	-	-
3	35286.0	53.2	14	1	1060.0	-	-
4	228939.0	52.2	14	1	1460.0	-	-
5	421796.0	77.8	14	2	1080.0	1919.0	-
6	615380.0	80.6	14	2	1437.0	1191.0	-
7	11418.0	53.7	14	1	1036.0	-	-
8	205097.0	62.8	14	1	1408.0	-	-
9	398879.0	55.2	14	1	1212.0	-	-
10	590385.0	96.5	14	3	1179.0	1833.0	1199.0
11	786167.0	61.1	14	1	1389.0	-	-
12	180616.0	88.3	14	3	1805.0	1306.0	1043.0
13	374253.0	67.4	14	2	1455.0	1381.0	-
14	566978.0	78.3	14	2	1851.0	1844.0	-

Type 5 Radar Waveform_19								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	601225.0	55.8	19	1	1723.0	—	—	
1	123884.0	80.2	19	2	1906.0	1057.0	—	
2	276433.0	72.5	19	2	1621.0	1138.0	—	
3	428455.0	95.0	19	3	1018.0	1340.0	1114.0	
4	581629.0	71.8	19	2	1405.0	1161.0	—	
5	105036.0	80.9	19	2	1867.0	1504.0	—	
6	257965.0	64.2	19	1	1984.0	—	—	
7	408624.0	96.8	19	3	1659.0	1485.0	1963.0	
8	560827.0	83.9	19	3	1193.0	1838.0	1782.0	
9	86082.0	85.9	19	3	1595.0	1836.0	1301.0	
10	239475.0	50.5	19	1	1145.0	—	—	
11	390442.0	84.8	19	3	1783.0	1236.0	1231.0	
12	544675.0	62.4	19	1	1839.0	—	—	
13	67657.0	63.0	19	1	1929.0	—	—	
14	219558.0	93.1	19	3	1046.0	1322.0	1871.0	
15	373148.0	62.3	19	1	1809.0	—	—	
16	524013.0	93.4	19	3	1163.0	1817.0	1073.0	
17	48895.0	64.1	19	1	1298.0	—	—	
18	200991.0	99.0	19	3	1055.0	1295.0	1345.0	
Type 5 Radar Waveform_20								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	613009.0	56.5	9	1	1387.0	—	—	
1	875727.0	78.5	9	2	1736.0	1545.0	—	
2	51817.0	88.4	9	3	1165.0	1814.0	1674.0	
3	315290.0	99.1	9	3	1618.0	1186.0	1775.0	
4	579554.0	69.4	9	2	1743.0	1344.0	—	
5	842493.0	91.2	9	3	1956.0	1023.0	1259.0	
6	19399.0	81.7	9	2	1499.0	1309.0	—	
7	283270.0	80.8	9	2	1694.0	1219.0	—	
8	547671.0	56.1	9	1	1864.0	—	—	
9	810067.0	89.0	9	3	1141.0	1845.0	1202.0	
10	1074213.0	90.6	9	3	1121.0	1433.0	1045.0	

Type 5 Radar Waveform_21

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	162173.0	76.1	16	2	1115.0	1153.0	-
1	333034.0	53.6	16	1	1820.0	-	-
2	501550.0	87.4	16	3	1614.0	1861.0	1477.0
3	672171.0	87.5	16	3	1770.0	1303.0	1228.0
4	141154.0	66.9	16	2	1194.0	1068.0	-
5	311545.0	75.3	16	2	1244.0	1604.0	-
6	482961.0	61.1	16	1	1523.0	-	-
7	650728.0	86.9	16	3	1979.0	1791.0	1052.0
8	119626.0	90.5	16	3	1516.0	1972.0	1747.0
9	290935.0	50.0	16	1	1896.0	-	-
10	460639.0	73.8	16	2	1920.0	1554.0	-
11	633050.0	66.3	16	1	1187.0	-	-
12	99027.0	80.7	16	2	1858.0	1016.0	-
13	269473.0	67.4	16	2	1034.0	1988.0	-
14	440591.0	51.6	16	1	1980.0	-	-
15	609133.0	93.0	16	3	1180.0	1881.0	1425.0
16	78015.0	68.1	16	2	1336.0	1633.0	-

Type 5 Radar Waveform_22

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	301130.0	90.7	12	3	1645.0	1985.0	1706.0
1	508986.0	69.7	12	2	1272.0	1940.0	-
2	714676.0	93.0	12	3	1207.0	1962.0	1731.0
3	69403.0	53.1	12	1	1511.0	-	-
4	275844.0	97.1	12	3	1411.0	1461.0	1948.0
5	482828.0	89.3	12	3	1912.0	1440.0	1003.0
6	692308.0	60.9	12	1	1076.0	-	-
7	43668.0	99.9	12	3	1737.0	1734.0	1434.0
8	250987.0	67.5	12	2	1146.0	1634.0	-
9	457836.0	81.1	12	2	1901.0	1552.0	-
10	666442.0	53.0	12	1	1451.0	-	-
11	18291.0	53.8	12	1	1011.0	-	-
12	224934.0	90.1	12	3	1498.0	1588.0	1699.0
13	433069.0	50.0	12	1	1999.0	-	-

Type 5 Radar Waveform_23								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	471636.0	58.0	18	1	1857.0	—	—	
1	624722.0	57.8	18	1	1495.0	—	—	
2	146612.0	93.3	18	3	1471.0	1868.0	1754.0	
3	300381.0	59.8	18	1	1260.0	—	—	
4	451587.0	96.9	18	3	1053.0	1065.0	1459.0	
5	603199.0	97.4	18	3	1184.0	1760.0	1359.0	
6	128328.0	74.9	18	2	1330.0	1646.0	—	
7	280213.0	96.1	18	3	1185.0	1302.0	1768.0	
8	432599.0	67.8	18	2	1910.0	1996.0	—	
9	587394.0	51.1	18	1	1154.0	—	—	
10	109812.0	56.5	18	1	1464.0	—	—	
11	261971.0	73.6	18	2	1518.0	1539.0	—	
12	413200.0	99.0	18	3	1928.0	1476.0	1484.0	
13	566585.0	82.8	18	2	1462.0	1882.0	—	
14	90938.0	62.1	18	1	1808.0	—	—	
15	243865.0	57.7	18	1	1324.0	—	—	
16	395660.0	81.7	18	2	1078.0	1933.0	—	
17	548311.0	67.8	18	2	1058.0	1719.0	—	
18	71832.0	98.2	18	3	1129.0	1319.0	1913.0	
Type 5 Radar Waveform_24								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	475581.0	63.6	6	1	1384.0	—	—	
1	796766.0	90.2	6	3	1299.0	1570.0	1607.0	
2	1119882.0	86.5	6	3	1015.0	1237.0	1243.0	
3	112483.0	96.1	6	3	1751.0	1766.0	1017.0	
4	435084.0	87.5	6	3	1229.0	1215.0	1097.0	
5	757543.0	79.1	6	2	1816.0	1825.0	—	
6	1082039.0	64.4	6	1	1175.0	—	—	
7	72886.0	76.4	6	2	1111.0	1609.0	—	
8	394845.0	87.7	6	3	1482.0	1957.0	1823.0	

Type 5 Radar Waveform_25								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	537744.0	99.5	10	3	1334.0	1167.0	1379.0	
1	778904.0	94.2	10	3	1710.0	1593.0	1128.0	
2	24855.0	58.1	10	1	1883.0	—	—	
3	266679.0	83.0	10	2	1537.0	1281.0	—	
4	509084.0	50.4	10	1	1727.0	—	—	
5	751180.0	50.0	10	1	1749.0	—	—	
6	993470.0	65.7	10	1	1566.0	—	—	
7	237199.0	58.4	10	1	1513.0	—	—	
8	477704.0	87.4	10	3	1722.0	1753.0	1496.0	
9	721305.0	57.5	10	1	1822.0	—	—	
10	963807.0	54.8	10	1	1396.0	—	—	
11	206899.0	95.6	10	3	1395.0	1127.0	1258.0	
Type 5 Radar Waveform_26								
Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)	
0	538164.0	93.3	7	3	1773.0	1376.0	1505.0	
1	828302.0	94.6	7	3	1435.0	1472.0	1416.0	
2	1121352.0	51.9	7	1	1050.0	—	—	
3	212617.0	91.8	7	3	1672.0	1422.0	1151.0	
4	502394.0	96.7	7	3	1918.0	1027.0	1852.0	
5	793609.0	73.4	7	2	1355.0	1420.0	—	
6	1082472.0	90.4	7	3	1211.0	1846.0	1375.0	
7	177103.0	78.2	7	2	1685.0	1152.0	—	
8	466854.0	87.7	7	3	1339.0	1519.0	1512.0	
9	758549.0	59.7	7	1	1657.0	—	—	

Type 5 Radar Waveform_27

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	1046512.0	99.5	8	3	1908.0	1274.0	1529.0
1	141077.0	85.3	8	3	1374.0	1837.0	1840.0
2	432091.0	55.6	8	1	1720.0	—	—
3	721962.0	76.5	8	2	1014.0	1949.0	—
4	1013850.0	59.8	8	1	1108.0	—	—
5	105510.0	71.5	8	2	1926.0	1640.0	—
6	396288.0	61.8	8	1	1735.0	—	—
7	686968.0	55.7	8	1	1625.0	—	—
8	976168.0	80.7	8	2	1397.0	1998.0	—
9	69818.0	82.5	8	2	1382.0	1310.0	—

Type 5 Radar Waveform_28

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	224720.0	71.0	15	2	1585.0	1450.0	—
1	404815.0	87.3	15	3	1275.0	1992.0	1733.0
2	585100.0	96.7	15	3	1860.0	1718.0	1932.0
3	21230.0	73.6	15	2	1517.0	1977.0	—
4	201883.0	93.1	15	3	1804.0	1886.0	1273.0
5	383954.0	73.5	15	2	1101.0	1182.0	—
6	564858.0	73.2	15	2	1819.0	1047.0	—
7	743748.0	99.0	15	3	1995.0	1630.0	1558.0
8	180132.0	67.0	15	2	1277.0	1584.0	—
9	362237.0	53.7	15	1	1000.0	—	—
10	542203.0	70.3	15	2	1936.0	1391.0	—
11	723099.0	74.1	15	2	1562.0	1967.0	—
12	158163.0	63.0	15	1	1197.0	—	—
13	339501.0	52.5	15	1	1794.0	—	—
14	520339.0	70.3	15	2	1116.0	1577.0	—
15	699485.0	95.7	15	3	1790.0	1579.0	1559.0

Type 5 Radar Waveform_29

Burst ID	Burst Offset (us)	Pulse Width (us)	Chirp Width (MHz)	Number of Pulses per Burst	PRI-1 (us)	PRI-2 (us)	PRI-3 (us)
0	120029.0	84.6	17	3	1192.0	1950.0	1650.0
1	281858.0	54.3	17	1	1717.0	—	—
2	441355.0	90.9	17	3	1954.0	1010.0	1415.0
3	604734.0	55.7	17	1	1350.0	—	—
4	100546.0	74.1	17	2	1088.0	1789.0	—
5	260921.0	98.3	17	3	1178.0	1406.0	1854.0
6	421637.0	100.0	17	3	1698.0	1490.0	1086.0
7	581697.0	89.7	17	3	1494.0	1826.0	1626.0
8	80499.0	94.7	17	3	1807.0	1528.0	1328.0
9	241486.0	72.8	17	2	1812.0	1669.0	—
10	402262.0	77.4	17	2	1602.0	1990.0	—
11	563584.0	73.9	17	2	1884.0	1113.0	—
12	60808.0	90.2	17	3	1590.0	1041.0	1090.0
13	221247.0	94.3	17	3	1834.0	1597.0	1327.0
14	381736.0	96.7	17	3	1526.0	1937.0	1373.0
15	543519.0	81.7	17	2	1470.0	1818.0	—
16	41054.0	76.9	17	2	1335.0	1564.0	—
17	202279.0	72.3	17	2	1004.0	1105.0	—

Radar Type 6 - Radar Statistical Performance			
Trail #	1=Detection 0=No Detection	Trail #	1=Detection 0=No Detection
0	1	15	1
1	1	16	1
2	1	17	1
3	1	18	1
4	1	19	1
5	0	20	1
6	0	21	1
7	1	22	0
8	1	23	1
9	1	24	1
10	1	25	0
11	0	26	1
12	1	27	1
13	0	28	1
14	1	29	1
Detection Percentage (%)		80.0%	

Type 6 Radar Waveform_0

Frequency List (MHz)	0	1	2	3	4
0	5330	5266	5634	5253	5686
5	5535	5591	5479	5469	5716
10	5565	5491	5678	5420	5474
15	5569	5379	5683	5556	5531
20	5275	5663	5256	5651	5439
25	5509	5724	5689	5665	5536
30	5722	5381	5376	5257	5255
35	5546	5465	5449	5318	5516
40	5378	5666	5562	5343	5380
45	5429	5617	5721	5513	5521
50	5586	5392	5357	5539	5427
55	5627	5636	5280	5341	5434
60	5462	5293	5415	5653	5354
65	5484	5488	5362	5622	5558
70	5406	5454	5693	5499	5317
75	5594	5682	5612	5543	5588
80	5385	5473	5272	5604	5614
85	5564	5258	5471	5265	5483
90	5452	5409	5619	5283	5571
95	5639	5492	5566	5497	5383

Type 6 Radar Waveform_1

Frequency List (MHz)	0	1	2	3	4
0	5488	5505	5570	5317	5431
5	5577	5516	5554	5632	5448
10	5399	5280	5341	5615	5495
15	5560	5506	5689	5601	5723
20	5283	5257	5672	5643	5412
25	5397	5673	5417	5294	5289
30	5270	5333	5472	5504	5366
35	5507	5281	5720	5568	5430
40	5314	5371	5500	5583	5377
45	5358	5597	5329	5474	5522
50	5265	5300	5287	5587	5481
55	5558	5274	5630	5381	5251
60	5446	5510	5409	5476	5594
65	5458	5379	5303	5475	5316
70	5543	5708	5519	5407	5382
75	5423	5338	5545	5395	5695
80	5393	5707	5273	5533	5580
85	5376	5686	5664	5331	5529
90	5687	5719	5357	5489	5486
95	5297	5421	5674	5267	5469

Type 6 Radar Waveform_2					
Frequency List (MHz)	0	1	2	3	4
0	5268	5269	5506	5478	5273
5	5619	5538	5629	5320	5655
10	5330	5544	5382	5713	5516
15	5648	5633	5317	5549	5440
20	5291	5423	5710	5257	5385
25	5663	5525	5620	5398	5604
30	5331	5256	5290	5687	5656
35	5661	5646	5372	5721	5344
40	5628	5454	5341	5251	5374
45	5287	5577	5412	5532	5530
50	5651	5463	5638	5667	5381
55	5596	5343	5335	5643	5481
60	5671	5421	5601	5517	5404
65	5677	5252	5511	5526	5650
70	5346	5388	5694	5358	5723
75	5295	5458	5688	5376	5623
80	5649	5299	5336	5397	5279
85	5528	5627	5426	5263	5492
90	5652	5595	5495	5557	5314
95	5254	5348	5367	5500	5698
Type 6 Radar Waveform_3					
Frequency List (MHz)	0	1	2	3	4
0	5523	5508	5442	5639	5493
5	5661	5463	5704	5386	5484
10	5261	5430	5423	5433	5537
15	5663	5420	5594	5632	5677
20	5492	5651	5724	5358	5551
25	5474	5348	5599	5638	5373
30	5620	5722	5330	5384	5310
35	5409	5399	5258	5467	5279
40	5491	5468	5460	5495	5590
45	5531	5417	5527	5689	5281
50	5679	5540	5289	5534	5462
55	5452	5570	5361	5366	5343
60	5350	5403	5676	5547	5445
65	5624	5557	5302	5622	5580
70	5712	5682	5264	5578	5259
75	5357	5303	5440	5592	5687
80	5618	5362	5692	5265	5375
85	5285	5598	5457	5439	5331
90	5309	5332	5479	5326	5307
95	5544	5617	5706	5443	5560

Type 6 Radar Waveform_4					
Frequency List (MHz)	0	1	2	3	4
0	5303	5272	5378	5325	5713
5	5485	5304	5549	5691	5570
10	5694	5464	5628	5558	5349
15	5315	5523	5639	5685	5658
20	5592	5338	5331	5342	5326
25	5454	5703	5672	5512	5509
30	5679	5545	5582	5449	5651
35	5680	5649	5269	5306	5620
40	5692	5256	5465	5440	5578
45	5551	5584	5682	5403	5340
50	5265	5370	5502	5387	5719
55	5718	5724	5281	5423	5699
60	5526	5311	5644	5296	5701
65	5625	5486	5568	5337	5427
70	5629	5288	5722	5332	5688
75	5641	5611	5698	5402	5555
80	5453	5686	5627	5462	5524
85	5312	5657	5309	5650	5705
90	5268	5513	5670	5450	5604
95	5394	5348	5364	5316	5638
Type 6 Radar Waveform_5					
Frequency List (MHz)	0	1	2	3	4
0	5461	5511	5314	5486	5555
5	5367	5410	5379	5712	5423
10	5501	5483	5505	5348	5579
15	5340	5442	5626	5684	5541
20	5693	5349	5630	5330	5401
25	5705	5653	5657	5332	5609
30	5554	5495	5636	5285	5356
35	5402	5491	5267	5476	5327
40	5658	5620	5325	5496	5462
45	5355	5420	5661	5637	5569
50	5516	5316	5459	5703	5331
55	5432	5575	5439	5297	5353
60	5691	5669	5567	5339	5427
65	5574	5522	5400	5607	5323
70	5274	5250	5656	5664	5600
75	5580	5721	5545	5319	5563
80	5467	5622	5424	5507	5560
85	5613	5430	5670	5697	5286
90	5393	5615	5610	5428	5581
95	5419	5397	5633	5532	5493

Type 6 Radar Waveform_6					
Frequency List (MHz)	0	1	2	3	4
0	5716	5275	5250	5647	5300
5	5409	5432	5454	5400	5252
10	5335	5272	5546	5543	5600
15	5428	5569	5632	5258	5604
20	5418	5571	5419	5374	5593
25	5602	5385	5436	5643	5596
30	5384	5500	5508	5697	5630
35	5358	5369	5480	5572	5556
40	5408	5568	5639	5459	5284
45	5269	5667	5690	5359	5533
50	5692	5367	5645	5526	5653
55	5620	5529	5629	5297	5268
60	5482	5381	5298	5501	5393
65	5285	5628	5523	5461	5610
70	5402	5411	5395	5357	5253
75	5505	5640	5559	5452	5366
80	5591	5584	5576	5723	5383
85	5685	5421	5702	5560	5565
90	5673	5622	5538	5273	5534
95	5688	5305	5616	5365	5463
Type 6 Radar Waveform_7					
Frequency List (MHz)	0	1	2	3	4
0	5496	5611	5661	5333	5617
5	5451	5357	5529	5466	5459
10	5266	5536	5587	5641	5621
15	5516	5696	5260	5677	5450
20	5612	5584	5512	5411	5347
25	5384	5454	5588	5540	5273
30	5550	5618	5282	5420	5294
35	5449	5640	5255	5583	5395
40	5491	5506	5404	5456	5688
45	5380	5628	5268	5624	5409
50	5393	5418	5259	5349	5597
55	5483	5344	5591	5714	5546
60	5718	5316	5706	5472	5497
65	5442	5689	5564	5343	5353
70	5354	5616	5518	5421	5486
75	5281	5361	5686	5504	5547
80	5519	5463	5407	5636	5717
85	5406	5702	5307	5470	5719
90	5399	5723	5365	5429	5676
95	5263	5721	5493	5312	5648

Type 6 Radar Waveform_8					
Frequency List (MHz)	0	1	2	3	4
0	5276	5375	5597	5397	5362
5	5590	5379	5604	5629	5666
10	5672	5422	5628	5361	5642
15	5251	5363	5722	5264	5620
20	5653	5550	5500	5320	5272
25	5403	5316	5266	5711	5302
30	5259	5507	5358	5434	5715
35	5433	5540	5436	5408	5497
40	5709	5671	5444	5644	5520
45	5360	5532	5686	5699	5511
50	5285	5569	5469	5348	5647
55	5424	5437	5534	5410	5685
60	5643	5640	5617	5274	5652
65	5518	5533	5564	5492	5636
70	5329	5356	5581	5495	5477
75	5293	5606	5305	5262	5613
80	5321	5415	5714	5366	5724
85	5696	5371	5278	5458	5706
90	5635	5250	5605	5515	5513
95	5584	5446	5327	5558	5269
Type 6 Radar Waveform_9					
Frequency List (MHz)	0	1	2	3	4
0	5434	5614	5533	5558	5679
5	5632	5304	5317	5495	5506
10	5686	5291	5556	5663	5595
15	5378	5466	5670	5456	5531
20	5344	5491	5492	5293	5538
25	5255	5519	5370	5270	5623
30	5464	5573	5683	5535	5475
35	5631	5707	5561	5411	5548
40	5279	5382	5312	5547	5449
45	5718	5615	5269	5277	5301
50	5539	5520	5437	5373	5388
55	5612	5391	5627	5607	5559
60	5297	5401	5705	5472	5443
65	5695	5467	5484	5295	5708
70	5315	5430	5471	5436	5262
75	5629	5448	5334	5541	5400
80	5496	5412	5366	5659	5626
85	5714	5706	5429	5325	5256
90	5390	5624	5639	5700	5537
95	5372	5264	5302	5712	5703